



FCC TEST REPORT

FCC ID: 2A36J-SS24-RE-VG

On Behalf of

Yi Tunnel (Beijing)Technology Co.,Ltd.

Jupiter2 AI Kit

Model No.: SS24-RE-VG

Prepared for : Yi Tunnel (Beijing)Technology Co.,Ltd.
Address : Room1511, Block B, SOHO Shangdu North Tower, Dongdaqiao
Road 8#, Chaoyang Disstrict, Beijing, China

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2601175-C01-R01
Date of Receipt : August 19, 2025
Date of Test : August 20, 2025-March 03, 2026
Date of Report : March 03, 2026
Version Number : V0

TABLE OF CONTENTS

Description	Page
1 TEST SUMMARY	5
2 GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	7
2.3 TEST METHODOLOGY	7
2.4 TEST FACILITY	7
2.5 ACCESSORIES OF DEVICE (EUT)	7
2.6 TESTED SUPPORTING SYSTEM DETAILS	7
2.7 TEST CONDITIONS	7
2.8 MEASUREMENT UNCERTAINTY	8
3 TEST INSTRUMENTS LIST	9
4 SYSTEM TEST CONFIGURATION	11
4.1 TEST MODE	11
4.2 CONFIGURATION OF TESTED SYSTEM	12
4.3 TRANSMITTER RADIATED POWER (EIRP/ERP)	13
4.4 PEAK-TO-AVERAGE RATIO	16
4.5 OCCUPY BANDWIDTH	17
4.6 MODULATION CHARACTERISTIC	18
4.7 OUT OF BAND EMISSION AT ANTENNA TERMINALS	18
4.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	19
4.9 FREQUENCY STABILITY	43
4.10 PHOTOS OF TEST SETUP	44

TEST REPORT DECLARATION

Applicant : Yi Tunnel (Beijing)Technology Co.,Ltd.
Address : Room1511, Block B, SOHO Shangdu North Tower, Dongdaqiao Road 8#,
Chaoyang Disstrict, Beijing, China
Manufacturer : Yi Tunnel (Beijing)Technology Co.,Ltd.
Address : Room1511, Block B, SOHO Shangdu North Tower, Dongdaqiao Road 8#,
Chaoyang Disstrict, Beijing, China
EUT Description : Jupiter2 AI Kit
(A) Model No. : SS24-RE-VG
(B) Trademark :  SANDSTAR

Measurement Standard Used:

FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E
FCC CFR Title 47 Part 27 Subpart C
FCC CFR Title 47 Part 90 Subpart S
ANSI C63.26:2015

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....: Felix Pang
Test Engineer 
Approved by (name + signature).....: Simple Guan
Project Manager 
Date of issue.....: March 03, 2026

Revision History

Revision	Issue Date	Revisions	Revised By
V0	March 03, 2026	Initial released Issue	Felix Pang



1 Test Summary

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 22.913(a) Part 24.232(b) Part 27.50(b) Part 27.50(c) Part 27.50(d) Part 27.50(h) Part 90.635	Pass
Peak-To-Average Ratio	Part 2.1046 Part 22.913(d) Part 24.232 (d) Part 27.50(d)	Pass
Modulation Characteristics	Part 2.1047	N/A
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917 Part 24.238 Part 27.53(a)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m) Part 90.691	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 Part 24.238 Part 27.53(c)(f) Part 27.53(g) Part 27.53(h) Part 27.53(m) Part 90.691	Pass

Note: 1. Pass: The EUT complies with the essential requirements in the standard.

2. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

3. N/A indicates not applicable.

2 General Information

2.1 General Description of EUT

Description of Device (EUT)

Description	: Jupiter2 AI Kit
Model Number	: SS24-RE-VG
Diff	: N/A
Test Voltage	: DC 12V from Switching Power Supply with AC 120V/60Hz

Support Networks	: LTE
Support Bands	: LTE Band 2/4/5/7/19/25/26/38/41/66 LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 19: 5MHz, 10MHz, 15MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 2: 1850 ~ 1910 MHz; LTE Band 4: 1710 ~ 1755 MHz LTE Band 5: 824 ~ 849 MHz; LTE Band 7: 2500 ~ 2570 MHz LTE Band 19: 830 ~ 845MHz; LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz; LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2535MHz ~ 2655MHz; LTE Band 66: 1710 MHz ~ 1780 MHz
Channel Bandwidth	
TX Frequency	
Modulation type	: QPSK, 16QAM 4G Suction Cup antenna(External antenna), LTE Band 2: Maximum Gain is 3.55dBi; LTE Band 4: Maximum Gain is 3.55dBi;LTE Band 5: Maximum Gain is 2.53dBi. LTE Band 7: Maximum Gain is 3.05dBi;LTE Band 19: Maximum Gain is 2.53dBi. LTE Band 25: Maximum Gain is 3.55dBi; LTE Band 26: Maximum Gain is 2.53dBi. LTE Band 38: Maximum Gain is 3.05dBi; LTE Band 41: Maximum Gain is 3.05dBi. LTE Band 66: Maximum Gain is 3.55dBi. Antenna information is provided by applicant. There is WWAN diversity antenna inside the product, which is only for receiving function.
Antenna Type	
Software version	: V4.4T
Hardware version	: HM881L_V3

Remark:

1. The worst-case simultaneous transmission configuration was evaluated with no non-compliance found.
Results in this report are only for 4G function, and there is no other transmitter involved.
2. The product has two antennas, one of which is a diversity antenna with only receiving function.
The LTE Band41 supports frequency is 2535-2655MHz, Due to actual customer needs
Using software, the prototype can only operate at 2535-2655 MHz, other frequencies have been blocked

2.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

2.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on TIA/EIA 603 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

2.4 Test Facility

Shenzhen PSI Testing Co., Ltd.
1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 21, 2023 File on Federal Communication Commission
Registration Number: 916281

September 21, 2023 Certificated by IC
Registration Number: 31123
CAB identifier: CN0158

2.5 Accessories of Device (EUT)

Accessories : Switching Power Supply
Manufacturer : MEAN WELL (GUANGZHOU) ELECTRONICS CO.,LTD.
Model : LRS-100-12
Ratings : INPUT: 100-240V~ 2.1A
OUTPUT: 12V= 8.5A

2.6 Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1.	N/A	N/A	N/A	N/A	N/A

2.7 Test Conditions

Items	Required
Temperature range:	15-35℃
Humidity range:	25-75%
Pressure range:	86-106kPa

2.8 Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.17dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	2.74dB(Polarize: V)
	2.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB(Polarize: V)
	4.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31dB(Polarize: V)
	4.30dB(Polarize: H)
Uncertainty for radio frequency	48.24KHz
Uncertainty for conducted RF Power	0.41dB
Uncertainty for Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Conducted-Spurious Emission	1.26dB

3 Test Instruments list

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2025.12.18	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2025.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV 216	102282	/	2025.12.18	1 Year
4.	L.I.S.N.#2	EMCO	3810-2	00094944	/	2025.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV40-N	101648	3.70	2025.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LNPA_0118 G-50	SK20220329 01	/	2025.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_1840 G-50	SK20190403 02	/	2025.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.0 2-1111533-Fz	/	2025.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2025.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2025.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2025.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	2022112516 38	/	2025.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2025.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2025.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2025.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2025.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2025.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2025.12.18	1 Year

23	4G DTU Ant	HAOHAIXING	RG174	/	/	/	/
24.	Comprehensive Test Instrument	Rohde&Schwarz	CMW 500	145266	/	2025.12.18	1 Year

For Test Software Information

Item	Software Name	Manufacturer	Version
RE	EZ EMC	Farad	PSI-3A1
CE	EZ EMC	Farad	PSI-3A1
RF	RTS	TACHOY	V1.0.0



4 System test configuration

4.1 Test mode


During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Test modes		
Band	Radiated	Conducted
LTE Band 2	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 4	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 5	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 7	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 19	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 25	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 26	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 38	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 41	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link
LTE Band 66	■ QPSK link, 16QAM link	■ QPSK link, 16QAM link


Note: Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas License Digital Systems v03r1 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

4.2 Configuration of Tested System

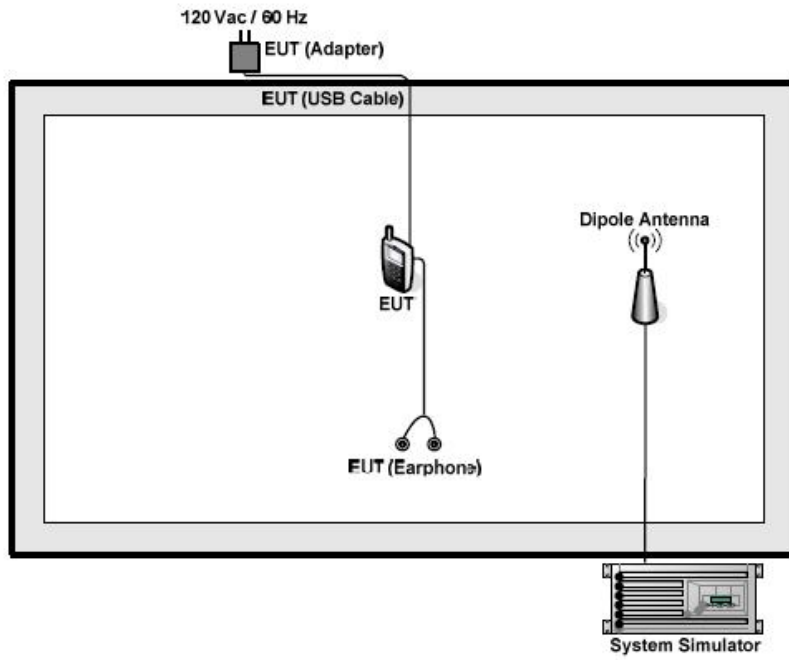

4.3 Transmitter Radiated Power (EIRP/ERP)

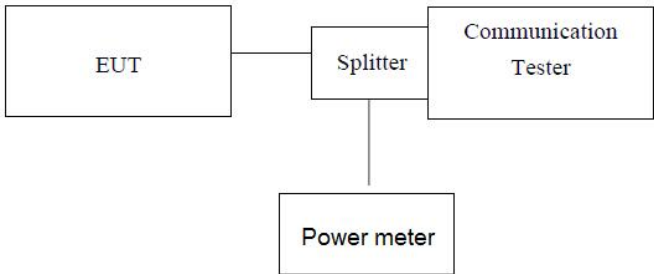Test Requirement:	Part 2.1046, Part 22.913(a), Part 24.232(c), Part 27.50(b), Part 27.50(c), Part 27.50(d), Part 27.50(h), Part 90.635
Test Method:	ANSI C63.26:2015
Limit:	LTE Band 2: 2W; LTE Band 4: 1W; LTE Band 5/19: 7W LTE Band 7: 2W; LTE Band 25: 2W; LTE Band 26 (814-824MHz): 100W LTE Band 26 (824-849MHz): 7W, LTE Band 38: 2W; LTE Band 41: 2W; LTE Band 66: 1W
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	Description of the Conducted Output Power Measurement The EUT is coupled to the SS with attenuator through power splitter; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. A system simulator is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported. The relevant equation for determining the conducted measured value is: Conducted Output Power Value (dBm) = Measured Value (dBm) + Path Loss (dB) where: Conducted Output Power Value = final conducted measured value in the conducted power test, in dBm; Measured Value = measured conducted power received by spectrum analyzer or power meter, in dBm; Path Loss = signal attenuation in the connecting cable between the transmitter and spectrum analyzer or power meter, including external cable loss, in dB; During the test, the data of Path Loss (dB) is added in the spectrum analyzer or power meter, so Measured Value (dBm) is the final values which contains the data of Path Loss (dB). For example: In the conducted output power test, when measured value for GSM850 is 24.7 dBm, and path loss is 8.5 dB, then final conducted output power value is: Conducted Output Power Value (dBm) = 24.7 dBm + 8.5 dB = 33.2 dBm Description of the Transmitter Radiated Power Measurement In many cases, the RF output power limits for licensed digital transmission devices is specified in terms of effective radiated power (ERP) or equivalent isotropic radiated power (EIRP). Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the

conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).

Final measurement calculation as below:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW; GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP); dBd (ERP)=dBi (EIRP) -2.15 dB

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

For example:

In the EIRP test, when PMeas value for GSM1900 is 30.2 dBm, LC is 0.6 dB, and GT is -3.4 dB, then final EIRP value is:

$$\text{EIRP for GSM1900} = 30.2 \text{ dBm} - 3.4 \text{ dBi} - 0.6 \text{ dB} = 26.2 \text{ dBm}$$

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP (dBm)} = \text{SA Read Value (dBm)} + \text{Correction Factor (dB)}$$

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm; Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

For example:


In the ERP test, when SA read value for GSM850 is 21dBm, and correction factor is 8dB, then final ERP value for GSM850 is:

$$\text{ERP (dBm)} = 21\text{dBm} + 8\text{dB} = 29\text{dBm}$$


Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass (Please refer to ANNEX for the test results)



4.4 Peak-to-Average Ratio

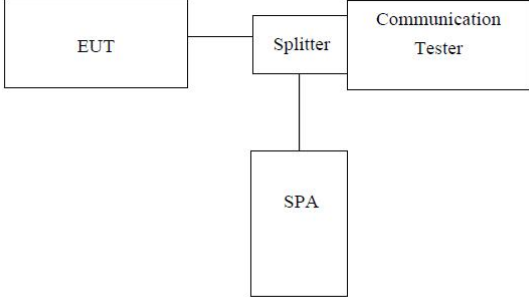Test Requirement:	Part 22.913(d), FCC part24.232(d) and FCC part27.50(d)(5)
Test Method:	ANSI C63.26:2015
Test Limit:	Used complementary cumulative distribution function (CCDF) of analyzer to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.7. 2. The EUT was connected to spectrum and system simulator via a power divider 3. Using the CCDF measurement of spectrum analyzer; 4. Set RBW≥OBW or specified reference bandwidth; 5. Set the number of counts to a value that stabilizes the measured CCDF curve; 6. Set the measurement interval as 1ms 7. Record the maximum PAPR level associated with a probability of 0.1%.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass (Please refer to ANNEX for the test results)


4.5 Occupy Bandwidth

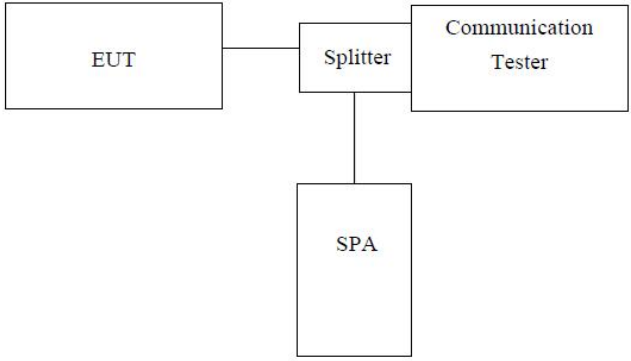Test Requirement:	FCC part22.913(a), FCC part24.232(b) and FCC part27.53(a), FCC part 90.209
Test Method:	ANSI C63.26:2015
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1.The EUT's output RF connector was connected with a short cable to the spectrum analyzer, set center frequency to channel center frequency. 2.RBW was set to about 1%-5% of emission OBW, VBW$\geq$ 3 X RBW. 3.Set spectrum analyzer detection mode to peak, and the trace mode to max hold. 4. Use the 99% OBW function, The 99% power OBW can be found on the plot, determine the "-26dB amplitude" as equal to reference value -26dB.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass (Please refer to ANNEX for the test results)




4.6 MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 24E & Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

4.7 Out of band emission at antenna terminals

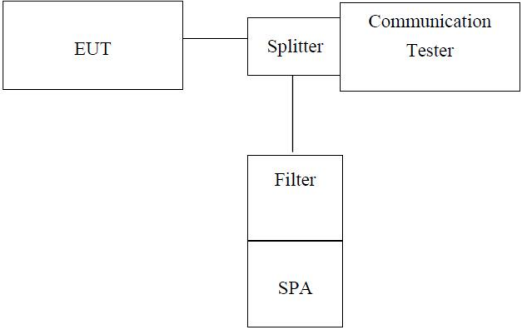Test Requirement:	Part 2.1051; Part 22.917; Part 24.238; Part 27.53(c)(f); Part 27.53(g) Part 27.53(h); Part 27.53(m); Part 90.691
Test Method:	ANSI C63.26:2015
Limit:	$\leq -13\text{dBm}$ (LTE Band5,19, 26(824-849MHz)) $\leq -13\text{dBm}$ (LTE Band2,25); $\leq -13\text{dBm}$ (LTE Band12, 17, 71) $\leq -13\text{dBm}$ (LTE Band4,66); $\leq -25\text{dBm}$ (LTE Band 7, 38, 41) $\leq -13\text{dBm}$ (LTE Band26(814-824MHz))
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW=1MHz, VBW = 3MHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass (Please refer to ANNEX for the test results)

4.8 Field strength of spurious radiation measurement

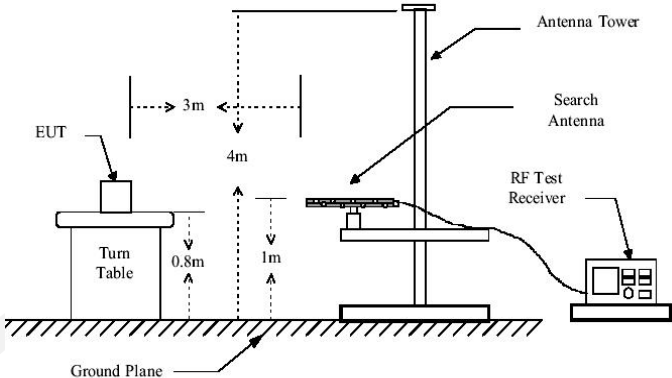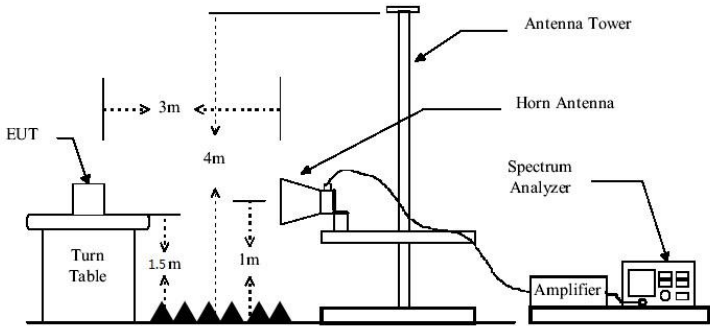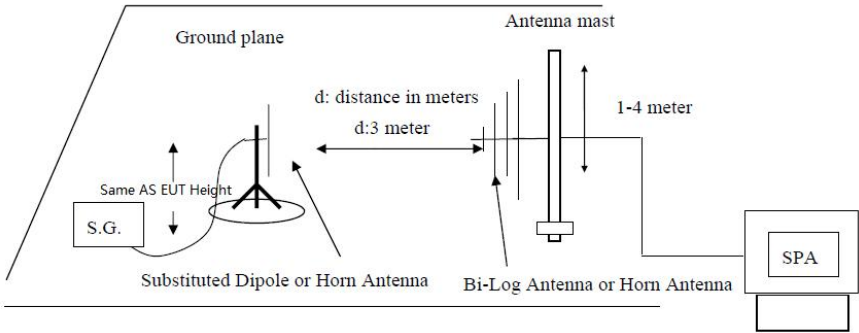Test Requirement:	FCC Part 22.913(a) FCC Part 27.53(h)/(m)/(g)
Test Method:	ANSI C63.26:2015
Limit:	Band 5:-13dBm Band 7/38/41:-25dBm
Test setup:	Below 1GHz  Above 1GHz  Substituted method: 

Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $\text{ERP / EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass

Remark :

1. The emission behaviour belongs to narrowband spurious emission, all modes investigated and only worst case is reported.
2. Remark"---" means that the emission level is too low (20dB lower than the limit) to be measured
3. The emission levels of below 1 GHz are very lower (20dB lower than the limit) than the limit and not show in test report.

Measurement Data:

QPSK Mode:

Test mode:	LTE Band 2(1.4MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3731.79	Vertical	-31.19	-13.00	Pass
5599.63	V	-31.17		
7430.29	V	-30.55		
9285.13	V	-42.42		
11257.19	V	---		
3732.85	Horizontal	-32.55	-13.00	Pass
5525.26	H	-31.56		
7406.69	H	-37.11		
9245.73	H	-41.80		
11234.37	H	---		
Test mode:	LTE Band 2(1.4MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3731.72	Vertical	-30.52	-13.00	Pass
5642.04	V	-31.23		
7508.10	V	-32.69		
9485.56	V	-43.86		
11408.94	V	---		
3717.03	Horizontal	-32.38	-13.00	Pass
5673.90	H	-31.68		
7532.16	H	-39.24		
9426.83	H	-38.83		
11330.41	H	---		
Test mode:	LTE Band 2(1.4MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3833.72	Vertical	-30.79	-13.00	Pass
5745.01	V	-31.29		
7650.26	V	-32.96		
9521.48	V	-43.40		
11607.60	V	---		
3834.78	Horizontal	-31.86	-13.00	Pass
5747.66	H	-31.16		
7626.06	H	-37.71		
9579.07	H	-40.77		
11532.57	H	---		

Test mode:	LTE Band 4(1.4MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3428.61	Vertical	-32.40	-13.00	Pass
5145.84	V	-28.81		
6872.05	V	-33.37		
8542.21	V	-44.23		
10330.33	V	---		
3429.38	Horizontal	-30.90	-13.00	Pass
5131.74	H	-39.42		
6870.41	H	-36.73		
8605.31	H	-34.47		
10245.43	H	---		
Test mode:	LTE Band 4(1.4MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3442.84	Vertical	-31.40	-13.00	Pass
5141.40	V	-30.86		
6980.03	V	-34.76		
8667.79	V	-43.27		
10476.13	V	---		
3471.92	Horizontal	-32.21	-13.00	Pass
5119.04	H	-38.29		
6965.21	H	-37.24		
8717.09	H	-34.91		
10320.24	H	---		
Test mode:	LTE Band 4(1.4MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3516.30	Vertical	-30.55	-13.00	Pass
5223.87	V	-28.67		
7032.39	V	-31.58		
8771.17	V	-44.14		
10667.44	V	---		
3545.62	Horizontal	-31.58	-13.00	Pass
5252.13	H	-38.32		
7060.44	H	-36.04		
8822.84	H	-37.01		
10547.93	H	---		

Test mode:	LTE Band 5(1.4MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1614.66	Vertical	-32.99	-13.00	Pass
2445.72	V	-33.34		
3224.29	V	-33.69		
4143.73	V	-44.33		
5073.36	V	---		
1811.70	Horizontal	-31.59	-13.00	Pass
2504.16	H	-40.26		
3885.26	H	-36.12		
4312.18	H	-33.91		
5147.65	H	---		
Test mode:	LTE Band 5(1.4MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1638.79	Vertical	-31.21	-13.00	Pass
2422.61	V	-29.61		
3252.20	V	-32.32		
4288.26	V	-43.89		
5160.15	V	---		
4750.53	Horizontal	-31.21	-13.00	Pass
2667.70	H	-38.08		
3856.91	H	-35.94		
4425.97	H	-35.63		
5148.18	H	---		
Test mode:	LTE Band 5(1.4MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1703.75	Vertical	-34.23	-13.00	Pass
2561.69	V	-32.62		
3420.61	V	-32.26		
4370.31	V	-43.81		
5260.61	V	---		
1752.22	Horizontal	-32.07	-13.00	Pass
2876.62	H	-38.75		
3440.81	H	-37.48		
4395.27	H	-36.30		
5148.15	H	---		

Test mode:	LTE Band 7(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5229.67	Vertical	-30.93	-25.00	Pass
4861.92	V	-29.14		
10095.47	V	-32.33		
13594.80	V	-44.24		
15234.33	V	---		
5139.18	Horizontal	-30.98	-25.00	Pass
7946.04	H	-38.41		
10155.94	H	-35.57		
12813.09	H	-35.93		
15138.34	H	---		
Test mode:	LTE Band 7(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5157.77	Vertical	-30.48	-25.00	Pass
7640.86	V	-31.71		
10224.86	V	-32.00		
13285.32	V	-44.86		
15637.07	V	---		
5130.90	Horizontal	-34.03	-25.00	Pass
7738.75	H	-39.06		
10278.63	H	-35.80		
13878.02	H	-33.79		
15363.23	H	---		
Test mode:	LTE Band 7(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5240.54	Vertical	-33.37	-25.00	Pass
7884.52	V	-34.86		
10349.14	V	-31.37		
12924.47	V	-44.85		
15442.05	V	---		
5226.95	Horizontal	-32.07	-25.00	Pass
7739.28	H	-38.66		
10358.24	H	-36.55		
12778.82	H	-36.39		
15363.91	H	---		

Test mode:	LTE Band 19(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1362.61	Vertical	-31.37	-13.00	Pass
2696.45	V	-34.50		
3350.95	V	-31.70		
4220.14	V	-42.57		
5064.94	V	---		
1407.69	Horizontal	-29.51	-13.00	Pass
2504.96	H	-38.65		
3643.31	H	-33.12		
4328.79	H	-30.55		
5147.37	H	---		
Test mode:	LTE Band 19(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1537.51	Vertical	-29.84	-13.00	Pass
2649.36	V	-32.49		
3450.95	V	-32.44		
4321.89	V	-43.63		
5256.58	V	---		
4845.63	Horizontal	-29.01	-13.00	Pass
2556.25	H	-34.92		
3956.38	H	-34.75		
4337.02	H	-34.56		
5365.28	H	---		
Test mode:	LTE Band 19(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1526.84	Vertical	-35.31	-13.00	Pass
2318.93	V	-31.66		
3586.68	V	-32.70		
4421.67	V	-43.03		
5405.08	V	---		
1745.42	Horizontal	-30.38	-13.00	Pass
2868.16	H	-37.76		
3567.17	H	-35.76		
4412.64	H	-35.18		
5147.47	H	---		

Test mode:	LTE Band 25(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5135.13	Vertical	-32.49	-13.00	Pass
7638.72	V	-30.56		
10125.55	V	-34.19		
12263.24	V	-40.55		
15331.22	V	---		
5049.74	Horizontal	-33.38	-13.00	Pass
7541.66	H	-35.30		
10560.00	H	-30.72		
12622.56	H	-32.76		
15242.00	H	---		
Test mode:	LTE Band 25(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5252.09	Vertical	-31.26	-13.00	Pass
7642.94	V	-28.98		
10226.46	V	-30.59		
12542.98	V	-41.99		
15514.22	V	---		
5220.50	Horizontal	-28.32	-13.00	Pass
7521.43	H	-31.83		
10266.96	H	-35.21		
13592.45	H	-35.40		
15319.05	H	---		
Test mode:	LTE Band 25(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5211.97	Vertical	-29.78	-13.00	Pass
7863.92	V	-31.36		
10013.08	V	-29.47		
12237.24	V	-43.62		
15505.34	V	---		
5307.92	Horizontal	-33.41	-13.00	Pass
7825.58	H	-37.90		
10404.94	H	-35.19		
12267.40	H	-33.36		
15327.47	H	---		

Test mode (814-824MHz) :	LTE Band 26(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3430.97	Vertical	-31.03	-13.00	Pass
7819.52	V	-31.14		
10131.87	V	-29.33		
12317.20	V	-43.62		
16343.58	V	---		
5193.92	Horizontal	-27.22	-13.00	Pass
7621.91	H	-38.43		
10264.07	H	-36.23		
12593.39	H	-33.43		
15219.74	H	---		
Test mode (814-824MHz) :	LTE Band 26(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5131.83	Vertical	-28.98	-13.00	Pass
7644.18	V	-28.30		
10248.35	V	-31.02		
13279.81	V	-41.49		
15650.44	V	---		
5237.38	Horizontal	-28.31	-13.00	Pass
7700.88	H	-32.54		
10285.56	H	-35.15		
12662.05	H	-34.61		
15268.84	H	---		
Test mode (814-824MHz) :	LTE Band 26(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5228.49	Vertical	-33.14	-13.00	Pass
7827.64	V	-29.38		
10349.75	V	-33.43		
12869.65	V	-41.89		
15444.65	V	---		
5143.58	Horizontal	-31.49	-13.00	Pass
7824.89	H	-37.39		
10344.40	H	-34.35		
12996.09	H	-39.49		
15268.39	H	---		

Test mode (824-849MHz) :	LTE Band 26(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3915.80	Vertical	-31.98	-13.00	Pass
5703.84	V	-28.59		
10252.20	V	-30.20		
12295.66	V	-43.76		
13526.97	V	---		
3846.14	Horizontal	-33.87	-13.00	Pass
7268.47	H	-36.27		
10307.43	H	-35.67		
12122.99	H	-36.06		
13343.66	H	---		
Test mode (824-849MHz) :	LTE Band 26(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3691.94	Vertical	-32.19	-13.00	Pass
7910.26	V	-28.97		
10451.47	V	-30.58		
12033.47	V	-43.72		
15888.10	V	---		
3845.48	Horizontal	-31.43	-13.00	Pass
7584.78	H	-38.84		
10487.29	H	-35.14		
12533.92	H	-35.58		
15336.30	H	---		
Test mode (824-849MHz) :	LTE Band 26(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3866.71	Vertical	-28.58	-13.00	Pass
7831.83	V	-25.25		
10452.48	V	-32.07		
12342.07	V	-43.48		
15618.45	V	---		
3904.82	Horizontal	-28.85	-13.00	Pass
7839.49	H	-35.22		
10458.64	H	-35.39		
12384.87	H	-35.89		
15288.21	H	---		

Test mode	LTE Band 38(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
2629.63	Vertical	-30.84	-25.00	Pass
5256.83	V	-31.07		
10565.31	V	-30.43		
12217.89	V	-43.34		
13698.13	V	---		
2643.46	Horizontal	-33.05	-25.00	Pass
5233.68	H	-37.93		
10853.26	H	-36.97		
12305.06	H	-36.77		
13264.75	H	---		
Test mode	LTE Band 38(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
2758.71	Vertical	-29.37	-25.00	Pass
5484.31	V	-33.46		
10639.33	V	-31.65		
12866.77	V	-46.05		
15709.54	V	---		
2687.73	Horizontal	-33.51	-25.00	Pass
5436.48	H	-37.45		
10840.57	H	-37.16		
12309.53	H	-36.48		
15330.67	H	---		
Test mode	LTE Band 38(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
2627.30	Vertical	-30.06	-25.00	Pass
6895.10	V	-32.31		
10440.15	V	-30.35		
12727.42	V	-43.13		
15638.69	V	---		
2690.11	Horizontal	-28.72	-25.00	Pass
5192.93	H	-37.13		
10762.24	H	-36.34		
13308.20	H	-36.61		
16261.07	H	---		

Test mode	LTE Band 41(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3676.54	Vertical	-28.56	-25.00	Pass
8634.73	V	-33.12		
10233.11	V	-34.26		
12662.87	V	-43.45		
13375.73	V	---		
3992.05	Horizontal	-31.38	-25.00	Pass
9811.61	H	-38.79		
10274.10	H	-37.12		
12318.26	H	-35.06		
13164.93	H	---		
Test mode	LTE Band 41(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3577.96	Vertical	-31.18	-25.00	Pass
5975.90	V	-32.95		
8944.24	V	-33.20		
10238.85	V	-43.89		
13802.75	V	---		
5869.97	Horizontal	-29.62	-25.00	Pass
7236.39	H	-41.44		
10342.28	H	-34.54		
12305.27	H	-26.58		
13262.13	H	---		
Test mode	LTE Band 41(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3116.72	Vertical	-33.23	-25.00	Pass
5637.90	V	-33.28		
8943.57	V	-33.48		
10362.53	V	-43.81		
12876.27	V	---		
5132.54	Horizontal	-32.93	-25.00	Pass
8675.66	H	-38.21		
10303.23	H	-35.72		
12710.96	H	-36.22		
13591.74	H	---		

Test mode:	LTE Band 66(1.4MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3317.02	Vertical	-30.83	-13.00	Pass
5689.62	V	-32.93		
7305.29	V	-31.65		
8300.33	V	-44.45		
10441.97	V	---		
3335.25	Horizontal	-33.12	-13.00	Pass
5231.69	H	-38.77		
6951.76	H	-37.27		
8917.19	H	-36.55		
10269.11	H	---		
Test mode:	LTE Band 66(1.4MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
2887.68	Vertical	-35.39	-13.00	Pass
5371.49	V	-34.12		
7518.04	V	-34.91		
9867.14	V	-45.03		
10369.14	V	---		
3021.76	Horizontal	-33.12	-13.00	Pass
5236.01	H	-38.30		
7652.58	H	-36.72		
8886.35	H	-35.58		
10400.89	H	---		
Test mode:	LTE Band 66(1.4MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3749.55	Vertical	-31.76	-13.00	Pass
5314.67	V	-27.61		
7234.39	V	-33.80		
8632.37	V	-46.49		
10574.77	V	---		
3335.83	Horizontal	-33.44	-13.00	Pass
5292.79	H	-40.97		
7329.39	H	-37.90		
8879.94	H	-37.14		
10128.54	H	---		

16 QAM Mode:

Test mode:	LTE Band 2 (1.4MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3731.56	Vertical	-31.42	-13.00	Pass
5599.40	V	-31.40		
7430.06	V	-30.78		
9284.90	V	-42.65		
11256.96	V	---		
3732.62	Horizontal	-32.78	-13.00	Pass
5525.03	H	-31.79		
7406.46	H	-37.34		
9245.50	H	-42.03		
11234.14	H	---		
Test mode:	LTE Band 2 (1.4MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3731.55	Vertical	-30.69	-13.00	Pass
5641.87	V	-31.40		
7507.93	V	-32.86		
9485.39	V	-44.03		
11408.77	V	---		
3716.86	Horizontal	-32.55	-13.00	Pass
5673.73	H	-31.85		
7531.99	H	-39.41		
9426.66	H	-39.00		
11330.24	H	---		
Test mode:	LTE Band 2 (1.4MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3833.09	Vertical	-31.42	-13.00	Pass
5744.38	V	-31.92		
7649.63	V	-33.59		
9520.85	V	-44.03		
11606.97	V	---		
3834.15	Horizontal	-32.49	-13.00	Pass
5747.03	H	-31.79		
7625.43	H	-38.34		
9578.44	H	-41.40		
11531.94	H	---		

Test mode:	LTE Band 4(1.4MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3428.76	Vertical	-32.25	-13.00	Pass
5146.52	V	-28.13		
6872.12	V	-33.30		
8541.80	V	-44.64		
10330.22	V	---		
3428.89	Horizontal	-31.39	-13.00	Pass
5131.95	H	-39.21		
6870.69	H	-36.45		
8605.40	H	-34.38		
10245.44	H	---		
Test mode:	LTE Band 4(1.4MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3442.99	Vertical	-31.25	-13.00	Pass
5142.08	V	-30.18		
6980.10	V	-34.69		
8667.38	V	-43.68		
10476.02	V	---		
3472.07	Horizontal	-31.93	-13.00	Pass
5119.72	H	-38.28		
6965.28	H	-37.17		
8716.60	H	-35.32		
10320.25	H	---		
Test mode:	LTE Band 4(1.4MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3516.31	Vertical	-30.27	-13.00	Pass
5224.08	V	-28.58		
7031.90	V	-31.37		
8771.45	V	-43.99		
10667.45	V	---		
3545.83	Horizontal	-31.57	-13.00	Pass
5252.22	H	-38.04		
7060.53	H	-36.03		
8822.99	H	-36.80		
10547.94	H	---		

Test mode:	LTE Band 5(1.4MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1615.31	Vertical	-32.34	-13.00	Pass
2446.37	V	-32.69		
3224.94	V	-33.04		
4144.38	V	-43.68		
5074.01	V	---		
1812.35	Horizontal	-30.94	-13.00	Pass
2504.81	H	-39.61		
3885.91	H	-35.47		
4312.83	H	-33.26		
5148.30	H	---		
Test mode:	LTE Band 5(1.4MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1638.79	Vertical	-31.21	-13.00	Pass
2422.61	V	-29.61		
3252.20	V	-32.32		
4288.26	V	-43.89		
5160.15	V	---		
4750.53	Horizontal	-31.21	-13.00	Pass
2667.70	H	-38.08		
3856.91	H	-35.94		
4425.97	H	-35.63		
5148.18	H	---		
Test mode:	LTE Band 5(1.4MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1704.16	Vertical	-33.82	-13.00	Pass
2562.10	V	-32.21		
3421.02	V	-31.85		
4370.72	V	-43.40		
5261.02	V	---		
1752.63	Horizontal	-31.66	-13.00	Pass
2877.03	H	-38.34		
3441.22	H	-37.07		
4395.68	H	-35.89		
5148.56	H	---		

Test mode:	LTE Band 19(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1362.26	Vertical	-31.72	-13.00	Pass
2696.10	V	-34.85		
3350.60	V	-32.05		
4219.79	V	-42.92		
5064.59	V	---		
1407.34	Horizontal	-29.86	-13.00	Pass
2504.61	H	-39.00		
3642.96	H	-33.47		
4328.44	H	-30.90		
5147.02	H	---		
Test mode:	LTE Band 19(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1537.67	Vertical	-29.68	-13.00	Pass
2649.52	V	-32.33		
3451.11	V	-32.28		
4322.05	V	-43.47		
5256.74	V	---		
4845.79	Horizontal	-28.85	-13.00	Pass
2556.41	H	-34.76		
3956.54	H	-34.59		
4337.18	H	-34.40		
5365.44	H	---		
Test mode:	LTE Band19(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1526.47	Vertical	-35.68	-13.00	Pass
2318.56	V	-32.03		
3586.31	V	-33.07		
4421.30	V	-43.40		
5404.71	V	---		
1745.05	Horizontal	-30.75	-13.00	Pass
2867.79	H	-38.13		
3566.80	H	-36.13		
4412.27	H	-35.55		
5147.10	H	---		

Test mode:	LTE Band 7(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5229.92	Vertical	-30.68	-25.00	Pass
4862.17	V	-28.89		
10095.72	V	-32.08		
13595.05	V	-43.99		
15234.58	V	---		
5139.43	Horizontal	-30.73	-25.00	Pass
7946.29	H	-38.16		
10156.19	H	-35.32		
12813.34	H	-35.68		
15138.59	H	---		
Test mode:	LTE Band 7(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5158.58	Vertical	-29.67	-25.00	Pass
7641.67	V	-30.90		
10225.67	V	-31.19		
13286.13	V	-44.05		
15637.88	V	---		
5131.71	Horizontal	-33.22	-25.00	Pass
7739.56	H	-38.25		
10279.44	H	-34.99		
13878.83	H	-32.98		
15364.04	H	---		
Test mode:	LTE Band 7(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5240.19	Vertical	-33.72	-25.00	Pass
7884.17	V	-35.21		
10348.79	V	-31.72		
12924.12	V	-45.20		
15441.70	V	---		
5226.60	Horizontal	-32.42	-25.00	Pass
7738.93	H	-39.01		
10357.89	H	-36.90		
12778.47	H	-36.74		
15363.56	H	---		

Test mode:	LTE Band 25(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5134.49	Vertical	-33.13	-13.00	Pass
7638.08	V	-31.20		
10124.91	V	-34.83		
12262.60	V	-41.19		
15330.58	V	---		
5049.10	Horizontal	-34.02	-13.00	Pass
7541.02	H	-35.94		
10559.36	H	-31.36		
12621.92	H	-33.40		
15241.36	H	---		
Test mode:	LTE Band 25(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5252.71	Vertical	-30.64	-13.00	Pass
7643.56	V	-28.36		
10227.08	V	-29.97		
12543.60	V	-41.37		
15514.84	V	---		
5221.12	Horizontal	-27.70	-13.00	Pass
7522.05	H	-31.21		
10267.58	H	-34.59		
13593.07	H	-34.78		
15319.67	H	---		
Test mode:	LTE Band 25(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5211.73	Vertical	-30.02	-13.00	Pass
7863.68	V	-31.60		
10012.84	V	-29.71		
12237.00	V	-43.86		
15505.10	V	---		
5307.68	Horizontal	-33.65	-13.00	Pass
7825.34	H	-38.14		
10404.70	H	-35.43		
12267.16	H	-33.60		
15327.23	H	---		

Test mode (814-824MHz) :	LTE Band 26(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3430.83	Vertical	-31.17	-13.00	Pass
7819.38	V	-31.28		
10131.73	V	-29.47		
12317.06	V	-43.76		
16343.44	V	---		
5193.78	Horizontal	-27.36	-13.00	Pass
7621.77	H	-38.57		
10263.93	H	-36.37		
12593.25	H	-33.57		
15219.60	H	---		
Test mode (814-824MHz) :	LTE Band 26(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5131.43	Vertical	-29.38	-13.00	Pass
7643.78	V	-28.70		
10247.95	V	-31.42		
13279.41	V	-41.89		
15650.04	V	---		
5236.98	Horizontal	-28.71	-13.00	Pass
7700.48	H	-32.94		
10285.16	H	-35.55		
12661.65	H	-35.01		
15268.44	H	---		
Test mode (814-824MHz) :	LTE Band 26(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
5229.03	Vertical	-32.60	-13.00	Pass
7828.18	V	-28.84		
10350.29	V	-32.89		
12870.19	V	-41.35		
15445.19	V	---		
5144.12	Horizontal	-30.95	-13.00	Pass
7825.43	H	-36.85		
10344.94	H	-33.81		
12998.44	H	-34.47		
15271.25	H	---		


Test mode (824-849MHz) :	LTE Band 26(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3915.65	Vertical	-32.13	-13.00	Pass
5703.69	V	-28.74		
10252.05	V	-30.35		
12295.51	V	-43.91		
13526.82	V	---		
3845.99	Horizontal	-34.02	-13.00	Pass
7268.32	H	-36.42		
10307.28	H	-35.82		
12122.84	H	-36.21		
13343.51	H	---		
Test mode (824-849MHz) :	LTE Band 26(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3692.02	Vertical	-32.11	-13.00	Pass
7910.34	V	-28.89		
10451.55	V	-30.50		
12033.55	V	-43.64		
15888.18	V	---		
3845.56	Horizontal	-31.35	-13.00	Pass
7584.86	H	-38.76		
10487.37	H	-35.06		
12534.00	H	-35.50		
15336.38	H	---		
Test mode (824-849MHz) :	LTE Band 26(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3866.15	Vertical	-29.14	-13.00	Pass
7831.27	V	-25.81		
10451.92	V	-32.63		
12341.51	V	-44.04		
15617.89	V	---		
3904.26	Horizontal	-29.41	-13.00	Pass
7838.93	H	-35.78		
10458.08	H	-35.95		
12384.31	H	-36.45		
15287.65	H	---		

Test mode	LTE Band 38(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
2629.66	Vertical	-30.81	-25.00	Pass
5256.86	V	-31.04		
10565.34	V	-30.40		
12217.92	V	-43.31		
13698.16	V	---		
2643.49	Horizontal	-33.02	-25.00	Pass
5233.71	H	-37.90		
10853.29	H	-36.94		
12305.09	H	-36.74		
13264.78	H	---		
Test mode	LTE Band 38(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
2758.70	Vertical	-29.38	-25.00	Pass
5484.30	V	-33.47		
10639.32	V	-31.66		
12866.76	V	-46.06		
15709.53	V	---		
2687.72	Horizontal	-33.52	-25.00	Pass
5436.47	H	-37.46		
10840.56	H	-37.17		
12309.52	H	-36.49		
15330.66	H	---		
Test mode	LTE Band 38(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
2627.32	Vertical	-30.04	-25.00	Pass
6895.12	V	-32.29		
10440.17	V	-30.33		
12727.44	V	-43.11		
15638.71	V	---		
2690.13	Horizontal	-28.81	-25.00	Pass
5192.95	H	-37.53		
10762.26	H	-36.57		
13308.22	H	-36.49		
16261.09	H	---		



Test mode	LTE Band 41(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3676.36	Vertical	-28.05	-25.00	Pass
8634.55	V	-32.45		
10232.93	V	-34.08		
12662.69	V	-43.56		
13375.55	V	---		
3991.87	Horizontal	-31.66	-25.00	Pass
9811.43	H	-39.00		
10273.92	H	-36.93		
12318.08	H	-34.78		
13164.75	H	---		
Test mode	LTE Band 41(5MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3577.71	Vertical	-31.43	-25.00	Pass
5976.55	V	-32.30		
8944.96	V	-32.48		
10239.32	V	-43.42		
13802.88	V	---		
5869.71	Horizontal	-29.44	-25.00	Pass
7236.57	H	-41.70		
10342.46	H	-34.36		
12305.08	H	-26.77		
13261.94	H	---		
Test mode	LTE Band 41(5MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3116.41	Vertical	-33.54	-25.00	Pass
5637.13	V	-33.37		
8943.48	V	-33.31		
10362.56	V	-43.78		
12876.31	V	---		
5132.71	Horizontal	-32.50	-25.00	Pass
8676.09	H	-38.77		
10303.40	H	-35.69		
12710.86	H	-36.19		
13592.66	H	---		

Test mode:	LTE Band 66(1.4MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3316.31	Vertical	-30.95	-13.00	Pass
5689.50	V	-32.91		
7305.41	V	-32.36		
8300.39	V	-44.39		
10442.01	V	---		
3334.83	Horizontal	-33.10	-13.00	Pass
5230.98	H	-38.71		
6951.78	H	-37.21		
8917.07	H	-36.67		
10268.76	H	---		
Test mode:	LTE Band 66(1.4MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
2887.74	Vertical	-35.33	-13.00	Pass
5370.78	V	-34.83		
7517.92	V	-34.85		
9867.20	V	-44.68		
10368.72	V	---		
3022.25	Horizontal	-33.10	-13.00	Pass
5236.36	H	-38.28		
7652.87	H	-36.66		
8886.37	H	-35.29		
10400.93	H	---		
Test mode:	LTE Band 66(1.4MHz)		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3749.33	Vertical	-31.63	-13.00	Pass
5314.80	V	-27.73		
7234.31	V	-33.83		
8632.23	V	-47.10		
10575.55	V	---		
3335.72	Horizontal	-32.66	-13.00	Pass
5292.92	H	-41.13		
7329.52	H	-37.98		
8880.07	H	-36.36		
10128.67	H	---		

1 Frequency stability

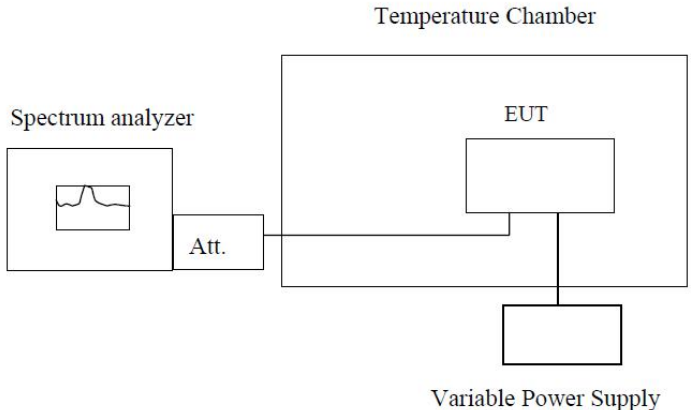Test Requirement:	FCC Part 2.1055(a)(1)(b), FCC Part 2.1055(d)(1)(2), FCC Part 27.54
Test Method:	ANSI C63.26:2015
Limit:	2.5ppm(Part 22) Within the authorized bands of operation(Part 24, Part 27)
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to –20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 4.1 for details
Test results:	Pass (Please refer to ANNEX for the test results)

4.9 Photos of test setup

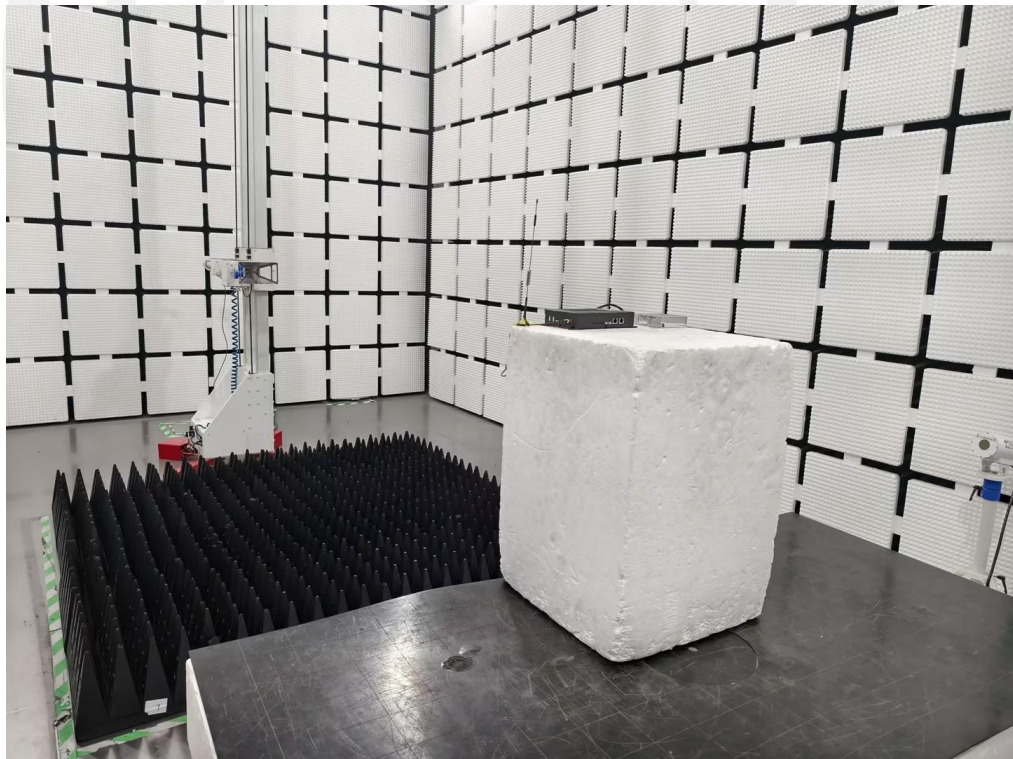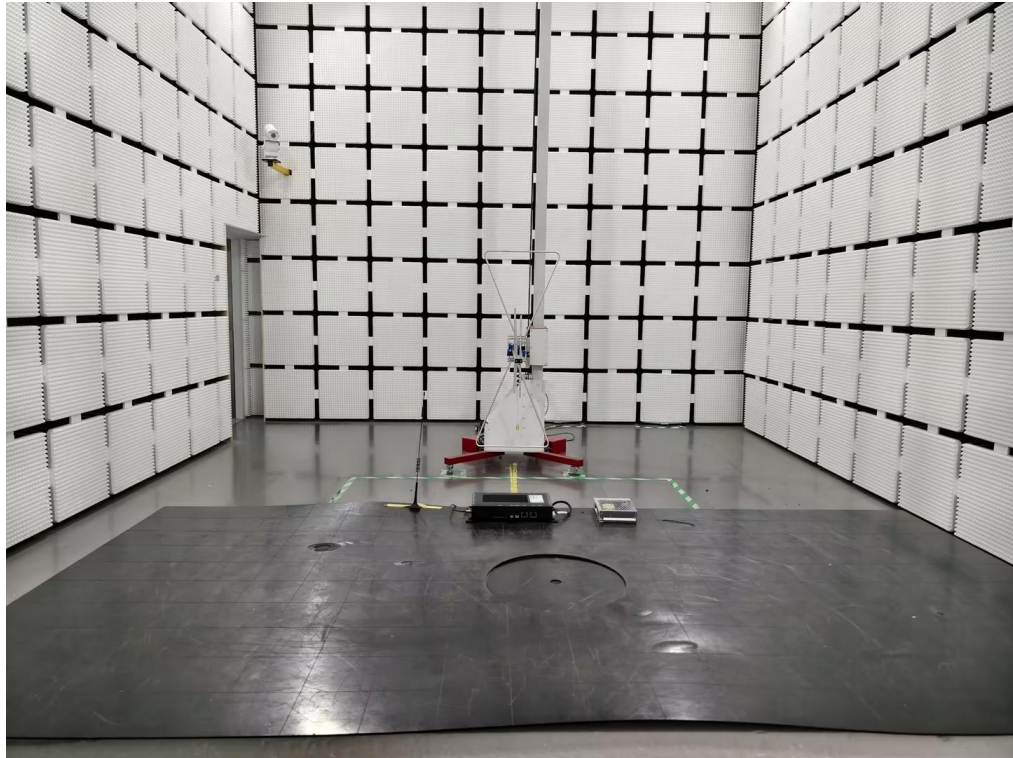



4.10 Photos of EUT












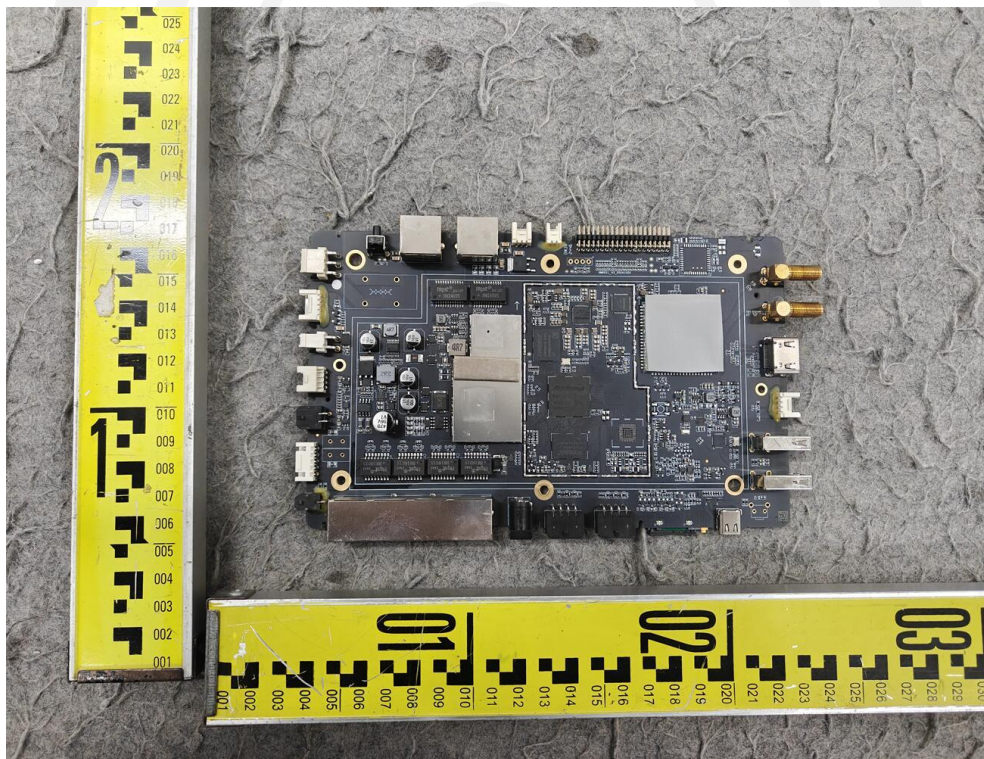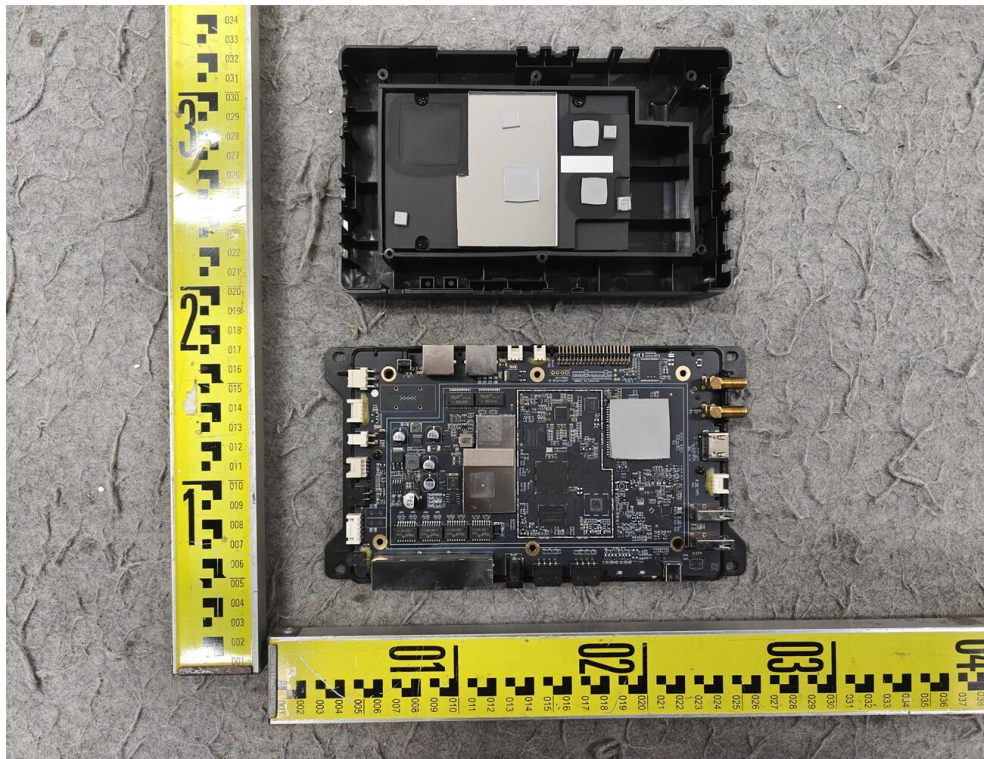

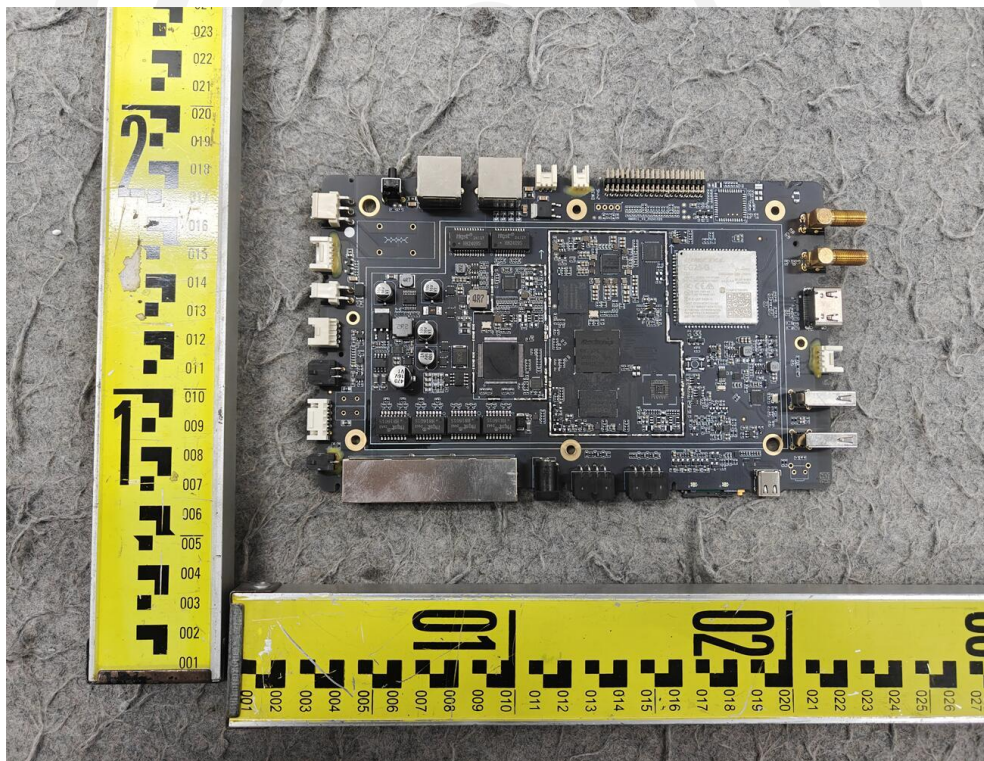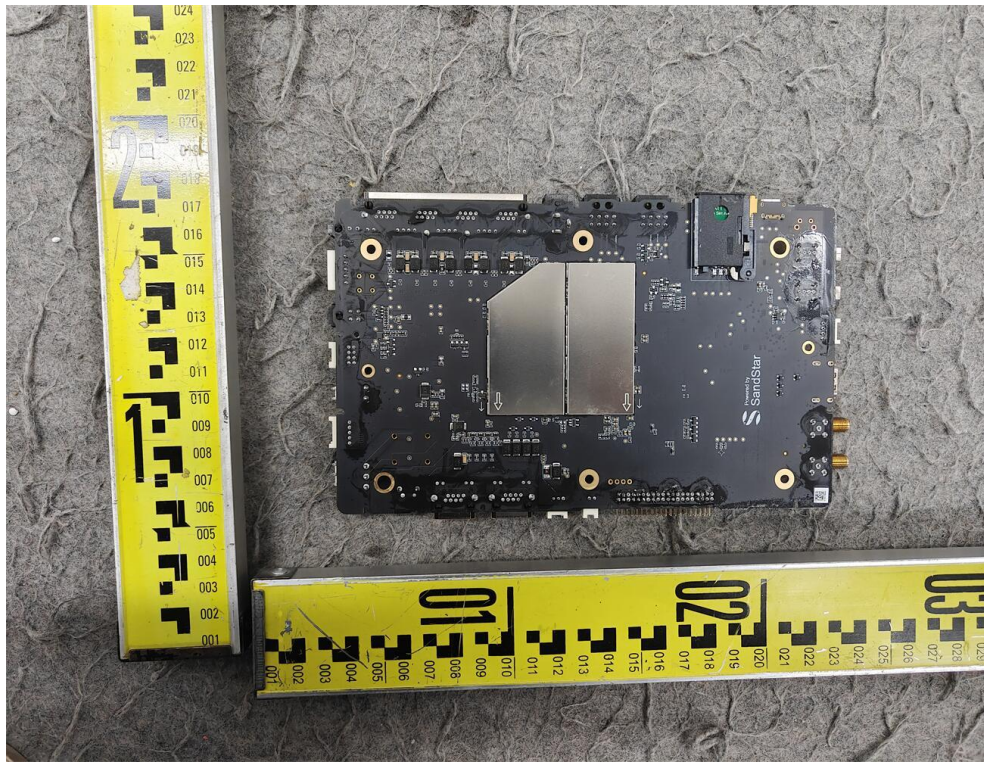

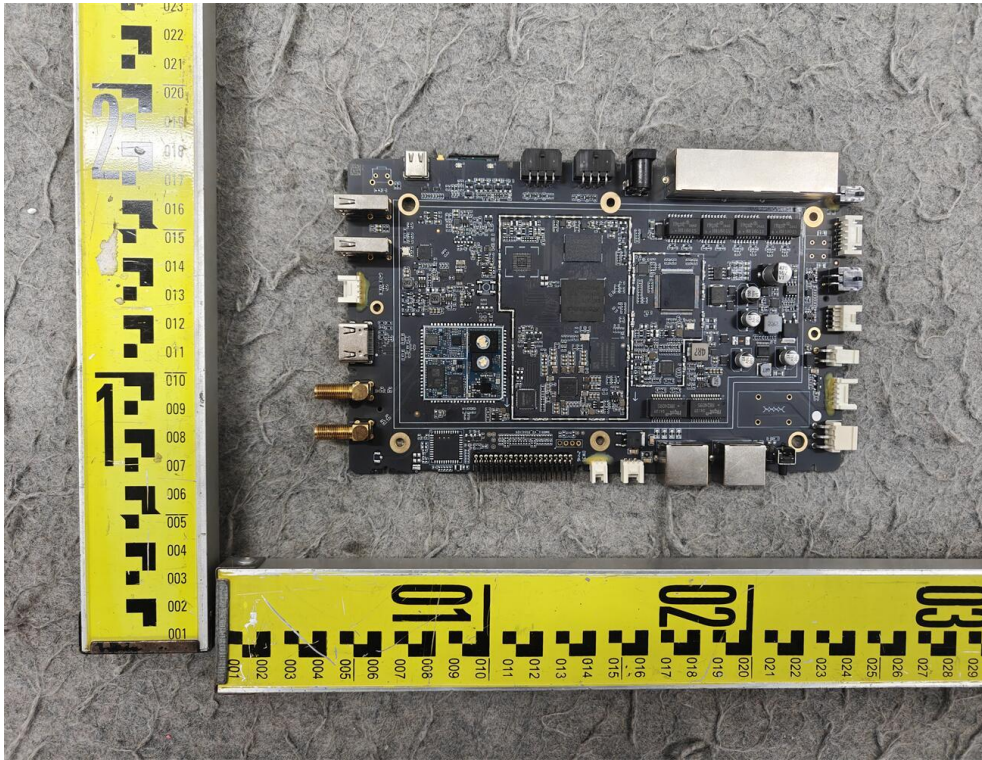

----- End of Report -----