



## Appendix D

### RF Test Data for 5.8GWIFI (Conducted Measurement)

Product Name: Wireless zoom receiver

Test Model: WVRM

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 24.3°C    |
| Relative Humidity: | 55.6%     |
| ATM Pressure:      | 100.0 kPa |
| Test Engineer:     | Jerry Chu |
| Supervised by:     | Can Kun   |





## D.1 -6dB Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | a    | 5745            | Ant1    | 16.34                 | 0.5                         | Pass    |
| NVNT      | a    | 5785            | Ant1    | 16.34                 | 0.5                         | Pass    |
| NVNT      | a    | 5825            | Ant1    | 16.34                 | 0.5                         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 17.29                 | 0.5                         | Pass    |
| NVNT      | n20  | 5785            | Ant1    | 17.53                 | 0.5                         | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 17.4                  | 0.5                         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 35.77                 | 0.5                         | Pass    |
| NVNT      | n40  | 5795            | Ant1    | 35.74                 | 0.5                         | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | 17.3                  | 0.5                         | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | 17.4                  | 0.5                         | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | 17.57                 | 0.5                         | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | 35.63                 | 0.5                         | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | 35.93                 | 0.5                         | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | 75.93                 | 0.5                         | Pass    |
| NVNT      | ax20 | 5745            | Ant1    | 17.31                 | 0.5                         | Pass    |
| NVNT      | ax20 | 5785            | Ant1    | 17.4                  | 0.5                         | Pass    |
| NVNT      | ax20 | 5825            | Ant1    | 17.24                 | 0.5                         | Pass    |
| NVNT      | ax40 | 5755            | Ant1    | 35.92                 | 0.5                         | Pass    |
| NVNT      | ax40 | 5795            | Ant1    | 35.9                  | 0.5                         | Pass    |
| NVNT      | ax80 | 5775            | Ant1    | 75.9                  | 0.5                         | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: [webmaster@lcs-cert.com](mailto:webmaster@lcs-cert.com) | Web: [www.lcs-cert.com](http://www.lcs-cert.com)

Scan code to check authenticity

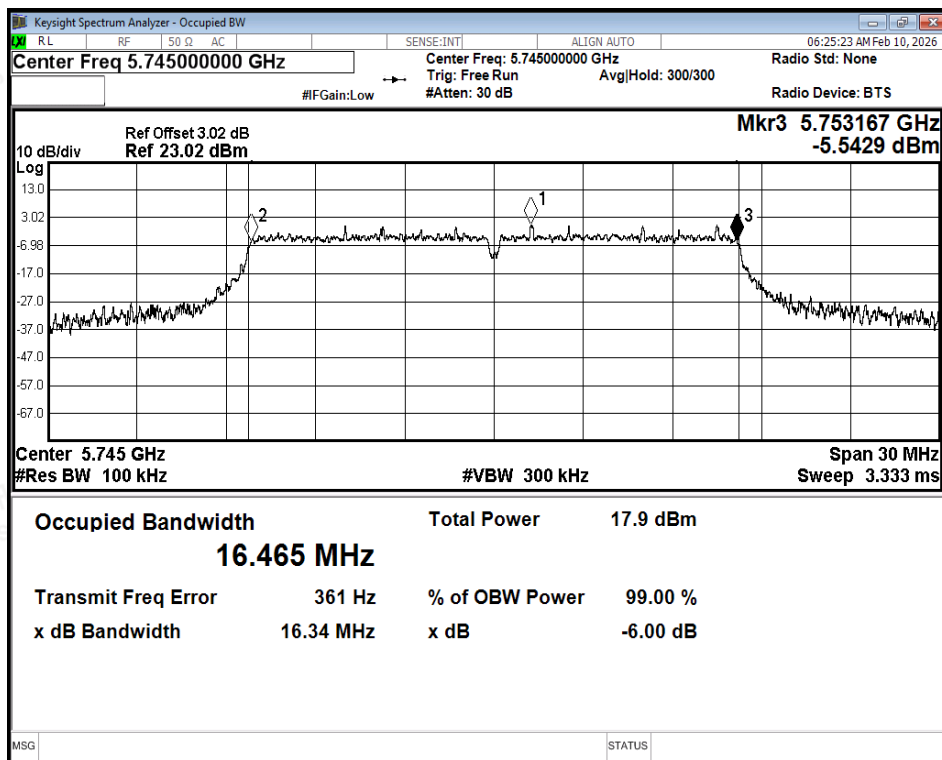

-6dB Bandwidth NVNT a 5745MHz Ant1

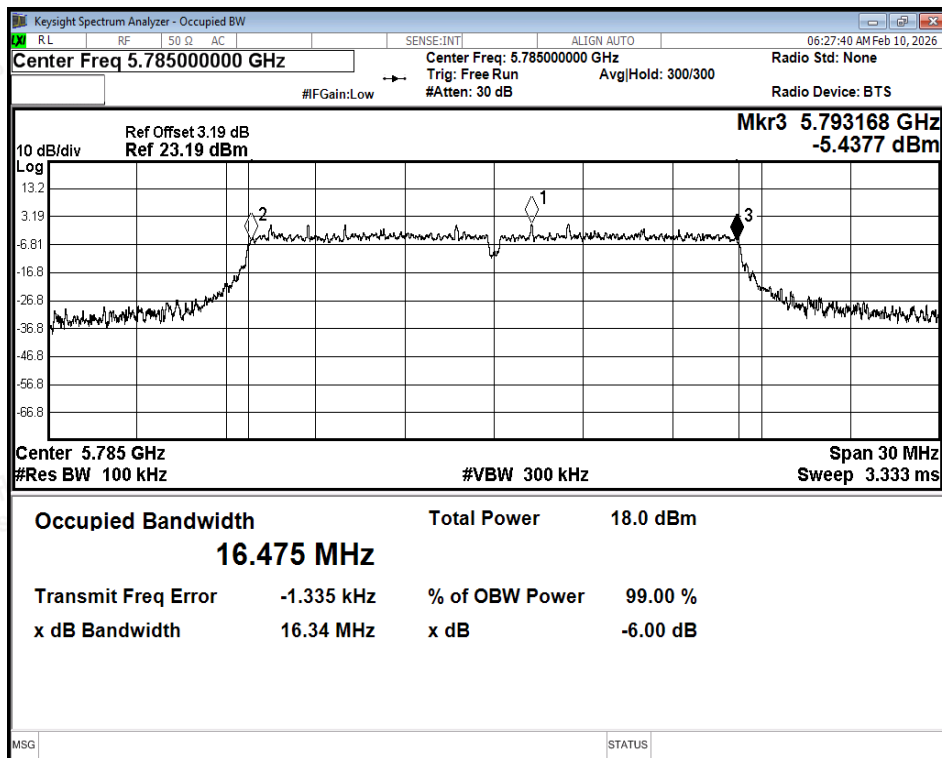

-6dB Bandwidth NVNT a 5785MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

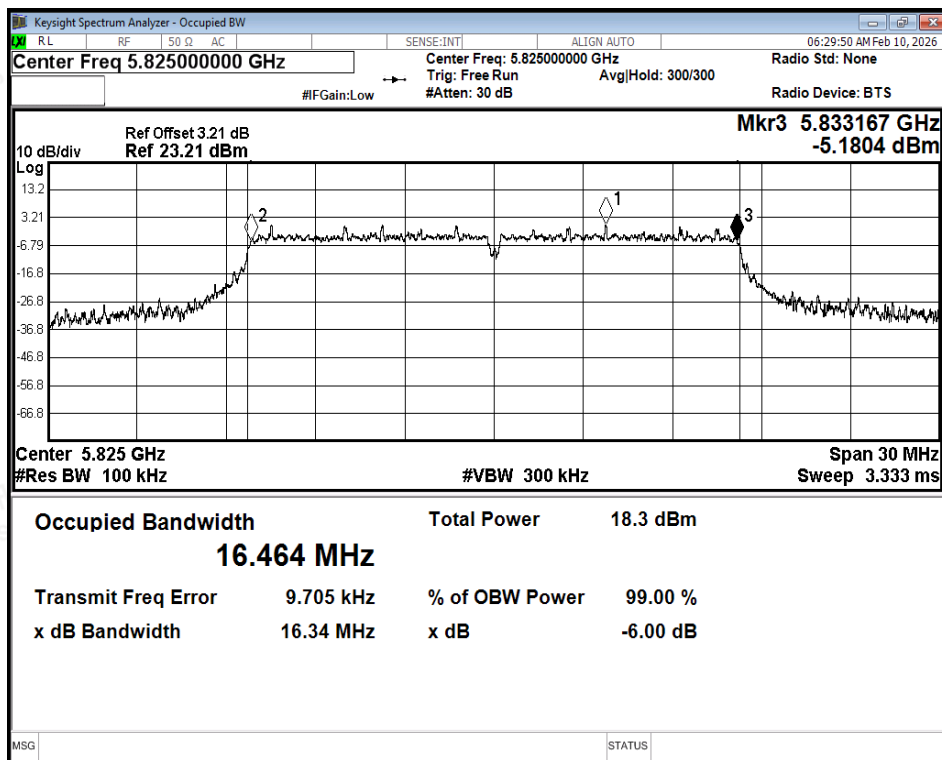

-6dB Bandwidth NVNT a 5825MHz Ant1

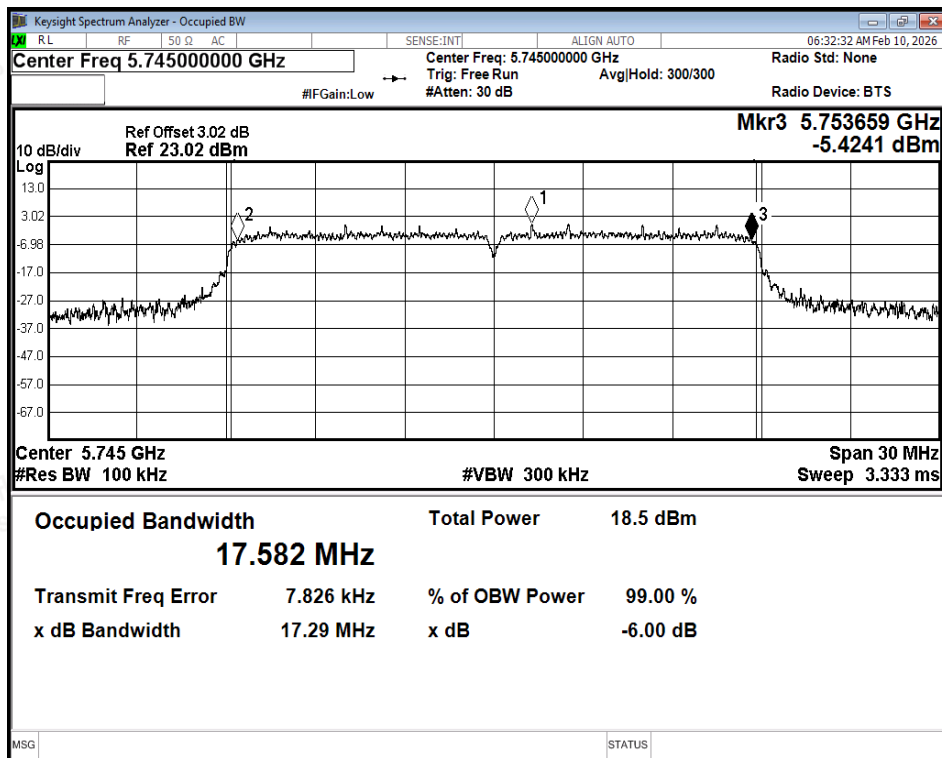

-6dB Bandwidth NVNT n20 5745MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

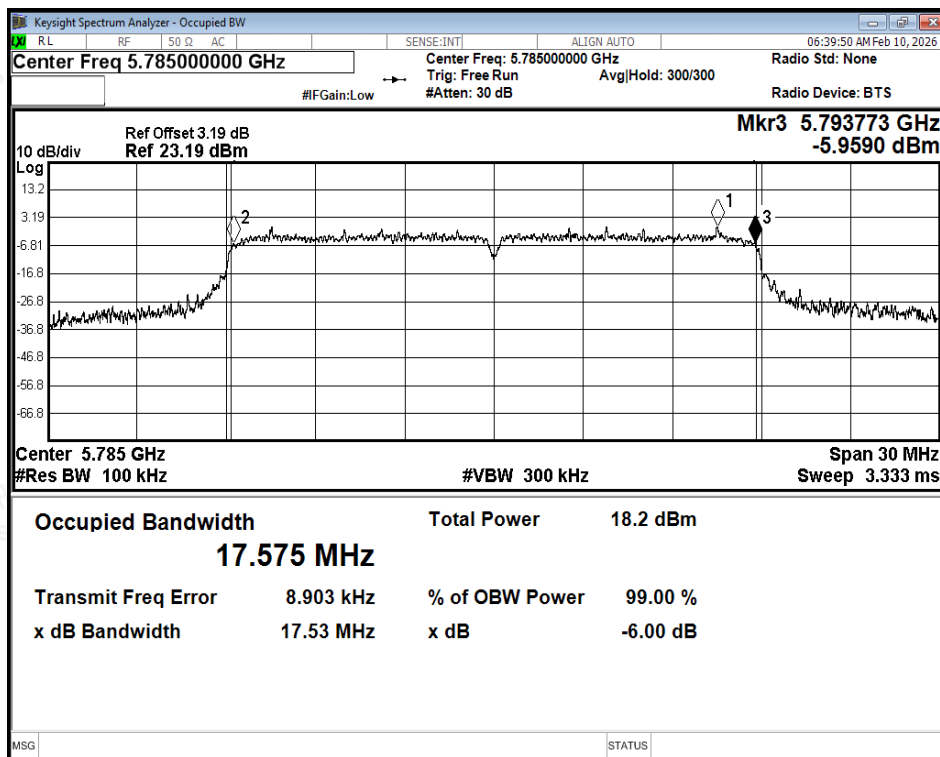

-6dB Bandwidth NVNT n20 5785MHz Ant1

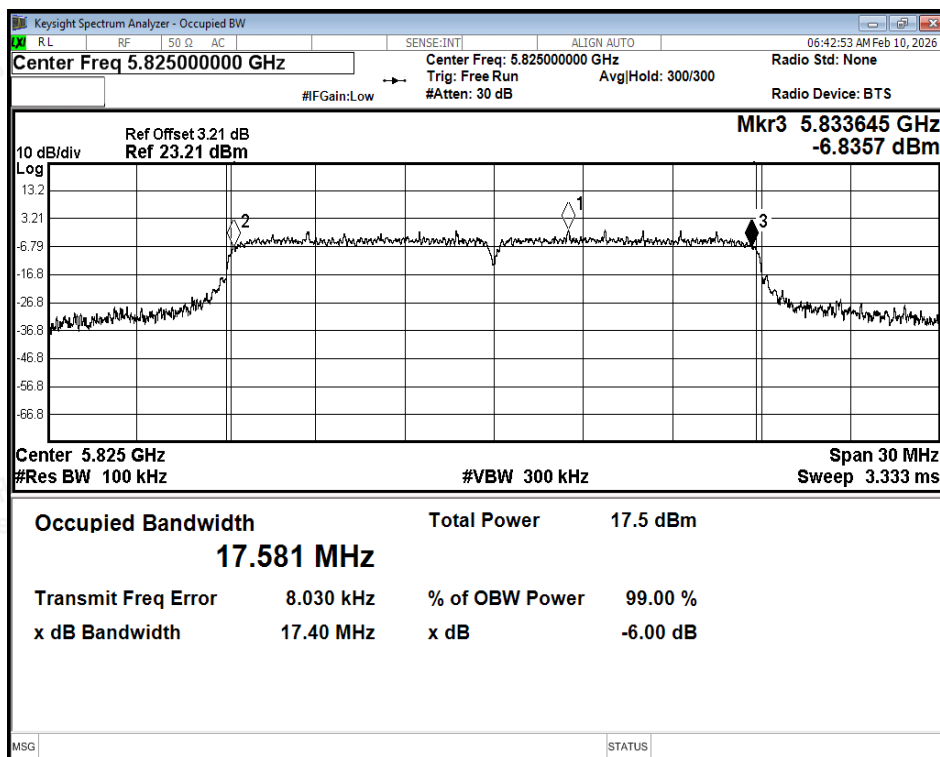

-6dB Bandwidth NVNT n20 5825MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

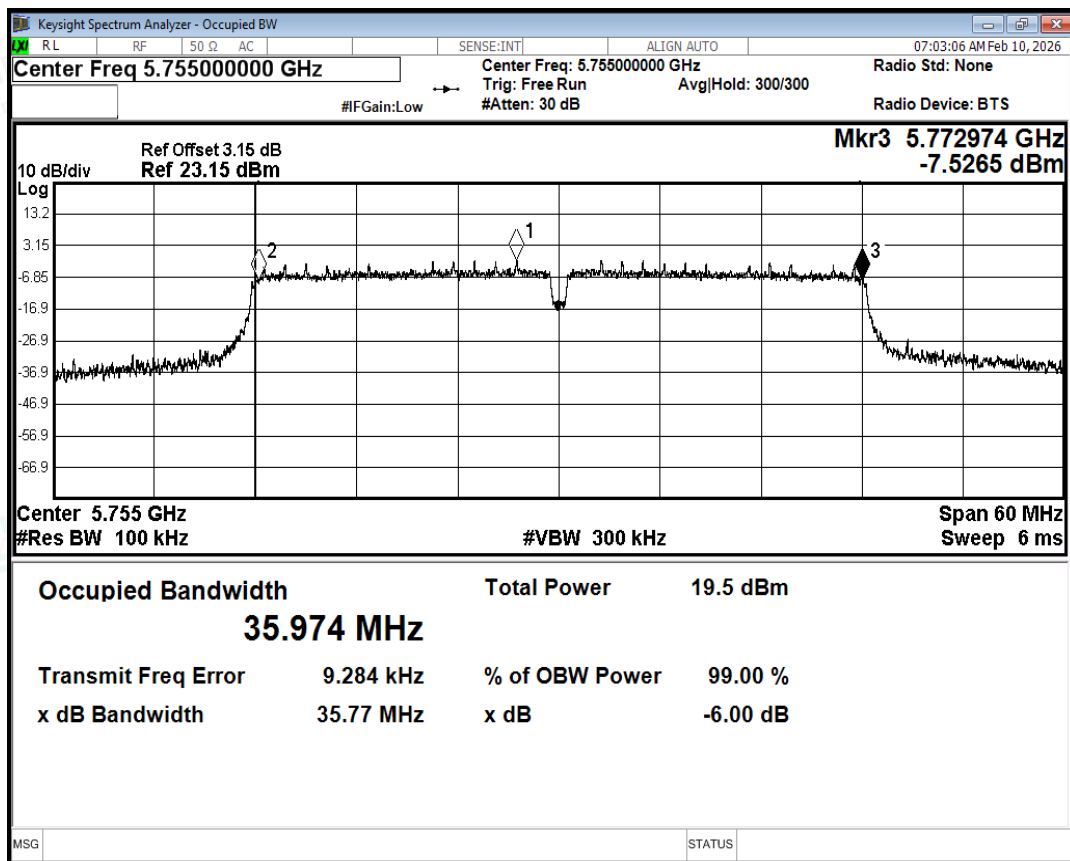

-6dB Bandwidth NVNT n40 5755MHz Ant1

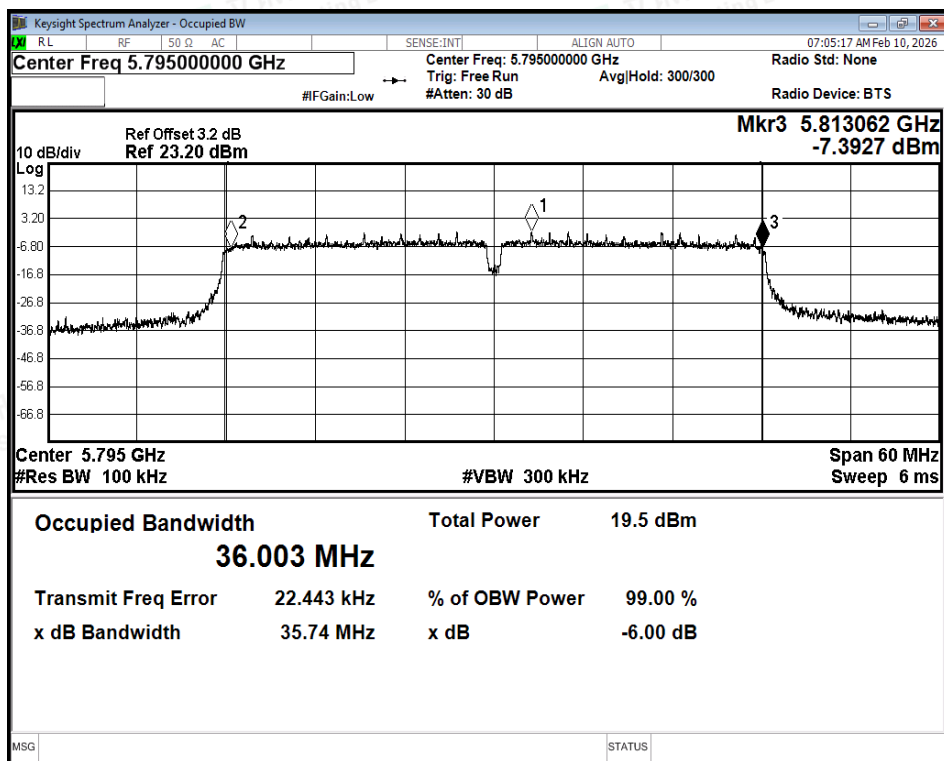

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT n40 5795MHz Ant1

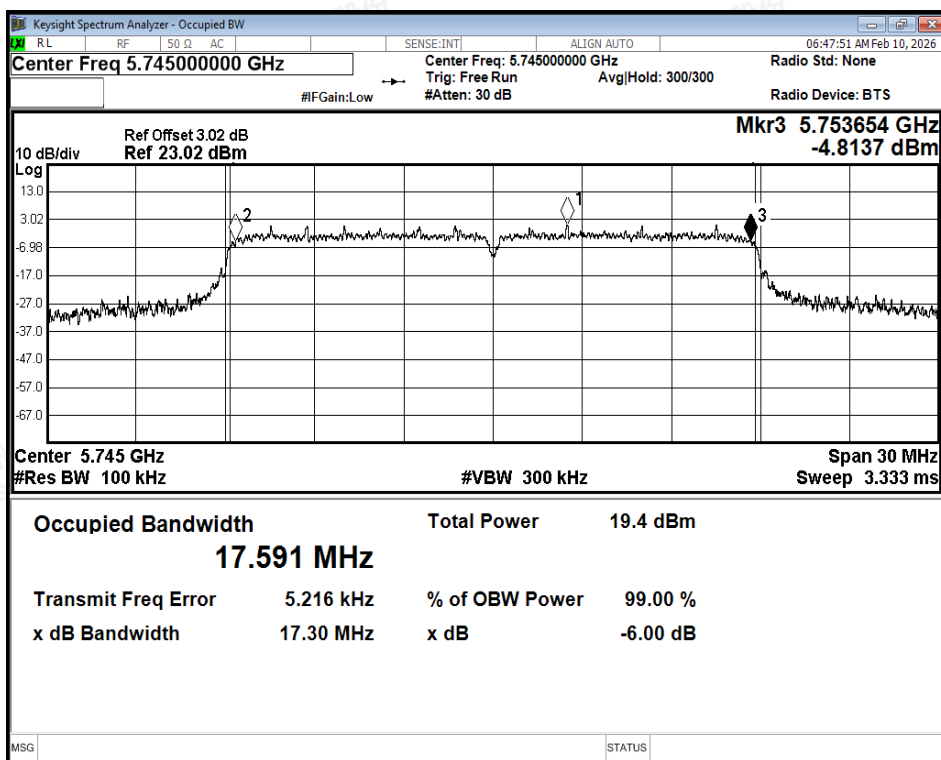

## -6dB Bandwidth NVNT ac20 5745MHz Ant1

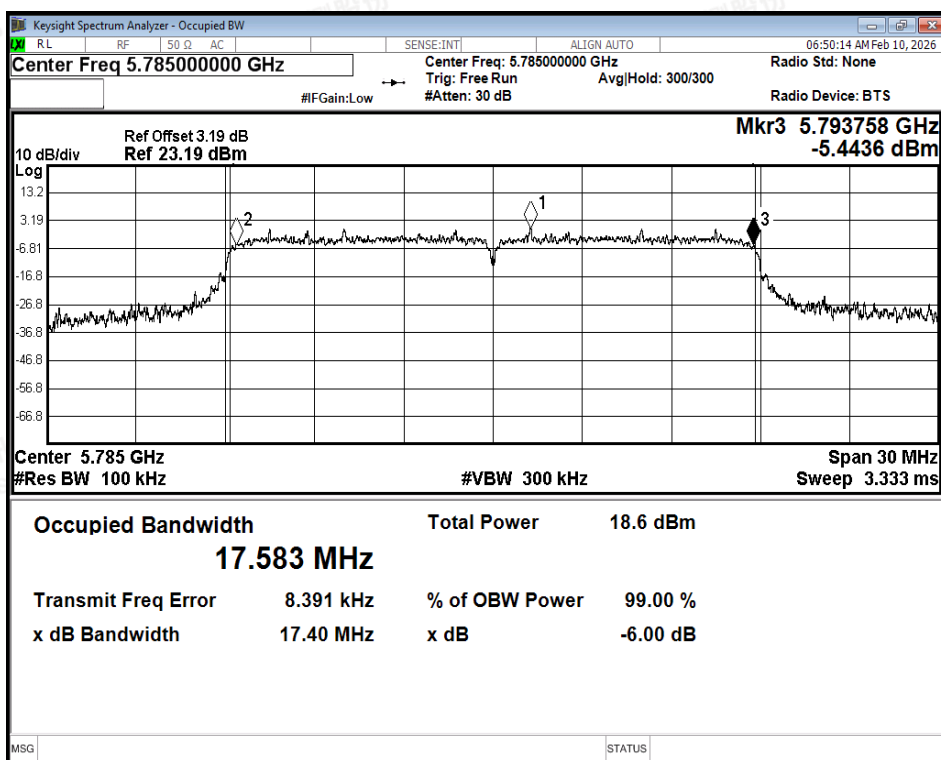

## -6dB Bandwidth NVNT ac20 5785MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

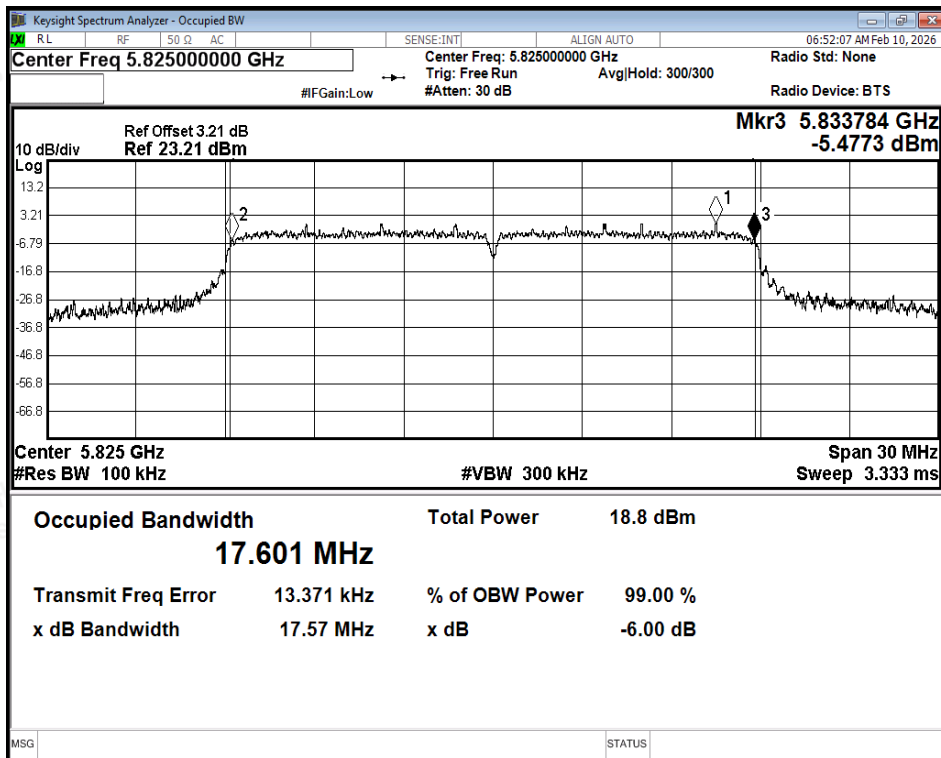

-6dB Bandwidth NVNT ac20 5825MHz Ant1

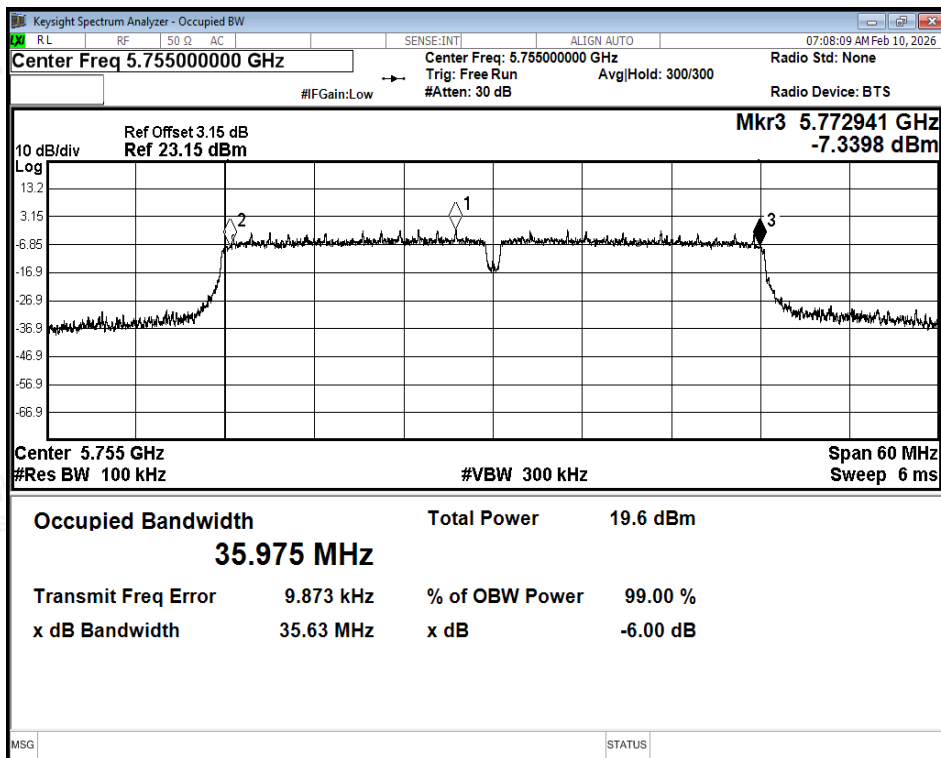

-6dB Bandwidth NVNT ac40 5755MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

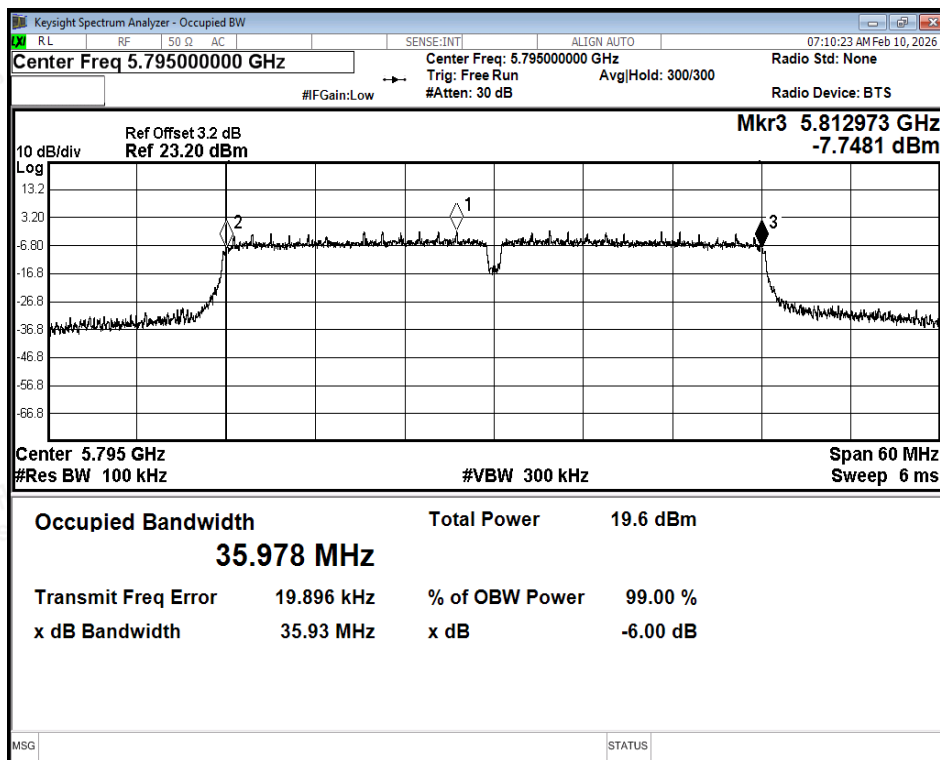

-6dB Bandwidth NVNT ac40 5795MHz Ant1

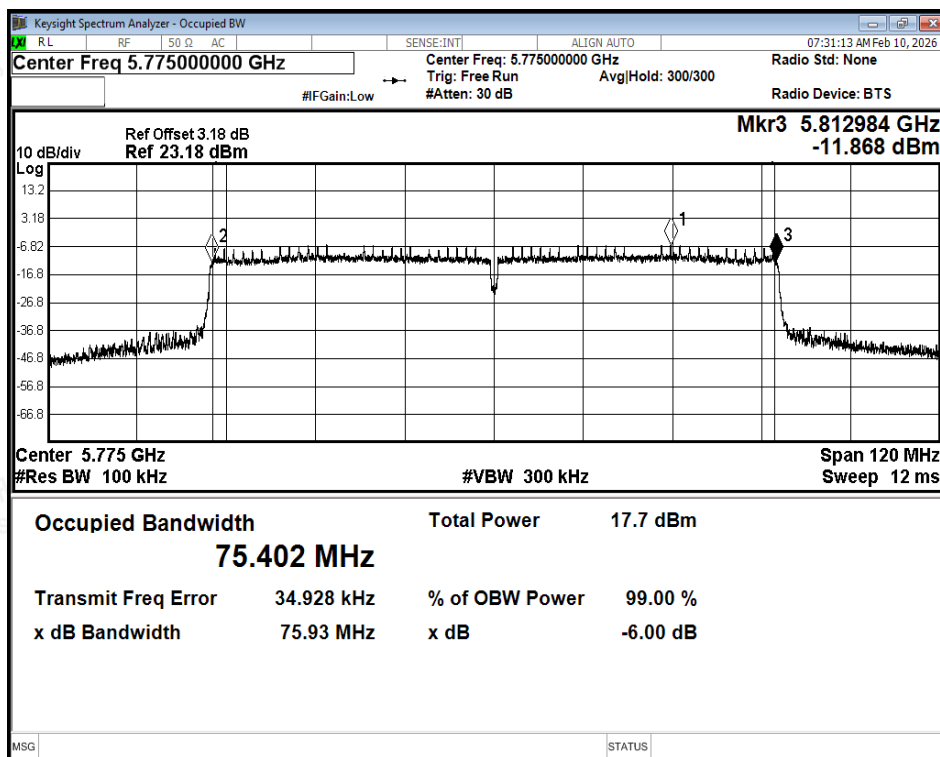

-6dB Bandwidth NVNT ac80 5775MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

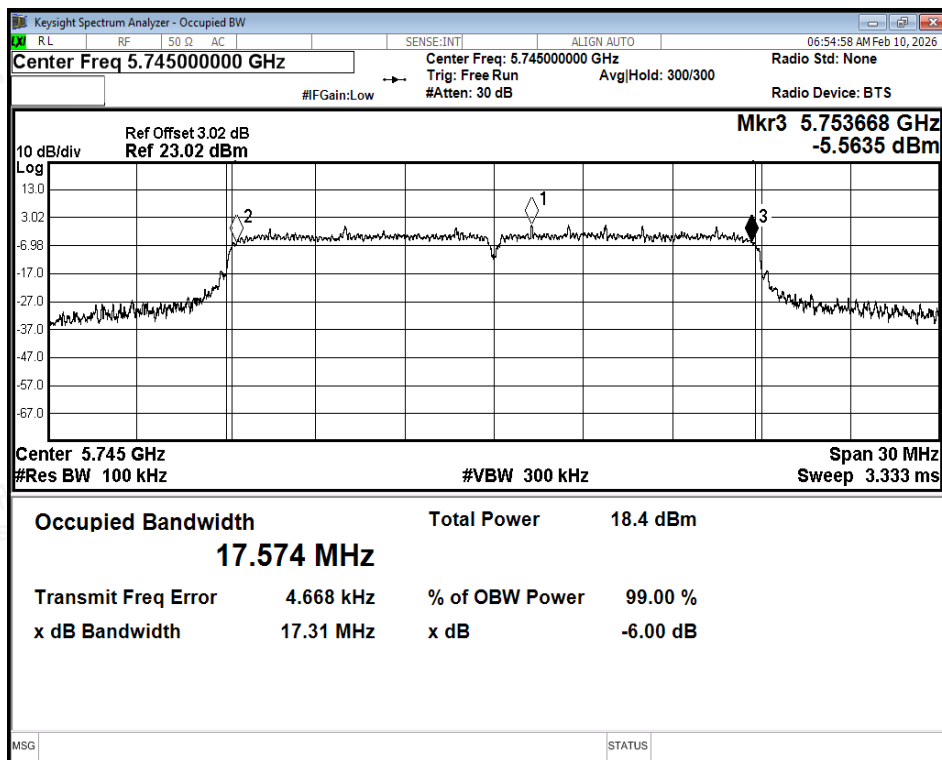

-6dB Bandwidth NVNT ax20 5745MHz Ant1

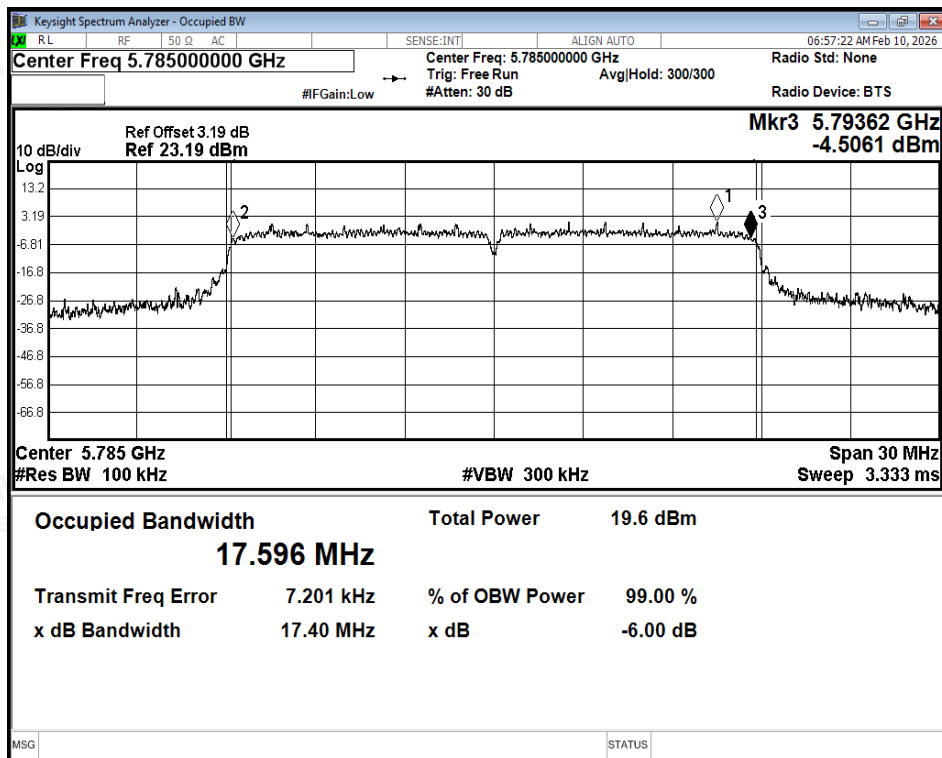

-6dB Bandwidth NVNT ax20 5785MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

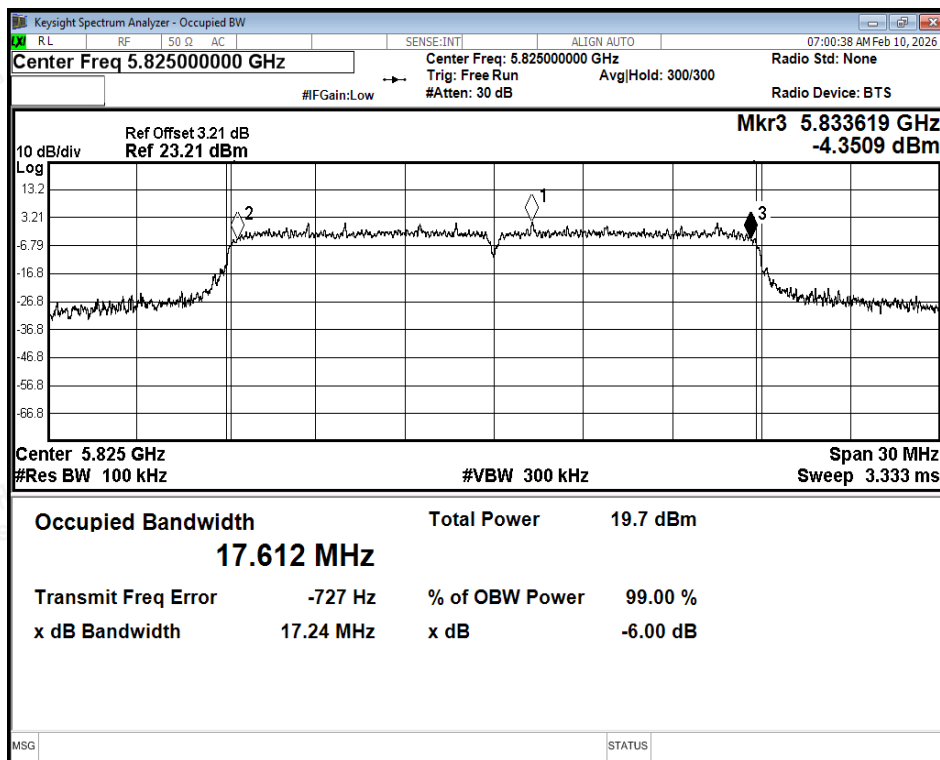

-6dB Bandwidth NVNT ax20 5825MHz Ant1

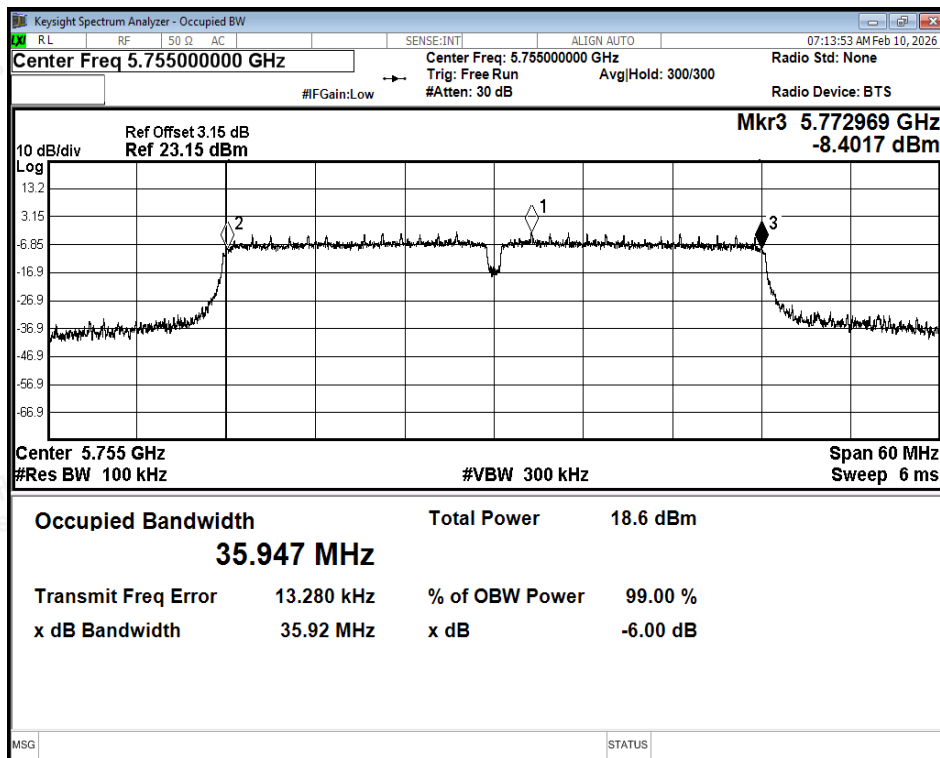

-6dB Bandwidth NVNT ax40 5755MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

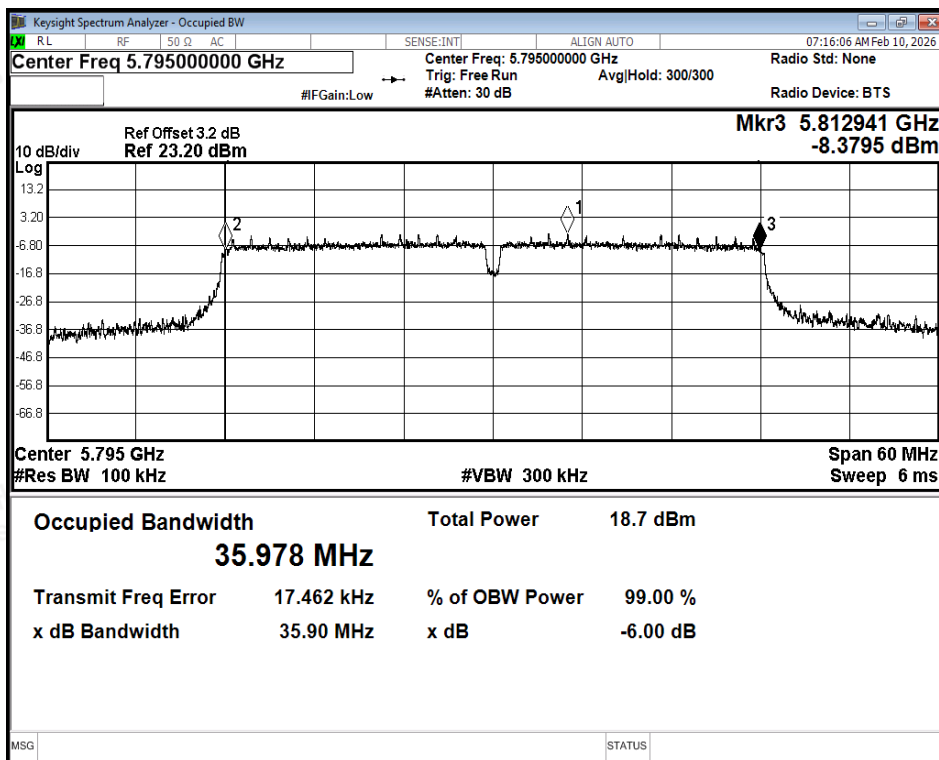

-6dB Bandwidth NVNT ax40 5795MHz Ant1

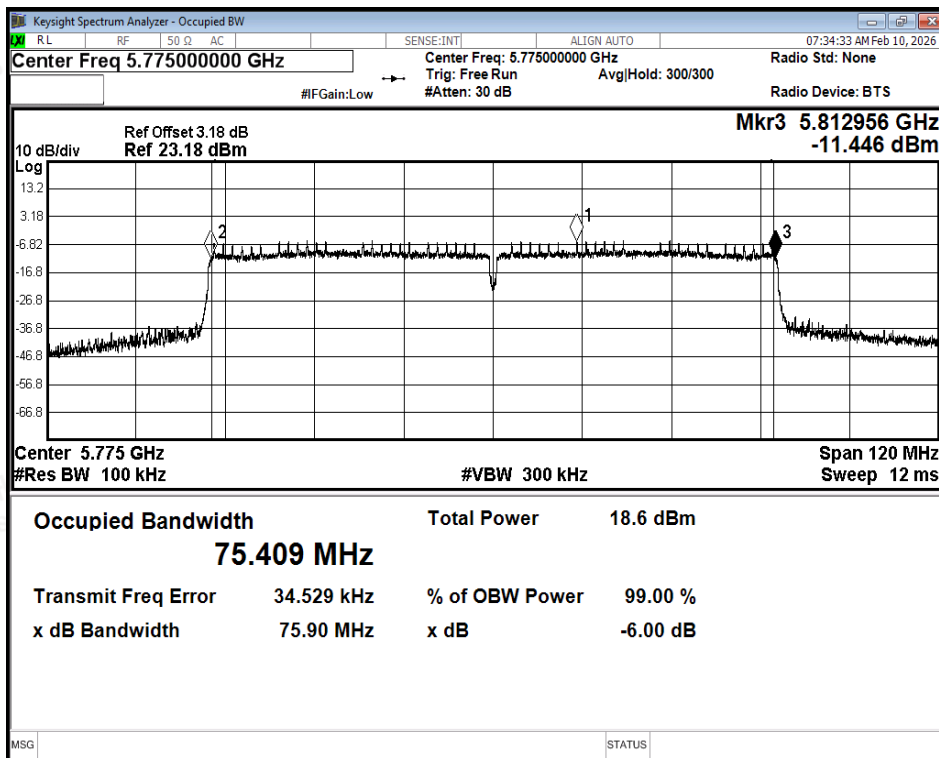

-6dB Bandwidth NVNT ax80 5775MHz Ant1



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | a    | 5745            | Ant2    | 16.35                 | 0.5                         | Pass    |
| NVNT      | a    | 5785            | Ant2    | 16.34                 | 0.5                         | Pass    |
| NVNT      | a    | 5825            | Ant2    | 16.35                 | 0.5                         | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 17.54                 | 0.5                         | Pass    |
| NVNT      | n20  | 5785            | Ant2    | 17.31                 | 0.5                         | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 17.36                 | 0.5                         | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 35.78                 | 0.5                         | Pass    |
| NVNT      | n40  | 5795            | Ant2    | 35.91                 | 0.5                         | Pass    |
| NVNT      | ac20 | 5745            | Ant2    | 17.41                 | 0.5                         | Pass    |
| NVNT      | ac20 | 5785            | Ant2    | 17.38                 | 0.5                         | Pass    |
| NVNT      | ac20 | 5825            | Ant2    | 17.39                 | 0.5                         | Pass    |
| NVNT      | ac40 | 5755            | Ant2    | 35.75                 | 0.5                         | Pass    |
| NVNT      | ac40 | 5795            | Ant2    | 35.89                 | 0.5                         | Pass    |
| NVNT      | ac80 | 5775            | Ant2    | 75.88                 | 0.5                         | Pass    |
| NVNT      | ax20 | 5745            | Ant2    | 17.51                 | 0.5                         | Pass    |
| NVNT      | ax20 | 5785            | Ant2    | 17.43                 | 0.5                         | Pass    |
| NVNT      | ax20 | 5825            | Ant2    | 17.53                 | 0.5                         | Pass    |
| NVNT      | ax40 | 5755            | Ant2    | 35.77                 | 0.5                         | Pass    |
| NVNT      | ax40 | 5795            | Ant2    | 36.04                 | 0.5                         | Pass    |
| NVNT      | ax80 | 5775            | Ant2    | 75.74                 | 0.5                         | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

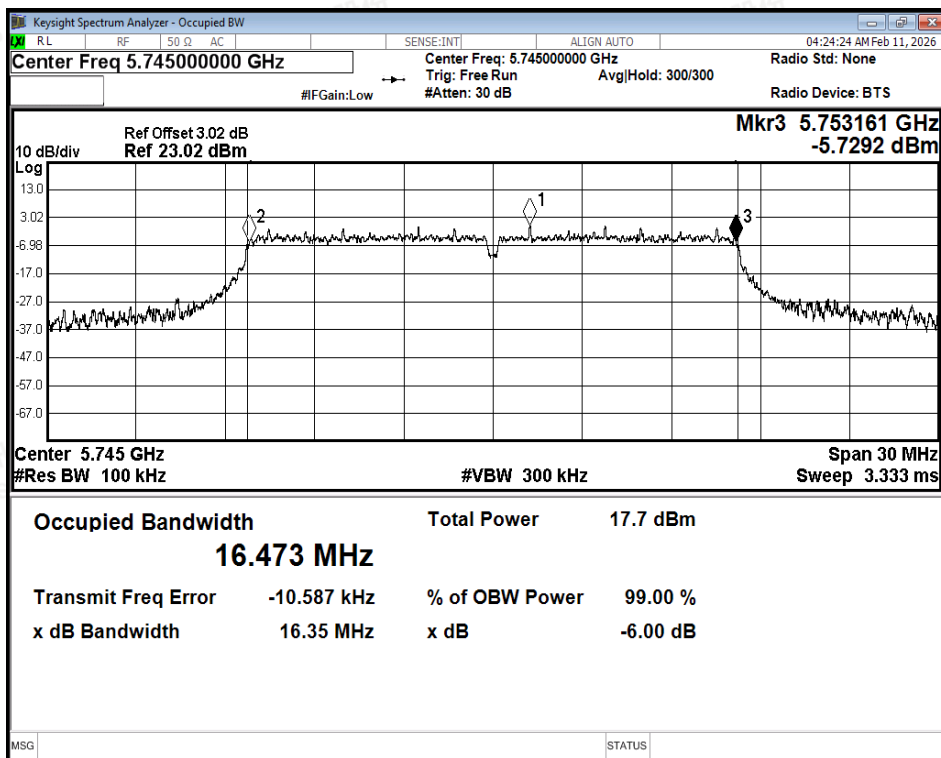

-6dB Bandwidth NVNT a 5745MHz Ant2

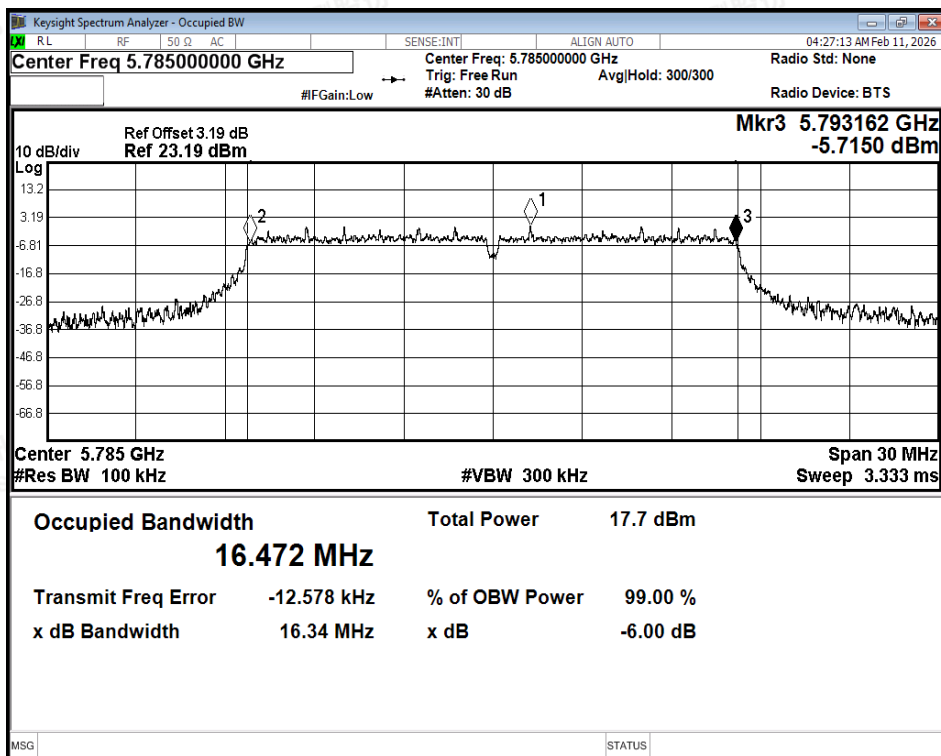

-6dB Bandwidth NVNT a 5785MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

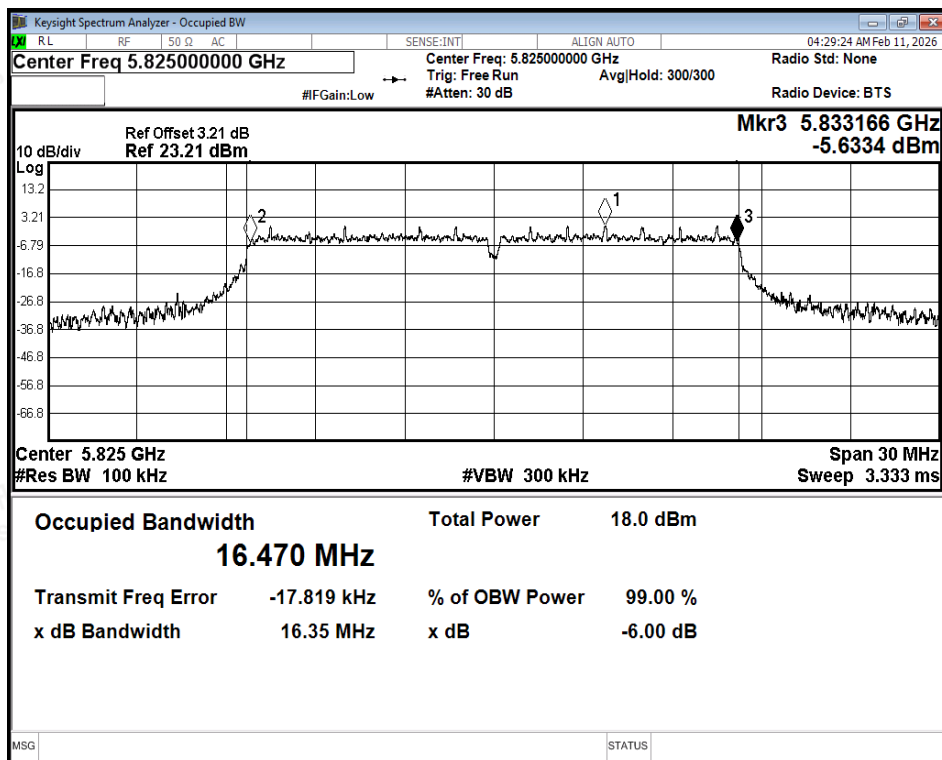

-6dB Bandwidth NVNT a 5825MHz Ant2

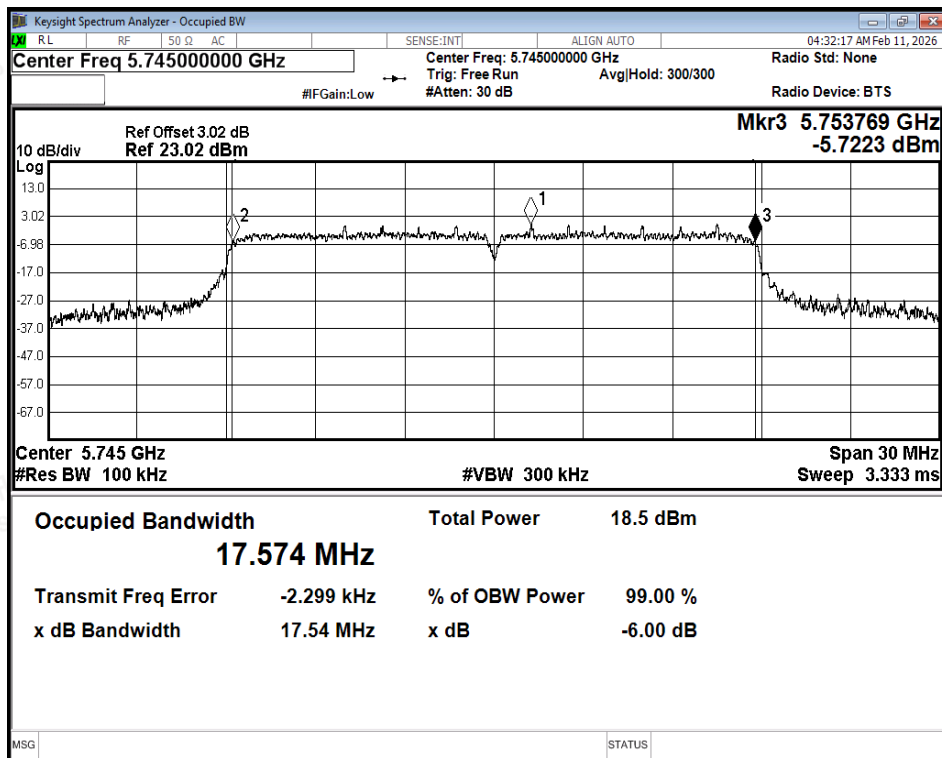

-6dB Bandwidth NVNT n20 5745MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

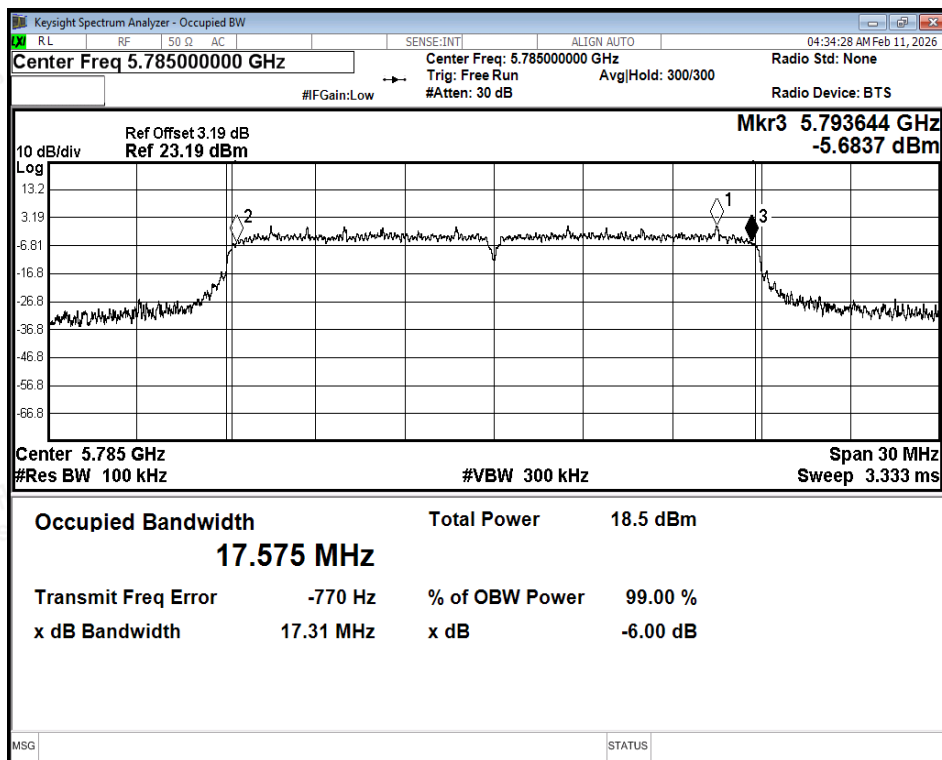

-6dB Bandwidth NVNT n20 5785MHz Ant2

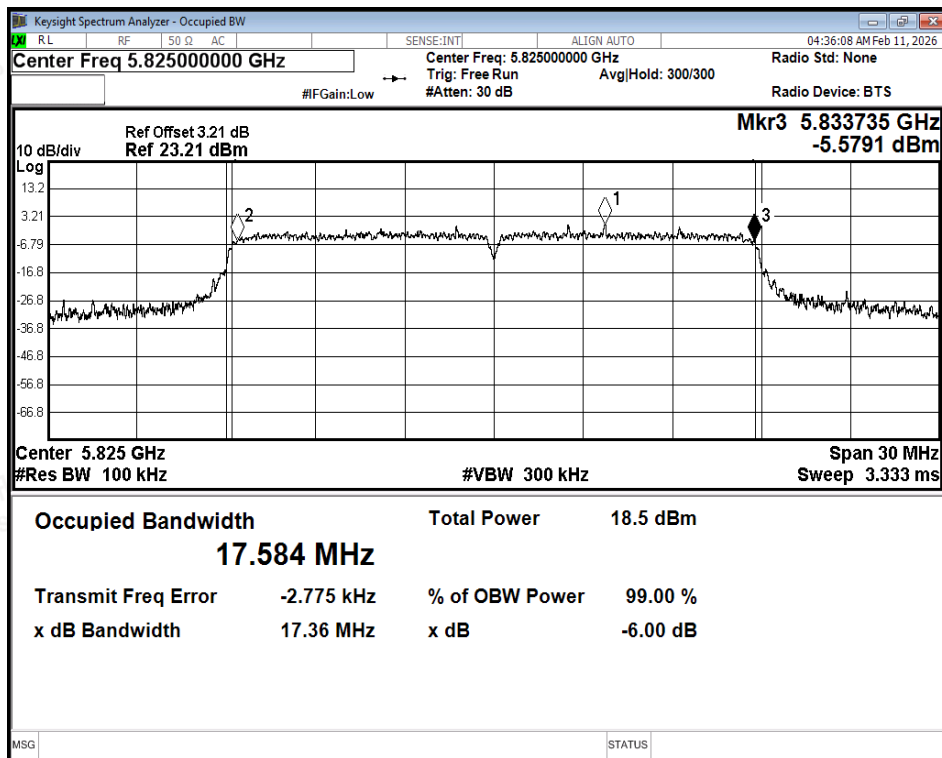

-6dB Bandwidth NVNT n20 5825MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

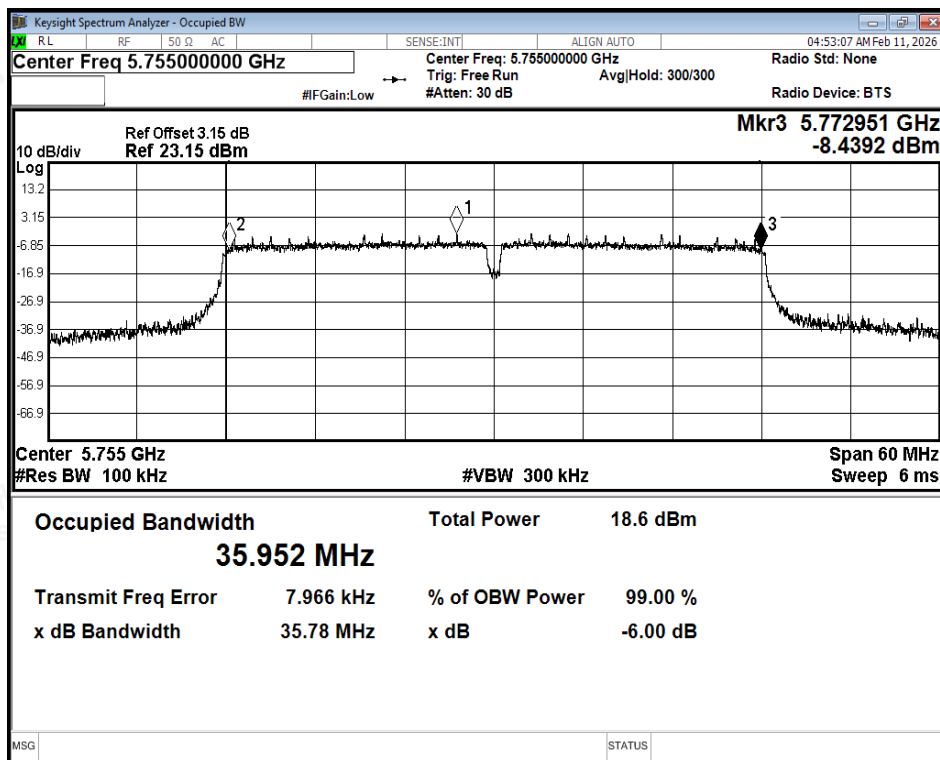

-6dB Bandwidth NVNT n40 5755MHz Ant2

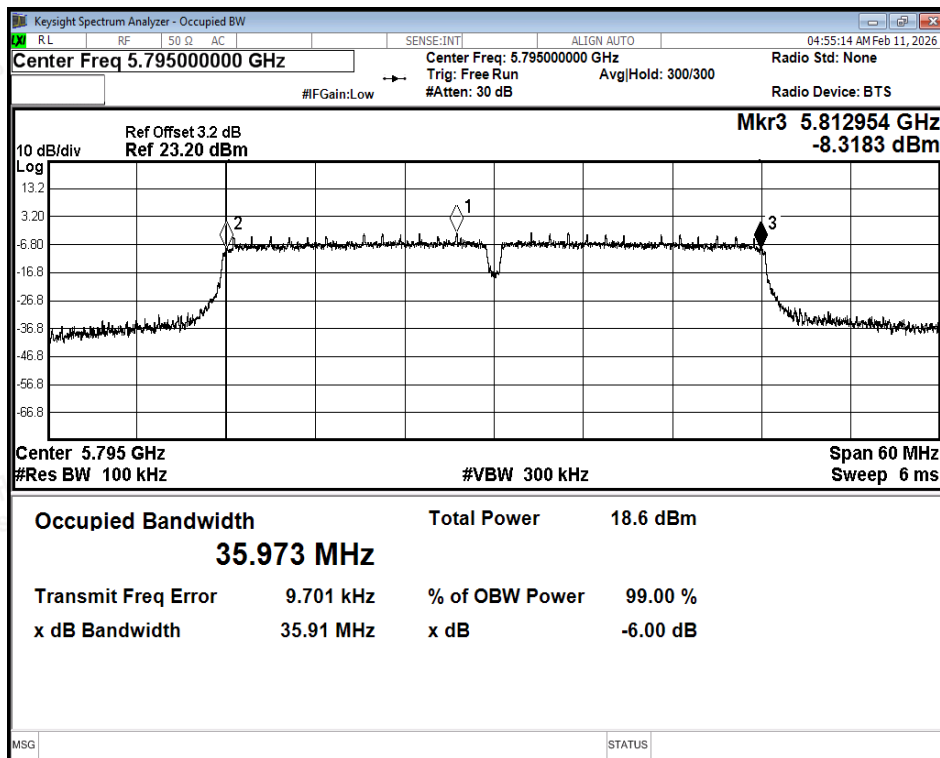

-6dB Bandwidth NVNT n40 5795MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

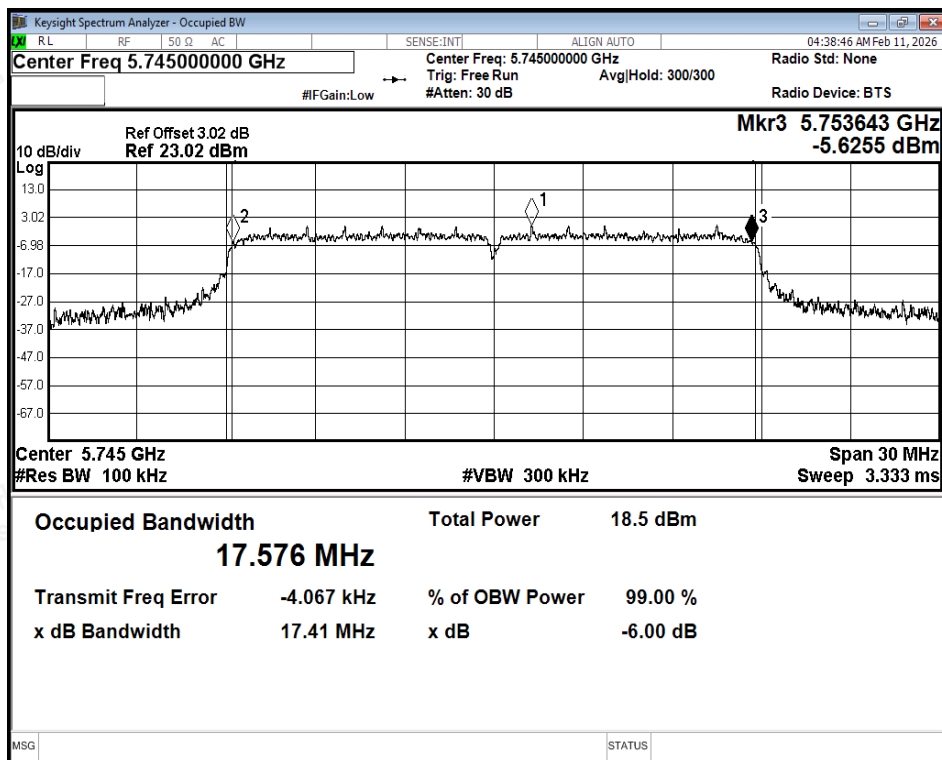

-6dB Bandwidth NVNT ac20 5745MHz Ant2

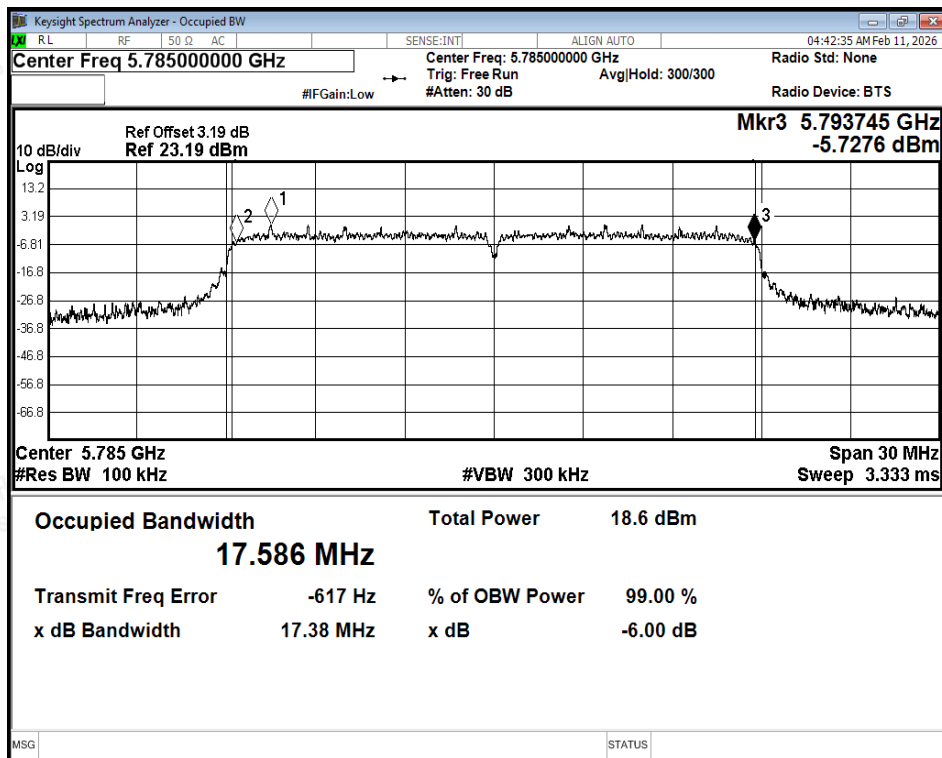

-6dB Bandwidth NVNT ac20 5785MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

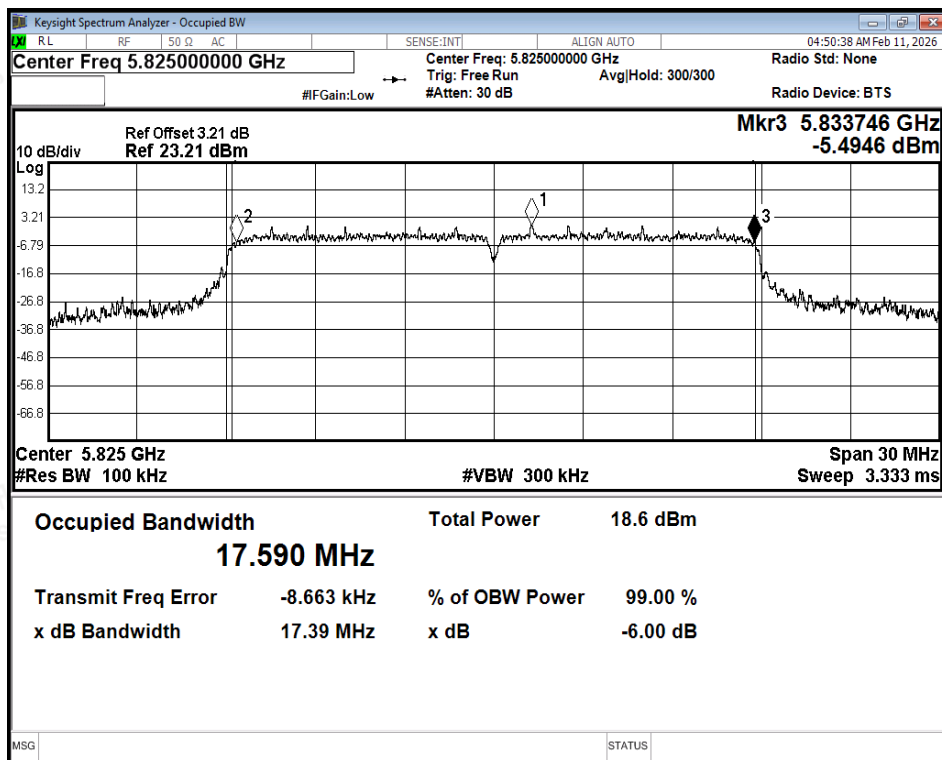

-6dB Bandwidth NVNT ac20 5825MHz Ant2

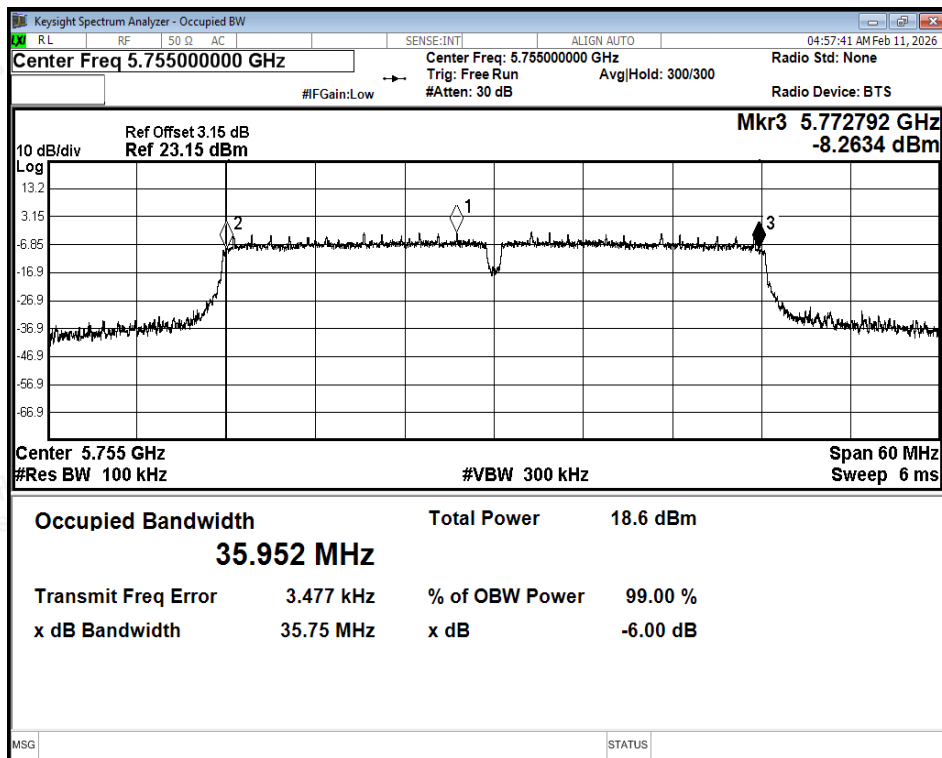

-6dB Bandwidth NVNT ac40 5755MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

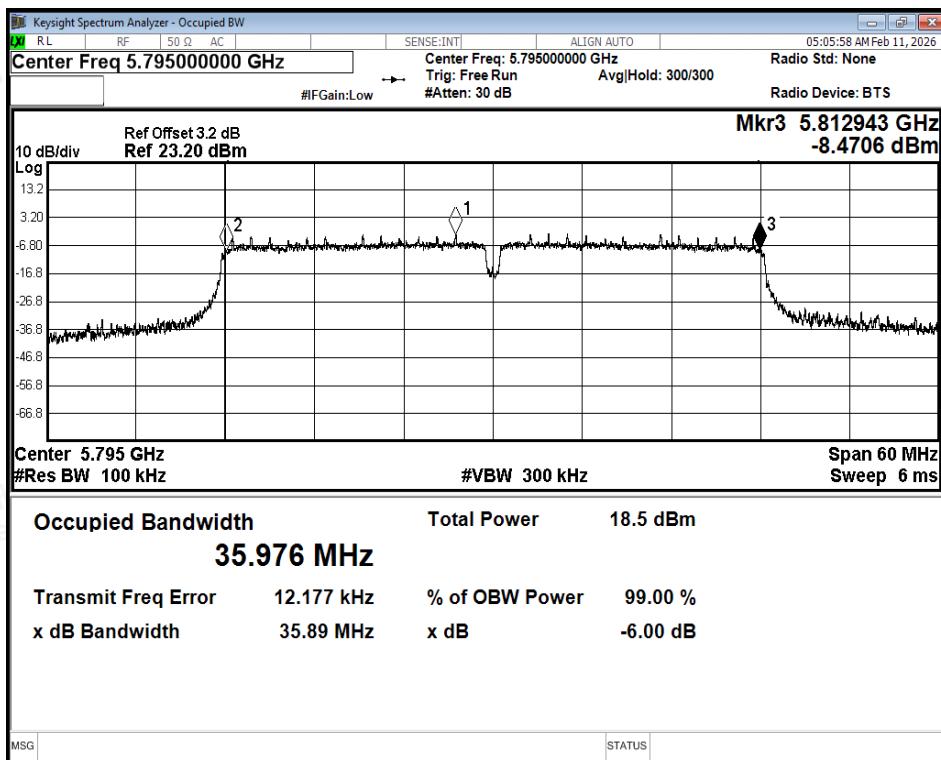

-6dB Bandwidth NVNT ac40 5795MHz Ant2

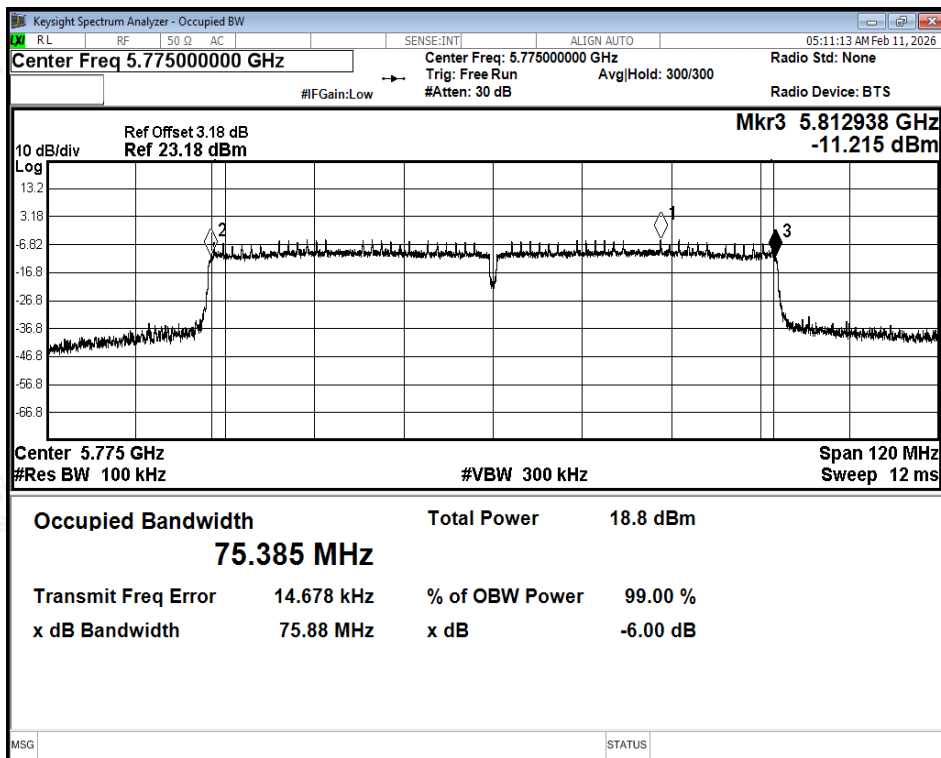

-6dB Bandwidth NVNT ac80 5775MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

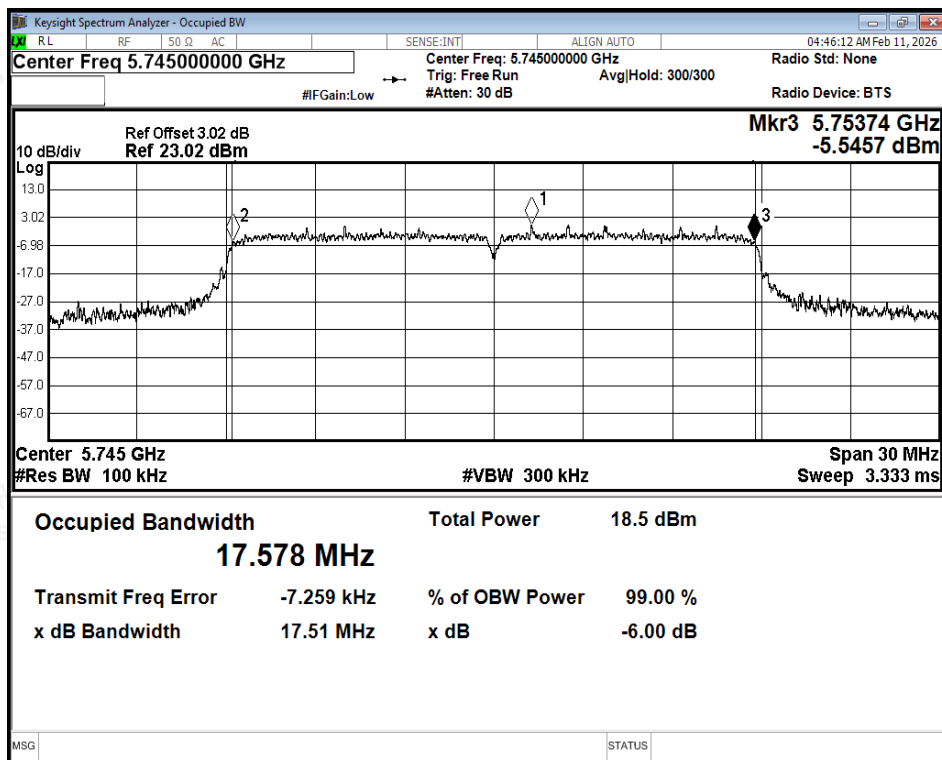

-6dB Bandwidth NVNT ax20 5745MHz Ant2

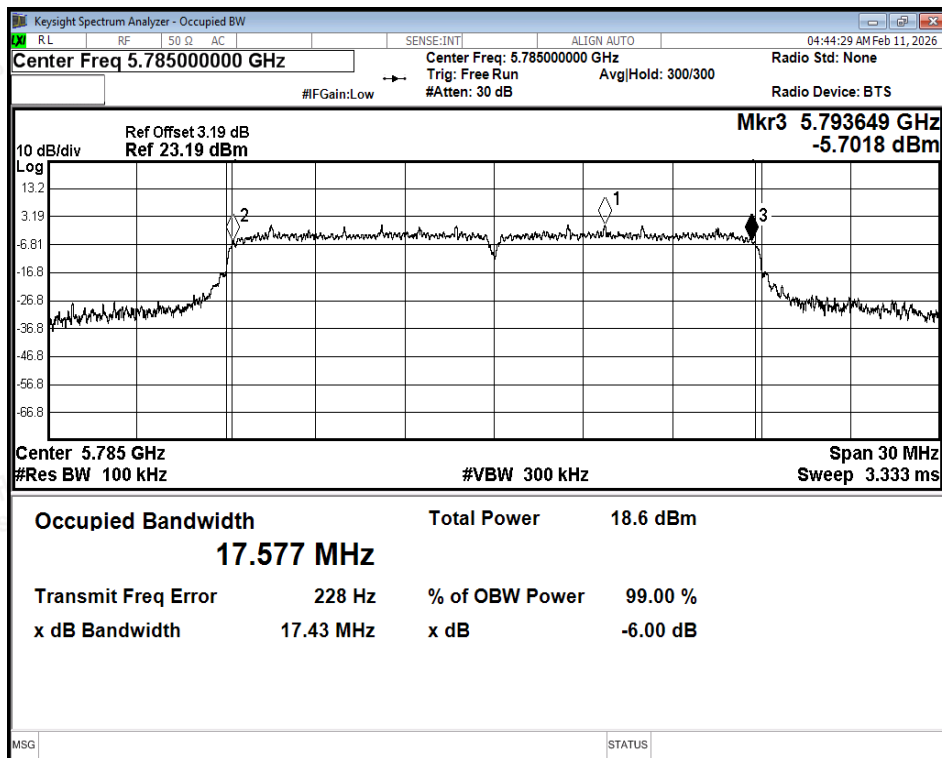

-6dB Bandwidth NVNT ax20 5785MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

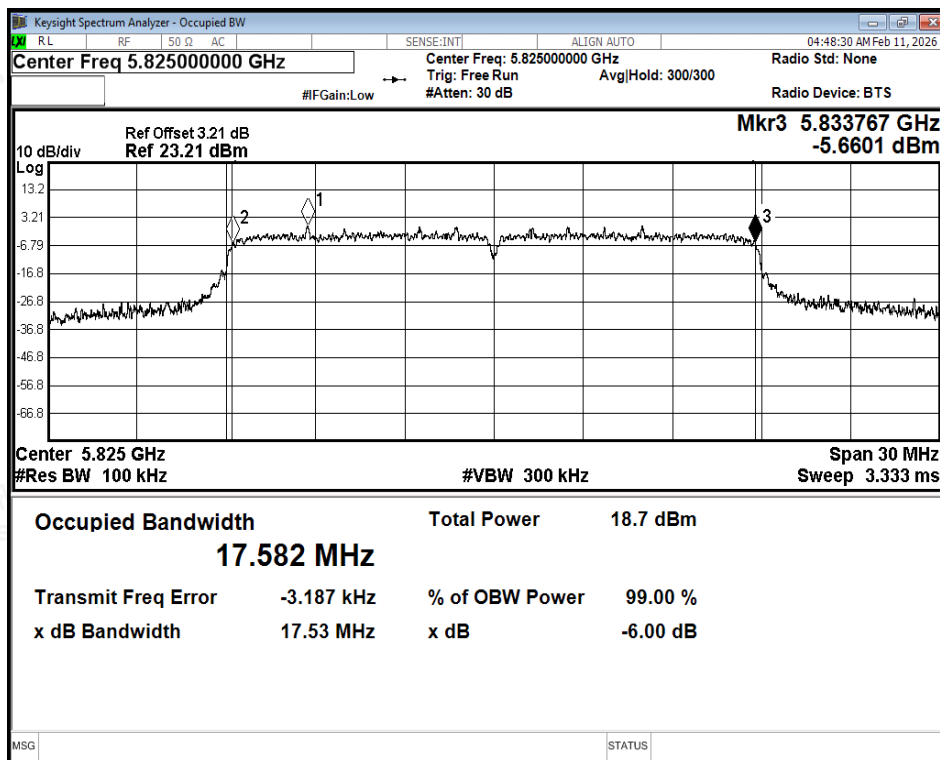

-6dB Bandwidth NVNT ax20 5825MHz Ant2

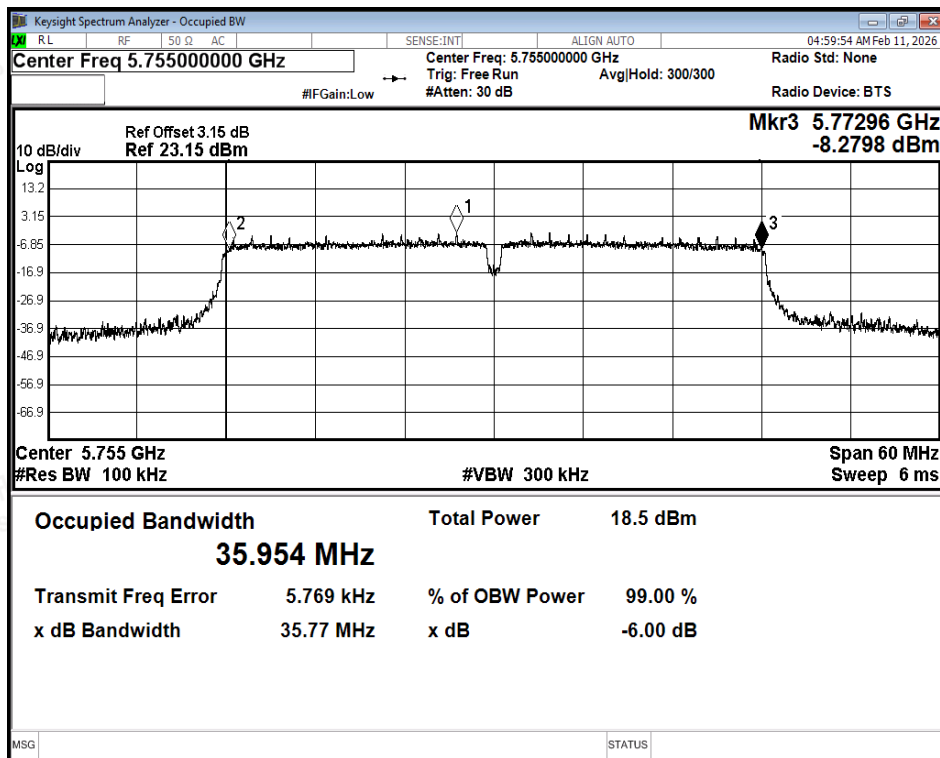

-6dB Bandwidth NVNT ax40 5755MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

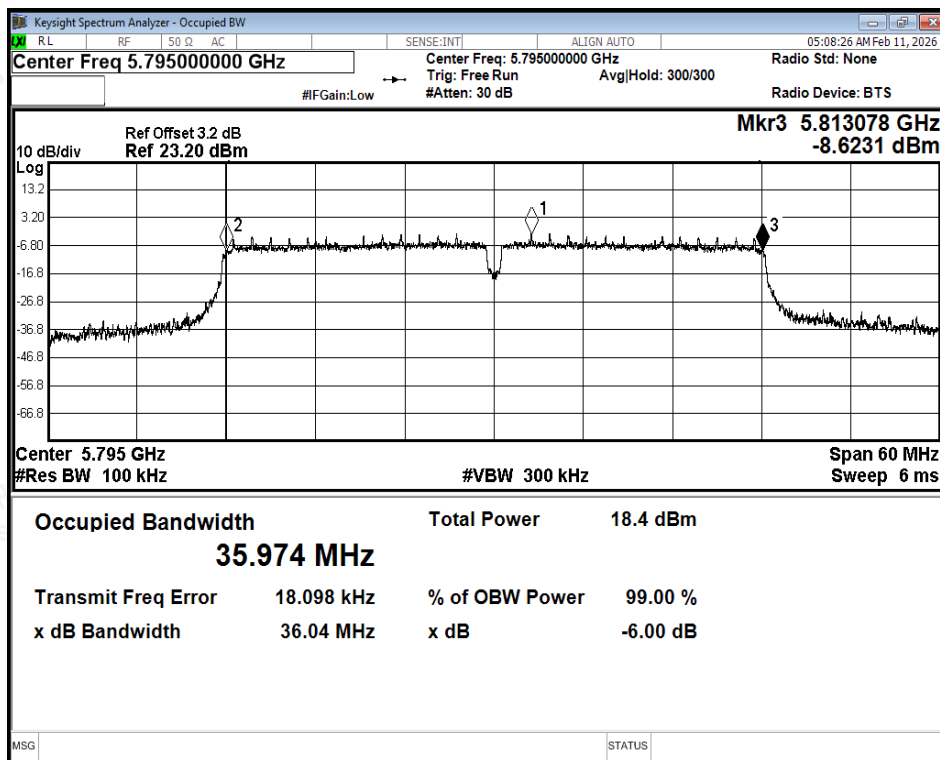

-6dB Bandwidth NVNT ax40 5795MHz Ant2

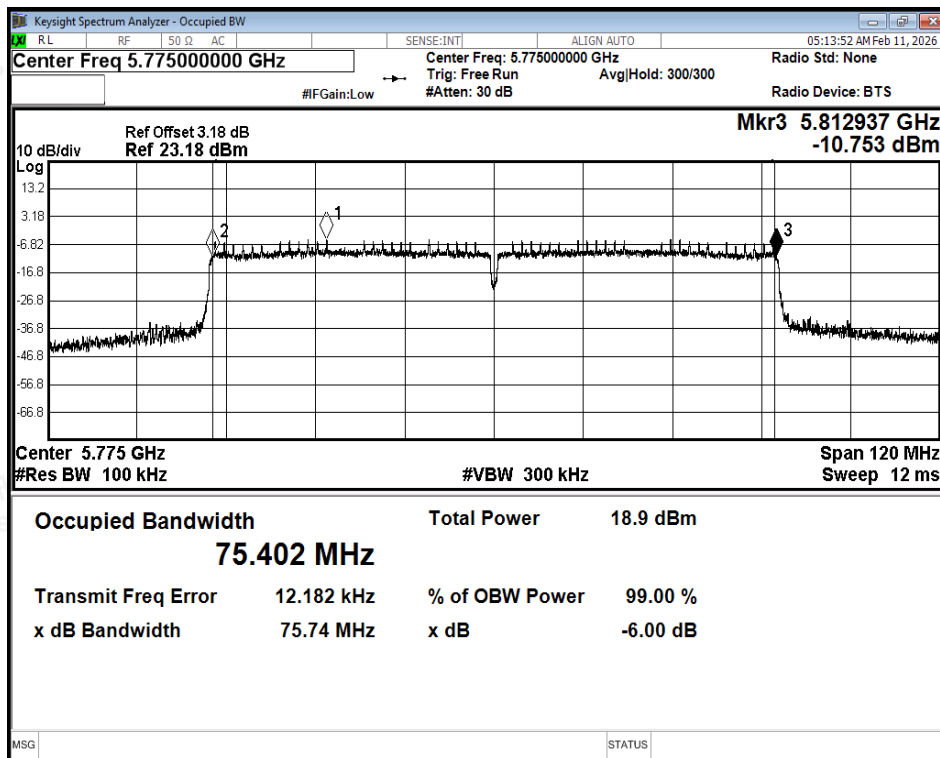

-6dB Bandwidth NVNT ax80 5775MHz Ant2



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## D.2 Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Conducted Power (dBm) | Limit Conducted (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|------------------|-----------------------------|-----------------------|---------|
| NVNT      | a    | 5745            | Ant1    | 11.57                 | 0.1              | 11.67                       | 30                    | Pass    |
| NVNT      | a    | 5785            | Ant1    | 11.67                 | 0.11             | 11.78                       | 30                    | Pass    |
| NVNT      | a    | 5825            | Ant1    | 11.89                 | 0.11             | 12                          | 30                    | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 11.8                  | 0.11             | 11.91                       | 30                    | Pass    |
| NVNT      | n20  | 5785            | Ant1    | 11.51                 | 0.13             | 11.64                       | 30                    | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 12.93                 | 0.13             | 13.06                       | 30                    | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 12.61                 | 0.27             | 12.88                       | 30                    | Pass    |
| NVNT      | n40  | 5795            | Ant1    | 12.61                 | 0.23             | 12.84                       | 30                    | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | 12.58                 | 0.11             | 12.69                       | 30                    | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | 11.81                 | 0.11             | 11.92                       | 30                    | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | 11.99                 | 0.11             | 12.1                        | 30                    | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | 12.62                 | 0.23             | 12.85                       | 30                    | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | 12.6                  | 0.23             | 12.83                       | 30                    | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | 10.66                 | 0.47             | 11.13                       | 30                    | Pass    |
| NVNT      | ax20 | 5745            | Ant1    | 11.69                 | 0.13             | 11.82                       | 30                    | Pass    |
| NVNT      | ax20 | 5785            | Ant1    | 12.73                 | 0.11             | 12.84                       | 30                    | Pass    |
| NVNT      | ax20 | 5825            | Ant1    | 12.93                 | 0.11             | 13.04                       | 30                    | Pass    |
| NVNT      | ax40 | 5755            | Ant1    | 11.73                 | 0.23             | 11.96                       | 30                    | Pass    |
| NVNT      | ax40 | 5795            | Ant1    | 11.76                 | 0.23             | 11.99                       | 30                    | Pass    |
| NVNT      | ax80 | 5775            | Ant1    | 11.46                 | 0.46             | 11.92                       | 30                    | Pass    |





| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Conducted Power (dBm) | Limit Conducted (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|------------------|-----------------------------|-----------------------|---------|
| NVNT      | a    | 5745            | Ant2    | 11.33                 | 0.1              | 11.43                       | 30                    | Pass    |
| NVNT      | a    | 5785            | Ant2    | 11.38                 | 0.1              | 11.48                       | 30                    | Pass    |
| NVNT      | a    | 5825            | Ant2    | 11.46                 | 0.1              | 11.56                       | 30                    | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 11.7                  | 0.11             | 11.81                       | 30                    | Pass    |
| NVNT      | n20  | 5785            | Ant2    | 11.7                  | 0.11             | 11.81                       | 30                    | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 11.84                 | 0.11             | 11.95                       | 30                    | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 11.59                 | 0.23             | 11.82                       | 30                    | Pass    |
| NVNT      | n40  | 5795            | Ant2    | 11.54                 | 0.27             | 11.81                       | 30                    | Pass    |
| NVNT      | ac20 | 5745            | Ant2    | 11.69                 | 0.11             | 11.8                        | 30                    | Pass    |
| NVNT      | ac20 | 5785            | Ant2    | 11.78                 | 0.13             | 11.91                       | 30                    | Pass    |
| NVNT      | ac20 | 5825            | Ant2    | 11.87                 | 0.13             | 12                          | 30                    | Pass    |
| NVNT      | ac40 | 5755            | Ant2    | 11.68                 | 0.23             | 11.91                       | 30                    | Pass    |
| NVNT      | ac40 | 5795            | Ant2    | 11.33                 | 0.23             | 11.56                       | 30                    | Pass    |
| NVNT      | ac80 | 5775            | Ant2    | 11.47                 | 0.46             | 11.93                       | 30                    | Pass    |
| NVNT      | ax20 | 5745            | Ant2    | 11.71                 | 0.11             | 11.82                       | 30                    | Pass    |
| NVNT      | ax20 | 5785            | Ant2    | 11.74                 | 0.11             | 11.85                       | 30                    | Pass    |
| NVNT      | ax20 | 5825            | Ant2    | 11.87                 | 0.11             | 11.98                       | 30                    | Pass    |
| NVNT      | ax40 | 5755            | Ant2    | 11.52                 | 0.27             | 11.79                       | 30                    | Pass    |
| NVNT      | ax40 | 5795            | Ant2    | 11.42                 | 0.23             | 11.65                       | 30                    | Pass    |
| NVNT      | ax80 | 5775            | Ant2    | 11.56                 | 0.46             | 12.02                       | 30                    | Pass    |





## MIMO

| Condition | Mode | Frequency (MHz) | Antenna |       | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-------|-------------------|-------------|---------|
|           |      |                 | Ant1    | Ant2  |                   |             |         |
| NVNT      | n20  | 5745            | 11.91   | 11.81 | 14.87             | 24          | Pass    |
| NVNT      | n20  | 5785            | 11.64   | 11.81 | 14.74             | 24          | Pass    |
| NVNT      | n20  | 5825            | 13.06   | 11.95 | 15.55             | 24          | Pass    |
| NVNT      | n40  | 5755            | 12.88   | 11.82 | 15.39             | 24          | Pass    |
| NVNT      | n40  | 5795            | 12.84   | 11.81 | 15.37             | 24          | Pass    |
| NVNT      | ac20 | 5745            | 12.69   | 11.8  | 15.28             | 24          | Pass    |
| NVNT      | ac20 | 5785            | 11.92   | 11.91 | 14.93             | 24          | Pass    |
| NVNT      | ac20 | 5825            | 12.1    | 12    | 15.06             | 24          | Pass    |
| NVNT      | ac40 | 5755            | 12.85   | 11.91 | 15.42             | 24          | Pass    |
| NVNT      | ac40 | 5795            | 12.83   | 11.56 | 15.25             | 24          | Pass    |
| NVNT      | ac80 | 5775            | 11.13   | 11.93 | 14.56             | 24          | Pass    |
| NVNT      | ax20 | 5745            | 11.82   | 11.82 | 14.83             | 24          | Pass    |
| NVNT      | ax20 | 5785            | 12.84   | 11.85 | 15.38             | 24          | Pass    |
| NVNT      | ax20 | 5825            | 13.04   | 11.98 | 15.55             | 24          | Pass    |
| NVNT      | ax40 | 5755            | 11.96   | 11.79 | 14.89             | 24          | Pass    |
| NVNT      | ax40 | 5795            | 11.99   | 11.65 | 14.83             | 24          | Pass    |
| NVNT      | ax80 | 5775            | 11.92   | 12.02 | 14.98             | 24          | Pass    |





### D.3 Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/MHz) | Duty Factor (dB) | Total Conducted PSD (dBm/MHz) | Limit Conducted (dBm/MHz) | Verdict |
|-----------|------|-----------------|---------|-------------------------|------------------|-------------------------------|---------------------------|---------|
| NVNT      | a    | 5745            | Ant1    | -2.56                   | 0.1              | -2.46                         | 30                        | Pass    |
| NVNT      | a    | 5785            | Ant1    | -2.5                    | 0.11             | -2.39                         | 30                        | Pass    |
| NVNT      | a    | 5825            | Ant1    | -2.39                   | 0.11             | -2.28                         | 30                        | Pass    |
| NVNT      | n20  | 5745            | Ant1    | -2.55                   | 0.11             | -2.44                         | 30                        | Pass    |
| NVNT      | n20  | 5785            | Ant1    | -2.85                   | 0.13             | -2.72                         | 30                        | Pass    |
| NVNT      | n20  | 5825            | Ant1    | -3.58                   | 0.13             | -3.45                         | 30                        | Pass    |
| NVNT      | n40  | 5755            | Ant1    | -4.74                   | 0.27             | -4.47                         | 30                        | Pass    |
| NVNT      | n40  | 5795            | Ant1    | -4.64                   | 0.23             | -4.41                         | 30                        | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | -1.74                   | 0.11             | -1.63                         | 30                        | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | -2.52                   | 0.11             | -2.41                         | 30                        | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | -2.36                   | 0.11             | -2.25                         | 30                        | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | -4.6                    | 0.23             | -4.37                         | 30                        | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | -4.74                   | 0.23             | -4.51                         | 30                        | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | -10.04                  | 0.47             | -9.57                         | 30                        | Pass    |
| NVNT      | ax20 | 5745            | Ant1    | -2.48                   | 0.13             | -2.35                         | 30                        | Pass    |
| NVNT      | ax20 | 5785            | Ant1    | -1.39                   | 0.11             | -1.28                         | 30                        | Pass    |
| NVNT      | ax20 | 5825            | Ant1    | -1.52                   | 0.11             | -1.41                         | 30                        | Pass    |
| NVNT      | ax40 | 5755            | Ant1    | -5.44                   | 0.23             | -5.21                         | 30                        | Pass    |
| NVNT      | ax40 | 5795            | Ant1    | -5.63                   | 0.23             | -5.4                          | 30                        | Pass    |
| NVNT      | ax80 | 5775            | Ant1    | -8.98                   | 0.46             | -8.52                         | 30                        | Pass    |





| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/MHz) | Duty Factor (dB) | Total Conducted PSD (dBm/MHz) | Limit Conducted (dBm/MHz) | Verdict |
|-----------|------|-----------------|---------|-------------------------|------------------|-------------------------------|---------------------------|---------|
| NVNT      | a    | 5745            | Ant2    | -2.66                   | 0.1              | -2.56                         | 30                        | Pass    |
| NVNT      | a    | 5785            | Ant2    | -2.66                   | 0.1              | -2.56                         | 30                        | Pass    |
| NVNT      | a    | 5825            | Ant2    | -2.66                   | 0.1              | -2.56                         | 30                        | Pass    |
| NVNT      | n20  | 5745            | Ant2    | -2.76                   | 0.11             | -2.65                         | 30                        | Pass    |
| NVNT      | n20  | 5785            | Ant2    | -2.58                   | 0.11             | -2.47                         | 30                        | Pass    |
| NVNT      | n20  | 5825            | Ant2    | -2.57                   | 0.11             | -2.46                         | 30                        | Pass    |
| NVNT      | n40  | 5755            | Ant2    | -5.5                    | 0.23             | -5.27                         | 30                        | Pass    |
| NVNT      | n40  | 5795            | Ant2    | -5.82                   | 0.27             | -5.55                         | 30                        | Pass    |
| NVNT      | ac20 | 5745            | Ant2    | -2.64                   | 0.11             | -2.53                         | 30                        | Pass    |
| NVNT      | ac20 | 5785            | Ant2    | -2.53                   | 0.13             | -2.4                          | 30                        | Pass    |
| NVNT      | ac20 | 5825            | Ant2    | -2.51                   | 0.13             | -2.38                         | 30                        | Pass    |
| NVNT      | ac40 | 5755            | Ant2    | -5.72                   | 0.23             | -5.49                         | 30                        | Pass    |
| NVNT      | ac40 | 5795            | Ant2    | -5.85                   | 0.23             | -5.62                         | 30                        | Pass    |
| NVNT      | ac80 | 5775            | Ant2    | -8.88                   | 0.46             | -8.42                         | 30                        | Pass    |
| NVNT      | ax20 | 5745            | Ant2    | -2.67                   | 0.11             | -2.56                         | 30                        | Pass    |
| NVNT      | ax20 | 5785            | Ant2    | -2.64                   | 0.11             | -2.53                         | 30                        | Pass    |
| NVNT      | ax20 | 5825            | Ant2    | -2.57                   | 0.11             | -2.46                         | 30                        | Pass    |
| NVNT      | ax40 | 5755            | Ant2    | -5.67                   | 0.27             | -5.4                          | 30                        | Pass    |
| NVNT      | ax40 | 5795            | Ant2    | -5.87                   | 0.23             | -5.64                         | 30                        | Pass    |
| NVNT      | ax80 | 5775            | Ant2    | -8.87                   | 0.46             | -8.41                         | 30                        | Pass    |







## MIMO

| Condition | Mode | Frequency (MHz) | Conducted PSD (dBm/MHz) |       | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|-----------|------|-----------------|-------------------------|-------|---------------------|-----------------|---------|
|           |      |                 | Duty Factor (dB)        |       |                     |                 |         |
|           |      |                 | Ant1                    | Ant2  |                     |                 |         |
| NVNT      | n20  | 5745            | -2.44                   | -2.65 | 0.47                | 30              | Pass    |
| NVNT      | n20  | 5785            | -2.72                   | -2.47 | 0.42                | 30              | Pass    |
| NVNT      | n20  | 5825            | -3.45                   | -2.46 | 0.08                | 30              | Pass    |
| NVNT      | n40  | 5755            | -4.47                   | -5.27 | -1.84               | 30              | Pass    |
| NVNT      | n40  | 5795            | -4.41                   | -5.55 | -1.93               | 30              | Pass    |
| NVNT      | ac20 | 5745            | -1.63                   | -2.53 | 0.95                | 30              | Pass    |
| NVNT      | ac20 | 5785            | -2.41                   | -2.4  | 0.61                | 30              | Pass    |
| NVNT      | ac20 | 5825            | -2.25                   | -2.38 | 0.70                | 30              | Pass    |
| NVNT      | ac40 | 5755            | -4.37                   | -5.49 | -1.88               | 30              | Pass    |
| NVNT      | ac40 | 5795            | -4.51                   | -5.62 | -2.02               | 30              | Pass    |
| NVNT      | ac80 | 5775            | -9.57                   | -8.42 | -5.95               | 30              | Pass    |
| NVNT      | ax20 | 5745            | -2.35                   | -2.56 | 0.56                | 30              | Pass    |
| NVNT      | ax20 | 5785            | -1.28                   | -2.53 | 1.15                | 30              | Pass    |
| NVNT      | ax20 | 5825            | -1.41                   | -2.46 | 1.11                | 30              | Pass    |
| NVNT      | ax40 | 5755            | -5.21                   | -5.4  | -2.29               | 30              | Pass    |
| NVNT      | ax40 | 5795            | -5.4                    | -5.64 | -2.51               | 30              | Pass    |
| NVNT      | ax80 | 5775            | -8.52                   | -8.41 | -5.45               | 30              | Pass    |



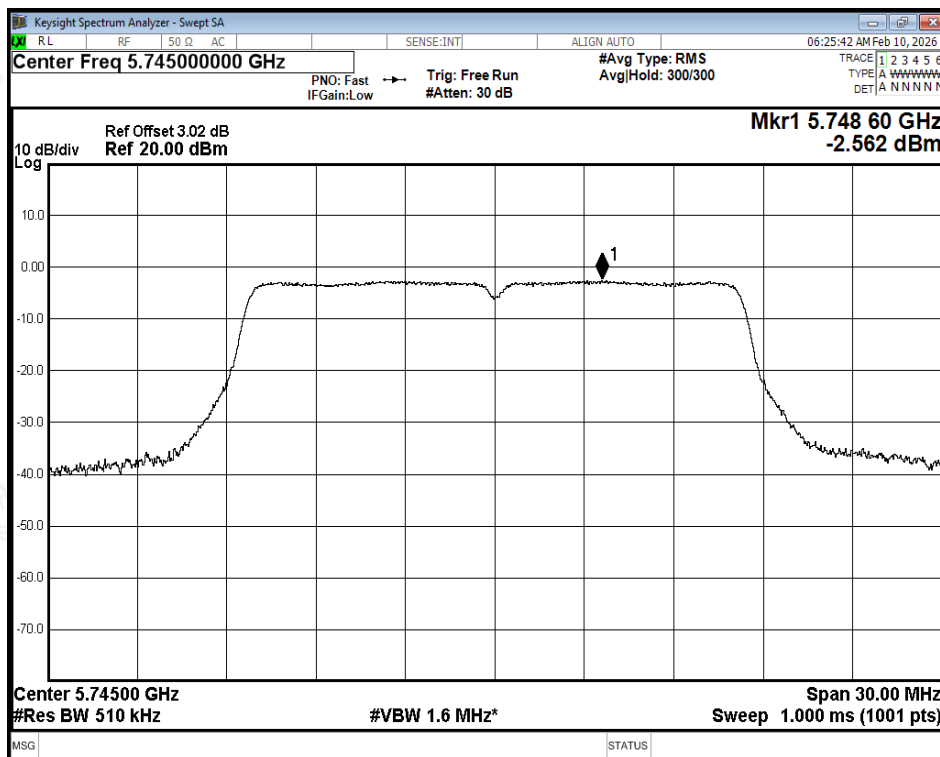

PSD NVNT a 5745MHz Ant1

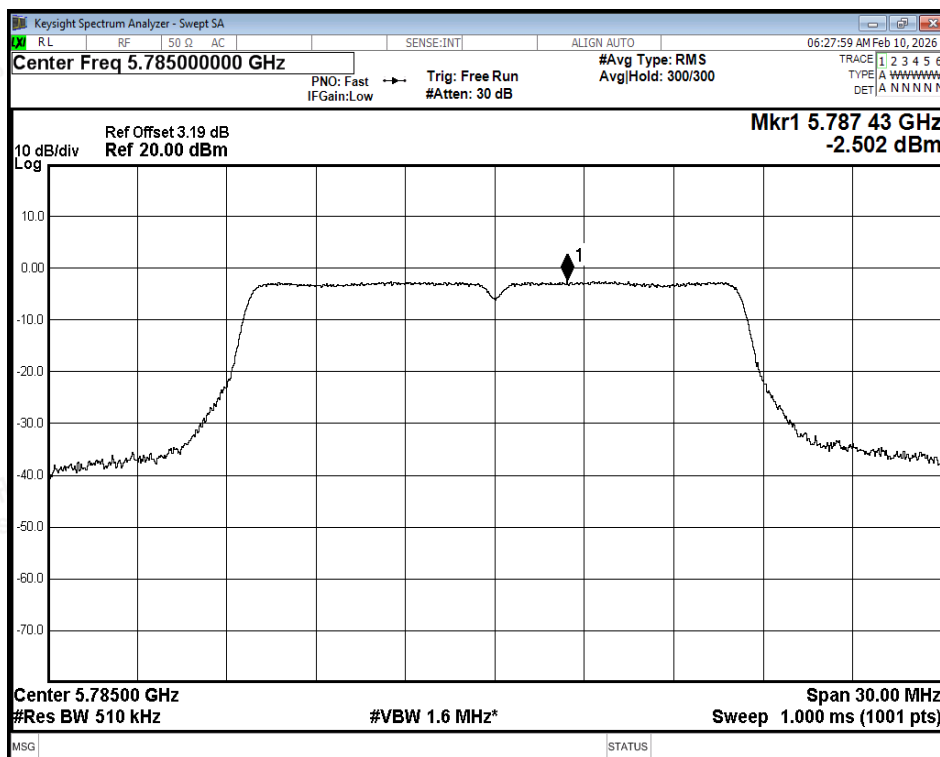

PSD NVNT a 5785MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

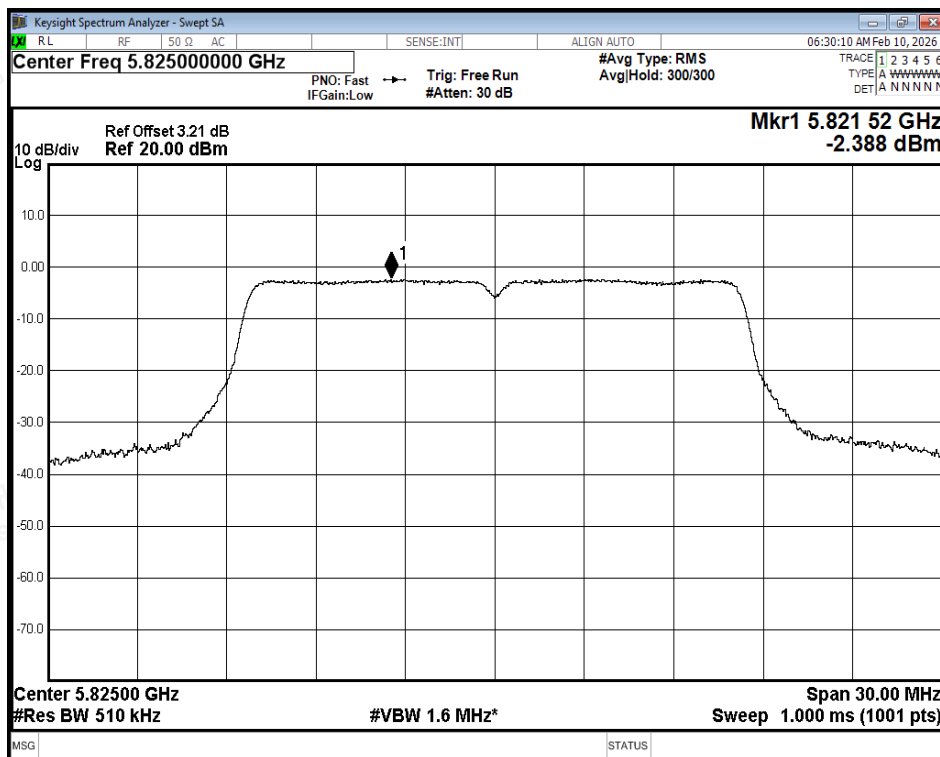

PSD NVNT a 5825MHz Ant1

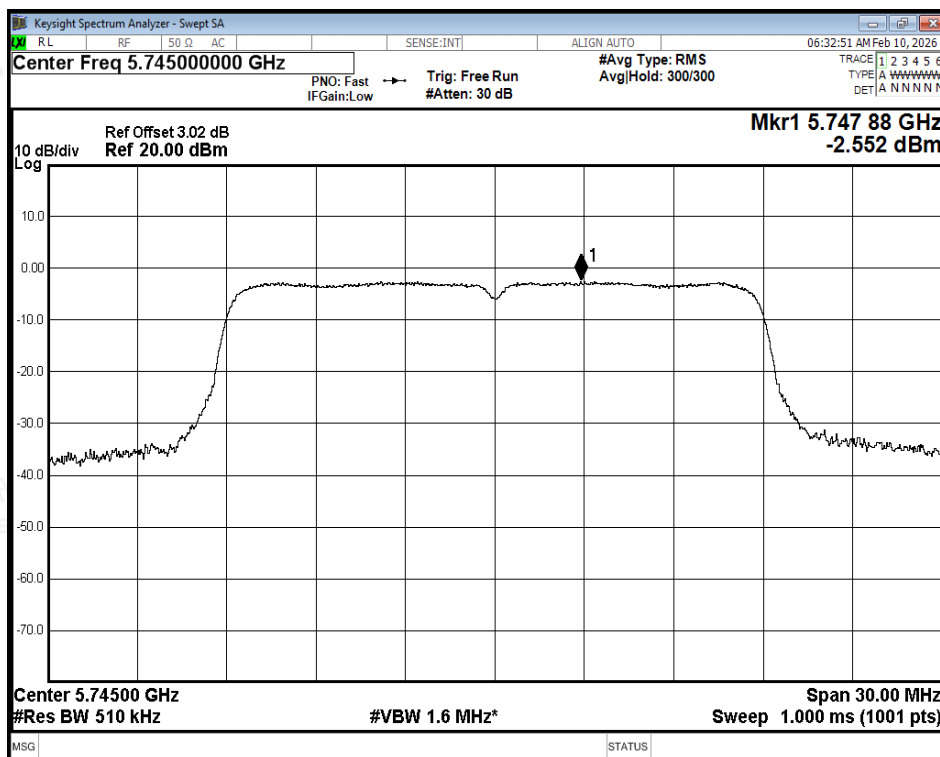

PSD NVNT n20 5745MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

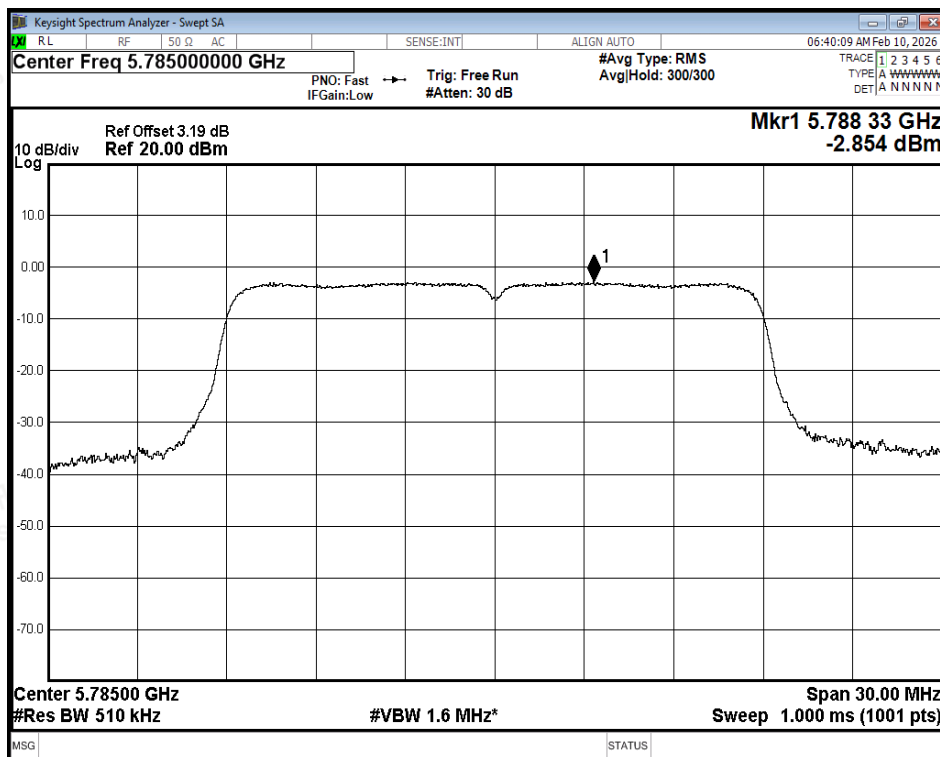

PSD NVNT n20 5785MHz Ant1

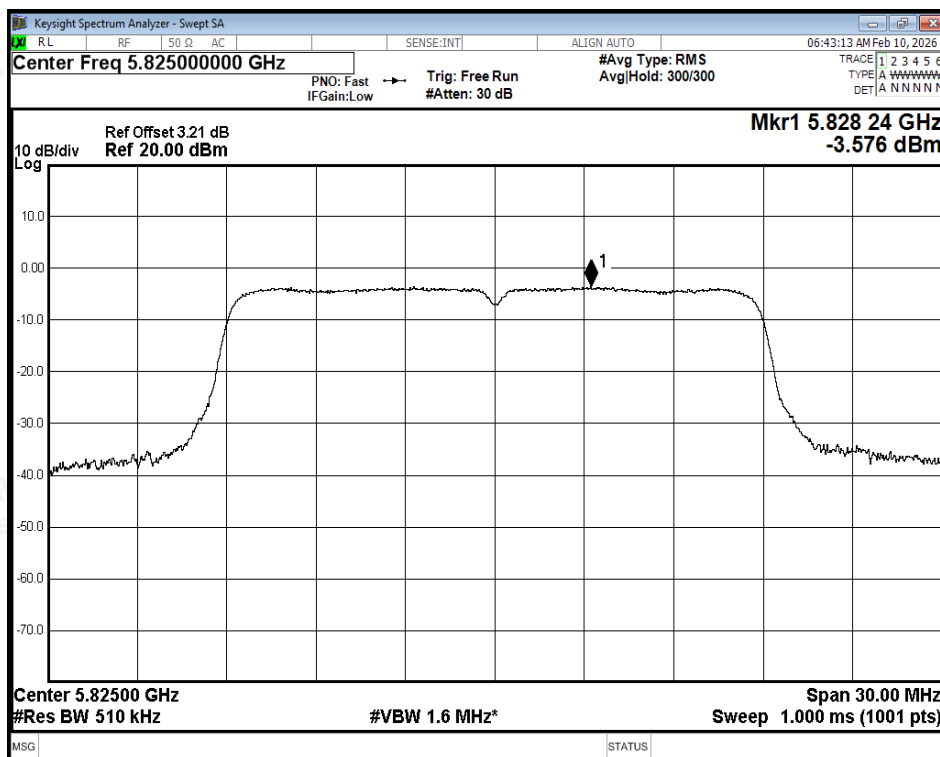

PSD NVNT n20 5825MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

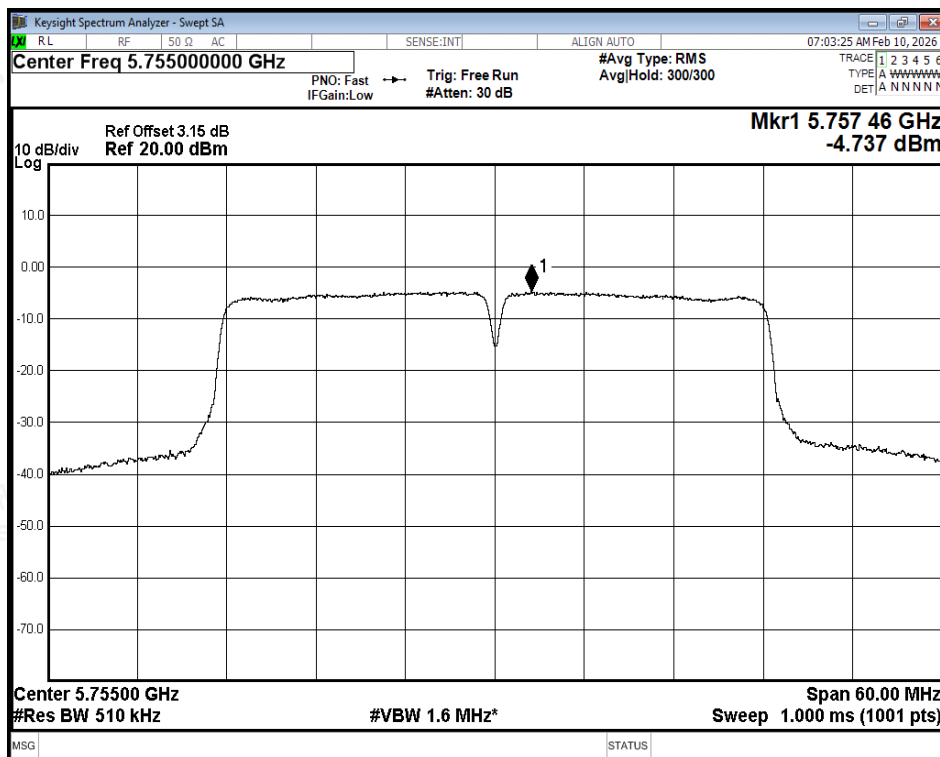


PSD NVNT n40 5755MHz Ant1

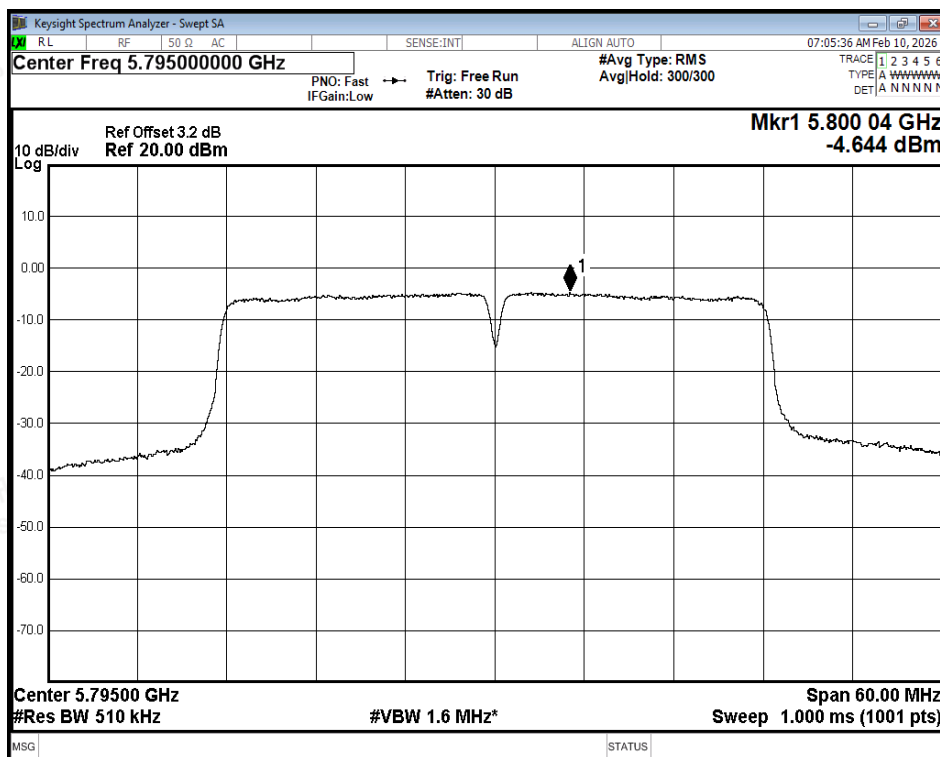


PSD NVNT n40 5795MHz Ant1



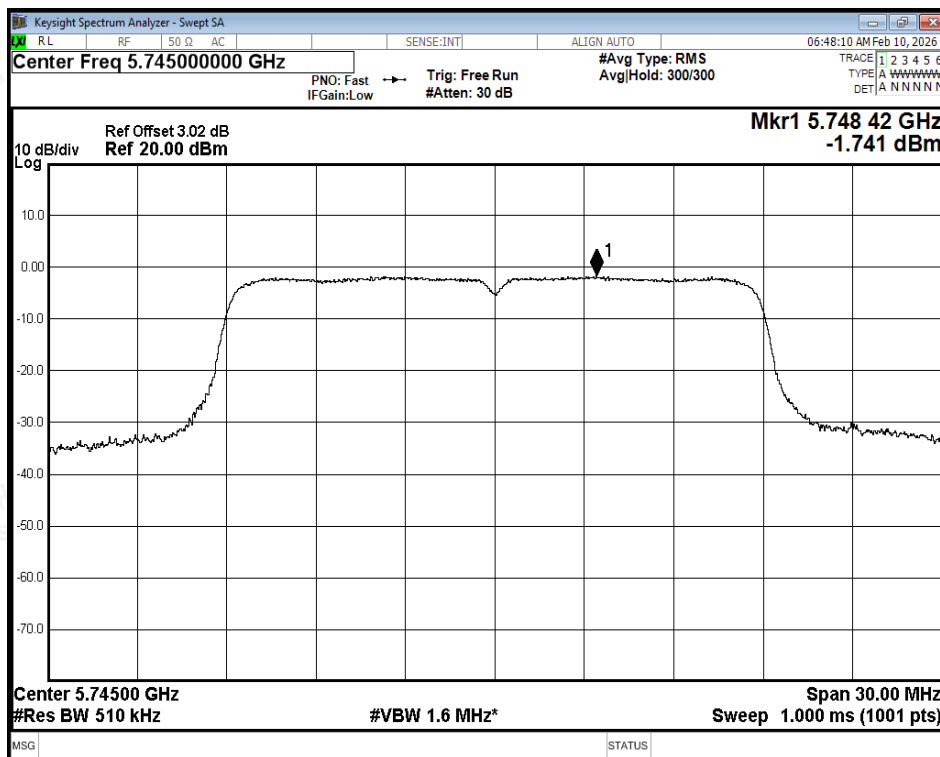


PSD NVNT ac20 5745MHz Ant1

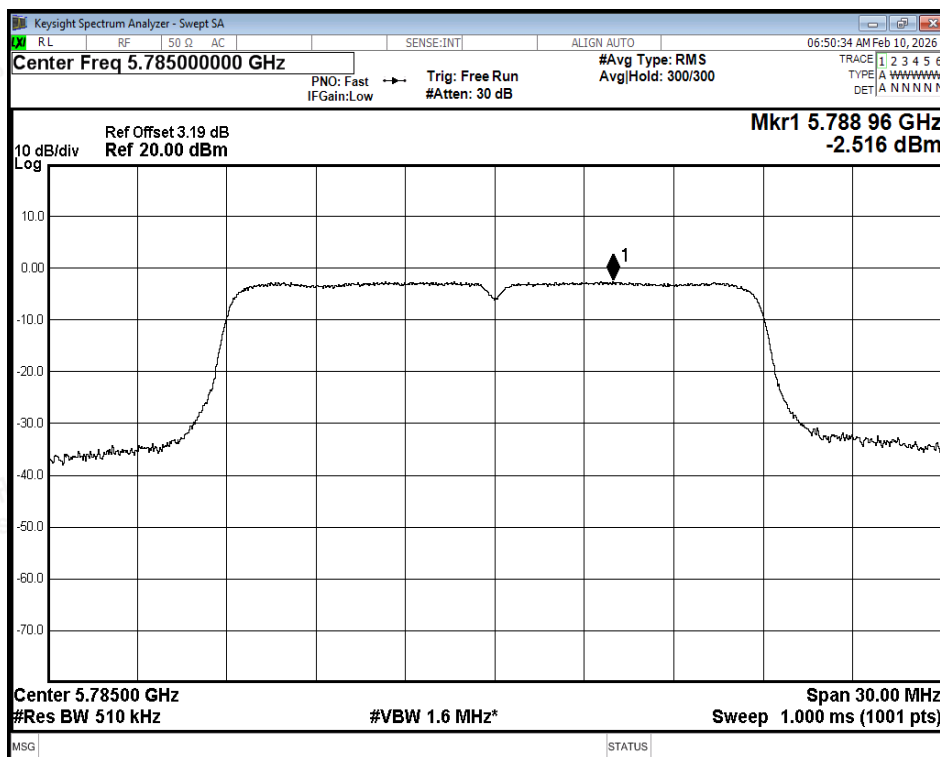


PSD NVNT ac20 5785MHz Ant1



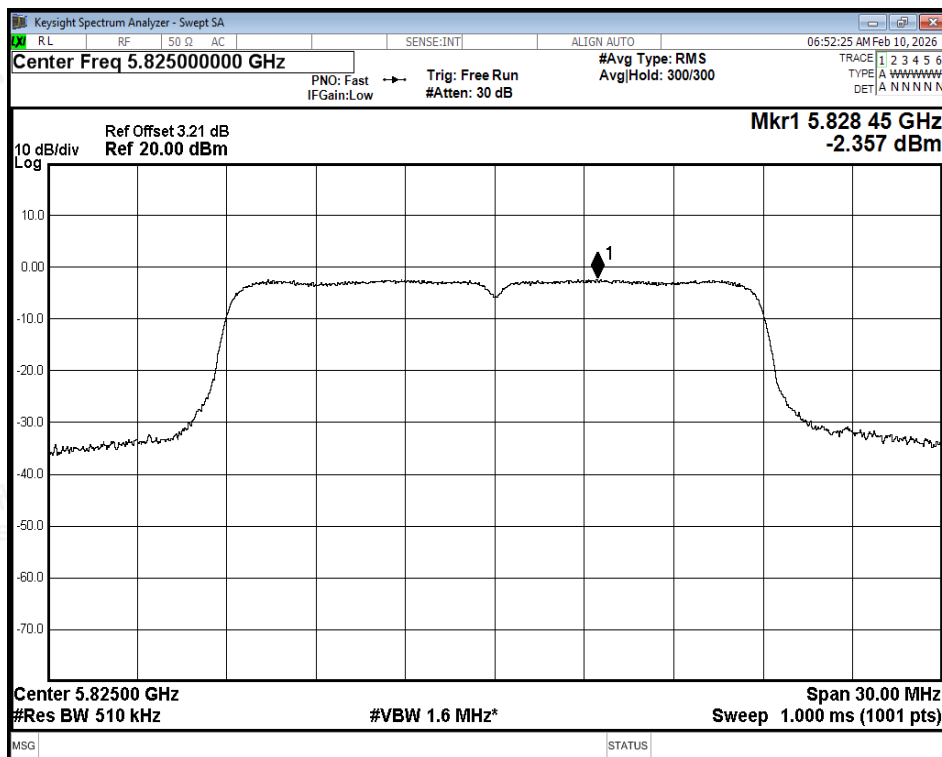


PSD NVNT ac20 5825MHz Ant1

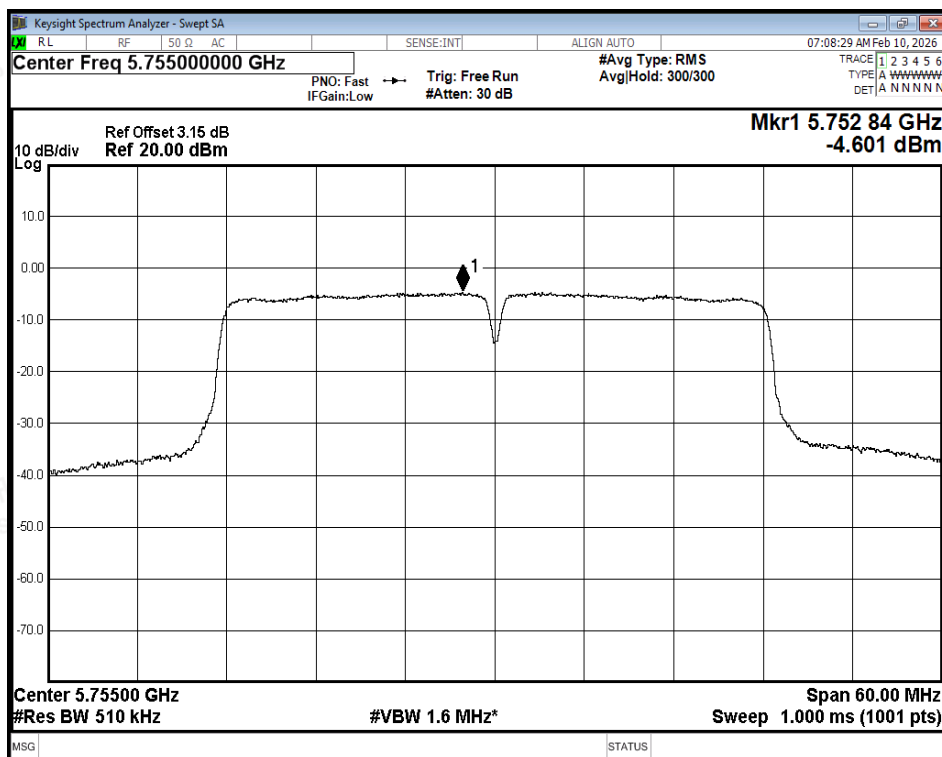


PSD NVNT ac40 5755MHz Ant1



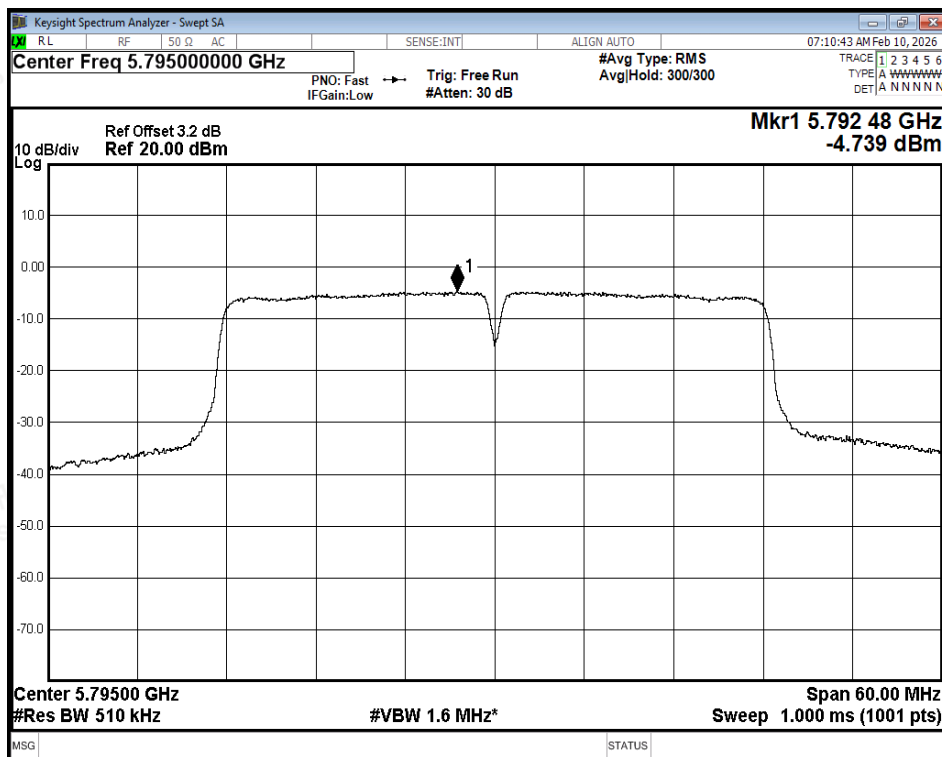


PSD NVNT ac40 5795MHz Ant1

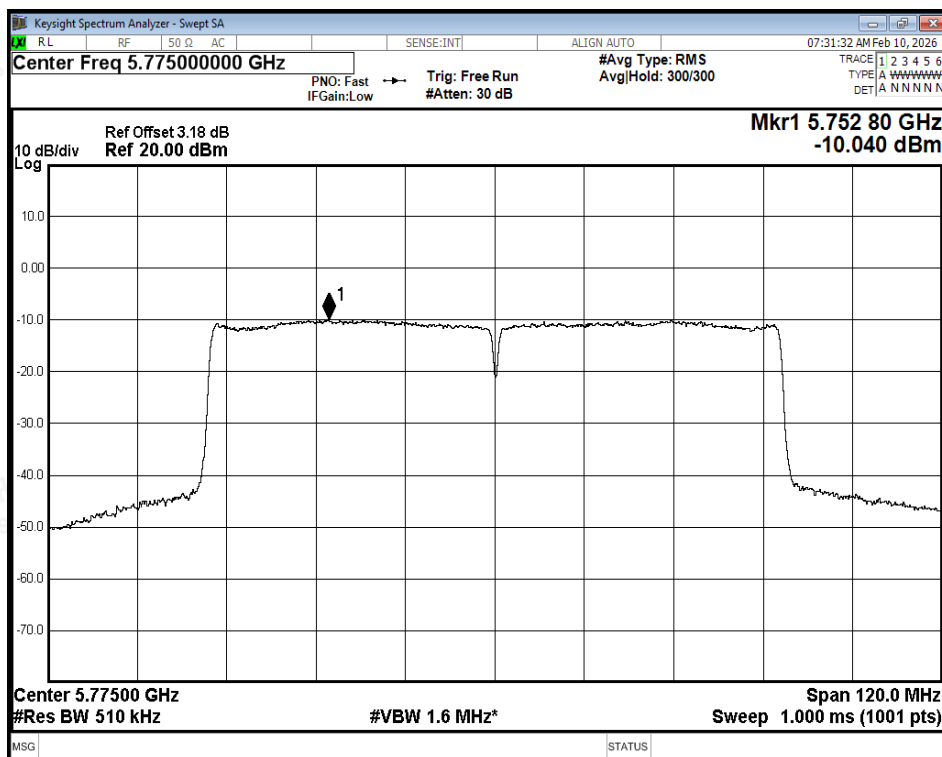


PSD NVNT ac80 5775MHz Ant1



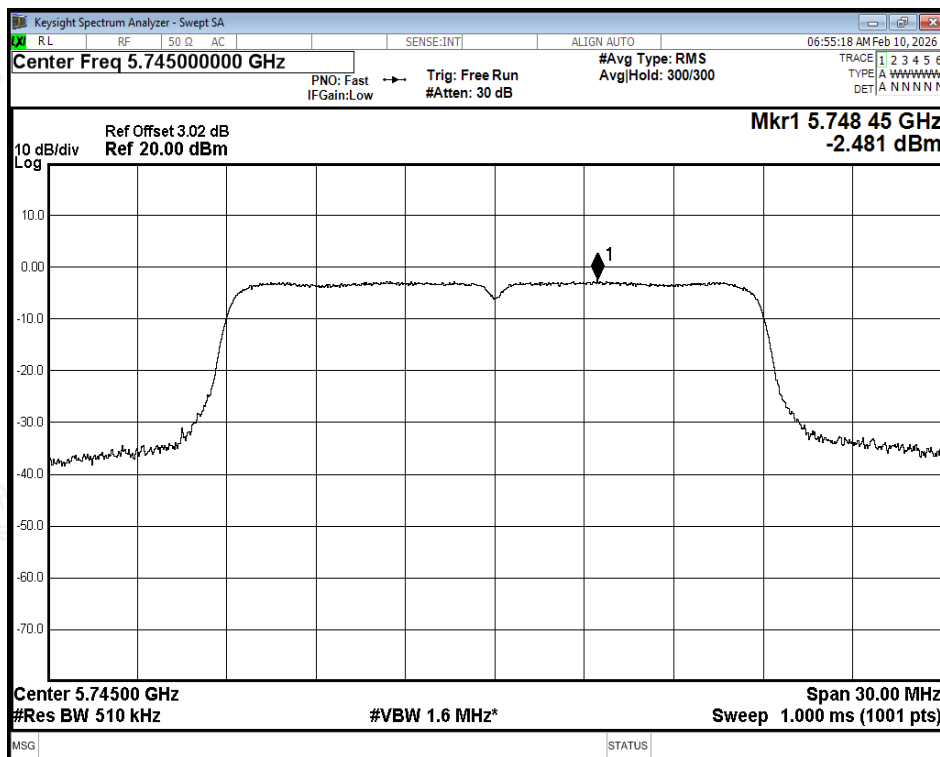

PSD NVNT ax20 5745MHz Ant1

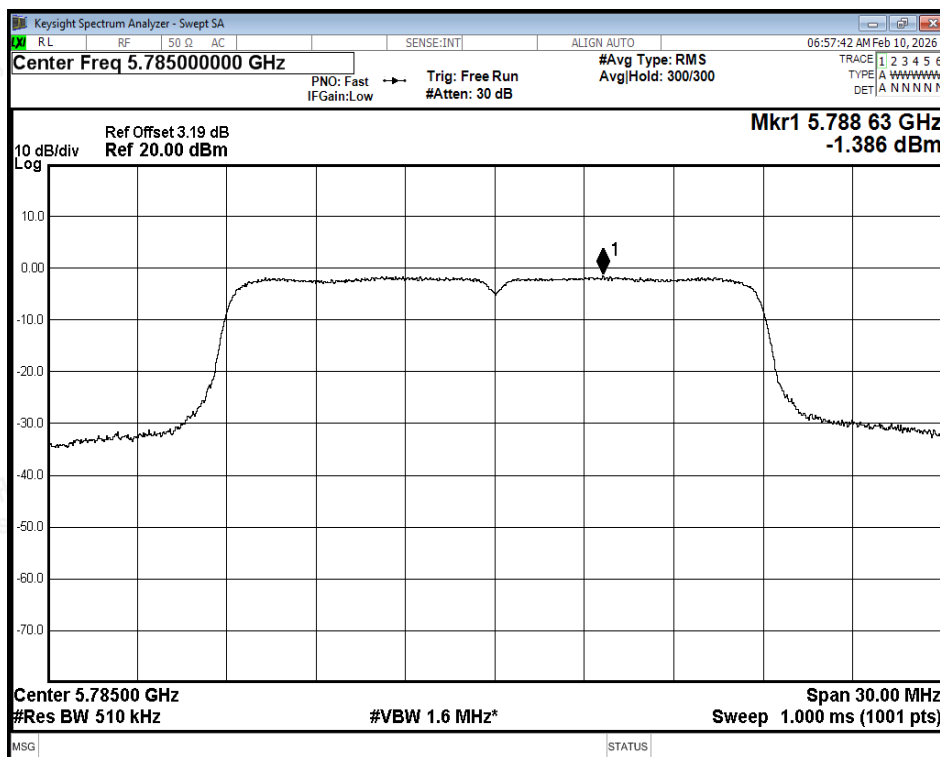

PSD NVNT ax20 5785MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

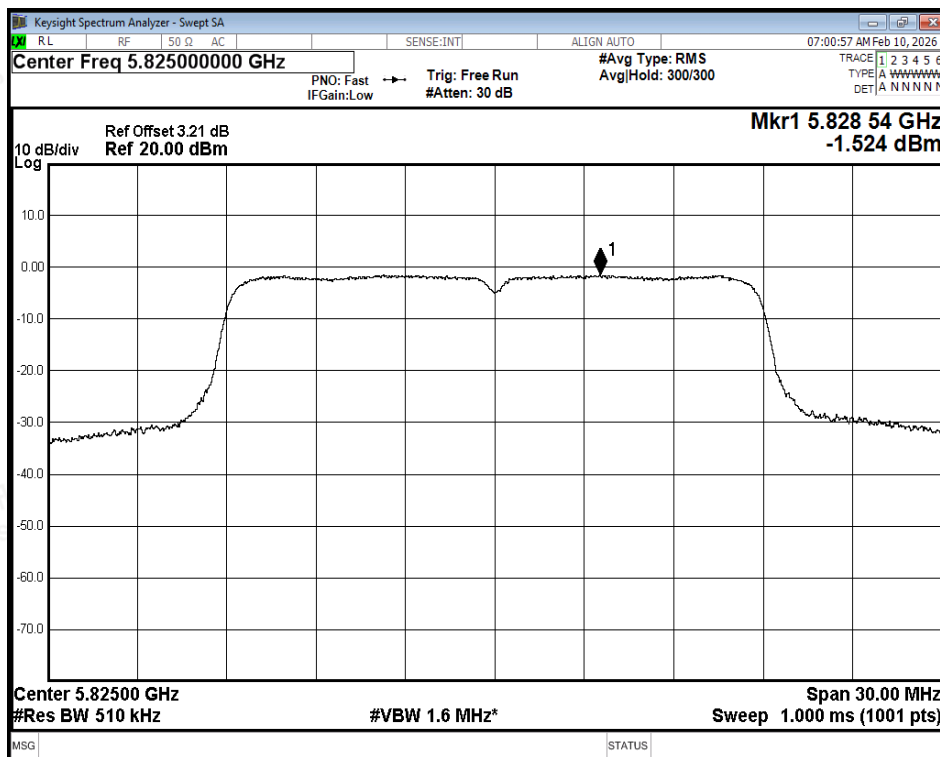

PSD NVNT ax20 5825MHz Ant1

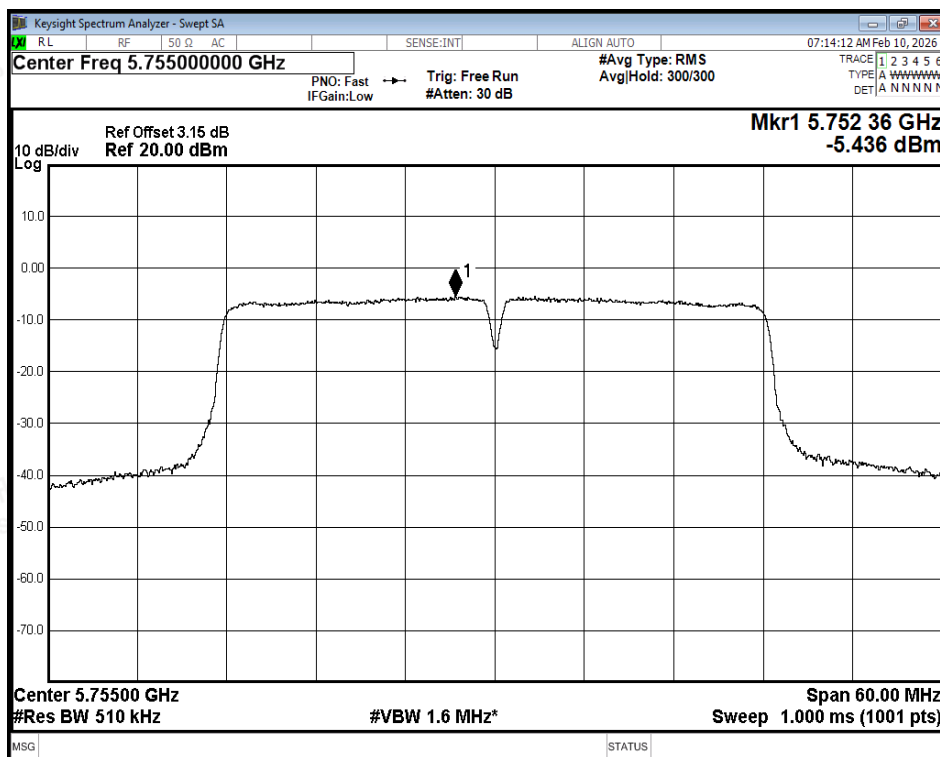

PSD NVNT ax40 5755MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

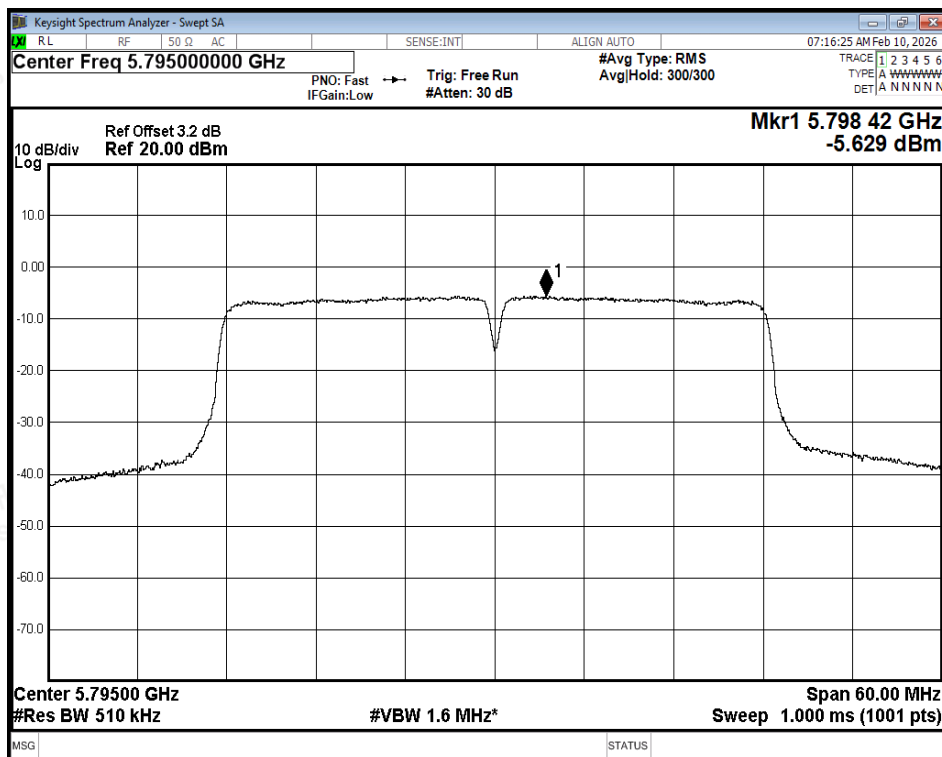

PSD NVNT ax40 5795MHz Ant1

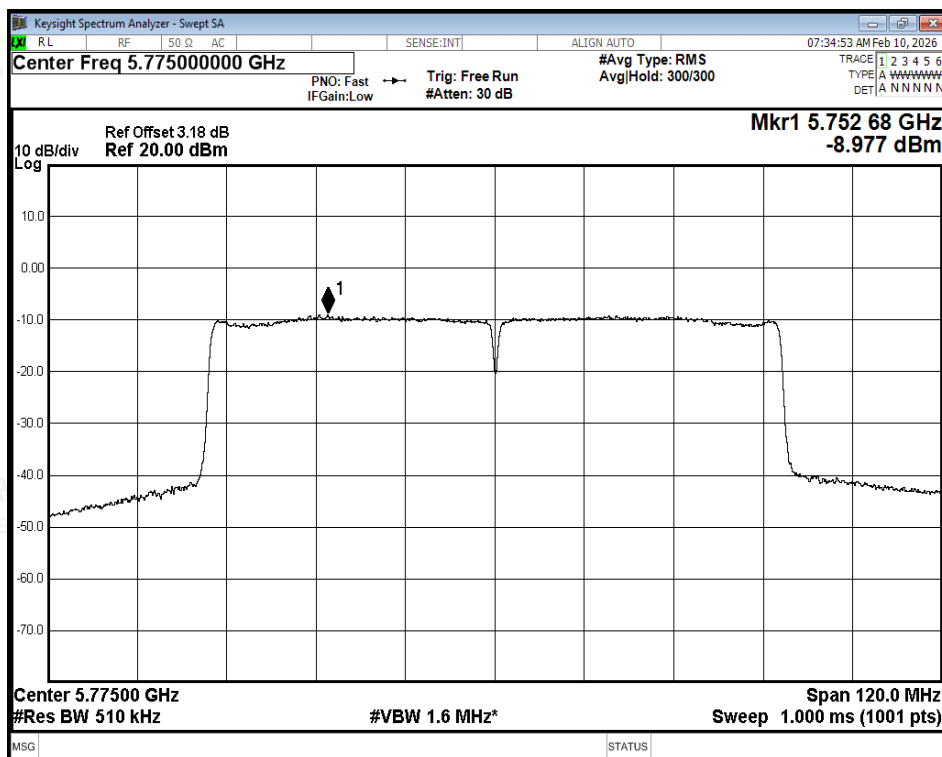

PSD NVNT ax80 5775MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

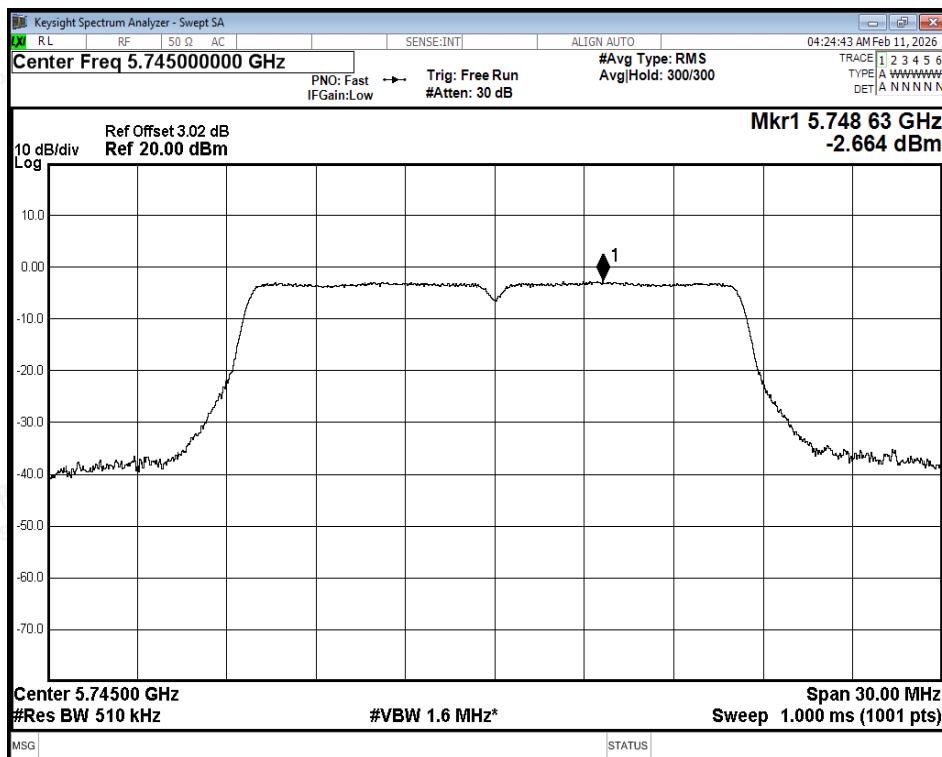


PSD NVNT a 5745MHz Ant2

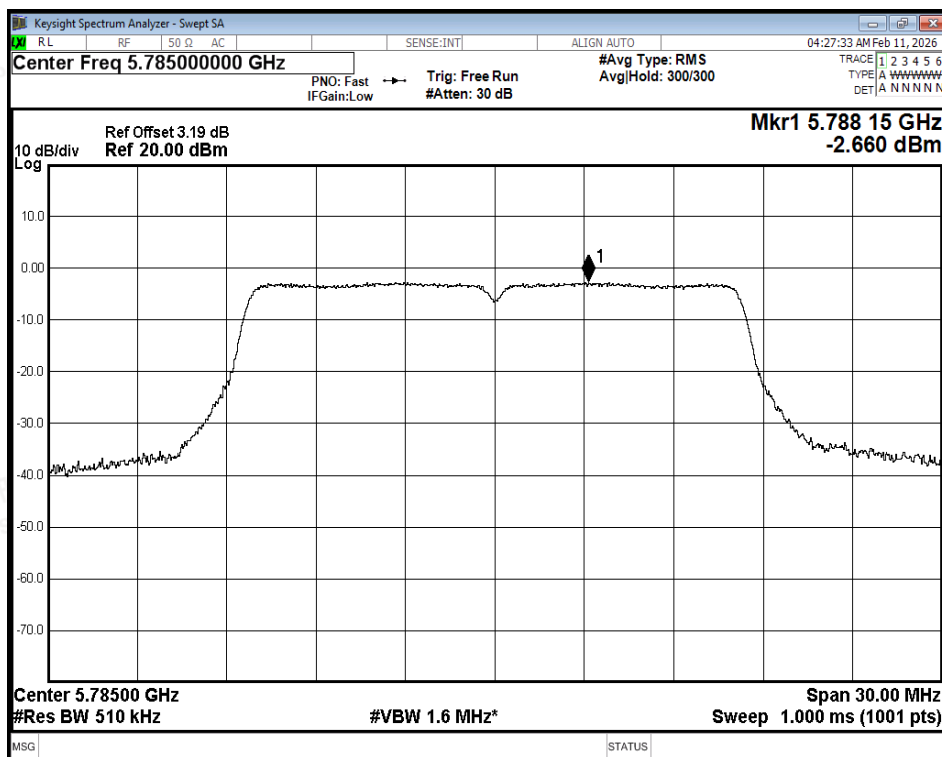


PSD NVNT a 5785MHz Ant2



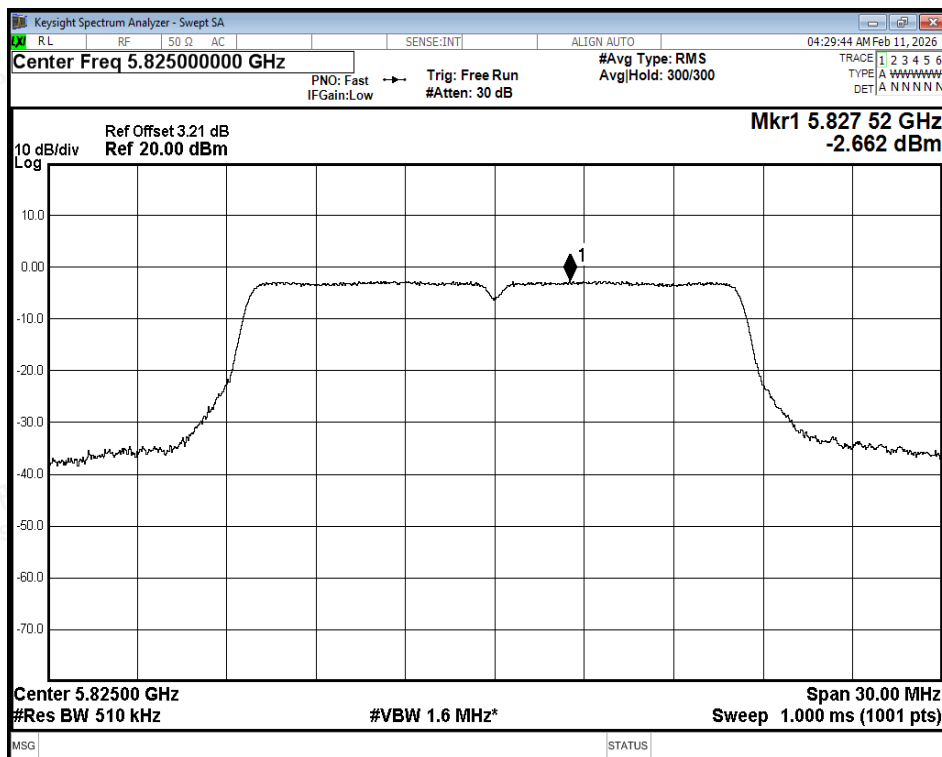

PSD NVNT a 5825MHz Ant2

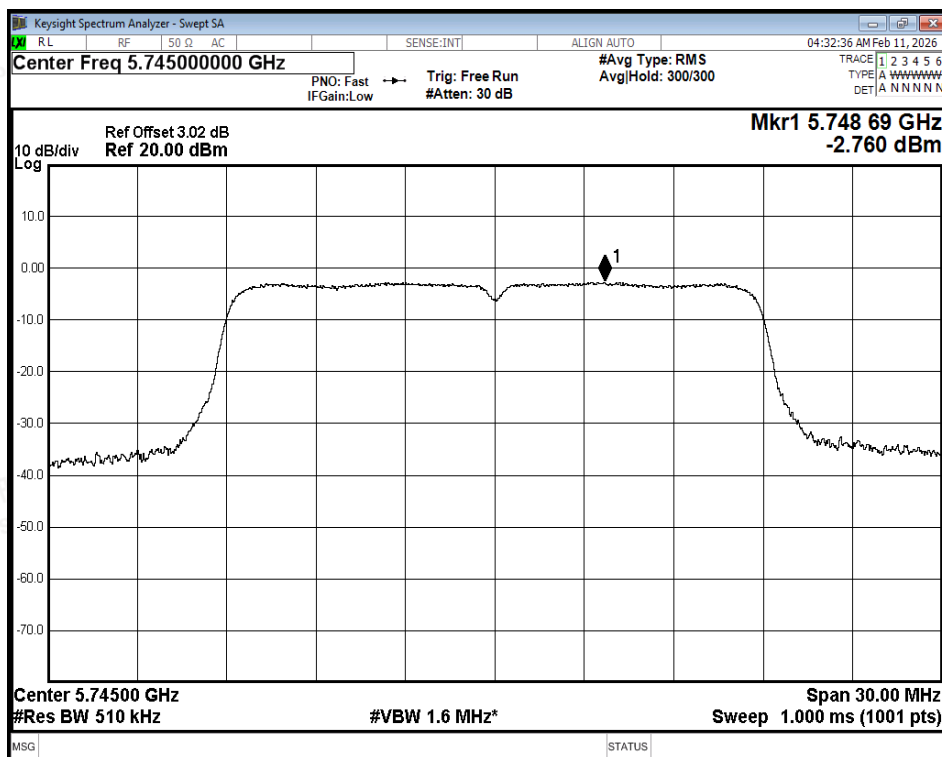

PSD NVNT n20 5745MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity


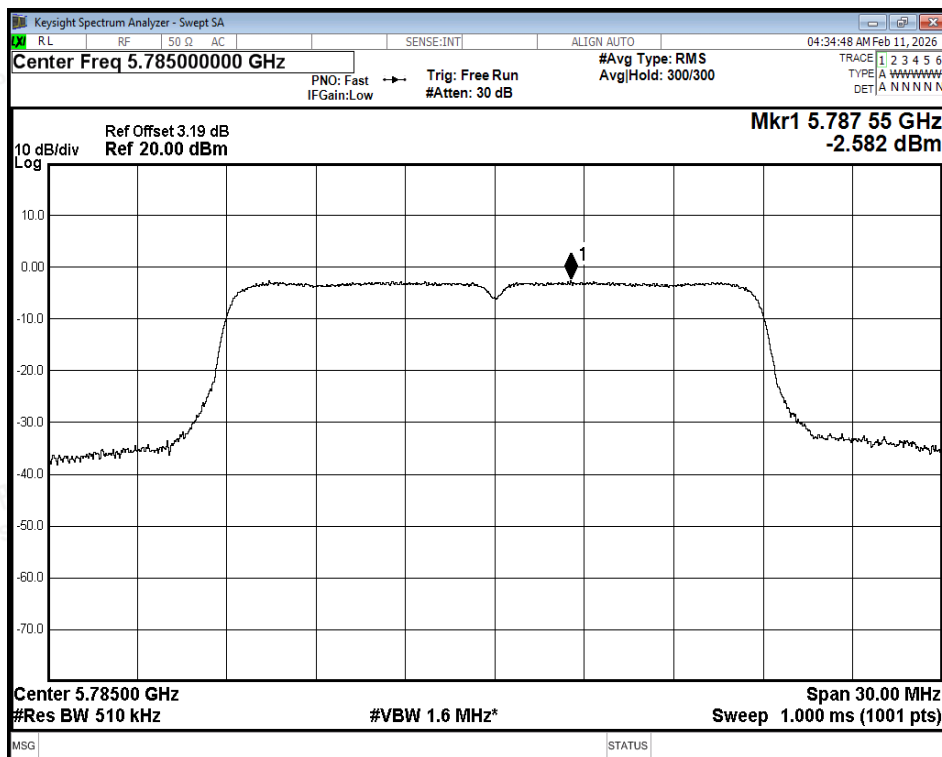




PSD NVNT n20 5785MHz Ant2

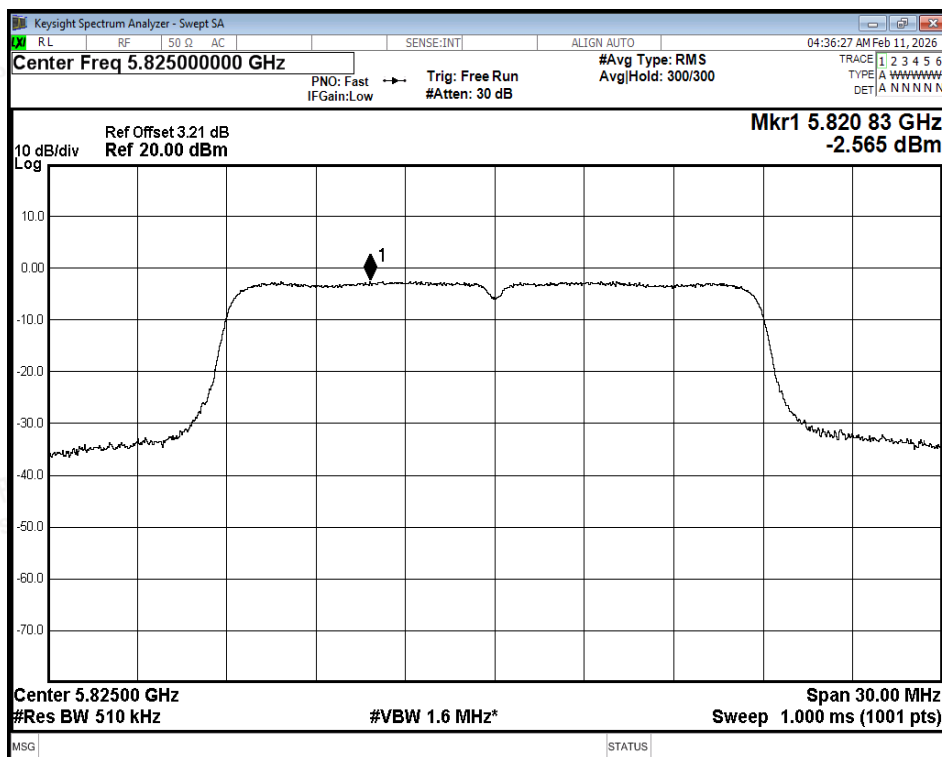


PSD NVNT n20 5825MHz Ant2




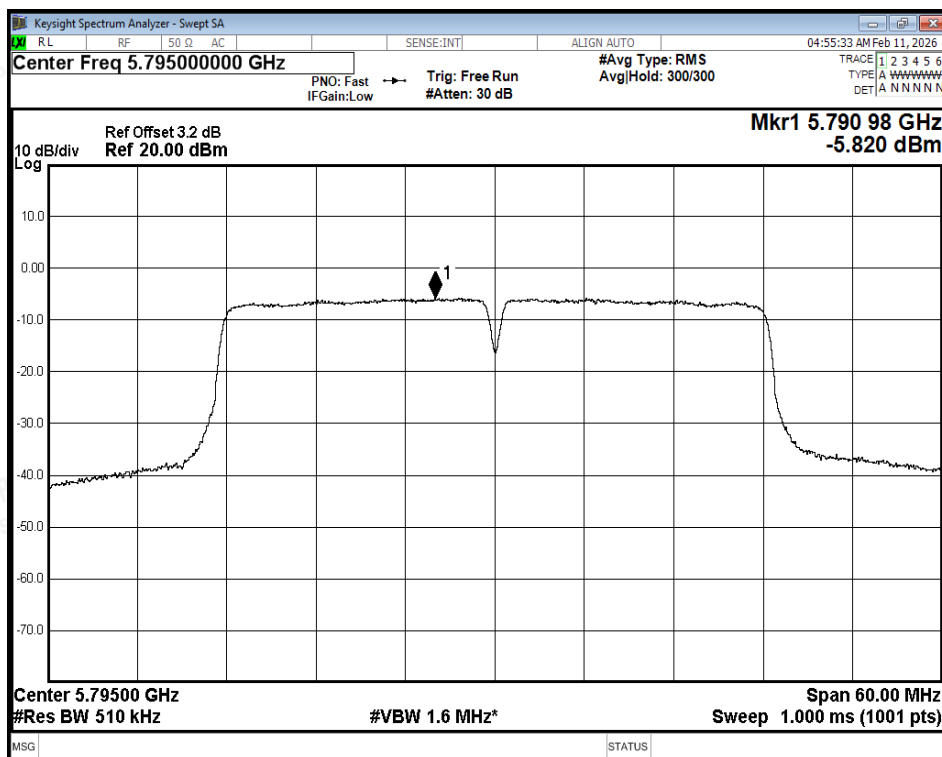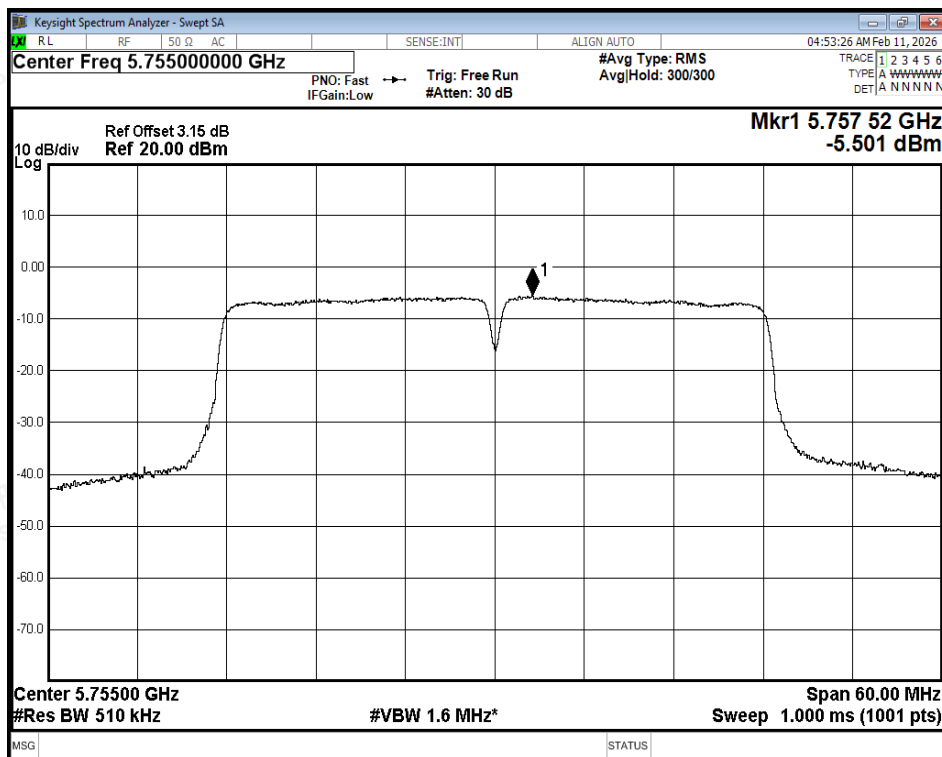

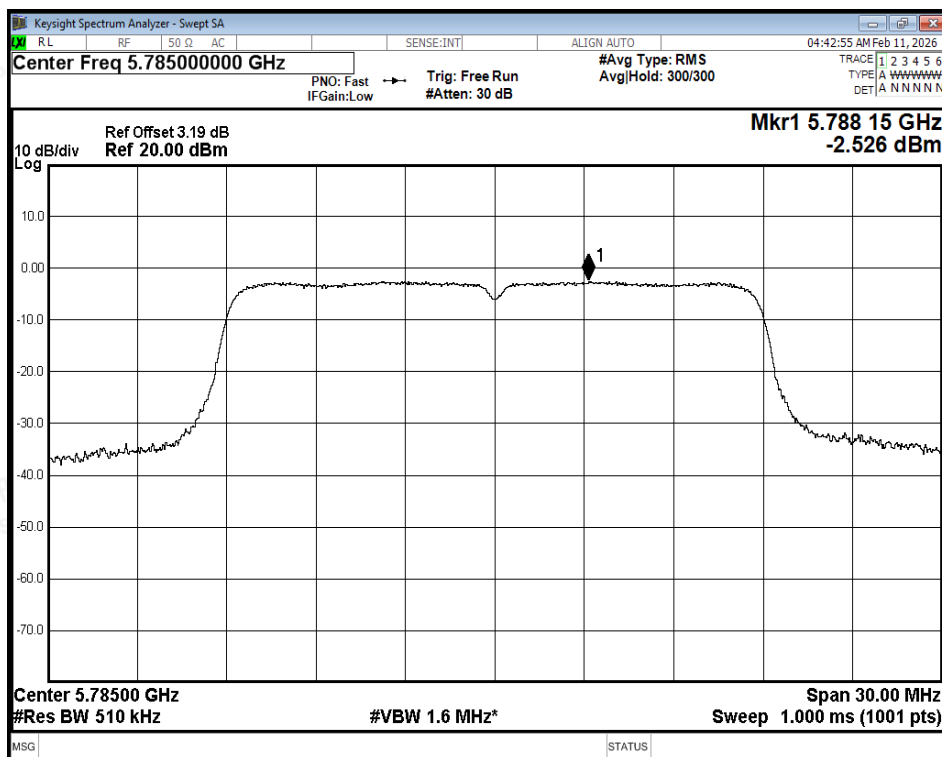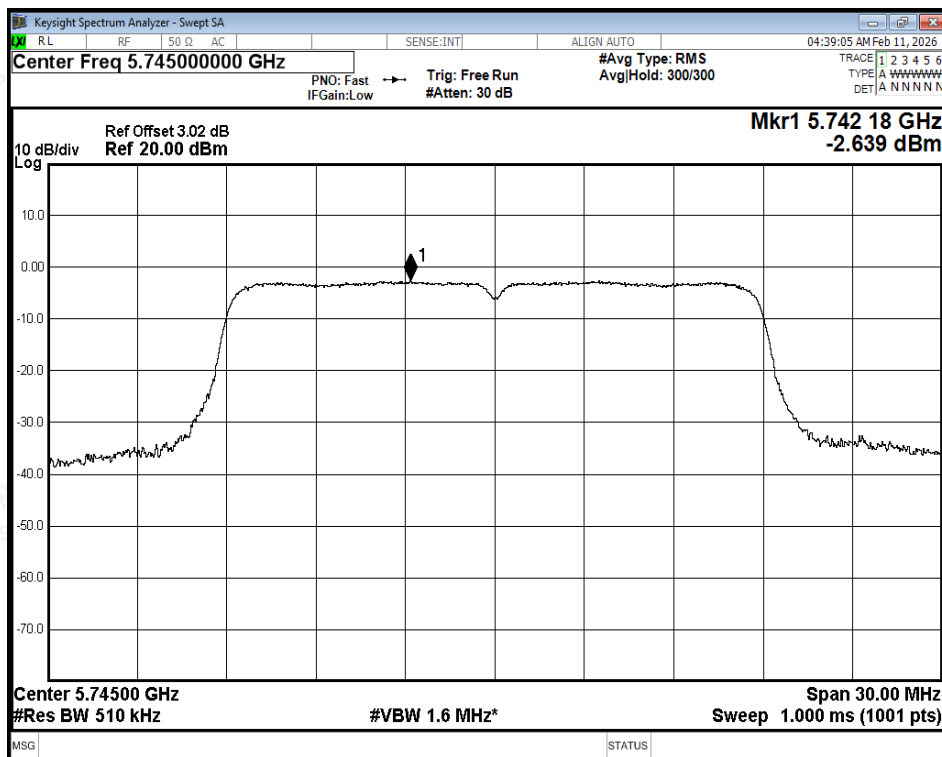

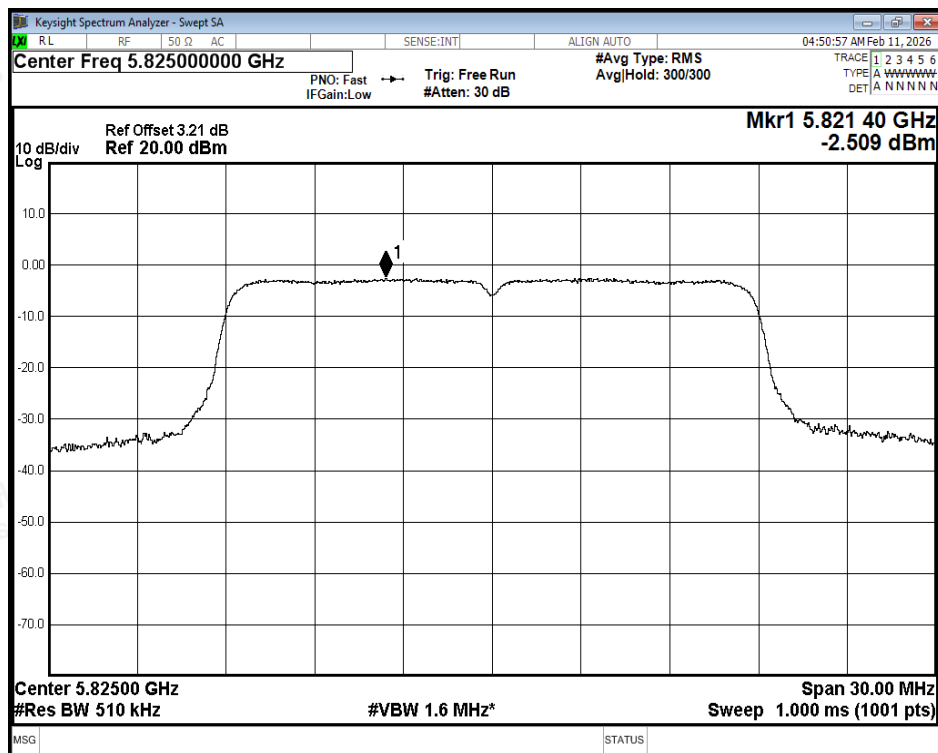

PSD NVNT ac20 5825MHz Ant2

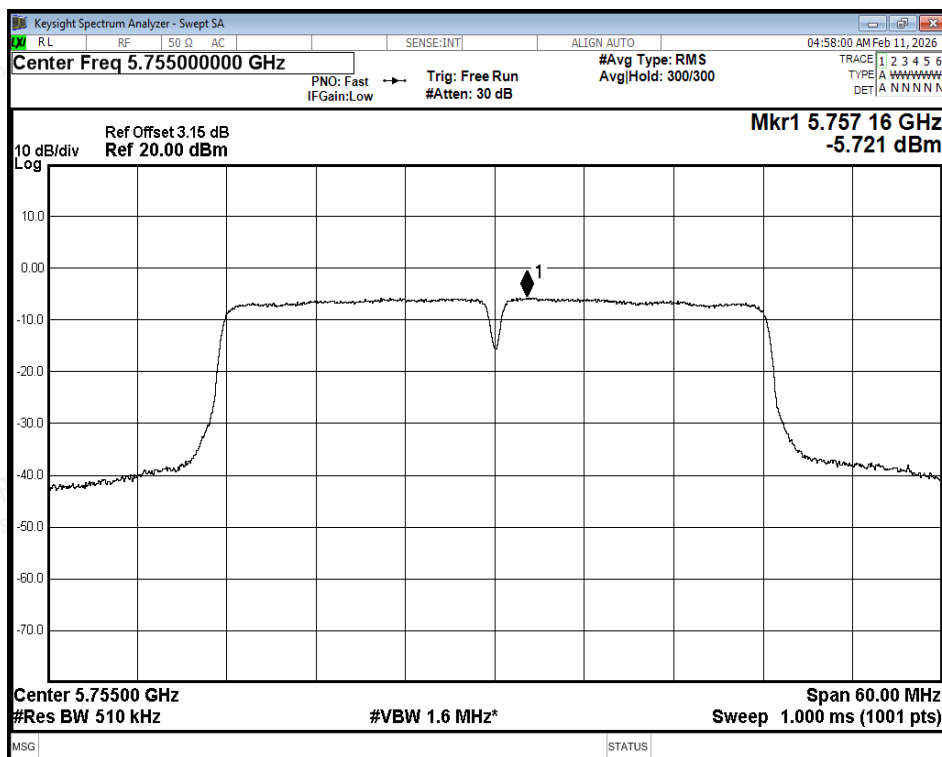

PSD NVNT ac40 5755MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

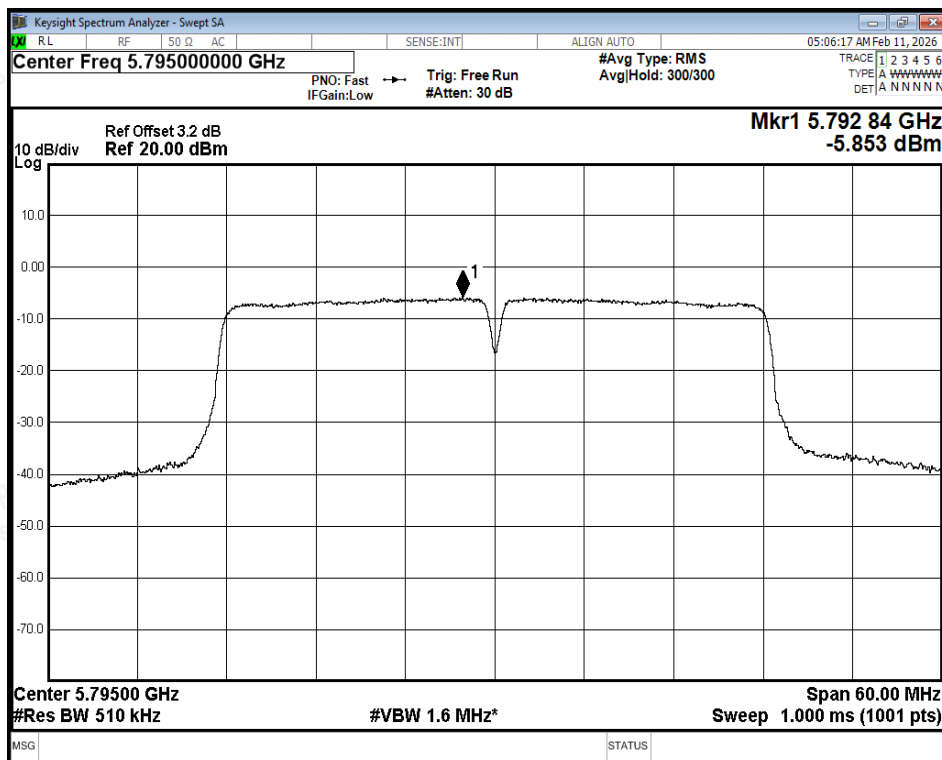

PSD NVNT ac40 5795MHz Ant2

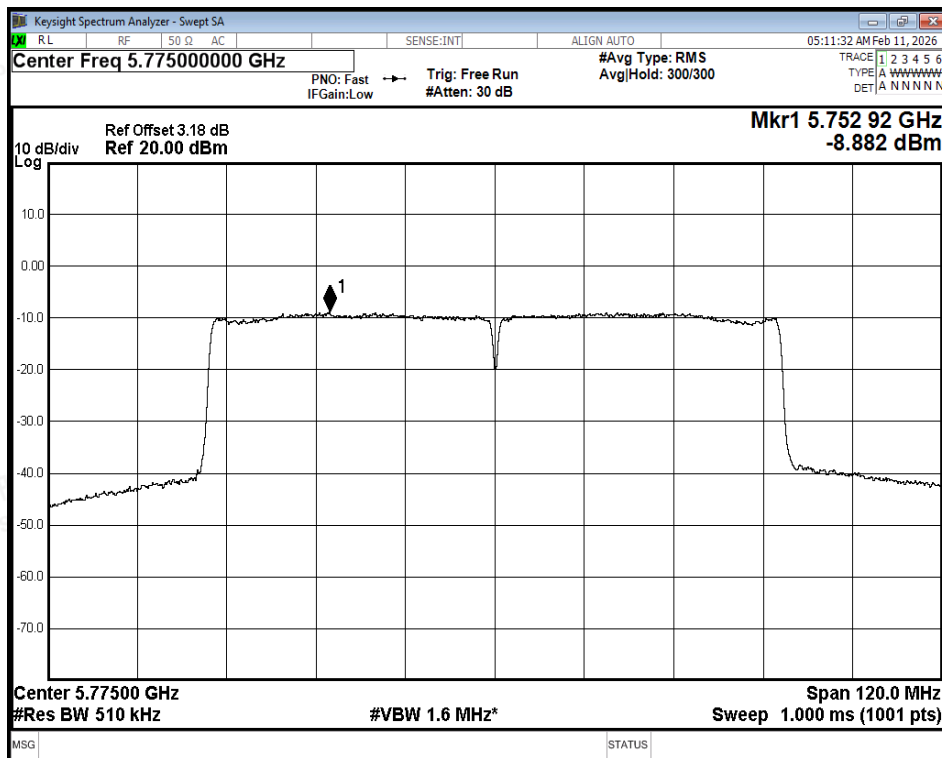

PSD NVNT ac80 5775MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity


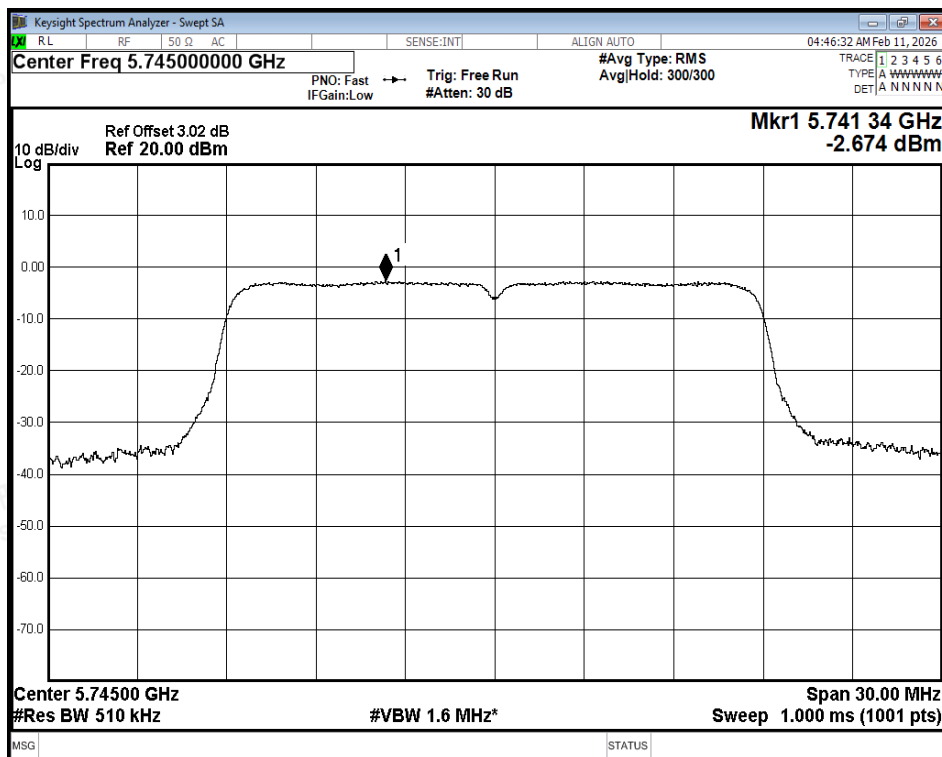



PSD NVNT ax20 5745MHz Ant2

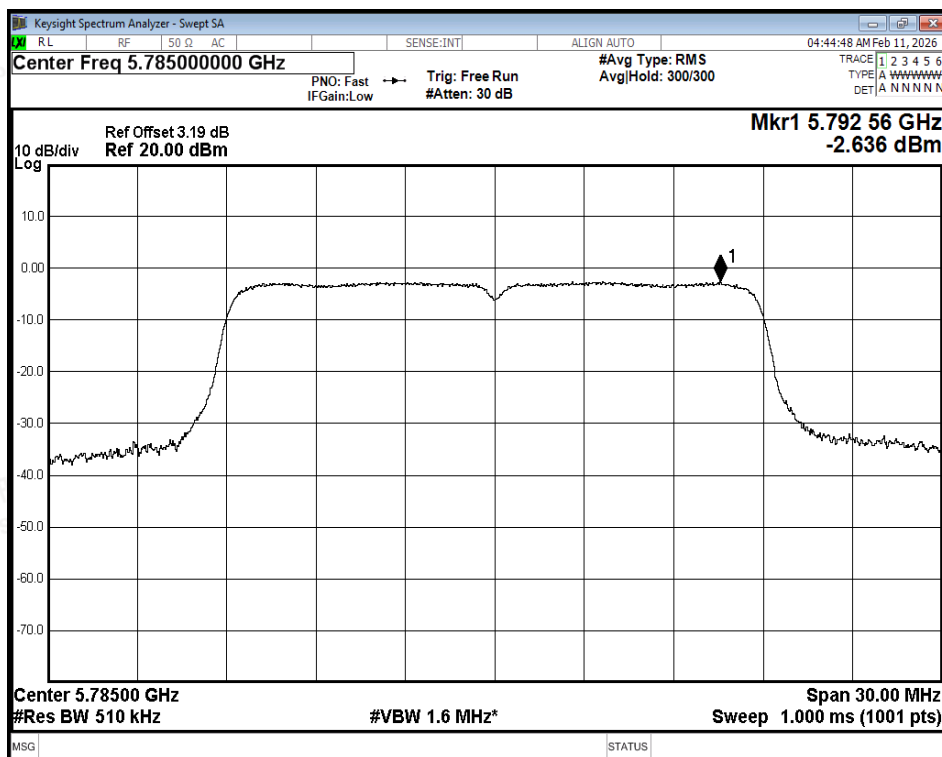


PSD NVNT ax20 5785MHz Ant2



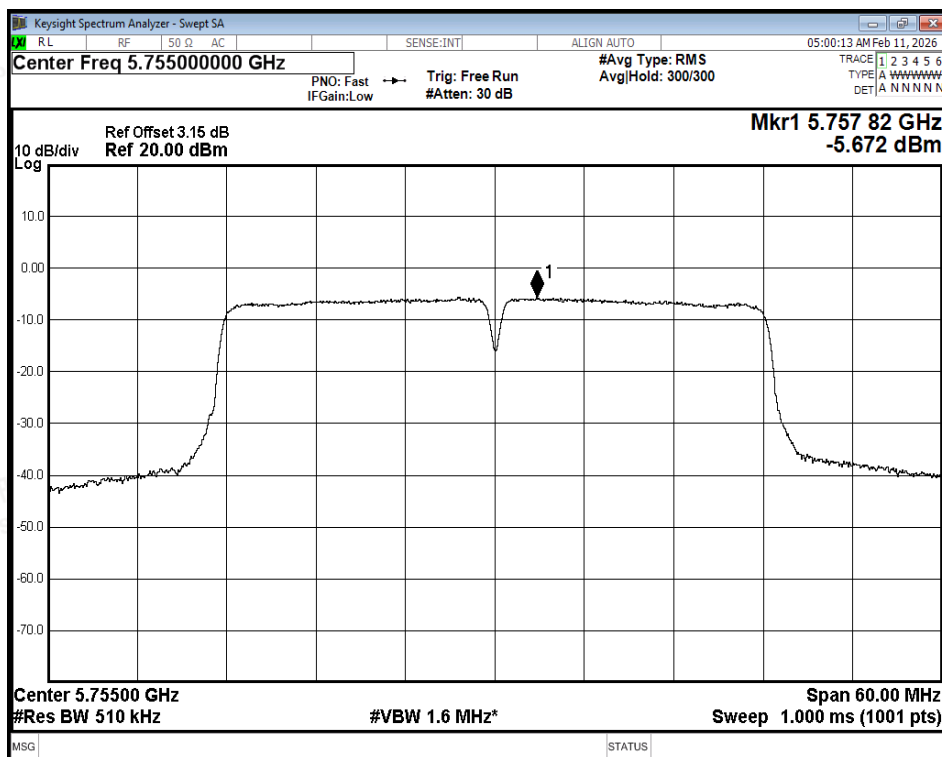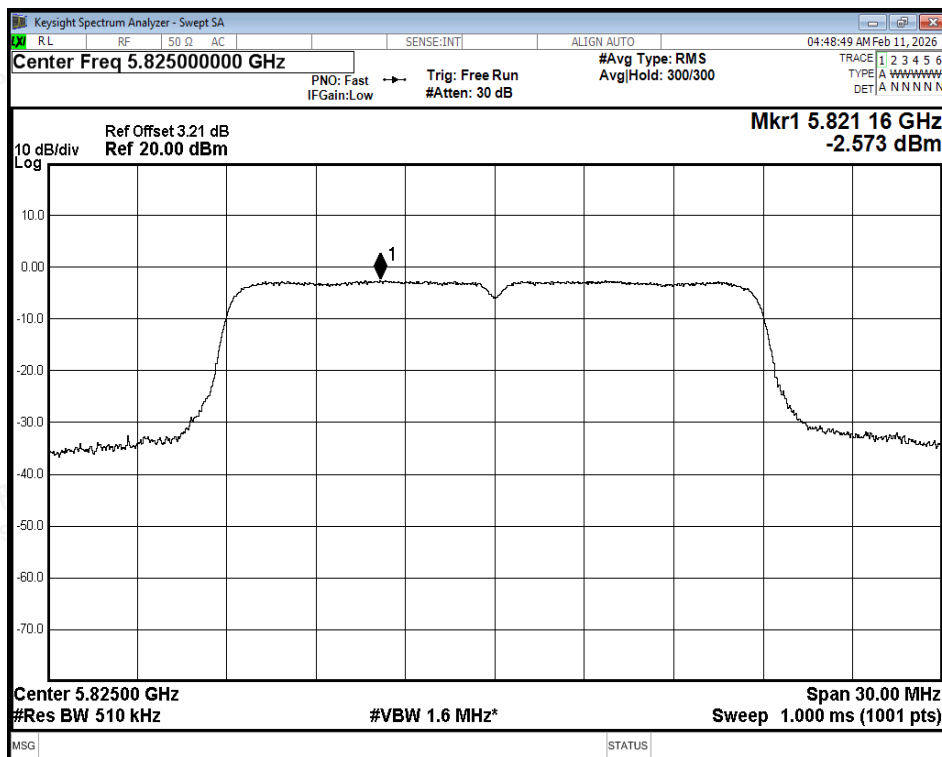

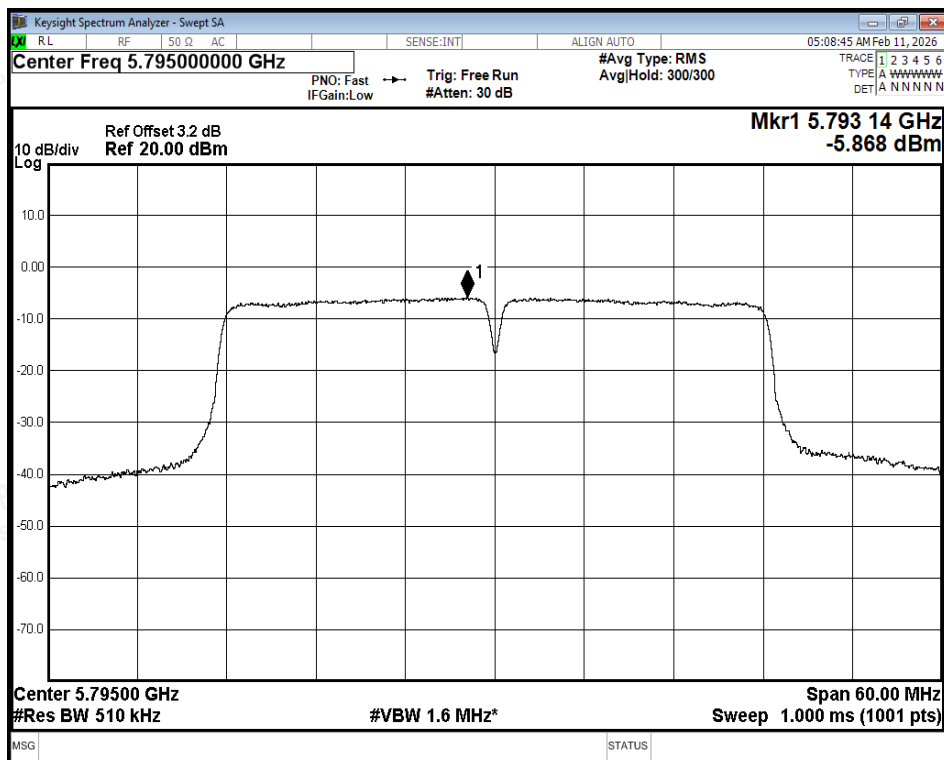

PSD NVNT ax40 5795MHz Ant2

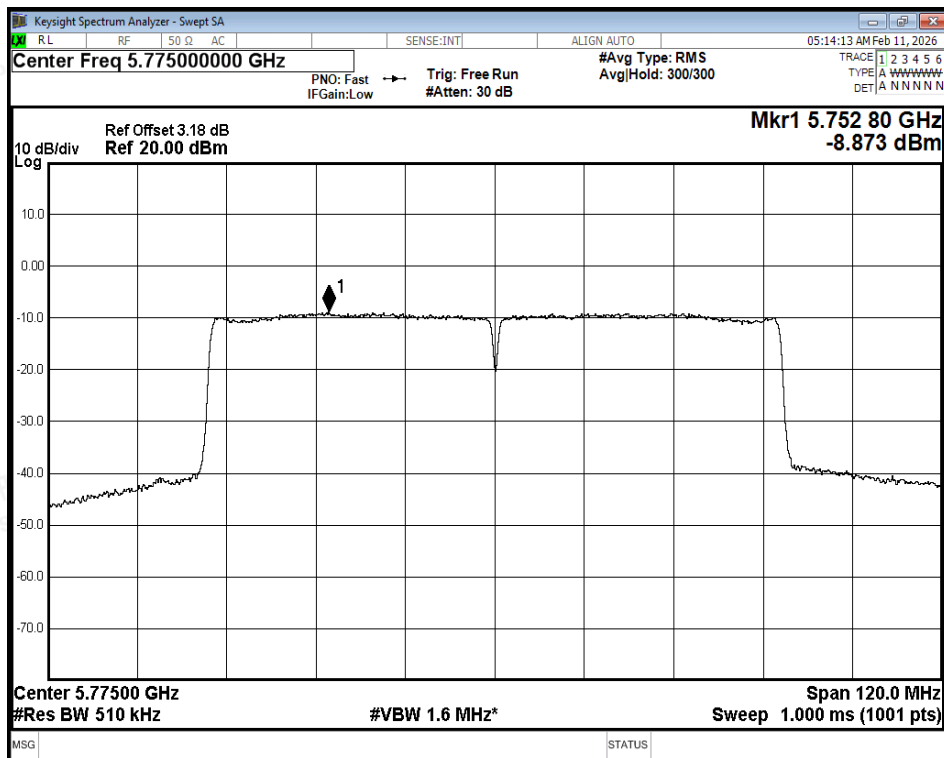

PSD NVNT ax80 5775MHz Ant2





## D.4 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | EIRP (dBm) | Detector | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------|----------|-------------|---------|
| NVNT      | a    | 5745            | Ant1    | 5650            | -49.58      | 2          | -47.58     | Peak     | -27         | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5650            | -57.42      | 2          | -55.42     | Average  | -27         | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5700            | -48.04      | 2          | -46.04     | Peak     | 10          | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5700            | -54.4       | 2          | -52.4      | Average  | 10          | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5720            | -34.63      | 2          | -32.63     | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5720            | -45.25      | 2          | -43.25     | Average  | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5725            | -24.35      | 2          | -22.35     | Peak     | 27          | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5725            | -39.1       | 2          | -37.1      | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5850            | -35.98      | 2          | -33.98     | Peak     | 27          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5850            | -47.56      | 2          | -45.56     | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5855            | -43.67      | 2          | -41.67     | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5855            | -51.74      | 2          | -49.74     | Average  | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5875            | -47.64      | 2          | -45.64     | Peak     | 10          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5875            | -54.3       | 2          | -52.3      | Average  | 10          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5925            | -47.39      | 2          | -45.39     | Peak     | -27         | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5925            | -55.54      | 2          | -53.54     | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5650            | -50.95      | 2          | -48.95     | Peak     | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5650            | -56.92      | 2          | -54.92     | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5700            | -46.97      | 2          | -44.97     | Peak     | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5700            | -54.04      | 2          | -52.04     | Average  | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5720            | -32.84      | 2          | -30.84     | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5720            | -43.3       | 2          | -41.3      | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5725            | -24.94      | 2          | -22.94     | Peak     | 27          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5725            | -36.03      | 2          | -34.03     | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5850            | -33.48      | 2          | -31.48     | Peak     | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5850            | -45.35      | 2          | -43.35     | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5855            | -39.1       | 2          | -37.1      | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5855            | -50.97      | 2          | -48.97     | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5875            | -48.49      | 2          | -46.49     | Peak     | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5875            | -54.53      | 2          | -52.53     | Average  | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5925            | -48.53      | 2          | -46.53     | Peak     | -27         | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5925            | -55.82      | 2          | -53.82     | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5650            | -48.06      | 2          | -46.06     | Peak     | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5650            | -56.27      | 2          | -54.27     | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5700            | -41.59      | 2          | -39.59     | Peak     | 10          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5700            | -49.28      | 2          | -47.28     | Average  | 10          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5720            | -26.21      | 2          | -24.21     | Peak     | 15.6        | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: [webmaster@lcs-cert.com](mailto:webmaster@lcs-cert.com) | Web: [www.lcs-cert.com](http://www.lcs-cert.com)

Scan code to check authenticity



|      |      |      |      |      |        |   |        |         |      |      |
|------|------|------|------|------|--------|---|--------|---------|------|------|
| NVNT | n40  | 5755 | Ant1 | 5720 | -36.62 | 2 | -34.62 | Average | 15.6 | Pass |
| NVNT | n40  | 5755 | Ant1 | 5725 | -22.47 | 2 | -20.47 | Peak    | 27   | Pass |
| NVNT | n40  | 5755 | Ant1 | 5725 | -34.8  | 2 | -32.8  | Average | 27   | Pass |
| NVNT | n40  | 5795 | Ant1 | 5850 | -40.76 | 2 | -38.76 | Peak    | 27   | Pass |
| NVNT | n40  | 5795 | Ant1 | 5850 | -48.67 | 2 | -46.67 | Average | 27   | Pass |
| NVNT | n40  | 5795 | Ant1 | 5855 | -42.26 | 2 | -40.26 | Peak    | 15.6 | Pass |
| NVNT | n40  | 5795 | Ant1 | 5855 | -50.11 | 2 | -48.11 | Average | 15.6 | Pass |
| NVNT | n40  | 5795 | Ant1 | 5875 | -47.19 | 2 | -45.19 | Peak    | 10   | Pass |
| NVNT | n40  | 5795 | Ant1 | 5875 | -54.98 | 2 | -52.98 | Average | 10   | Pass |
| NVNT | n40  | 5795 | Ant1 | 5925 | -49.83 | 2 | -47.83 | Peak    | -27  | Pass |
| NVNT | n40  | 5795 | Ant1 | 5925 | -56.4  | 2 | -54.4  | Average | -27  | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5650 | -49.53 | 2 | -47.53 | Peak    | -27  | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5650 | -56.81 | 2 | -54.81 | Average | -27  | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5700 | -44.17 | 2 | -42.17 | Peak    | 10   | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5700 | -53.33 | 2 | -51.33 | Average | 10   | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5720 | -33.41 | 2 | -31.41 | Peak    | 15.6 | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5720 | -42.16 | 2 | -40.16 | Average | 15.6 | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5725 | -20.13 | 2 | -18.13 | Peak    | 27   | Pass |
| NVNT | ac20 | 5745 | Ant1 | 5725 | -34.12 | 2 | -32.12 | Average | 27   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5850 | -33.32 | 2 | -31.32 | Peak    | 27   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5850 | -43.86 | 2 | -41.86 | Average | 27   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5855 | -37.56 | 2 | -35.56 | Peak    | 15.6 | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5855 | -50.18 | 2 | -48.18 | Average | 15.6 | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5875 | -48.41 | 2 | -46.41 | Peak    | 10   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5875 | -54.21 | 2 | -52.21 | Average | 10   | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5925 | -47.86 | 2 | -45.86 | Peak    | -27  | Pass |
| NVNT | ac20 | 5825 | Ant1 | 5925 | -55.58 | 2 | -53.58 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5650 | -48.02 | 2 | -46.02 | Peak    | -27  | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5650 | -56.33 | 2 | -54.33 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5700 | -40.66 | 2 | -38.66 | Peak    | 10   | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5700 | -49.2  | 2 | -47.2  | Average | 10   | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5720 | -30.19 | 2 | -28.19 | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5720 | -36.7  | 2 | -34.7  | Average | 15.6 | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5725 | -26.07 | 2 | -24.07 | Peak    | 27   | Pass |
| NVNT | ac40 | 5755 | Ant1 | 5725 | -34.21 | 2 | -32.21 | Average | 27   | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5850 | -38.99 | 2 | -36.99 | Peak    | 27   | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5850 | -48.63 | 2 | -46.63 | Average | 27   | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5855 | -43.44 | 2 | -41.44 | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5855 | -50.14 | 2 | -48.14 | Average | 15.6 | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5875 | -47.43 | 2 | -45.43 | Peak    | 10   | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5875 | -55    | 2 | -53    | Average | 10   | Pass |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |   |        |         |      |      |
|------|------|------|------|------|--------|---|--------|---------|------|------|
| NVNT | ac40 | 5795 | Ant1 | 5925 | -49.52 | 2 | -47.52 | Peak    | -27  | Pass |
| NVNT | ac40 | 5795 | Ant1 | 5925 | -56.33 | 2 | -54.33 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5850 | -37.91 | 2 | -35.91 | Peak    | 27   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5850 | -44.21 | 2 | -42.21 | Average | 27   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5855 | -36.68 | 2 | -34.68 | Peak    | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5855 | -45.22 | 2 | -43.22 | Average | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5875 | -41.57 | 2 | -39.57 | Peak    | 10   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5875 | -50.66 | 2 | -48.66 | Average | 10   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5925 | -48.8  | 2 | -46.8  | Peak    | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5925 | -55.53 | 2 | -53.53 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5650 | -48.67 | 2 | -46.67 | Peak    | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5650 | -55.19 | 2 | -53.19 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5700 | -40.35 | 2 | -38.35 | Peak    | 10   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5700 | -47.92 | 2 | -45.92 | Average | 10   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5720 | -31.43 | 2 | -29.43 | Peak    | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5720 | -42.38 | 2 | -40.38 | Average | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5725 | -34.96 | 2 | -32.96 | Peak    | 27   | Pass |
| NVNT | ac80 | 5775 | Ant1 | 5725 | -41.73 | 2 | -39.73 | Average | 27   | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5650 | -49.2  | 2 | -47.2  | Peak    | -27  | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5650 | -57.02 | 2 | -55.02 | Average | -27  | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5700 | -45.11 | 2 | -43.11 | Peak    | 10   | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5700 | -54    | 2 | -52    | Average | 10   | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5720 | -31.2  | 2 | -29.2  | Peak    | 15.6 | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5720 | -43.39 | 2 | -41.39 | Average | 15.6 | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5725 | -21.68 | 2 | -19.68 | Peak    | 27   | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5725 | -36.8  | 2 | -34.8  | Average | 27   | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5850 | -30.42 | 2 | -28.42 | Peak    | 27   | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5850 | -42.3  | 2 | -40.3  | Average | 27   | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5855 | -36.87 | 2 | -34.87 | Peak    | 15.6 | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5855 | -48.74 | 2 | -46.74 | Average | 15.6 | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5875 | -47.05 | 2 | -45.05 | Peak    | 10   | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5875 | -53.84 | 2 | -51.84 | Average | 10   | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5925 | -48.3  | 2 | -46.3  | Peak    | -27  | Pass |
| NVNT | ax20 | 5825 | Ant1 | 5925 | -55.38 | 2 | -53.38 | Average | -27  | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5650 | -48.1  | 2 | -46.1  | Peak    | -27  | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5650 | -56.58 | 2 | -54.58 | Average | -27  | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5700 | -42.73 | 2 | -40.73 | Peak    | 10   | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5700 | -50.27 | 2 | -48.27 | Average | 10   | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5720 | -30.6  | 2 | -28.6  | Peak    | 15.6 | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5720 | -39.65 | 2 | -37.65 | Average | 15.6 | Pass |
| NVNT | ax40 | 5755 | Ant1 | 5725 | -27.36 | 2 | -25.36 | Peak    | 27   | Pass |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




|      |      |      |      |      |        |   |        |         |      |      |
|------|------|------|------|------|--------|---|--------|---------|------|------|
| NVNT | ax40 | 5755 | Ant1 | 5725 | -37.34 | 2 | -35.34 | Average | 27   | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5850 | -44.83 | 2 | -42.83 | Peak    | 27   | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5850 | -51.35 | 2 | -49.35 | Average | 27   | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5855 | -44.61 | 2 | -42.61 | Peak    | 15.6 | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5855 | -52.49 | 2 | -50.49 | Average | 15.6 | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5875 | -47.54 | 2 | -45.54 | Peak    | 10   | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5875 | -55.53 | 2 | -53.53 | Average | 10   | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5925 | -50.55 | 2 | -48.55 | Peak    | -27  | Pass |
| NVNT | ax40 | 5795 | Ant1 | 5925 | -56.5  | 2 | -54.5  | Average | -27  | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5850 | -32.25 | 2 | -30.25 | Peak    | 27   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5850 | -41.1  | 2 | -39.1  | Average | 27   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5855 | -32.98 | 2 | -30.98 | Peak    | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5855 | -41.69 | 2 | -39.69 | Average | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5875 | -39.1  | 2 | -37.1  | Peak    | 10   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5875 | -47.55 | 2 | -45.55 | Average | 10   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5925 | -48.08 | 2 | -46.08 | Peak    | -27  | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5925 | -55.11 | 2 | -53.11 | Average | -27  | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5650 | -48.25 | 2 | -46.25 | Peak    | -27  | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5650 | -54.54 | 2 | -52.54 | Average | -27  | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5700 | -37.87 | 2 | -35.87 | Peak    | 10   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5700 | -45.29 | 2 | -43.29 | Average | 10   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5720 | -32.49 | 2 | -30.49 | Peak    | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5720 | -40.79 | 2 | -38.79 | Average | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5725 | -26.17 | 2 | -24.17 | Peak    | 27   | Pass |
| NVNT | ax80 | 5775 | Ant1 | 5725 | -39.63 | 2 | -37.63 | Average | 27   | Pass |



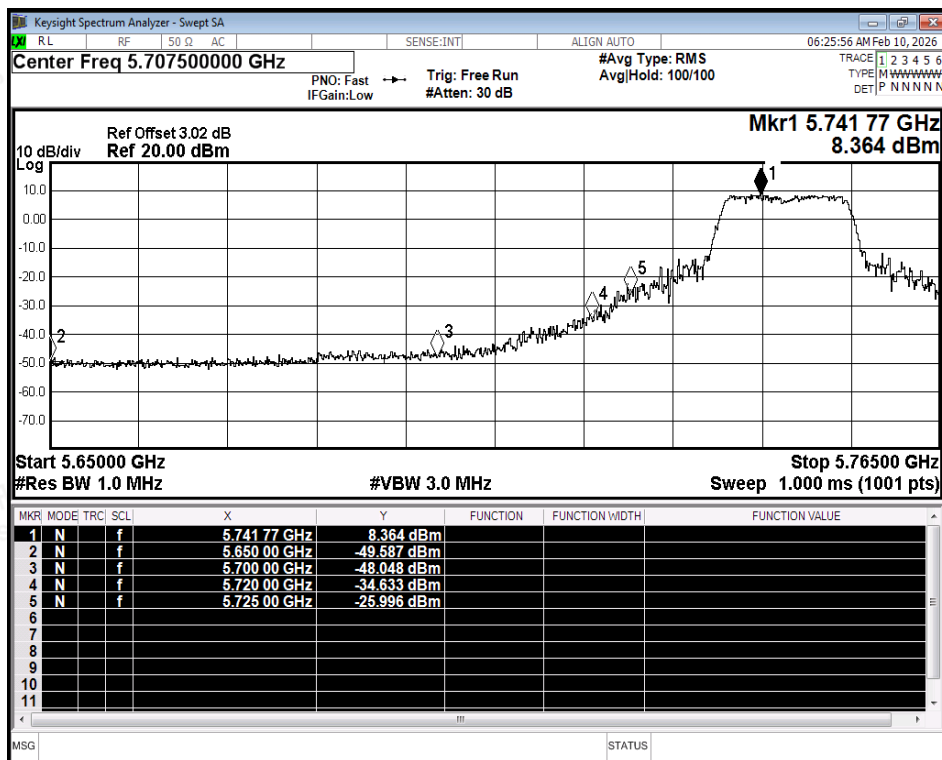

Restrict Band NVNT a 5745MHz Ant1 Peak

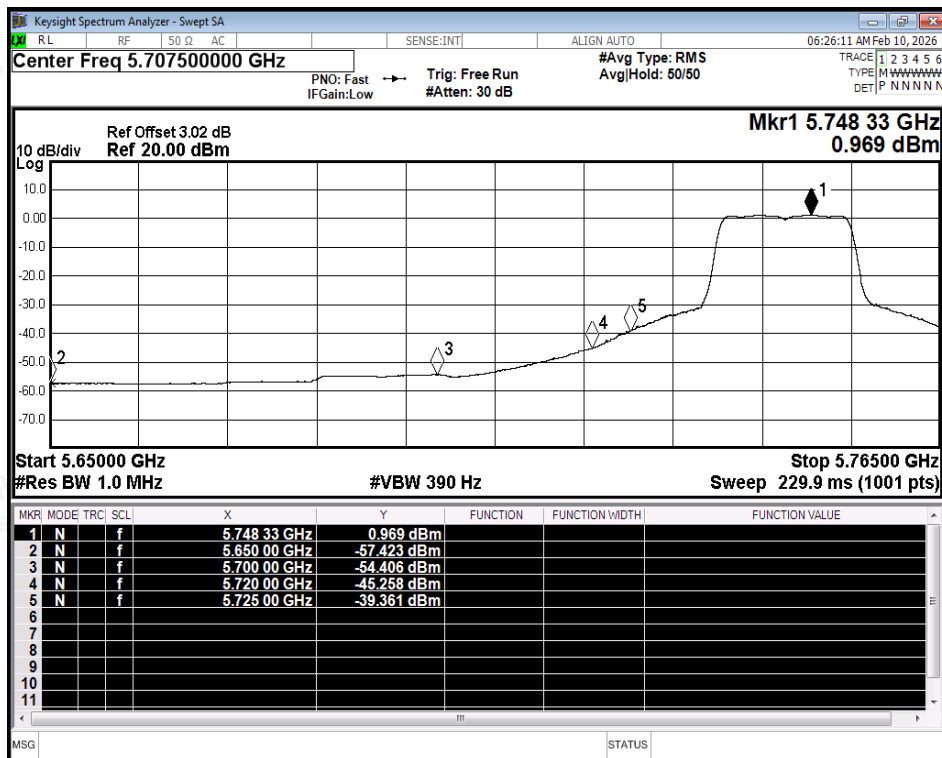

Restrict Band NVNT a 5745MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

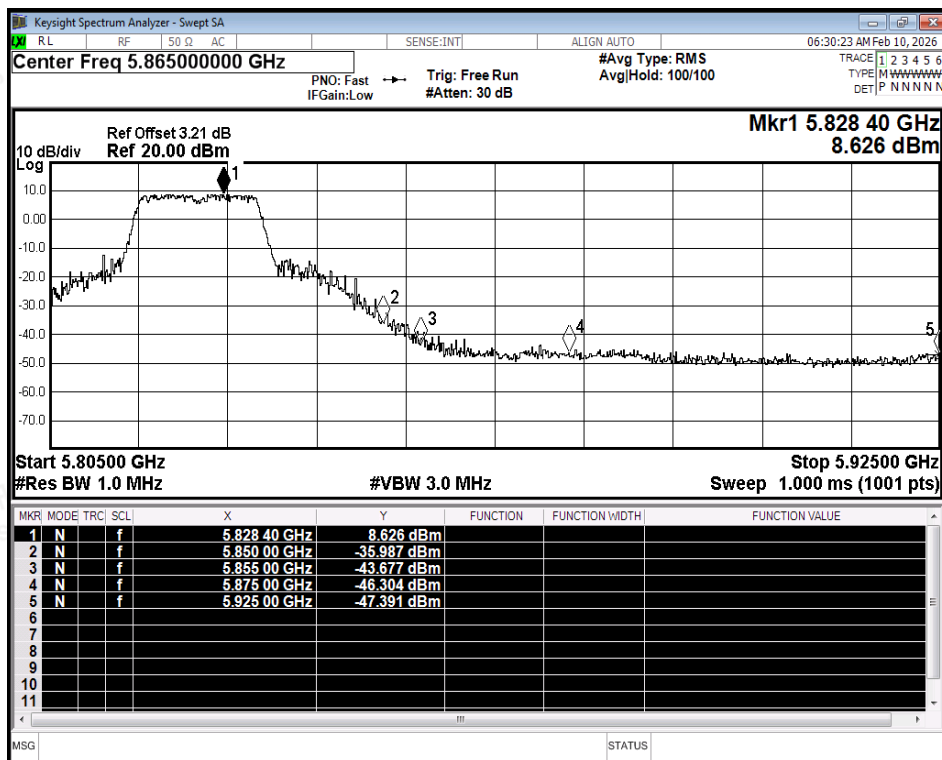

Restrict Band NVNT a 5825MHz Ant1 Peak

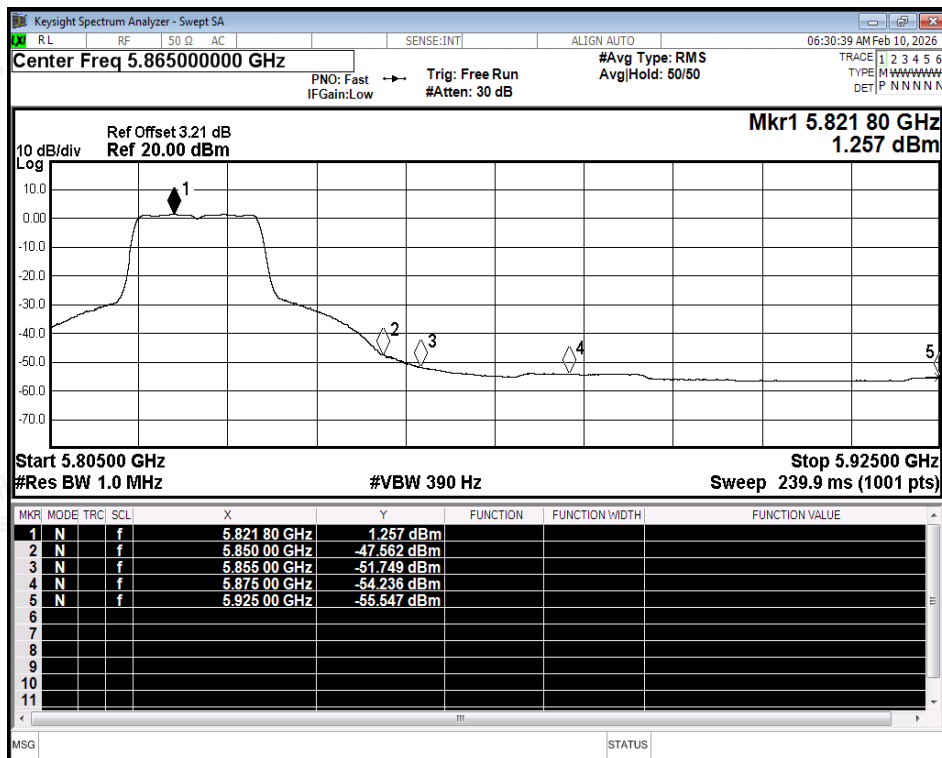

Restrict Band NVNT a 5825MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

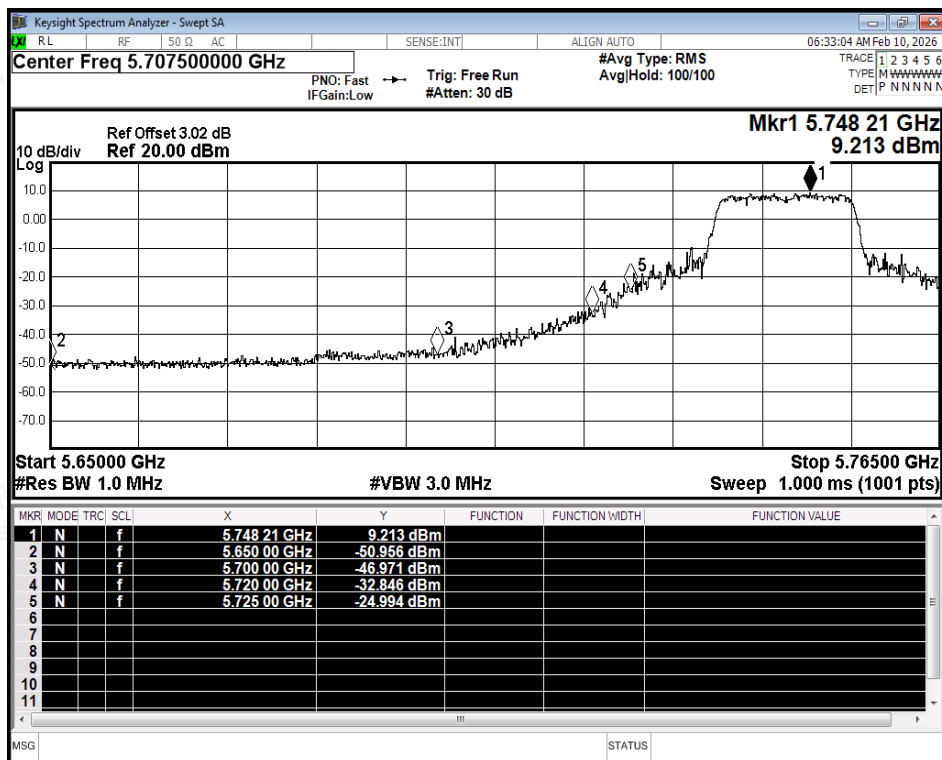

Restrict Band NVNT n20 5745MHz Ant1 Peak

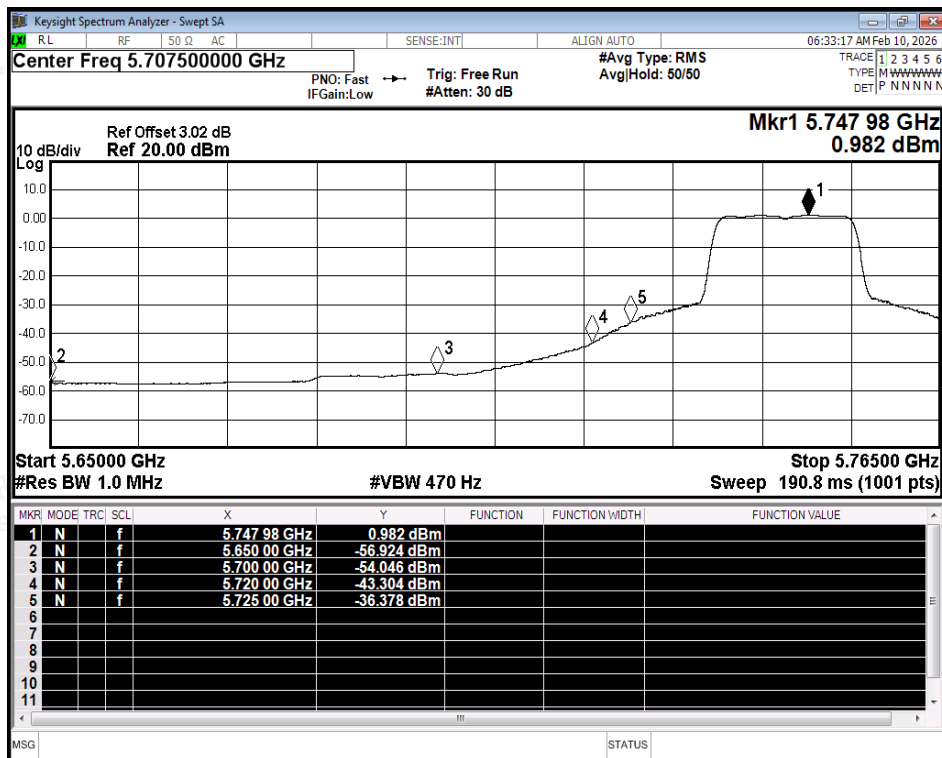

Restrict Band NVNT n20 5745MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

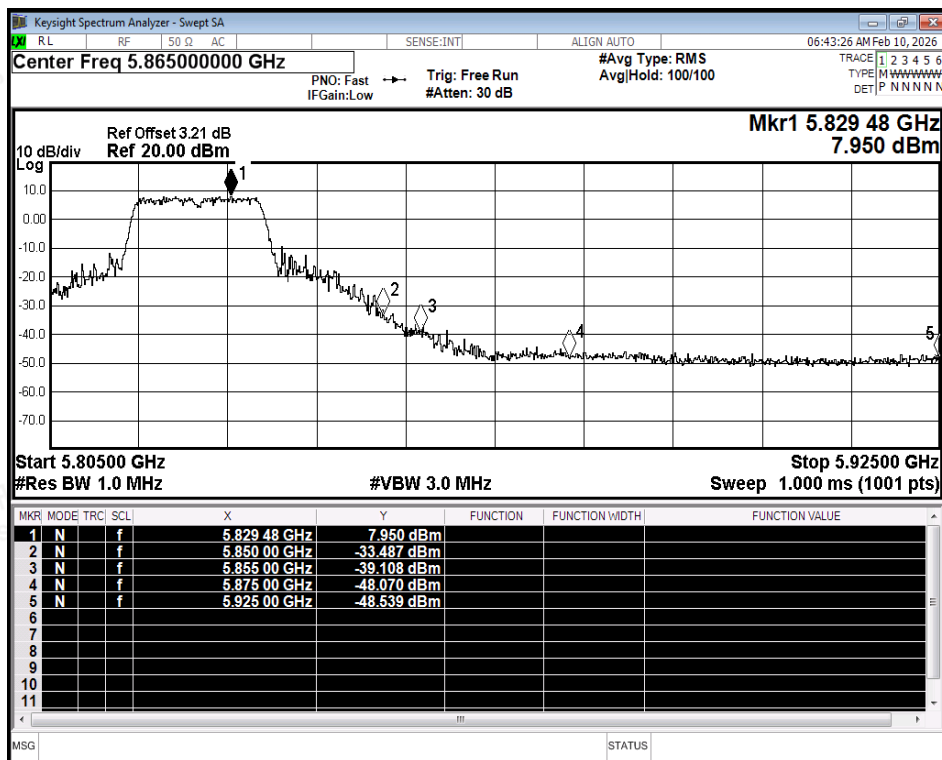

Restrict Band NVNT n20 5825MHz Ant1 Peak

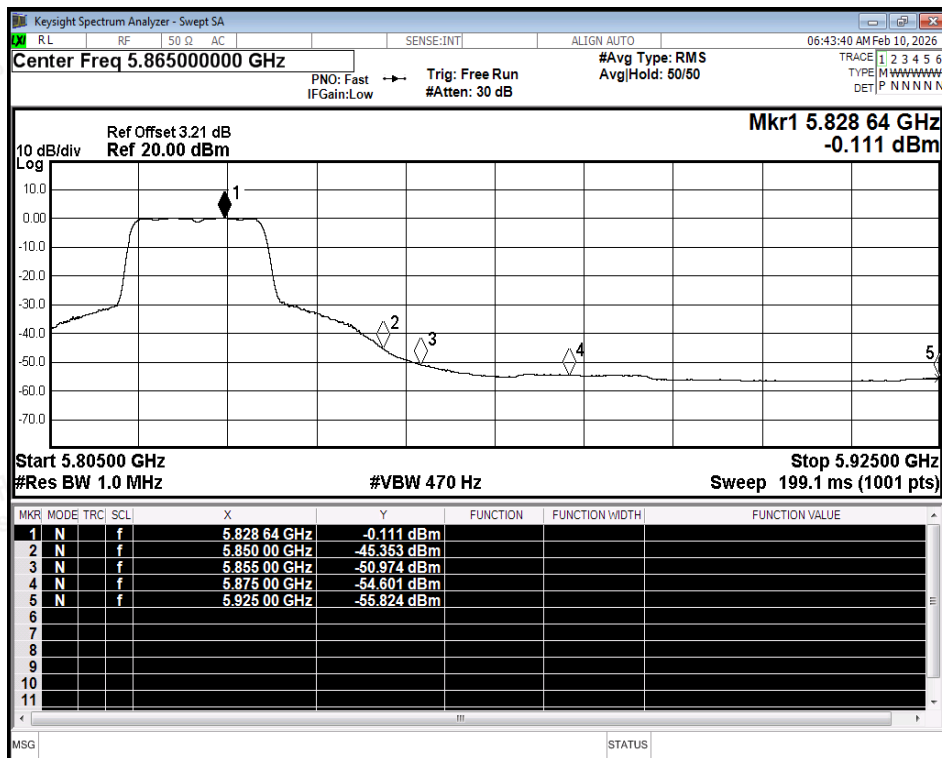

Restrict Band NVNT n20 5825MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

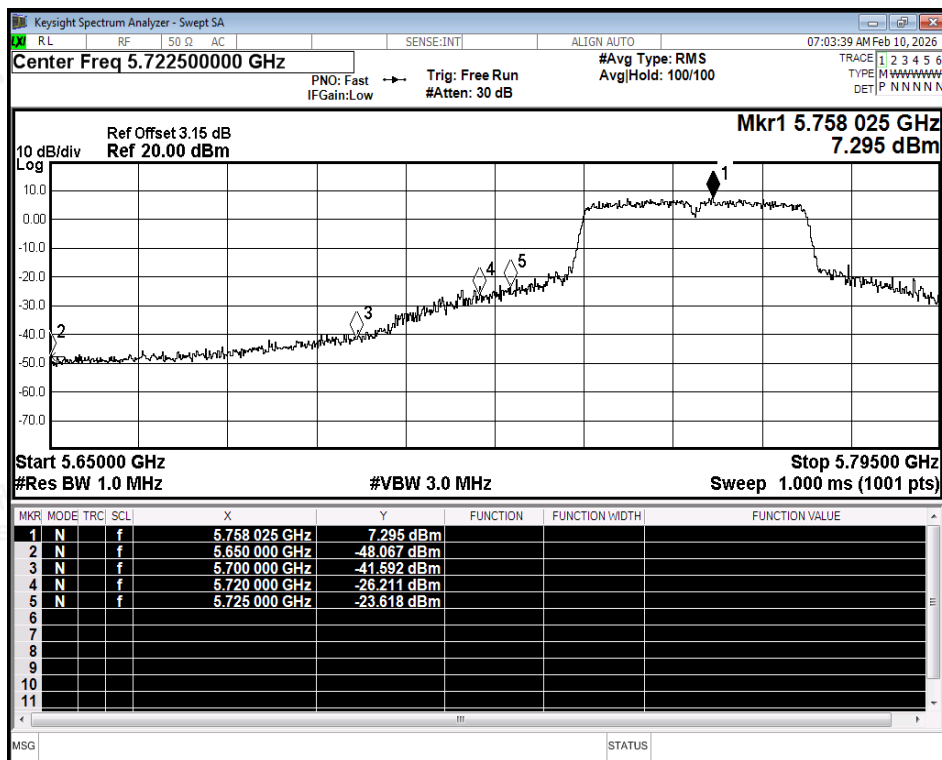

Restrict Band NVNT n40 5755MHz Ant1 Peak

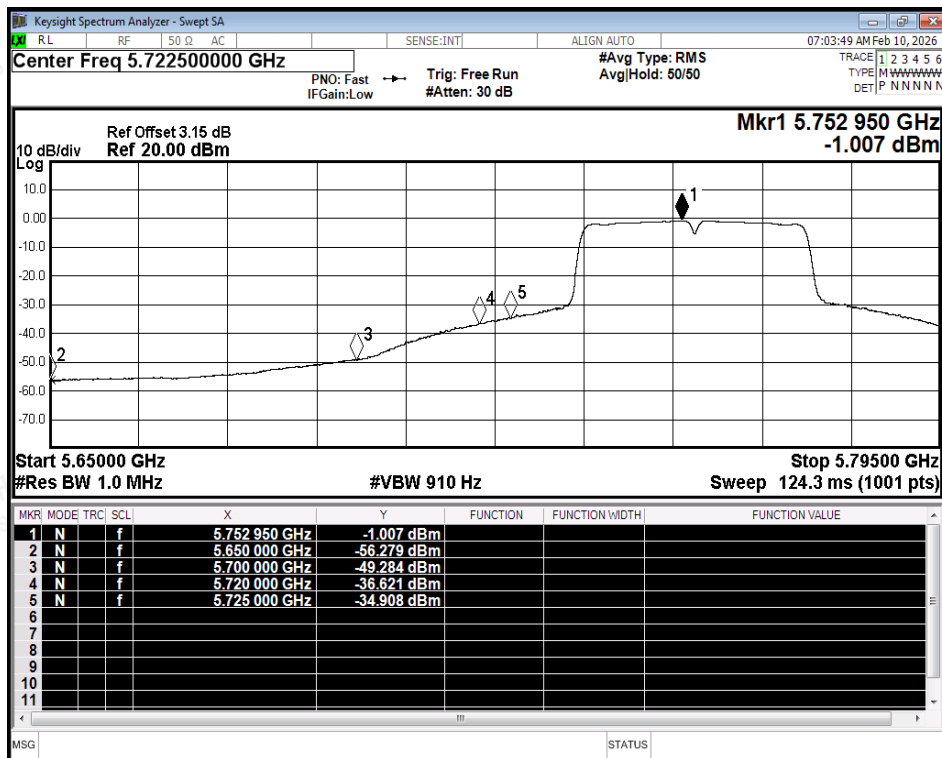

Restrict Band NVNT n40 5755MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

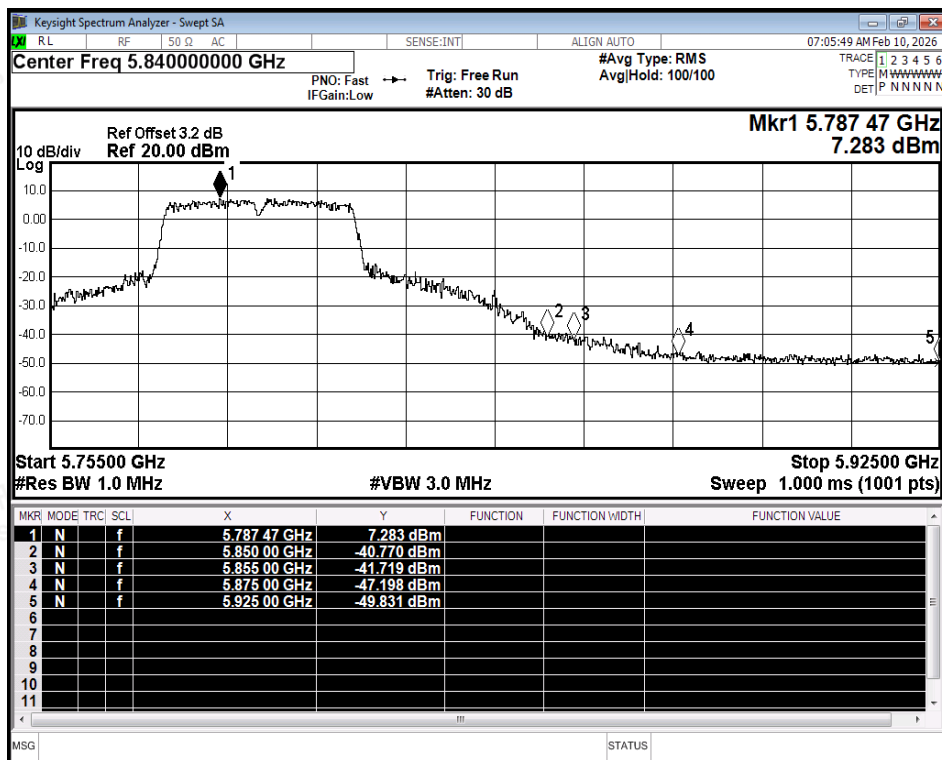

Restrict Band NVNT n40 5795MHz Ant1 Peak

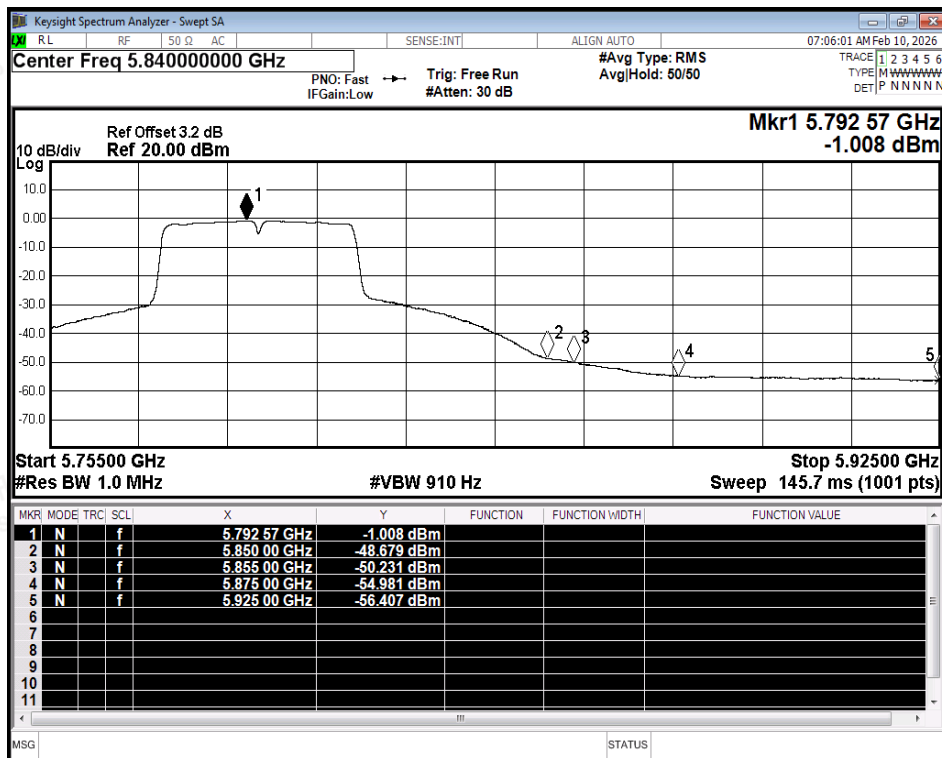

Restrict Band NVNT n40 5795MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

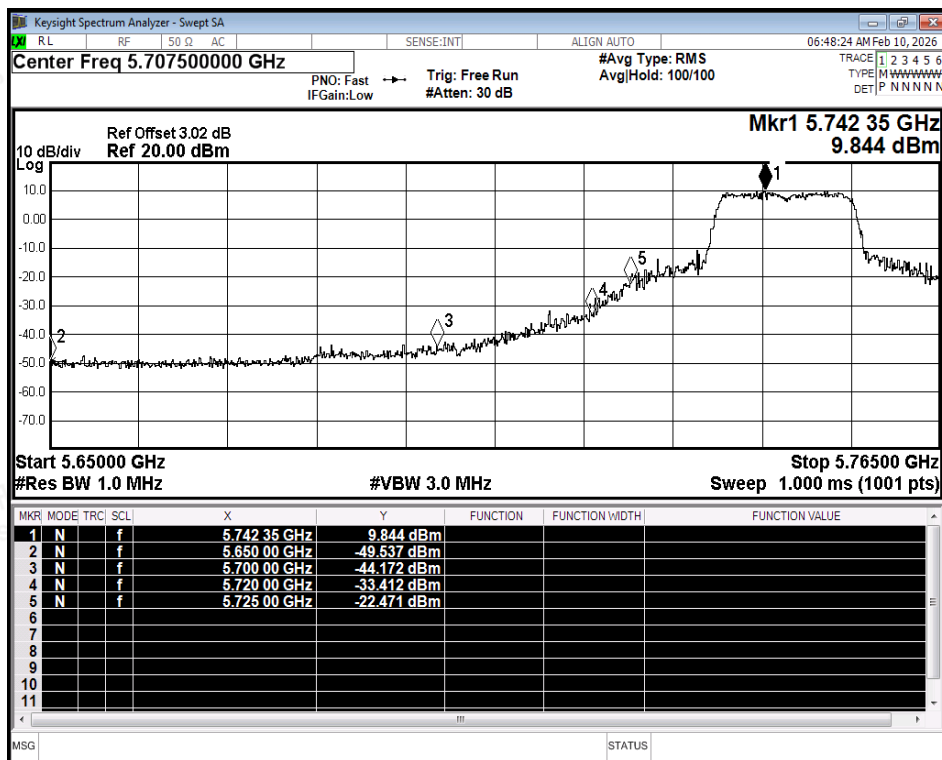

Restrict Band NVNT ac20 5745MHz Ant1 Peak

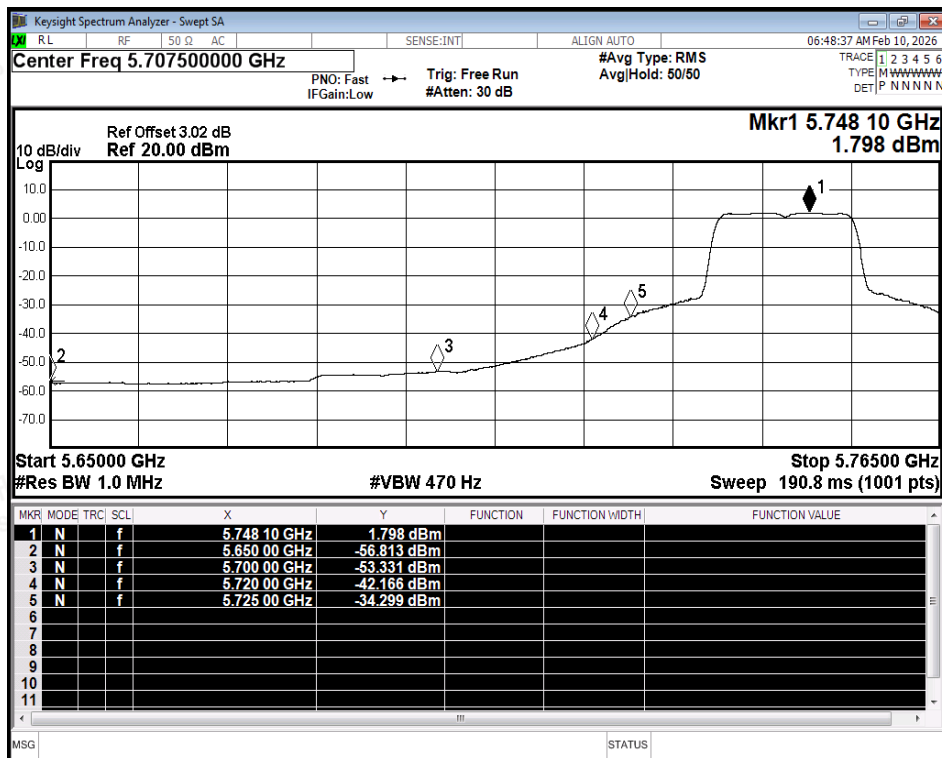

Restrict Band NVNT ac20 5745MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

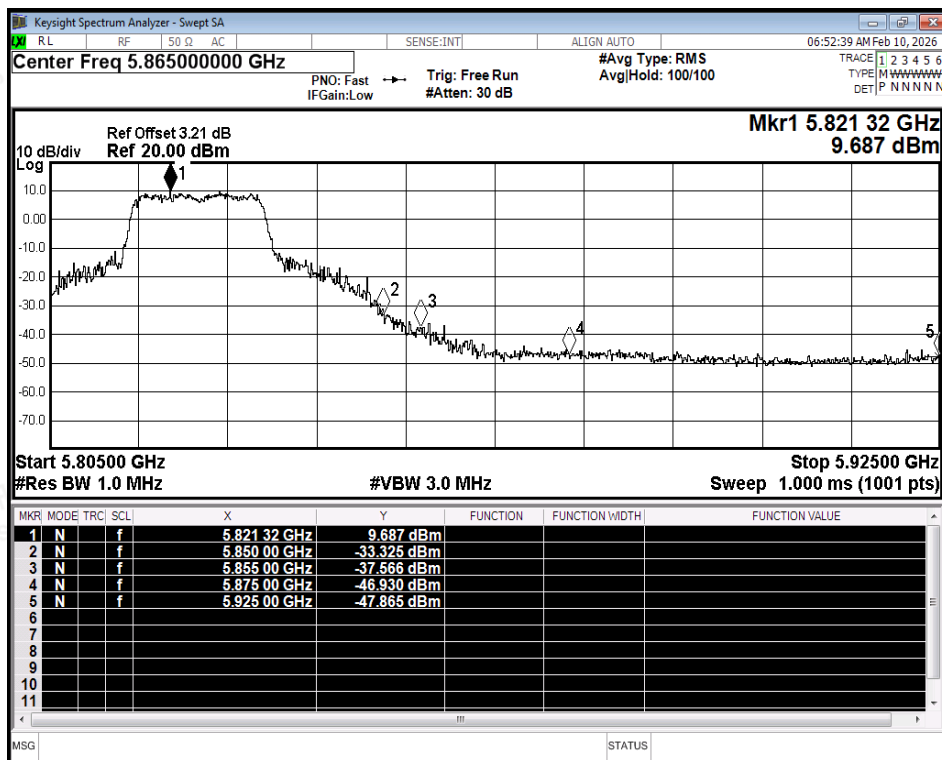

Restrict Band NVNT ac20 5825MHz Ant1 Peak

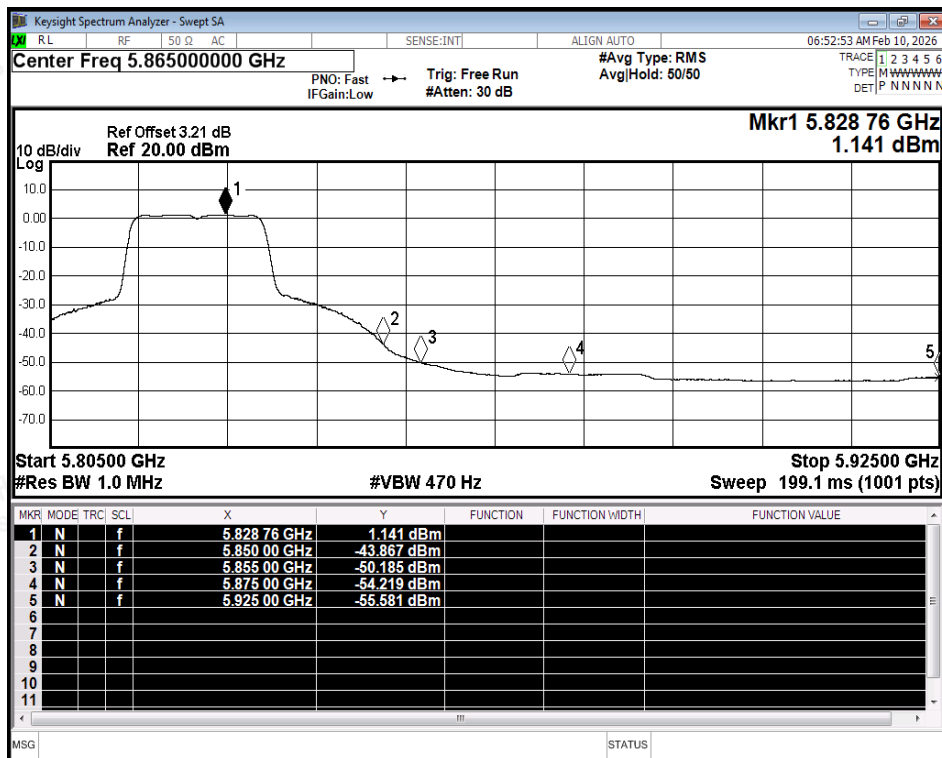

Restrict Band NVNT ac20 5825MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

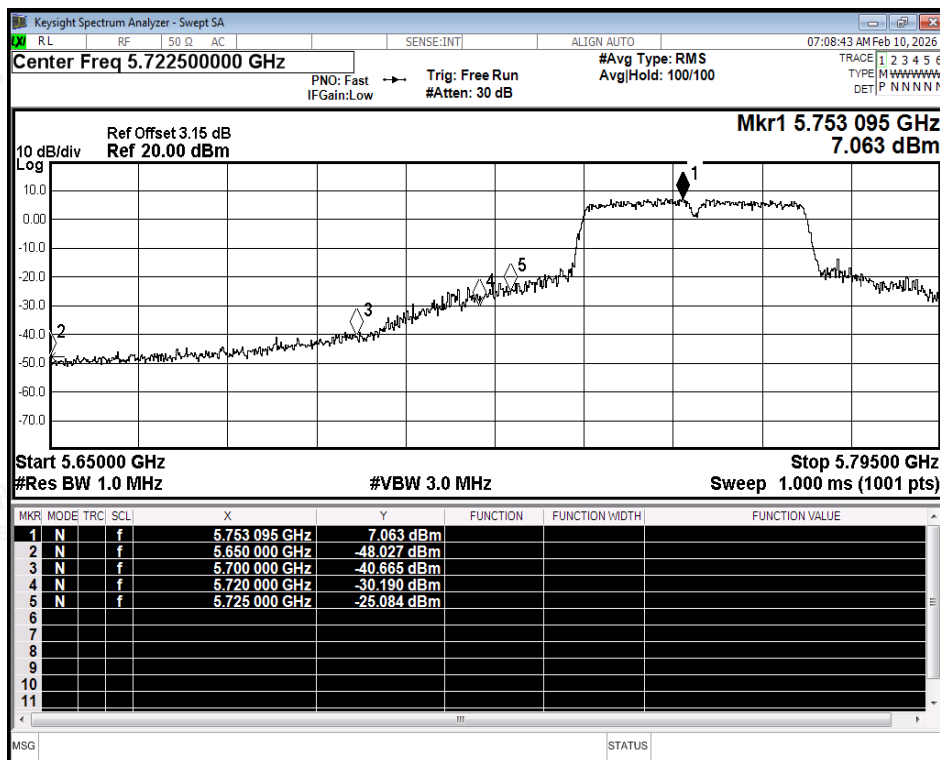

Restrict Band NVNT ac40 5755MHz Ant1 Peak

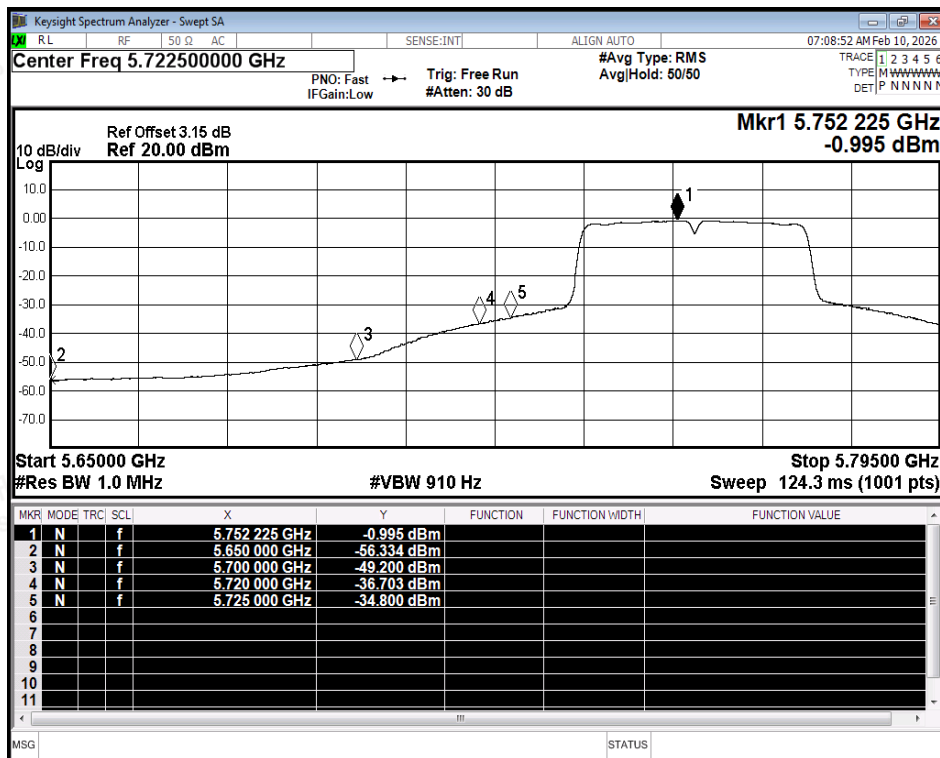

Restrict Band NVNT ac40 5755MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

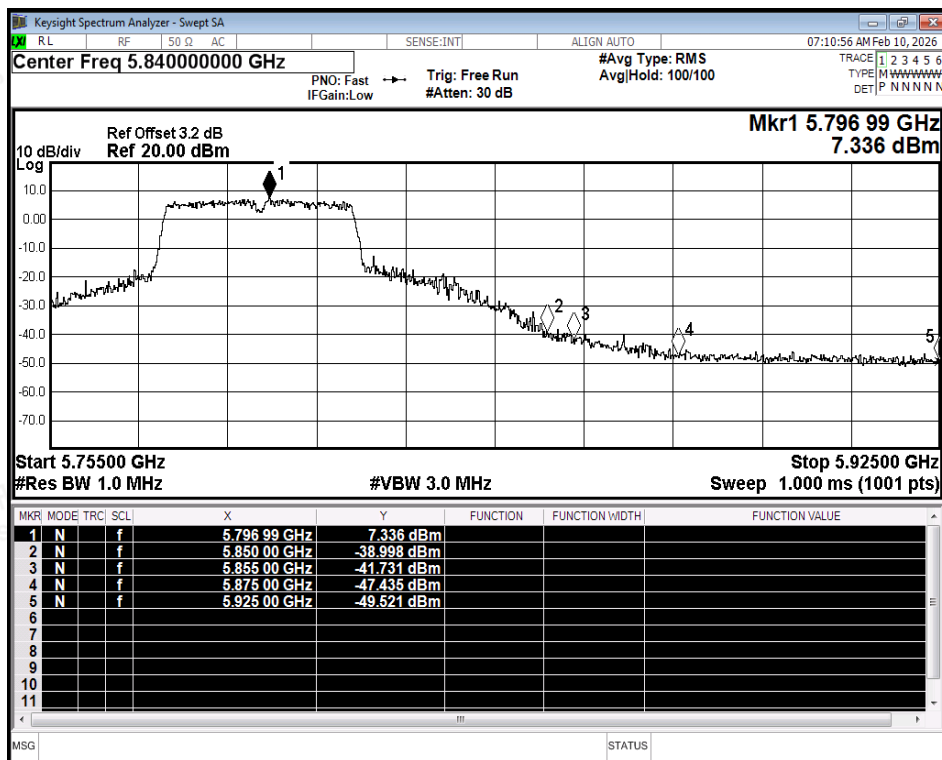

Restrict Band NVNT ac40 5795MHz Ant1 Peak

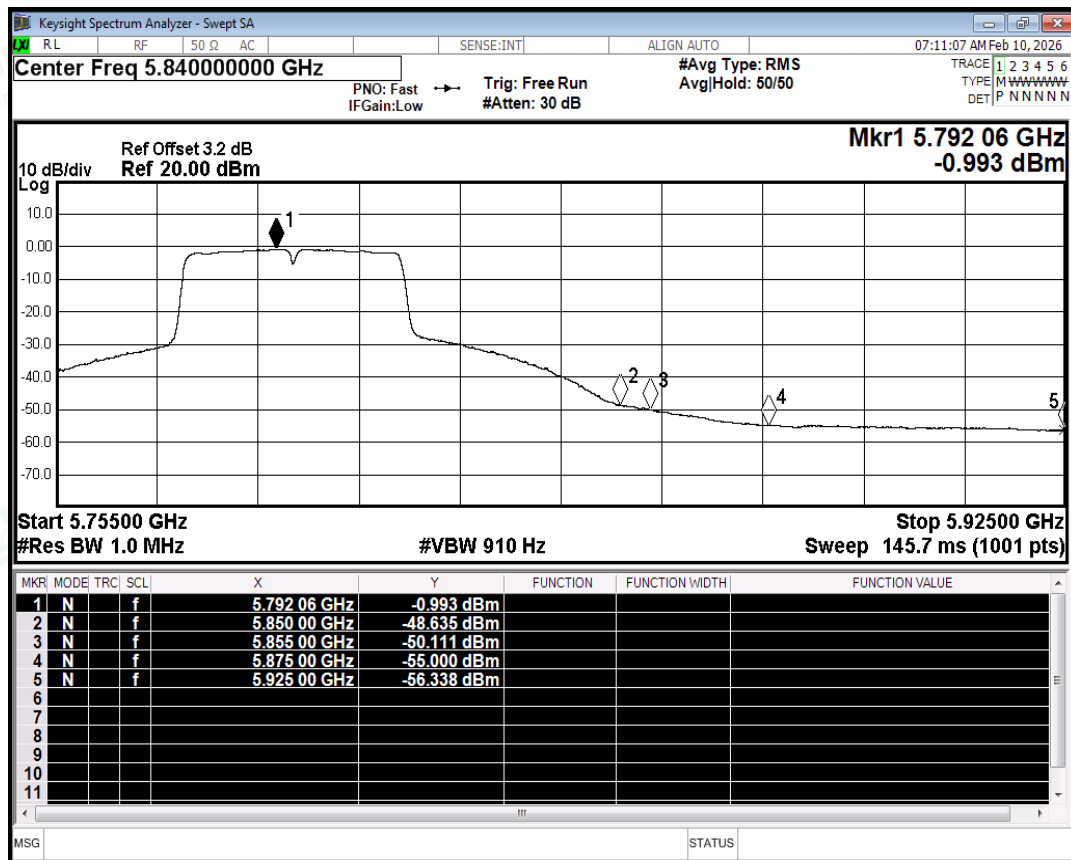

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac40 5795MHz Ant1 Average

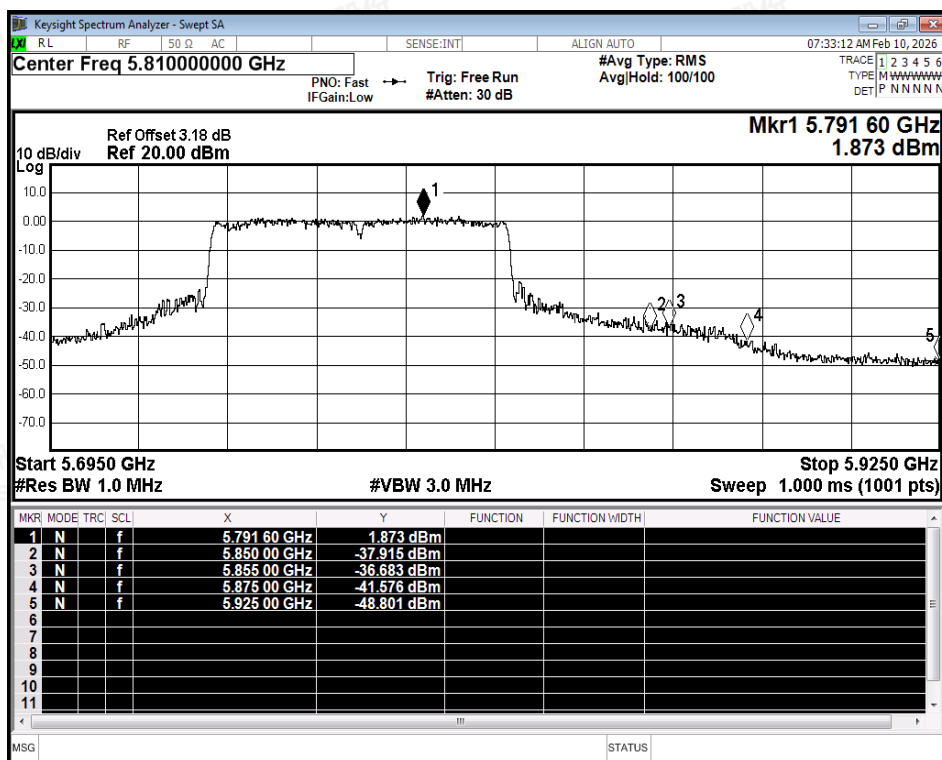

## Restrict Band NVNT ac80 5775MHz Ant1 Peak

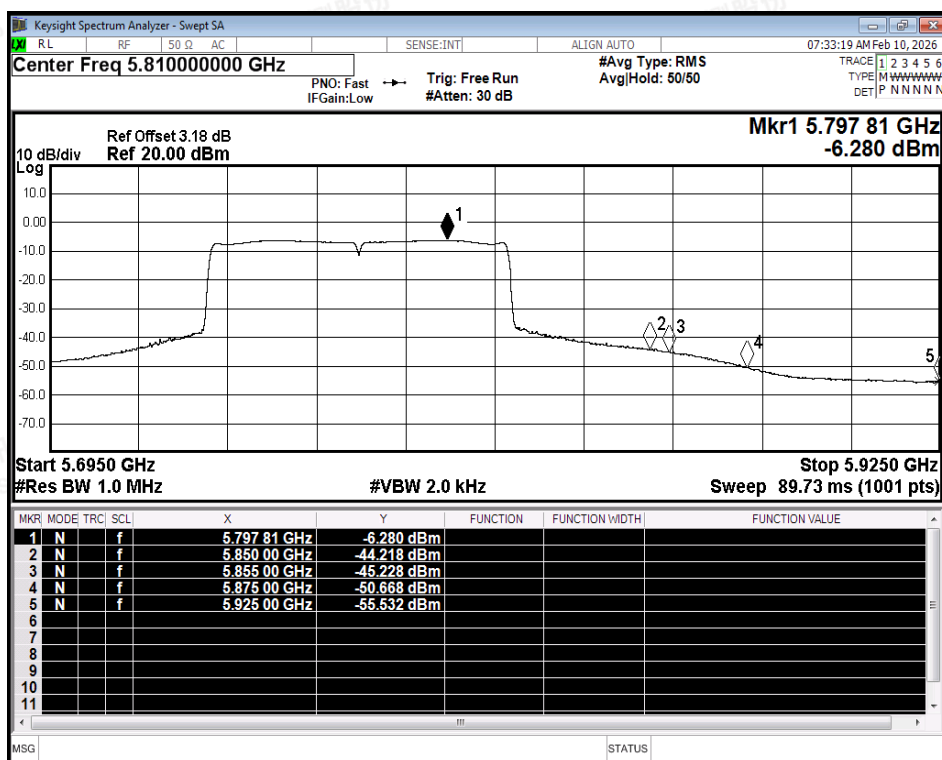

## Restrict Band NVNT ac80 5775MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

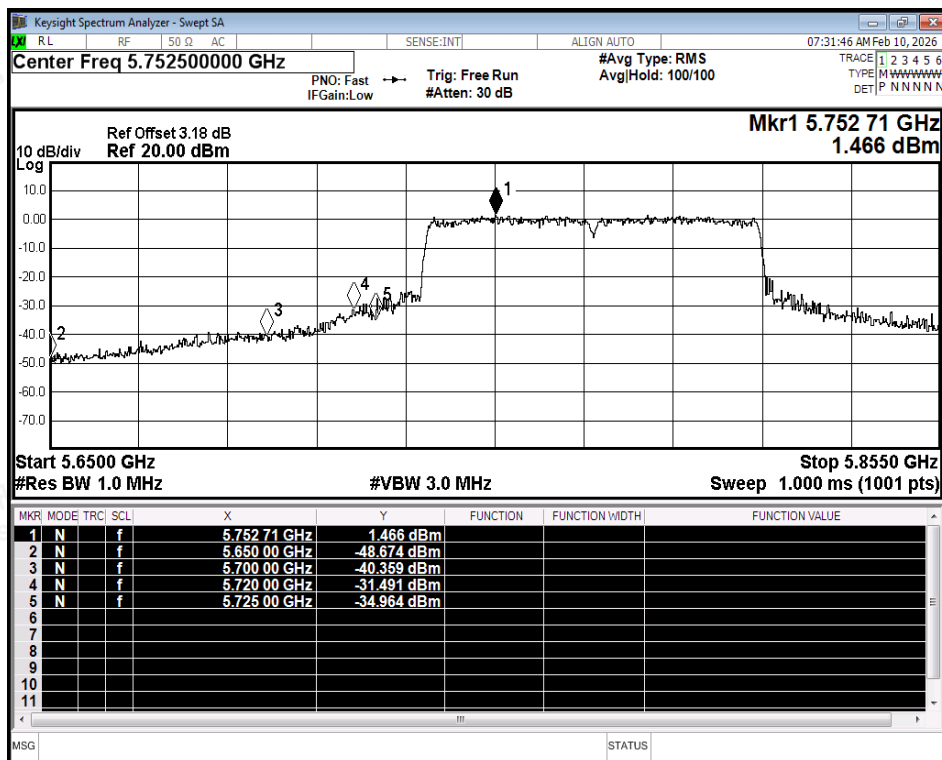

Restrict Band NVNT ac80 5775MHz Ant1 Peak

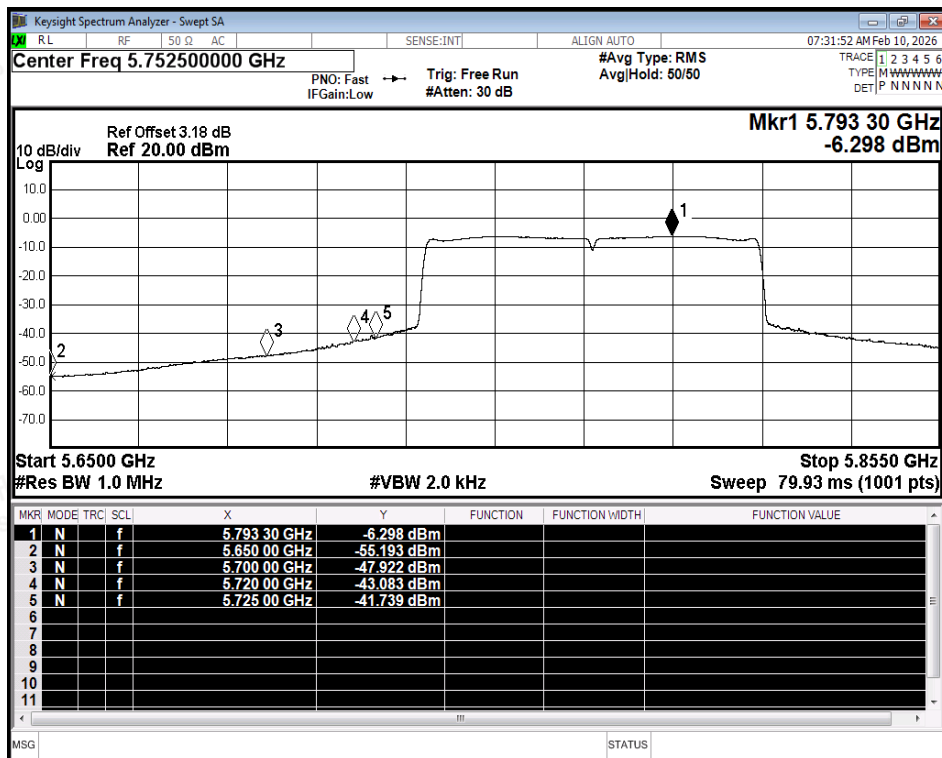

Restrict Band NVNT ac80 5775MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

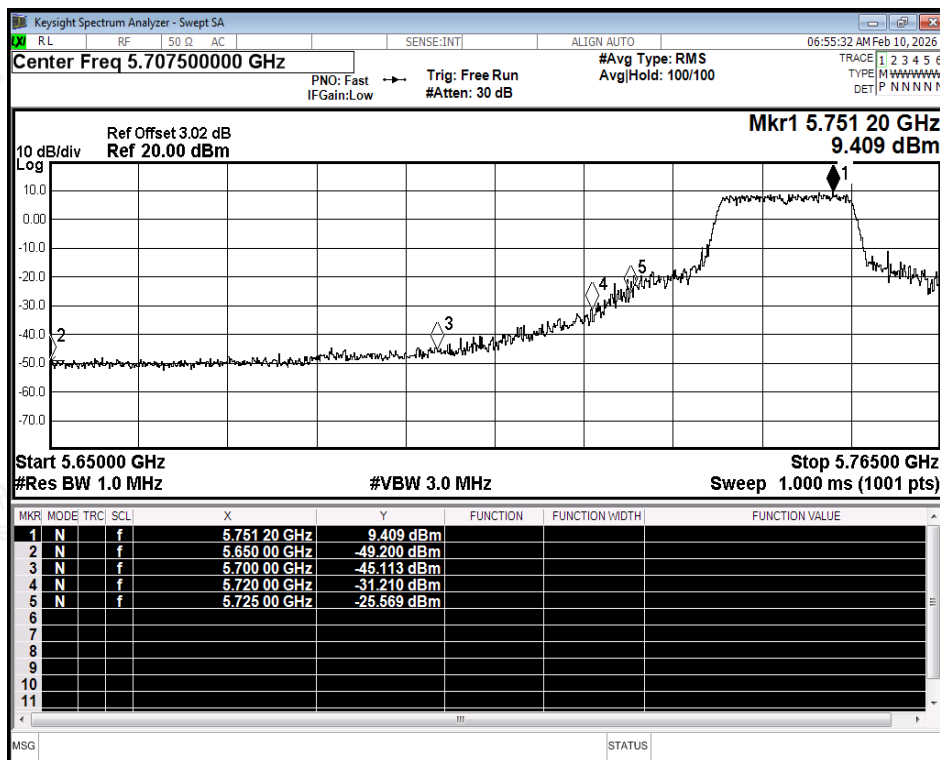

Restrict Band NVNT ax20 5745MHz Ant1 Peak

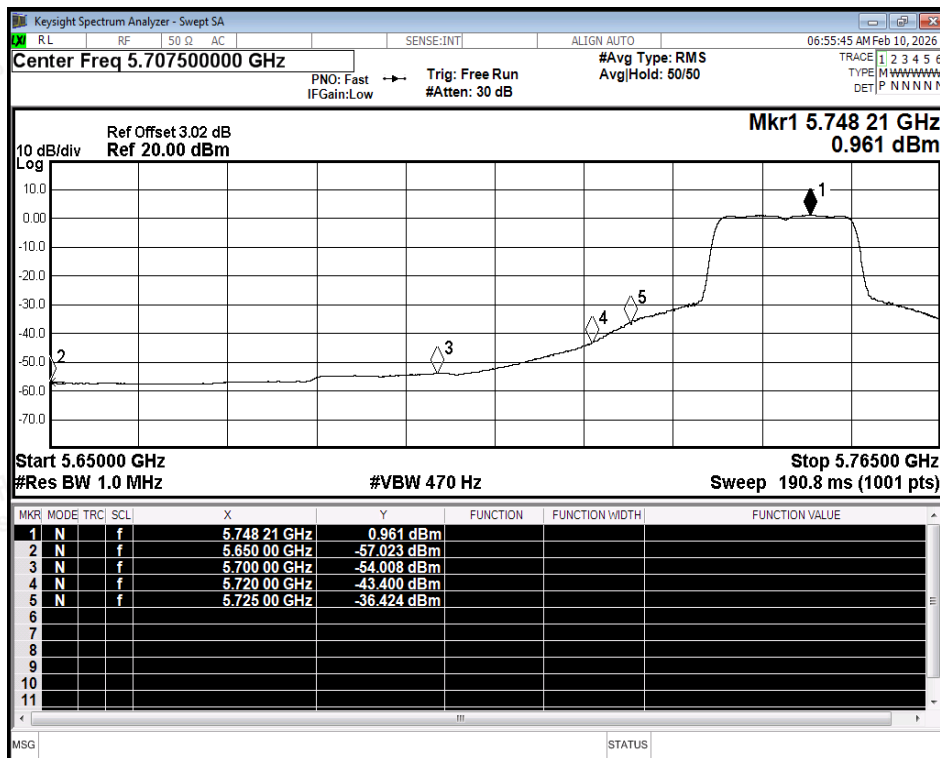

Restrict Band NVNT ax20 5745MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

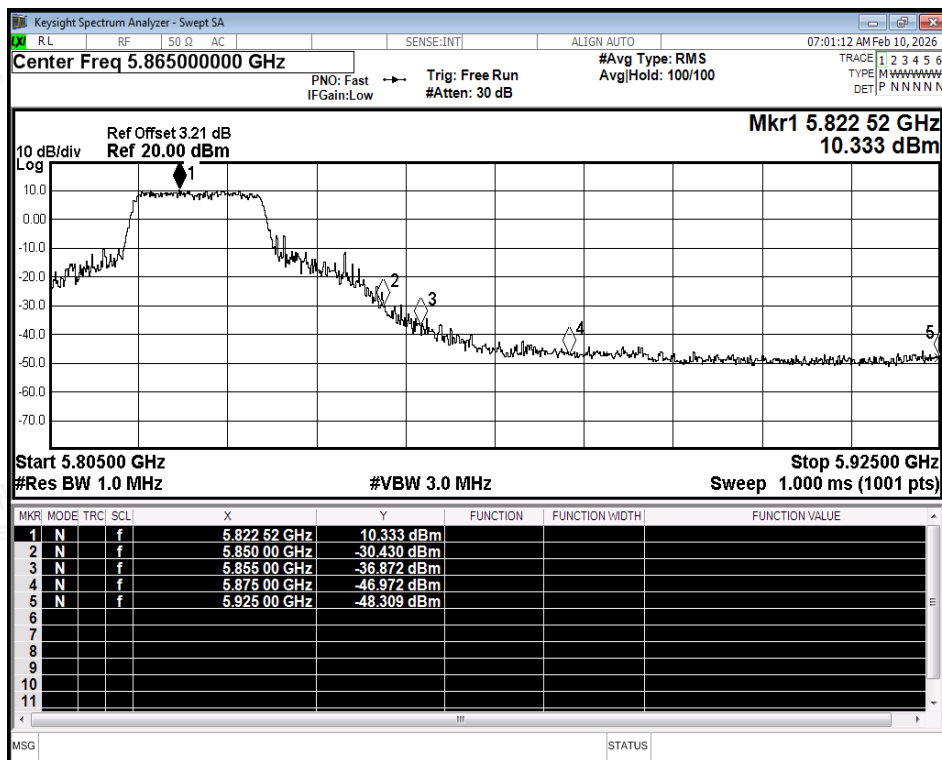

Restrict Band NVNT ax20 5825MHz Ant1 Peak

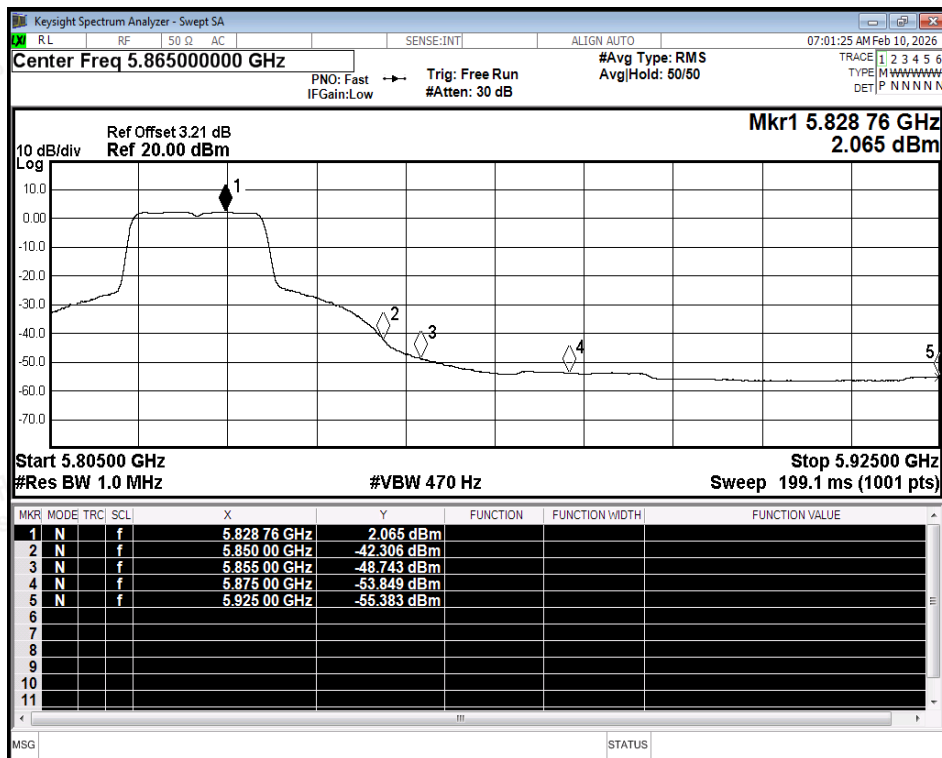

Restrict Band NVNT ax20 5825MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

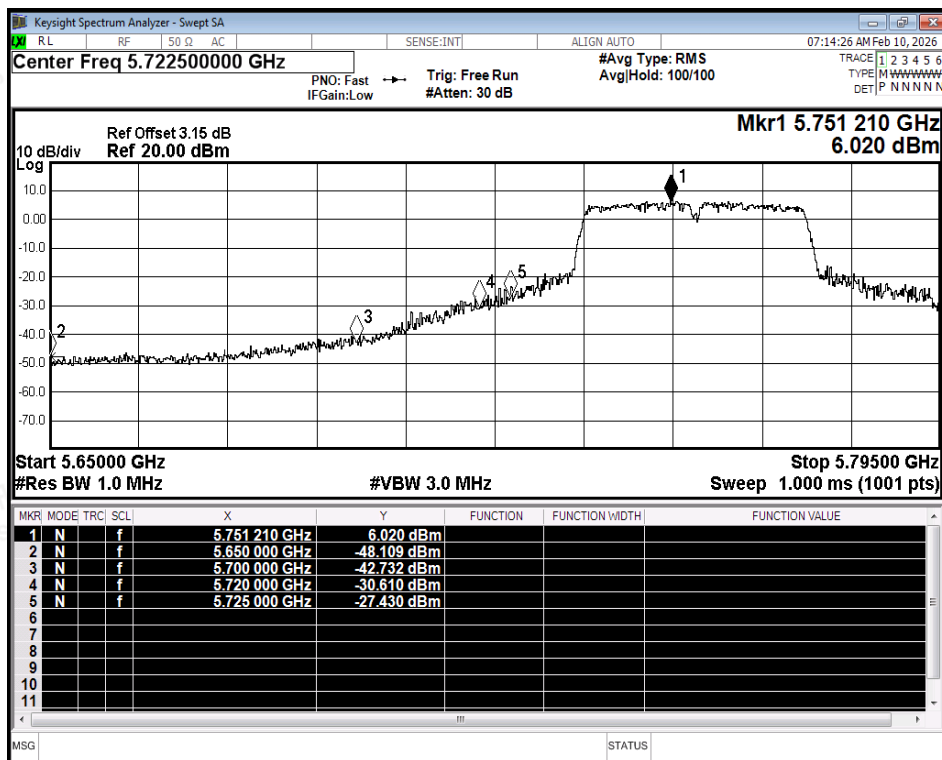

Restrict Band NVNT ax40 5755MHz Ant1 Peak

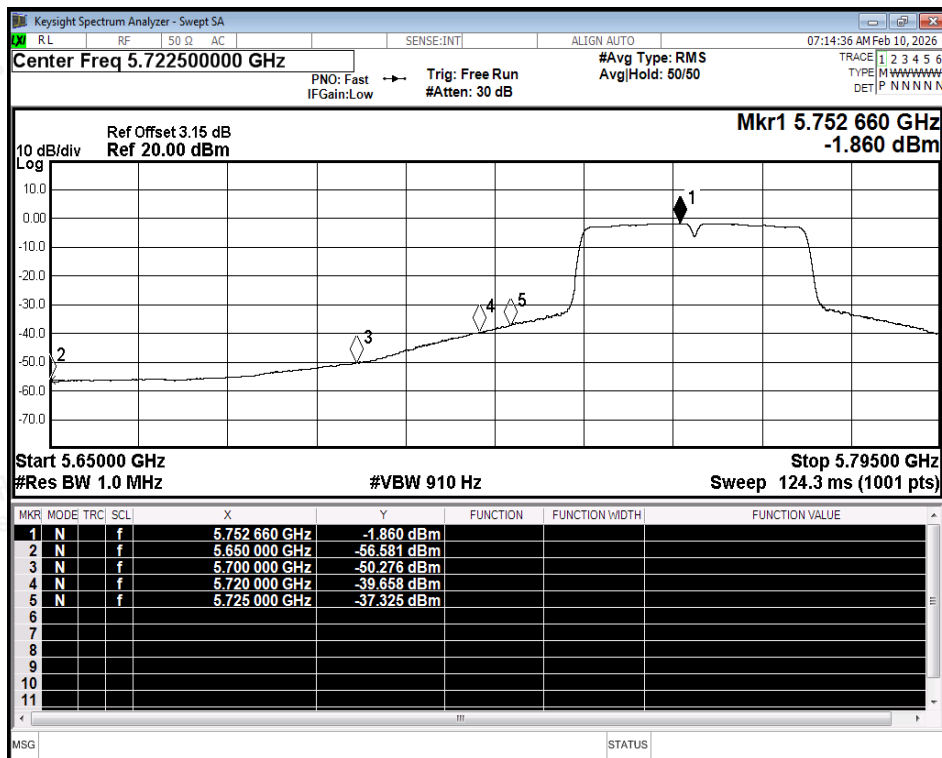

Restrict Band NVNT ax40 5755MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

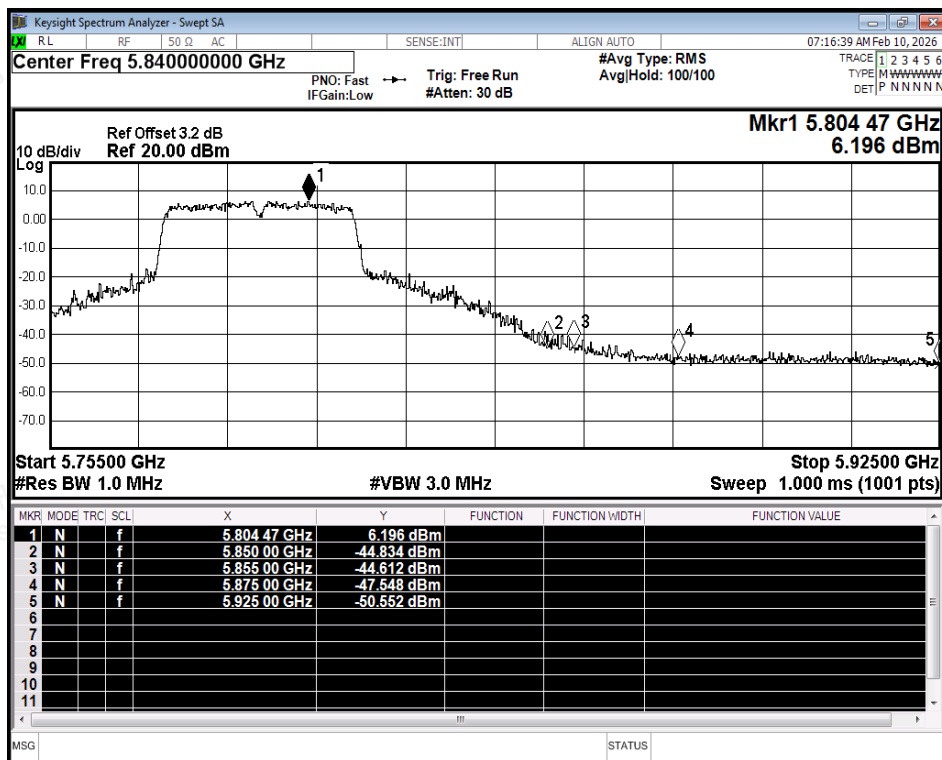

Restrict Band NVNT ax40 5795MHz Ant1 Peak

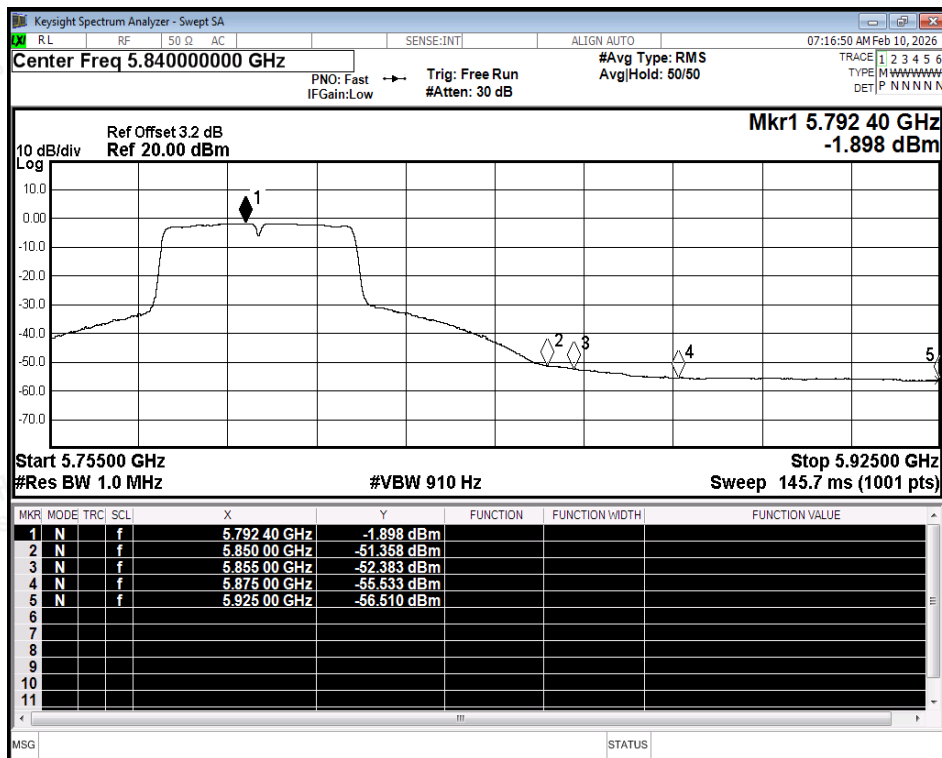

Restrict Band NVNT ax40 5795MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

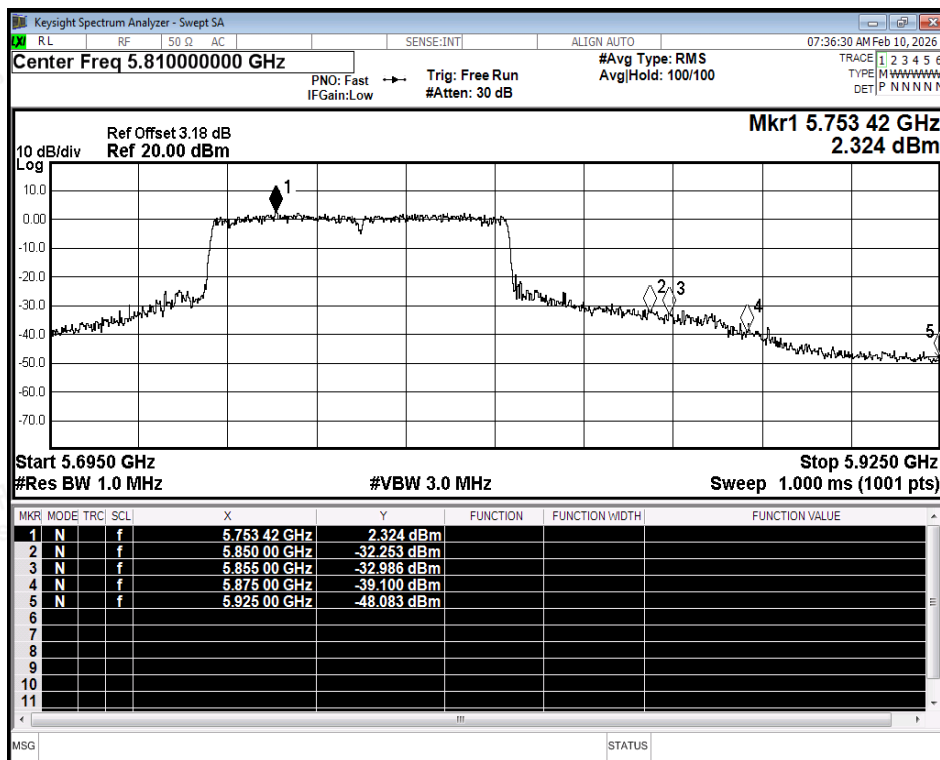

Restrict Band NVNT ax80 5775MHz Ant1 Peak

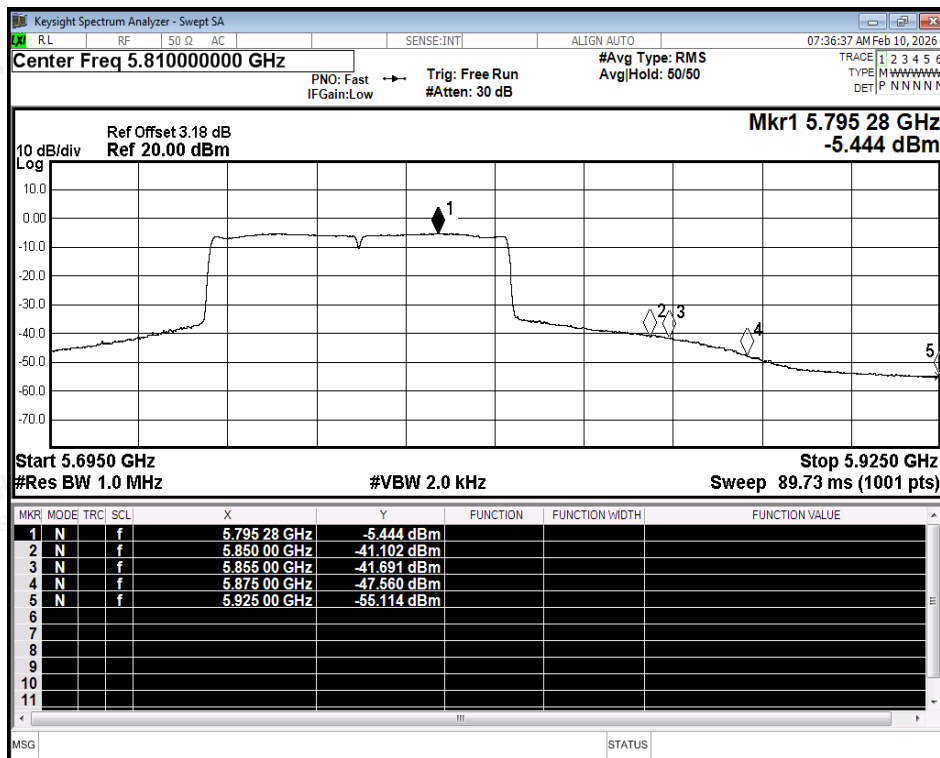

Restrict Band NVNT ax80 5775MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

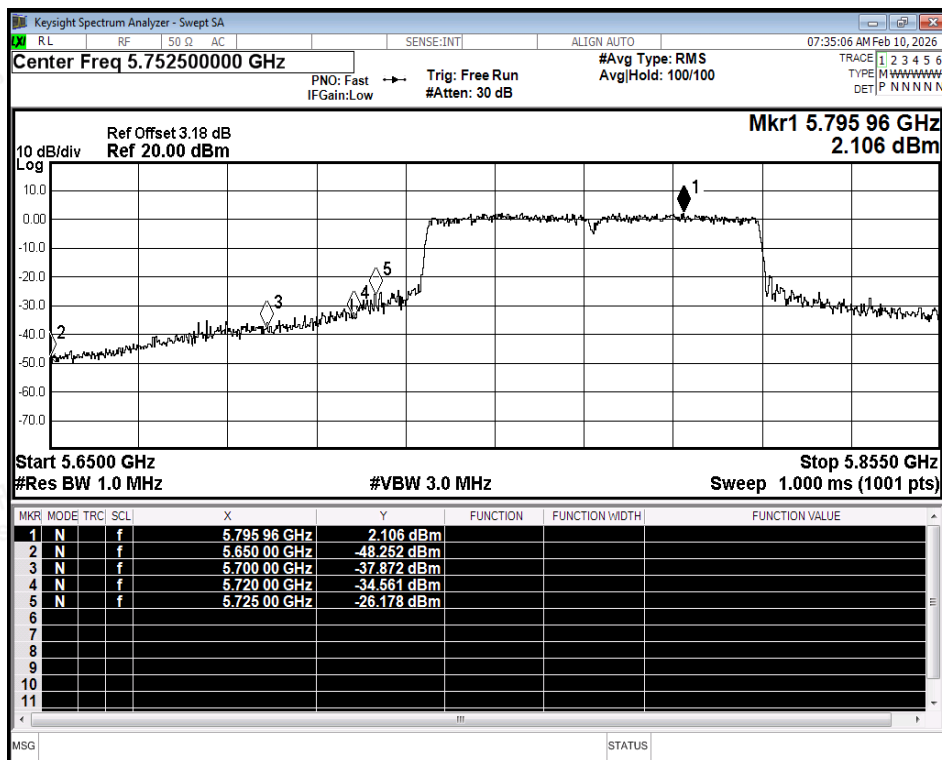

Restrict Band NVNT ax80 5775MHz Ant1 Peak

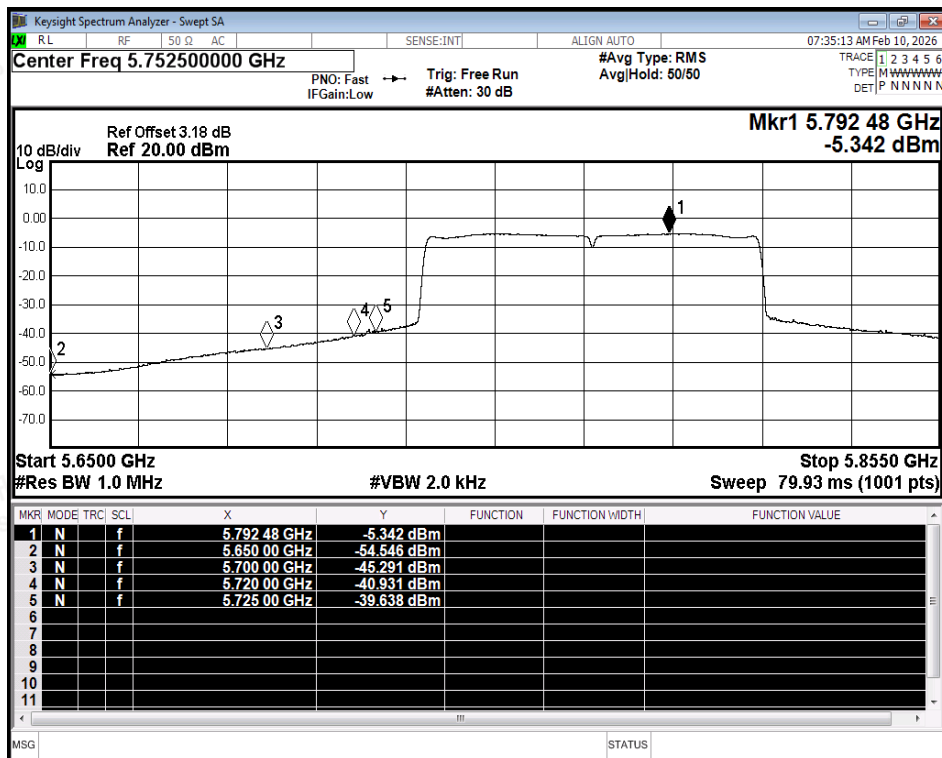

Restrict Band NVNT ax80 5775MHz Ant1 Average



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | EIRP (dBm) | Detector | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------|----------|-------------|---------|
| NVNT      | a    | 5745            | Ant2    | 5650            | -50.2       | 2          | -48.2      | Peak     | -27         | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5650            | -57.31      | 2          | -55.31     | Average  | -27         | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5700            | -46.13      | 2          | -44.13     | Peak     | 10          | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5700            | -54.53      | 2          | -52.53     | Average  | 10          | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5720            | -33.83      | 2          | -31.83     | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5720            | -45.49      | 2          | -43.49     | Average  | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5725            | -25.52      | 2          | -23.52     | Peak     | 27          | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5725            | -39.48      | 2          | -37.48     | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5850            | -36.03      | 2          | -34.03     | Peak     | 27          | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5850            | -48.01      | 2          | -46.01     | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5855            | -45.45      | 2          | -43.45     | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5855            | -52.13      | 2          | -50.13     | Average  | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5875            | -47.03      | 2          | -45.03     | Peak     | 10          | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5875            | -54.63      | 2          | -52.63     | Average  | 10          | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5925            | -47.72      | 2          | -45.72     | Peak     | -27         | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5925            | -55.81      | 2          | -53.81     | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5650            | -50.59      | 2          | -48.59     | Peak     | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5650            | -56.95      | 2          | -54.95     | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5700            | -46.38      | 2          | -44.38     | Peak     | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5700            | -54.17      | 2          | -52.17     | Average  | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5720            | -33.78      | 2          | -31.78     | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5720            | -43.68      | 2          | -41.68     | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5725            | -23.44      | 2          | -21.44     | Peak     | 27          | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5725            | -36.81      | 2          | -34.81     | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5850            | -27.77      | 2          | -25.77     | Peak     | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5850            | -44.41      | 2          | -42.41     | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5855            | -40.74      | 2          | -38.74     | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5855            | -50.55      | 2          | -48.55     | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5875            | -46.1       | 2          | -44.1      | Peak     | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5875            | -54.58      | 2          | -52.58     | Average  | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5925            | -49.2       | 2          | -47.2      | Peak     | -27         | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5925            | -55.77      | 2          | -53.77     | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 5650            | -49.35      | 2          | -47.35     | Peak     | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 5650            | -56.61      | 2          | -54.61     | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 5700            | -44.25      | 2          | -42.25     | Peak     | 10          | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 5700            | -50.53      | 2          | -48.53     | Average  | 10          | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 5720            | -29.8       | 2          | -27.8      | Peak     | 15.6        | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 5720            | -40.23      | 2          | -38.23     | Average  | 15.6        | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |   |        |         |      |      |
|------|------|------|------|------|--------|---|--------|---------|------|------|
| NVNT | n40  | 5755 | Ant2 | 5725 | -28.05 | 2 | -26.05 | Peak    | 27   | Pass |
| NVNT | n40  | 5755 | Ant2 | 5725 | -37.75 | 2 | -35.75 | Average | 27   | Pass |
| NVNT | n40  | 5795 | Ant2 | 5850 | -43.4  | 2 | -41.4  | Peak    | 27   | Pass |
| NVNT | n40  | 5795 | Ant2 | 5850 | -51.62 | 2 | -49.62 | Average | 27   | Pass |
| NVNT | n40  | 5795 | Ant2 | 5855 | -45.88 | 2 | -43.88 | Peak    | 15.6 | Pass |
| NVNT | n40  | 5795 | Ant2 | 5855 | -52.57 | 2 | -50.57 | Average | 15.6 | Pass |
| NVNT | n40  | 5795 | Ant2 | 5875 | -46.94 | 2 | -44.94 | Peak    | 10   | Pass |
| NVNT | n40  | 5795 | Ant2 | 5875 | -55.66 | 2 | -53.66 | Average | 10   | Pass |
| NVNT | n40  | 5795 | Ant2 | 5925 | -50.1  | 2 | -48.1  | Peak    | -27  | Pass |
| NVNT | n40  | 5795 | Ant2 | 5925 | -56.59 | 2 | -54.59 | Average | -27  | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5650 | -51.06 | 2 | -49.06 | Peak    | -27  | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5650 | -56.96 | 2 | -54.96 | Average | -27  | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5700 | -45.42 | 2 | -43.42 | Peak    | 10   | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5700 | -54.18 | 2 | -52.18 | Average | 10   | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5720 | -31.35 | 2 | -29.35 | Peak    | 15.6 | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5720 | -43.47 | 2 | -41.47 | Average | 15.6 | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5725 | -25.72 | 2 | -23.72 | Peak    | 27   | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5725 | -36.87 | 2 | -34.87 | Average | 27   | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5850 | -30.89 | 2 | -28.89 | Peak    | 27   | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5850 | -44.25 | 2 | -42.25 | Average | 27   | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5855 | -39.98 | 2 | -37.98 | Peak    | 15.6 | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5855 | -50.21 | 2 | -48.21 | Average | 15.6 | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5875 | -47.05 | 2 | -45.05 | Peak    | 10   | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5875 | -54.48 | 2 | -52.48 | Average | 10   | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5925 | -47.33 | 2 | -45.33 | Peak    | -27  | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5925 | -55.69 | 2 | -53.69 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5650 | -49.43 | 2 | -47.43 | Peak    | -27  | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5650 | -56.52 | 2 | -54.52 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5700 | -44.14 | 2 | -42.14 | Peak    | 10   | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5700 | -50.6  | 2 | -48.6  | Average | 10   | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5720 | -29.44 | 2 | -27.44 | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5720 | -40.19 | 2 | -38.19 | Average | 15.6 | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5725 | -21.87 | 2 | -19.87 | Peak    | 27   | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5725 | -37.55 | 2 | -35.55 | Average | 27   | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5850 | -37.91 | 2 | -35.91 | Peak    | 27   | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5850 | -51.57 | 2 | -49.57 | Average | 27   | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5855 | -44    | 2 | -42    | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5855 | -52.8  | 2 | -50.8  | Average | 15.6 | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5875 | -49.07 | 2 | -47.07 | Peak    | 10   | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5875 | -55.73 | 2 | -53.73 | Average | 10   | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5925 | -50.56 | 2 | -48.56 | Peak    | -27  | Pass |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |   |        |         |      |      |
|------|------|------|------|------|--------|---|--------|---------|------|------|
| NVNT | ac40 | 5795 | Ant2 | 5925 | -56.59 | 2 | -54.59 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5850 | -33.07 | 2 | -31.07 | Peak    | 27   | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5850 | -39.51 | 2 | -37.51 | Average | 27   | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5855 | -32.86 | 2 | -30.86 | Peak    | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5855 | -40.87 | 2 | -38.87 | Average | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5875 | -39.12 | 2 | -37.12 | Peak    | 10   | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5875 | -47.16 | 2 | -45.16 | Average | 10   | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5925 | -48.96 | 2 | -46.96 | Peak    | -27  | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5925 | -55.35 | 2 | -53.35 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5650 | -44.83 | 2 | -42.83 | Peak    | -27  | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5650 | -54.18 | 2 | -52.18 | Average | -27  | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5700 | -36.87 | 2 | -34.87 | Peak    | 10   | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5700 | -43.74 | 2 | -41.74 | Average | 10   | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5720 | -30.54 | 2 | -28.54 | Peak    | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5720 | -39.99 | 2 | -37.99 | Average | 15.6 | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5725 | -30.48 | 2 | -28.48 | Peak    | 27   | Pass |
| NVNT | ac80 | 5775 | Ant2 | 5725 | -38.43 | 2 | -36.43 | Average | 27   | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5650 | -49.96 | 2 | -47.96 | Peak    | -27  | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5650 | -56.92 | 2 | -54.92 | Average | -27  | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5700 | -46.39 | 2 | -44.39 | Peak    | 10   | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5700 | -54    | 2 | -52    | Average | 10   | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5720 | -31.07 | 2 | -29.07 | Peak    | 15.6 | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5720 | -43.29 | 2 | -41.29 | Average | 15.6 | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5725 | -21.67 | 2 | -19.67 | Peak    | 27   | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5725 | -36.37 | 2 | -34.37 | Average | 27   | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5850 | -31.56 | 2 | -29.56 | Peak    | 27   | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5850 | -44.2  | 2 | -42.2  | Average | 27   | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5855 | -38.78 | 2 | -36.78 | Peak    | 15.6 | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5855 | -50.51 | 2 | -48.51 | Average | 15.6 | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5875 | -47.38 | 2 | -45.38 | Peak    | 10   | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5875 | -54.53 | 2 | -52.53 | Average | 10   | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5925 | -49.4  | 2 | -47.4  | Peak    | -27  | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5925 | -55.7  | 2 | -53.7  | Average | -27  | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5650 | -48.92 | 2 | -46.92 | Peak    | -27  | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5650 | -56.63 | 2 | -54.63 | Average | -27  | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5700 | -44.24 | 2 | -42.24 | Peak    | 10   | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5700 | -50.58 | 2 | -48.58 | Average | 10   | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5720 | -30.82 | 2 | -28.82 | Peak    | 15.6 | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5720 | -40.56 | 2 | -38.56 | Average | 15.6 | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5725 | -26.51 | 2 | -24.51 | Peak    | 27   | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5725 | -37.49 | 2 | -35.49 | Average | 27   | Pass |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |      |        |   |        |         |      |      |
|------|------|------|------|------|--------|---|--------|---------|------|------|
| NVNT | ax40 | 5795 | Ant2 | 5850 | -42.43 | 2 | -40.43 | Peak    | 27   | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5850 | -51.64 | 2 | -49.64 | Average | 27   | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5855 | -45.73 | 2 | -43.73 | Peak    | 15.6 | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5855 | -52.71 | 2 | -50.71 | Average | 15.6 | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5875 | -48.87 | 2 | -46.87 | Peak    | 10   | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5875 | -55.73 | 2 | -53.73 | Average | 10   | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5925 | -49.24 | 2 | -47.24 | Peak    | -27  | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5925 | -56.49 | 2 | -54.49 | Average | -27  | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5850 | -33.47 | 2 | -31.47 | Peak    | 27   | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5850 | -39.71 | 2 | -37.71 | Average | 27   | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5855 | -30.39 | 2 | -28.39 | Peak    | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5855 | -40.73 | 2 | -38.73 | Average | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5875 | -39.24 | 2 | -37.24 | Peak    | 10   | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5875 | -47.13 | 2 | -45.13 | Average | 10   | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5925 | -48    | 2 | -46    | Peak    | -27  | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5925 | -55.08 | 2 | -53.08 | Average | -27  | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5650 | -48.32 | 2 | -46.32 | Peak    | -27  | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5650 | -54.11 | 2 | -52.11 | Average | -27  | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5700 | -35.34 | 2 | -33.34 | Peak    | 10   | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5700 | -43.48 | 2 | -41.48 | Average | 10   | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5720 | -30.54 | 2 | -28.54 | Peak    | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5720 | -39.59 | 2 | -37.59 | Average | 15.6 | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5725 | -30.78 | 2 | -28.78 | Peak    | 27   | Pass |
| NVNT | ax80 | 5775 | Ant2 | 5725 | -38.15 | 2 | -36.15 | Average | 27   | Pass |

