



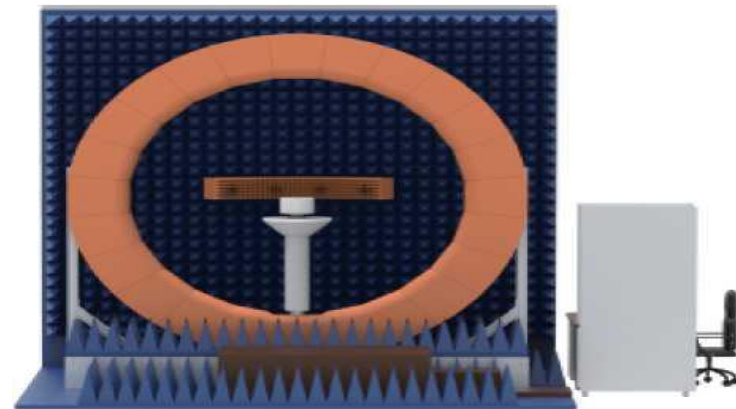

Customer	星辰
Project	G6151
Antenna Revision	A0
Prepared by	18814303605
Checked by	
Date :	2026. 04. 21

2. Test System

Sequence Number	Test Item	equipment
S parameter	VSWR	Agilent 5071C & Agilent 5071B
OTA Test	TRP&TIS	Agilent 8960 & CMW500 STIMO
Gain & Efficiency	Gain & Efficiency	SATIMO Agilent 5071C

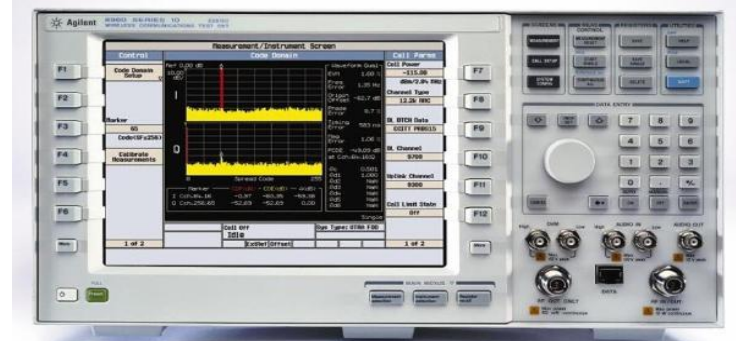

Purpose

This report is to measure the performance of antenna for (型号) The antenna operating frequency at 2400MHz0-2500MHz 。 All test data are showed as below.

Content

1. Product Overview & Dimension

2. Test system

3. Test Result

3.1 S11 Parameter

3.2 Gain & Efficiency

3.3 2D Pattern


4. OTA

4.1 Test Result

4.2 2D Pattern




匹配图

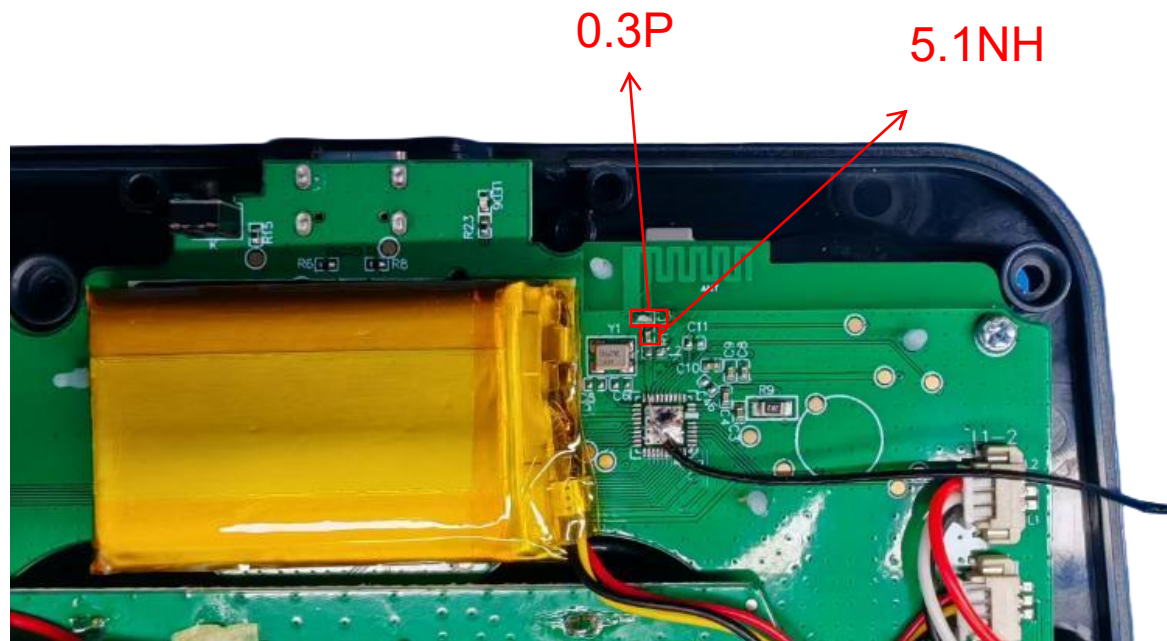

3.1 Test Result

1 .S11 Parameter-VSWR

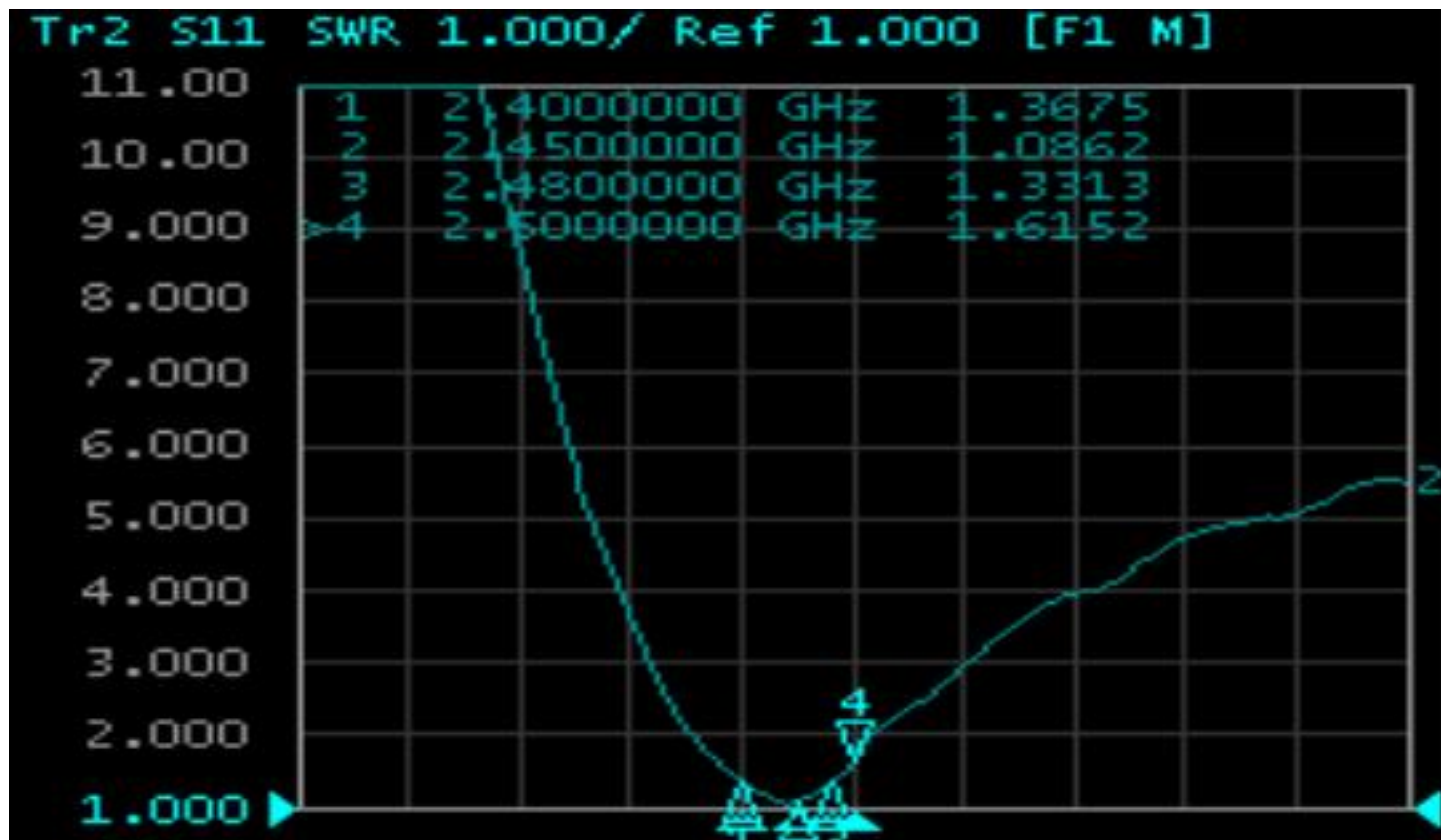

Frequency (MHz)	2400	2450	2480	2500
VSWR	1.36	1.08	1.33	1.61

3.1 Test Result


2. S11 Parameter-Log Mag



Frequency (MHz)	2400	2450	2480	2500
Log Mag	-16.10	-27.14	-16.77	-12.45

3.1 Test Result

3.S11 Parameter-Smith

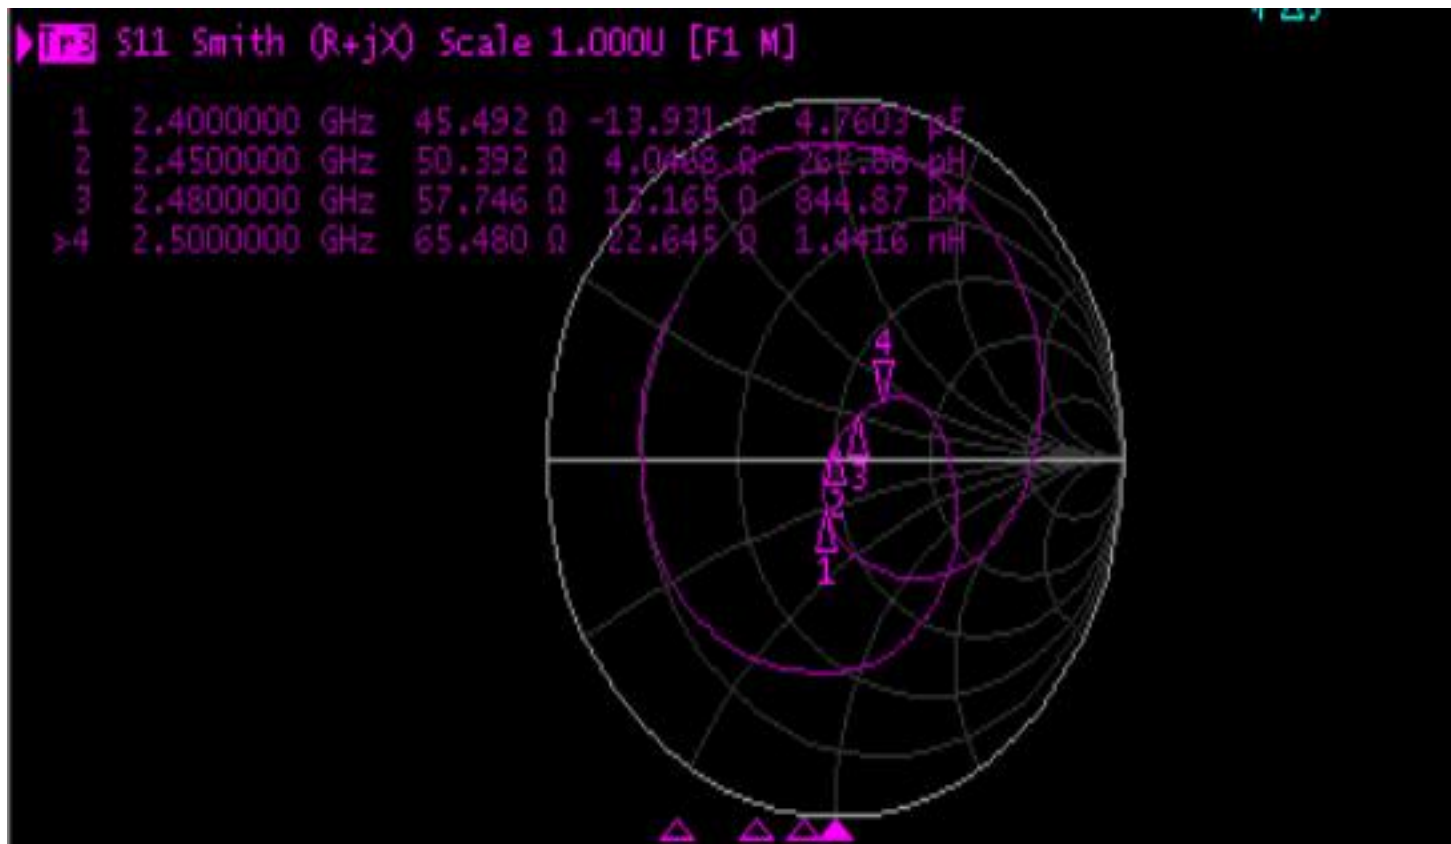

Frequency (MHz)	2400	2450	2480	2500
Smi th(Ω)	45.49	50.39	57.39	65.48

3.2 Test Result


1 Gain & Efficiency—**ANT**

Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
2400	51.07	1.41
2410	51.64	1.44
2420	52.43	1.66
2430	52.90	2.05
2440	53.51	2.33
2450	54.02	2.43
2460	55.75	2.37
2470	55.85	2.23
2480	56.08	2.54


3.3 Test Result

1 2D Pattern——BTANT


2400.0MHz Total, Eff: 43.2%

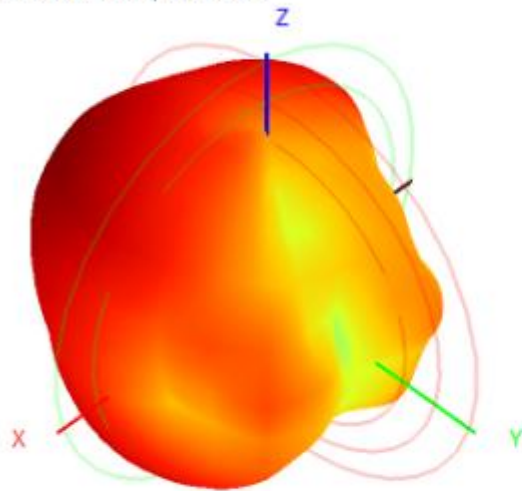

Back View

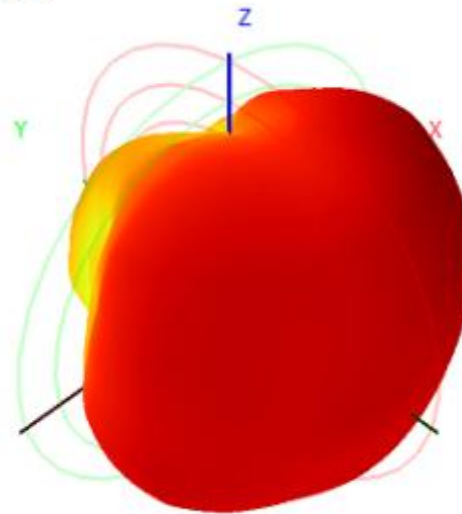


2400.0MHz Total(E1-XZ), Max= -0.32dBi

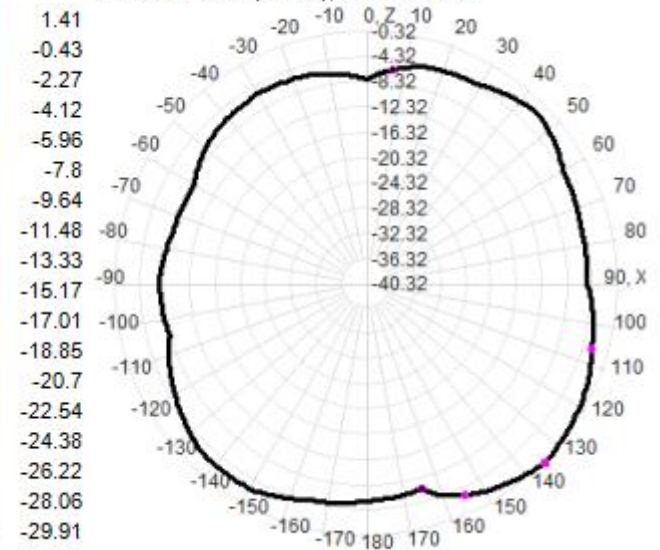


3.3 Test Result

2 2D Pattern—BTANT


2450.0MHz Total, Eff: 52.0%

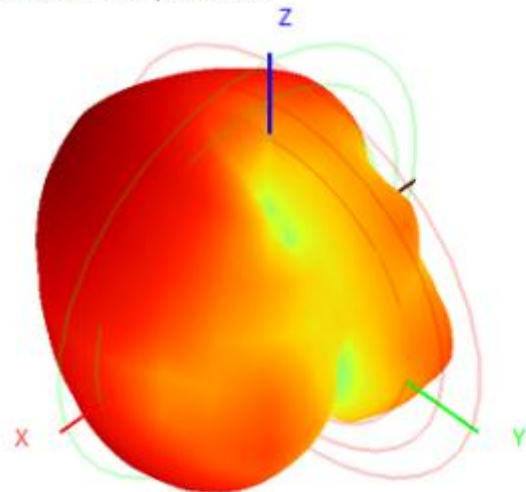

Back View

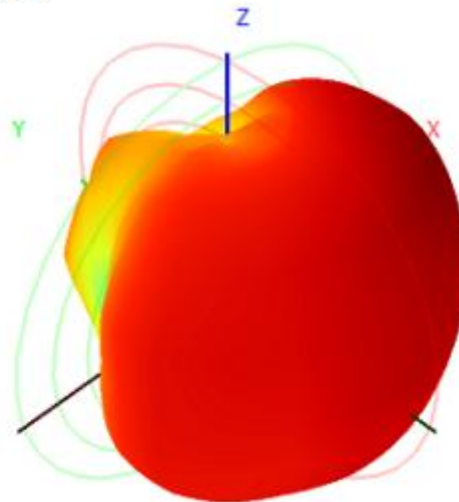


2450.0MHz Total(E1-XZ), Max= 1.32dBi

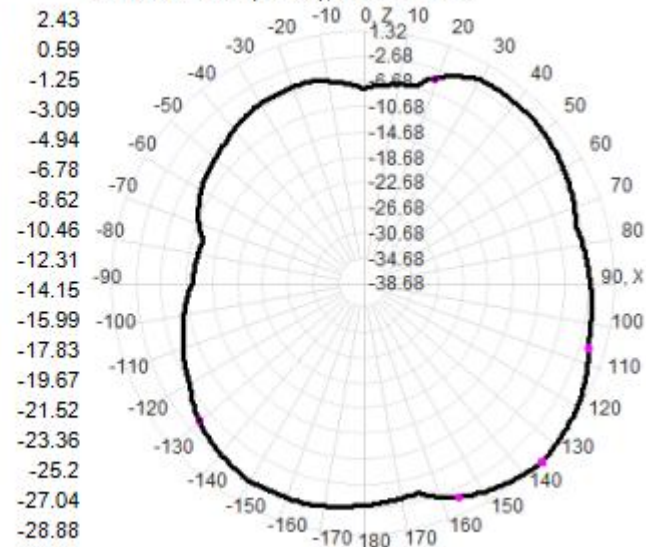


3.3 Test Result

3 2D Pattern—BTANT


2480.0MHz Total, Eff: 53.1%

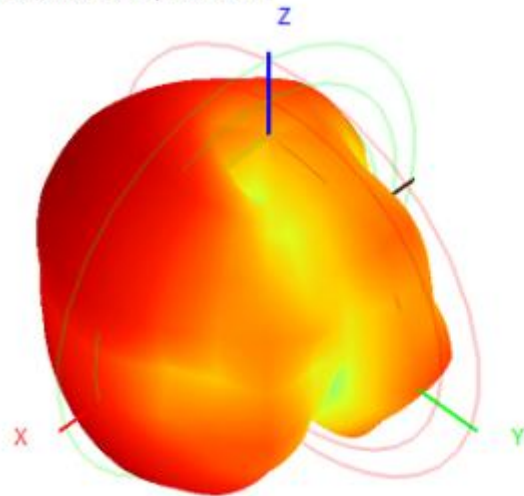

Back View

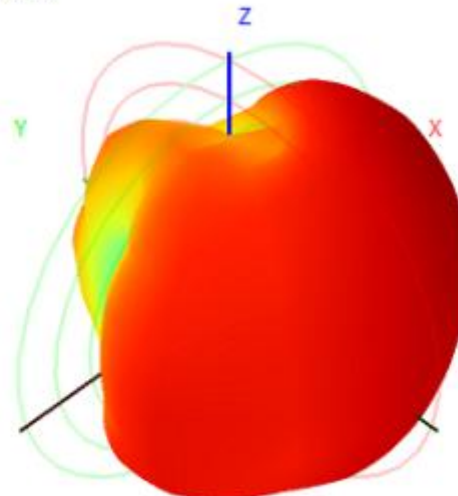

2480.0MHz Total(E1-XZ), Max= 1.75dBi

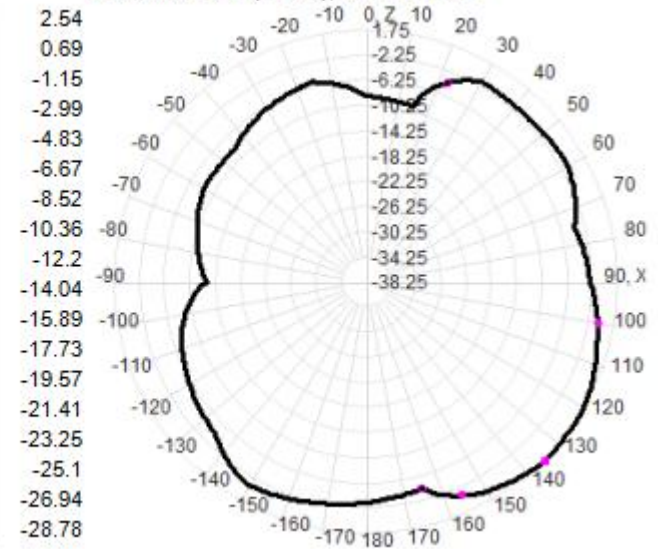

Thank you!