

TEST REPORT

Product Name: Smart watch
FCC ID: 2A3MS-DM20
Trademark: N/A
Model Number: DM20, DM101, DM100, DM30, DM28, DM19
Prepared For: Xiamen Best Fortune Import And Export Co., Ltd.
Address: Room401, No.2368, Fangzhong Road, Huli District, Xiamen, Fujian, China.
Manufacturer: Shenzhen Domino Times Technology Co., Ltd.
Address: Room809, Taibang Tech. Building, Yuehai Street, Nanshan District, Shenzhen, China.
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China
Sample Received Date: Oct. 20, 2021
Sample tested Date: Oct. 20, 2021 to Nov. 3, 2021
Issue Date: Nov. 3, 2021
Report No.: CTB211030004RF
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

He Xiaona

He Xiaona

Reviewed by:

Arron Liu

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. This report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	8
4.4 Channel List.....	9
4.5 Test Mode.....	9
4.6 Test Environment.....	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure.....	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSION	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	17
7.3 Test procedure.....	18
7.4 Test Result	19
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	41
8.1 Block Diagram Of Test Setup	41
8.2 Limit	41
8.3 Test procedure.....	41
8.4 Test Result	42
9. CONDUCTED OUTPUT POWER	50
9.1 Block Diagram Of Test Setup	50
9.2 Limit	50

9.3	Test procedure.....	50
9.4	Test Result	51
10.	6DB OCCUPIED BANDWIDTH	56
10.1	Block Diagram Of Test Setup	56
10.2	Limit.....	56
10.3	Test procedure.....	56
10.4	Test Result.....	57
11.	POWER SPECTRAL DENSITY	62
11.1	Block Diagram Of Test Setup	62
11.2	Limit.....	62
11.3	Test procedure.....	62
11.4	Test Result.....	63
12.	ANTENNA REQUIREMENT	68
13.	EUT PHOTOGRAPHS	69
14.	EUT TEST SETUP PHOTOGRAPHS	70

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB211030004RF	Nov. 3, 2021	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	DM20, DM101, DM100, DM30, DM28, DM19
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: DM20
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	C10-MB-V1.2
Software Version:	DM20A_C10_EN_V1.2_20210706
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 7.591dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal Antenna
Antenna Gain:	WiFi (2.4G) : 1.29dBi
Ratings:	DC 5V charging from adapter DC 3.8V from battery 1200mAh 3.8V 4.560Wh

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	SHENZEHN ENGINE ELECTRONIC CO.,LTD	EE-0501000E	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: Dutycycle>98%.

Test mode	rate
802.11b	11M
802.11g	54M
802.11n20	65M
802.11n40	65M

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):	3.8
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY5209007 3	2020.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2020.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2020.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2020.09.27	2022.10.30
6	Signal Generator	Agilent	N5181A	MY4906092 0	2020.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY4742019 5	2020.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY5010256 7	2020.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-248 3.5MS-1154	2018101500 1	2020.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-585 0MS-1155	2018101500 1	2020.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA1 20	190821-1-1	2020.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2020.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2020.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2020.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2020.09.27	2022.08.05
16	966 chamber	C.R.T.	966 Room	966	2020.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2020.09.27	2022.08.05

18	Amplifier	HP	8447E	2945A02747	2020.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2020.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2020.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2020.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2020.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2020.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2020.09.27	2022.10.30
25	Horn antenna	A/H/System	SAS-574	588	2020.09.27	2022.10.30
26	Amplifier	AEROFLEX	/	S/N/ 097	2020.09.27	2022.10.30

Continuous Emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2020.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2020.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2020.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2020.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2020.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2020.09.27	2022.08.16
7	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A 1.1	/	/	/


Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2020.09.27	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2020.09.27	2022.11.01
3	Amplifier	Agilent	8449B	3008A01838	2020.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2020.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2020.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2020.09.27	2022.08.05

7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2020.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2020.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2020.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2020.09.27	2022.08.16
11	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

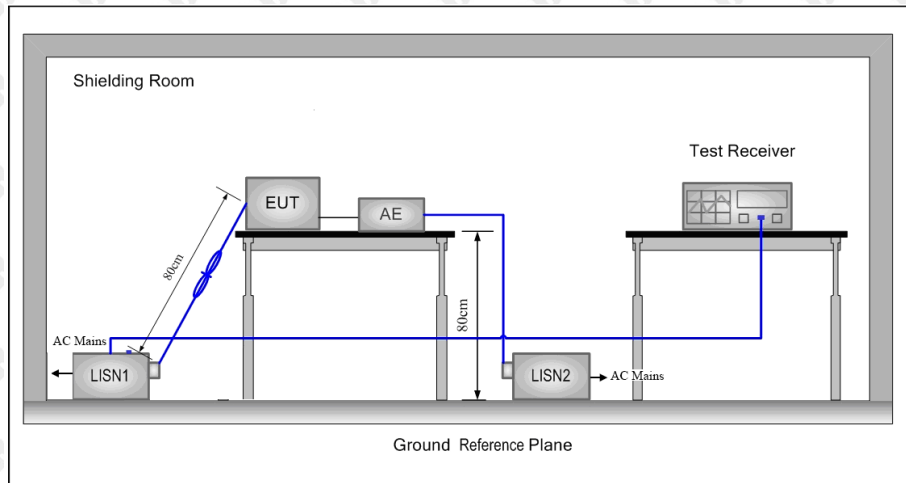

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference

plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line
AC 120V 60Hz

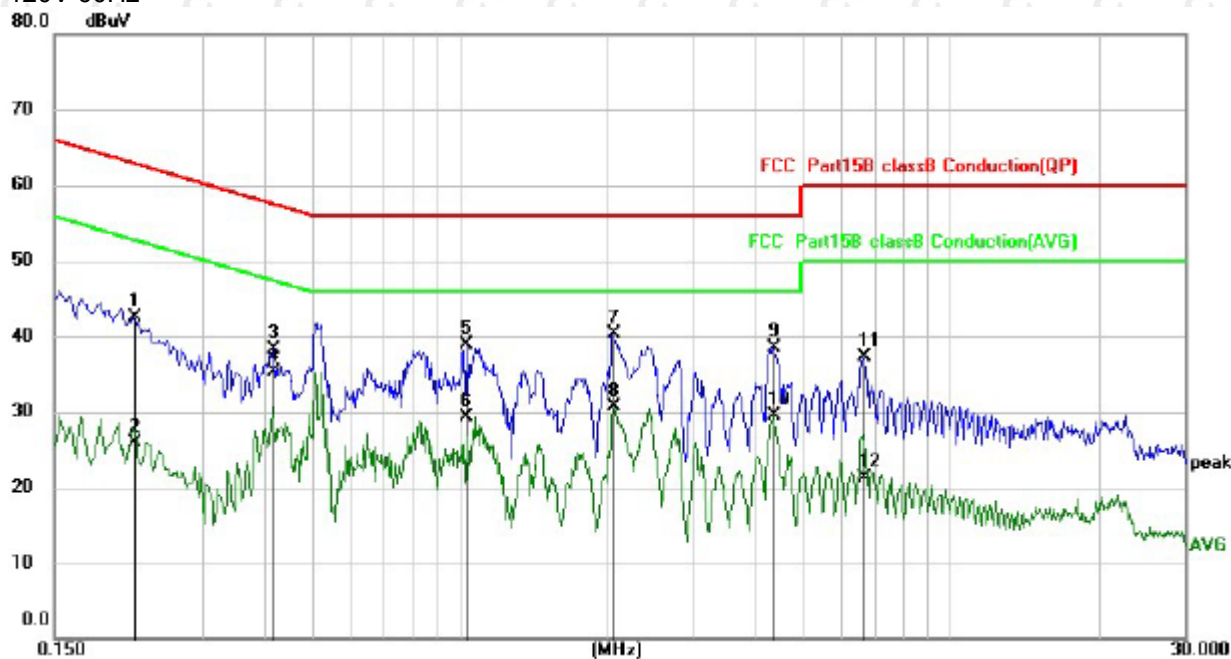


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.2180	32.48	9.96	42.44	62.89	-20.45	QP
2		0.2180	15.96	9.96	25.92	52.89	-26.97	AVG
3		0.4180	28.32	9.96	38.28	57.49	-19.21	QP
4	*	0.4180	25.42	9.96	35.38	47.49	-12.11	AVG
5		1.0339	28.86	9.96	38.82	56.00	-17.18	QP
6		1.0339	19.41	9.96	29.37	46.00	-16.63	AVG
7		2.0579	30.29	10.02	40.31	56.00	-15.69	QP
8		2.0579	20.70	10.02	30.72	46.00	-15.28	AVG
9		4.3619	28.38	10.14	38.52	56.00	-17.48	QP
10		4.3619	19.41	10.14	29.55	46.00	-16.45	AVG
11		6.6339	26.83	10.38	37.21	60.00	-22.79	QP
12		6.6339	10.92	10.38	21.30	50.00	-28.70	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

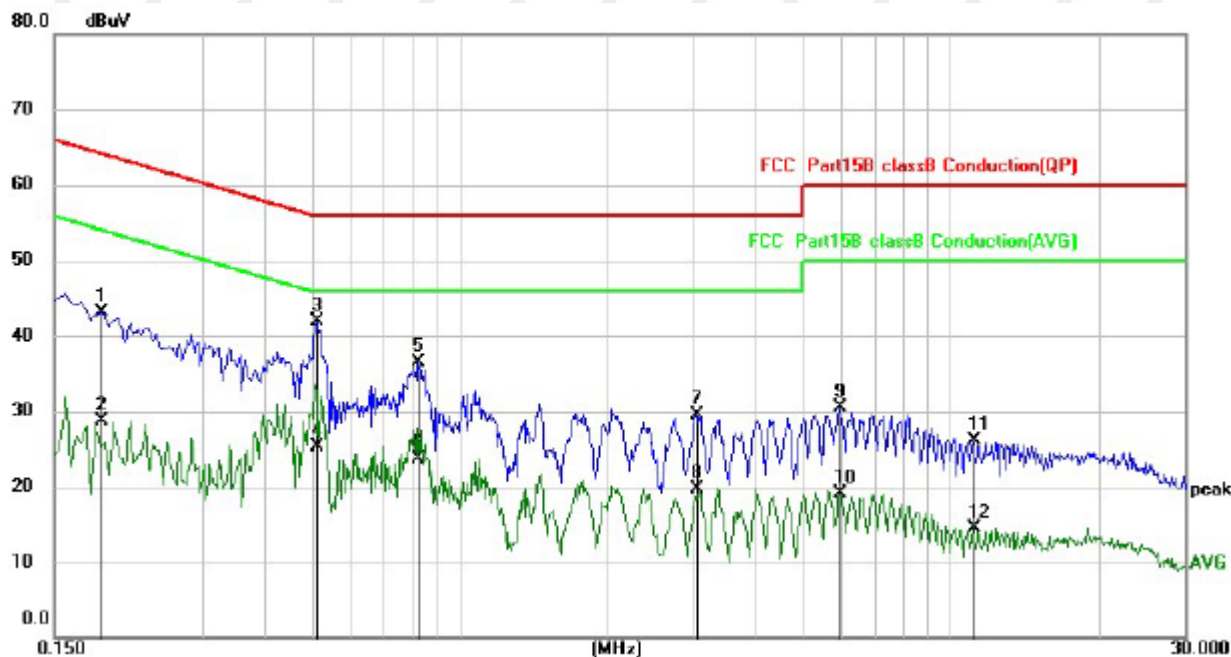

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1864	33.06	9.96	43.02	64.20	-21.18	QP
2		0.1864	18.73	9.96	28.69	54.20	-25.51	AVG
3	*	0.5140	31.90	9.96	41.86	56.00	-14.14	QP
4		0.5140	15.28	9.96	25.24	46.00	-20.76	AVG
5		0.8220	26.59	9.96	36.55	56.00	-19.45	QP
6		0.8220	13.70	9.96	23.66	46.00	-22.34	AVG
7		3.0380	19.42	10.07	29.49	56.00	-26.51	QP
8		3.0380	9.73	10.07	19.80	46.00	-26.20	AVG
9		5.9539	20.19	10.29	30.48	60.00	-29.52	QP
10		5.9539	8.80	10.29	19.09	50.00	-30.91	AVG
11		11.1459	15.17	10.84	26.01	60.00	-33.99	QP
12		11.1459	3.62	10.84	14.46	50.00	-35.54	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

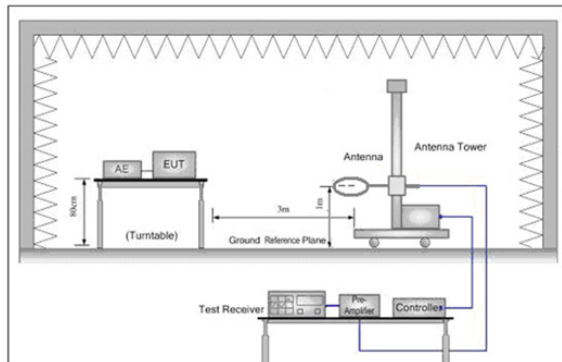


Figure 1. Below 30MHz

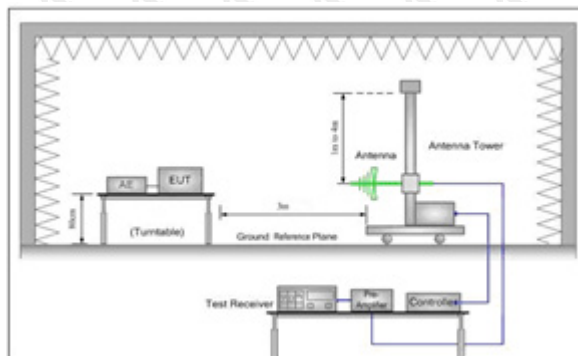


Figure 2. 30MHz to 1GHz

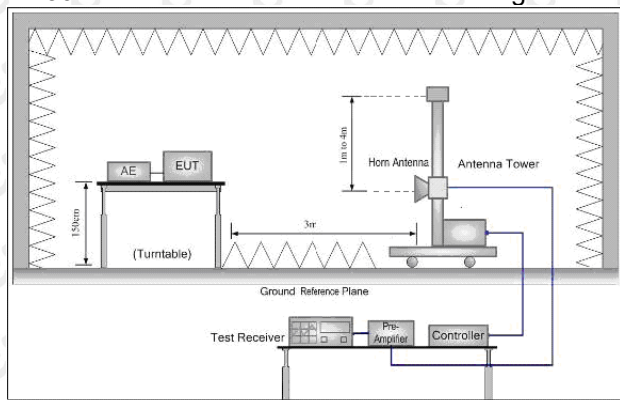


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

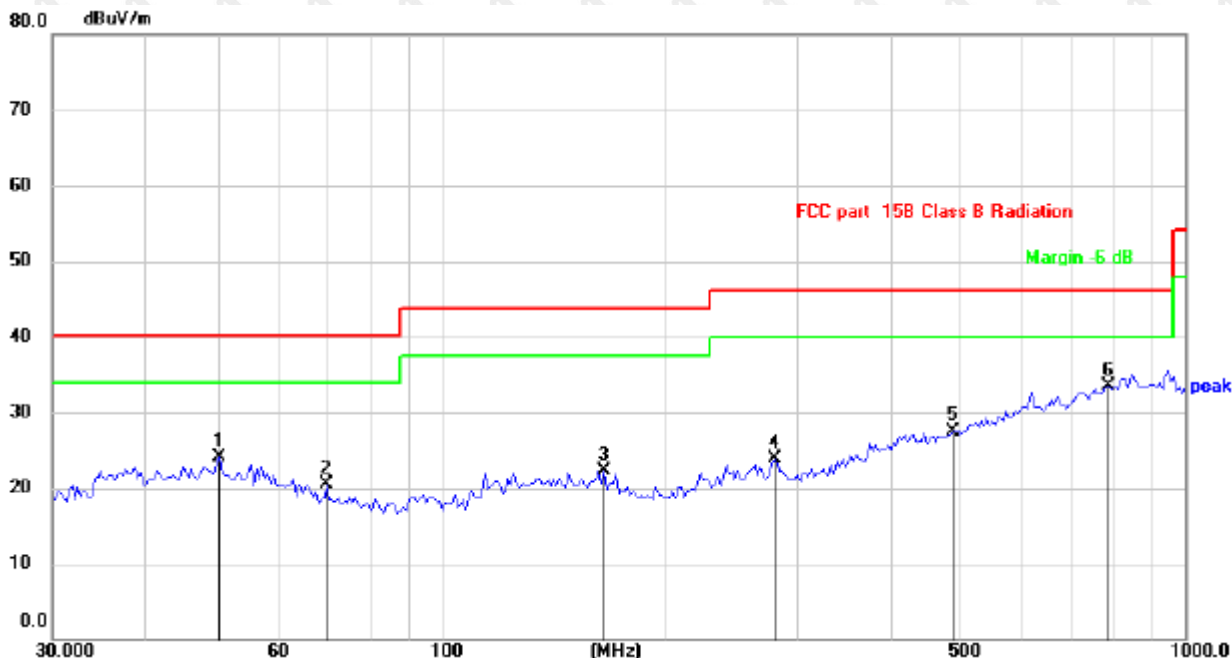

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		50.3205	29.82	-5.66	24.16	40.00	-15.84	QP
2		70.2132	28.40	-7.97	20.43	40.00	-19.57	QP
3		165.7768	28.19	-5.91	22.28	43.50	-21.22	QP
4		280.5151	29.39	-5.41	23.98	46.00	-22.02	QP
5		487.3149	27.03	0.41	27.44	46.00	-18.56	QP
6	*	789.2335	27.60	5.81	33.41	46.00	-12.59	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

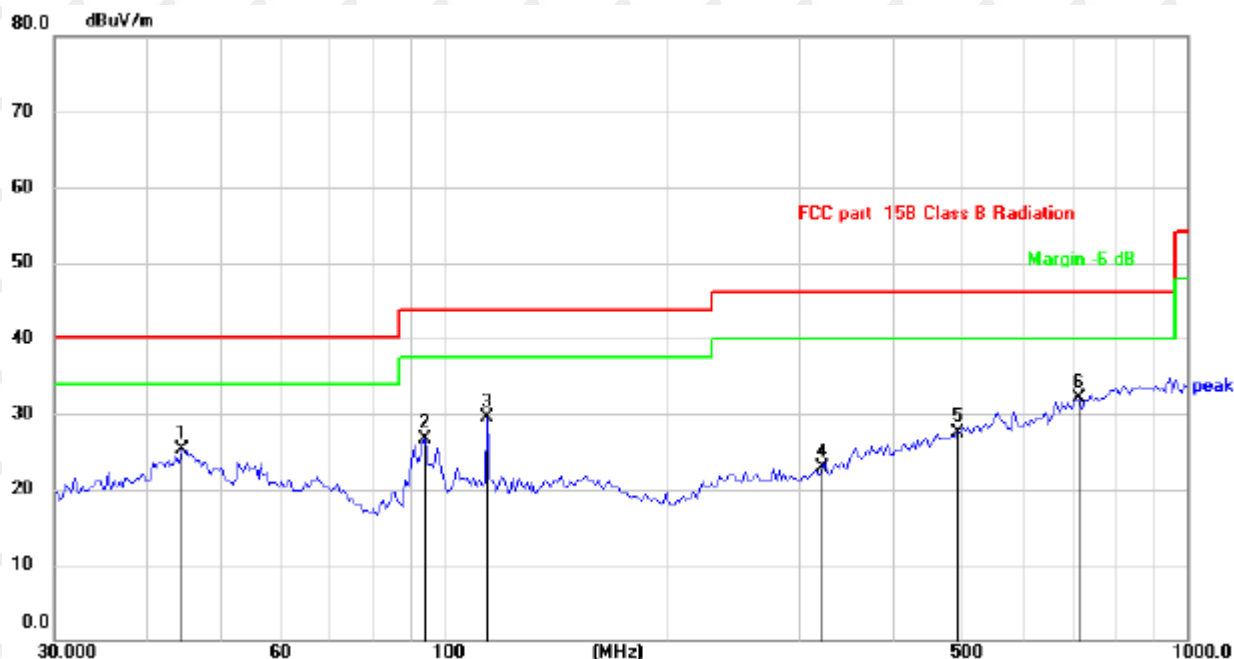

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		44.5086	30.70	-5.44	25.26	40.00	-14.74	QP
2		94.5939	35.89	-9.23	26.66	43.50	-16.84	QP
3		114.7155	36.89	-7.47	29.42	43.50	-14.08	QP
4		322.7538	27.33	-4.41	22.92	46.00	-23.08	QP
5		491.6057	26.90	0.51	27.41	46.00	-18.59	QP
6	*	716.6820	27.71	4.31	32.02	46.00	-13.98	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MHz measurement exceeds 20dB, so the test chart is not included. Test Mode: TM1 (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: TM1 (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: TM1 (the worst)

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.47	-3.64	60.83	74	-13.17	peak
4824	50.96	-3.64	47.32	54	-6.68	AVG
7236	59.25	-0.95	58.30	74	-15.70	peak
7236	46.44	-0.95	45.49	54	-8.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.91	-3.64	63.27	74	-10.73	peak
4824	46.83	-3.64	43.19	54	-10.81	AVG
7236	58.66	-0.95	57.71	74	-16.29	peak
7236	44.18	-0.95	43.23	54	-10.77	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	66.22	-3.51	62.71	74	-11.29	peak
4874	49.63	-3.51	46.12	54	-7.88	AVG
7311	57.83	-0.82	57.01	74	-16.99	peak
7311	44.97	-0.82	44.15	54	-9.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.04	-3.51	59.53	74	-14.47	peak
4874	48.30	-3.51	44.79	54	-9.21	AVG
7311	60.15	-0.82	59.33	74	-14.67	peak
7311	42.92	-0.82	42.10	54	-11.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.47	-3.43	59.04	74	-14.96	peak
4924	47.48	-3.43	44.05	54	-9.95	AVG
7386	59.91	-0.75	59.16	74	-14.84	peak
7386	43.94	-0.75	43.19	54	-10.81	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.38	-3.43	61.95	74	-12.05	peak
4924	47.18	-3.43	43.75	54	-10.25	AVG
7386	58.60	-0.75	57.85	74	-16.15	peak
7386	42.41	-0.75	41.66	54	-12.34	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.80	-3.64	60.16	74	-13.84	peak
4824	49.43	-3.64	45.79	54	-8.21	AVG
7236	59.01	-0.95	58.06	74	-15.94	peak
7236	46.73	-0.95	45.78	54	-8.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.26	-3.64	59.62	74	-14.38	peak
4824	48.37	-3.64	44.73	54	-9.27	AVG
7236	59.79	-0.95	58.84	74	-15.16	peak
7236	45.64	-0.95	44.69	54	-9.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.41	-3.51	58.90	74	-15.10	peak
4874	47.66	-3.51	44.15	54	-9.85	AVG
7311	60.44	-0.82	59.62	74	-14.38	peak
7311	43.42	-0.82	42.60	54	-11.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.20	-3.51	60.69	74	-13.31	peak
4874	47.20	-3.51	43.69	54	-10.31	AVG
7311	57.06	-0.82	56.24	74	-17.76	peak
7311	43.13	-0.82	42.31	54	-11.69	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.25	-3.43	60.82	74	-13.18	peak
4924	49.80	-3.43	46.37	54	-7.63	AVG
7386	57.37	-0.75	56.62	74	-17.38	peak
7386	44.16	-0.75	43.41	54	-10.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.26	-3.43	58.83	74	-15.17	peak
4924	47.39	-3.43	43.96	54	-10.04	AVG
7386	57.12	-0.75	56.37	74	-17.63	peak
7386	41.67	-0.75	40.92	54	-13.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.83	-3.64	61.19	74	-12.81	peak
4824	47.22	-3.64	43.58	54	-10.42	AVG
7236	57.29	-0.95	56.34	74	-17.66	peak
7236	45.09	-0.95	44.14	54	-9.86	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.41	-3.64	62.77	74	-11.23	peak
4824	51.31	-3.64	47.67	54	-6.33	AVG
7236	57.77	-0.95	56.82	74	-17.18	peak
7236	43.43	-0.95	42.48	54	-11.52	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.29	-3.51	60.78	74.00	-13.22	peak
4874.00	49.00	-3.51	45.49	54.00	-8.51	AVG
7311.00	58.71	-0.82	57.89	74.00	-16.11	peak
7311.00	46.62	-0.82	45.80	54.00	-8.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.00	-3.51	60.49	74.00	-13.51	peak
4874.00	46.76	-3.51	43.25	54.00	-10.75	AVG
7311.00	56.92	-0.82	56.10	74.00	-17.90	peak
7311.00	42.12	-0.82	41.30	54.00	-12.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.66	-3.43	60.23	74	-13.77	peak
4924	46.10	-3.43	42.67	54	-11.33	AVG
7386	58.54	-0.75	57.79	74	-16.21	peak
7386	41.70	-0.75	40.95	54	-13.05	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.21	-3.43	59.78	74	-14.22	peak
4924	47.43	-3.43	44.00	54	-10.00	AVG
7386	57.56	-0.75	56.81	74	-17.19	peak
7386	41.70	-0.75	40.95	54	-13.05	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	63.54	-3.63	59.91	74	-14.09	peak
4844	46.88	-3.63	43.25	54	-10.75	AVG
7266	58.51	-0.94	57.57	74	-16.43	peak
7266	45.25	-0.94	44.31	54	-9.69	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.21	-3.63	61.58	74	-12.42	peak
4844	49.11	-3.63	45.48	54	-8.52	AVG
7266	58.90	-0.94	57.96	74	-16.04	peak
7266	44.39	-0.94	43.45	54	-10.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.38	-3.51	58.87	74	-15.13	peak
4874	49.54	-3.51	46.03	54	-7.97	AVG
7311	60.36	-0.82	59.54	74	-14.46	peak
7311	43.75	-0.82	42.93	54	-11.07	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.29	-3.51	58.78	74	-15.22	peak
4874	46.49	-3.51	42.98	54	-11.02	AVG
7311	56.71	-0.82	55.89	74	-18.11	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	64.03	-3.43	60.60	74	-13.40	peak
4904	48.10	-3.43	44.67	54	-9.33	AVG
7356	56.68	-0.75	55.93	74	-18.07	peak
7356	41.97	-0.75	41.22	54	-12.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	63.94	-3.43	60.51	74	-13.49	peak
4904	46.31	-3.43	42.88	54	-11.12	AVG
7356	57.56	-0.75	56.81	74	-17.19	peak
7356	44.70	-0.75	43.95	54	-10.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5) Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.38	-5.81	50.57	74	-23.43	peak
2390	/	-5.81	/	54	/	AVG
2399	65.15	-5.84	59.31	74	-14.69	peak
2399	49.22	-5.84	43.38	54	-10.62	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.99	-5.81	50.18	74	-23.82	peak
2390	/	-5.81	/	54	/	AVG
2399	63.12	-5.84	57.28	74	-16.72	peak
2399	47.58	-5.84	41.74	54	-12.26	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.09	-5.65	51.44	74	-22.56	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.24	-5.65	49.59	74	-24.41	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.90	-5.81	53.09	74	-20.91	peak
2390	/	-5.81	/	54	/	AVG
2399	62.62	-5.84	56.78	74	-17.22	peak
2399	45.99	-5.84	40.15	54	-13.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.15	-5.81	50.34	74	-23.66	peak
2390	/	-5.81	/	54	/	AVG
2399	63.15	-5.84	57.31	74	-16.69	peak
2399	46.12	-5.84	40.28	54	-13.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.93	-5.65	51.28	74	-22.72	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.79	-5.65	51.14	74	-22.86	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.30	-5.81	50.49	74	-23.51	peak
2390	/	-5.81	/	54	/	AVG
2399	63.26	-5.84	57.42	74	-16.58	peak
2399	48.43	-5.84	42.59	54	-11.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.59	-5.81	51.78	74	-22.22	peak
2390	/	-5.81	/	54	/	AVG
2399	59.80	-5.84	53.96	74	-20.04	peak
2399	47.75	-5.84	41.91	54	-12.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.39	-5.65	50.74	74	-23.26	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.19	-5.65	51.54	74	-22.46	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.40	-5.81	51.59	74	-22.41	peak
2390	/	-5.81	/	54	/	AVG
2399	63.36	-5.84	57.52	74	-16.48	peak
2399	46.90	-5.84	41.06	54	-12.94	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.46	-5.81	52.65	74	-21.35	peak
2390	/	-5.81	/	54	/	AVG
2399	61.04	-5.84	55.20	74	-18.80	peak
2399	45.30	-5.84	39.46	54	-14.54	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.34	-5.65	51.69	74	-22.31	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.73	-5.65	50.08	74	-23.92	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

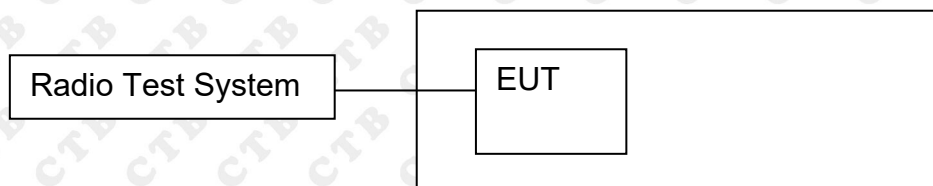


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold

8.4 Test Result

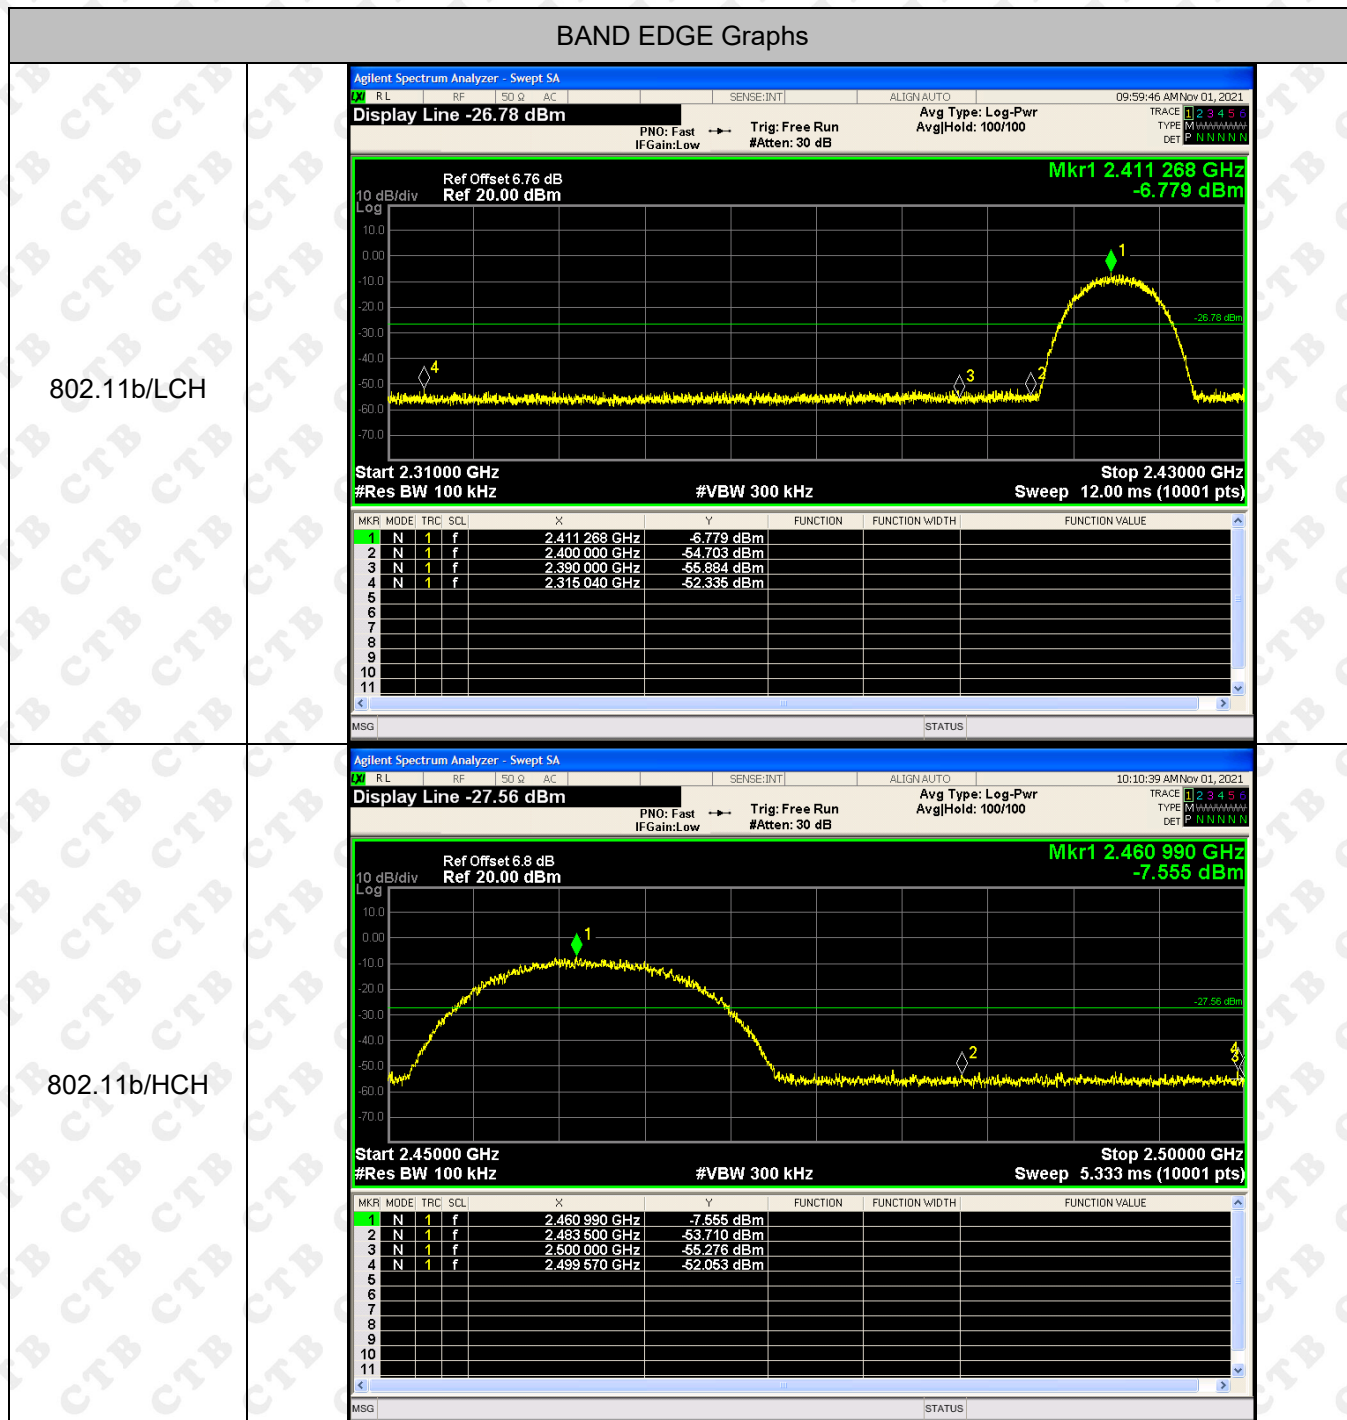


BAND EDGE Graphs

802.11g/LCH

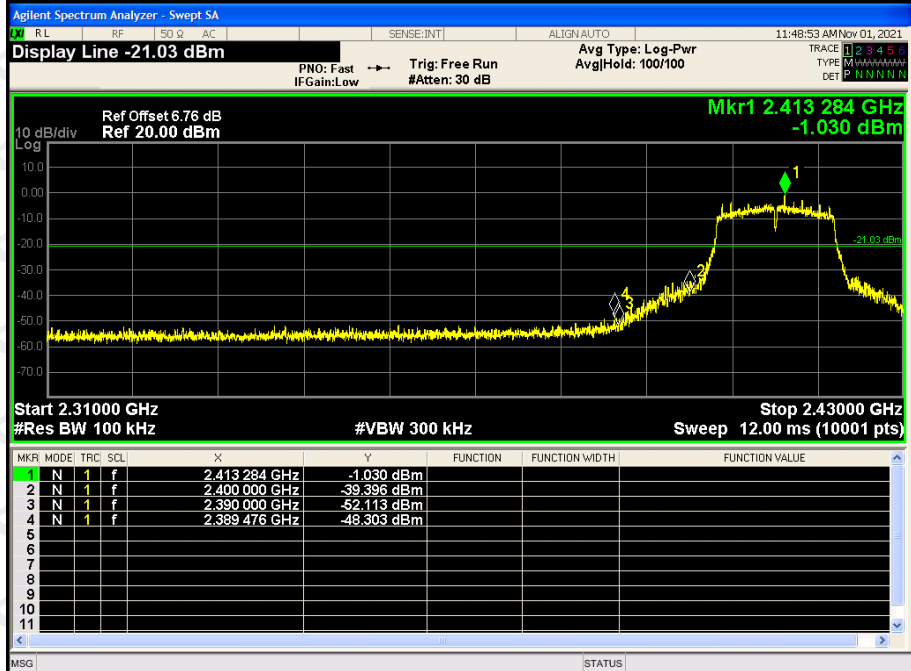


802.11g/HCH

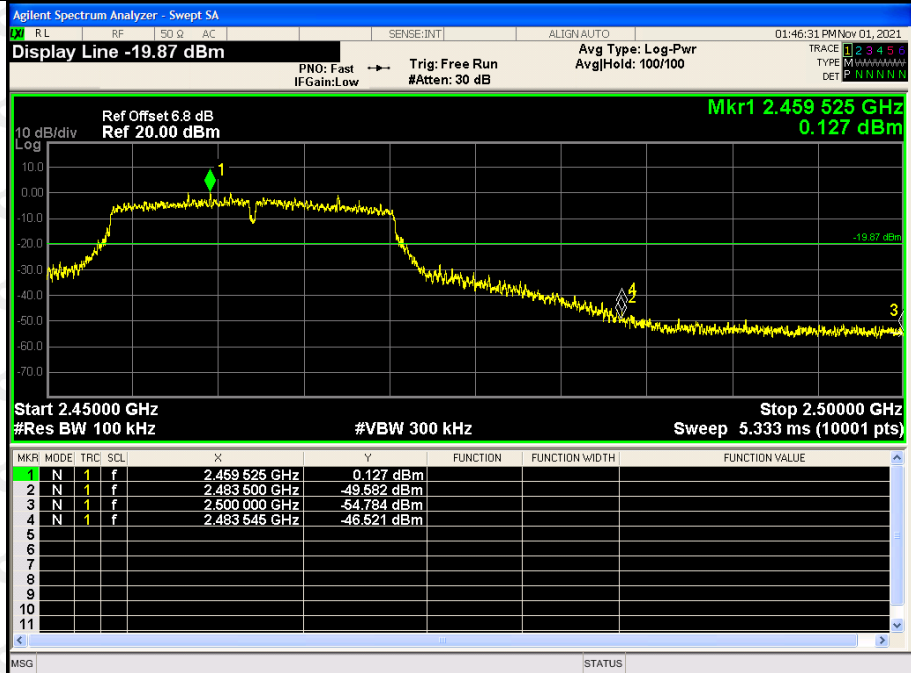



BAND EDGE Graphs

802.11n(HT20)/L
CH

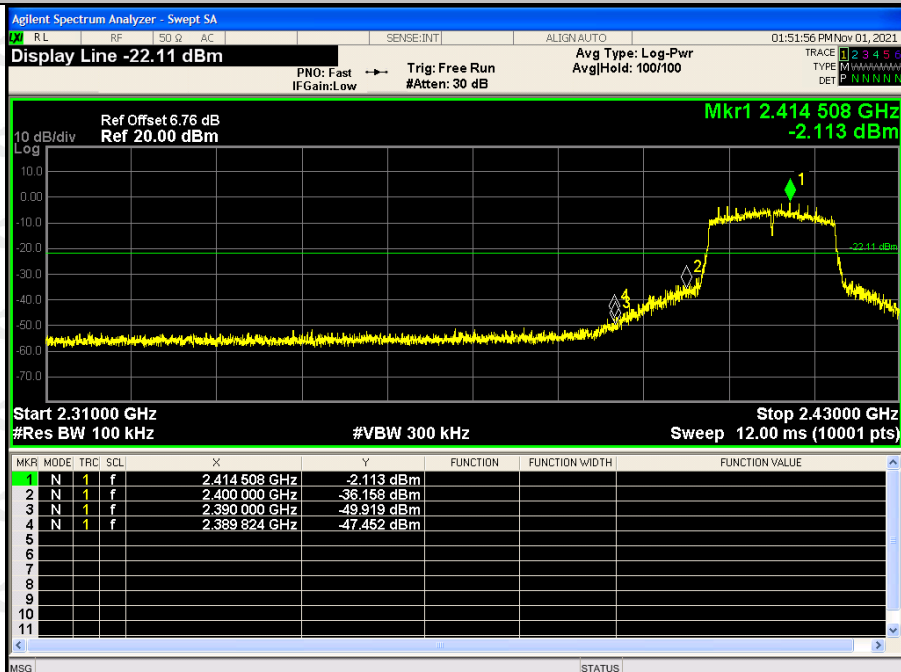


802.11n(HT20)/H
CH

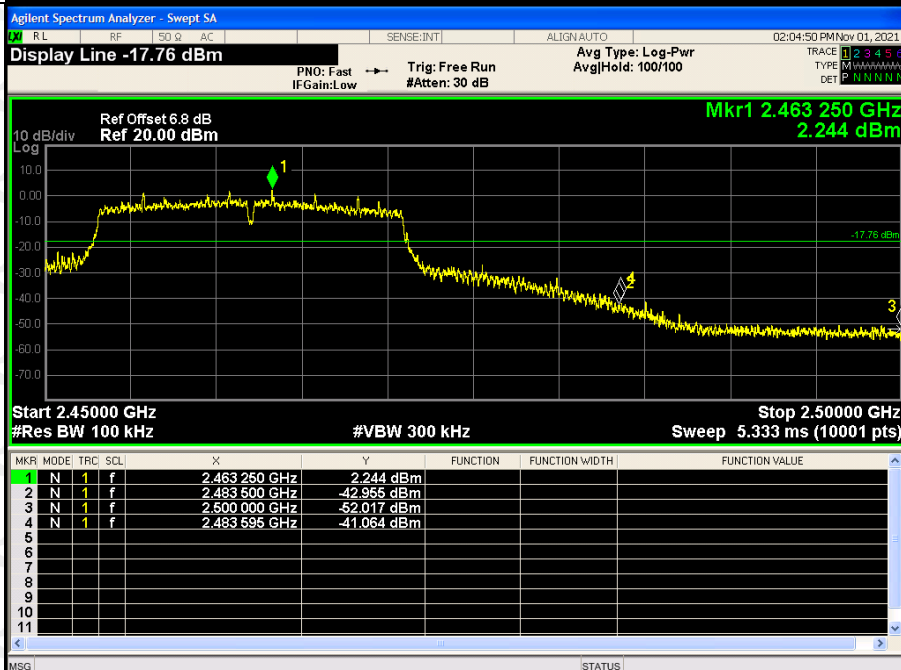

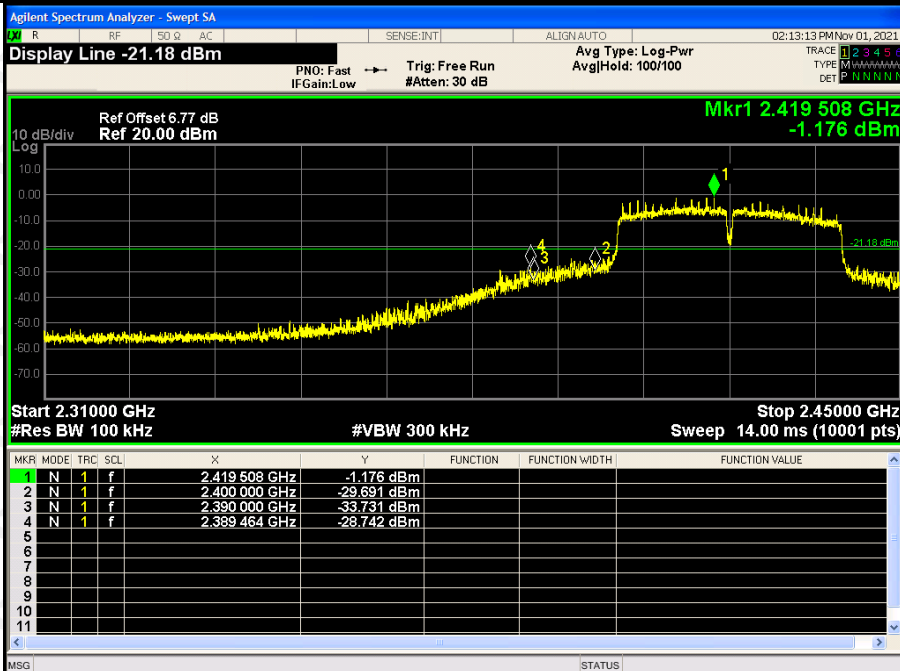
802.11n(HT40)/L
CH

802.11n(HT40)/H
CH


RF Conducted Spurious Emissions Graphs

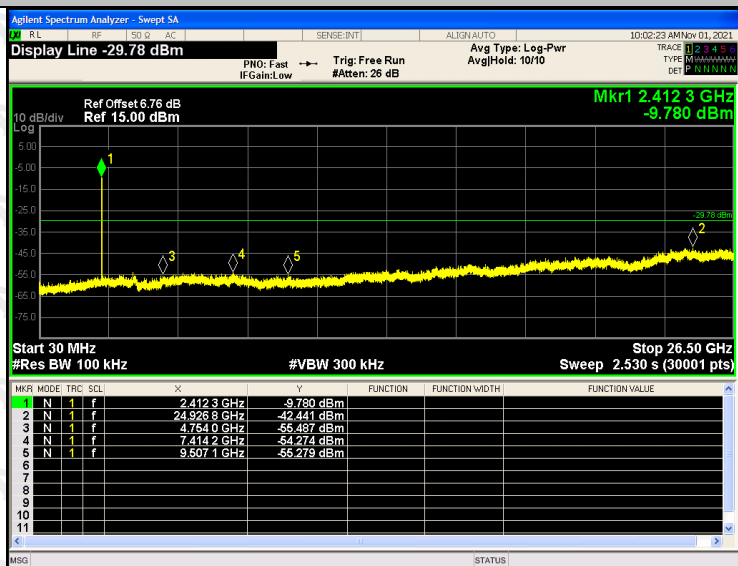
802.11b
/LCH

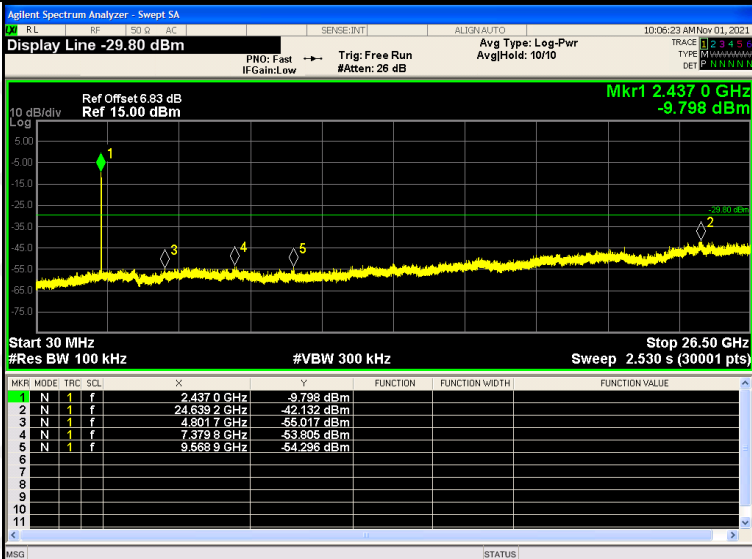

802.11b
/MCH




802.11b
/HCH

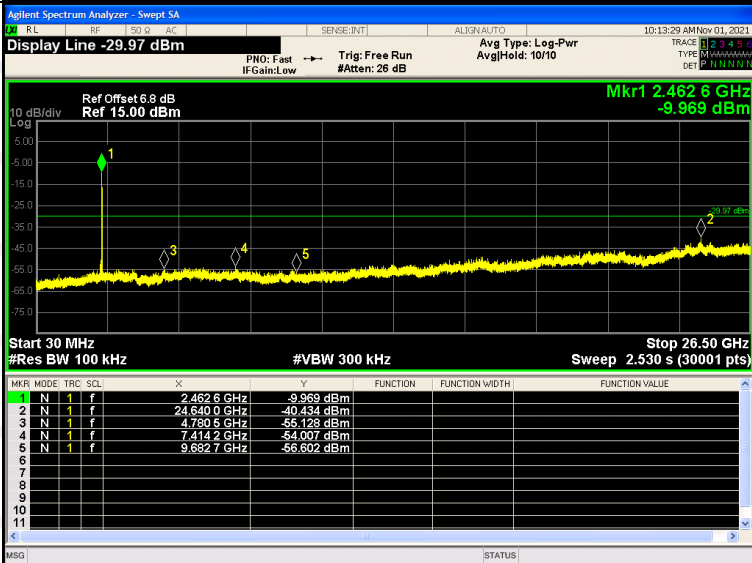


RF Conducted Spurious Emissions Graphs


802.11g
/LCH

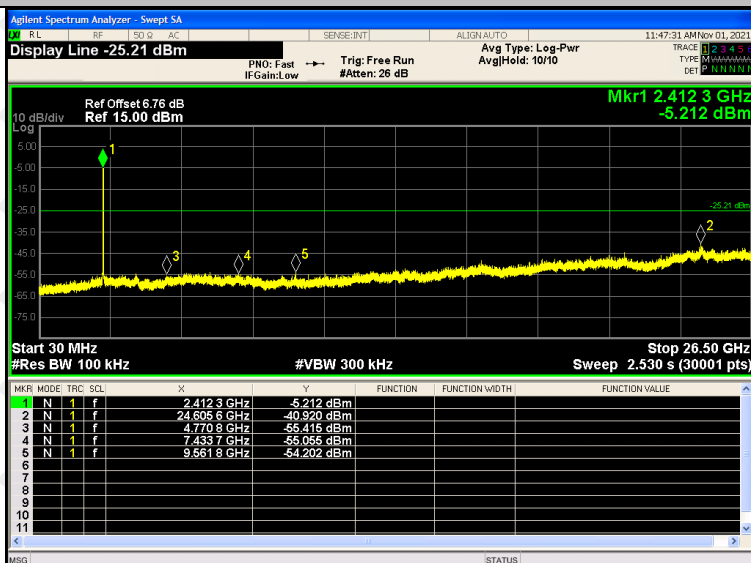

802.11g
/MCH

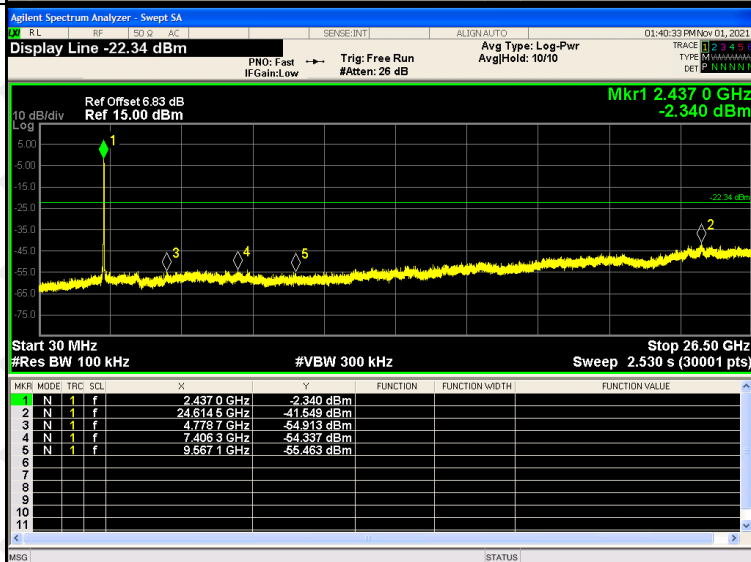


802.11g
/HCH

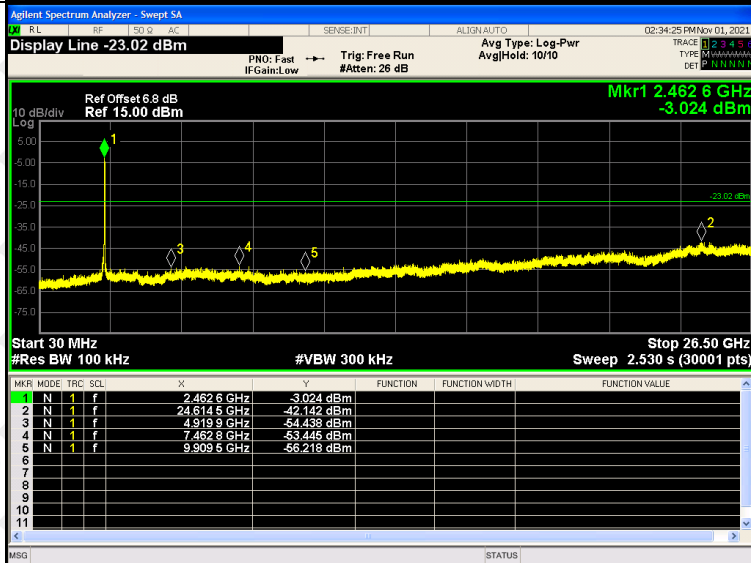


RF Conducted Spurious Emissions Graphs


802.11n
(HT20)/
LCH

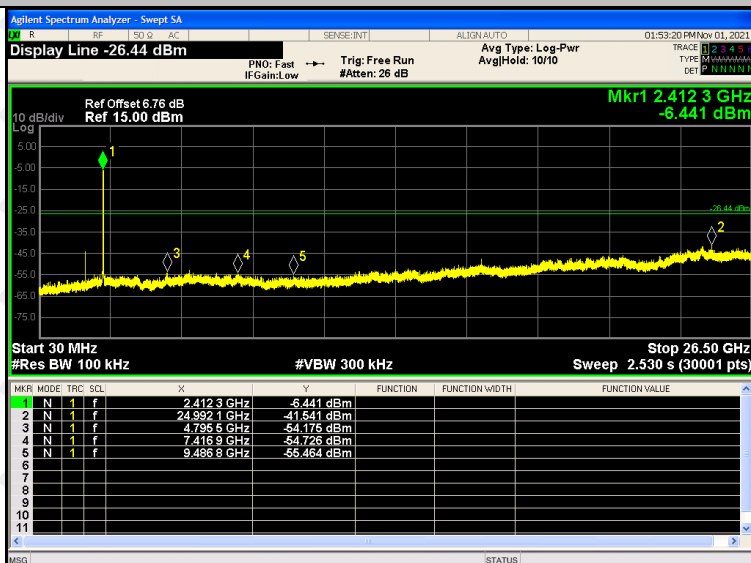

802.11
n(HT20)
/MCH

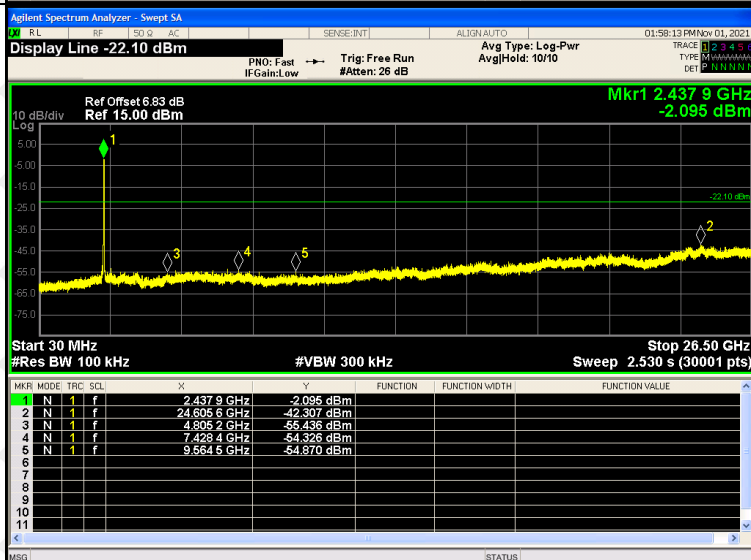


802.11
n(HT20)
/HCH

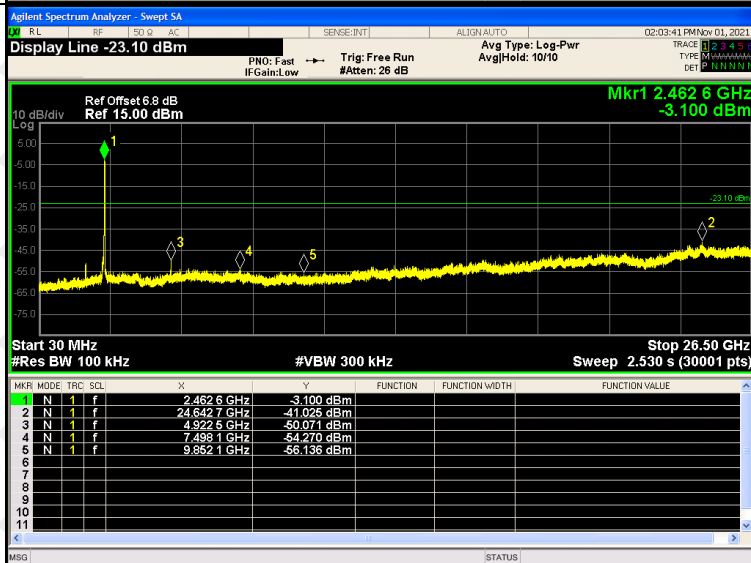

802.11n (HT40)/ LCH	Agilent Spectrum Analyzer - Swept SA Display Line -27.11 dBm Ref Offset 6.77 dB Ref 15.00 dBm Mkr1 2.422 9 GHz -7.110 dBm Start 30 MHz #Res BW 100 kHz Stop 26.50 GHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.422 9 GHz</td><td>-7.110 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>1.766 4 GHz</td><td>-32.734 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.761 1 GHz</td><td>-54.940 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.126 7 GHz</td><td>-54.713 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.539 8 GHz</td><td>-55.026 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.422 9 GHz	-7.110 dBm				2	N	1	f	1.766 4 GHz	-32.734 dBm				3	N	1	f	4.761 1 GHz	-54.940 dBm				4	N	1	f	7.126 7 GHz	-54.713 dBm				5	N	1	f	9.539 8 GHz	-55.026 dBm				6									7									8									9									10									11									
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																						
1	N	1	f	2.422 9 GHz	-7.110 dBm																																																																																																									
2	N	1	f	1.766 4 GHz	-32.734 dBm																																																																																																									
3	N	1	f	4.761 1 GHz	-54.940 dBm																																																																																																									
4	N	1	f	7.126 7 GHz	-54.713 dBm																																																																																																									
5	N	1	f	9.539 8 GHz	-55.026 dBm																																																																																																									
6																																																																																																														
7																																																																																																														
8																																																																																																														
9																																																																																																														
10																																																																																																														
11																																																																																																														
802.11 n(HT40) /MCH	Agilent Spectrum Analyzer - Swept SA Display Line -34.39 dBm Ref Offset 6.83 dB Ref 15.00 dBm Mkr1 2.437 0 GHz -14.394 dBm Start 30 MHz #Res BW 100 kHz Stop 26.50 GHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.437 0 GHz</td><td>-14.394 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.608 3 GHz</td><td>-41.927 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.724 0 GHz</td><td>-54.525 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.348 1 GHz</td><td>-53.570 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.641 3 GHz</td><td>-54.956 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 0 GHz	-14.394 dBm				2	N	1	f	24.608 3 GHz	-41.927 dBm				3	N	1	f	4.724 0 GHz	-54.525 dBm				4	N	1	f	7.348 1 GHz	-53.570 dBm				5	N	1	f	9.641 3 GHz	-54.956 dBm				6									7									8									9									10									11									
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																						
1	N	1	f	2.437 0 GHz	-14.394 dBm																																																																																																									
2	N	1	f	24.608 3 GHz	-41.927 dBm																																																																																																									
3	N	1	f	4.724 0 GHz	-54.525 dBm																																																																																																									
4	N	1	f	7.348 1 GHz	-53.570 dBm																																																																																																									
5	N	1	f	9.641 3 GHz	-54.956 dBm																																																																																																									
6																																																																																																														
7																																																																																																														
8																																																																																																														
9																																																																																																														
10																																																																																																														
11																																																																																																														
802.11 n(HT40) /HCH	Agilent Spectrum Analyzer - Swept SA Display Line -25.10 dBm Ref Offset 6.81 dB Ref 15.00 dBm Mkr1 2.451 1 GHz -5.097 dBm Start 30 MHz #Res BW 100 kHz Stop 26.50 GHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.451 1 GHz</td><td>-5.097 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>1.746 1 GHz</td><td>-38.577 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.759 3 GHz</td><td>-53.538 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.428 4 GHz</td><td>-54.332 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.891 8 GHz</td><td>-56.332 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.451 1 GHz	-5.097 dBm				2	N	1	f	1.746 1 GHz	-38.577 dBm				3	N	1	f	4.759 3 GHz	-53.538 dBm				4	N	1	f	7.428 4 GHz	-54.332 dBm				5	N	1	f	9.891 8 GHz	-56.332 dBm				6									7									8									9									10									11									
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																						
1	N	1	f	2.451 1 GHz	-5.097 dBm																																																																																																									
2	N	1	f	1.746 1 GHz	-38.577 dBm																																																																																																									
3	N	1	f	4.759 3 GHz	-53.538 dBm																																																																																																									
4	N	1	f	7.428 4 GHz	-54.332 dBm																																																																																																									
5	N	1	f	9.891 8 GHz	-56.332 dBm																																																																																																									
6																																																																																																														
7																																																																																																														
8																																																																																																														
9																																																																																																														
10																																																																																																														
11																																																																																																														

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

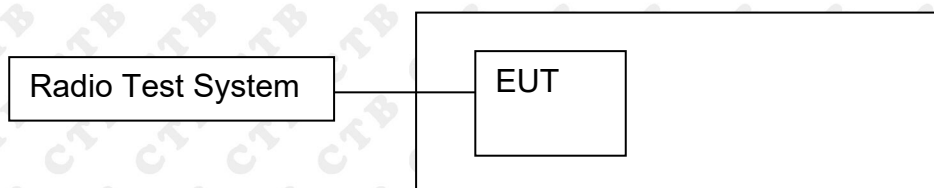

9.2 Limit




FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS




9.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	7.591	30	PASS
	MCH	7.467	30	PASS
	HCH	7.031	30	PASS
802.11g	LCH	6.719	30	PASS
	MCH	6.782	30	PASS
	HCH	6.988	30	PASS
802.11n(HT20)	LCH	6.383	30	PASS
	MCH	6.413	30	PASS
	HCH	7.036	30	PASS
802.11n(HT40)	LCH	5.201	30	PASS
	MCH	5.409	30	PASS
	HCH	5.571	30	PASS

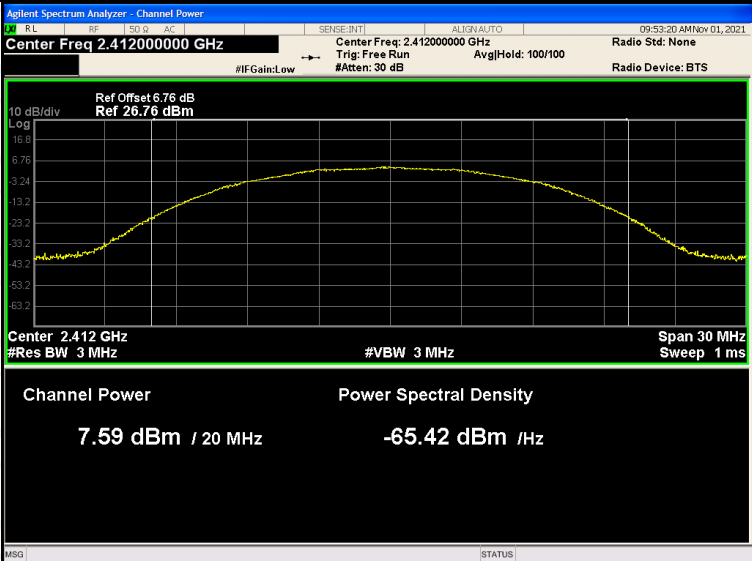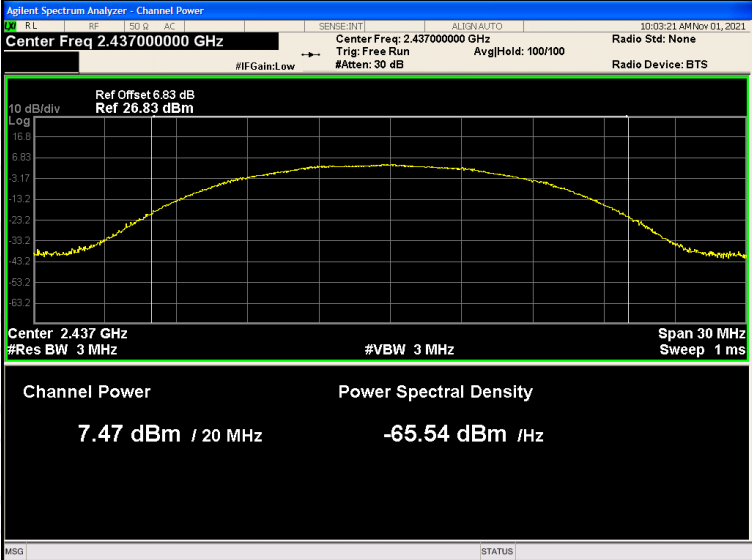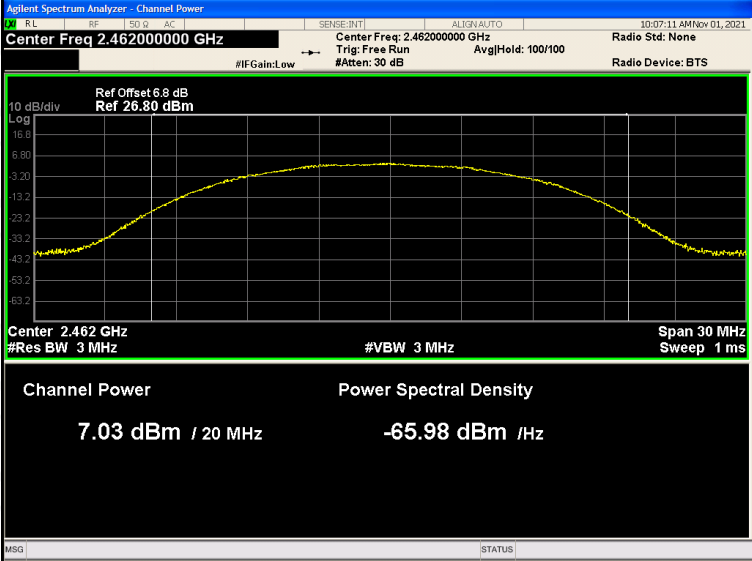Mode	Channel.	Maximum Output Power [dBm]
802.11b	LCH	
	MCH	
	HCH	

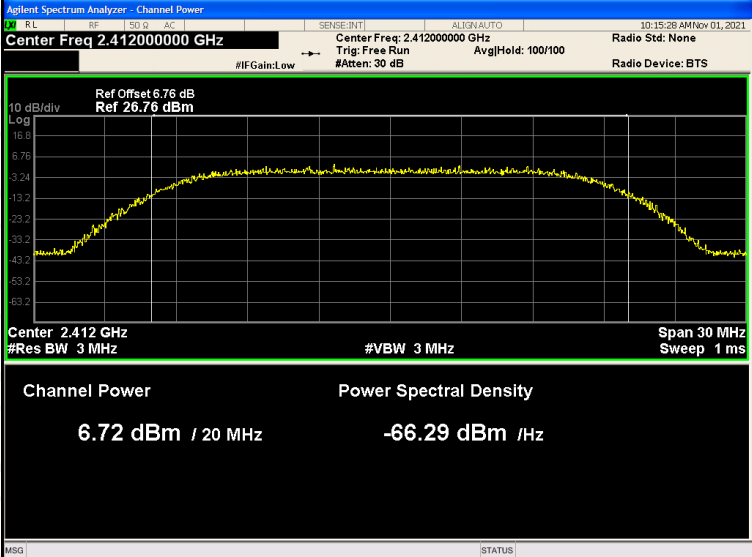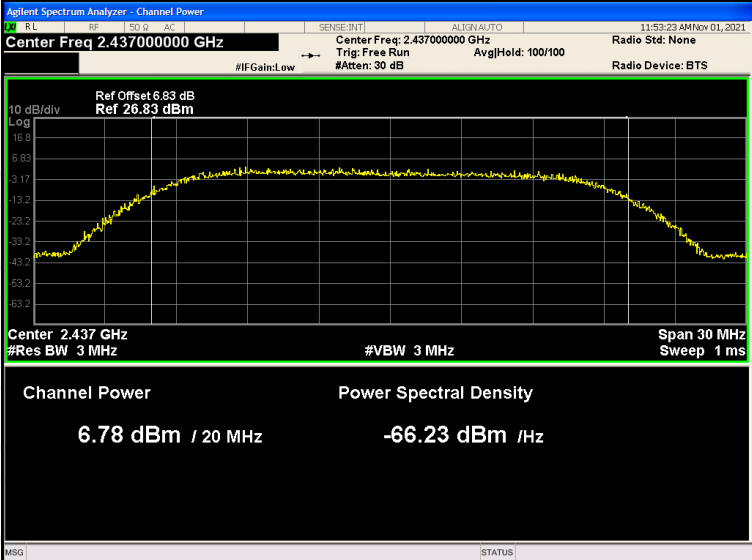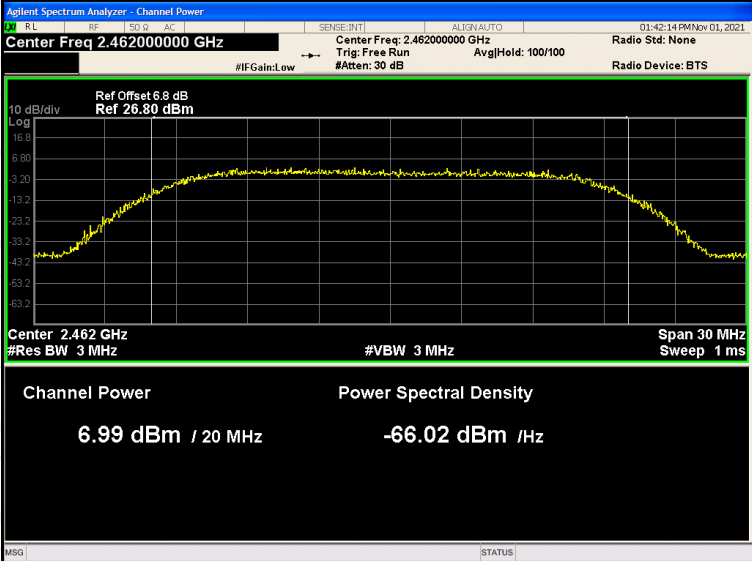
	LCH		
802.11g	MCH		
	HCH		

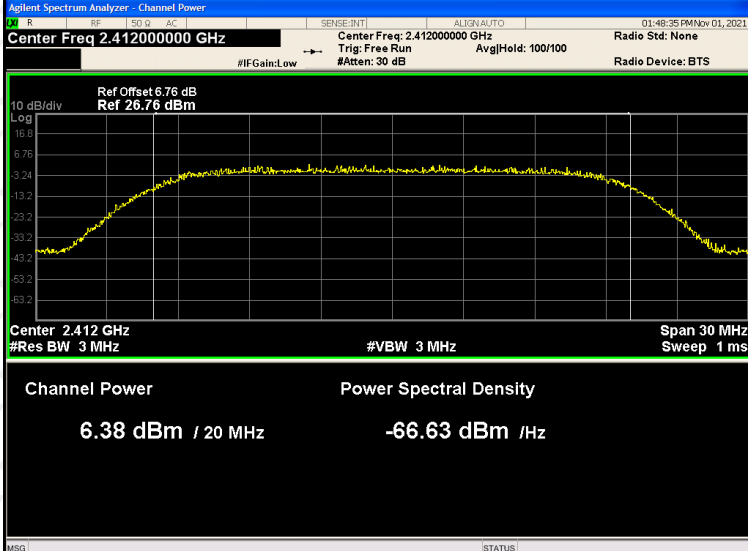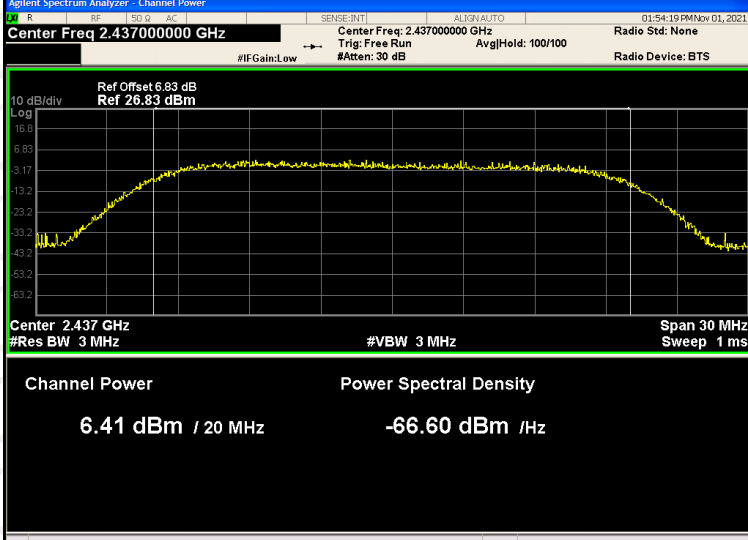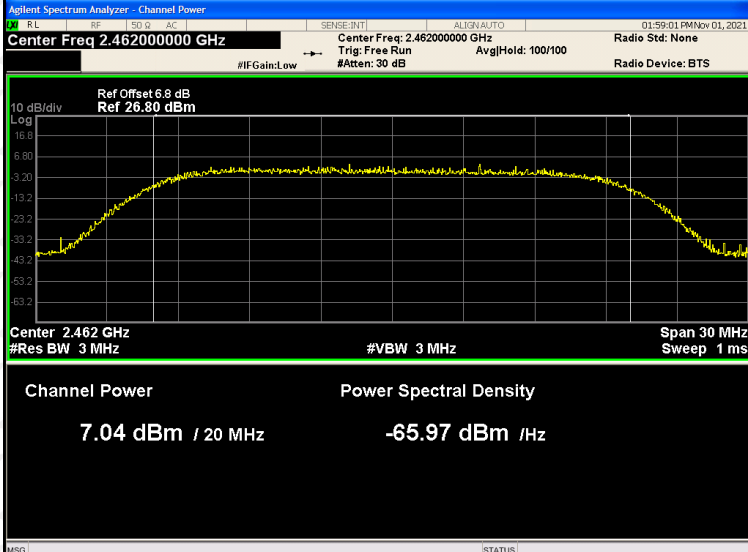	LCH	 Agilent Spectrum Analyzer - Channel Power Center Freq: 2.412000000 GHz Channel Power: 6.38 dBm / 20 MHz Power Spectral Density: -66.63 dBm / Hz	
802.11n(HT20)	MCH	 Agilent Spectrum Analyzer - Channel Power Center Freq: 2.437000000 GHz Channel Power: 6.41 dBm / 20 MHz Power Spectral Density: -66.60 dBm / Hz	
	HCH	 Agilent Spectrum Analyzer - Channel Power Center Freq: 2.462000000 GHz Channel Power: 7.04 dBm / 20 MHz Power Spectral Density: -65.97 dBm / Hz	

	LCH	Agilent Spectrum Analyzer - Channel Power Center Freq: 2.422000000 GHz Channel Power: 5.20 dBm / 40 MHz Power Spectral Density: -70.82 dBm / Hz	
802.11n(HT40)	MCH	Agilent Spectrum Analyzer - Channel Power Center Freq: 2.437000000 GHz Channel Power: 5.41 dBm / 40 MHz Power Spectral Density: -70.61 dBm / Hz	
	HCH	Agilent Spectrum Analyzer - Channel Power Center Freq: 2.452000000 GHz Channel Power: 5.57 dBm / 40 MHz Power Spectral Density: -70.45 dBm / Hz	

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

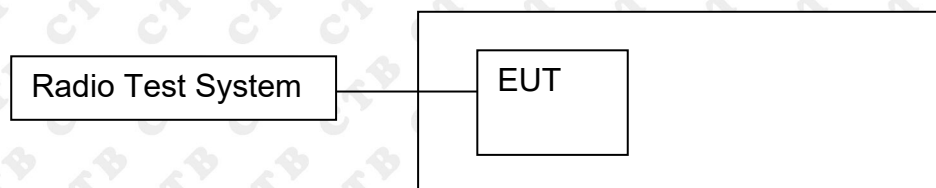

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.201	500	PASS
	MCH	8.208	500	PASS
	HCH	9.9	500	PASS
802.11g	LCH	16.348	500	PASS
	MCH	16.358	500	PASS
	HCH	16.321	500	PASS
802.11n(HT20)	LCH	17.572	500	PASS
	MCH	16.357	500	PASS
	HCH	17.542	500	PASS
802.11n(HT40)	LCH	35.457	500	PASS
	MCH	35.661	500	PASS
	HCH	35.704	500	PASS


Test Graph:




802.11g/LCH

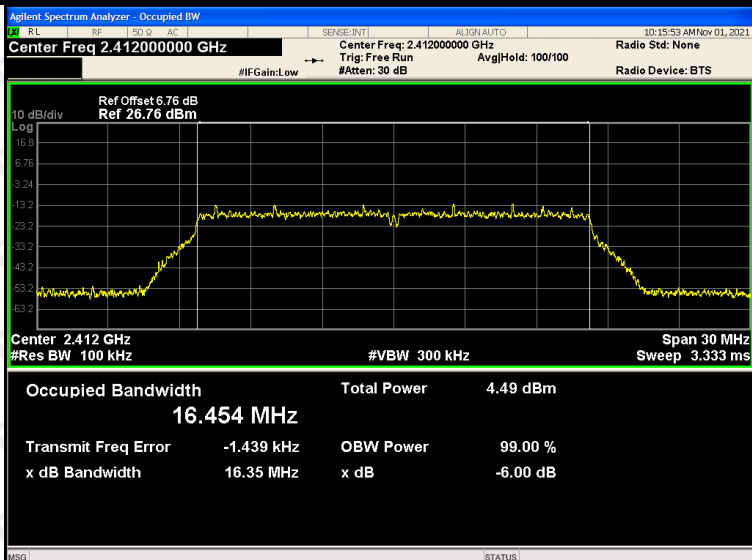




802.11g/MCH

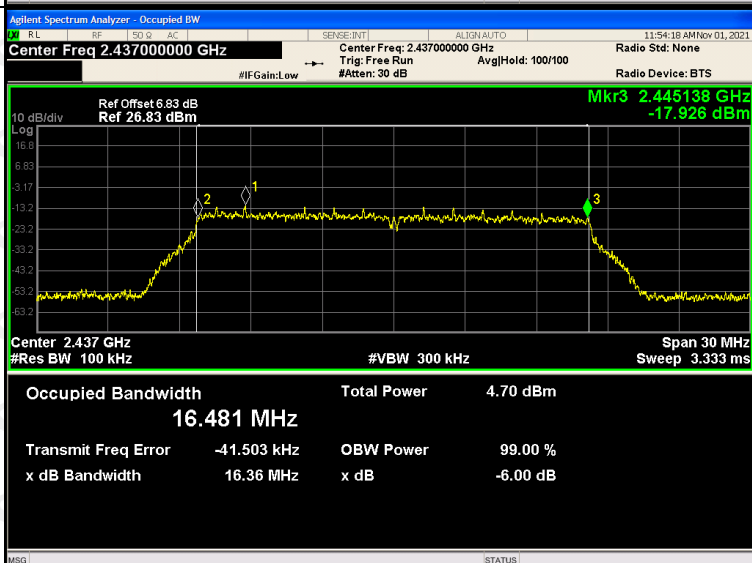

802.11g/HCH

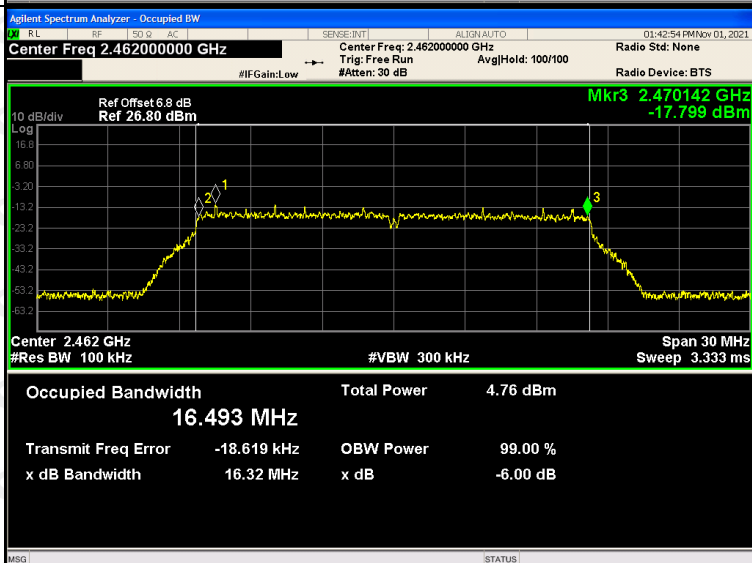


802.11n(HT20)/LC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run #Atten: 30 dB Align: AUTO Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 6.76 dB Ref 26.76 dBm Mkr3 2.420793 GHz -18.979 dBm 10 dB/div Log 16.8 6.76 3.24 13.2 23.2 33.2 43.2 53.2 63.2 Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 3.333 ms Occupied Bandwidth Total Power 4.33 dBm 17.648 MHz Transmit Freq Error 6.885 kHz OBW Power 99.00 % x dB Bandwidth 17.57 MHz x dB -6.00 dB MSG STATUS
802.11n(HT20)/MC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Atten: 30 dB Align: AUTO Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 6.83 dB Ref 26.83 dBm Mkr3 2.445133 GHz -18.857 dBm 10 dB/div Log 16.8 6.83 3.17 13.2 23.2 33.2 43.2 53.2 63.2 Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 3.333 ms Occupied Bandwidth Total Power 4.35 dBm 17.643 MHz Transmit Freq Error -45.262 kHz OBW Power 99.00 % x dB Bandwidth 16.36 MHz x dB -6.00 dB MSG STATUS
802.11n(HT20)/HC H	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run #Atten: 30 dB Align: AUTO Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 6.8 dB Ref 26.80 dBm Mkr3 2.47075 GHz -17.944 dBm 10 dB/div Log 16.8 6.80 3.20 13.2 23.2 33.2 43.2 53.2 63.2 Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 3.333 ms Occupied Bandwidth Total Power 4.99 dBm 17.640 MHz Transmit Freq Error -20.863 kHz OBW Power 99.00 % x dB Bandwidth 17.54 MHz x dB -6.00 dB MSG STATUS

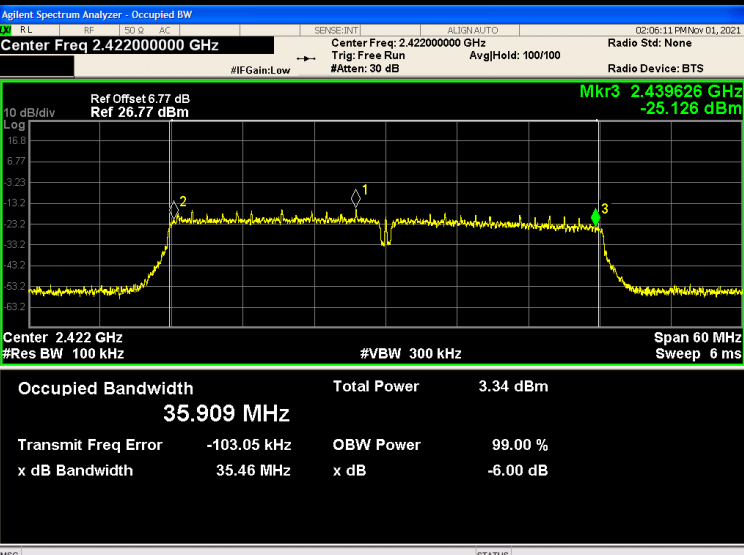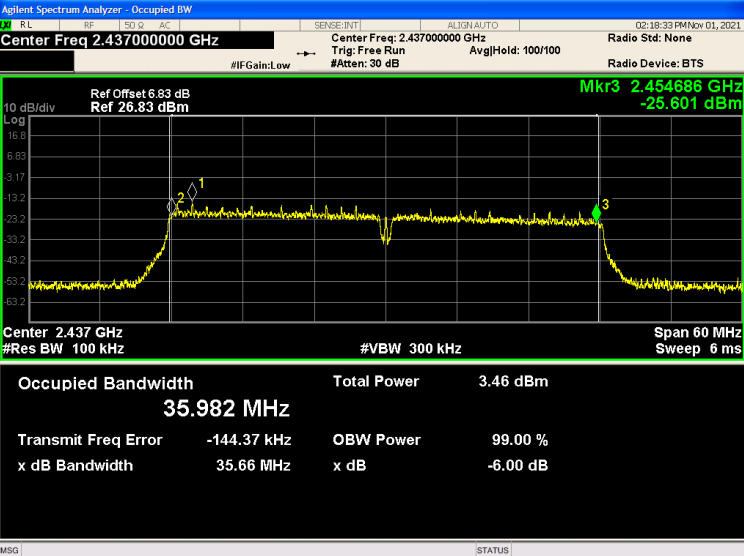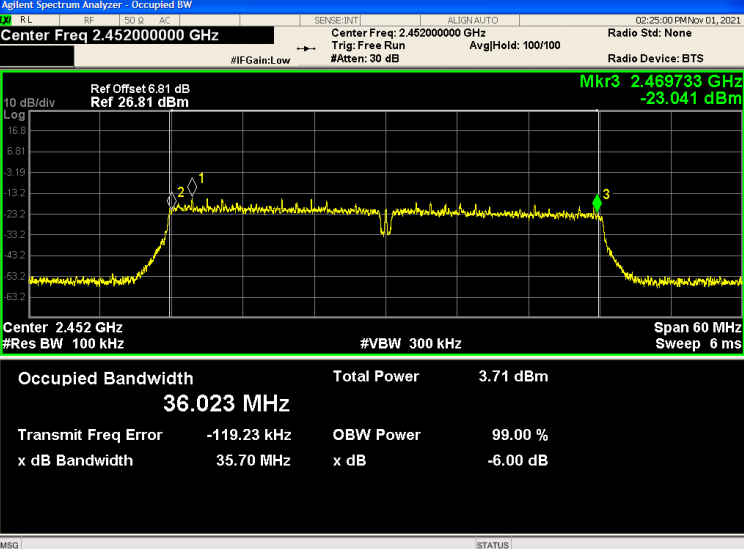802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 6.77 dB Ref 26.77 dBm Mkr3 2.439626 GHz -25.126 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 6 ms Occupied Bandwidth 35.909 MHz Total Power 3.34 dBm Transmit Freq Error -103.05 kHz OBW Power 99.00 % x dB Bandwidth 35.46 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 6.83 dB Ref 26.83 dBm Mkr3 2.454686 GHz -25.601 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 6 ms Occupied Bandwidth 35.982 MHz Total Power 3.46 dBm Transmit Freq Error -144.37 kHz OBW Power 99.00 % x dB Bandwidth 35.66 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Ref Offset 6.81 dB Ref 26.81 dBm Mkr3 2.469733 GHz -23.041 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 6 ms Occupied Bandwidth 36.023 MHz Total Power 3.71 dBm Transmit Freq Error -119.23 kHz OBW Power 99.00 % x dB Bandwidth 35.70 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

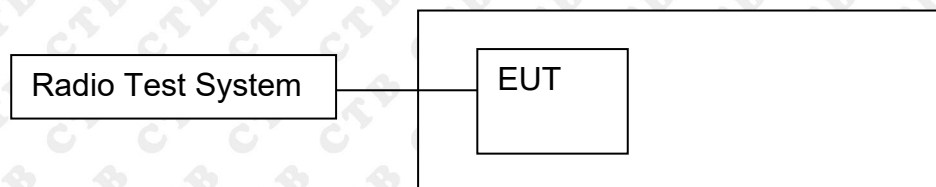

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-21.995	8	PASS
	MCH	-19.152	8	PASS
	HCH	-21.275	8	PASS
802.11g	LCH	-20.816	8	PASS
	MCH	-21.838	8	PASS
	HCH	-21.62	8	PASS
802.11n(H T20)	LCH	-21.103	8	PASS
	MCH	-20.431	8	PASS
	HCH	-21.803	8	PASS
802.11n(H T40)	LCH	-14.814	8	PASS
	MCH	-23.507	8	PASS
	HCH	-21.76	8	PASS


Test Graph

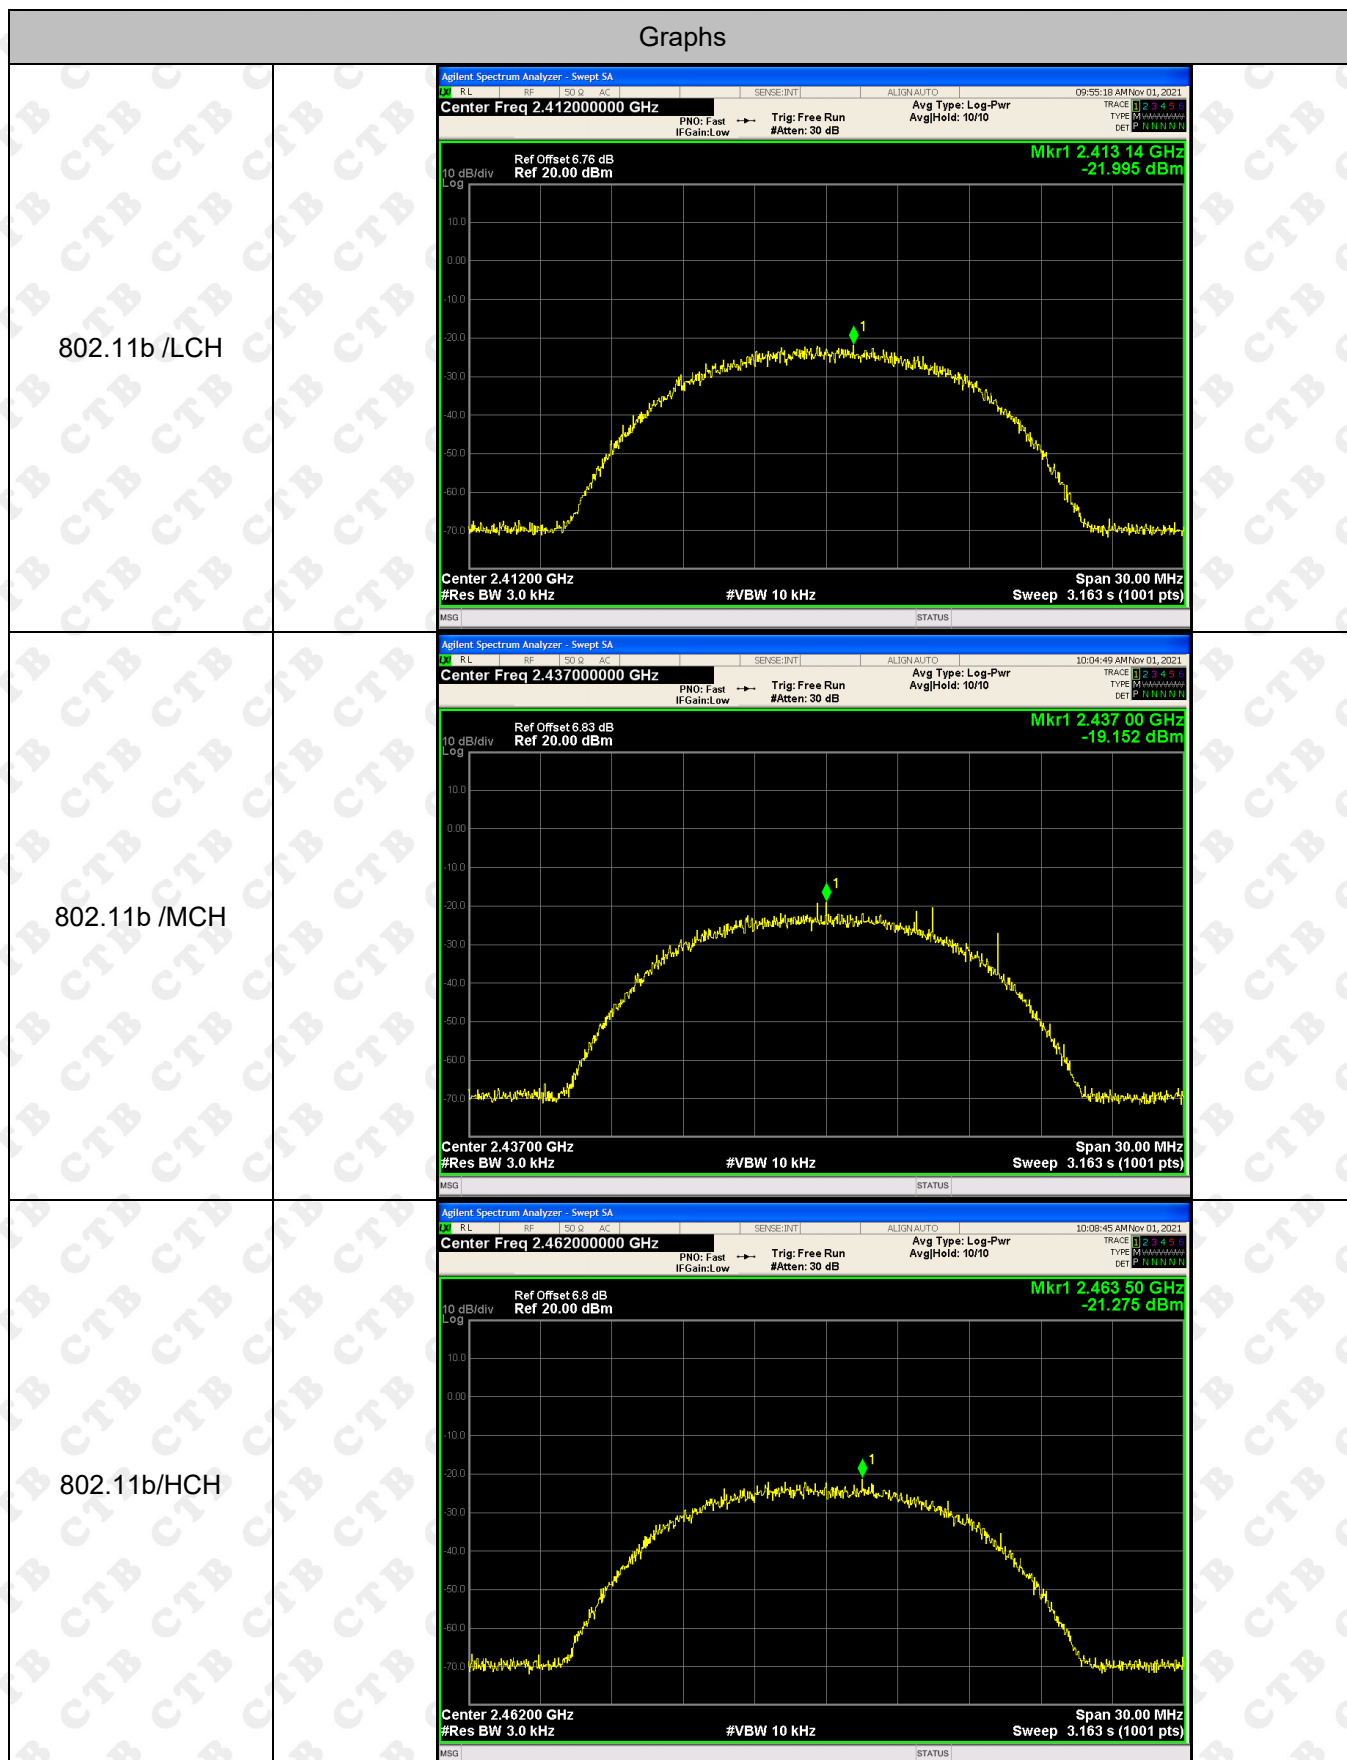


802.11g/LCH



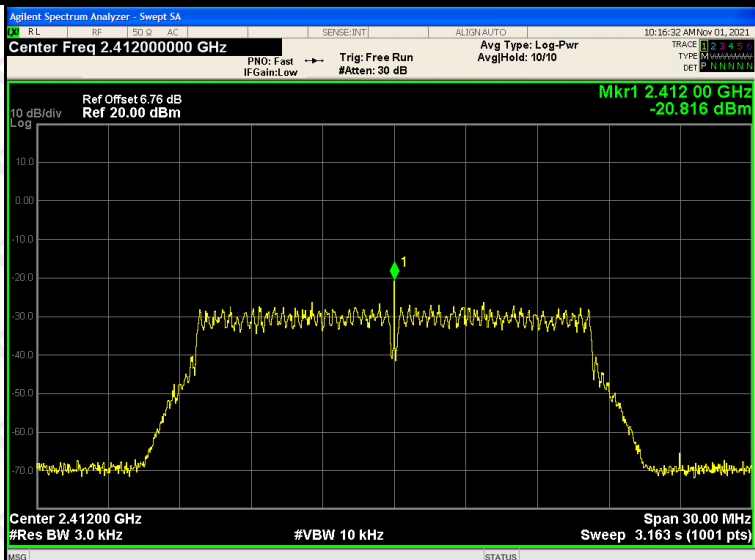


802.11g/MCH

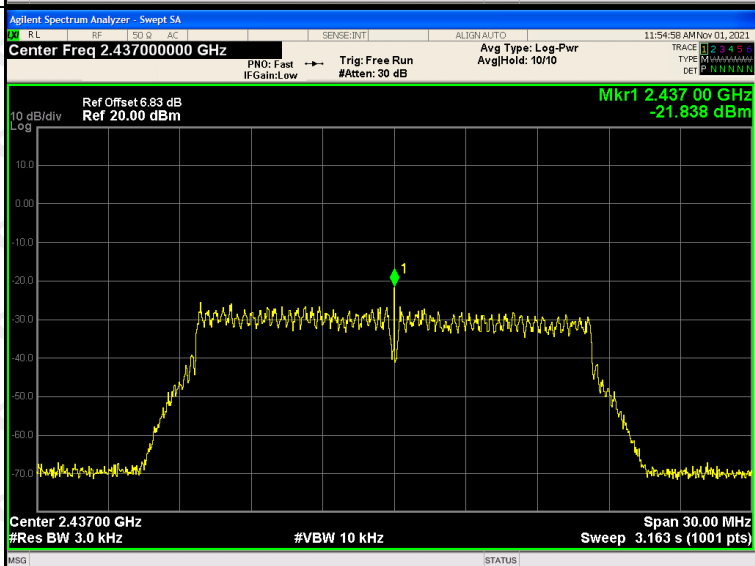

802.11g/HCH

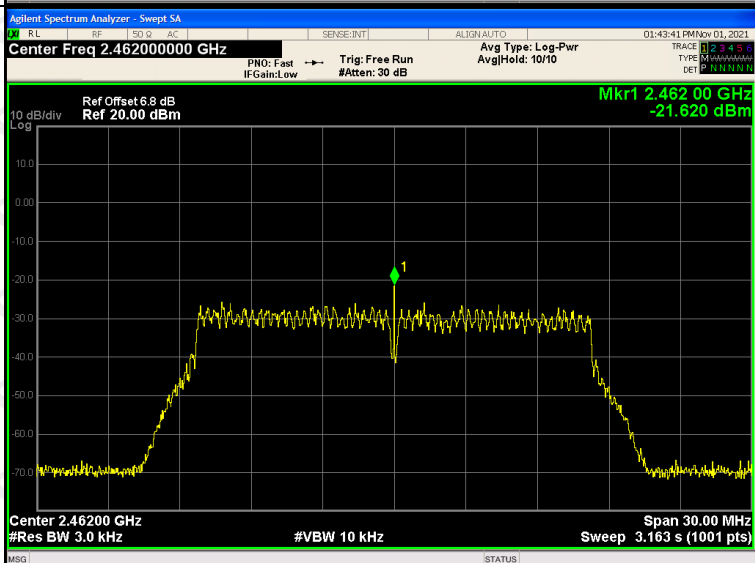

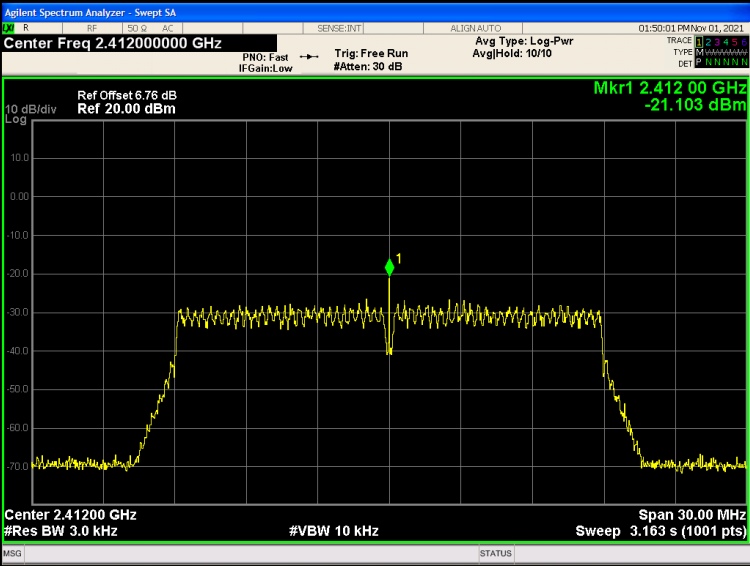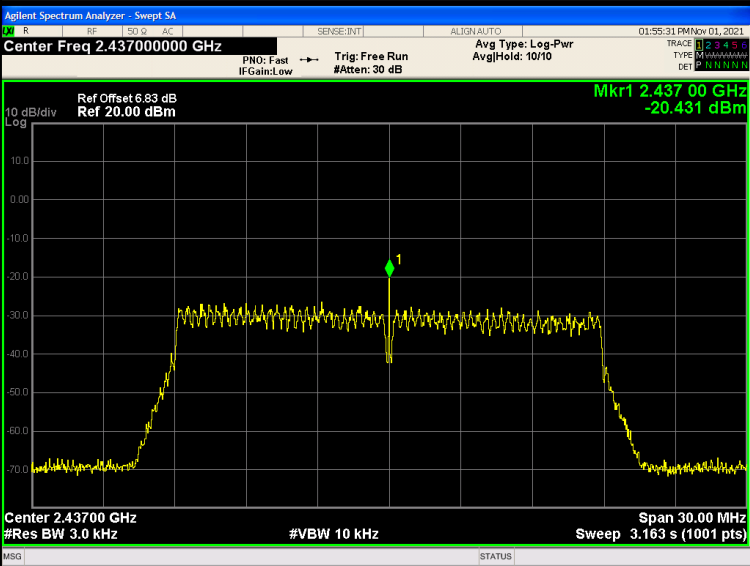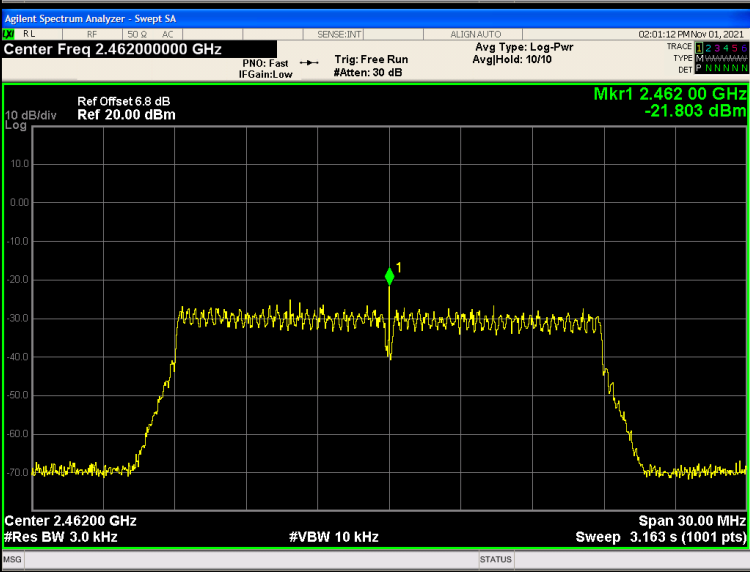802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.412 00 GHz -21.103 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.437 00 GHz -20.431 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.462 00 GHz -21.803 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 3.163 s (1001 pts)

802.11n(HT40)/LC H	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.422000000 GHz Ref Offset 6.77 dB Ref 20.00 dBm Mkr1 2.420 14 GHz -14.814 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.437 00 GHz -23.507 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.452000000 GHz Ref Offset 6.81 dB Ref 20.00 dBm Mkr1 2.452 00 GHz -21.760 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is 1.29dBi.

13. EUT PHOTOGRAPHS

EUT Photo 1




EUT Photo 2



14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G

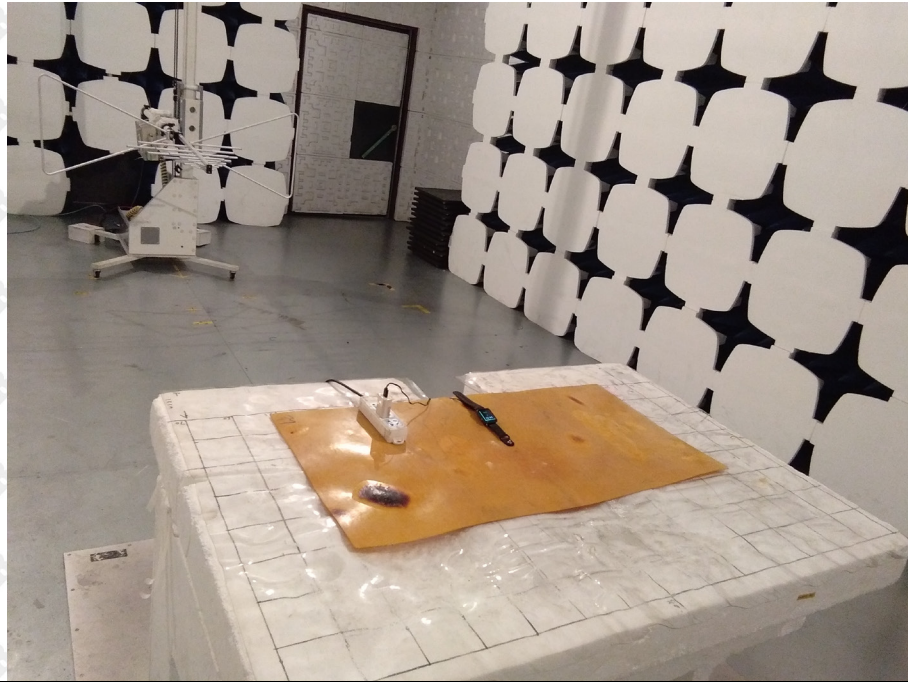

Above 1G



Conducted Emission

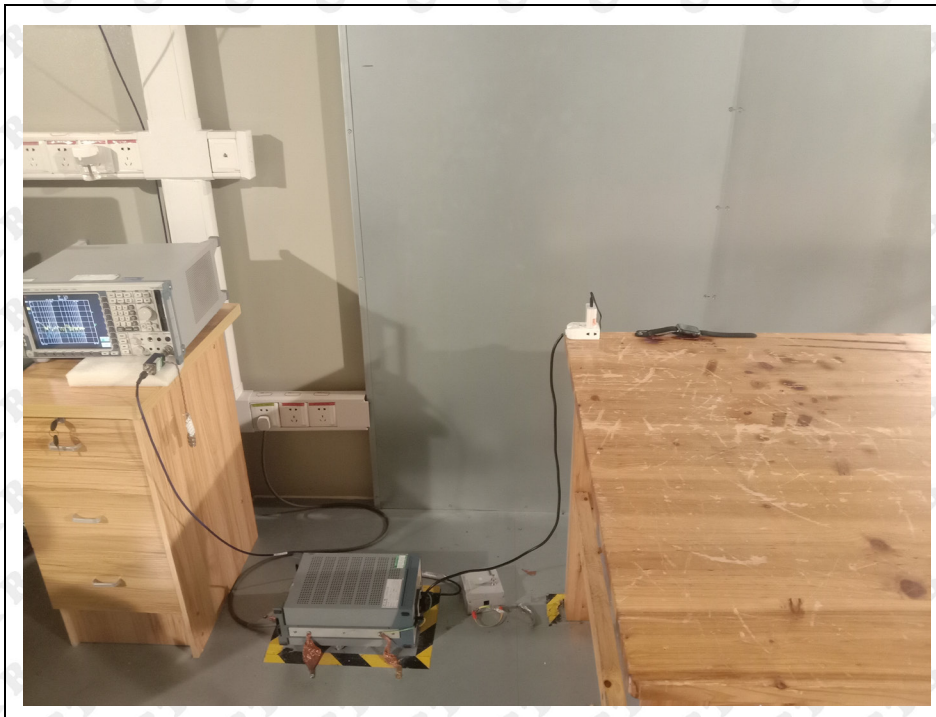

***** END OF REPORT *****