


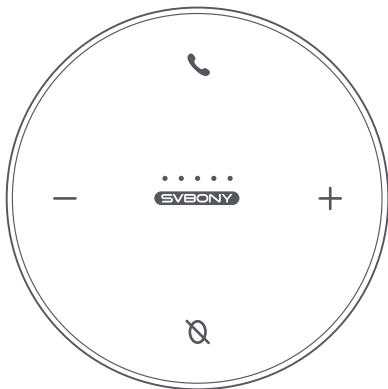

## SVHub Omni2 User Manual

EN: Note: To protect the environment and save paper, please consult our customer service or scan the QR code to download the user manual in multiple languages, including English, French, German, Italian, Spanish, Russian, Portuguese, and Japanese.

DE: Hinweis: Um die Umwelt zu schützen und Papier zu sparen, wenden Sie sich bitte an unseren Kundenservice oder scannen Sie den QR-Code, um das Benutzerhandbuch in mehreren Sprachen herunterzuladen, darunter Englisch, Französisch, Deutsch, Italienisch, Spanisch, Russisch, Portugiesisch und Japanisch.

FR: Remarque : Pour protéger l'environnement et économiser du papier, veuillez consulter notre service client ou scanner le code QR pour télécharger le manuel d'utilisation en plusieurs langues, y compris l'anglais, le français, l'allemand, l'italien, l'espagnol, le russe, le portugais et le japonais.

IT: Nota: Per proteggere l'ambiente e risparmiare carta, consultare il nostro servizio clienti o scansionare il codice QR per scaricare il manuale utente in più lingue, tra cui inglese, francese, tedesco, italiano, spagnolo, russo, portoghese e giapponese.

ES: Nota: Para proteger el medio ambiente y ahorrar papel, consulte a nuestro servicio de atención al cliente o escanee el código QR para descargar el manual del usuario en varios idiomas, incluyendo inglés, francés, alemán, italiano, español, ruso, portugués y japonés.

RU: Примечание: Чтобы защитить окружающую среду и сэкономить бумагу, обратитесь в нашу службу поддержки клиентов или отсканируйте QR-код для загрузки руководства пользователя на нескольких языках, включая английский, французский, немецкий, итальянский, испанский, русский, португальский и японский.

PT: Nota: Para proteger o meio ambiente e economizar papel, consulte o nosso serviço de atendimento ao cliente ou escaneie o código QR para baixar o manual do usuário em vários idiomas, incluindo inglês, francês, alemão, italiano, espanhol, russo, português e japonês.

JP: 注: 環境保護および紙の節約のため、カスタマーサービスにお問い合わせいただくか、QRコードをスキャンして、英語、フランス語、ドイツ語、イタリア語、スペイン語、ロシア語、ポルトガル語、日本語などの多言語ユーザーマニュアルをダウンロードしてください。



# Contents

|                                            |    |
|--------------------------------------------|----|
| I. Precautions -----                       | 01 |
| II. Product Introduction -----             | 01 |
| III. Function Operation Instructions ----- | 02 |
| IV. Technical Specifications -----         | 03 |
| V. Troubleshooting Guide -----             | 03 |
| CAUTION -----                              | 05 |

EN(1-8)

DE(9-17)


JP(18-24)

|     |                                                                                                                            |
|-----|----------------------------------------------------------------------------------------------------------------------------|
| EU  | Germany Retevis Technology GmbH<br>Uetzenäcker 29, 38176 Wendeburg<br>Retevis-Europa@outlook.com<br>Tel:+0049 053029369179 |
| REP |                                                                                                                            |

## I. Precautions

- Ensure the charging port is completely dry before charging.
- To extend the lifespan of the host device, fully charge the battery before using it for the first time.
- Use certified charging cables and chargers to avoid damaging the device.

## II. Product Introduction

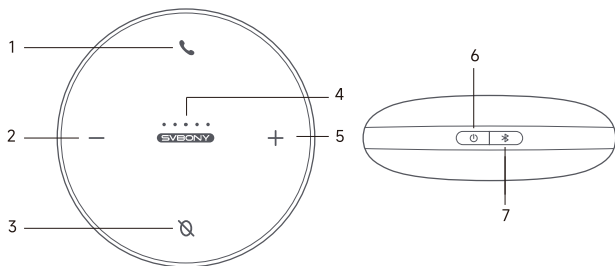

| Serial Number | Display                | Function Description                 |
|---------------|------------------------|--------------------------------------|
| 1             | Call Key               | Short press to answer/hang up a call |
| 2             | Volume -               | Short press to decrease volume       |
| 3             | Mute Key               | Short press to mute the microphone   |
| 4             | Volume Indicator Light | Displays the volume level            |
| 5             | Volume +               | Short press to increase volume       |
| 6             | Power Key              | Turn on/off the device               |
| 7             | Bluetooth Key          | Turn on/off Bluetooth                |

## **III.Function Operation Instructions**

### **3.1 Power On/Off**

When the device is off, press and hold the power key for 3 seconds to turn it on. When the device is on, press and hold the power key for 3 seconds to turn it off.

### **3.2 Volume Adjustment**

With the device on, short press the volume+ button to increase the volume. With the device on, short press the volume- button to decrease the volume.

### **3.3 Bluetooth Connection**

After turning on the device, press and hold the Bluetooth key for 3 seconds. Once the Bluetooth indicator light starts flashing blue, turn on the Bluetooth function on your computer and search for the Bluetooth device "SV\*\*\*-Omni2-\*\*\*\*" to pair and connect. After successful connection, the Bluetooth indicator light will stay solid blue.

Note: When using the device with mainstream conference software such as Zoom, Teams, Google Meet, Tencent Meeting, and DingTalk Meeting on Windows and MAC systems, ensure to switch to the corresponding microphone and speaker devices of this device.

### **3.4 USB Connection**

The device supports USB plug-and-play. When the device is off, connect it via USB, and it will automatically turn on and complete the connection.

Note: When using the device with mainstream conference software such as Zoom, Teams, Google Meet, Tencent Meeting, and DingTalk Meeting on Windows and MAC systems, ensure to switch to the corresponding microphone and speaker devices of this device.

### **3.5 One-Touch Mute**

During communication, short press the mute key to turn off the device's microphone. The status indicator light will turn red.

When the microphone is off, short press the mute key again to resume communication. The microphone will turn on, and the status indicator light will turn white.

### **3.6 AI Transcription**

The device is compatible with common AI conference software on the market, such as app.notta.ai. Download and install the corresponding client software based on your computer system. After installation, open the software and

connect the device to your computer using Bluetooth or a USB data cable (recommended). Register and log in to the AI conference software to start using it.

## IV. Technical Specifications

| Item                       | Specification                                                                                      |
|----------------------------|----------------------------------------------------------------------------------------------------|
| Dimensions                 | Φ112.5mm × 35.2mm                                                                                  |
| Input                      | 5V --- 2A                                                                                          |
| Rated Output Power         | 10W                                                                                                |
| Battery Capacity           | Built-in lithium battery, 2000mAh                                                                  |
| Talk Time                  | 8h                                                                                                 |
| USB                        | USB 2.0, Type-C                                                                                    |
| Speaker                    | 1 × 5W speaker                                                                                     |
| Speaker Frequency Response | Music Mode: 100Hz - 20kHz<br>Talk Mode: 150Hz - 7.5kHz                                             |
| Pickup Range               | Effective pickup radius: 3 meters<br>Maximum pickup radius (in good acoustic conditions): 5 meters |
| Microphones                | 4 analog omnidirectional microphones                                                               |
| Bluetooth Version          | 5.1                                                                                                |

## V. Troubleshooting Guide

If you encounter any issues with your product during use, please refer to the following table for simple troubleshooting steps:

| Problem Description                                                                             | Troubleshooting Suggestions                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Volume not synchronized when connecting the host to a phone via Bluetooth                       | <ol style="list-style-type: none"> <li>1. Confirm if the phone supports Bluetooth volume synchronization. Some Android/HarmonyOS phones may not support this feature.</li> <li>2. Check if the phone has volume synchronization enabled. Some phone models may require enabling volume settings permissions in the system settings.</li> </ol> |
| Ringtones for calls/meetings not coming from the device when connected to a phone via Bluetooth | <ol style="list-style-type: none"> <li>1. Check if the phone's call volume is turned on or if it is set too low.</li> <li>2. Check if the device can make calls normally.</li> <li>3. Check if the phone's call input/output device is set to this device.</li> </ol>                                                                          |
| No sound when connecting the host to a Windows computer via Bluetooth                           | <ol style="list-style-type: none"> <li>1. When playing music, ensure the speaker is selected as the device with this device's model number.</li> <li>2. When on a call or in a meeting, ensure the speaker is selected as the device with this device's model number.</li> </ol>                                                               |
| No sound when connecting the host to a computer's conference software via Bluetooth for calls   | <ol style="list-style-type: none"> <li>1. Check if the call software's microphone and speaker are correctly connected to this device.</li> <li>2. Check if the computer's audio driver is functioning properly. Try restarting the computer.</li> </ol>                                                                                        |
| No response when connecting the host to a computer via USB                                      | <ol style="list-style-type: none"> <li>1. Check if the device is currently connected via Bluetooth. Disconnect the Bluetooth connection first, then connect using a USB data cable.</li> <li>2. Check if the USB data cable is damaged.</li> <li>3. Try restarting both the device and the computer.</li> </ol>                                |

## **CAUTION**

### **ENERGY EXPOSURE AND PRODUCT SAFETY GUIDE**

Before using this device, please read this guide which contains important operating instructions for safe usage, control information and operational instructions for compliance with RF Energy Exposure limits in applicable national and international standards.

User' instructions should accompany the device when transferred to other users. Unauthorized modification and adjustment

Changes or modifications not expressly approved by the party responsible for compliance may void the user's authority granted by the local government radio management departments to operate this radio and should not be made. To comply with the corresponding requirements, transmitter adjustments should be made only by or under the supervision of a person certified as technically qualified to perform transmitter maintenance and repairs in the private land mobile and fixed services as certified by an organization representative of the user of those services. Replacement of any transmitter component (crystal, semiconductor, etc.) not authorized by the local government radio management departments equipment authorization for this radio could violate the rules.

### **FCC compliance information**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## ISED compliance information

Licence-exempt radio apparatus

EN: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

## CE

Simple EU declaration of conformity

HONGKONG SVBONY CO., LIMITED declares that the radio equipment type is in compliance with the essential requirements and other relevant provisions of RED Directive 2014/53/EU and the ROHS Directive 2011/65/EU; the full text of the EU declaration of conformity is available at the following internet address:

[www.svbony.com](http://www.svbony.com).

## Disposal

The crossed-out wheeled-bin symbol on your product, literature, or packaging reminds you that all electrical and electronic products, batteries, or accumulators must be taken to designated collection locations at the end of their working life. Do not dispose of these products as unsorted municipal waste. Dispose of them according to the laws and rules in your region.



## RF Safety

This radio is designed for and classified as "General population/uncontrolled use". General population/uncontrolled environments are defined as locations where there is exposure of individuals who have no knowledge or control of RF exposure level.

This equipment complies with the FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

For users who wish to further reduce their exposure, some effective measures to reduce RF exposure include:

- Reduce the amount of time spent using your wireless device.
- Increase the distance between wireless devices and your body.

## Protect your hearing



- Use the lowest volume necessary to do your job. Turn up the volume only if you are in noisy surroundings.
- Limit the amount of time you use headsets or earpieces at high volume.

**CAUTION:** Exposure to loud noises from any source for extended periods of time may temporarily or permanently affect your hearing. The louder the device's volume, the less time is required before your hearing could be affected. Hearing damage from loud noise is sometimes undetectable at first and can have a cumulative effect.

## Recommended Charging Guidelines for Supplied Chargers and Secondary Batteries (Rechargeable Batteries)

- Turn off your radio before charging.
- Batteries shall be charged at 10°C~40°C environment temperature specified. If the environment temperature is lower than 0°C, the charge shall be prohibited.
- Rechargeable batteries are only to be charged by adults.
- Charging should only take place in a well ventilated area and when someone is about to be aware and react to a potential issue. To reduce risk of fire, a battery should not be charged for more than 8 hours and disconnect charger from line voltage (AC outlet) by removing main plug even if the batter is not completely

charged. Don't leave a device unattended while charging. Disconnect the charger when the device is fully charged: do not overcharge the device.

The power delivered by the charger must be between min 5 Watts and max 10 Watts required by the radio equipment in order to achieve the maximum charging speed. Power adapter shall be installed near the equipment and shall be easily accessible. The plug of the adapter is considered a disconnect device. The socket-outlet shall be installed near the equipment and shall be easily accessible.

### **Dedicated for Children's Products**

WARNING: CHOKING HAZARD-Small Parts. Not suitable for children.

### **Authorized Accessories List**

- Contact Svbonny for assistance regarding repairs and service.
- For a list of Svbonny-approved accessories for your radio model, visit the website: <http://www.svbonny.com>

# SVBONY

Go for Beauty Go for Svbonny



## HONGKONG SVBONY CO., LIMITED

Add: 3A, 42 Smithfield, Kennedy Town, Hong Kong

Facebook: @Svbonny

E-mail: [info@svbonny.com](mailto:info@svbonny.com)

Web: [www.svbonny.com](http://www.svbonny.com)



Made in China