

TEST REPORT
FCC CFR Title 47 Part 2, Part 27

Report Reference No......: HK2110254033-7E

FCC ID.....: 2A3OE-GP08B

Compiled by

(position+printed name+signature)..: File administrators Gary Qian

Supervised by

(position+printed name+signature)..: Technique principal Eden Hu

Approved by

(position+printed name+signature)..: Manager Jason Zhou

Date of issue.....: Nov. 04, 2021

Testing Laboratory Name: **Shenzhen HUAK Testing Technology Co., Ltd.**

Address: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong,
China

Applicant's name.....: **Shenzhen Zhumang Technology Co.,Ltd.**

Address: 10th Floor, Financial Technology Tower, No.11, Keyuan Road,
Science and Technology Park, Yuehai Subdistrict, Nanshan
District, Shenzhen, 518057, P.R.China

Test specification

Standard: **FCC CFR Title 47 Part 2, Part 27**

TRF Originator.....: Shenzhen HUAK Testing Technology Co., Ltd.

Shenzhen HUAK Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Stackable sharing charging station with LED screen

Trade Mark:  **ChargerGoGo**
POWER THE WORLD

Manufacturer.....: **Shenzhen Zhumang Technology Co.,Ltd.**

Model/Type reference.....: GP08B A1B8

Listed Models: GP08B A1B1, GP08B A1B2, GP08B A1B3, GP08B A1B4, GP08B
A1B5, GP08B A1B6, GP08B A1B7

Modulation Type.....: QPSK, 16QAM

Rating: Input: 100-240V~50/60Hz 1.5A Max

Output: 5V $\equiv$ 2A Max (per. layer) Max. Total Output : 80W

Hardware version: V1.0

Software version: V1.0

Result.....: **PASS**

TEST REPORT

Test Report No. :	HK2110254033-7E	Nov. 04, 2021
		Date of issue

Equipment under Test : Stackable sharing charging station with LED screen

Model /Type : GP08B A1B8

Listed Models : GP08B A1B1, GP08B A1B2, GP08B A1B3, GP08B A1B4, GP08B A1B5, GP08B A1B6, GP08B A1B7

Applicant : **Shenzhen Zhumang Technology Co.,Ltd.**

Address : 10th Floor, Financial Technology Tower, No.11, Keyuan Road, Science and Technology Park, Yuehai Subdistrict, Nanshan District, Shenzhen, 518057, P.R.China

Manufacturer : **Shenzhen Zhumang Technology Co.,Ltd.**

Address : 10th Floor, Financial Technology Tower, No.11, Keyuan Road, Science and Technology Park, Yuehai Subdistrict, Nanshan District, Shenzhen, 518057, P.R.China

Test result	Pass
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1</u>	<u>SUMMARY</u>	<u>4</u>
1.1	TEST STANDARDS	4
1.2	Test Description	4
1.3	Information of the Test Laboratory	5
1.4	Statement of the measurement uncertainty	5
<u>2</u>	<u>GENERAL INFORMATION</u>	<u>6</u>
2.1	General Remarks	6
2.2	Product Description	6
2.3	Equipment under Test	6
2.4	Environmental conditions	6
2.5	Description of Test Modes	7
2.6	Equipments Used during the Test	8
2.7	Modifications	8
<u>3</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
3.1	Output Power	9
3.3	Peak-to-Average Ratio (PAR)	12
3.4	Occupied Bandwidth and Emission Bandwidth	15
3.5	Band Edge compliance	18
3.6	Spurious Emission	21
3.7	Frequency Stability under Temperature & Voltage Variations	33
<u>4</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>35</u>
<u>5</u>	<u>PHOTOS OF THE EUT</u>	<u>36</u>

1 SUMMARY

1.1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 27](#) : MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

47 CFR FCC Part 15 Subpart B: - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

1.2 Test Description

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 27.50 (b)(10) and (d)(4)	Pass
Peak-to-Average Ratio	27.50 (d)(5)	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 27.53(h)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 27.53(h)	Pass
Field Strength of Spurious Radiation	Clause 7 of KDB971168 D01 v02r02	Pass
Out of band emission, Band Edge	2.1051 27.53 (c)(2) and (5), (h)(1) and (3)(i)	Pass
Frequency stability	2.1055 27.54	Pass

1.3 Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.
FCC Designation Number is CN1229.
Canada IC CAB identifier is CN0045.
CNAS Registration Number is L9589.

1.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen HUAK Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen HUAK Testing Technology Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2 GENERAL INFORMATION

2.1 General Remarks

Date of receipt of test sample	:	Oct. 25, 2021
Testing commenced on	:	Oct. 25, 2021
Testing concluded on	:	Nov. 04, 2021

2.2 Product Description

Name of EUT	Stackable sharing charging station with LED screen
Model/Type reference:	GP08B A1B8
List Model:	GP08B A1B1, GP08B A1B2, GP08B A1B3, GP08B A1B4, GP08B A1B5, GP08B A1B6, GP08B A1B7
Power supply:	Input: 100~240V~50/60Hz 1.5A Max Output: 5V $\overline{\text{---}}$ 2A Max (per. layer) Max. Total Output : 80W
Adapter Information	N/A
Modulation Type	QPSK, 16QAM
Antenna Type	Internal Antenna
Operation Frequency Band	LTE Band 13
Operation frequency	LTE Band 13: 777~787 MHz
LTE Release	R8
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	99VDC to 121VDC (nominal: 110VDC)

2.3 Equipment under Test

Power supply system utilised

Power supply voltage	:	☐ 120V/ 60 Hz	☐ 115V/60Hz
		☐ 12V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

2.4 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.5 Description of Test Modes

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Note:

1. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.
2. Test method and refer to 3GPP TS136521.

2.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	ENV216	R&S	HKE-059	2020/12/10	2021/12/09
LISN	R&S	ENV216	HKE-002	2020/12/10	2021/12/09
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	2020/12/10	2021/12/09
Receiver	R&S	ESCI 7	HKE-010	2020/12/10	2021/12/09
Spectrum analyzer	Agilent	N9020A	HKE-048	2020/12/10	2021/12/09
RF automatic control unit	Tonscend	JS0806-2	HKE-060	2020/12/10	2021/12/09
Horn antenna	Schwarzbeck	9120D	HKE-013	2020/12/10	2021/12/09
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	2020/12/10	2021/12/09
Preamplifier	EMCI	EMC051845SE	HKE-015	2020/12/10	2021/12/09
Preamplifier	Agilent	83051A	HKE-016	2020/12/10	2021/12/09
Temperature and humidity meter	Boyang	HTC-1	HKE-075	2020/12/10	2021/12/09
High pass filter unit	Tonscend	JS0806-F	HKE-055	2020/12/10	2021/12/09
RF cable	Times	1-40G	HKE-034	2020/12/10	2021/12/09
Power meter	Agilent	E4419B	HKE-085	2020/12/10	2021/12/09
Power Sensor	Agilent	E9300A	HKE-086	2020/12/10	2021/12/09
Wireless Communication Test Set	R&S	CMW500	HKE-026	2020/12/10	2021/12/09
Horn Antenna	Schwarzbeck	BBHA 9170	HKE-017	2020/12/10	2021/12/09
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	2020/12/10	2021/12/09
Horn antenna	Schwarzbeck	9120D	HKE-135	2020/12/10	2021/12/09
High gain antenna	Schwarzbeck	LB-180400KF	HKE-128	2020/12/10	2021/12/09
Broadband antenna	Schwarzbeck	VULB 9163	HKE-087	2020/12/10	2021/12/09
Signal generator	Agilent	E4433B	HKE-120	2020/12/10	2021/12/09
Signal generator	Agilent	E4421B	HKE-121	2020/12/10	2021/12/09

2.7 Modifications

No modifications were implemented to meet testing criteria.


3 TEST CONDITIONS AND RESULTS

3.1 Output Power

LIMIT

According to §27.50 (d) (4): Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. The average equivalent isotropically radiated power (e.i.r.p.) for fixed, mobile and portable transmitters in the 1710-1755 MHz shall not exceed 1 watt.

TEST CONFIGURATION

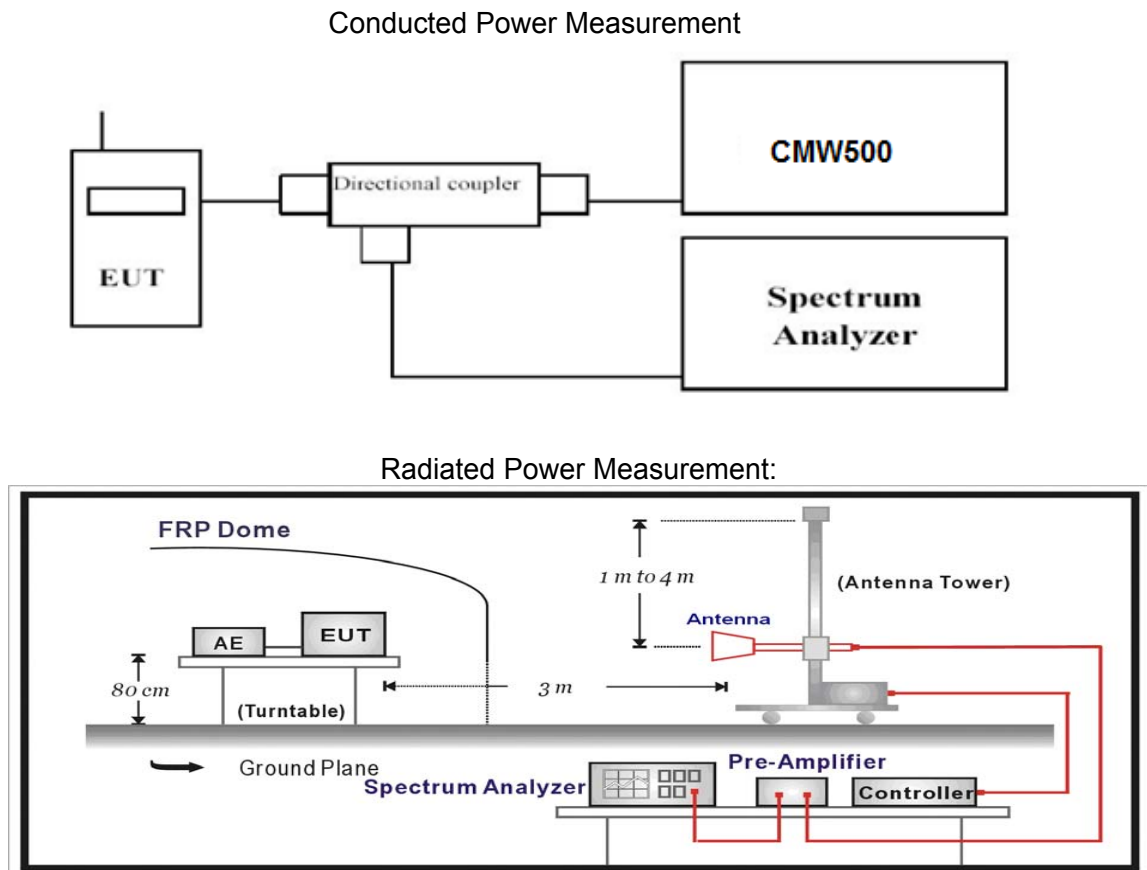

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.

- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4.

TEST RESULTS

Conducted Measurement:

<i>LTE FDD Band 13</i>				
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	Average Power [dBm]	
			QPSK	16QAM
5 MHz	1 RB low	779.5	22.38	21.81
		782	22.40	22.23
		784.5	22.45	22.15
	1 RB high	779.5	23.56	21.43
		782	23.54	21.43
		784.5	23.66	21.38
	50% RB mid	779.5	22.40	21.53
		782	22.52	22.25
		784.5	22.43	22.38
	100% RB	779.5	23.34	22.28
		782	23.36	21.25
		784.5	23.58	21.45
10 MHz	1 RB low	782	23.41	22.29
	1 RB high	782	23.51	22.52
	50% RB mid	782	22.44	22.73
	100% RB	782	22.44	21.48

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 13; recorded worst case for each Channel Bandwidth of LTE FDD Band 13.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$
Margin = Limit - EIRP

LTE FDD Band 13_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
779.5	-15.79	3.06	9.68	34.8	25.63	23.48	33.01	7.38	V
782.0	-15.85	3.17	9.68	34.8	25.46	23.31	33.01	7.55	V
784.5	-15.73	3.22	9.75	34.8	25.6	23.45	33.01	7.41	V
779.5	-15.59	3.06	9.68	34.8	25.83	23.68	33.01	7.18	H
782.0	-16.43	3.17	9.68	34.8	24.88	22.73	33.01	8.13	H
784.5	-17.24	3.22	9.75	34.8	24.09	21.94	33.01	8.92	H

LTE FDD Band 13_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
782.0	-15.17	3.22	9.75	34.8	26.16	24.01	33.01	6.85	V
782.0	-14.89	3.06	9.68	34.8	26.53	24.38	33.01	6.48	H

LTE FDD Band 13_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
779.5	-16.14	3.06	9.68	34.8	25.28	23.13	33.01	7.73	V
782.0	-16.74	3.17	9.68	34.8	24.57	22.42	33.01	8.44	V
784.5	-16.01	3.22	9.75	34.8	25.32	23.17	33.01	7.69	V
779.5	-15.67	3.06	9.68	34.8	25.75	23.6	33.01	7.26	H
782.0	-15.99	3.17	9.68	34.8	25.32	23.17	33.01	7.69	H
784.5	-16.69	3.22	9.75	34.8	24.64	22.49	33.01	8.37	H

LTE FDD Band 13_Channel Bandwidth 10MHz_16QAM


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
782.0	-15.11	3.22	9.75	34.8	26.22	24.07	33.01	6.79	V
782.0	-14.87	3.06	9.68	34.8	26.55	24.4	33.01	6.46	H

3.3 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

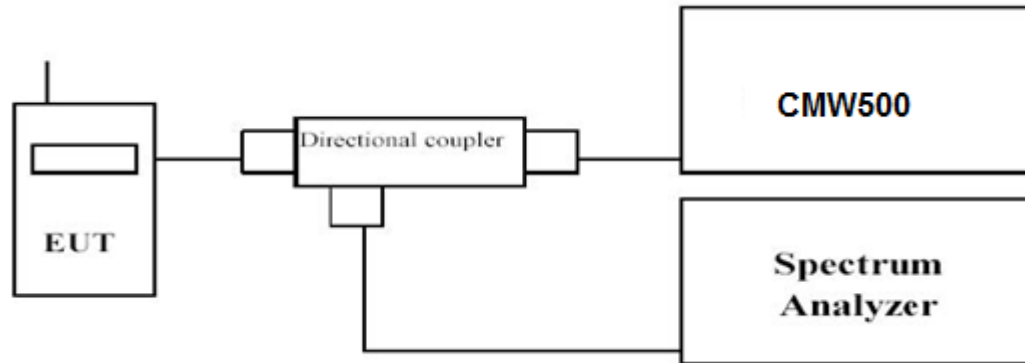

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS


Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 13; recorded worst case for each Channel Bandwidth of LTE Band 13.

LTE Band 13				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
5 MHz	779.5	1RB#0	4.03	4.85
	782		3.98	5.08
	784.5		4.15	5.06
10 MHz	782	1RB#0	3.99	4.94

LTE Band 13-5MHz Channel Bandwidth PAPR

QPSK

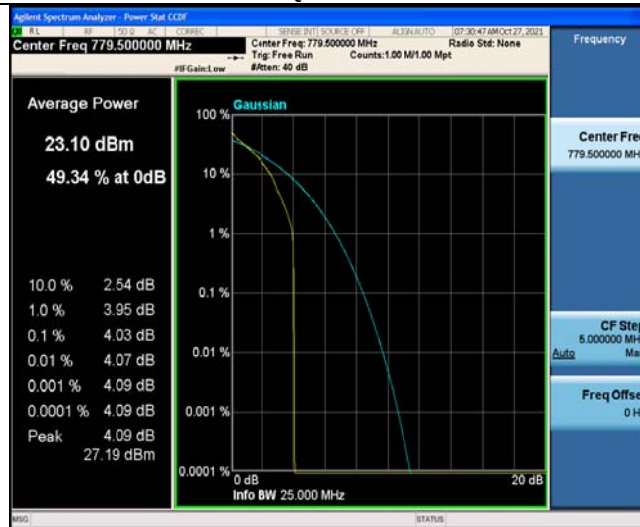

1RB#0

16QAM



1RB#0

Low Channel



1RB#0



1RB#0

Middle Channel



1RB#0



1RB#0

High Channel

LTE Band 13-10MHz Channel Bandwidth PAPR

QPSK

16QAM



1RB#0




1RB#0

3.4 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

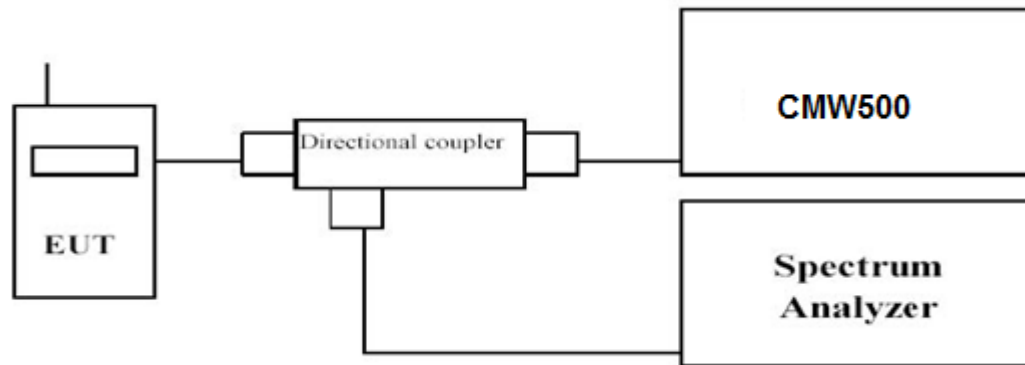

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 13; recorded worst case for each Channel Bandwidth of LTE Band 13.


LTE Band 13						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
5 MHz	25RB#0	779.5	4.897	4.871	4.4924	4.5001
		782	4.878	4.907	4.4923	4.4965
		784.5	4.891	4.876	4.4985	4.5012
10 MHz	50RB#0	782	9.548	9.513	8.9528	8.9428

LTE Band 13-5MHz Channel Bandwidth

QPSK



16QAM

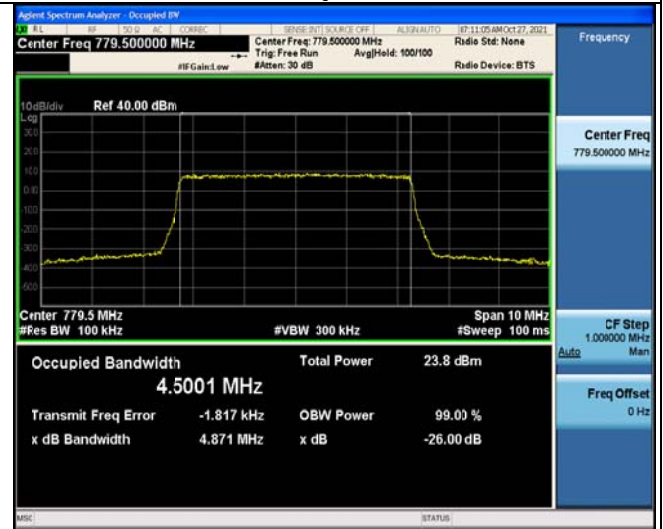

25RB#0

25RB#0



Low Channel



25RB#0

25RB#0

Middle Channel

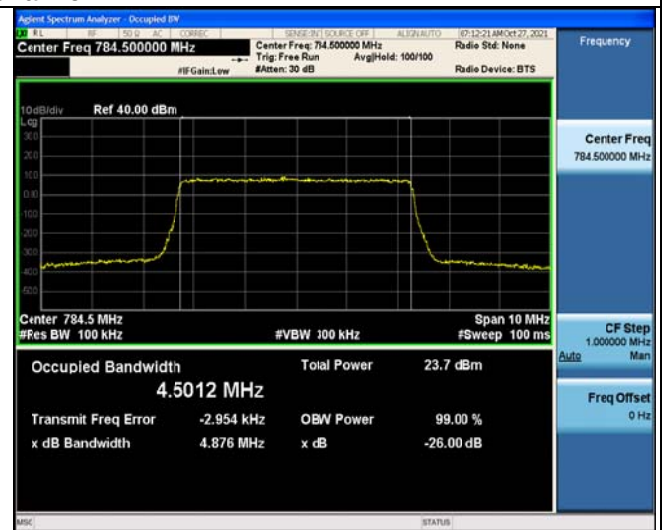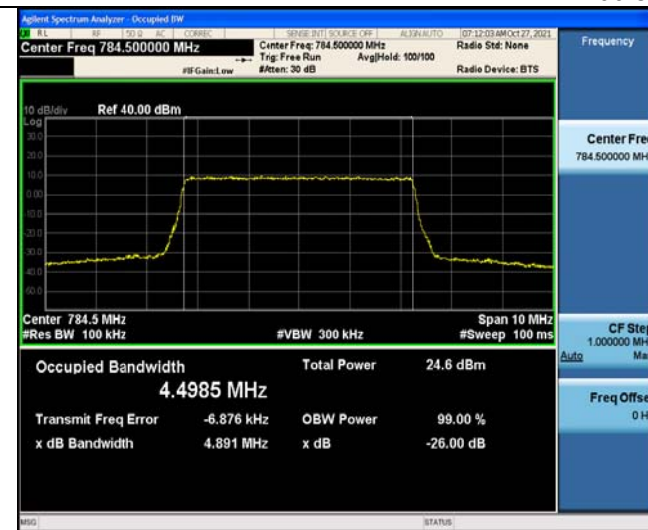

25RB#0

25RB#0

High Channel


LTE Band 13-10MHz Channel Bandwidth

QPSK



50RB#0

16QAM

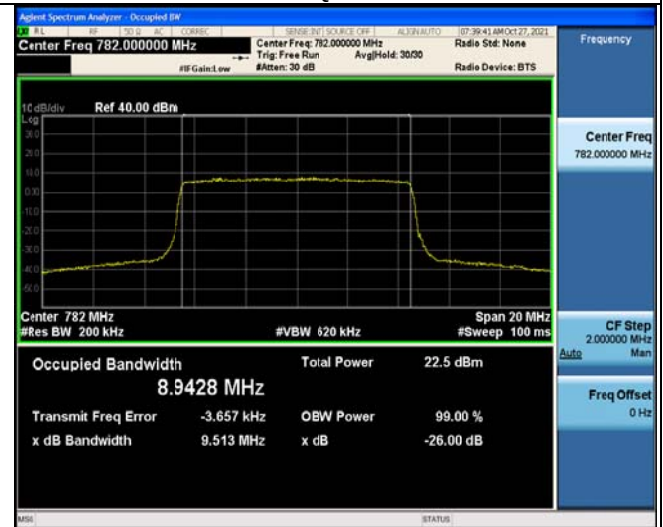


50RB#0

3.5 Band Edge compliance

LIMIT

According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST CONFIGURATION

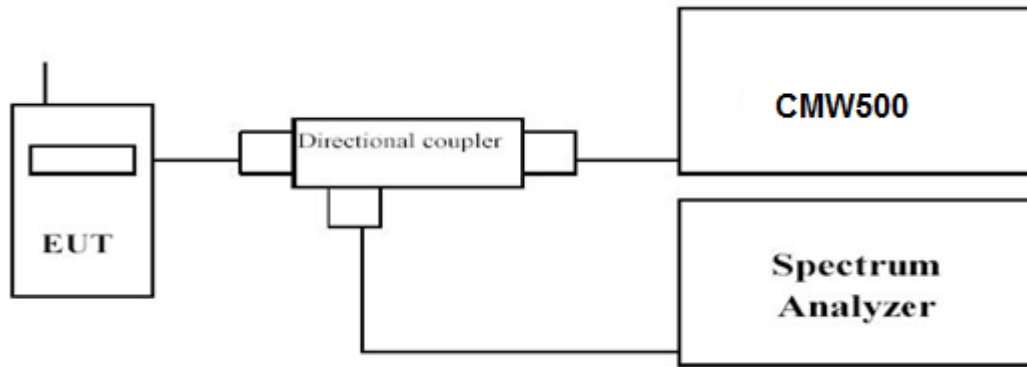

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 13; recorded worst case for each Channel Bandwidth of LTE Band 13.

LTE Band 13-5MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM



25RB#0

25RB#0

Low Channel



25RB#0

25RB#0

High Channel

LTE Band 13-10MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM



50RB#0



50RB#0


3.6 Spurious Emission

LIMIT


According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST CONFIGURATION

Conducted Spurious Measurement:

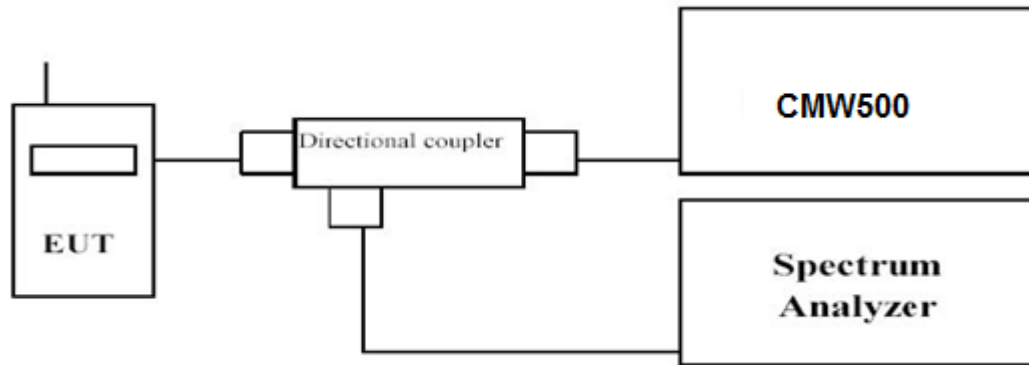

Radiated Spurious Measurement:

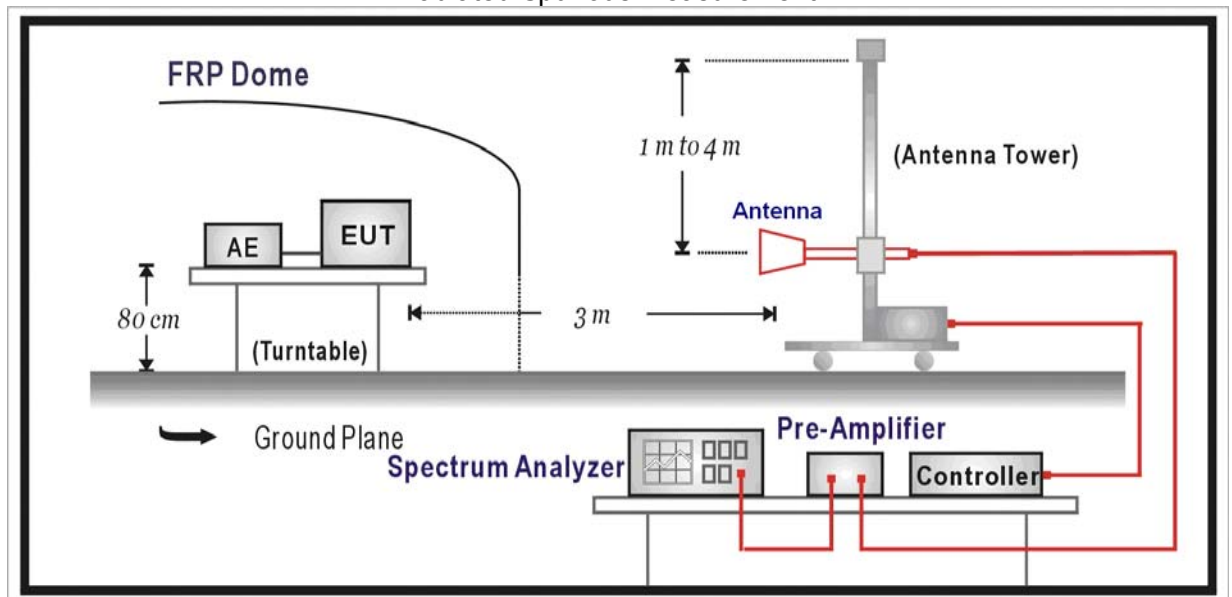

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Conducted Spurious Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Coupler.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10^{th} harmonic.

- f. Please refer to following tables for test antenna conducted emissions.

Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 13	0.000009~0.000015	1KHz	3KHz	Auto
	0.000015~0.03	10KHz	30KHz	Auto
	0.03~26.5	1 MHz	3 MHz	Auto

Radiated Spurious Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The maximum signal level detected by the measuring receiver shall be noted.
- The transmitter shall be replaced by a substitution antenna.
- The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- The substitution antenna shall be connected to a calibrated signal generator.
- If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- Test site anechoic chamber refer to ANSI C63.



TEST RESULTS


Remark:

- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 13; recorded worst case for each Channel Bandwidth of LTE Band 13.*

Conducted Measurement:


LTE Band 13-5MHz Channel Bandwidth
Low Channel

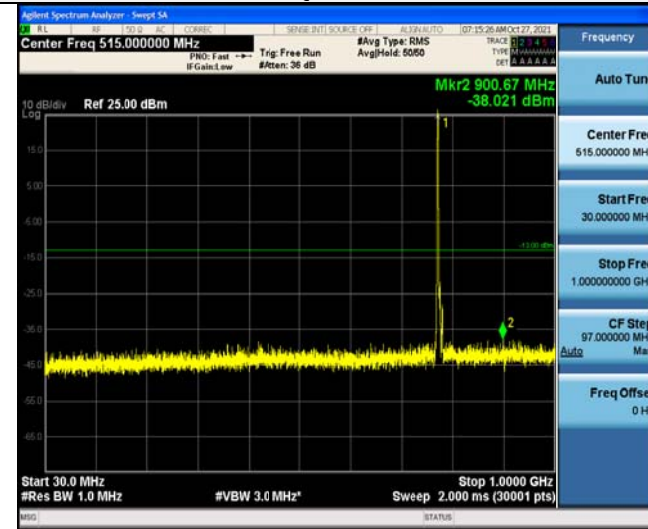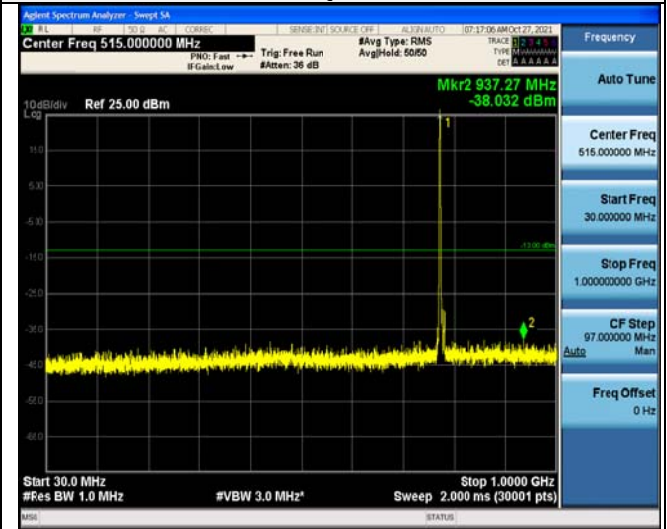QPSK**16QAM****30MHz~1GHz****30MHz~1GHz****1000~5000MHz****1000~5000MHz****5000~12000MHz****5000~12000MHz**

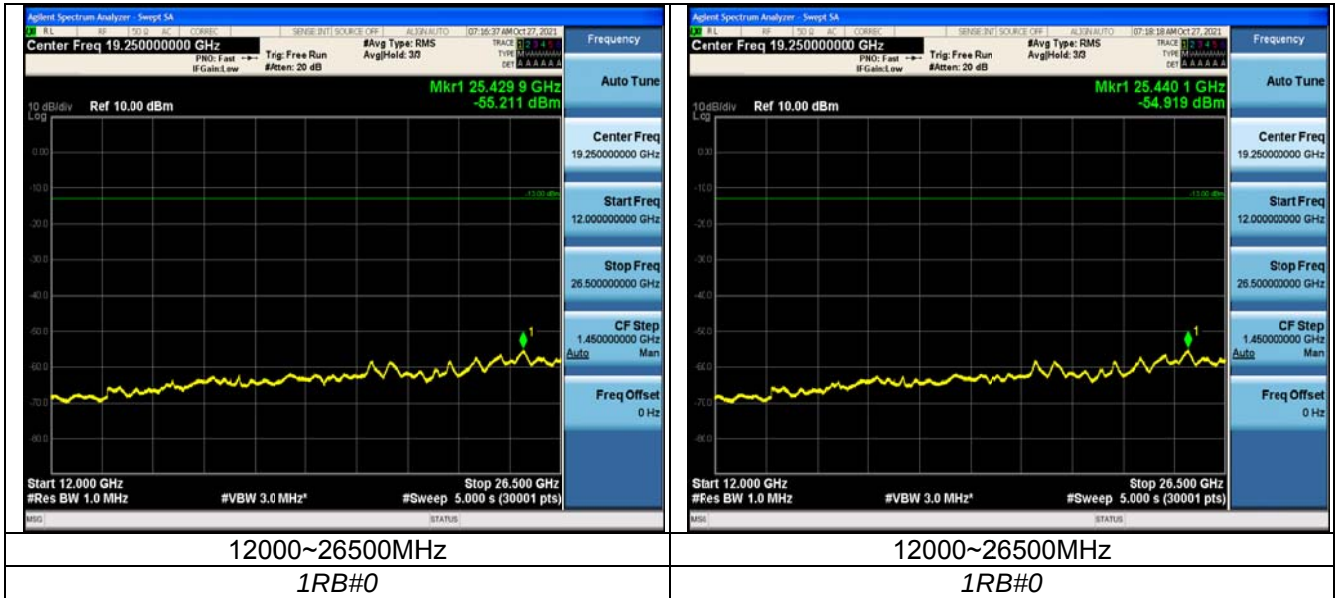


LTE Band 13-5MHz Channel Bandwidth
Middle Channel

QPSK

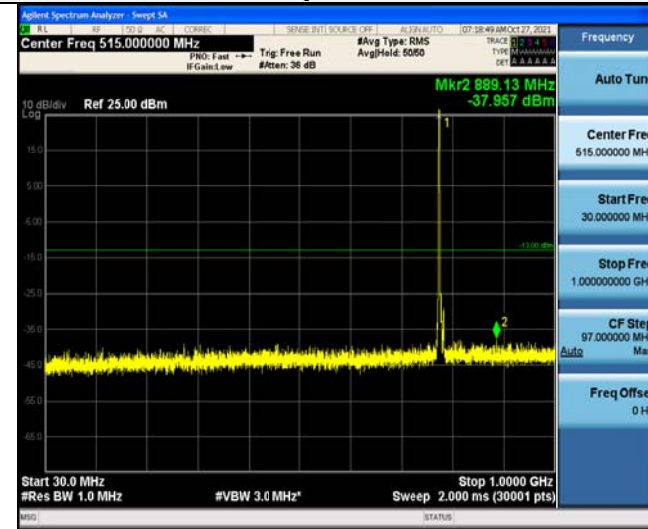

16QAM

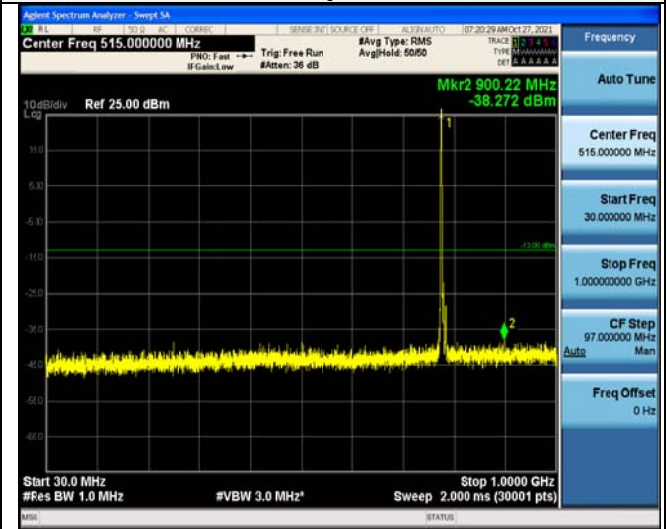

30MHz~1GHz



30MHz~1GHz



1000~5000MHz



1000~5000MHz



5000~12000MHz

5000~12000MHz






12000~26500MHz
1RB#0



12000~26500MHz
1RB#0


LTE Band 13-5MHz Channel Bandwidth
High Channel

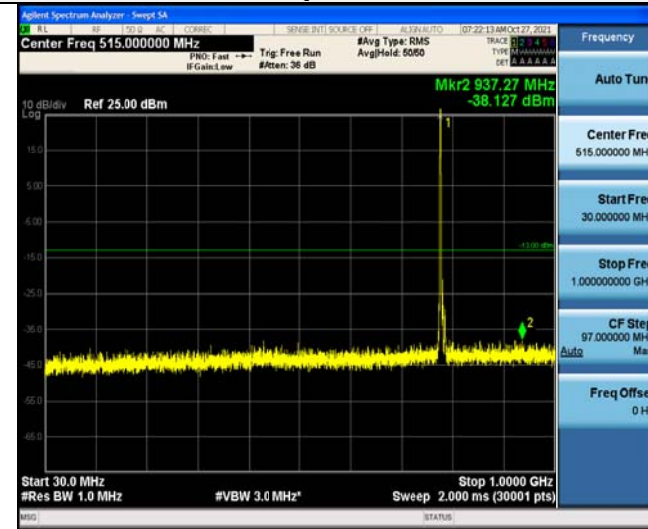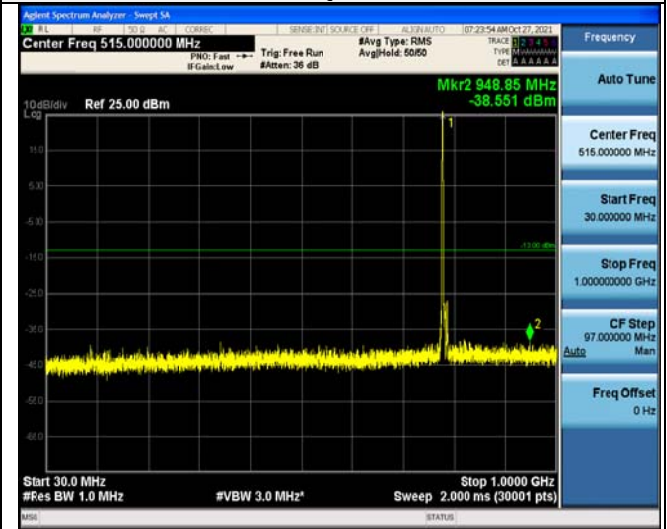QPSK**16QAM****30~1000MHz****10MHz~3GHz****1000~5000MHz****1000~5000MHz****5000~12000MHz****5000~12000MHz**

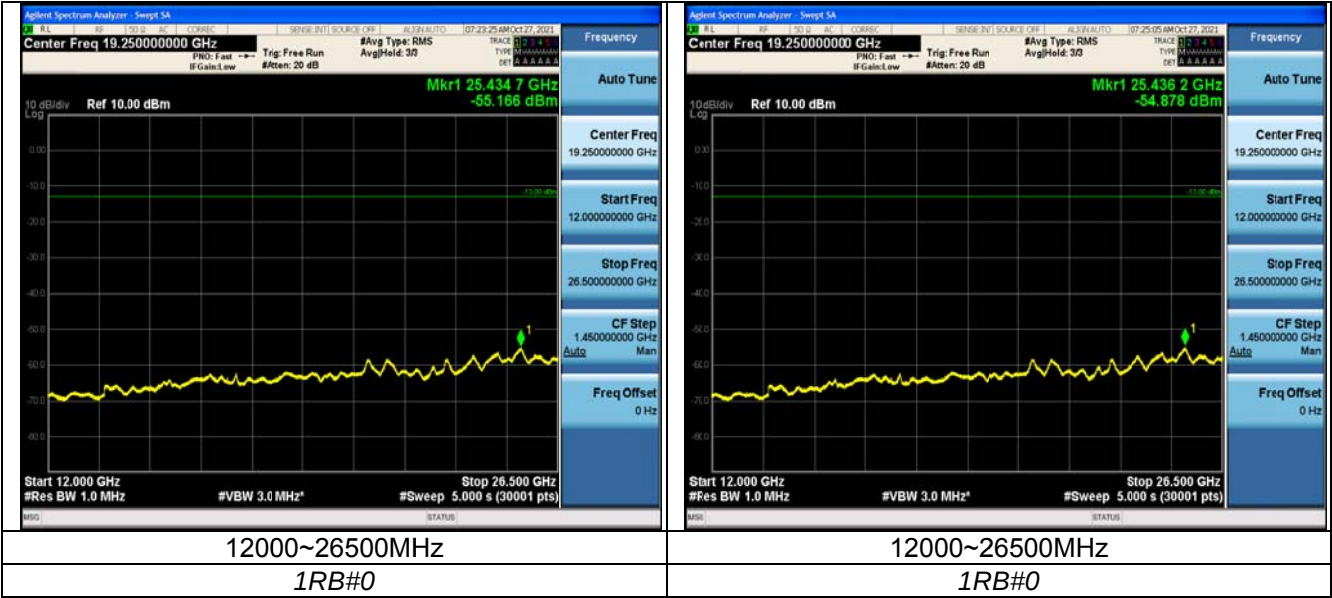


LTE Band 13-10MHz Channel Bandwidth

QPSK

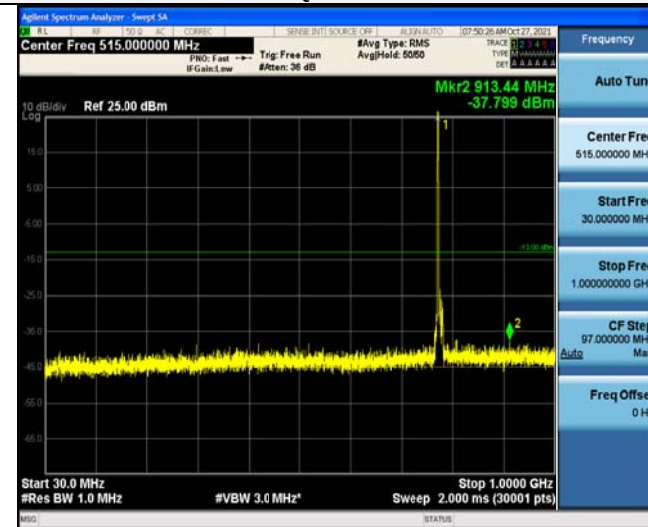

16QAM

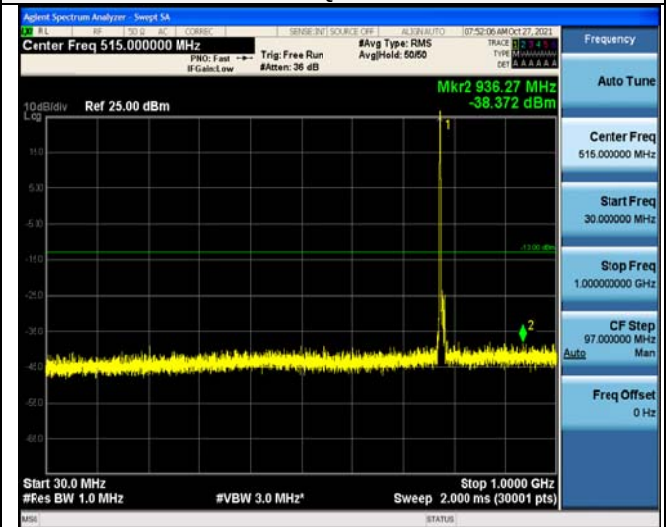

30~1000MHz



30~1000MHz



1000~5000MHz




1000~5000MHz



5000~12000MHz

5000~12000MHz

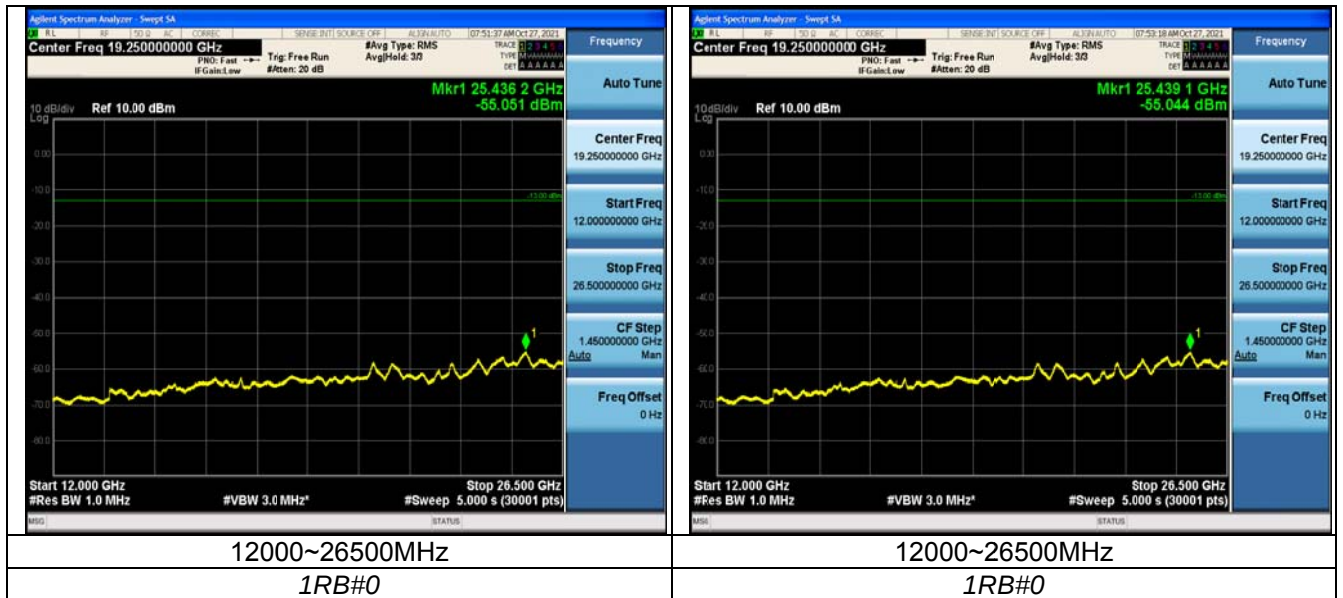

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 13; recorded worst case for each Channel Bandwidth of LTE FDD Band 13.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4. $Margin = Limit - EIRP$

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 13; recorded worst case for each Channel Bandwidth of LTE FDD Band 13.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4. $Margin = Limit - EIRP$

LTE FDD Band 13_Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1559.0	-54.24	4.02	3	12.21	-46.05	-40.00	6.05	H
2338.5	-47.48	5.11	3	13.26	-39.33	-13.00	26.33	H
1559.0	-58.99	4.02	3	12.21	-50.8	-40.00	10.80	V
2338.5	-54.18	5.11	3	13.26	-46.03	-13.00	33.03	V

LTE FDD Band 13_Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1564.0	-54.16	4.02	3	12.21	-45.97	-40.00	5.97	H
2346.0	-47.69	5.11	3	13.26	-39.54	-13.00	26.54	H
1564.0	-59.27	4.02	3	12.21	-51.08	-40.00	11.08	V
2346.0	-53.9	5.11	3	13.26	-45.75	-13.00	32.75	V

LTE FDD Band 13_Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1569.0	-54.48	4.02	3	12.21	-46.29	-40.00	6.29	H
2353.5	-47.51	5.11	3	13.26	-39.36	-13.00	26.36	H
1569.0	-58.53	4.02	3	12.21	-50.34	-40.00	10.34	V
2353.5	-54.46	5.11	3	13.26	-46.31	-13.00	33.31	V

LTE FDD Band 13_Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1564.0	-54.34	4.02	3	12.21	-46.15	-40.00	6.15	H
2346.0	-47.93	5.11	3	13.26	-39.78	-13.00	26.78	H
1564.0	-58.9	4.02	3	12.21	-50.71	-40.00	10.71	V
2346.0	-54.51	5.11	3	13.26	-46.36	-13.00	33.36	V

LTE FDD Band 13_Channel Bandwidth 5MHz_16QAM_Middle Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1564.0	-54.04	4.02	3	12.21	-45.85	-40.00	5.85	H
2346.0	-47.73	5.11	3	13.26	-39.58	-13.00	26.58	H
1564.0	-58.65	4.02	3	12.21	-50.46	-40.00	10.46	V
2346.0	-53.92	5.11	3	13.26	-45.77	-13.00	32.77	V

LTE FDD Band 13_Channel Bandwidth 5MHz_16QAM_High Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1569.0	-53.92	4.02	3	12.21	-45.73	-40.00	5.73	H
2353.5	-47.61	5.11	3	13.26	-39.46	-13.00	26.46	H
1569.0	-58.65	4.02	3	12.21	-50.46	-40.00	10.46	V
2353.5	-54.51	5.11	3	13.26	-46.36	-13.00	33.36	V

LTE FDD Band 13_Channel Bandwidth 10MHz_16QAM_Middle Channel


Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1564.0	-54.04	4.02	3	12.21	-45.85	-40.00	5.85	H
2346.0	-47.77	5.11	3	13.26	-39.62	-13.00	26.62	H
1564.0	-58.61	4.02	3	12.21	-50.42	-40.00	10.42	V
2346.0	-54.62	5.11	3	13.26	-46.47	-13.00	33.47	V

3.7 Frequency Stability under Temperature & Voltage Variations

LIMIT

According to §27.54, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

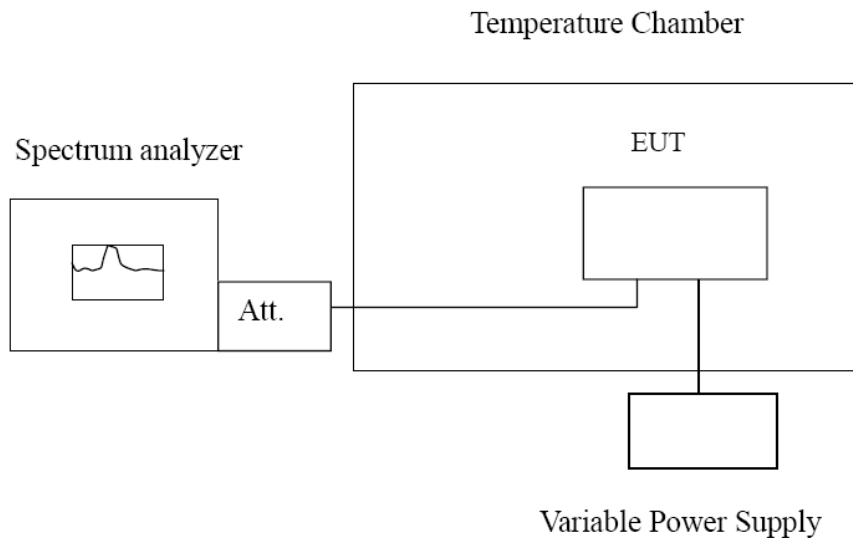

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE Band 13, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 13; recorded worst case.

LTE Band 13, 10MHz bandwidth (worst case of all bandwidths)



Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
10.2	-3.81	-4.05	-0.004888	-0.005196
12	-5.52	-4.75	-0.007081	-0.006094
13.8	-5.01	-5.48	-0.006427	-0.007030

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30°	-3.68	-5.66	-0.004721	-0.007261
-20°	-4.63	-5.29	-0.005940	-0.006786
-10°	-3.38	-4.06	-0.004322	-0.005192
0°	-4.65	-5.39	-0.005946	-0.006893
10°	-4.35	-4.68	-0.005563	-0.005985
20°	-4.26	-5.71	-0.005448	-0.007302
30°	-3.71	-3.10	-0.004744	-0.003964
40°	-2.69	-3.98	-0.003429	-0.005073
50°	-2.56	3.40	-0.003263	0.004334

4 Test Setup Photos of the EUT

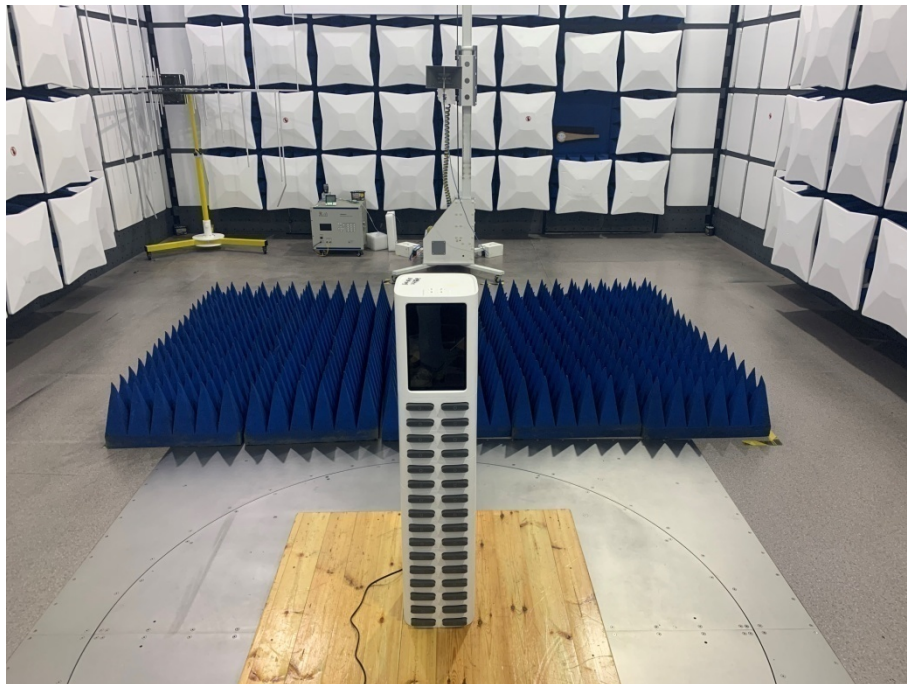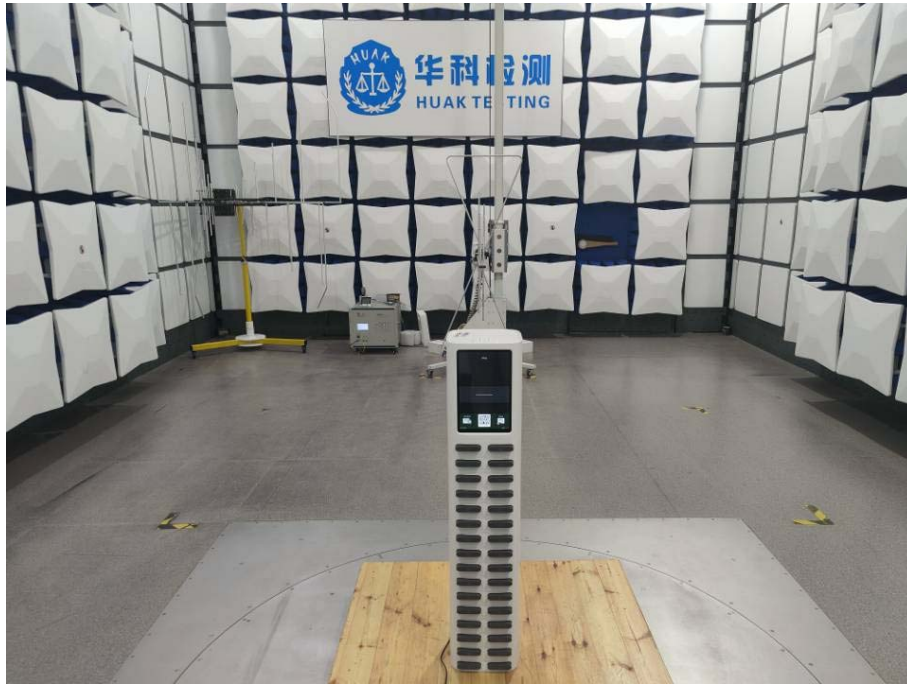

5 PHOTOS OF THE EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos

******* End of Report *******