

# Emitter User Manual


RE715DW

# 01 Product description


---

Package containing:

Emitter\*1, Bracket\*1, User Manual\*1

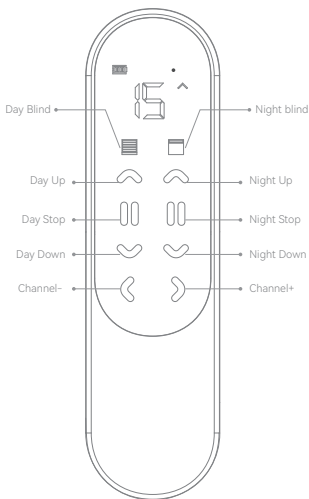

**RE715DW**  
15 Channel Remote  
Frontside

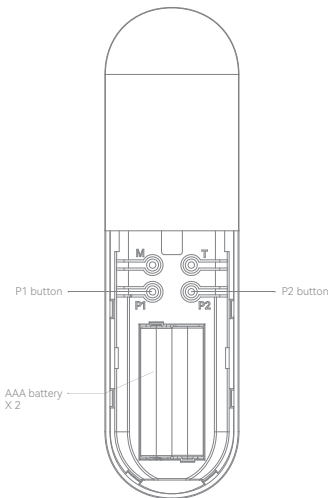

**RE715DW**  
15 Channel Remote  
Backside

## 02 Technical parameters

---

Product name: Wireless emitter

Product model: RE715DW

Product size: 165\*45\*16mm

Input voltage: 3.0V

Transmission distance:

Exterior conditions>100m

Interior conditions>35m

Operating frequency: 433.92MHz

Working temperature: -10°C~55°C

Working humidity: 10%~90%RH, no condensing

## 03 Features

---

- 1.RE715DW: The displayed number is the chosen channel.
2. RE715DW: Channel Lock operation, example: if the remote only needs 4 channels, then lock the 4th channel; the remote will be able to use channels from 0 to 4. Switch the screen number to the 4th channel, press channel + and channel - simultaneously to make the number on the screen flash 3 times, then release to finish the setting. Repeat this operation to cancel the Channel Lock function.
- 3.RE715DW: Channel 0 is group control of all paired motors.

## 04 Operation steps

---

| Keystroke | Time                      | Description                               |
|-----------|---------------------------|-------------------------------------------|
| ▲ + ▼     | Long press 2s             | Enter Setting Mode                        |
| ▲ + ▼     | 1 time                    | Pairing                                   |
| ⏸         | Long press 2s             | Switch direction/<br>setting confirmation |
| ▲ + ⏸     | Long press 2s             | Speed +/Confirm<br>Down Limit             |
| ▼ + ⏸     | Long press 2s             | Speed -/Confirm<br>Up Limit               |
| ◀ + ▶     | Number flashes<br>3 times | Channel Lock                              |

Remarks: Please follow up with motor User manual.

## 05 Warnings and Precautions ⚠

---

1.To prevent shortening the remote's service life, avoid exposing the device to moisture or physical impacts during use. If you notice reduced effective range or decreased sensitivity, replace the battery with the same model type and ensure proper environmentally friendly recycling of used batteries.

2.Never use unauthorized replacement with different battery types, as this may create explosion hazards.

## 06 Warranty coverage

| Type          | Warranty coverage | Warranty |
|---------------|-------------------|----------|
| Entire device | Wireless emitter  | 2 years  |

## 07 Hazardous Substances and Concentrations in the Product

| Part      | Hazardous Substances |    |    |        |      |
|-----------|----------------------|----|----|--------|------|
|           | Pb                   | Hg | Cd | Cr(VI) | PBDE |
| Enclosure | ○                    | ○  | ○  | ○      | ○    |
| PCB parts | ×                    | ○  | ○  | ○      | ○    |

This table is prepared in accordance with SJ/T 11364

○ : Indicates that the concentration of the hazardous substance in all homogeneous materials of this component is below the threshold limits specified in GB/T 26572.

× : Indicates that the hazardous substance exceeds the threshold limits specified in GB/T 26572 in at least one homogeneous material of this component.

## 08 FCC Warning

---

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular

installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement.

## 09 IC Warning

---

This device contains licence-exempt transmitter (s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux normes CNR exemptes de licence d'Innovation, Sciences et Développement économique Canada. Son fonctionnement est assujéti aux deux conditions suivantes :

- (1) Cet appareil ne doit pas causer d'interférences.
- (2) Cet appareil doit accepter toute interférence, y compris celles qui peuvent entra?ner un fonctionnement indésirable de l'appareil.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

L'appareil a été évalué pour répondre aux exigences générales d'exposition aux RF. L'appareil peut être utilisé sans restriction dans des conditions d'exposition portables.

FCC ID: 2A3UM-RE715DW  
IC: 30162-RE715DW