



01 Product description

Package containing:

Emitter*1, Bracket*1, User Manual*1

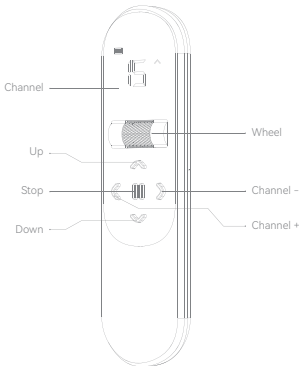

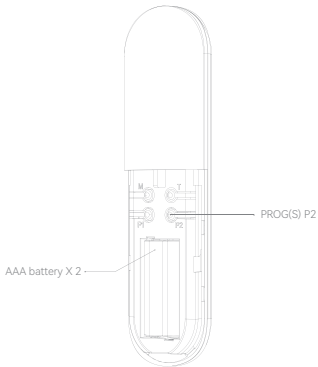

Backside



RE701/RE701W
Single-Channel emitter




RE702/RE702W
2 Channel emitter



RE706/RE706W
6 Channel emitter



RE715/RE715W
15 Channel emitter



RE715R/RE715RW
15 Channel emitter with Wheel

02 Technical parameters

Product name: Wireless emitter

Product model: RE701, RE702, RE706, RE715, RE715R
RE701W, RE702W, RE706W, RE715W, RE715RW

Product size: 144*37.5*15mm

Input voltage: 3.0V

Transmission distance: Exterior conditions > 100m

Interior conditions > 35m

Operating frequency: 433.92MHz

Working temperature: -10°C~55°C

Working humidity: 10%~90%RH, no condensing

03 Features

1.RE706,RE706W,RE715, RE715R,RE715W,RE715RW:

The displayed number is the chosen channel.

2.RE706,RE706W,RE715, RE715R,RE715W,RE715RW:

LCD Version

Channel Lock operation (example:if the emitter only needs 4 channels, then lock the 4th channel, the emitter will be able to use channels from 0 to 4): Switch the screen number to 4th channel, press + and - simultaneously to let the number on the screen flashes 3 times, then release to finish the setting. Repeating this operation is for canceling the Channel Lock function.

3.RE706,RE706W,RE715, RE715R,RE715W,RE715RW: 0
channel is group control of all paired motors.

4.RE715R,RE715RW Wheel: Short rolling the wheel, the motor rotates inchingly. Fast rolling 3 times enter % control, screen shows 50% then roll the wheel to adjust %, motor will rotate accordingly after % confirmed.

04 Operation steps

Keystroke	Time	Description
 + 	Long press 2s	Feature settings
 + 	1 time	Pairing
	Long press 2s	Switch direction/ setting confirmation
 + 	Long press 2s	Speed +
 + 	Long press 2s	Speed -
	Short rolling	Tilting move
	Fast rolling 3 times	Enter % control mode

Remarks: Please follow up with motor User manual.

05 Warnings and Precautions

1. To prevent shortening the emitter's service life, avoid exposing the device to moisture or physical impacts during use. If you notice reduced effective range or decreased sensitivity, replace the battery with the same model type and ensure proper environmentally friendly recycling of used batteries.

2. Never use unauthorized replacement with different battery types, as this may create explosion hazards.

06 Warranty coverage

Type	Warranty coverage	Warranty
Entire device	Wireless emitter	2 years

07 Hazardous Substances and Concentrations in the Product

Part	Hazardous Substances				
	Pb	Hg	Cd	Cr(VI)	PBDE
Enclosure	○	○	○	○	○
PCB parts	×	○	○	○	○

This table is prepared in accordance with SJ/T 11364

- : Indicates that the concentration of the hazardous substance in all homogeneous materials of this component is below the threshold limits specified in GB/T 26572.
- × : Indicates that the hazardous substance exceeds the threshold limits specified in GB/T 26572 in at least one homogeneous material of this component.

08 FCC Statement

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note : This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates,uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a

particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment .

09 ISED Statement

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.

Le présent appareil est conforme aux CNR d'ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout

brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement. L'appareil a été évalué comme répondant aux exigences générales d'exposition aux radiofréquences. L'appareil peut être utilisé dans des conditions d'exposition portable sans restriction.