

NOTES: UNLESS OTHERWISE SPECIFIED

PURCHASED LABEL

1. PRINT PER LABEL CONTENT SHOWN.

2 PRINTING SPECIFICATION:

INK COLOR - BLACK
BACKGROUND - WHITE
MATERIAL - 2mil POLYESTER with 1 mil CLEAR OVERCOAT
ADHESIVE - 1.8 mil #350 ACRYLIC

LABEL SIZE - 2.0 x 1.0 ± .02

CORNER RADIUS - .05 ± .02
ROLL SIZE - 500, MAX

3 INNER DIE CUT: 1.25 x 0.5 ± .02

4. DIE CUT TO LINER.
PERFORATING LINER BETWEEN LABELS IS OPTIONAL.
PART NUMBER TO BE PRINTED ON THE WASTE MATRIX.


5. LABEL MUST CONFORM TO UL 969 AND SHALL
BE UL APPROVED MATERIAL WITH SUPPLIER
NAME AND LABEL NAME OR DESIGNATION ON
INSIDE OF ROLL CORE.

6. LABEL MUST BE PROCURED FROM UL AUTHORIZED
SUPPLIER.

7. REFERENCE S14913.

8. THIS PART IS A U.L. CRITICAL PART. ANY CHANGES TO THIS
PART MUST BE APPROVED BY EMC/SAFETY GROUP.

9. THIS PART/ASSEMBLY SHALL BE COMPLIANT PER THE
LATEST REVISION OF ABBOTT SPECIFICATION S205053.

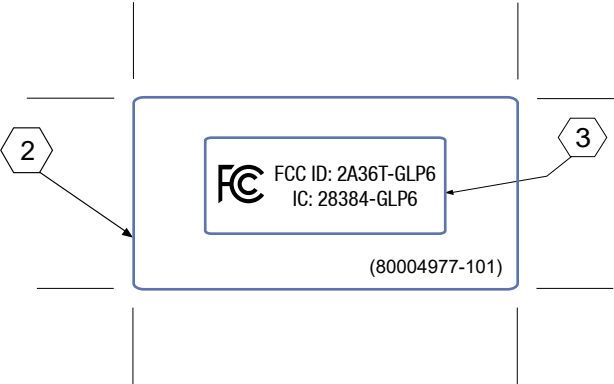

CONFIDENTIAL INFORMATION

CONTAINS TRADE SECRET AND/OR CONFIDENTIAL INFORMATION
WHICH IS THE PROPERTY OF ABBOTT LABORATORIES. AS PROVIDED
BY 21CFR 20.61. DO NOT DISCLOSE TO THE PUBLIC.

UNLESS OTHERWISE SPECIFIED:	DWN BY: S. Goldston	DATE: 07/14/22			ABBOTT DIAGNOSTIC DIVISION ABBOTT LABORATORIES 1921 HURD DRIVE IRVING, TEXAS 75038, USA		
	MATERIAL: 2		TITLE: LABEL, GLP6 FCC - IC ID				
DIMENSIONS IN INCHES TOLERANCES .XX ± .02 .XXX ± .010 ANGULAR ± 2° 63 ✓ THREADS CLASS 2A OR 2B REMOVE BURRS AND SHARP EDGES .02 MAX.	APPLIED FINISH: None		SCALE 1/1	SIZE B	DWG NO. 80004977-101	REV. A	
				DO NOT SCALE DRAWING		SHEET 1 OF 1	

1	2	3	4																																																																										
A			A																																																																										
B			B																																																																										
C			C																																																																										
D			D																																																																										
E	Fonts: 1) Calibri 8 normal 2) Calibri 7 normal *: Deviating dimensions require the consent of Abbott / *: Abweichende Maße bedürfen der Zustimmung durch Abbott Material requirements: self-adhesive, abrasion-proof, temperature-resistant from -20 to +80°C / Materialanforderungen: Selbstklebend, abriebfest und temperaturbeständig von -20 bis +80°C		E																																																																										
F	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td rowspan="2" style="width: 15%; text-align: center;"> </td> <td style="width: 15%;">General tolerances</td> <td style="width: 15%;">Surface finish</td> <td style="width: 20%;">Scale 1:1</td> <td colspan="2" style="width: 35%;">Weight: 0.00 g</td> </tr> <tr> <td>DIN ISO 2768 - mK</td> <td>DIN ISO 1302</td> <td>Material</td> <td>Sale No. 12553</td> <td>Revision B</td> </tr> <tr> <td></td> <td></td> <td>Date</td> <td>Signature</td> <td colspan="2" rowspan="5" style="text-align: center; vertical-align: middle;"> Component Label ChargeLane m </td> </tr> <tr> <td></td> <td>Cre. Part</td> <td>05.11.2020</td> <td>she</td> </tr> <tr> <td></td> <td>Cre. Drw.</td> <td>05.11.2020</td> <td>she</td> </tr> <tr> <td></td> <td>Appv'd</td> <td>26.04.2022</td> <td>rem</td> </tr> <tr> <td></td> <td>Standard</td> <td></td> <td></td> </tr> <tr> <td></td> <td colspan="3" rowspan="2" style="text-align: center;"> Abbott Sachsenkamp 5, 20097 Hamburg </td> <td colspan="2" style="text-align: center;">Article No.</td> <td style="text-align: center;">Sheet</td> </tr> <tr> <td></td> <td colspan="2" style="text-align: center;">20036667</td> <td colspan="2" style="text-align: center;">1 / 1</td> </tr> <tr> <td></td> <td>B</td> <td>AAS Rev. updated</td> <td>24.02.2022</td> <td>kiw</td> <td colspan="2" style="text-align: center;">A4</td> </tr> <tr> <td></td> <td>Rev.</td> <td>Change</td> <td>Date</td> <td>Name</td> <td colspan="2">Refer to protection notice ISO 16016</td> </tr> <tr> <td></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">Replacement for:</td> </tr> <tr> <td></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">Replaced by:</td> </tr> </table>				General tolerances	Surface finish	Scale 1:1	Weight: 0.00 g		DIN ISO 2768 - mK	DIN ISO 1302	Material	Sale No. 12553	Revision B			Date	Signature	Component Label ChargeLane m			Cre. Part	05.11.2020	she		Cre. Drw.	05.11.2020	she		Appv'd	26.04.2022	rem		Standard				Abbott Sachsenkamp 5, 20097 Hamburg			Article No.		Sheet		20036667		1 / 1			B	AAS Rev. updated	24.02.2022	kiw	A4			Rev.	Change	Date	Name	Refer to protection notice ISO 16016							Replacement for:							Replaced by:		F
	General tolerances	Surface finish	Scale 1:1		Weight: 0.00 g																																																																								
	DIN ISO 2768 - mK	DIN ISO 1302	Material	Sale No. 12553	Revision B																																																																								
		Date	Signature	Component Label ChargeLane m																																																																									
	Cre. Part	05.11.2020	she																																																																										
	Cre. Drw.	05.11.2020	she																																																																										
	Appv'd	26.04.2022	rem																																																																										
	Standard																																																																												
	Abbott Sachsenkamp 5, 20097 Hamburg			Article No.		Sheet																																																																							
				20036667		1 / 1																																																																							
	B	AAS Rev. updated	24.02.2022	kiw	A4																																																																								
	Rev.	Change	Date	Name	Refer to protection notice ISO 16016																																																																								
					Replacement for:																																																																								
					Replaced by:																																																																								
1	2	3	4																																																																										

Component Label

FCC/IC Label Location (Permanent acrylic adhesive)

