

NOTES: UNLESS OTHERWISE SPECIFIED

PURCHASED LABEL

1. PRINT PER LABEL CONTENT SHOWN.

2 PRINTING SPECIFICATION:

INK COLOR - BLACK
BACKGROUND - WHITE
MATERIAL - 2mil POLYESTER with 1 mil CLEAR OVERCOAT
ADHESIVE - 1.8 mil #350 ACRYLIC

LABEL SIZE - 2.0 x 1.0 ± .02

CORNER RADIUS - .05 ± .02
ROLL SIZE - 500, MAX

3 INNER DIE CUT: 1.25 x 0.5 ± .02

4. DIE CUT TO LINER.
PERFORATING LINER BETWEEN LABELS IS OPTIONAL.
PART NUMBER TO BE PRINTED ON THE WASTE MATRIX.


5. LABEL MUST CONFORM TO UL 969 AND SHALL
BE UL APPROVED MATERIAL WITH SUPPLIER
NAME AND LABEL NAME OR DESIGNATION ON
INSIDE OF ROLL CORE.

6. LABEL MUST BE PROCURED FROM UL AUTHORIZED
SUPPLIER.

7. REFERENCE S14913.

8. THIS PART IS A U.L. CRITICAL PART. ANY CHANGES TO THIS
PART MUST BE APPROVED BY EMC/SAFETY GROUP.

9. THIS PART/ASSEMBLY SHALL BE COMPLIANT PER THE
LATEST REVISION OF ABBOTT SPECIFICATION S205053.

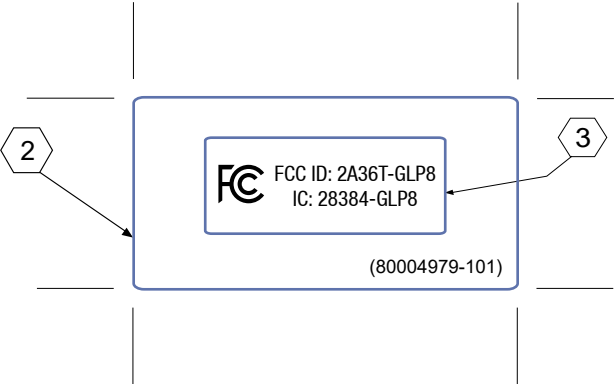

CONFIDENTIAL INFORMATION

CONTAINS TRADE SECRET AND/OR CONFIDENTIAL INFORMATION
WHICH IS THE PROPERTY OF ABBOTT LABORATORIES. AS PROVIDED
BY 21CFR 20.61. DO NOT DISCLOSE TO THE PUBLIC.

UNLESS OTHERWISE SPECIFIED:	DWN BY: S. Goldston	DATE: 07/14/22	 ABBOTT DIAGNOSTIC DIVISION ABBOTT LABORATORIES 1921 HURD DRIVE IRVING, TEXAS 75038, USA				
	MATERIAL: 2		TITLE: LABEL, GLP8 FCC - IC ID				
DIMENSIONS IN INCHES TOLERANCES .XX ± .02 .XXX ± .010 ANGULAR ± 2° 63 ✓ THREADS CLASS 2A OR 2B REMOVE BURRS AND SHARP EDGES .02 MAX.	APPLIED FINISH: None						SCALE 1/1
			DO NOT SCALE DRAWING		SHEET 1 OF 1		



FCC/IC Label
Location
(Permanent
Acrylic Adhesive)