

NOTES: UNLESS OTHERWISE SPECIFIED

PURCHASED LABEL

1. PRINT PER LABEL CONTENT SHOWN.

2 PRINTING SPECIFICATION:

- INK COLOR -

BACKGROUND -

MATERIAL -

ADHESIVE -
- BLACK

WHITE

2mil POLYESTER with 1 mil CLEAR OVERCOAT

1.8 mil #350 ACRYLIC
- LABEL SIZE -

CORNER RADIUS -

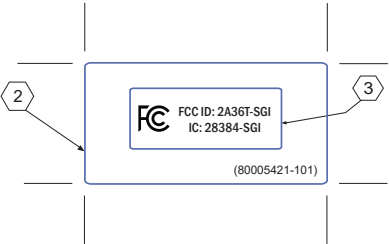
ROLL SIZE -
- 2.0 x 1.0 ± .02

.05 ± .02

500, MAX

3 INNER DIE CUT: 1.25 x 0.5 ± .02

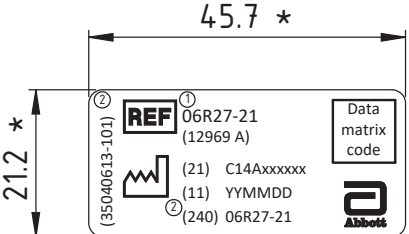



4. DIE CUT TO LINER.
PERFORATE LINER BETWEEN LABELS.
PART NUMBER TO BE PRINTED ON THE WASTE MATRIX.
5. LABEL MUST CONFORM TO UL 969 AND CSA 22.2 NO. 0.15-95 AND SHALL BE UL APPROVED MATERIAL, WITH SUPPLIER NAME AND LABEL NAME OR DESIGNATION ON INSIDE OF ROLL CORE.
6. LABEL MUST BE PROCURED FROM UL AUTHORIZED SUPPLIER.
7. REFERENCE S14913.
8. THIS PART IS A U.L. CRITICAL PART. ANY CHANGES TO THIS PART MUST BE REVIEWED BY EMC/SAFETY GROUP. LABEL TO BE U.L. RECOGNIZED COMPONENT CATEGORY PGDQ2/PGDQ8. EMC/SAFETY GROUP MUST REVIEW ALL SUPPLIERS.
9. THIS PART/ASSEMBLY SHALL BE COMPLIANT PER THE LATEST REVISION OF ABBOTT SPECIFICATION S205053.



CONFIDENTIAL INFORMATION

CONTAINS TRADE SECRET AND/OR CONFIDENTIAL INFORMATION
WHICH IS THE PROPERTY OF ABBOTT LABORATORIES. AS PROVIDED
BY 21CFR 20.61. DO NOT DISCLOSE TO THE PUBLIC.

UNLESS OTHERWISE SPECIFIED:	DWN BY: S. Goldston	DATE: 01/06/26	 ABBOTT DIAGNOSTIC DIVISION ABBOTT LABORATORIES 1921 HURD DRIVE IRVING, TEXAS 75038, USA		
	MATERIAL: 2				
DIMENSIONS IN INCHES TOLERANCES .XX ± .02 .XXX ± .010	ANGULAR ± 2° 63		TITLE: LABEL, SGI FCC - IC ID		
	THREADS CLASS 2A OR 2B REMOVE BURRS AND SHARP EDGES .02 MAX.	APPLIED FINISH: None			
SCALE 1/1		SIZE B	DWG NO. 80005421-101	REV. A	
DO NOT SCALE DRAWING			SHEET 1 OF 1		

1	2	3	4																																							
A			A																																							
B			B																																							
C			C																																							
D	Fonts: 1) Calibri 8 normal 2) Calibri 7 normal		D																																							
E	THIS PART/ASSEMBLY SHALL BE ROHS COMPLIANT PER THE LATEST REVISION OF ABBOTT SPECIFICATION S205053. / DIESES TEIL / DIESE BAUGRUPPE MUSS ROHS-KONFORM SEIN, GEMÄß DER LETZTEN REVISION DER ABBOTT-SPEZIFIKATION S205053. *: Deviating dimensions require the consent of Abbott / *: Abweichende Maße bedürfen der Zustimmung durch Abbott Material requirements: Self-adhesive, abrasion-proof and temperature-resistant from -20 to +80°C. Does not contain natural rubber latex/ dry natural rubber. / Materialanforderungen: Selbstklebend, abriebfest und temperaturbeständig von -20 bis +80°C. Enthält kein Naturlatex/ keinen trockenen Naturkautschuk.		E																																							
F	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td rowspan="2" style="text-align: center; vertical-align: middle;">  </td> <td style="text-align: center;">General tolerances</td> <td style="text-align: center;">Surface finish</td> <td style="text-align: center;">Scale 1:1</td> <td colspan="2" style="text-align: center;">Weight: 0.00 g</td> </tr> <tr> <td style="text-align: center;">DIN ISO 2768 - mK</td> <td style="text-align: center;">DIN ISO 1302</td> <td style="text-align: center;">Material</td> <td style="text-align: center;">Sale No. 12969</td> <td style="text-align: center;">Revision A</td> </tr> <tr> <td style="text-align: center;">Date</td> <td style="text-align: center;">Signature</td> <td colspan="4" rowspan="5" style="text-align: center; vertical-align: middle;"> Component Label, SGI-SAL AccessPoint </td> </tr> <tr> <td style="text-align: center;">Cre. Part 30.09.2025</td> <td style="text-align: center;">mussojx</td> </tr> <tr> <td style="text-align: center;">Cre. Drw. 30.09.2025</td> <td style="text-align: center;">mussojx</td> </tr> <tr> <td style="text-align: center;">Appv'd</td> <td></td> </tr> <tr> <td style="text-align: center;">Standard</td> <td></td> </tr> <tr> <td colspan="3" style="text-align: center;">  </td> <td colspan="2" style="text-align: center;">Article No. 35040613-101</td> <td style="text-align: center;">Sheet 1 / 1</td> </tr> <tr> <td style="text-align: center;">Rev.</td> <td style="text-align: center;">Change</td> <td style="text-align: center;">Date</td> <td style="text-align: center;">Name</td> <td colspan="2" style="text-align: center;">Refer to protection notice ISO 16016</td> <td style="text-align: center;">Replacement for:</td> <td style="text-align: center;">Replaced by:</td> </tr> </table>			General tolerances	Surface finish	Scale 1:1	Weight: 0.00 g		DIN ISO 2768 - mK	DIN ISO 1302	Material	Sale No. 12969	Revision A	Date	Signature	Component Label, SGI-SAL AccessPoint				Cre. Part 30.09.2025	mussojx	Cre. Drw. 30.09.2025	mussojx	Appv'd		Standard					Article No. 35040613-101		Sheet 1 / 1	Rev.	Change	Date	Name	Refer to protection notice ISO 16016		Replacement for:	Replaced by:	F
	General tolerances	Surface finish		Scale 1:1	Weight: 0.00 g																																					
	DIN ISO 2768 - mK	DIN ISO 1302	Material	Sale No. 12969	Revision A																																					
Date	Signature	Component Label, SGI-SAL AccessPoint																																								
Cre. Part 30.09.2025	mussojx																																									
Cre. Drw. 30.09.2025	mussojx																																									
Appv'd																																										
Standard																																										
			Article No. 35040613-101		Sheet 1 / 1																																					
Rev.	Change	Date	Name	Refer to protection notice ISO 16016		Replacement for:	Replaced by:																																			
1	2	3	4																																							

Component Label
IC HVIN Location

FCC/IC Label Location for
Access Point (Permanent
Acrylic Adhesive)

