



Appendix E

RF Test Data for 5.3GWIFI (Conducted Measurement)

Product Name: Projector

Test Model: N5

Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 23.8°C    |
| Relative Humidity: | 52.1%     |
| ATM Pressure:      | 100.0 kPa |
| Test Engineer:     | Can Kun   |
| Supervised by:     | Nick Peng |





## E.1 -26dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -26 dB Bandwidth (MHz) | Limit -26 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|------------------------|------------------------------|---------|
| NVNT      | a    | 5260            | Ant1    | 28.498                 | ---                          | Pass    |
| NVNT      | a    | 5300            | Ant1    | 25.464                 | ---                          | Pass    |
| NVNT      | a    | 5320            | Ant1    | 25.706                 | ---                          | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 27.282                 | ---                          | Pass    |
| NVNT      | n20  | 5300            | Ant1    | 28.533                 | ---                          | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 26.227                 | ---                          | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 50.057                 | ---                          | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 48.665                 | ---                          | Pass    |
| NVNT      | ac20 | 5260            | Ant1    | 29.235                 | ---                          | Pass    |
| NVNT      | ac20 | 5300            | Ant1    | 29.07                  | ---                          | Pass    |
| NVNT      | ac20 | 5320            | Ant1    | 28.391                 | ---                          | Pass    |
| NVNT      | ac40 | 5270            | Ant1    | 46.873                 | ---                          | Pass    |
| NVNT      | ac40 | 5310            | Ant1    | 49.117                 | ---                          | Pass    |
| NVNT      | ax20 | 5260            | Ant1    | 27.189                 | ---                          | Pass    |
| NVNT      | ax20 | 5300            | Ant1    | 27.919                 | ---                          | Pass    |
| NVNT      | ax20 | 5320            | Ant1    | 28.881                 | ---                          | Pass    |
| NVNT      | ax40 | 5270            | Ant1    | 49.851                 | ---                          | Pass    |
| NVNT      | ax40 | 5310            | Ant1    | 52.577                 | ---                          | Pass    |






## Test Graphs

-26dB Bandwidth NVNT a 5260MHz Ant1

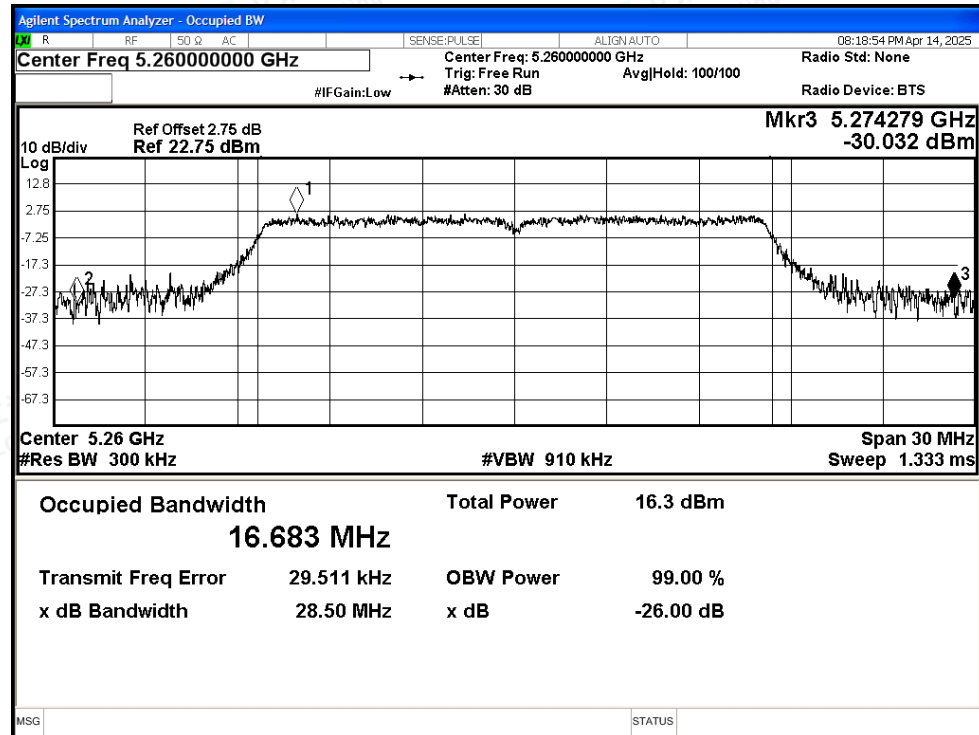

-26dB Bandwidth NVNT a 5300MHz Ant1

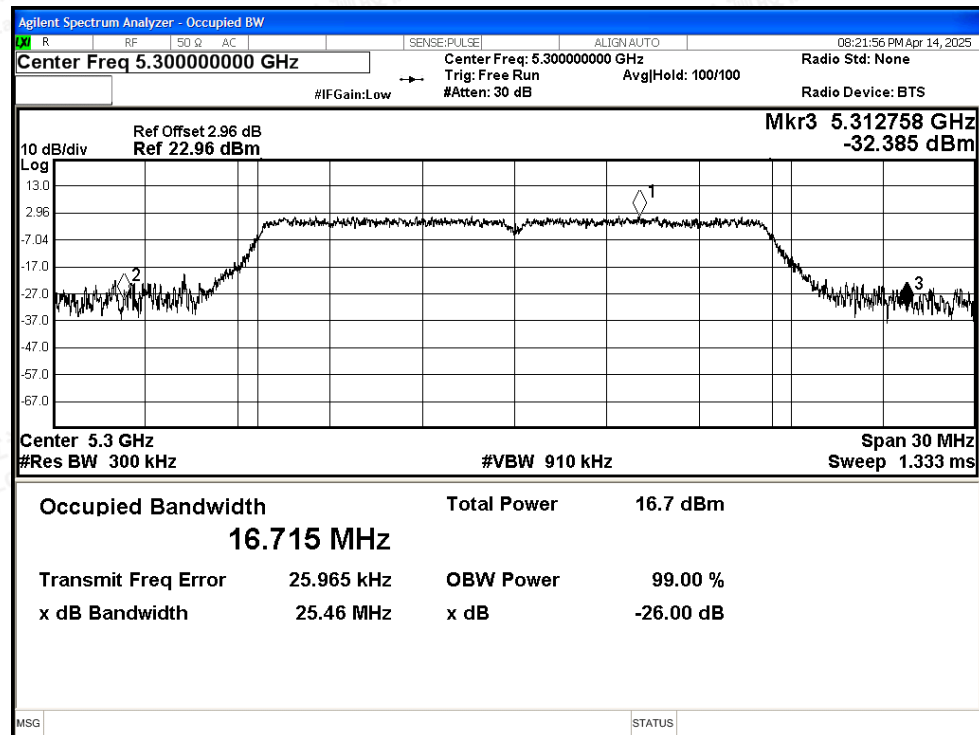

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT a 5320MHz Ant1

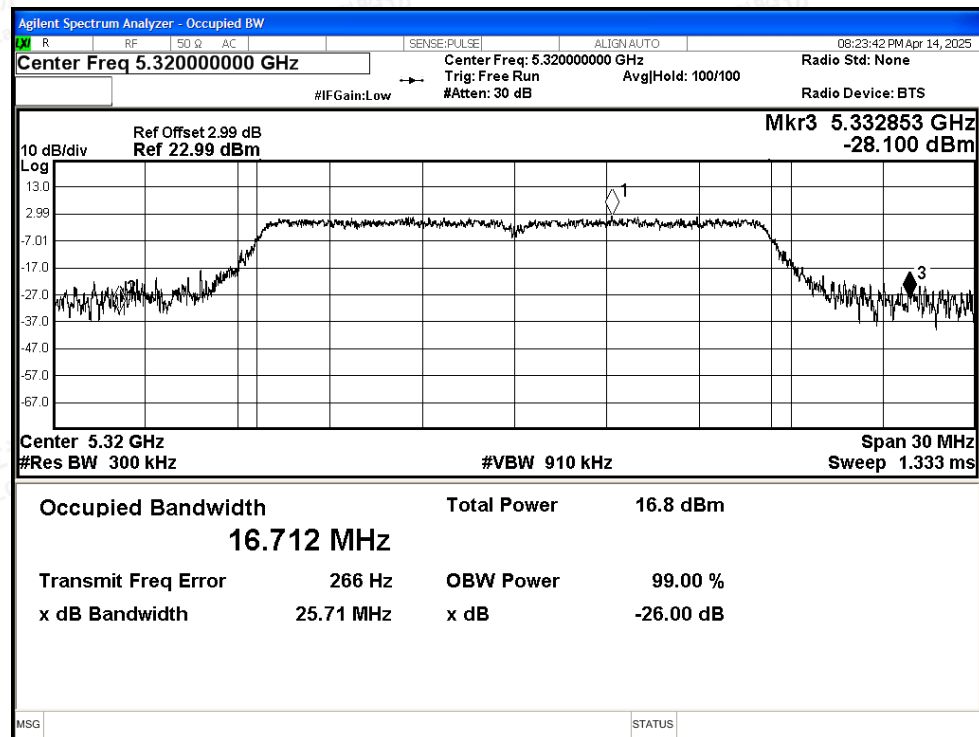

## -26dB Bandwidth NVNT n20 5260MHz Ant1

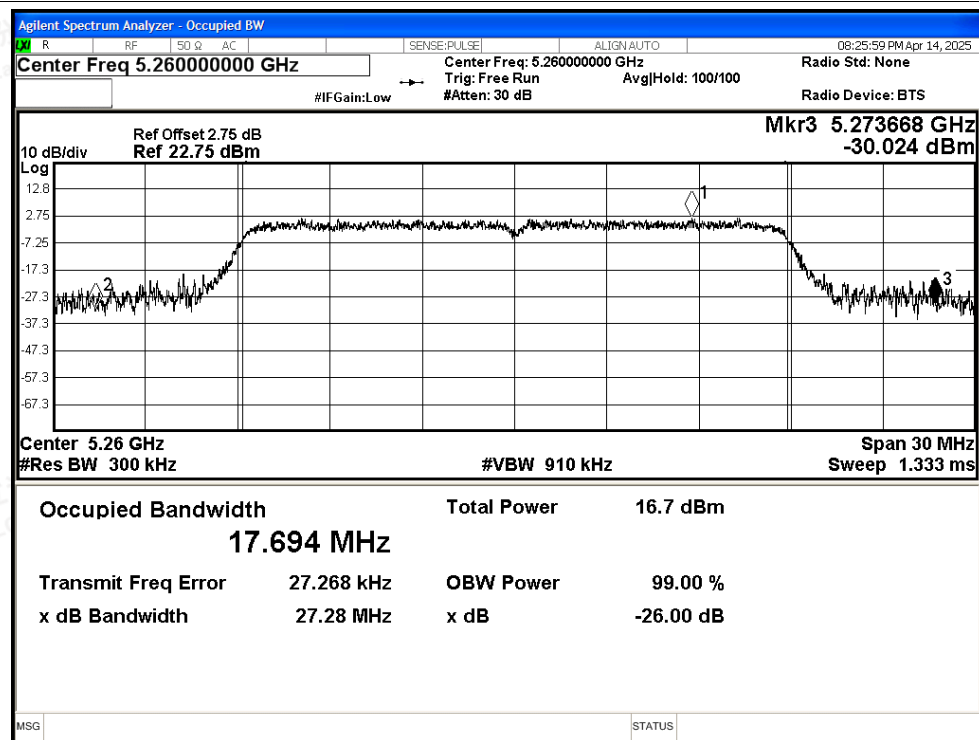

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT n20 5300MHz Ant1

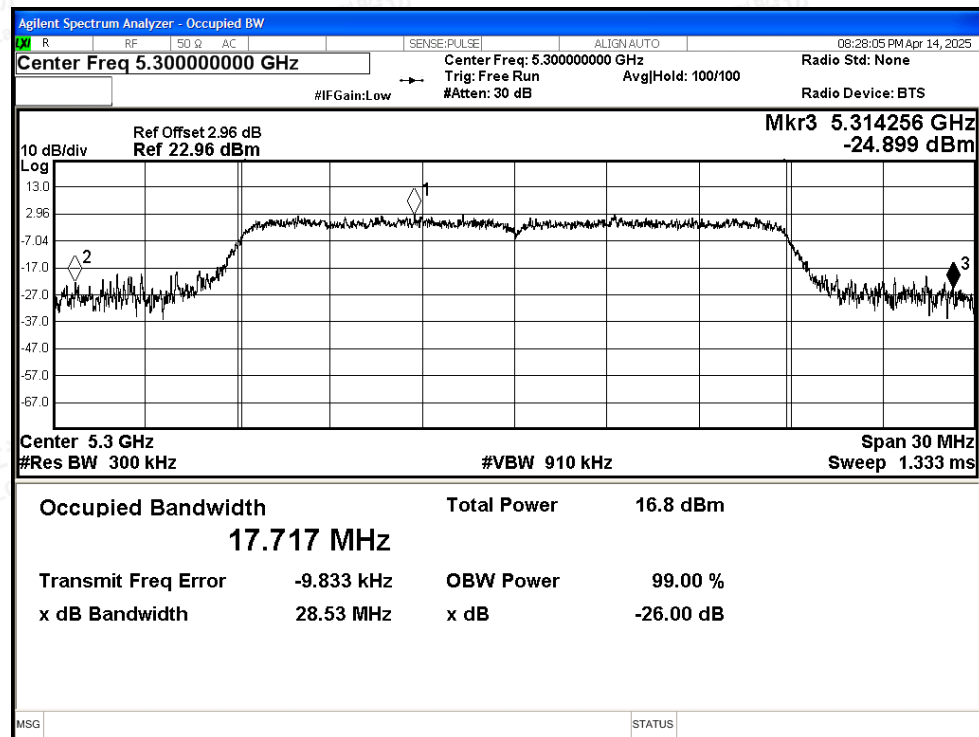

## -26dB Bandwidth NVNT n20 5320MHz Ant1

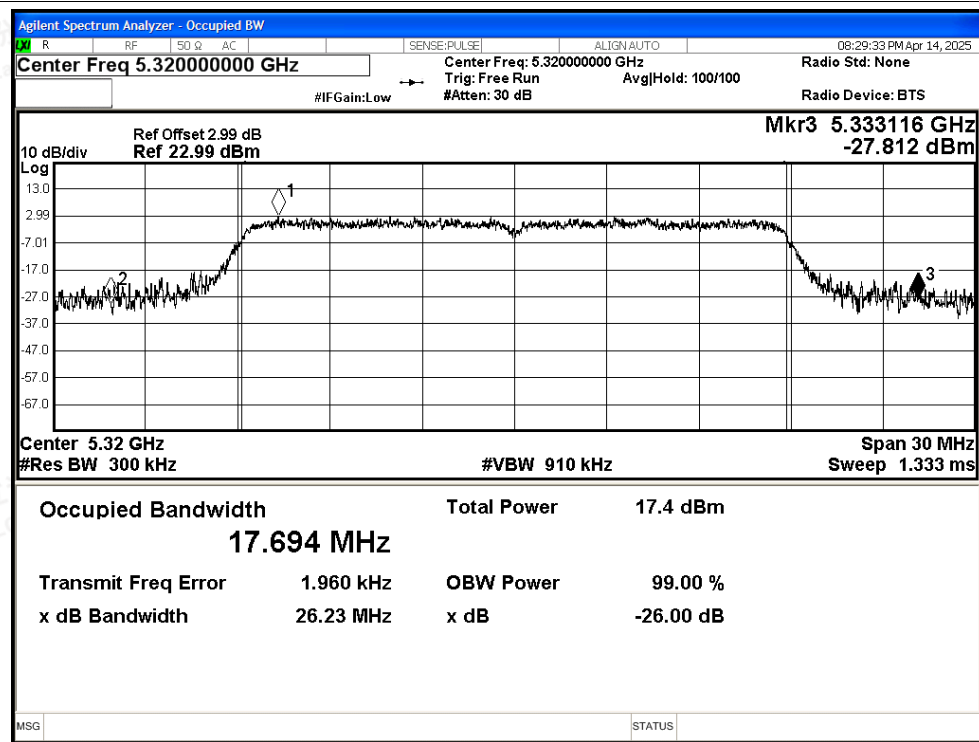

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT n40 5270MHz Ant1

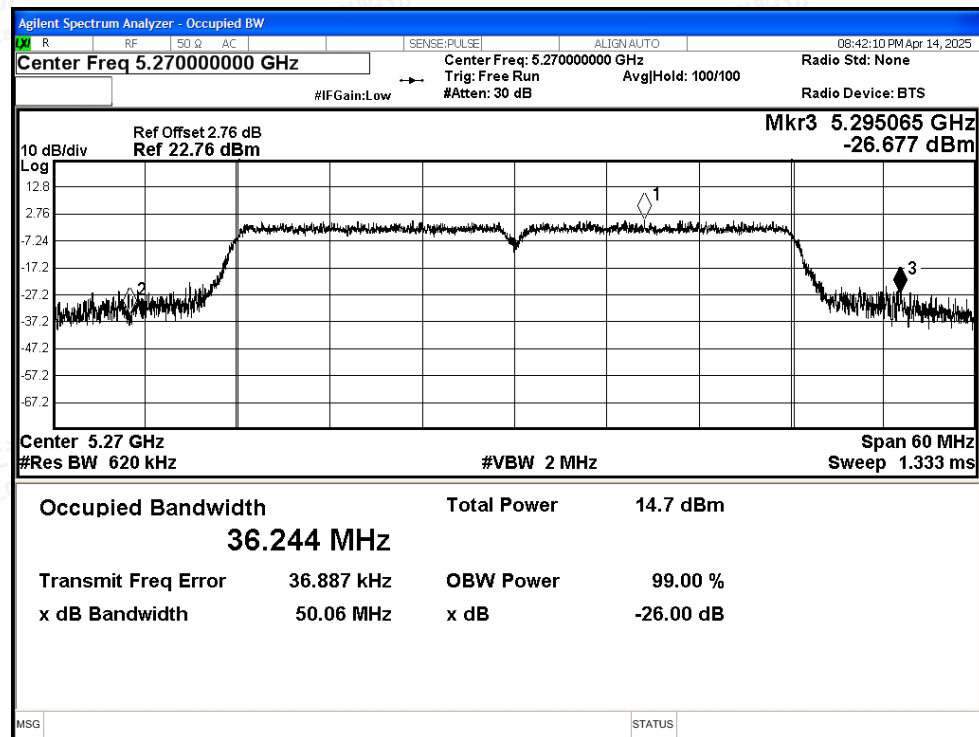

## -26dB Bandwidth NVNT n40 5310MHz Ant1

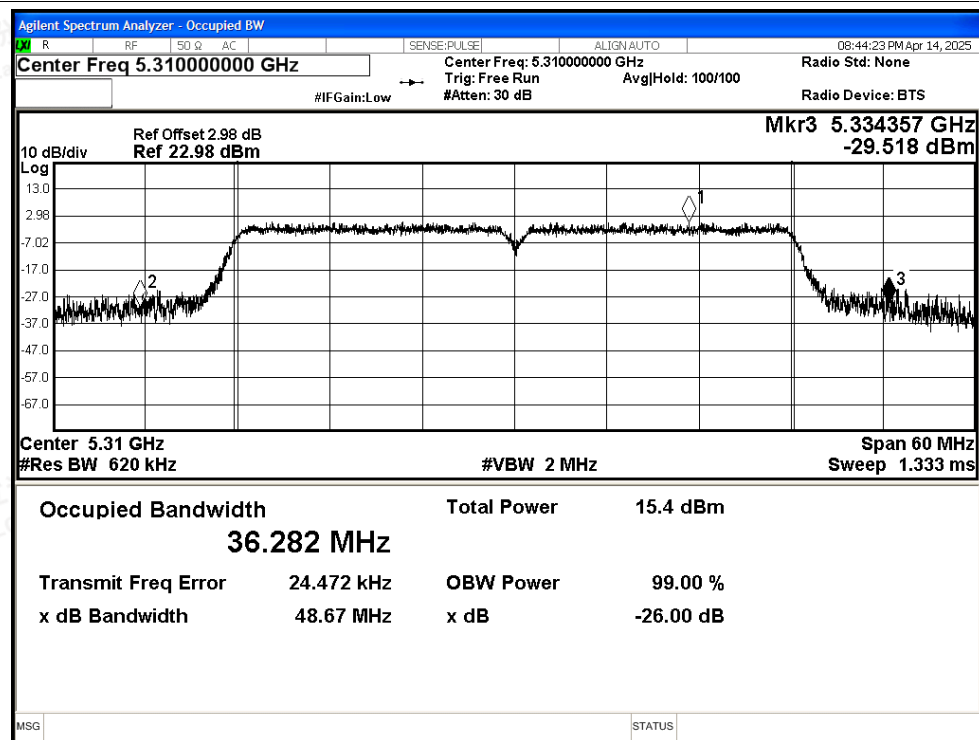

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT ac20 5260MHz Ant1

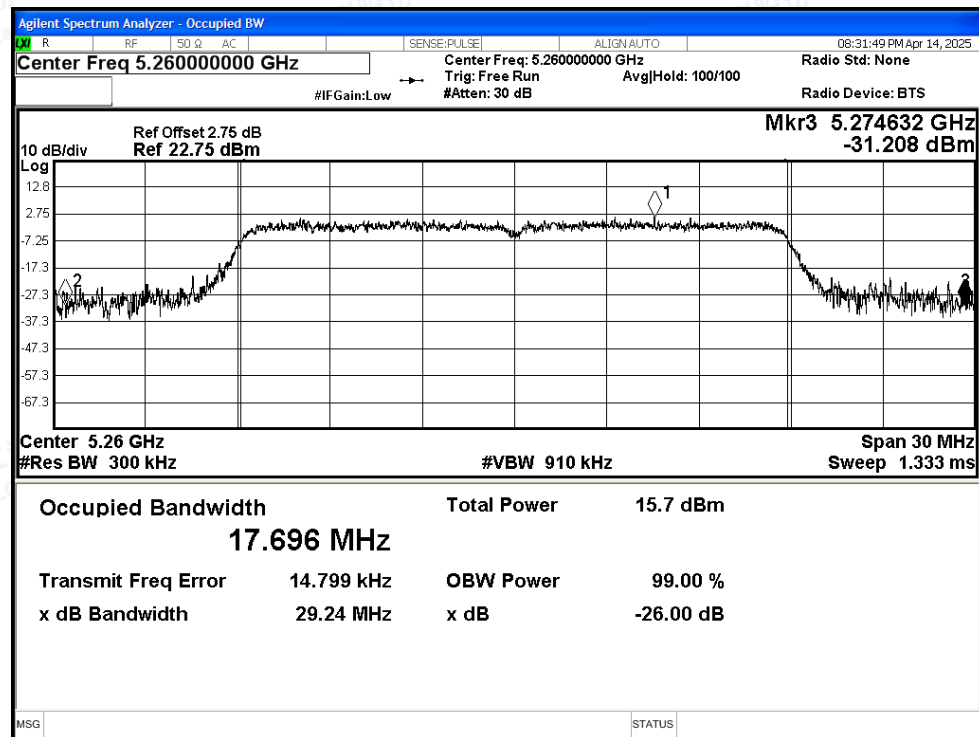

## -26dB Bandwidth NVNT ac20 5300MHz Ant1

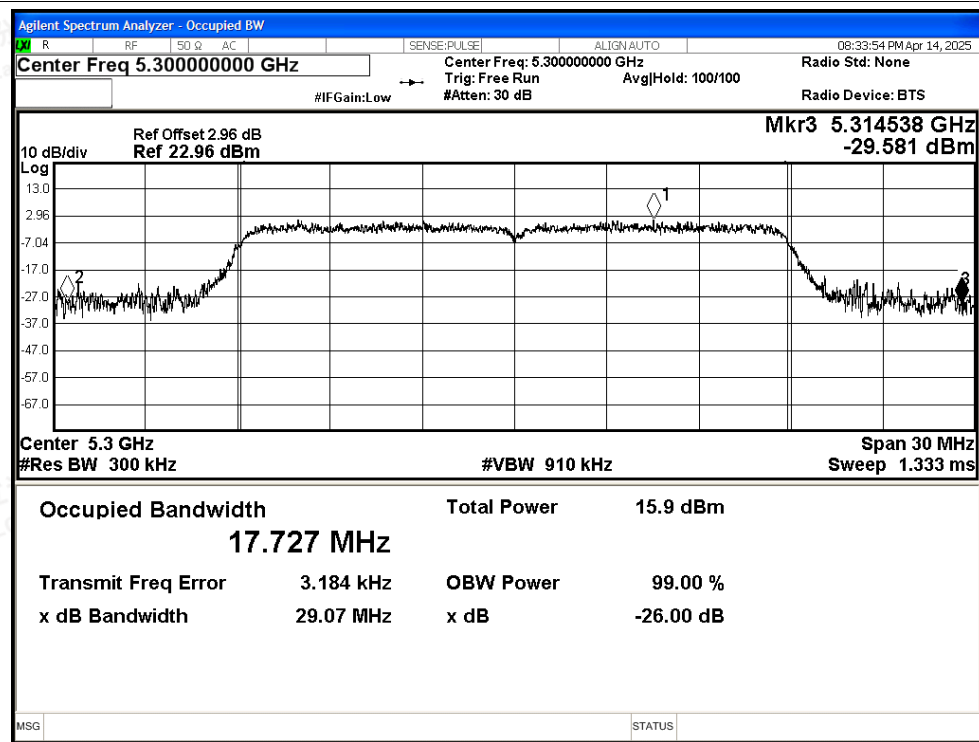

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT ac20 5320MHz Ant1

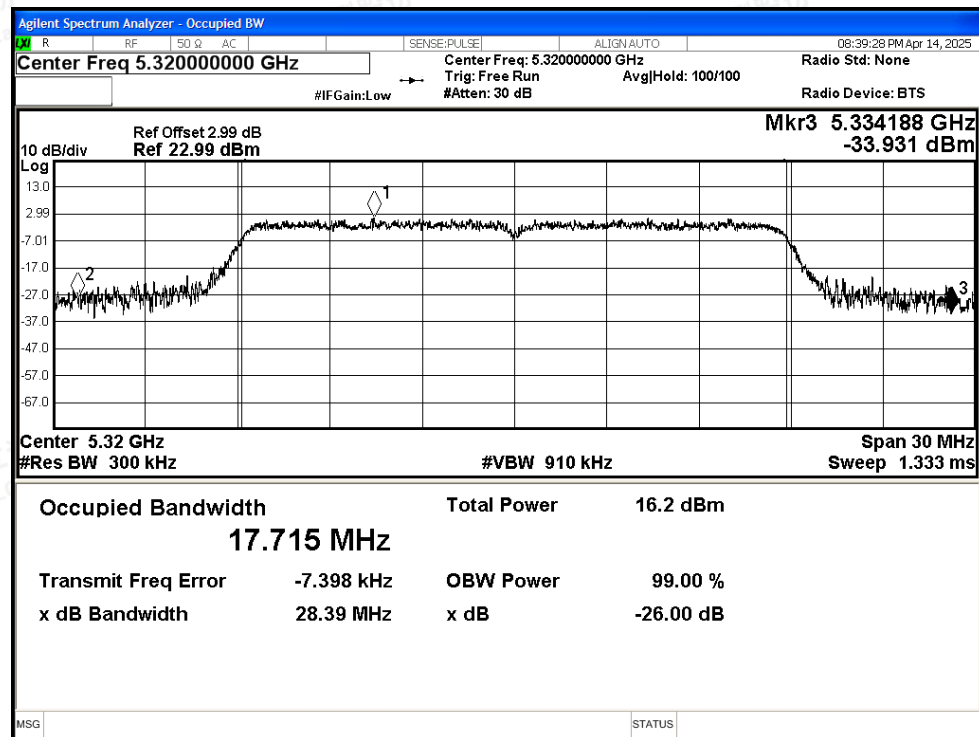

## -26dB Bandwidth NVNT ac40 5270MHz Ant1

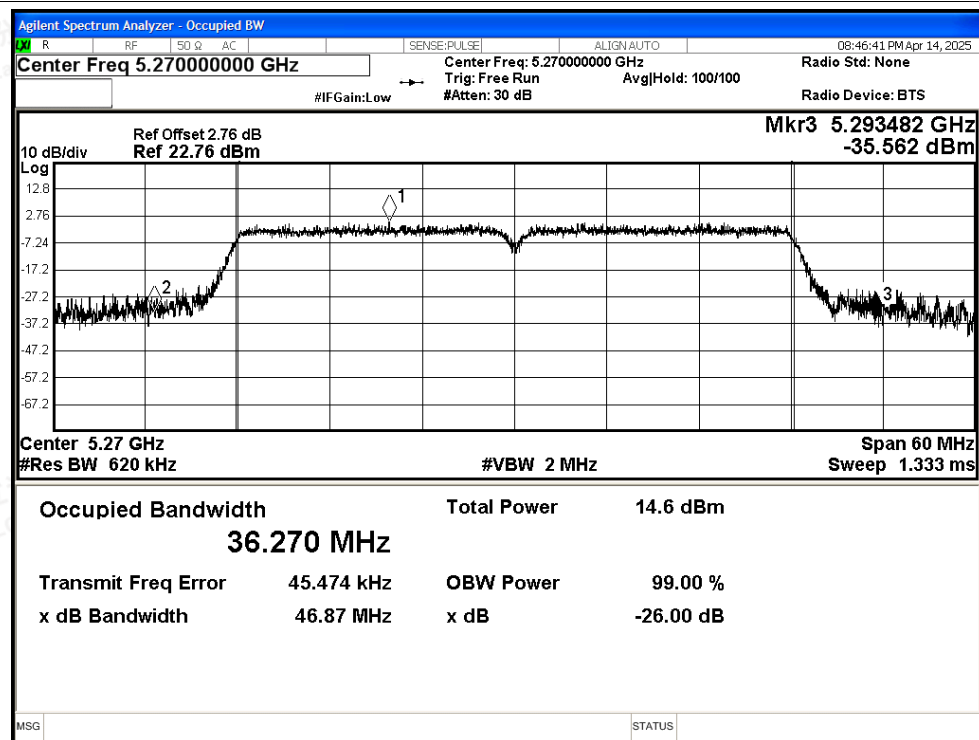

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT ac40 5310MHz Ant1

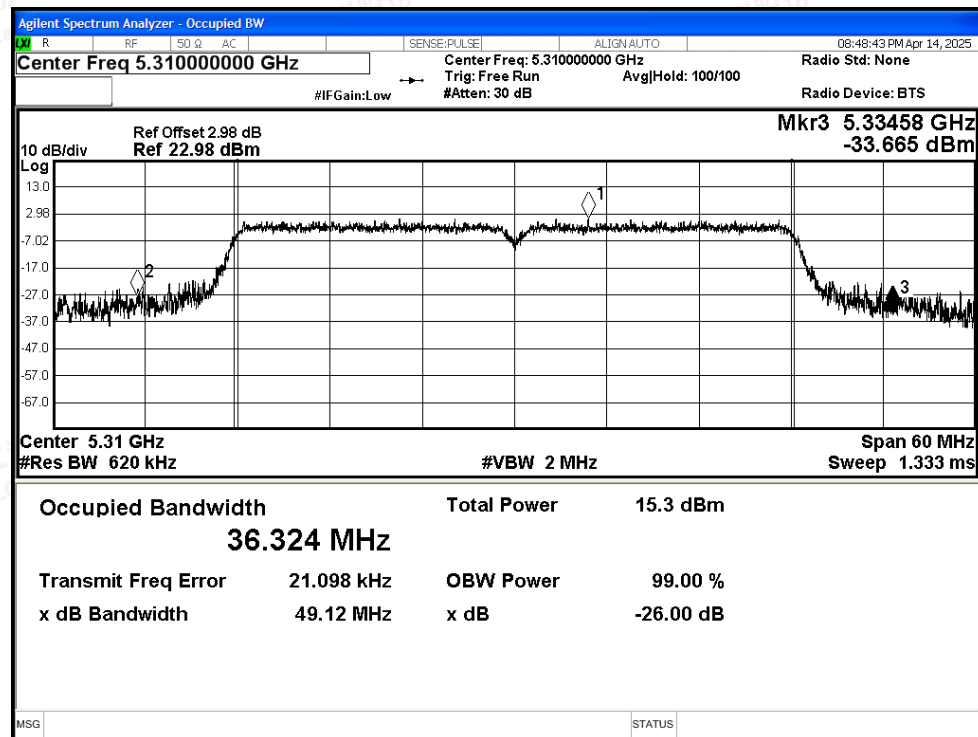

## -26dB Bandwidth NVNT ax20 5260MHz Ant1

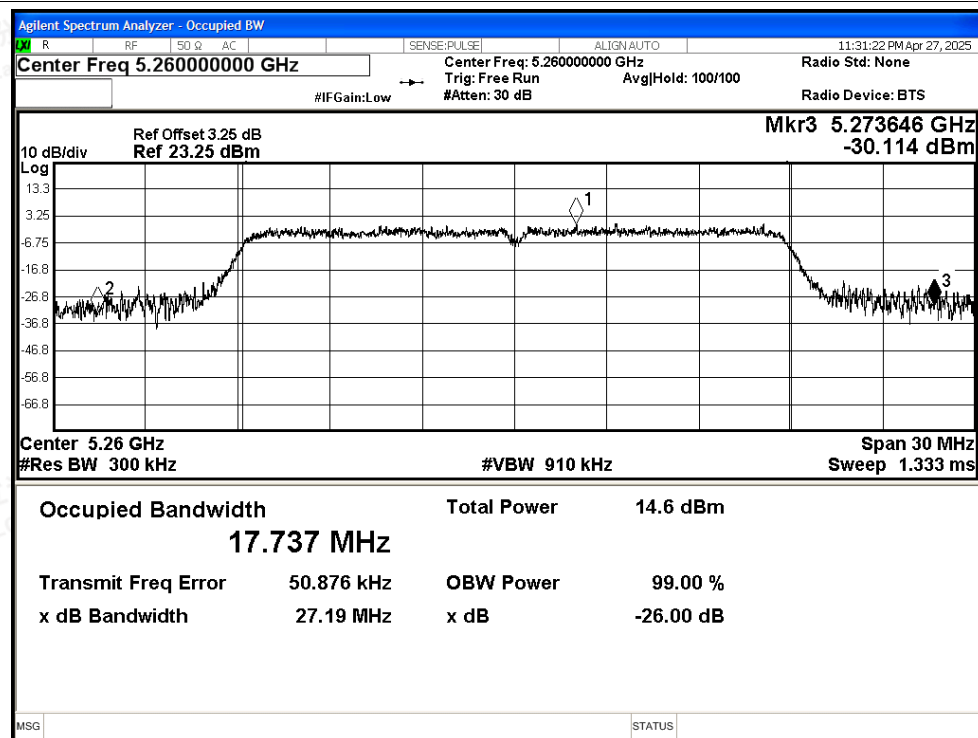

## -26dB Bandwidth NVNT ax20 5300MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

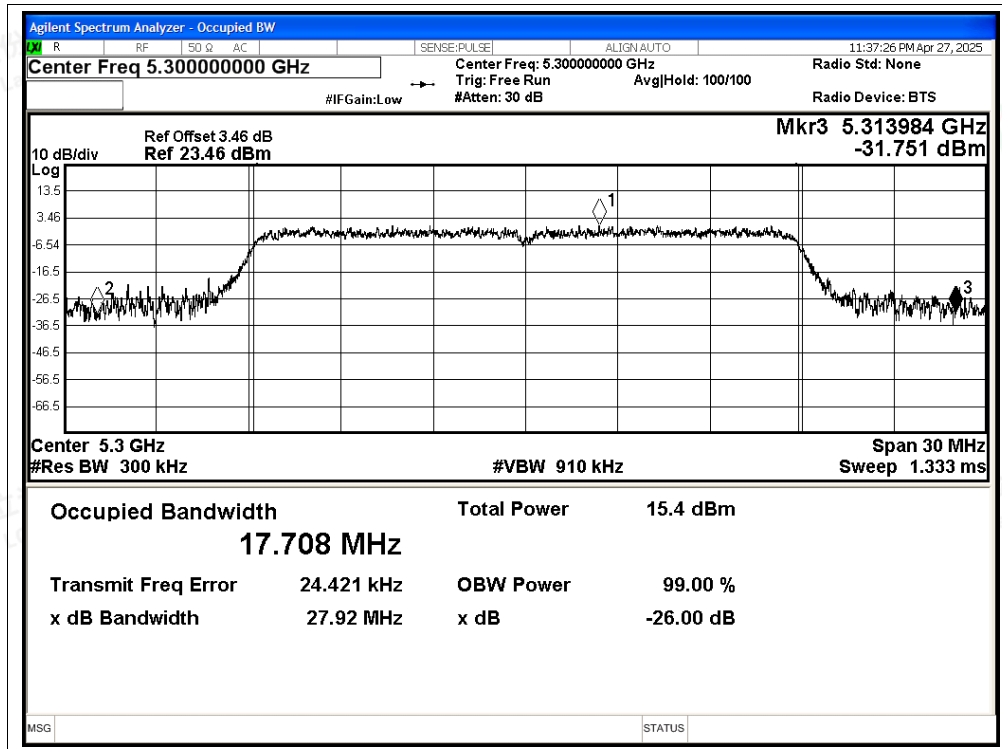

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT ax20 5320MHz Ant1

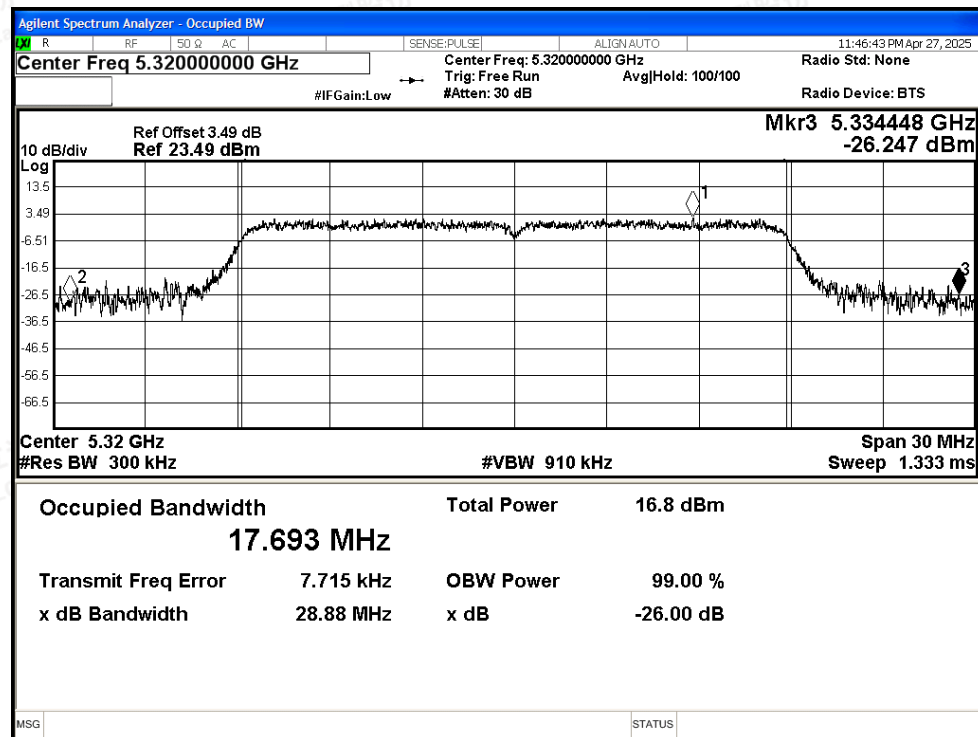

## -26dB Bandwidth NVNT ax40 5270MHz Ant1

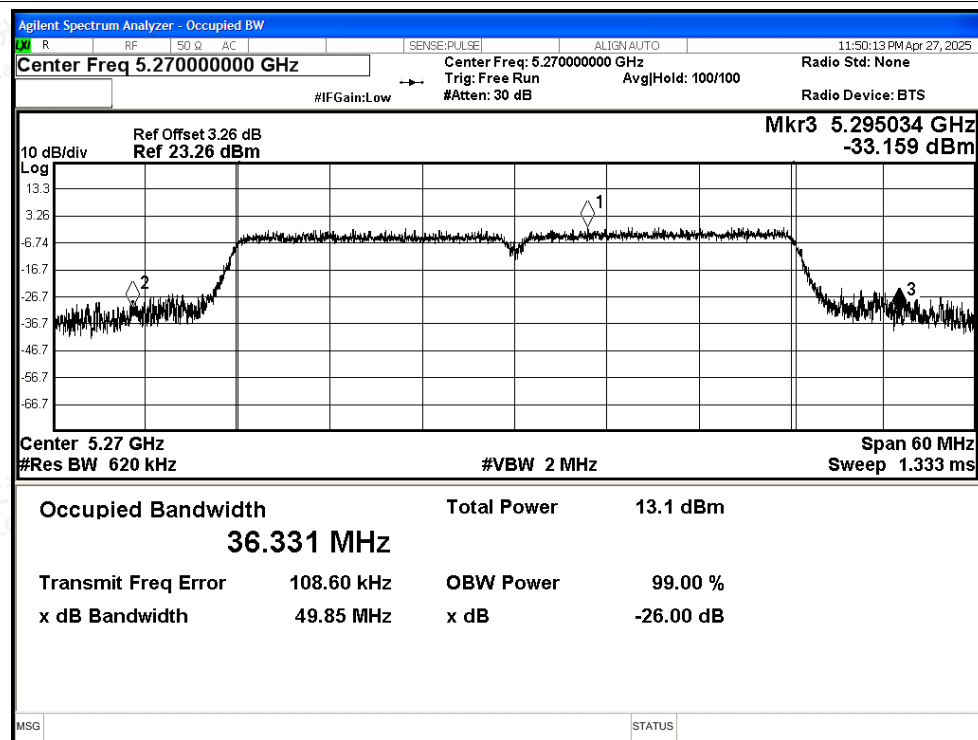


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

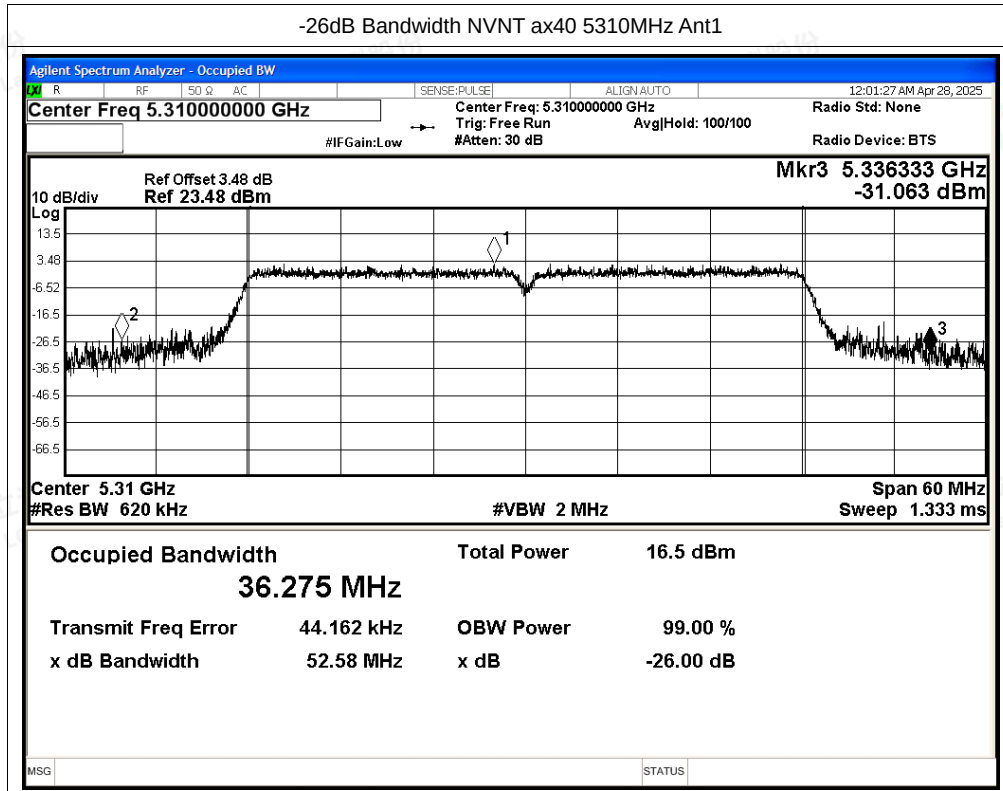

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




| Condition | Mode | Frequency (MHz) | Antenna | -26 dB Bandwidth (MHz) | Limit -26 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|------------------------|------------------------------|---------|
| NVNT      | a    | 5260            | Ant2    | 28.571                 | ---                          | Pass    |
| NVNT      | a    | 5300            | Ant2    | 28.449                 | ---                          | Pass    |
| NVNT      | a    | 5320            | Ant2    | 27.636                 | ---                          | Pass    |
| NVNT      | n20  | 5260            | Ant2    | 28.073                 | ---                          | Pass    |
| NVNT      | n20  | 5300            | Ant2    | 29.03                  | ---                          | Pass    |
| NVNT      | n20  | 5320            | Ant2    | 27.433                 | ---                          | Pass    |
| NVNT      | n40  | 5270            | Ant2    | 46.181                 | ---                          | Pass    |
| NVNT      | n40  | 5310            | Ant2    | 48.597                 | ---                          | Pass    |
| NVNT      | ac20 | 5260            | Ant2    | 28.951                 | ---                          | Pass    |
| NVNT      | ac20 | 5300            | Ant2    | 28.526                 | ---                          | Pass    |
| NVNT      | ac20 | 5320            | Ant2    | 26.008                 | ---                          | Pass    |
| NVNT      | ac40 | 5270            | Ant2    | 47.478                 | ---                          | Pass    |
| NVNT      | ac40 | 5310            | Ant2    | 50.2                   | ---                          | Pass    |
| NVNT      | ax20 | 5260            | Ant2    | 28.275                 | ---                          | Pass    |
| NVNT      | ax20 | 5300            | Ant2    | 29.377                 | ---                          | Pass    |
| NVNT      | ax20 | 5320            | Ant2    | 25.963                 | ---                          | Pass    |
| NVNT      | ax40 | 5270            | Ant2    | 47.481                 | ---                          | Pass    |
| NVNT      | ax40 | 5310            | Ant2    | 50.673                 | ---                          | Pass    |






## Test Graphs

-26dB Bandwidth NVNT a 5260MHz Ant2

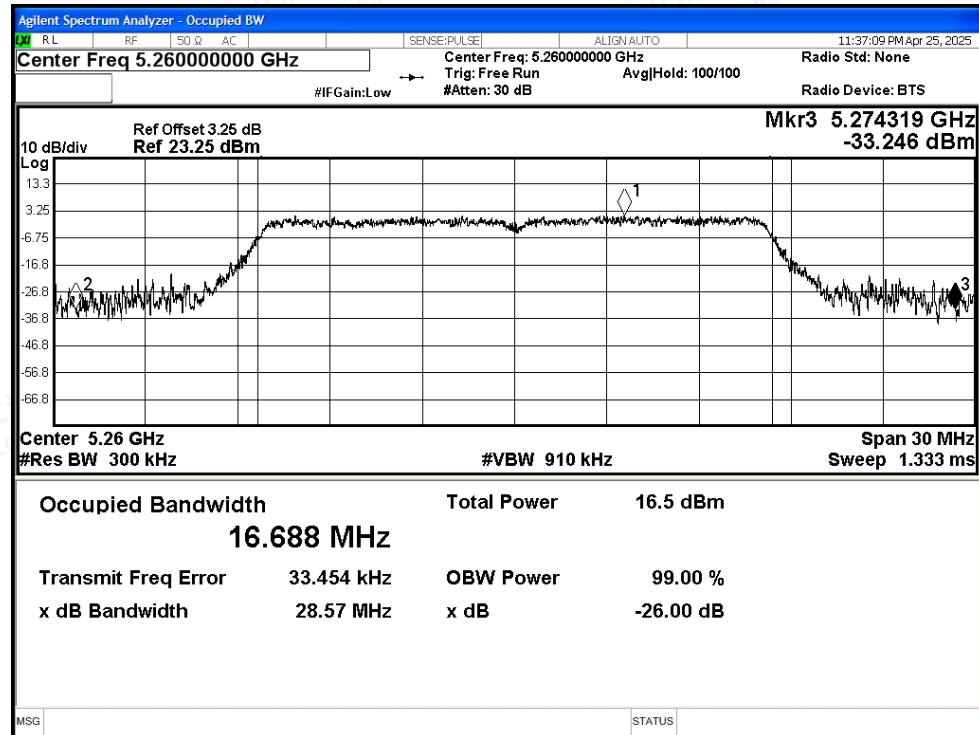

-26dB Bandwidth NVNT a 5300MHz Ant2


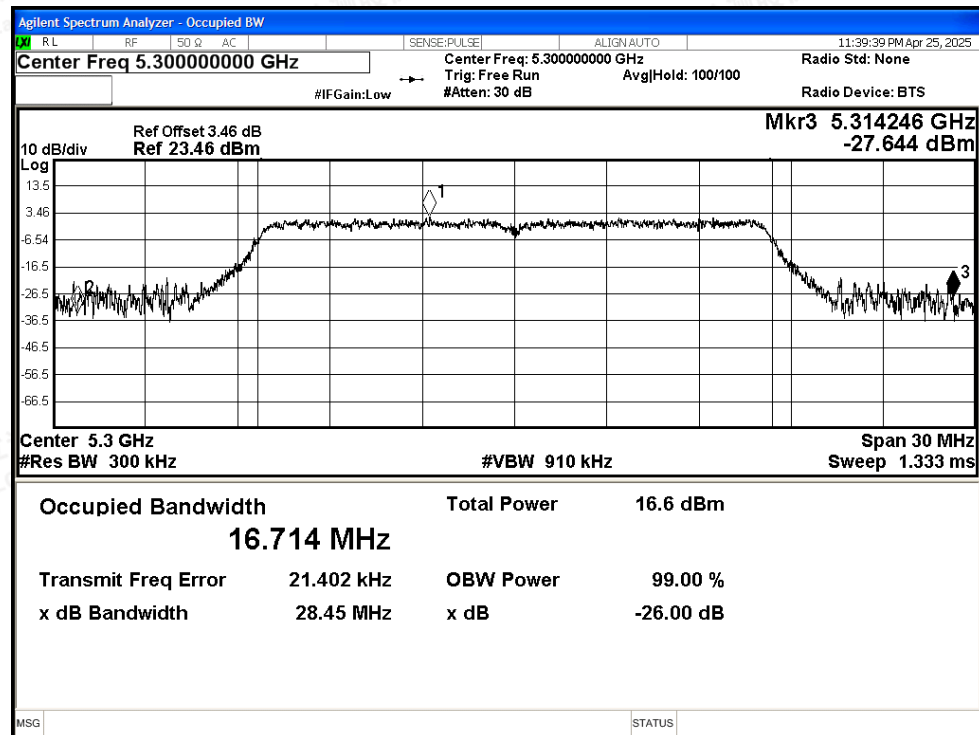


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

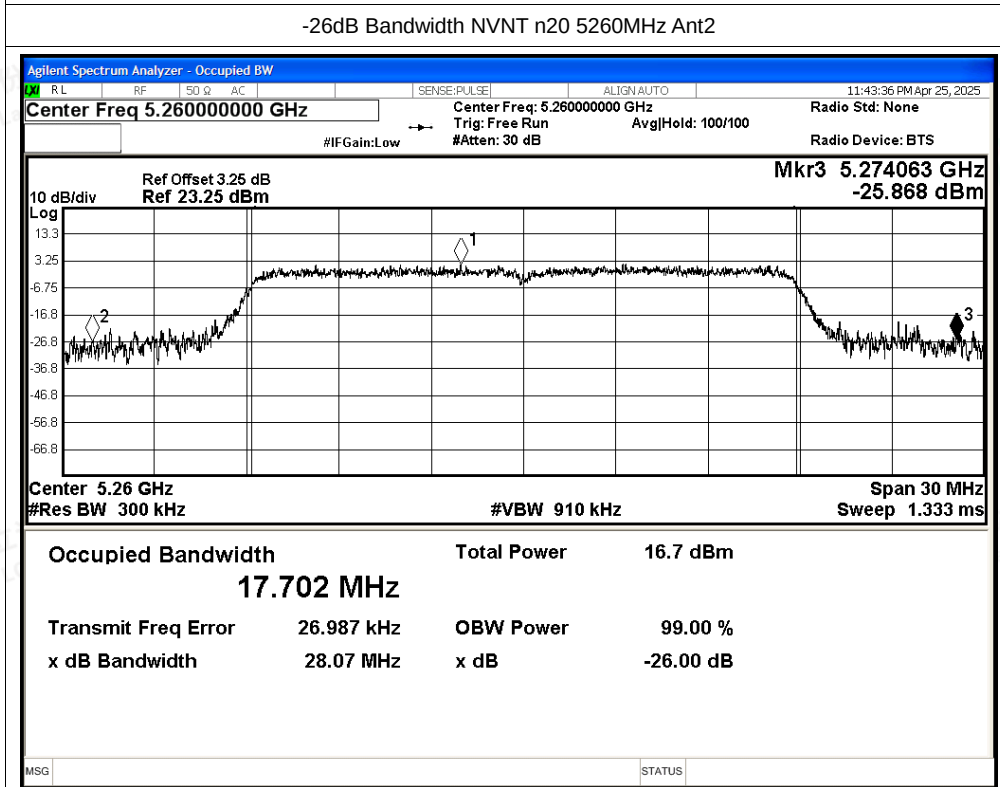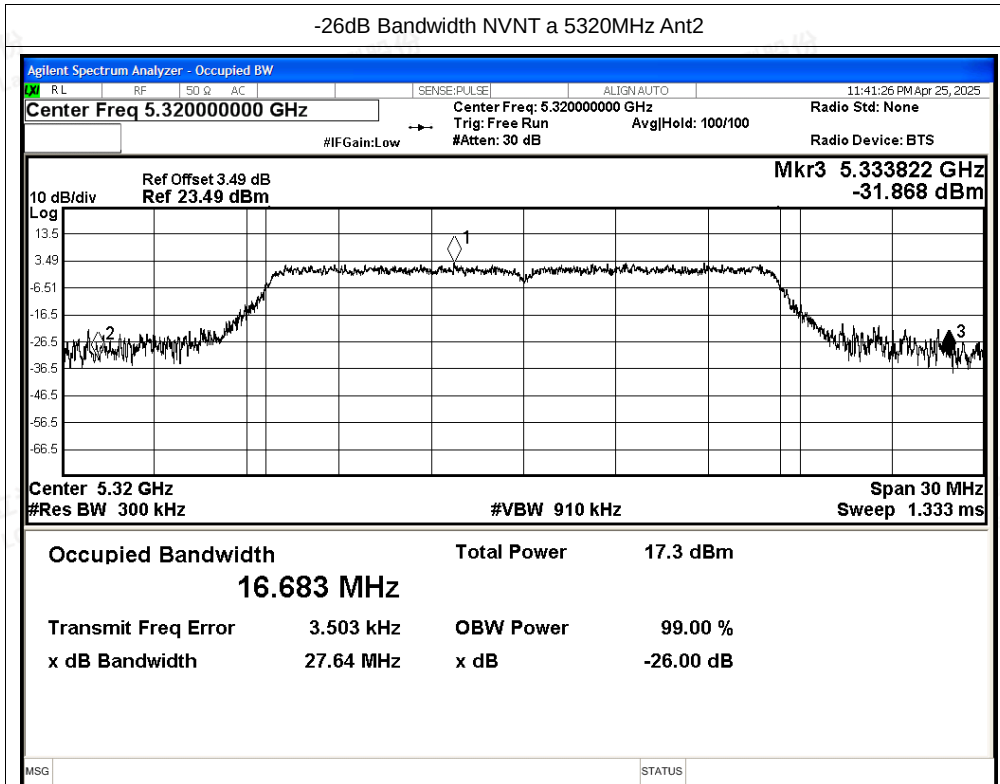

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT n20 5300MHz Ant2

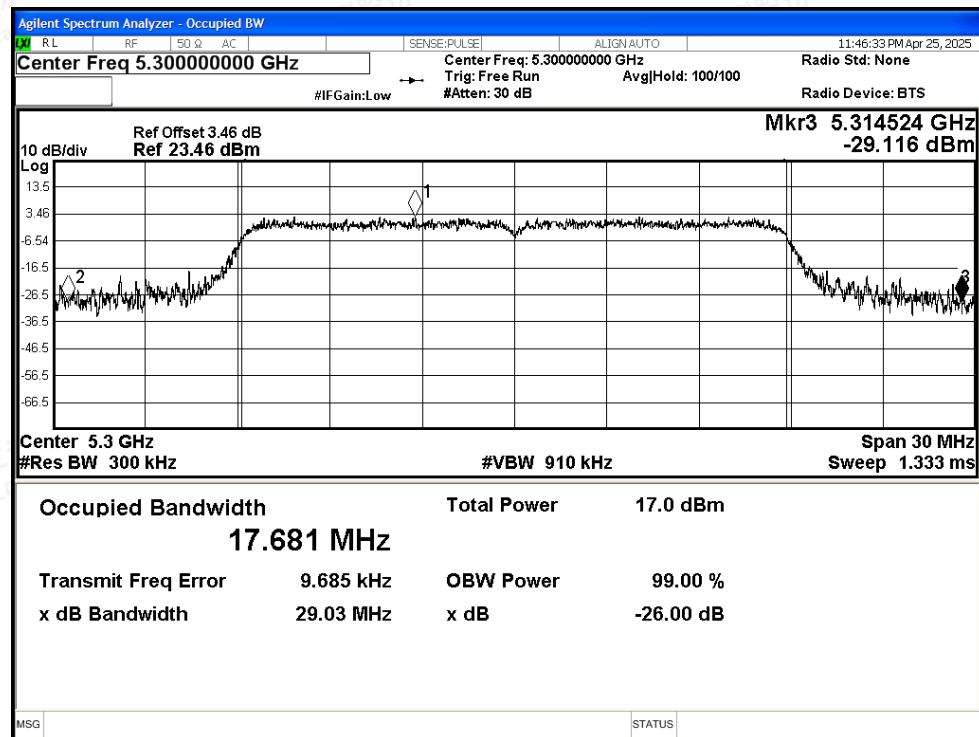

## -26dB Bandwidth NVNT n20 5320MHz Ant2

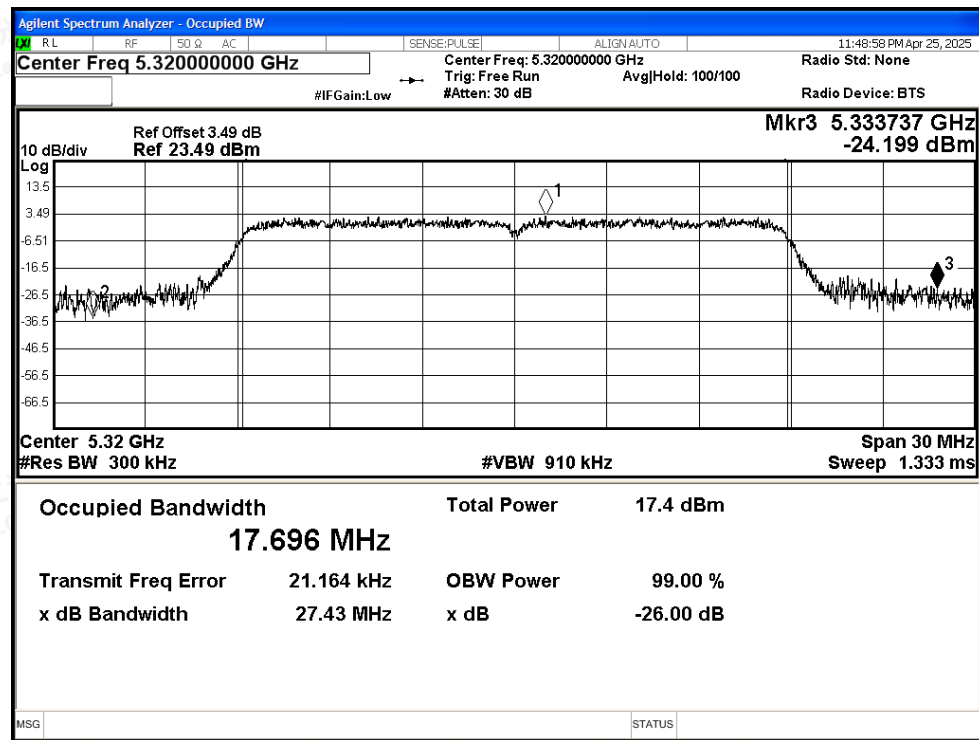

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT n40 5270MHz Ant2

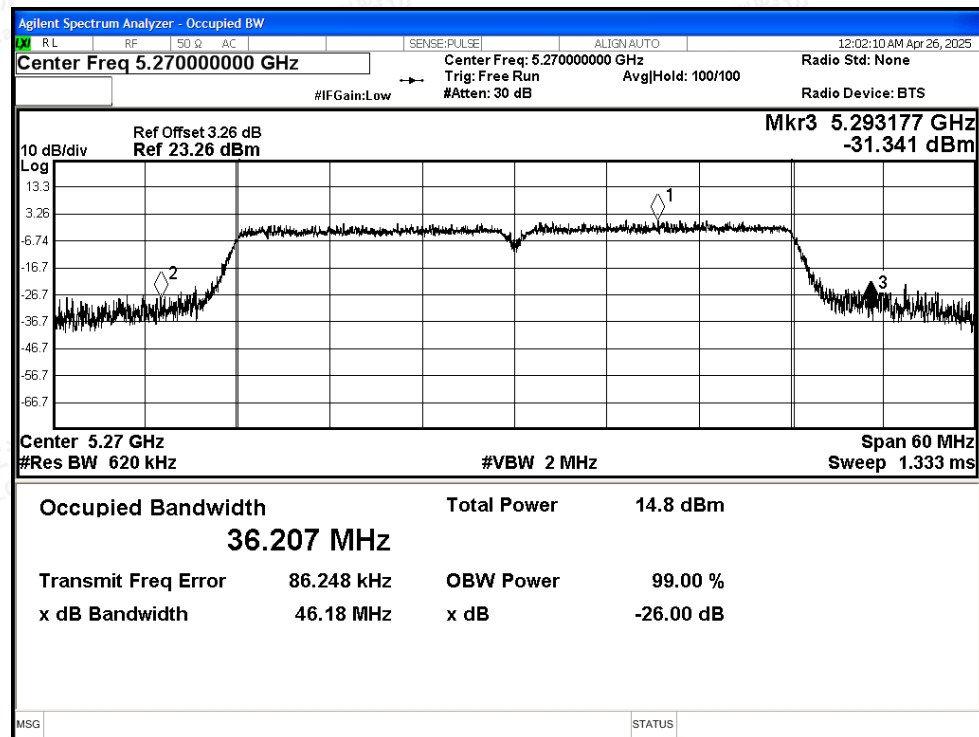

## -26dB Bandwidth NVNT n40 5310MHz Ant2

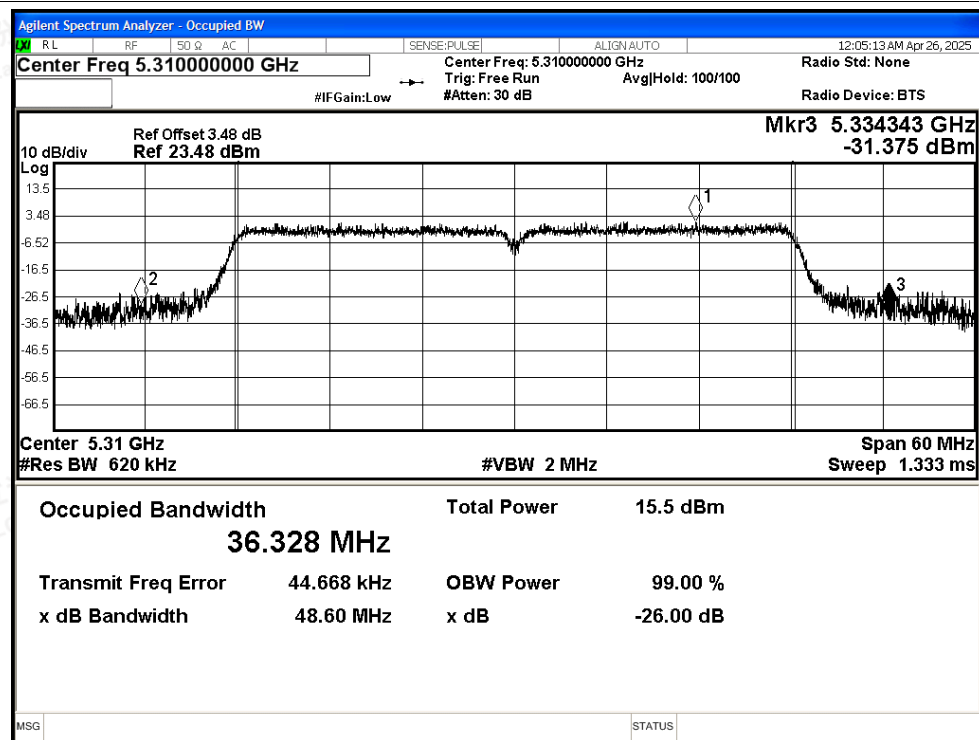

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT ac20 5260MHz Ant2

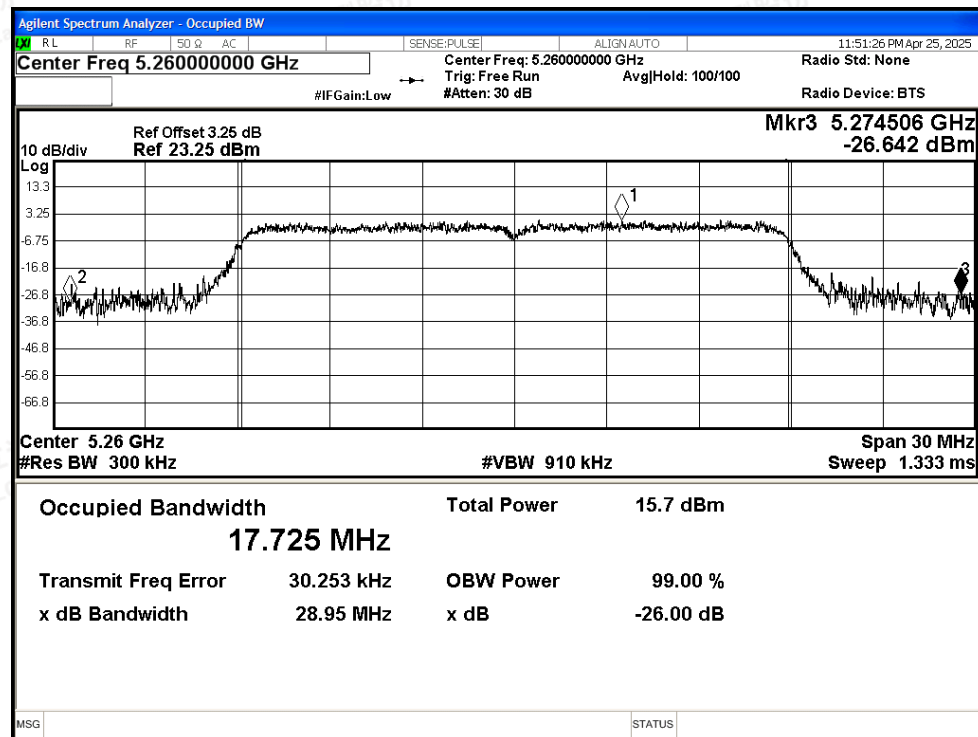

## -26dB Bandwidth NVNT ac20 5300MHz Ant2

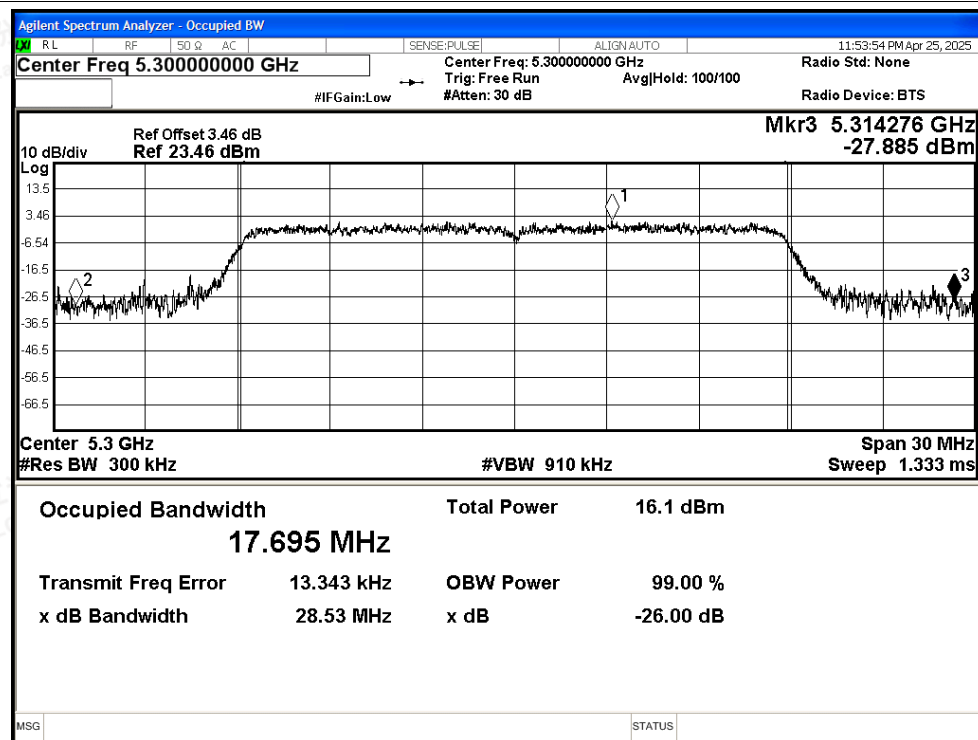

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT ac20 5320MHz Ant2

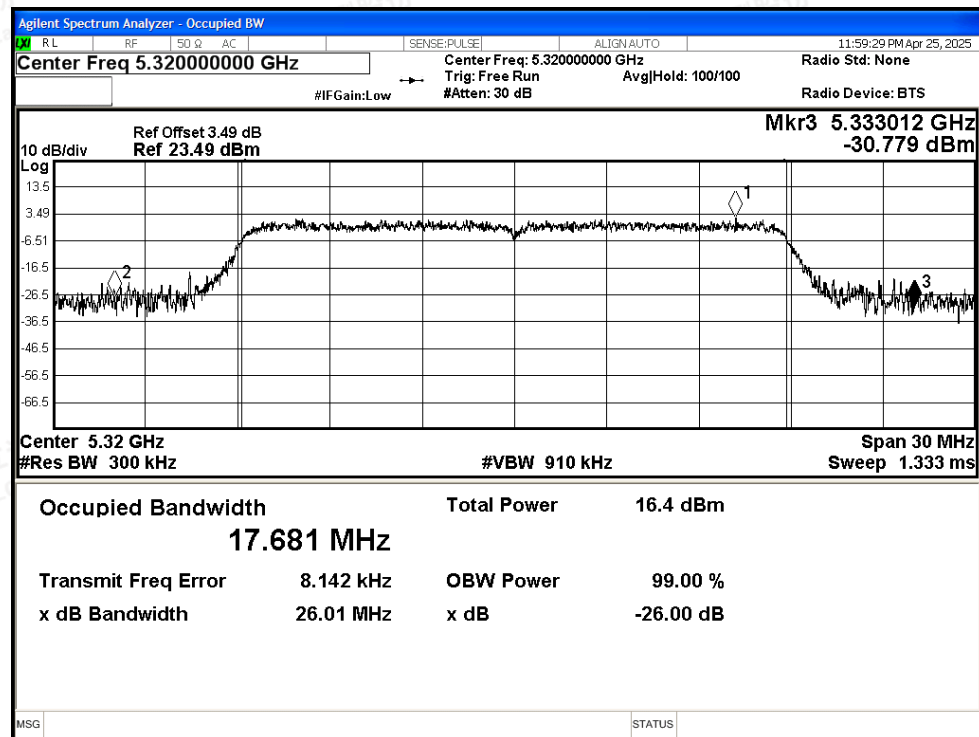

## -26dB Bandwidth NVNT ac40 5270MHz Ant2

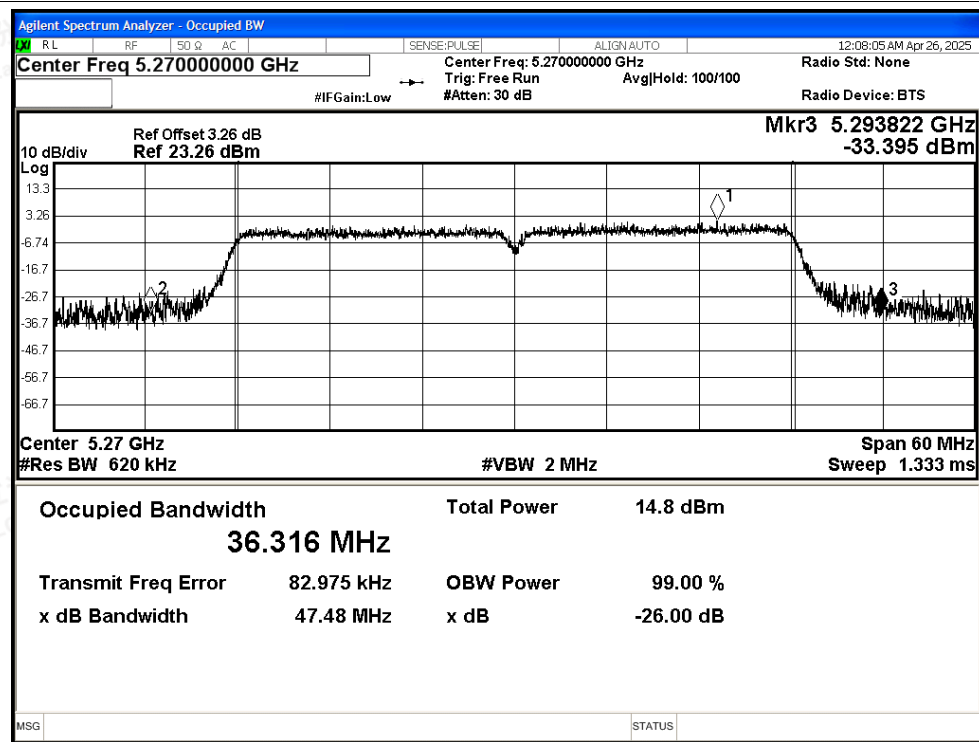

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT ac40 5310MHz Ant2

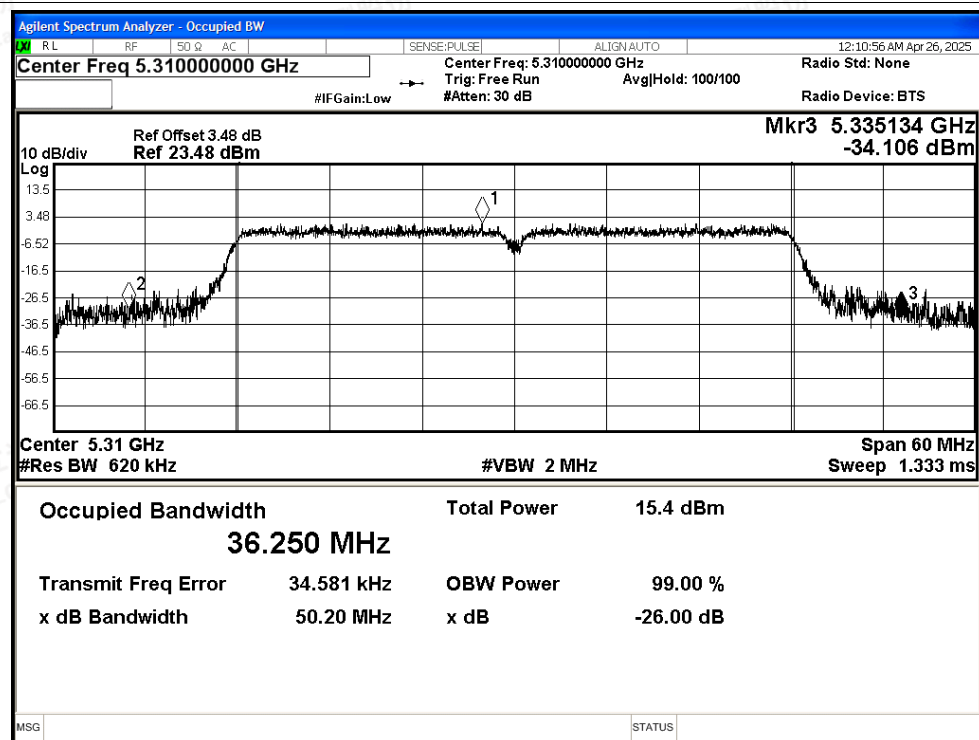

## -26dB Bandwidth NVNT ax20 5260MHz Ant2

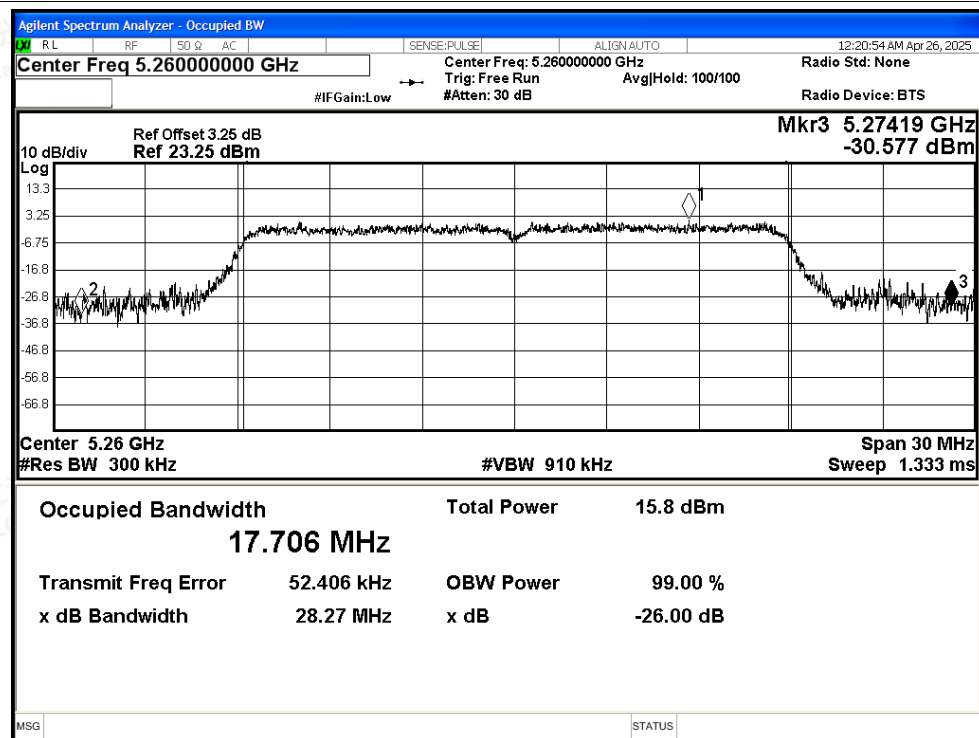

## -26dB Bandwidth NVNT ax20 5300MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

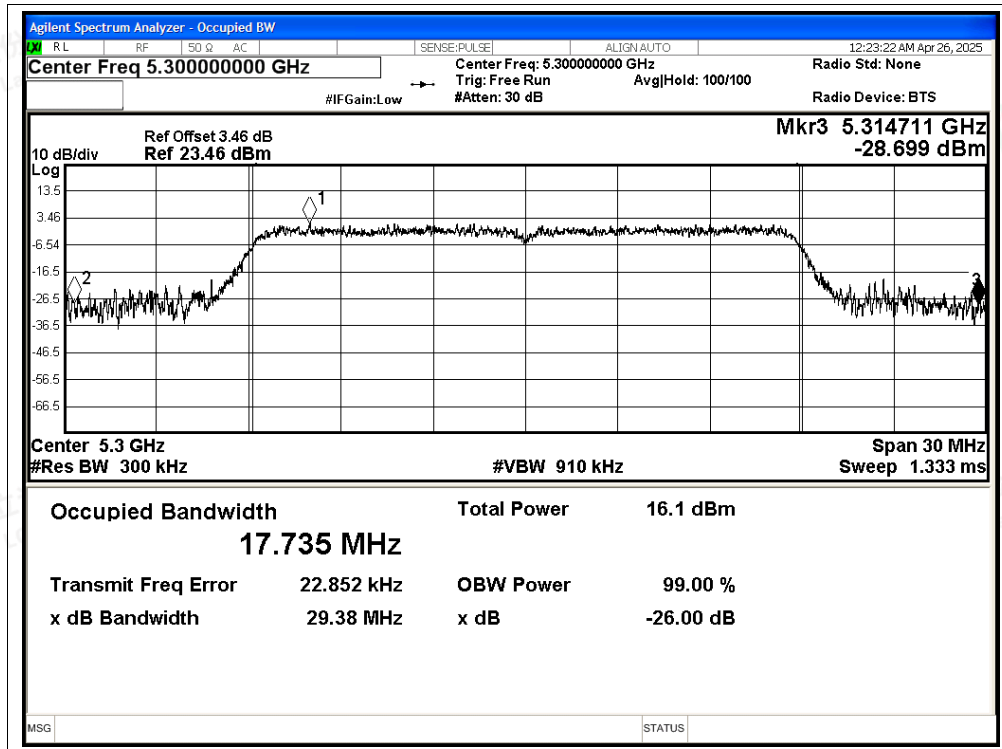




## -26dB Bandwidth NVNT ax20 5320MHz Ant2

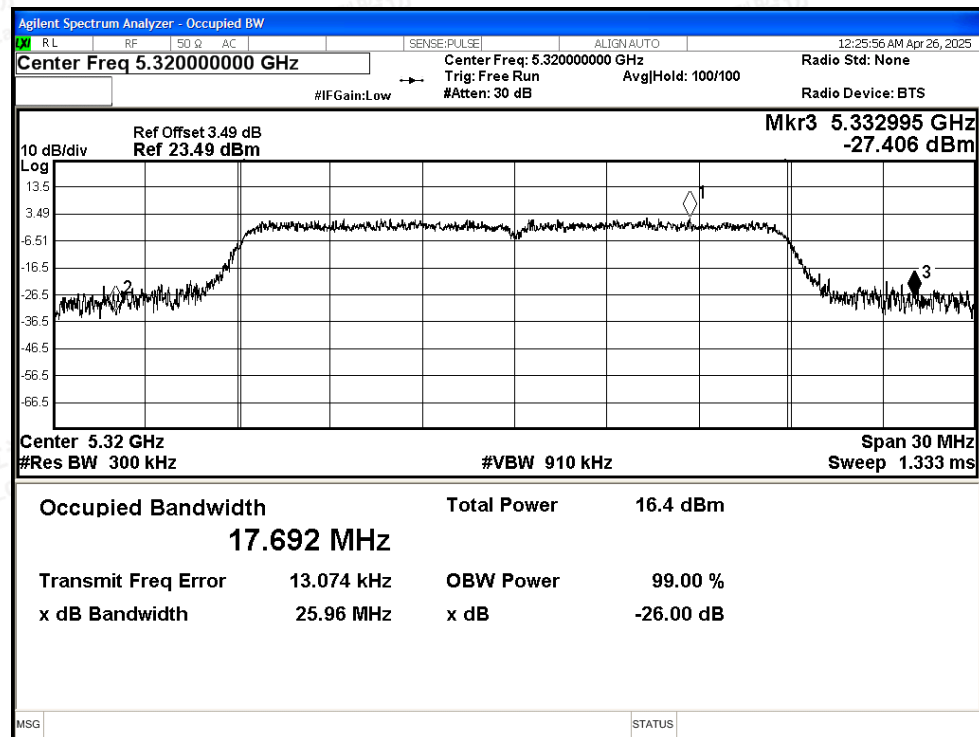

## -26dB Bandwidth NVNT ax40 5270MHz Ant2

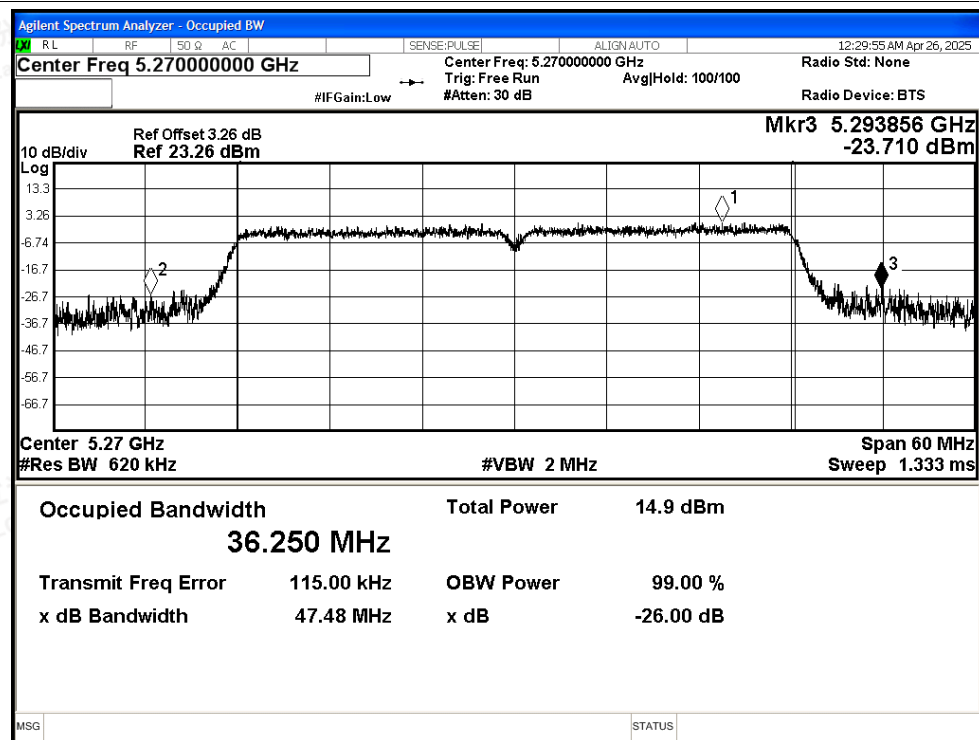


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

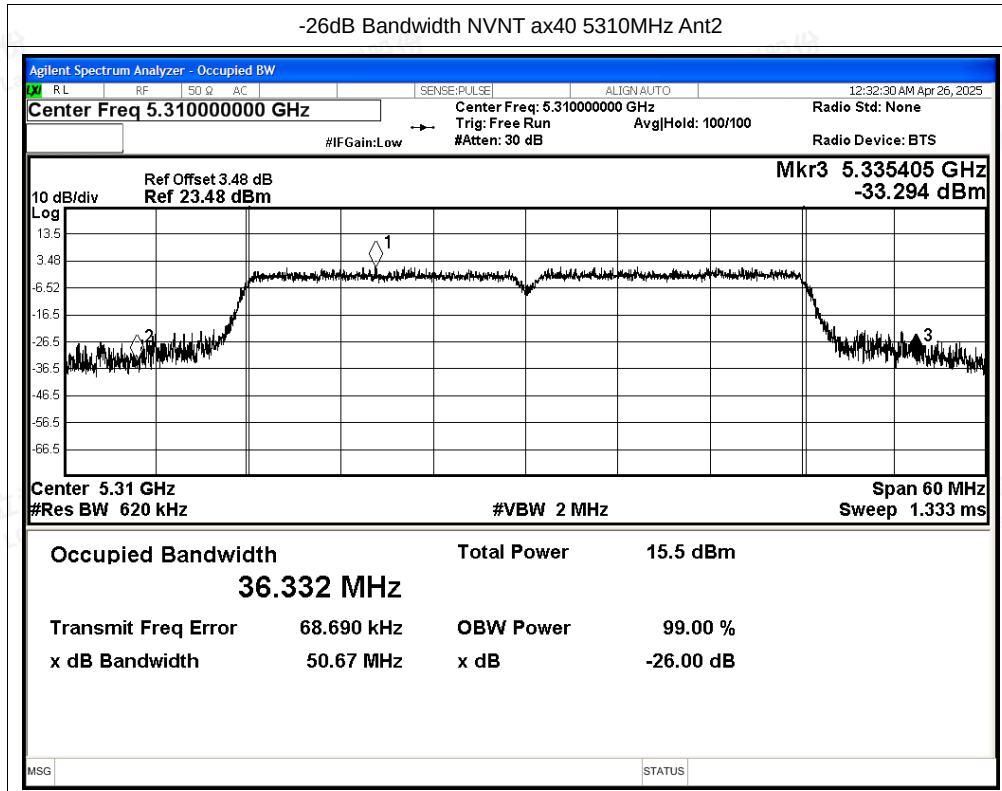

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## E.2 Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT      | a    | 5260            | Ant1    | 10.5                  | 0.24             | 10.74             | 24          | Pass    |
| NVNT      | a    | 5300            | Ant1    | 11                    | 0.24             | 11.24             | 24          | Pass    |
| NVNT      | a    | 5320            | Ant1    | 11.01                 | 0.24             | 11.25             | 24          | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 11.15                 | 0                | 11.15             | 24          | Pass    |
| NVNT      | n20  | 5300            | Ant1    | 11.34                 | 0                | 11.34             | 24          | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 11.93                 | 0                | 11.93             | 24          | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 8.44                  | 0.16             | 8.6               | 24          | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 9.34                  | 0.16             | 9.5               | 24          | Pass    |
| NVNT      | ac20 | 5260            | Ant1    | 10.17                 | 0                | 10.17             | 24          | Pass    |
| NVNT      | ac20 | 5300            | Ant1    | 10.47                 | 0                | 10.47             | 24          | Pass    |
| NVNT      | ac20 | 5320            | Ant1    | 10.81                 | 0                | 10.81             | 24          | Pass    |
| NVNT      | ac40 | 5270            | Ant1    | 8.46                  | 0.16             | 8.62              | 24          | Pass    |
| NVNT      | ac40 | 5310            | Ant1    | 9.34                  | 0.16             | 9.5               | 24          | Pass    |
| NVNT      | ax20 | 5260            | Ant1    | 9.16                  | 0                | 9.16              | 24          | Pass    |
| NVNT      | ax20 | 5300            | Ant1    | 9.85                  | 0                | 9.85              | 24          | Pass    |
| NVNT      | ax20 | 5320            | Ant1    | 11.35                 | 0                | 11.35             | 24          | Pass    |
| NVNT      | ax40 | 5270            | Ant1    | 7.8                   | 0.16             | 7.96              | 24          | Pass    |
| NVNT      | ax40 | 5310            | Ant1    | 10.35                 | 0.16             | 10.51             | 24          | Pass    |

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT      | a    | 5260            | Ant2    | 10.8                  | 0.24             | 11.04             | 24          | Pass    |
| NVNT      | a    | 5300            | Ant2    | 10.9                  | 0.24             | 11.14             | 24          | Pass    |
| NVNT      | a    | 5320            | Ant2    | 11.14                 | 0.24             | 11.38             | 24          | Pass    |
| NVNT      | n20  | 5260            | Ant2    | 10.97                 | 0.28             | 11.25             | 24          | Pass    |
| NVNT      | n20  | 5300            | Ant2    | 11.41                 | 0.28             | 11.69             | 24          | Pass    |
| NVNT      | n20  | 5320            | Ant2    | 11.77                 | 0.28             | 12.05             | 24          | Pass    |
| NVNT      | n40  | 5270            | Ant2    | 8.7                   | 0.16             | 8.86              | 24          | Pass    |
| NVNT      | n40  | 5310            | Ant2    | 9.39                  | 0.16             | 9.55              | 24          | Pass    |
| NVNT      | ac20 | 5260            | Ant2    | 10.24                 | 0                | 10.24             | 24          | Pass    |
| NVNT      | ac20 | 5300            | Ant2    | 10.63                 | 0                | 10.63             | 24          | Pass    |
| NVNT      | ac20 | 5320            | Ant2    | 10.89                 | 0                | 10.89             | 24          | Pass    |
| NVNT      | ac40 | 5270            | Ant2    | 8.69                  | 0.16             | 8.85              | 24          | Pass    |
| NVNT      | ac40 | 5310            | Ant2    | 9.25                  | 0.16             | 9.41              | 24          | Pass    |
| NVNT      | ax20 | 5260            | Ant2    | 10.39                 | 0                | 10.39             | 24          | Pass    |
| NVNT      | ax20 | 5300            | Ant2    | 10.6                  | 0                | 10.6              | 24          | Pass    |
| NVNT      | ax20 | 5320            | Ant2    | 10.89                 | 0                | 10.89             | 24          | Pass    |
| NVNT      | ax40 | 5270            | Ant2    | 8.8                   | 0.16             | 8.96              | 24          | Pass    |
| NVNT      | ax40 | 5310            | Ant2    | 9.34                  | 0.16             | 9.5               | 24          | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



MIMO

| Condition | Mode | Frequency (MHz) | Total Power (dBm) |       |           | Limit (dBm) | Verdict |
|-----------|------|-----------------|-------------------|-------|-----------|-------------|---------|
|           |      |                 | Ant1              | Ant2  | Ant1+Ant2 |             |         |
| NVNT      | n20  | 5260            | 11.15             | 11.25 | 14.21     | 24          | Pass    |
| NVNT      | n20  | 5300            | 11.34             | 11.69 | 14.53     | 24          | Pass    |
| NVNT      | n20  | 5320            | 11.93             | 12.05 | 15.00     | 24          | Pass    |
| NVNT      | n40  | 5270            | 8.6               | 8.86  | 11.74     | 24          | Pass    |
| NVNT      | n40  | 5310            | 9.5               | 9.55  | 12.54     | 24          | Pass    |
| NVNT      | ac20 | 5260            | 10.17             | 10.24 | 13.22     | 24          | Pass    |
| NVNT      | ac20 | 5300            | 10.47             | 10.63 | 13.56     | 24          | Pass    |
| NVNT      | ac20 | 5320            | 10.81             | 10.89 | 13.86     | 24          | Pass    |
| NVNT      | ac40 | 5270            | 8.62              | 8.85  | 11.75     | 24          | Pass    |
| NVNT      | ac40 | 5310            | 9.5               | 9.41  | 12.47     | 24          | Pass    |
| NVNT      | ax20 | 5260            | 9.16              | 10.39 | 12.83     | 24          | Pass    |
| NVNT      | ax20 | 5300            | 9.85              | 10.6  | 13.25     | 24          | Pass    |
| NVNT      | ax20 | 5320            | 11.35             | 10.89 | 14.14     | 24          | Pass    |
| NVNT      | ax40 | 5270            | 7.96              | 8.96  | 11.50     | 24          | Pass    |
| NVNT      | ax40 | 5310            | 10.51             | 9.5   | 13.04     | 24          | Pass    |





### E.3 Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/MHz) | Duty Factor (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|-----------|------|-----------------|---------|-------------------------|------------------|---------------------|-----------------|---------|
| NVNT      | a    | 5260            | Ant1    | -0.28                   | 0.24             | -0.04               | 11              | Pass    |
| NVNT      | a    | 5300            | Ant1    | 0.62                    | 0.24             | 0.86                | 11              | Pass    |
| NVNT      | a    | 5320            | Ant1    | 0.4                     | 0.24             | 0.64                | 11              | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 0.3                     | 0                | 0.3                 | 11              | Pass    |
| NVNT      | n20  | 5300            | Ant1    | 0.37                    | 0                | 0.37                | 11              | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 1.13                    | 0                | 1.13                | 11              | Pass    |
| NVNT      | n40  | 5270            | Ant1    | -5.61                   | 0.16             | -5.45               | 11              | Pass    |
| NVNT      | n40  | 5310            | Ant1    | -4.94                   | 0.16             | -4.78               | 11              | Pass    |
| NVNT      | ac20 | 5260            | Ant1    | -0.23                   | 0                | -0.23               | 11              | Pass    |
| NVNT      | ac20 | 5300            | Ant1    | -0.34                   | 0                | -0.34               | 11              | Pass    |
| NVNT      | ac20 | 5320            | Ant1    | -0.03                   | 0                | -0.03               | 11              | Pass    |
| NVNT      | ac40 | 5270            | Ant1    | -5.53                   | 0.16             | -5.37               | 11              | Pass    |
| NVNT      | ac40 | 5310            | Ant1    | -4.76                   | 0.16             | -4.6                | 11              | Pass    |
| NVNT      | ax20 | 5260            | Ant1    | -1.19                   | 0                | -1.19               | 11              | Pass    |
| NVNT      | ax20 | 5300            | Ant1    | -0.75                   | 0                | -0.75               | 11              | Pass    |
| NVNT      | ax20 | 5320            | Ant1    | 0.48                    | 0                | 0.48                | 11              | Pass    |
| NVNT      | ax40 | 5270            | Ant1    | -6.39                   | 0.16             | -6.23               | 11              | Pass    |
| NVNT      | ax40 | 5310            | Ant1    | -3.64                   | 0.16             | -3.48               | 11              | Pass    |

| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/MHz) | Duty Factor (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|-----------|------|-----------------|---------|-------------------------|------------------|---------------------|-----------------|---------|
| NVNT      | a    | 5260            | Ant2    | 0.28                    | 0.24             | 0.52                | 11              | Pass    |
| NVNT      | a    | 5300            | Ant2    | 0.37                    | 0.24             | 0.61                | 11              | Pass    |
| NVNT      | a    | 5320            | Ant2    | 0.95                    | 0.24             | 1.19                | 11              | Pass    |
| NVNT      | n20  | 5260            | Ant2    | 0.3                     | 0.28             | 0.58                | 11              | Pass    |
| NVNT      | n20  | 5300            | Ant2    | 0.61                    | 0.28             | 0.89                | 11              | Pass    |
| NVNT      | n20  | 5320            | Ant2    | 0.95                    | 0.28             | 1.23                | 11              | Pass    |
| NVNT      | n40  | 5270            | Ant2    | -5.06                   | 0.16             | -4.9                | 11              | Pass    |
| NVNT      | n40  | 5310            | Ant2    | -4.42                   | 0.16             | -4.26               | 11              | Pass    |
| NVNT      | ac20 | 5260            | Ant2    | -0.55                   | 0                | -0.55               | 11              | Pass    |
| NVNT      | ac20 | 5300            | Ant2    | -0.19                   | 0                | -0.19               | 11              | Pass    |
| NVNT      | ac20 | 5320            | Ant2    | 0.04                    | 0                | 0.04                | 11              | Pass    |
| NVNT      | ac40 | 5270            | Ant2    | -4.59                   | 0.16             | -4.43               | 11              | Pass    |
| NVNT      | ac40 | 5310            | Ant2    | -4.91                   | 0.16             | -4.75               | 11              | Pass    |
| NVNT      | ax20 | 5260            | Ant2    | -0.28                   | 0                | -0.28               | 11              | Pass    |
| NVNT      | ax20 | 5300            | Ant2    | -0.29                   | 0                | -0.29               | 11              | Pass    |
| NVNT      | ax20 | 5320            | Ant2    | -0.08                   | 0                | -0.08               | 11              | Pass    |
| NVNT      | ax40 | 5270            | Ant2    | -4.82                   | 0.16             | -4.66               | 11              | Pass    |
| NVNT      | ax40 | 5310            | Ant2    | -4.64                   | 0.16             | -4.48               | 11              | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



MIMO

| Condition | Mode | Frequency (MHz) | Total PSD (dBm/MHz) |       |           | Limit (dBm/MHz) | Verdict |
|-----------|------|-----------------|---------------------|-------|-----------|-----------------|---------|
|           |      |                 | Ant1                | Ant2  | Ant1+Ant2 |                 |         |
| NVNT      | n20  | 5260            | 0.3                 | 0.58  | 3.45      | 10.59           | Pass    |
| NVNT      | n20  | 5300            | 0.37                | 0.89  | 3.65      | 10.59           | Pass    |
| NVNT      | n20  | 5320            | 1.13                | 1.23  | 4.19      | 10.59           | Pass    |
| NVNT      | n40  | 5270            | -5.45               | -4.9  | -2.16     | 10.59           | Pass    |
| NVNT      | n40  | 5310            | -4.78               | -4.26 | -1.50     | 10.59           | Pass    |
| NVNT      | ac20 | 5260            | -0.23               | -0.55 | 2.62      | 10.59           | Pass    |
| NVNT      | ac20 | 5300            | -0.34               | -0.19 | 2.75      | 10.59           | Pass    |
| NVNT      | ac20 | 5320            | -0.03               | 0.04  | 3.02      | 10.59           | Pass    |
| NVNT      | ac40 | 5270            | -5.37               | -4.43 | -1.86     | 10.59           | Pass    |
| NVNT      | ac40 | 5310            | -4.6                | -4.75 | -1.66     | 10.59           | Pass    |
| NVNT      | ax20 | 5260            | -1.19               | -0.28 | 2.30      | 10.59           | Pass    |
| NVNT      | ax20 | 5300            | -0.75               | -0.29 | 2.50      | 10.59           | Pass    |
| NVNT      | ax20 | 5320            | 0.48                | -0.08 | 3.22      | 10.59           | Pass    |
| NVNT      | ax40 | 5270            | -6.23               | -4.66 | -2.36     | 10.59           | Pass    |
| NVNT      | ax40 | 5310            | -3.48               | -4.48 | -0.94     | 10.59           | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




## Test Graphs

PSD NVNT a 5260MHz Ant1

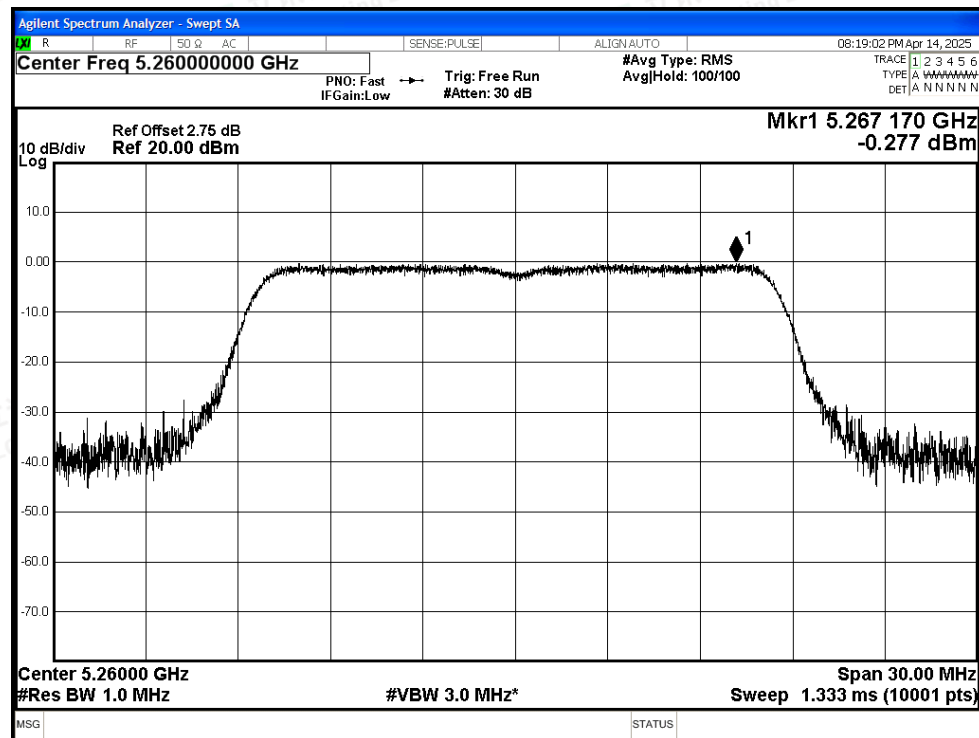

PSD NVNT a 5300MHz Ant1


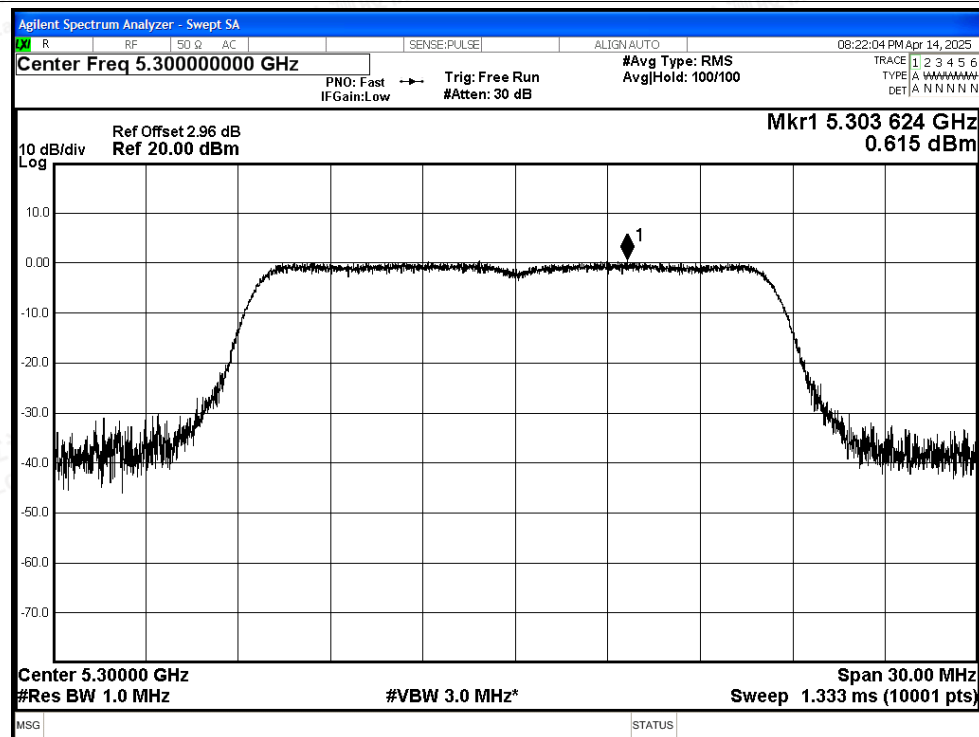


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

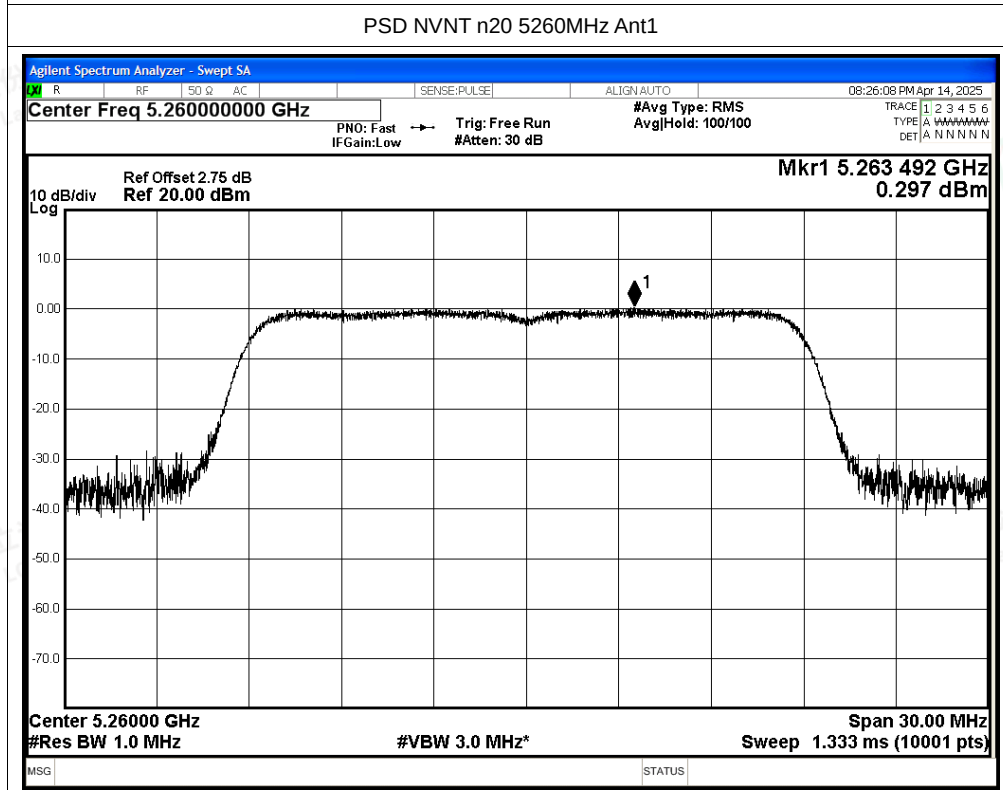
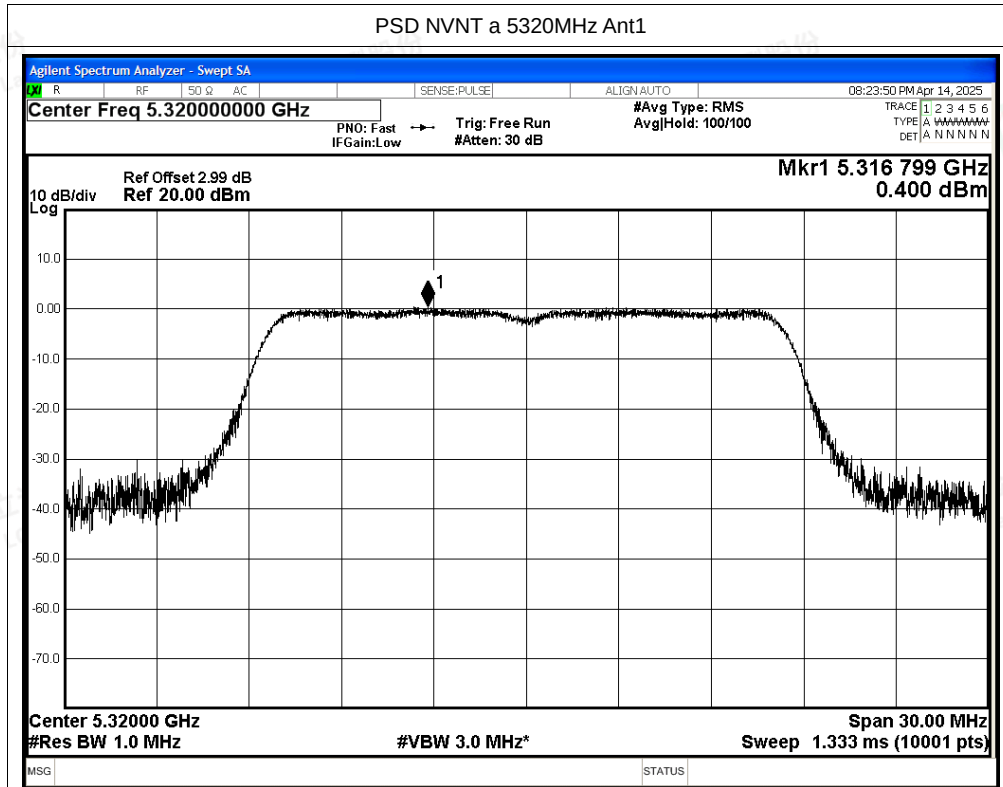




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

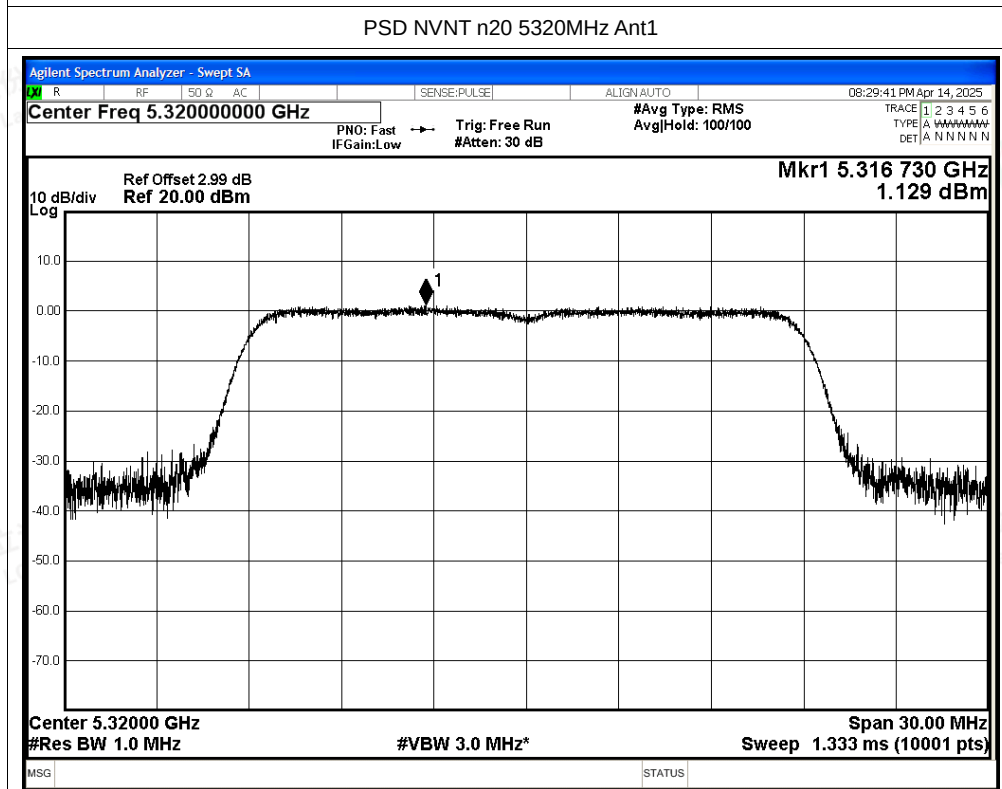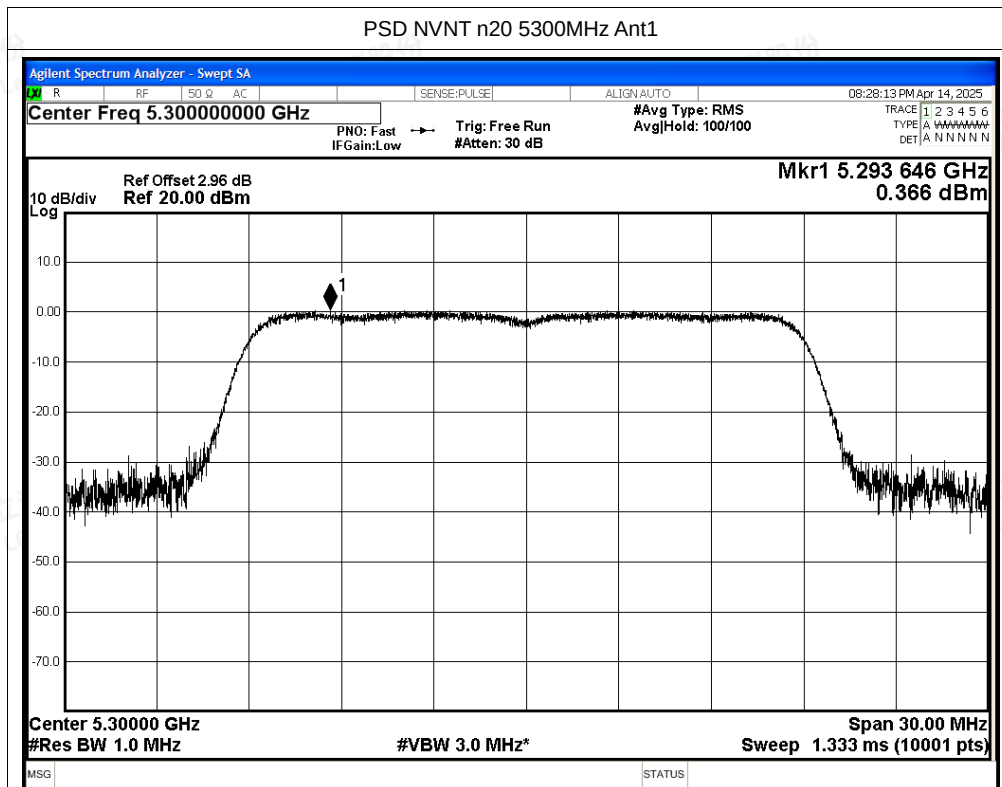

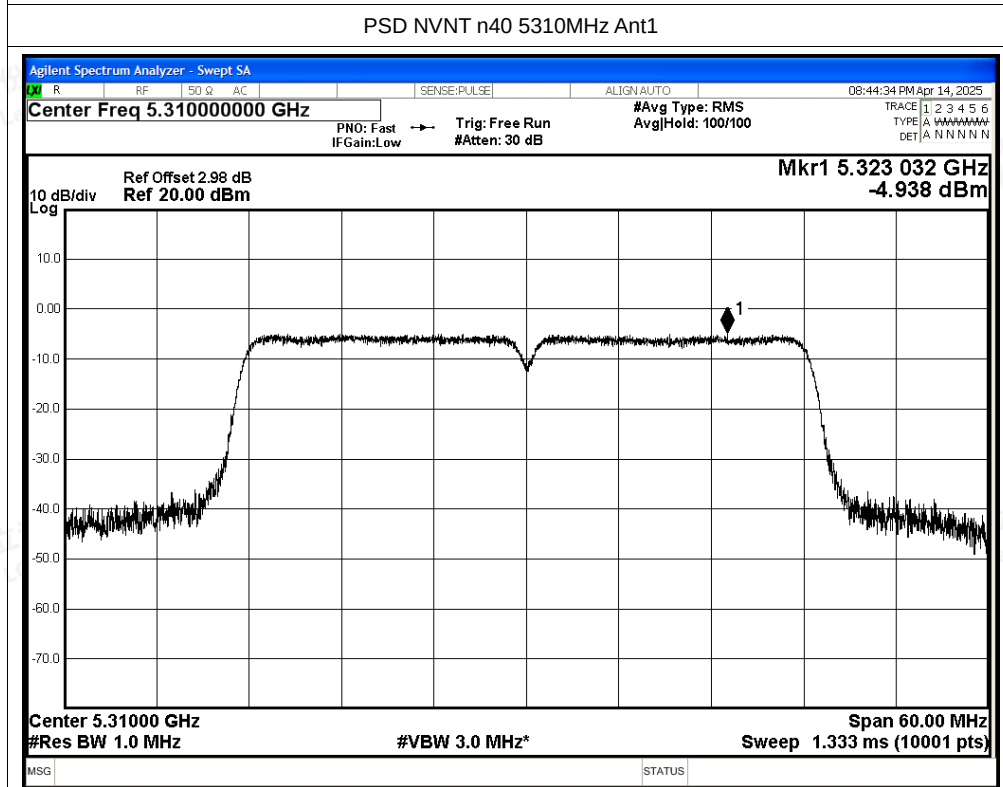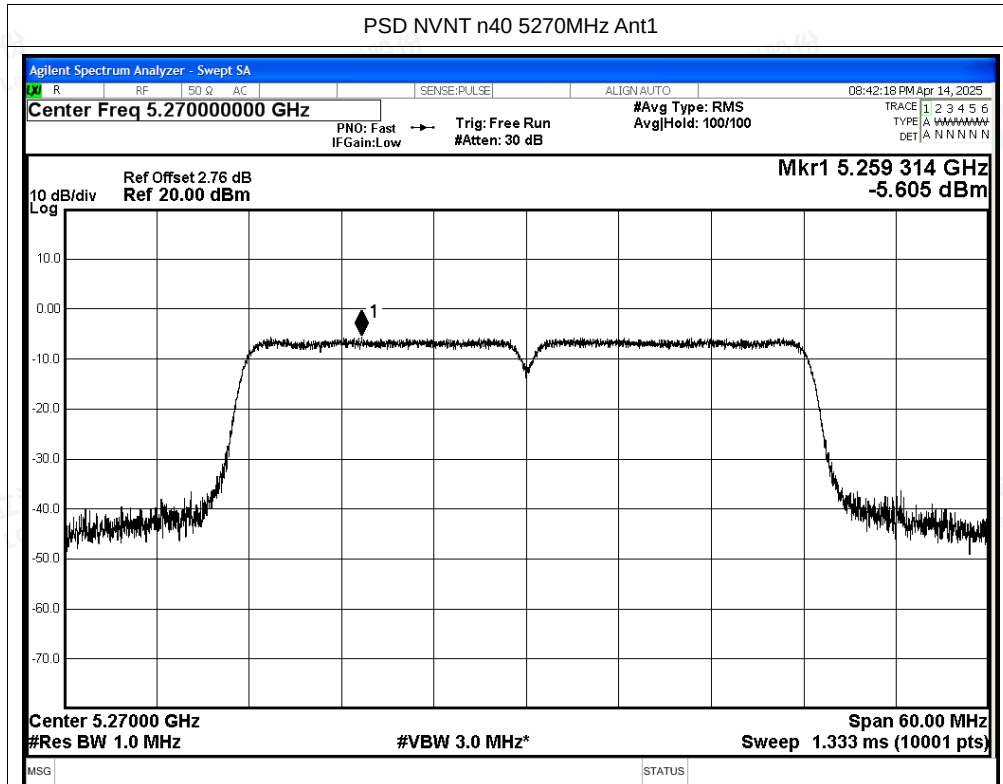




PSD NVNT ac20 5260MHz Ant1

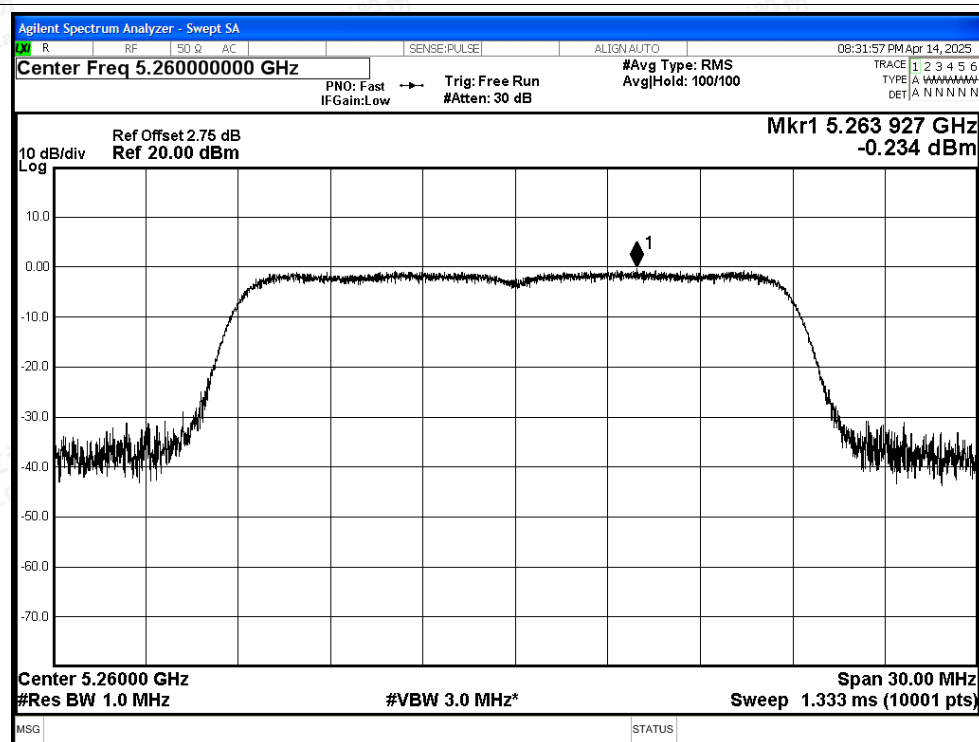


PSD NVNT ac20 5300MHz Ant1

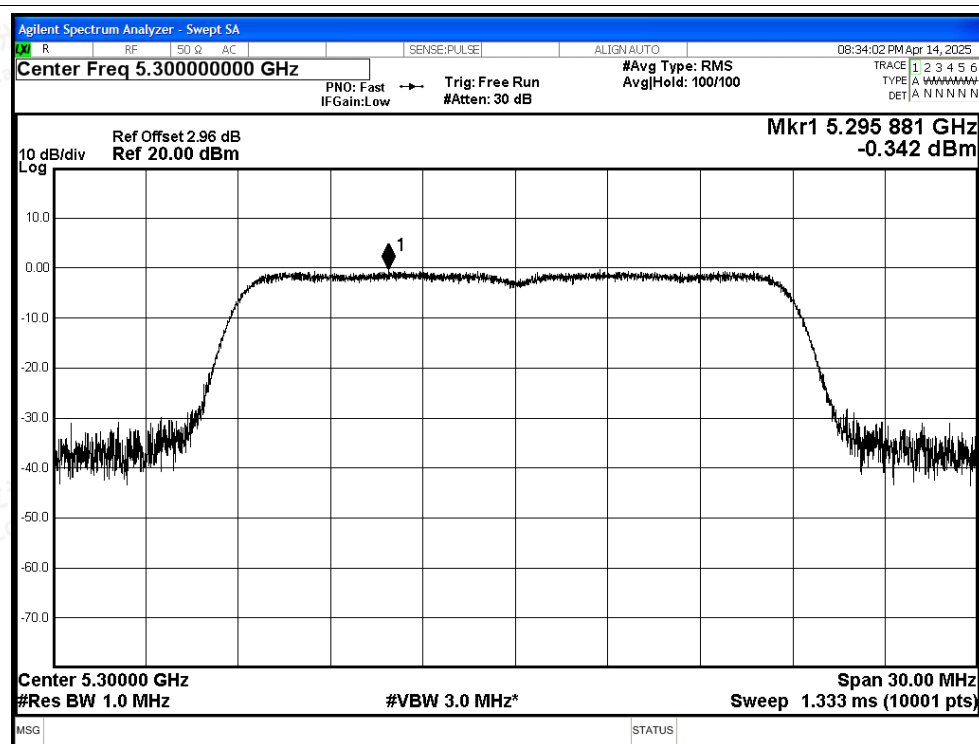




PSD NVNT ac20 5320MHz Ant1

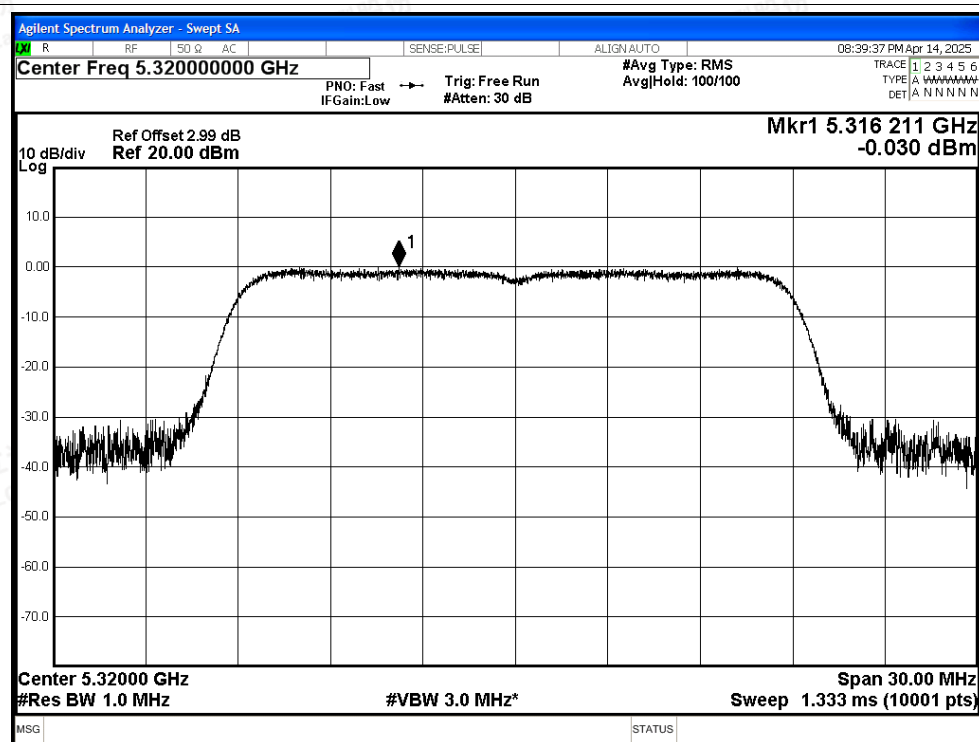

PSD NVNT ac40 5270MHz Ant1

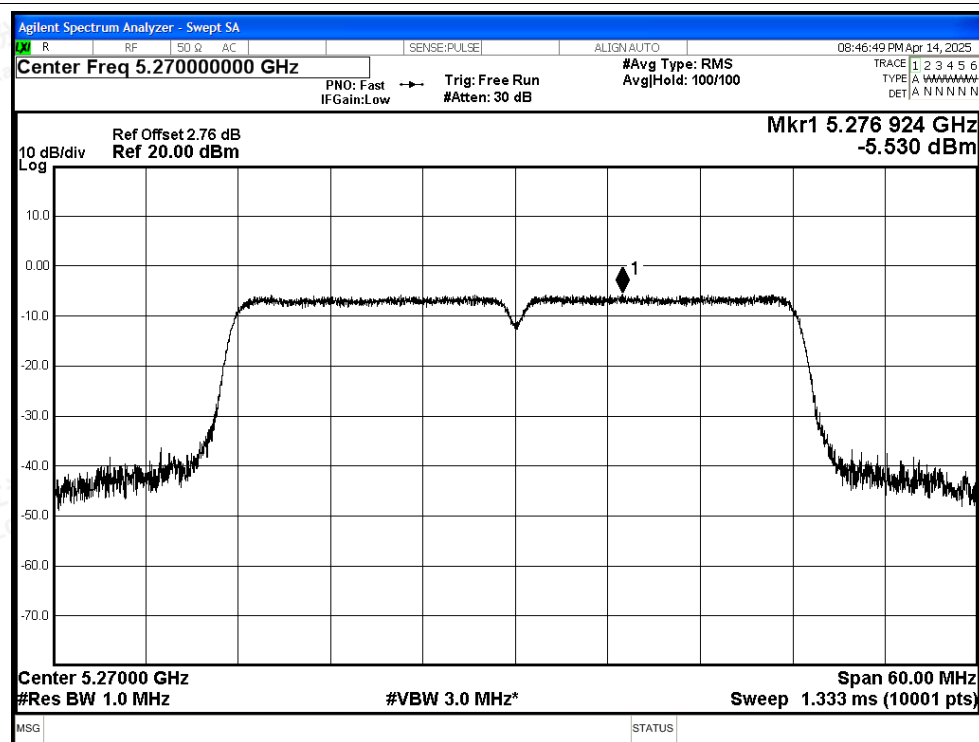

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT ac40 5310MHz Ant1

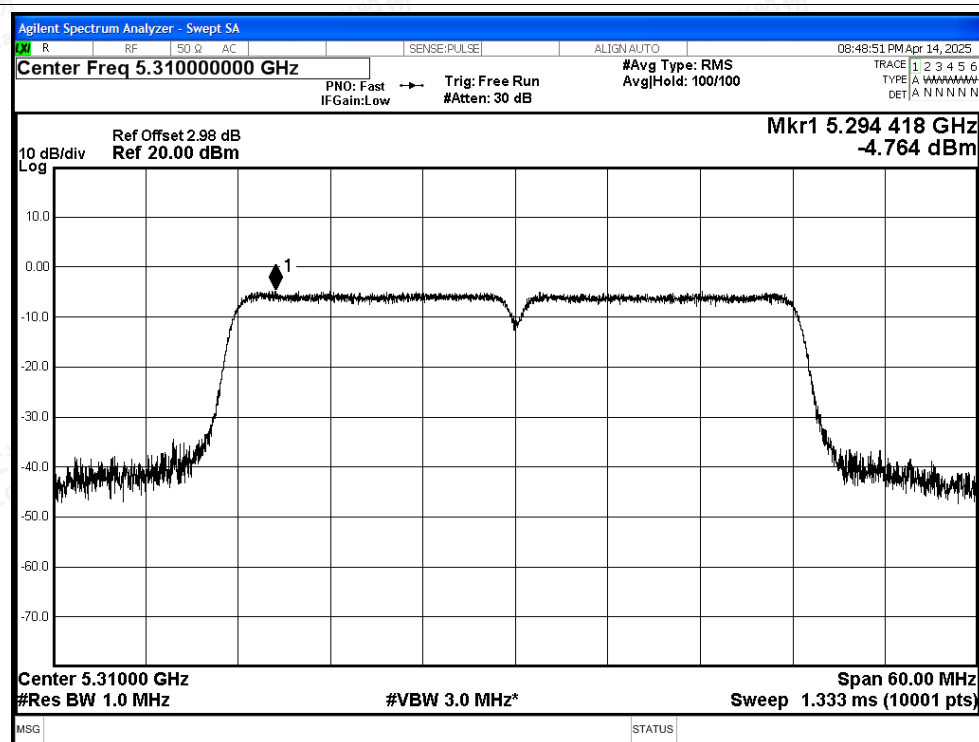


PSD NVNT ax20 5260MHz Ant1

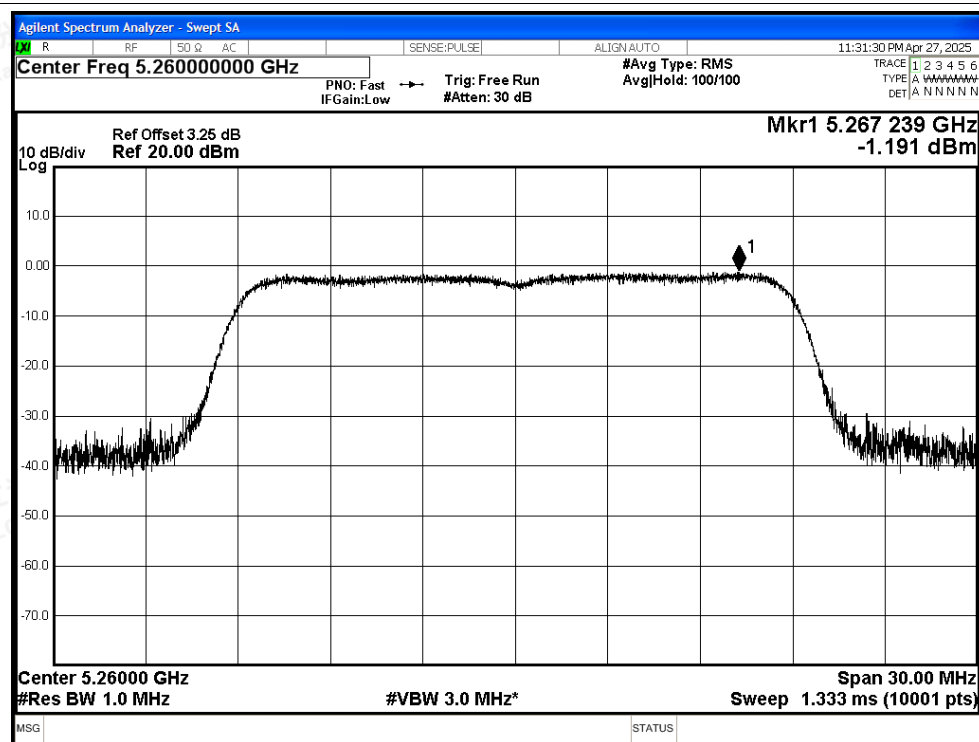


PSD NVNT ax20 5300MHz Ant1



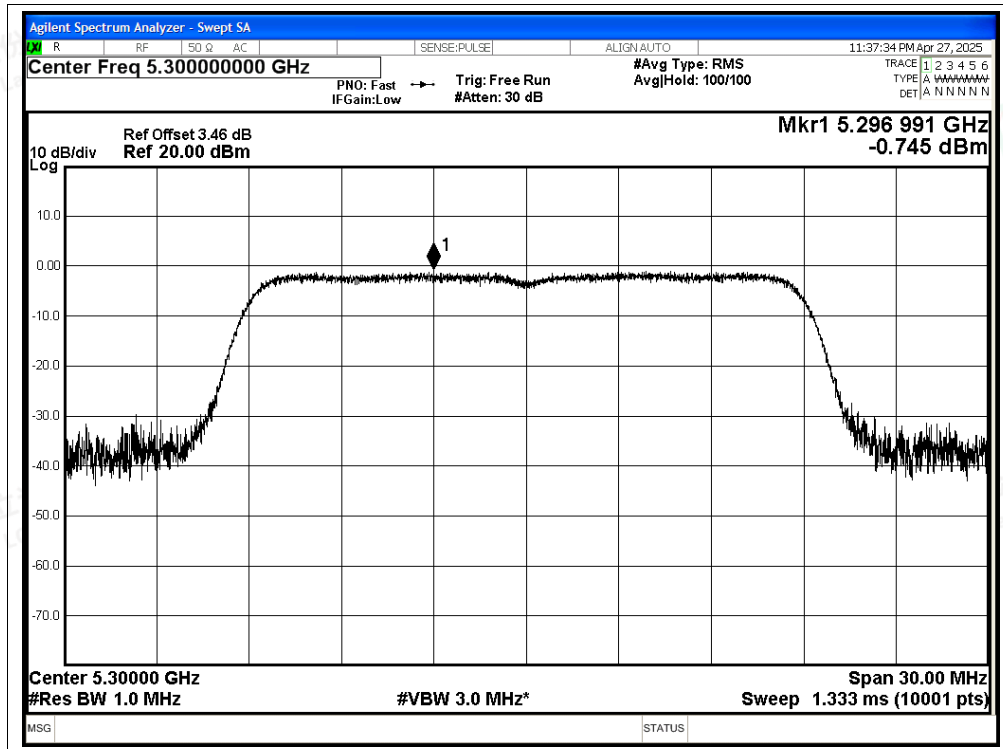




PSD NVNT ax20 5320MHz Ant1

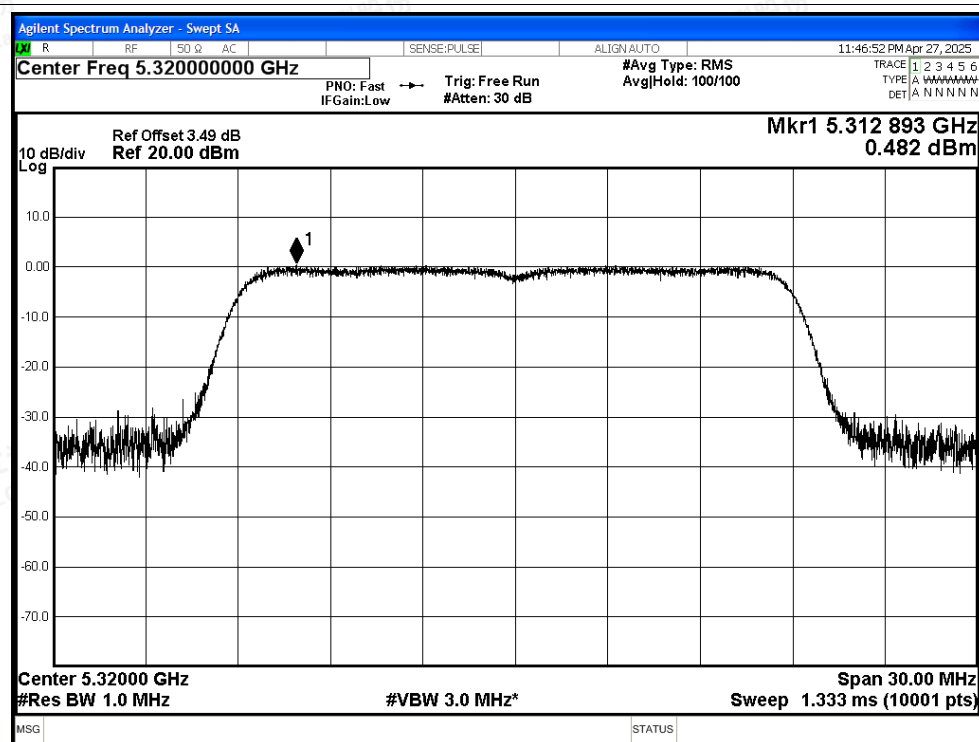

PSD NVNT ax40 5270MHz Ant1

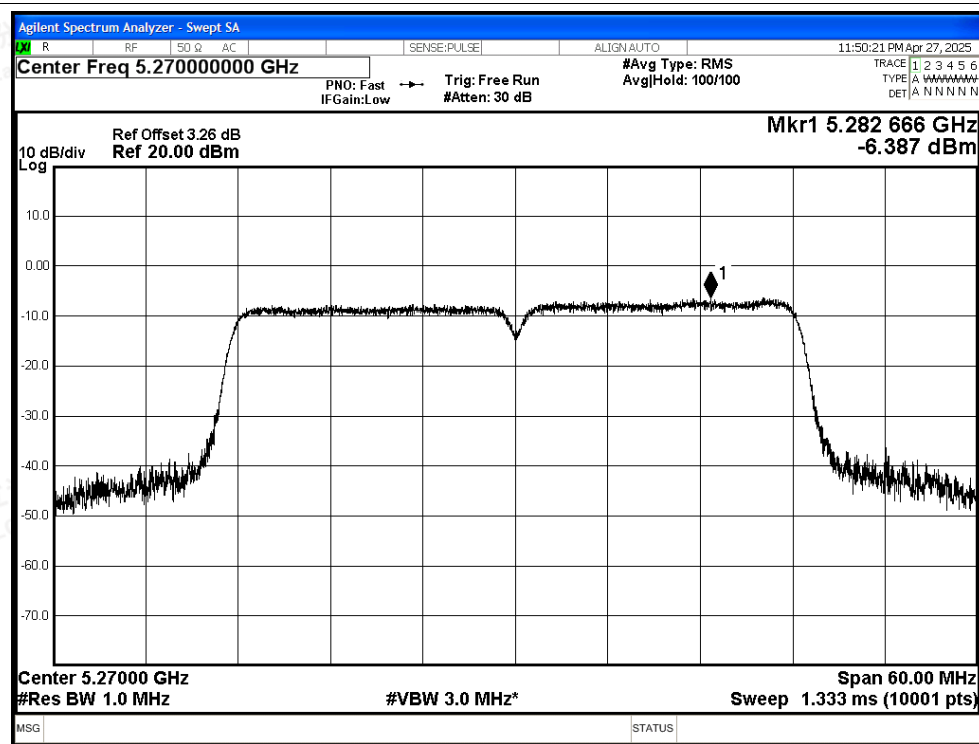

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT ax40 5310MHz Ant1

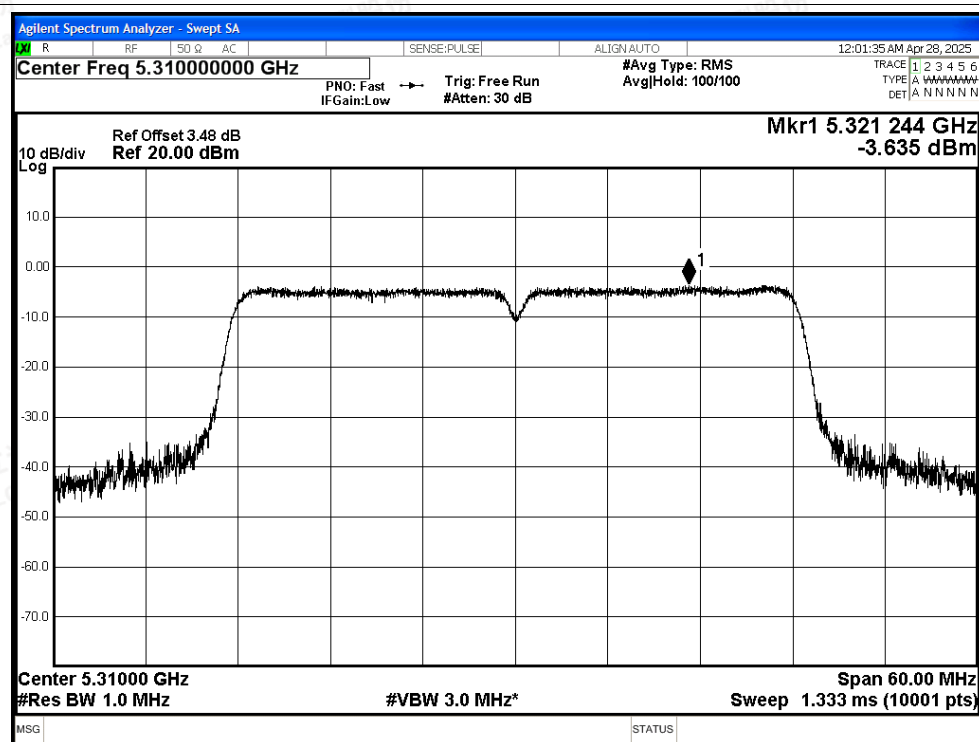

PSD NVNT a 5260MHz Ant2

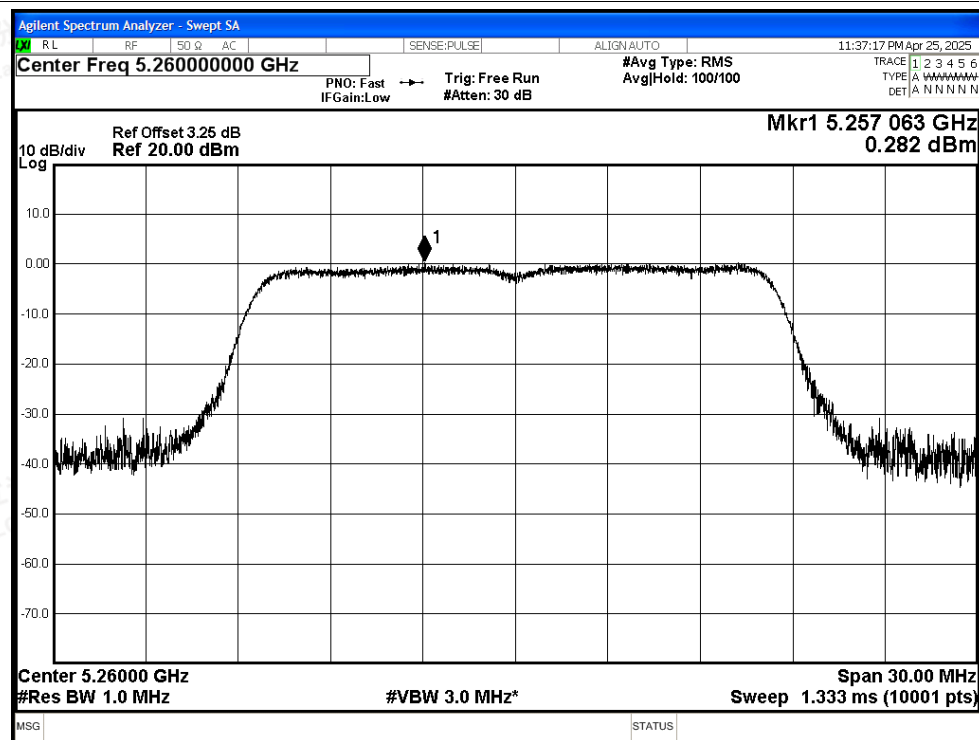

PSD NVNT a 5300MHz Ant2






Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

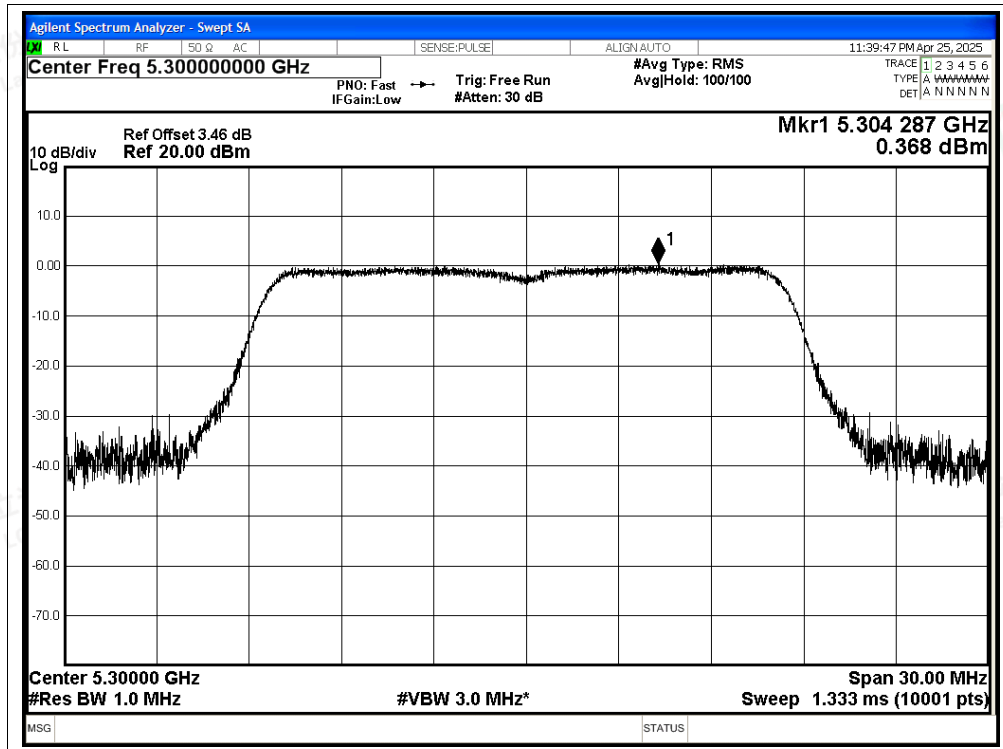

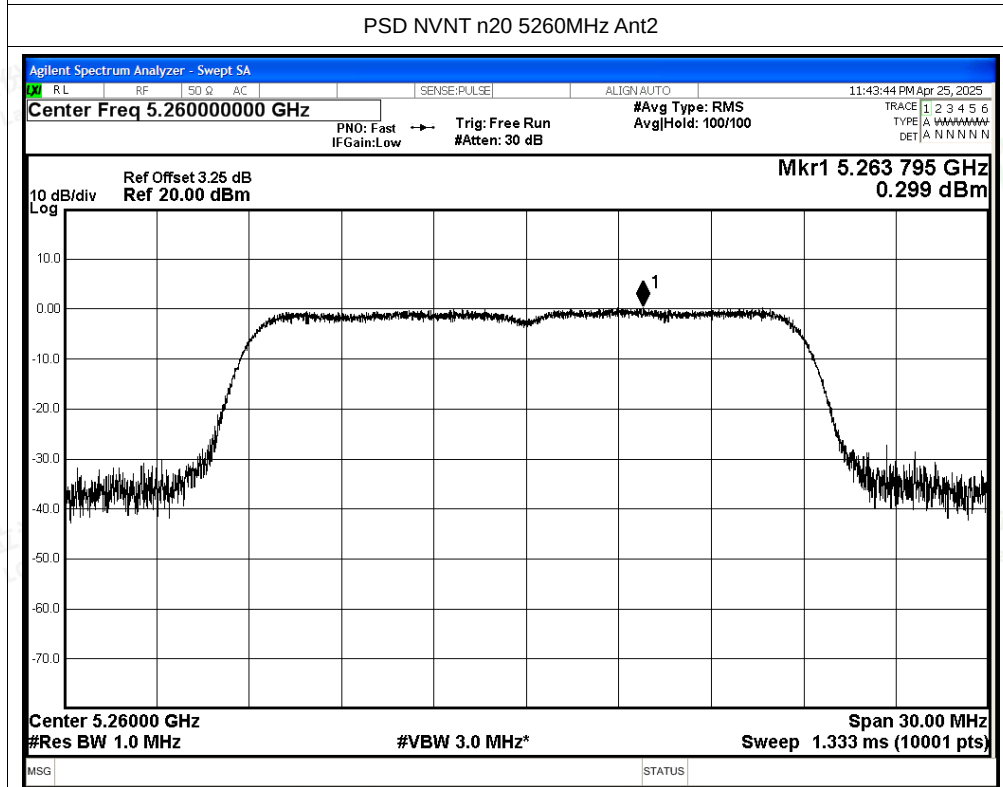
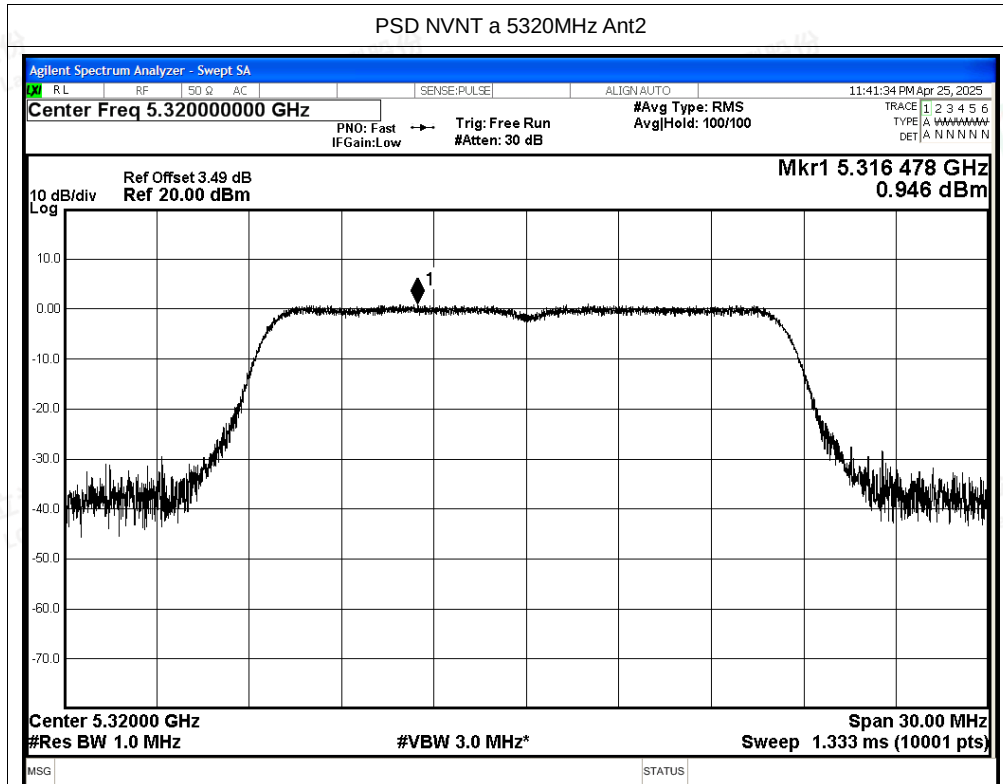


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

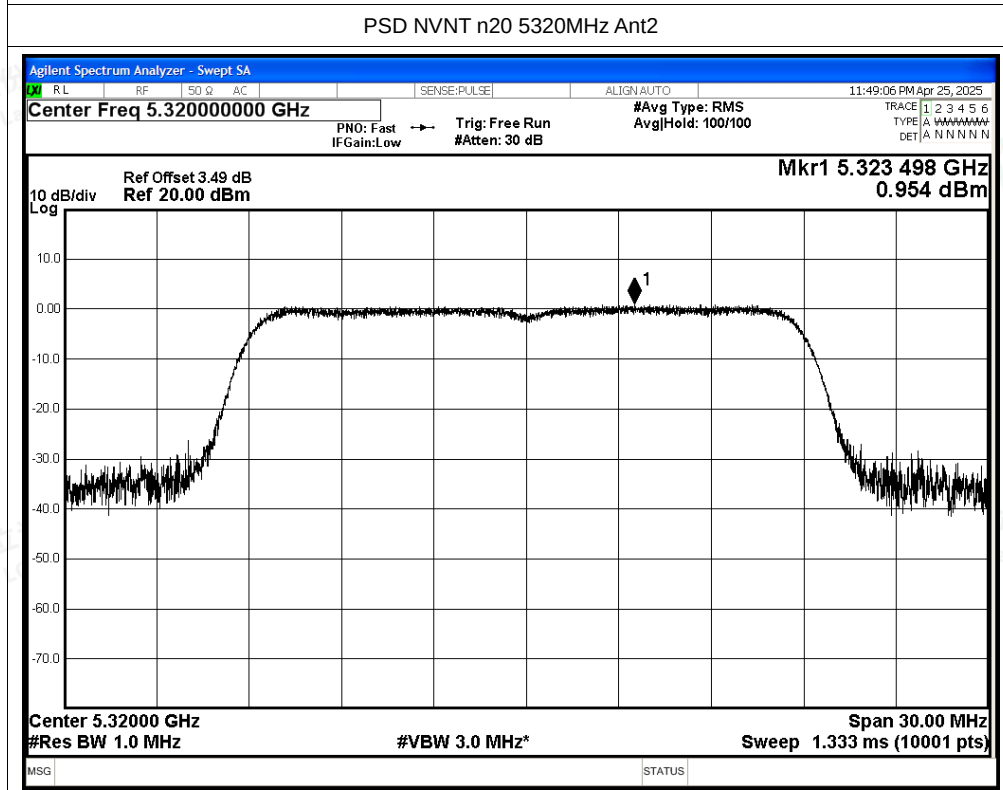
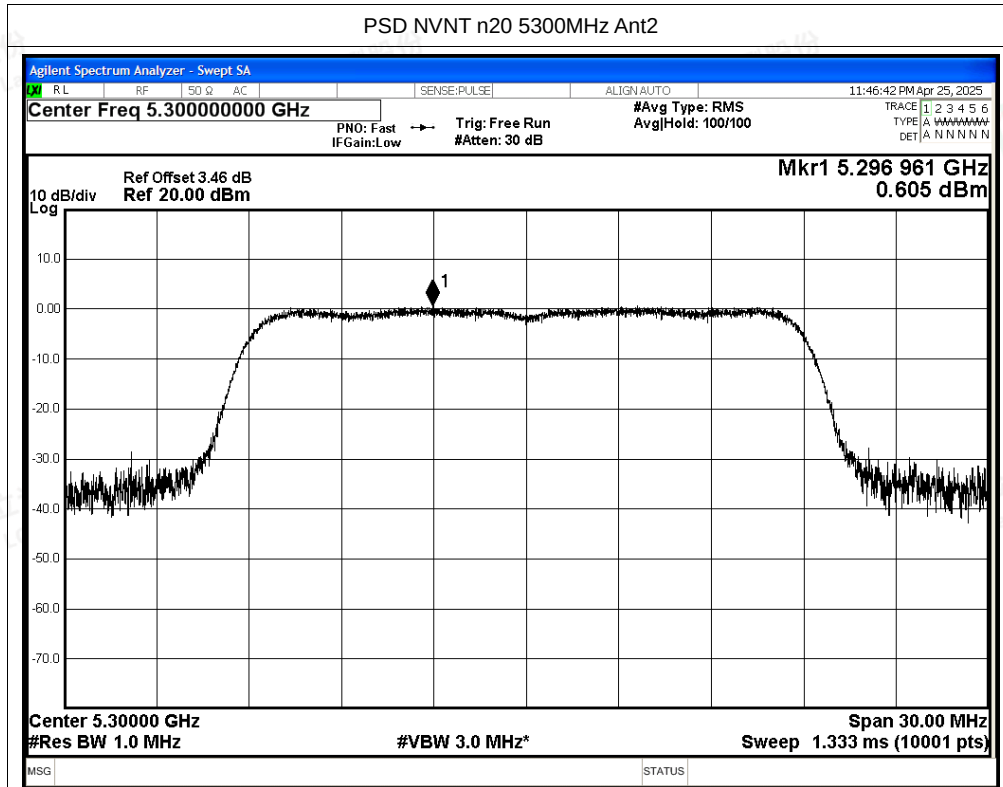


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

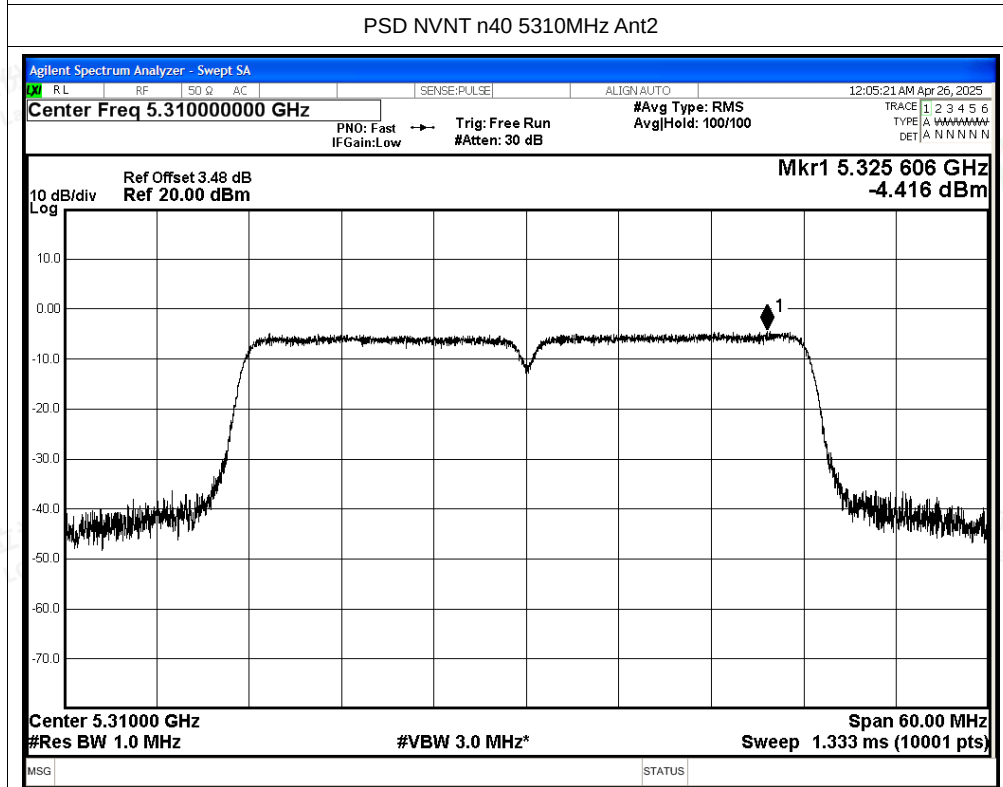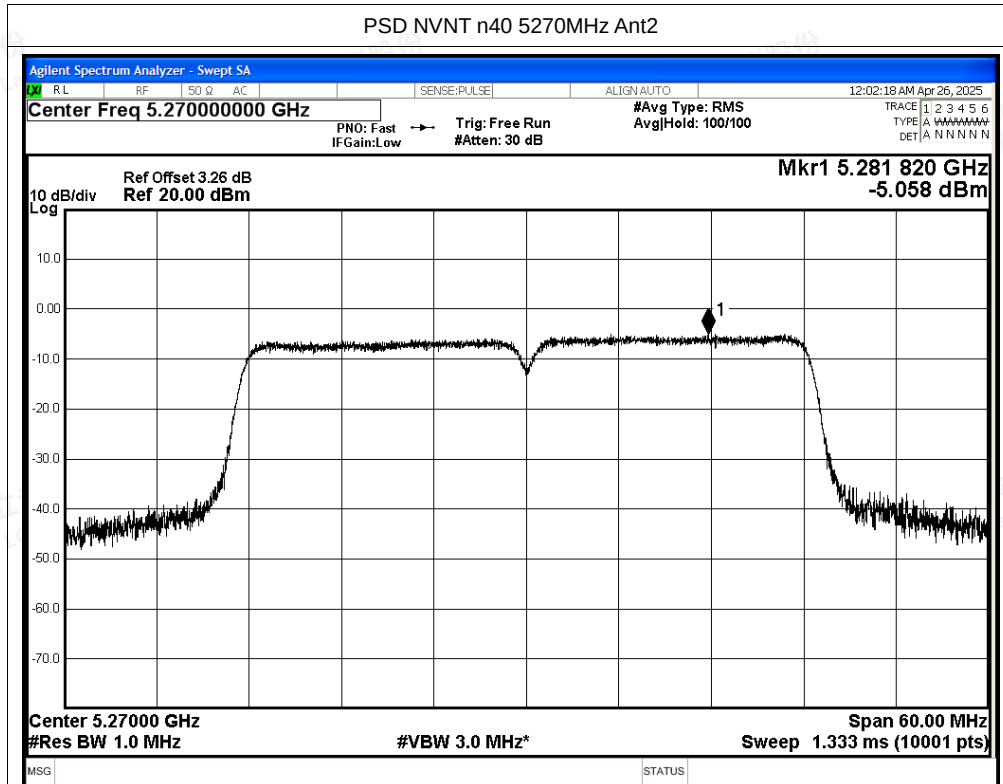

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT ac20 5260MHz Ant2

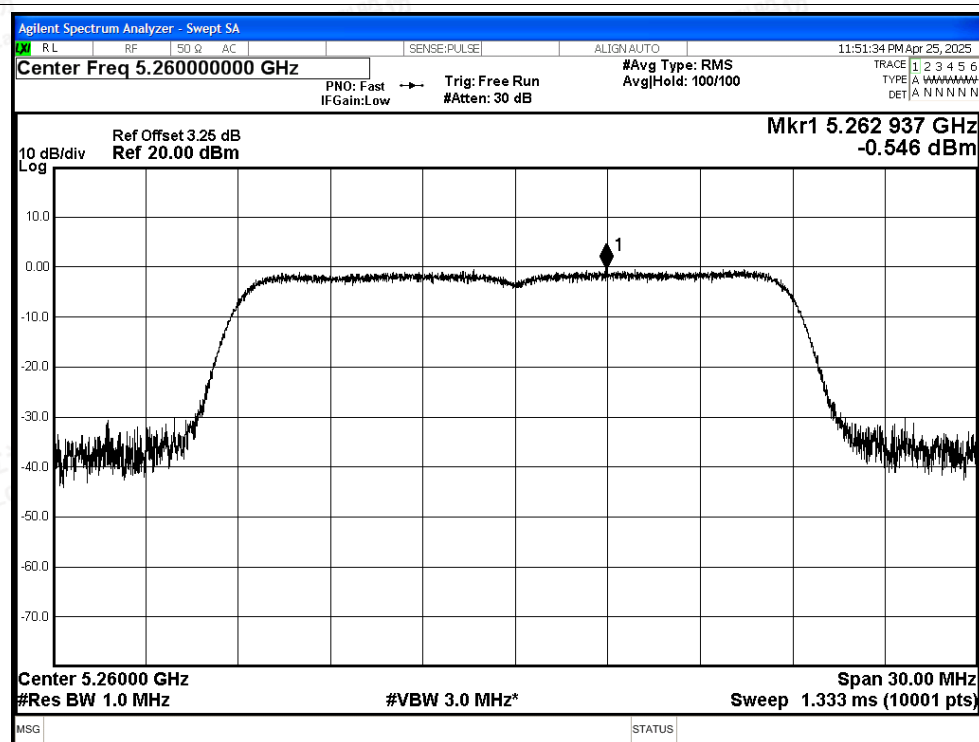


PSD NVNT ac20 5300MHz Ant2

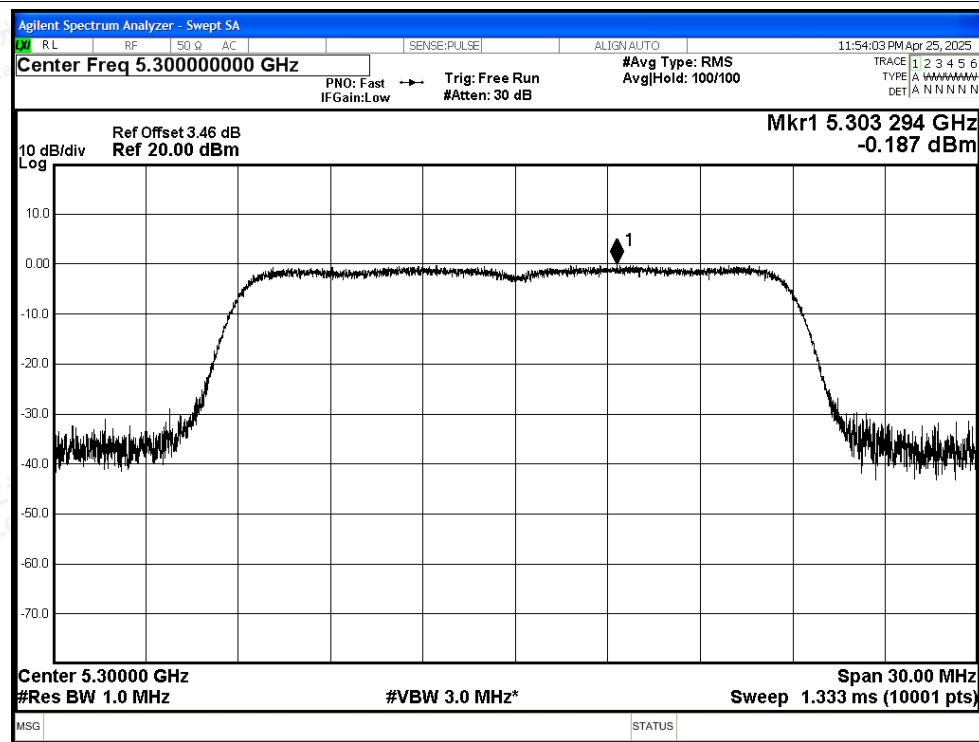




PSD NVNT ac20 5320MHz Ant2

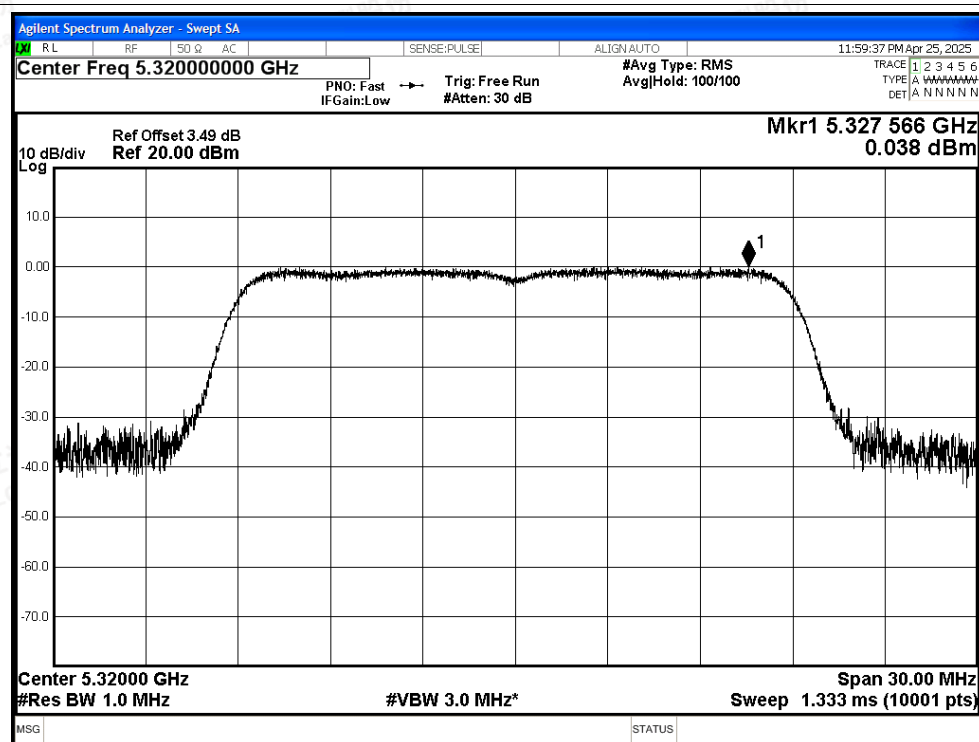

PSD NVNT ac40 5270MHz Ant2

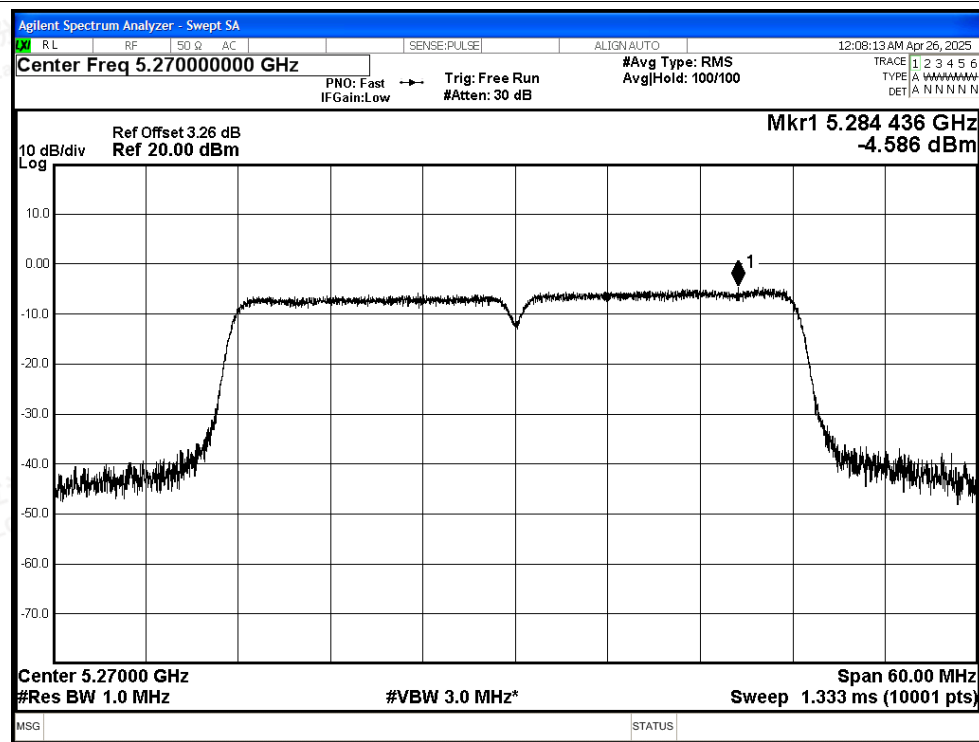

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT ac40 5310MHz Ant2

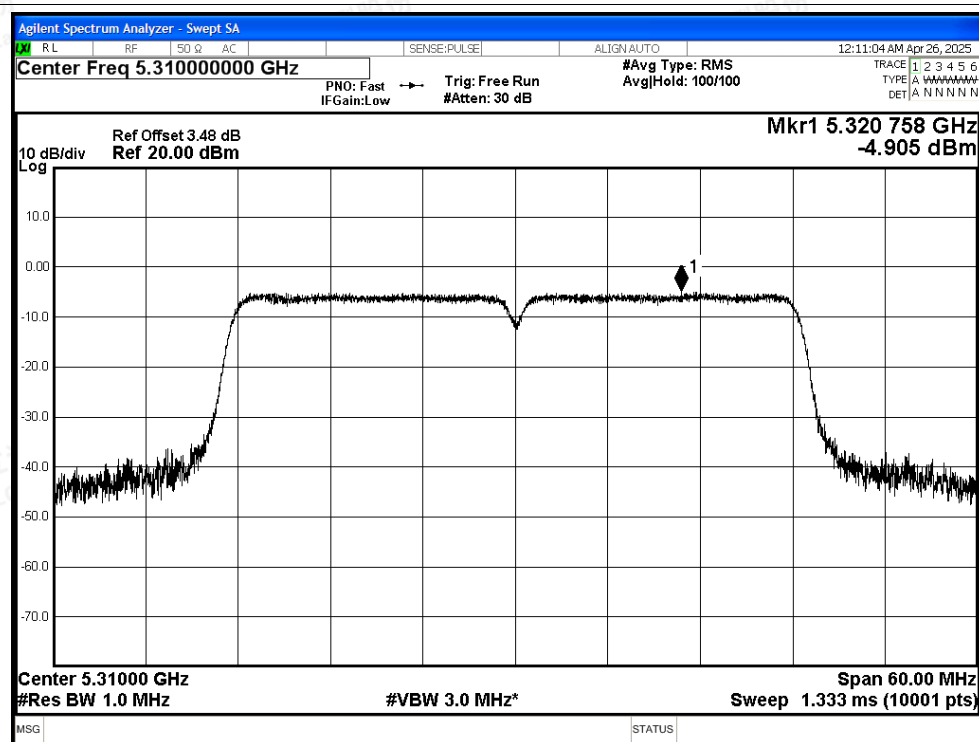

PSD NVNT ax20 5260MHz Ant2

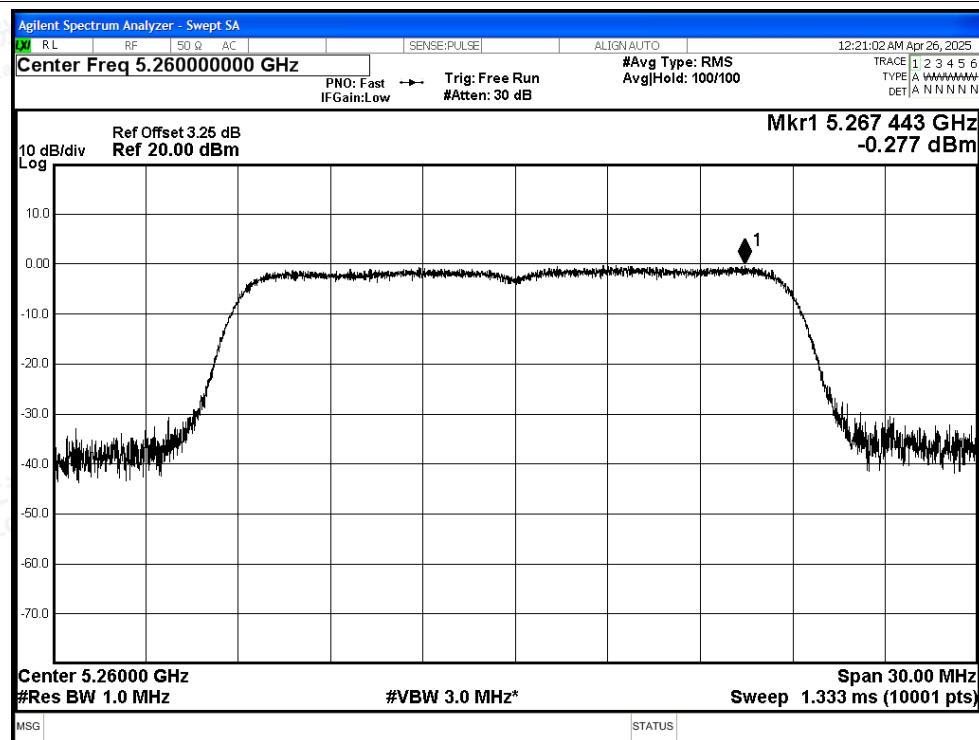

PSD NVNT ax20 5300MHz Ant2




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

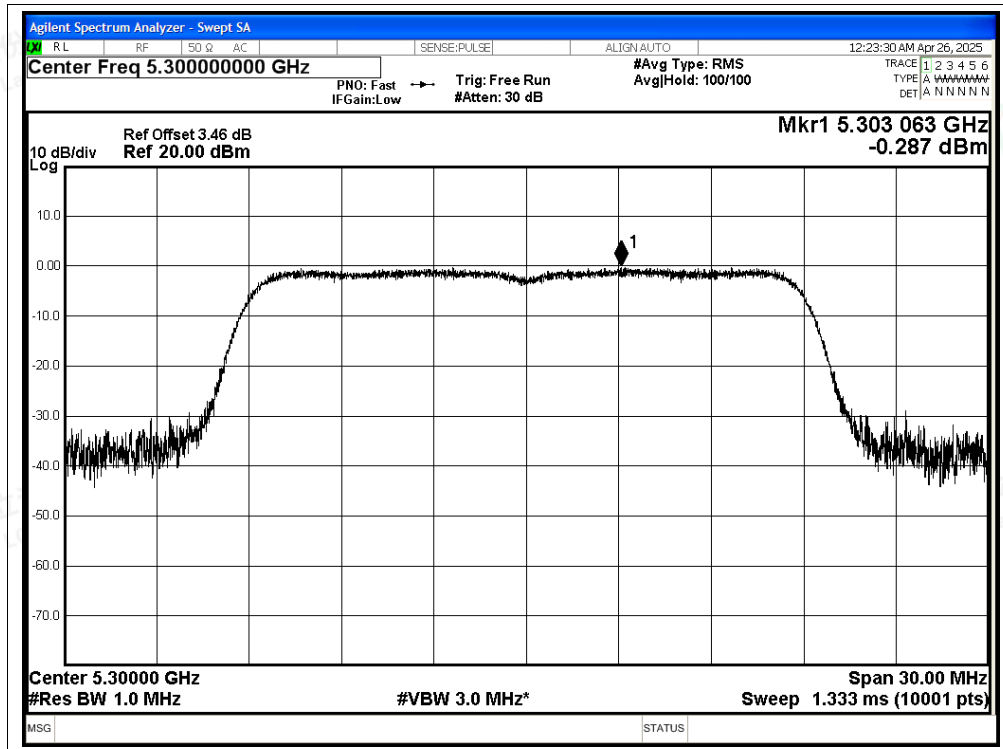





PSD NVNT ax20 5320MHz Ant2

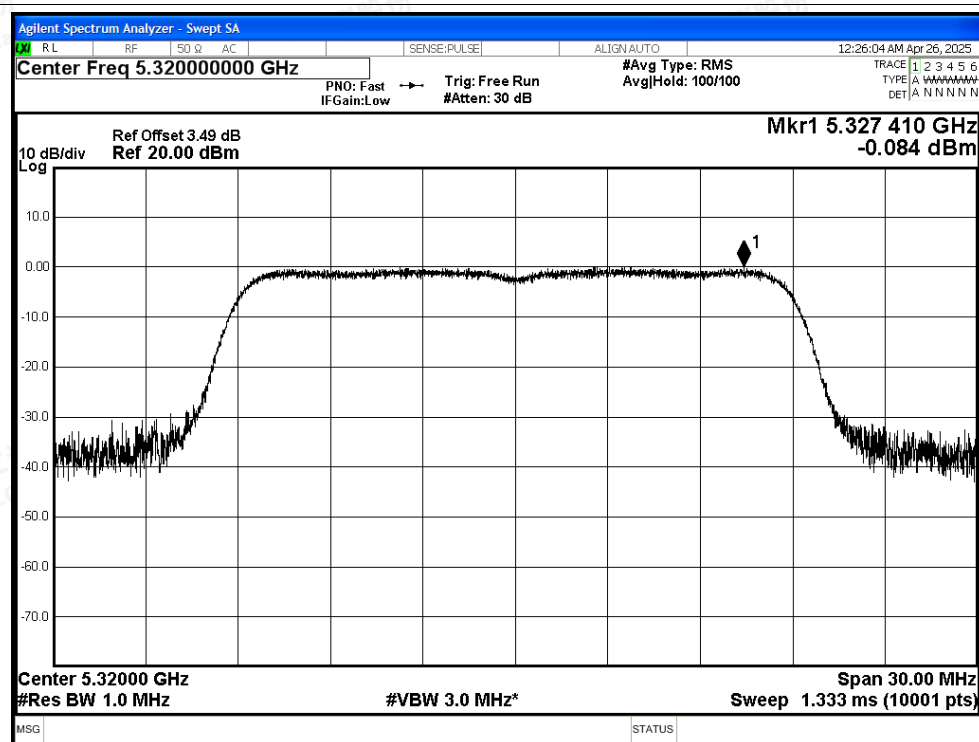

PSD NVNT ax40 5270MHz Ant2

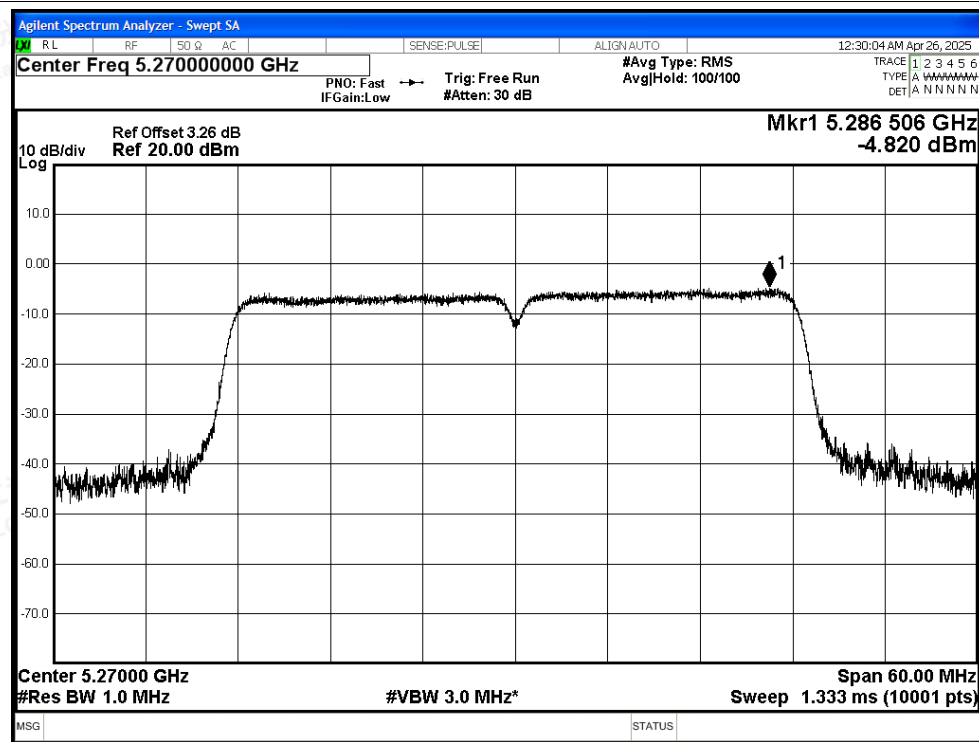

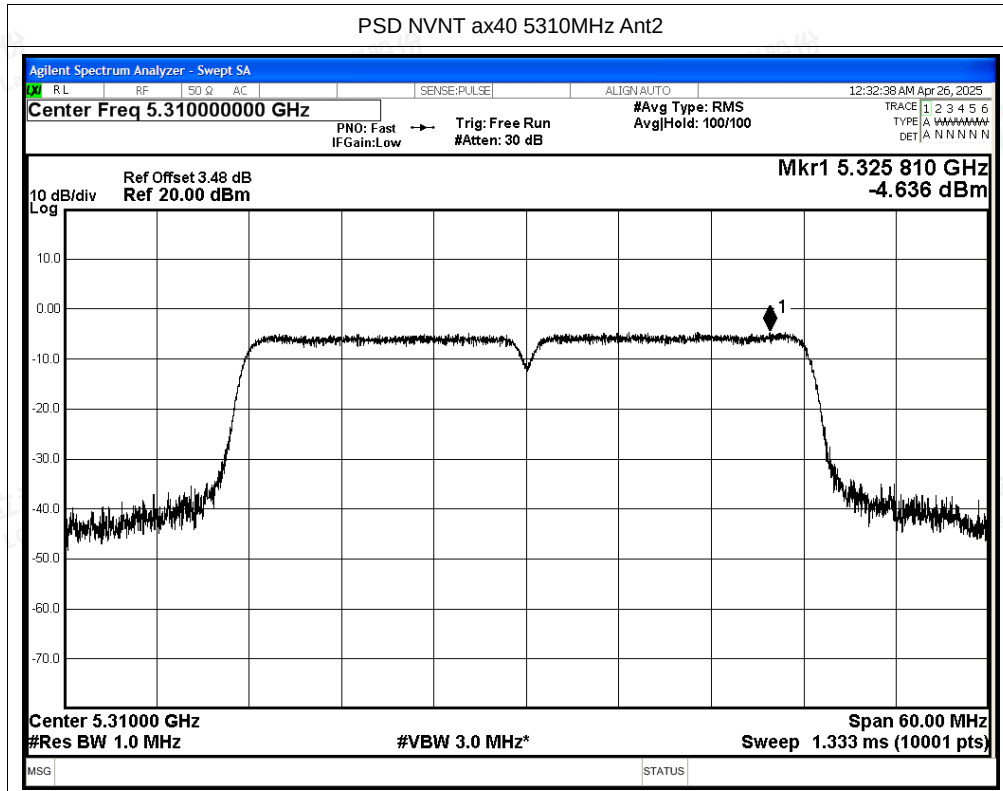



## E.4 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|------------|----------|----------------|---------|
| NVNT      | a    | 5260            | Ant1    | 4500            | -49.63      | 3.40       | -                | 49.00      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5260            | Ant1    | 4500            | -59.45      | 3.40       | 0.24             | 39.42      | Average  | 54             | Pass    |
| NVNT      | a    | 5260            | Ant1    | 5077.2          | -46.18      | 3.40       | -                | 52.45      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5260            | Ant1    | 4773            | -55.85      | 3.40       | 0.24             | 43.02      | Average  | 54             | Pass    |
| NVNT      | a    | 5260            | Ant1    | 5150            | -48.31      | 3.40       | -                | 50.32      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5260            | Ant1    | 5150            | -56.81      | 3.40       | 0.24             | 42.06      | Average  | 54             | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5350            | -36.34      | 3.40       | -                | 62.29      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5350            | -49.54      | 3.40       | 0.24             | 49.33      | Average  | 54             | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5352.4          | -33.73      | 3.40       | -                | 64.90      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5350            | -49.54      | 3.40       | 0.24             | 49.33      | Average  | 54             | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5460            | -49.39      | 3.40       | -                | 49.24      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5460            | -57.96      | 3.40       | 0.24             | 40.91      | Average  | 54             | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 4500            | -51.16      | 3.40       | -                | 47.47      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 4500            | -59.29      | 3.40       | 0                | 39.34      | Average  | 54             | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 4787.82         | -45.78      | 3.40       | -                | 52.85      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 4787.82         | -55.47      | 3.40       | 0                | 43.16      | Average  | 54             | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 5150            | -49.37      | 3.40       | -                | 49.26      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 5150            | -56.72      | 3.40       | 0                | 41.91      | Average  | 54             | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5350            | -37.74      | 3.40       | -                | 60.89      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5350            | -48.08      | 3.40       | 0                | 50.55      | Average  | 54             | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5351            | -30.97      | 3.40       | -                | 67.66      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5351.8          | -47.37      | 3.40       | 0                | 51.26      | Average  | 54             | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5460            | -51.02      | 3.40       | -                | 47.61      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5460            | -57.63      | 3.40       | 0                | 41.00      | Average  | 54             | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 4500            | -51.18      | 3.40       | -                | 47.45      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 4500            | -59.26      | 3.40       | 0.16             | 39.53      | Average  | 54             | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 4773.78         | -46.21      | 3.40       | -                | 52.42      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 4806.18         | -54.11      | 3.40       | 0.16             | 44.68      | Average  | 54             | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 5150            | -48.56      | 3.40       | -                | 50.07      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 5150            | -57.14      | 3.40       | 0.16             | 41.65      | Average  | 54             | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5350            | -39.3       | 3.40       | -                | 59.33      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5350            | -51.31      | 3.40       | 0.16             | 47.48      | Average  | 54             | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5351.4          | -37.97      | 3.40       | -                | 60.66      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5351.2          | -50.83      | 3.40       | 0.16             | 47.96      | Average  | 54             | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5460            | -49.07      | 3.40       | -                | 49.56      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5460            | -57.88      | 3.40       | 0.16             | 40.91      | Average  | 54             | Pass    |
| NVNT      | ac20 | 5260            | Ant1    | 4500            | -52.33      | 3.40       | -                | 46.30      | Peak     | 68.2           | Pass    |
| NVNT      | ac20 | 5260            | Ant1    | 4500            | -58.81      | 3.40       | 0                | 39.82      | Average  | 54             | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |         |        |      |      |       |         |      |      |
|------|------|------|------|---------|--------|------|------|-------|---------|------|------|
| NVNT | ac20 | 5260 | Ant1 | 4772.22 | -46.23 | 3.40 | -    | 52.40 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5260 | Ant1 | 4787.82 | -56.02 | 3.40 | 0    | 42.61 | Average | 54   | Pass |
| NVNT | ac20 | 5260 | Ant1 | 5150    | -49.36 | 3.40 | -    | 49.27 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5260 | Ant1 | 5150    | -57.25 | 3.40 | 0    | 41.38 | Average | 54   | Pass |
| NVNT | ac20 | 5320 | Ant1 | 5350    | -35.47 | 3.40 | -    | 63.16 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5320 | Ant1 | 5350    | -49.62 | 3.40 | 0    | 49.01 | Average | 54   | Pass |
| NVNT | ac20 | 5320 | Ant1 | 5352.4  | -34.22 | 3.40 | -    | 64.41 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5320 | Ant1 | 5350.2  | -49.46 | 3.40 | 0    | 49.17 | Average | 54   | Pass |
| NVNT | ac20 | 5320 | Ant1 | 5460    | -50.33 | 3.40 | -    | 48.30 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5320 | Ant1 | 5460    | -58.17 | 3.40 | 0    | 40.46 | Average | 54   | Pass |
| NVNT | ac40 | 5270 | Ant1 | 4500    | -49.62 | 3.40 | -    | 49.01 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5270 | Ant1 | 4500    | -58.77 | 3.40 | 0.16 | 40.02 | Average | 54   | Pass |
| NVNT | ac40 | 5270 | Ant1 | 4806.99 | -45.91 | 3.40 | -    | 52.72 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5270 | Ant1 | 4806.18 | -54.21 | 3.40 | 0.16 | 44.58 | Average | 54   | Pass |
| NVNT | ac40 | 5270 | Ant1 | 5150    | -49.01 | 3.40 | -    | 49.62 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5270 | Ant1 | 5150    | -56.78 | 3.40 | 0.16 | 42.01 | Average | 54   | Pass |
| NVNT | ac40 | 5310 | Ant1 | 5350    | -36.89 | 3.40 | -    | 61.74 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5310 | Ant1 | 5350    | -50.72 | 3.40 | 0.16 | 48.07 | Average | 54   | Pass |
| NVNT | ac40 | 5310 | Ant1 | 5350.4  | -36.67 | 3.40 | -    | 61.96 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5310 | Ant1 | 5350.2  | -50.44 | 3.40 | 0.16 | 48.35 | Average | 54   | Pass |
| NVNT | ac40 | 5310 | Ant1 | 5460    | -50.39 | 3.40 | -    | 48.24 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5310 | Ant1 | 5460    | -58.02 | 3.40 | 0.16 | 40.77 | Average | 54   | Pass |
| NVNT | ax20 | 5260 | Ant1 | 4500    | -51.04 | 3.40 | -    | 47.59 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5260 | Ant1 | 4500    | -58.38 | 3.40 | 0    | 40.25 | Average | 54   | Pass |
| NVNT | ax20 | 5260 | Ant1 | 5149.74 | -45.56 | 3.40 | -    | 53.07 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5260 | Ant1 | 4787.82 | -54.97 | 3.40 | 0    | 43.66 | Average | 54   | Pass |
| NVNT | ax20 | 5260 | Ant1 | 5150    | -45.56 | 3.40 | -    | 53.07 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5260 | Ant1 | 5150    | -56.66 | 3.40 | 0    | 41.97 | Average | 54   | Pass |
| NVNT | ax20 | 5320 | Ant1 | 5350    | -36.82 | 3.40 | -    | 61.81 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5320 | Ant1 | 5350    | -50.59 | 3.40 | 0    | 48.04 | Average | 54   | Pass |
| NVNT | ax20 | 5320 | Ant1 | 5351    | -31.56 | 3.40 | -    | 67.07 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5320 | Ant1 | 5352    | -48.97 | 3.40 | 0    | 49.66 | Average | 54   | Pass |
| NVNT | ax20 | 5320 | Ant1 | 5460    | -50.12 | 3.40 | -    | 48.51 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5320 | Ant1 | 5460    | -57.46 | 3.40 | 0    | 41.17 | Average | 54   | Pass |
| NVNT | ax40 | 5270 | Ant1 | 4500    | -49.92 | 3.40 | -    | 48.71 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5270 | Ant1 | 4500    | -58.37 | 3.40 | 0.16 | 40.42 | Average | 54   | Pass |
| NVNT | ax40 | 5270 | Ant1 | 4807.8  | -44.78 | 3.40 | -    | 53.85 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5270 | Ant1 | 4806.99 | -53.04 | 3.40 | 0.16 | 45.75 | Average | 54   | Pass |
| NVNT | ax40 | 5270 | Ant1 | 5150    | -48.53 | 3.40 | -    | 50.10 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5270 | Ant1 | 5150    | -57.16 | 3.40 | 0.16 | 41.63 | Average | 54   | Pass |
| NVNT | ax40 | 5310 | Ant1 | 5350    | -38.05 | 3.40 | -    | 60.58 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5310 | Ant1 | 5350    | -49.45 | 3.40 | 0.16 | 49.34 | Average | 54   | Pass |
| NVNT | ax40 | 5310 | Ant1 | 5350.4  | -35.12 | 3.40 | -    | 63.51 | Peak    | 68.2 | Pass |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity




|      |      |      |      |        |        |      |      |       |         |      |      |
|------|------|------|------|--------|--------|------|------|-------|---------|------|------|
| NVNT | ax40 | 5310 | Ant1 | 5350.4 | -49.27 | 3.40 | 0.16 | 49.52 | Average | 54   | Pass |
| NVNT | ax40 | 5310 | Ant1 | 5460   | -48.74 | 3.40 | -    | 49.89 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5310 | Ant1 | 5460   | -57.07 | 3.40 | 0.16 | 41.72 | Average | 54   | Pass |

## Test Graphs

## Restrict Band NVNT a 5260MHz Ant1 Peak

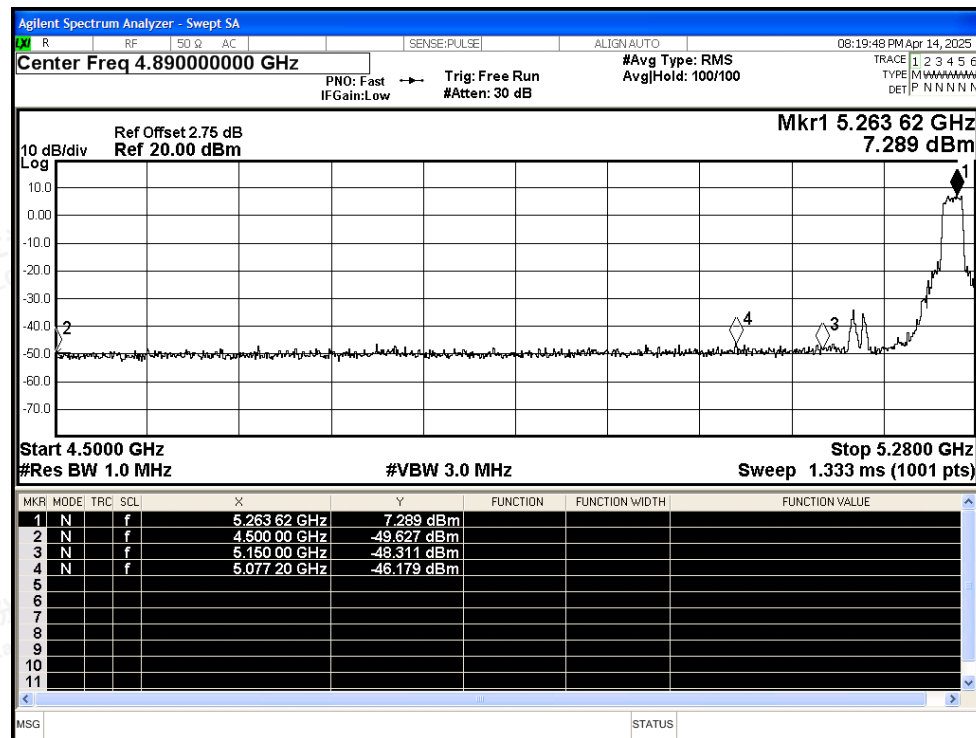

## Restrict Band NVNT a 5260MHz Ant1 Average

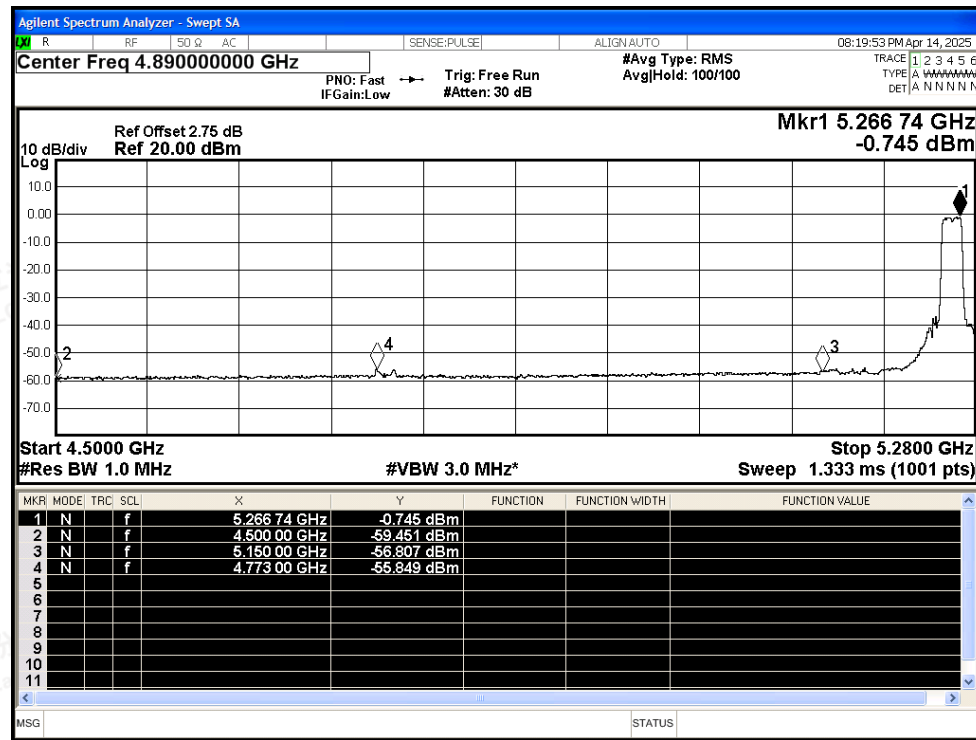

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity






## Restrict Band NVNT a 5320MHz Ant1 Peak

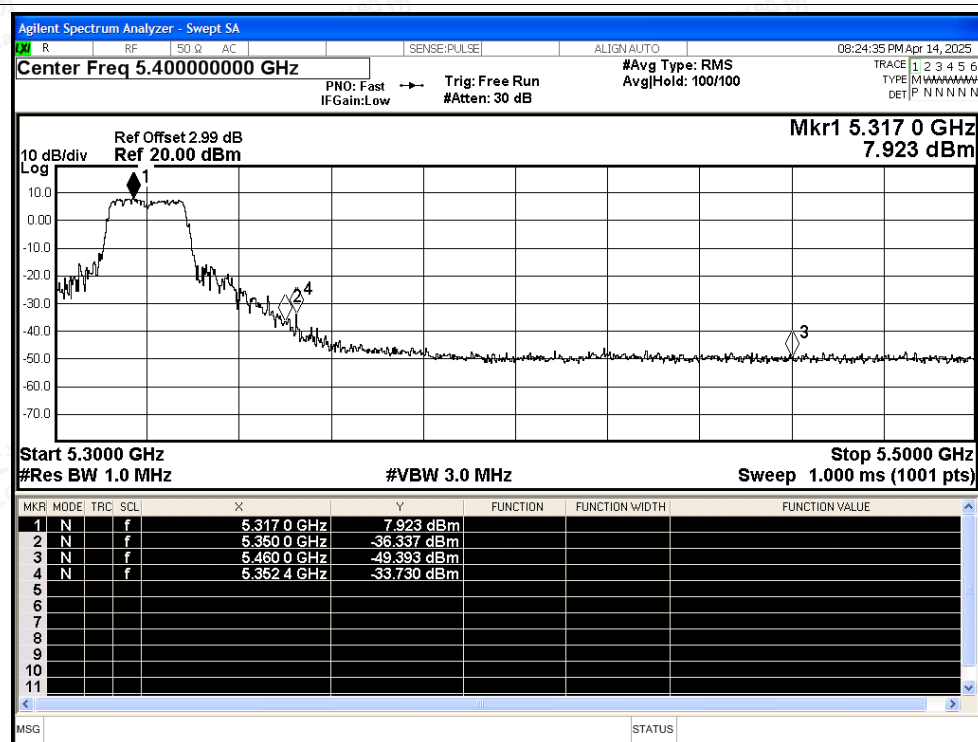

## Restrict Band NVNT a 5320MHz Ant1 Average

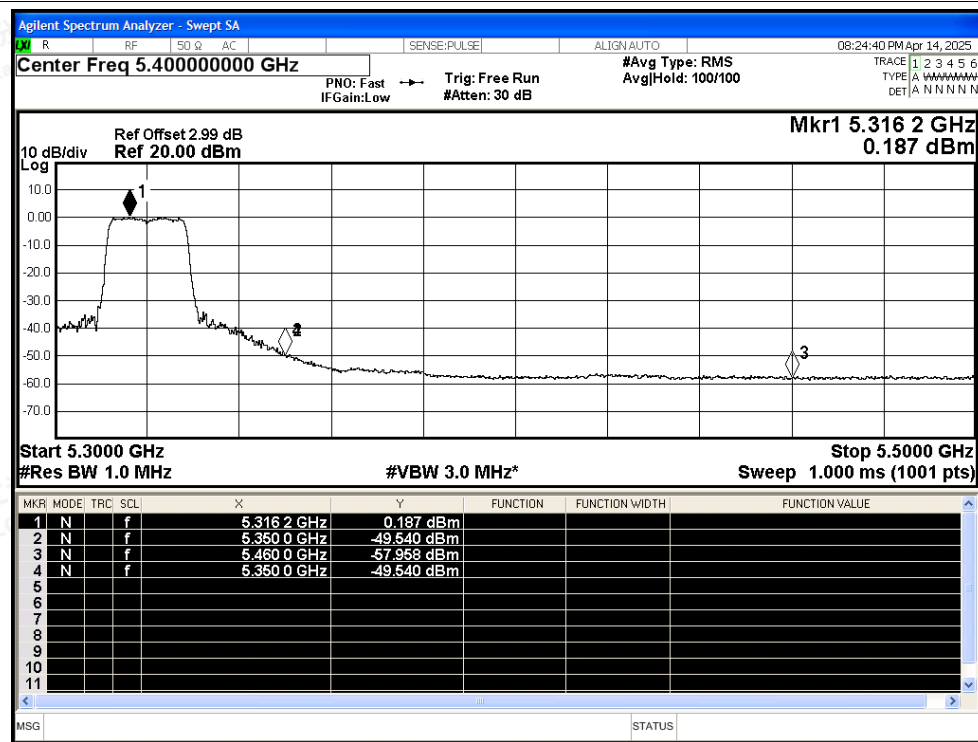

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5260MHz Ant1 Peak

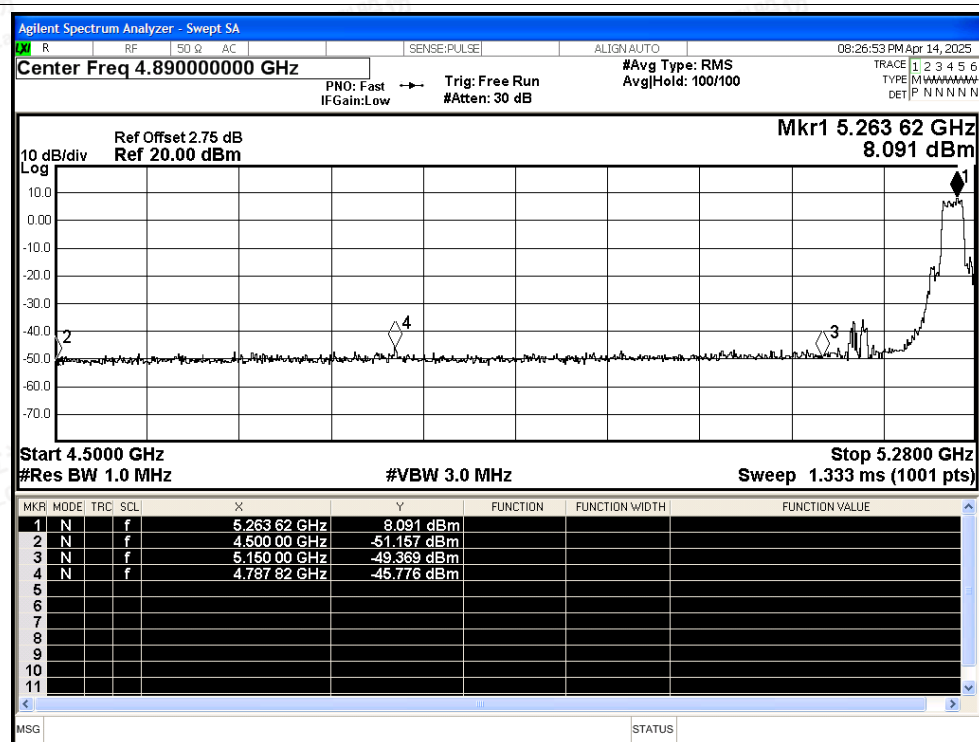

## Restrict Band NVNT n20 5260MHz Ant1 Average

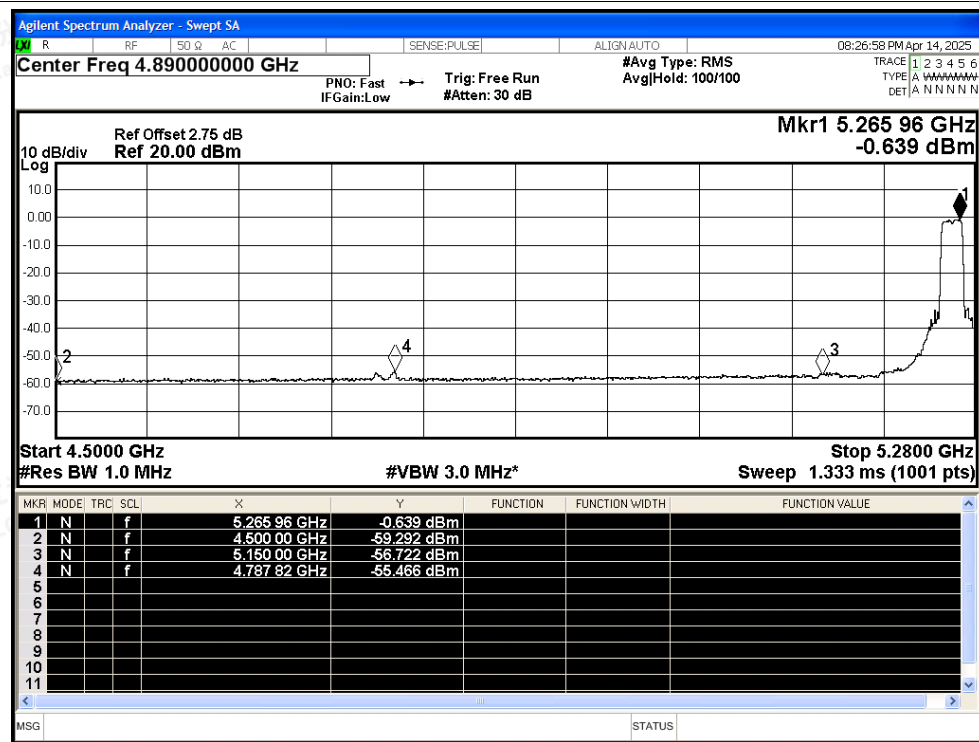

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5320MHz Ant1 Peak

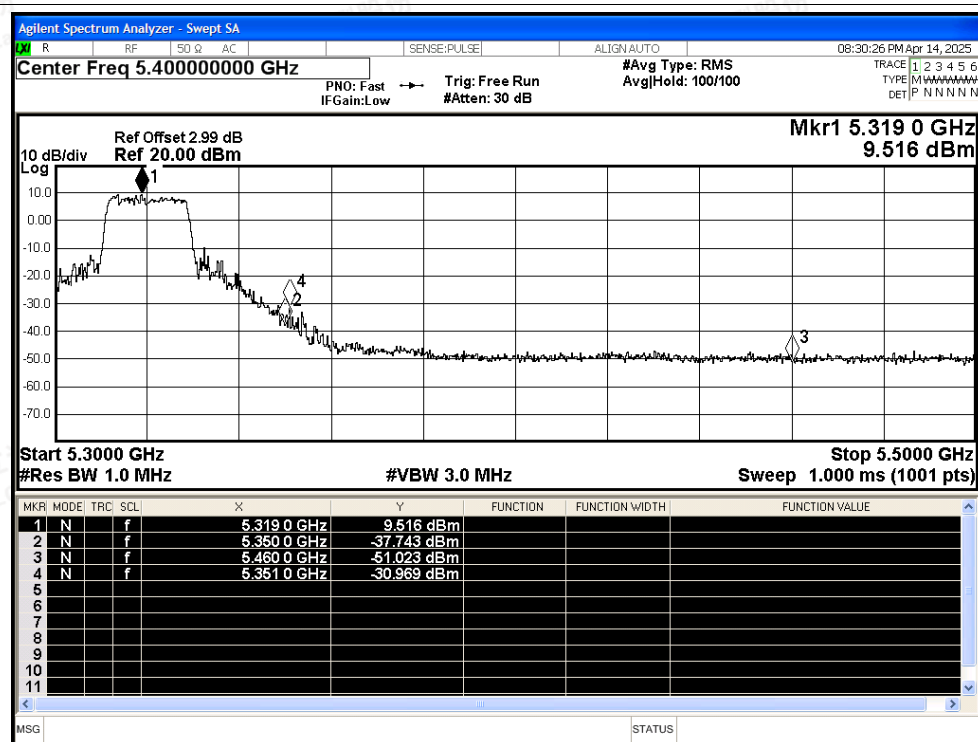

## Restrict Band NVNT n20 5320MHz Ant1 Average

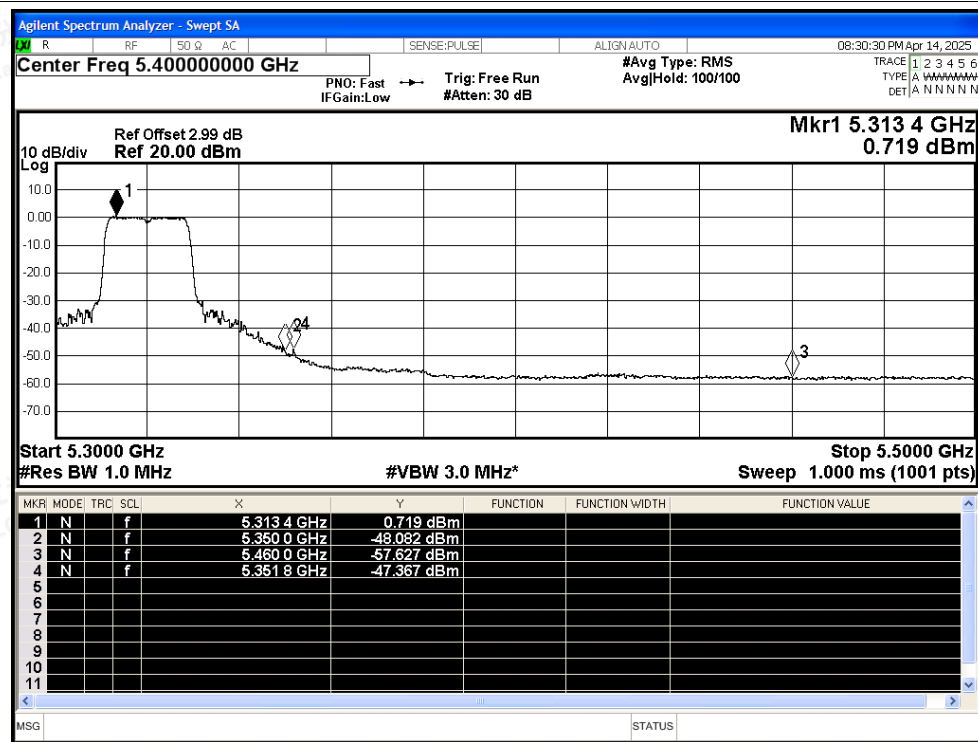

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5270MHz Ant1 Peak

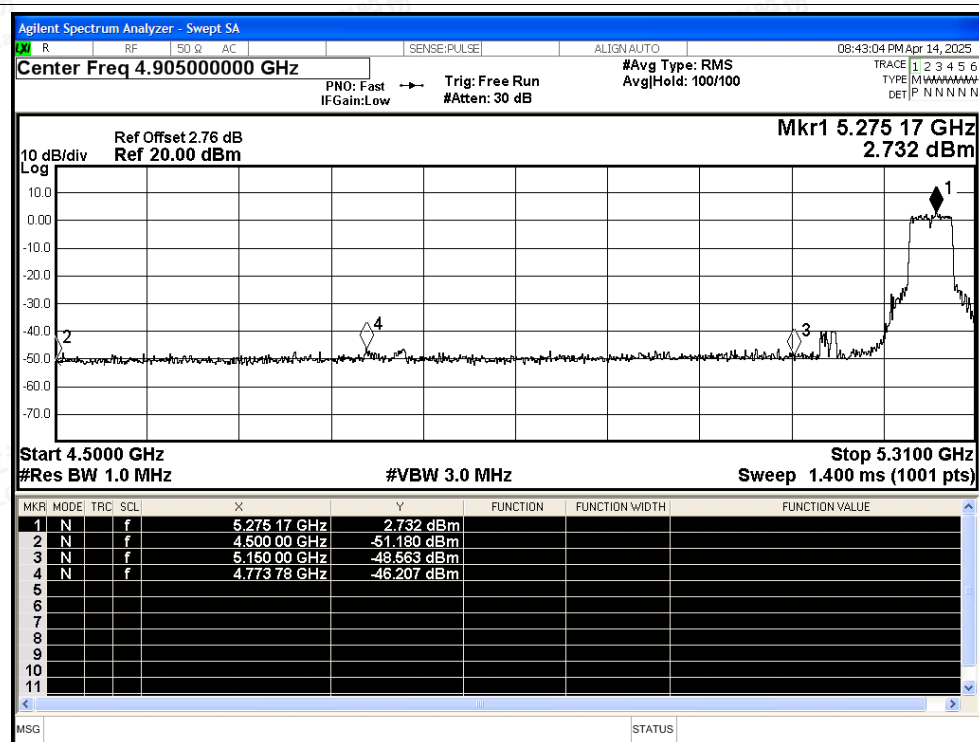

## Restrict Band NVNT n40 5270MHz Ant1 Average

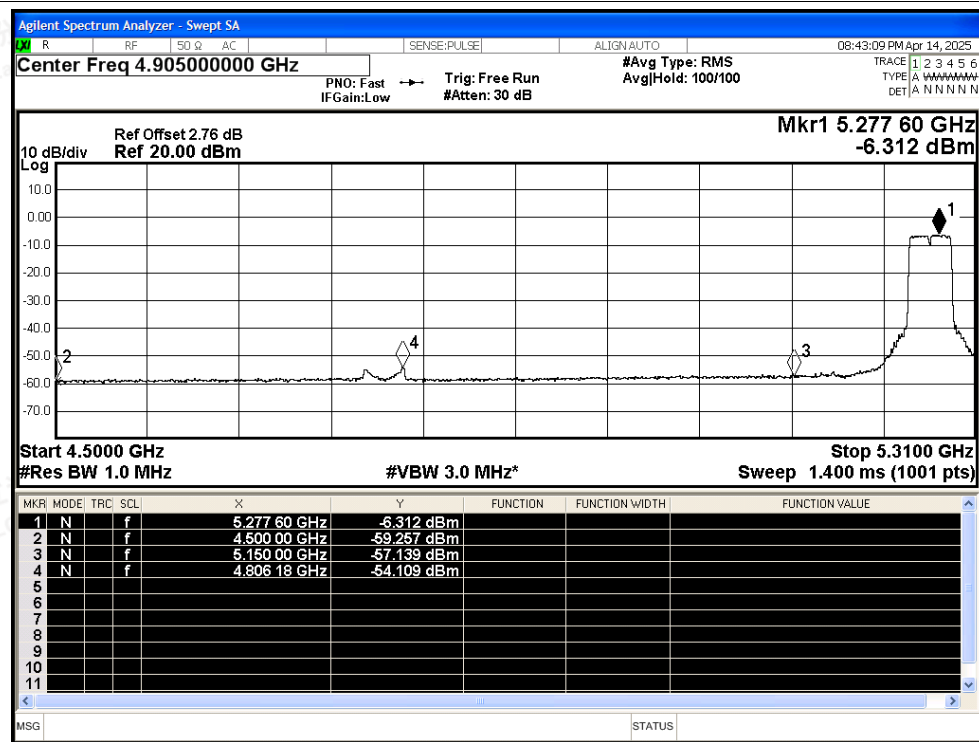

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5310MHz Ant1 Peak

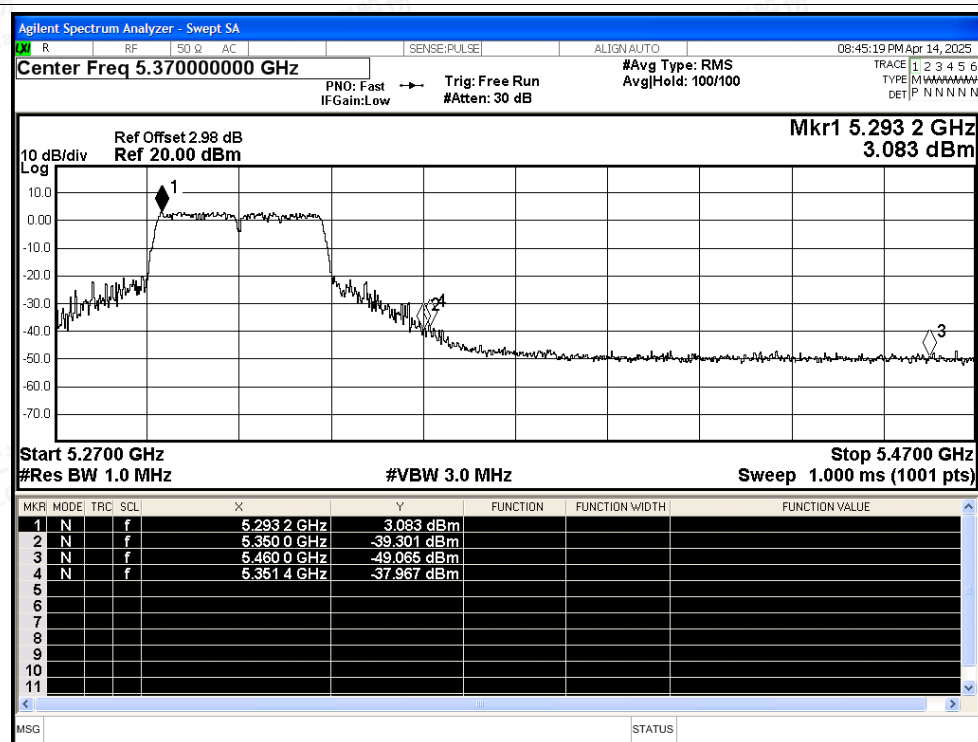

## Restrict Band NVNT n40 5310MHz Ant1 Average

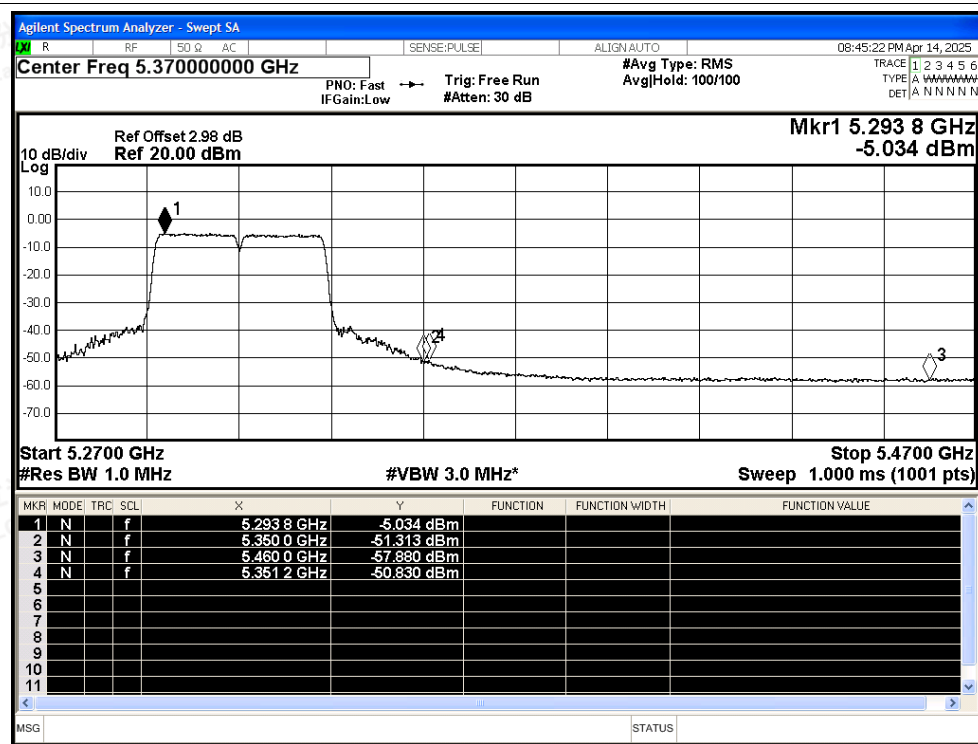

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac20 5260MHz Ant1 Peak

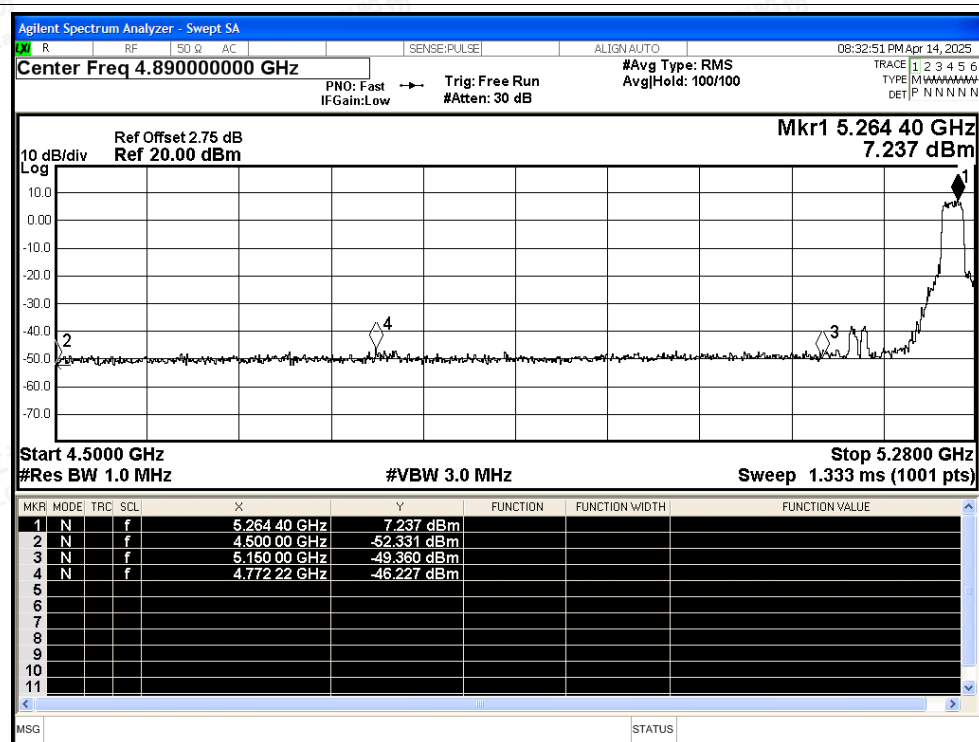

## Restrict Band NVNT ac20 5260MHz Ant1 Average

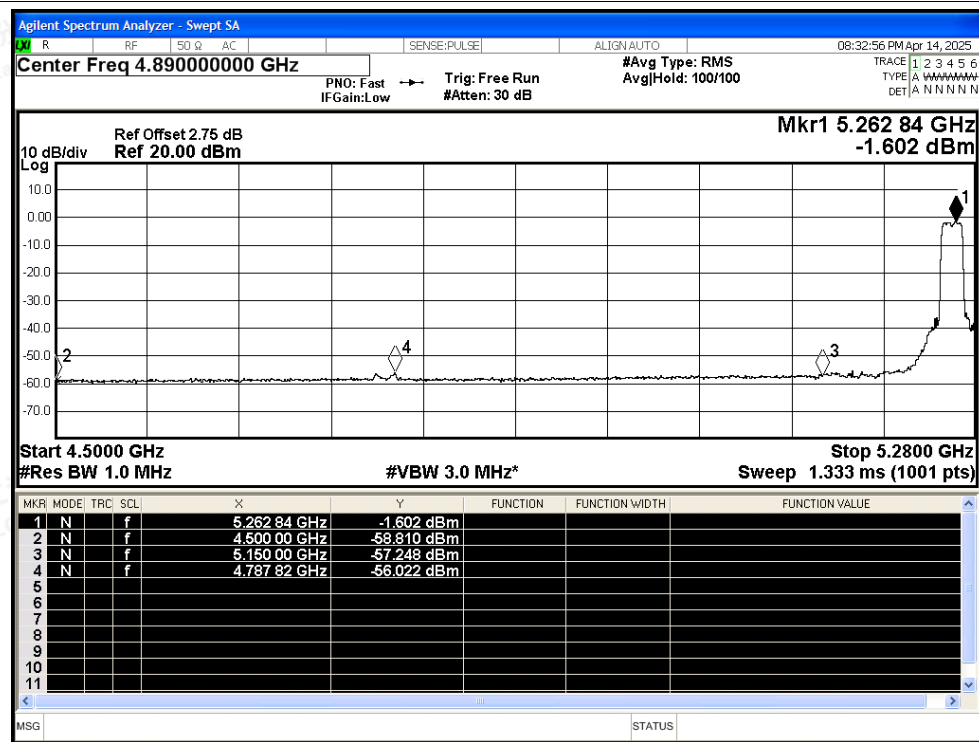

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac20 5320MHz Ant1 Peak

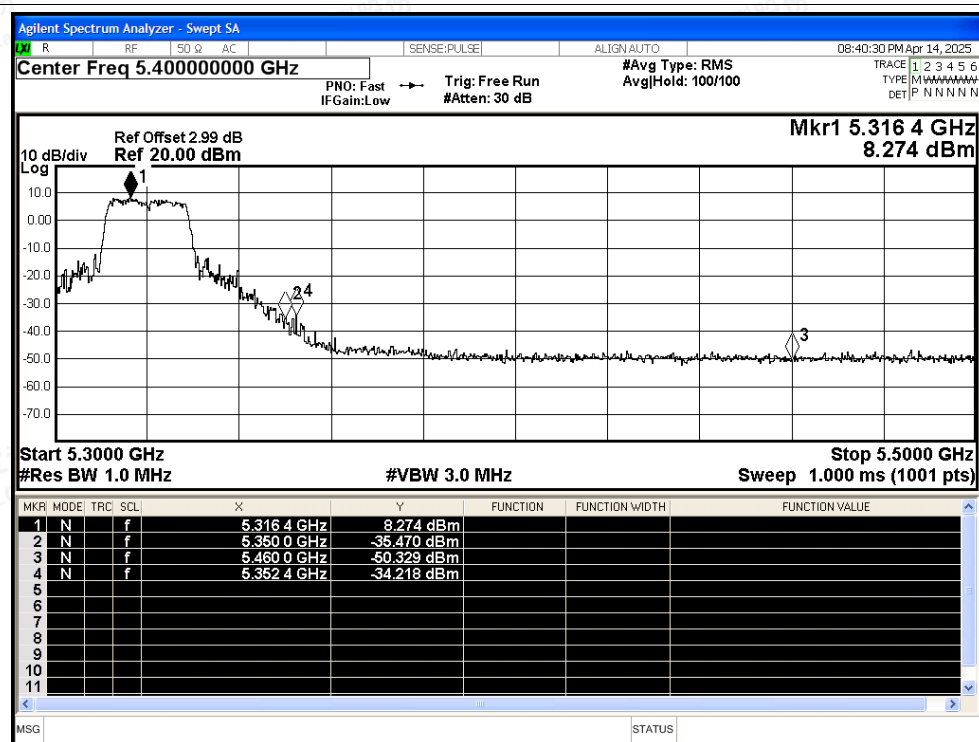

## Restrict Band NVNT ac20 5320MHz Ant1 Average

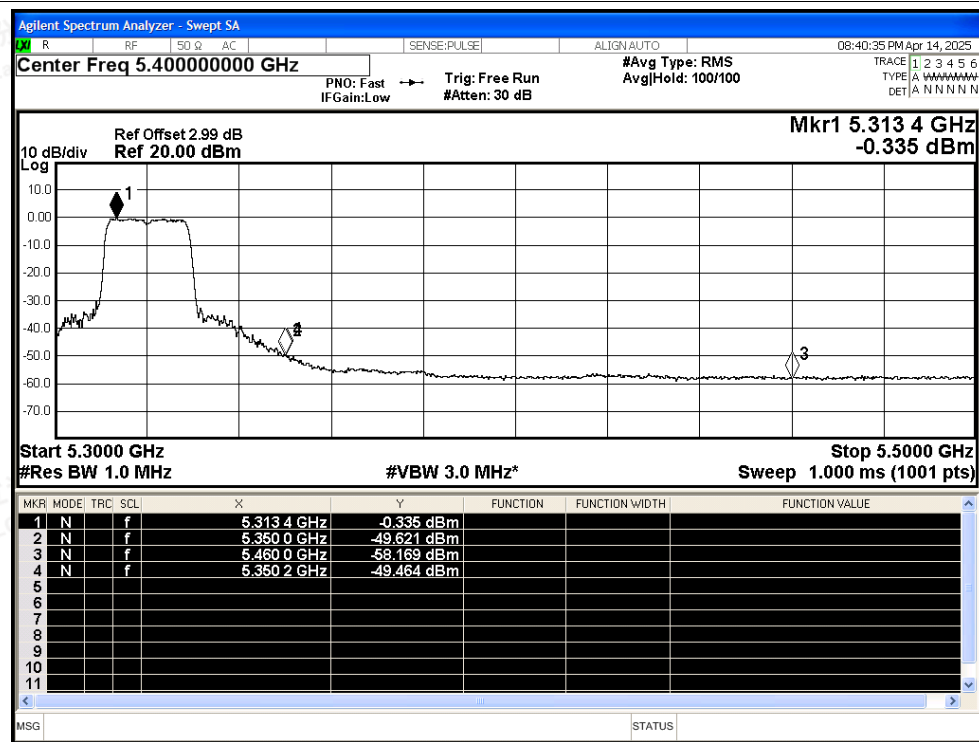

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac40 5270MHz Ant1 Peak

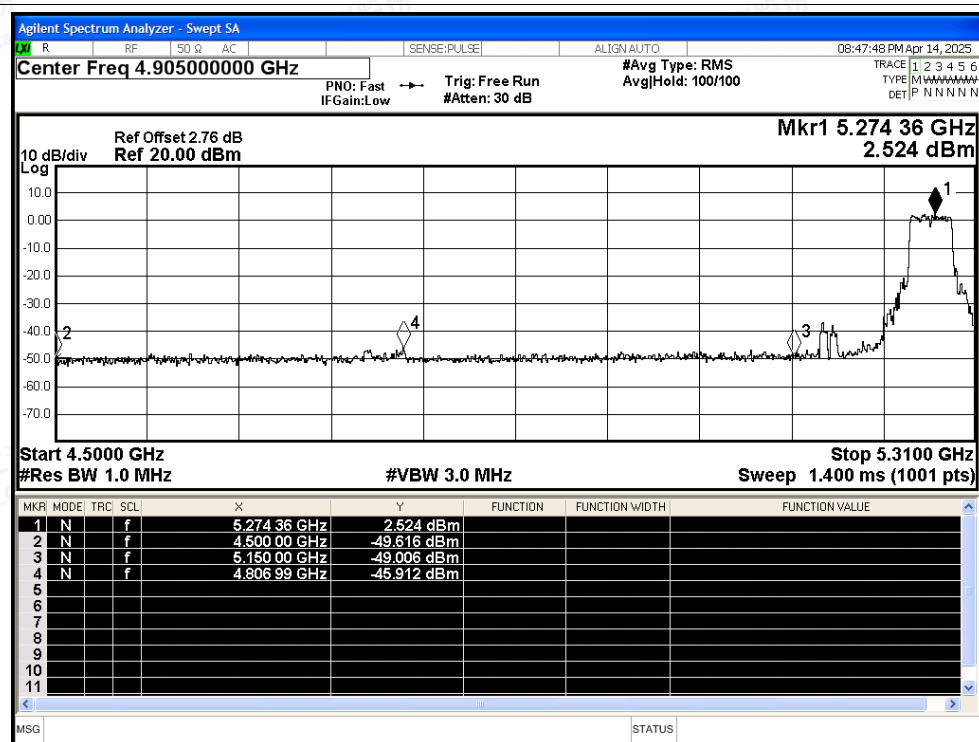

## Restrict Band NVNT ac40 5270MHz Ant1 Average

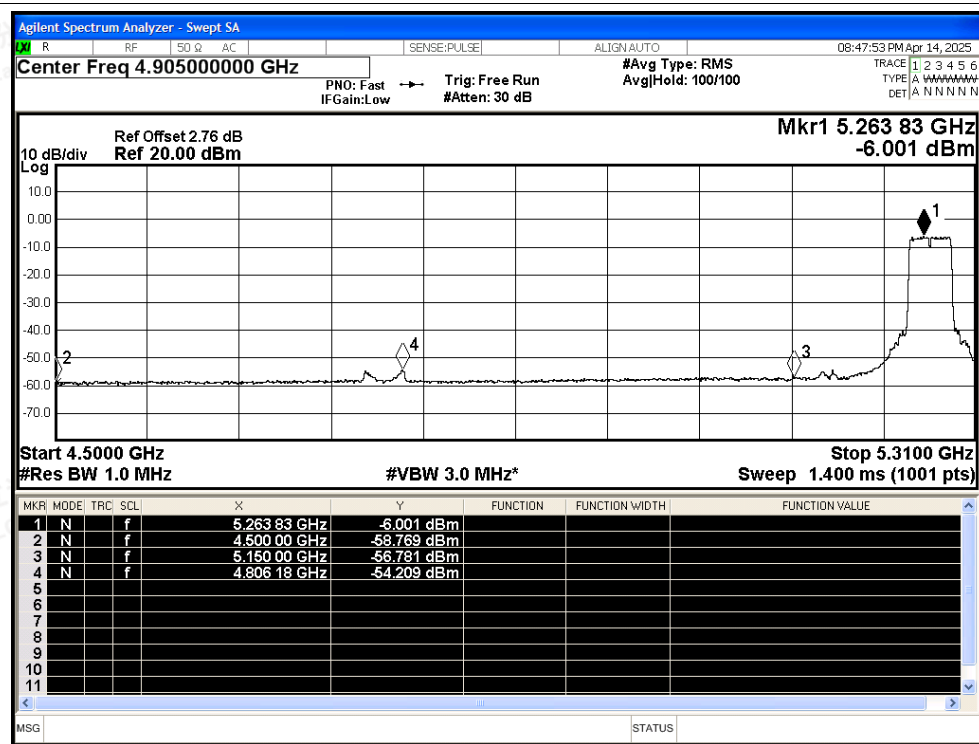

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac40 5310MHz Ant1 Peak

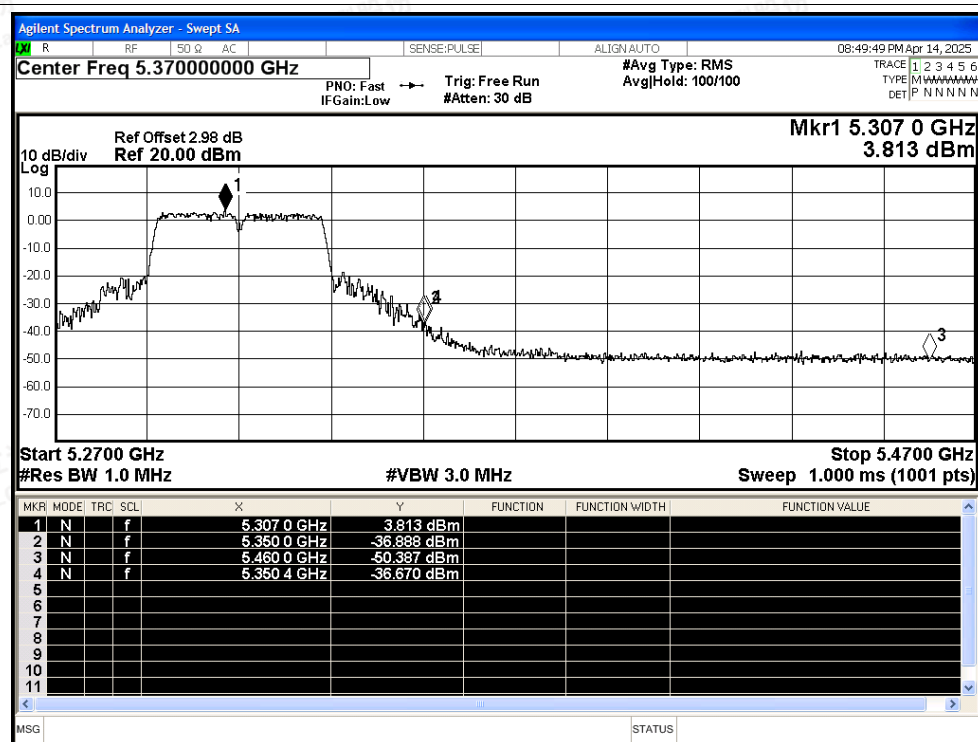

## Restrict Band NVNT ac40 5310MHz Ant1 Average

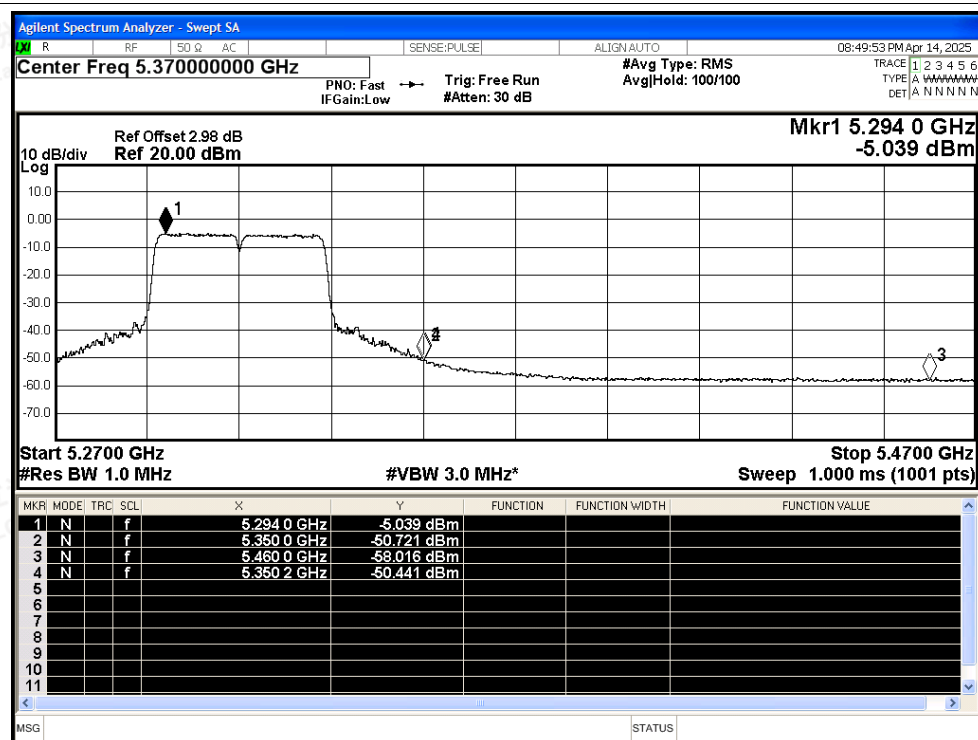

## Restrict Band NVNT ax20 5260MHz Ant1 Peak




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

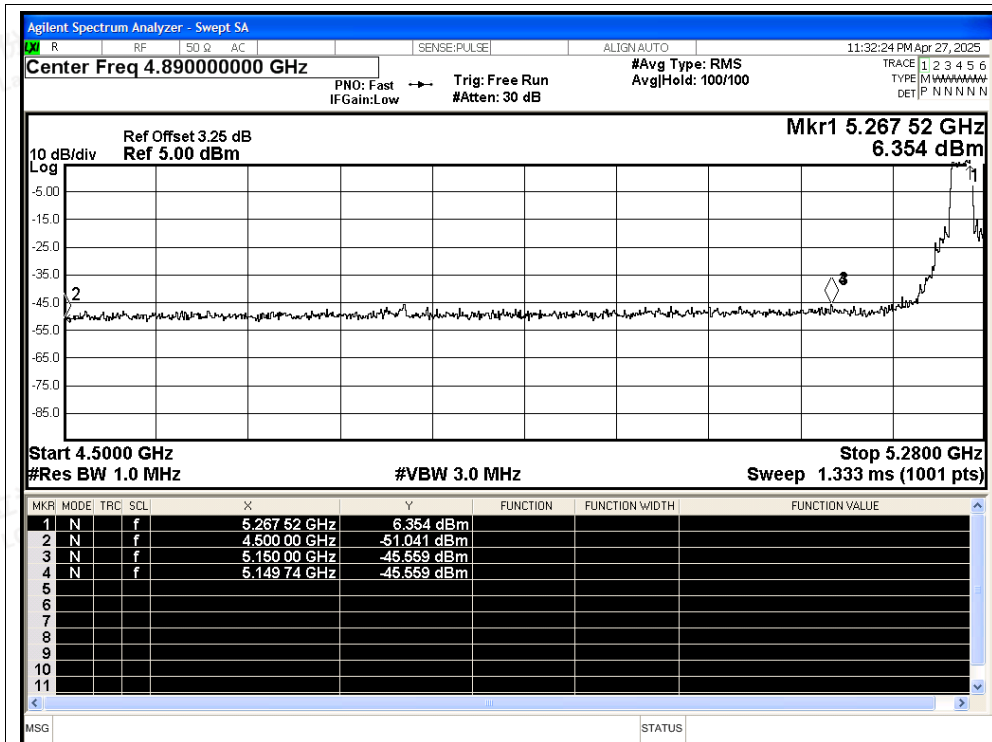

Restrict Band NVNT ax20 5260MHz Ant1 Average

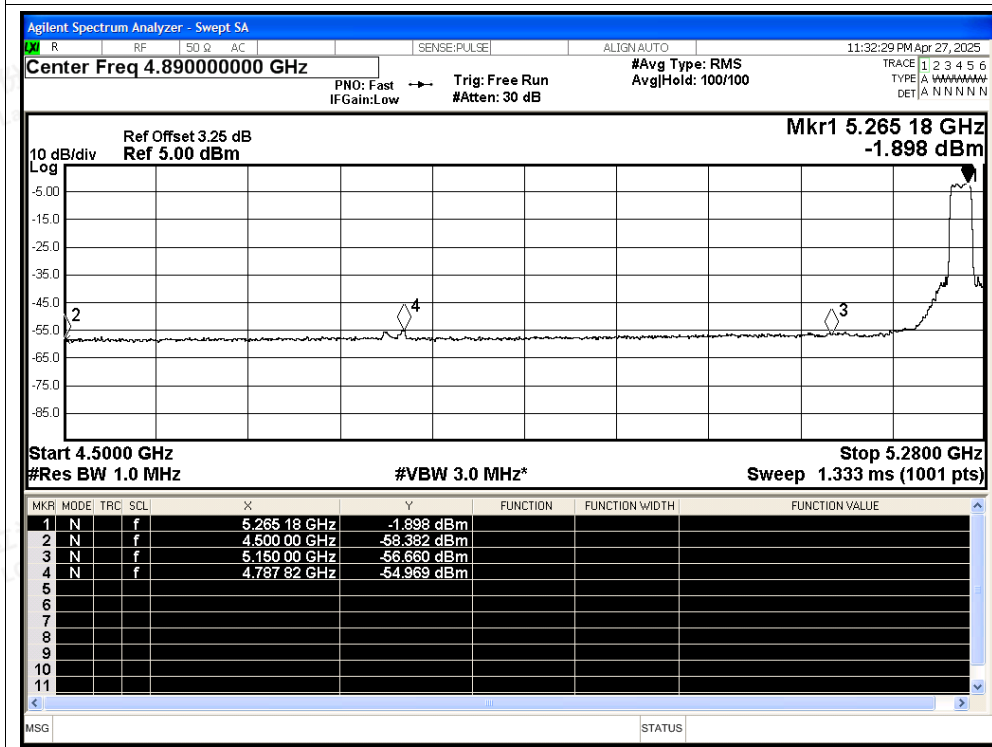

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax20 5320MHz Ant1 Peak

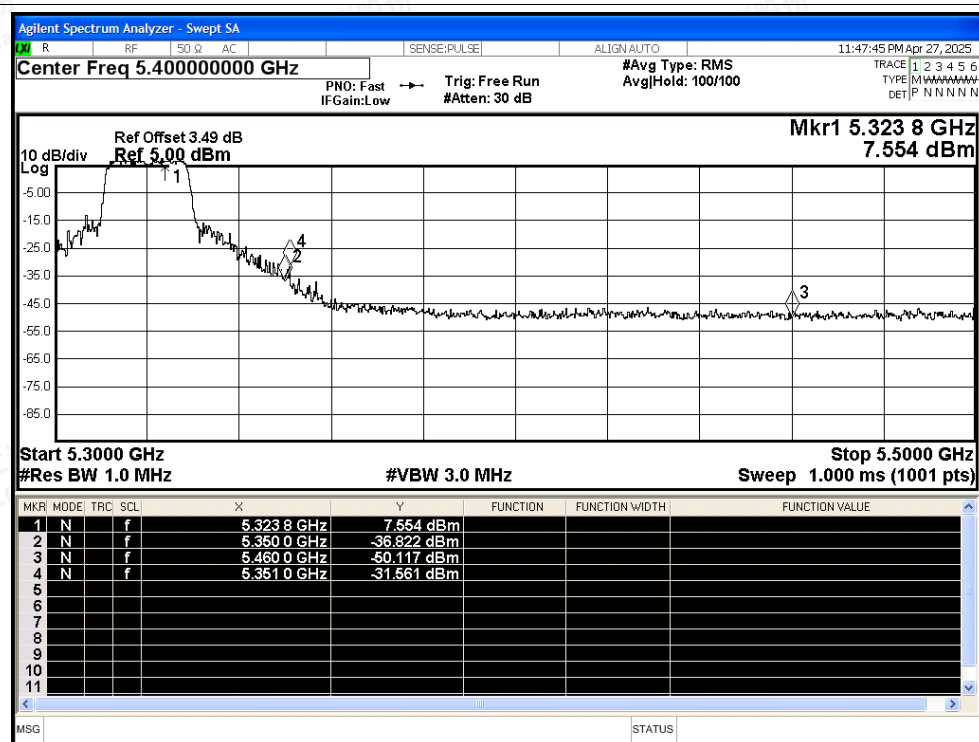

## Restrict Band NVNT ax20 5320MHz Ant1 Average

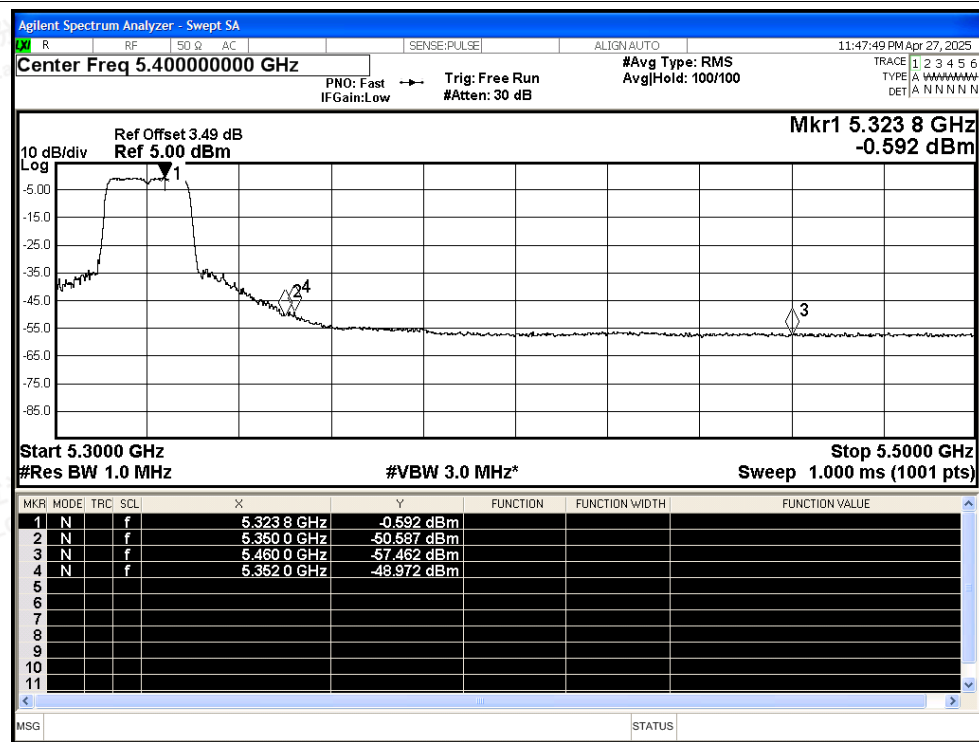

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax40 5270MHz Ant1 Peak

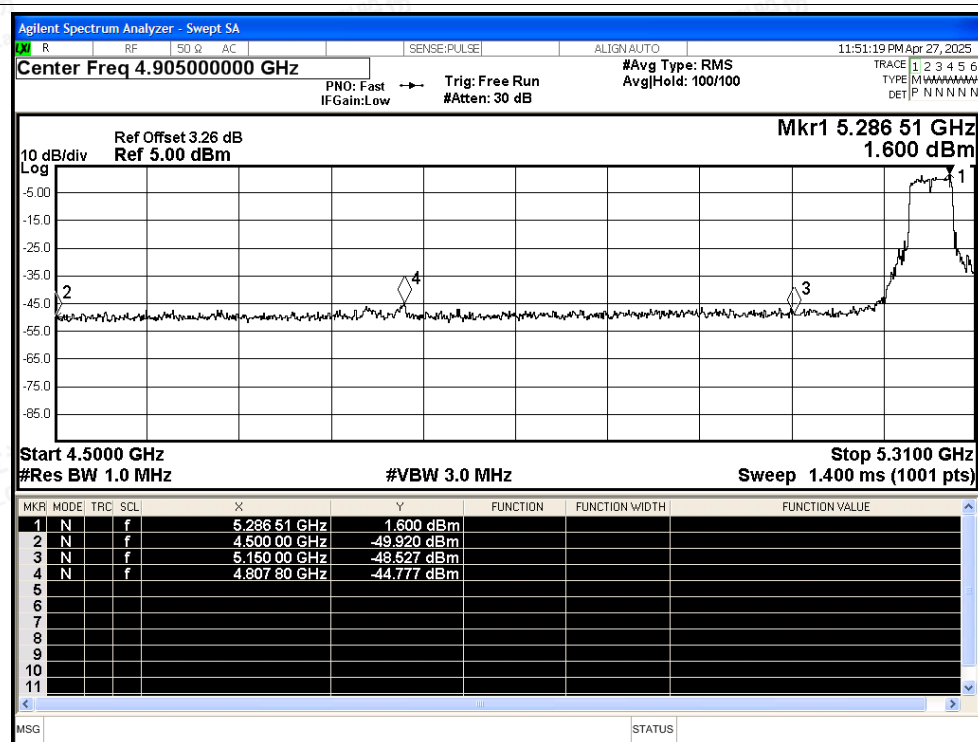

## Restrict Band NVNT ax40 5270MHz Ant1 Average

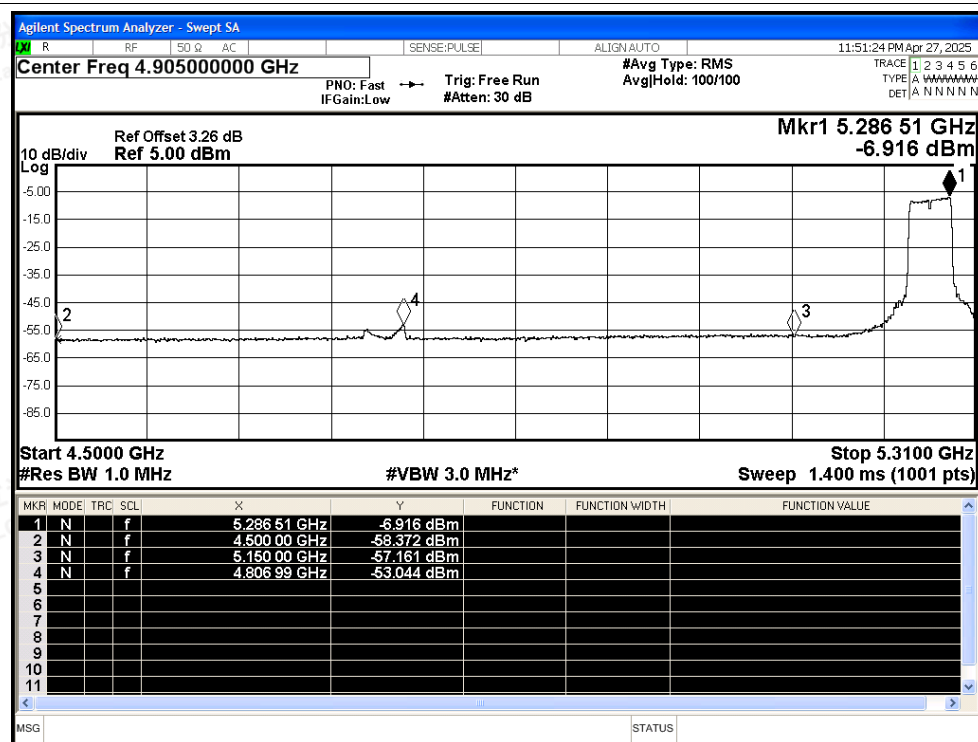

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax40 5310MHz Ant1 Peak

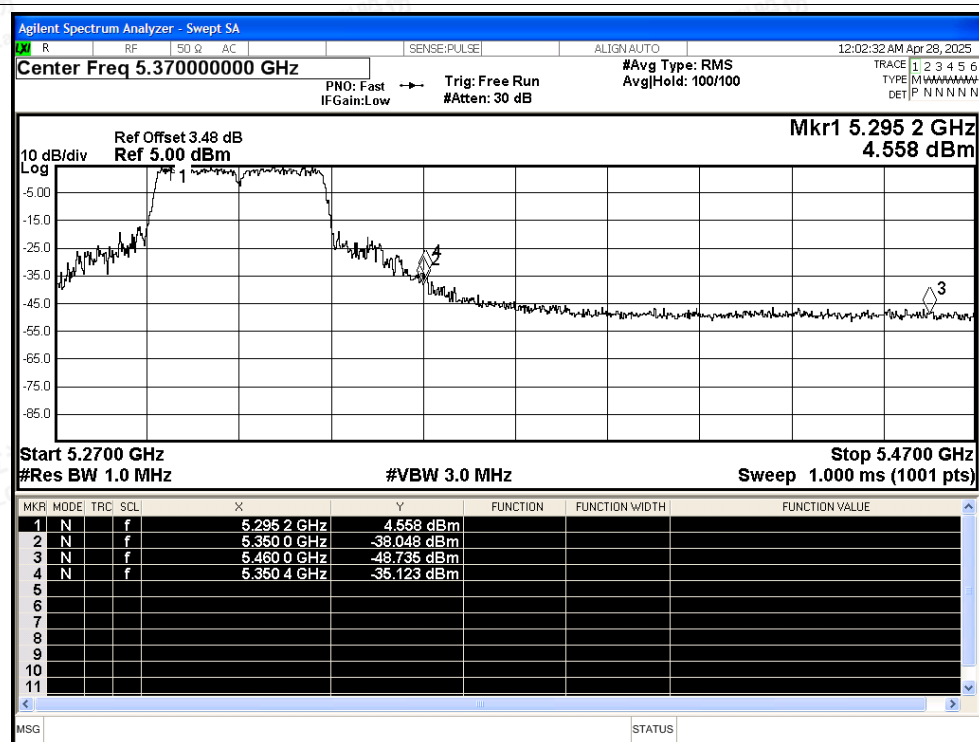

## Restrict Band NVNT ax40 5310MHz Ant1 Average

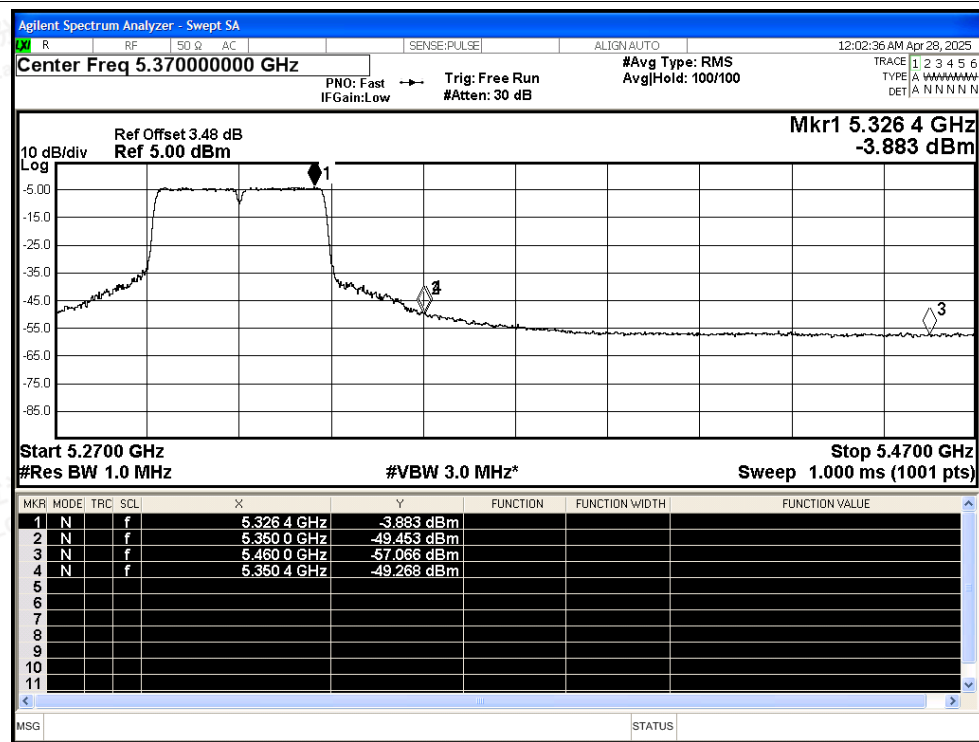

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|------------|----------|----------------|---------|
| NVNT      | a    | 5260            | Ant2    | 4500            | -49.96      | 3.40       | -                | 48.67      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5260            | Ant2    | 4500            | -58.4       | 3.40       | 0.24             | 40.47      | Average  | 54             | Pass    |
| NVNT      | a    | 5260            | Ant2    | 4787.82         | -45.24      | 3.40       | -                | 53.39      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5260            | Ant2    | 4787.82         | -54.49      | 3.40       | 0.24             | 44.38      | Average  | 54             | Pass    |
| NVNT      | a    | 5260            | Ant2    | 5150            | -47.44      | 3.40       | -                | 51.19      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5260            | Ant2    | 5150            | -56.37      | 3.40       | 0.24             | 42.50      | Average  | 54             | Pass    |
| NVNT      | a    | 5320            | Ant2    | 5350            | -40.02      | 3.40       | -                | 58.61      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5320            | Ant2    | 5350            | -51.06      | 3.40       | 0.24             | 47.81      | Average  | 54             | Pass    |
| NVNT      | a    | 5320            | Ant2    | 5350.4          | -38.47      | 3.40       | -                | 60.16      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5320            | Ant2    | 5350            | -51.06      | 3.40       | 0.24             | 47.81      | Average  | 54             | Pass    |
| NVNT      | a    | 5320            | Ant2    | 5460            | -49.81      | 3.40       | -                | 48.82      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5320            | Ant2    | 5460            | -57.42      | 3.40       | 0.24             | 41.45      | Average  | 54             | Pass    |
| NVNT      | n20  | 5260            | Ant2    | 4500            | -49.26      | 3.40       | -                | 49.37      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5260            | Ant2    | 4500            | -59.3       | 3.40       | 0.28             | 39.61      | Average  | 54             | Pass    |
| NVNT      | n20  | 5260            | Ant2    | 4789.38         | -45.56      | 3.40       | -                | 53.07      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5260            | Ant2    | 4787.82         | -54.39      | 3.40       | 0.28             | 44.52      | Average  | 54             | Pass    |
| NVNT      | n20  | 5260            | Ant2    | 5150            | -47.82      | 3.40       | -                | 50.81      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5260            | Ant2    | 5150            | -55.91      | 3.40       | 0.28             | 43.00      | Average  | 54             | Pass    |
| NVNT      | n20  | 5320            | Ant2    | 5350            | -36.66      | 3.40       | -                | 61.97      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5320            | Ant2    | 5350            | -48.22      | 3.40       | 0.28             | 50.69      | Average  | 54             | Pass    |
| NVNT      | n20  | 5320            | Ant2    | 5351.8          | -31.8       | 3.40       | -                | 66.83      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5320            | Ant2    | 5350.4          | -47.28      | 3.40       | 0.28             | 51.63      | Average  | 54             | Pass    |
| NVNT      | n20  | 5320            | Ant2    | 5460            | -49.32      | 3.40       | -                | 49.31      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5320            | Ant2    | 5460            | -57.33      | 3.40       | 0.28             | 41.58      | Average  | 54             | Pass    |
| NVNT      | n40  | 5270            | Ant2    | 4500            | -49.97      | 3.40       | -                | 48.66      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5270            | Ant2    | 4500            | -58.52      | 3.40       | 0.16             | 40.27      | Average  | 54             | Pass    |
| NVNT      | n40  | 5270            | Ant2    | 4803.75         | -44.44      | 3.40       | -                | 54.19      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5270            | Ant2    | 4806.99         | -52.77      | 3.40       | 0.16             | 46.02      | Average  | 54             | Pass    |
| NVNT      | n40  | 5270            | Ant2    | 5150            | -47.79      | 3.40       | -                | 50.84      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5270            | Ant2    | 5150            | -57.17      | 3.40       | 0.16             | 41.62      | Average  | 54             | Pass    |
| NVNT      | n40  | 5310            | Ant2    | 5350            | -38.14      | 3.40       | -                | 60.49      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5310            | Ant2    | 5350            | -50.41      | 3.40       | 0.16             | 48.38      | Average  | 54             | Pass    |
| NVNT      | n40  | 5310            | Ant2    | 5352.2          | -36.04      | 3.40       | -                | 62.59      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5310            | Ant2    | 5350            | -50.41      | 3.40       | 0.16             | 48.38      | Average  | 54             | Pass    |
| NVNT      | n40  | 5310            | Ant2    | 5460            | -49.05      | 3.40       | -                | 49.58      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5310            | Ant2    | 5460            | -57.41      | 3.40       | 0.16             | 41.38      | Average  | 54             | Pass    |
| NVNT      | ac20 | 5260            | Ant2    | 4500            | -49.94      | 3.40       | -                | 48.69      | Peak     | 68.2           | Pass    |
| NVNT      | ac20 | 5260            | Ant2    | 4500            | -58.94      | 3.40       | 0                | 39.69      | Average  | 54             | Pass    |
| NVNT      | ac20 | 5260            | Ant2    | 4787.82         | -45.79      | 3.40       | -                | 52.84      | Peak     | 68.2           | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |      |         |        |      |      |       |         |      |      |
|------|------|------|------|---------|--------|------|------|-------|---------|------|------|
| NVNT | ac20 | 5260 | Ant2 | 4787.82 | -54.41 | 3.40 | 0    | 44.22 | Average | 54   | Pass |
| NVNT | ac20 | 5260 | Ant2 | 5150    | -48.36 | 3.40 | -    | 50.27 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5260 | Ant2 | 5150    | -56.78 | 3.40 | 0    | 41.85 | Average | 54   | Pass |
| NVNT | ac20 | 5320 | Ant2 | 5350    | -33.75 | 3.40 | -    | 64.88 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5320 | Ant2 | 5350    | -50.15 | 3.40 | 0    | 48.48 | Average | 54   | Pass |
| NVNT | ac20 | 5320 | Ant2 | 5350.2  | -33.72 | 3.40 | -    | 64.91 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5320 | Ant2 | 5350.8  | -48.66 | 3.40 | 0    | 49.97 | Average | 54   | Pass |
| NVNT | ac20 | 5320 | Ant2 | 5460    | -48.11 | 3.40 | -    | 50.52 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5320 | Ant2 | 5460    | -57.03 | 3.40 | 0    | 41.60 | Average | 54   | Pass |
| NVNT | ac40 | 5270 | Ant2 | 4500    | -49.85 | 3.40 | -    | 48.78 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5270 | Ant2 | 4500    | -58.56 | 3.40 | 0.16 | 40.23 | Average | 54   | Pass |
| NVNT | ac40 | 5270 | Ant2 | 4807.8  | -44.8  | 3.40 | -    | 53.83 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5270 | Ant2 | 4806.18 | -52.81 | 3.40 | 0.16 | 45.98 | Average | 54   | Pass |
| NVNT | ac40 | 5270 | Ant2 | 5150    | -49.34 | 3.40 | -    | 49.29 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5270 | Ant2 | 5150    | -57.28 | 3.40 | 0.16 | 41.51 | Average | 54   | Pass |
| NVNT | ac40 | 5310 | Ant2 | 5350    | -36.23 | 3.40 | -    | 62.40 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5310 | Ant2 | 5350    | -49.5  | 3.40 | 0.16 | 49.29 | Average | 54   | Pass |
| NVNT | ac40 | 5310 | Ant2 | 5351.2  | -35.05 | 3.40 | -    | 63.58 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5310 | Ant2 | 5350.4  | -49.26 | 3.40 | 0.16 | 49.53 | Average | 54   | Pass |
| NVNT | ac40 | 5310 | Ant2 | 5460    | -50.67 | 3.40 | -    | 47.96 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5310 | Ant2 | 5460    | -57.44 | 3.40 | 0.16 | 41.35 | Average | 54   | Pass |
| NVNT | ax20 | 5260 | Ant2 | 4500    | -51.31 | 3.40 | -    | 47.32 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5260 | Ant2 | 4500    | -58.74 | 3.40 | 0    | 39.89 | Average | 54   | Pass |
| NVNT | ax20 | 5260 | Ant2 | 4879.86 | -46.33 | 3.40 | -    | 52.30 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5260 | Ant2 | 4787.04 | -54.87 | 3.40 | 0    | 43.76 | Average | 54   | Pass |
| NVNT | ax20 | 5260 | Ant2 | 5150    | -49.43 | 3.40 | -    | 49.20 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5260 | Ant2 | 5150    | -56.47 | 3.40 | 0    | 42.16 | Average | 54   | Pass |
| NVNT | ax20 | 5320 | Ant2 | 5350    | -37.44 | 3.40 | -    | 61.19 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5320 | Ant2 | 5350    | -49.05 | 3.40 | 0    | 49.58 | Average | 54   | Pass |
| NVNT | ax20 | 5320 | Ant2 | 5350.2  | -32.09 | 3.40 | -    | 66.54 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5320 | Ant2 | 5350.6  | -47.76 | 3.40 | 0    | 50.87 | Average | 54   | Pass |
| NVNT | ax20 | 5320 | Ant2 | 5460    | -50.09 | 3.40 | -    | 48.54 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5320 | Ant2 | 5460    | -57.45 | 3.40 | 0    | 41.18 | Average | 54   | Pass |
| NVNT | ax40 | 5270 | Ant2 | 4500    | -50.81 | 3.40 | -    | 47.82 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5270 | Ant2 | 4500    | -58.27 | 3.40 | 0.16 | 40.52 | Average | 54   | Pass |
| NVNT | ax40 | 5270 | Ant2 | 4807.8  | -44.14 | 3.40 | -    | 54.49 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5270 | Ant2 | 4806.99 | -52.82 | 3.40 | 0.16 | 45.97 | Average | 54   | Pass |
| NVNT | ax40 | 5270 | Ant2 | 5150    | -49.67 | 3.40 | -    | 48.96 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5270 | Ant2 | 5150    | -57.54 | 3.40 | 0.16 | 41.25 | Average | 54   | Pass |
| NVNT | ax40 | 5310 | Ant2 | 5350    | -39    | 3.40 | -    | 59.63 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5310 | Ant2 | 5350    | -49.9  | 3.40 | 0.16 | 48.89 | Average | 54   | Pass |
| NVNT | ax40 | 5310 | Ant2 | 5350.8  | -36.26 | 3.40 | -    | 62.37 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5310 | Ant2 | 5350.2  | -49.21 | 3.40 | 0.16 | 49.58 | Average | 54   | Pass |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity




|      |      |      |      |      |        |      |      |       |         |      |      |
|------|------|------|------|------|--------|------|------|-------|---------|------|------|
| NVNT | ax40 | 5310 | Ant2 | 5460 | -49.91 | 3.40 | -    | 48.72 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5310 | Ant2 | 5460 | -57.73 | 3.40 | 0.16 | 41.06 | Average | 54   | Pass |

## Test Graphs

## Restrict Band NVNT a 5260MHz Ant2 Peak

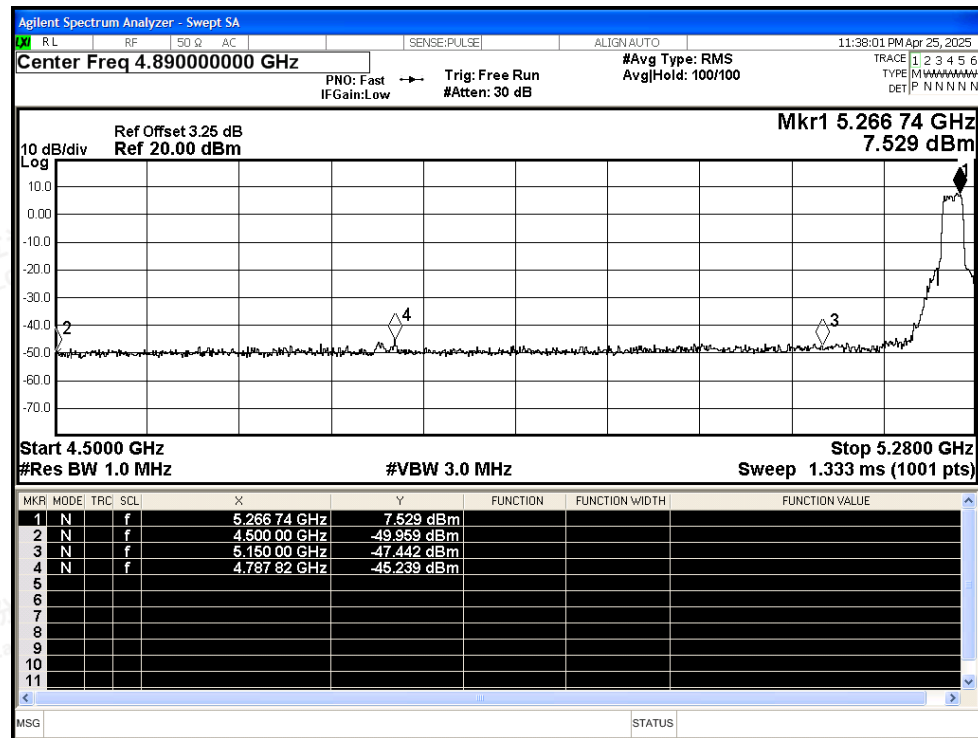

## Restrict Band NVNT a 5260MHz Ant2 Average

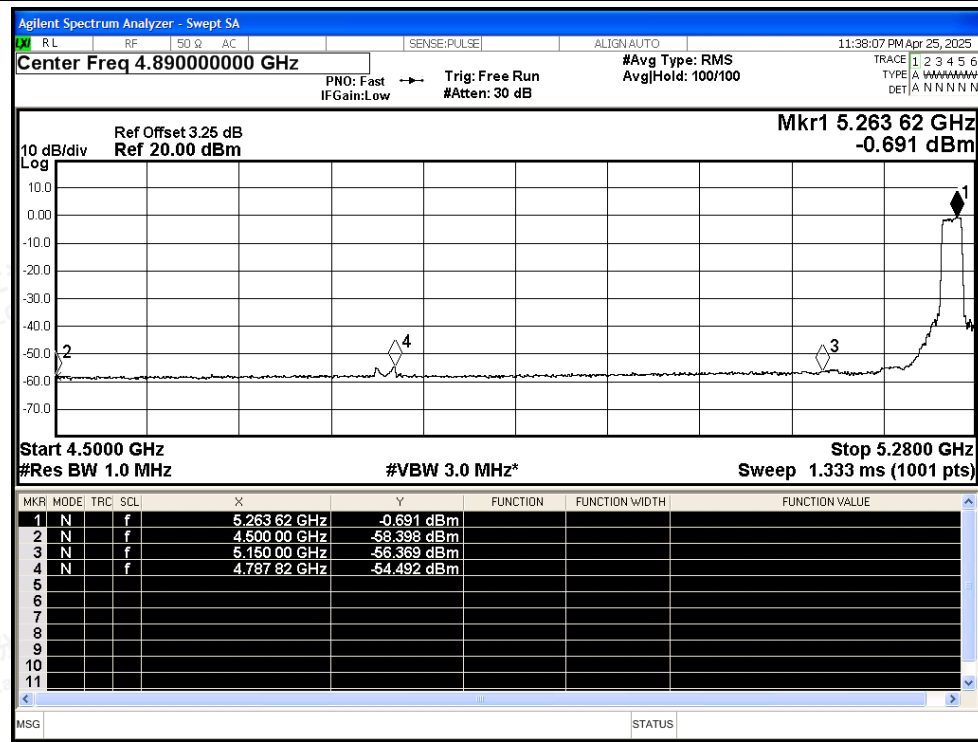

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT a 5320MHz Ant2 Peak

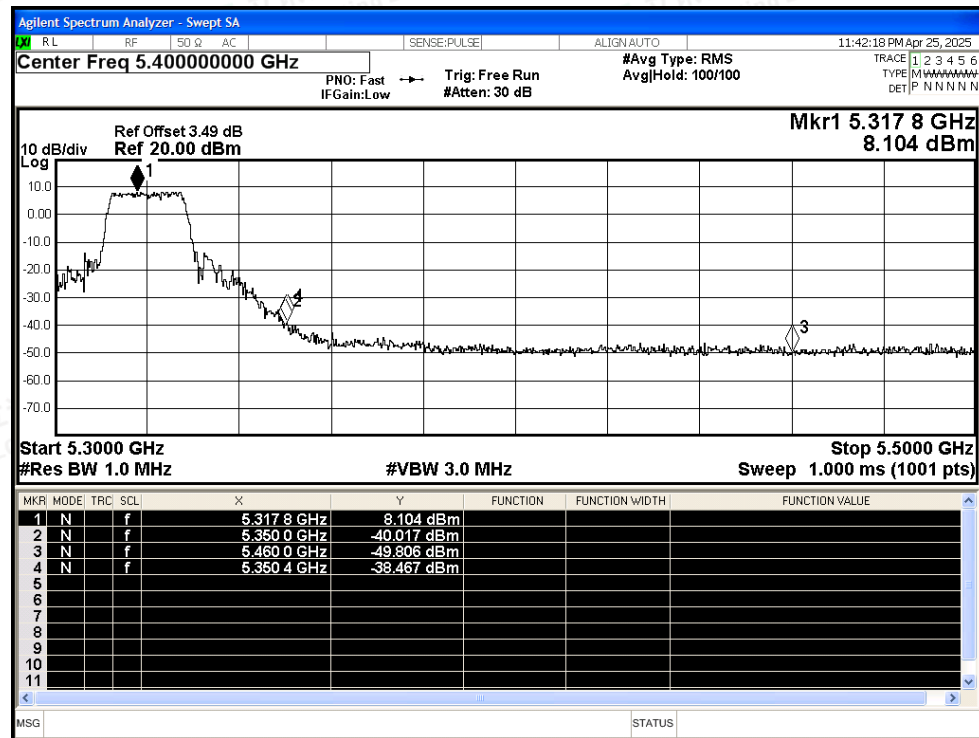

## Restrict Band NVNT a 5320MHz Ant2 Average

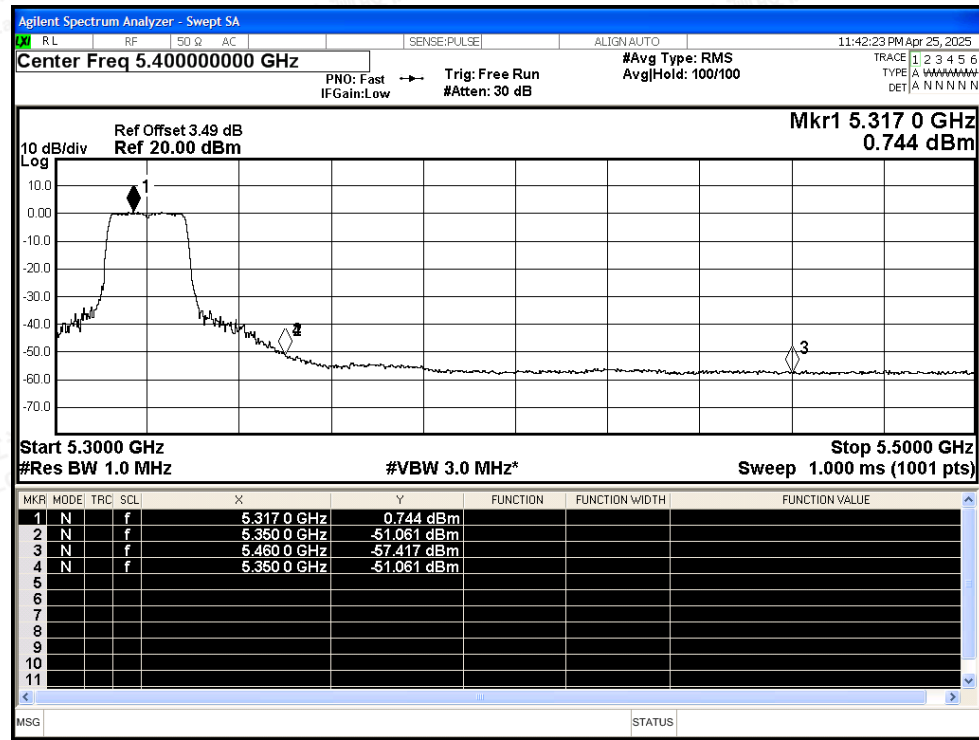

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5260MHz Ant2 Peak

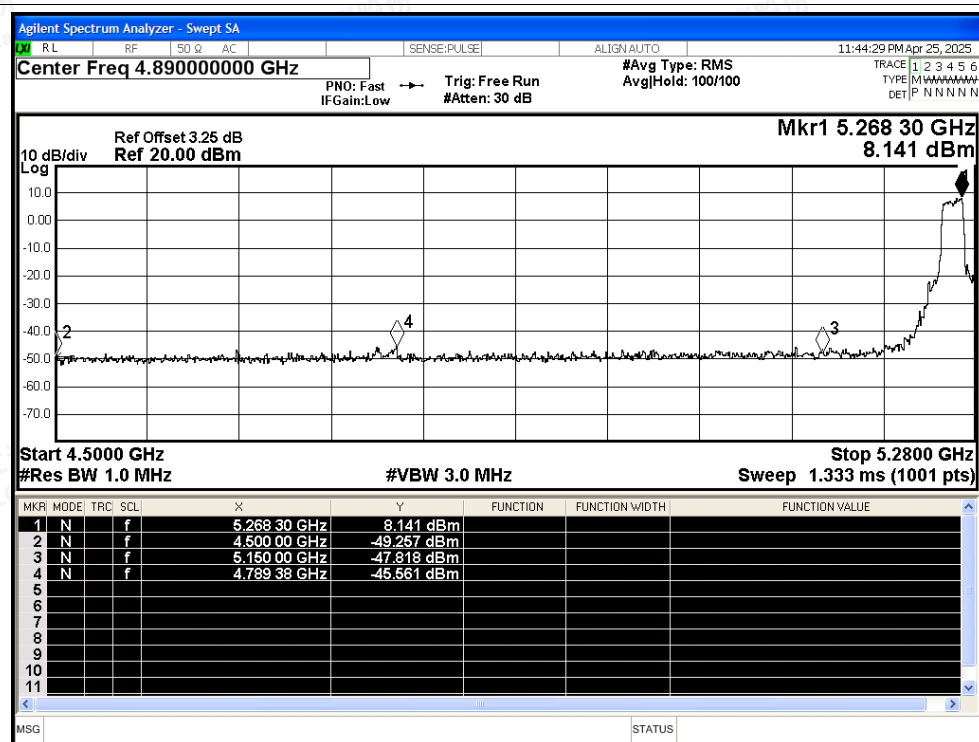

## Restrict Band NVNT n20 5260MHz Ant2 Average

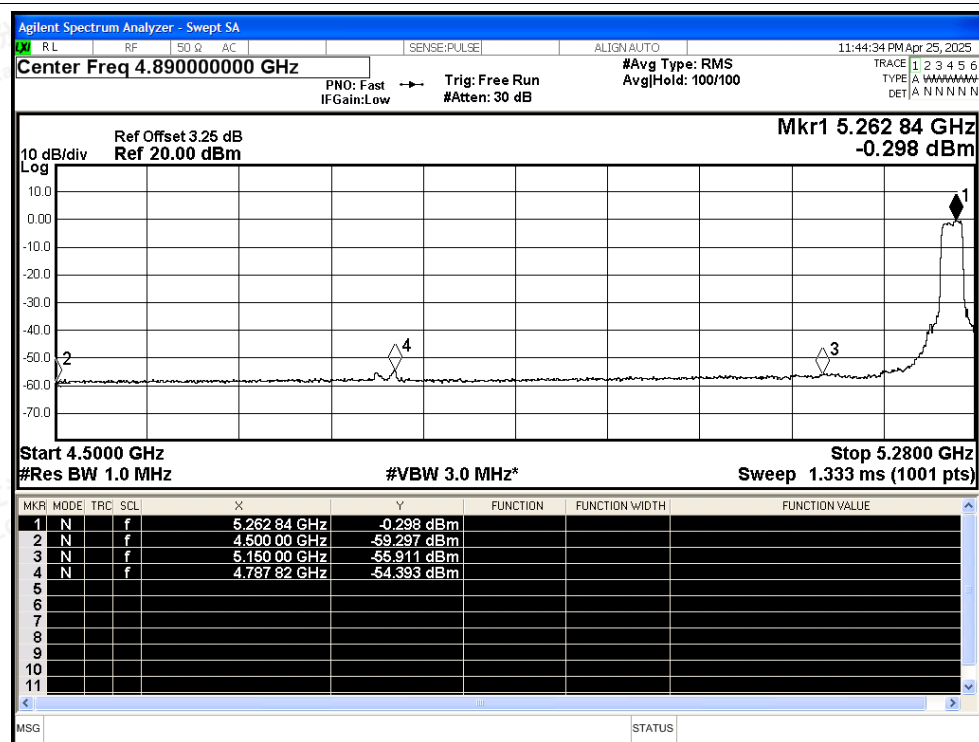

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5320MHz Ant2 Peak

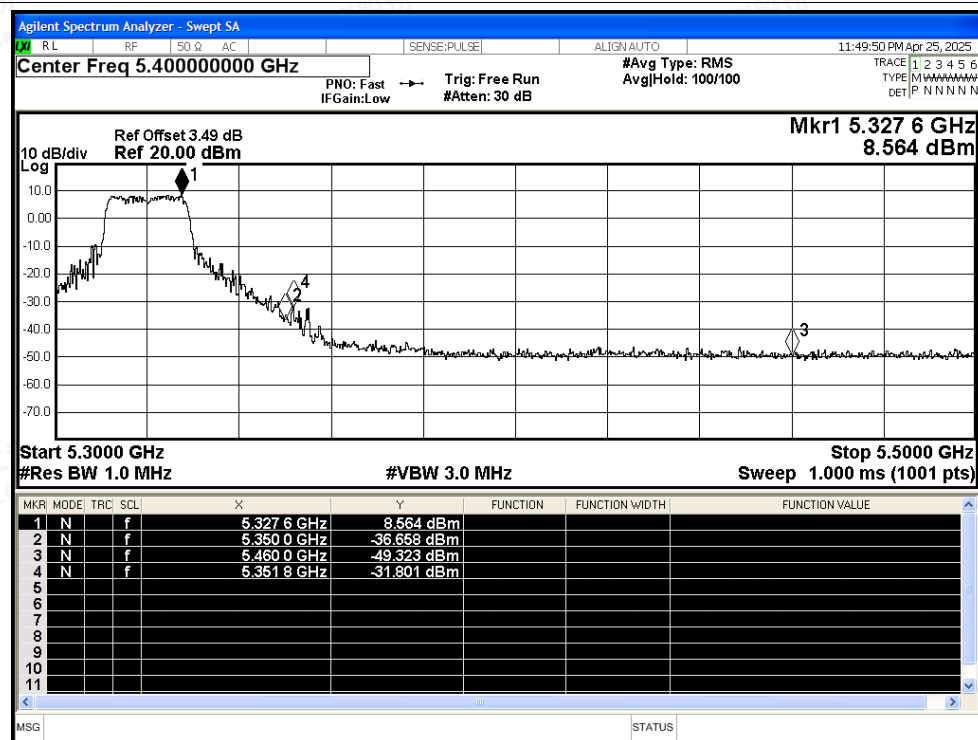

## Restrict Band NVNT n20 5320MHz Ant2 Average

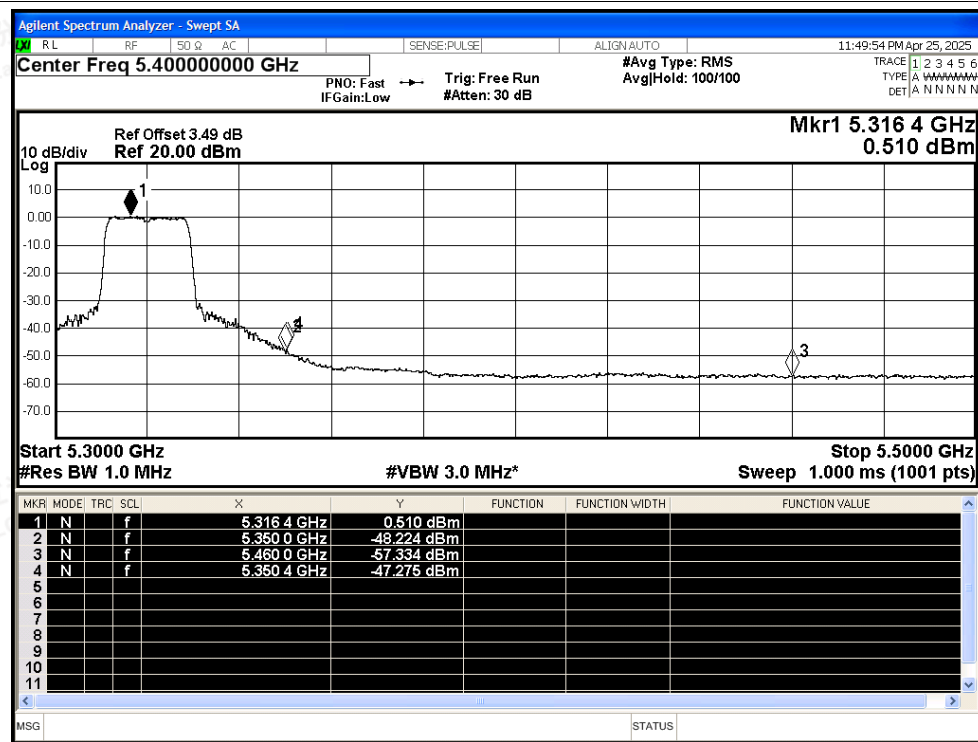

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5270MHz Ant2 Peak

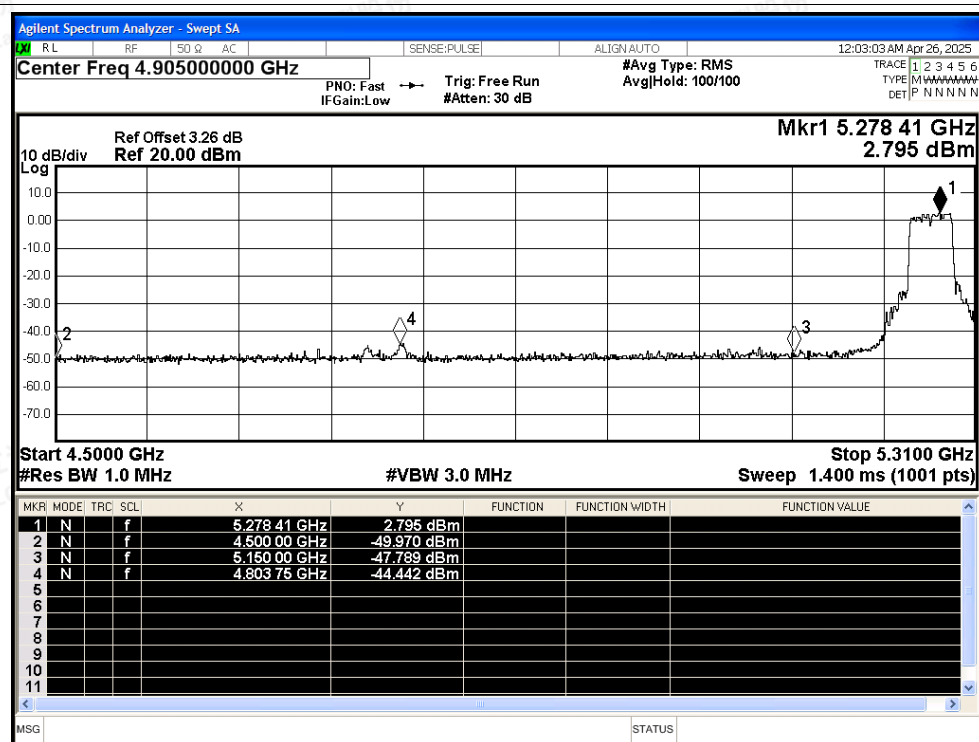

## Restrict Band NVNT n40 5270MHz Ant2 Average

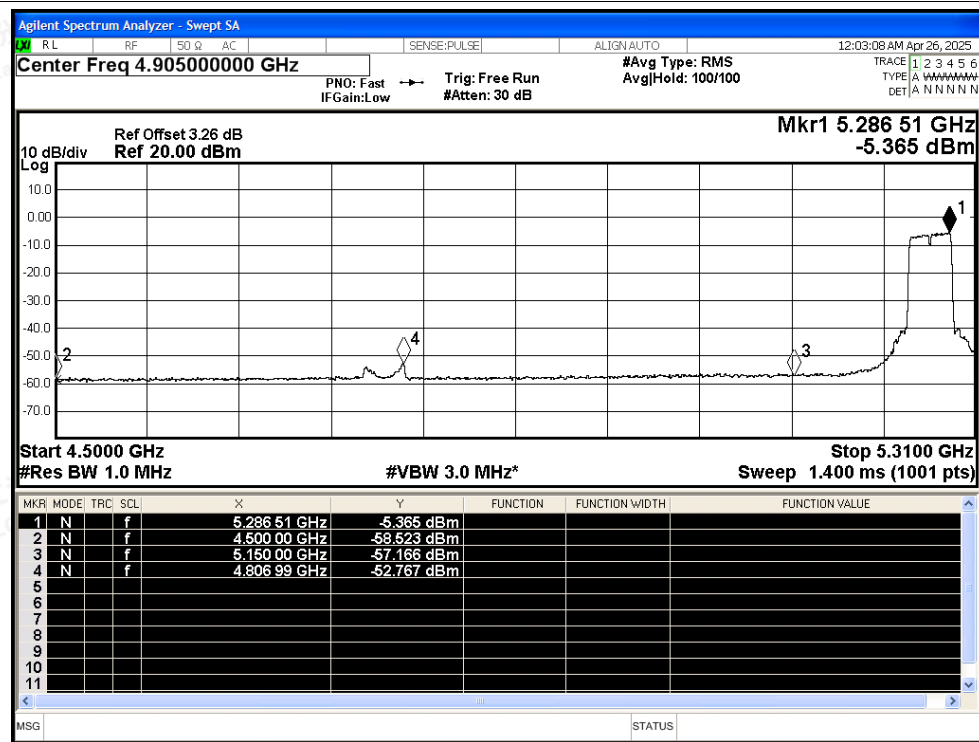

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5310MHz Ant2 Peak

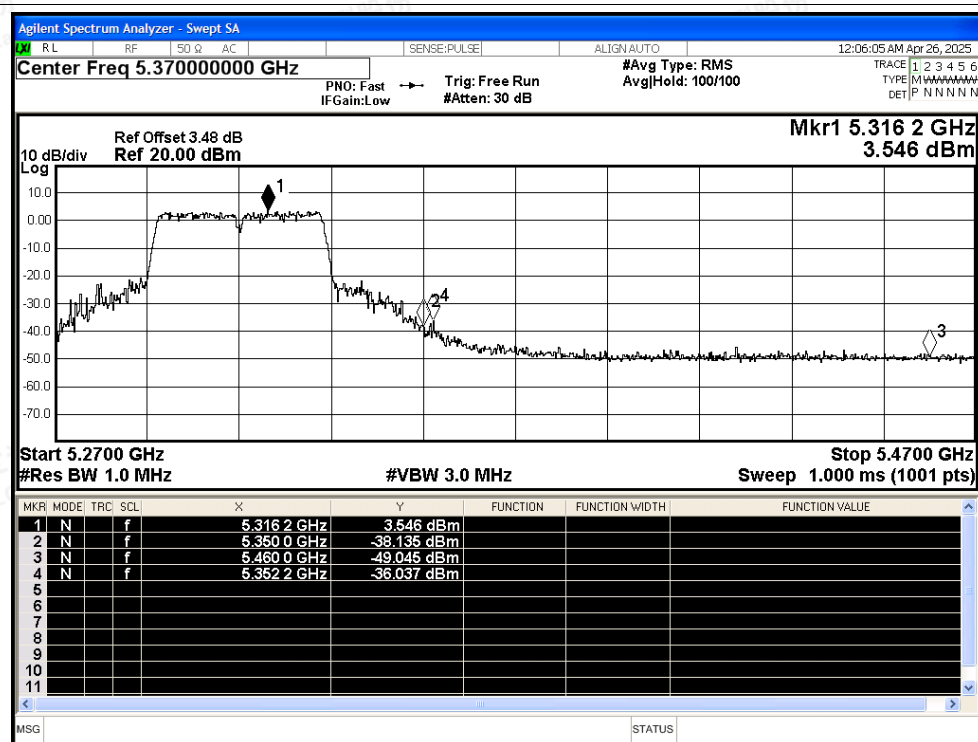

## Restrict Band NVNT n40 5310MHz Ant2 Average

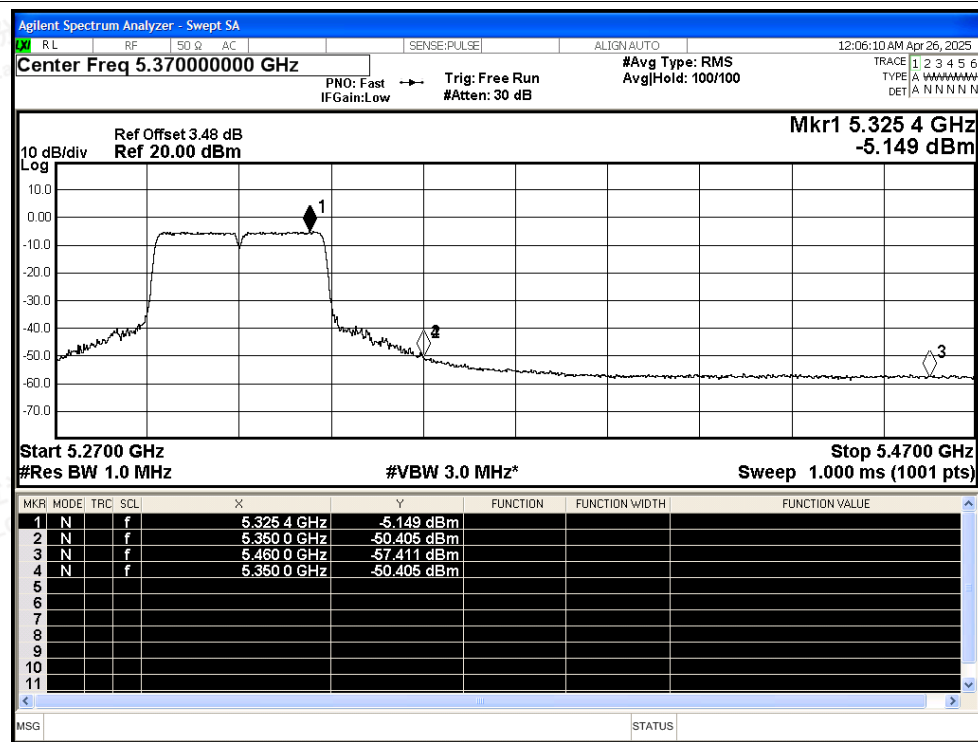

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac20 5260MHz Ant2 Peak

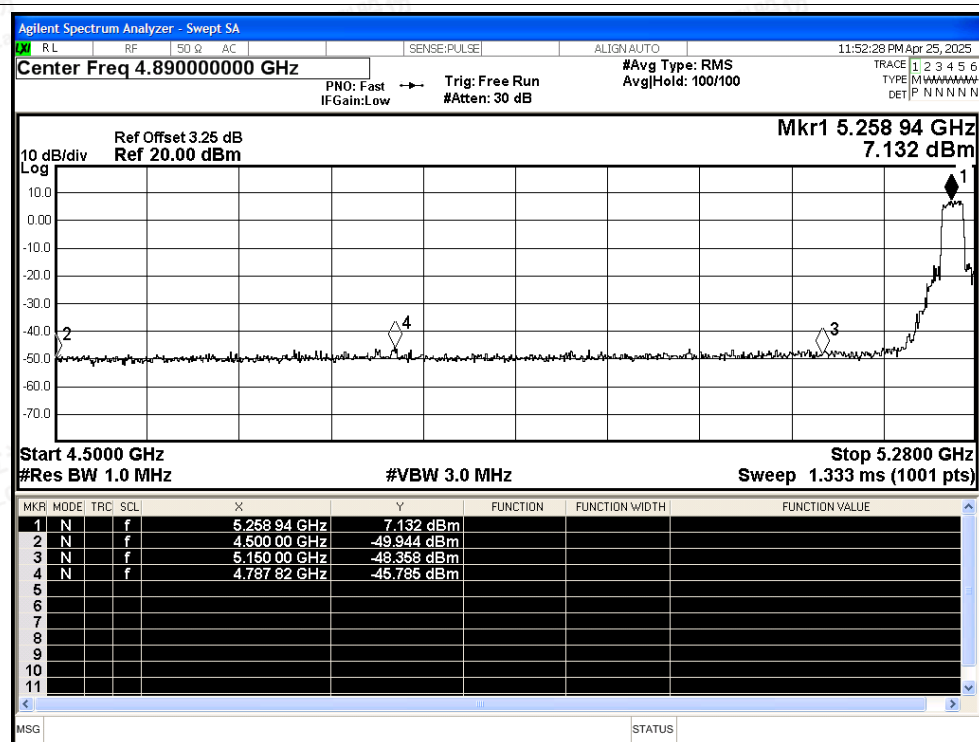

## Restrict Band NVNT ac20 5260MHz Ant2 Average

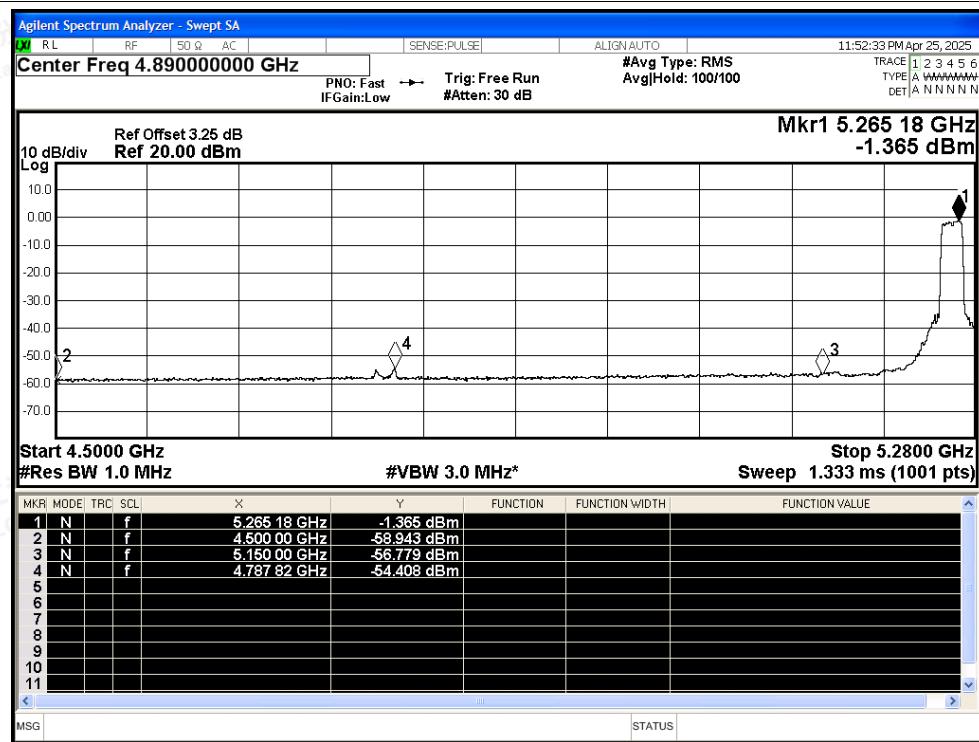

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac20 5320MHz Ant2 Peak

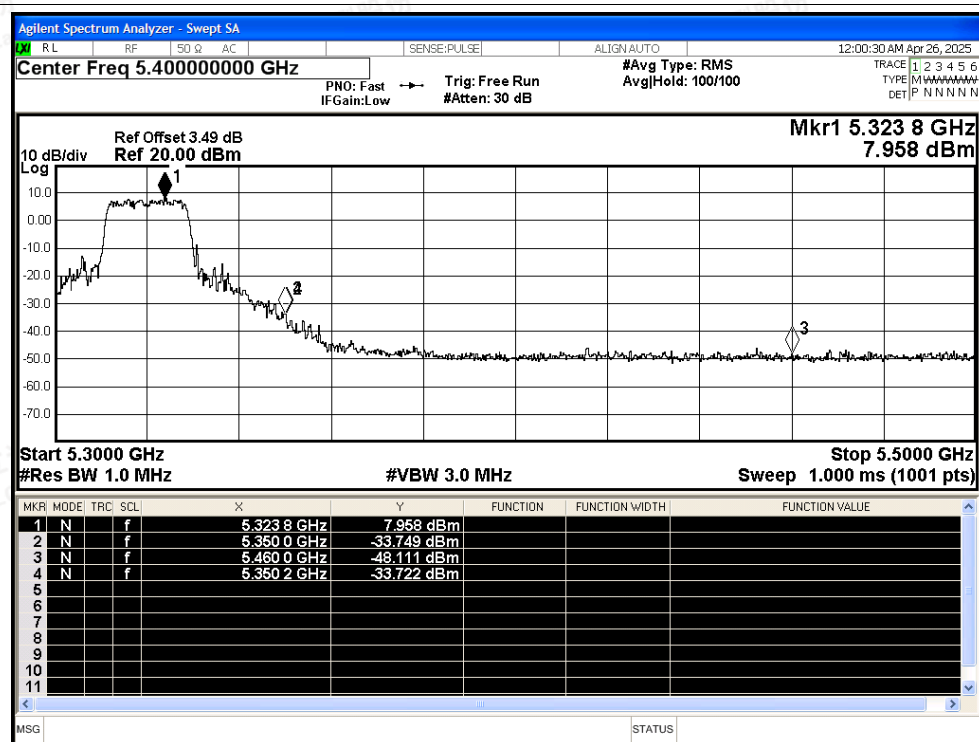

## Restrict Band NVNT ac20 5320MHz Ant2 Average

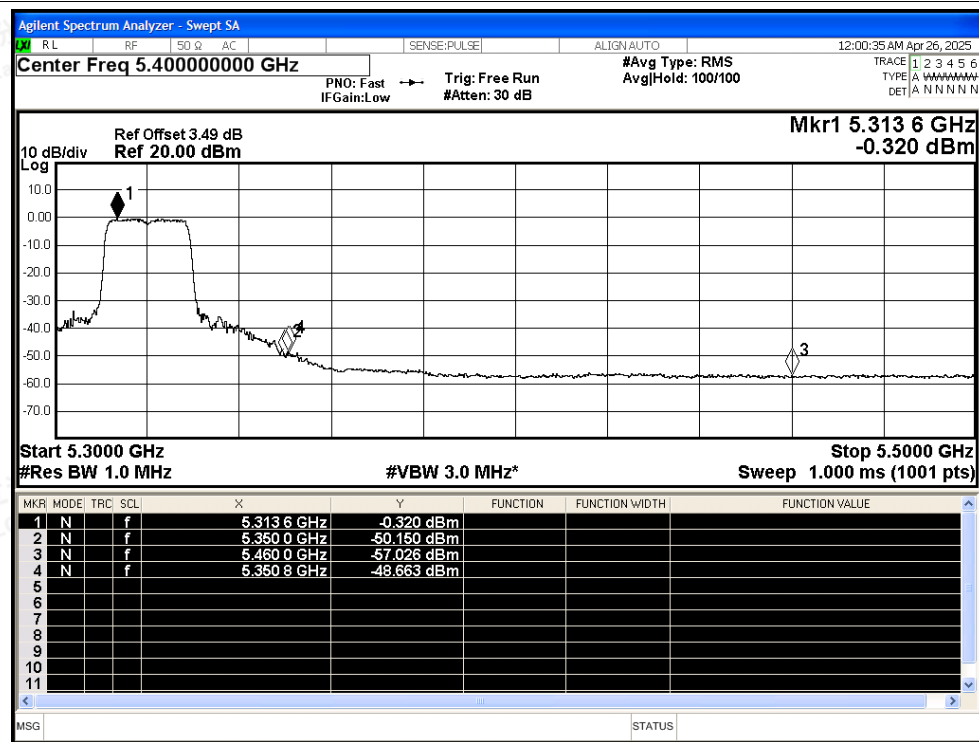

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac40 5270MHz Ant2 Peak

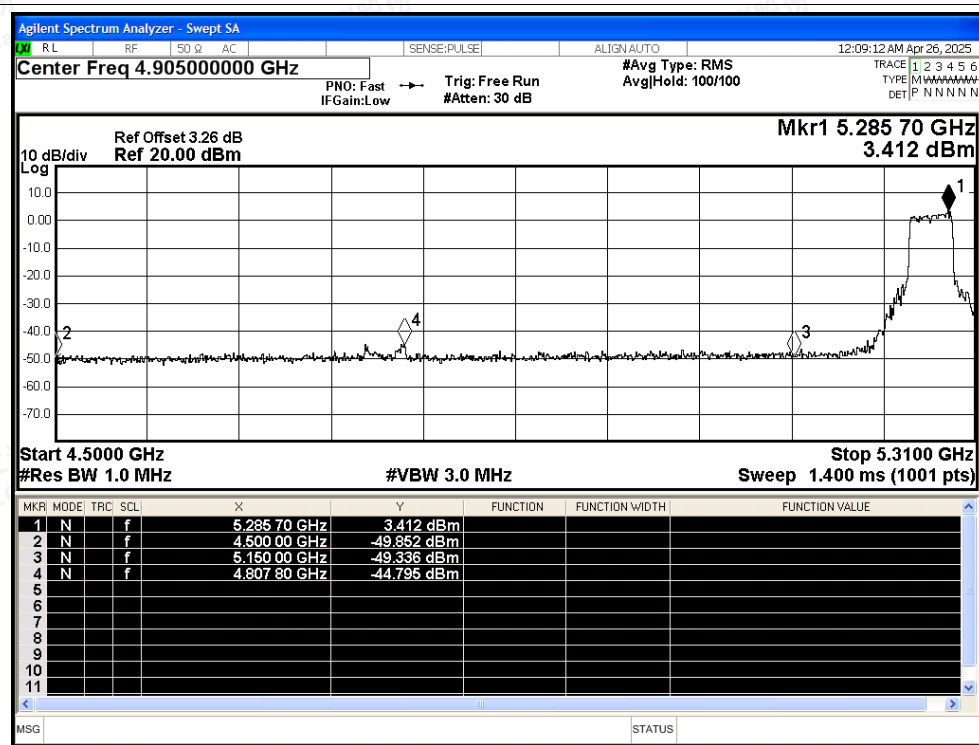

## Restrict Band NVNT ac40 5270MHz Ant2 Average

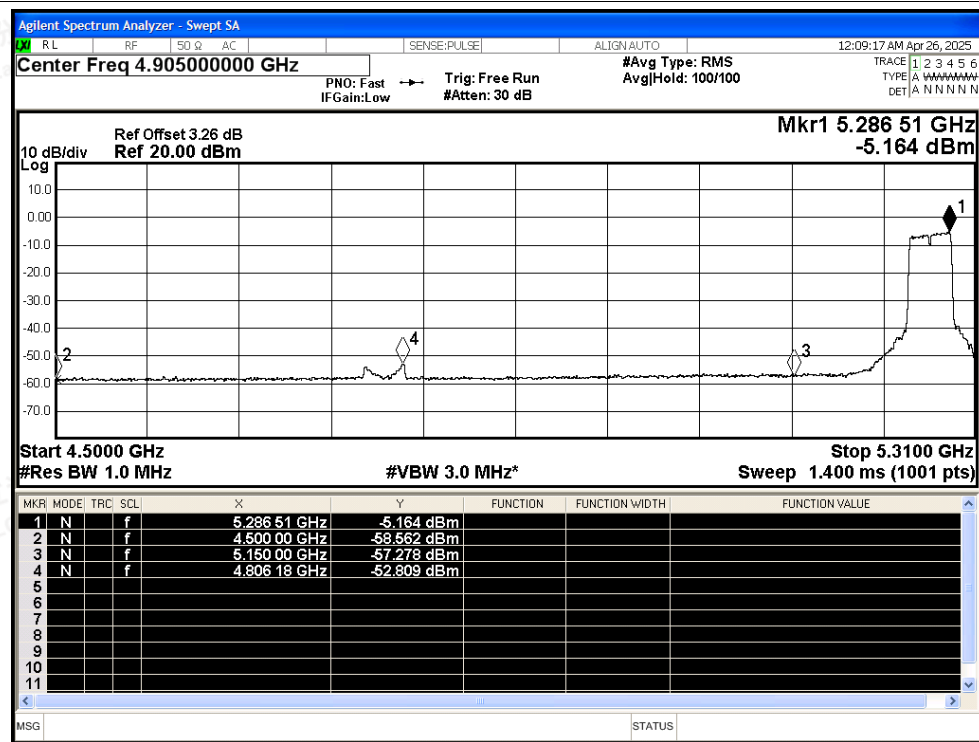

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac40 5310MHz Ant2 Peak

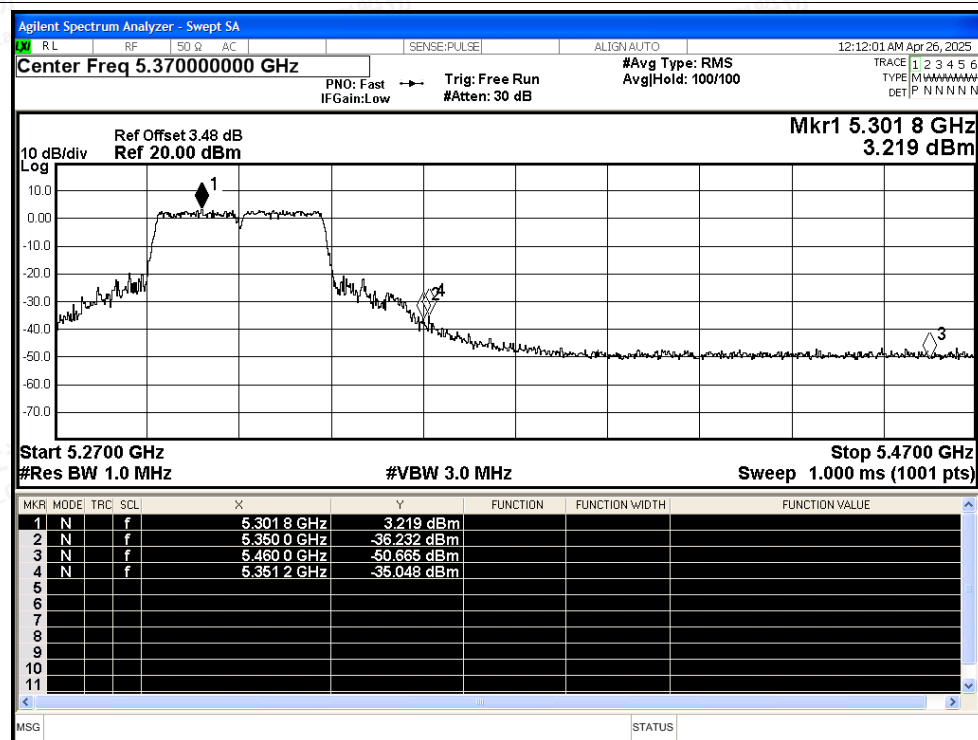

## Restrict Band NVNT ac40 5310MHz Ant2 Average

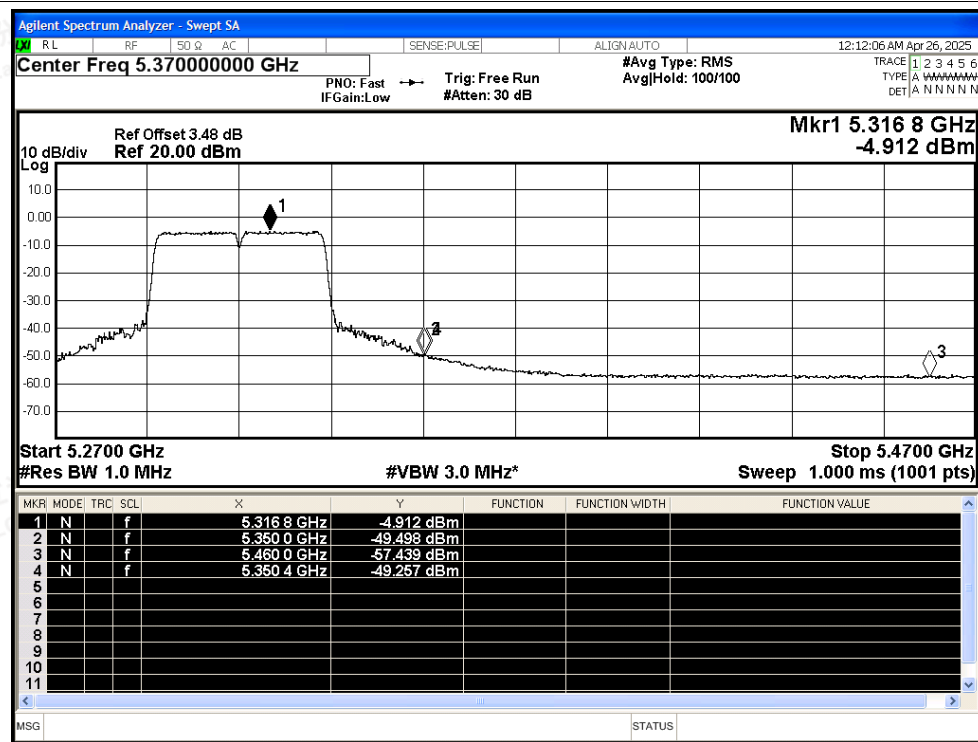

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax20 5260MHz Ant2 Peak

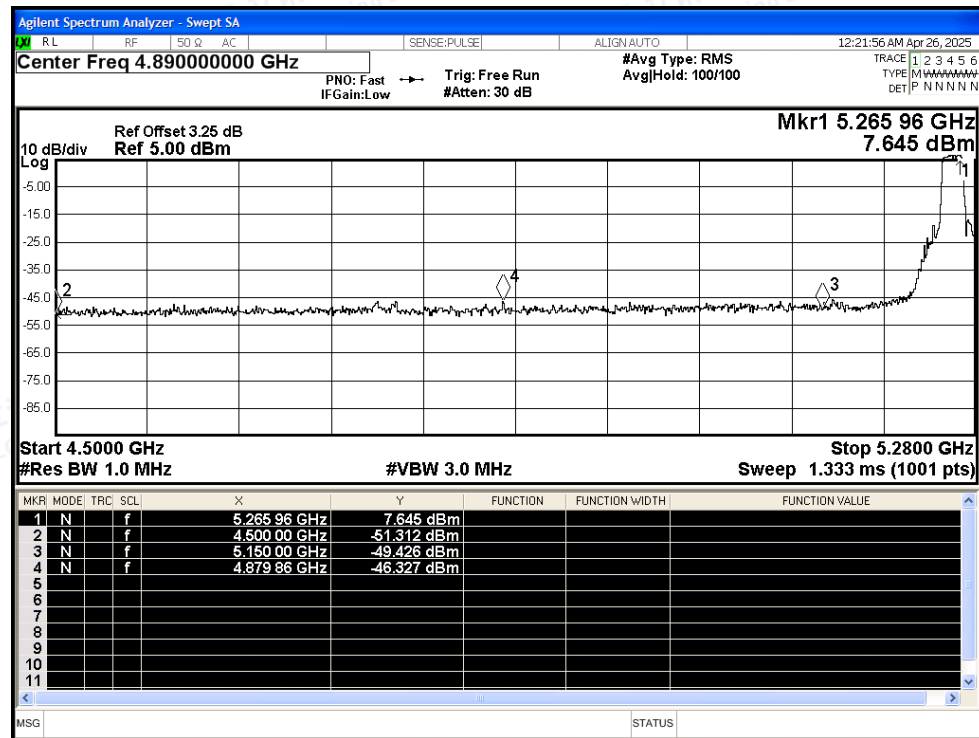

## Restrict Band NVNT ax20 5260MHz Ant2 Average

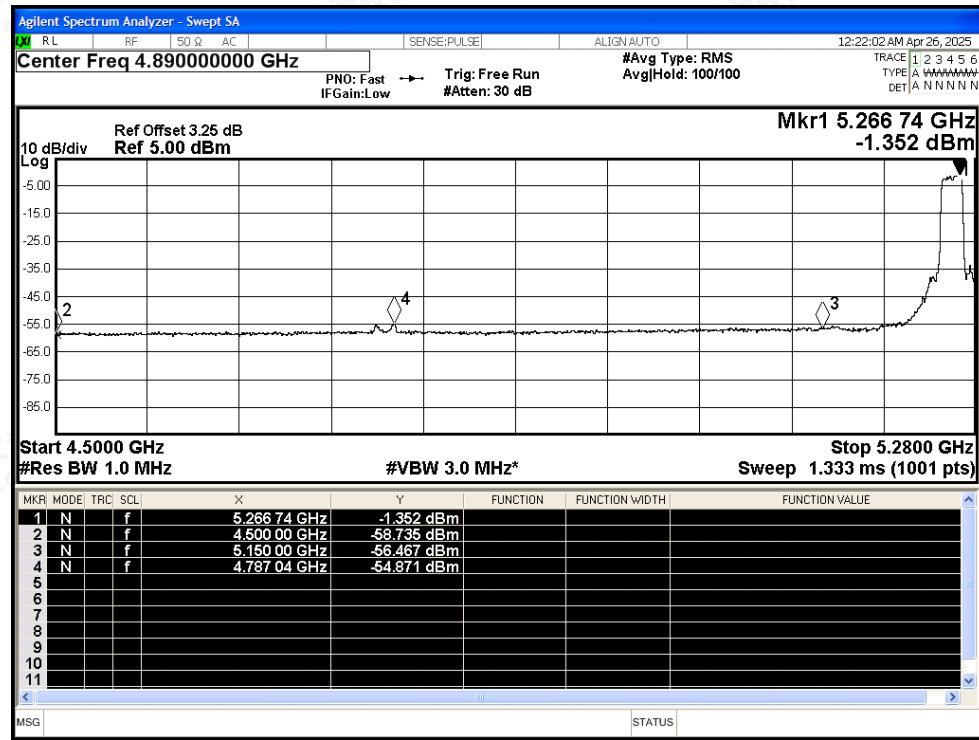

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax20 5320MHz Ant2 Peak

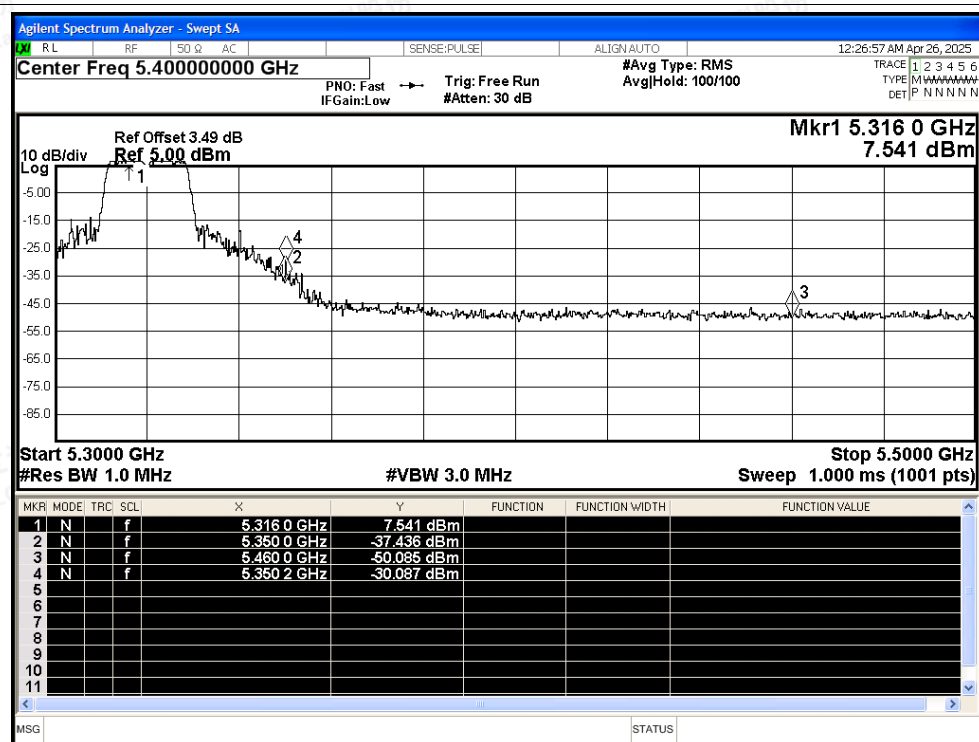

## Restrict Band NVNT ax20 5320MHz Ant2 Average

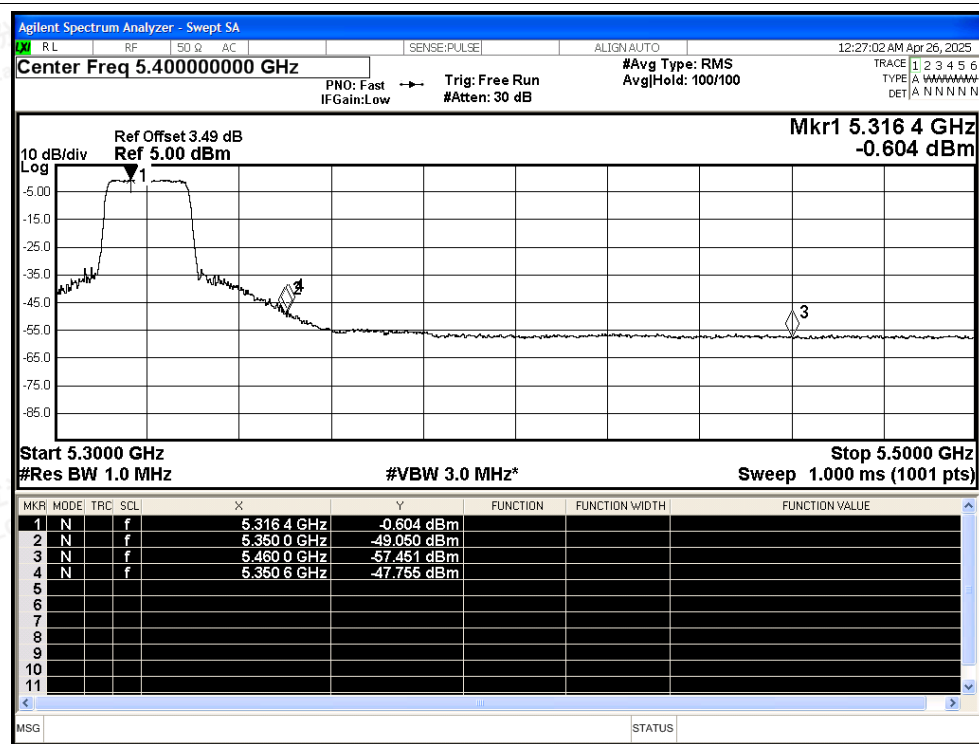

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax40 5270MHz Ant2 Peak

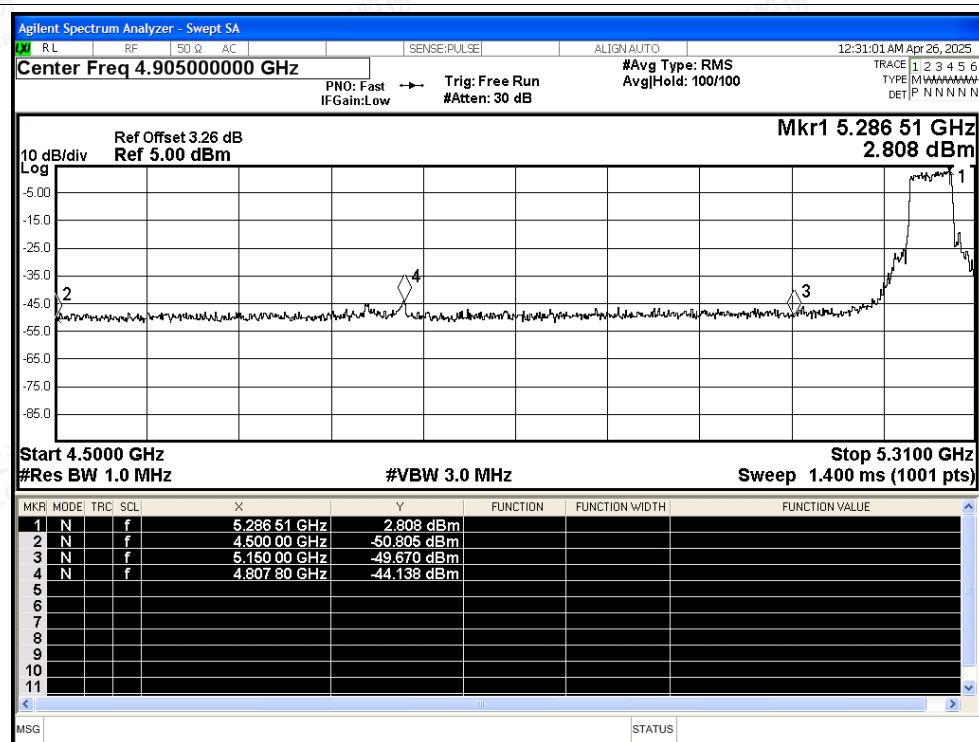

## Restrict Band NVNT ax40 5270MHz Ant2 Average

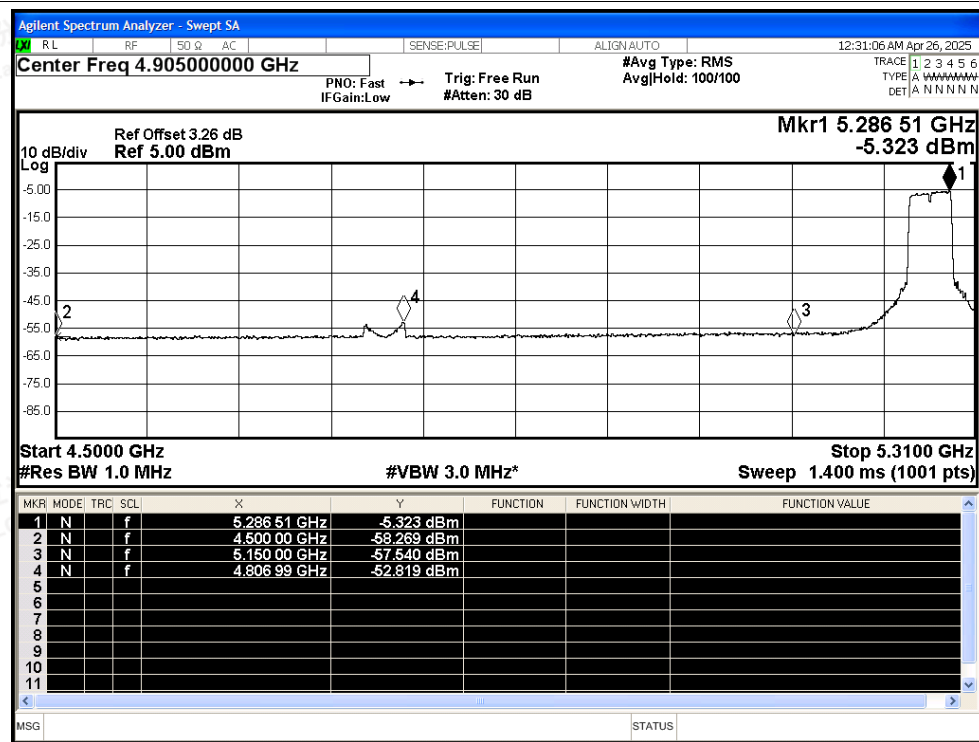

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax40 5310MHz Ant2 Peak

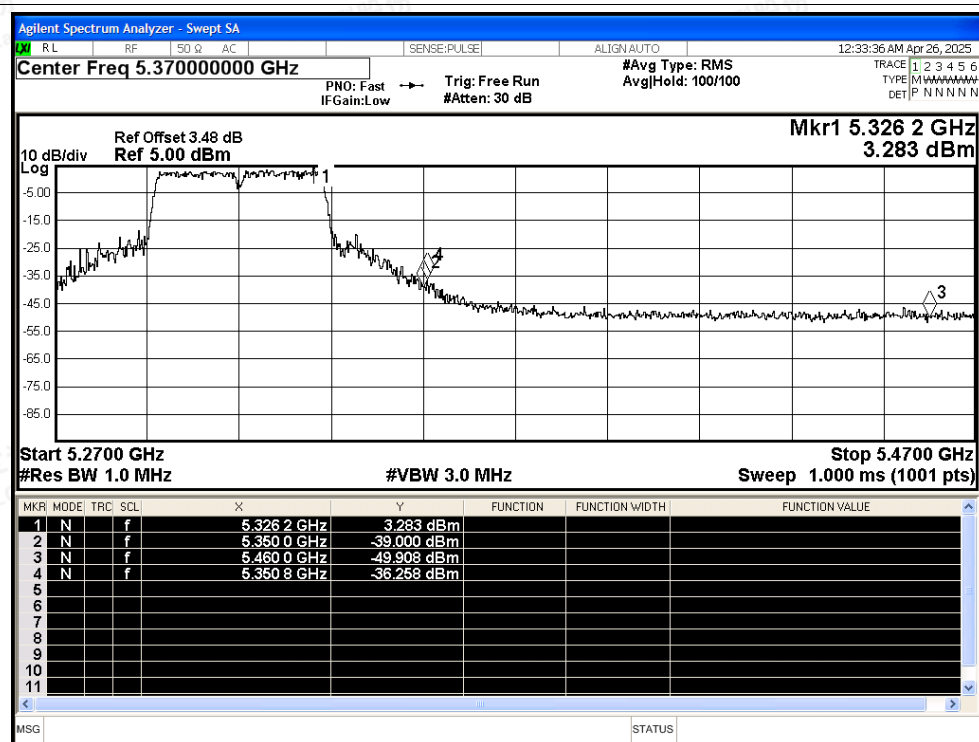

## Restrict Band NVNT ax40 5310MHz Ant2 Average

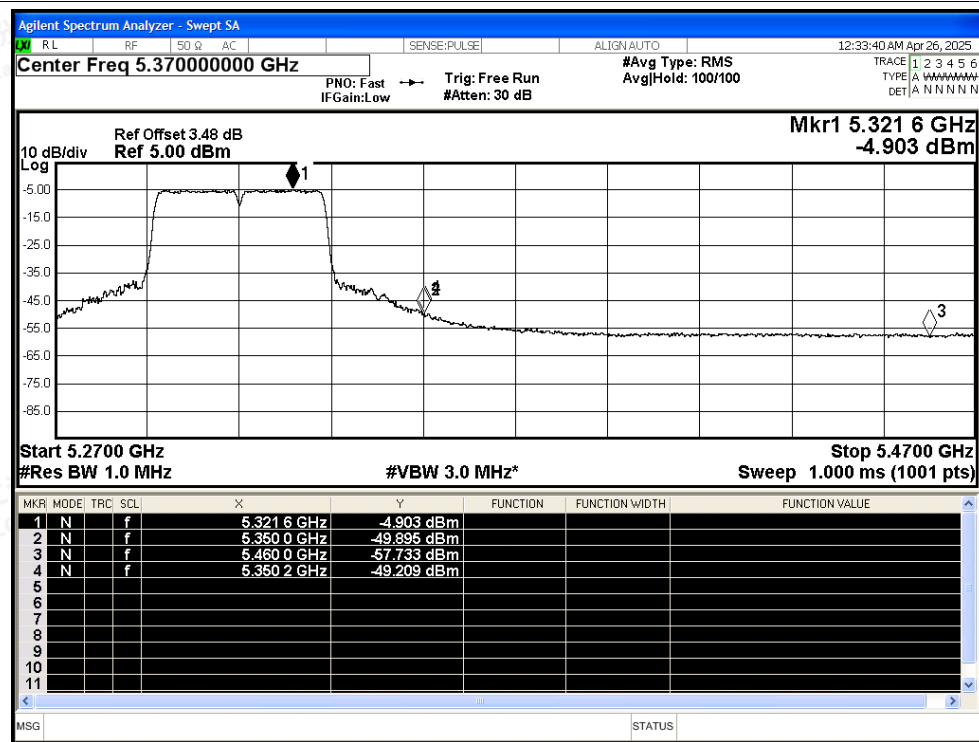

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## MIMO

| Condition | Mode | Frequency<br>(MHz) | Spur Freq<br>(MHz) | Ant1<br>Power<br>(dBm) | Ant2<br>Power<br>(dBm) | Gain<br>(dBi) | E<br>(dBuV/m) | Detector | Limit<br>(dBuV/m) | Verdict |
|-----------|------|--------------------|--------------------|------------------------|------------------------|---------------|---------------|----------|-------------------|---------|
| NVNT      | n20  | 5260               | 4500               | -51.16                 | -49.26                 | 6.41          | 54.54         | Peak     | 68.2              | Pass    |
| NVNT      | n20  | 5260               | 4500               | -59.29                 | -59.3                  | 6.41          | 45.35         | Average  | 54                | Pass    |
| NVNT      | n20  | 5260               | 4787.82            | -45.78                 | -45.56                 | 6.41          | 58.98         | Peak     | 68.2              | Pass    |
| NVNT      | n20  | 5260               | 4787.82            | -55.47                 | -54.39                 | 6.41          | 49.75         | Average  | 54                | Pass    |
| NVNT      | n20  | 5260               | 5150               | -49.37                 | -47.82                 | 6.41          | 56.12         | Peak     | 68.2              | Pass    |
| NVNT      | n20  | 5260               | 5150               | -56.72                 | -55.91                 | 6.41          | 48.35         | Average  | 54                | Pass    |
| NVNT      | n20  | 5320               | 5350               | -37.74                 | -36.66                 | 6.41          | 67.48         | Peak     | 68.2              | Pass    |
| NVNT      | n20  | 5320               | 5350               | -50.12                 | -52.34                 | 6.41          | 53.56         | Average  | 54                | Pass    |
| NVNT      | n20  | 5320               | 5351               | -38.62                 | -37.12                 | 6.41          | 66.84         | Peak     | 68.2              | Pass    |
| NVNT      | n20  | 5320               | 5351.8             | -51.85                 | -51.48                 | 6.41          | 52.99         | Average  | 54                | Pass    |
| NVNT      | n20  | 5320               | 5460               | -51.02                 | -49.32                 | 6.41          | 54.56         | Peak     | 68.2              | Pass    |
| NVNT      | n20  | 5320               | 5460               | -57.63                 | -57.33                 | 6.41          | 47.17         | Average  | 54                | Pass    |
| NVNT      | n40  | 5270               | 4500               | -51.18                 | -49.97                 | 6.41          | 54.11         | Peak     | 68.2              | Pass    |
| NVNT      | n40  | 5270               | 4500               | -59.26                 | -58.52                 | 6.41          | 45.77         | Average  | 54                | Pass    |
| NVNT      | n40  | 5270               | 4773.78            | -46.21                 | -44.44                 | 6.41          | 59.41         | Peak     | 68.2              | Pass    |
| NVNT      | n40  | 5270               | 4806.18            | -54.11                 | -52.77                 | 6.41          | 51.26         | Average  | 54                | Pass    |
| NVNT      | n40  | 5270               | 5150               | -48.56                 | -47.79                 | 6.41          | 56.49         | Peak     | 68.2              | Pass    |
| NVNT      | n40  | 5270               | 5150               | -57.14                 | -57.17                 | 6.41          | 47.49         | Average  | 54                | Pass    |
| NVNT      | n40  | 5310               | 5350               | -39.3                  | -38.14                 | 6.41          | 65.97         | Peak     | 68.2              | Pass    |
| NVNT      | n40  | 5310               | 5350               | -51.31                 | -50.41                 | 6.41          | 53.81         | Average  | 54                | Pass    |
| NVNT      | n40  | 5310               | 5351.4             | -37.97                 | -36.04                 | 6.41          | 67.75         | Peak     | 68.2              | Pass    |
| NVNT      | n40  | 5310               | 5351.2             | -51.35                 | -52.41                 | 6.41          | 52.80         | Average  | 54                | Pass    |
| NVNT      | n40  | 5310               | 5460               | -49.07                 | -49.05                 | 6.41          | 55.59         | Peak     | 68.2              | Pass    |
| NVNT      | n40  | 5310               | 5460               | -57.88                 | -57.41                 | 6.41          | 47.01         | Average  | 54                | Pass    |
| NVNT      | ac20 | 5260               | 4500               | -52.33                 | -49.94                 | 6.41          | 53.68         | Peak     | 68.2              | Pass    |
| NVNT      | ac20 | 5260               | 4500               | -58.81                 | -58.94                 | 6.41          | 45.77         | Average  | 54                | Pass    |
| NVNT      | ac20 | 5260               | 4772.22            | -46.23                 | -45.79                 | 6.41          | 58.64         | Peak     | 68.2              | Pass    |
| NVNT      | ac20 | 5260               | 4787.82            | -56.02                 | -54.41                 | 6.41          | 49.51         | Average  | 54                | Pass    |
| NVNT      | ac20 | 5260               | 5150               | -49.36                 | -48.36                 | 6.41          | 55.82         | Peak     | 68.2              | Pass    |
| NVNT      | ac20 | 5260               | 5150               | -57.25                 | -56.78                 | 6.41          | 47.64         | Average  | 54                | Pass    |
| NVNT      | ac20 | 5320               | 5350               | -39.52                 | -35.10                 | 6.41          | 67.88         | Peak     | 68.2              | Pass    |
| NVNT      | ac20 | 5320               | 5350               | -50.15                 | -52.5                  | 6.41          | 53.48         | Average  | 54                | Pass    |
| NVNT      | ac20 | 5320               | 5352.4             | -38.03                 | -36.25                 | 6.41          | 67.60         | Peak     | 68.2              | Pass    |
| NVNT      | ac20 | 5320               | 5350.2             | -51.02                 | -52.35                 | 6.41          | 53.01         | Average  | 54                | Pass    |
| NVNT      | ac20 | 5320               | 5460               | -50.33                 | -48.11                 | 6.41          | 55.57         | Peak     | 68.2              | Pass    |
| NVNT      | ac20 | 5320               | 5460               | -58.17                 | -57.03                 | 6.41          | 47.09         | Average  | 54                | Pass    |
| NVNT      | ac40 | 5310               | 4500               | -49.62                 | -49.85                 | 6.41          | 54.91         | Peak     | 68.2              | Pass    |
| NVNT      | ac40 | 5310               | 4500               | -58.77                 | -58.56                 | 6.41          | 45.98         | Average  | 54                | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



|      |      |      |         |        |        |      |       |         |      |      |
|------|------|------|---------|--------|--------|------|-------|---------|------|------|
| NVNT | ac40 | 5310 | 4806.99 | -45.91 | -44.8  | 6.41 | 59.33 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5310 | 4806.18 | -54.21 | -52.81 | 6.41 | 51.19 | Average | 54   | Pass |
| NVNT | ac40 | 5310 | 5150    | -49.01 | -49.34 | 6.41 | 55.48 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5310 | 5150    | -56.78 | -57.28 | 6.41 | 47.63 | Average | 54   | Pass |
| NVNT | ac40 | 5310 | 5350    | -36.89 | -36.23 | 6.41 | 68.10 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5310 | 5350    | -52.51 | -50.14 | 6.41 | 53.48 | Average | 54   | Pass |
| NVNT | ac40 | 5310 | 5350.4  | -38.76 | -37.05 | 6.41 | 66.83 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5310 | 5350.2  | -52.63 | -52.74 | 6.41 | 51.96 | Average | 54   | Pass |
| NVNT | ac40 | 5310 | 5460    | -50.39 | -50.67 | 6.41 | 54.12 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5310 | 5460    | -58.02 | -57.44 | 6.41 | 46.93 | Average | 54   | Pass |
| NVNT | ax20 | 5260 | 4500    | -51.04 | -51.31 | 6.41 | 53.47 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5260 | 4500    | -58.38 | -58.74 | 6.41 | 46.09 | Average | 54   | Pass |
| NVNT | ax20 | 5260 | 5149.74 | -45.56 | -46.33 | 6.41 | 58.72 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5260 | 4787.82 | -54.97 | -54.87 | 6.41 | 49.73 | Average | 54   | Pass |
| NVNT | ax20 | 5260 | 5150    | -45.56 | -49.43 | 6.41 | 57.57 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5260 | 5150    | -56.66 | -56.47 | 6.41 | 48.08 | Average | 54   | Pass |
| NVNT | ax20 | 5320 | 5350    | -36.82 | -37.44 | 6.41 | 67.53 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5320 | 5350    | -51.85 | -51.62 | 6.41 | 52.91 | Average | 54   | Pass |
| NVNT | ax20 | 5320 | 5351    | -38.05 | -37.62 | 6.41 | 66.82 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5320 | 5352    | -50.35 | -52.71 | 6.41 | 53.28 | Average | 54   | Pass |
| NVNT | ax20 | 5320 | 5460    | -50.12 | -50.09 | 6.41 | 54.54 | Peak    | 68.2 | Pass |
| NVNT | ax20 | 5320 | 5460    | -57.46 | -57.45 | 6.41 | 47.19 | Average | 54   | Pass |
| NVNT | ax40 | 5310 | 4500    | -49.92 | -50.81 | 6.41 | 54.31 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5310 | 4500    | -58.37 | -58.27 | 6.41 | 46.33 | Average | 54   | Pass |
| NVNT | ax40 | 5310 | 4807.8  | -44.78 | -44.14 | 6.41 | 60.20 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5310 | 4806.99 | -53.04 | -52.82 | 6.41 | 51.72 | Average | 54   | Pass |
| NVNT | ax40 | 5310 | 5150    | -48.53 | -49.67 | 6.41 | 55.59 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5310 | 5150    | -57.16 | -57.54 | 6.41 | 47.30 | Average | 54   | Pass |
| NVNT | ax40 | 5310 | 5350    | -38.05 | -39    | 6.41 | 66.15 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5310 | 5350    | -50.25 | -53.01 | 6.41 | 53.23 | Average | 54   | Pass |
| NVNT | ax40 | 5310 | 5350.4  | -39.52 | -36.26 | 6.41 | 67.06 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5310 | 5350.4  | -52.68 | -54.12 | 6.41 | 51.31 | Average | 54   | Pass |
| NVNT | ax40 | 5310 | 5460    | -48.74 | -49.91 | 6.41 | 55.36 | Peak    | 68.2 | Pass |
| NVNT | ax40 | 5310 | 5460    | -57.07 | -57.73 | 6.41 | 47.26 | Average | 54   | Pass |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## E.5 Frequency Stability


| Condition | Mode | Frequency (MHz) | Antenna | Measured Frequency (MHz) | Frequency Error (Hz) | Deviation (ppm) | Limit (ppm) | Verdict |
|-----------|------|-----------------|---------|--------------------------|----------------------|-----------------|-------------|---------|
| NVNT      | a    | 5260            | Ant1    | 5260                     | 0                    | 0               | 25          | Pass    |
| NVNT      | a    | 5300            | Ant1    | 5300                     | 0                    | 0               | 25          | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5320                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 5260                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n20  | 5300            | Ant1    | 5300                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5319.98                  | -20000               | -3.76           | 25          | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 5270                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5309.96                  | -40000               | -7.53           | 25          | Pass    |
| NVNT      | ac20 | 5260            | Ant1    | 5260                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac20 | 5300            | Ant1    | 5300                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac20 | 5320            | Ant1    | 5319.98                  | -20000               | -3.76           | 25          | Pass    |
| NVNT      | ac40 | 5270            | Ant1    | 5270                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac40 | 5310            | Ant1    | 5310                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ax20 | 5260            | Ant1    | 5260                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ax20 | 5300            | Ant1    | 5299.96                  | -40000               | -7.55           | 25          | Pass    |
| NVNT      | ax20 | 5320            | Ant1    | 5320                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ax40 | 5270            | Ant1    | 5270                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ax40 | 5310            | Ant1    | 5310                     | 0                    | 0               | 25          | Pass    |






## Test Graphs

## Freq. Stability NVNT a 5260MHz Ant1

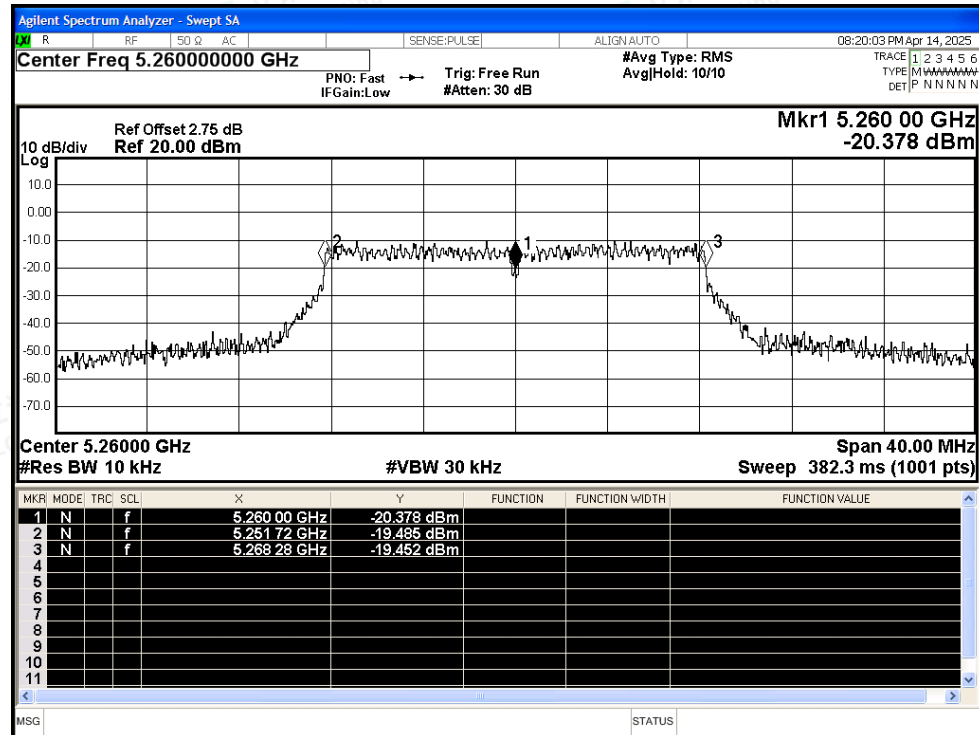

## Freq. Stability NVNT a 5300MHz Ant1

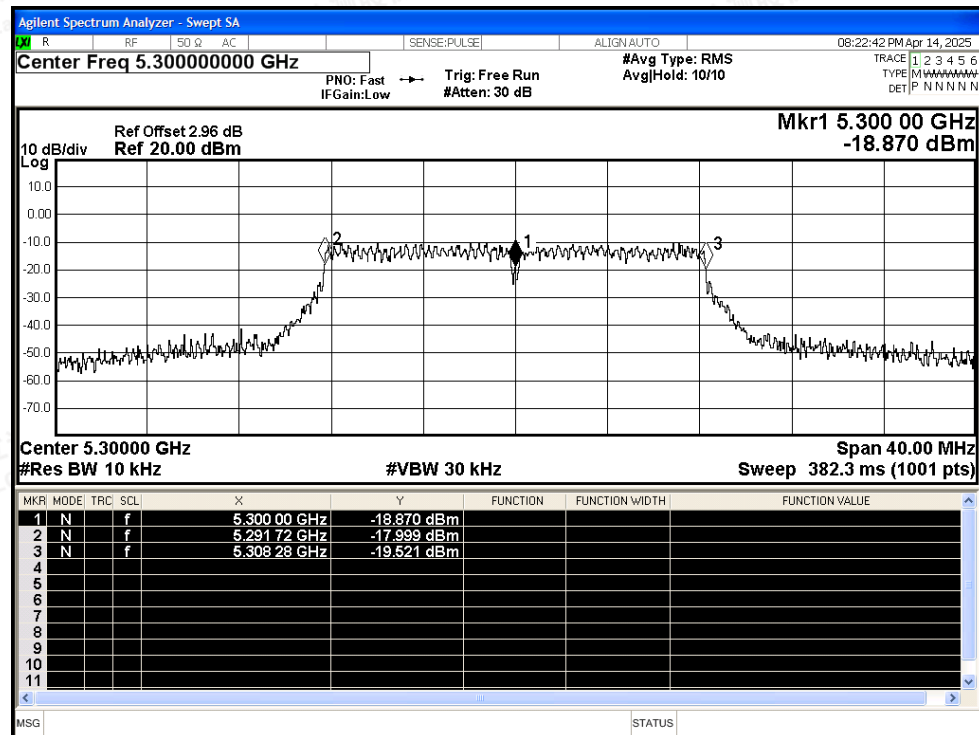

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT a 5320MHz Ant1

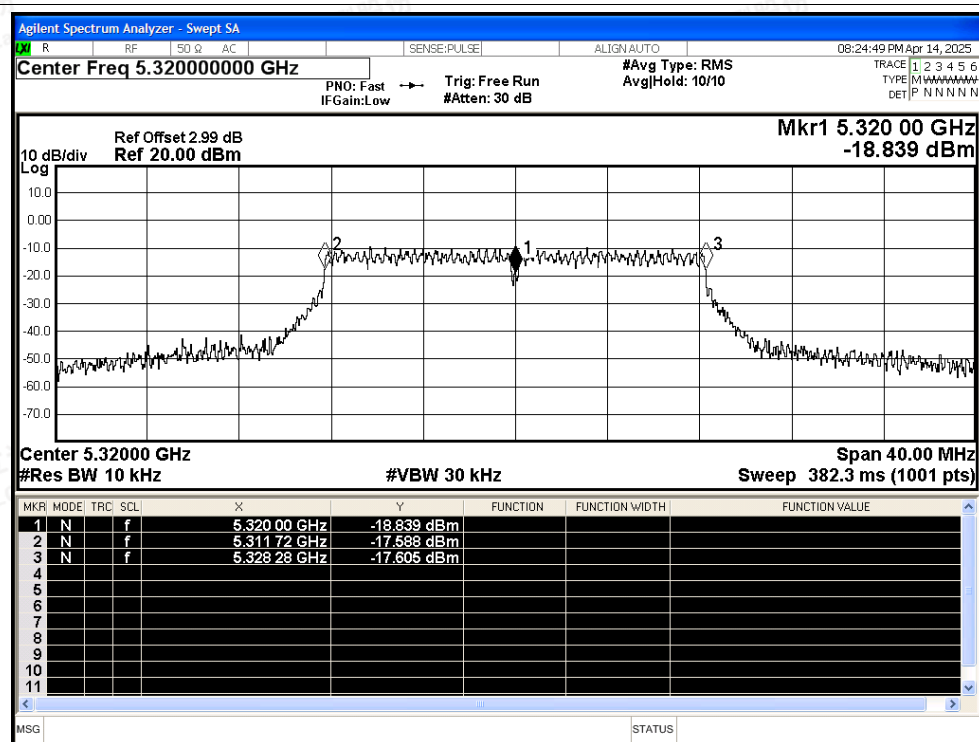

## Freq. Stability NVNT n20 5260MHz Ant1

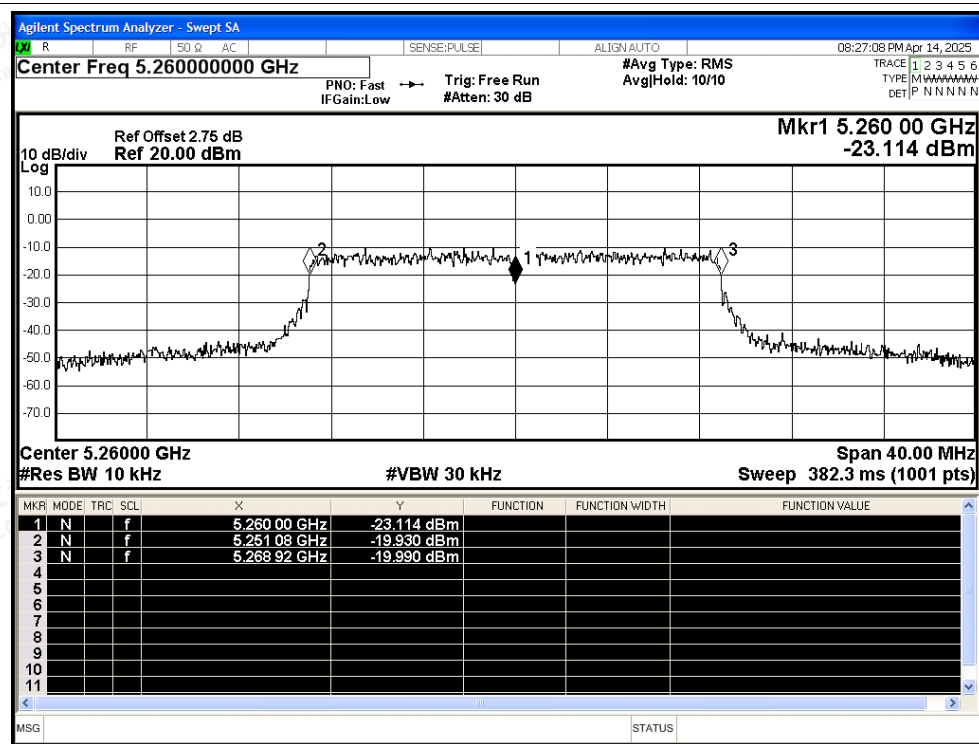

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT n20 5300MHz Ant1

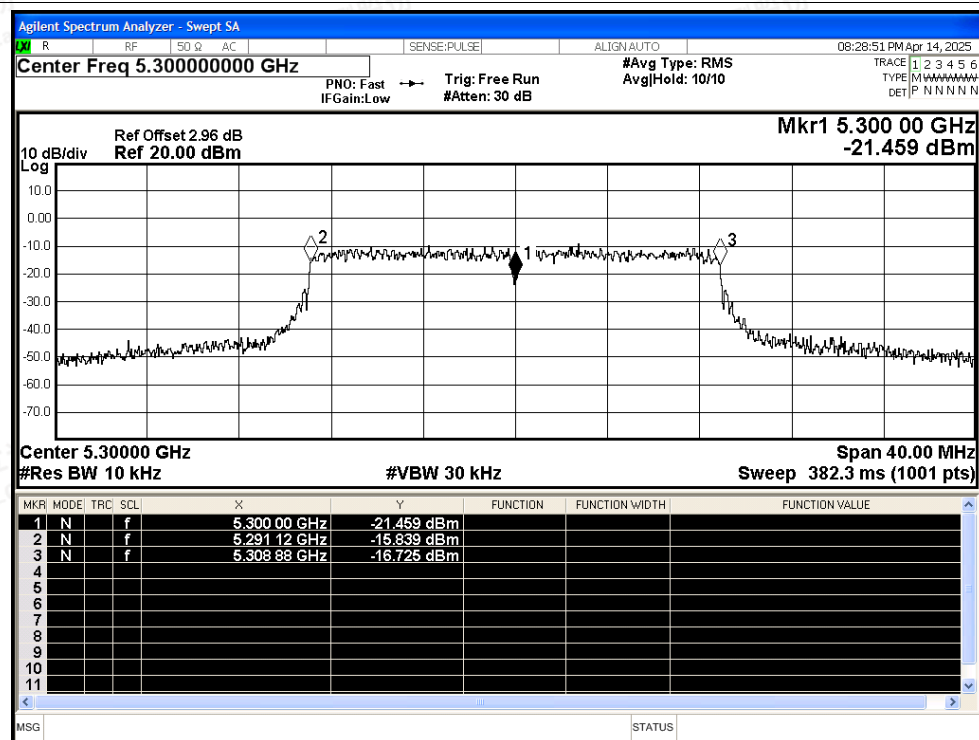

## Freq. Stability NVNT n20 5320MHz Ant1

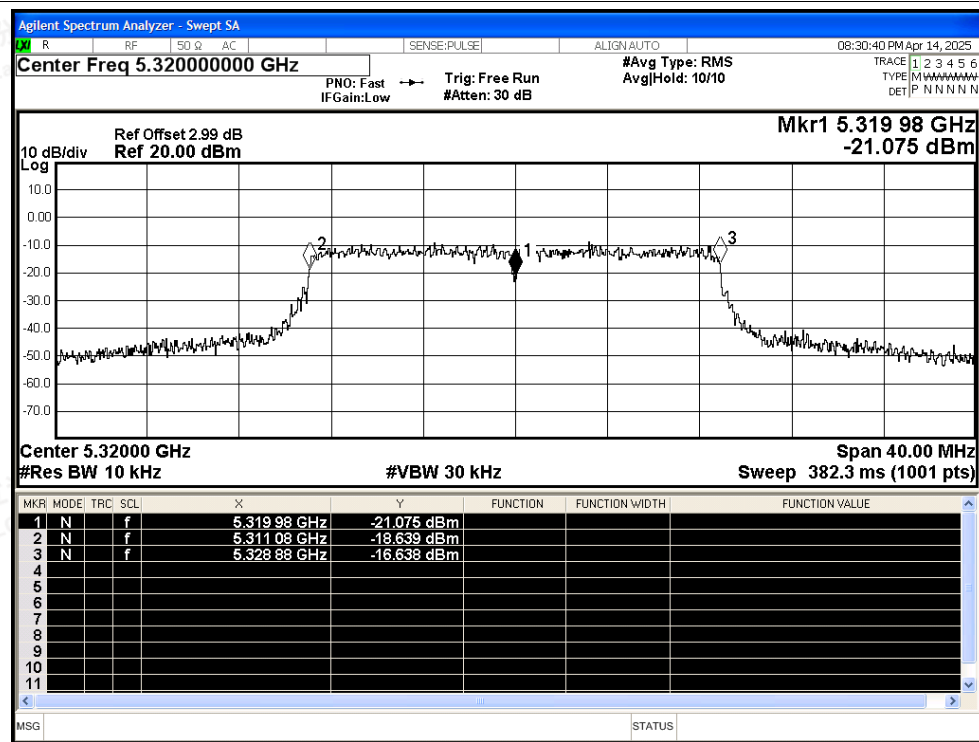

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT n40 5270MHz Ant1

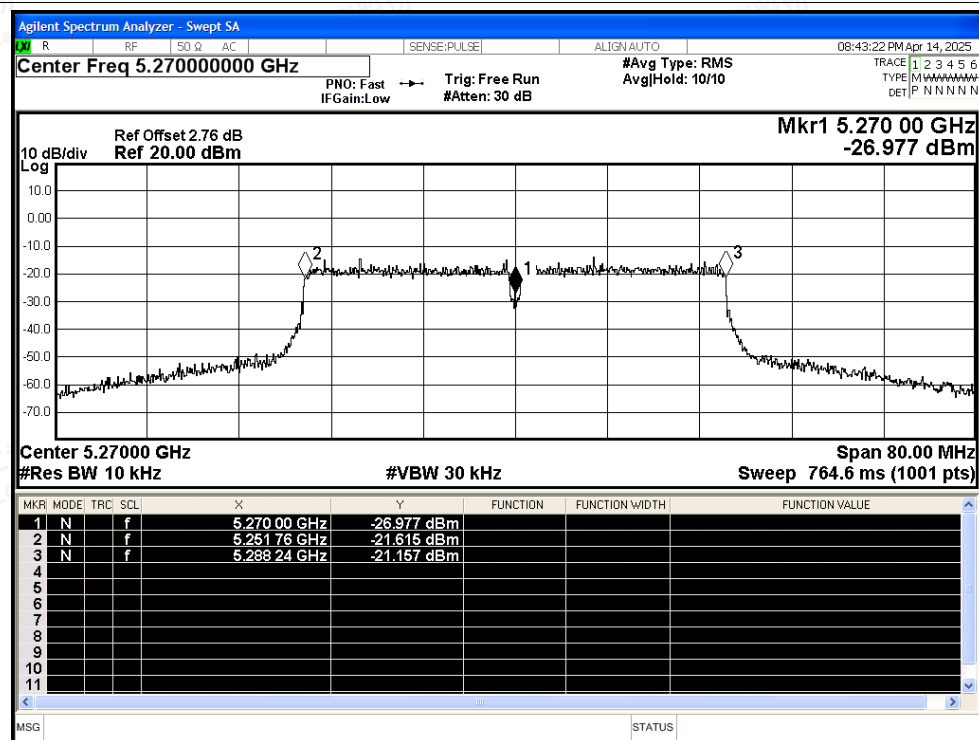

## Freq. Stability NVNT n40 5310MHz Ant1

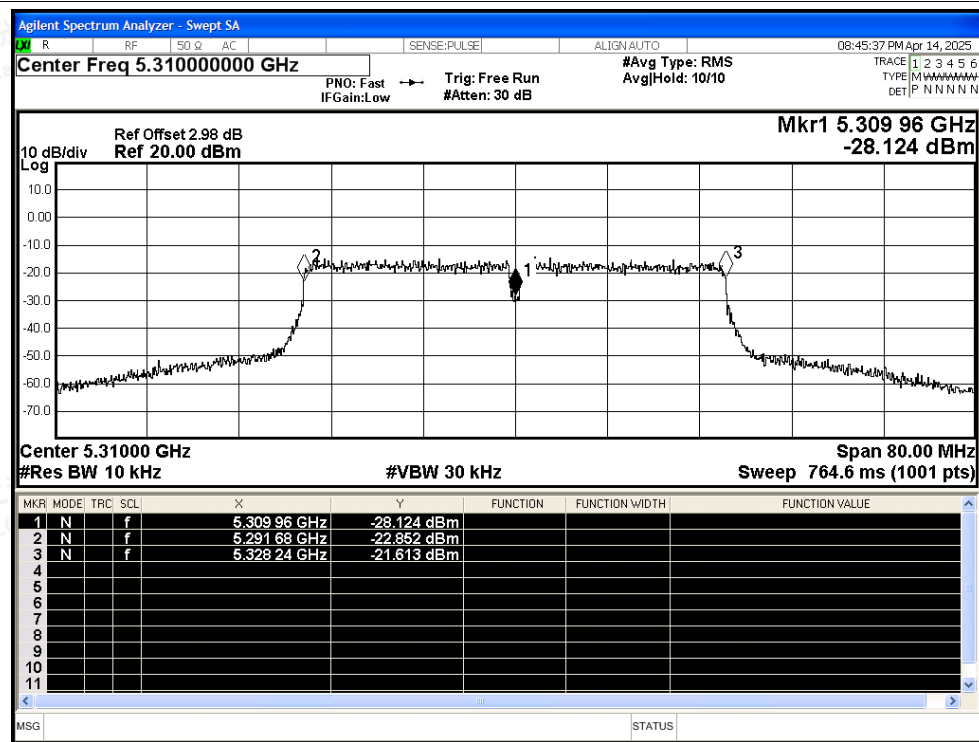

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT ac20 5260MHz Ant1

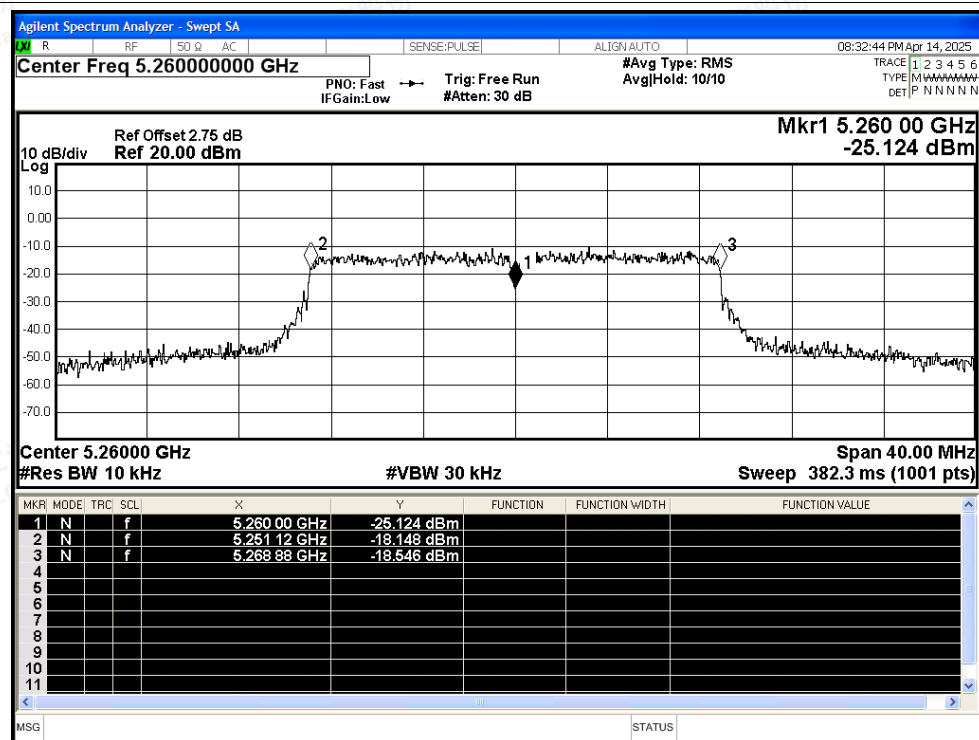

## Freq. Stability NVNT ac20 5300MHz Ant1

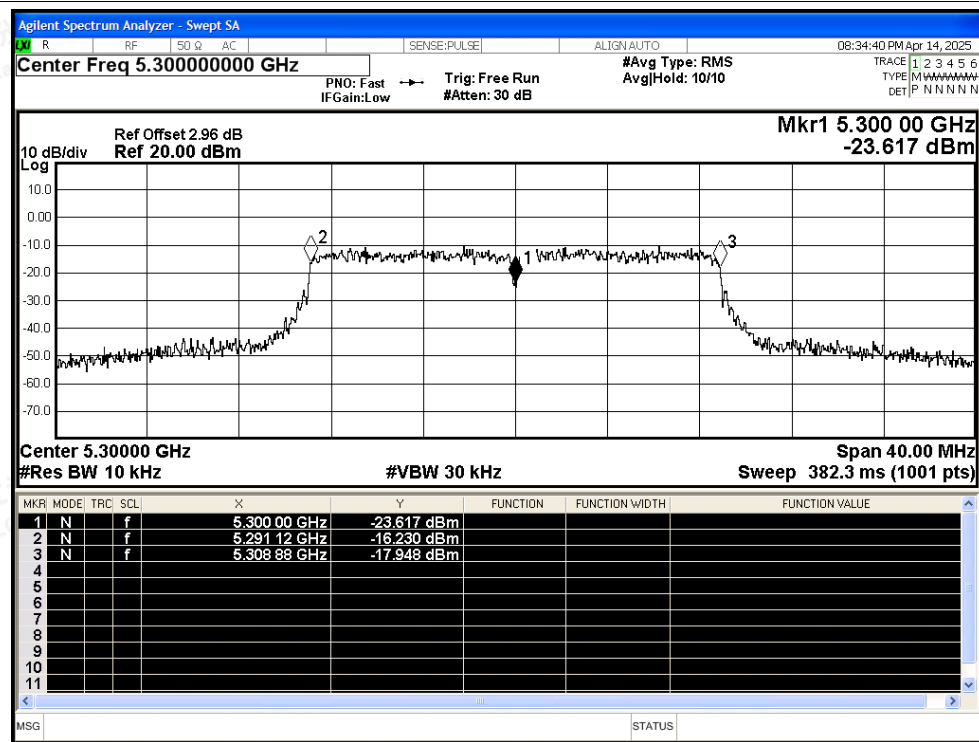

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT ac20 5320MHz Ant1

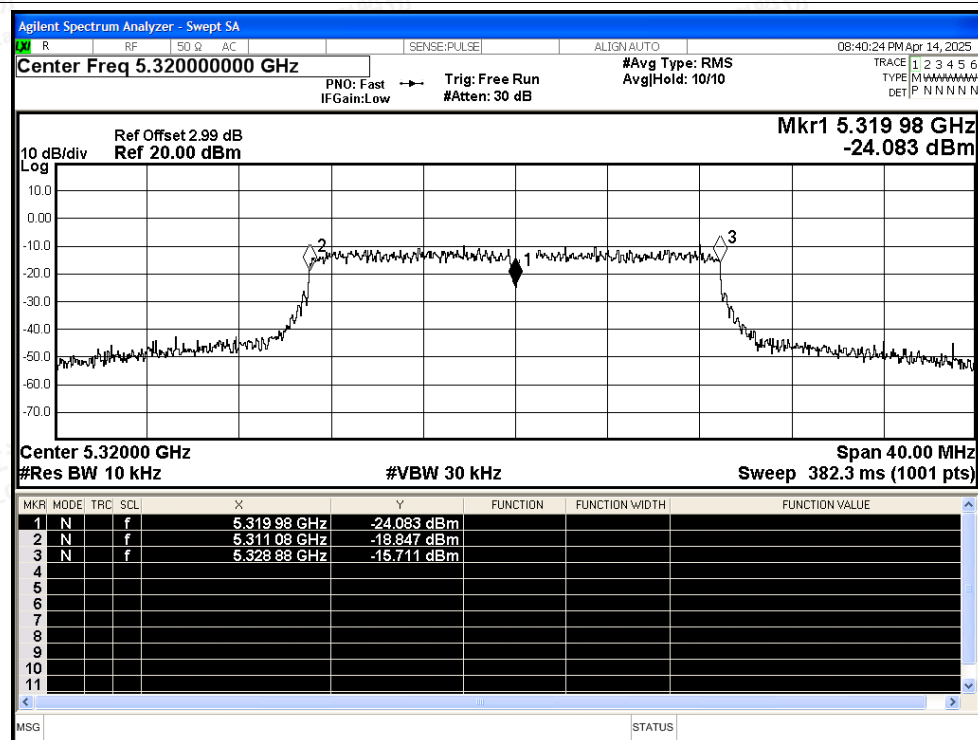

## Freq. Stability NVNT ac40 5270MHz Ant1

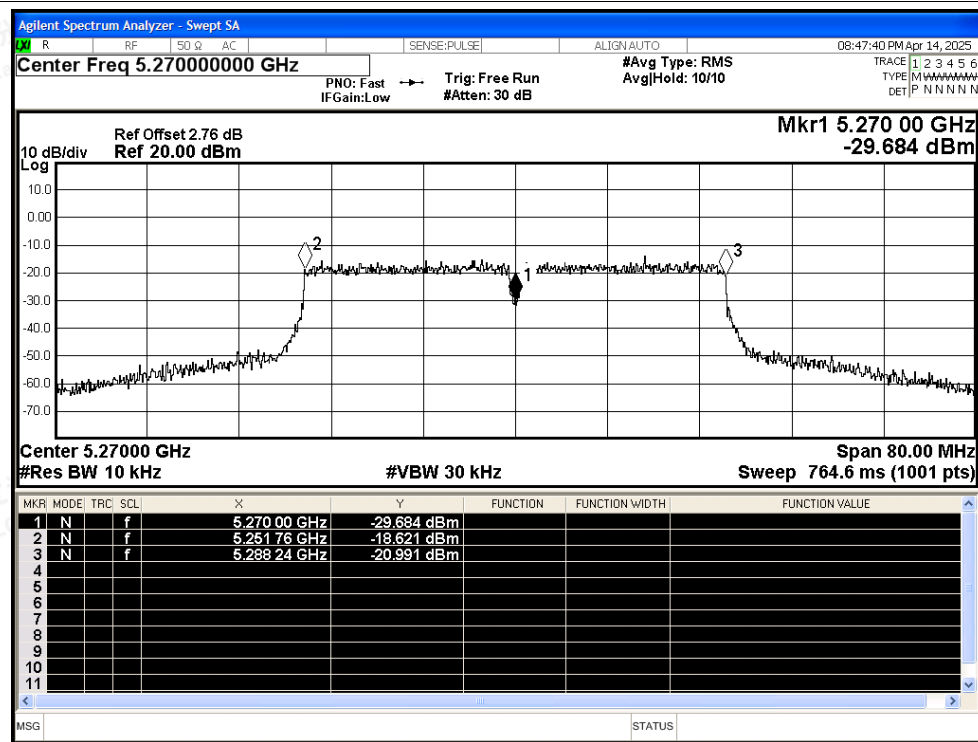

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT ac40 5310MHz Ant1

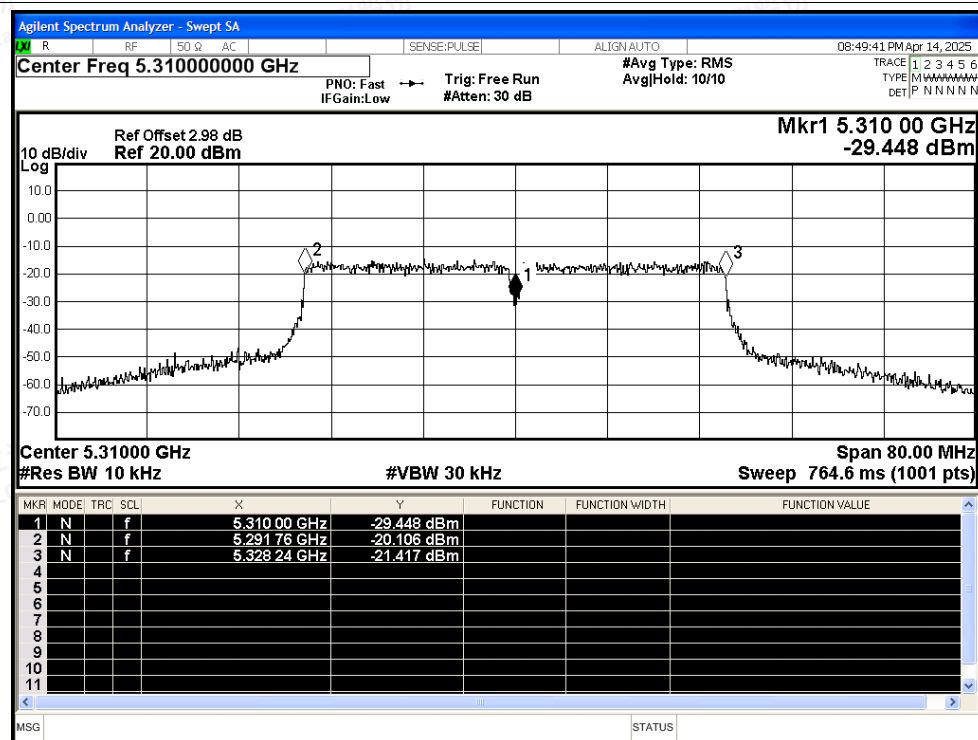

## Freq. Stability NVNT ax20 5260MHz Ant1

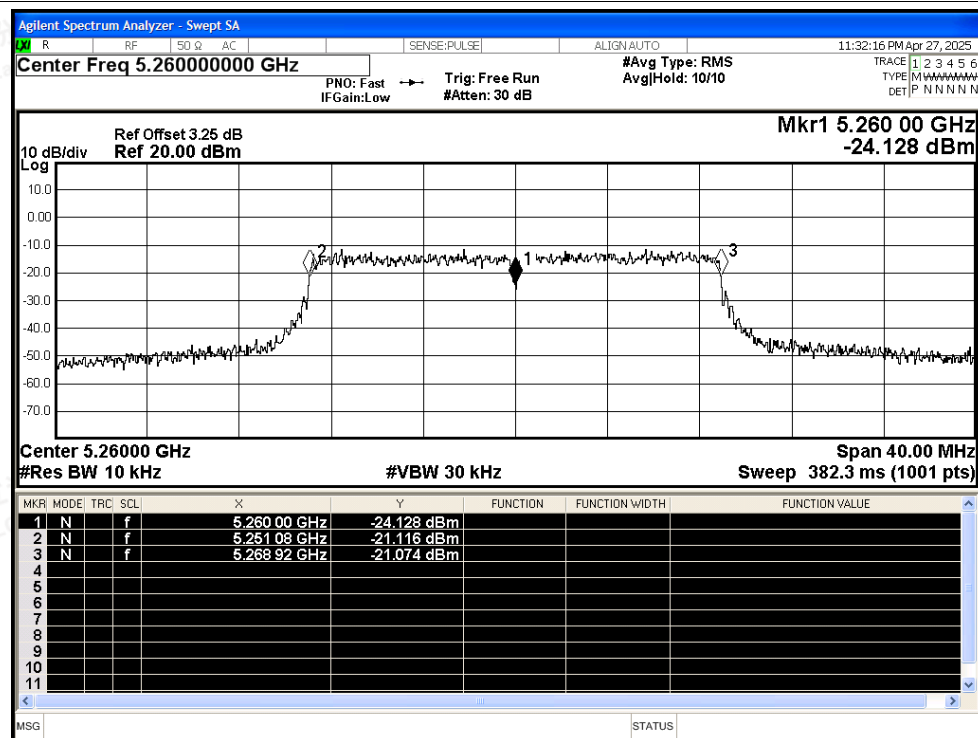

## Freq. Stability NVNT ax20 5300MHz Ant1



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity