


TEST REPORT

Product Name: Food Delivery Robot
FCC ID: 2A5GA-FDR001
Trademark: Theseus Robot
Model Number: FDR001
Prepared For: Theseus Robot, Inc.
Address: 921 N Milliken Ave Unit 1068 Ontario CA 91764 United States
Manufacturer: Theseus Robot, Inc.
Address: 921 N Milliken Ave Unit 1068 Ontario CA 91764 United States
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: Jan. 10, 2022
Sample tested Date: Jan. 10, 2022 to Jan. 20, 2022
Issue Date: Jan. 20, 2022
Report No.: CTB220115006RF
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSION	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	61
8.1 Block Diagram Of Test Setup	61
8.2 Limit	61
8.3 Test procedure	61
8.4 Test Result	62
9. CONDUCTED OUTPUT POWER	86
9.1 Block Diagram Of Test Setup	86
9.2 Limit	86
9.3 Test procedure	86
9.4 Test Result	87
10. 6DB OCCUPIED BANDWIDTH	88
10.1 Block Diagram Of Test Setup	88
10.2 Limit	88
10.3 Test procedure	88
10.4 Test Result	89
11. POWER SPECTRAL DENSITY	103
11.1 Block Diagram Of Test Setup	103
11.2 Limit	103



11.3	Test procedure	103
11.4	Test Result	103
12.	ANTENNA REQUIREMENT	117
13.	EUT PHOTOGRAPHS	118
14.	EUT TEST SETUP PHOTOGRAPHS	119

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB220115006RF	Jan. 18, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m camber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m camber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted emission(150K-30MHz)	3.2dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	FDR001
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	RK3128_Main_A1.4
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 9.477dBm
Type of Modulation:	WiFi: OFDM, CCK, DSSS
Antenna installation:	WiFi: Internal Antenna
Antenna Gain:	ANT 1 : 1.0dBi, ANT 2 : 1.0dBi, ANT 3 : 1.0dBi
Ratings:	Input: AC 100-240V 50/60Hz Output: 29.4V $\Rightarrow$ 4.0A 25.9V $\Rightarrow$ 538.72Wh(Built-in battery)

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	Foshan Shunde Guan Yuda Power Supply Co.,LTD	GM130-2940400-F	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 2+ANT 3)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 1.0dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,
Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=0dB,

So the directional gain for PSD is 1.0dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1.0dBi

NOTE: Dutycycle>98%.

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY5209007 3	2020.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2020.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2020.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2020.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY4906092 0	2020.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY4742019 5	2020.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY5010256 7	2020.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-248 3.5MS-1154	2018101500 1	2020.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-585 0MS-1155	2018101500 1	2020.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA1 20	190821-1-1	2020.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2020.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2020.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2020.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2020.09.27	2022.08.05
16	966 chamber	C.R.T.	966 Room	966	2020.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2020.09.27	2022.08.05


18	Amplifier	HP	8447E	2945A02747	2020.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2020.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2020.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2020.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2020.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2020.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2020.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2020.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2020.09.27	2022.08.05

Continuous Emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2020.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2020.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2020.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2020.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2020.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2020.09.27	2022.08.16
7	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A 1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2020.09.27	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2020.09.27	2022.11.01
3	Amplifier	Agilent	8449B	3008A01838	2020.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2020.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2020.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2020.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2020.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2020.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2020.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2020.09.27	2022.08.16
11	Communication test set	R&S	CMW500	108058	2020.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

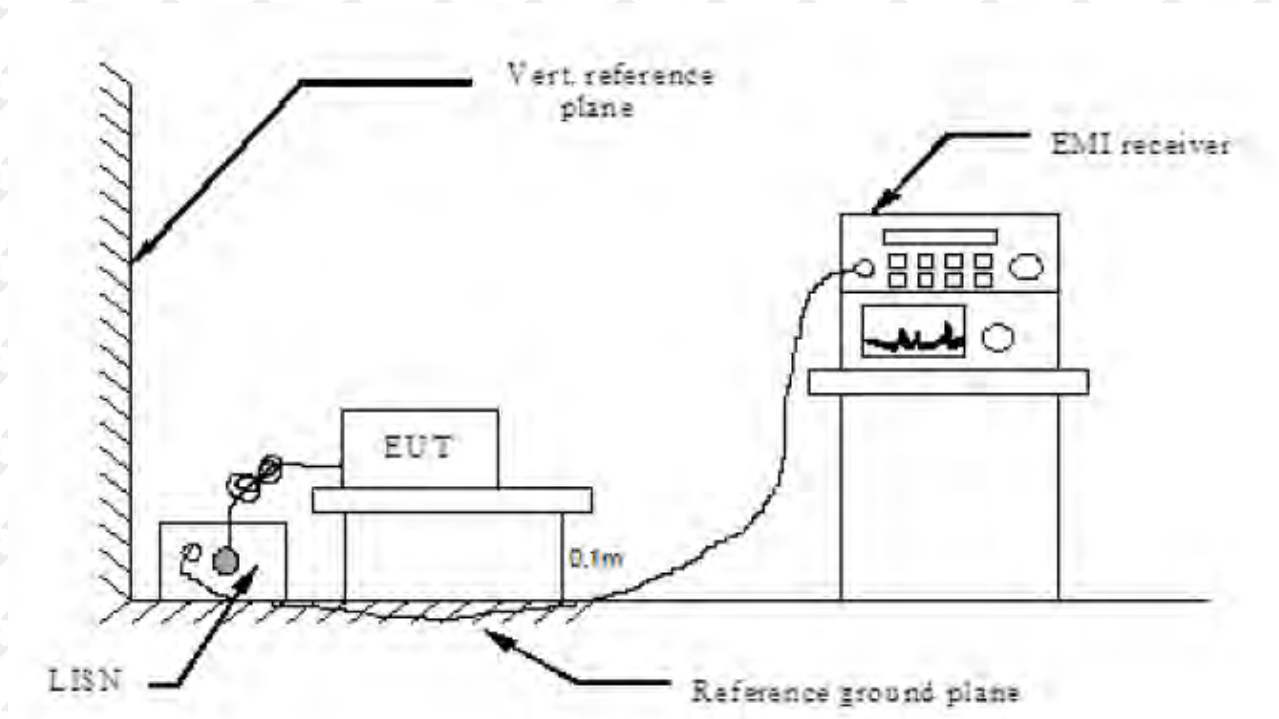

6.2 Limit

Table 4 - AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being

measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.1m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

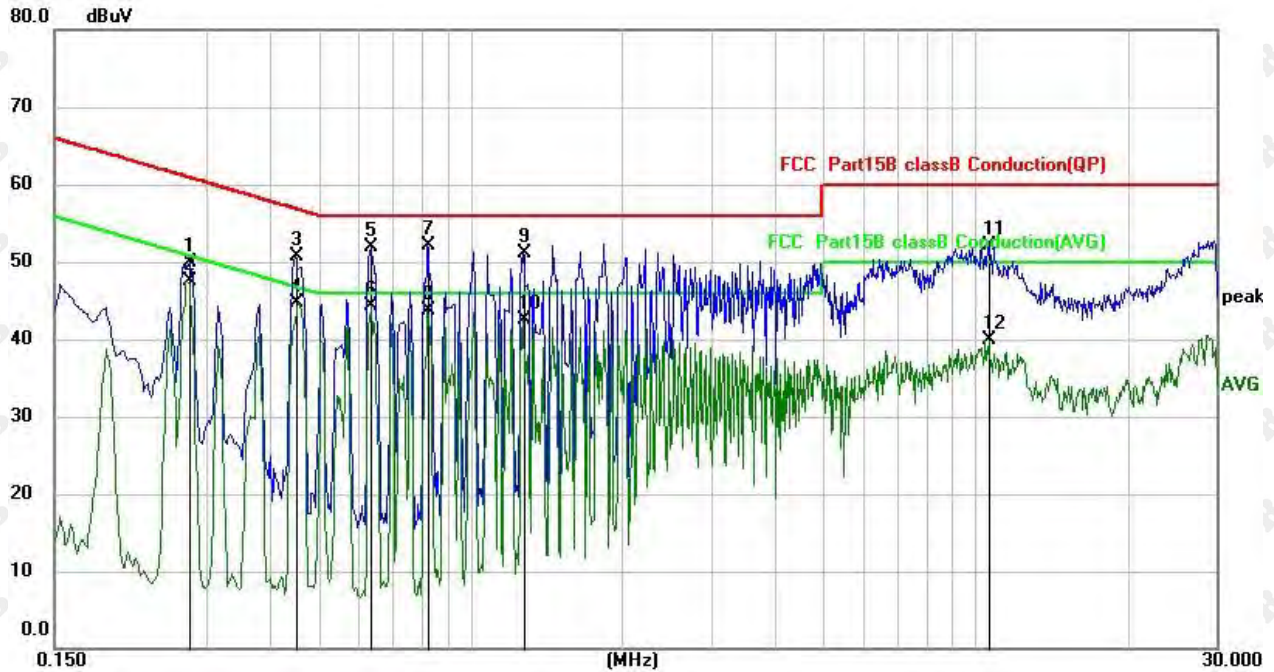

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.2779	39.21	10.65	49.86	60.88	-11.02	QP
2		0.2779	36.87	10.65	47.52	50.88	-3.36	AVG
3		0.4500	40.15	10.55	50.70	56.88	-6.18	QP
4		0.4500	34.06	10.55	44.61	46.88	-2.27	AVG
5		0.6340	41.41	10.55	51.96	56.00	-4.04	QP
6	*	0.6340	33.83	10.55	44.38	46.00	-1.62	AVG
7		0.8260	41.62	10.58	52.20	56.00	-3.80	QP
8		0.8260	33.22	10.58	43.80	46.00	-2.20	AVG
9		1.2700	40.52	10.62	51.14	56.00	-4.86	QP
10		1.2700	31.89	10.62	42.51	46.00	-3.49	AVG
11		10.6580	41.27	10.83	52.10	60.00	-7.90	QP
12		10.6580	29.14	10.83	39.97	50.00	-10.03	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

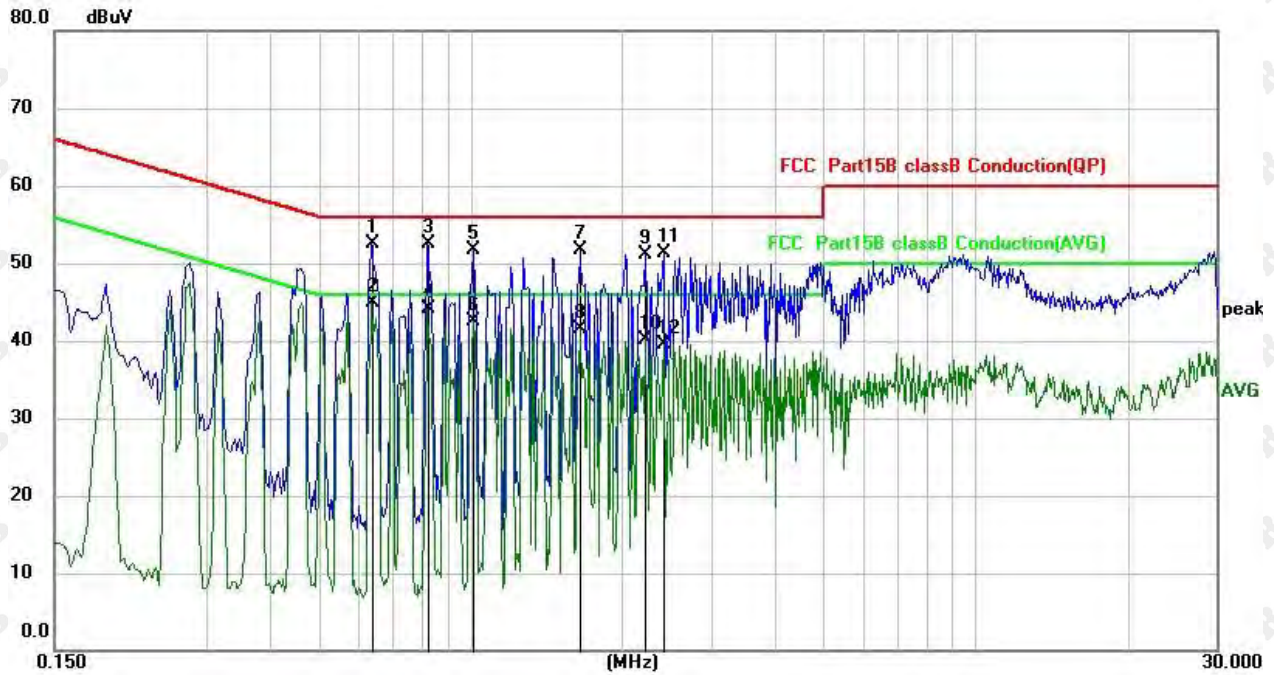

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.6380	41.98	10.55	52.53	56.00	-3.47	QP
2	*	0.6380	34.26	10.55	44.81	46.00	-1.19	AVG
3		0.8260	41.92	10.58	52.50	56.00	-3.50	QP
4		0.8260	33.46	10.58	44.04	46.00	-1.96	AVG
5		1.0140	41.01	10.62	51.63	56.00	-4.37	QP
6		1.0140	31.87	10.62	42.49	46.00	-3.51	AVG
7		1.6500	41.11	10.62	51.73	56.00	-4.27	QP
8		1.6500	30.96	10.62	41.58	46.00	-4.42	AVG
9		2.2220	40.56	10.63	51.19	56.00	-4.81	QP
10		2.2220	29.57	10.63	40.20	46.00	-5.80	AVG
11		2.4140	40.63	10.63	51.26	56.00	-4.74	QP
12		2.4140	28.97	10.63	39.60	46.00	-6.40	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

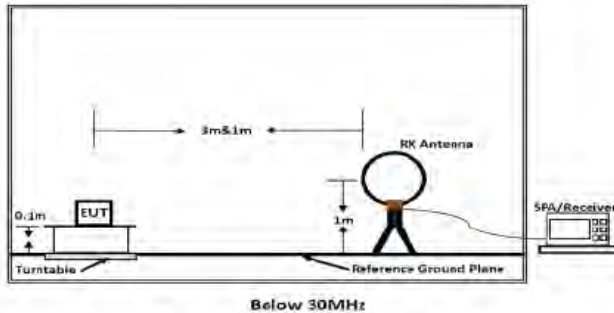


Figure 1. Below 30MHz

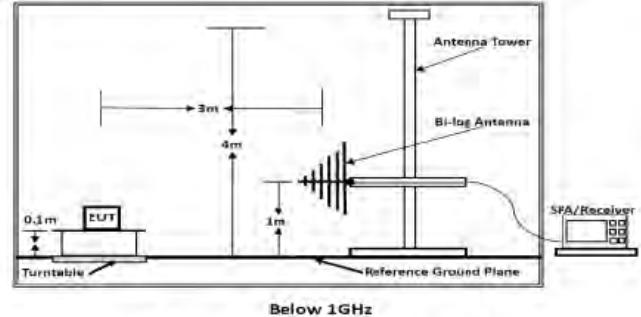


Figure 2. 30MHz to 1GHz

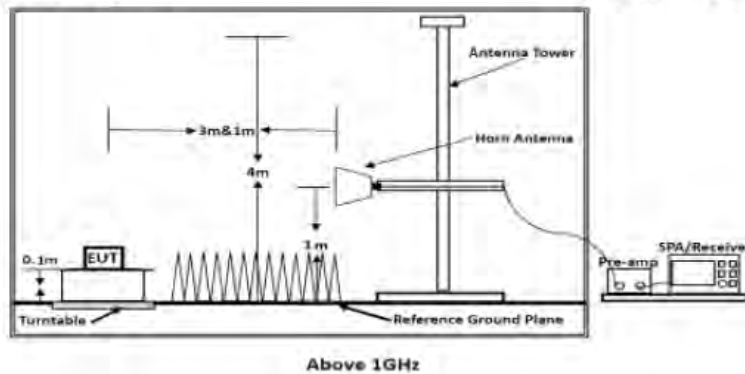


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.1meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

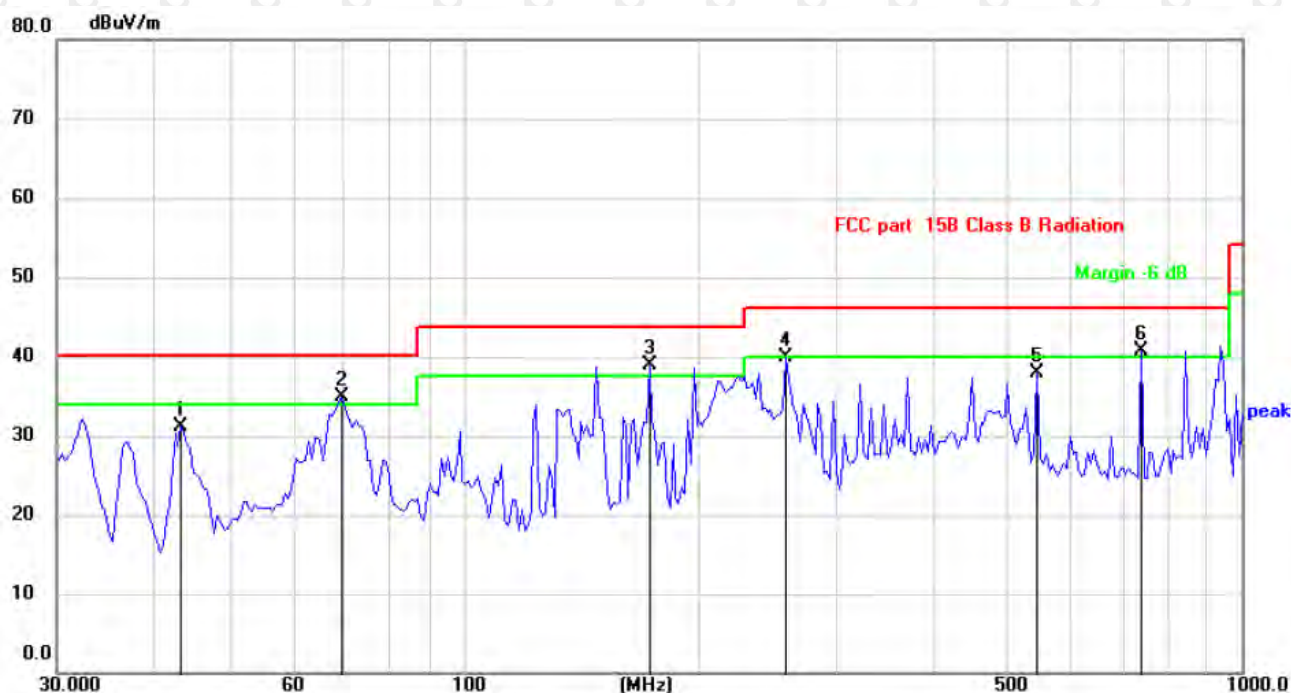

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		43.3534	36.54	-5.39	31.15	40.00	-8.85	QP
2	!	69.6003	42.69	-7.86	34.83	40.00	-5.17	QP
3	*	173.2050	45.56	-6.68	38.88	43.50	-4.62	QP
4		259.2336	45.59	-5.61	39.98	46.00	-6.02	QP
5		546.1390	36.24	1.57	37.81	46.00	-8.19	QP
6	!	742.2586	35.94	4.84	40.78	46.00	-5.22	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

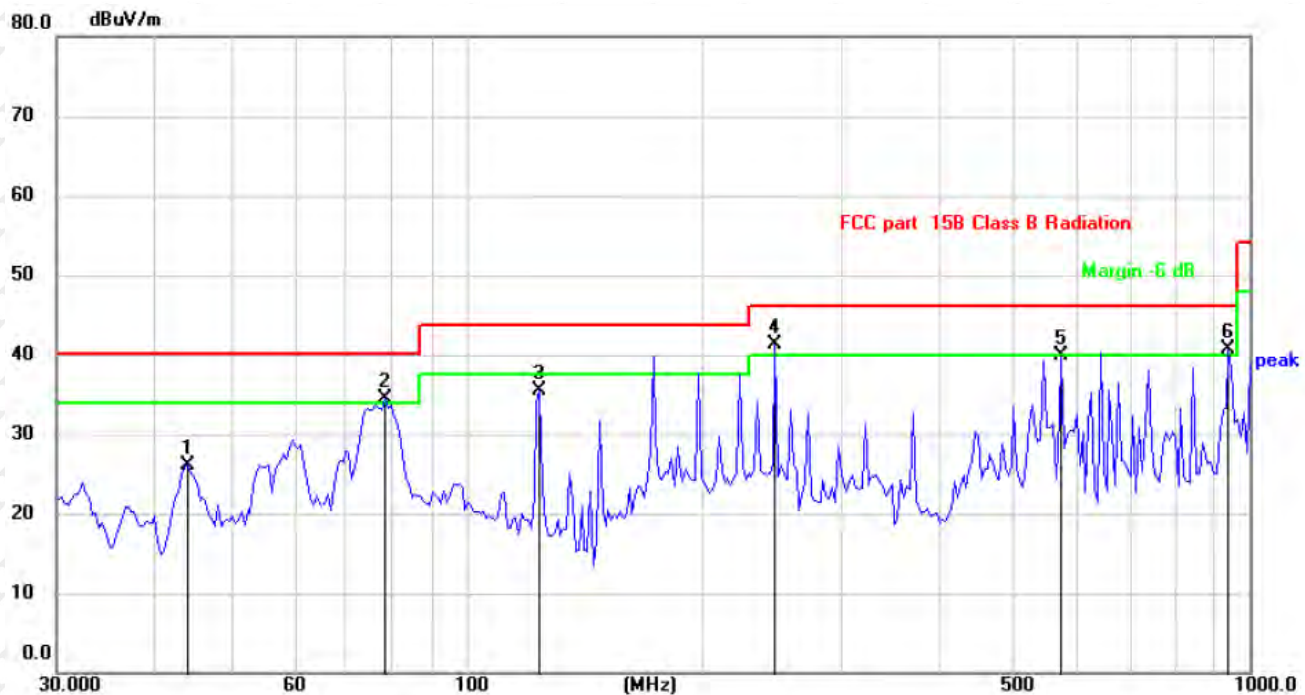

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		44.1200	31.53	-5.42	26.11	40.00	-13.89	QP
2	!	78.6885	43.95	-9.52	34.43	40.00	-5.57	QP
3		124.1329	42.02	-6.58	35.44	43.50	-8.06	QP
4	*	248.1165	46.94	-5.72	41.22	46.00	-4.78	QP
5		575.6340	37.81	2.12	39.93	46.00	-6.07	QP
6	!	940.4800	34.70	5.96	40.66	46.00	-5.34	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

ANT1

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.36	-3.64	61.72	74	-12.28	peak
4824	48.67	-3.64	45.03	54	-8.97	AVG
7236	57.28	-0.95	56.33	74	-17.67	peak
7236	44.19	-0.95	43.24	54	-10.76	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.59	-3.64	62.95	74	-11.05	peak
4824	49.25	-3.64	45.61	54	-8.39	AVG
7236	57.72	-0.95	56.77	74	-17.23	peak
7236	42.90	-0.95	41.95	54	-12.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	64.48	-3.51	60.97	74	-13.03	peak
4874	49.78	-3.51	46.27	54	-7.73	AVG
7311	59.36	-0.82	58.54	74	-15.46	peak
7311	45.98	-0.82	45.16	54	-8.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	63.10	-3.51	59.59	74	-14.41	peak
4874	49.07	-3.51	45.56	54	-8.44	AVG
7311	59.40	-0.82	58.58	74	-15.42	peak
7311	42.94	-0.82	42.12	54	-11.88	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.18	-3.43	60.75	74	-13.25	peak
4924	46.17	-3.43	42.74	54	-11.26	AVG
7386	59.47	-0.75	58.72	74	-15.28	peak
7386	45.22	-0.75	44.47	54	-9.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.01	-3.43	59.58	74	-14.42	peak
4924	48.27	-3.43	44.84	54	-9.16	AVG
7386	57.63	-0.75	56.88	74	-17.12	peak
7386	41.43	-0.75	40.68	54	-13.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.82	-3.64	60.18	74	-13.82	peak
4824	49.85	-3.64	46.21	54	-7.79	AVG
7236	59.76	-0.95	58.81	74	-15.19	peak
7236	45.62	-0.95	44.67	54	-9.33	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.17	-3.64	58.53	74	-15.47	peak
4824	46.55	-3.64	42.91	54	-11.09	AVG
7236	58.55	-0.95	57.60	74	-16.40	peak
7236	43.02	-0.95	42.07	54	-11.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.80	-3.51	61.29	74	-12.71	peak
4874	47.39	-3.51	43.88	54	-10.12	AVG
7311	58.02	-0.82	57.20	74	-16.80	peak
7311	45.54	-0.82	44.72	54	-9.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.29	-3.51	59.78	74	-14.22	peak
4874	46.99	-3.51	43.48	54	-10.52	AVG
7311	56.06	-0.82	55.24	74	-18.76	peak
7311	42.19	-0.82	41.37	54	-12.63	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.83	-3.43	59.40	74	-14.60	peak
4924	48.93	-3.43	45.50	54	-8.50	AVG
7386	58.76	-0.75	58.01	74	-15.99	peak
7386	44.05	-0.75	43.30	54	-10.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.20	-3.43	59.77	74	-14.23	peak
4924	46.59	-3.43	43.16	54	-10.84	AVG
7386	56.09	-0.75	55.34	74	-18.66	peak
7386	42.64	-0.75	41.89	54	-12.11	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.66	-3.64	61.02	74	-12.98	peak
4824	49.13	-3.64	45.49	54	-8.51	AVG
7236	57.82	-0.95	56.87	74	-17.13	peak
7236	42.69	-0.95	41.74	54	-12.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.80	-3.64	62.16	74	-11.84	peak
4824	48.56	-3.64	44.92	54	-9.08	AVG
7236	59.39	-0.95	58.44	74	-15.56	peak
7236	46.11	-0.95	45.16	54	-8.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.30	-3.51	58.79	74.00	-15.21	peak
4874.00	50.26	-3.51	46.75	54.00	-7.25	AVG
7311.00	58.92	-0.82	58.10	74.00	-15.90	peak
7311.00	46.72	-0.82	45.90	54.00	-8.10	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.78	-3.51	59.27	74.00	-14.73	peak
4874.00	46.41	-3.51	42.90	54.00	-11.10	AVG
7311.00	57.78	-0.82	56.96	74.00	-17.04	peak
7311.00	43.67	-0.82	42.85	54.00	-11.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.55	-3.43	58.12	74	-15.88	peak
4924	47.44	-3.43	44.01	54	-9.99	AVG
7386	57.47	-0.75	56.72	74	-17.28	peak
7386	43.05	-0.75	42.30	54	-11.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.29	-3.43	59.86	74	-14.14	peak
4924	47.26	-3.43	43.83	54	-10.17	AVG
7386	56.88	-0.75	56.13	74	-17.87	peak
7386	43.15	-0.75	42.40	54	-11.60	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.73	-3.63	61.10	74	-12.90	peak
4844	49.81	-3.63	46.18	54	-7.82	AVG
7266	59.15	-0.94	58.21	74	-15.79	peak
7266	46.03	-0.94	45.09	54	-8.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.21	-3.63	60.58	74	-13.42	peak
4844	48.94	-3.63	45.31	54	-8.69	AVG
7266	58.70	-0.94	57.76	74	-16.24	peak
7266	45.73	-0.94	44.79	54	-9.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.13	-3.51	59.62	74	-14.38	peak
4874	49.14	-3.51	45.63	54	-8.37	AVG
7311	58.93	-0.82	58.11	74	-15.89	peak
7311	45.70	-0.82	44.88	54	-9.12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.32	-3.51	58.81	74	-15.19	peak
4874	46.53	-3.51	43.02	54	-10.98	AVG
7311	56.69	-0.82	55.87	74	-18.13	peak
7311	43.36	-0.82	42.54	54	-11.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.72	-3.43	59.29	74	-14.71	peak
4904	47.99	-3.43	44.56	54	-9.44	AVG
7356	57.66	-0.75	56.91	74	-17.09	peak
7356	41.20	-0.75	40.45	54	-13.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.11	-3.43	58.68	74	-15.32	peak
4904	47.10	-3.43	43.67	54	-10.33	AVG
7356	56.84	-0.75	56.09	74	-17.91	peak
7356	42.46	-0.75	41.71	54	-12.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT2+ANT3

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.57	-3.64	60.93	74	-13.07	peak
4824	50.65	-3.64	47.01	54	-6.99	AVG
7236	57.15	-0.95	56.20	74	-17.80	peak
7236	43.89	-0.95	42.94	54	-11.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.22	-3.64	62.58	74	-11.42	peak
4824	46.87	-3.64	43.23	54	-10.77	AVG
7236	58.49	-0.95	57.54	74	-16.46	peak
7236	43.29	-0.95	42.34	54	-11.66	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	64.59	-3.51	61.08	74	-12.92	peak
4874	48.33	-3.51	44.82	54	-9.18	AVG
7311	57.90	-0.82	57.08	74	-16.92	peak
7311	44.56	-0.82	43.74	54	-10.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	63.04	-3.51	59.53	74	-14.47	peak
4874	47.52	-3.51	44.01	54	-9.99	AVG
7311	58.76	-0.82	57.94	74	-16.06	peak
7311	42.34	-0.82	41.52	54	-12.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.48	-3.43	61.05	74	-12.95	peak
4924	46.46	-3.43	43.03	54	-10.97	AVG
7386	59.78	-0.75	59.03	74	-14.97	peak
7386	42.48	-0.75	41.73	54	-12.27	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.65	-3.43	61.22	74	-12.78	peak
4924	47.03	-3.43	43.60	54	-10.40	AVG
7386	57.47	-0.75	56.72	74	-17.28	peak
7386	44.01	-0.75	43.26	54	-10.74	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.06	-3.64	61.42	74	-12.58	peak
4824	49.64	-3.64	46.00	54	-8.00	AVG
7236	57.03	-0.95	56.08	74	-17.92	peak
7236	45.52	-0.95	44.57	54	-9.43	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.80	-3.64	61.16	74	-12.84	peak
4824	47.30	-3.64	43.66	54	-10.34	AVG
7236	60.35	-0.95	59.40	74	-14.60	peak
7236	43.82	-0.95	42.87	54	-11.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.81	-3.51	60.30	74	-13.70	peak
4874	48.12	-3.51	44.61	54	-9.39	AVG
7311	60.20	-0.82	59.38	74	-14.62	peak
7311	44.71	-0.82	43.89	54	-10.11	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.83	-3.51	59.32	74	-14.68	peak
4874	48.30	-3.51	44.79	54	-9.21	AVG
7311	56.52	-0.82	55.70	74	-18.30	peak
7311	42.65	-0.82	41.83	54	-12.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.07	-3.43	59.64	74	-14.36	peak
4924	49.23	-3.43	45.80	54	-8.20	AVG
7386	58.17	-0.75	57.42	74	-16.58	peak
7386	42.04	-0.75	41.29	54	-12.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.51	-3.43	60.08	74	-13.92	peak
4924	48.05	-3.43	44.62	54	-9.38	AVG
7386	57.75	-0.75	57.00	74	-17.00	peak
7386	41.55	-0.75	40.80	54	-13.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.63	-3.64	60.99	74	-13.01	peak
4824	48.30	-3.64	44.66	54	-9.34	AVG
7236	58.87	-0.95	57.92	74	-16.08	peak
7236	44.13	-0.95	43.18	54	-10.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.17	-3.64	62.53	74	-11.47	peak
4824	46.77	-3.64	43.13	54	-10.87	AVG
7236	58.86	-0.95	57.91	74	-16.09	peak
7236	45.09	-0.95	44.14	54	-9.86	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.86	-3.51	59.35	74.00	-14.65	peak
4874.00	48.25	-3.51	44.74	54.00	-9.26	AVG
7311.00	58.17	-0.82	57.35	74.00	-16.65	peak
7311.00	45.20	-0.82	44.38	54.00	-9.62	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.50	-3.51	59.99	74.00	-14.01	peak
4874.00	46.77	-3.51	43.26	54.00	-10.74	AVG
7311.00	58.90	-0.82	58.08	74.00	-15.92	peak
7311.00	43.08	-0.82	42.26	54.00	-11.74	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.84	-3.43	58.41	74	-15.59	peak
4924	46.59	-3.43	43.16	54	-10.84	AVG
7386	56.35	-0.75	55.60	74	-18.40	peak
7386	42.56	-0.75	41.81	54	-12.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.95	-3.43	60.52	74	-13.48	peak
4924	46.07	-3.43	42.64	54	-11.36	AVG
7386	56.67	-0.75	55.92	74	-18.08	peak
7386	41.32	-0.75	40.57	54	-13.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.51	-3.63	60.88	74	-13.12	peak
4844	47.15	-3.63	43.52	54	-10.48	AVG
7266	58.40	-0.94	57.46	74	-16.54	peak
7266	46.75	-0.94	45.81	54	-8.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.14	-3.63	60.51	74	-13.49	peak
4844	47.97	-3.63	44.34	54	-9.66	AVG
7266	57.99	-0.94	57.05	74	-16.95	peak
7266	44.29	-0.94	43.35	54	-10.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.67	-3.51	60.16	74	-13.84	peak
4874	48.88	-3.51	45.37	54	-8.63	AVG
7311	60.55	-0.82	59.73	74	-14.27	peak
7311	45.82	-0.82	45.00	54	-9.00	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.25	-3.51	58.74	74	-15.26	peak
4874	46.48	-3.51	42.97	54	-11.03	AVG
7311	56.68	-0.82	55.86	74	-18.14	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	63.97	-3.43	60.54	74	-13.46	peak
4904	49.08	-3.43	45.65	54	-8.35	AVG
7356	56.82	-0.75	56.07	74	-17.93	peak
7356	41.43	-0.75	40.68	54	-13.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	61.78	-3.43	58.35	74	-15.65	peak
4904	47.79	-3.43	44.36	54	-9.64	AVG
7356	58.48	-0.75	57.73	74	-16.27	peak
7356	42.57	-0.75	41.82	54	-12.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.64	-5.81	51.83	74	-22.17	peak
2390	/	-5.81	/	54	/	AVG
2399	64.70	-5.84	58.86	74	-15.14	peak
2399	48.71	-5.84	42.87	54	-11.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.76	-5.81	50.95	74	-23.05	peak
2390	/	-5.81	/	54	/	AVG
2399	62.96	-5.84	57.12	74	-16.88	peak
2399	47.42	-5.84	41.58	54	-12.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.07	-5.65	50.42	74	-23.58	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.93	-5.65	50.28	74	-23.72	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.55	-5.81	52.74	74	-21.26	peak
2390	/	-5.81	/	54	/	AVG
2399	62.33	-5.84	56.49	74	-17.51	peak
2399	46.43	-5.84	40.59	54	-13.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.93	-5.81	50.12	74	-23.88	peak
2390	/	-5.81	/	54	/	AVG
2399	62.33	-5.84	56.49	74	-17.51	peak
2399	46.15	-5.84	40.31	54	-13.69	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.34	-5.65	51.69	74	-22.31	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.72	-5.65	51.07	74	-22.93	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.76	-5.81	50.95	74	-23.05	peak
2390	/	-5.81	/	54	/	AVG
2399	63.18	-5.84	57.34	74	-16.66	peak
2399	47.64	-5.84	41.80	54	-12.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.84	-5.81	50.03	74	-23.97	peak
2390	/	-5.81	/	54	/	AVG
2399	61.24	-5.84	55.40	74	-18.60	peak
2399	46.42	-5.84	40.58	54	-13.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.27	-5.65	50.62	74	-23.38	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.55	-5.65	49.90	74	-24.10	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.35	-5.81	53.54	74	-20.46	peak
2390	/	-5.81	/	54	/	AVG
2399	63.72	-5.84	57.88	74	-16.12	peak
2399	47.26	-5.84	41.42	54	-12.58	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.94	-5.81	52.13	74	-21.87	peak
2390	/	-5.81	/	54	/	AVG
2399	61.88	-5.84	56.04	74	-17.96	peak
2399	47.02	-5.84	41.18	54	-12.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.60	-5.65	50.95	74	-23.05	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.05	-5.65	50.40	74	-23.60	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:
ANT 2+ ANT 3
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.49	-5.81	51.68	74	-22.32	peak
2390	/	-5.81	/	54	/	AVG
2399	64.10	-5.84	58.26	74	-15.74	peak
2399	48.49	-5.84	42.65	54	-11.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.62	-5.81	51.81	74	-22.19	peak
2390	/	-5.81	/	54	/	AVG
2399	61.90	-5.84	56.06	74	-17.94	peak
2399	46.57	-5.84	40.73	54	-13.27	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.76	-5.65	51.11	74	-22.89	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.71	-5.65	51.06	74	-22.94	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.71	-5.81	51.90	74	-22.10	peak
2390	/	-5.81	/	54	/	AVG
2399	62.06	-5.84	56.22	74	-17.78	peak
2399	46.57	-5.84	40.73	54	-13.27	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.24	-5.81	50.43	74	-23.57	peak
2390	/	-5.81	/	54	/	AVG
2399	63.21	-5.84	57.37	74	-16.63	peak
2399	46.12	-5.84	40.28	54	-13.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.66	-5.65	52.01	74	-21.99	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.53	-5.65	50.88	74	-23.12	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.22	-5.81	50.41	74	-23.59	peak
2390	/	-5.81	/	54	/	AVG
2399	62.00	-5.84	56.16	74	-17.84	peak
2399	47.42	-5.84	41.58	54	-12.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.96	-5.81	50.15	74	-23.85	peak
2390	/	-5.81	/	54	/	AVG
2399	61.32	-5.84	55.48	74	-18.52	peak
2399	47.85	-5.84	42.01	54	-11.99	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.79	-5.65	50.14	74	-23.86	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.98	-5.65	51.33	74	-22.67	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.34	-5.81	52.53	74	-21.47	peak
2390	/	-5.81	/	54	/	AVG
2399	62.14	-5.84	56.30	74	-17.70	peak
2399	46.42	-5.84	40.58	54	-13.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.65	-5.81	51.84	74	-22.16	peak
2390	/	-5.81	/	54	/	AVG
2399	61.78	-5.84	55.94	74	-18.06	peak
2399	46.56	-5.84	40.72	54	-13.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.57	-5.65	51.92	74	-22.08	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.64	-5.65	50.99	74	-23.01	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

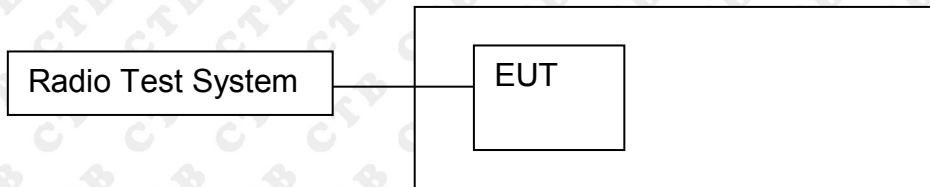

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:


RBW = 100KHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold

8.4 Test Result


Above 12.75GHz Test Results: Power below the limit of 20dbm, so do not put the test results.

ANT1:

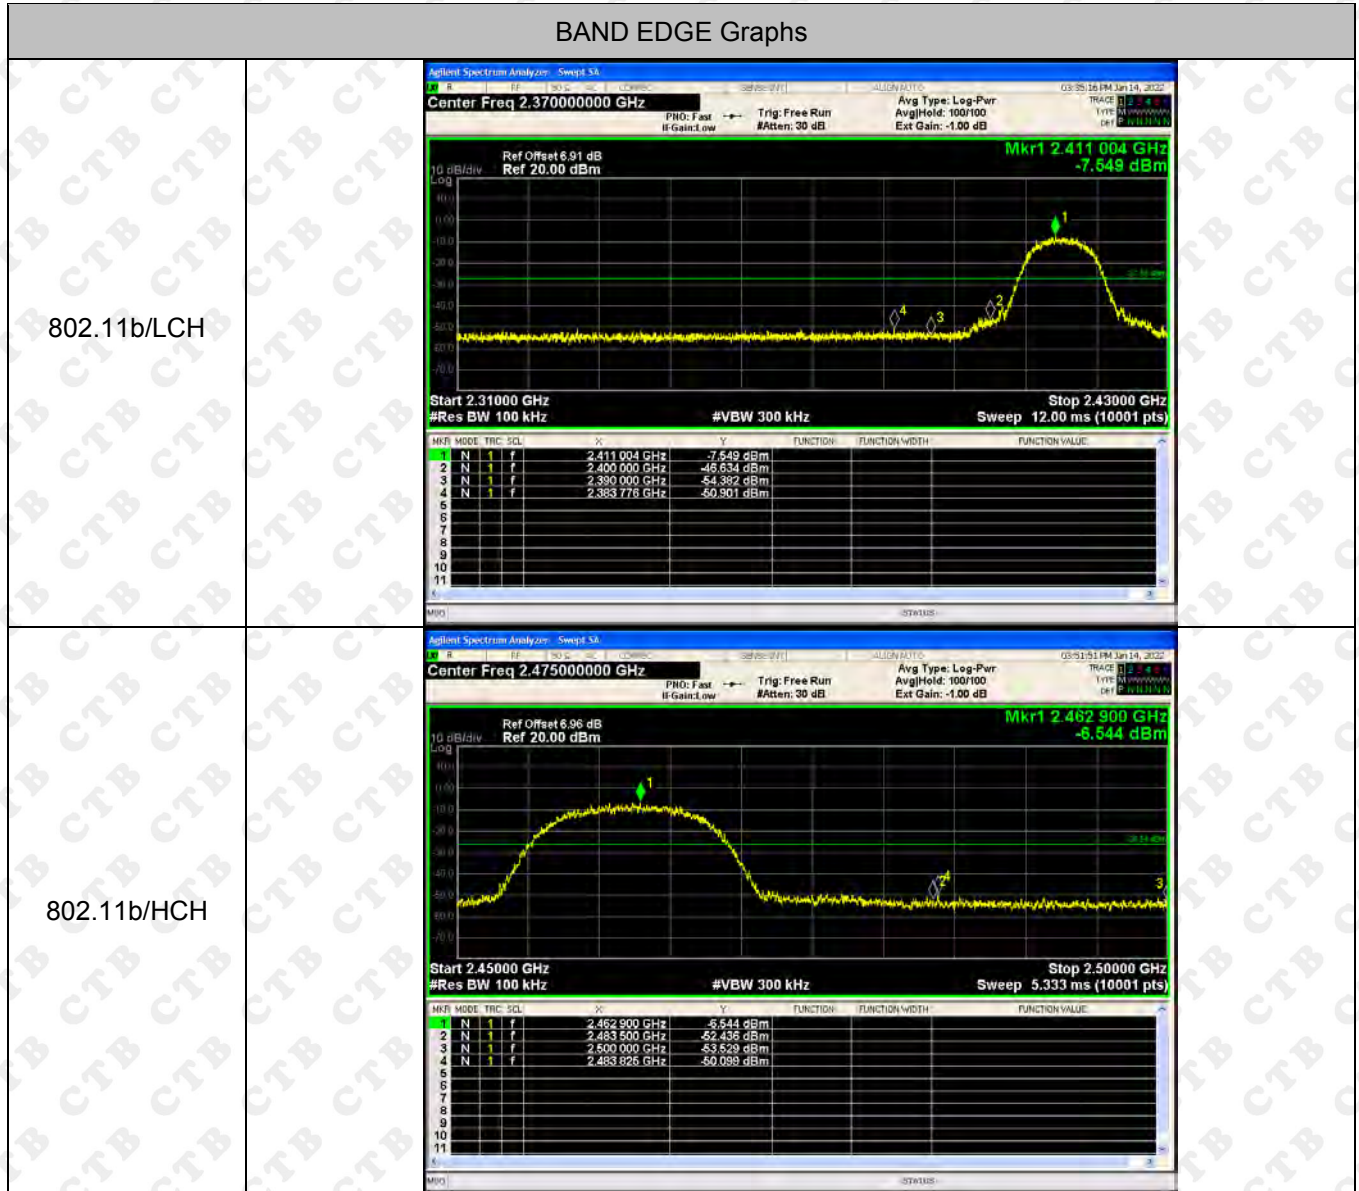

BAND EDGE Graphs

802.11g/LCH

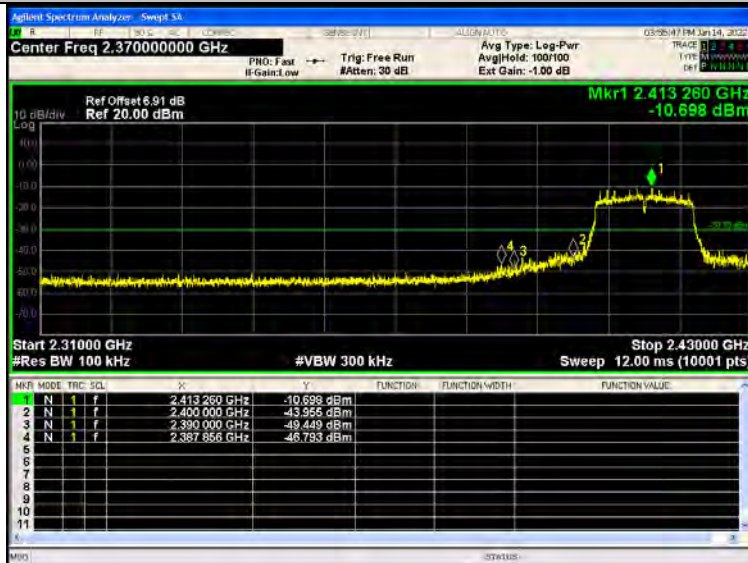

802.11g/HCH



BAND EDGE Graphs

802.11n(HT20)/L
CH

802.11n(HT20)/H
CH


BAND EDGE Graphs




802.11n(HT40)/L
CH






802.11n(HT40)/H
CH






RF Conducted Spurious Emissions Graphs

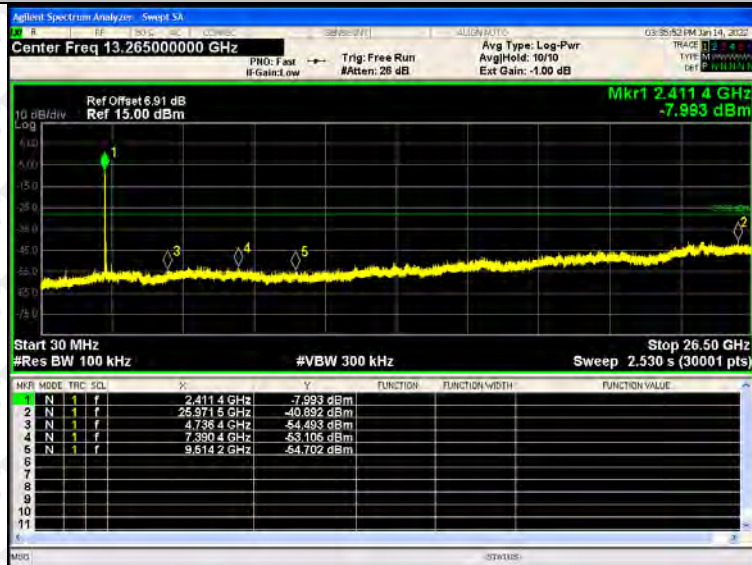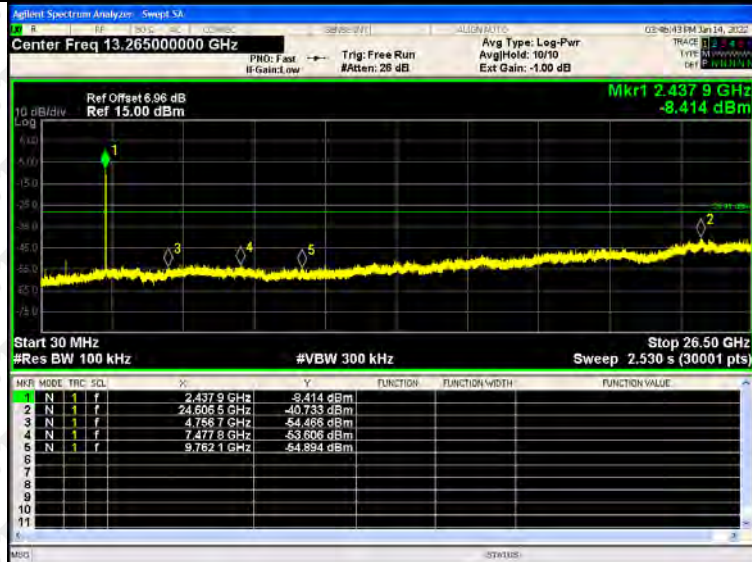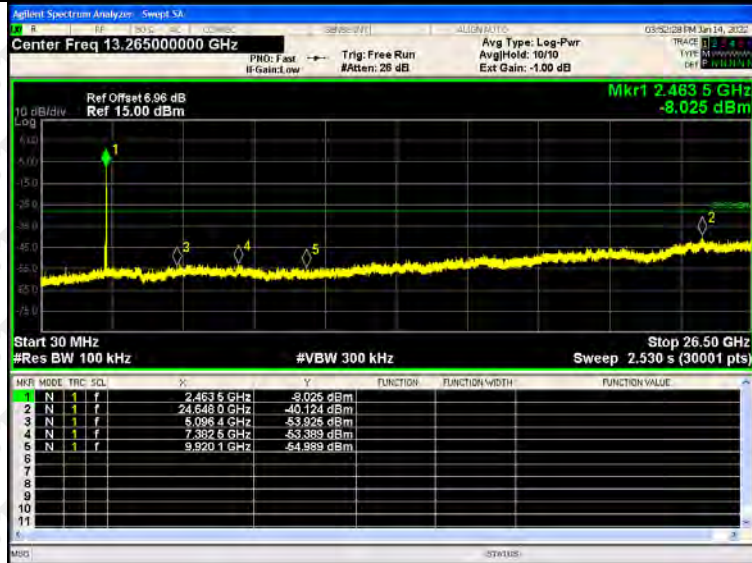802.11b
/LCH

802.11b
/MCH

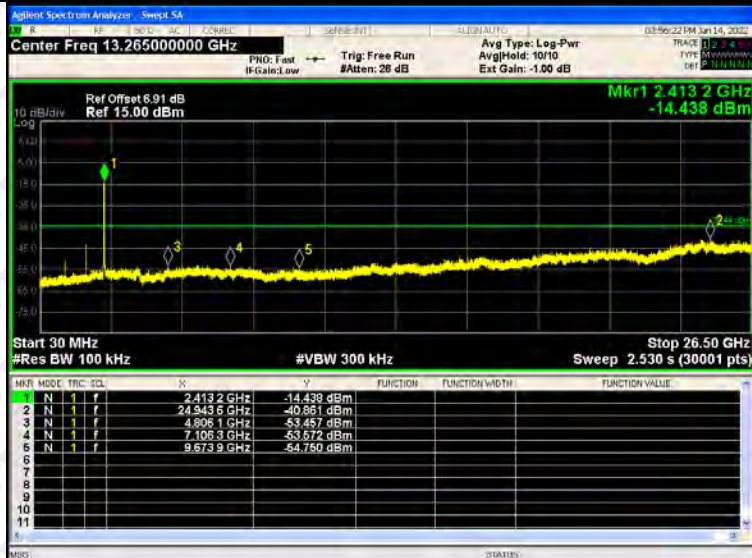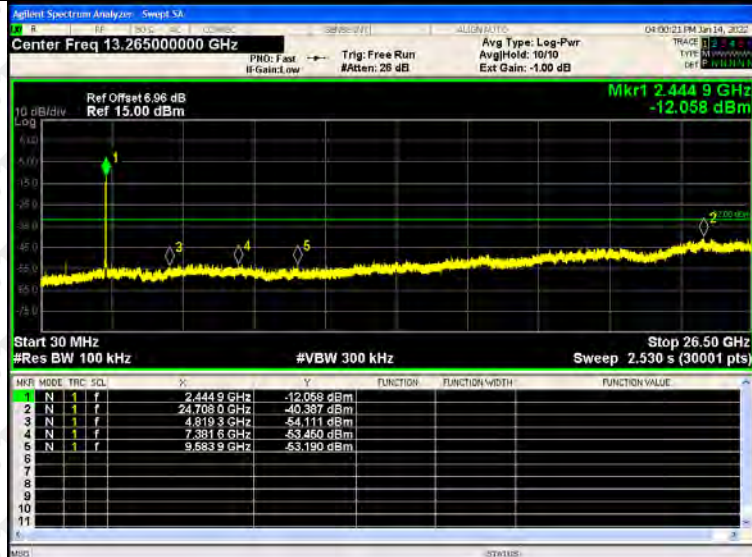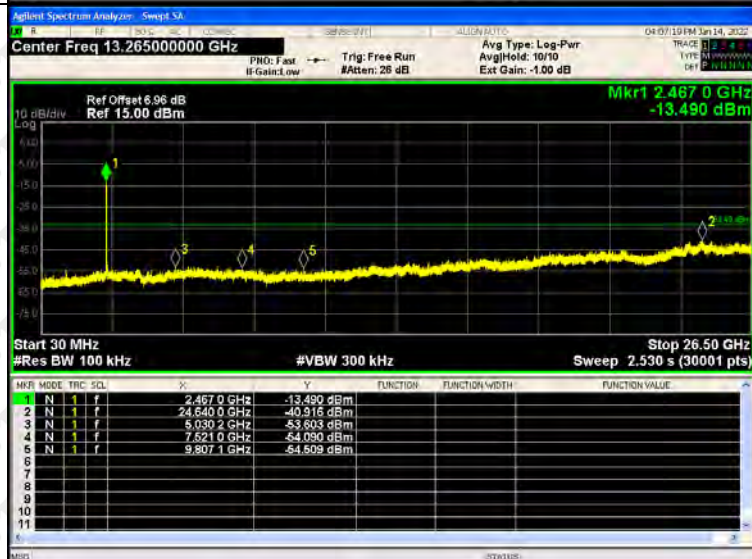802.11b
/HCH


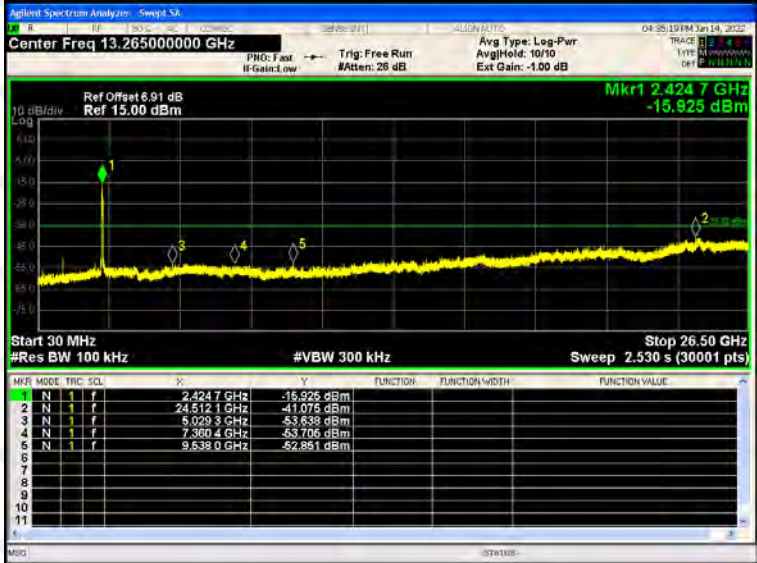
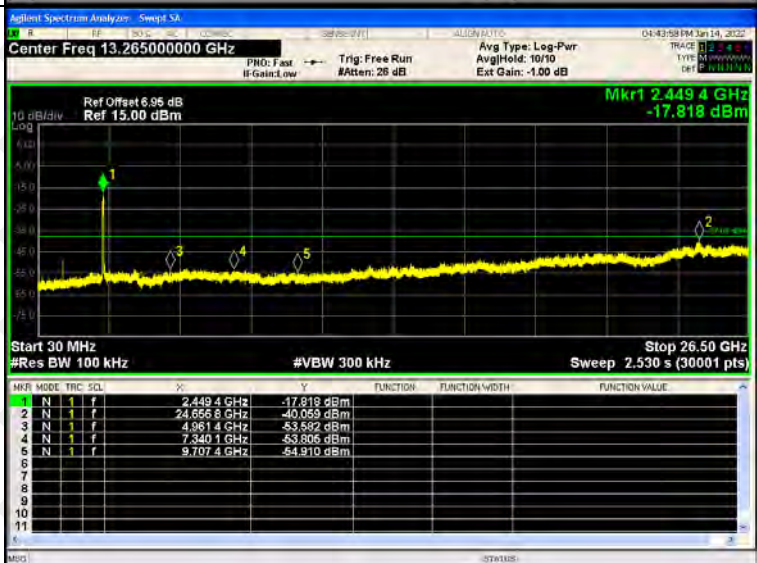
RF Conducted Spurious Emissions Graphs

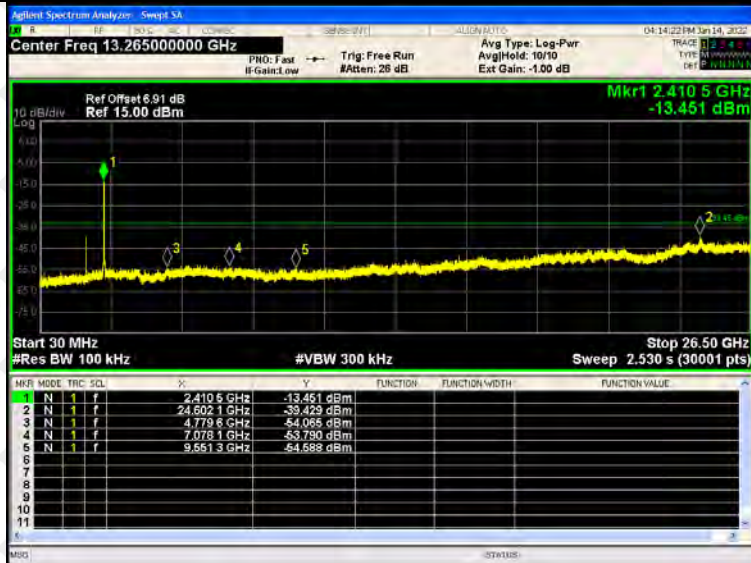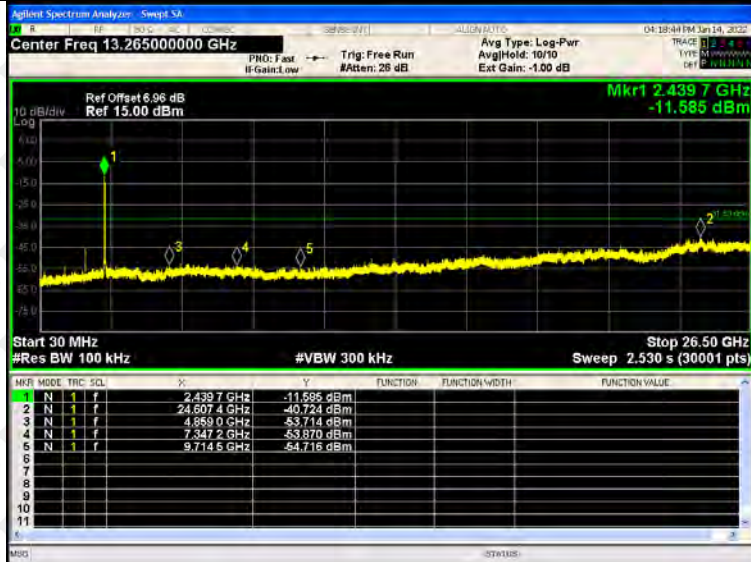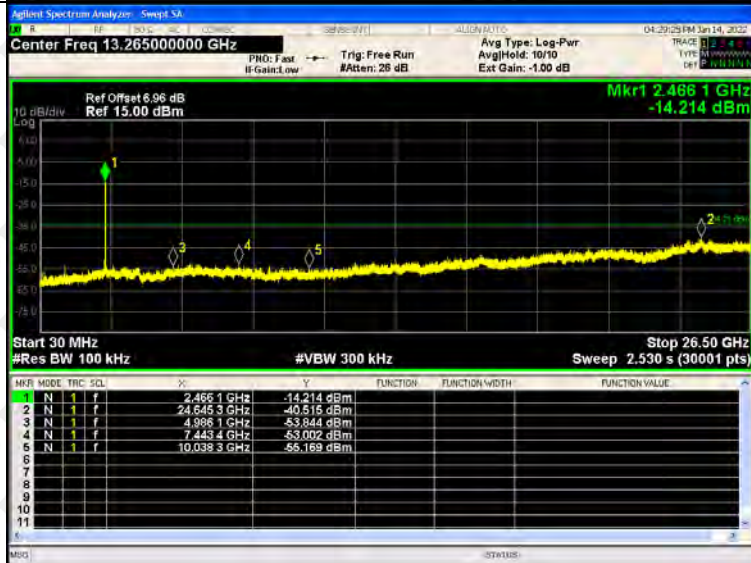802.11g
/LCH

802.11g
/MCH

802.11g
/HCH


RF Conducted Spurious Emissions Graphs

802.11n
(HT20)/
LCH

802.11
n(HT20)
/MCH

802.11
n(HT20)
/HCH


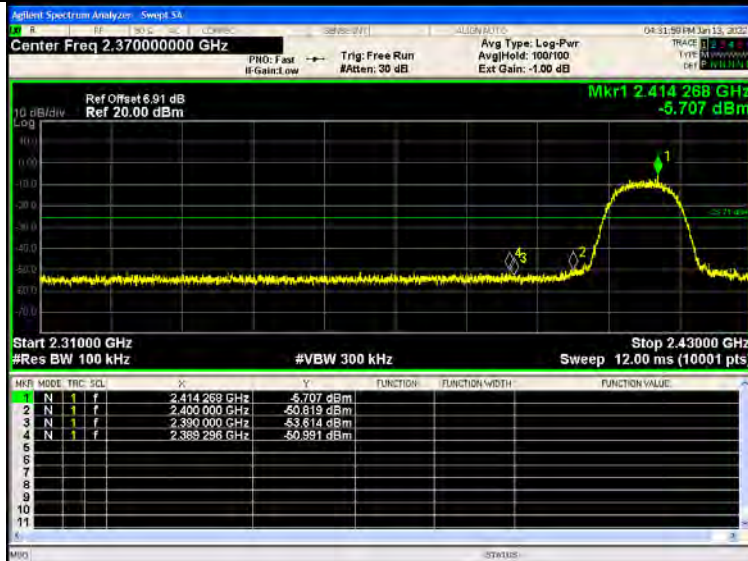
RF Conducted Spurious Emissions Graphs

802.11 n(HT40) /LCH	 <table><tr><th>Marker</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>2.4247 GHz</td><td>-15.925 dBm</td></tr><tr><td>2</td><td>24.5121 GHz</td><td>-41.075 dBm</td></tr><tr><td>3</td><td>5.0293 GHz</td><td>-53.638 dBm</td></tr><tr><td>4</td><td>7.3604 GHz</td><td>-53.706 dBm</td></tr><tr><td>5</td><td>9.5380 GHz</td><td>-52.851 dBm</td></tr></table>	Marker	Freq	Power	1	2.4247 GHz	-15.925 dBm	2	24.5121 GHz	-41.075 dBm	3	5.0293 GHz	-53.638 dBm	4	7.3604 GHz	-53.706 dBm	5	9.5380 GHz	-52.851 dBm
Marker	Freq	Power																	
1	2.4247 GHz	-15.925 dBm																	
2	24.5121 GHz	-41.075 dBm																	
3	5.0293 GHz	-53.638 dBm																	
4	7.3604 GHz	-53.706 dBm																	
5	9.5380 GHz	-52.851 dBm																	
802.11 n(HT40) /MCH	 <table><tr><th>Marker</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>2.4494 GHz</td><td>-16.369 dBm</td></tr><tr><td>2</td><td>24.5560 GHz</td><td>-40.803 dBm</td></tr><tr><td>3</td><td>4.7822 GHz</td><td>-53.106 dBm</td></tr><tr><td>4</td><td>7.4649 GHz</td><td>-53.095 dBm</td></tr><tr><td>5</td><td>9.5574 GHz</td><td>-55.162 dBm</td></tr></table>	Marker	Freq	Power	1	2.4494 GHz	-16.369 dBm	2	24.5560 GHz	-40.803 dBm	3	4.7822 GHz	-53.106 dBm	4	7.4649 GHz	-53.095 dBm	5	9.5574 GHz	-55.162 dBm
Marker	Freq	Power																	
1	2.4494 GHz	-16.369 dBm																	
2	24.5560 GHz	-40.803 dBm																	
3	4.7822 GHz	-53.106 dBm																	
4	7.4649 GHz	-53.095 dBm																	
5	9.5574 GHz	-55.162 dBm																	
802.11 n(HT40) /HCH	 <table><tr><th>Marker</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>2.4494 GHz</td><td>-17.818 dBm</td></tr><tr><td>2</td><td>24.5558 GHz</td><td>-40.059 dBm</td></tr><tr><td>3</td><td>4.9614 GHz</td><td>-53.592 dBm</td></tr><tr><td>4</td><td>7.3401 GHz</td><td>-53.806 dBm</td></tr><tr><td>5</td><td>9.7074 GHz</td><td>-54.910 dBm</td></tr></table>	Marker	Freq	Power	1	2.4494 GHz	-17.818 dBm	2	24.5558 GHz	-40.059 dBm	3	4.9614 GHz	-53.592 dBm	4	7.3401 GHz	-53.806 dBm	5	9.7074 GHz	-54.910 dBm
Marker	Freq	Power																	
1	2.4494 GHz	-17.818 dBm																	
2	24.5558 GHz	-40.059 dBm																	
3	4.9614 GHz	-53.592 dBm																	
4	7.3401 GHz	-53.806 dBm																	
5	9.7074 GHz	-54.910 dBm																	

ANT2:

BAND EDGE Graphs

802.11b/LCH



802.11b/HCH



BAND EDGE Graphs

802.11g/LCH



802.11g/HCH




BAND EDGE Graphs

802.11n(HT20)/L
CH




802.11n(HT20)/H
CH

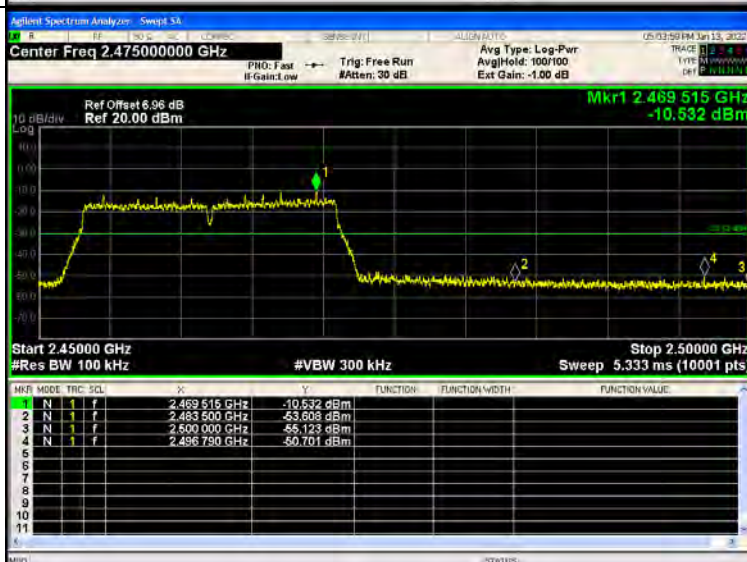

BAND EDGE Graphs




802.11n(HT40)/L
CH

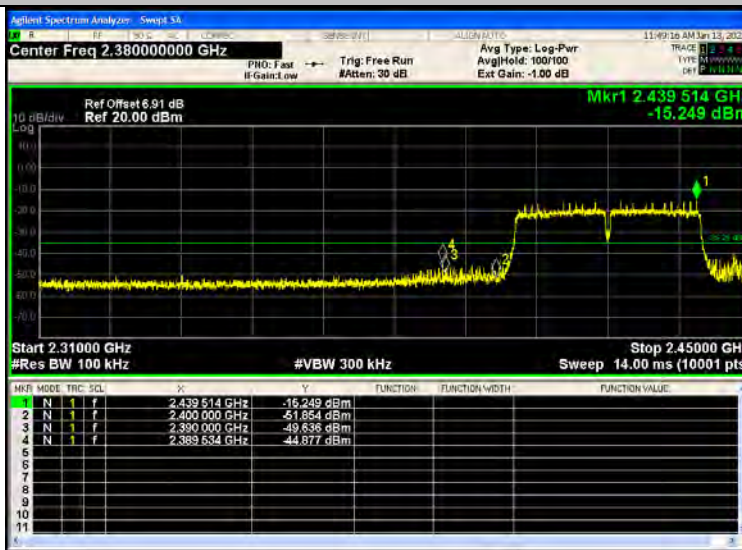




802.11n(HT40)/H
CH






RF Conducted Spurious Emissions Graphs

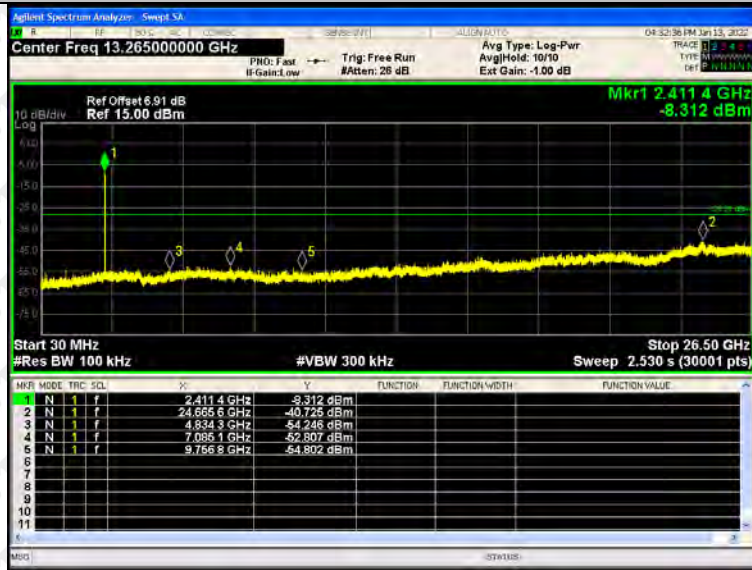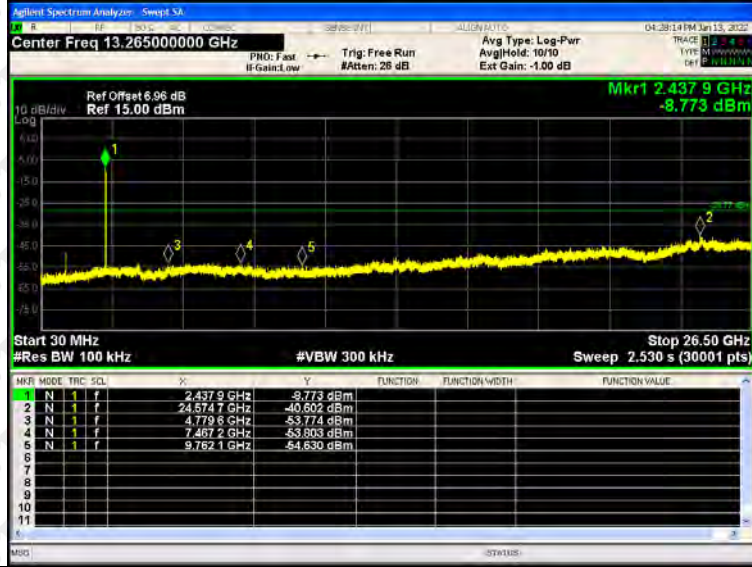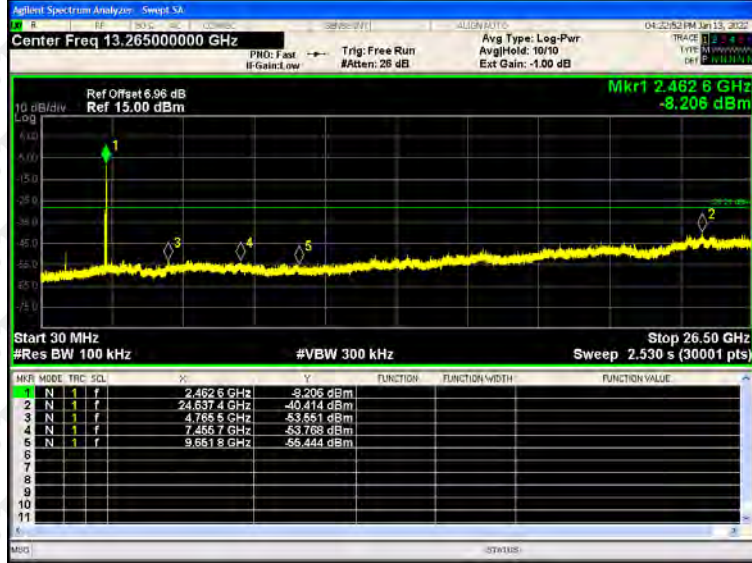802.11b
/LCH

802.11b
/MCH

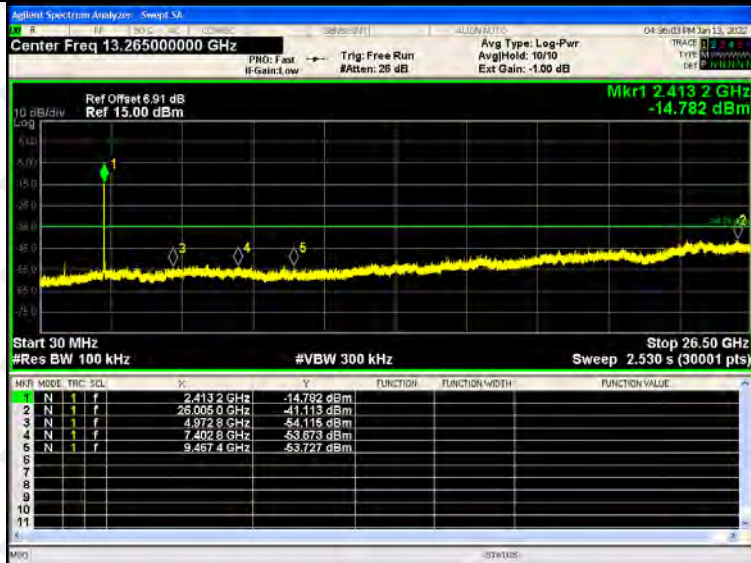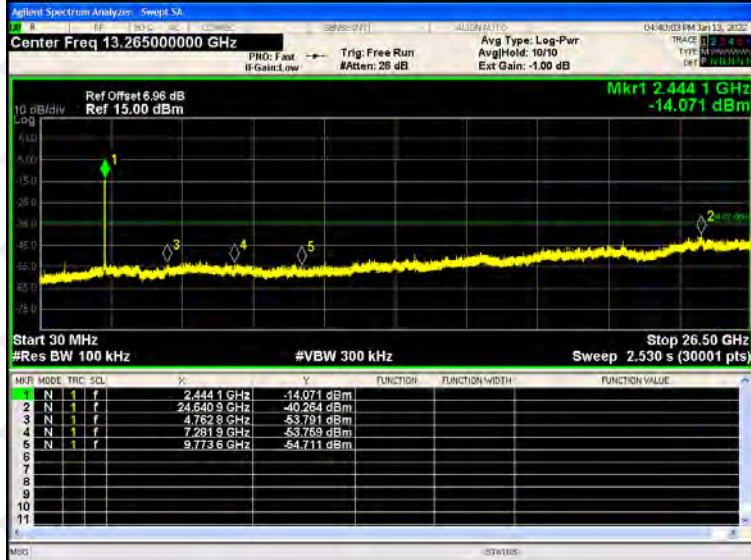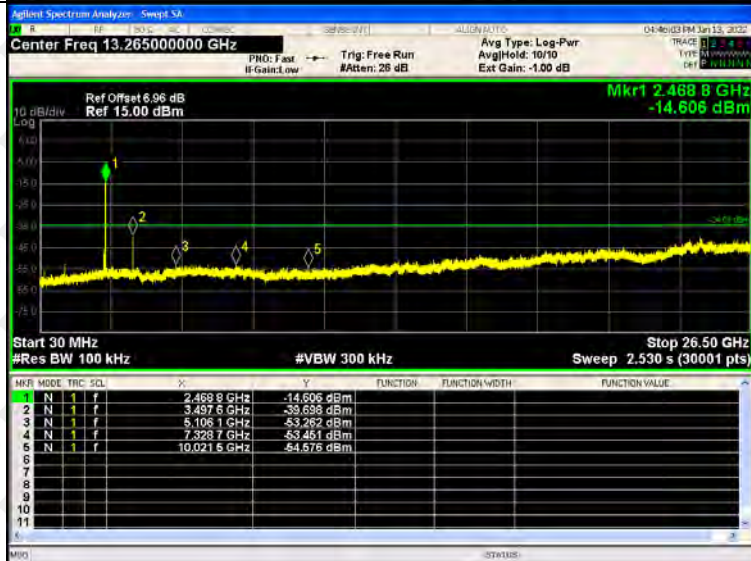802.11b
/HCH


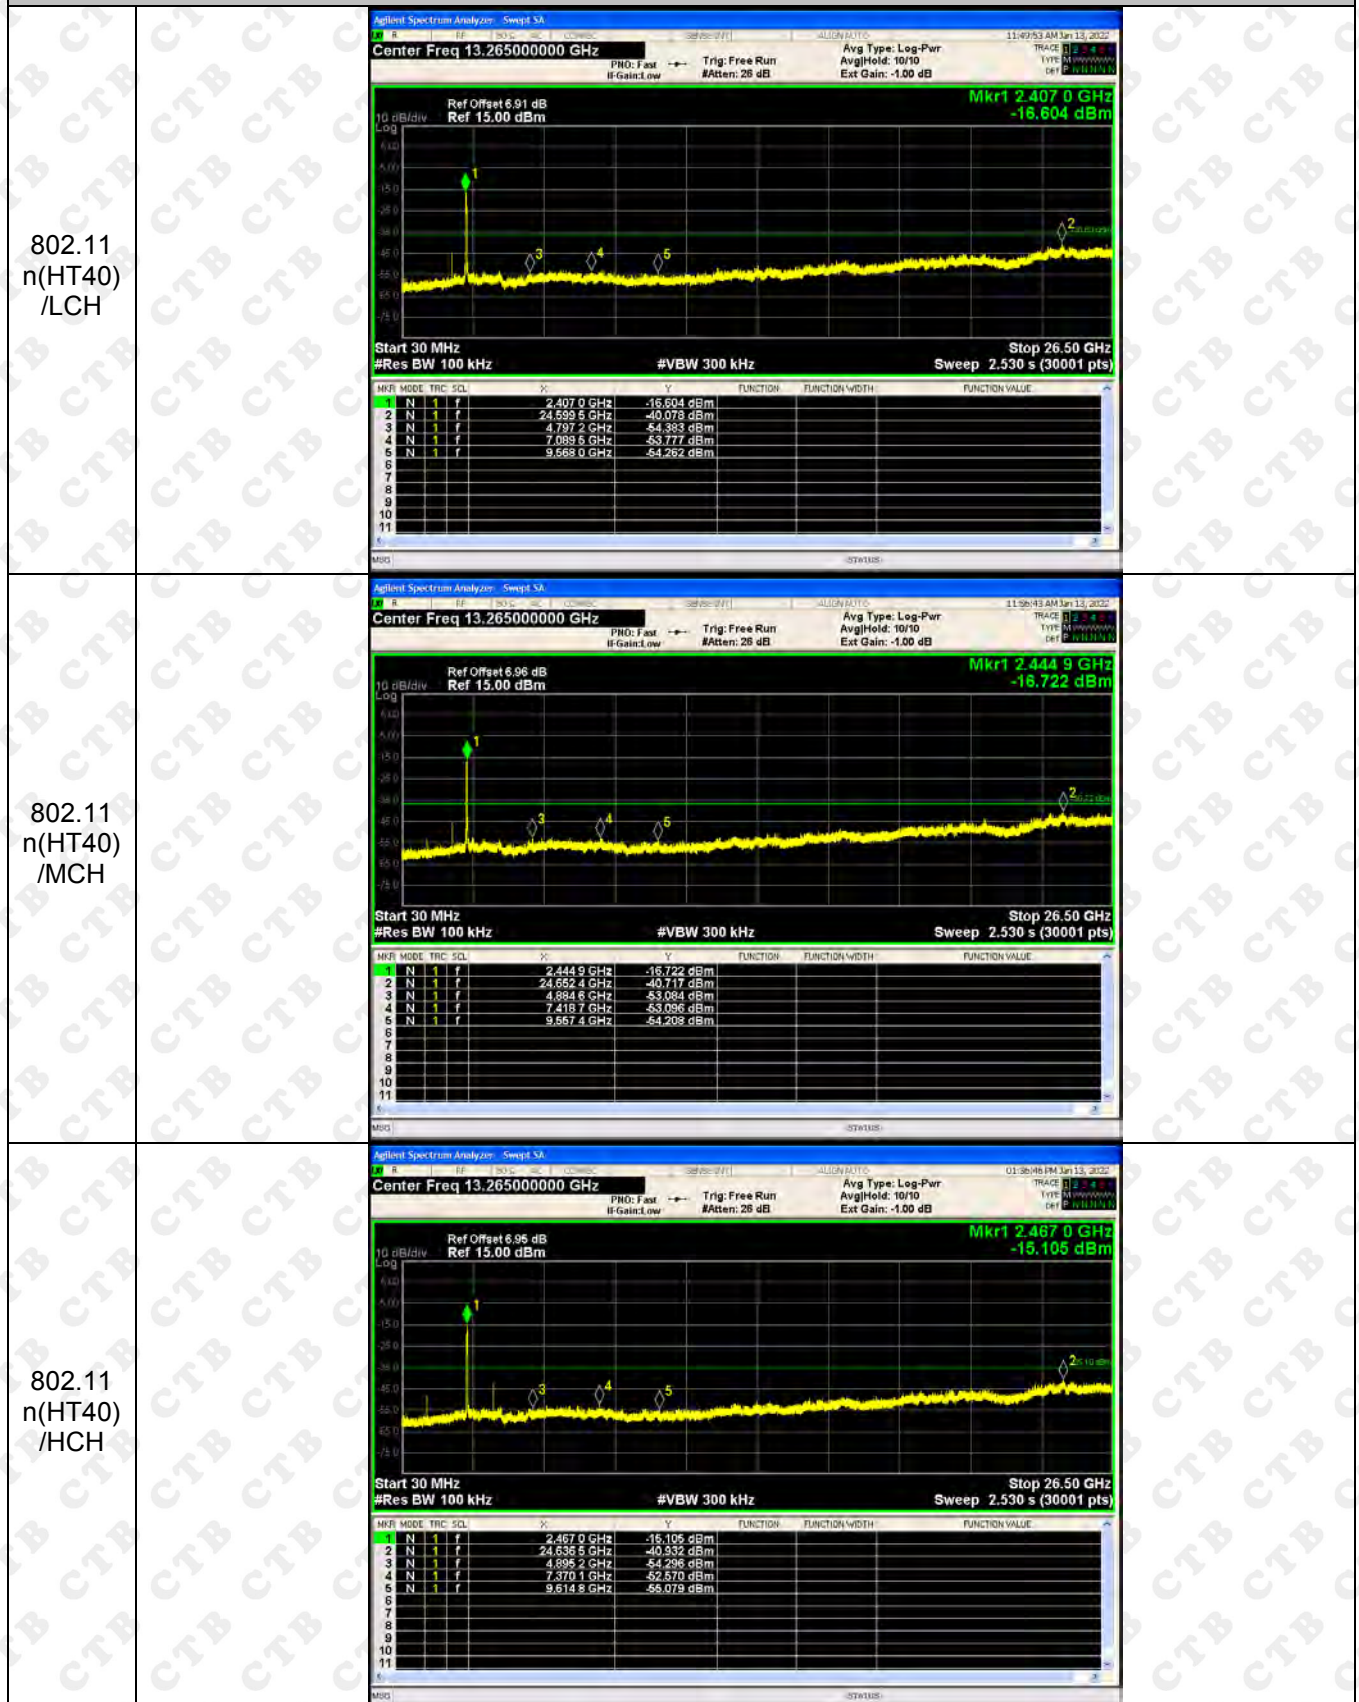
RF Conducted Spurious Emissions Graphs

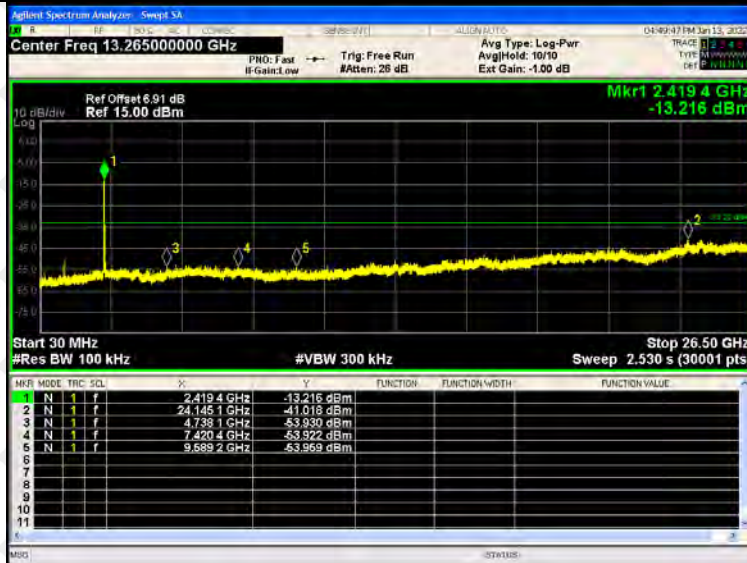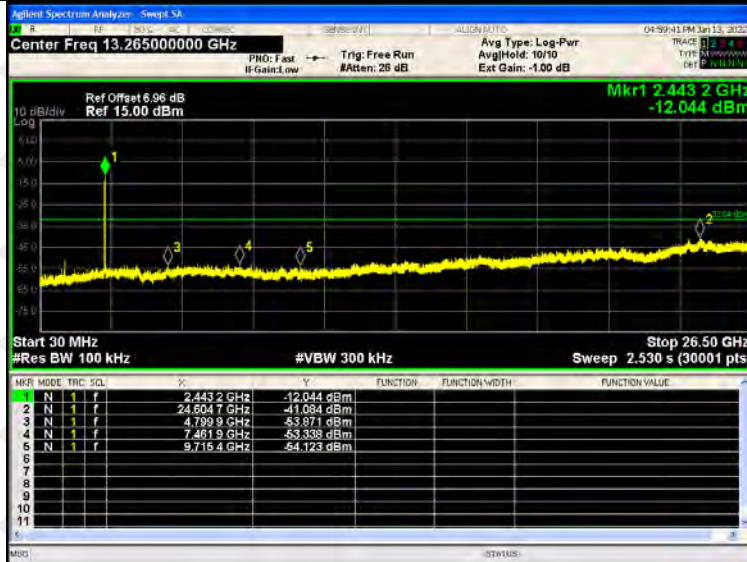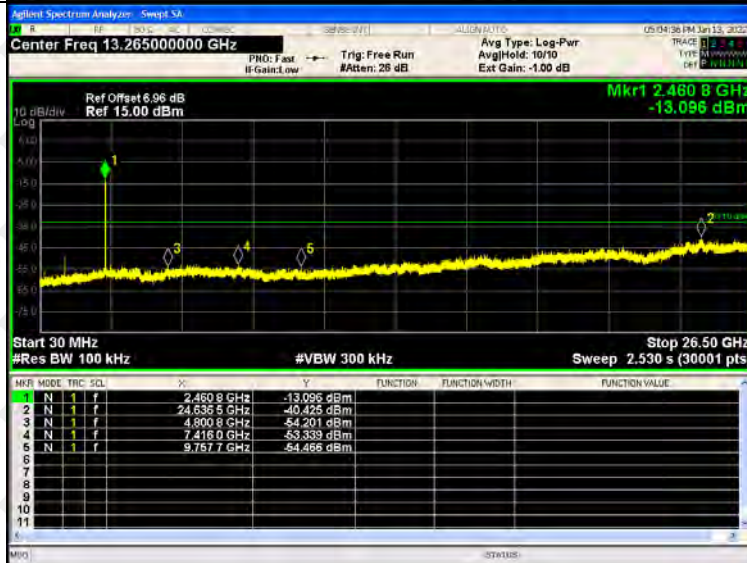802.11g
/LCH

802.11g
/MCH

802.11g
/HCH


RF Conducted Spurious Emissions Graphs

802.11n
(HT20)/
LCH

802.11
n(HT20)
/MCH

802.11
n(HT20)
/HCH


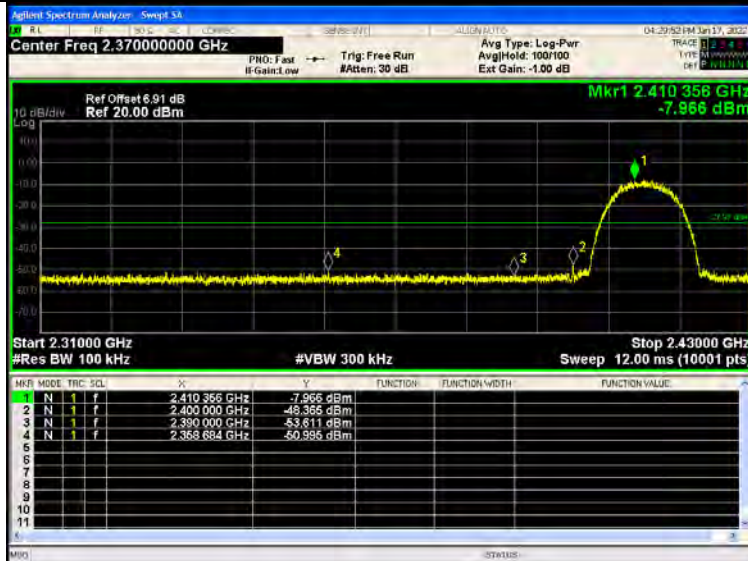
RF Conducted Spurious Emissions Graphs




ANT3:

BAND EDGE Graphs

802.11b/LCH




802.11b/HCH

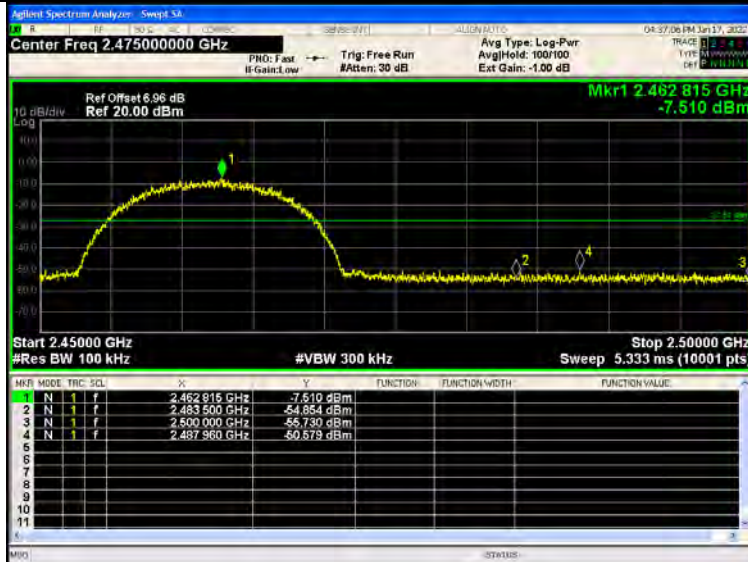


BAND EDGE Graphs

802.11g/LCH

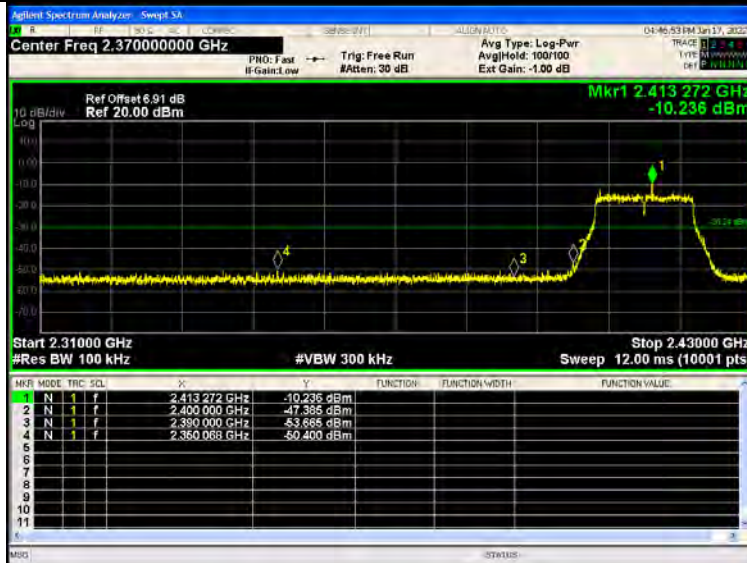


802.11g/HCH

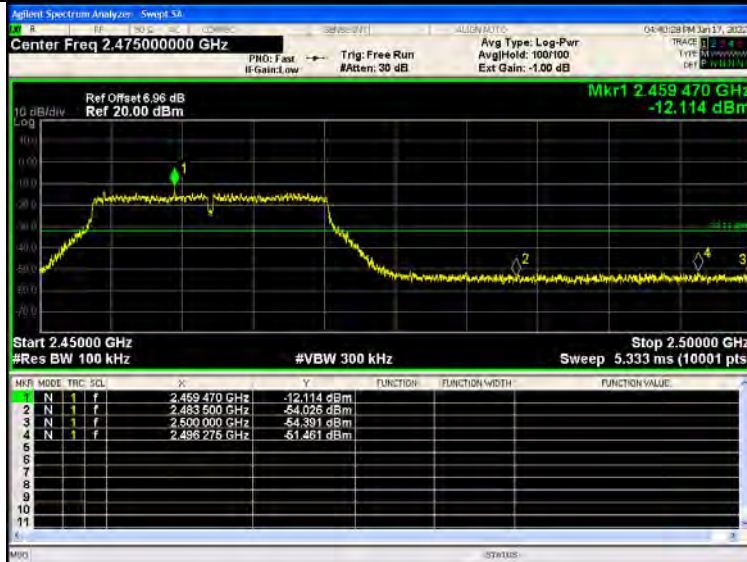

BAND EDGE Graphs

802.11n(HT20)/L
CH

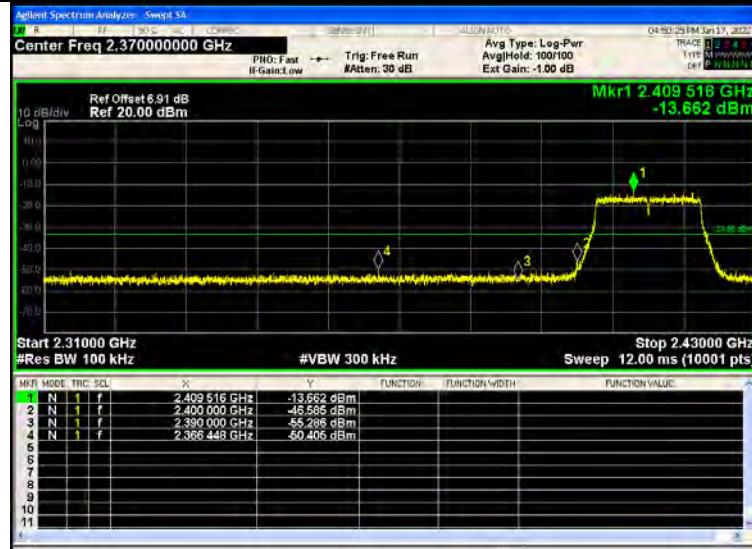


802.11n(HT20)/H
CH



BAND EDGE Graphs




802.11n(HT40)/L
CH

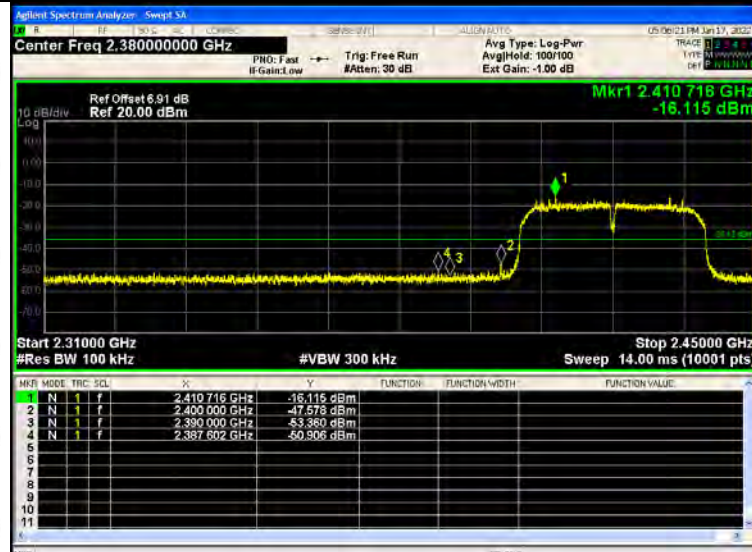




802.11n(HT40)/H
CH






RF Conducted Spurious Emissions Graphs

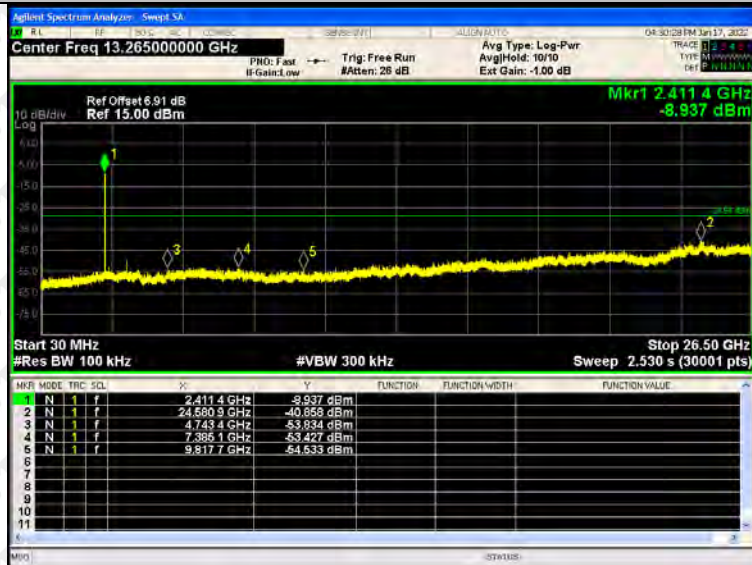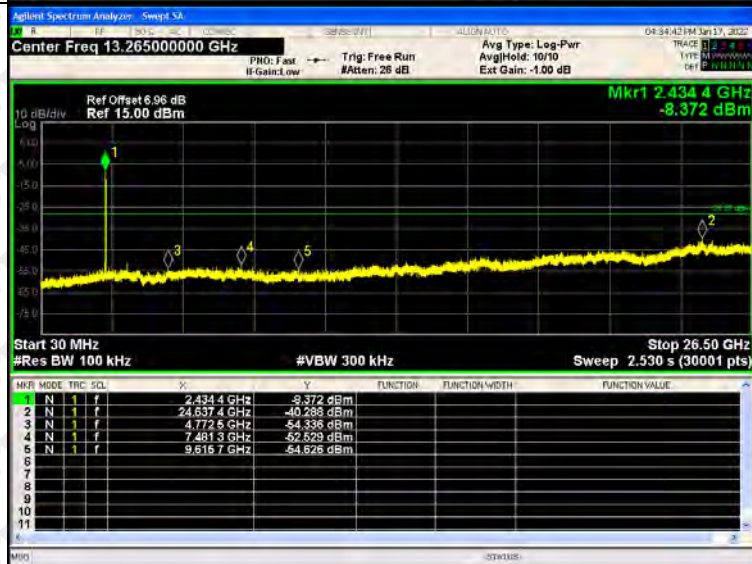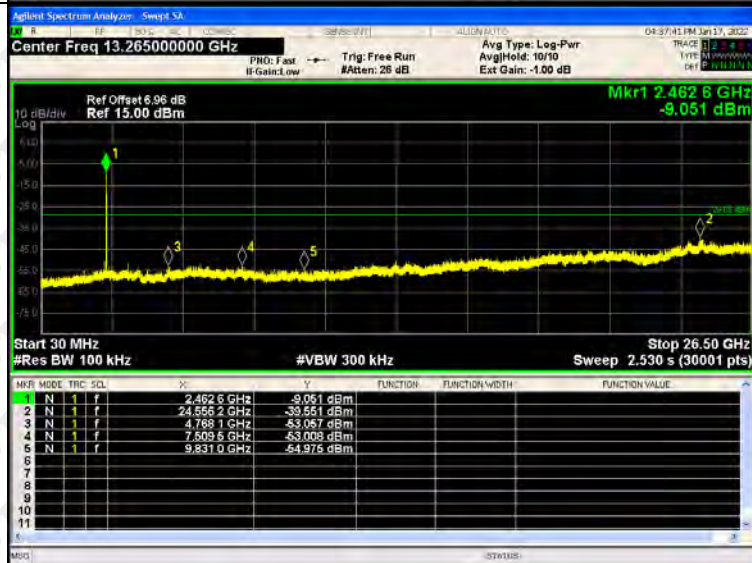802.11b
/LCH

802.11b
/MCH

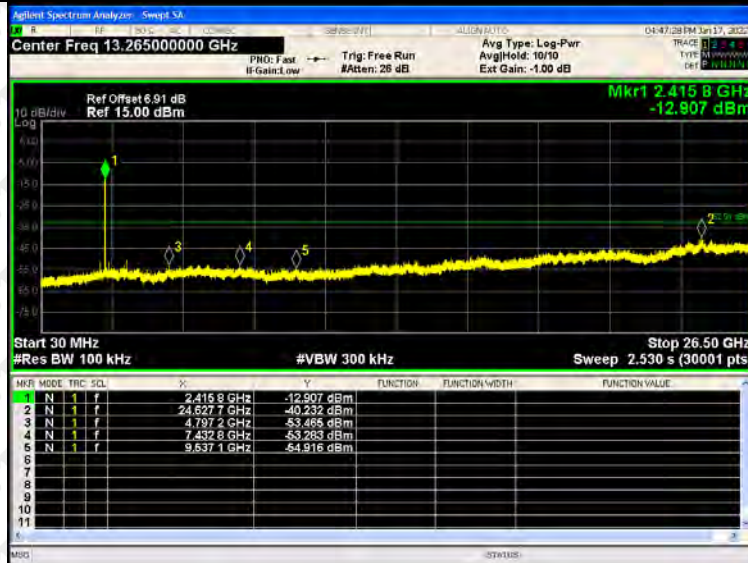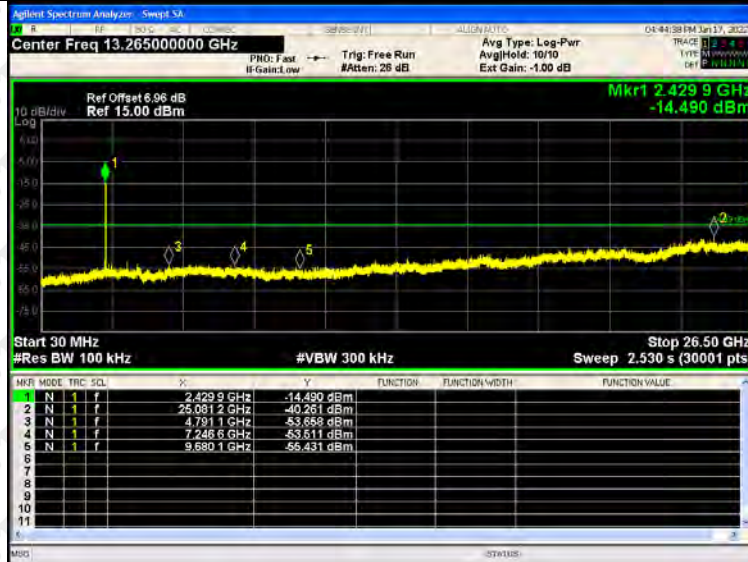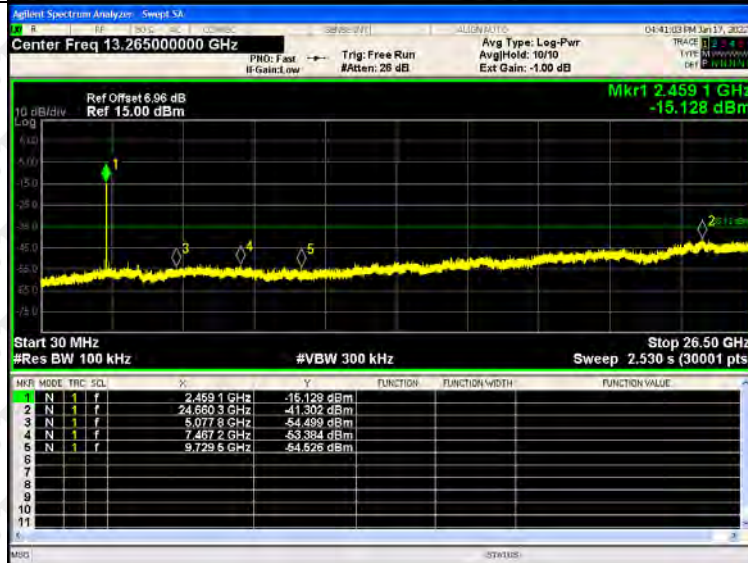802.11b
/HCH


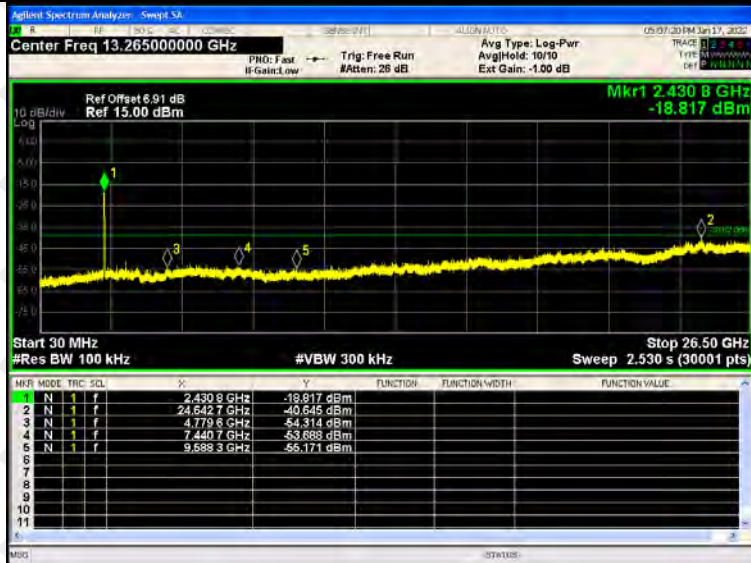
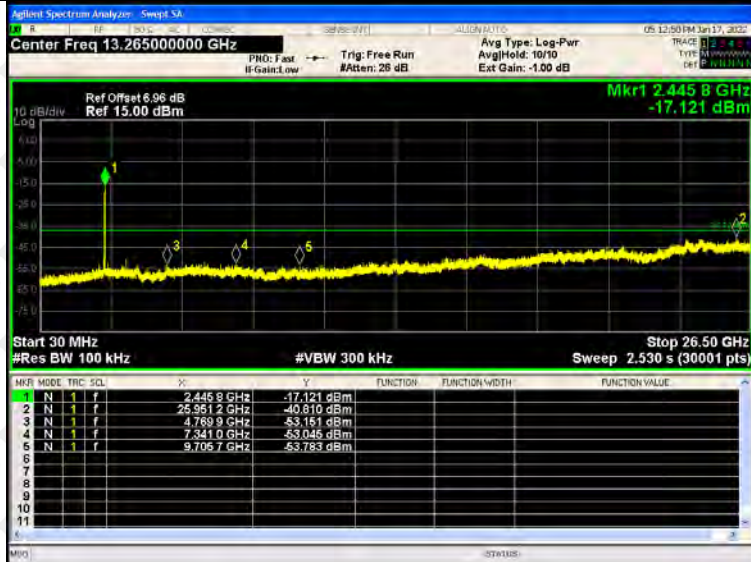
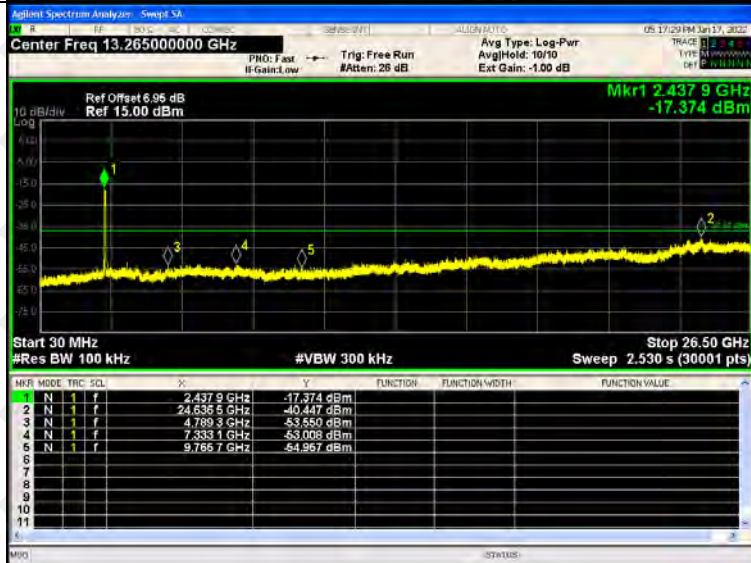
RF Conducted Spurious Emissions Graphs

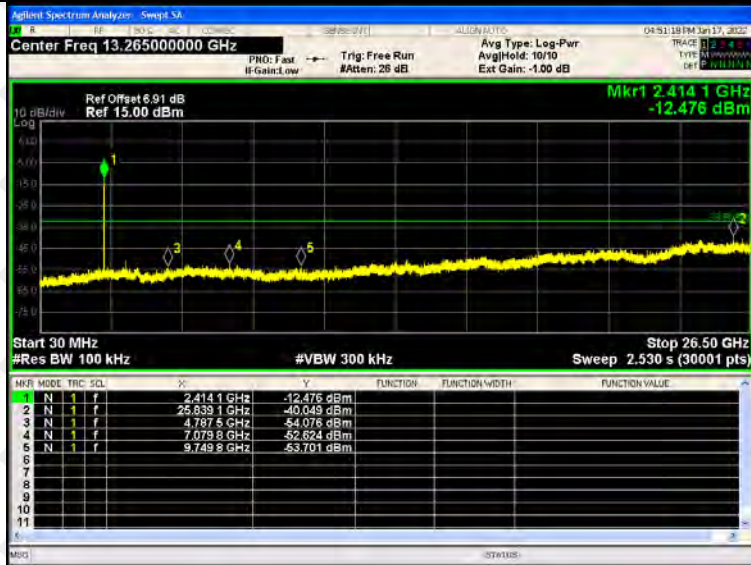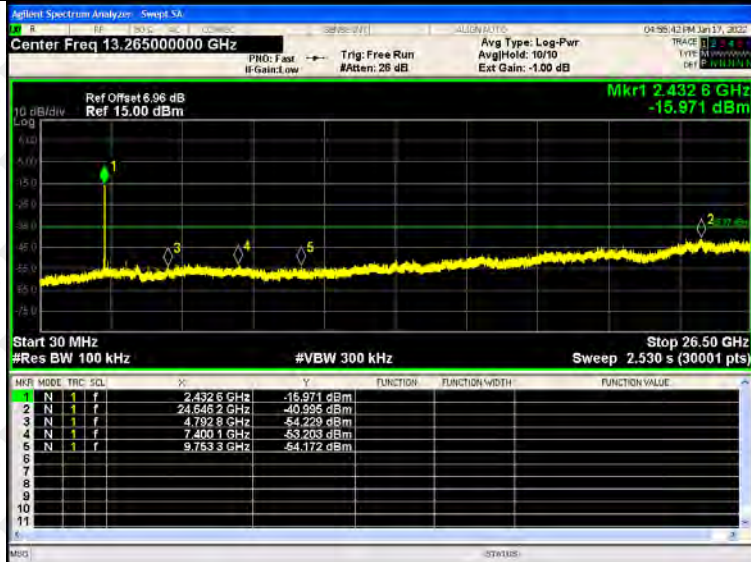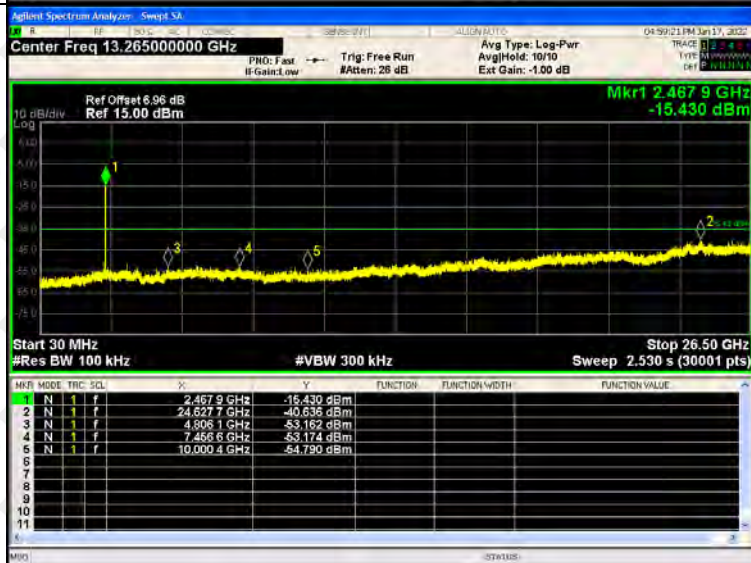802.11g
/LCH

802.11g
/MCH

802.11g
/HCH


RF Conducted Spurious Emissions Graphs

802.11n
(HT20)/
LCH

802.11
n(HT20)
/MCH

802.11
n(HT20)
/HCH


RF Conducted Spurious Emissions Graphs

802.11
n(HT40)
/LCH

802.11
n(HT40)
/MCH

802.11
n(HT40)
/HCH


9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

1. The EUT was directly connected to the Power meter


9.4 Test Result

Mode	Channel.	Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	7.50	30	PASS
	MCH	7.49	30	PASS
	HCH	7.56	30	PASS
802.11g	LCH	6.58	30	PASS
	MCH	6.40	30	PASS
	HCH	6.55	30	PASS
802.11n(HT20)	LCH	6.72	30	PASS
	MCH	6.16	30	PASS
	HCH	6.29	30	PASS
802.11n(HT40)	LCH	5.40	30	PASS
	MCH	5.03	30	PASS
	HCH	5.38	30	PASS

Mode	Channel.	Maximum Output Power [dBm] ant 2	Maximum Output Power [dBm] ant 3	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	7.19	7.05	/	30
	MCH	7.39	7.25	/	30
	HCH	7.50	7.16	/	30
802.11g	LCH	6.13	6.89	/	30
	MCH	6.87	6.47	/	30
	HCH	6.73	6.51	/	30
802.11n(HT20)	LCH	6.26	6.24	9.260	30
	MCH	6.54	6.07	9.322	30
	HCH	6.70	6.22	9.477	30
802.11n(HT40)	LCH	5.48	5.53	8.515	30
	MCH	5.24	5.54	8.403	30
	HCH	5.28	5.20	8.250	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

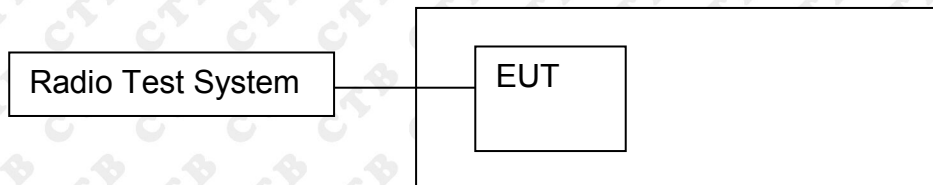

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.35	500	PASS
	MCH	9.568	500	PASS
	HCH	8.333	500	PASS
802.11g	LCH	14.773	500	PASS
	MCH	15.687	500	PASS
	HCH	16.46	500	PASS
802.11n(HT20)	LCH	15.132	500	PASS
	MCH	14.855	500	PASS
	HCH	17.376	500	PASS
802.11n(HT40)	LCH	35.486	500	PASS
	MCH	35.272	500	PASS
	HCH	35.1	500	PASS

ANT2:




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	8.852	500	PASS
	MCH	9.619	500	PASS
	HCH	10.255	500	PASS
802.11g	LCH	15.187	500	PASS
	MCH	16.105	500	PASS
	HCH	16.462	500	PASS
802.11n(HT20)	LCH	15.654	500	PASS
	MCH	17.687	500	PASS
	HCH	17.617	500	PASS
802.11n(HT40)	LCH	35.553	500	PASS
	MCH	35.509	500	PASS
	HCH	35.498	500	PASS

ANT3:


Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.063	500	PASS
	MCH	8.882	500	PASS
	HCH	9.297	500	PASS
802.11g	LCH	16.464	500	PASS
	MCH	16.471	500	PASS
	HCH	16.37	500	PASS
802.11n(HT20)	LCH	17.639	500	PASS
	MCH	17.558	500	PASS
	HCH	17.648	500	PASS
802.11n(HT40)	LCH	31.973	500	PASS
	MCH	32.506	500	PASS
	HCH	32.485	500	PASS

ANT1:

Test Graph:

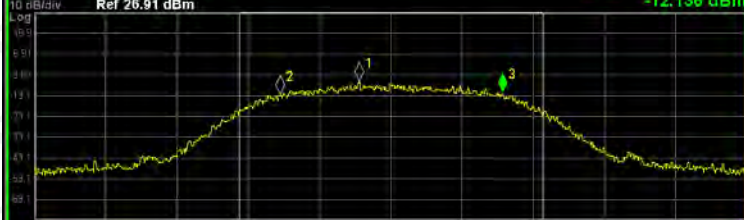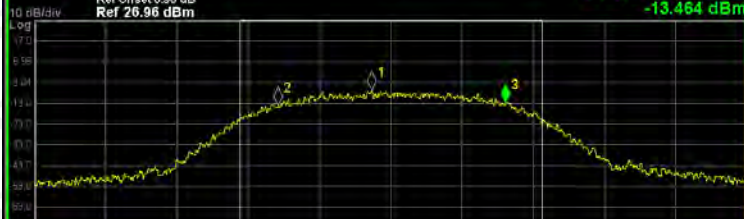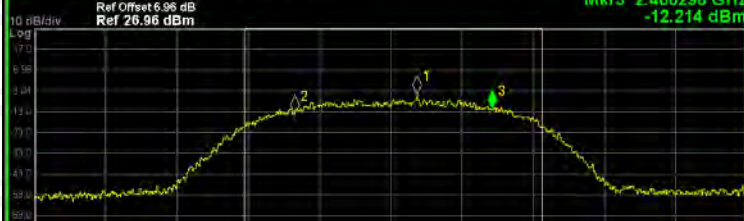Graphs	
802.11b /LCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 100/100 #Atten: 30 dB Ext Gain: -1.00 dB Radio Std: None Radio Device: BTS 03:53:12 PM Jan 14, 2022 Ref Offset 6.91 dB Ref 26.91 dBm Mkr3 2.41698 GHz -12.136 dBm  Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 12.786 MHz Total Power 9.65 dBm Transmit Freq Error 22.947 kHz OBW Power 99.00 % x dB Bandwidth 9.350 MHz x dB -6.00 dB
802.11b /MCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 #Atten: 30 dB Ext Gain: -1.00 dB Radio Std: None Radio Device: BTS 03:44:23 PM Jan 14, 2022 Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.441829 GHz -13.464 dBm  Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 12.650 MHz Total Power 9.86 dBm Transmit Freq Error 44.820 kHz OBW Power 99.00 % x dB Bandwidth 9.568 MHz x dB -6.00 dB
802.11b/HCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 #Atten: 30 dB Ext Gain: -1.00 dB Radio Std: None Radio Device: BTS 03:49:05 PM Jan 14, 2022 Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.466296 GHz -12.214 dBm  Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 12.498 MHz Total Power 10.2 dBm Transmit Freq Error 129.44 kHz OBW Power 99.00 % x dB Bandwidth 8.333 MHz x dB -6.00 dB


802.11g/LCH

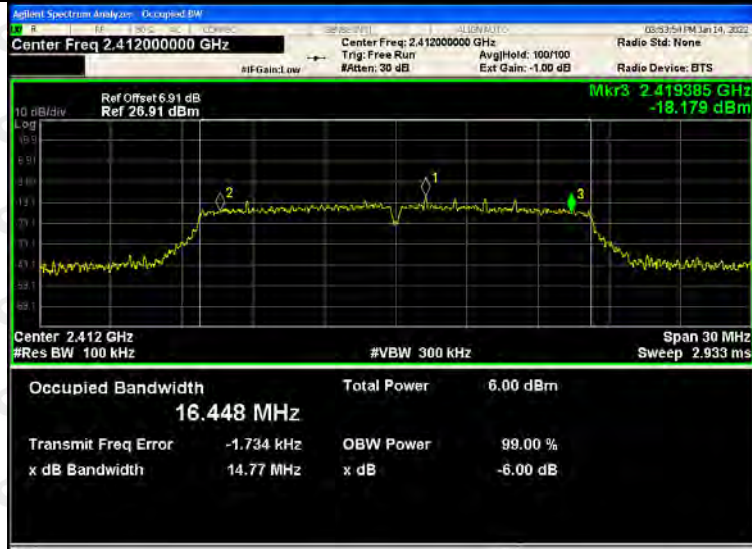


802.11g/MCH



802.11g/HCH

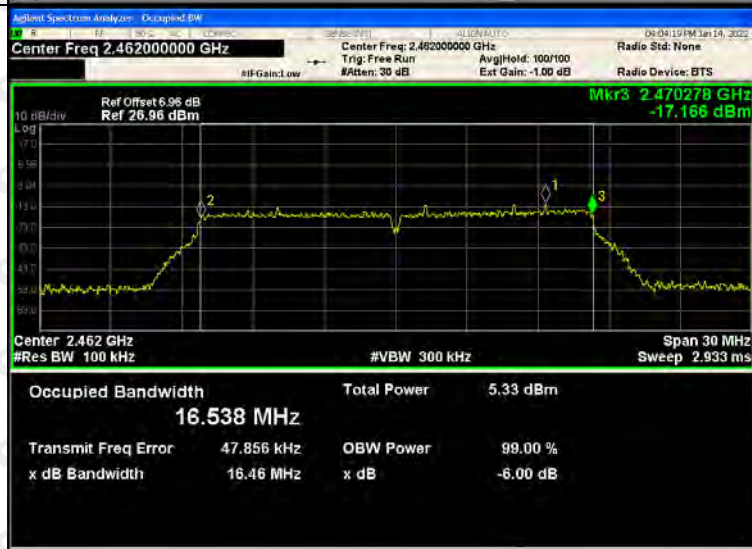

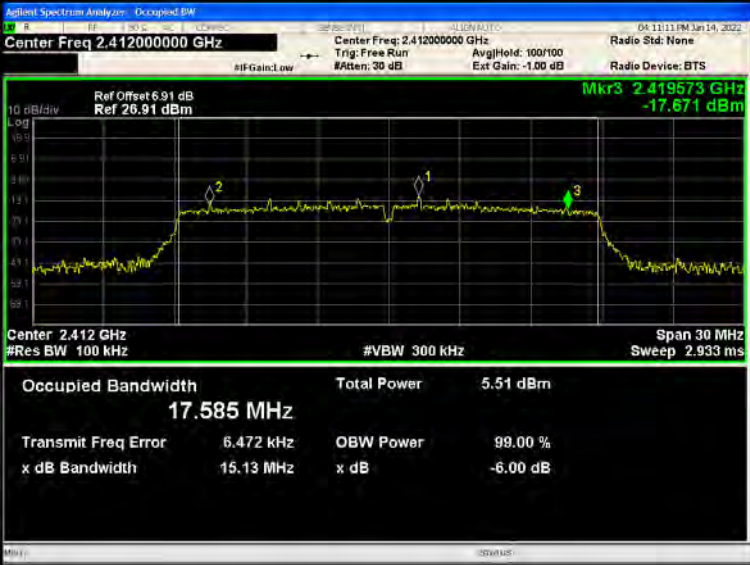802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 6.91 dB Ref 26.91 dBm Mkr3 2.419573 GHz -17.871 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.585 MHz Total Power 5.51 dBm Transmit Freq Error 6.472 kHz OBW Power 99.00 % x dB Bandwidth 15.13 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.444466 GHz -16.633 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.587 MHz Total Power 5.84 dBm Transmit Freq Error 38.789 kHz OBW Power 99.00 % x dB Bandwidth 14.86 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.470735 GHz -15.362 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.690 MHz Total Power 5.49 dBm Transmit Freq Error 47.252 kHz OBW Power 99.00 % x dB Bandwidth 17.38 MHz x dB -6.00 dB

802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.422000000 GHz Ref Offset: 6.91 dB Ref: 26.91 dBm Mkr3: 2.439814 GHz -22.071 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>4.97 dBm</td></tr><tr><td>36.000 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>71.325 kHz</td><td></td><td></td></tr><tr><td>x dB Bandwidth</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>35.49 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	4.97 dBm	36.000 MHz			Transmit Freq Error	OBW Power	99.00 %	71.325 kHz			x dB Bandwidth	x dB	-6.00 dB	35.49 MHz		
Occupied Bandwidth	Total Power	4.97 dBm																	
36.000 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
71.325 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
35.49 MHz																			
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.96 dB Ref: 26.96 dBm Mkr3: 2.45454 GHz -14.679 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>4.75 dBm</td></tr><tr><td>36.441 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-96.579 kHz</td><td></td><td></td></tr><tr><td>x dB Bandwidth</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>35.27 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	4.75 dBm	36.441 MHz			Transmit Freq Error	OBW Power	99.00 %	-96.579 kHz			x dB Bandwidth	x dB	-6.00 dB	35.27 MHz		
Occupied Bandwidth	Total Power	4.75 dBm																	
36.441 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-96.579 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
35.27 MHz																			
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.452000000 GHz Ref Offset: 6.95 dB Ref: 26.95 dBm Mkr3: 2.469751 GHz -21.055 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>4.92 dBm</td></tr><tr><td>35.822 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>201.01 kHz</td><td></td><td></td></tr><tr><td>x dB Bandwidth</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>35.10 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	4.92 dBm	35.822 MHz			Transmit Freq Error	OBW Power	99.00 %	201.01 kHz			x dB Bandwidth	x dB	-6.00 dB	35.10 MHz		
Occupied Bandwidth	Total Power	4.92 dBm																	
35.822 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
201.01 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
35.10 MHz																			


ANT2: Test Graph:

Graphs

802.11b /LCH




802.11b /MCH

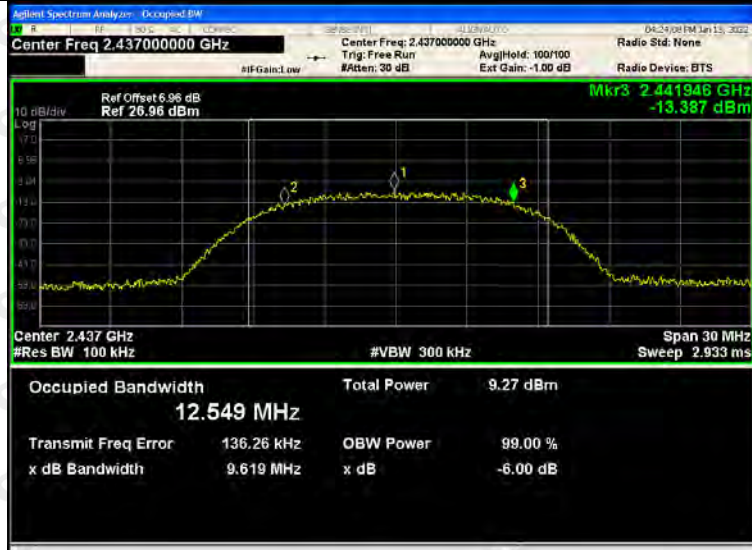

802.11b/HCH



802.11g/LCH

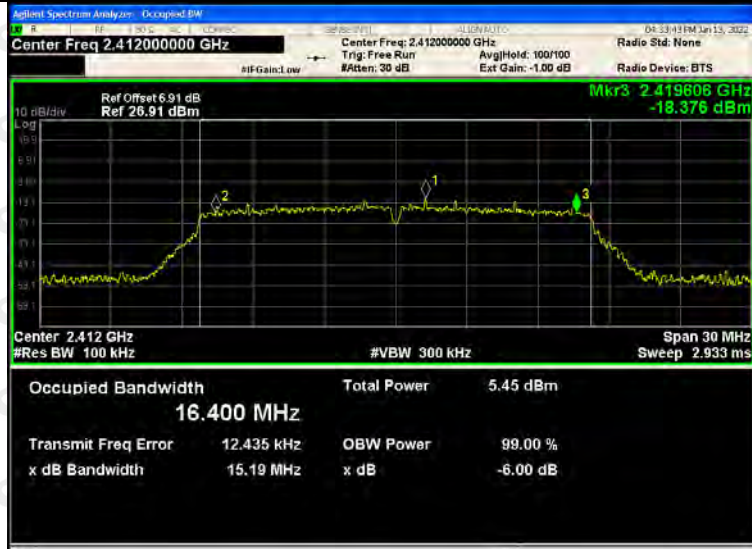


802.11g/MCH



802.11g/HCH

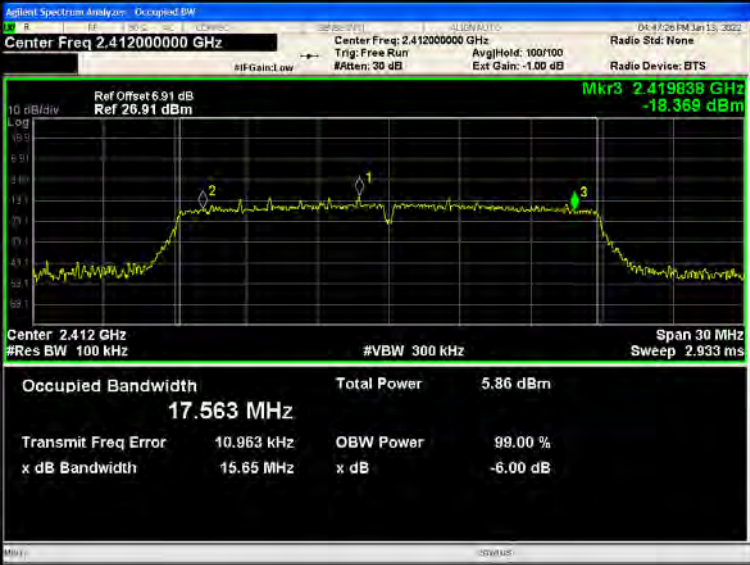

802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 6.91 dB Ref 26.91 dBm Mkr3 2.419838 GHz -18.369 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.563 MHz Total Power 5.86 dBm Transmit Freq Error 10.963 kHz OBW Power 99.00 % x dB Bandwidth 15.65 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.445877 GHz -17.132 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.726 MHz Total Power 5.47 dBm Transmit Freq Error 33.279 kHz OBW Power 99.00 % x dB Bandwidth 17.69 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.470863 GHz -17.065 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.702 MHz Total Power 5.33 dBm Transmit Freq Error 54.569 kHz OBW Power 99.00 % x dB Bandwidth 17.62 MHz x dB -6.00 dB


802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.422000000 GHz Ref Offset: 6.91 dB Ref: 26.91 dBm Mkr3: 2.435842 GHz -21.100 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> </tr> <tr> <td>36.010 MHz</td> <td>5.21 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> </tr> <tr> <td>65.376 kHz</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> </tr> <tr> <td>35.55 MHz</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	36.010 MHz	5.21 dBm	Transmit Freq Error	OBW Power	65.376 kHz	99.00 %	x dB Bandwidth	x dB	35.55 MHz	-6.00 dB
Occupied Bandwidth	Total Power												
36.010 MHz	5.21 dBm												
Transmit Freq Error	OBW Power												
65.376 kHz	99.00 %												
x dB Bandwidth	x dB												
35.55 MHz	-6.00 dB												
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.96 dB Ref: 26.96 dBm Mkr3: 2.454893 GHz -20.982 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> </tr> <tr> <td>35.956 MHz</td> <td>4.94 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> </tr> <tr> <td>138.65 kHz</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> </tr> <tr> <td>35.51 MHz</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	35.956 MHz	4.94 dBm	Transmit Freq Error	OBW Power	138.65 kHz	99.00 %	x dB Bandwidth	x dB	35.51 MHz	-6.00 dB
Occupied Bandwidth	Total Power												
35.956 MHz	4.94 dBm												
Transmit Freq Error	OBW Power												
138.65 kHz	99.00 %												
x dB Bandwidth	x dB												
35.51 MHz	-6.00 dB												
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.452000000 GHz Ref Offset: 6.95 dB Ref: 26.95 dBm Mkr3: 2.469971 GHz -21.422 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> </tr> <tr> <td>35.850 MHz</td> <td>4.90 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> </tr> <tr> <td>221.88 kHz</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> </tr> <tr> <td>35.50 MHz</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	35.850 MHz	4.90 dBm	Transmit Freq Error	OBW Power	221.88 kHz	99.00 %	x dB Bandwidth	x dB	35.50 MHz	-6.00 dB
Occupied Bandwidth	Total Power												
35.850 MHz	4.90 dBm												
Transmit Freq Error	OBW Power												
221.88 kHz	99.00 %												
x dB Bandwidth	x dB												
35.50 MHz	-6.00 dB												

ANT3:

Test Graph:

Graphs


802.11b /LCH

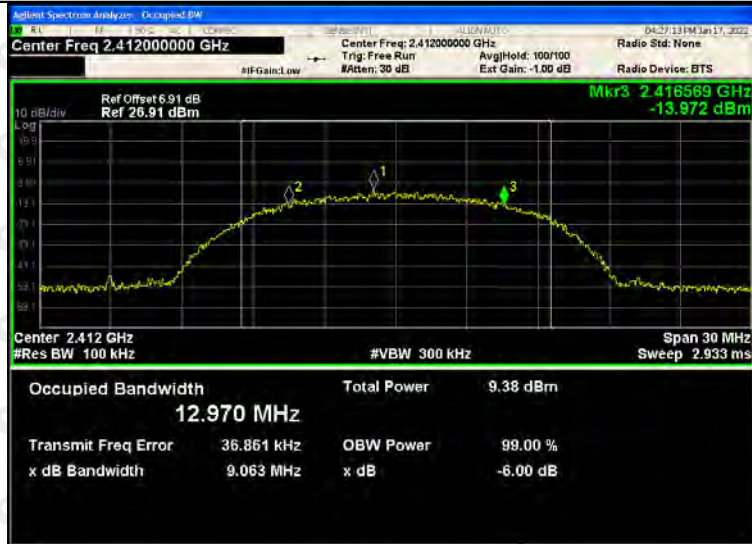

802.11b /MCH




802.11b/HCH

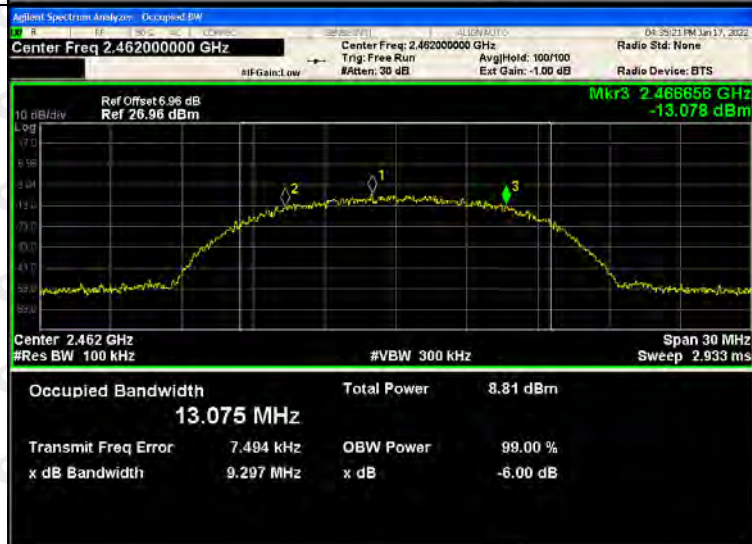

802.11g/LCH





802.11g/MCH

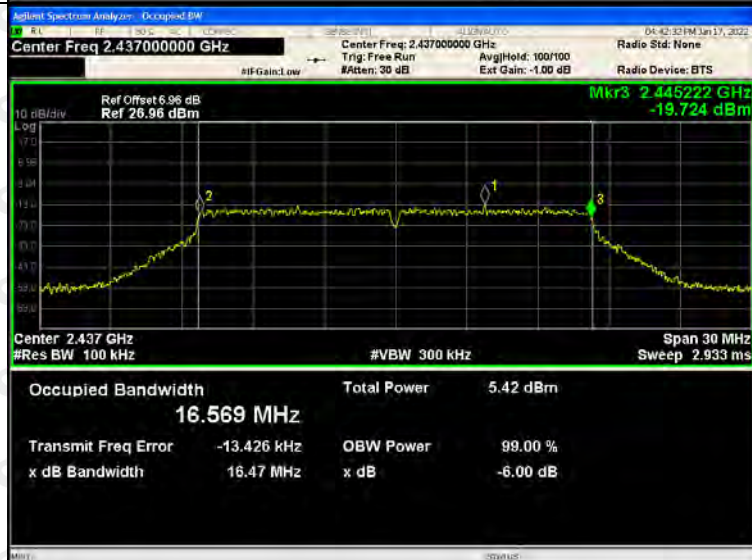

802.11g/HCH

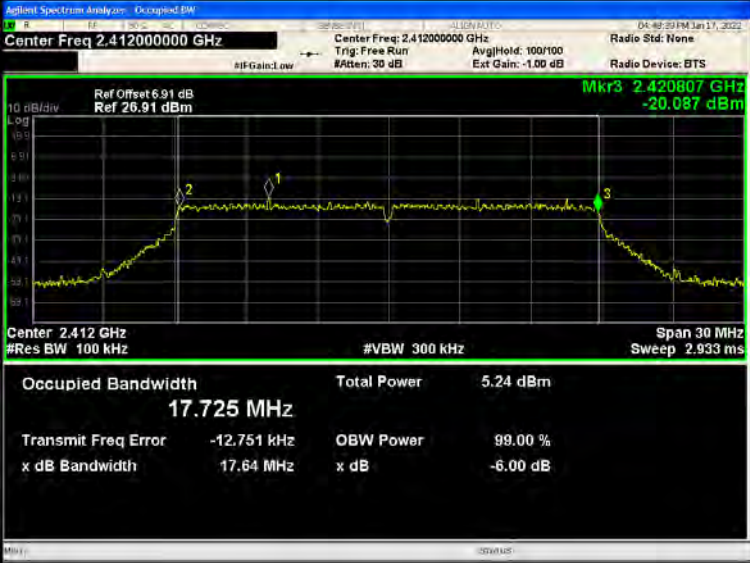


802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 6.91 dB Ref 26.91 dBm Mkr3 2.420807 GHz -20.087 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.725 MHz Total Power 5.24 dBm Transmit Freq Error -12.751 kHz OBW Power 99.00 % x dB Bandwidth 17.64 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.445755 GHz -17.700 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.733 MHz Total Power 5.15 dBm Transmit Freq Error -23.603 kHz OBW Power 99.00 % x dB Bandwidth 17.56 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.470802 GHz -18.107 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.751 MHz Total Power 5.16 dBm Transmit Freq Error -21.562 kHz OBW Power 99.00 % x dB Bandwidth 17.65 MHz x dB -6.00 dB

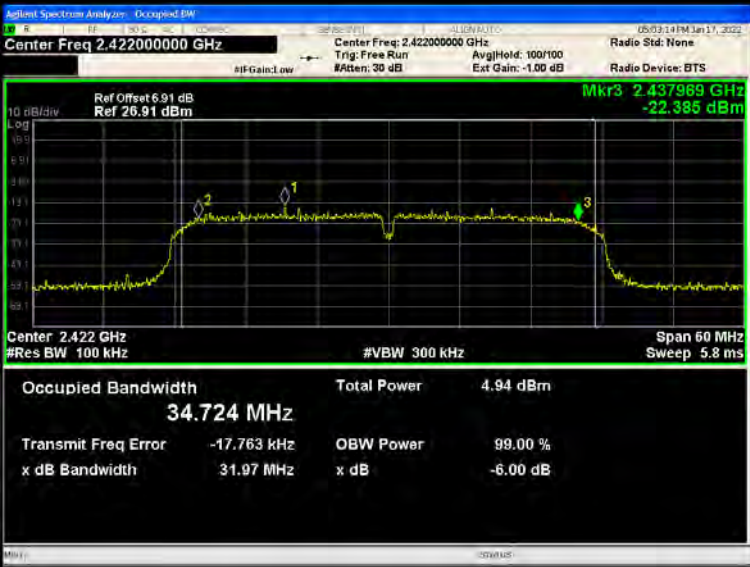802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Ref Offset 6.91 dB Ref 26.91 dBm Mkr3 2.437968 GHz -22.385 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 34.724 MHz Total Power 4.94 dBm Transmit Freq Error -17.763 kHz OBW Power 99.00 % x dB Bandwidth 31.97 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.453194 GHz -20.830 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 34.776 MHz Total Power 4.96 dBm Transmit Freq Error -59.360 kHz OBW Power 99.00 % x dB Bandwidth 32.51 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Ref Offset 6.95 dB Ref 26.95 dBm Mkr3 2.46831 GHz -22.036 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 34.749 MHz Total Power 4.56 dBm Transmit Freq Error 67.637 kHz OBW Power 99.00 % x dB Bandwidth 32.48 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

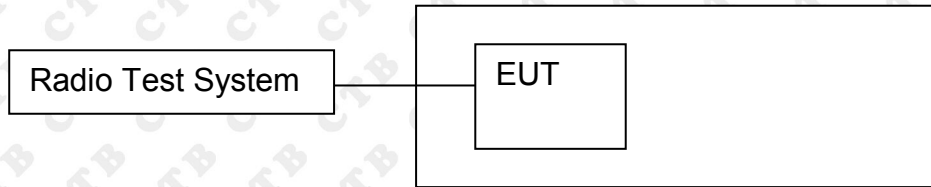

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = RMS.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-21.915	8	PASS
	MCH	-20.945	8	PASS
	HCH	-21.056	8	PASS
802.11g	LCH	-24.748	8	PASS
	MCH	-24.18	8	PASS
	HCH	-25.756	8	PASS
802.11n(H T20)	LCH	-24.423	8	PASS
	MCH	-25.178	8	PASS


	HCH	-24.337	8	PASS
802.11n(H T40)	LCH	-30.086	8	PASS
	MCH	-29.118	8	PASS
	HCH	-29.591	8	PASS

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz]] ANT 3	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	-22.06	-21.087	/	8
	MCH	-22.019	-21.479	/	8
	HCH	-20.607	-21.605	/	8
802.11g	LCH	-24.357	-25.412	/	8
	MCH	-24.925	-25.81	/	8
	HCH	-25.108	-25.721	/	8
802.11n(H T20)	LCH	-24.708	-25.71	-22.170	8
	MCH	-25.571	-26.063	-22.800	8
	HCH	-24.817	-25.723	-22.236	8
802.11n(H T40)	LCH	-29.453	-28.897	-26.156	8
	MCH	-30.408	-29.421	-26.876	8
	HCH	-29.229	-29.296	-26.252	8

ANT1: Test Graph

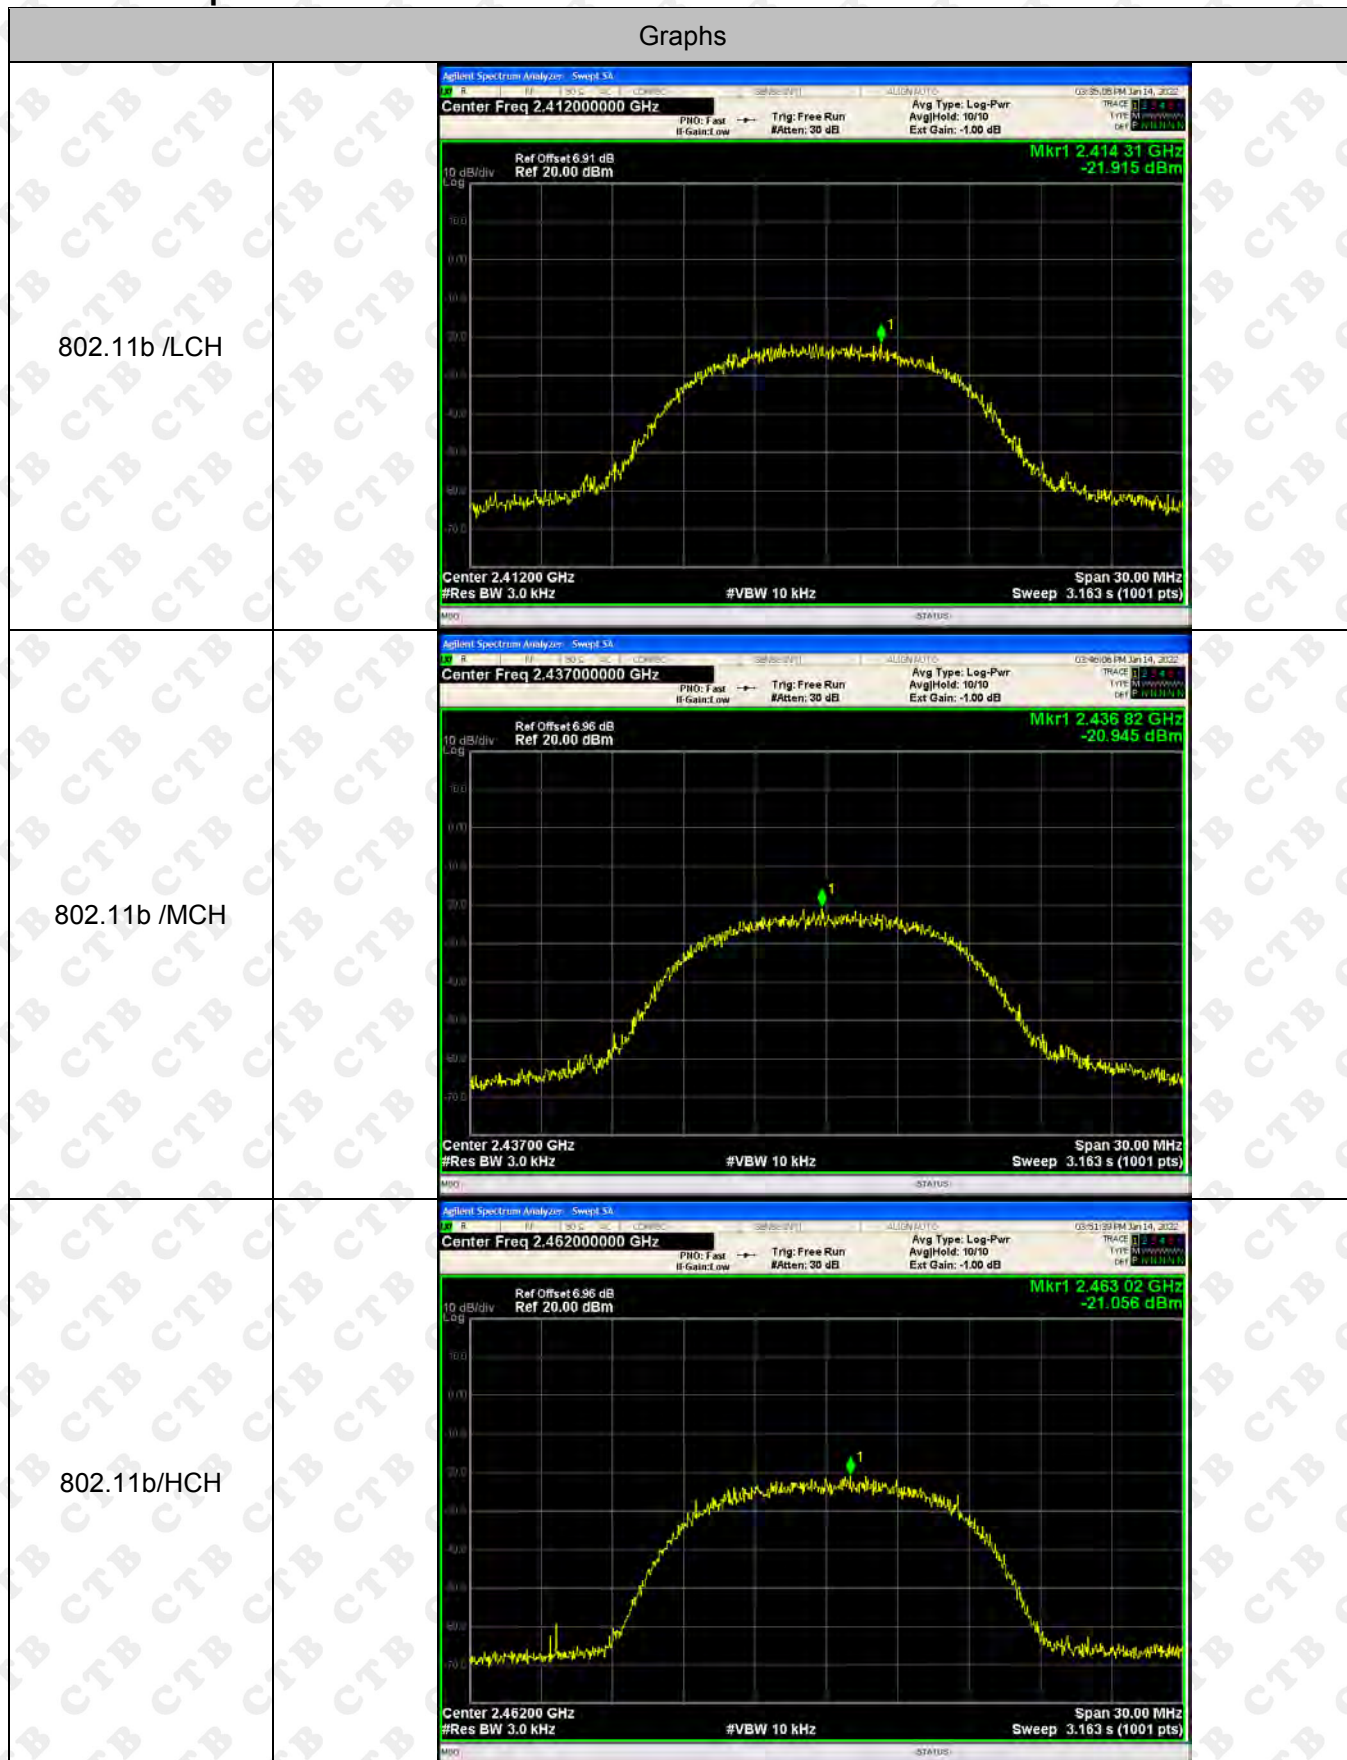

802.11g/LCH

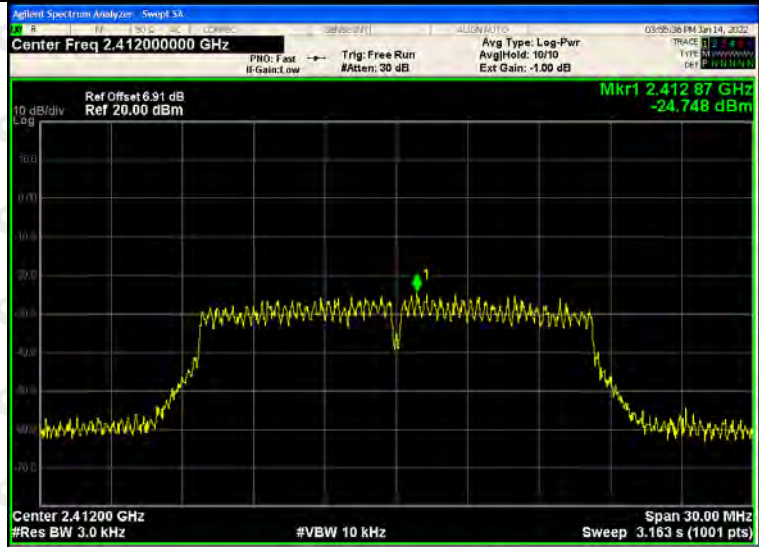




802.11g/MCH



802.11g/HCH

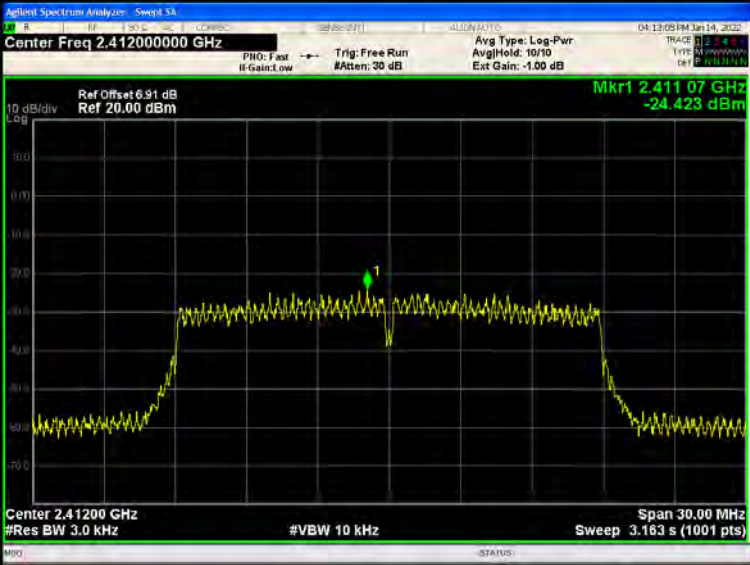

802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

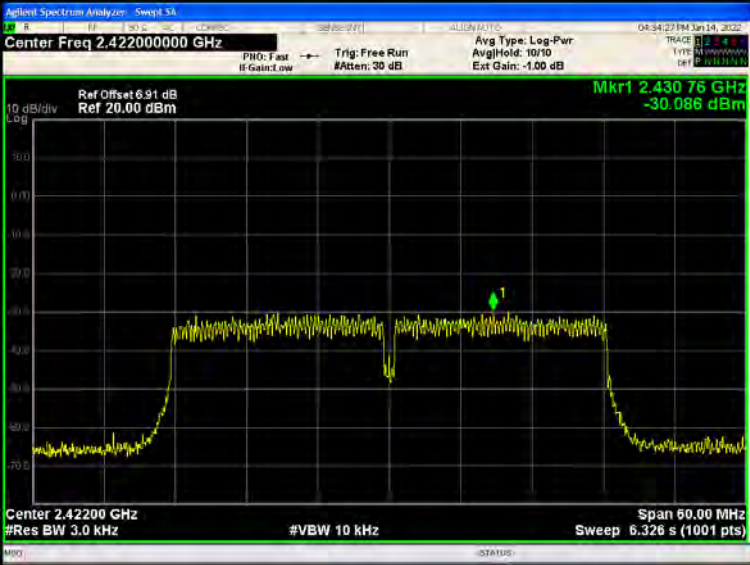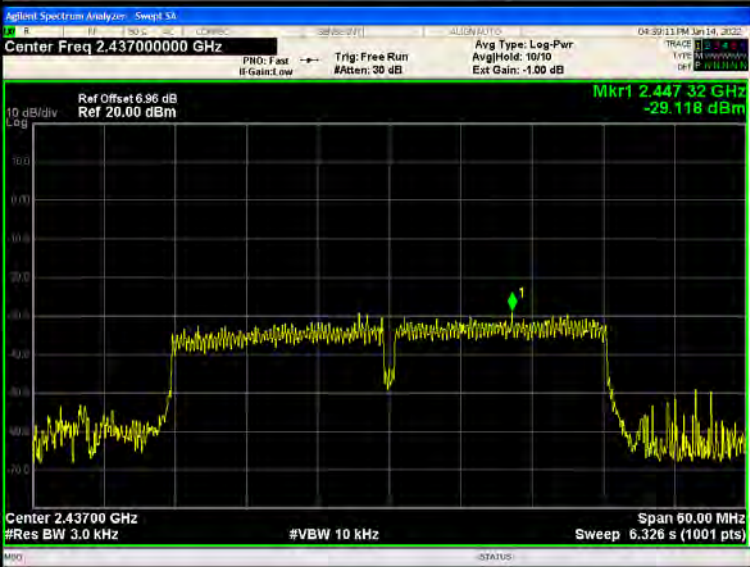802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

ANT 2: Test Graph

Graphs

802.11b /LCH




802.11b /MCH



802.11b/HCH



802.11g/LCH

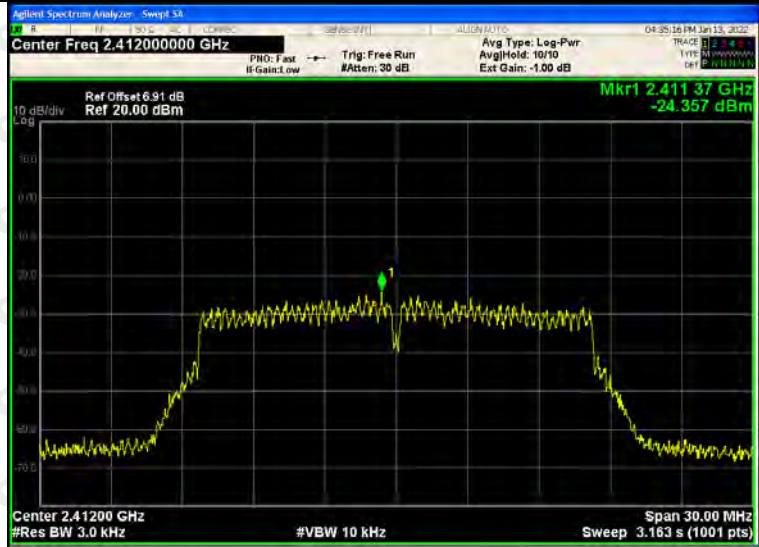



802.11g/MCH



802.11g/HCH

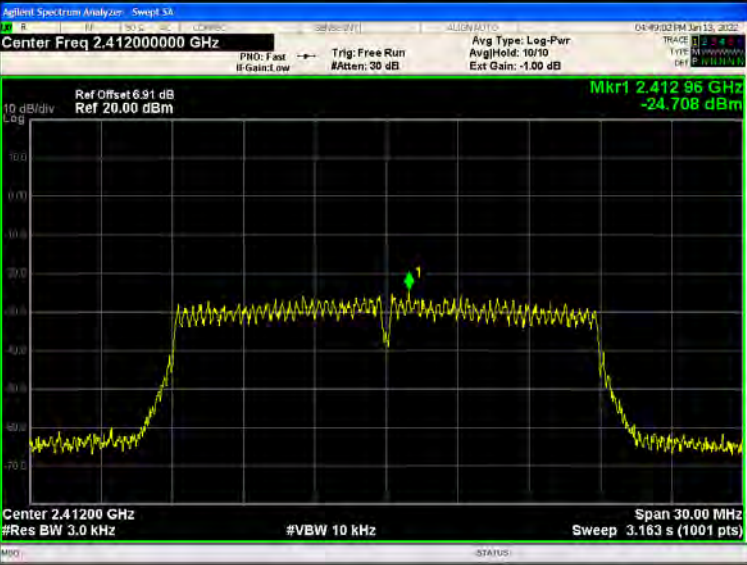

802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

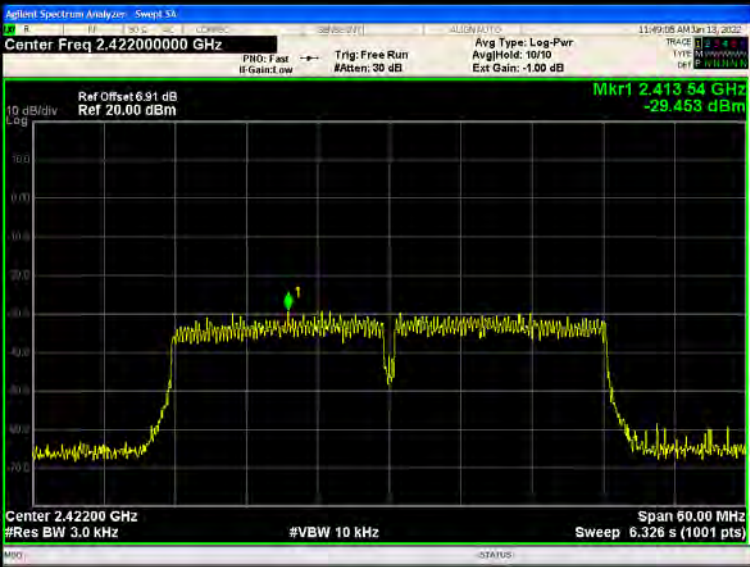802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

ANT 3: Test Graph

Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.410 47 GHz -21.087 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11b /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.437 99 GHz -21.479 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11b/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.460 47 GHz -21.605 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

802.11g/LCH









802.11g/MCH



802.11g/HCH

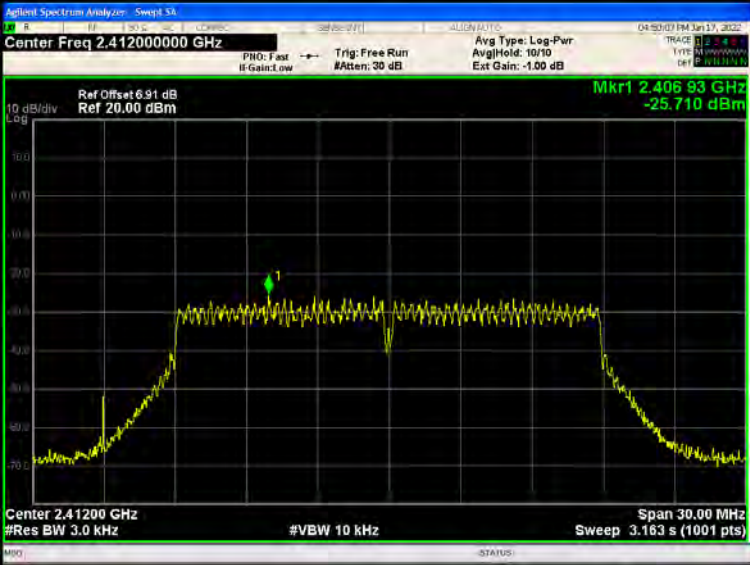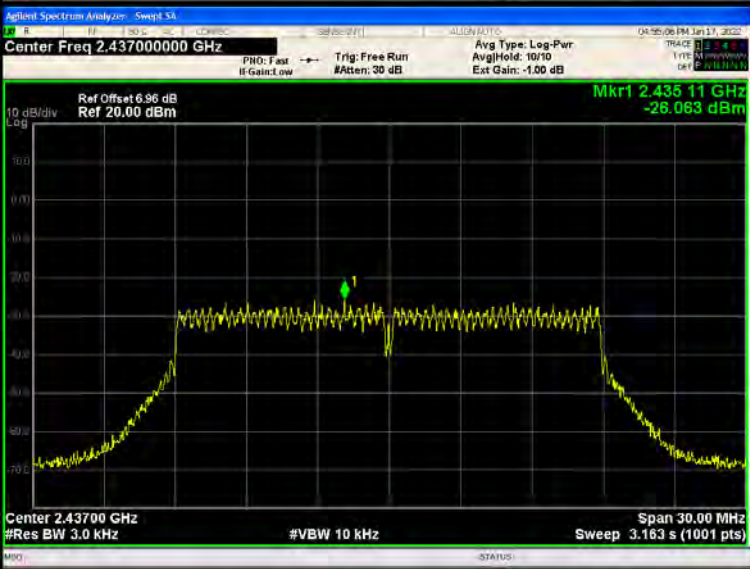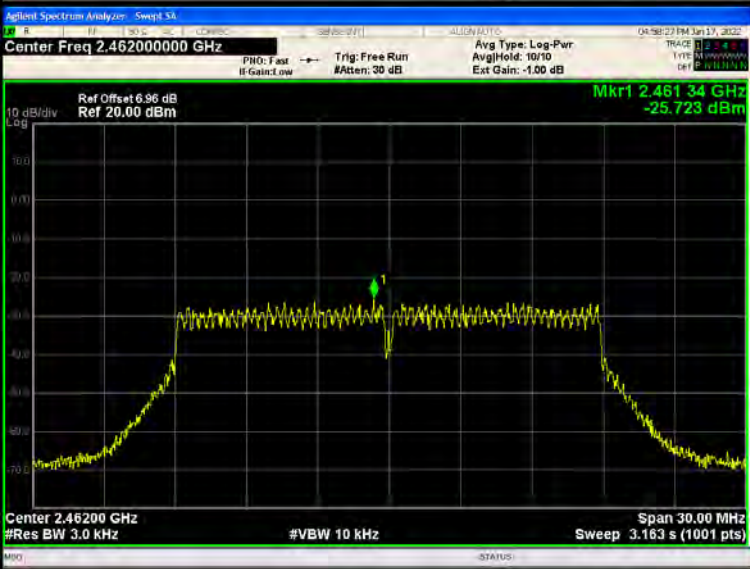

802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

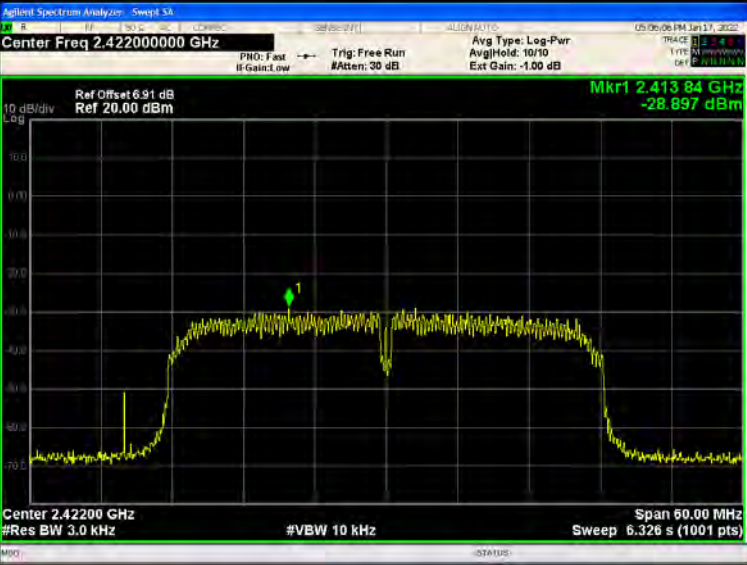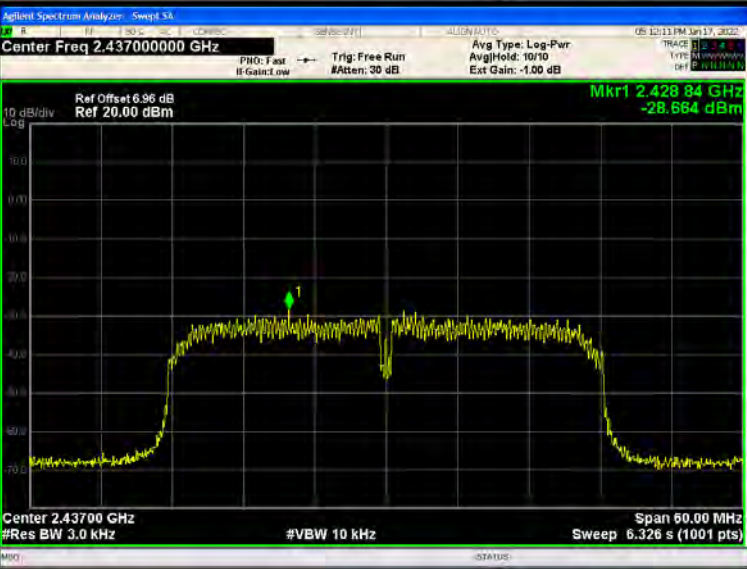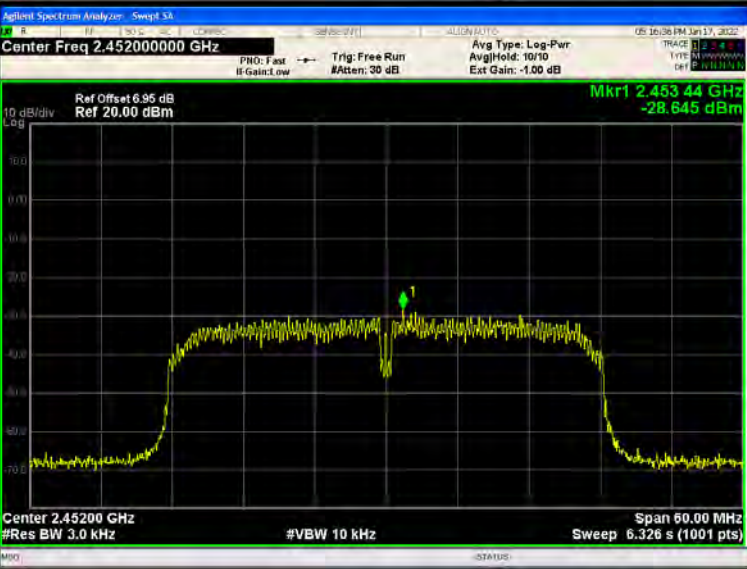802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.422000000 GHz Ref Offset: 6.91 dB Ref 20.00 dBm Mkr1 2.41384 GHz -28.897 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset: 6.96 dB Ref 20.00 dBm Mkr1 2.42884 GHz -28.864 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.452000000 GHz Ref Offset: 6.96 dB Ref 20.00 dBm Mkr1 2.45344 GHz -28.645 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is 1.0dBi.

13. EUT PHOTOGRAPHS

External Photos

EUT Photo 1




EUT Photo 2



14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

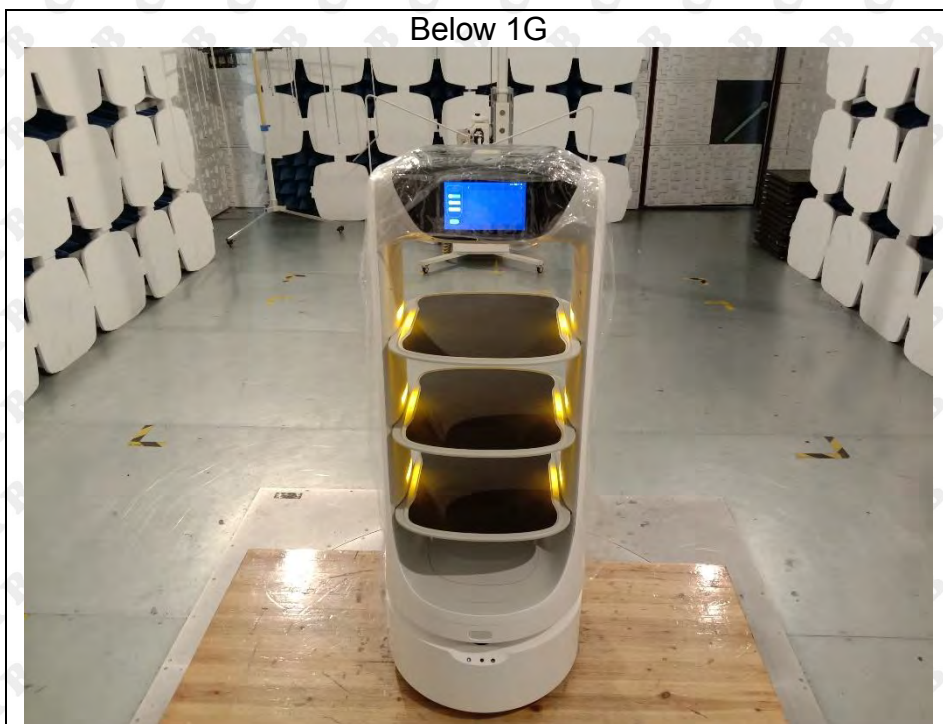

Above 1G



Conducted Emission



***** END OF REPORT *****