



Appendix RF test data for WIFI2.4G

Product Name: ELEGOO Conqueror Robot Tank Kit

Trade Mark: N/A

Test Model: B08CZ4MG5P

Environmental Conditions

Temperature:	24.6° C
Relative Humidity:	52.4%
ATM Pressure:	100.0 kPa
Test Engineer:	Emiya Lin
Supervised by:	Simba Huang



Contents

	Page
COVER PAGE	
1 Duty Cycle	3
1.1 Test Result	3
1.2 Test Graphs	4
2 Maximum Conducted Output Power	10
2.1 Test Result	10
3 -6dB Bandwidth	11
3.1 Test Result	11
3.2 Test Graphs	12
4 Maximum Power Spectral Density Level	18
4.1 Test Result	18
4.2 Test Graphs	19
5 Band Edge	25
5.1 Test Result	25
5.2 Test Graphs	26
6 Conducted RF Spurious Emission	34
6.1 Test Result	34
6.2 Test Graphs	35





1 Duty Cycle


1.1 Test Result


Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor	1/T (kHz)
b	2412	Ant1	91.52	0.38	0.99
b	2437	Ant1	91.79	0.37	0.99
b	2462	Ant1	91.85	0.37	0.99
g	2412	Ant1	93.48	0.29	1.61
g	2437	Ant1	93.57	0.29	1.61
g	2462	Ant1	93.56	0.29	1.61
n20	2412	Ant1	93.22	0.3	1.64
n20	2437	Ant1	93.87	0.27	1.64
n20	2462	Ant1	93.81	0.28	1.61
n40	2422	Ant1	88.32	0.54	3.23
n40	2437	Ant1	88.35	0.54	3.13
n40	2452	Ant1	88.24	0.54	3.12


1.2 Test Graphs

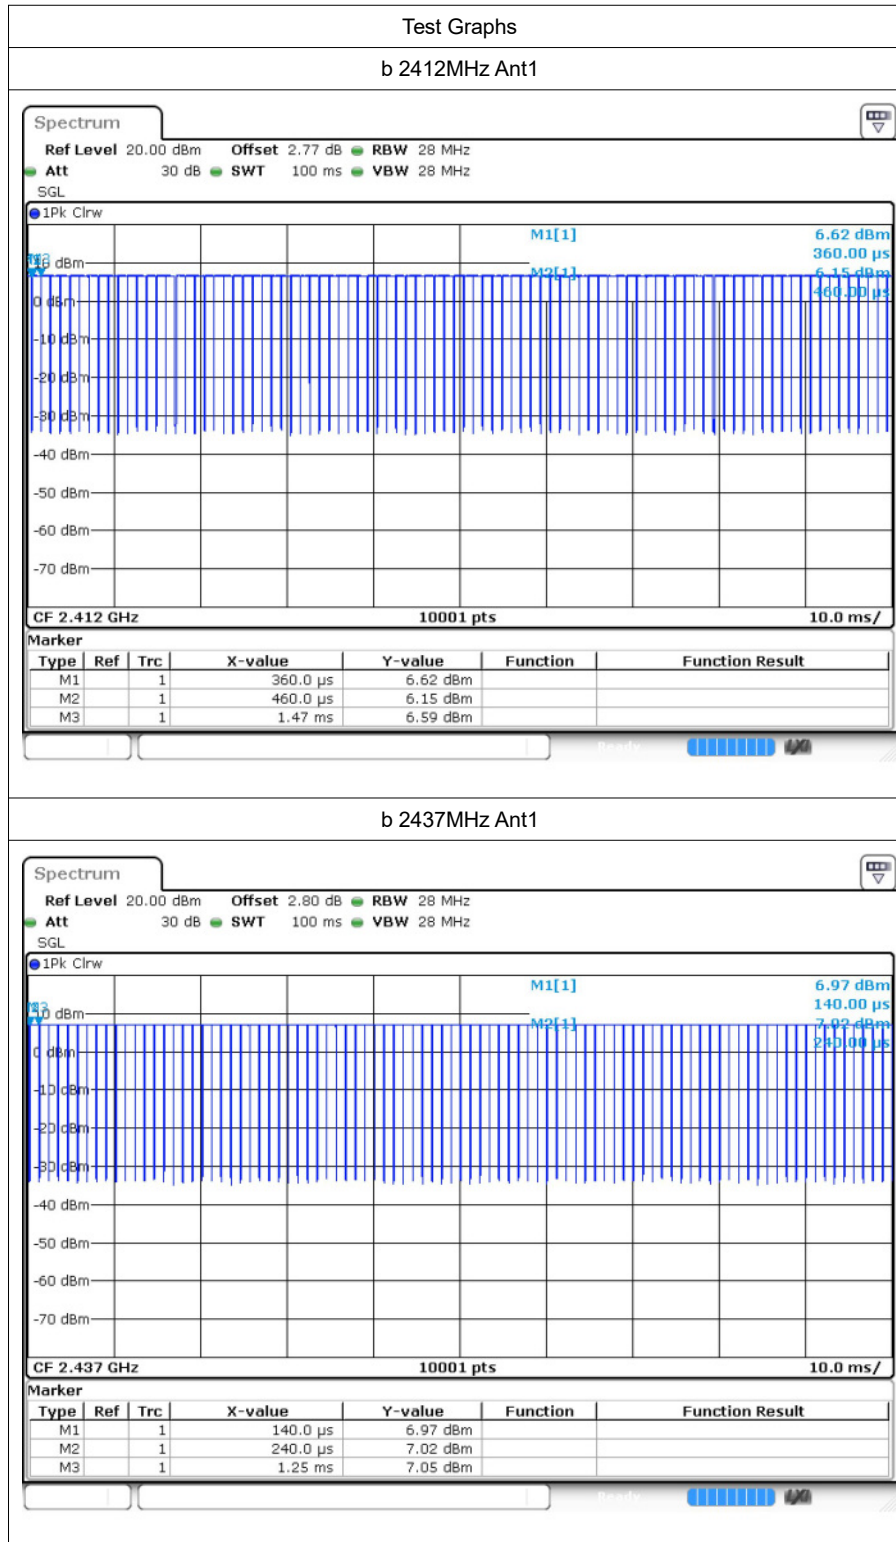

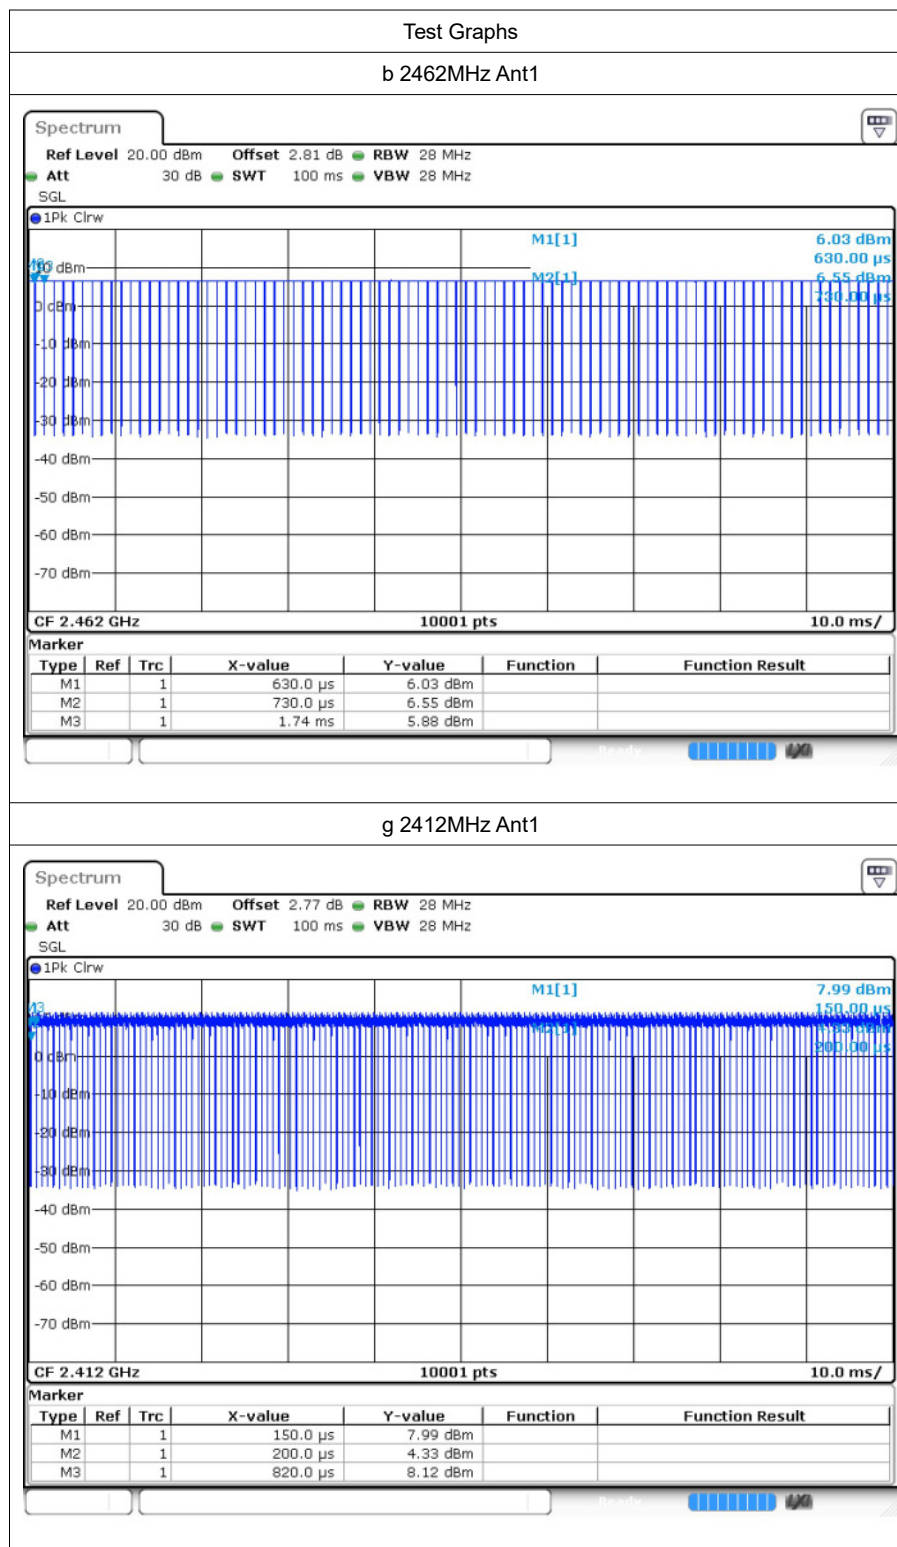

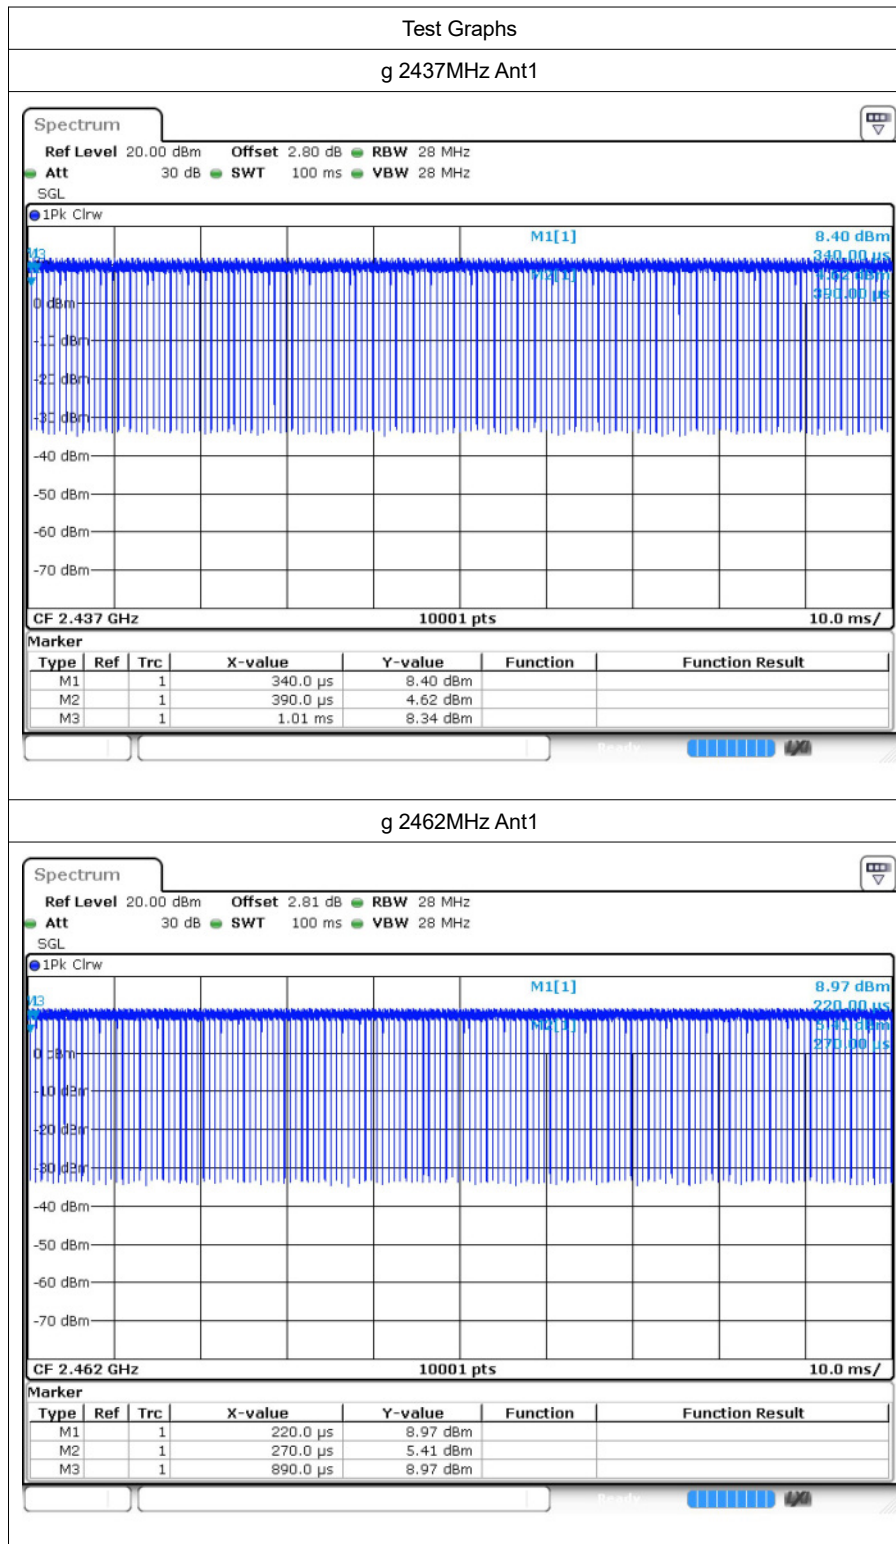

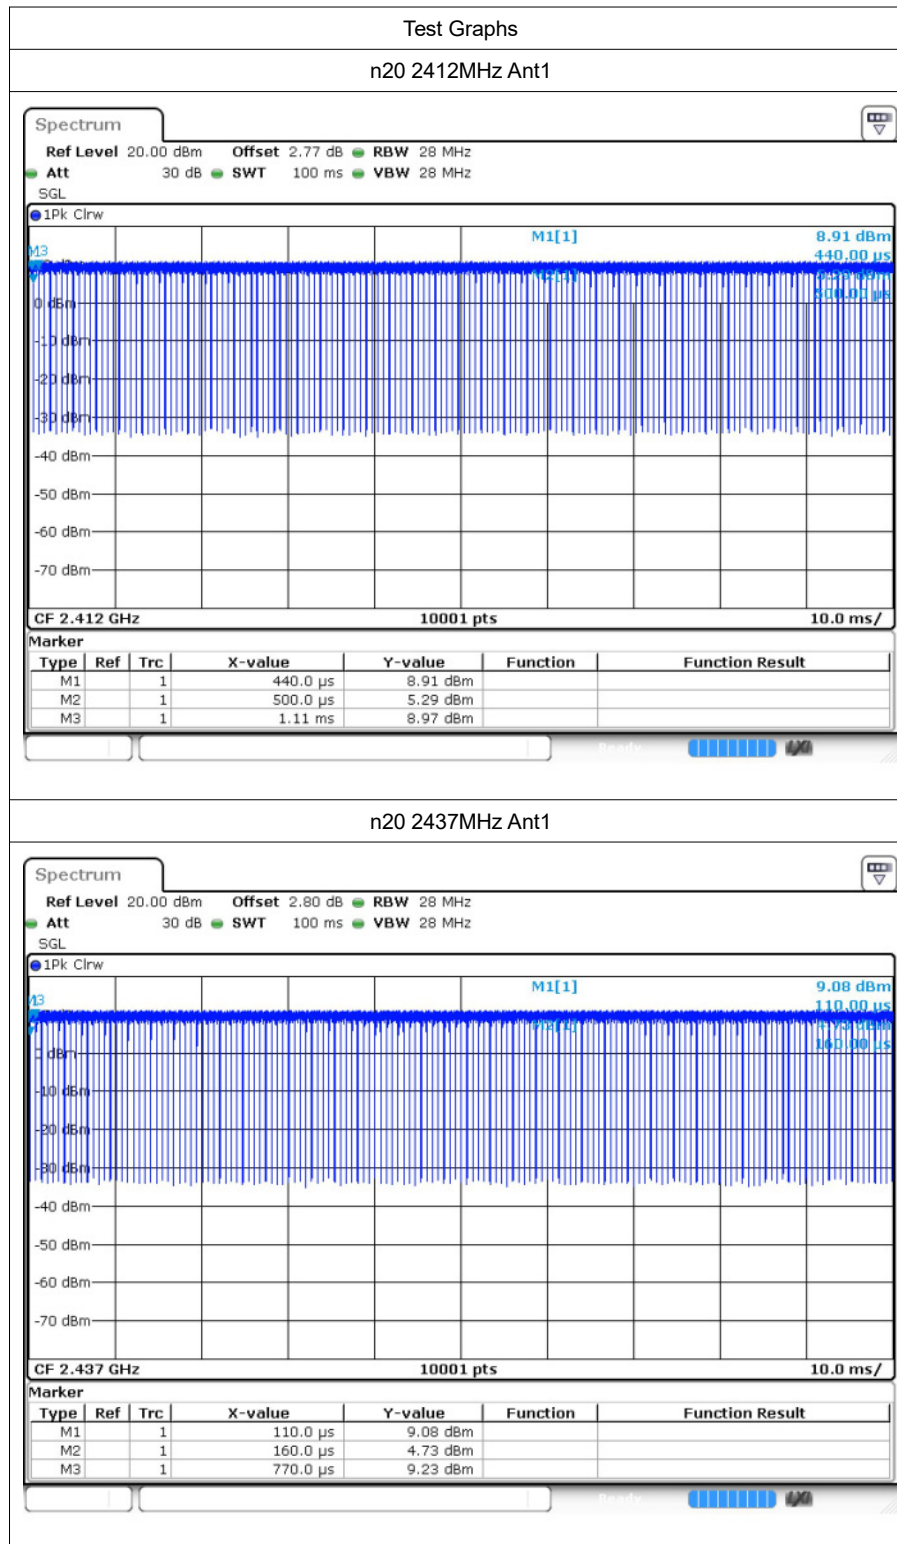

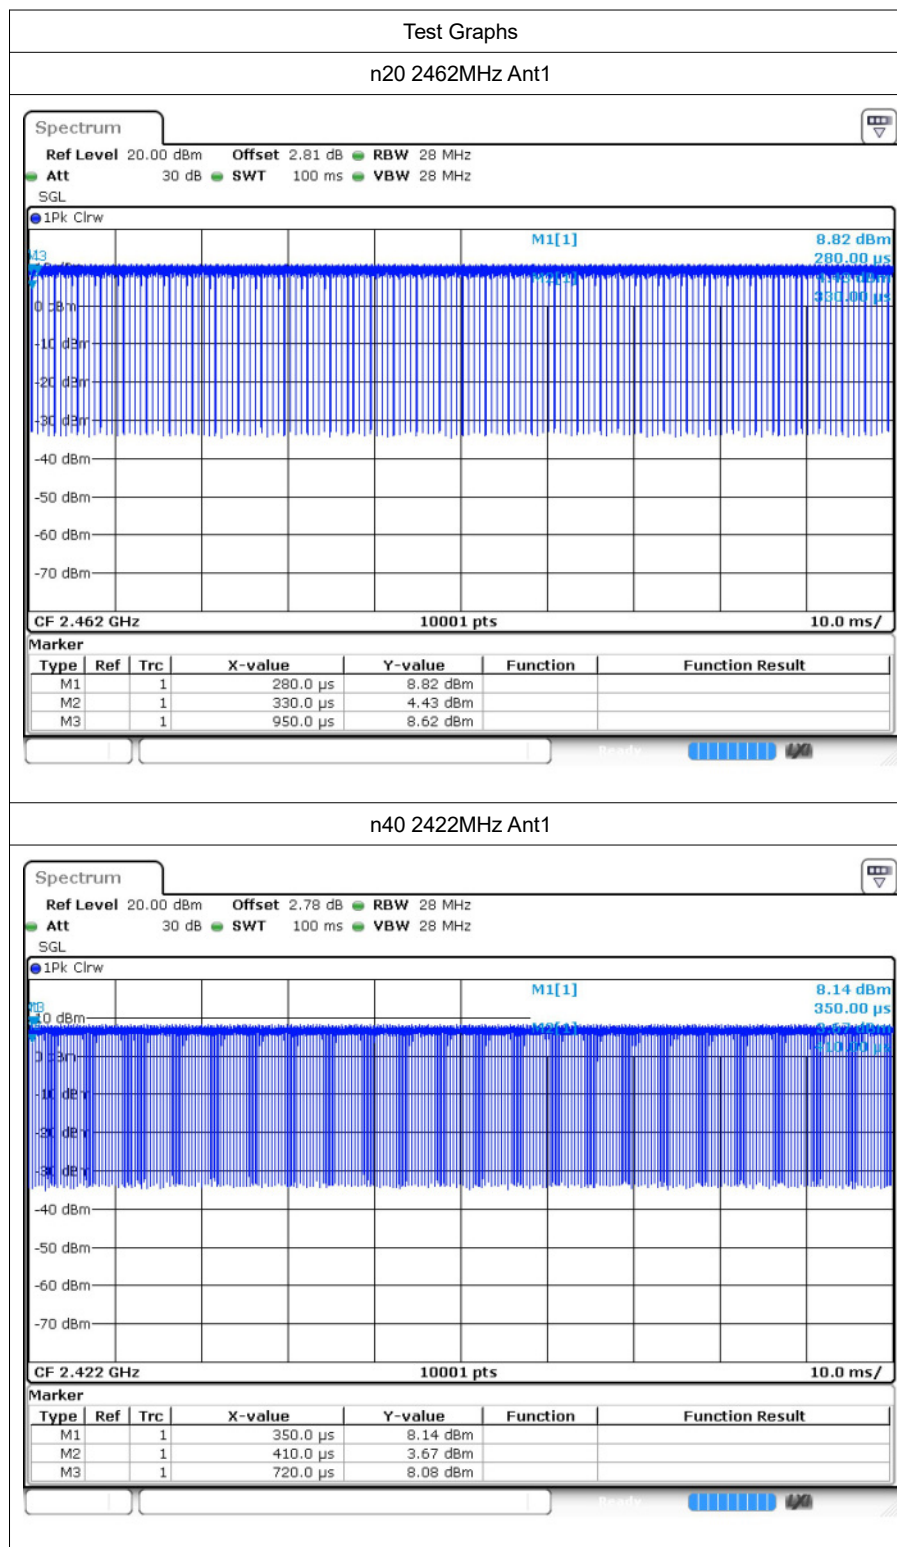



2 Maximum Conducted Output Power

2.1 Test Result


Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
b	2412	Ant1	7.62	30	Pass
b	2437	Ant1	8.54	30	Pass
b	2462	Ant1	7.49	30	Pass
g	2412	Ant1	7.82	30	Pass
g	2437	Ant1	8.24	30	Pass
g	2462	Ant1	8.41	30	Pass
n20	2412	Ant1	7.78	30	Pass
n20	2437	Ant1	8.22	30	Pass
n20	2462	Ant1	7.86	30	Pass
n40	2422	Ant1	7.15	30	Pass
n40	2437	Ant1	7.22	30	Pass
n40	2452	Ant1	7.19	30	Pass


3 -6dB Bandwidth

3.1 Test Result


Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	Ant1	9.588	0.5	Pass
b	2437	Ant1	9.585	0.5	Pass
b	2462	Ant1	9.567	0.5	Pass
g	2412	Ant1	16.518	0.5	Pass
g	2437	Ant1	16.353	0.5	Pass
g	2462	Ant1	16.374	0.5	Pass
n20	2412	Ant1	17.517	0.5	Pass
n20	2437	Ant1	17.586	0.5	Pass
n20	2462	Ant1	17.616	0.5	Pass
n40	2422	Ant1	36.102	0.5	Pass
n40	2437	Ant1	35.85	0.5	Pass
n40	2452	Ant1	36.138	0.5	Pass

3.2 Test Graphs

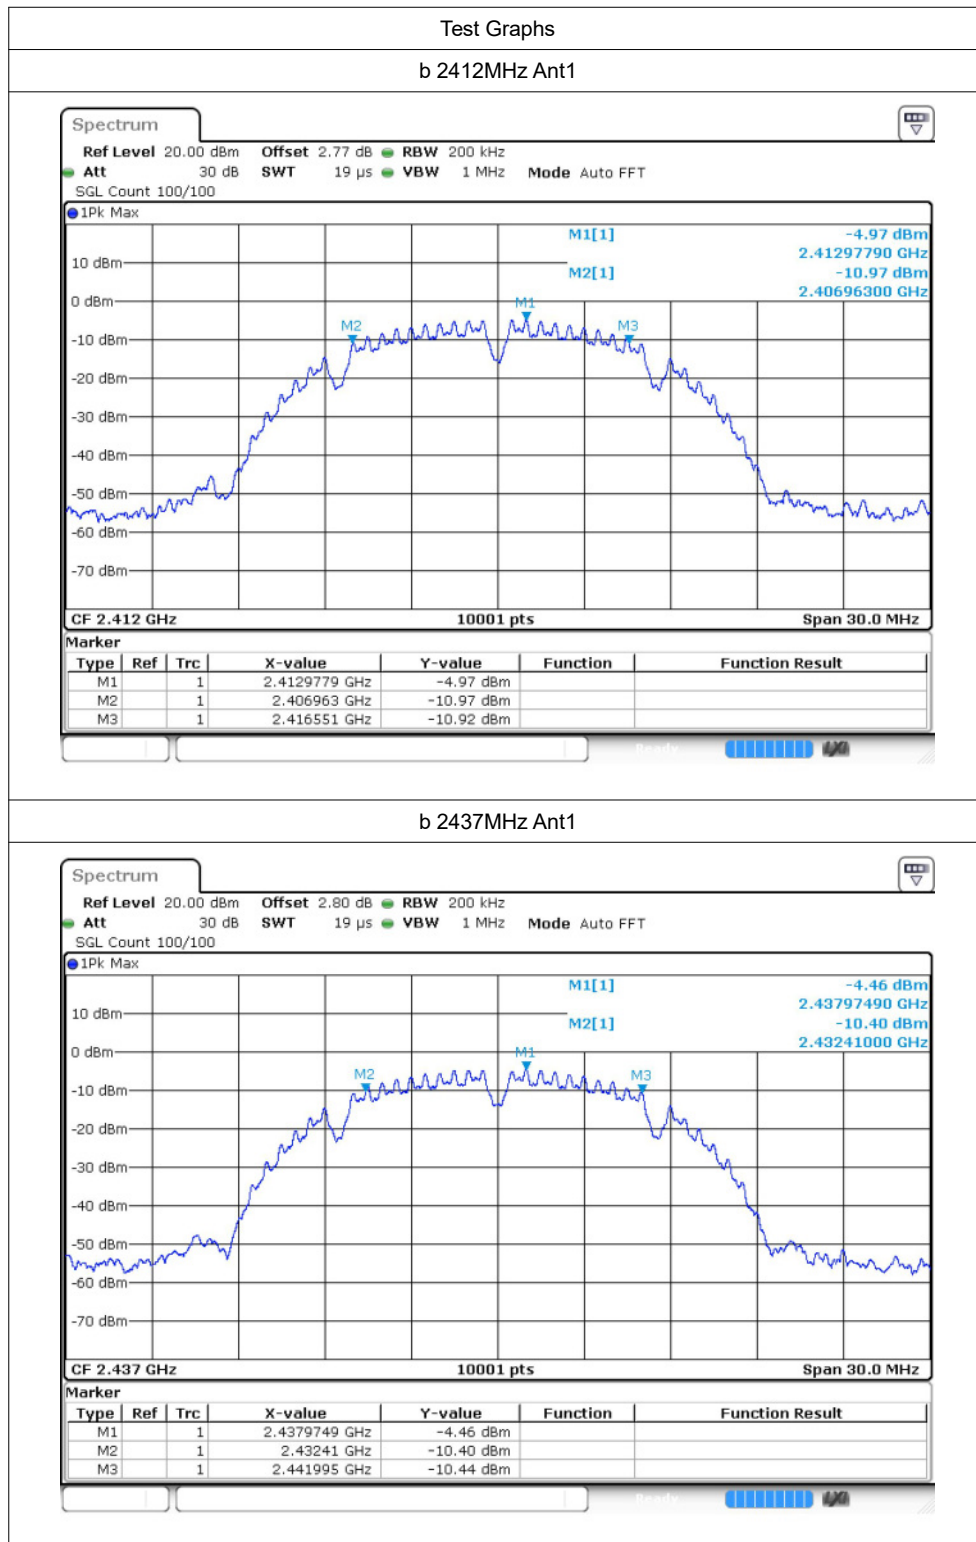


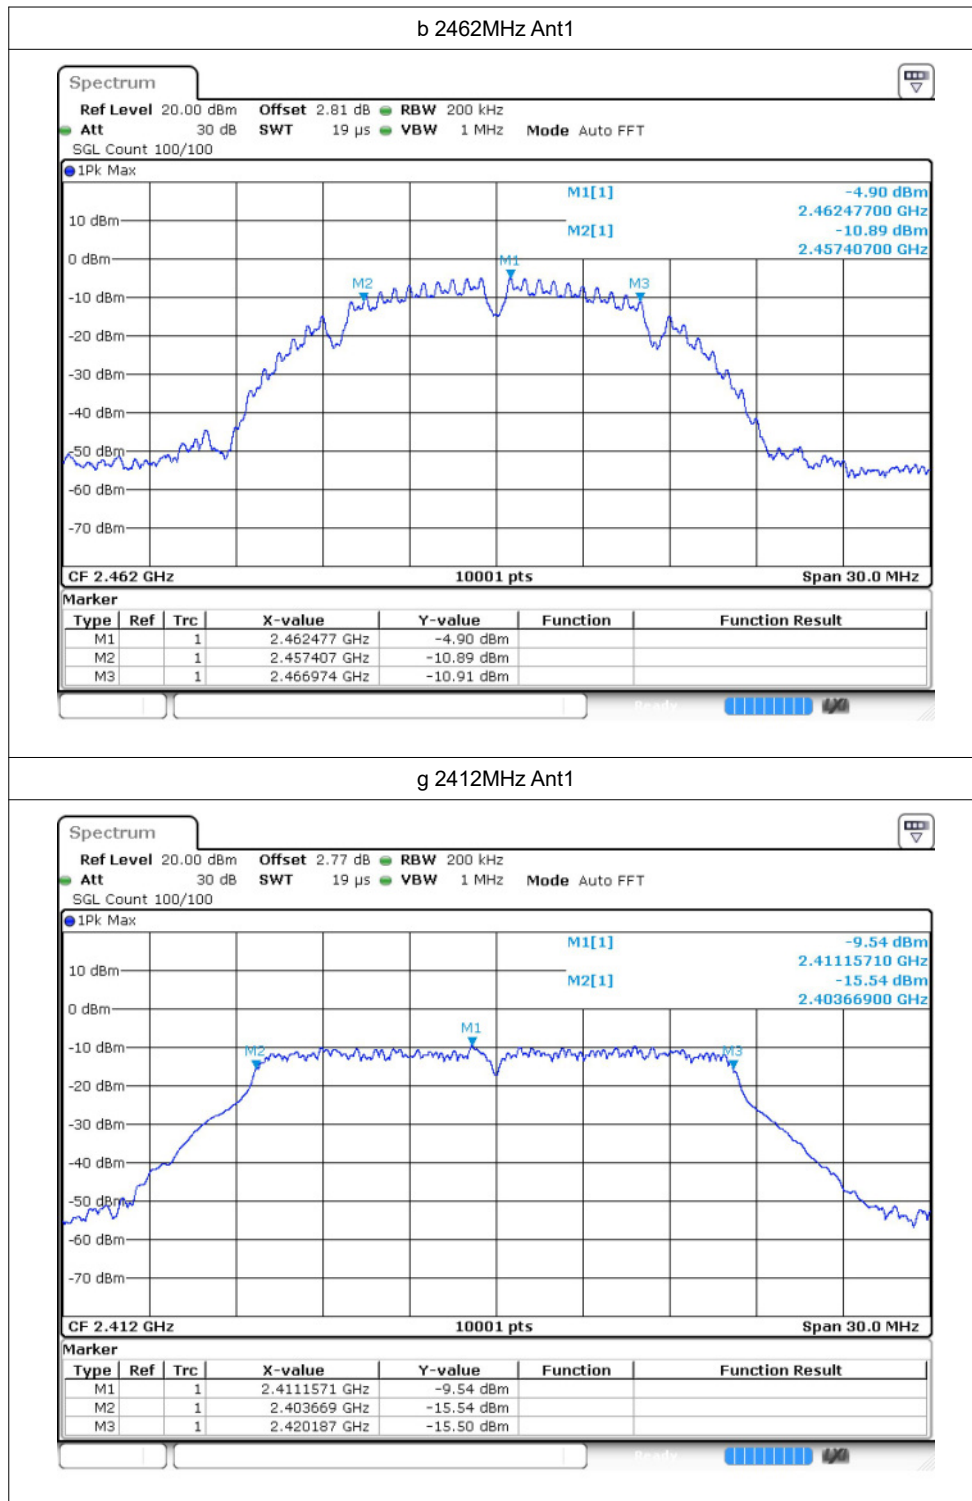


g 2437MHz Ant1

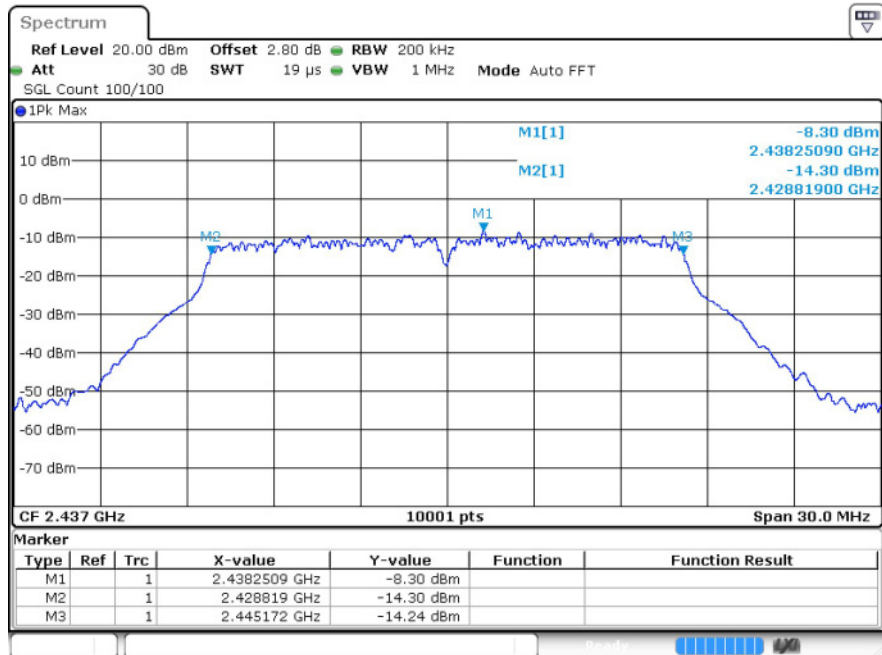


g 2462MHz Ant1

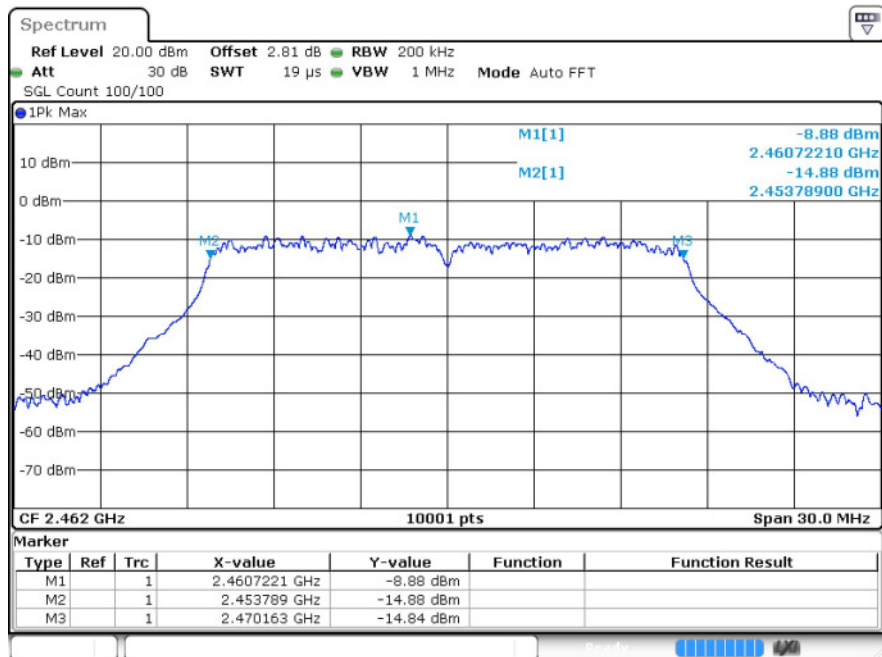


n20 2412MHz Ant1

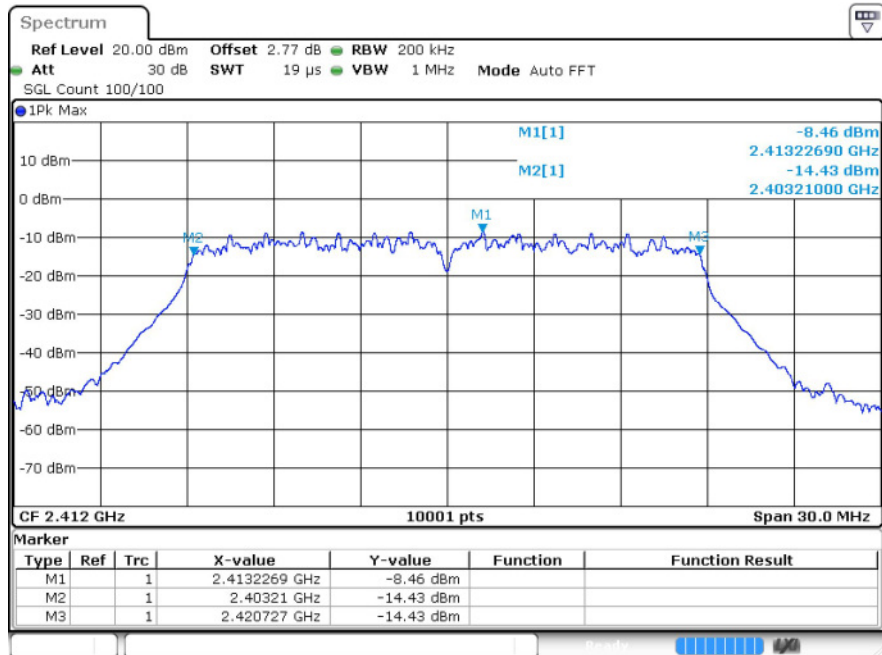


n20 2437MHz Ant1

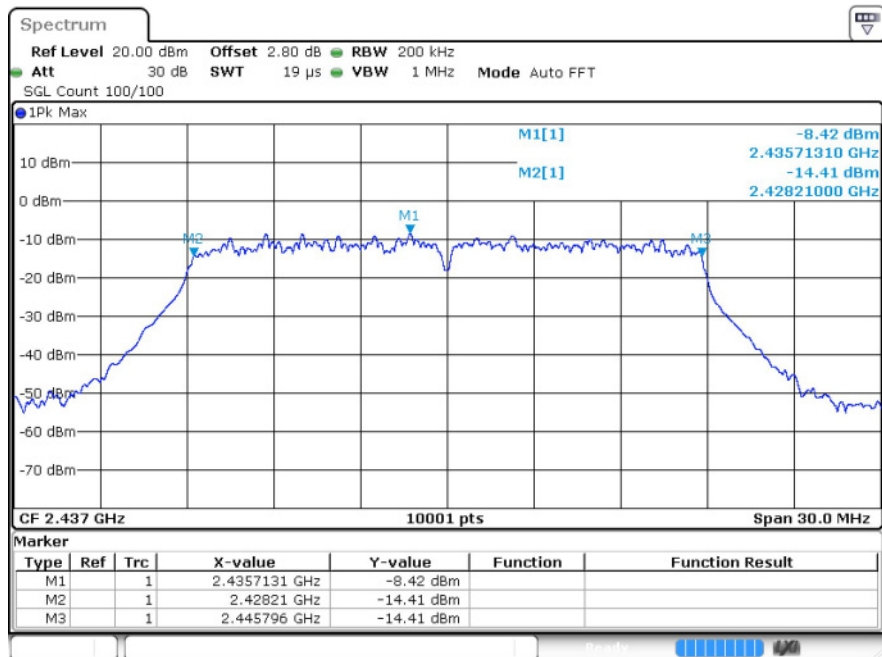


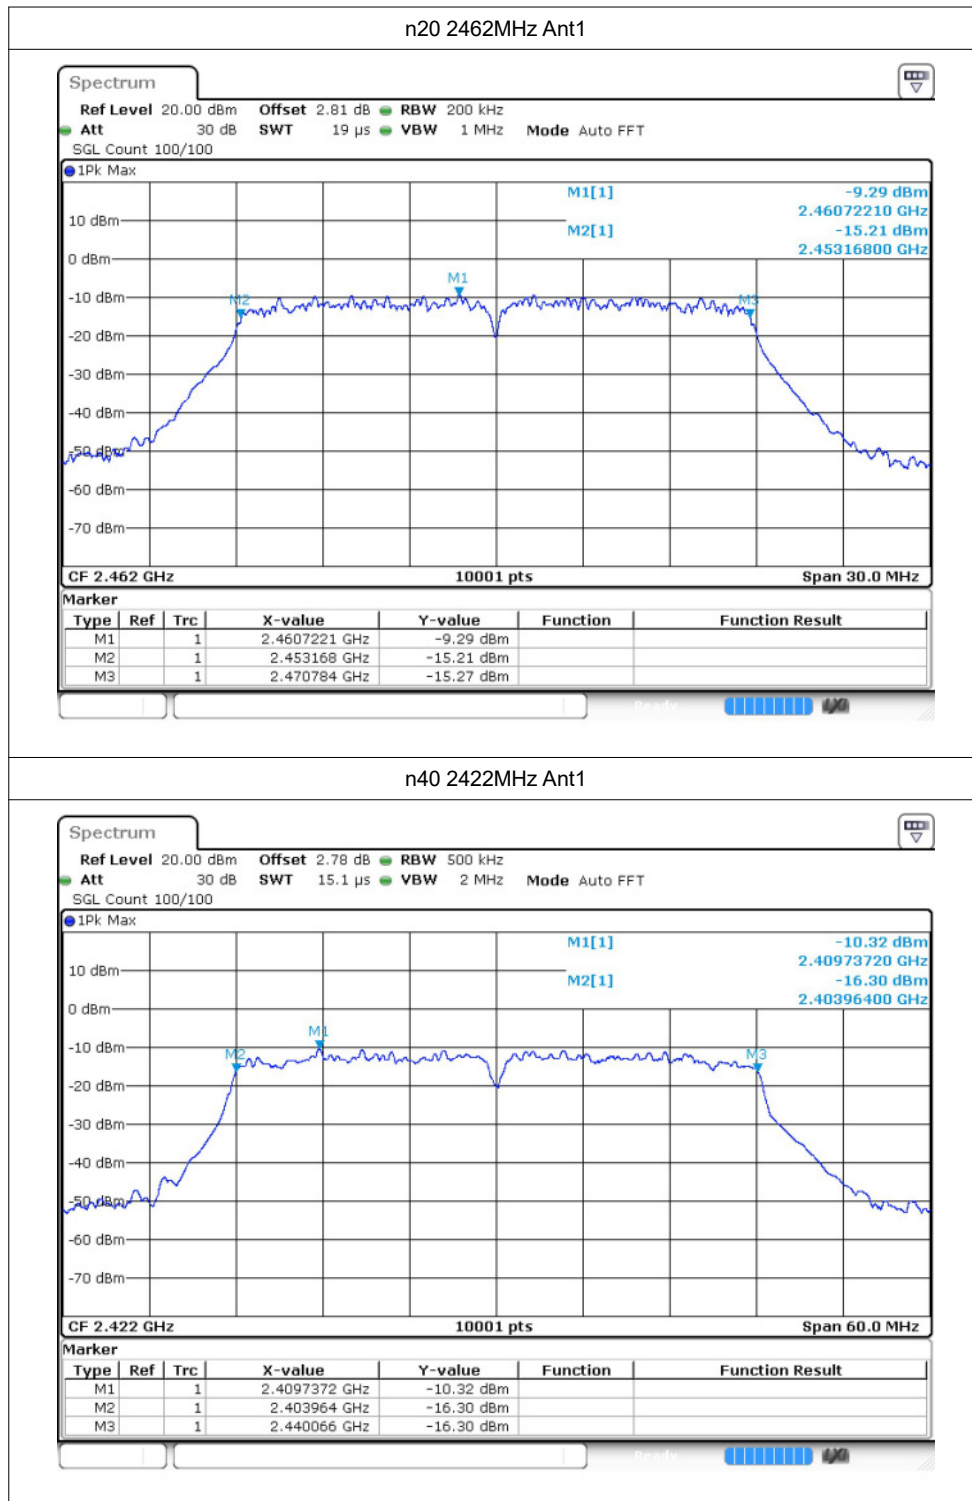

n40 2437MHz Ant1

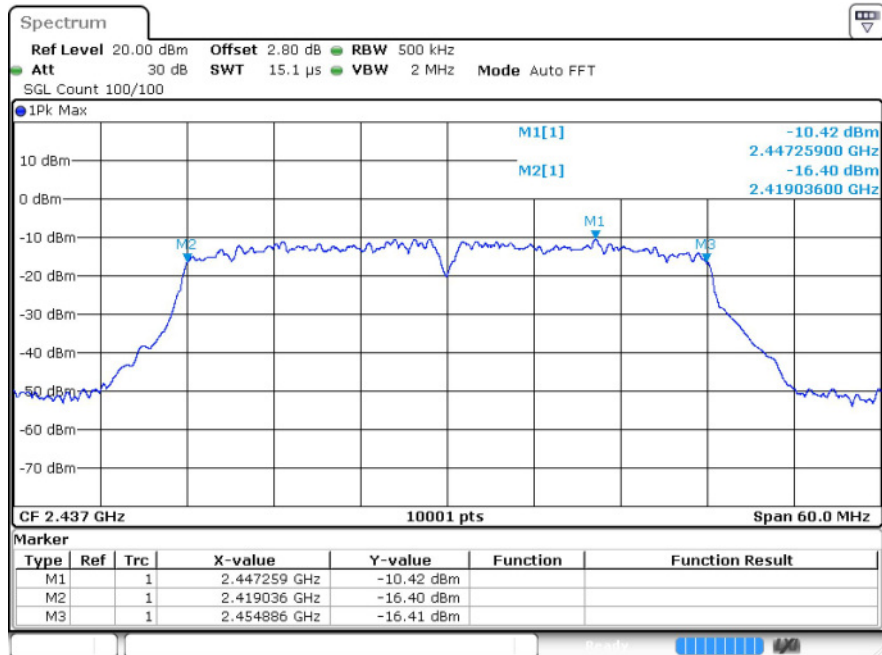

n40 2452MHz Ant1

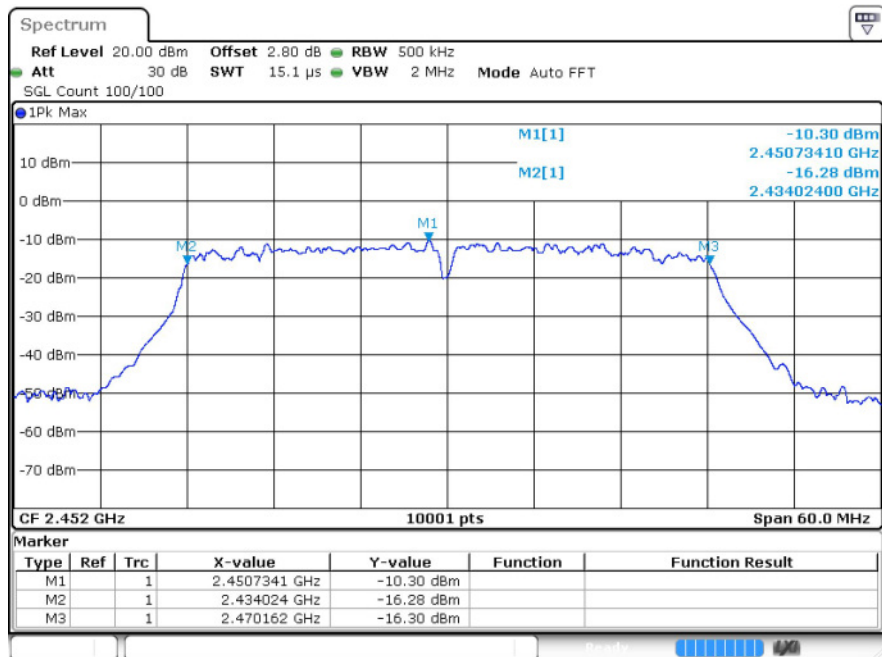



4 Maximum Power Spectral Density Level


4.1 Test Result


Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3-100kHz)	Limit (dBm/3kHz)	Verdict
b	2412	Ant1	-20.83	≤8	Pass
b	2437	Ant1	-20.45	≤8	Pass
b	2462	Ant1	-20.97	≤8	Pass
g	2412	Ant1	-23.2	≤8	Pass
g	2437	Ant1	-23.26	≤8	Pass
g	2462	Ant1	-23.47	≤8	Pass
n20	2412	Ant1	-24.17	≤8	Pass
n20	2437	Ant1	-23.59	≤8	Pass
n20	2462	Ant1	-24	≤8	Pass
n40	2422	Ant1	-28.22	≤8	Pass
n40	2437	Ant1	-27.78	≤8	Pass
n40	2452	Ant1	-28.14	≤8	Pass


4.2 Test Graphs

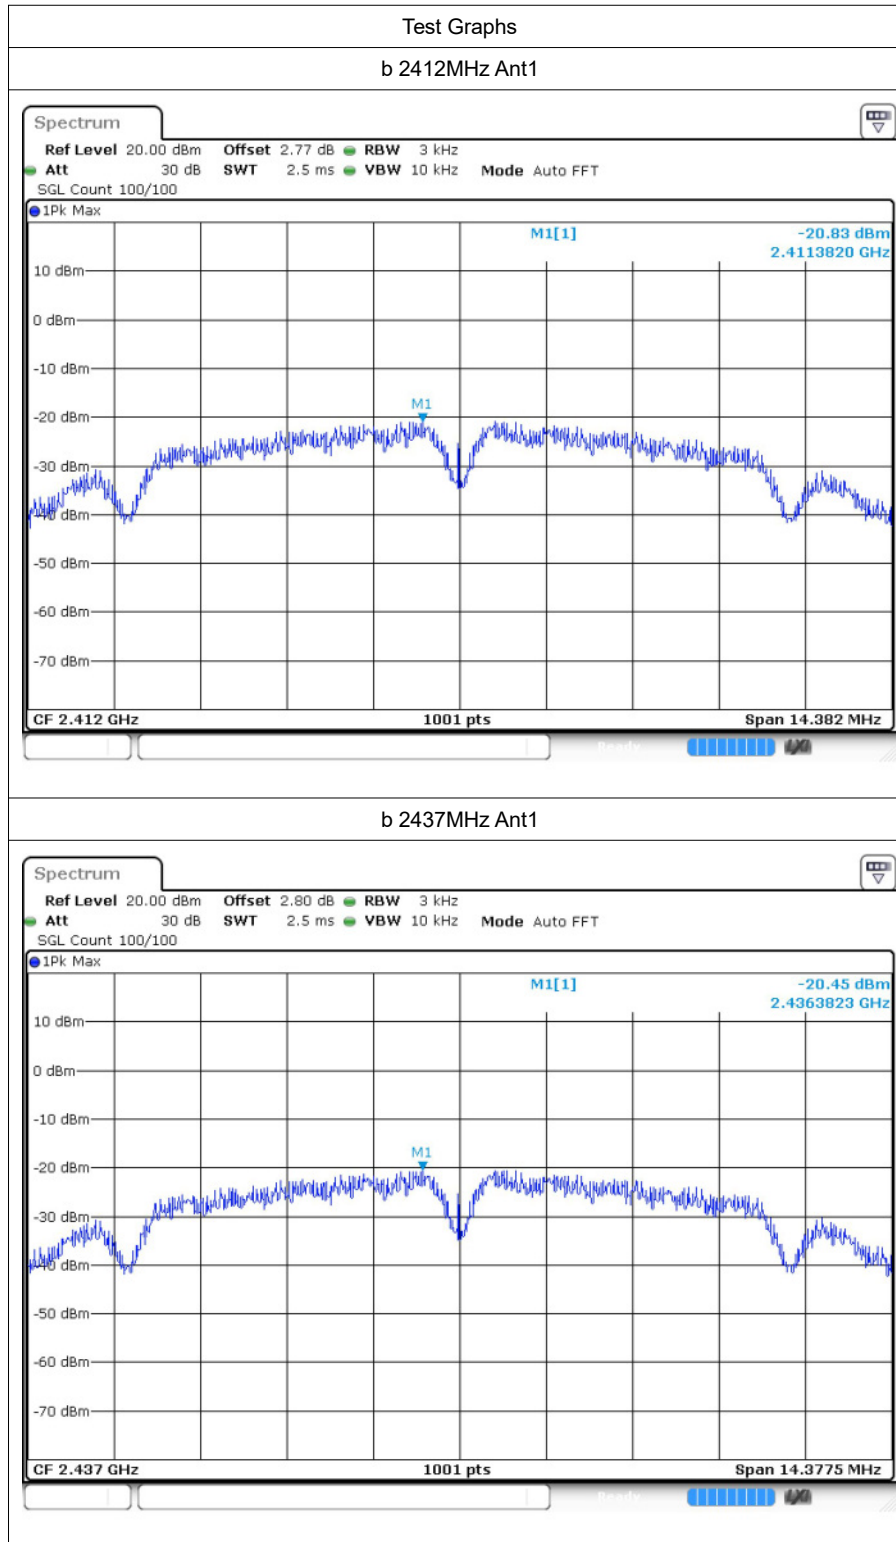


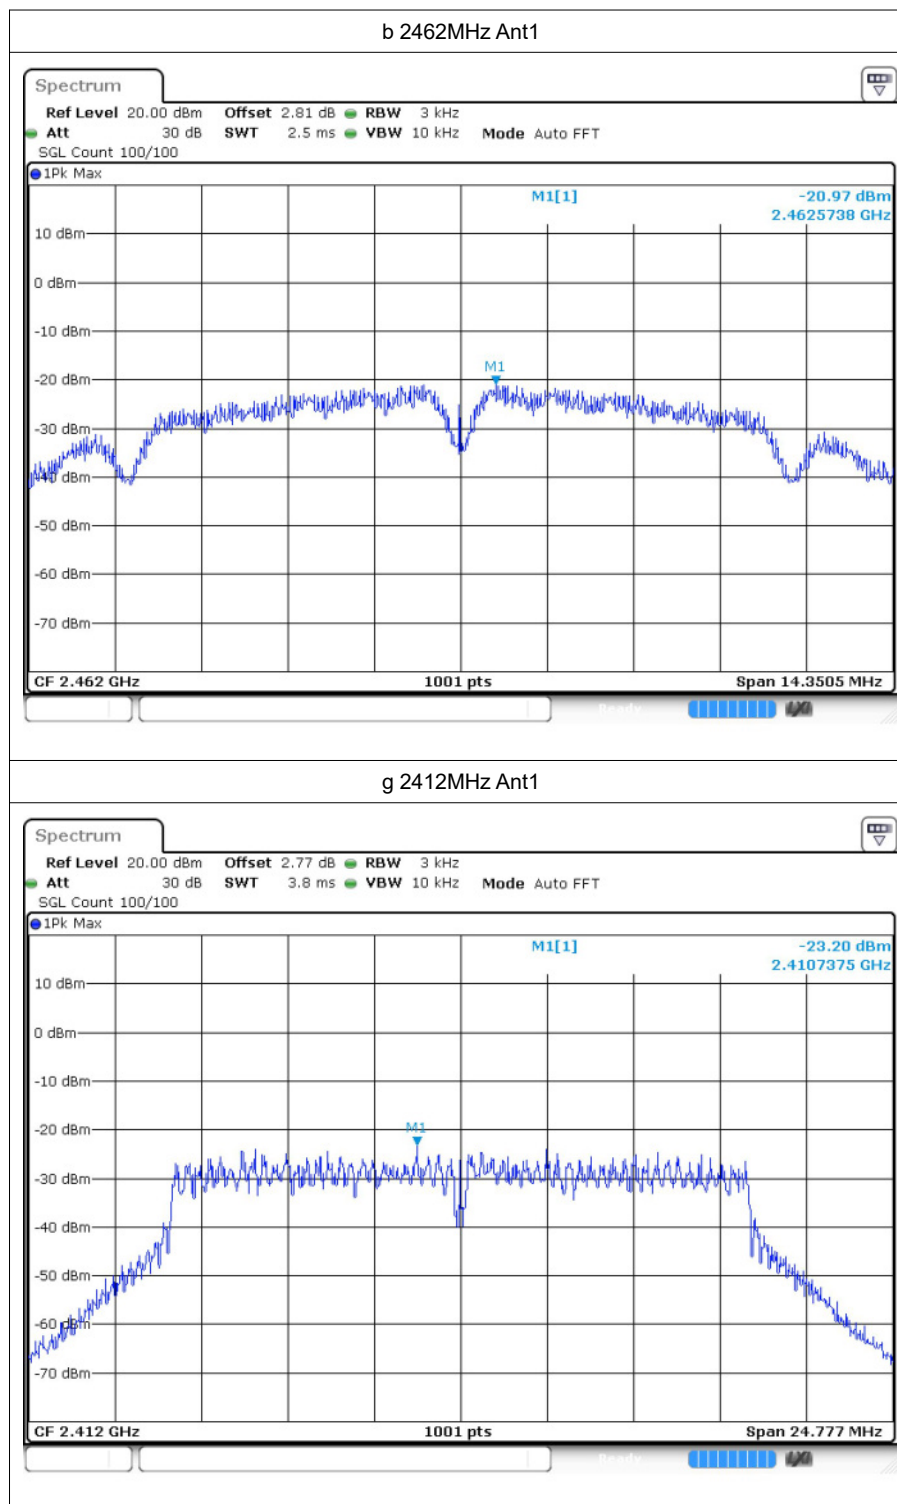

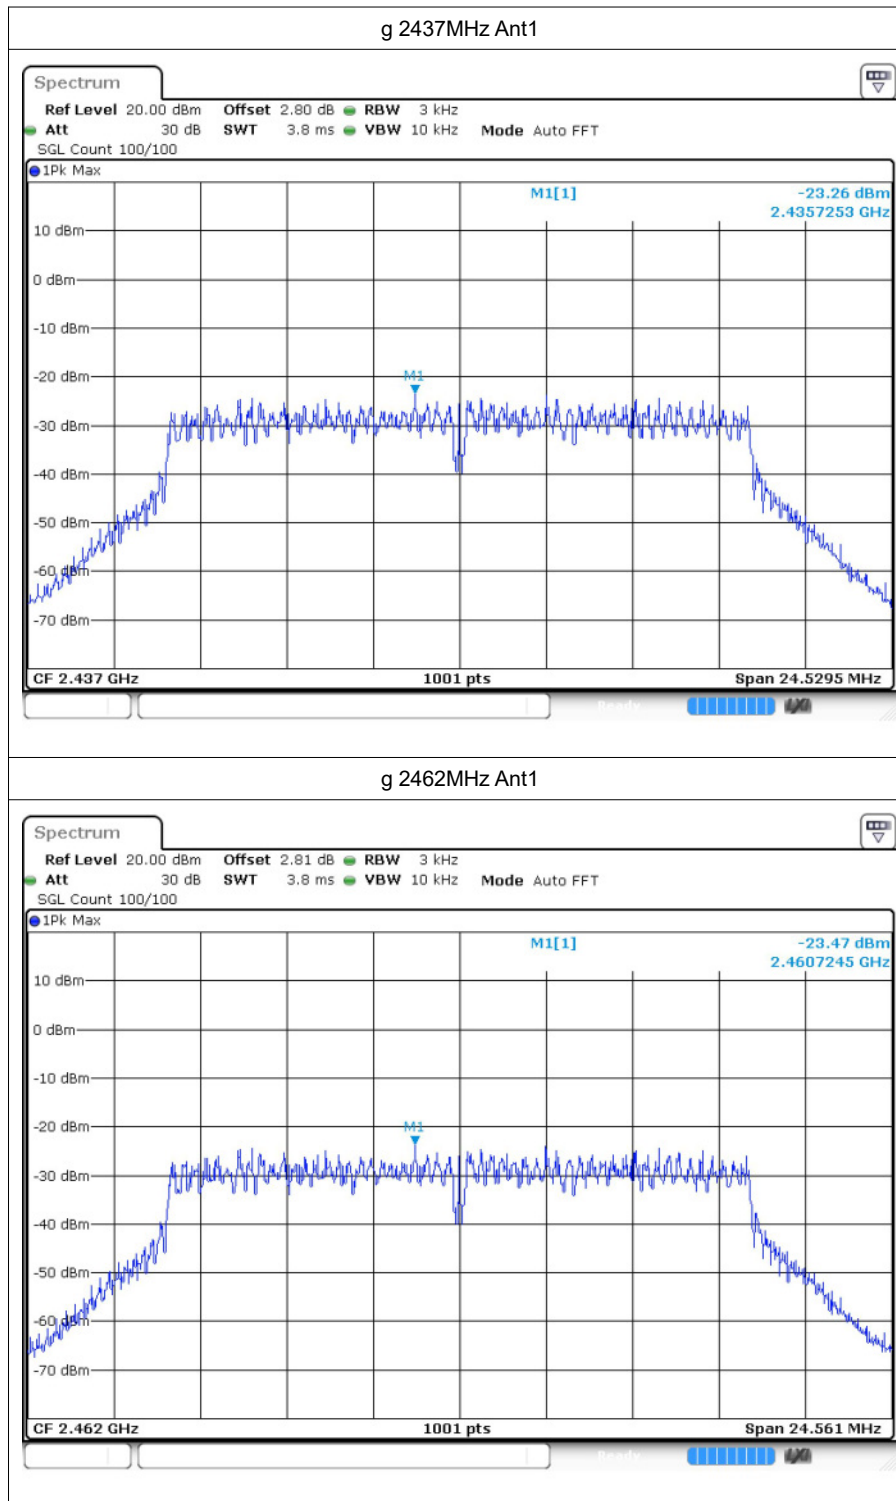

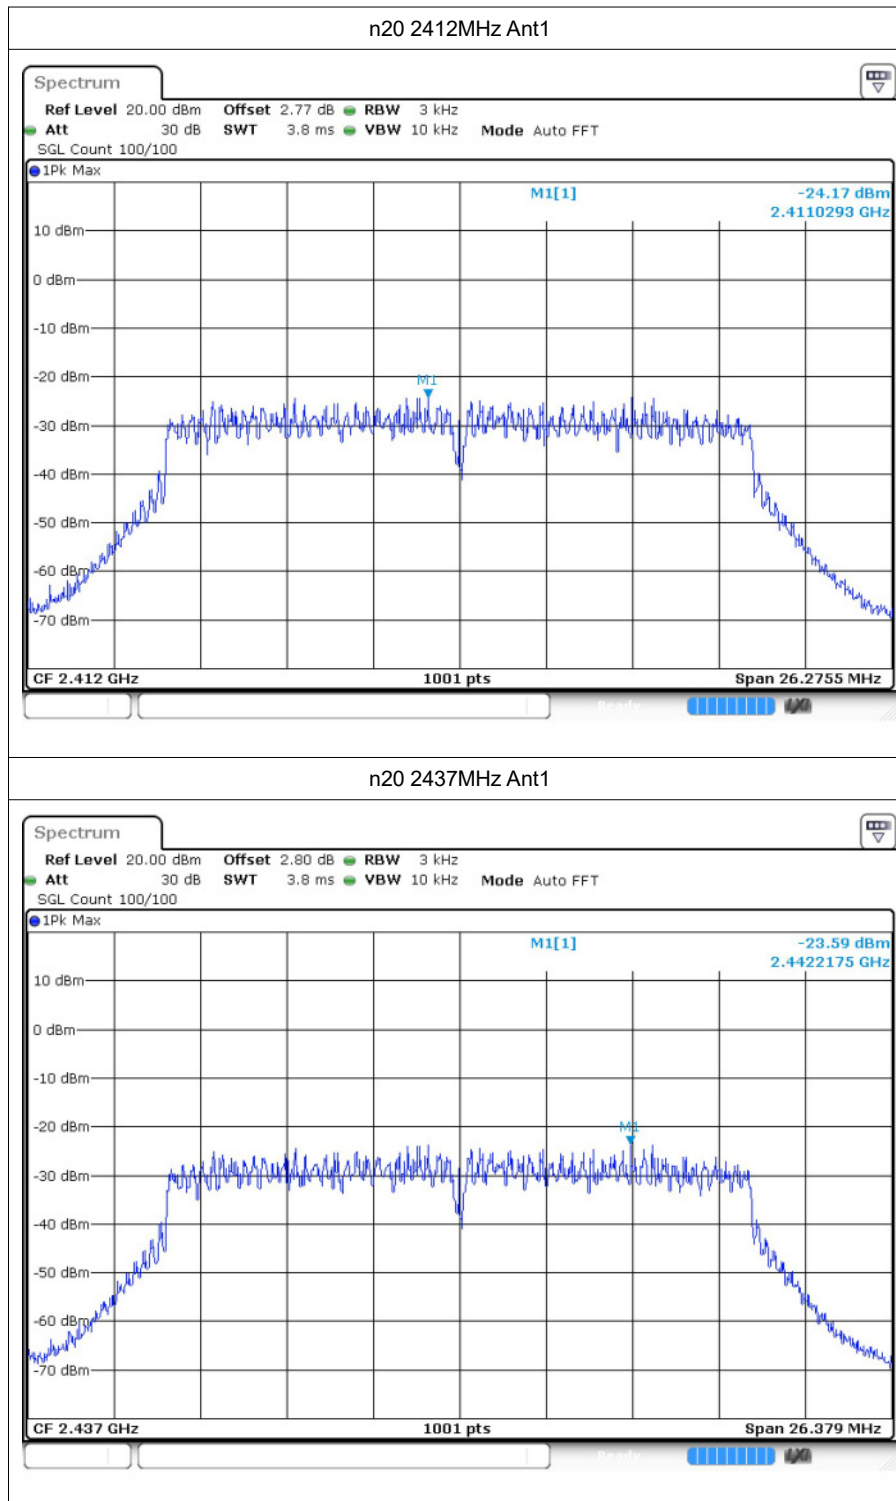

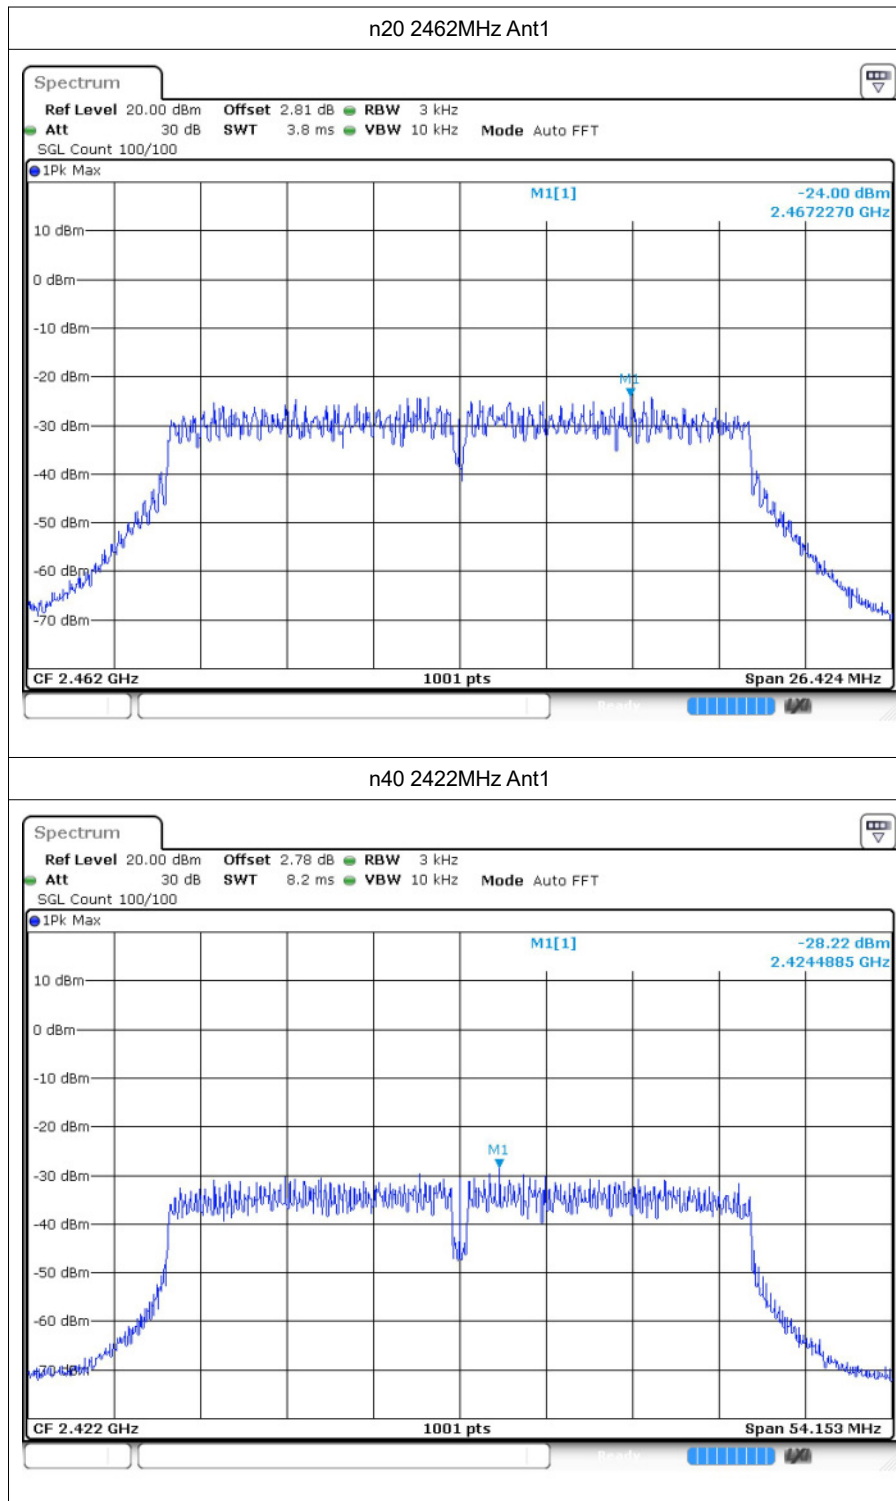

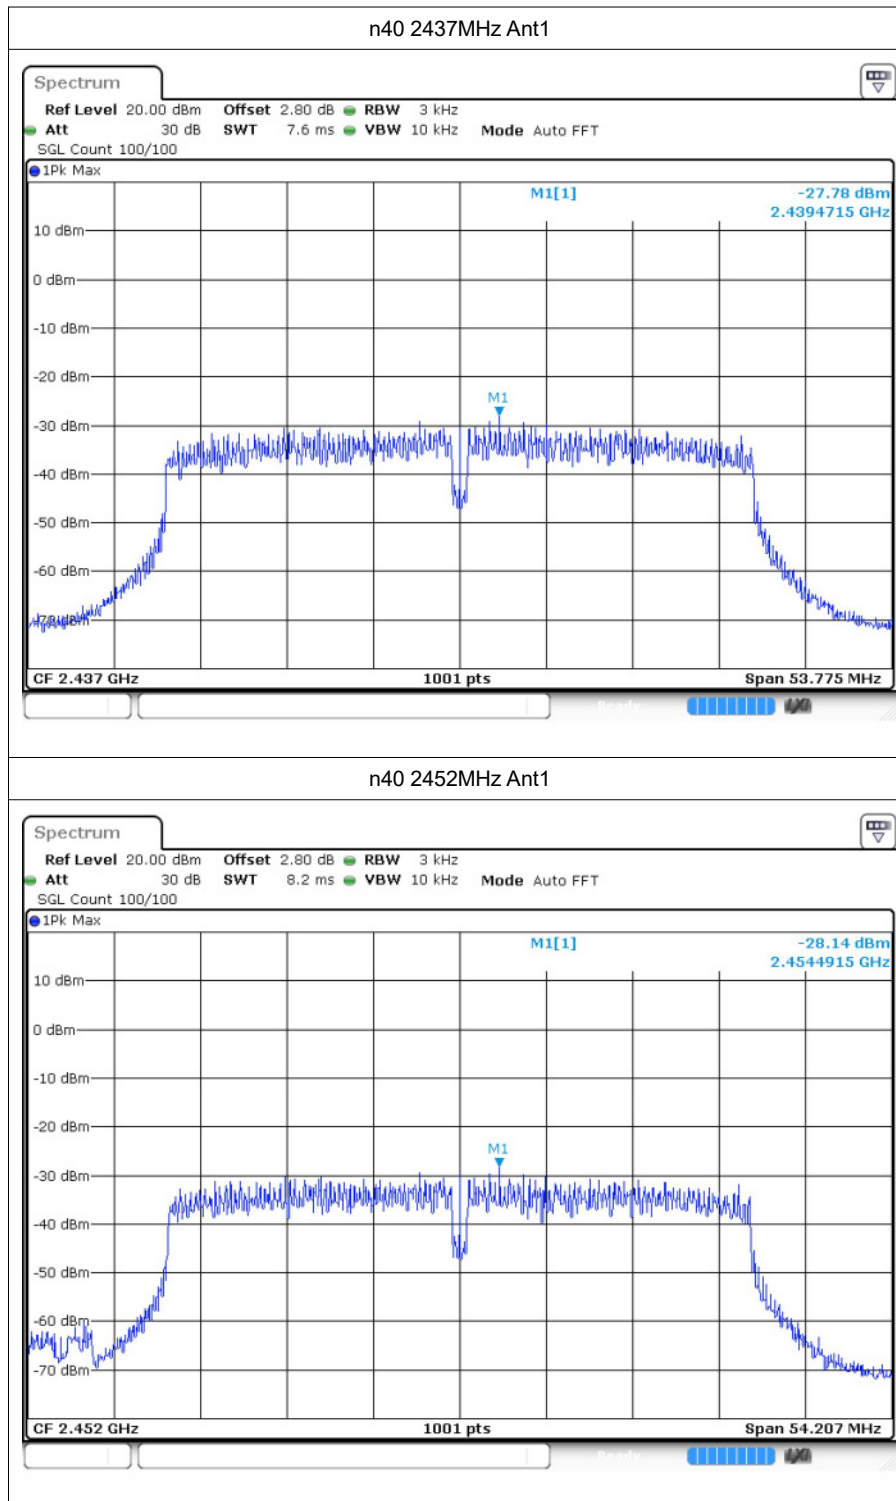



5 Band Edge


5.1 Test Result


Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-48.44	-20	Pass
b	2462	Ant1	-49.34	-20	Pass
g	2412	Ant1	-44.95	-20	Pass
g	2462	Ant1	-45.71	-20	Pass
n20	2412	Ant1	-42	-20	Pass
n20	2462	Ant1	-45.62	-20	Pass
n40	2422	Ant1	-40.65	-20	Pass
n40	2452	Ant1	-41.02	-20	Pass


5.2 Test Graphs

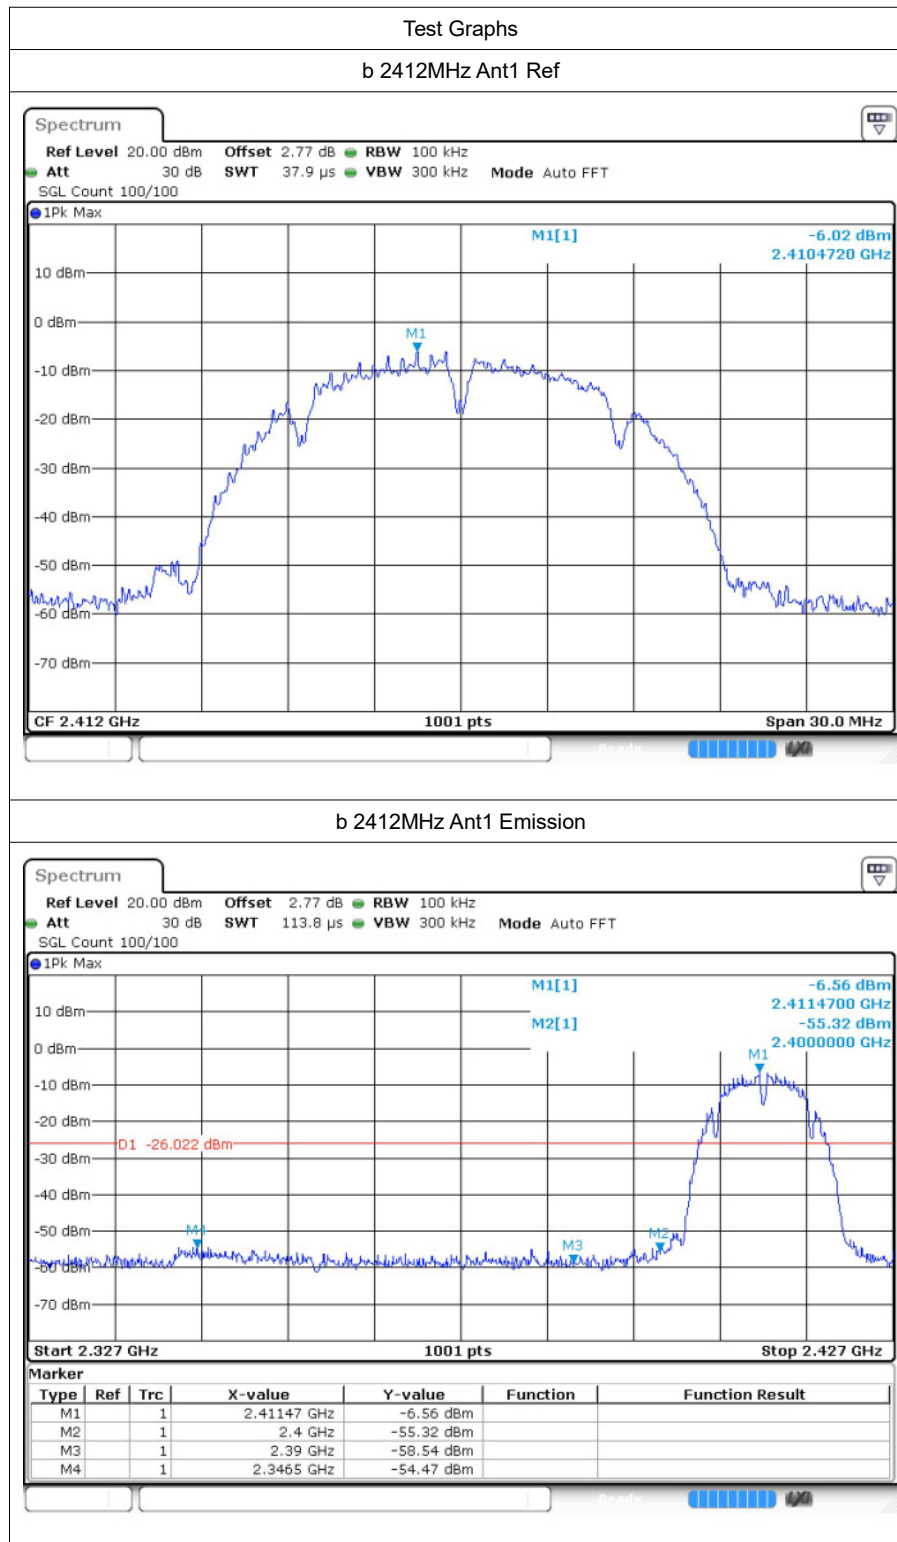


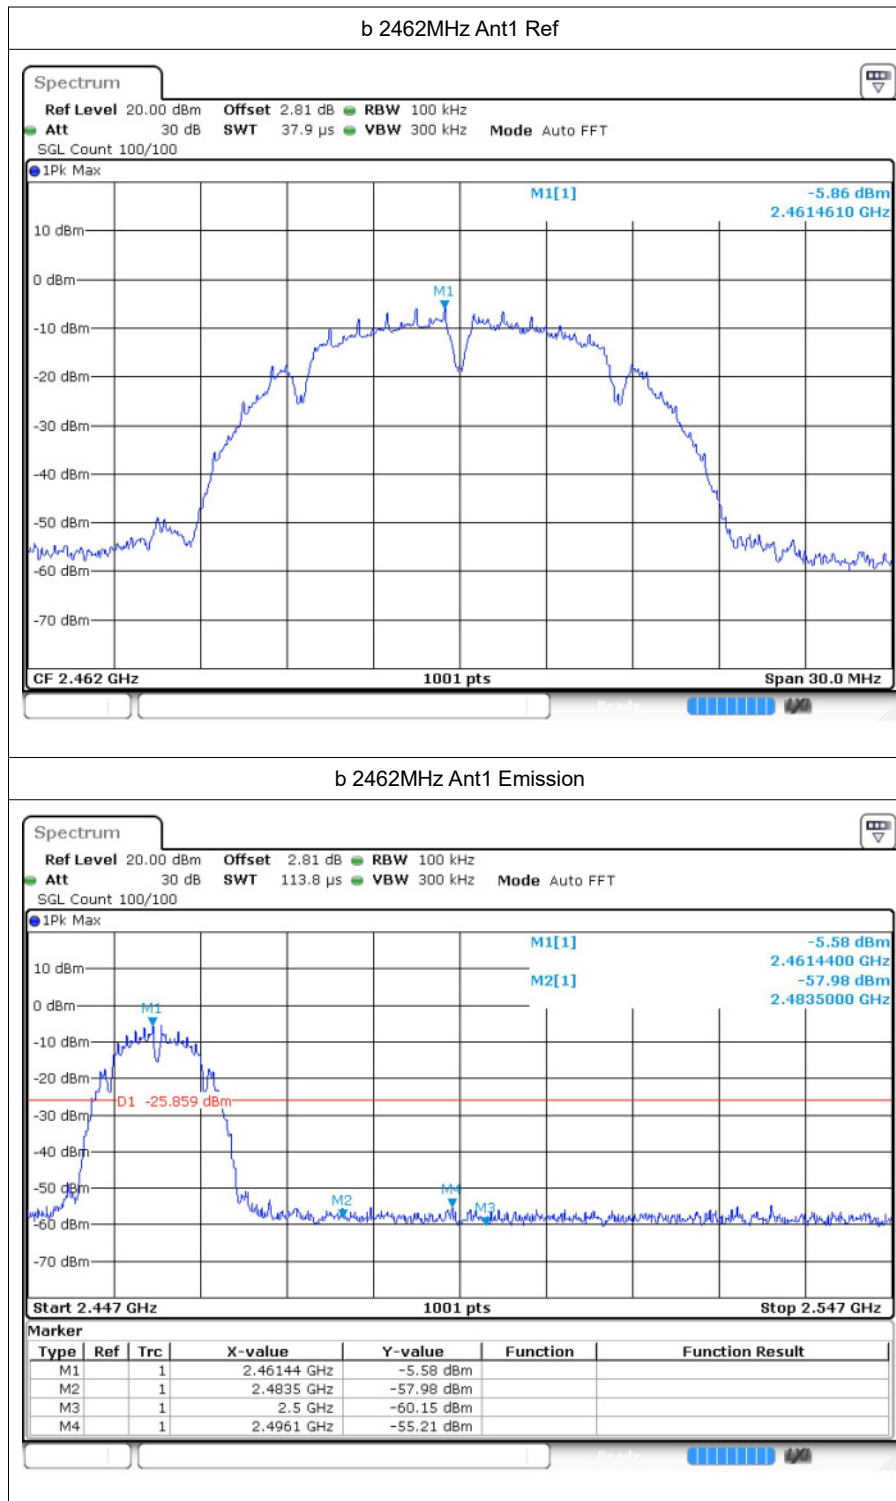


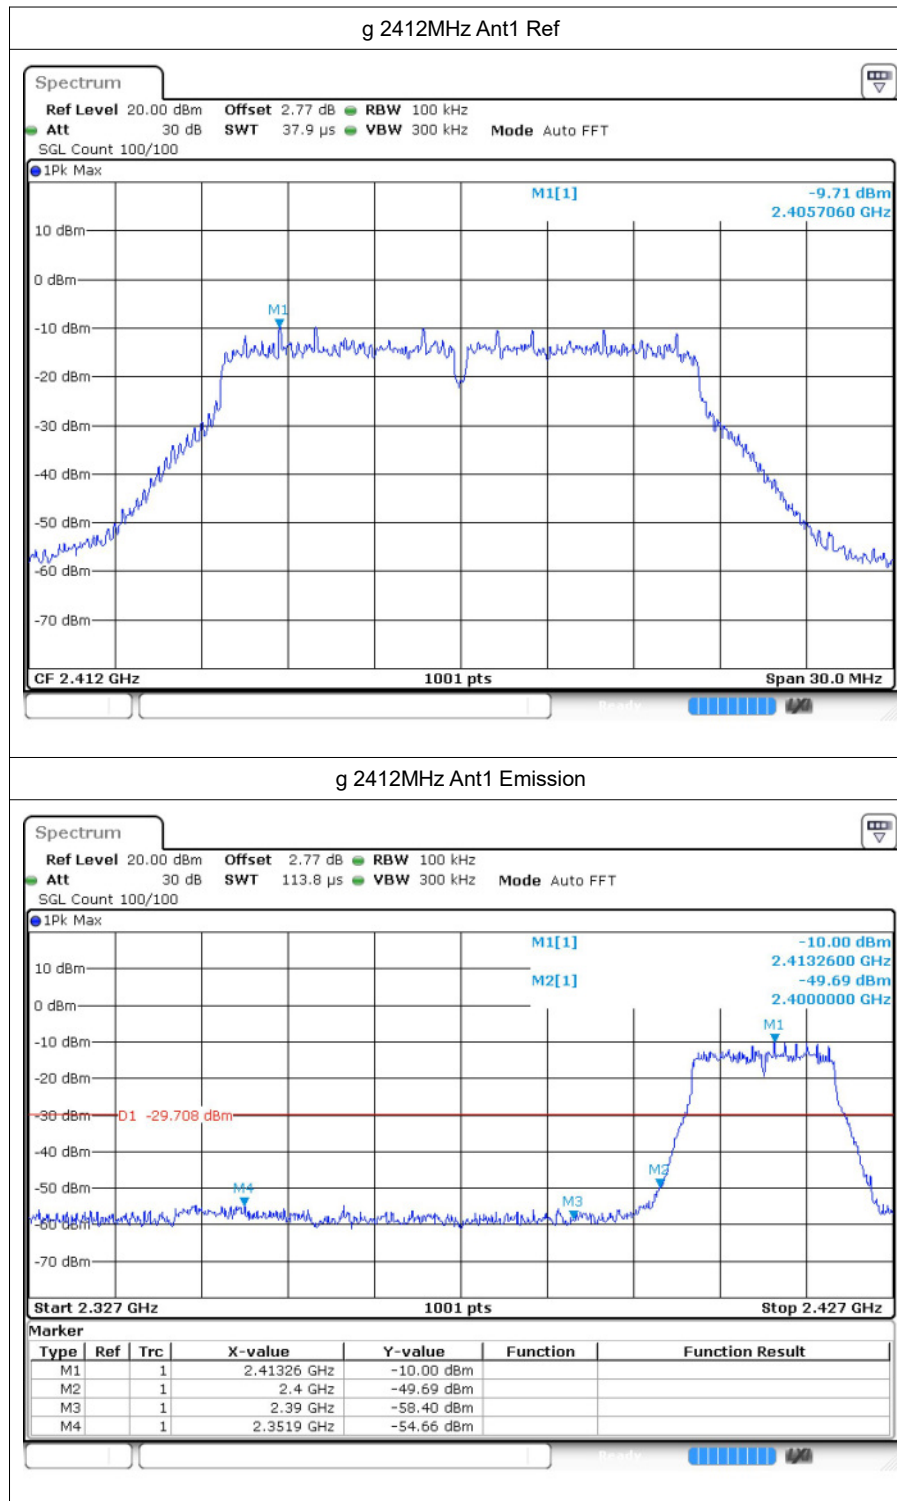


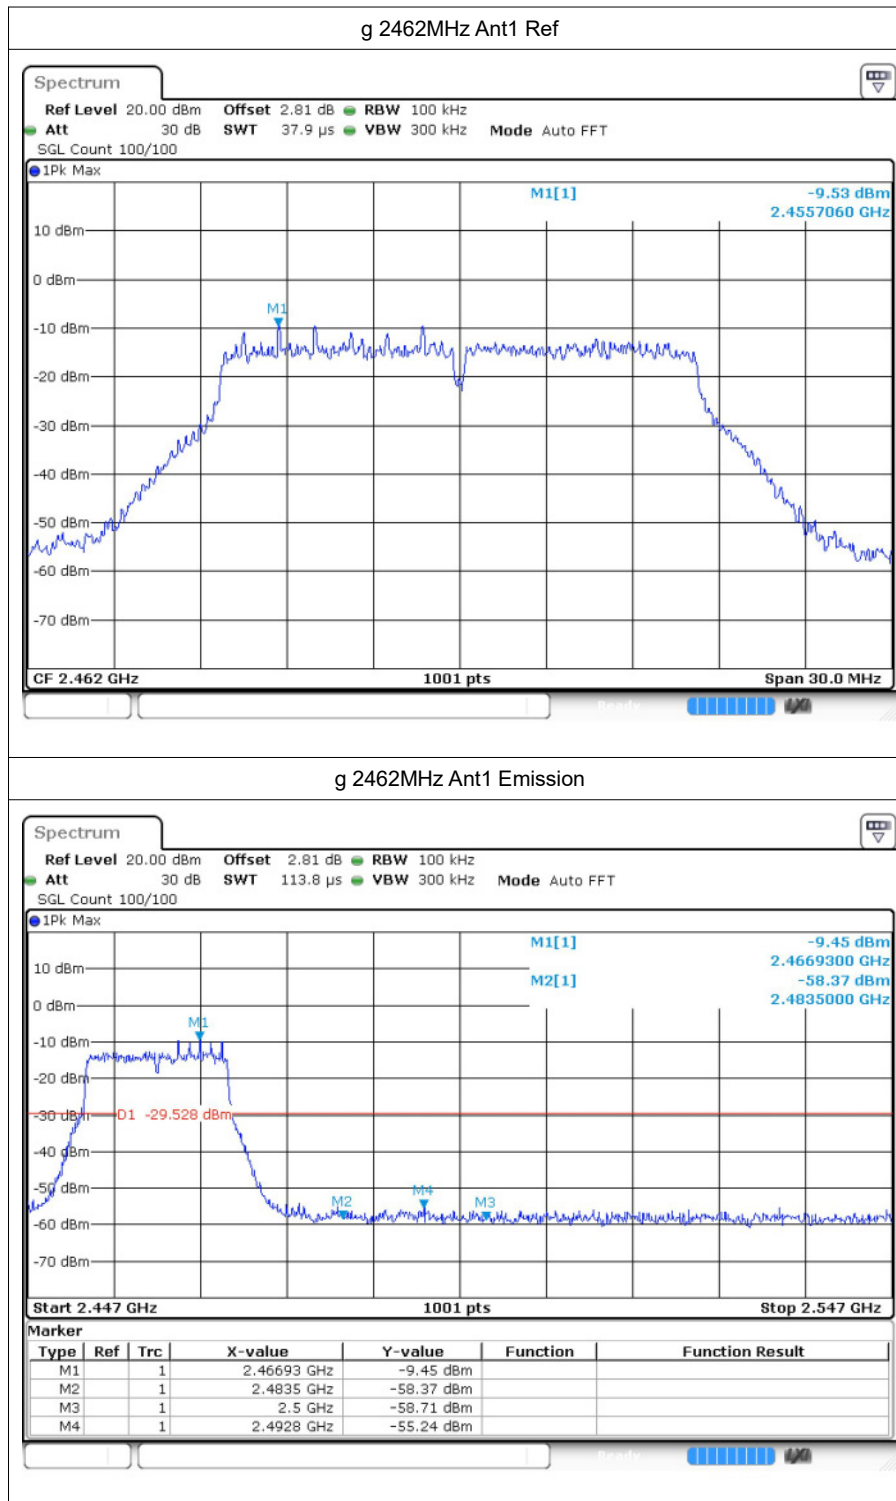

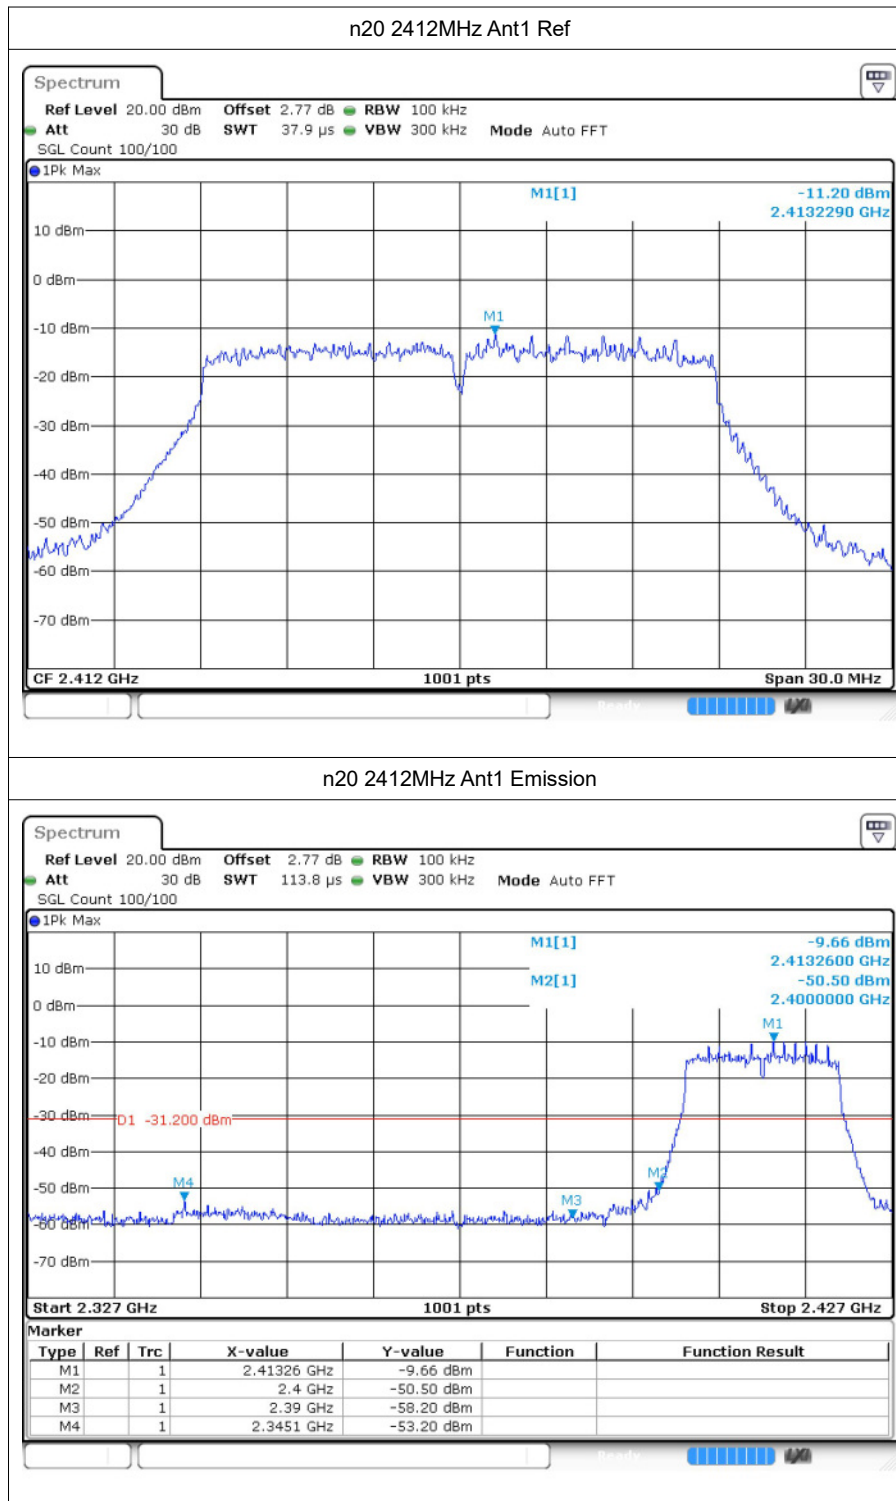

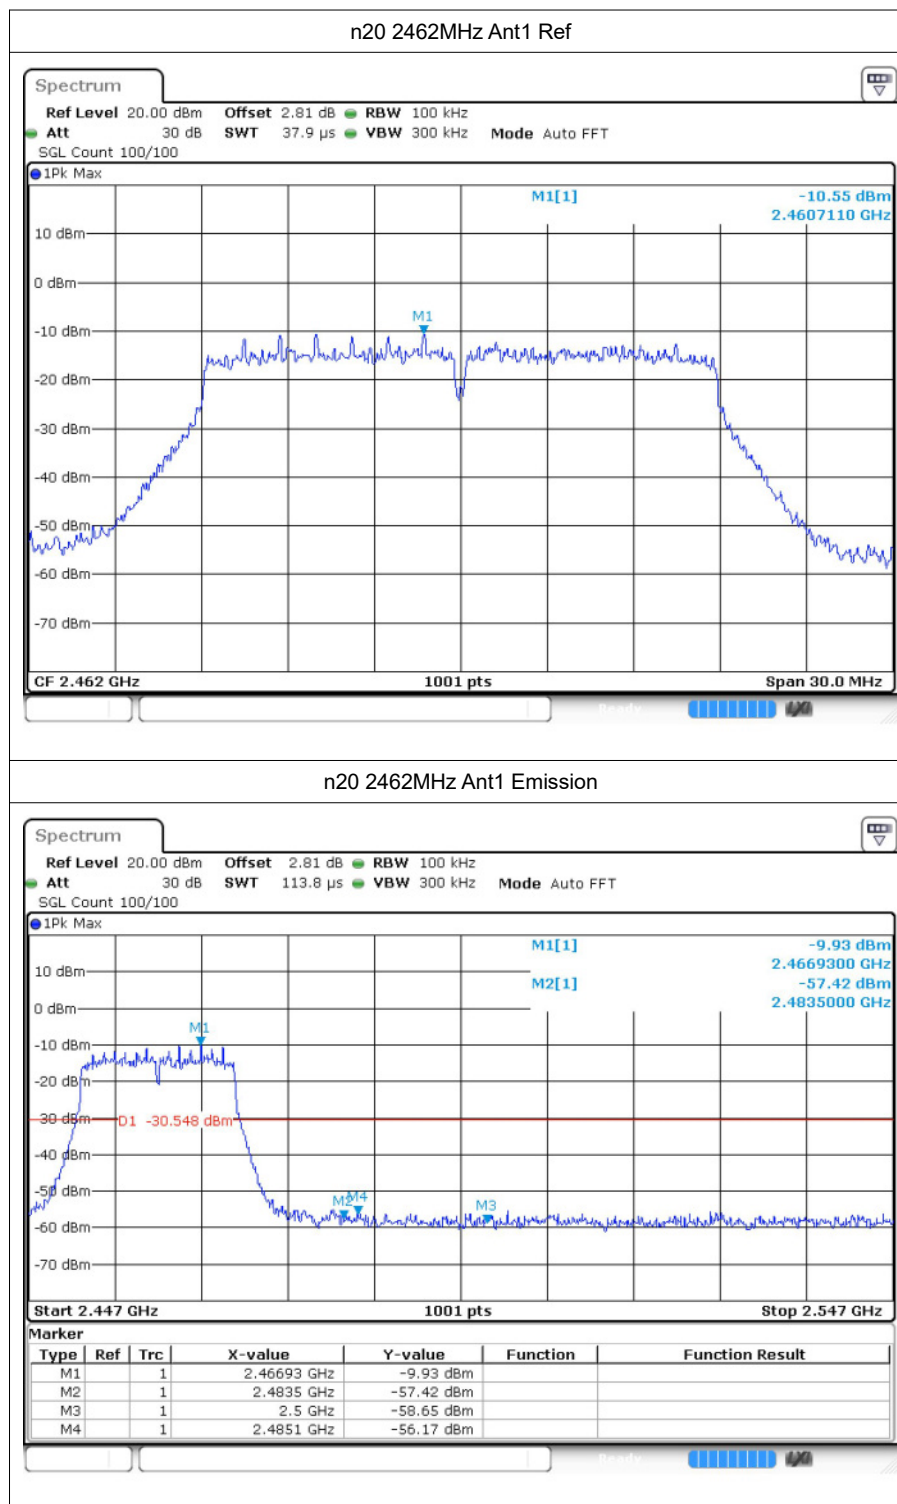

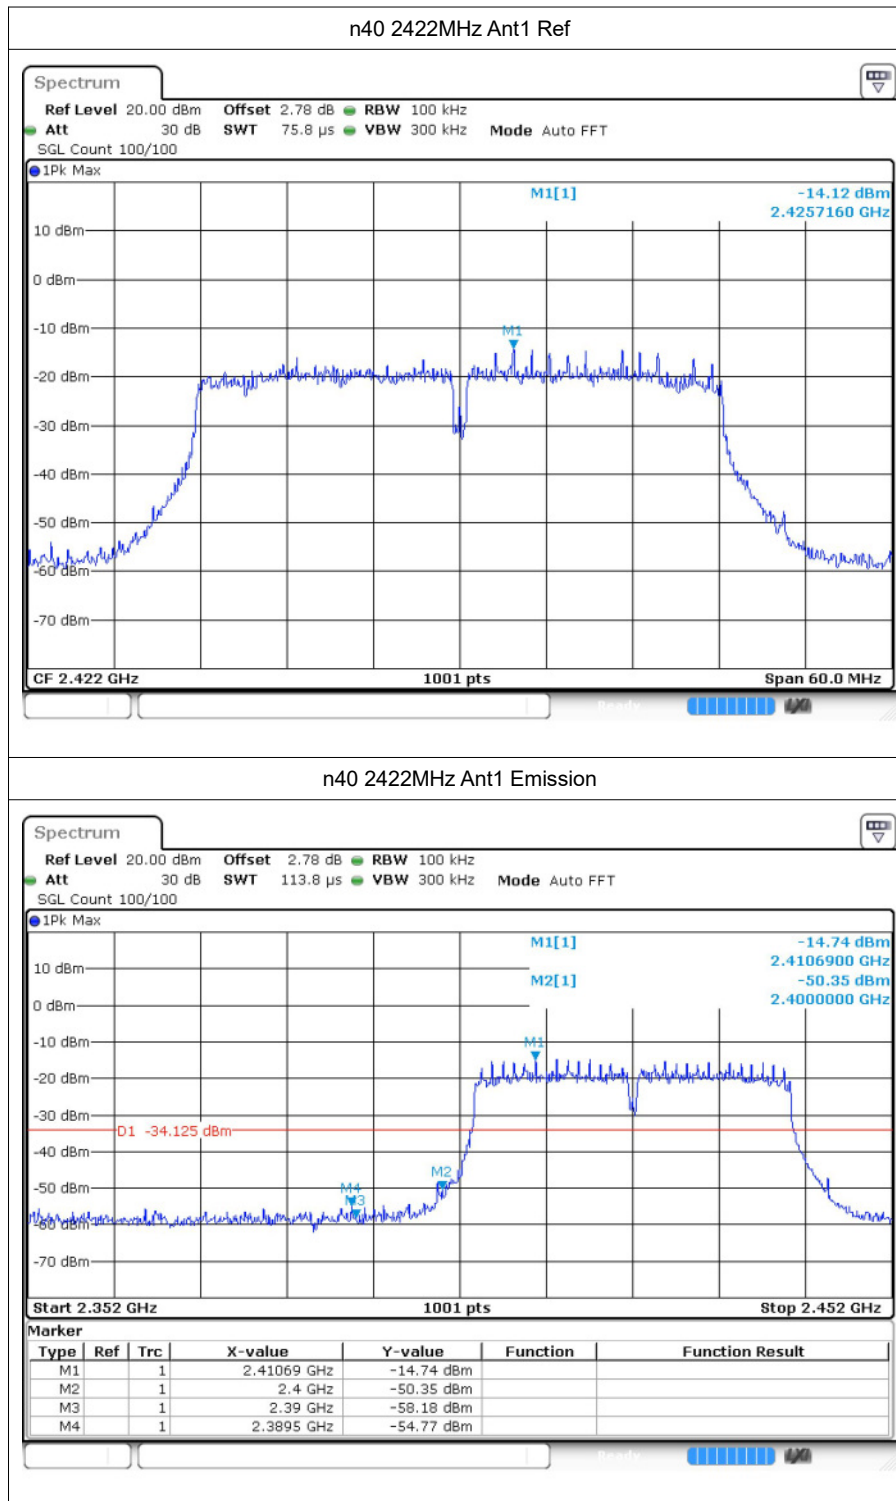

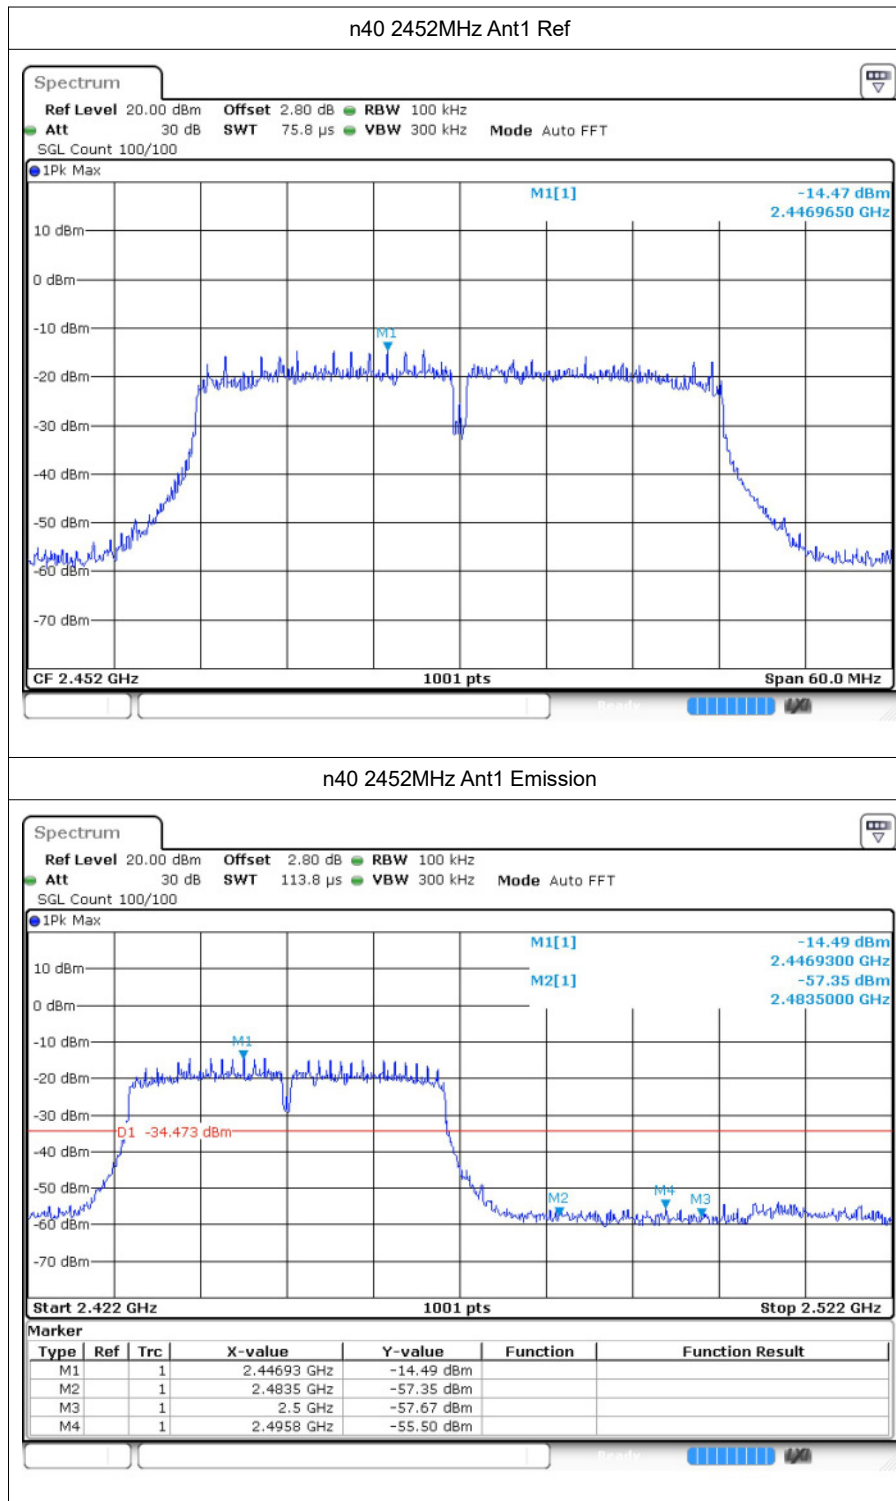

6 Conducted RF Spurious Emission

6.1 Test Result

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-35.6	-20	Pass
b	2437	Ant1	-35.17	-20	Pass
b	2462	Ant1	-33.76	-20	Pass
g	2412	Ant1	-31.96	-20	Pass
g	2437	Ant1	-30.41	-20	Pass
g	2462	Ant1	-29.05	-20	Pass
n20	2412	Ant1	-32.07	-20	Pass
n20	2437	Ant1	-30.99	-20	Pass
n20	2462	Ant1	-31.87	-20	Pass
n40	2422	Ant1	-27.3	-20	Pass
n40	2437	Ant1	-27.05	-20	Pass
n40	2452	Ant1	-27.55	-20	Pass