


折法:左右S折,封面朝外

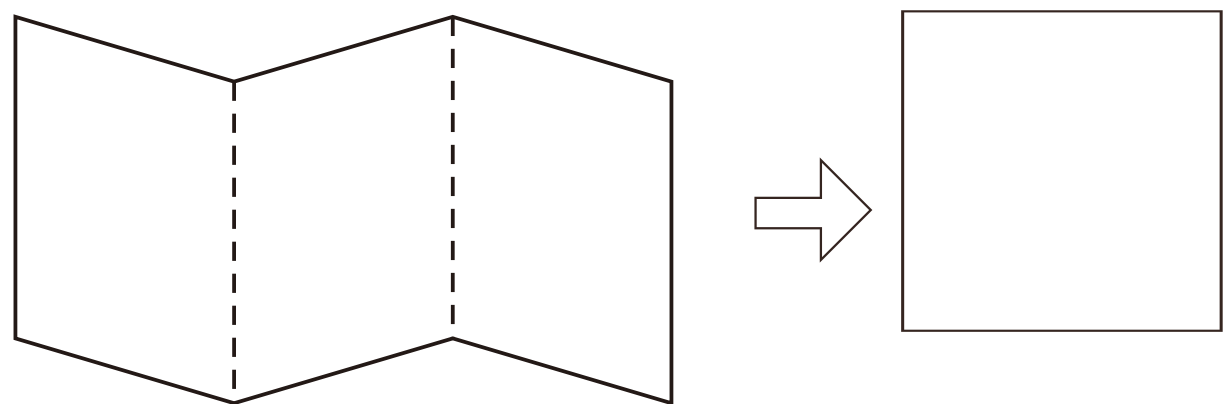


- 注意:
- 1.须正反面(双面印刷)
 - 2.印刷面不可产生影像模糊或有余影
 - 3.裁切边不可有裁切不良现象
 - 4.交货时需左右S折,封面需朝正面

说明书尺寸:103×143mm (折合尺寸)
说明书材质:128G双铜纸 四色印刷

Foldable Bluetooth 5.1 Keyboard User Manual



Note: Please read the user manual carefully before you start using this product.

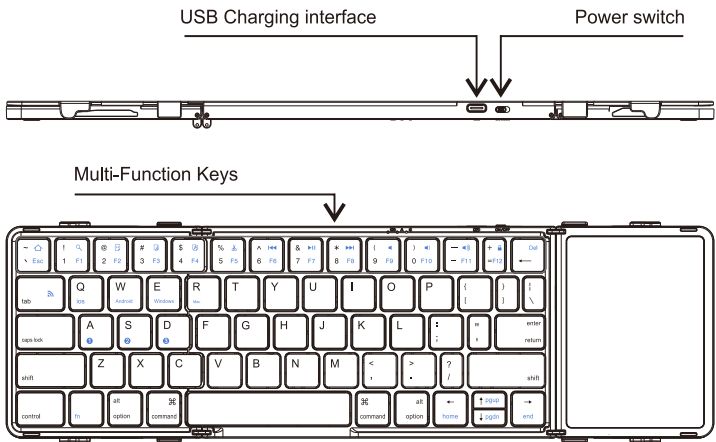

Compatible system
Windows/ios/Android/Mac

Technical Specifications

Keyboard size:346.86x106.09x8.8mm(open) 187x106.09x17.8mm(folding)	Touchpad size:92.1x67.46mm Weight:227g
---	---

Use touchpad the working current<10mA
Standby current:<1mA
Key working current<4mA Working
Sleep current:17μA
Sleep time:Ten minutes
distance:10m
Lithium battery capacity:210mAh
Awaken way: Press key
Working voltage:3.7V

Product features

Fn+	iOS/Mac Android	Fn+ shift	Windows	Fn+	Windows
	Return to Desk		Return to Desk		Esc
	Search		Search		F1
	Select		Select		F2
	Copy		Copy		F3
	Stick		Stick		F4
	Cut		Cut		F5
	Pre-Track		Pre-Track		F6
	Play/Pause		Play/Pause		F7
	Next		Next		F8
	Mute		Mute		F9
	Volume-		Volume-		F10
	Volume+		Volume+		F11
	Lock		Lock		F12


Three system switching language:

- Windows: Alt+Shift switch language.
- iOS/Mac: Ctr+Space key switch language.
- Android : Shift+Space key switch language.


Multi-channel connection:

When connecting the first device,press Fn+, then press Fn+tab to pair the code to start the connection.
When connecting the second device, press Fn+, then press Fn+tab to pair the code to start the connection.
When connecting the third device, press Fn+, and then press Fn+tab to pair the code to start the connection.
When using multiple devices at the same time, press Fn+ switch to the connected device freely.


iOS Connection instructions :




1.Please open the power switch,blue lights up, Select channel,press the Fn + tab connect button, blue light twinkles.



2.Open the set up button at starting interface and select " Bluetooth " , then searching.




3.You will find the" BT 5.1 keyboard-1503",and click the pairing name to connect .




4.There is a tip for connecting successfully, you can use your keyboard comfortably.

Mac Connection instructions :




1.Please open the power switch,blue lights up, Select channel,press the Fn + tab connect button, blue light twinkles.



2.Open the Mac System Preferences and select " Bluetooth " , then searching.




3.You will find the "BT 5.1 keyboard-1503 " ,and click the pairing name to connect.




4.There is a tip for connecting successfully , you can use your keyboard comfortably.


Win 10 Connection instructions :




1.Please open the power switch,blue lights up, Select channel,press the Fn + tab connect button, blue light twinkles.



2.Open settings, turn on Bluetooth ,click Add Bluetooth or other devices .



3.Select"Bluetooth" in the Add Device to search.




4. You will find the" BT 5.1 keyboard-1503",and click the pairing name to connect.




5.There is a tip for connecting successfully , you can use your keyboard comfortably .


Android Connection instructions :




1.Please open the power switch,blue lights up, Select channel,press the Fn + tab connect button, blue light twinkles.



2. Open the tablet PC setting" Bluetooth" into searching and pairing status.



3.You will find the" BT 5.1 keyboard-1503",and click to next step.



4.There is a tip for connecting successfully, you can use your keyboard comfortably .

Remarks : After connecting successfully the next time you don't need match code, just open the Bluetooth keyboard power switch and the tablet PC " Bluetooth ." The BT keyboard will search the device and automatic connects.

Touchpad Functions

	One finger tap — Left click		Two-finger tap — Right Click
	Two finger slide horizontally or vertically — Scroll		Two finger pinch in and out — Zoom in and out
	Three finger tap --- Search		Three fingers to left --- Switch between open windows
	Three finger swipe up — Show Task View		Three finger to the right continuous swipe — Active window switch
	Three finger swipe down — Show the desktop		Four fingers click — open Act on+center

Status Display LED

Connect : Open the power switch,blue lights up,press the connect button,blue light twinkles.
Charging : Indicator light will be on red,after fully charging,the light crush out.
Low Voltage Indication: When the voltage is below 3.3V, blue light twinkles.

Keyboard Maintenance

1,Please keep the keyboard away from liquid or humid environment,saunas,swimming pool,steam room and don't let the keyboard get wet in the rain.
2,Please don't expose the keyboard at too high or too low temperature condition.
3,Please don't put keyboard under sun for a long time.
4,Please don't put keyboard close to the flame,such as cooking stoves,candles or fireplace.
5,Avoid sharp objects scratching products,timely to recharge products to ensure the normal use.

FAQ

1,The tablet PC can't connect the BT keyboard?
1)At first check the BT keyboard is into match code state,then open the table PC Bluetooth searching.
2)Checking the BT keyboard Battery is enough,the battery low is also lead to can't connect,you need charge.

2,The keyboard indication light always flashing when use?
Keyboard indication always flashing when use, is means the keyboard will be no power , please charge the power as soon as possible.

3,The table PC display BT keyboard is disconnect?
The Bluetooth keyboard is not used for a period of time,the device will , automatically enter the sleep state in order to save power Press any key on the keyboard to wake up,and the Bluetooth connection will be automatically restored.

Warranty Card

User information
Company or personage full name _____


Contact address _____

TEL _____ **Zip** _____

The purchased product name and model NO. _____

Purchased date _____

This reason due to the product broken and damage is not include on the warranty .
1) Accident , misuse , improper operation , or any unauthorized repair , modified or removed.
2) Improper operation or maintenance , when operation violation of the instructions or connectionun suitability power supply.
3) Or use consumables (such as spare batteries) that are not provided by the company , but applicable laws Except where such restrictions are prohibited .



FCC Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.