AB236 说明书
成品尺寸: 60x90mm 展开尺寸: 360x90mm
100克粉卡，单黑印刷，风琴折

封面


正面

SEAJIC®
Portable Selfie Tripod



User Manual【AB236】

Product Introduction

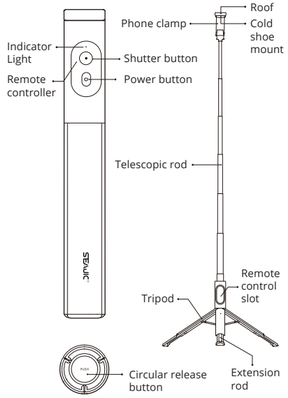


Deploy/Fold the Tripod

Deploy the tripod

1.As shown, hold the main body of the selfie stick and continuously press the circular release button until the tripod fully deploys




2.Pull out the tripod's bottom extension rods as needed to increase height.



How to Fold the Tripod

1.If the tripod's bottom extension rods are deployed, retract them one by one first



2.Hold the main body of the selfie stick, push the top of the phone clamp to retract the tripod, then pinch the tripod's joint until a click is heard.



Operating instructions

1.Pull out the phone clamp and telescopic rod from the t op of the selfie stick, as shown in the figure below




2.The phone clamp is capable of 90-degree horizontal rotation in both left and right directions, as shown in the figure below



Phone Mount

Release the lower clamp of the phone holder, insert the phone while avoiding its buttons, then adjust the upper and lower clamps to secure the phone, ensuring the back of the phone is flush against the holder, as shown in the figure below.

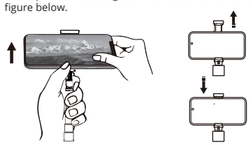

Cold Shoe Function Instructions

Cold shoe mount extension installation:
Rotate to open the top cover and mount compatible fill lights or other devices to the cold shoe mount.



Note:
When rotating the top cover, hold the phone clamp to prevent damage from over-rotation of the telescopic rod.

Specification & Parameters

Product Name:	"Two-Stage Release" Mini Selfie Stick
Model:	AB236
Overall dimensions:	229.5*36*30mm
Product weight:	228g
Connection method:	Bluetooth
Remote control range:	10m
Supported systems:	Android/iOS/HarmonyOS
Product material:	ABS+PC/aluminum alloy
Battery type:	Lithium manganese coin battery
Battery model:	CR1632

Bluetooth Connection to Phone

1.Mount the phone on the holder, then press and hold the power button for 3 seconds until the green indicator light flashes to enter Bluetooth pairing mode;
2.Turn on the Bluetooth settings on your phone, search for and connect to "AB236"; the green indicator light will stay on once successfully connected;
3.Press the selfie stick's shutter button to take photos. Press and hold the power button for 3 seconds again to power off the selfie stick and exit Bluetooth pairing mode.



Note:
The selfie stick is set to automatically connect to the successfully paired phone. If you need to switch the connected device, please first unpair the Bluetooth connection on the currently paired phone, then pair with and connect to the new device.

Remote Control Function Instructions

Power-on method: Press and hold the power button for 2 seconds to turn on. The green indicator light will stay on for 3 seconds to enter reconnection mode.
Power-off method: When powered on or in sleep mode, press and hold the power button for 3 seconds until the green indicator light flashes 3 times to shut down. The remote control will automatically shut down 15 minutes after entering sleep mode (green indicator light flashes 3 times).
Paired state: Green indicator light stays on for 5 seconds before turning off.
Unpaired state: Green indicator light flashes.
Wake from sleep mode: When in sleep mode, press the shutter button – the shutter indicator light flashes once, then the device enters reconnection/broadcast flashing mode.
Auto-pairing on startup: When powered on, it will automatically reconnect to the previously paired phone if the phone's Bluetooth is enabled.Auto-reconnection after **wake-up:** Upon waking from sleep mode, if the previously paired phone's Bluetooth remains enabled, it will automatically reconnect.
Taking photos/videos: Press the shutter button to take a photo/video (green indicator light flashes once).
Removing the connection on the phone: When the remote is connected to the phone, cancel the pairing in the phone's settings and the remote will enter sleep mode directly.
Out-of-range disconnection: When the remote control and phone are connected, if either device moves out of Bluetooth range and disconnect, the remote control will automatically enter sleep mode.
Disabling Bluetooth on the phone during connection: If the phone's Bluetooth is disabled while connected to the remote control, the remote control will immediately enter sleep mode.
Inactivity period after connection: After 5 minutes without photo capture while connected, the remote control enters sleep mode. After 15 minutes in sleep mode, the green indicator light flashes 3 times before automatic shutdown.

封底

背面

After-sales services of SEAJIC

After-sales service commitment of SEAJIC: We provide three-warranty services for all products which are sold through the official channel or authorized channel of SEAJIC in strict accordance with Law of the People's Republic of China on Protection of Consumer Rights and Interests. For regions where special three-warranty regulations are executed, SEAJIC hereby undertakes to abide by the local regulations. Please keep the warranty card and effective purchase voucher properly in order to safeguard your legal rights.

Warranty Card of SEAJIC

User Information
Name: _____
Contact phone: _____
Date of purchase: _____
Purchase platform and shop name: _____
Order No.: _____
Product information
Model: _____

OSM PASS Qualified Inspector


✳ OSM (China) owns the right of interpretation of pictures and texts in the Manual.

Remote Control Function Instructions

Low battery indication: 1. When voltage drops below 2.6V, upon power-on, if the remote control is not paired, it will initiate pairing or reconnection. After successful pairing, the green indicator light stays on for 5 seconds, then the red indicator light flashes 5 times (1-second interval), and finally turns off.
2. During operation, the red indicator light illuminates instead of green for operational feedback.
Power requirement: Standby current <1μA
Bluetooth name: AB236
Battery capacity: CR1632/110mAh
Bluetooth version: 4.2 or higher
Number of buttons: 2
Number of indicator lights: 1
Range requirement: Effective within 10 meters


Remove Remote Control

As shown in the figure, pry the remote control from its bottom to remove



Replace Remote Control Battery

Insert a SIM eject tool or appropriate instrument into the pinhole at the bottom of the remote control, remove the battery cover, replace the battery, and then reinstall the battery cover



Tip:
a: When installing batteries, ensure the positive terminal faces outward.
b: The battery model is CR1632. Please purchase compatible batteries from reputable brands.

Important Safety Information

1 Please read all safety and operating instructions carefully before use, and keep the user manual properly for future reference.
2 Please note all warnings on the device and user manual.
3 Please follow all operating and usage instructions.
4 Use accessories/attachments specified by the manufacturer only.
5 This device must be serviced by official repair personnel.
6 If this device is damaged, such as bracket damage, liquid ingress, exposure to rain or moisture, malfunction, or drop damage, please contact official customer service for related matters.

Name and content of hazardous substances in the product

Parts	Pb Lead	Hg Mercury	Cd Cadmium	Cr(VI) Hexavalent Chromium	PBBs Polybrominated piphenyls	PBDEs Polybrominated diphenyl ethers
Selfie stick	○	○	○	○	○	○
Packing accessories	○	○	○	○	○	○

This table was prepared according to SJ/T11364
○ : It means that the content of the toxic and hazardous substance in all the homogeneous materials of the component is below the limit requirements specified in GB/T 26572.
X: It means that the content of the toxic and harmful substance in at least one homogeneous material of the component exceeds the limit requirements specified by GB/T 26572.
To protect the environment and human health:
1. Once scrapped, the product should be separated from the household wastes; users have responsibilities for sending the scrapped products to the designated recycling center;
2. The recycling center should recycle the product's useful materials properly;
3. For details of scrapping the product, please consult the local government, waste disposal center or dealer;

Attention

To avoid damaging the product, please

- Do not expose the product to rain or a wet environment;
- Do not put open flames (such as lighted candle) on or near the product;
- Do not place the product near heat sources, such as oven, cooler, stove or other heating devices;
- Do not expose the product to boiled water;
- Do not put the product in articles containing liquids, such as vase;
- Do not place the product in hot places;
- Do not pull the product by force;
- Do not open the product's back cover by force, or repair its internal parts without permission to avoid electric shock or damage.

FCC Requirement

1/ Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.
2/ Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
– Reorient or relocate the receiving antenna.
– Increase the separation between the equipment and receiver.
– Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
– Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

The equipment complies with FCC Radiation exposure limit set forth for uncontrolled environment. The device shall be operated and installed without restrcition.

Public Account

Tik Tok