



# FCC TEST REPORT

**Test report  
On Behalf of  
Shenzhen Ruichi Technology Co., Ltd  
For  
TMKB**

**Model No.: TMKB GK61, Please refer to page 6 for Serial models**

**FCC ID: 2A6LZ-TMKBGK61**

**Prepared For :** Shenzhen Ruichi Technology Co., Ltd  
No. 1607, plant 1, kanghuai Industrial Park, No. 60, Ping'an Road, Dafu  
community, Guanlan street, Longhua District, Shenzhen, China

**Prepared By :** Shenzhen HUAKE Testing Technology Co., Ltd.  
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,  
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Date of Test:** Mar. 22, 2022 ~ Mar. 31, 2022

**Date of Report:** Mar. 31, 2022

**Report Number:** HK2203221079-2E

**TEST RESULT CERTIFICATION****Applicant's name** ..... : Shenzhen Ruichi Technology Co., LtdAddress ..... : No. 1607, plant 1, kanghuai Industrial Park, No. 60, Ping'an Road,  
Dafu community, Guanlan street, Longhua District, Shenzhen,  
China**Manufacture's Name** ..... : Shenzhen Ruichi Technology Co., LtdAddress ..... : No. 1607, plant 1, kanghuai Industrial Park, No. 60, Ping'an Road,  
Dafu community, Guanlan street, Longhua District, Shenzhen,  
China**Product description**

Trade Mark:



Product name ..... : TMKB

Model and/or type reference : TMKB GK61, Please refer to page 6 for Serial models

Standards ..... : FCC Rules and Regulations Part 15 Subpart C Section 15.249  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** .....Date (s) of performance of tests ..... : **Mar. 22, 2022 ~ Mar. 31, 2022**Date of Issue ..... : **Mar. 31, 2022**Test Result ..... : **Pass**

Testing Engineer : \_\_\_\_\_

(Gary Qian)

Technical Manager : \_\_\_\_\_

(Eden Hu)

Authorized Signatory : \_\_\_\_\_

(Jason Zhou)



**Table of Contents****Page**

|                                          |           |
|------------------------------------------|-----------|
| <b>1 . TEST SUMMARY</b>                  | <b>5</b>  |
| 1.1 . Test Procedures and Results        | 5         |
| 1.2 . Information of the Test Laboratory | 5         |
| 1.3 . Measurement Uncertainty            | 5         |
| <b>2 . GENERAL INFORMATION</b>           | <b>6</b>  |
| 2.1 . General Description of EUT         | 6         |
| 2.2 . Operation of EUT During Testing    | 7         |
| 2.3 . Description of Test Setup          | 8         |
| 2.4 . Measurement Instruments List       | 9         |
| <b>3 . CONDUCTED EMISSIONS TEST</b>      | <b>10</b> |
| 3.1. Conducted Power Line Emission Limit | 10        |
| 3.2. Test Setup                          | 10        |
| 3.3. Test Procedure                      | 10        |
| 3.4. Test Result                         | 11        |
| <b>4. RADIATED EMISSION TEST</b>         | <b>13</b> |
| 4.1. Radiation Limit                     | 13        |
| 4.2. Test Setup                          | 13        |
| 4.3. Test Procedure                      | 14        |
| 4.4. Test Result                         | 14        |
| <b>5. BAND EDGE</b>                      | <b>20</b> |
| 5.1. Limits                              | 20        |
| 5.2. Test Procedure                      | 20        |
| 5.3. Test Result                         | 21        |
| <b>6. OCCUPIED BANDWIDTH MEASUREMENT</b> | <b>23</b> |
| 6.1. Test Setup                          | 23        |
| 6.2. Test Procedure                      | 23        |
| 6.3. Measurement Equipment Used          | 23        |
| 6.4. Test Result                         | 23        |
| <b>7. ANTENNA REQUIREMENT</b>            | <b>25</b> |
| <b>8. PHOTOGRAPH OF TEST</b>             | <b>26</b> |
| <b>9. PHOTOS OF THE EUT</b>              | <b>28</b> |



**\*\* Modified History \*\***

| Revision     | Description                 | Issued Data   | Remark     |
|--------------|-----------------------------|---------------|------------|
| Revision 1.0 | Initial Test Report Release | Mar. 31, 2022 | Jason Zhou |
|              |                             |               |            |
|              |                             |               |            |



## 1. TEST SUMMARY

### 1.1. Test Procedures and Results

| DESCRIPTION OF TEST            | SECTION NUMBER   | RESULT    |
|--------------------------------|------------------|-----------|
| CONDUCTED EMISSIONS TEST       | 15.207           | COMPLIANT |
| RADIATED EMISSION TEST         | 15.249(a)/15.209 | COMPLIANT |
| BAND EDGE                      | 15.249(d)/15.205 | COMPLIANT |
| OCCUPIED BANDWIDTH MEASUREMENT | 15.215 (c)       | COMPLIANT |
| ANTENNA REQUIREMENT            | 15.203           | COMPLIANT |

### 1.2. Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

### 1.3. Measurement Uncertainty

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.71dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.28dB, k=2



## 2. GENERAL INFORMATION

### 2.1. General Description of EUT

|                      |                                                                                                                                                                                                                                                                                              |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment:           | TMKB                                                                                                                                                                                                                                                                                         |
| Model Name:          | TMKB GK61                                                                                                                                                                                                                                                                                    |
| Series Model:        | TMKB T61, TMKB T63, TMKB T68, TMKB T71, TMKB T75, TMKB T78, TMKB T83, TMKB T87, TMKB T89, TMKB T93, TMKB T96, TMKB T99, TMKB T104, TMKB T108, TMKB T44, TMKB T22, TMKB T55, TMKB M1, TMKB M2, TMKB M3, TMKB M4, TMKB M5, TMKB M6, TMKB E-1, TMKB E-2, TMKB E-3, TMKB E-4, TMKB E-5, TMKB E-6 |
| Model Difference:    | All model's the function, software and electric circuit are the same, only with a product color, appearance and model named different. Test sample model: TMKB GK61.                                                                                                                         |
| FCC ID:              | 2A6LZ-TMKBGK61                                                                                                                                                                                                                                                                               |
| Antenna Type:        | PCB Antenna                                                                                                                                                                                                                                                                                  |
| Antenna Gain:        | 0dBi                                                                                                                                                                                                                                                                                         |
| Operation frequency: | 2402-2480MHz                                                                                                                                                                                                                                                                                 |
| Number of Channels:  | 40CH                                                                                                                                                                                                                                                                                         |
| Modulation Type:     | GFSK                                                                                                                                                                                                                                                                                         |
| Power Source:        | DC 3.7V from battery or DC 5V from Type-C                                                                                                                                                                                                                                                    |
| Power Rating:        | DC 3.7V from battery or DC 5V from Type-C                                                                                                                                                                                                                                                    |



### 2.1.1. Carrier Frequency of Channels

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 1       | 2402            | 15      | 2428            | 29      | 2458            |
| 2       | 2404            | 16      | 2430            | 30      | 2460            |
| 3       | 2406            | 17      | 2432            | 31      | 2462            |
| 4       | 2408            | 18      | 2434            | 32      | 2464            |
| 5       | 2410            | 19      | 2436            | 33      | 2466            |
| 6       | 2412            | 20      | 2438            | 34      | 2468            |
| 7       | 2414            | 21      | 2440            | 35      | 2470            |
| 8       | 2416            | 22      | 2442            | 36      | 2472            |
| 9       | 2418            | 23      | 2444            | 37      | 2474            |
| 10      | 2420            | 24      | 2446            | 38      | 2476            |
| 11      | 2422            | 25      | 2448            | 39      | 2478            |
| 12      | 2424            | 26      | 2450            | 40      | 2480            |
| 13      | 2426            | 27      | 2452            |         |                 |
| 14      | 2428            | 28      | 2454            |         |                 |

### 2.2. Operation of EUT During Testing

Operating Mode

The mode is used: **Transmitting mode**

Low Channel: 2402MHz


Middle Channel: 2440MHz

High Channel: 2480MHz



### 2.3. Description of Test Setup

Operation of EUT during conducted and radiation below 1GHz testing:



Operation of EUT during radiation above 1GHz testing:



PC information

Model: TP00067A

Input: DC20V, 2.25-3.25A

Output: 5VDC, 0.5A

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.

**2.4. Measurement Instruments List**

| Item | Equipment                               | Manufacturer    | Model No.           | Serial No. | Last Cal.     | Cal. Interval |
|------|-----------------------------------------|-----------------|---------------------|------------|---------------|---------------|
| 1.   | L.I.S.N.<br>Artificial Mains<br>Network | R&S             | ENV216              | HKE-002    | Feb. 18, 2022 | 1 Year        |
| 2.   | Receiver                                | R&S             | ESCI 7              | HKE-010    | Feb. 18, 2022 | 1 Year        |
| 3.   | RF automatic<br>control unit            | Tonscend        | JS0806-2            | HKE-060    | Feb. 18, 2022 | 1 Year        |
| 4.   | Spectrum analyzer                       | R&S             | FSP40               | HKE-025    | Feb. 18, 2022 | 1 Year        |
| 5.   | Spectrum analyzer                       | Agilent         | N9020A              | HKE-048    | Feb. 18, 2022 | 1 Year        |
| 6.   | Preamplifier                            | Schwarzbeck     | BBV 9743            | HKE-006    | Feb. 18, 2022 | 1 Year        |
| 7.   | EMI Test Receiver                       | Rohde & Schwarz | ESCI 7              | HKE-010    | Feb. 18, 2022 | 1 Year        |
| 8.   | Bilog Broadband<br>Antenna              | Schwarzbeck     | VULB9163            | HKE-012    | Feb. 18, 2022 | 1 Year        |
| 9.   | Loop Antenna                            | Schwarzbeck     | FMZB 1519 B         | HKE-014    | Feb. 18, 2022 | 1 Year        |
| 10.  | Horn Antenna                            | Schwarzbeck     | 9120D               | HKE-013    | Feb. 18, 2022 | 1 Year        |
| 11.  | Pre-amplifier                           | EMCI            | EMC051845S<br>E     | HKE-015    | Feb. 18, 2022 | 1 Year        |
| 12.  | Pre-amplifier                           | Agilent         | 83051A              | HKE-016    | Feb. 18, 2022 | 1 Year        |
| 13.  | EMI Test Software<br>EZ-EMC             | Tonscend        | JY3120-B<br>Version | HKE-083    | N/A           | N/A           |
| 14.  | Power Sensor                            | Agilent         | E9300A              | HKE-086    | Feb. 18, 2022 | 1 Year        |
| 15.  | Spectrum analyzer                       | Agilent         | N9020A              | HKE-048    | Feb. 18, 2022 | 1 Year        |
| 16.  | Signal generator                        | Agilent         | N5182A              | HKE-029    | Feb. 18, 2022 | 1 Year        |
| 17.  | Signal Generator                        | Agilent         | 83630A              | HKE-028    | Feb. 18, 2022 | 1 Year        |
| 18.  | Shielded room                           | Shiel Hong      | 4*3*3               | HKE-039    | Dec. 09, 2021 | 3 Year        |
| 19.  | Hight gain antenna                      | Schwarzbeck     | LB-180400KF         | HKE-054    | Feb. 18, 2022 | 1 Year        |



### 3. CONDUCTED EMISSIONS TEST

#### 3.1. Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following.

| Frequency<br>(MHz) | Maximum RF Line Voltage (dBμV) |      |         |        |
|--------------------|--------------------------------|------|---------|--------|
|                    | CLASS A                        |      | CLASS B |        |
|                    | Q.P.                           | Ave. | Q.P.    | Ave.   |
| 0.15 - 0.50        | 79                             | 66   | 66-56*  | 56-46* |
| 0.50 - 5.00        | 73                             | 60   | 56      | 46     |
| 5.00 - 30.0        | 73                             | 60   | 60      | 50     |

\* Decreasing linearly with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

#### 3.2. Test Setup

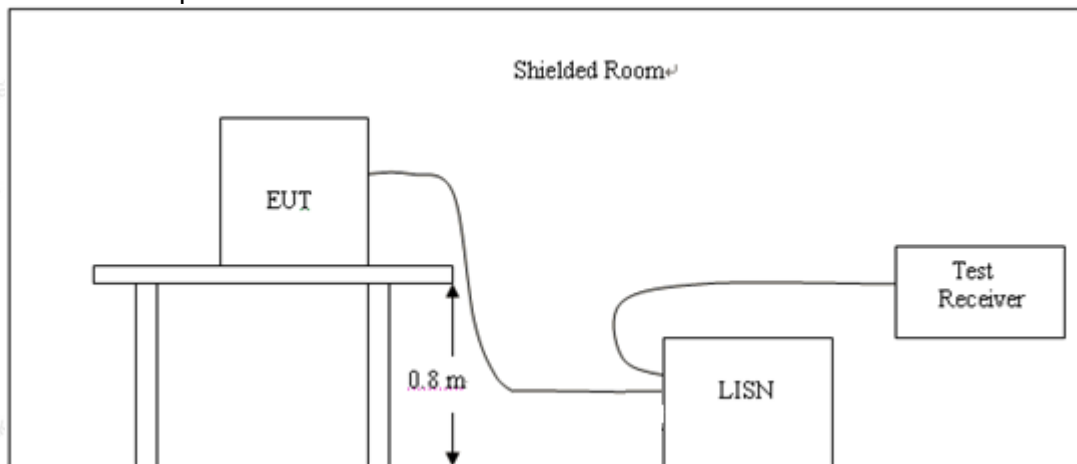


#### 3.3. Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.



## 3.4. Test Result

Test Specification: Line

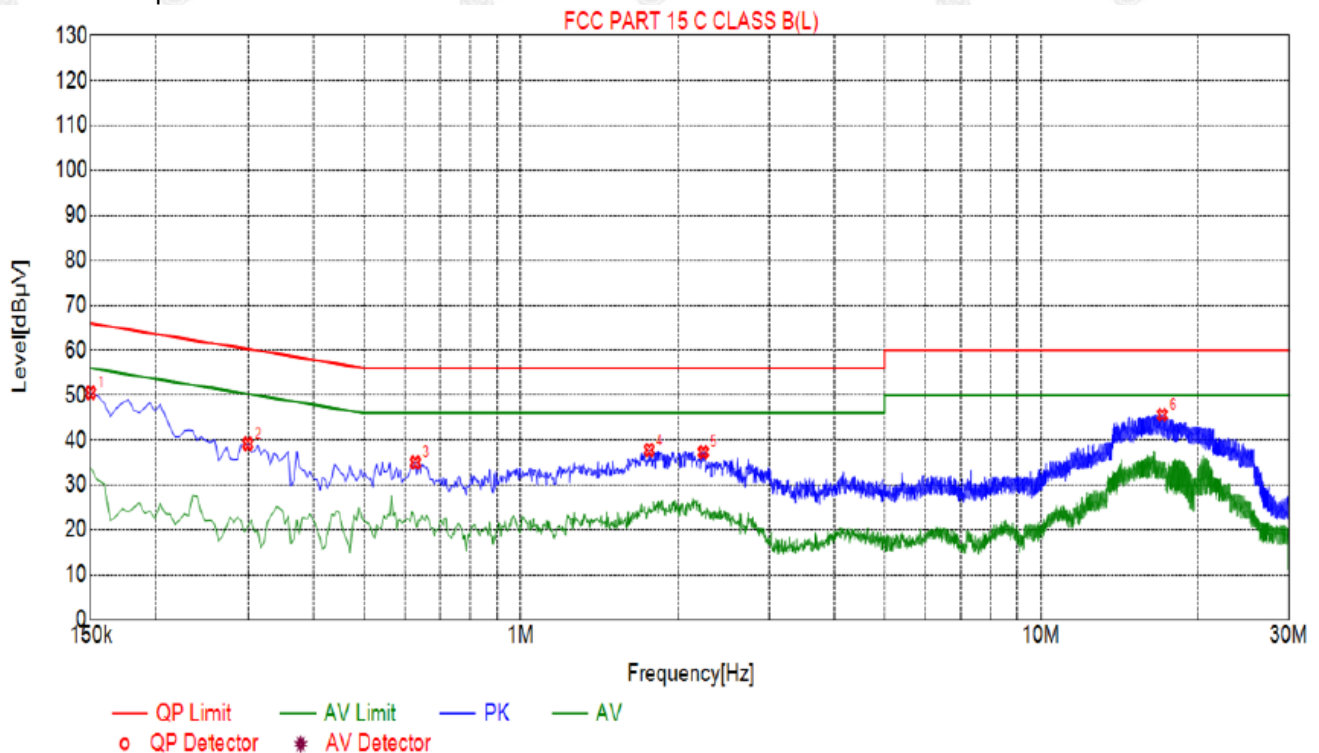


## Suspected List

| NO. | Freq.<br>[MHz] | Level<br>[dBμV] | Factor<br>[dB] | Limit<br>[dBμV] | Margin<br>[dB] | Reading<br>[dBμV] | Detector | Type |
|-----|----------------|-----------------|----------------|-----------------|----------------|-------------------|----------|------|
| 1   | 0.1500         | 50.53           | 20.03          | 66.00           | 15.47          | 30.50             | PK       | L    |
| 2   | 0.2985         | 39.16           | 20.04          | 60.28           | 21.12          | 19.12             | PK       | L    |
| 3   | 0.6270         | 35.01           | 20.05          | 56.00           | 20.99          | 14.96             | PK       | L    |
| 4   | 1.7655         | 37.80           | 20.14          | 56.00           | 18.20          | 17.66             | PK       | L    |
| 5   | 2.2425         | 37.31           | 20.17          | 56.00           | 18.69          | 17.14             | PK       | L    |
| 6   | 17.1105        | 45.63           | 20.00          | 60.00           | 14.37          | 25.63             | PK       | L    |

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor

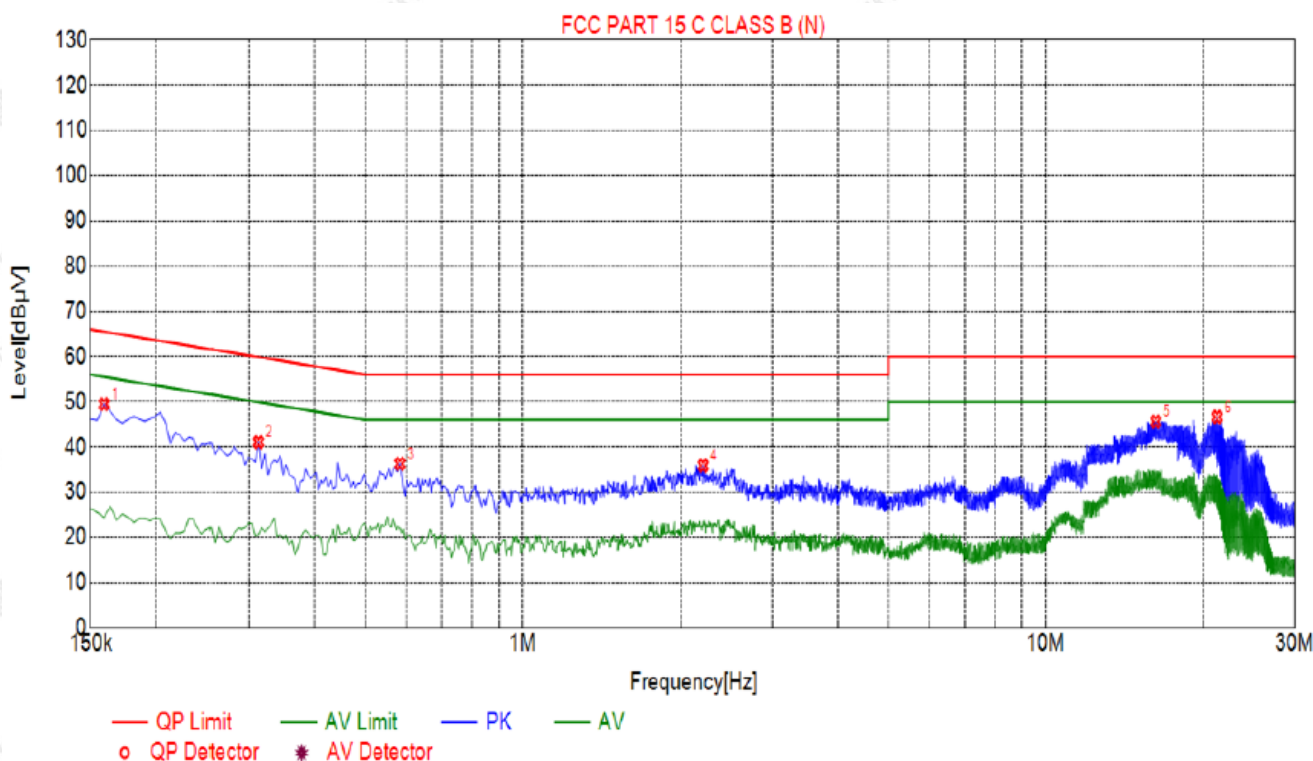

## Suspected List

| NO. | Freq.<br>[MHz] | Level<br>[dBμV] | Factor<br>[dB] | Limit<br>[dBμV] | Margin<br>[dB] | Reading<br>[dBμV] | Detector | Type |
|-----|----------------|-----------------|----------------|-----------------|----------------|-------------------|----------|------|
| 1   | 0.1590         | 49.49           | 20.01          | 65.52           | 16.03          | 29.48             | PK       | N    |
| 2   | 0.3120         | 41.08           | 20.05          | 59.92           | 18.84          | 21.03             | PK       | N    |
| 3   | 0.5820         | 36.29           | 20.05          | 56.00           | 19.71          | 16.24             | PK       | N    |
| 4   | 2.2110         | 35.92           | 20.17          | 56.00           | 20.08          | 15.75             | PK       | N    |
| 5   | 16.2420        | 45.62           | 19.98          | 60.00           | 14.38          | 25.64             | PK       | N    |
| 6   | 21.2775        | 46.66           | 20.14          | 60.00           | 13.34          | 26.52             | PK       | N    |

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level = Test receiver reading + correction factor



## 4. RADIATED EMISSION TEST

### 4.1. Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency (MHz) | Distance (Meters) | Radiated (dB $\mu$ V/m) | Radiated ( $\mu$ V/m) |
|-----------------|-------------------|-------------------------|-----------------------|
| 0.009-0.490     | 300               | $20\log 2400/F$ (kHz)   | 2400/F (kHz)          |
| 0.490-1.705     | 30                | $20\log 24000/F$ (kHz)  | 24000/F (kHz)         |
| 1.705-30        | 30                | $20\log 30$             | 30                    |
| 30-88           | 3                 | 40                      | 100                   |
| 88-216          | 3                 | 43.5                    | 150                   |
| 216-960         | 3                 | 46                      | 200                   |
| Above 960       | 3                 | 54                      | 500                   |


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

### 4.2. Test Setup

#### (1) Radiated Emission Test-Up Frequency Below 30MHz

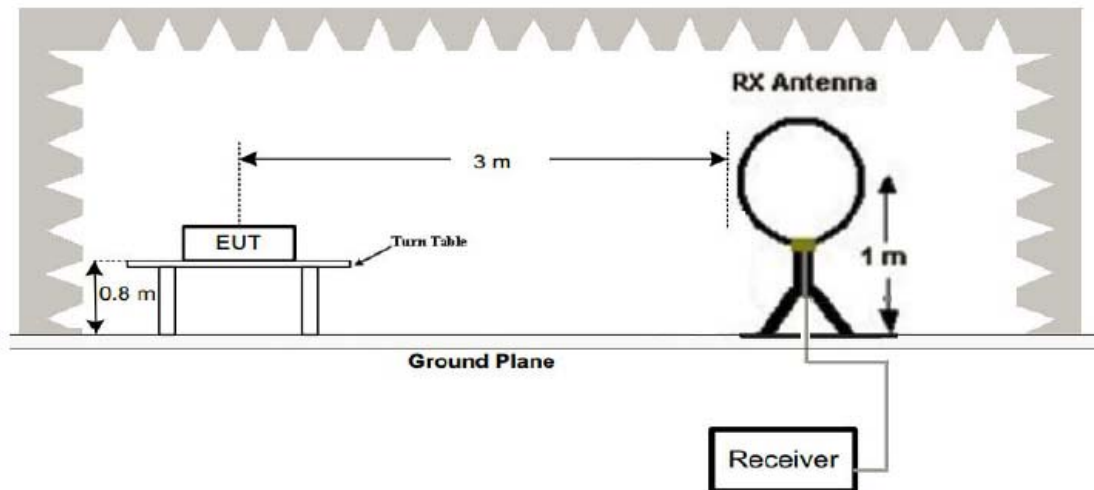


#### (2) Radiated Emission Test-Up Frequency 30MHz~1GHz

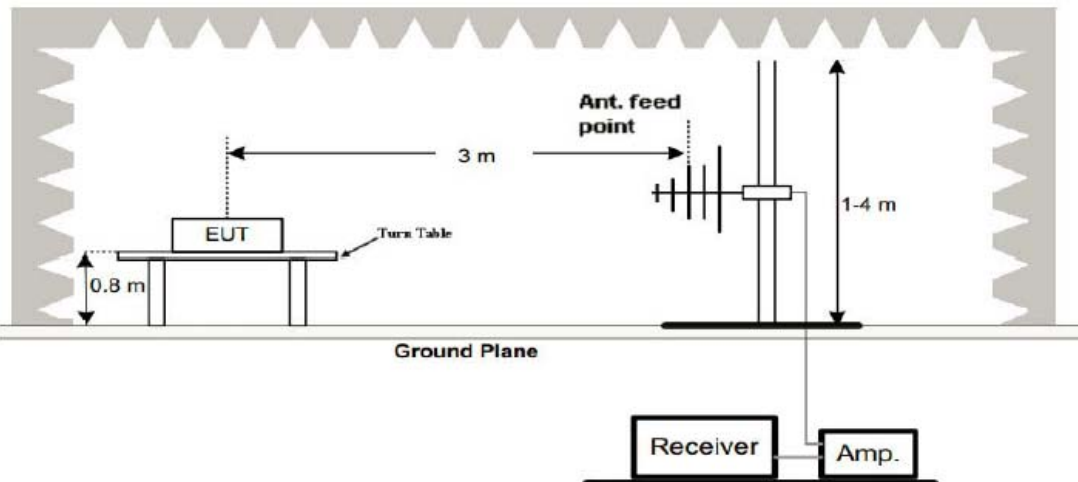



### (3) Radiated Emission Test-Up Frequency Above 1GHz

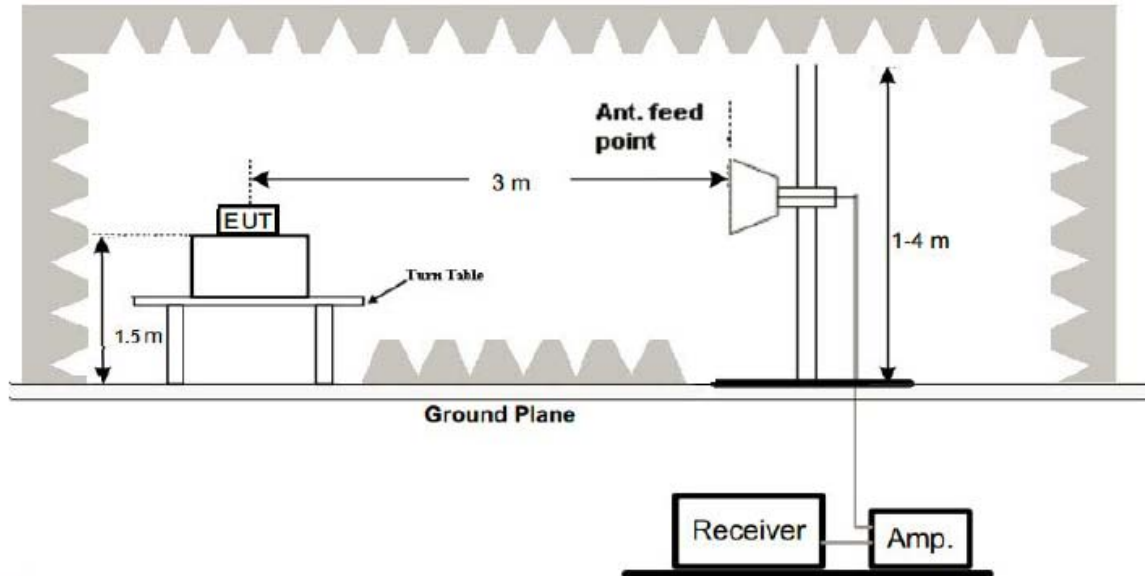

#### 4.3. Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

#### Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

#### 4.4. Test Result


##### PASS

All the test modes completed for test. The worst case of Radiated Emission is CH 01; the test data of this mode was reported.



## Below 1GHz Test Results:

Antenna polarity: H

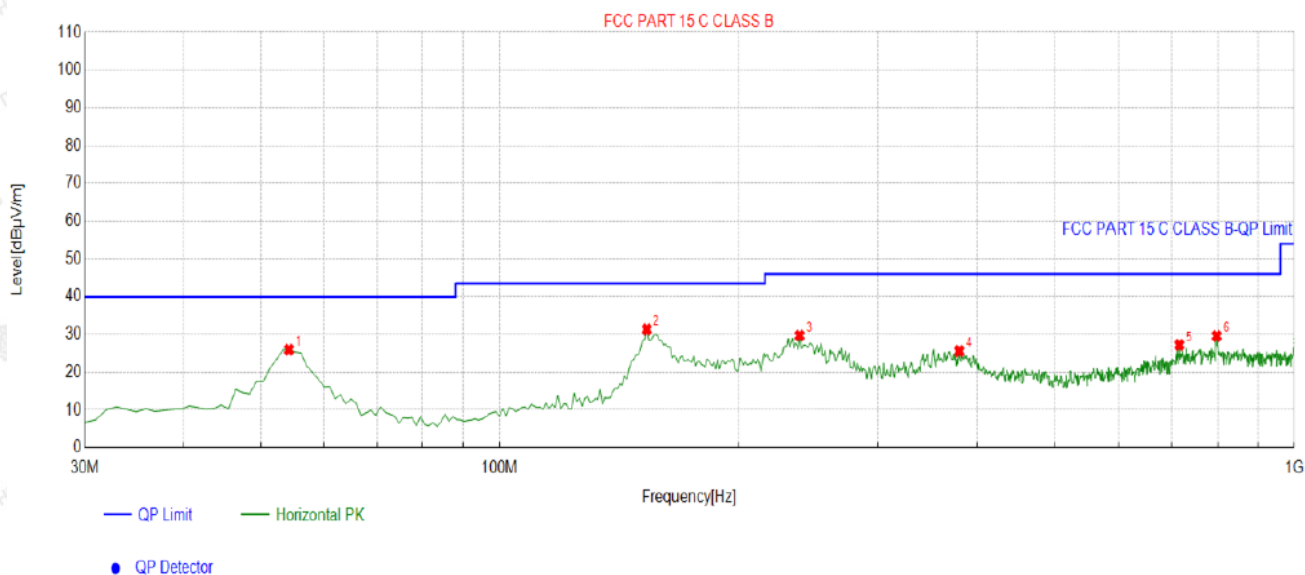


| Suspected List |             |             |                  |                |                |             |             |           |            |
|----------------|-------------|-------------|------------------|----------------|----------------|-------------|-------------|-----------|------------|
| NO.            | Freq. [MHz] | Factor [dB] | Reading [dBμV/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
| 1              | 54.2743     | -14.30      | 40.27            | 25.97          | 40.00          | 14.03       | 100         | 151       | Horizontal |
| 2              | 153.3133    | -18.70      | 50.03            | 31.33          | 43.50          | 12.17       | 100         | 80        | Horizontal |
| 3              | 238.7588    | -13.91      | 43.61            | 29.70          | 46.00          | 16.30       | 100         | 358       | Horizontal |
| 4              | 379.5496    | -10.83      | 36.42            | 25.59          | 46.00          | 20.41       | 100         | 191       | Horizontal |
| 5              | 716.4765    | -4.77       | 31.97            | 27.20          | 46.00          | 18.80       | 100         | 36        | Horizontal |
| 6              | 798.0380    | -3.15       | 32.73            | 29.58          | 46.00          | 16.42       | 100         | 56        | Horizontal |

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Antenna polarity: V

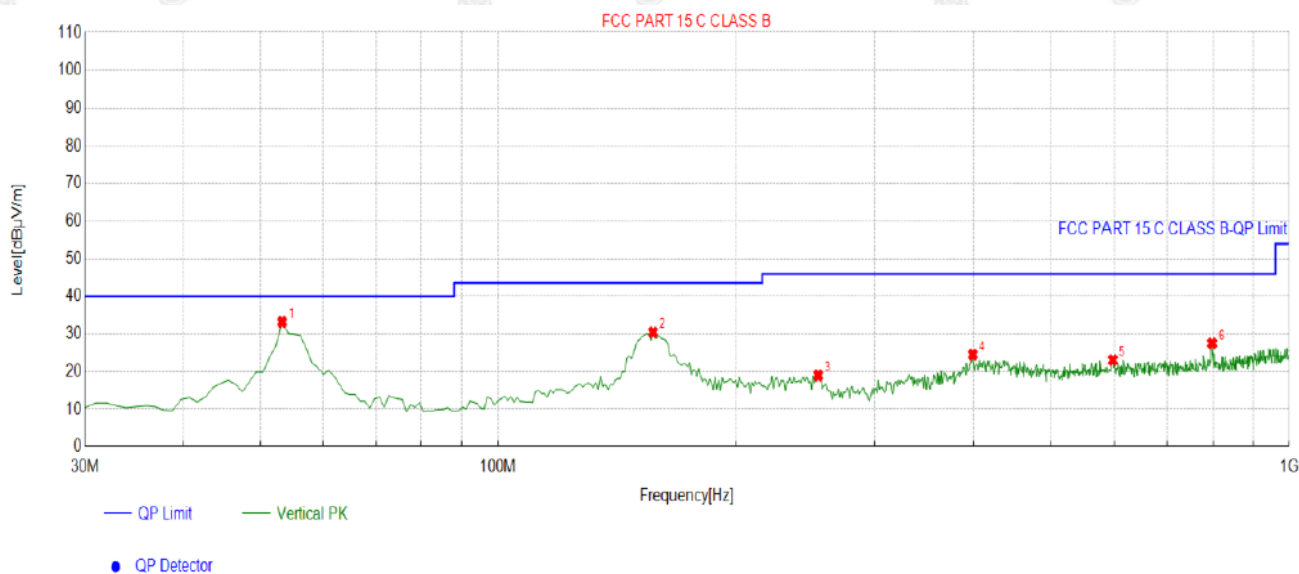

| Suspected List |             |             |                  |                |                |             |             |           |          |
|----------------|-------------|-------------|------------------|----------------|----------------|-------------|-------------|-----------|----------|
| NO.            | Freq. [MHz] | Factor [dB] | Reading [dBμV/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1              | 53.3033     | -14.15      | 47.34            | 33.19          | 40.00          | 6.81        | 100         | 58        | Vertical |
| 2              | 157.1972    | -18.42      | 48.87            | 30.45          | 43.50          | 13.05       | 100         | 312       | Vertical |
| 3              | 254.2943    | -13.45      | 32.41            | 18.96          | 46.00          | 27.04       | 100         | 117       | Vertical |
| 4              | 398.9690    | -10.43      | 34.91            | 24.48          | 46.00          | 21.52       | 100         | 50        | Vertical |
| 5              | 598.0180    | -6.24       | 29.29            | 23.05          | 46.00          | 22.95       | 100         | 1         | Vertical |
| 6              | 798.0380    | -3.15       | 30.67            | 27.52          | 46.00          | 18.48       | 100         | 94        | Vertical |

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

## Harmonics and Spurious Emissions

### Frequency Range (9 kHz-30MHz)

| Frequency (MHz) | Level@3m (dBμV/m) | Limit@3m (dBμV/m) |
|-----------------|-------------------|-------------------|
| --              | --                | --                |
| --              | --                | --                |
| --              | --                | --                |
| --              | --                | --                |

**Note:**1. Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.



## Above 1 GHz Test Results:

## CH Low (2402MHz)

## Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2402               | 105.73                  | -5.84          | 99.89                      | 114                | -14.11         | peak             |
| 2402               | 82.71                   | -5.84          | 76.87                      | 94                 | -17.13         | AVG              |
| 4804               | 56.97                   | -3.64          | 53.33                      | 74                 | -20.67         | peak             |
| 4804               | 44.44                   | -3.64          | 40.8                       | 54                 | -13.2          | AVG              |
| 7206               | 52.78                   | -0.95          | 51.83                      | 74                 | -22.17         | peak             |
| 7206               | 41.14                   | -0.95          | 40.19                      | 54                 | -13.81         | AVG              |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2402               | 107.29                  | -5.84          | 101.45                     | 114                | -12.55         | peak             |
| 2402               | 82.07                   | -5.84          | 76.23                      | 94                 | -17.77         | AVG              |
| 4804               | 56.38                   | -3.64          | 52.74                      | 74                 | -21.26         | peak             |
| 4804               | 42.64                   | -3.64          | 39                         | 54                 | -15            | AVG              |
| 7206               | 50.86                   | -0.95          | 49.91                      | 74                 | -24.09         | peak             |
| 7206               | 39.54                   | -0.95          | 38.59                      | 54                 | -15.41         | AVG              |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## CH Middle (2440MHz)

Horizontal:

| Frequency                                                     | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                         | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2440                                                          | 106.68        | -5.71  | 100.97         | 114      | -13.03 | peak          |
| 2440                                                          | 79.43         | -5.71  | 73.72          | 94       | -20.28 | AVG           |
| 4880                                                          | 55.57         | -3.51  | 52.06          | 74       | -21.94 | peak          |
| 4880                                                          | 42.71         | -3.51  | 39.2           | 54       | -14.8  | AVG           |
| 7320                                                          | 53.04         | -0.82  | 52.22          | 74       | -21.78 | peak          |
| 7320                                                          | 39.53         | -0.82  | 38.71          | 54       | -15.29 | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |               |        |                |          |        |               |

Vertical:

| Frequency                                                     | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                         | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2440                                                          | 105.1         | -5.71  | 99.39          | 114      | -14.61 | peak          |
| 2440                                                          | 81.84         | -5.71  | 76.13          | 94       | -17.87 | AVG           |
| 4880                                                          | 55.88         | -3.51  | 52.37          | 74       | -21.63 | peak          |
| 4880                                                          | 43.69         | -3.51  | 40.18          | 54       | -13.82 | AVG           |
| 7320                                                          | 50.18         | -0.82  | 49.36          | 74       | -24.64 | peak          |
| 7320                                                          | 40.45         | -0.82  | 39.63          | 54       | -14.37 | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |               |        |                |          |        |               |



## CH High (2480MHz)

## Horizontal:

| Frequency                                                     | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                         | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2480                                                          | 105.75        | -5.65  | 100.1          | 114      | -13.9  | peak          |
| 2480                                                          | 82.71         | -5.65  | 77.06          | 94       | -16.94 | AVG           |
| 4960                                                          | 55.80         | -3.43  | 52.37          | 74       | -21.63 | peak          |
| 4960                                                          | 40.68         | -3.43  | 37.25          | 54       | -16.75 | AVG           |
| 7440                                                          | 50.99         | -0.75  | 50.24          | 74       | -23.76 | peak          |
| 7440                                                          | 38.66         | -0.75  | 37.91          | 54       | -16.09 | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |               |        |                |          |        |               |

## Vertical:

| Frequency                                                     | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                         | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2480                                                          | 103.94        | -5.65  | 98.29          | 114      | -15.71 | peak          |
| 2480                                                          | 81.6          | -5.65  | 75.95          | 94       | -18.05 | AVG           |
| 4960                                                          | 55.96         | -3.43  | 52.53          | 74       | -21.47 | peak          |
| 4960                                                          | 42.58         | -3.43  | 39.15          | 54       | -14.85 | AVG           |
| 7440                                                          | 53.12         | -0.75  | 52.37          | 74       | -21.63 | peak          |
| 7440                                                          | 38.87         | -0.75  | 38.12          | 54       | -15.88 | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |               |        |                |          |        |               |

## Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.



## 5. BAND EDGE

### 5.1. Limits

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2. Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.



## 5.3. Test Result

**PASS**

Radiated Band Edge Test:

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case)

| Frequency                                                     | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                         | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2310                                                          | 57.15         | -5.81  | 51.34          | 74       | -22.66 | peak          |
| 2310                                                          | /             | -5.81  | /              | 54       | /      | AVG           |
| 2390                                                          | 56.24         | -5.84  | 50.4           | 74       | -23.6  | peak          |
| 2390                                                          | /             | -5.84  | /              | 54       | /      | AVG           |
| 2400                                                          | 55.03         | -5.84  | 49.19          | 74       | -24.81 | peak          |
| 2400                                                          | /             | -5.84  | /              | 54       | /      | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |               |        |                |          |        |               |

Vertical:

| Frequency                                                     | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                         | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2310                                                          | 57.36         | -5.81  | 51.55          | 74       | -22.45 | peak          |
| 2310                                                          | /             | -5.81  | /              | 54       | /      | AVG           |
| 2390                                                          | 56.87         | -5.84  | 51.03          | 74       | -22.97 | peak          |
| 2390                                                          | /             | -5.84  | /              | 54       | /      | AVG           |
| 2400                                                          | 55.19         | -5.84  | 49.35          | 74       | -24.65 | peak          |
| 2400                                                          | /             | -5.84  | /              | 54       | /      | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |               |        |                |          |        |               |



Operation Mode: TX CH High (2480MHz)

Horizontal (Worst case)

| Frequency                                                     | Reading Result | Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------------------------------------|----------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                         | (dBμV)         | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.50                                                       | 56.52          | -5.65  | 50.87          | 74       | -23.13 | peak          |
| 2483.50                                                       | /              | -5.65  | /              | 54       | /      | AVG           |
| 2500.00                                                       | 55.18          | -5.65  | 49.53          | 74       | -24.47 | peak          |
| 2500.00                                                       | /              | -5.65  | /              | 54       | /      | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                |        |                |          |        |               |

Vertical:

| Frequency                                                                                              | Reading Result | Factor | Emission Level | Limits   | Margin | Detector Type |
|--------------------------------------------------------------------------------------------------------|----------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                                                                  | (dBμV)         | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.50                                                                                                | 56.14          | -5.65  | 50.49          | 74       | -23.51 | peak          |
| 2483.50                                                                                                | /              | -5.65  | /              | 54       | /      | AVG           |
| 2500.00                                                                                                | 55.22          | -5.65  | 49.57          | 74       | -24.43 | peak          |
| 2500.00                                                                                                | /              | -5.65  | /              | 54       | /      | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.                                          |                |        |                |          |        |               |
| Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit. |                |        |                |          |        |               |



## 6. OCCUPIED BANDWIDTH MEASUREMENT

### 6.1. Test Setup

Same as Radiated Emission Measurement

### 6.2. Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on ANSI C63.10 section 6.9.2: RBW= 20KHz. VBW= 62 KHz, Span=3MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.

### 6.3. Measurement Equipment Used


Same as Radiated Emission Measurement

### 6.4. Test Result

**PASS**


| Frequency | 20dB Bandwidth<br>(MHz) | Result      |
|-----------|-------------------------|-------------|
| 2402 MHz  | 1.185                   | <b>PASS</b> |
| 2440 MHz  | 1.185                   | <b>PASS</b> |
| 2480 MHz  | 1.186                   | <b>PASS</b> |

CH: 2402MHz

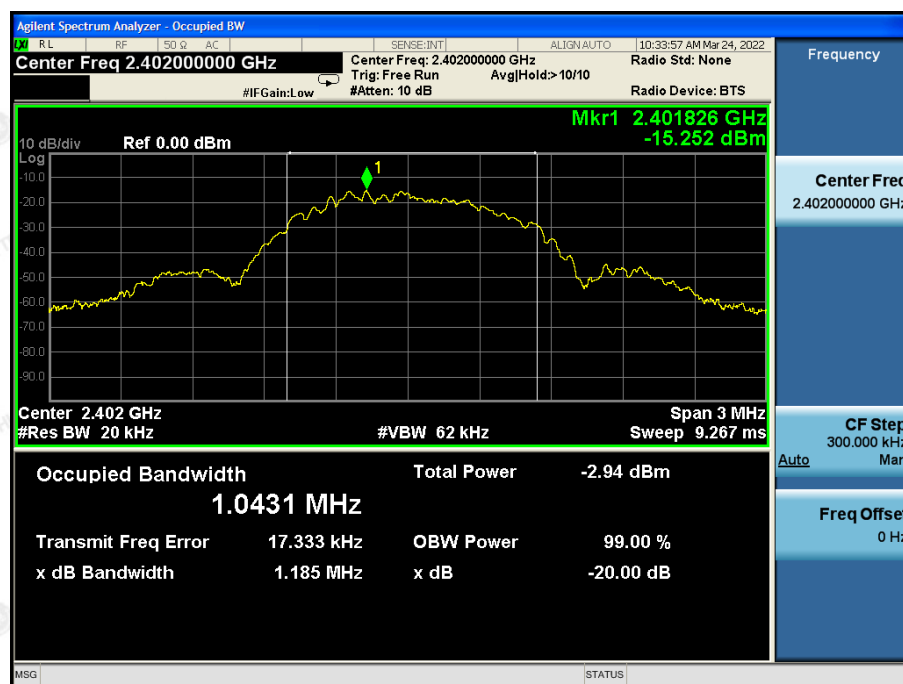




CH: 2440MHz

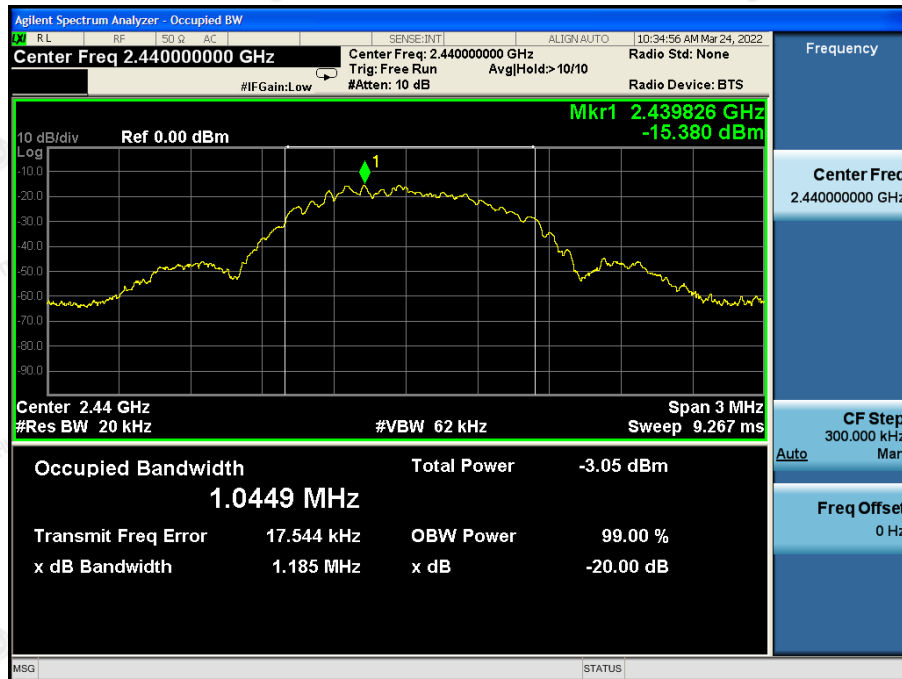


CH: 2480MHz

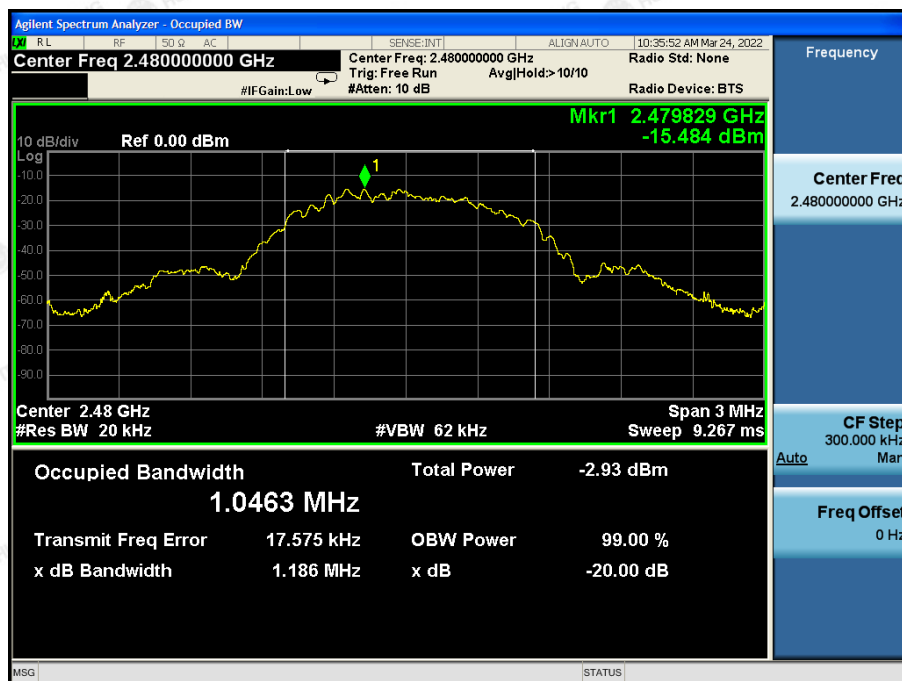

### Standard Applicable

## Antenna Connected Construction

ANTENNA

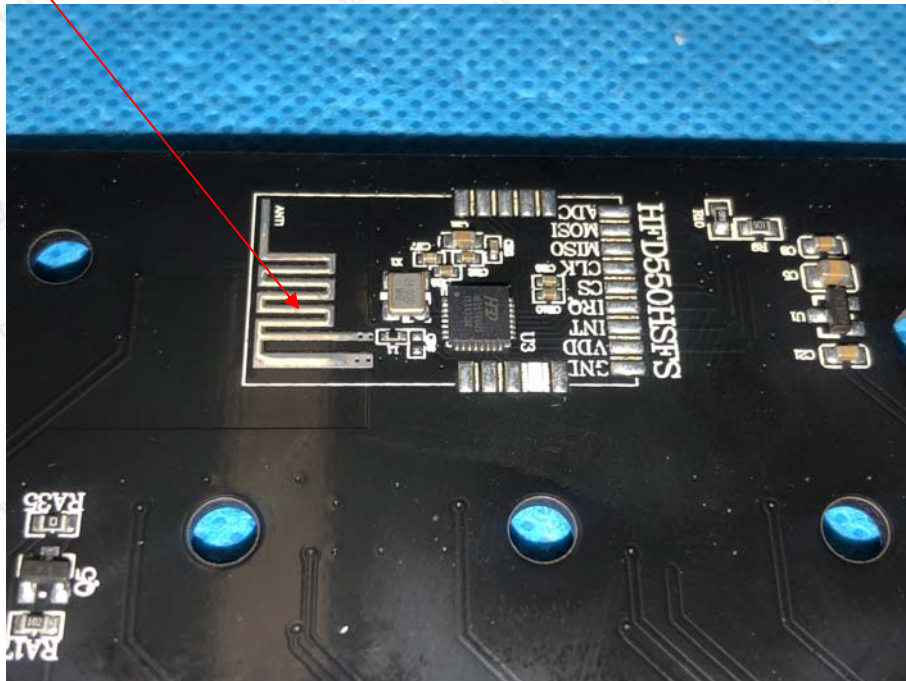



TEL : +86-755 2302 9901    FAX : +86-755 2302 9901    E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 8. PHOTOGRAPH OF TEST

### Radiated Emission

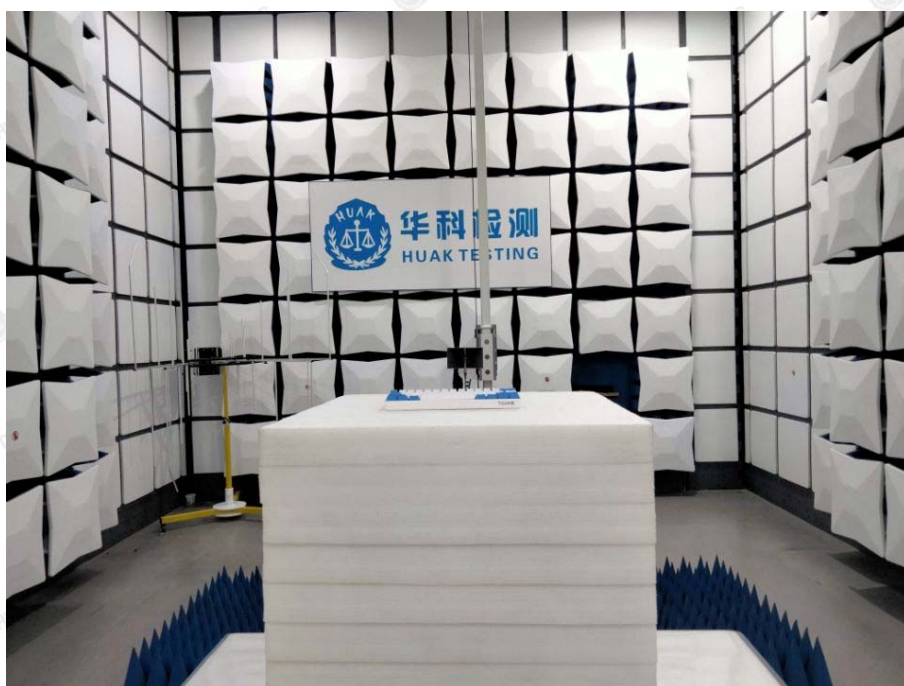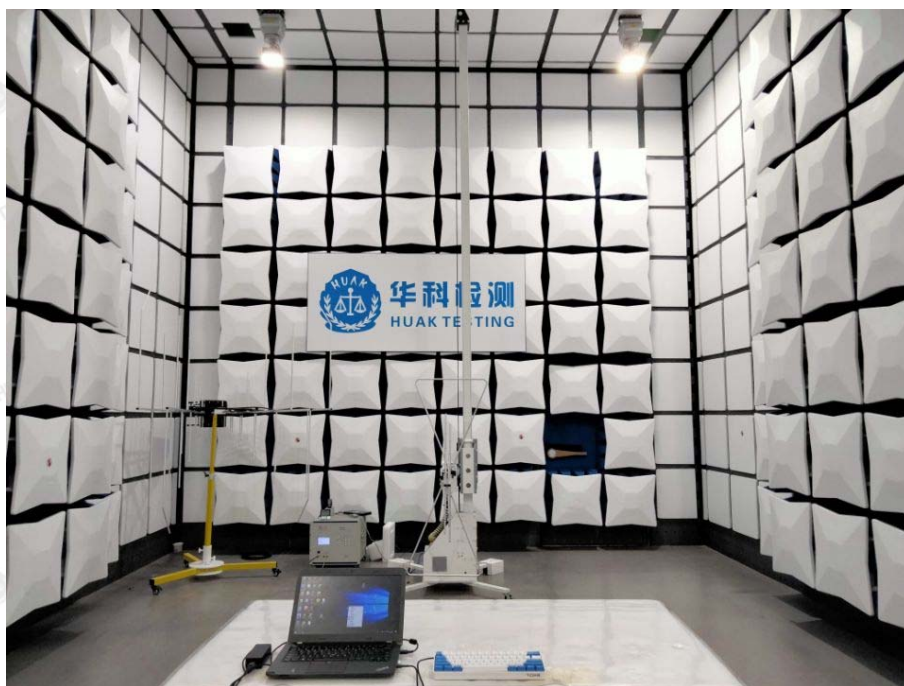


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## Conducted Emission

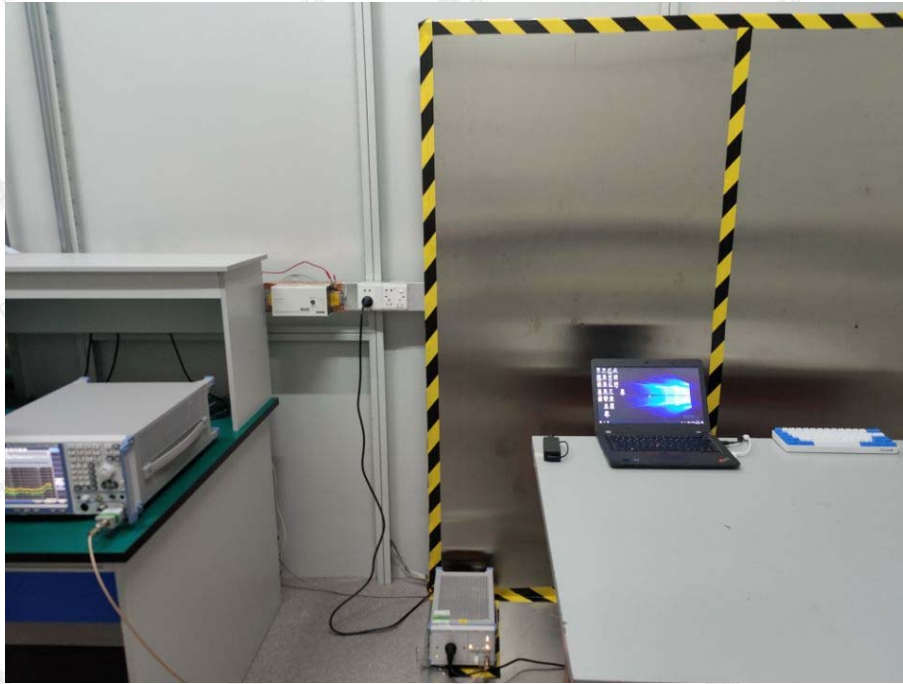



## 9. PHOTOS OF THE EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----

