

Instruction Manual for 12 Key Wireless Remote Controller



3 Key Definitions

Red emergency stop switch: Pressing it halts the system's operation, while rotating it resumes normal function.

Work mode status indicator: Each operational state is clearly marked.

A1 key: controls the corresponding action extension of the upper table. The switch is a reset switch, effective when pressed and invalid when not.

The A2 key controls the corresponding actions of the upper table. It is a reset switch: pressing it activates the function, while leaving it unpressed deactivates it.

The B1 key controls the extension of the corresponding action on the upper table. It is a reset switch: pressing it activates the function, while leaving it unpressed deactivates it.

B2 key: controls the corresponding actions of the upper table. The switch is a reset switch, effective when pressed and invalid when released.

C1 key: controls the corresponding action extension of the upper table. The switch is a reset switch, effective when pressed and invalid when not.

C2 key: controls the corresponding action on the upper table. The switch is a reset switch—pressed means active, unpressed means inactive.

D1 key: controls the extension or locking of the upper table's corresponding action. The switch is a reset switch—pressed to activate, released to deactivate.


D2 key: controls the corresponding actions of the upper table (reduction or right cylinder locking). The switch is a reset switch—pressed to activate, unpressed to deactivate.

E1 key: When pressing the F1 key to switch to the off-vehicle installation mode, a single press activates manual leg operation, with the corresponding indicator light turning red. A second press enables one-touch leg activation, changing the leg indicator light to green.

E2 key: Press to switch to tracked drive pin action, and the corresponding indicator light below will turn on. (This action is only valid when F1 key is pressed to switch to off-road installation mode.)

START button: The system activation key. Pressing it activates the system, powering both the transmitter and receiver. Then select either the onboard or off-board installation mode, with the corresponding receiver displaying a red indicator light.

F1 key: Press once to enter the upcar installation mode, press again to shift to neutral, press a third time to exit the installation mode. The corresponding mode indicator light will illuminate.

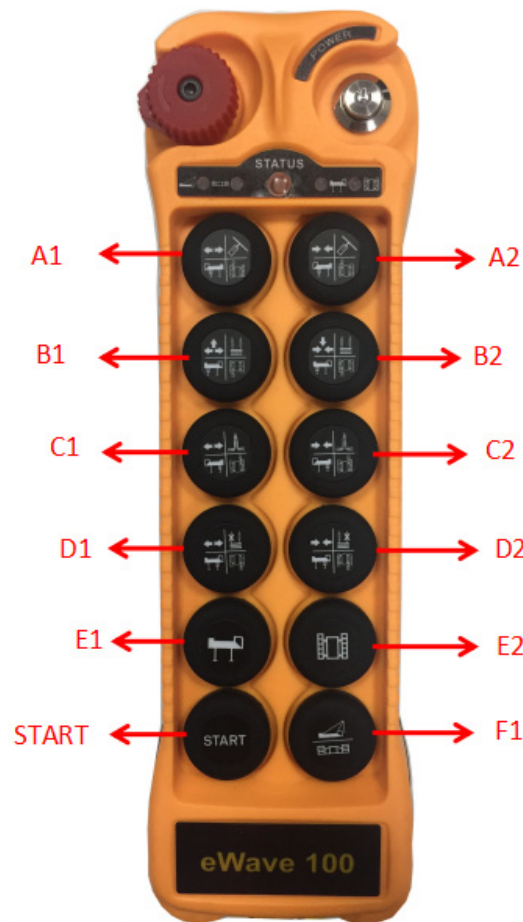

4 Product image



5 Product accessories

Order number	Accessory images	Accessory name	Quantity
1		5 dry cell	2 jié

6 Usage Notes

- 1) The product enters standby mode after 2 minutes when not in use. To use it, restart the power button.
- 2) The product can operate for 6 hours without charging.
- 3) The device has a built-in battery. Avoid placing it in high-temperature areas.
- 4) During operation, if the emergency stop switch is pressed, the power will be cut off within 5 seconds. To resume normal use, reset the emergency stop switch and restart the power switch.
- 5) Use the remote control with a compatible receiver.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition, compliance with exposure requirements.

This equipment should be installed and operated with minimum distance 0 mm between the radiator & your body.