

TEST REPORT

Product Name: Small television stereo
FCC ID: 2A77ETV-Q02
Trademark: N/A
Model Number: TV-Q02, Q02, TV-Q2
Prepared For: Bugang Electric appliance (Zhongshan) Co., LTD
Address: Funan Avenue, Fusha Town, Zhongshan city, China
Manufacturer: Bugang Electric appliance (Zhongshan) Co., LTD
Address: Funan Avenue, Fusha Town, Zhongshan city, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.
Sample Received Date: Jul. 27, 2022
Sample tested Date: Jul. 27, 2022 to Jul.30, 2022
Issue Date: Jul. 30, 2022
Report No.: CTB220730026RF
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	27
8.1 Block Diagram Of Test Setup	27
8.2 Limit	27
8.3 Test procedure	27
8.4 Test Result	28
9. CONDUCTED PEAK OUTPUT POWER	35
9.1 Block Diagram Of Test Setup	35
9.2 Limit	35
9.3 Test procedure	35
9.4 Test Result	36
10. 20DB OCCUPIED BANDWIDTH	40
10.1 Block Diagram Of Test Setup	40
10.2 Limit	40
10.3 Test procedure	40
10.4 Test Result	40
11. CARRIER FREQUENCIES SEPARATION	44
11.1 Block Diagram Of Test Setup	44
11.2 Limit	44
11.3 Test procedure	44
11.4 Test Result	44
12. HOPPING CHANNEL NUMBER	48
12.1 Block Diagram Of Test Setup	48
12.2 Limit	48
12.3 Test procedure	48
12.4 Test Result	48
13. DWELL TIME	50

13.1	Block Diagram Of Test Setup	50
13.2	Limit	50
13.3	Test procedure	50
13.4	Test Result	51
14.	PSEUDORANDOM FREQUENCY	55
14.1	Limit	55
14.2	Test procedure	55
14.3	Test Result	56
15.	ANTENNA REQUIREMENT	57
16.	EUT TEST SETUP PHOTOGRAPHS	58

(Note: N/A means not applicable)

**1. VERSION**

Report No.	Issue Date	Description	Approved
CTB220730026RF	Jul.30, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	TV-Q02, Q02, TV-Q2
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: TV-Q02
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 4.580dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: PCB antenna
Antenna Gain:	Bluetooth: 1.2dBi
Ratings:	DC 5V by adapter DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	SHENZHEN ENGINE ELECTRONIC CO.,LTD	EE-0501000E	N/A	AE

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	5V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05
16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05


18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.11.01	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.11.01	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

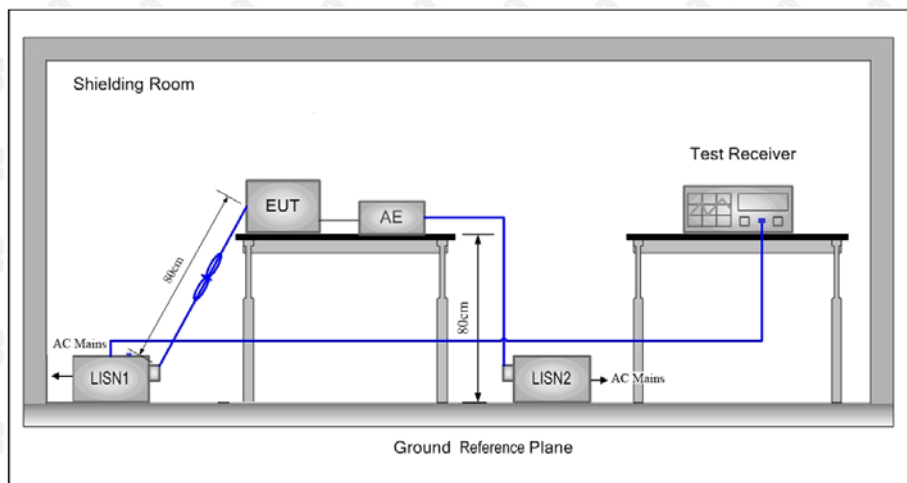

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L:

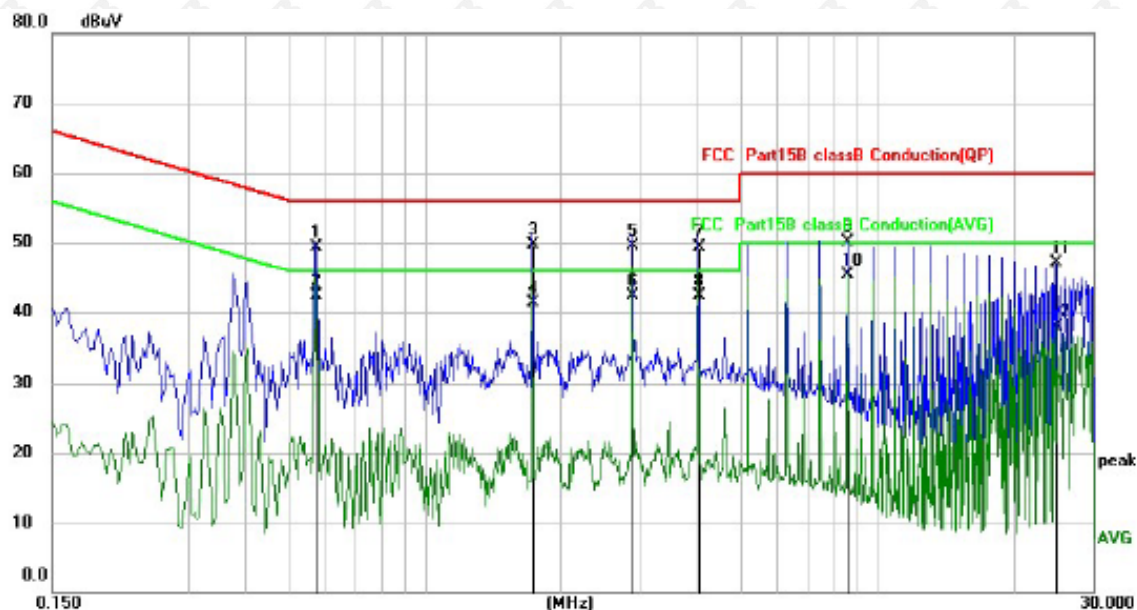


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.5740	38.68	10.53	49.21	56.00	-6.79	QP
2		0.5740	31.78	10.53	42.31	46.00	-3.69	AVG
3		1.7260	39.12	10.63	49.75	56.00	-6.25	QP
4		1.7260	30.65	10.63	41.28	46.00	-4.72	AVG
5		2.8780	38.91	10.63	49.54	56.00	-6.46	QP
6	*	2.8780	31.77	10.63	42.40	46.00	-3.60	AVG
7		4.0300	38.70	10.64	49.34	56.00	-6.66	QP
8		4.0300	31.58	10.64	42.22	46.00	-3.78	AVG
9		8.6339	39.43	10.77	50.20	60.00	-9.80	QP
10		8.6339	34.61	10.77	45.38	50.00	-4.62	AVG
11		24.7460	36.06	11.01	47.07	60.00	-12.93	QP
12		24.7460	26.99	11.01	38.00	50.00	-12.00	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

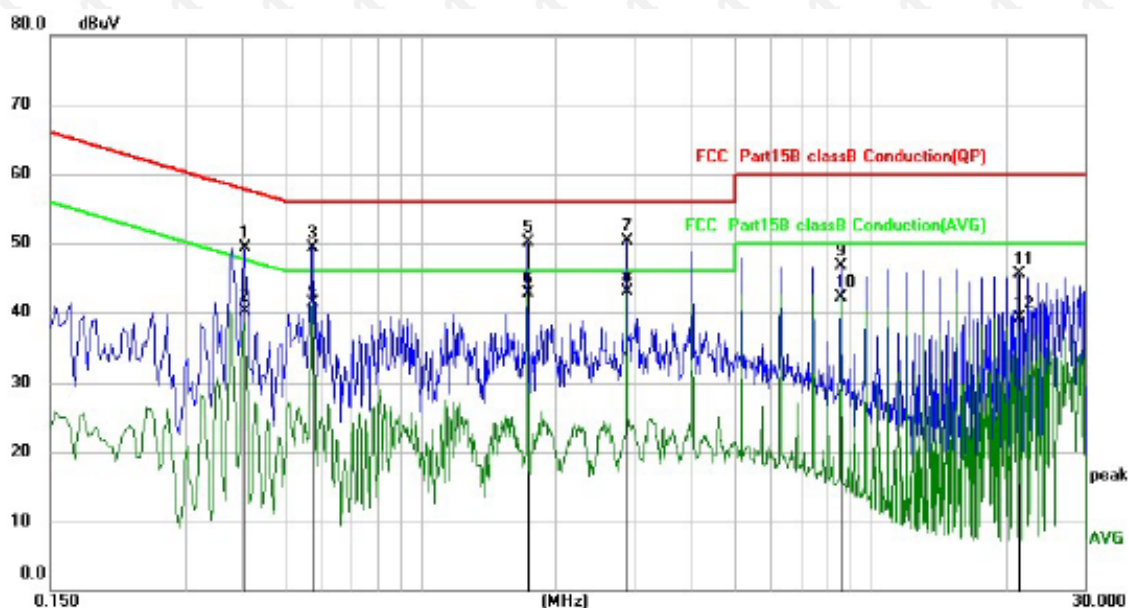

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.4060	38.76	10.57	49.33	57.73	-8.40	QP
2		0.4060	29.49	10.57	40.06	47.73	-7.67	AVG
3		0.5740	38.87	10.53	49.40	56.00	-6.60	QP
4		0.5740	30.85	10.53	41.38	46.00	-4.62	AVG
5		1.7260	39.53	10.63	50.16	56.00	-5.84	QP
6		1.7260	32.17	10.63	42.80	46.00	-3.20	AVG
7		2.8780	39.66	10.63	50.29	56.00	-5.71	QP
8	*	2.8780	32.20	10.63	42.83	46.00	-3.17	AVG
9		8.6340	36.00	10.77	46.77	60.00	-13.23	QP
10		8.6340	31.24	10.77	42.01	50.00	-7.99	AVG
11		21.2939	34.42	11.00	45.42	60.00	-14.58	QP
12		21.2939	28.07	11.00	39.07	50.00	-10.93	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

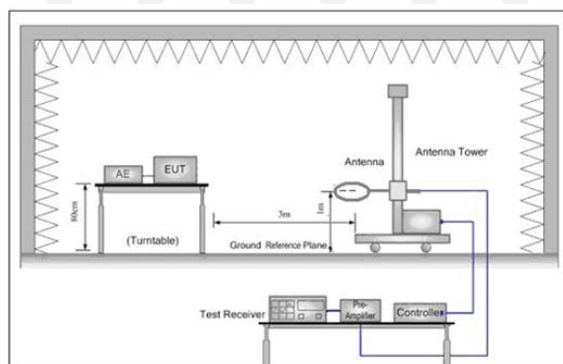


Figure 1. Below 30MHz

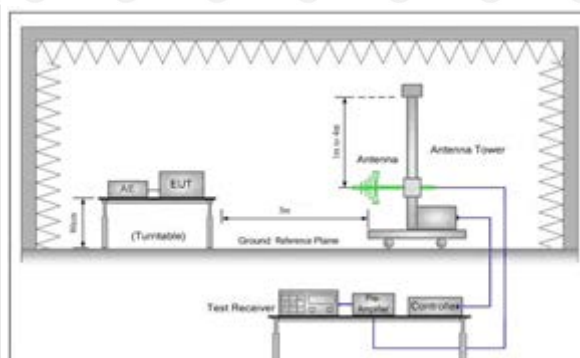


Figure 2. 30MHz to 1GHz

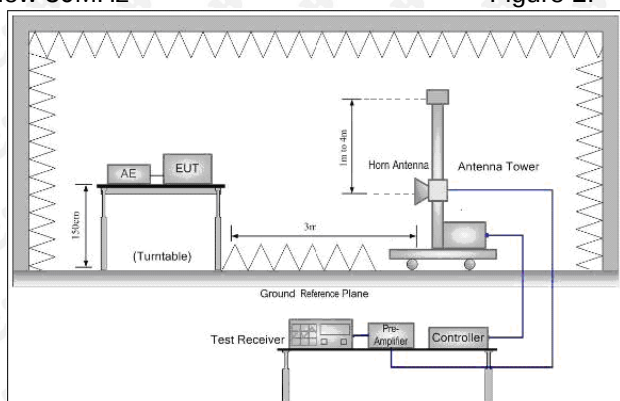


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:
Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		41.1320	35.04	-5.31	29.73	40.00	-10.27	QP
2		80.0806	36.77	-9.76	27.01	40.00	-12.99	QP
3		117.7725	37.70	-7.13	30.57	43.50	-12.93	QP
4		190.7390	44.68	-8.09	36.59	43.50	-6.91	QP
5	*	293.5842	50.78	-5.28	45.50	46.00	-0.50	QP
6		565.6297	29.59	1.93	31.52	46.00	-14.48	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	42.1950	44.24	-5.35	38.89	40.00	-1.11	QP
2	!	55.4147	44.09	-5.93	38.16	40.00	-1.84	QP
3	!	64.3202	45.24	-6.93	38.31	40.00	-1.69	QP
4		128.5630	41.34	-6.26	35.08	43.50	-8.42	QP
5	!	280.5152	47.81	-5.41	42.40	46.00	-3.60	QP
6		565.6297	32.31	1.93	34.24	46.00	-11.76	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.10	-3.65	54.45	74.00	-19.55	peak
4804	48.27	-3.65	44.62	54.00	-9.38	AVG
7206	60.17	-0.95	59.22	74.00	-14.78	peak
7206	42.55	-0.95	41.60	54.00	-12.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.62	-3.65	54.97	74.00	-19.03	peak
4804	49.03	-3.65	45.38	54.00	-8.62	AVG
7206	59.78	-0.95	58.83	74.00	-15.17	peak
7206	41.91	-0.95	40.96	54.00	-13.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	58.42	-3.54	54.88	74.00	-19.12	peak
4882.00	48.85	-3.54	45.31	54.00	-8.69	AVG
7323.00	57.70	-0.81	56.89	74.00	-17.11	peak
7323.00	42.32	-0.81	41.51	54.00	-12.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.10	-3.54	55.56	74.00	-18.44	peak
4882.00	49.93	-3.54	46.39	54.00	-7.61	AVG
7323.00	56.30	-0.81	55.49	74.00	-18.51	peak
7323.00	43.21	-0.81	42.40	54.00	-11.60	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.56	-3.43	54.13	74.00	-19.87	peak
4960	48.08	-3.44	44.64	54.00	-9.36	AVG
7440	60.88	-0.77	60.11	74.00	-13.89	peak
7440	41.31	-0.77	40.54	54.00	-13.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	59.40	-3.43	55.97	74.00	-18.03	peak
4960	48.75	-3.44	45.31	54.00	-8.69	AVG
7440	59.47	-0.77	58.70	74.00	-15.30	peak
7440	42.12	-0.77	41.35	54.00	-12.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.56	-5.81	50.75	74.00	-23.25	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.34	-5.84	50.50	74.00	-23.50	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	57.07	-5.81	51.26	74.00	-22.74	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.64	-5.84	50.80	74.00	-23.20	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.39	-5.81	48.58	74.00	-25.42	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.27	-6.06	48.21	74.00	-25.79	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.58	-5.81	50.77	74.00	-23.23	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.38	-6.06	48.32	74.00	-25.68	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

NO hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.40	-5.81	48.59	74.00	-25.41	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.55	-5.84	48.71	74.00	-25.29	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.81	-5.81	51.00	74.00	-23.00	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.76	-5.84	48.92	74.00	-25.08	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.92	-5.81	50.11	74.00	-23.89	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.86	-6.06	49.80	74.00	-24.20	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.66	-5.81	49.85	74.00	-24.15	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.99	-6.06	47.93	74.00	-26.07	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

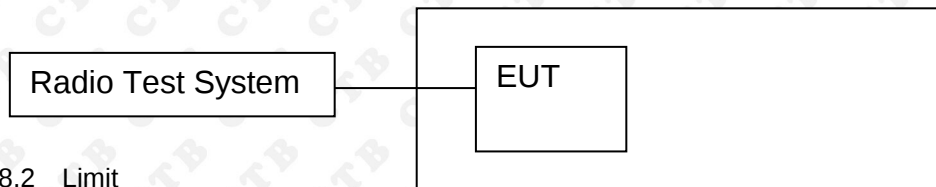


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold


8.4 Test Result

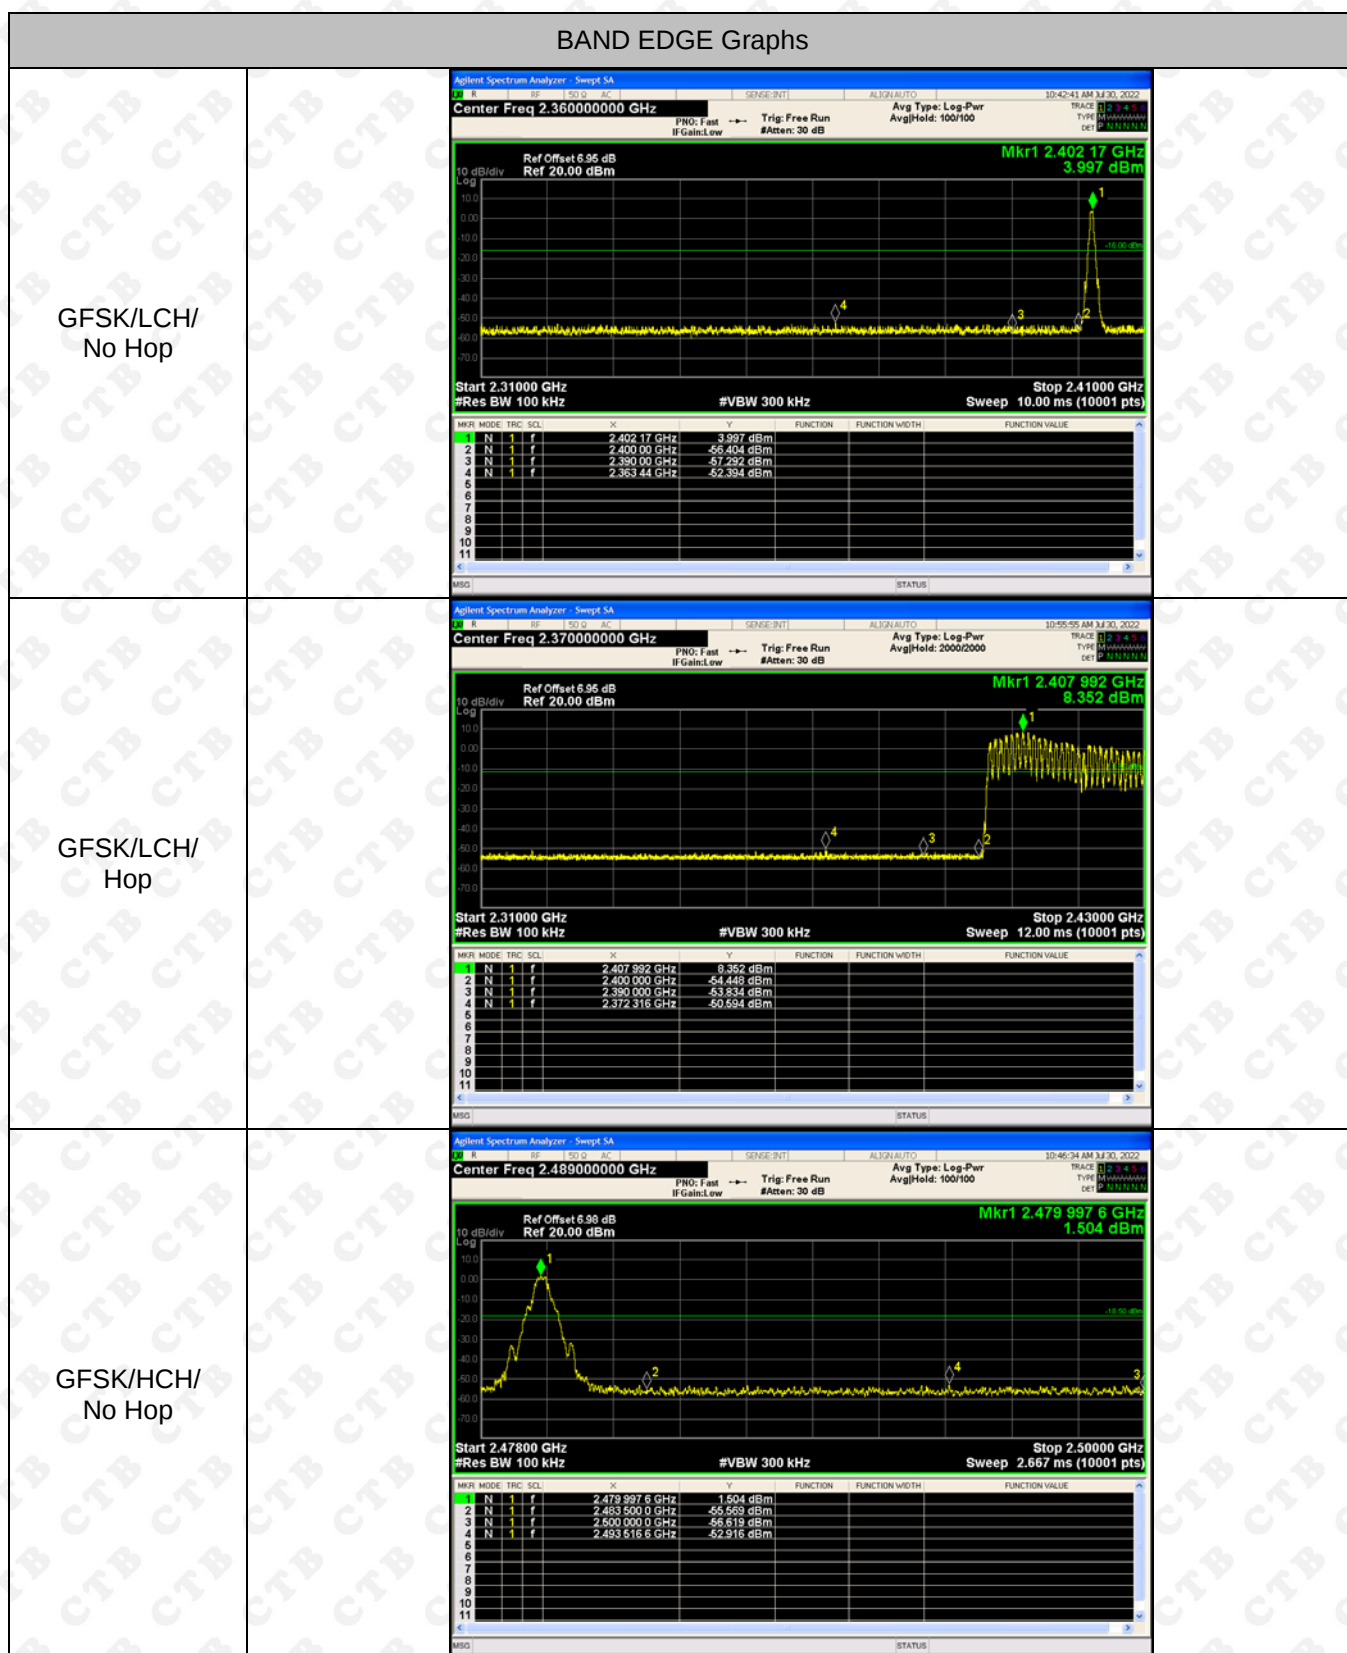


GFSK/HCH/
Hop



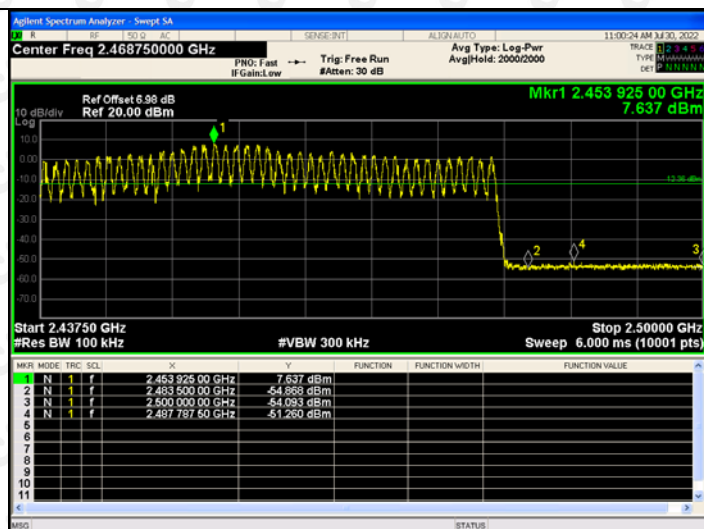


$\pi/4$ DQPSK/LCH/
No Hop

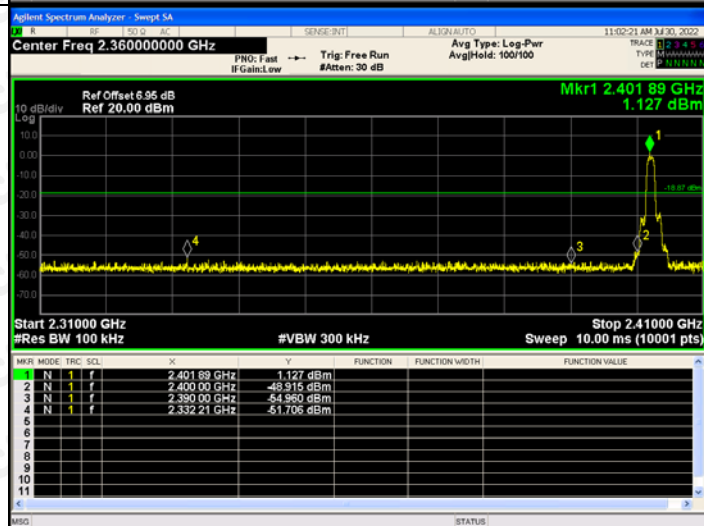


$\pi/4$ DQPSK/LCH/
Hop

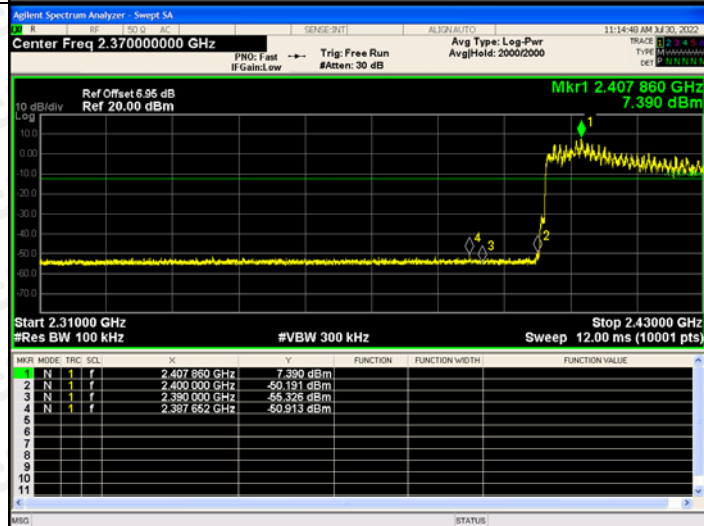


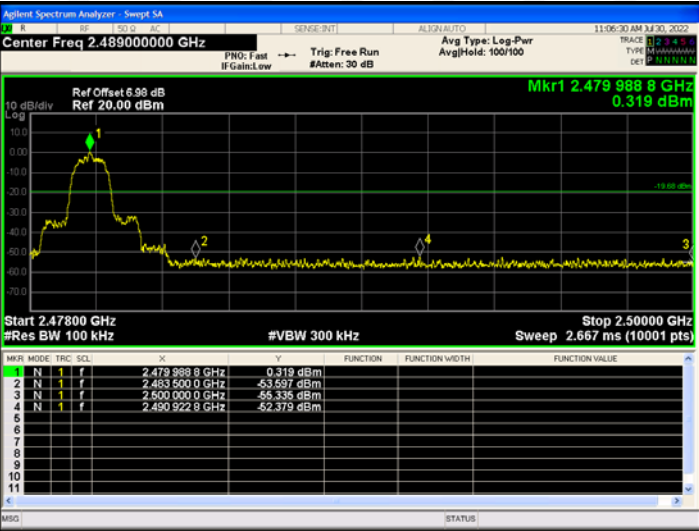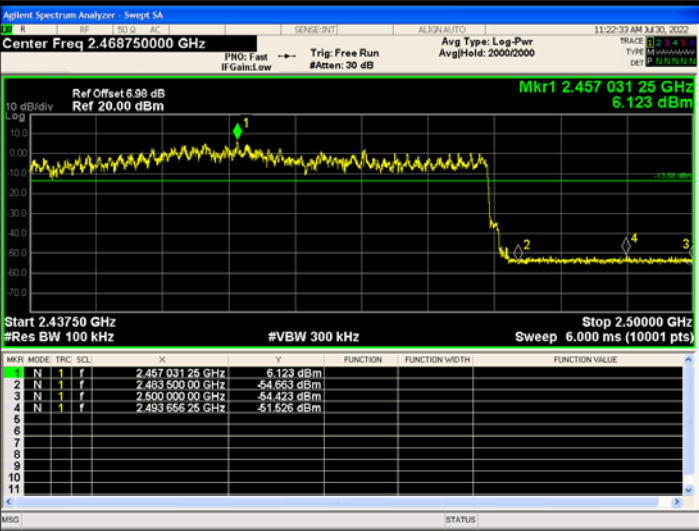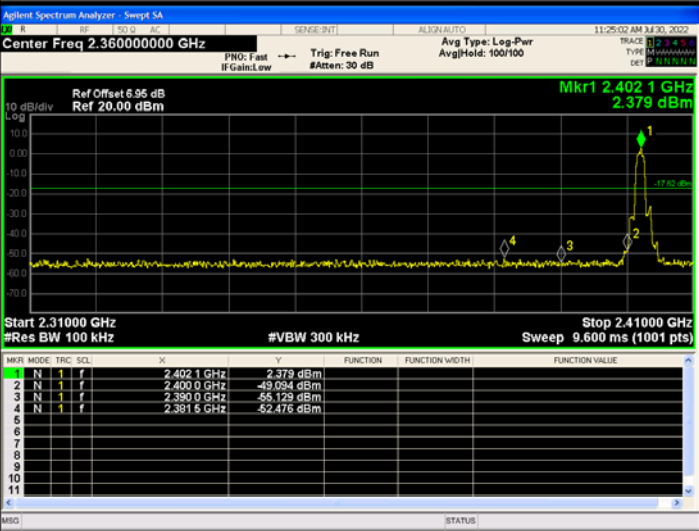$\pi/4$DQPSK/HCH/ No Hop	
$\pi/4$DQPSK/HCH/ Hop	
8DPSK/LCH/No Hop	


8DPSK
/LCH/Hop

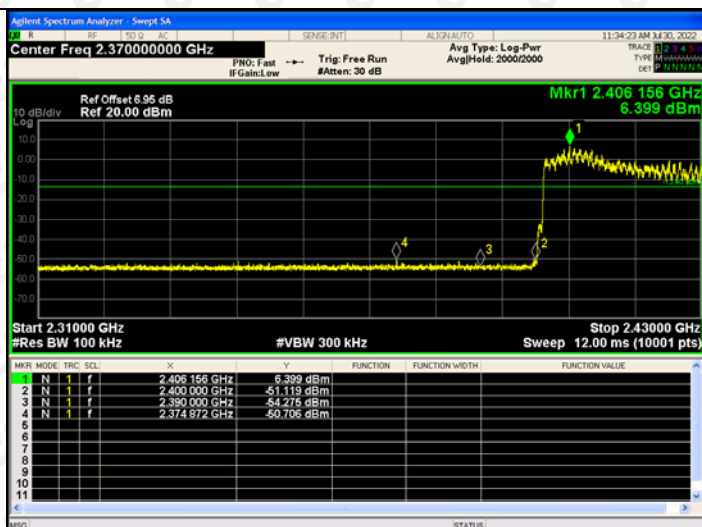

8DPSK /HCH/No
Hop

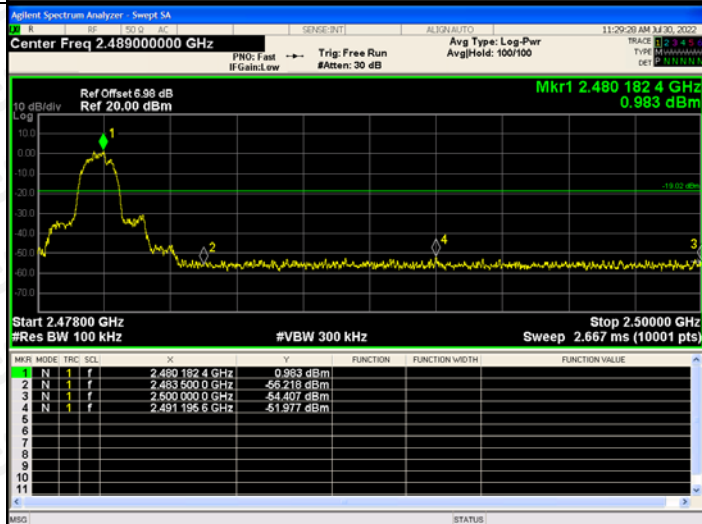


8DPSK
/HCH/Hop

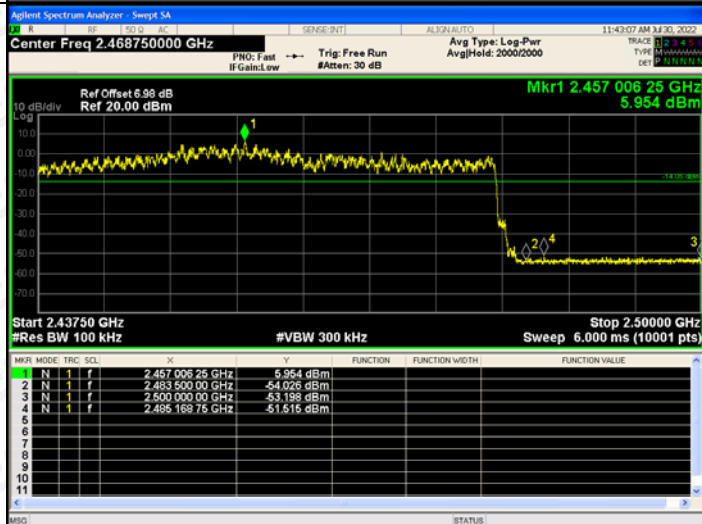


RF Conducted Spurious Emissions Graphs


GFSK/LCH



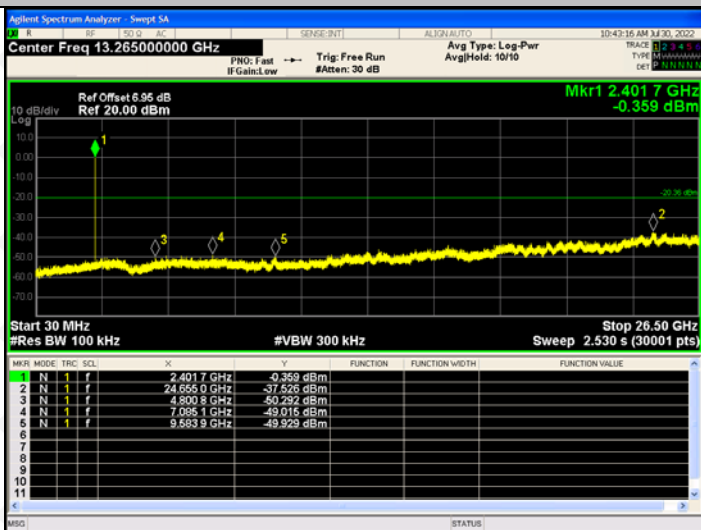


GFSK/MCH

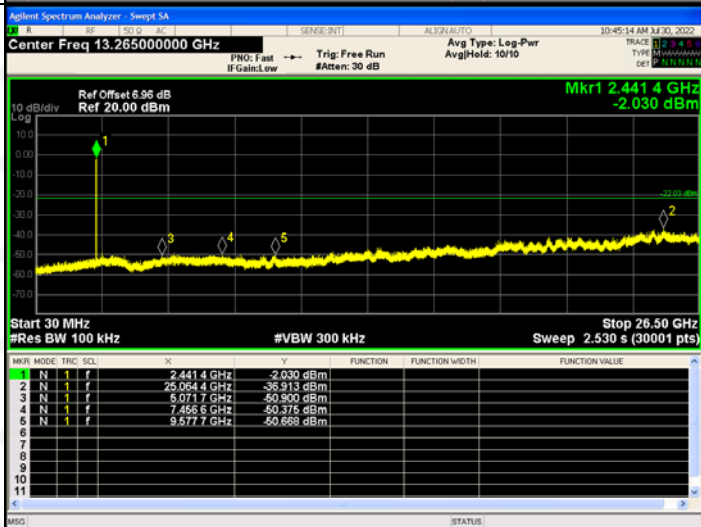


GFSK/HCH

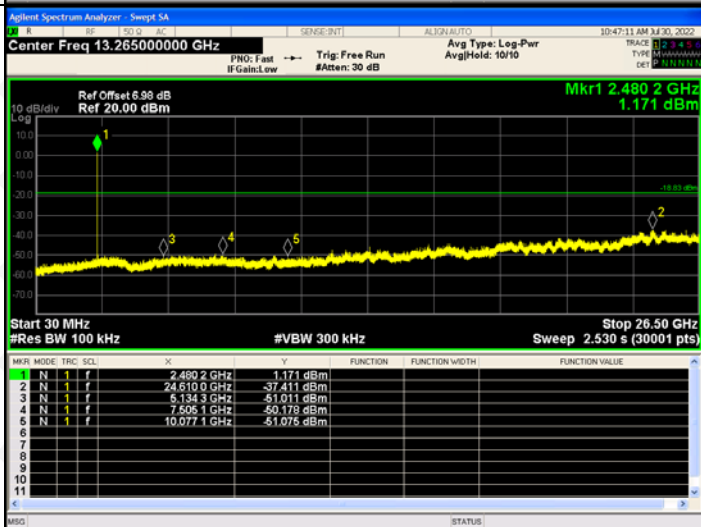


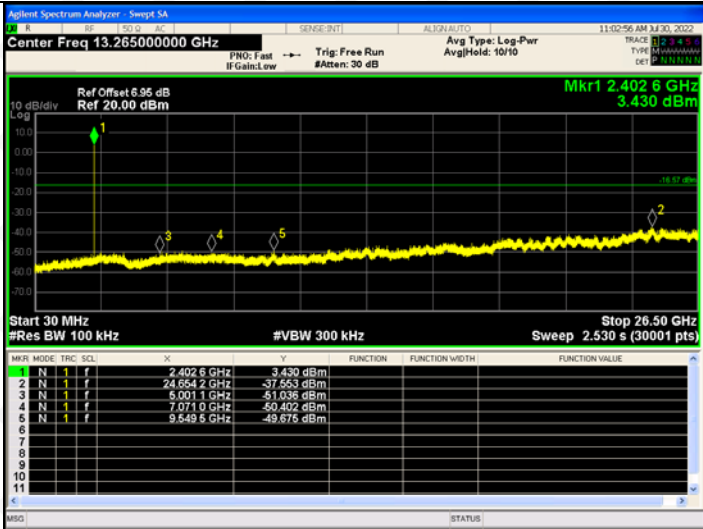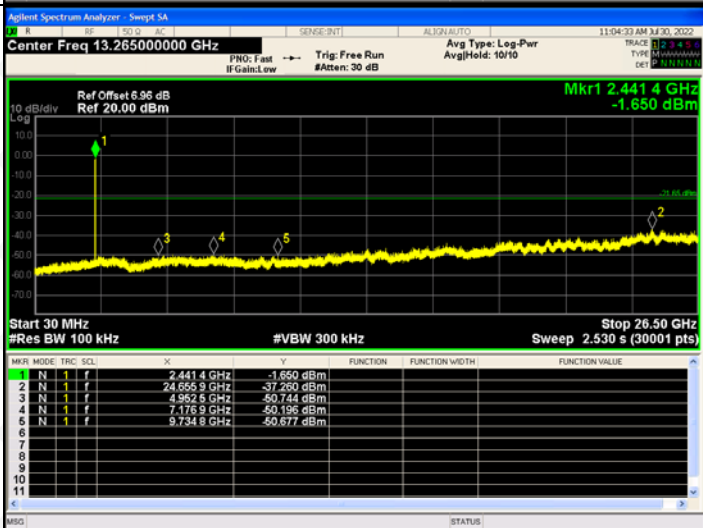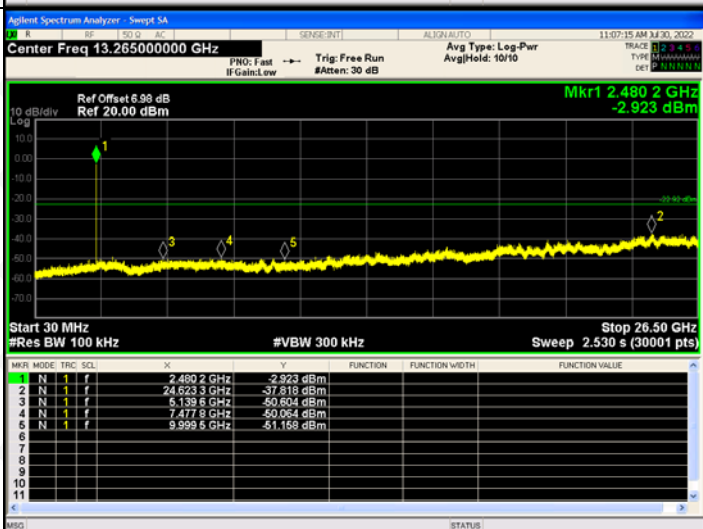$\pi/4$ DQPSK /LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.402 6 GHz 3.430 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 6 GHz</td><td>3.430 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.654 2 GHz</td><td>-37.553 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.001 1 GHz</td><td>-51.036 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.071 0 GHz</td><td>-50.402 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.549 5 GHz</td><td>-49.675 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 6 GHz	3.430 dBm				2	N	1	f	24.654 2 GHz	-37.553 dBm				3	N	1	f	5.001 1 GHz	-51.036 dBm				4	N	1	f	7.071 0 GHz	-50.402 dBm				5	N	1	f	9.549 5 GHz	-49.675 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.402 6 GHz	3.430 dBm																																																		
2	N	1	f	24.654 2 GHz	-37.553 dBm																																																		
3	N	1	f	5.001 1 GHz	-51.036 dBm																																																		
4	N	1	f	7.071 0 GHz	-50.402 dBm																																																		
5	N	1	f	9.549 5 GHz	-49.675 dBm																																																		
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.441 4 GHz -1.650 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.441 4 GHz</td><td>-1.650 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.655 9 GHz</td><td>-37.250 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.952 5 GHz</td><td>-50.744 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.175 9 GHz</td><td>-50.196 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.734 8 GHz</td><td>-50.677 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 4 GHz	-1.650 dBm				2	N	1	f	24.655 9 GHz	-37.250 dBm				3	N	1	f	4.952 5 GHz	-50.744 dBm				4	N	1	f	7.175 9 GHz	-50.196 dBm				5	N	1	f	9.734 8 GHz	-50.677 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.441 4 GHz	-1.650 dBm																																																		
2	N	1	f	24.655 9 GHz	-37.250 dBm																																																		
3	N	1	f	4.952 5 GHz	-50.744 dBm																																																		
4	N	1	f	7.175 9 GHz	-50.196 dBm																																																		
5	N	1	f	9.734 8 GHz	-50.677 dBm																																																		
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.98 dB Ref 20.00 dBm Mkr1 2.480 2 GHz -2.923 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 2 GHz</td><td>-2.923 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.623 3 GHz</td><td>-37.818 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.139 6 GHz</td><td>-50.804 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.477 9 GHz</td><td>-50.054 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.999 5 GHz</td><td>-51.158 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	-2.923 dBm				2	N	1	f	24.623 3 GHz	-37.818 dBm				3	N	1	f	5.139 6 GHz	-50.804 dBm				4	N	1	f	7.477 9 GHz	-50.054 dBm				5	N	1	f	9.999 5 GHz	-51.158 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.480 2 GHz	-2.923 dBm																																																		
2	N	1	f	24.623 3 GHz	-37.818 dBm																																																		
3	N	1	f	5.139 6 GHz	-50.804 dBm																																																		
4	N	1	f	7.477 9 GHz	-50.054 dBm																																																		
5	N	1	f	9.999 5 GHz	-51.158 dBm																																																		


8DPSK /LCH

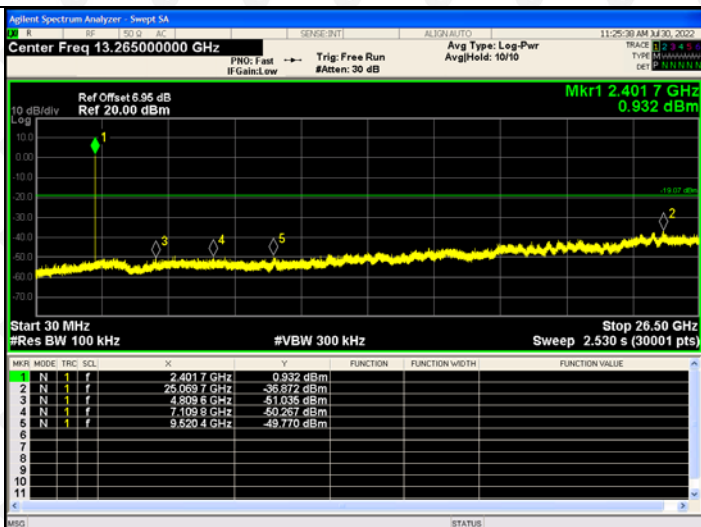

8DPSK /MCH

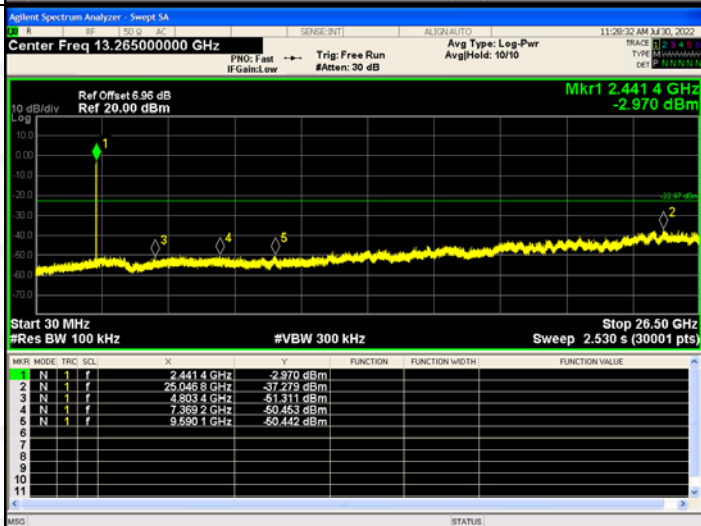


8DPSK /HCH

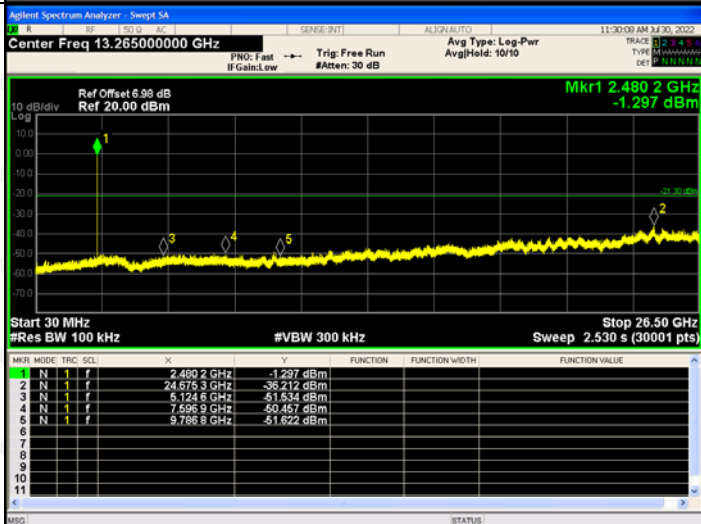

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

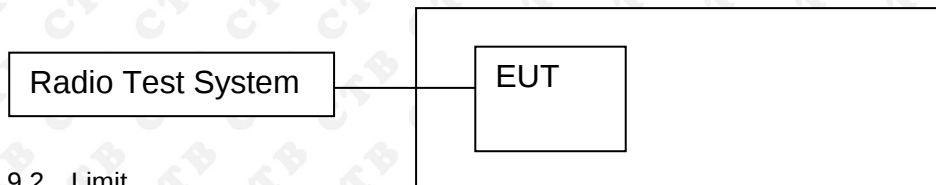

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


9.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
EDR mode (GFSK)	LCH	4.580	PASS
	MCH	0.912	PASS
	HCH	2.728	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	4.462	PASS
	MCH	0.578	PASS
	HCH	2.401	PASS
EDR mode (8DPSK)	LCH	4.472	PASS
	MCH	0.505	PASS
	HCH	2.285	PASS

Test Graph:

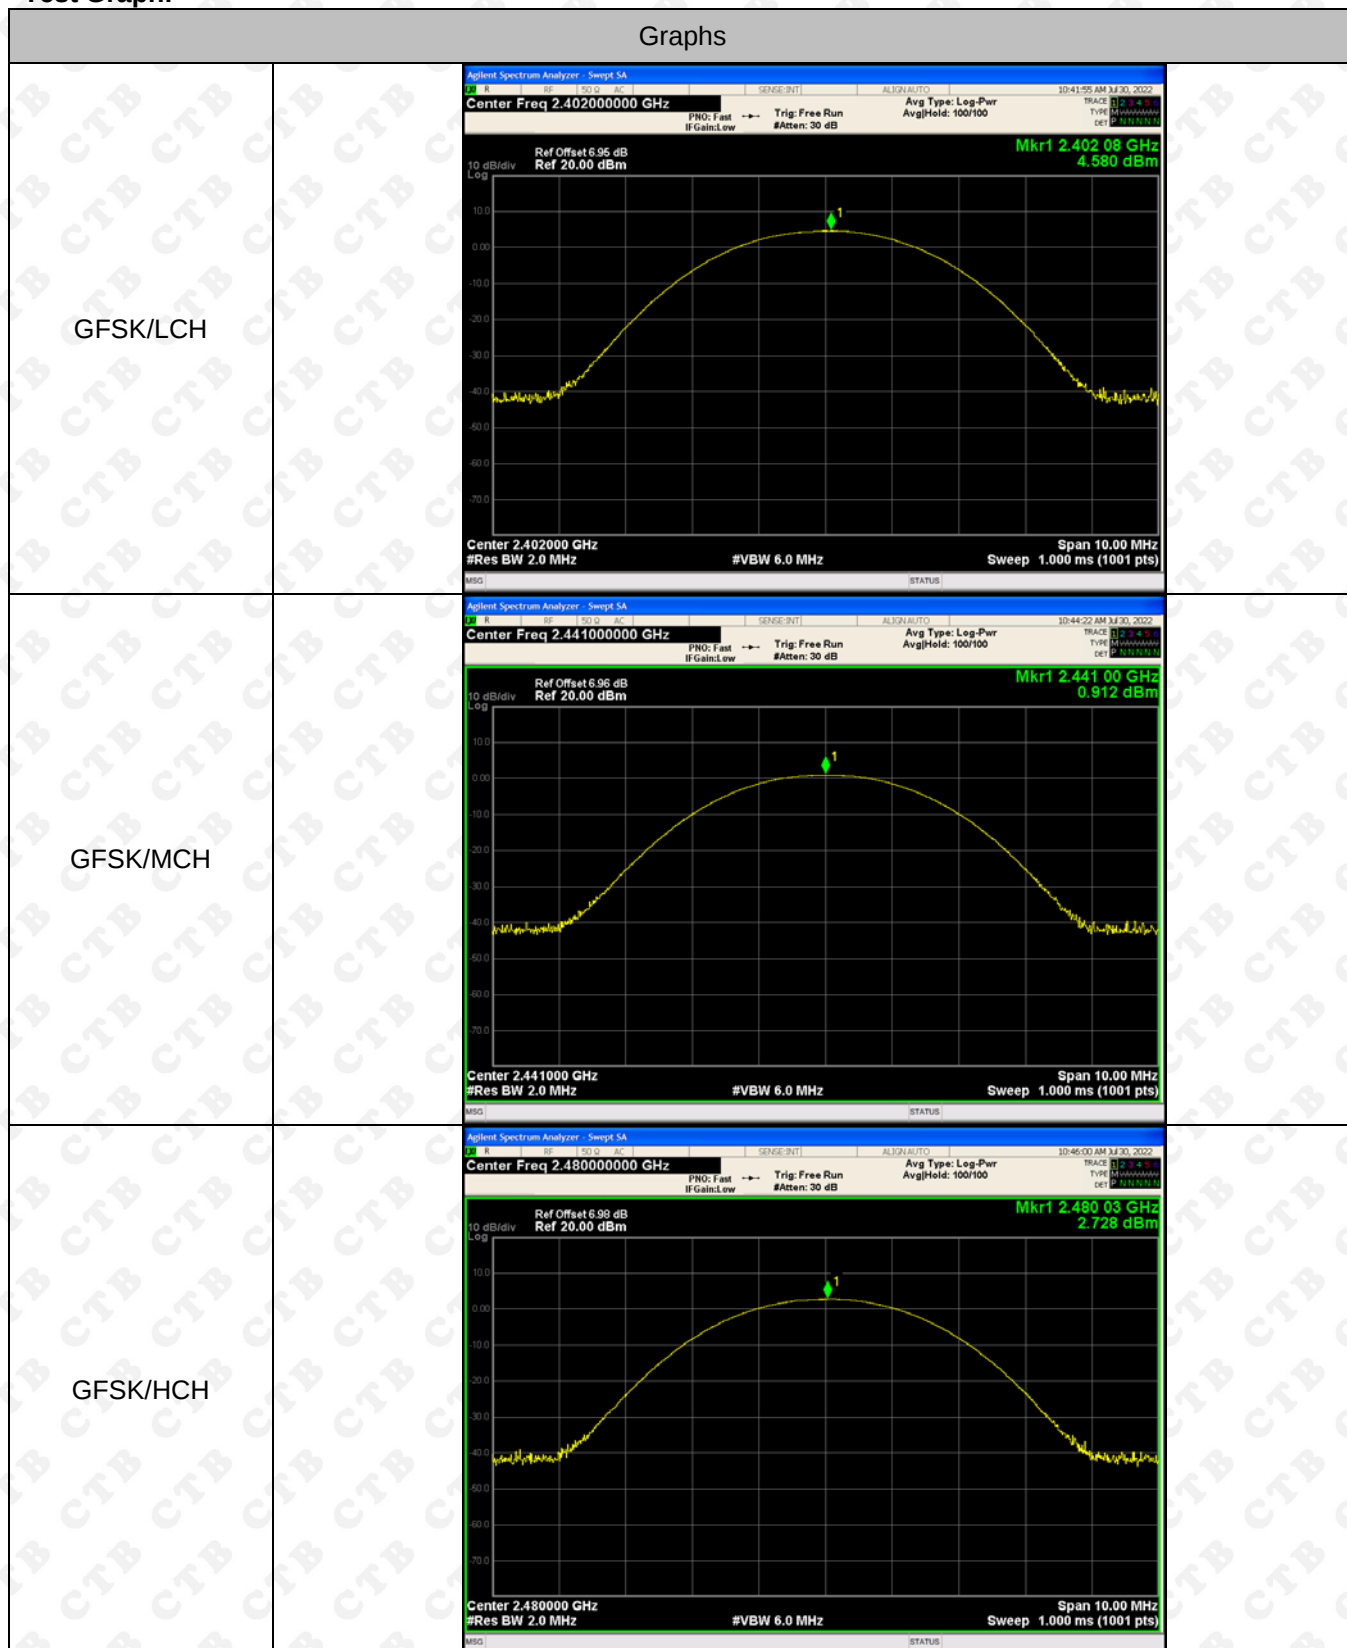


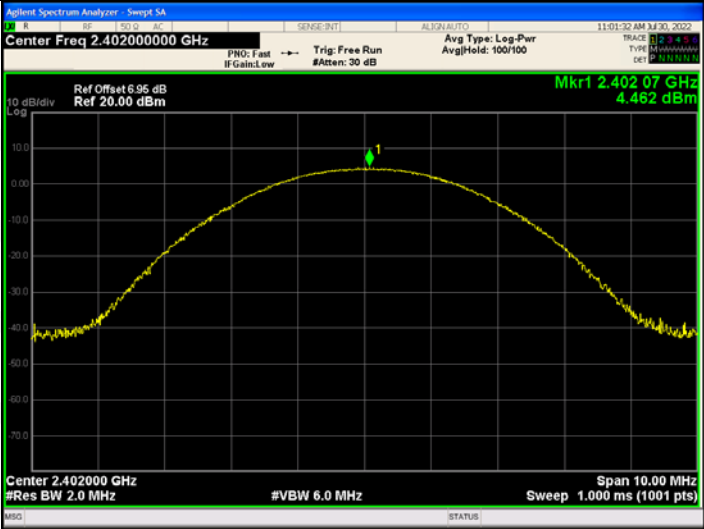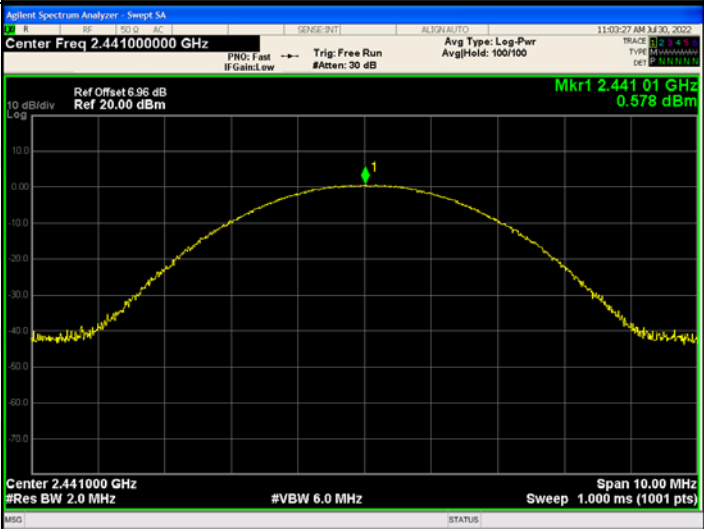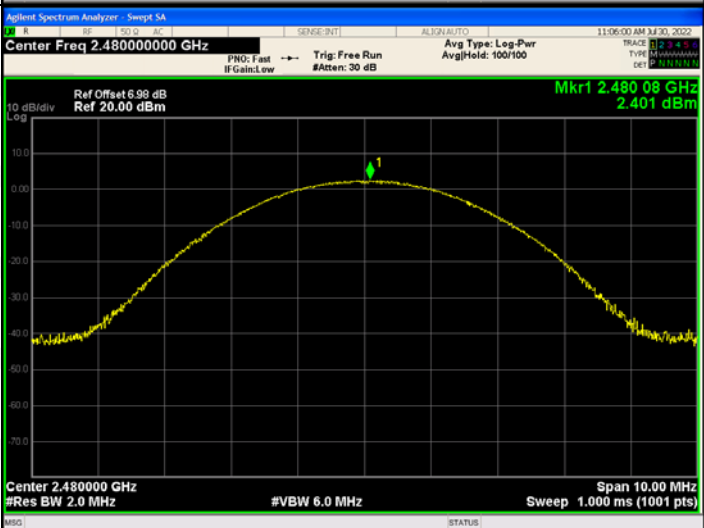$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.402 07 GHz 4.462 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.441 01 GHz 0.578 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.480 08 GHz 2.401 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

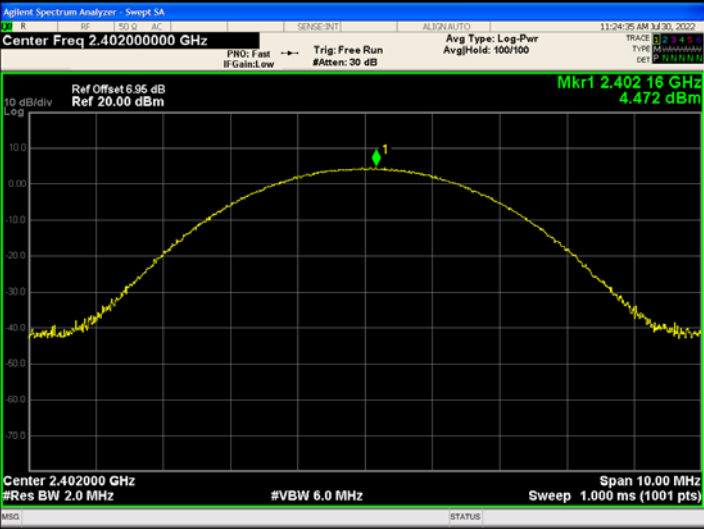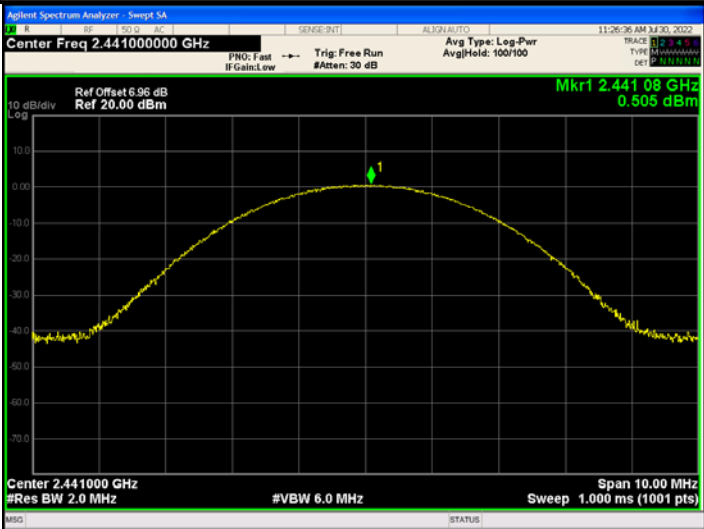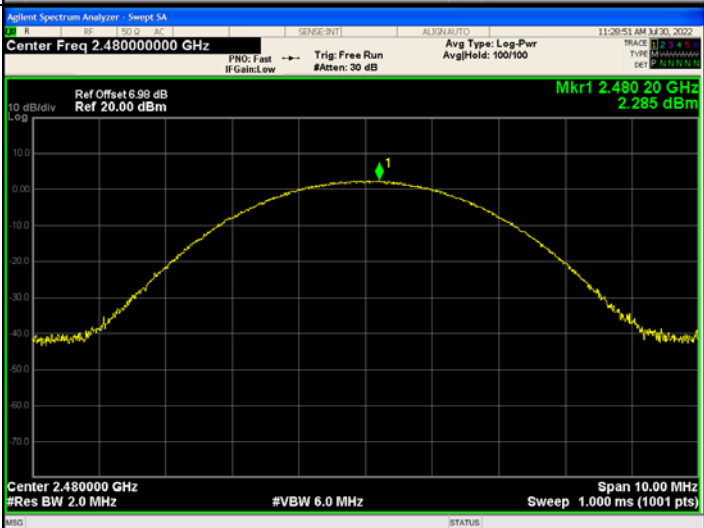8DPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.40216 GHz 4.472 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.44108 GHz 0.505 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.48020 GHz 2.285 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

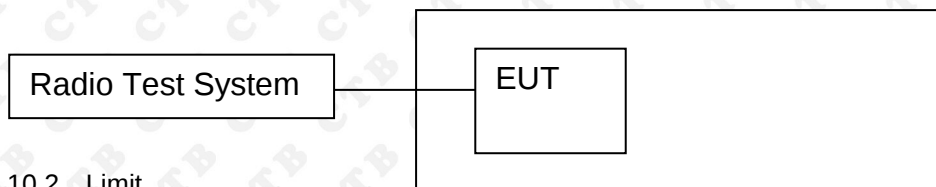

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure




1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result




Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	1.019	PASS
	Mid channel	1.018	PASS
	High channel	1.012	PASS
$\pi/4$ DQPSK	Low channel	1.329	PASS
	Mid channel	1.314	PASS
	High channel	1.33	PASS
8DPSK	Low channel	1.311	PASS
	Mid channel	1.309	PASS
	High channel	1.31	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

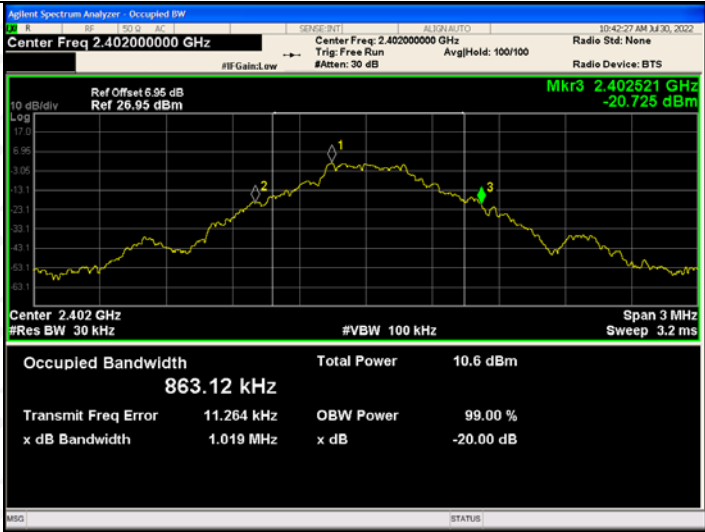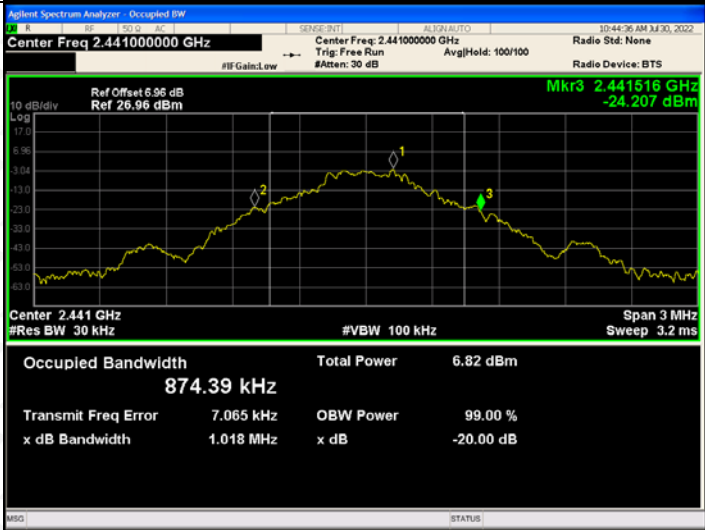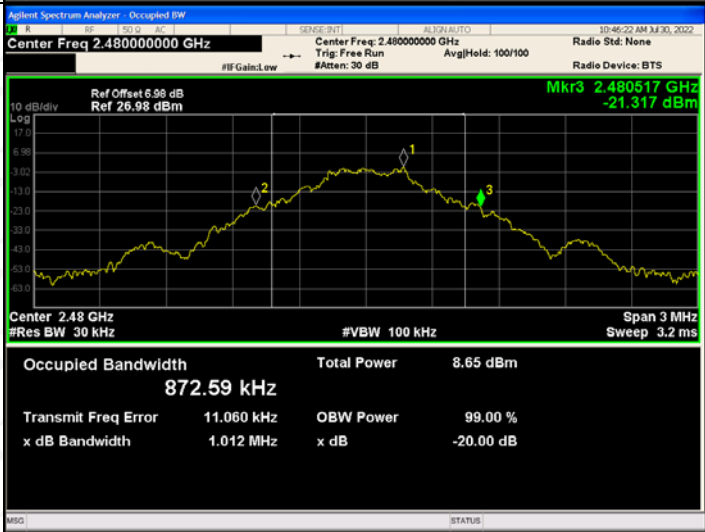
GFSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Ref Offset: 6.95 dB Ref: 26.95 dBm Occupied Bandwidth: 863.12 kHz Total Power: 10.6 dBm Transmit Freq Error: 11.264 kHz OBW Power: 99.00 % x dB Bandwidth: 1.019 MHz x dB: -20.00 dB
GFSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Ref Offset: 6.95 dB Ref: 26.95 dBm Occupied Bandwidth: 874.39 kHz Total Power: 6.82 dBm Transmit Freq Error: 7.065 kHz OBW Power: 99.00 % x dB Bandwidth: 1.018 MHz x dB: -20.00 dB
GFSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Ref Offset: 6.95 dB Ref: 26.95 dBm Occupied Bandwidth: 872.59 kHz Total Power: 8.65 dBm Transmit Freq Error: 11.060 kHz OBW Power: 99.00 % x dB Bandwidth: 1.012 MHz x dB: -20.00 dB

$\pi/4$-DQPSK Low channel	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 6.95 dB Ref: 26.95 dBm 10 dB/div Log Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1918 MHz Total Power: 9.79 dBm Transmit Freq Error: 7.940 kHz OBW Power: 99.00 % x dB Bandwidth: 1.329 MHz x dB: -20.00 dB Mkr3: 2.402672 GHz -21.112 dBm
$\pi/4$-DQPSK Mid channel	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 6.95 dB Ref: 26.95 dBm 10 dB/div Log Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1801 MHz Total Power: 6.02 dBm Transmit Freq Error: 5.287 kHz OBW Power: 99.00 % x dB Bandwidth: 1.314 MHz x dB: -20.00 dB Mkr3: 2.441662 GHz -24.419 dBm
$\pi/4$-DQPSK High channel	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 6.95 dB Ref: 26.95 dBm 10 dB/div Log Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1935 MHz Total Power: 7.67 dBm Transmit Freq Error: 5.550 kHz OBW Power: 99.00 % x dB Bandwidth: 1.330 MHz x dB: -20.00 dB Mkr3: 2.48067 GHz -22.998 dBm

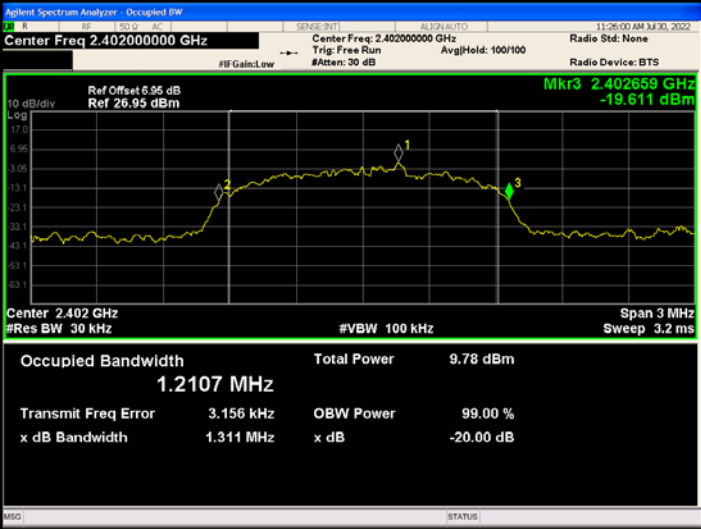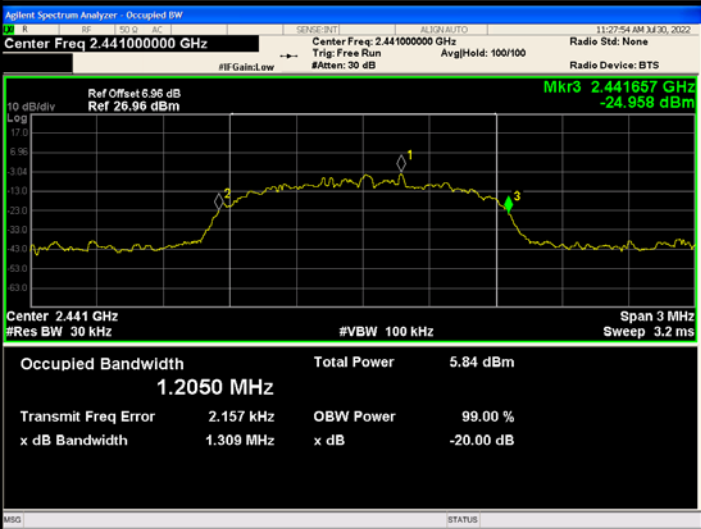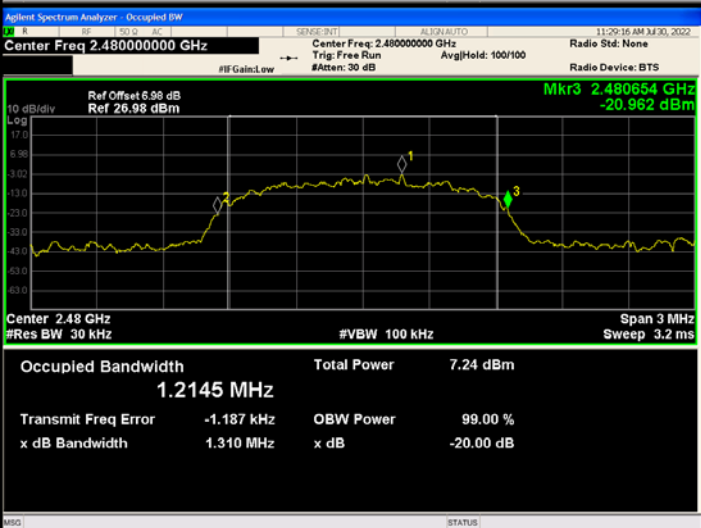8DPSK Low channel	
8DPSK Mid channel	
8DPSK High channel	

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

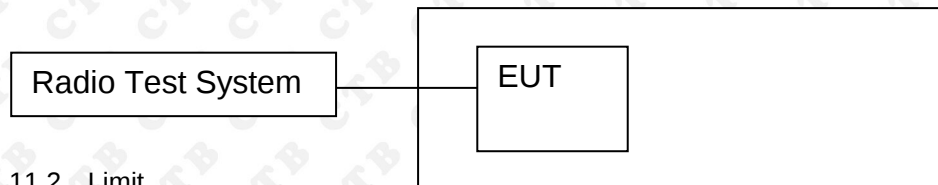

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit [MHz]	Verdict
GFSK	LCH	1.000	0.679	PASS
GFSK	MCH	1.000	0.679	PASS
GFSK	HCH	1.000	0.675	PASS
$\pi/4$ DQPSK	LCH	1.000	0.886	PASS
$\pi/4$ DQPSK	MCH	1.000	0.876	PASS
$\pi/4$ DQPSK	HCH	1.000	0.887	PASS
8DPSK	LCH	1.000	0.874	PASS
8DPSK	MCH	1.000	0.873	PASS
8DPSK	HCH	1.000	0.873	PASS

Test Graph

Graphs

GFSK/LCH



GFSK/MCH




GFSK/HCH



$\pi/4$ DQPSK/LCH	<table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.000 MHz (Δ)</td><td>1.386 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.402170 GHz</td><td>-1.749 dBm</td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	1.000 MHz (Δ)	1.386 dB			2	F	1	f		2.402170 GHz	-1.749 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(Δ)	1.000 MHz (Δ)	1.386 dB																							
2	F	1	f		2.402170 GHz	-1.749 dBm																							
$\pi/4$ DQPSK/MCH	<table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.000 MHz (Δ)</td><td>1.427 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.440836 GHz</td><td>-5.289 dBm</td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	1.000 MHz (Δ)	1.427 dB			2	F	1	f		2.440836 GHz	-5.289 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(Δ)	1.000 MHz (Δ)	1.427 dB																							
2	F	1	f		2.440836 GHz	-5.289 dBm																							
$\pi/4$ DQPSK/HCH	<table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(Δ)</td><td>1.000 MHz (Δ)</td><td>1.576 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.479006 GHz</td><td>-4.280 dBm</td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	1.000 MHz (Δ)	1.576 dB			2	F	1	f		2.479006 GHz	-4.280 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(Δ)	1.000 MHz (Δ)	1.576 dB																							
2	F	1	f		2.479006 GHz	-4.280 dBm																							


8DPSK/LCH

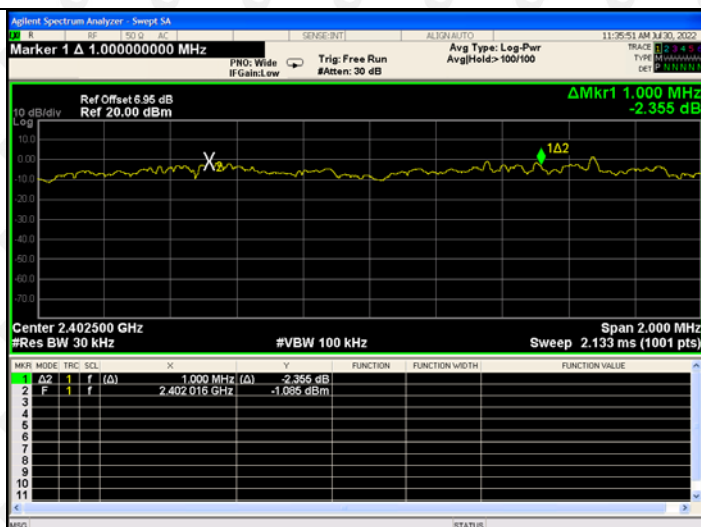

8DPSK /MCH




8DPSK /HCH

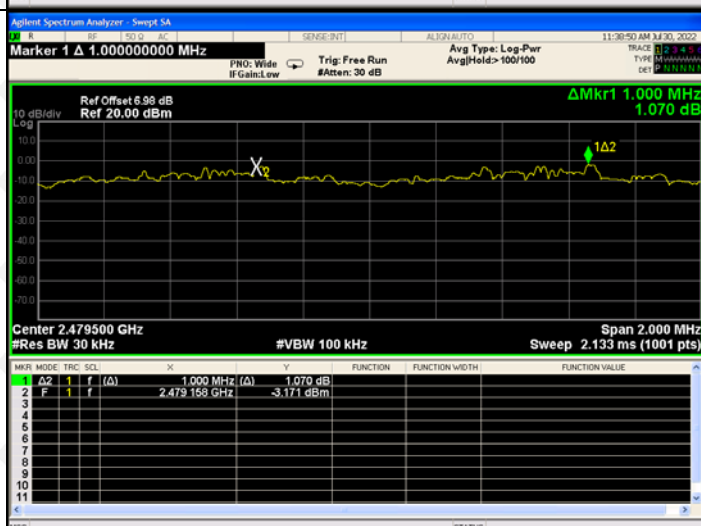

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

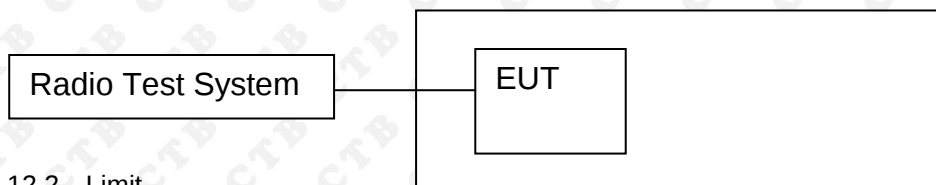

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;



12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS


Test Graph

Graphs

GFSK/Hop

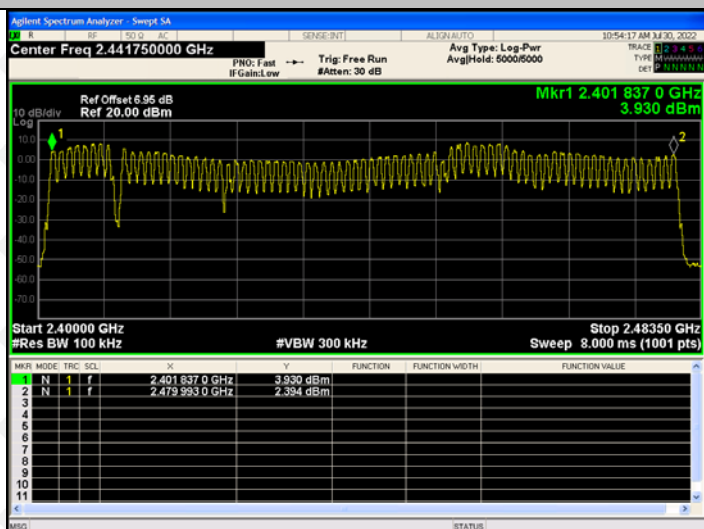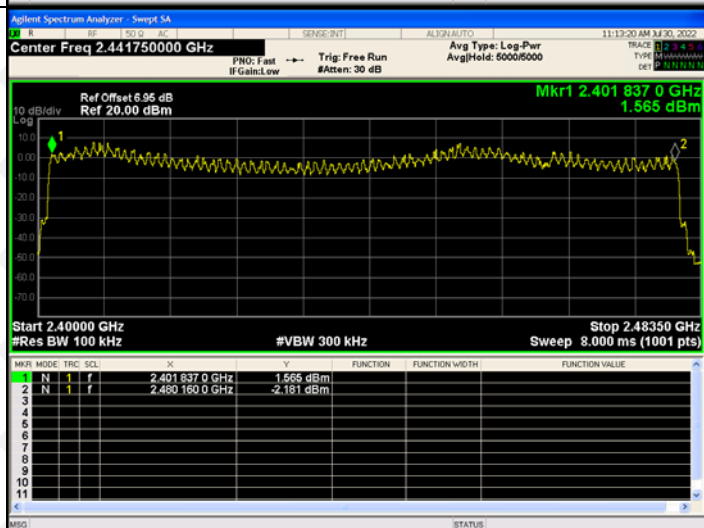

 $\pi/4$ DQPSK/Hop


8DPSK/Hop

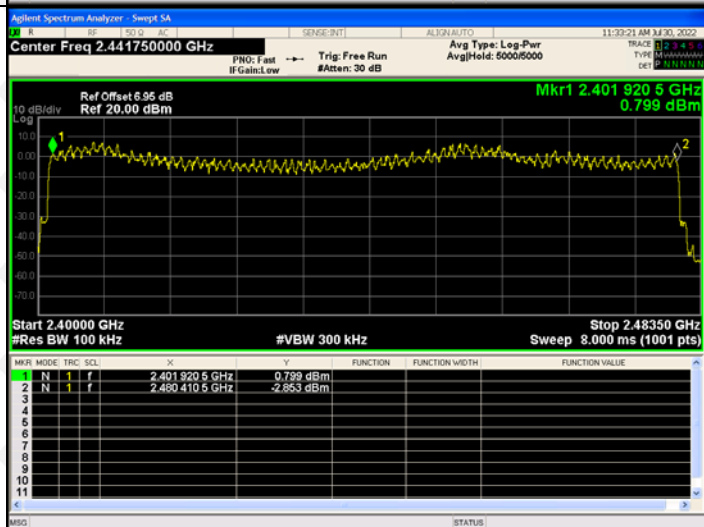

13. DWELL TIME

13.1 Block Diagram Of Test Setup

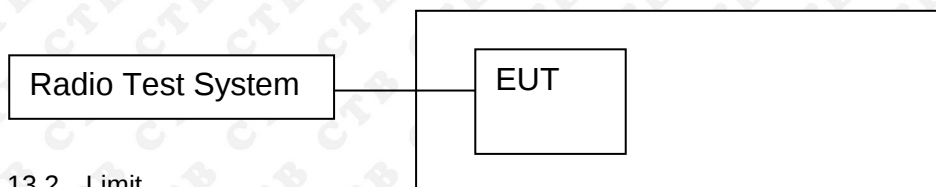

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.378	120.96	400	PASS
	DH1	MCH	0.378	120.96	400	PASS
	DH1	HCH	0.378	120.96	400	PASS
	DH3	LCH	1.637	261.92	400	PASS
	DH3	MCH	1.637	261.92	400	PASS
	DH3	HCH	1.637	261.92	400	PASS
	DH5	LCH	2.887	307.947	400	PASS
	DH5	MCH	2.887	307.947	400	PASS
	DH5	HCH	2.887	307.947	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$


DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.


Test Graph

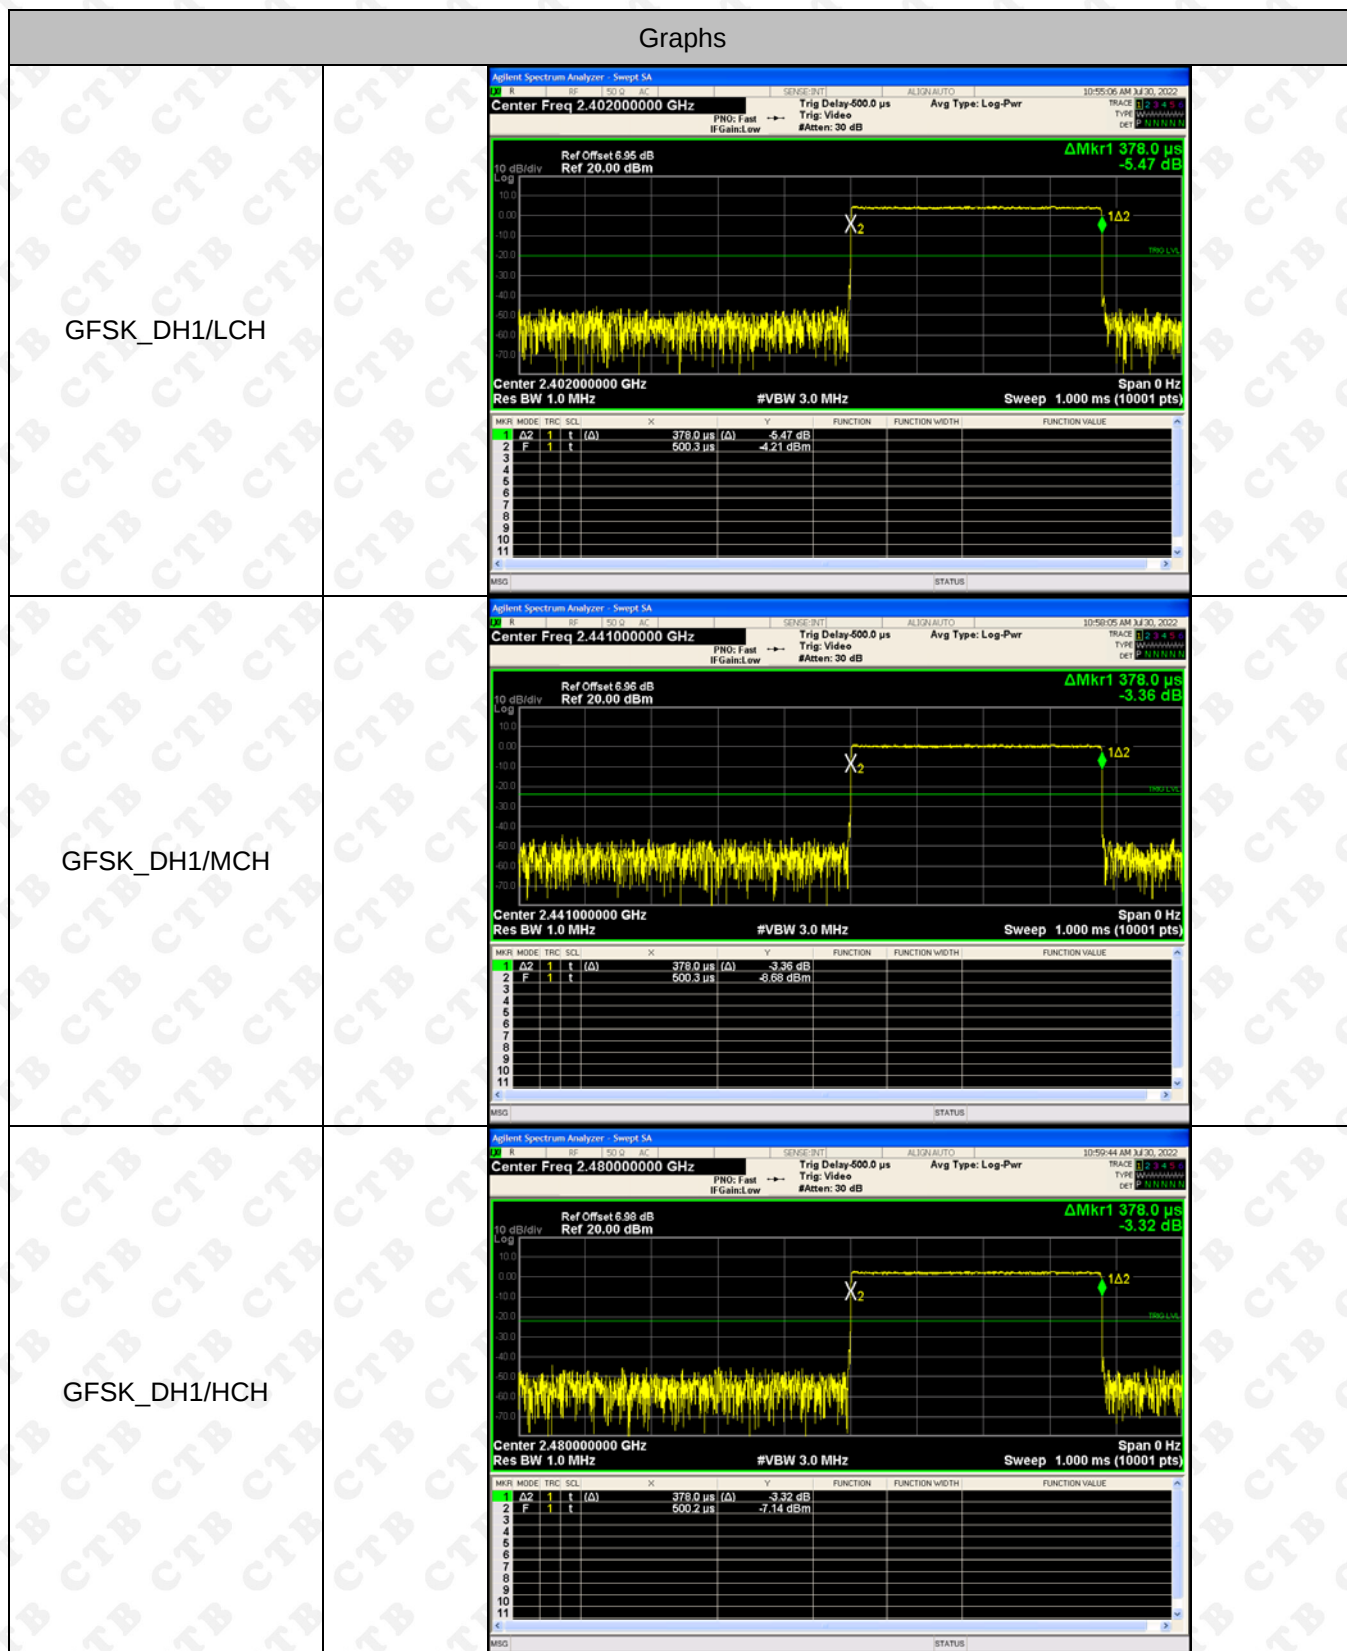


GFSK_DH3/LCH

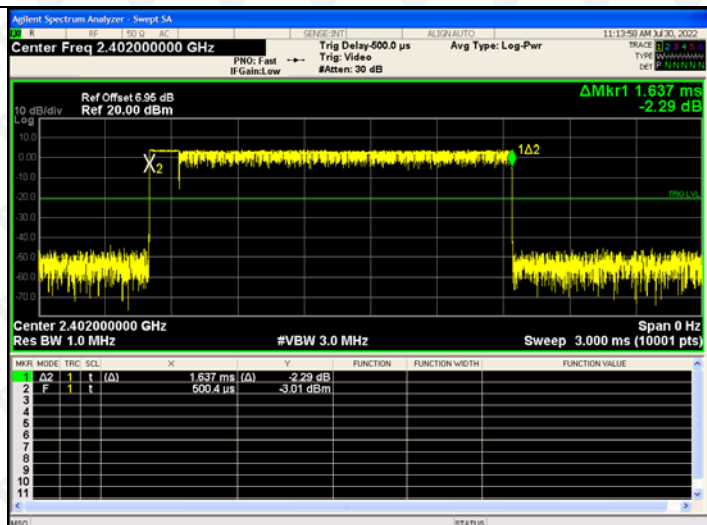


GFSK_DH3/MCH

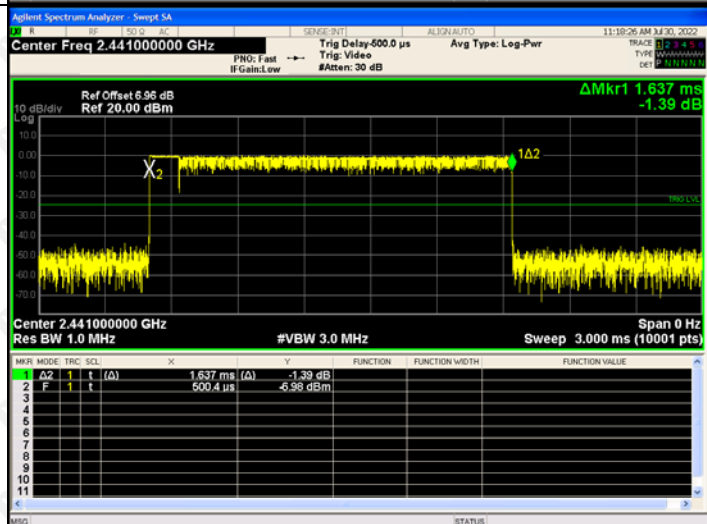


GFSK_DH3/HCH

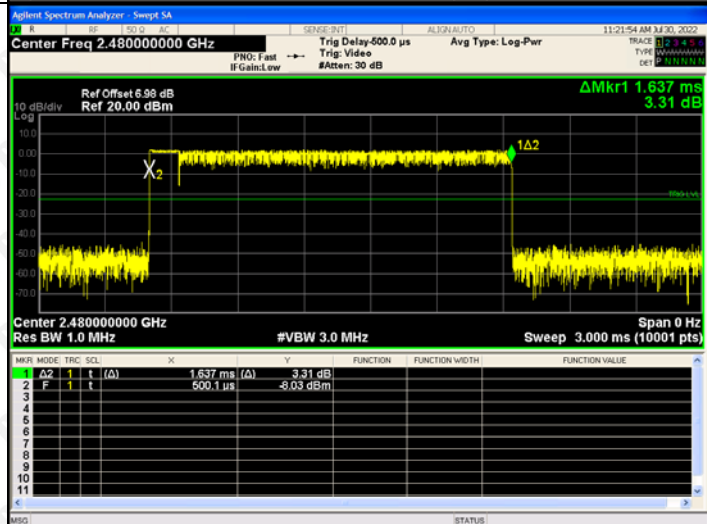


GFSK_DH5/LCH

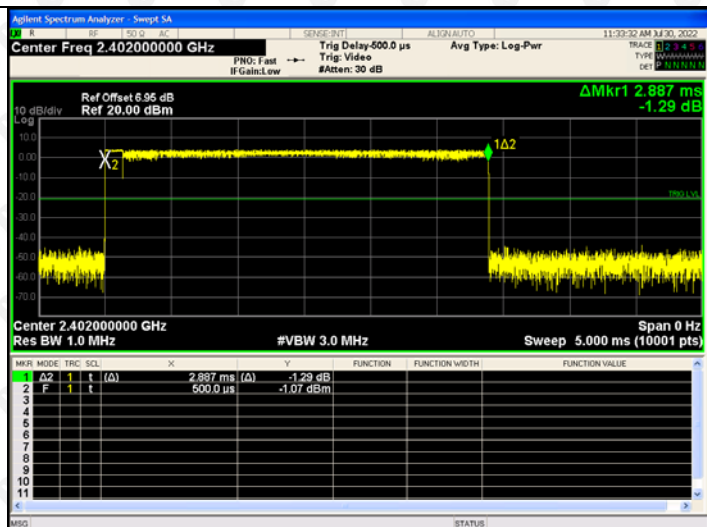

GFSK_DH5/MCH

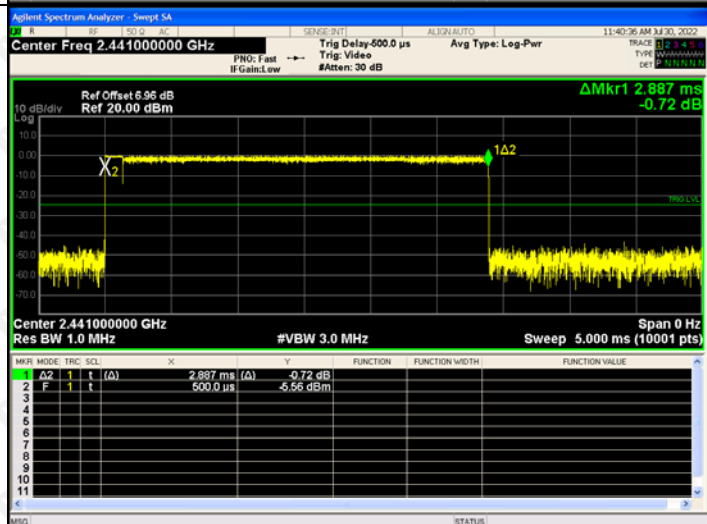

GFSK_DH5/HCH

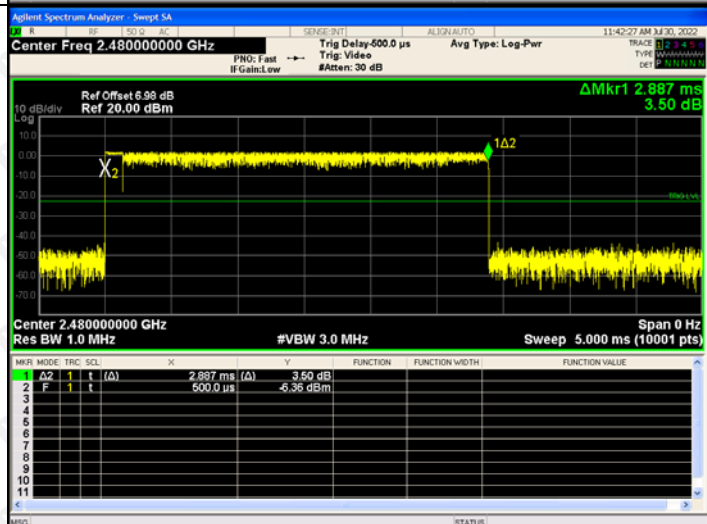

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

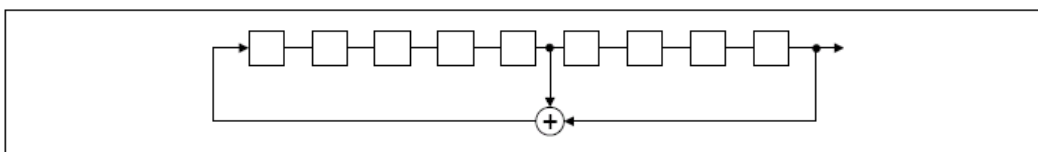

An example of Pseudorandom Frequency Hopping Sequence as follow:

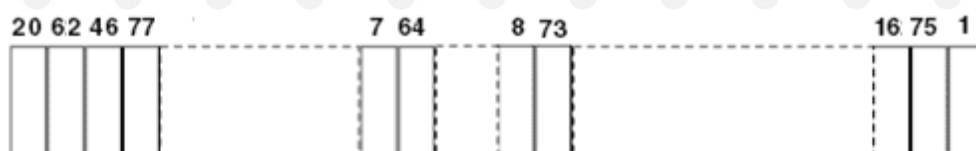

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is PCB antenna. The best case gain of the antenna is 1.2dBi.


16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

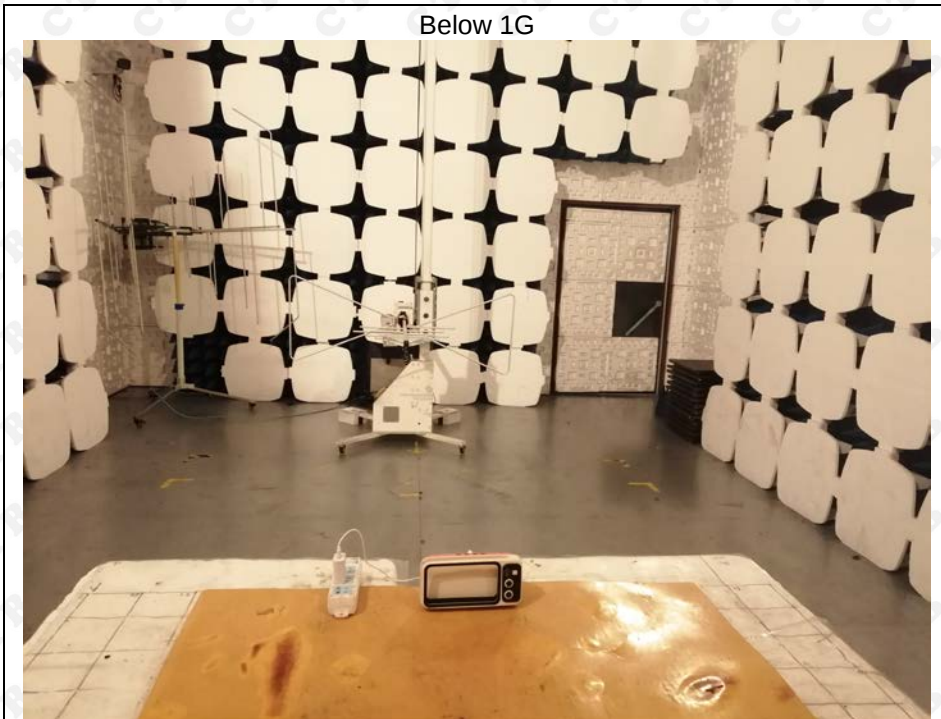

Above 1G

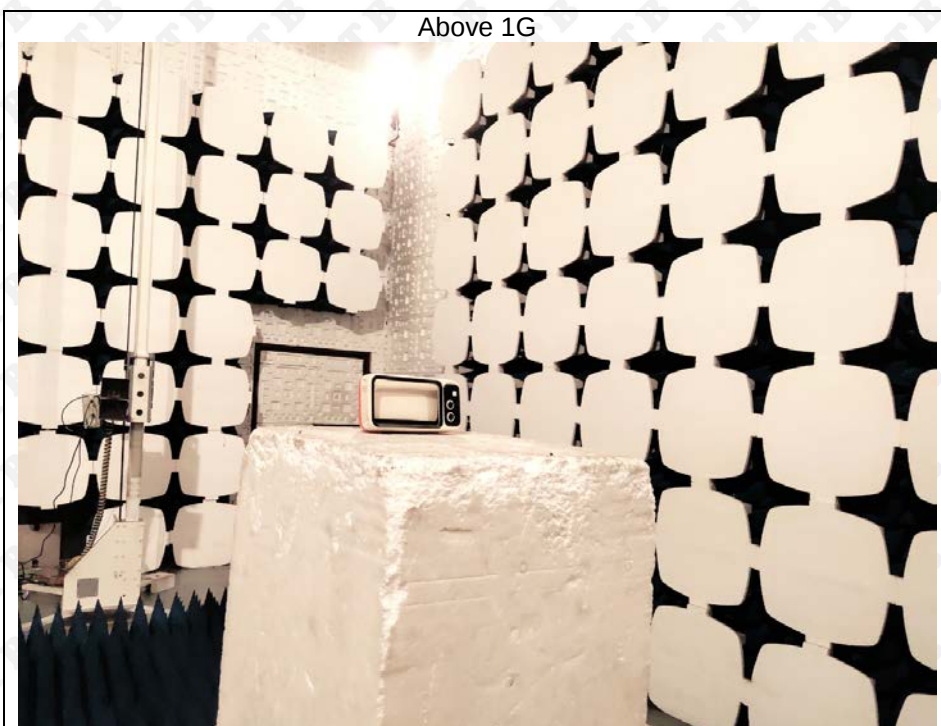

Conducted emissions



***** END OF REPORT *****