

SPECIFICATION FOR APPROVAL

CUSTOMER: Shenzhen Future Charger Technology Co. Ltd.

CUST P/N:

DESC:

J-FCA12L15

DATE:

20221203

VERSION:

A.0

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE
杨茂新	刘惜姜	罗杰	

东莞市吉欧电子科技有限公司

DONGGUAN JIOU ELECTRONIC TECHNOLOGY CO,LTD

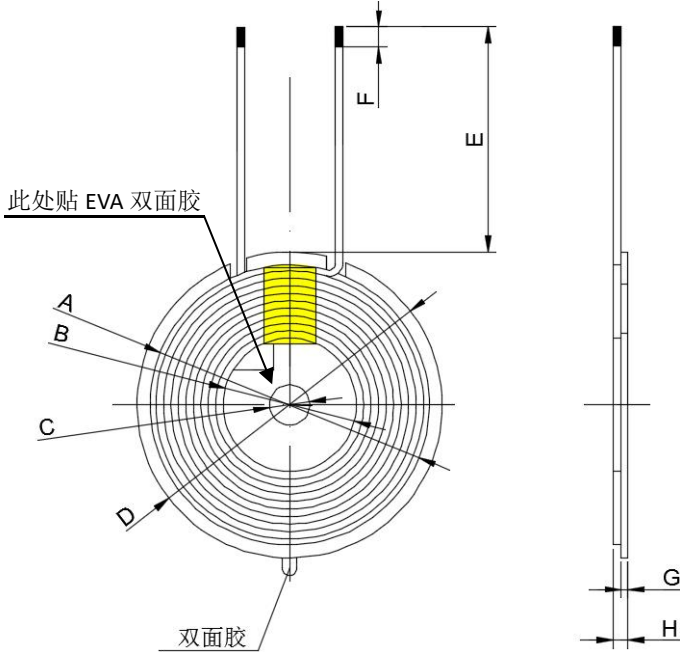
ADDR: Xinfu Industrial Zone, Shijie Town, Dongguan City

[TEL:0769-83067050](tel:0769-83067050)E-mail: lybofmana@163.com

Version Change History

Rev	Before Change	After Change	Change Date	Approved BY
A.0	New Issue		20221203	罗杰

SPECIFICATION

DESC	J-FCA12L15	REV:A.O	CUST	分寸
			CUST P/N	
一、 DIMENSION(MM)				
 notes: 1. Paste 1.5~2 circles of 8mm high temperature tape at the lead 2. Middle sticker of magnetic separator and coil inner hole $\Phi 15 * 1.0$EVA double-sided adhesive			A	46±1mm
			B	18±0.5 mm
			C	5±0.5 mm
			D	50±1mm
			E	15±2 mm
			F	3±2 mm
			G	2±0.1 mm
			H	4.0Max

二、Winding Specification:

Wire	Turns	Winding Direction
silk wire 0.08*90P	13TS	Rewind

三、ELECTRICAL CHARACTERISTICS:

TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, RELATIVE HUMIDITY : $65 \pm 20\%$

TIEM	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
IND	$10.0\text{UH} \pm 10\%$	100 KHZ/1.0V	LCZ METER 1062B
DCR	65m Ω Max		LCZ METER 1062B

PREPARED BY	CHECKED BY	DATE
杨茂新	刘惜姜	20221203

