



Appendix A

RF Test Data for BT (Conducted Measurement)

Product Name: tablet

Test Model: B610A103A

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Ling Zhu
Supervised by:	Li huan



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



A.1 -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.843	N/A	Pass
NVNT	1-DH5	2441	Ant1	0.812	N/A	Pass
NVNT	1-DH5	2480	Ant1	0.854	N/A	Pass
NVNT	2-DH5	2402	Ant1	1.272	N/A	Pass
NVNT	2-DH5	2441	Ant1	1.265	N/A	Pass
NVNT	2-DH5	2480	Ant1	1.26	N/A	Pass
NVNT	3-DH5	2402	Ant1	1.271	N/A	Pass
NVNT	3-DH5	2441	Ant1	1.288	N/A	Pass
NVNT	3-DH5	2480	Ant1	1.254	N/A	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

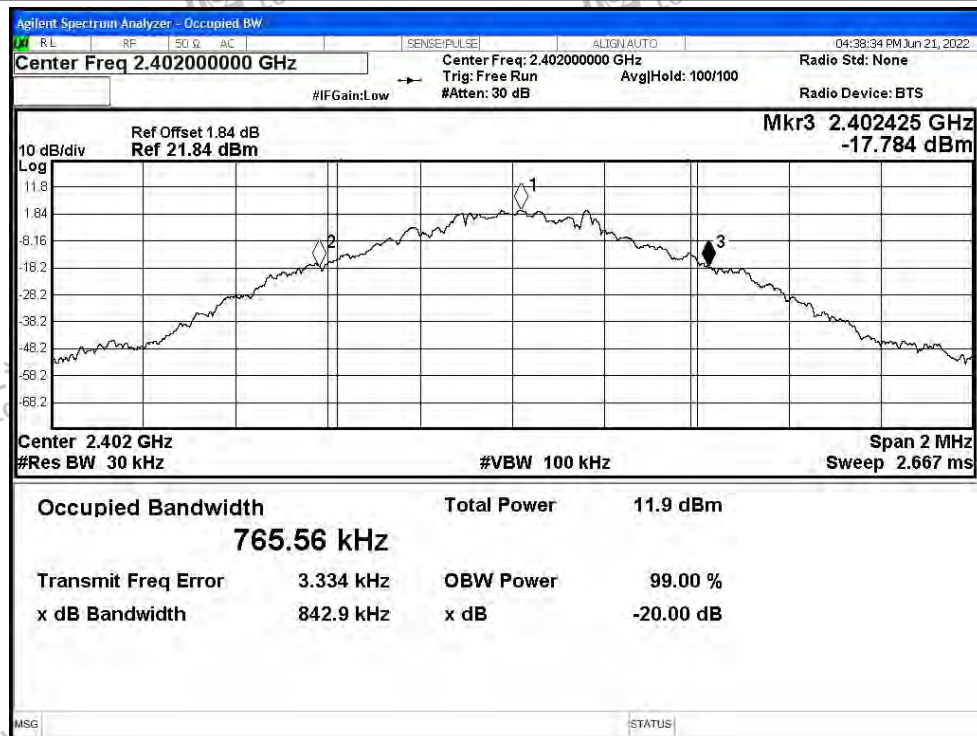


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

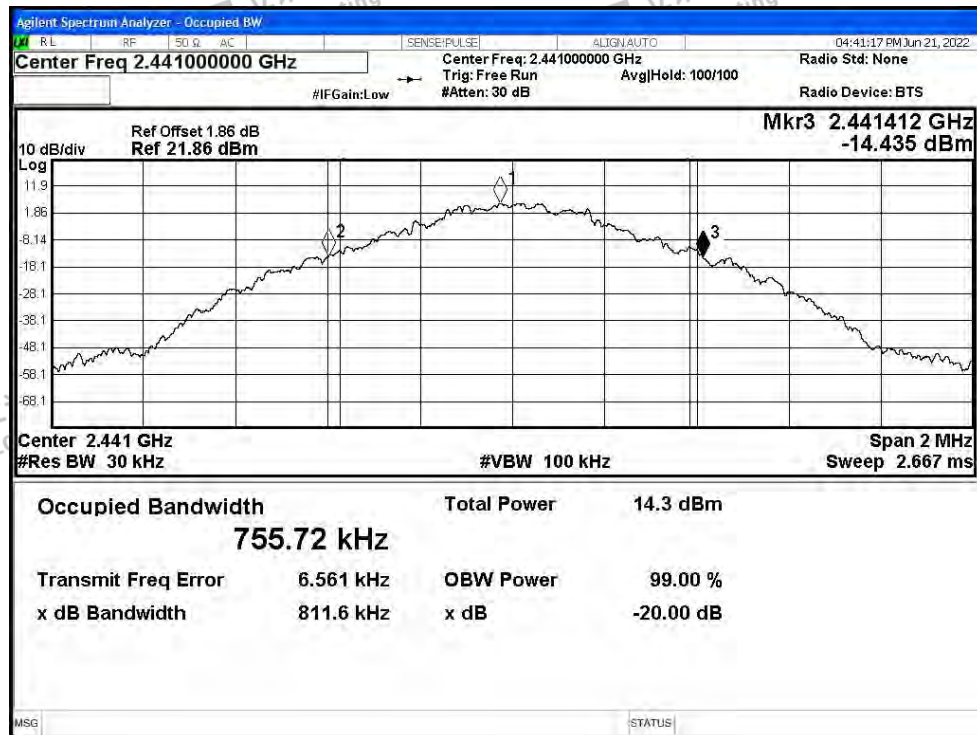



-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

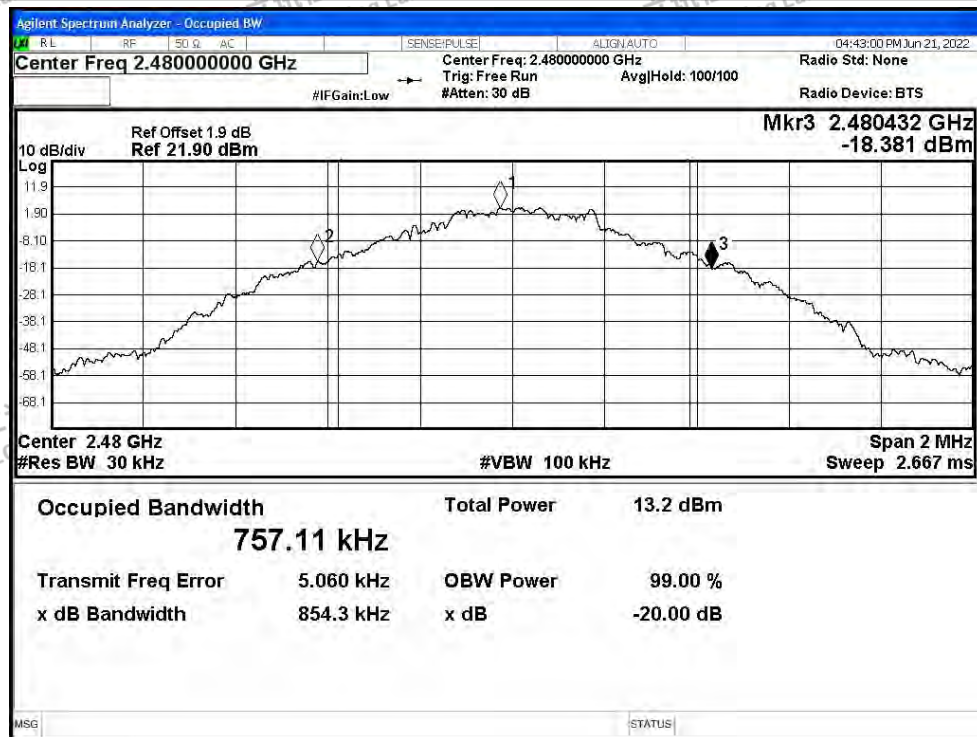


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1





-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

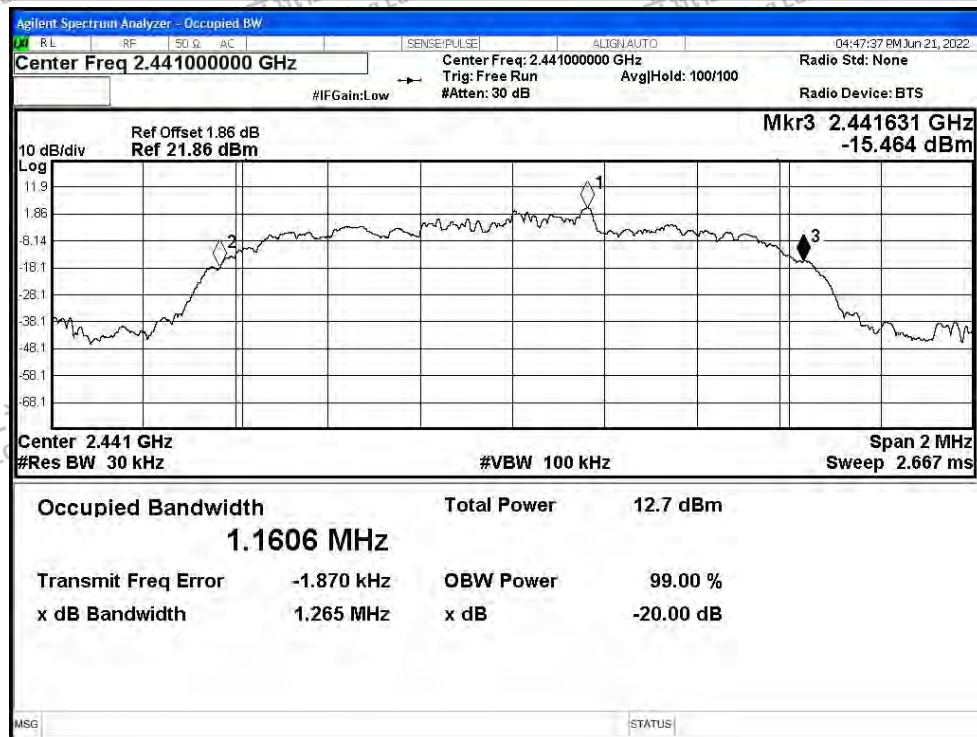

-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1







-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

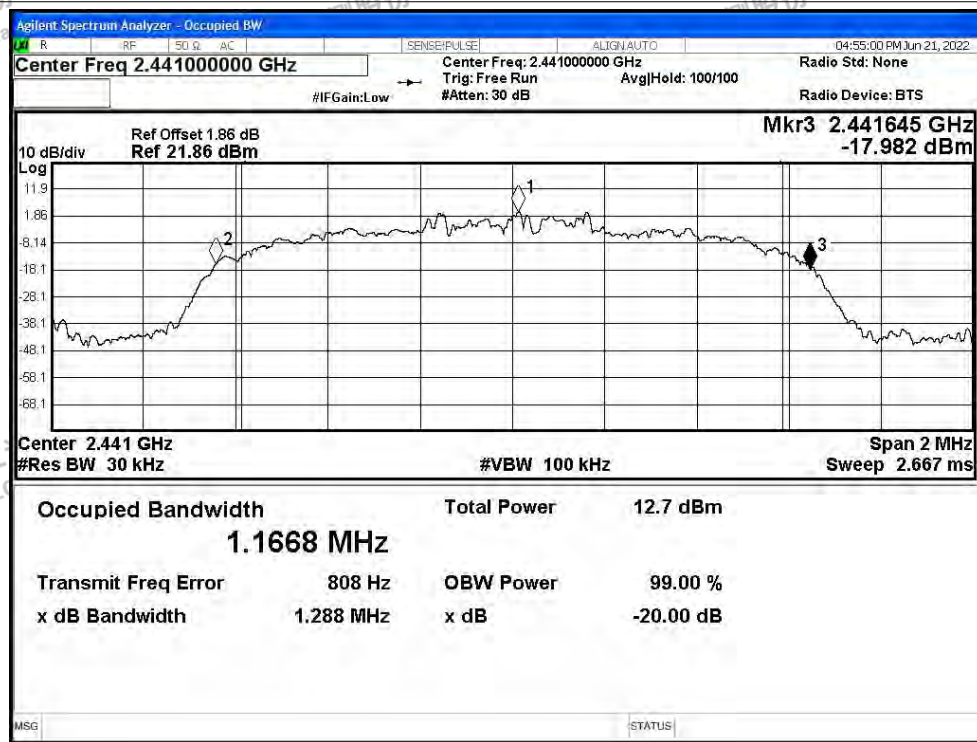

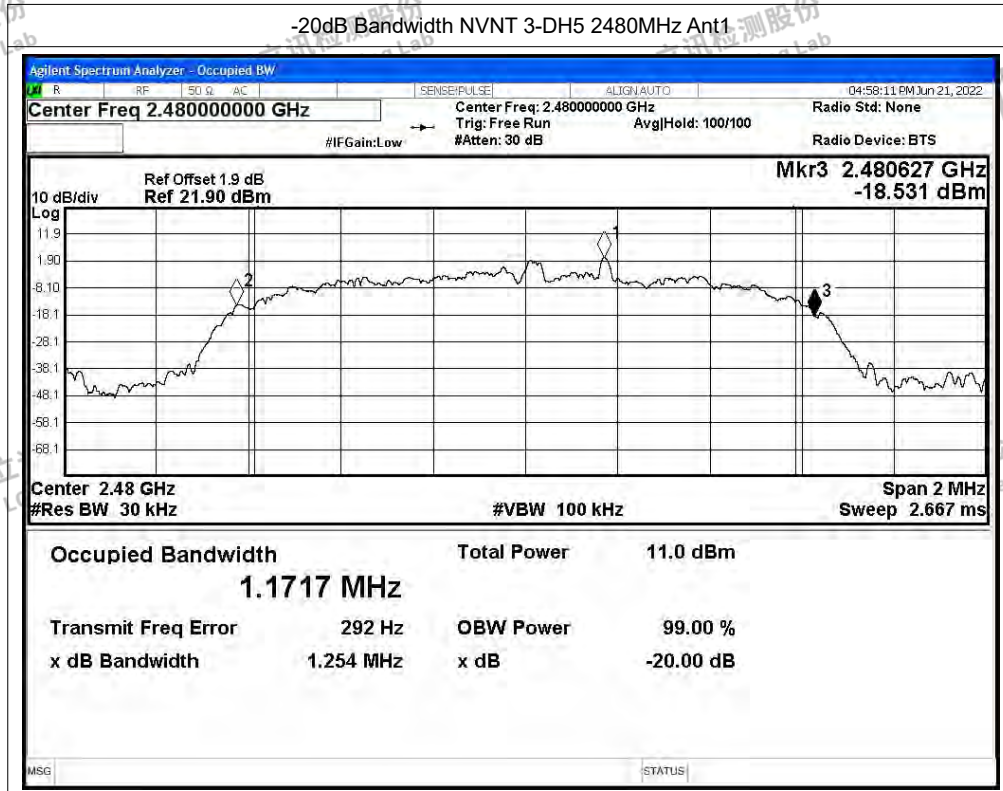



A.2 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	6.08	21	Pass
NVNT	1-DH5	2441	Ant1	7.36	21	Pass
NVNT	1-DH5	2480	Ant1	7.46	21	Pass
NVNT	2-DH5	2402	Ant1	5.5	21	Pass
NVNT	2-DH5	2441	Ant1	7.63	21	Pass
NVNT	2-DH5	2480	Ant1	6.45	21	Pass
NVNT	3-DH5	2402	Ant1	5.42	21	Pass
NVNT	3-DH5	2441	Ant1	7.57	21	Pass
NVNT	3-DH5	2480	Ant1	6.4	21	Pass






Test Graphs

Power NVNT 1-DH5 2402MHz Ant1

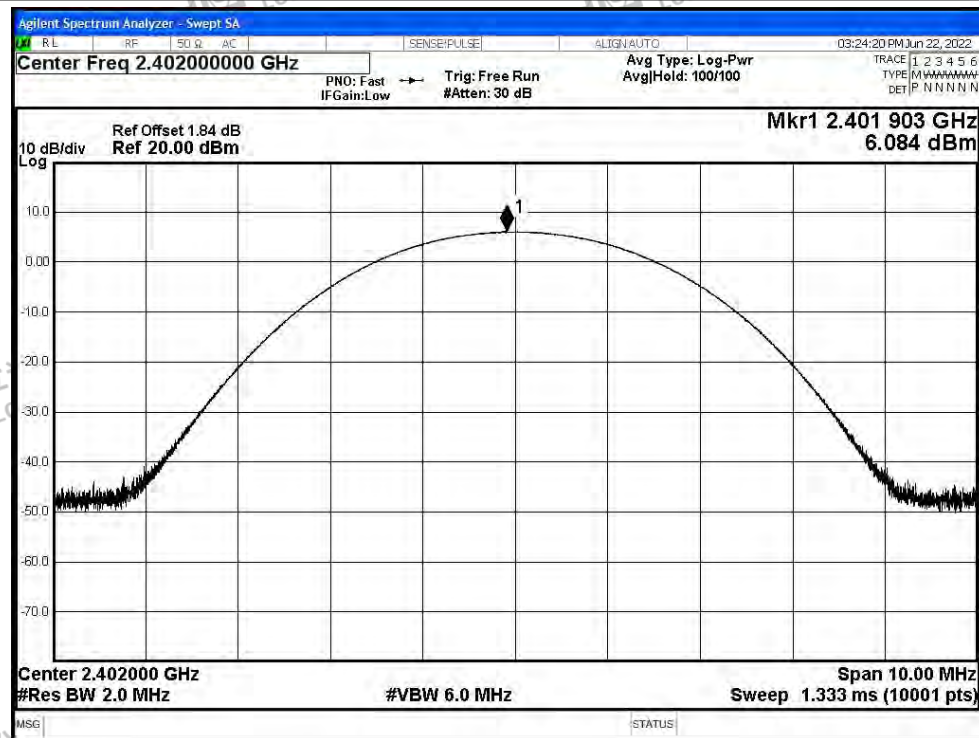


Power NVNT 1-DH5 2441MHz Ant1

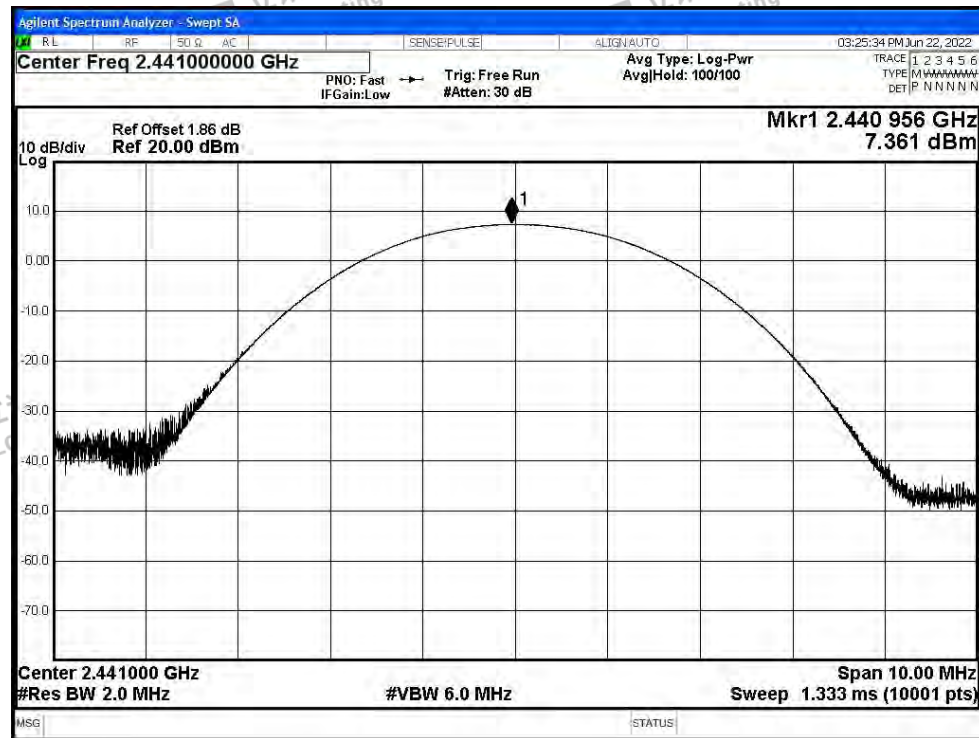




Power NVNT 1-DH5 2480MHz Ant1

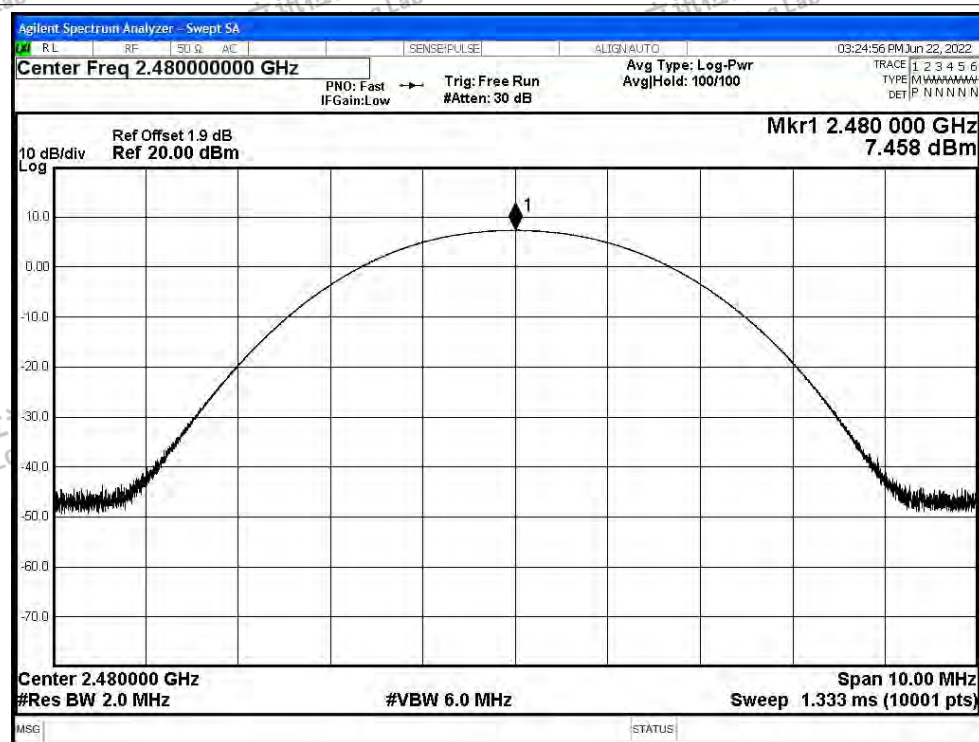


Power NVNT 2-DH5 2402MHz Ant1

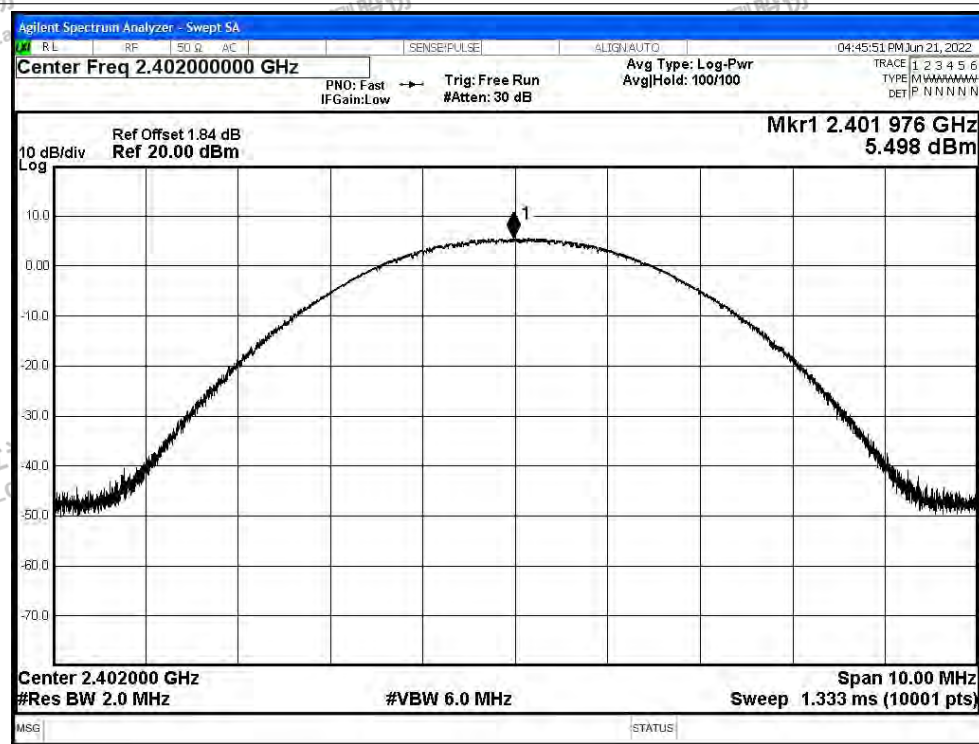




Power NVNT 2-DH5 2441MHz Ant1

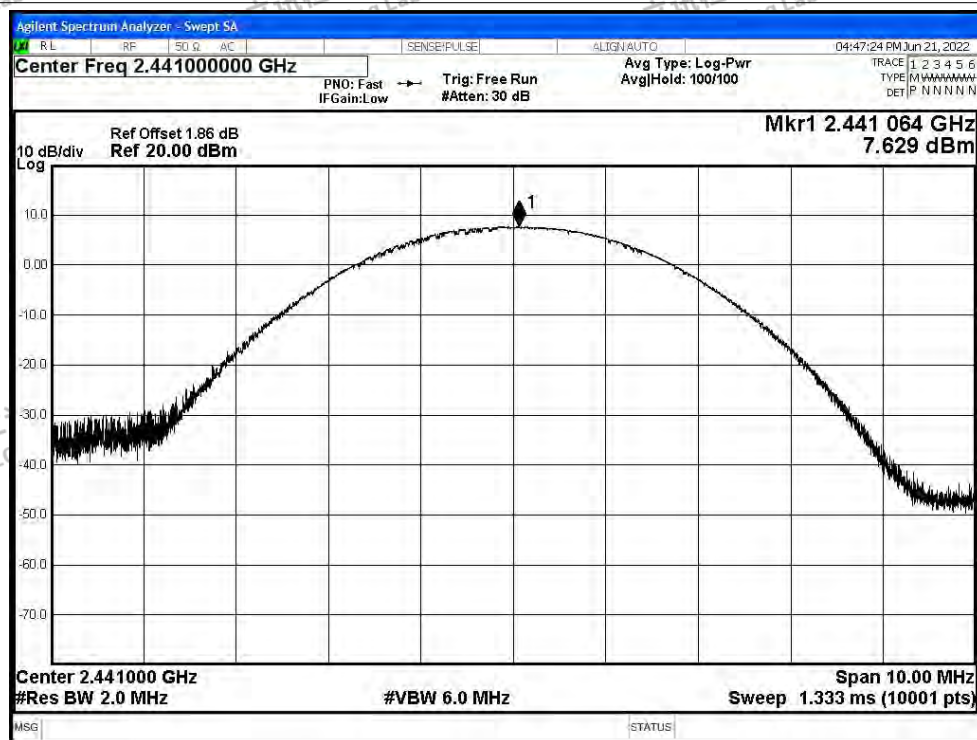


Power NVNT 2-DH5 2480MHz Ant1

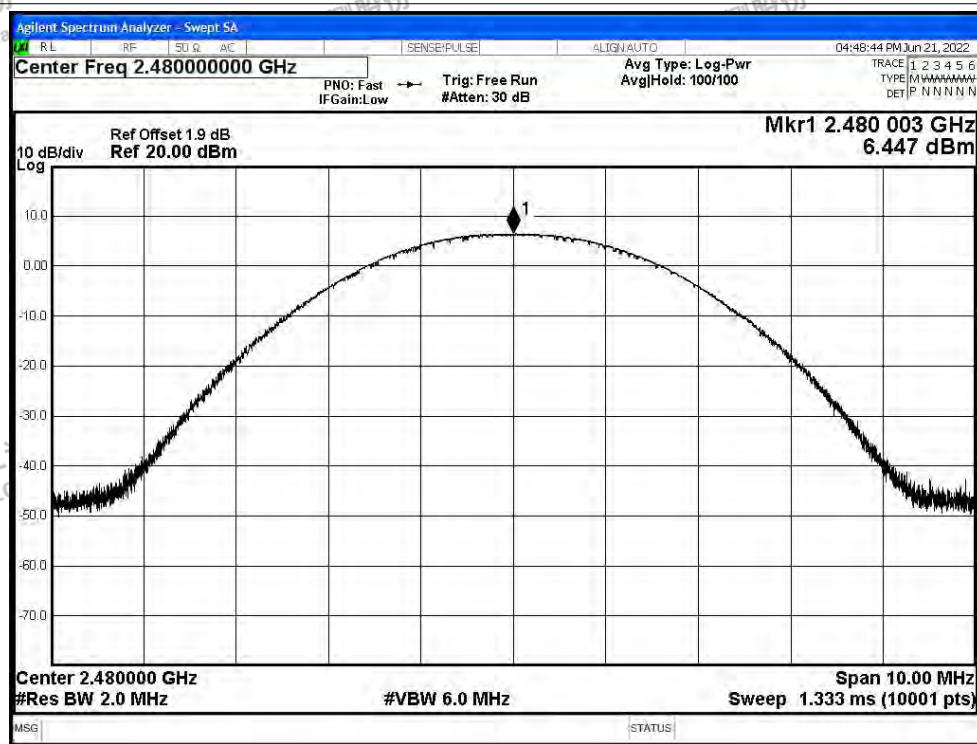





Power NVNT 3-DH5 2402MHz Ant1

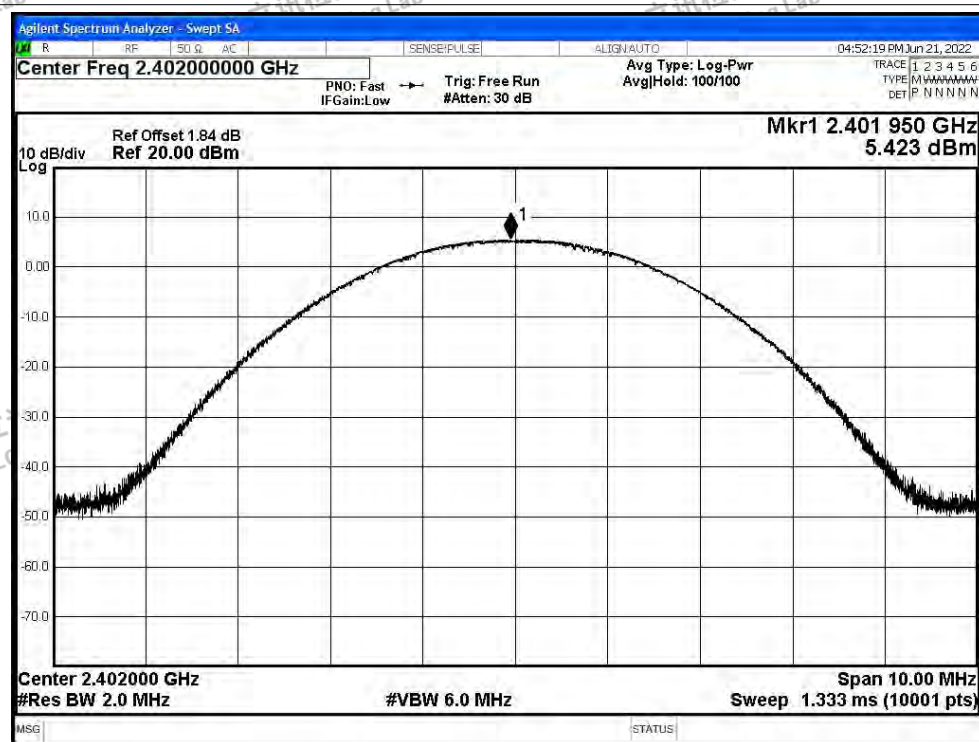

Power NVNT 3-DH5 2441MHz Ant1

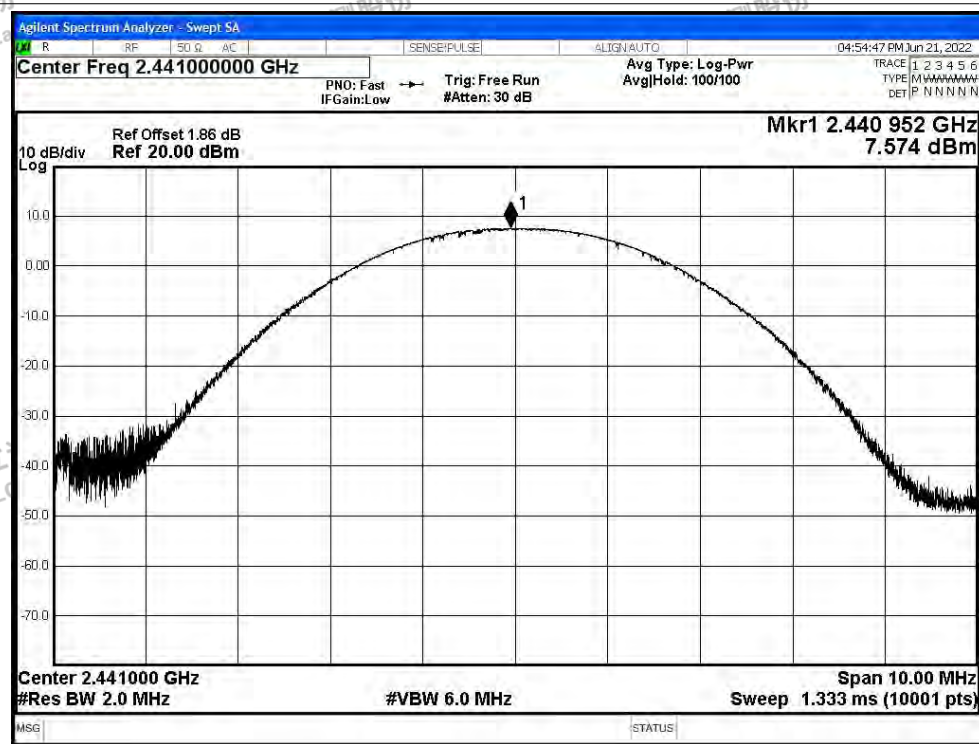

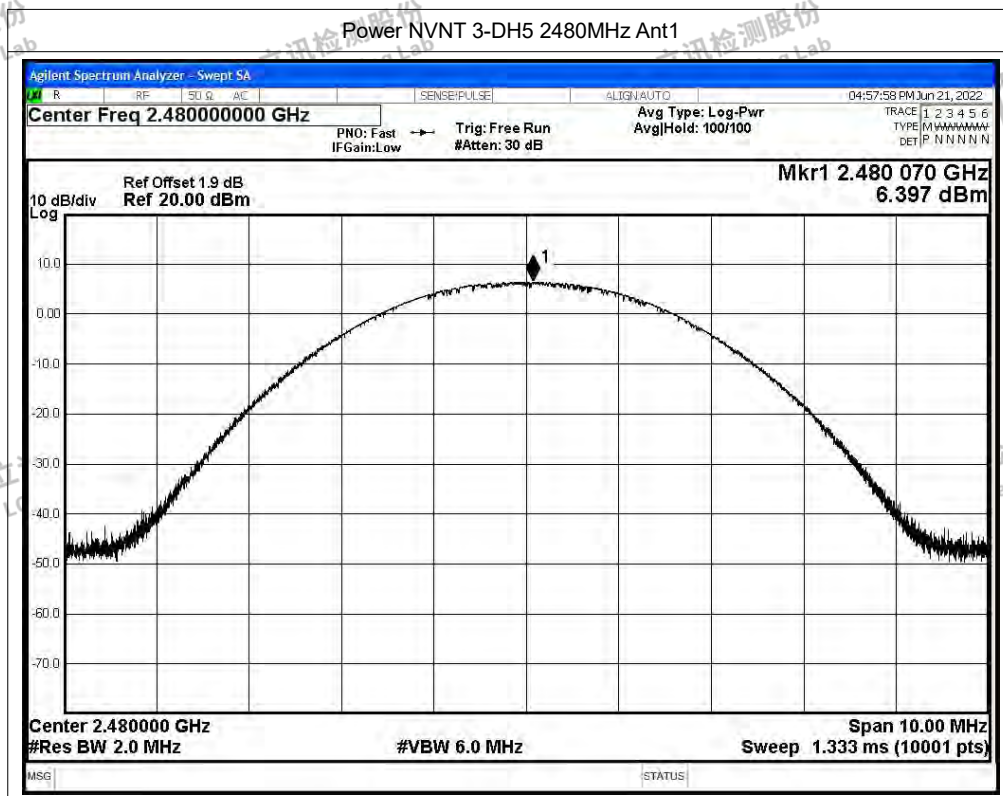



A.3 Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2402.016	2403.018	1.002	0.562	Pass
NVNT	2-DH5	Ant1	2401.86	2402.998	1.138	0.848	Pass
NVNT	3-DH5	Ant1	2402.162	2403.156	0.994	0.847	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1

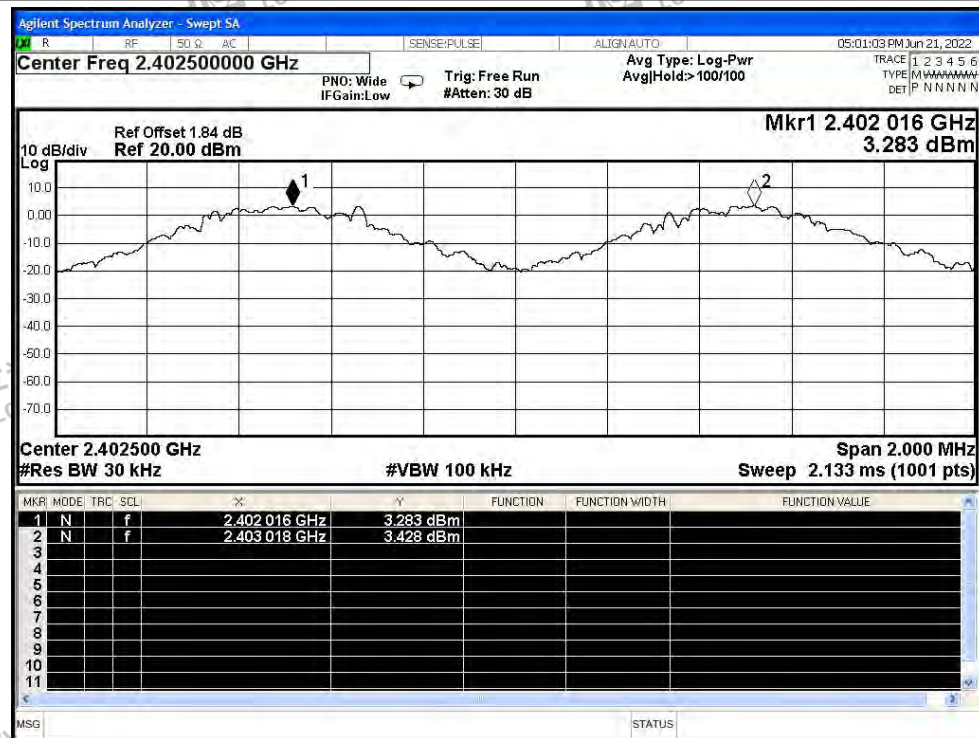

CFS NVNT 2-DH5 2402MHz Ant1

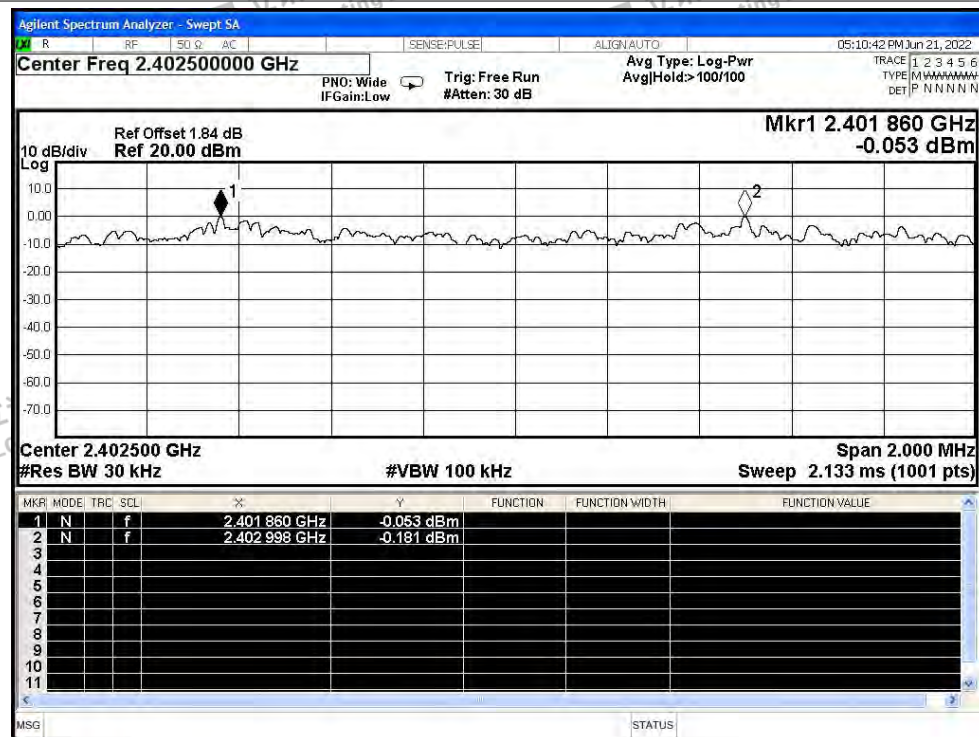

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



CFS NVNT 3-DH5 2402MHz Ant1

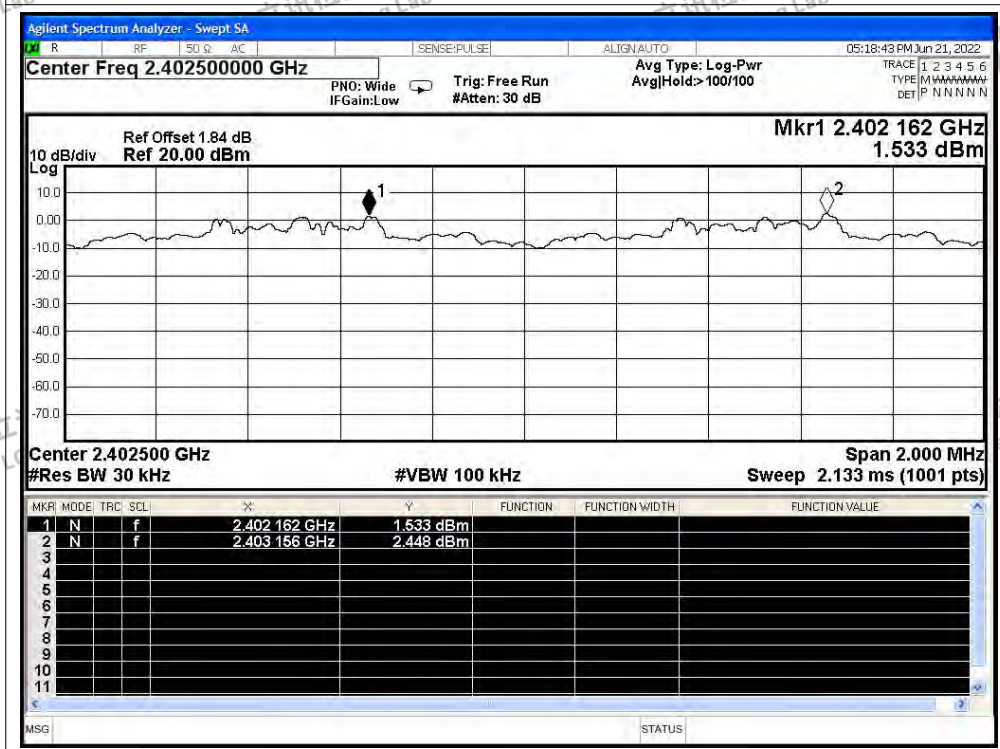



A.4 Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.881	319.791	111	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.882	299.728	104	31600	400	Pass
NVNT	1-DH5	2480	Ant1	2.882	273.79	95	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.882	282.436	98	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.885	265.42	92	31600	400	Pass
NVNT	2-DH5	2480	Ant1	2.883	328.662	114	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.887	308.909	107	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.887	311.796	108	31600	400	Pass
NVNT	3-DH5	2480	Ant1	2.886	320.346	111	31600	400	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

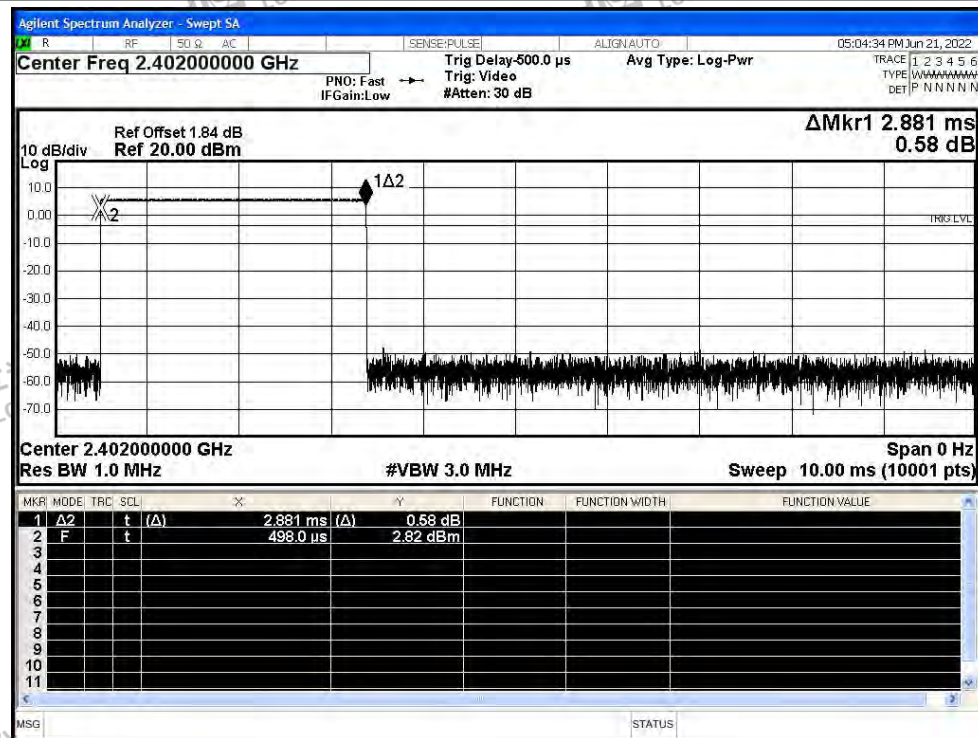

Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

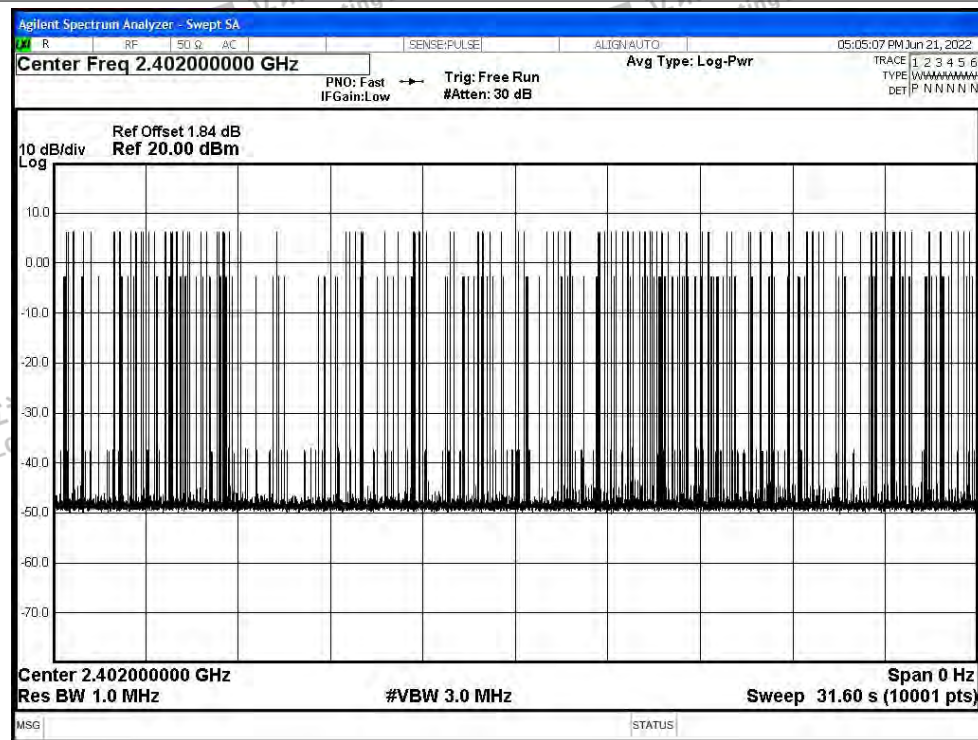

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

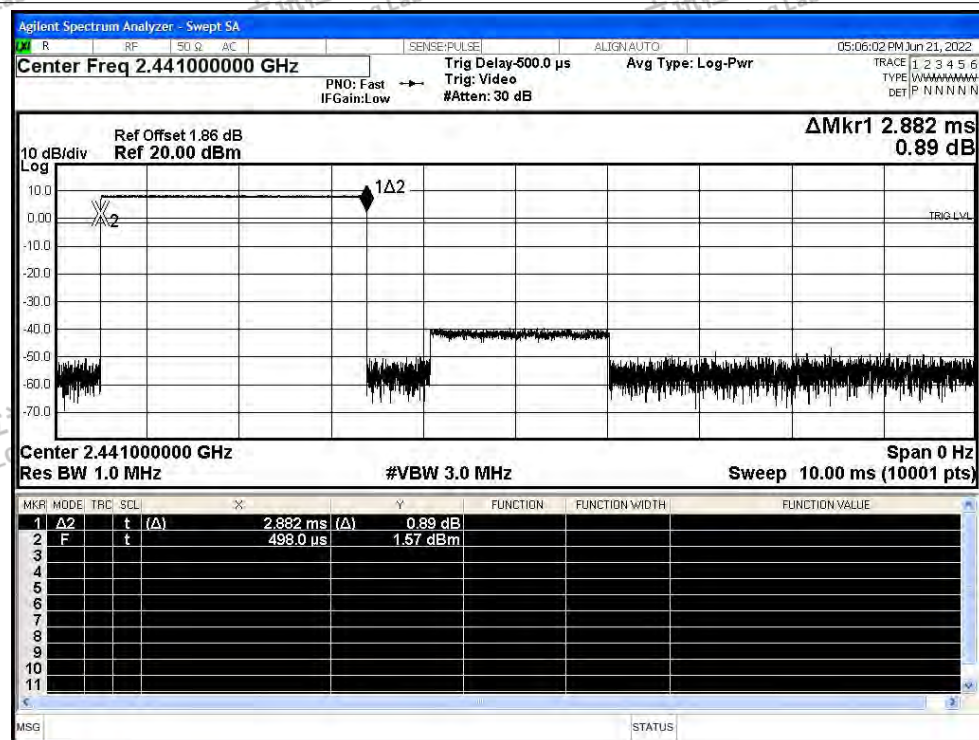


Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

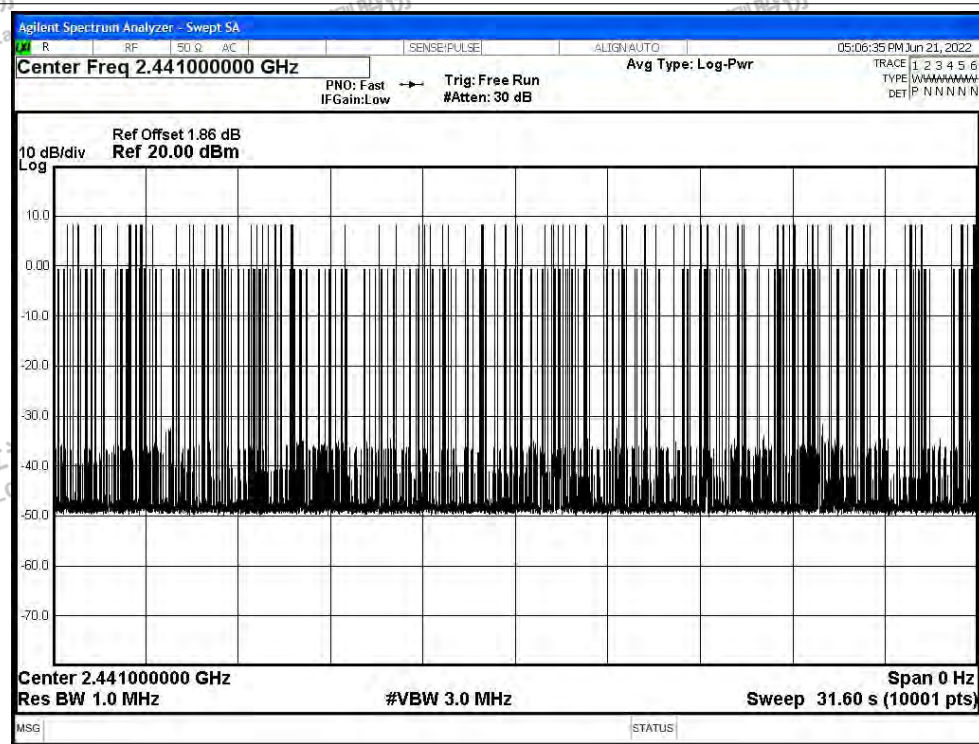




Dwell NVNT 1-DH5 2480MHz Ant1 One Burst

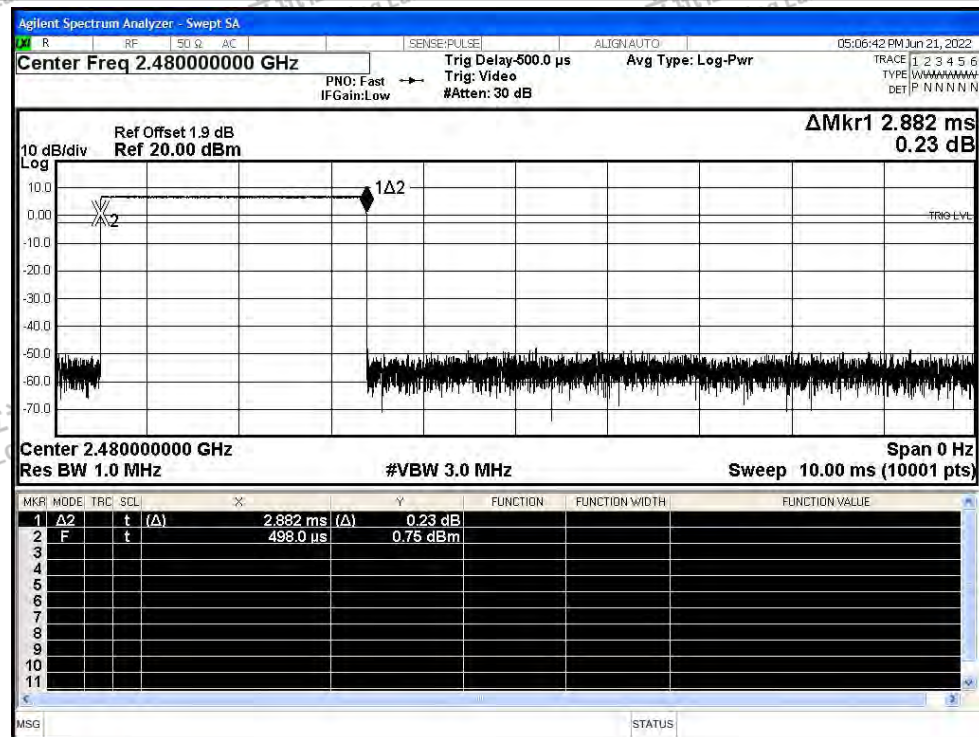


Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated

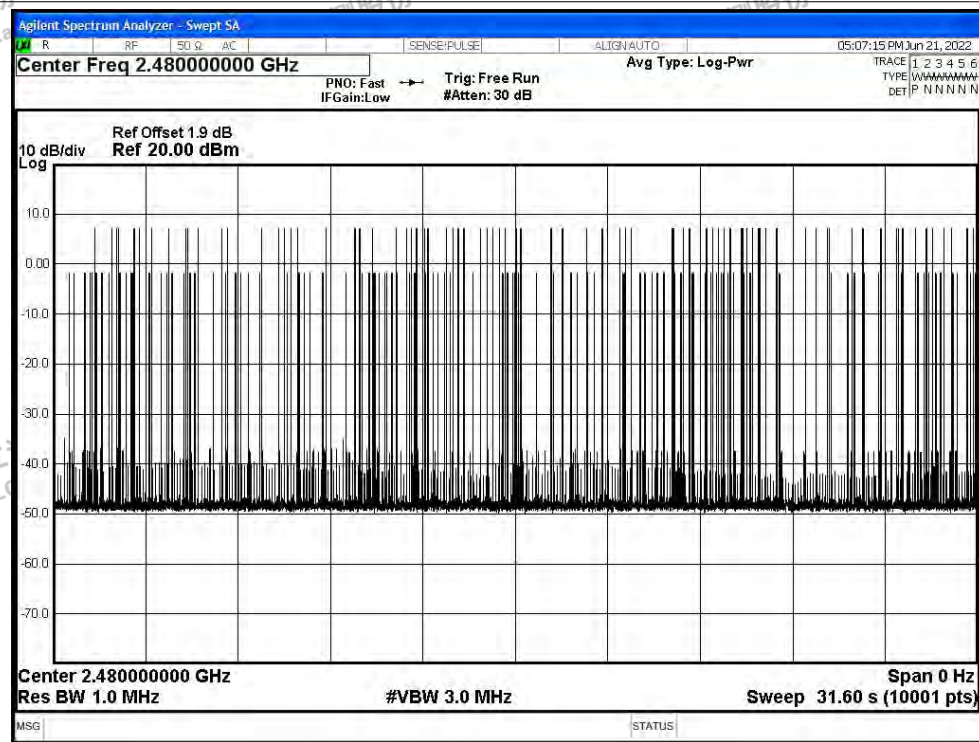




Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

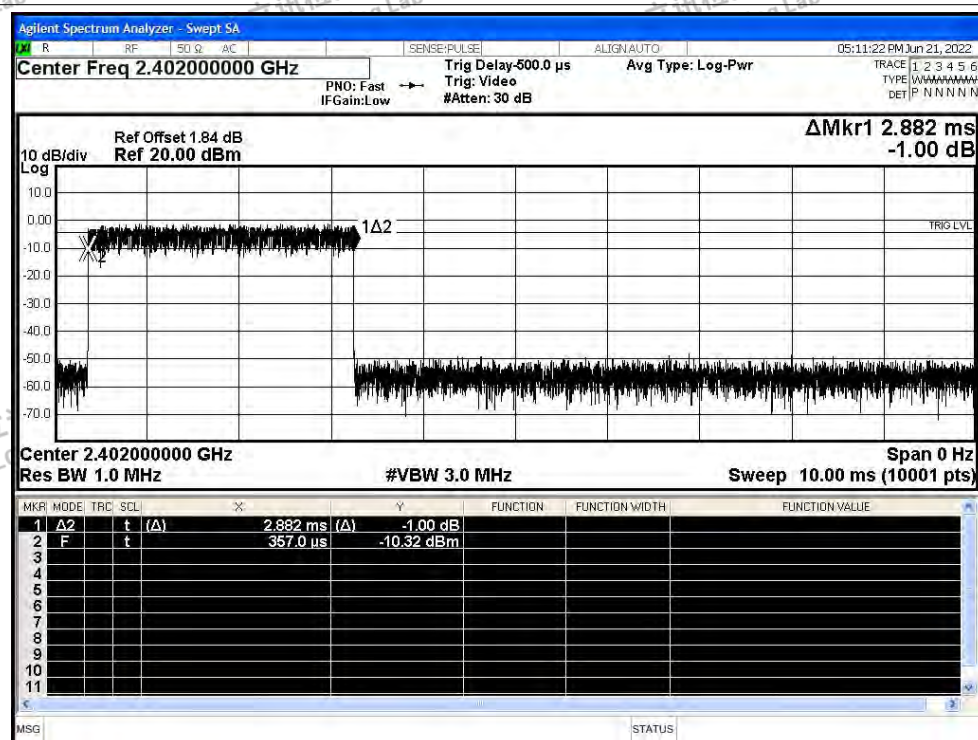


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

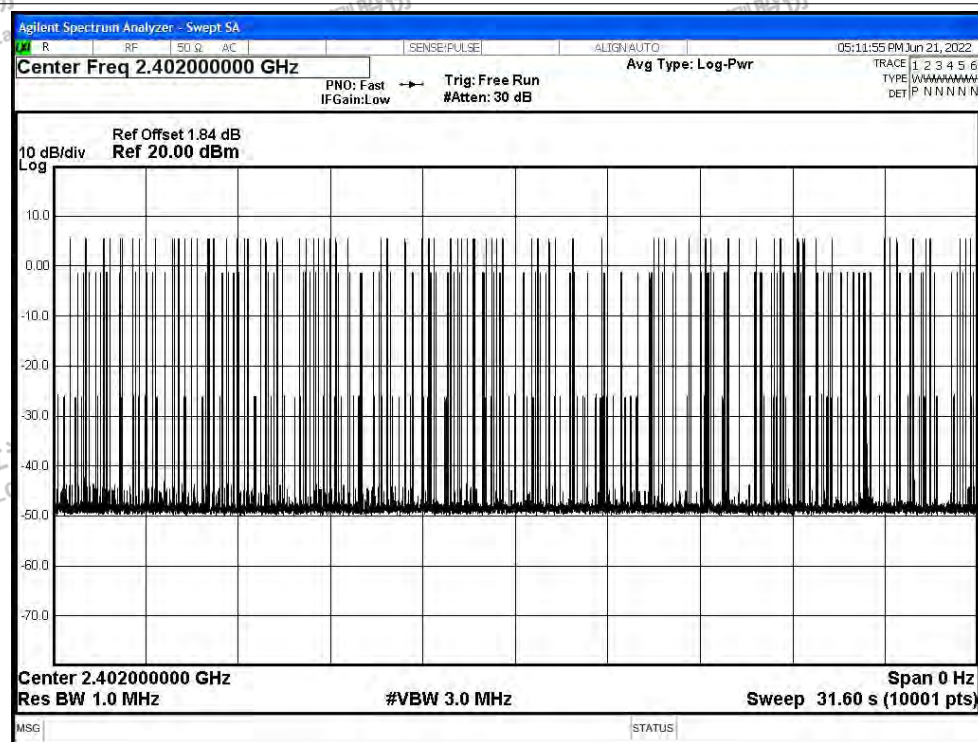




Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

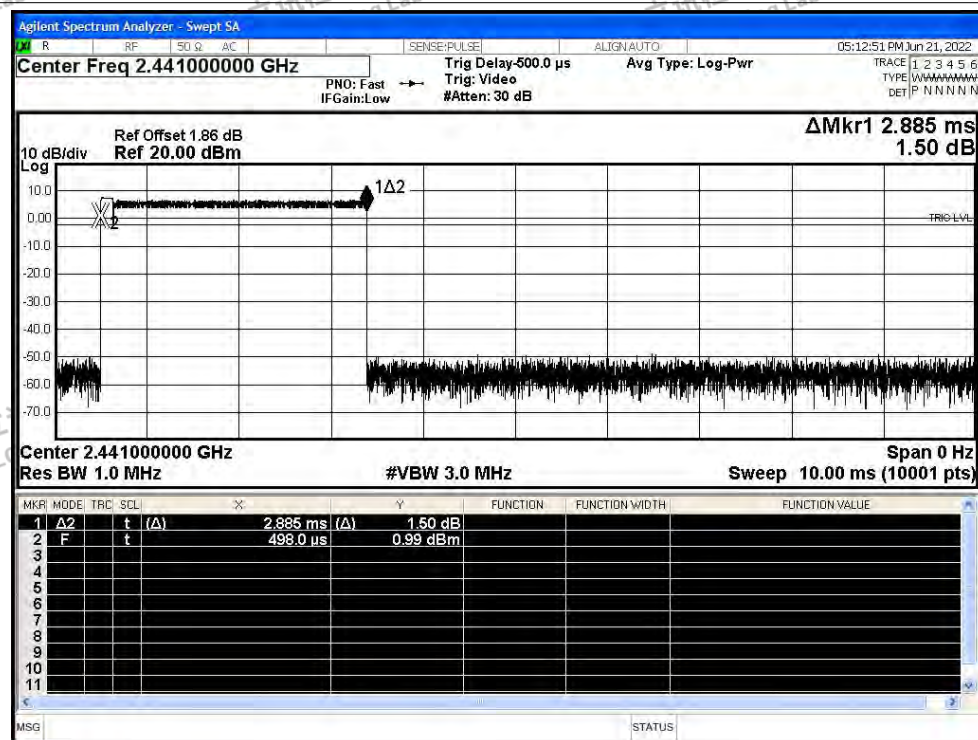


Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

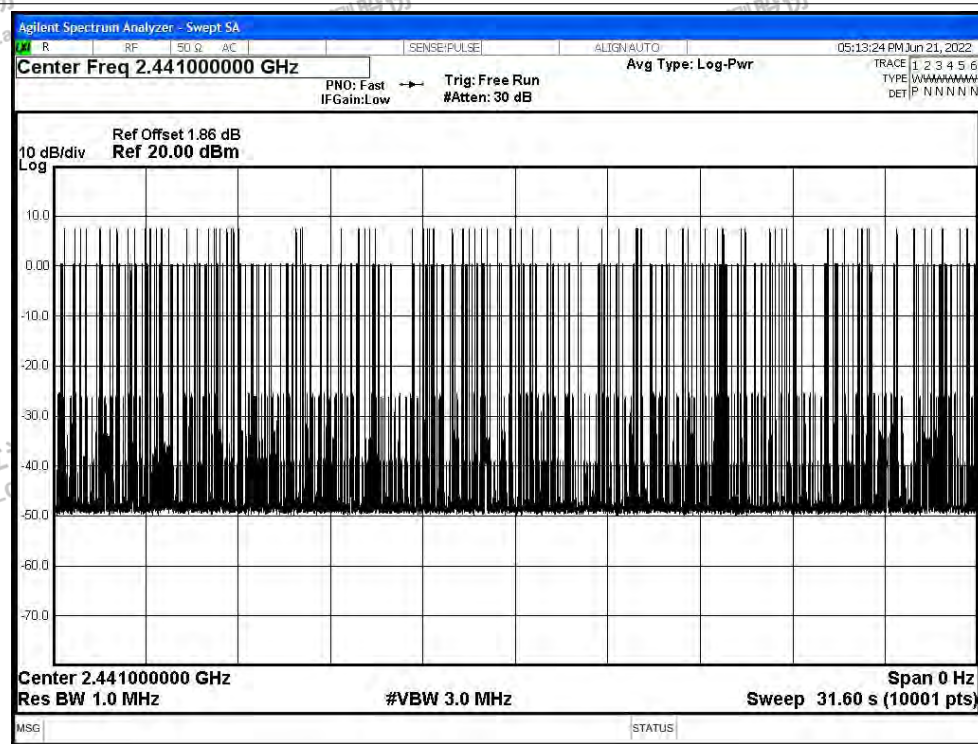




Dwell NVNT 2-DH5 2480MHz Ant1 One Burst

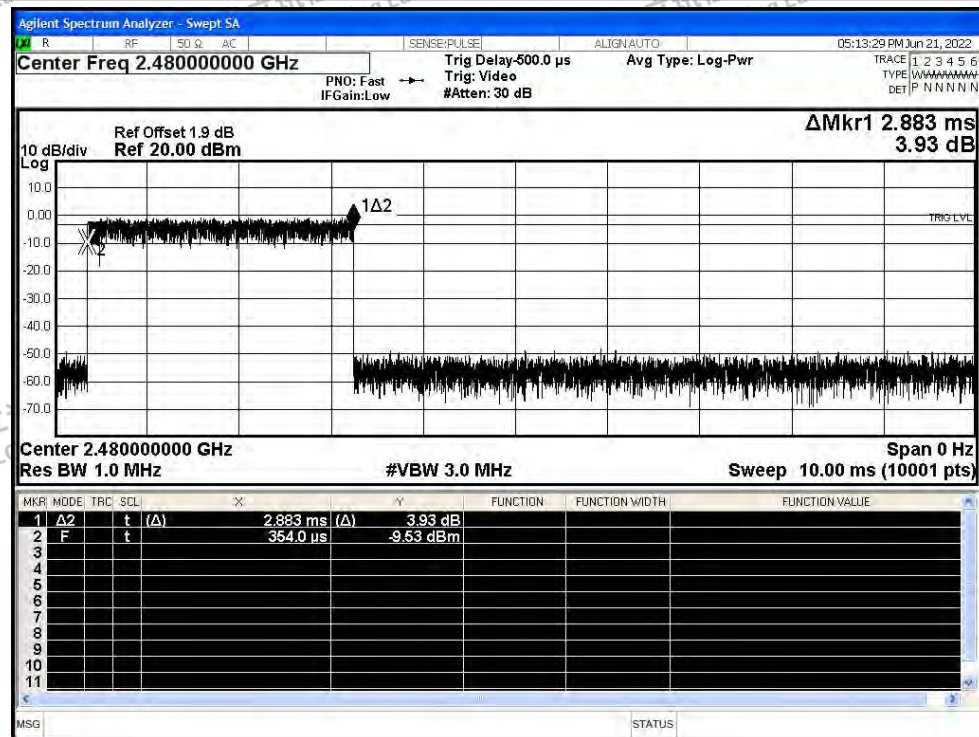


Dwell NVNT 2-DH5 2480MHz Ant1 Accumulated

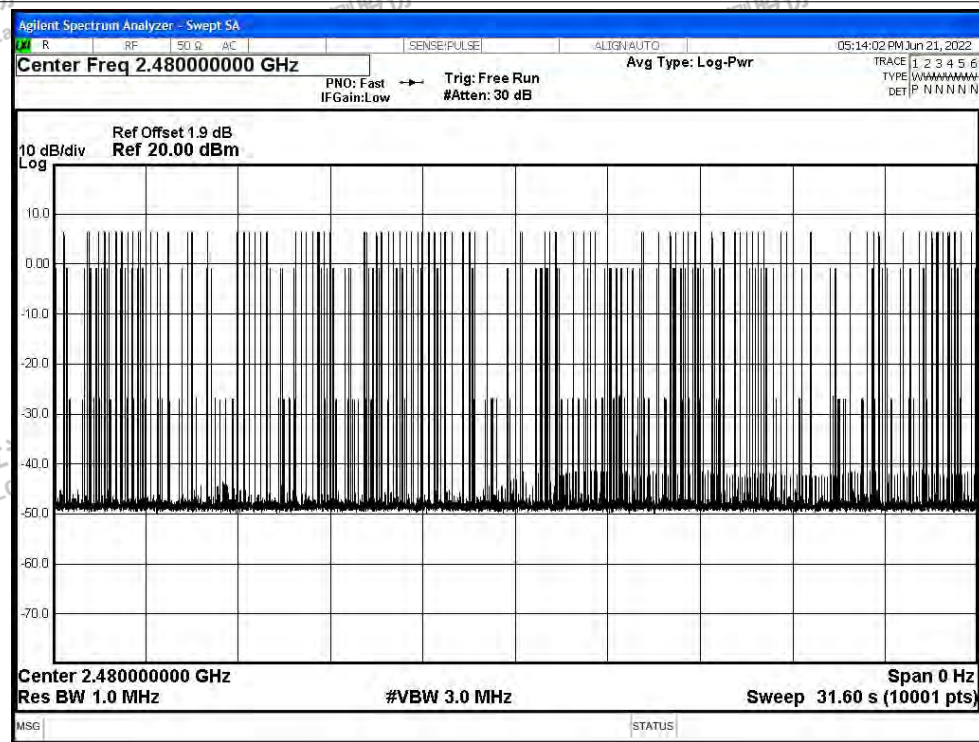




Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

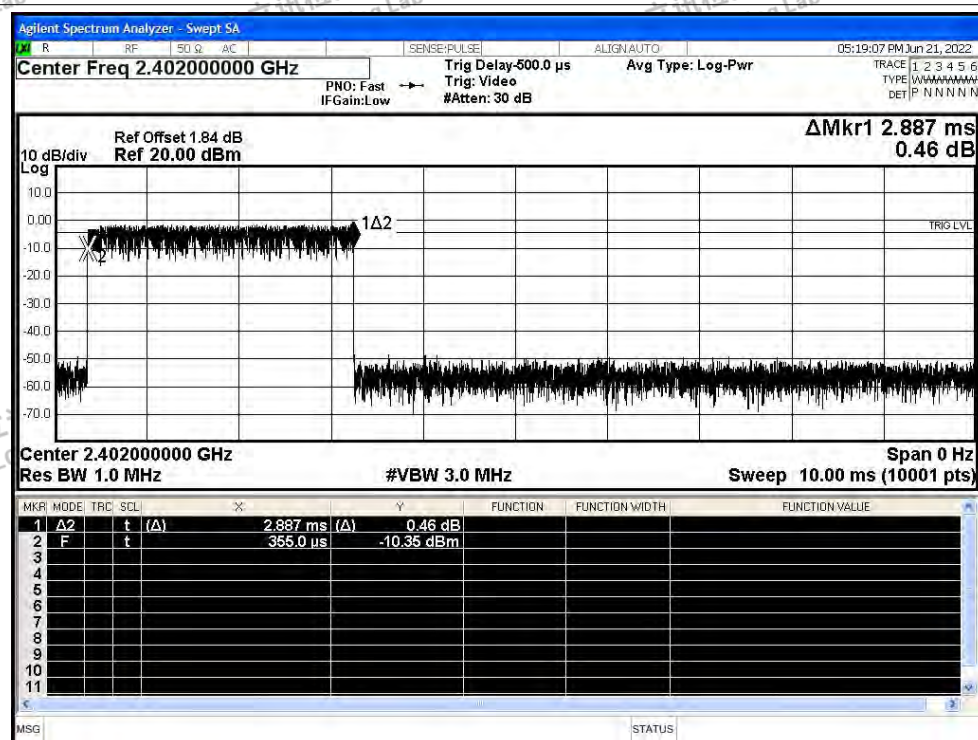


Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

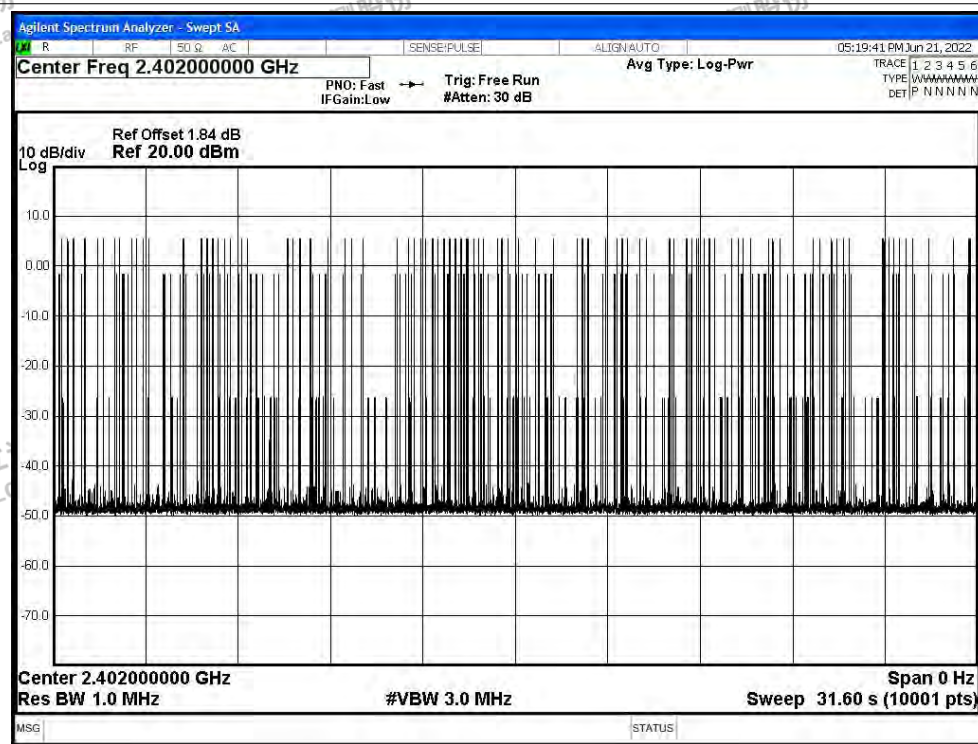




Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

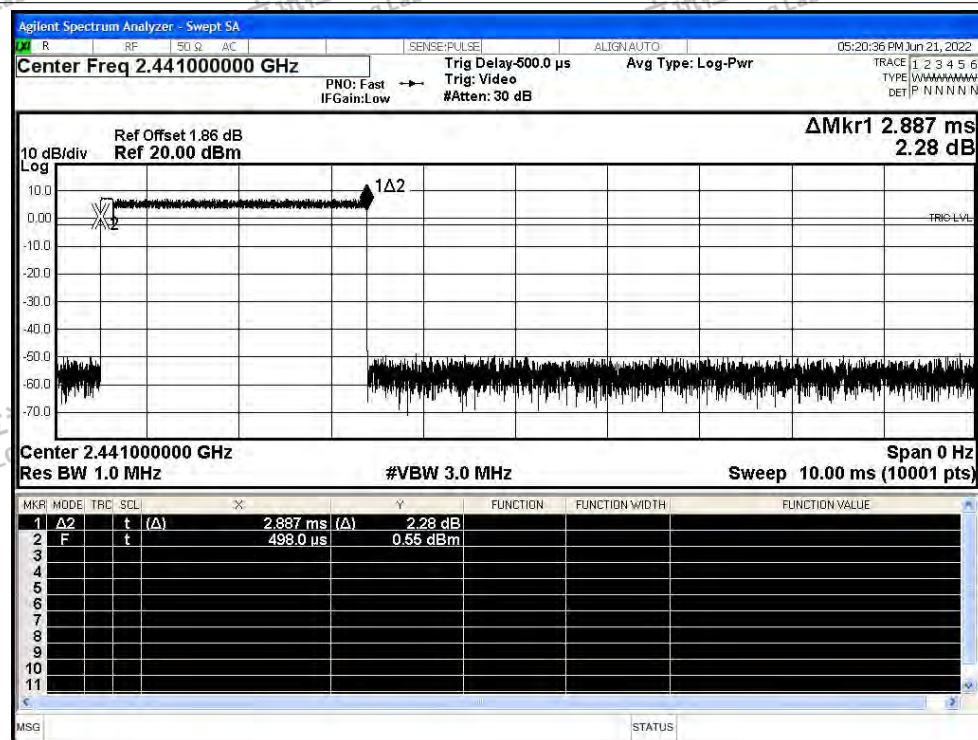


Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

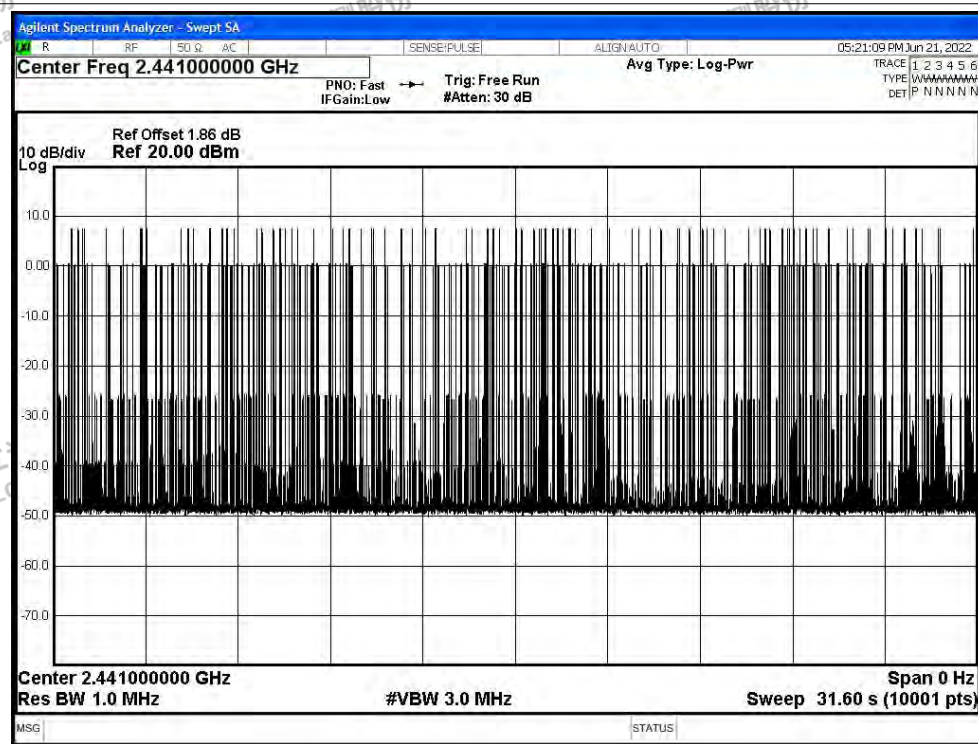




Dwell NVNT 3-DH5 2480MHz Ant1 One Burst

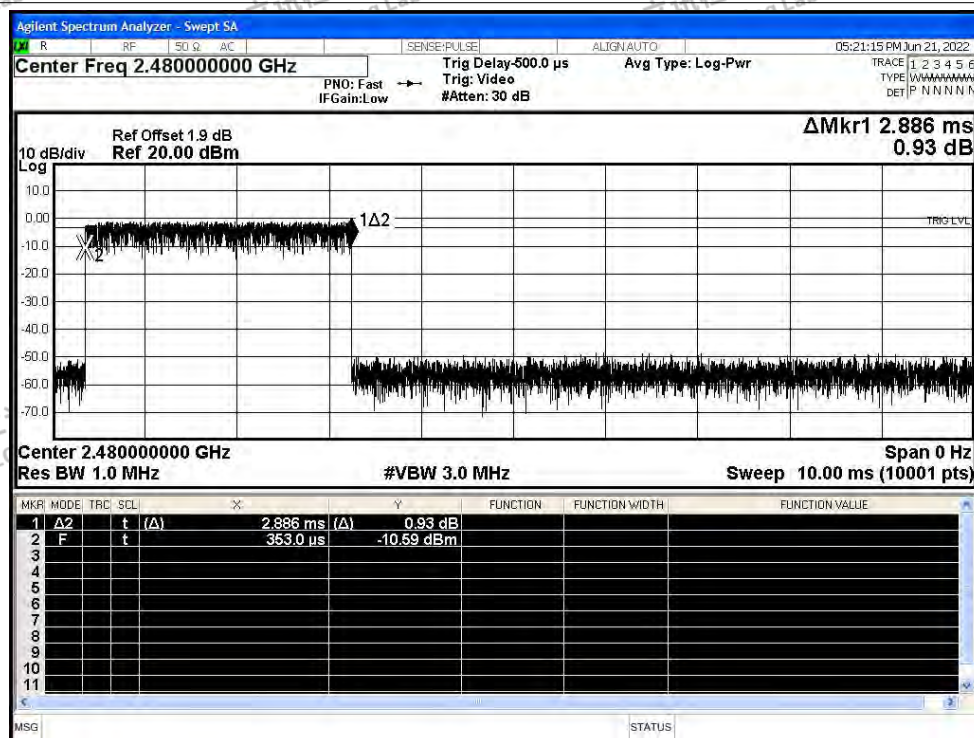

Dwell NVNT 3-DH5 2480MHz Ant1 Accumulated

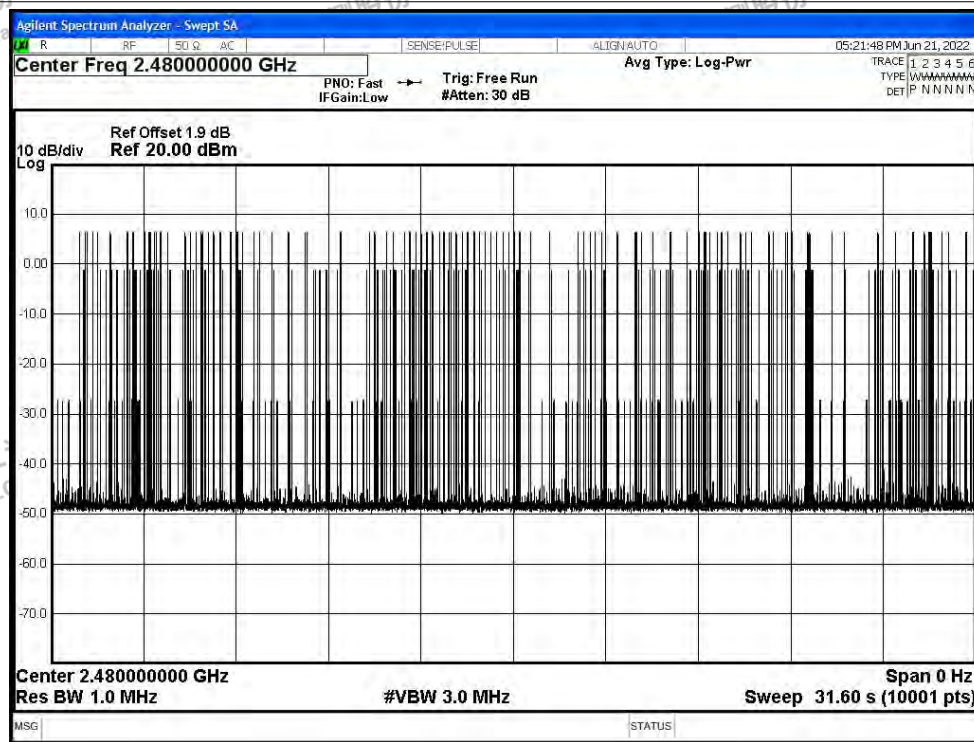



A.5 Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass






Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

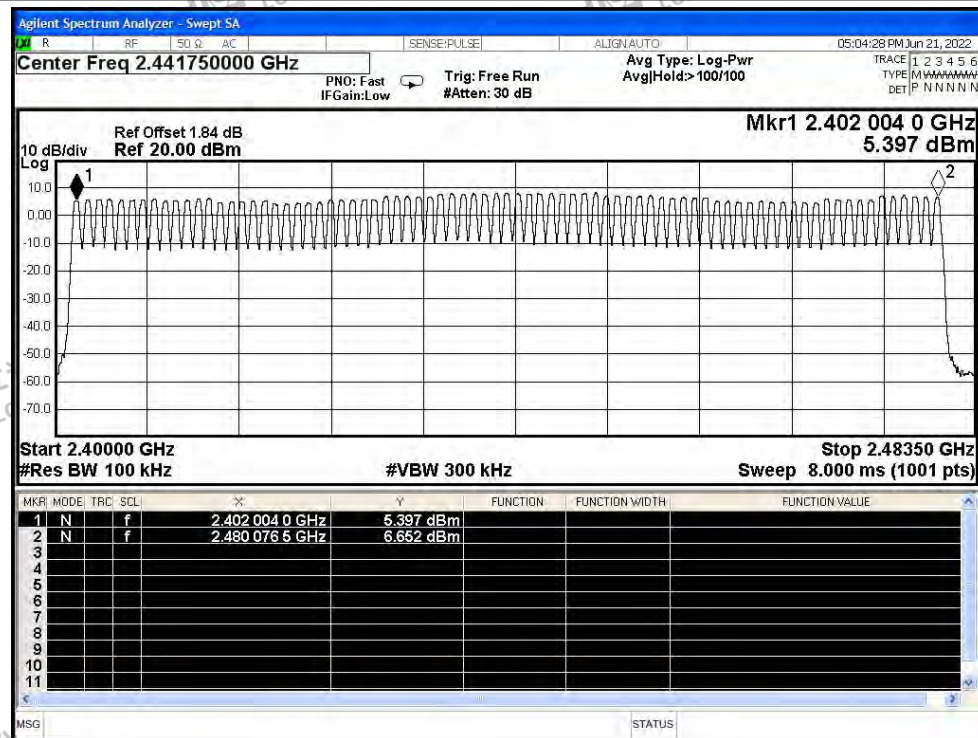


Hopping No. NVNT 2-DH5 2402MHz Ant1

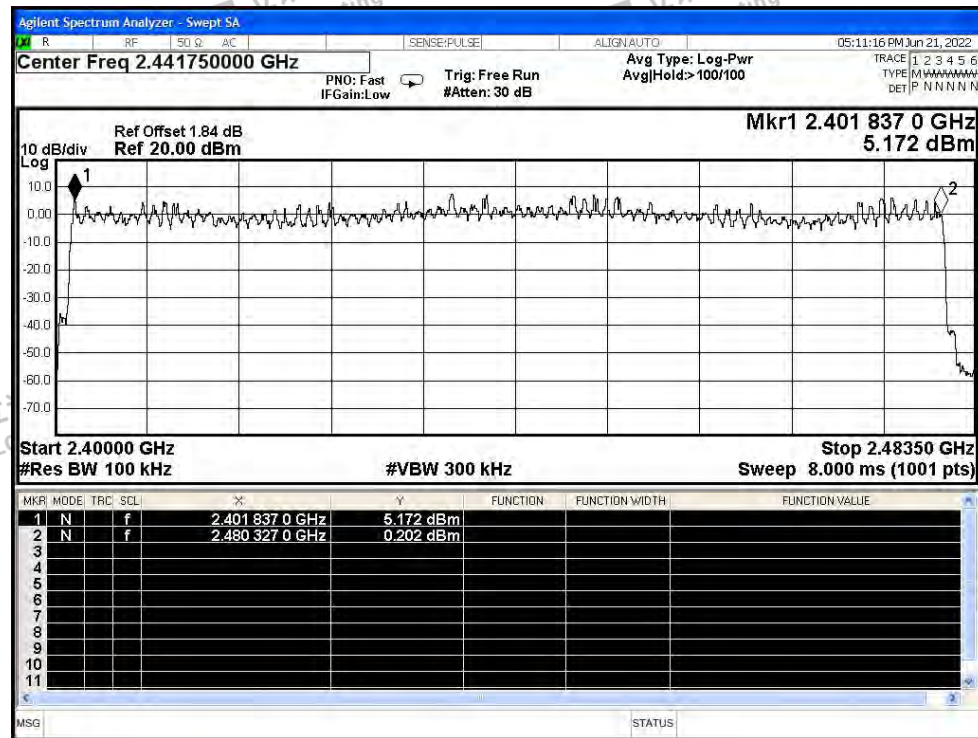



Hopping No. NVNT 3-DH5 2402MHz Ant1

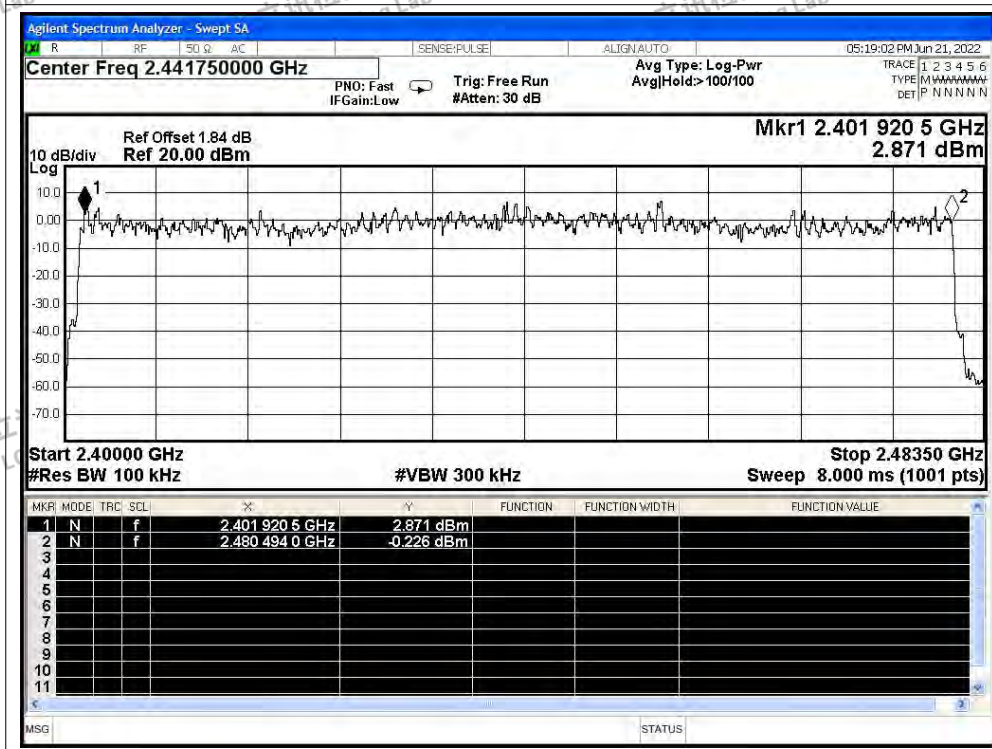



A.6 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-61.47	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-63.4	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-57.09	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-63.08	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-57.21	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-61.98	-20	Pass






Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

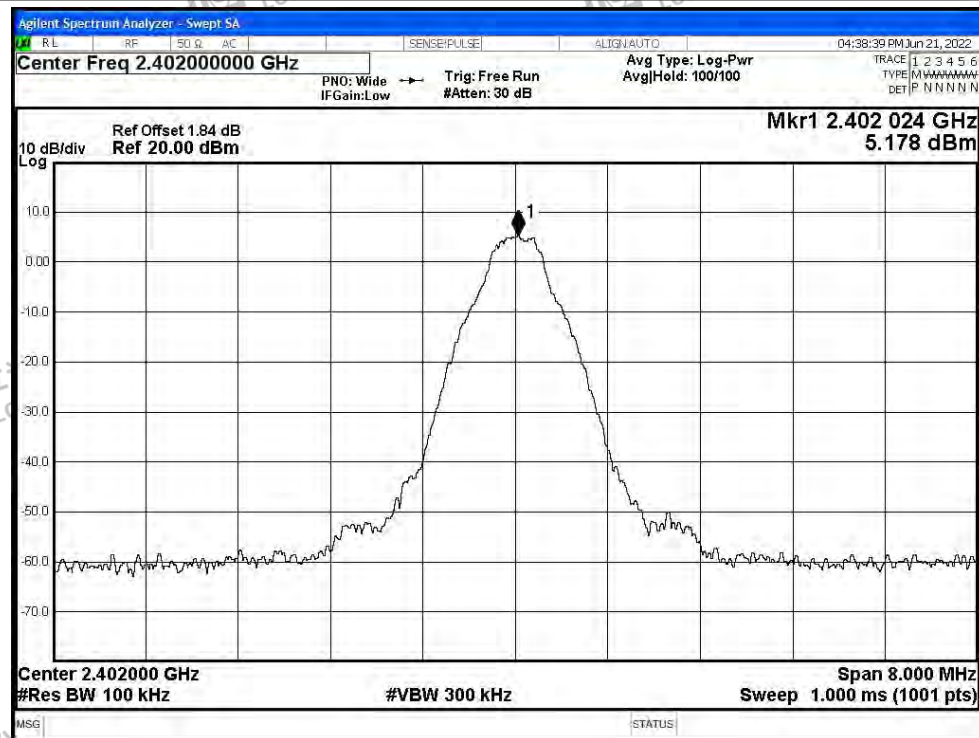

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

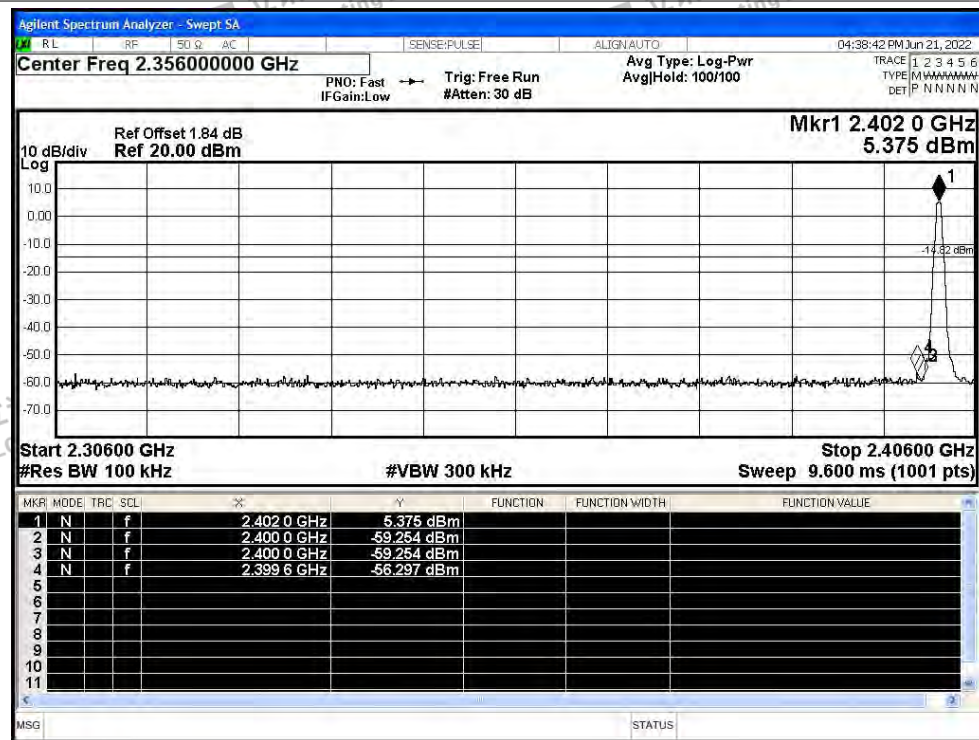

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

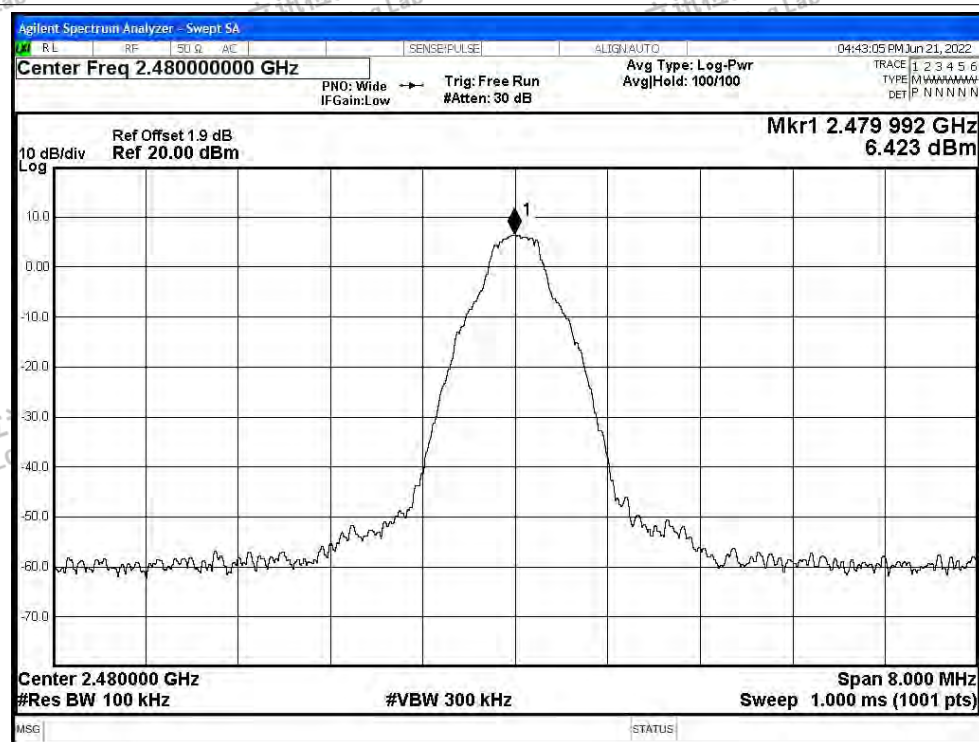

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

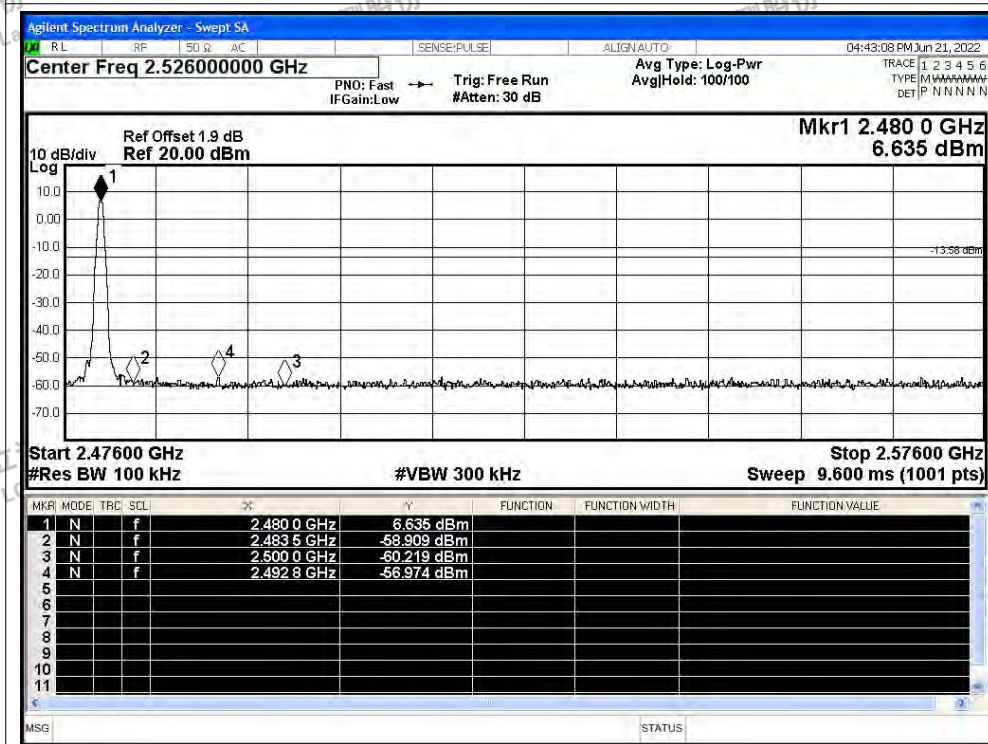

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

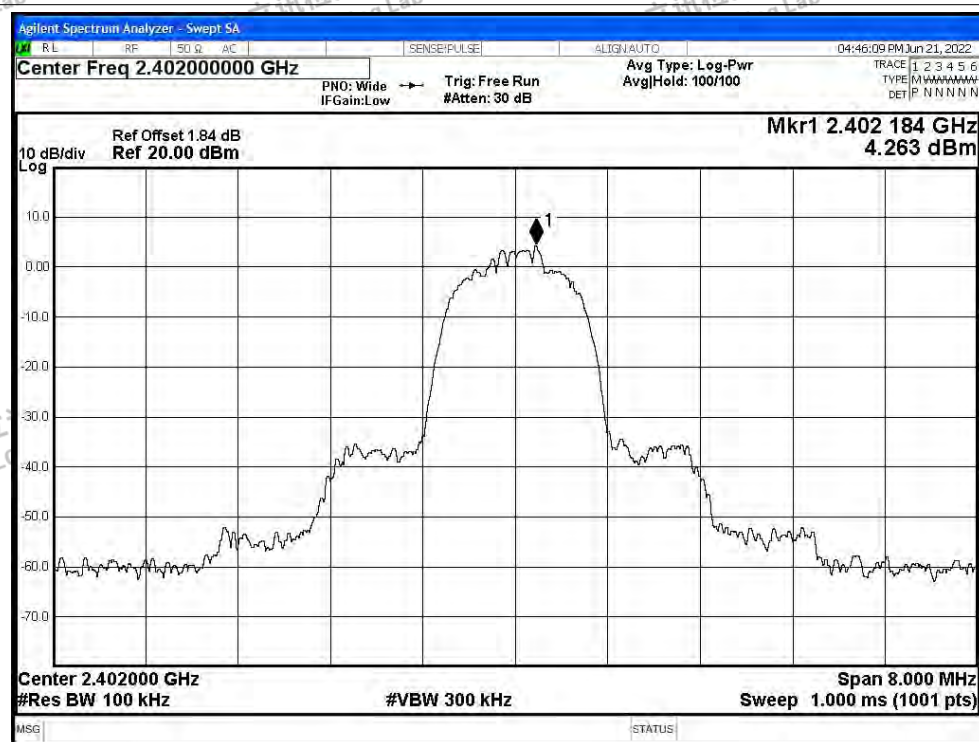


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

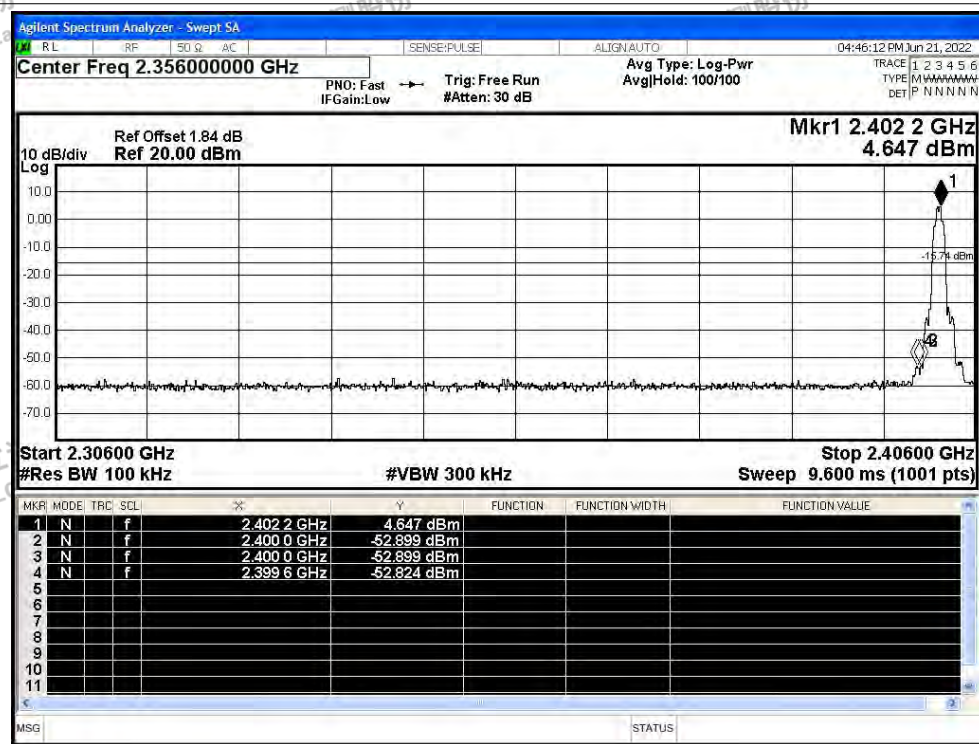




Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

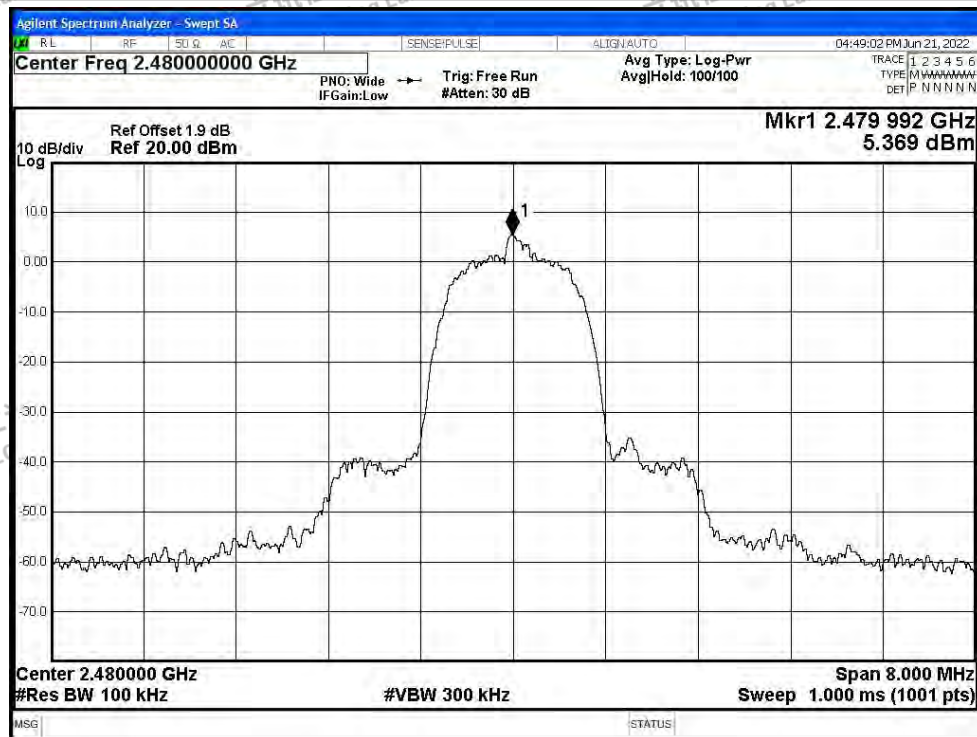

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

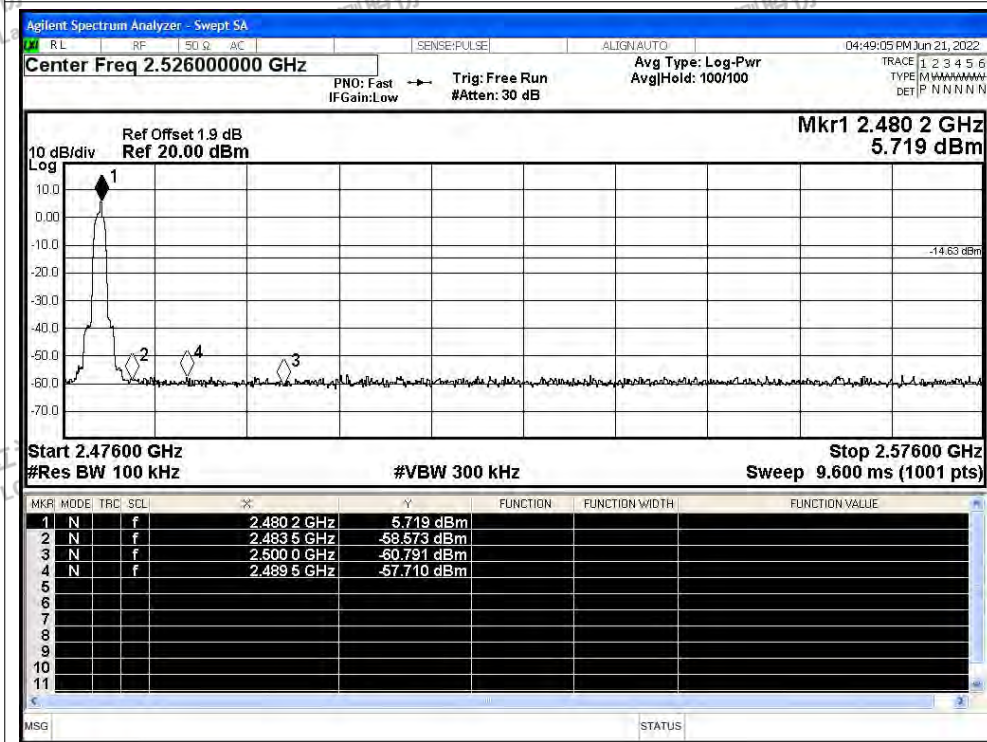




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

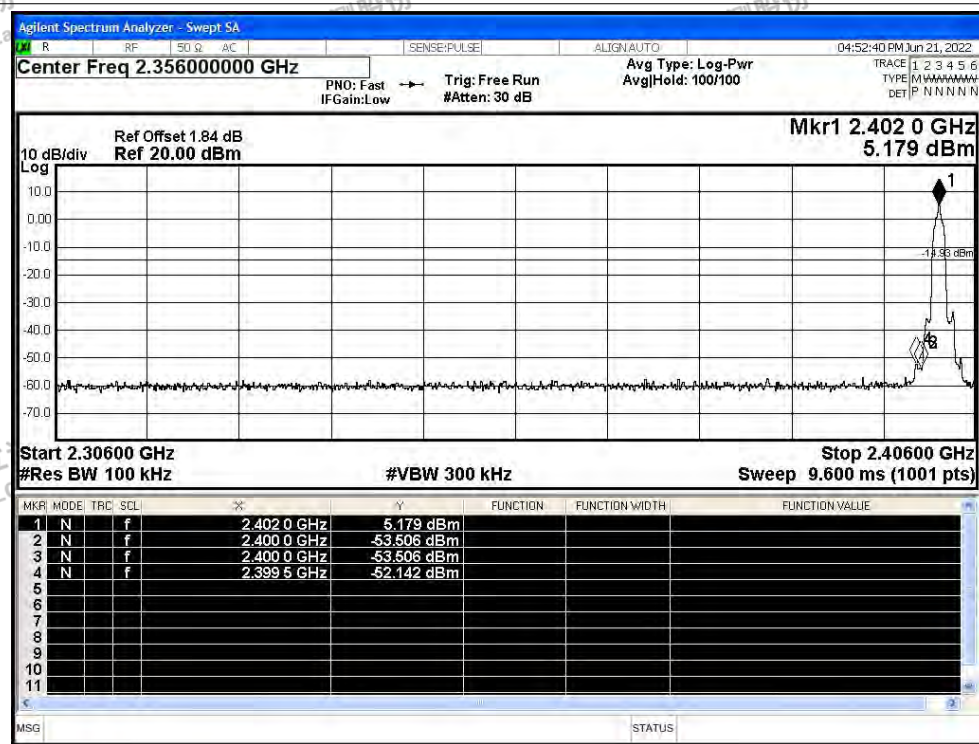




Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

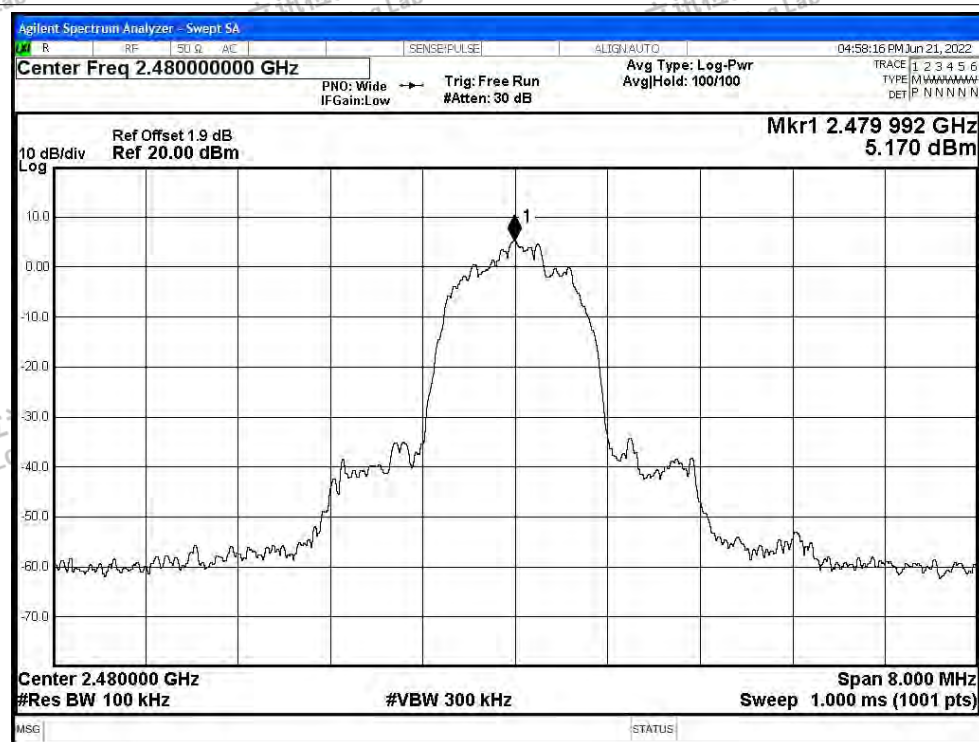

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

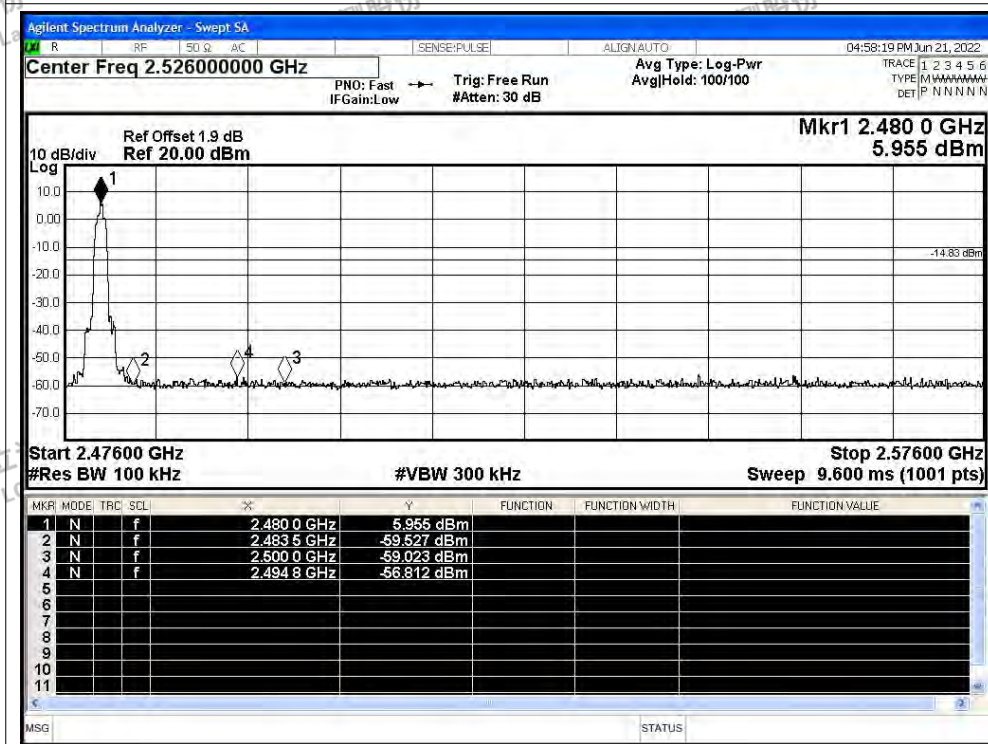

**(Hopping)**

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-61.59	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-62.97	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-60.35	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-59.52	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-60.94	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-62.61	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

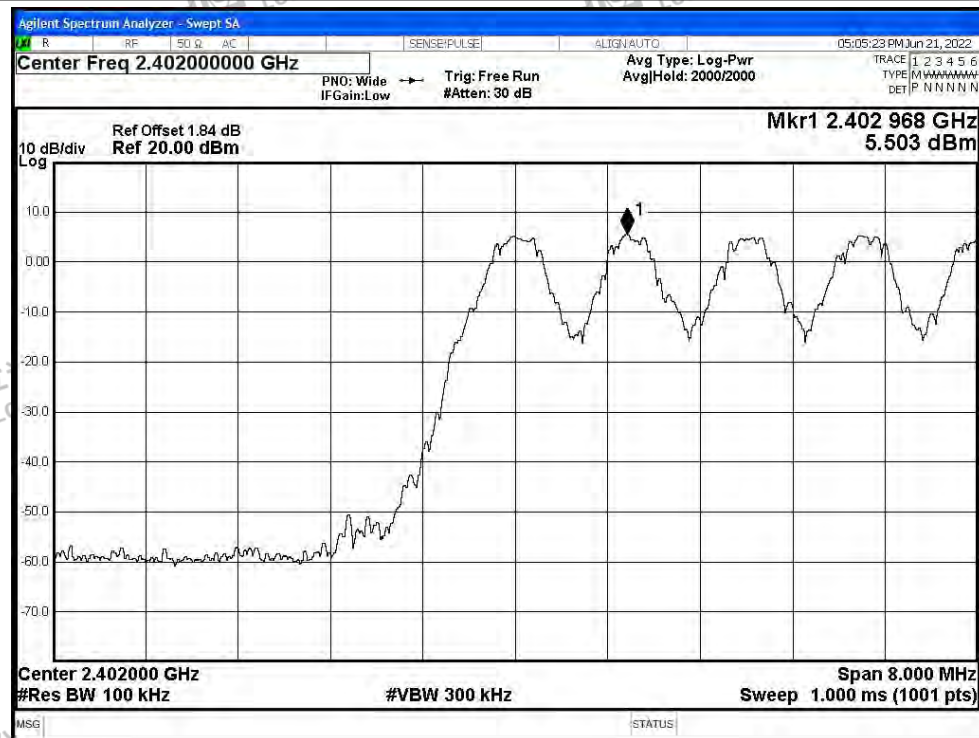


Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

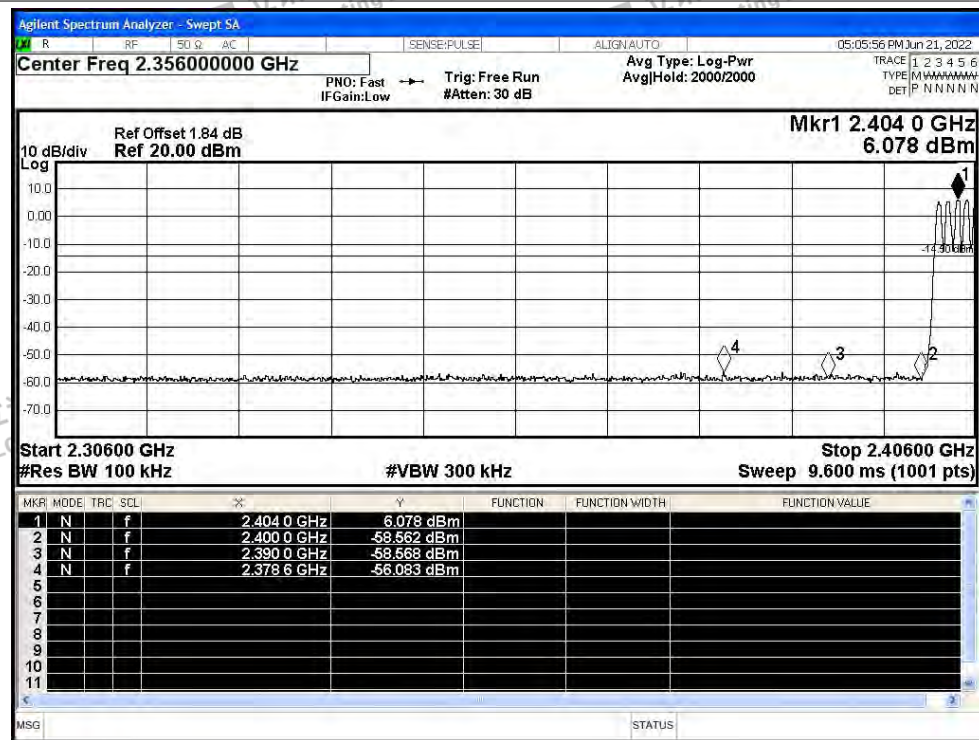




Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

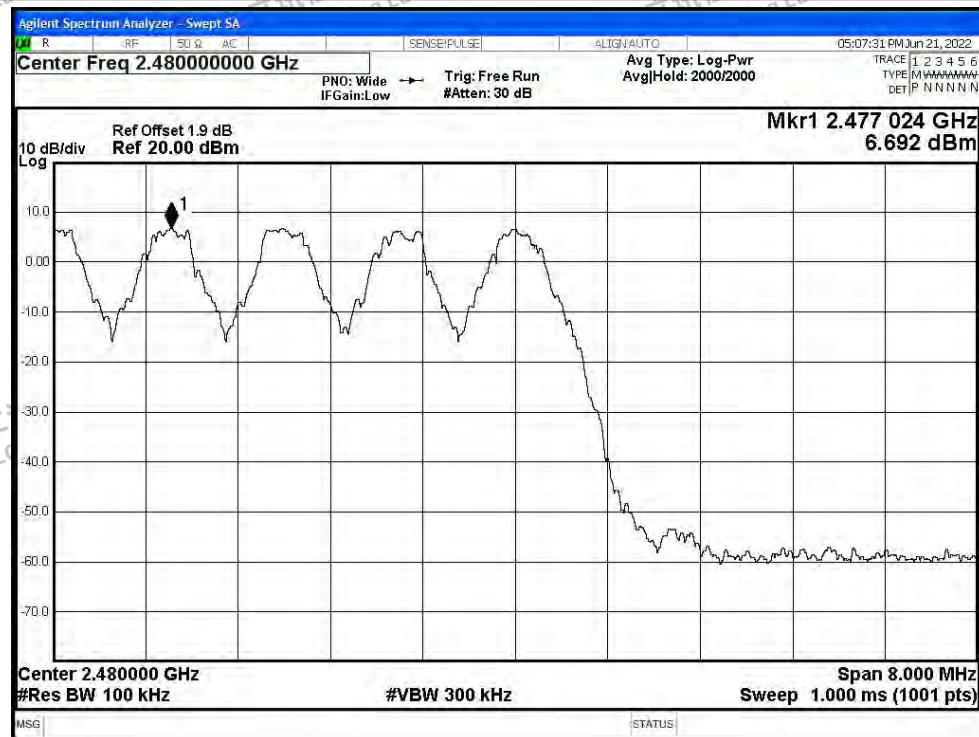


Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

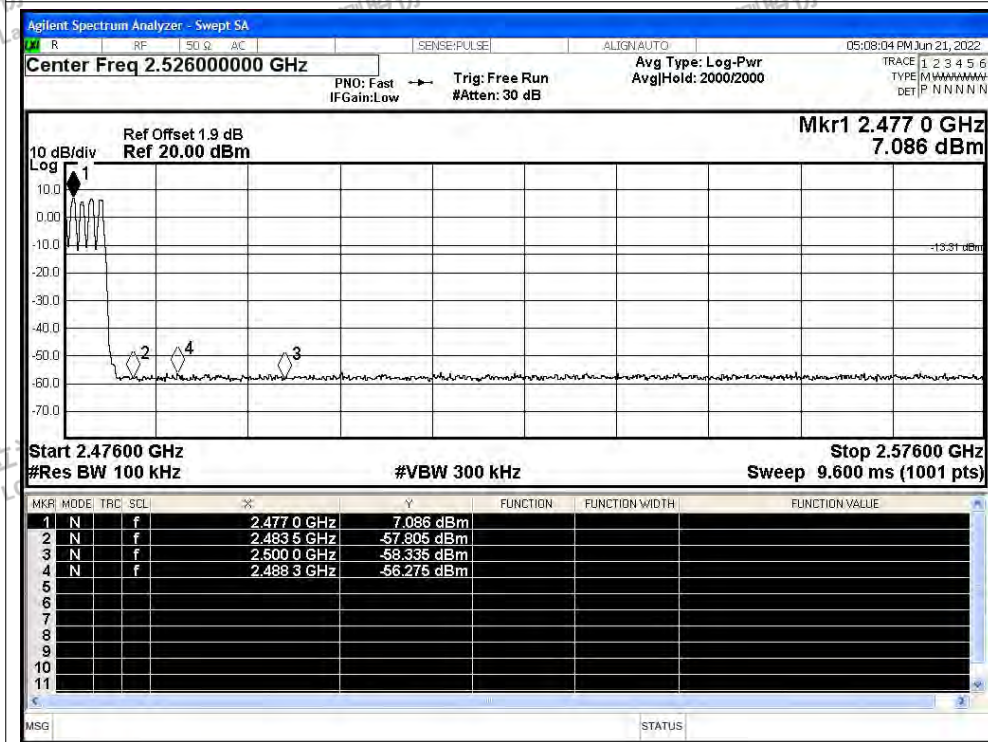




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

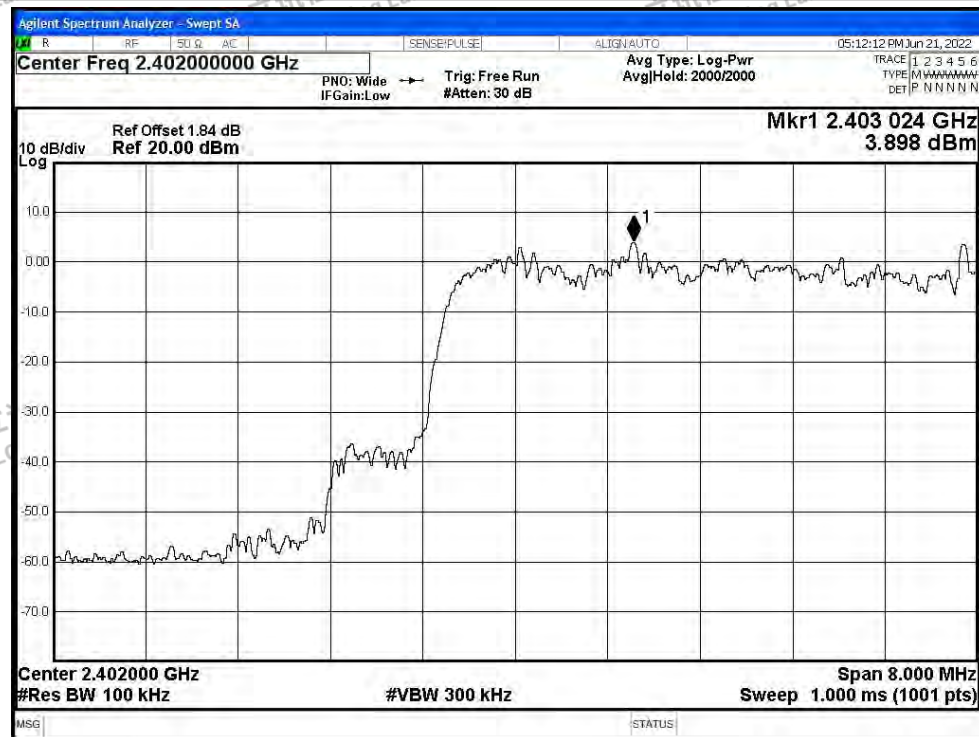


Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

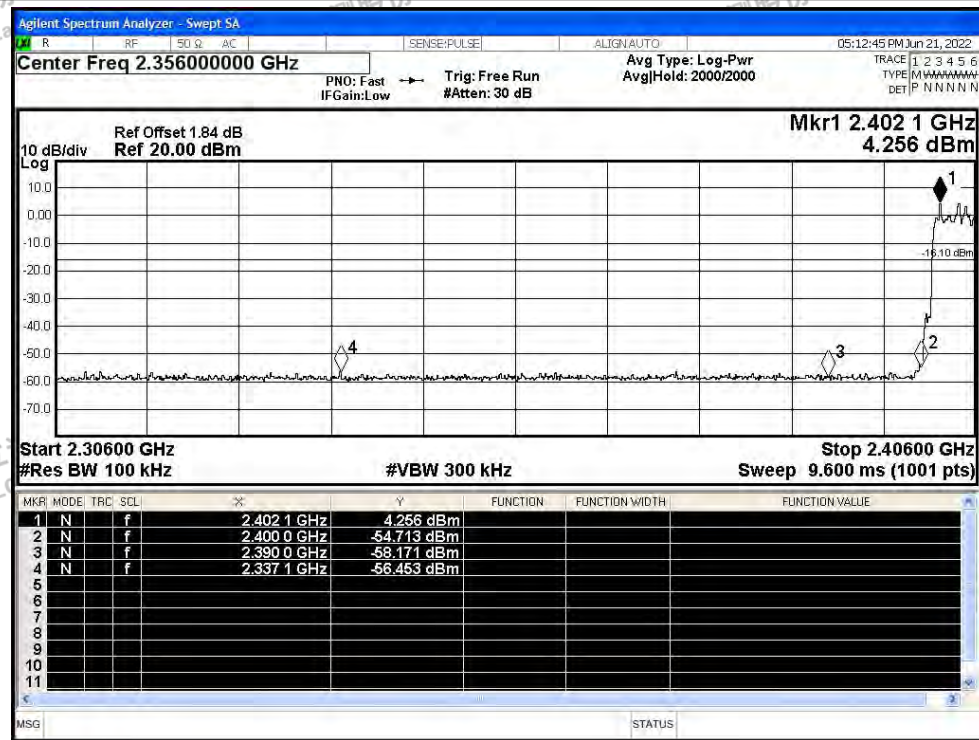




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

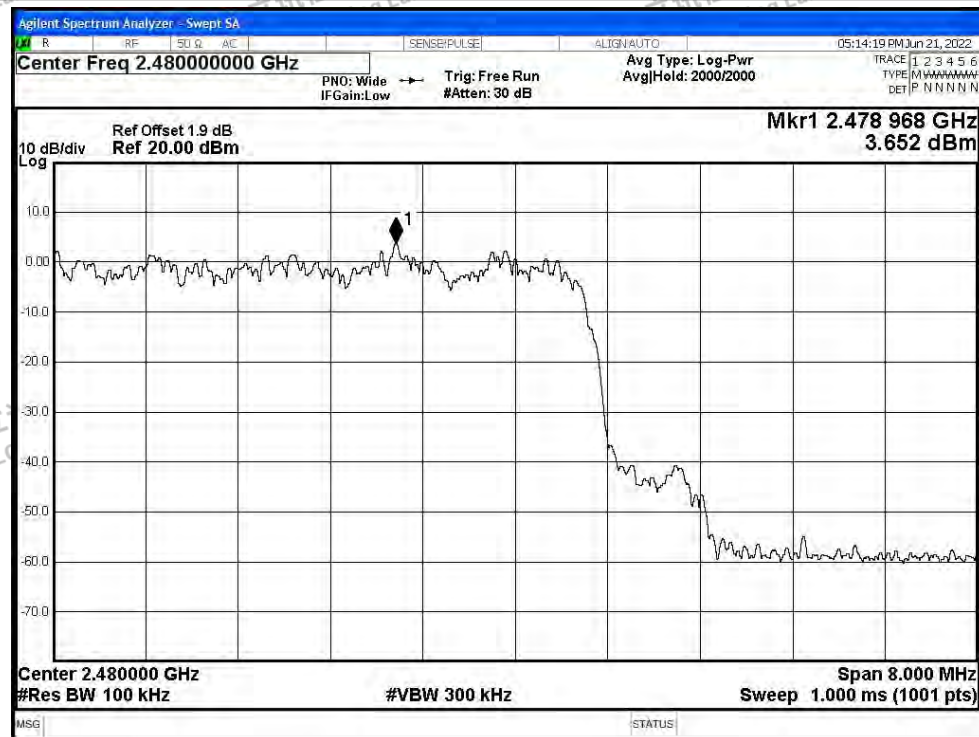


Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

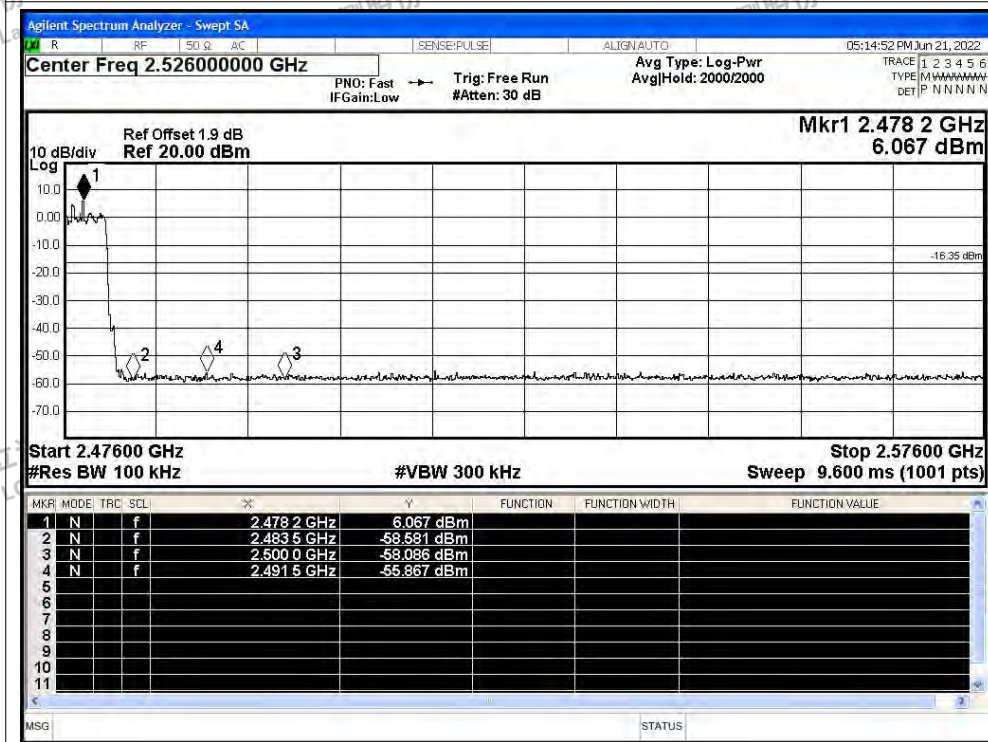




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

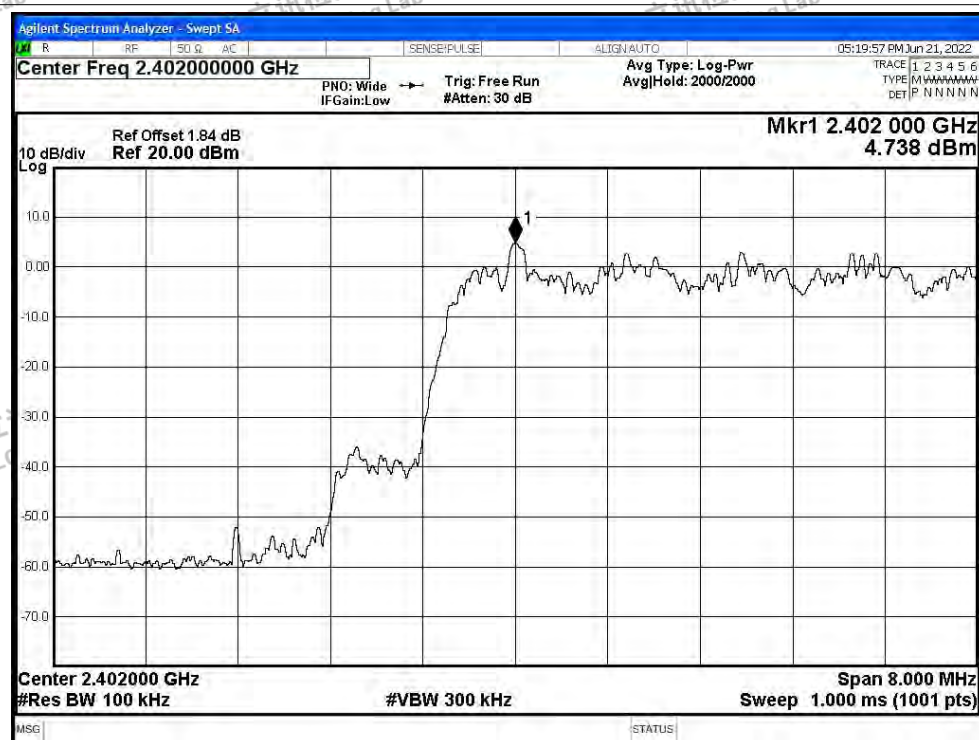


Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

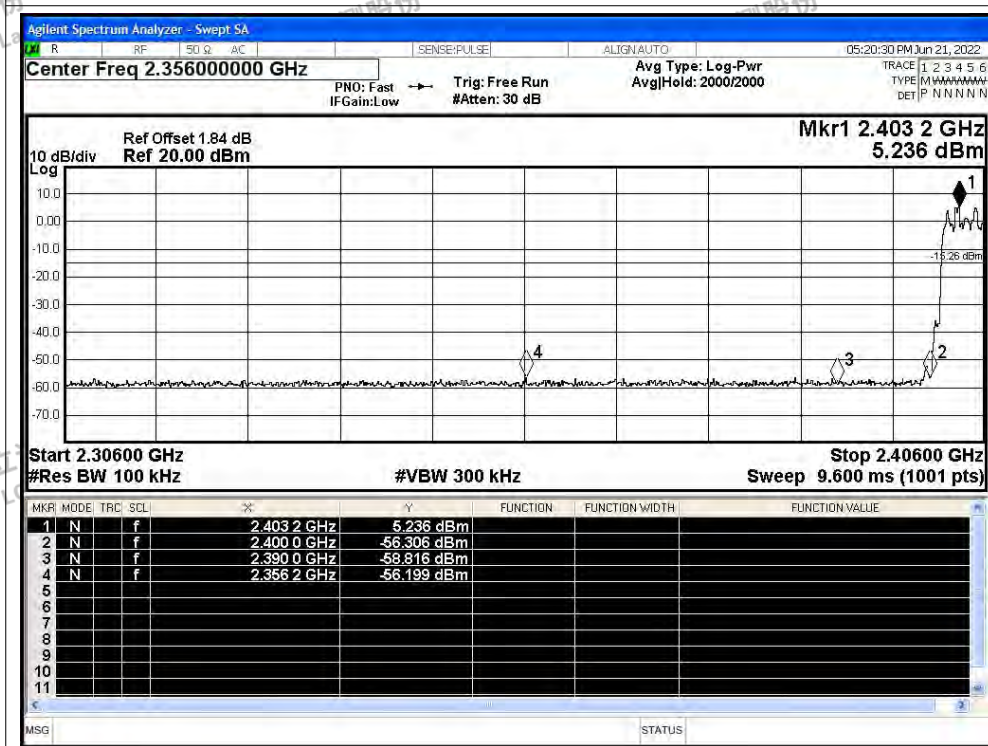




Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

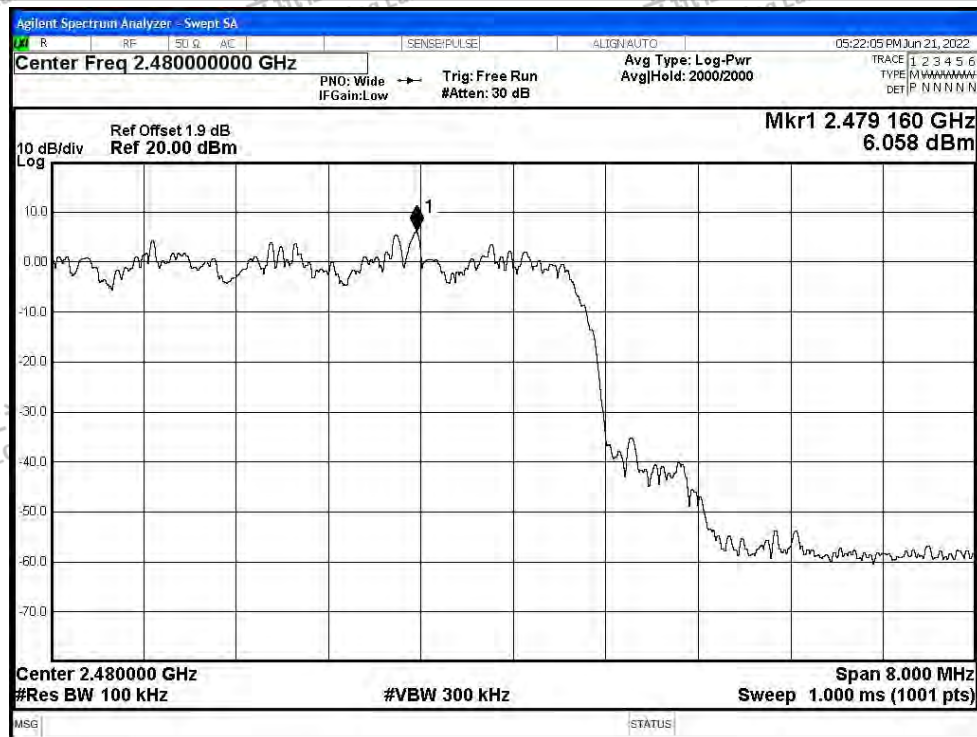

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

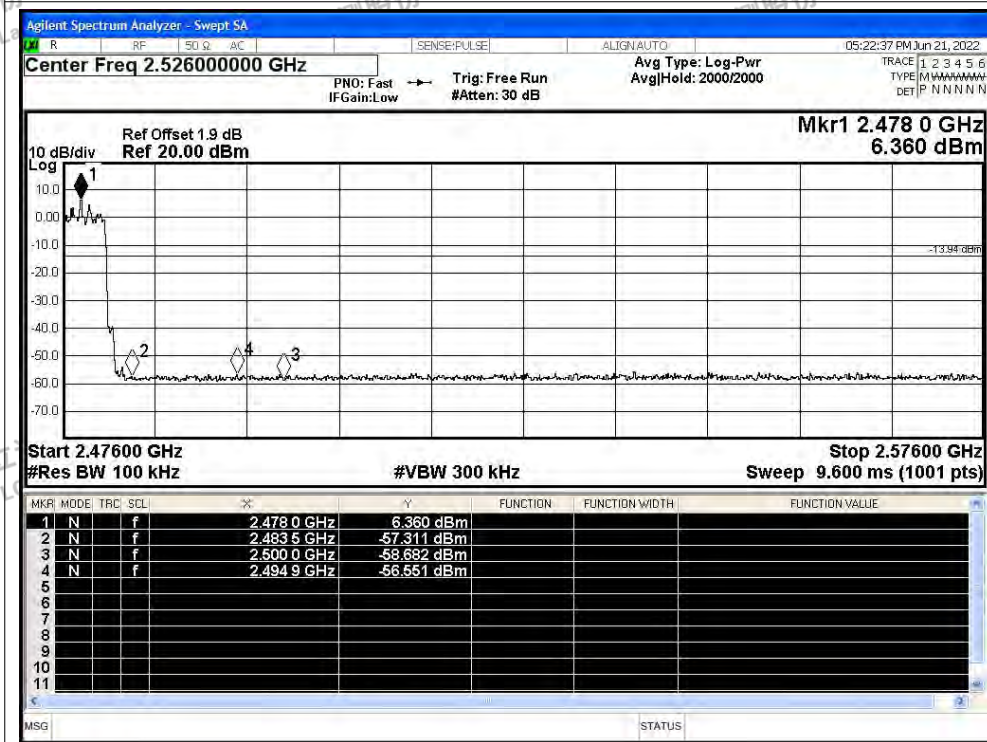



A.7 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-61.59	-20	Pass
NVNT	1-DH5	2441	Ant1	-62.45	-20	Pass
NVNT	1-DH5	2480	Ant1	-62.31	-20	Pass
NVNT	2-DH5	2402	Ant1	-61.21	-20	Pass
NVNT	2-DH5	2441	Ant1	-50.02	-20	Pass
NVNT	2-DH5	2480	Ant1	-62.19	-20	Pass
NVNT	3-DH5	2402	Ant1	-61.23	-20	Pass
NVNT	3-DH5	2441	Ant1	-62.12	-20	Pass
NVNT	3-DH5	2480	Ant1	-59.95	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

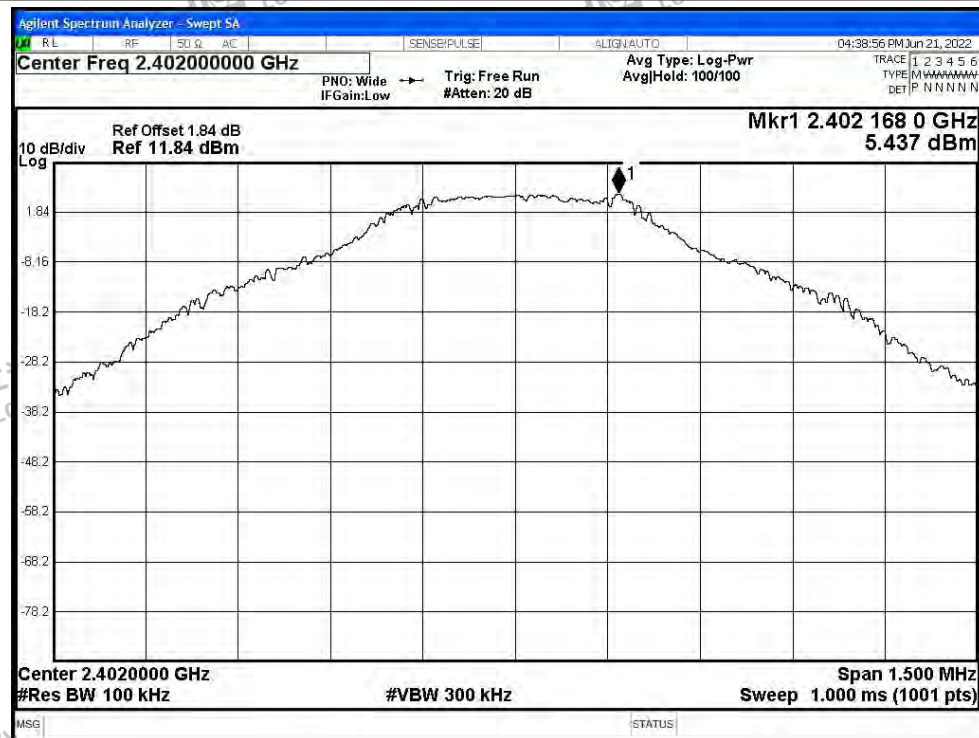

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

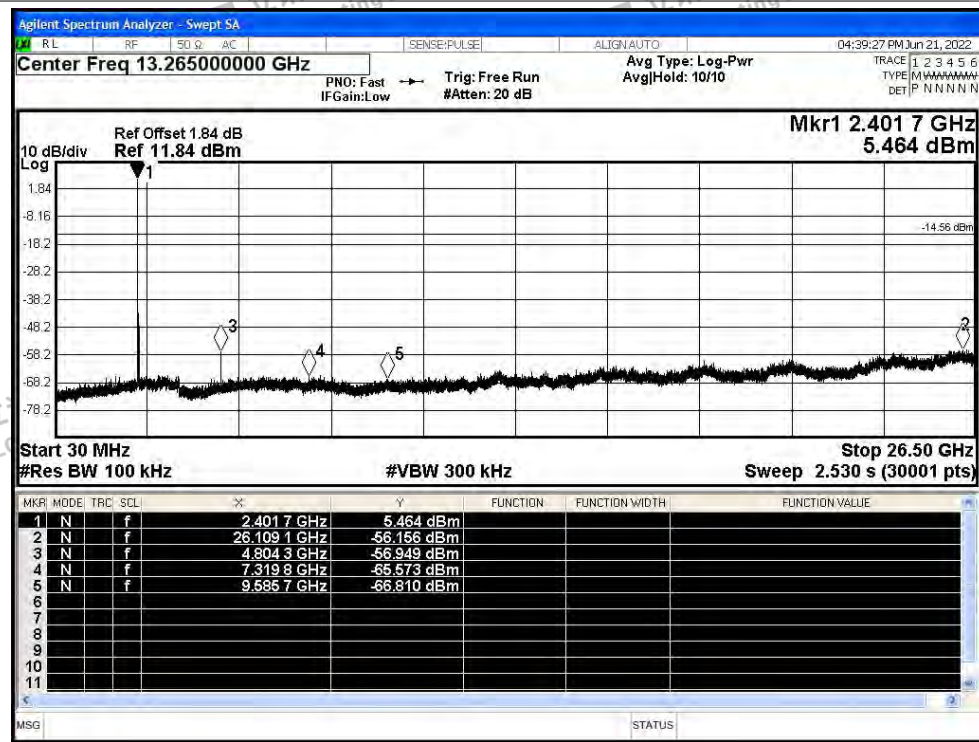

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

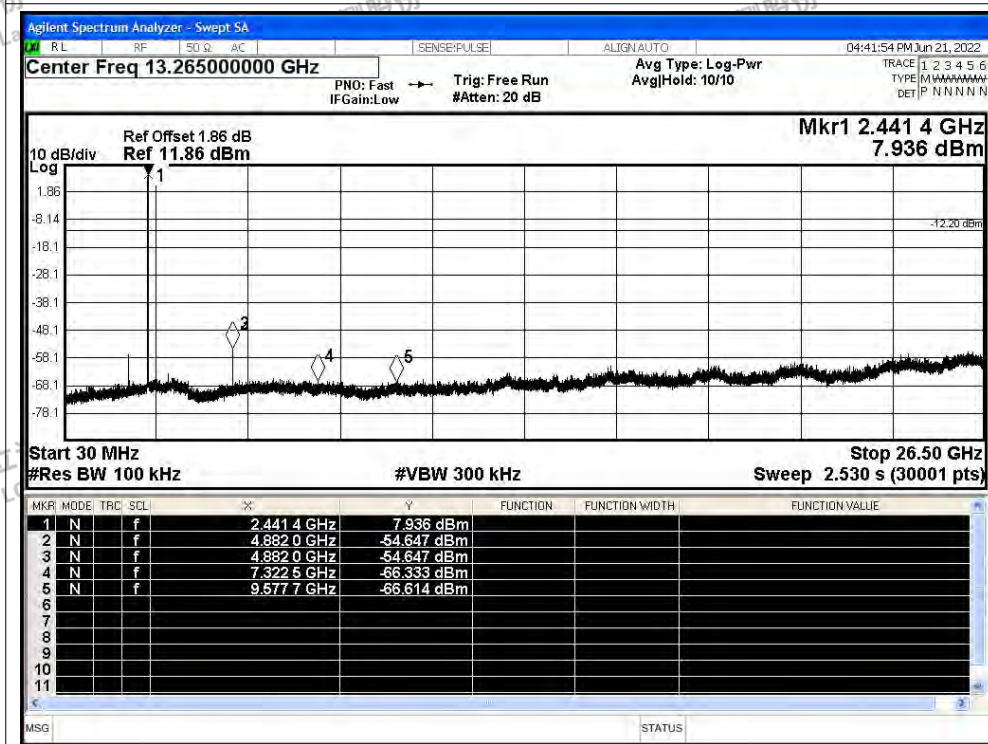




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

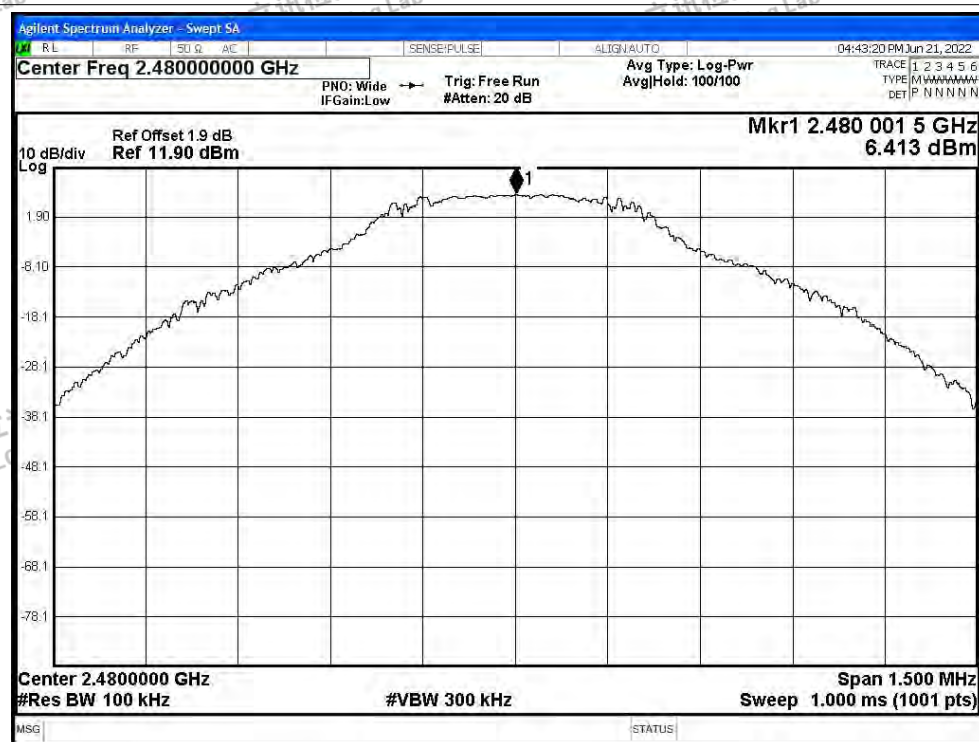


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

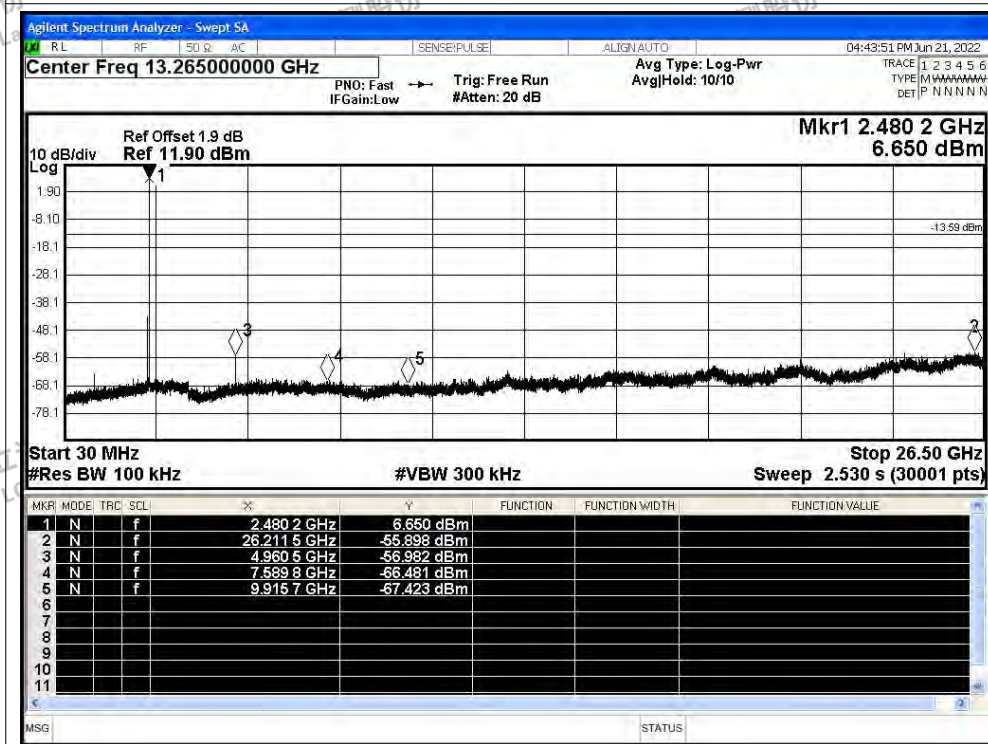




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

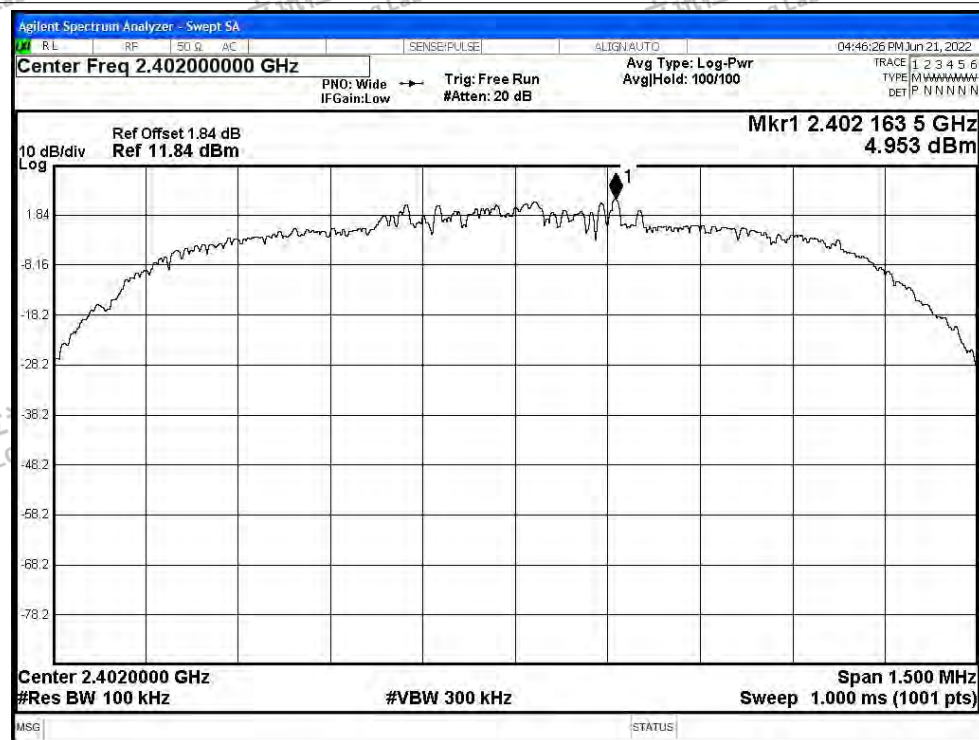

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

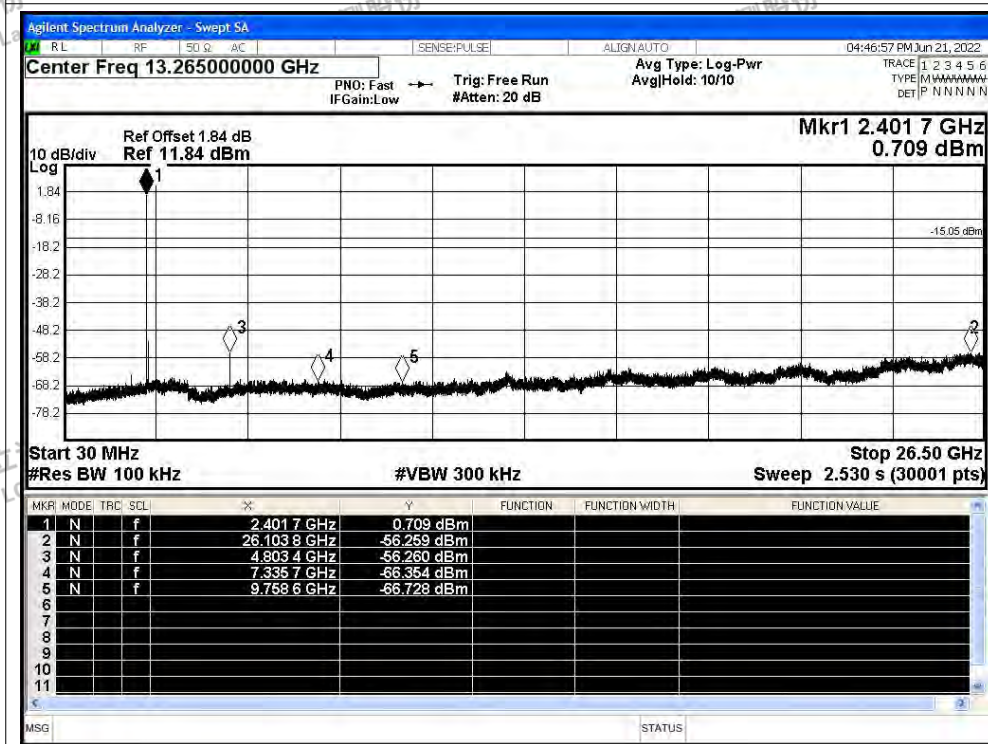




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

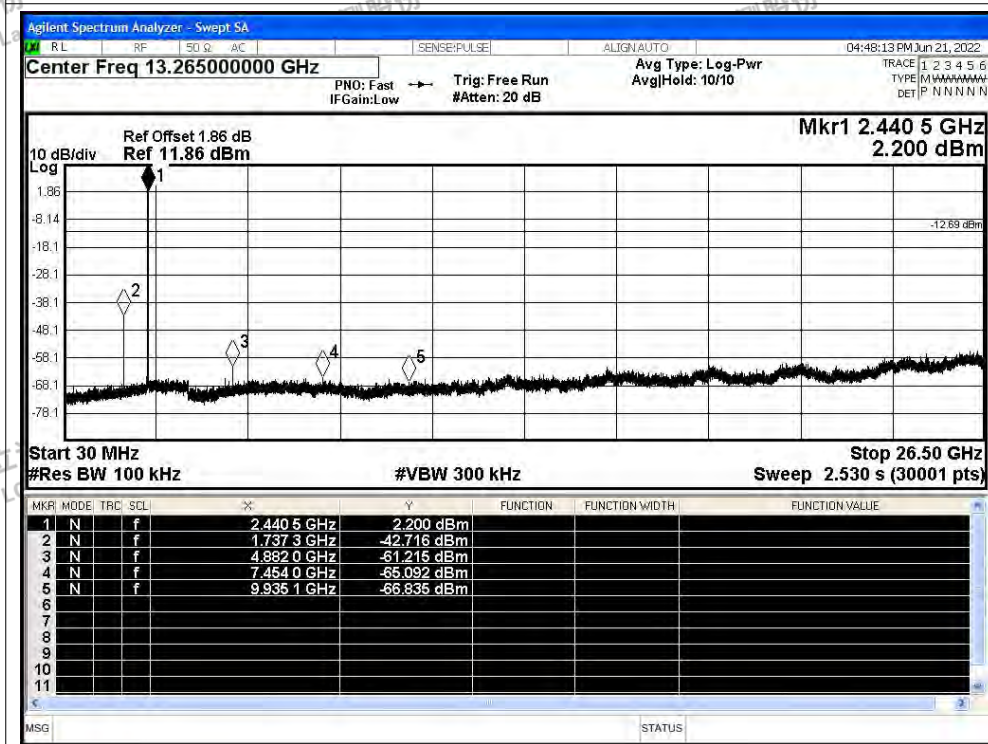




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

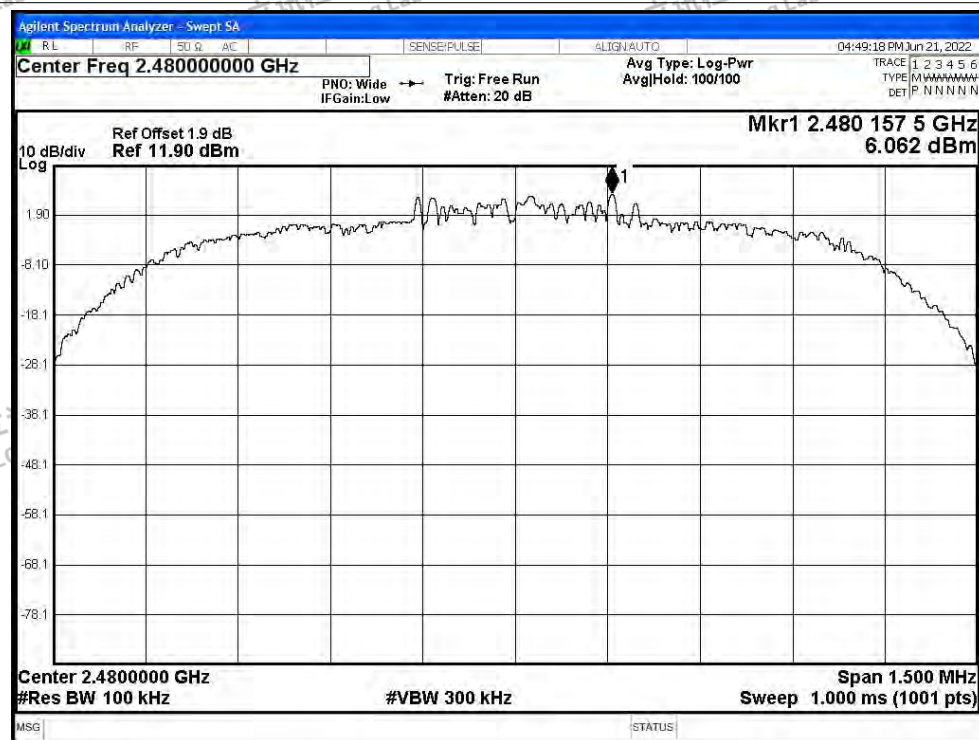


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

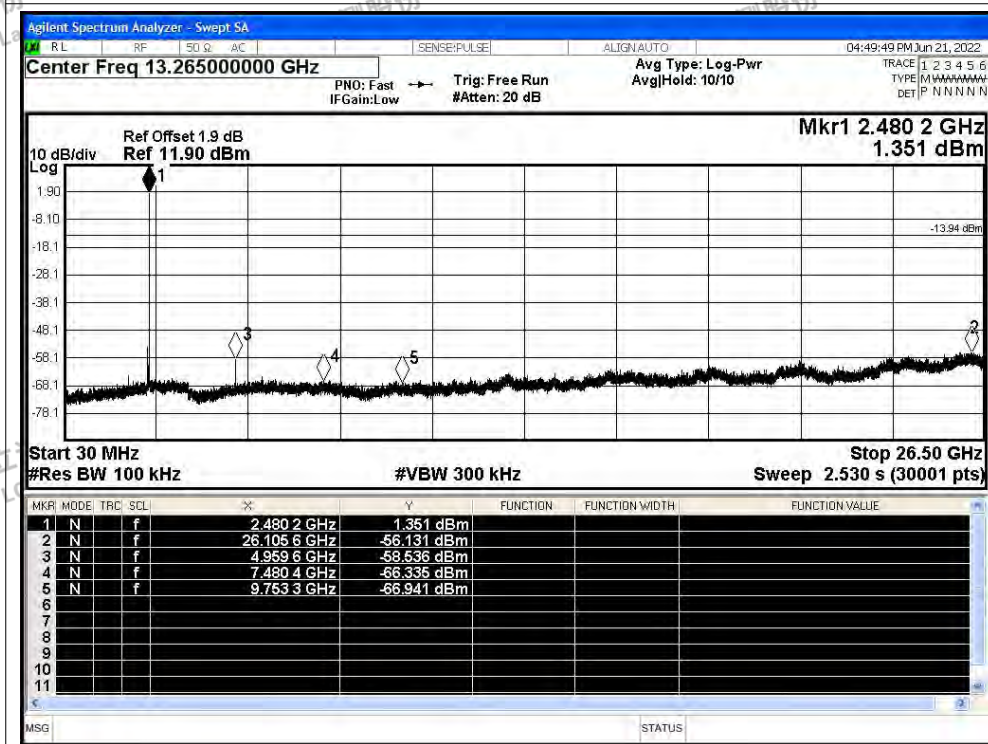




Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

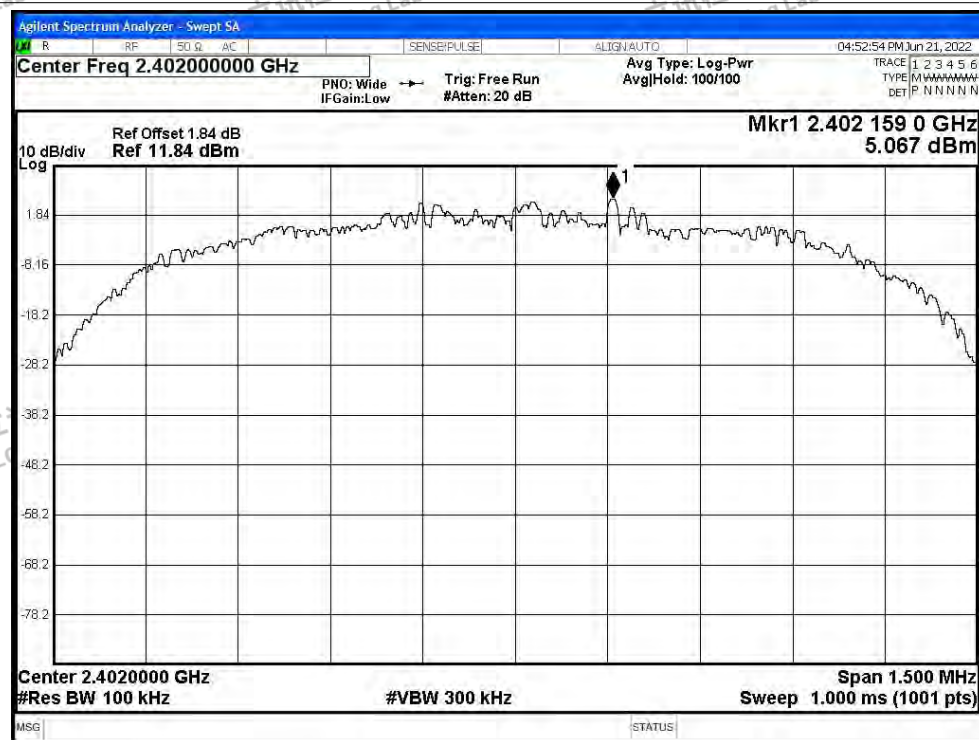

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

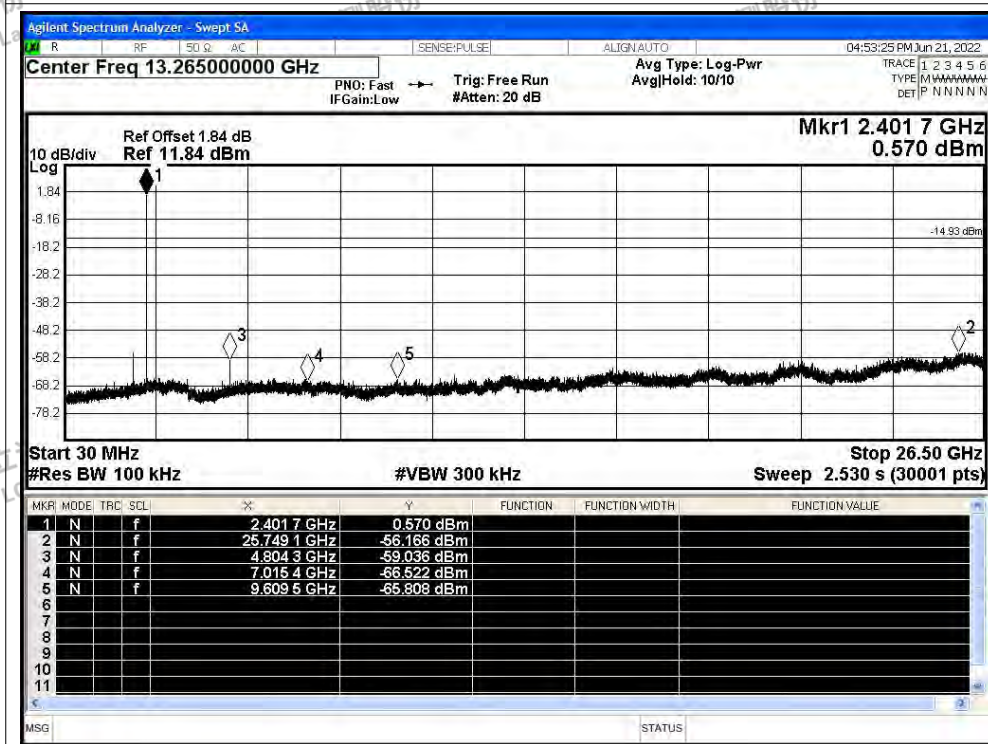




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

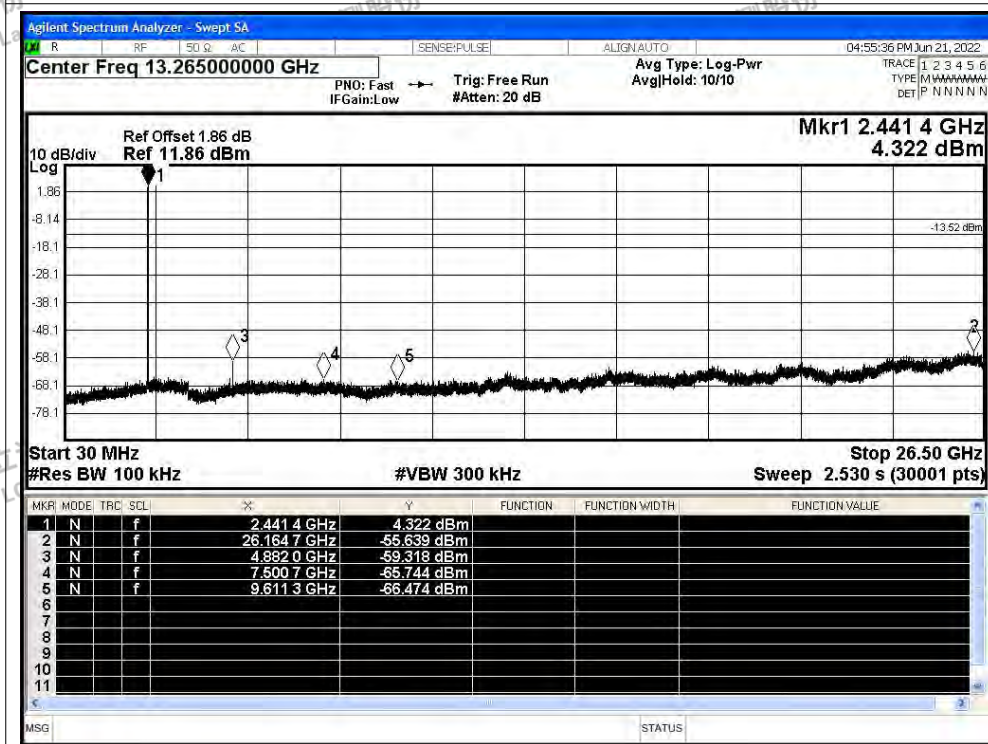




Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

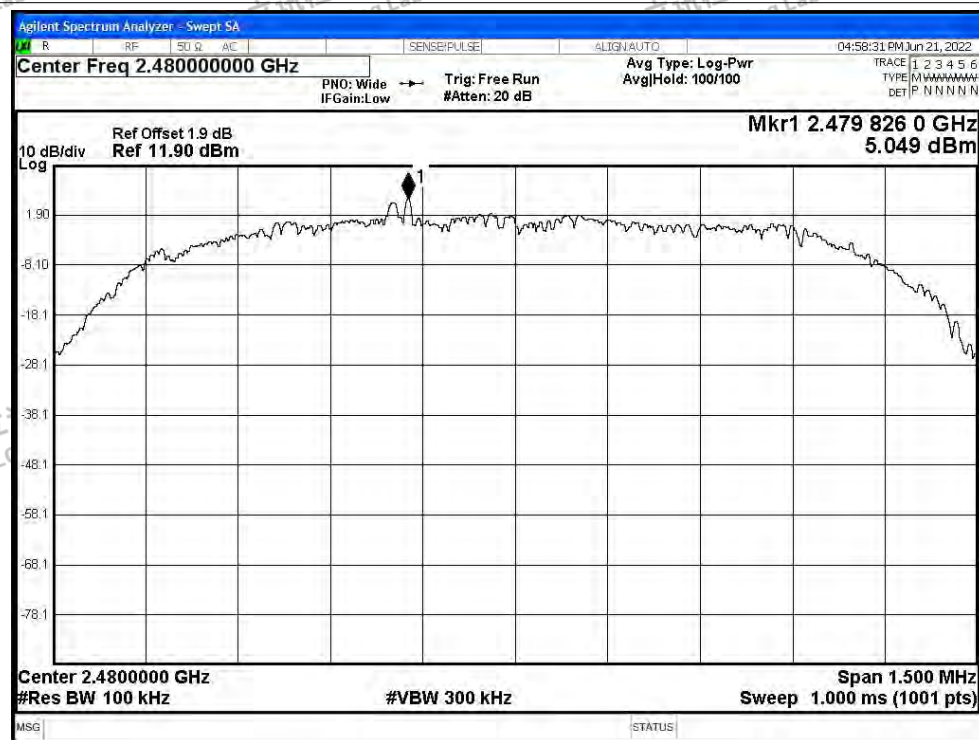

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

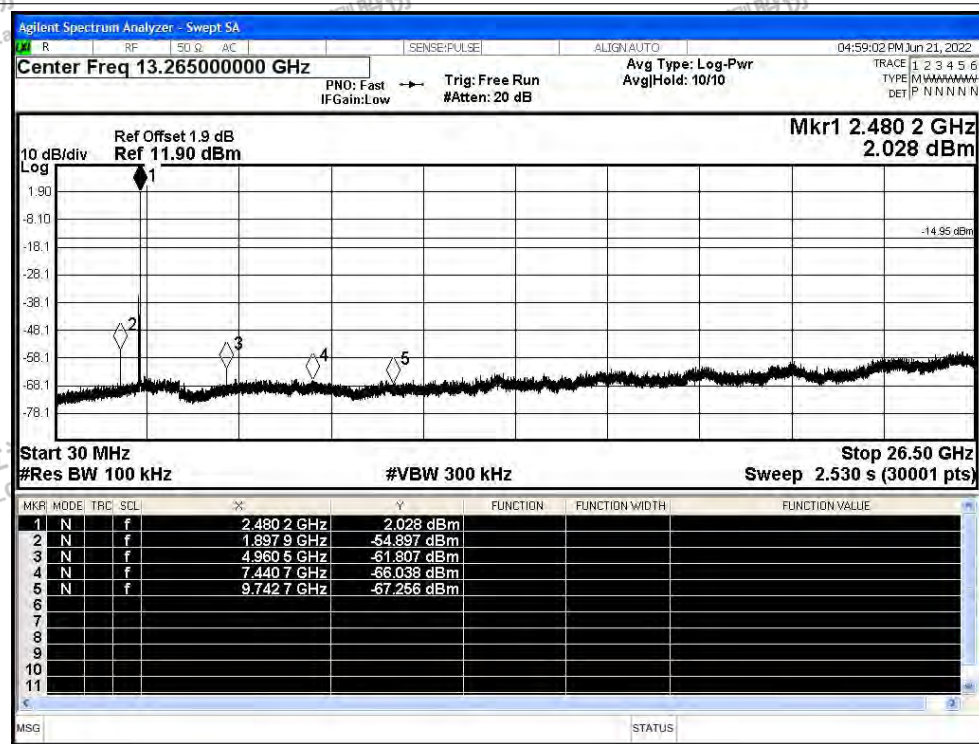

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



A.8 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-52.4	2	44.86	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-60.58	2	36.68	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2327.76	-47.86	2	49.4	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2382.864	-60.18	2	37.08	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-51.39	2	45.87	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-60.26	2	37	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-49.52	2	47.74	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-59.04	2	38.22	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2485.096	-46.79	2	50.47	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.944	-58.84	2	38.42	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-48.89	2	48.37	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-60.08	2	37.18	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-51.25	2	46.01	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-60.65	2	36.61	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2343.6	-47.71	2	49.55	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2388.912	-60.17	2	37.09	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-51.01	2	46.25	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-60.25	2	37.01	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-50.32	2	46.94	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-58.85	2	38.41	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2484.904	-46.83	2	50.43	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.536	-58.84	2	38.42	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-51.23	2	46.03	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-59.93	2	37.33	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-50.98	2	46.28	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-60.7	2	36.56	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2372.496	-47.81	2	49.45	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2382	-60.18	2	37.08	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-49.29	2	47.97	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-60.42	2	36.84	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-50.7	2	46.56	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-58.8	2	38.46	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2487.76	-46.94	2	50.32	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.536	-58.78	2	38.48	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-49.75	2	47.51	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-60	2	37.26	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Peak

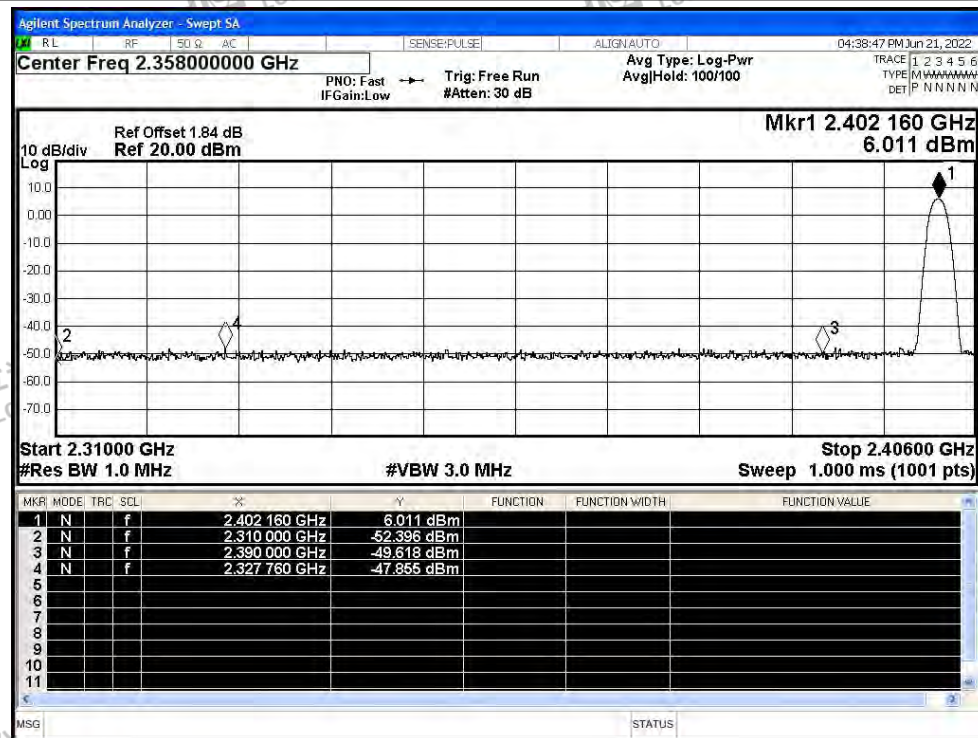


Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Average

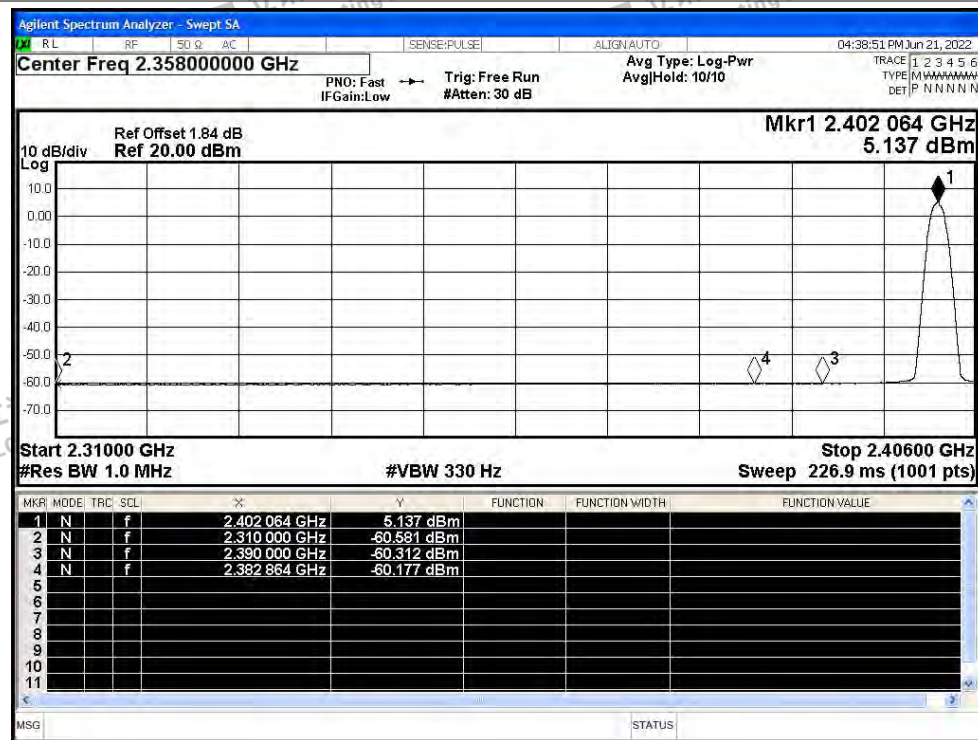




Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Peak

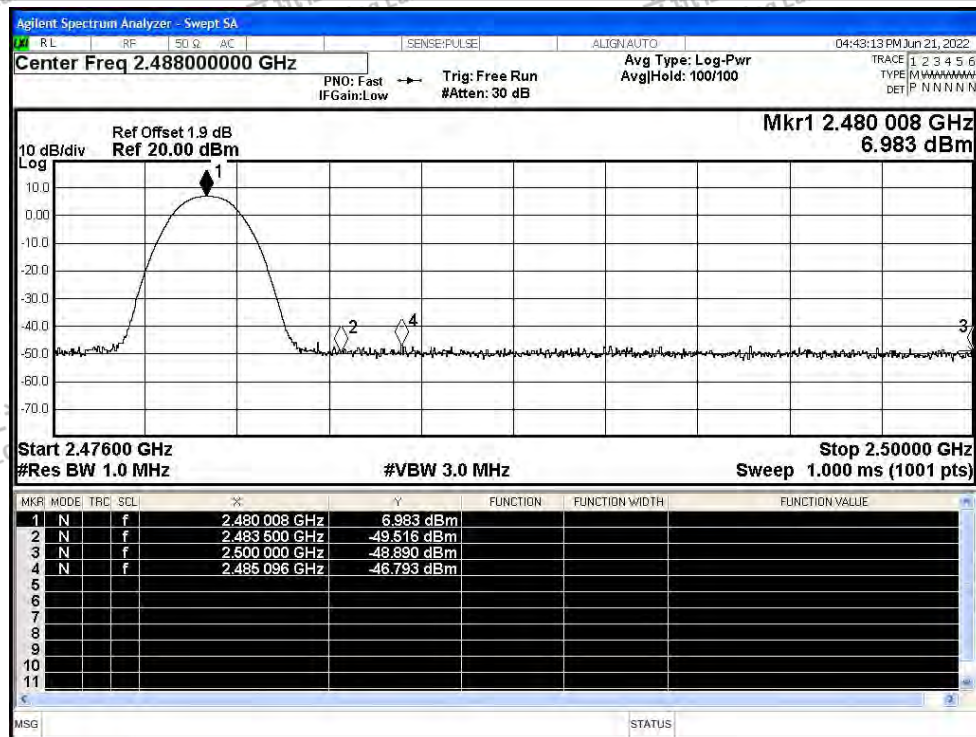


Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Average

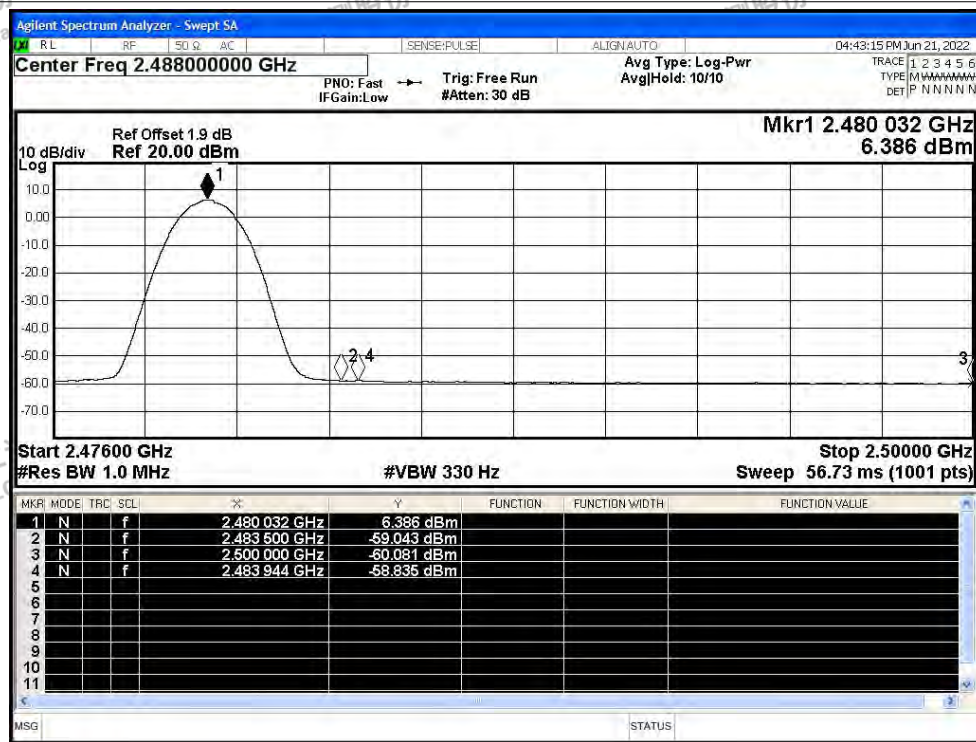




Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Peak

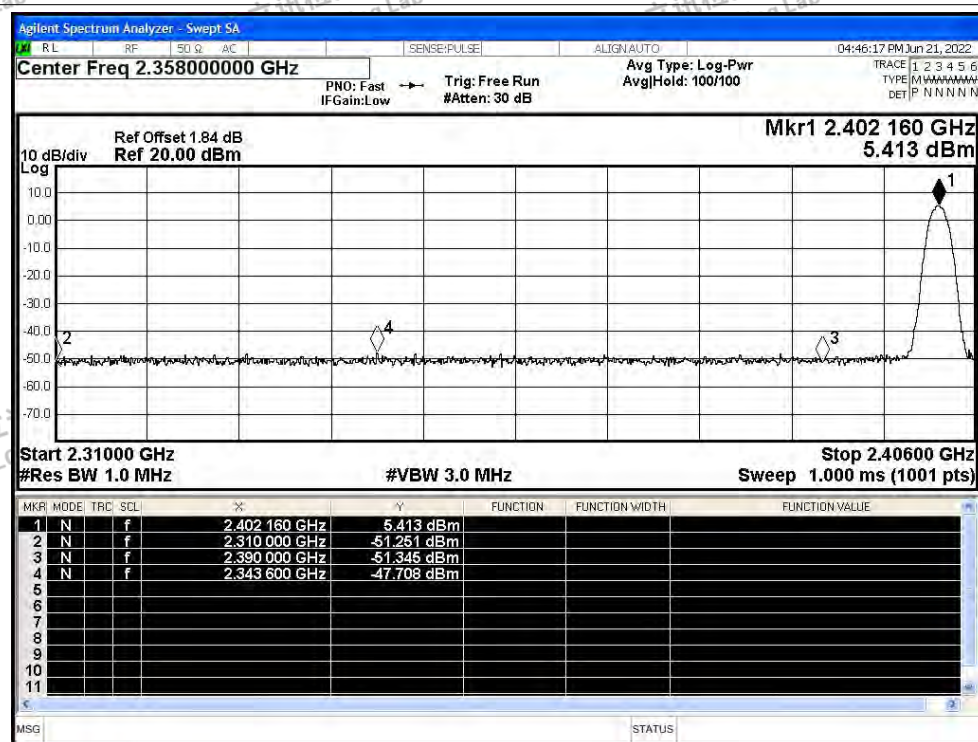


Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Average

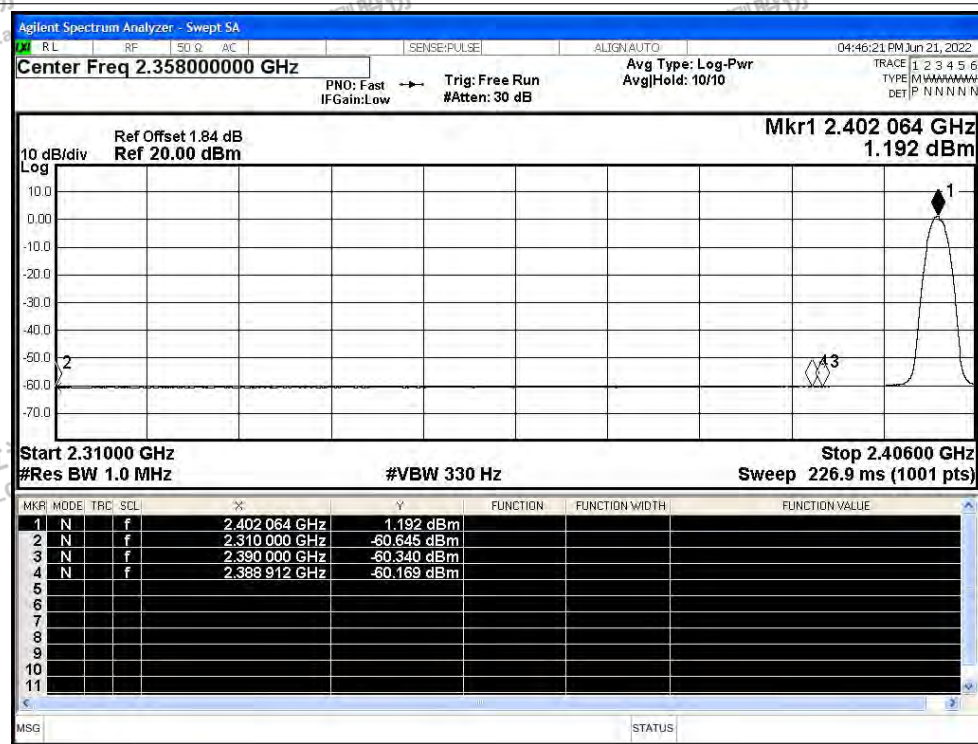




Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Peak

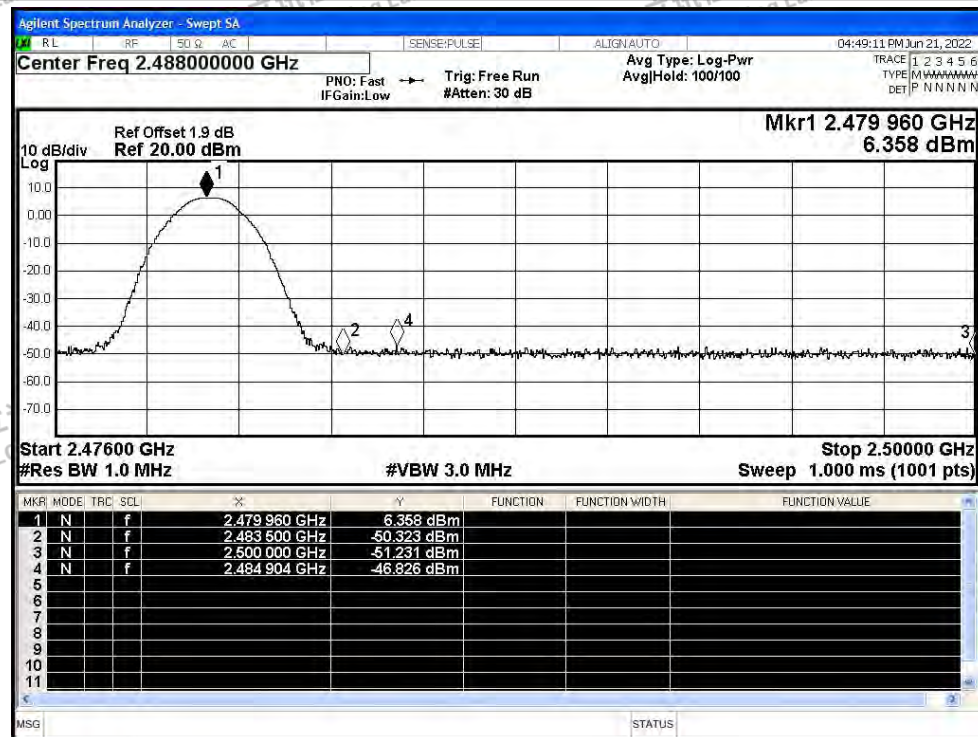


Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Average

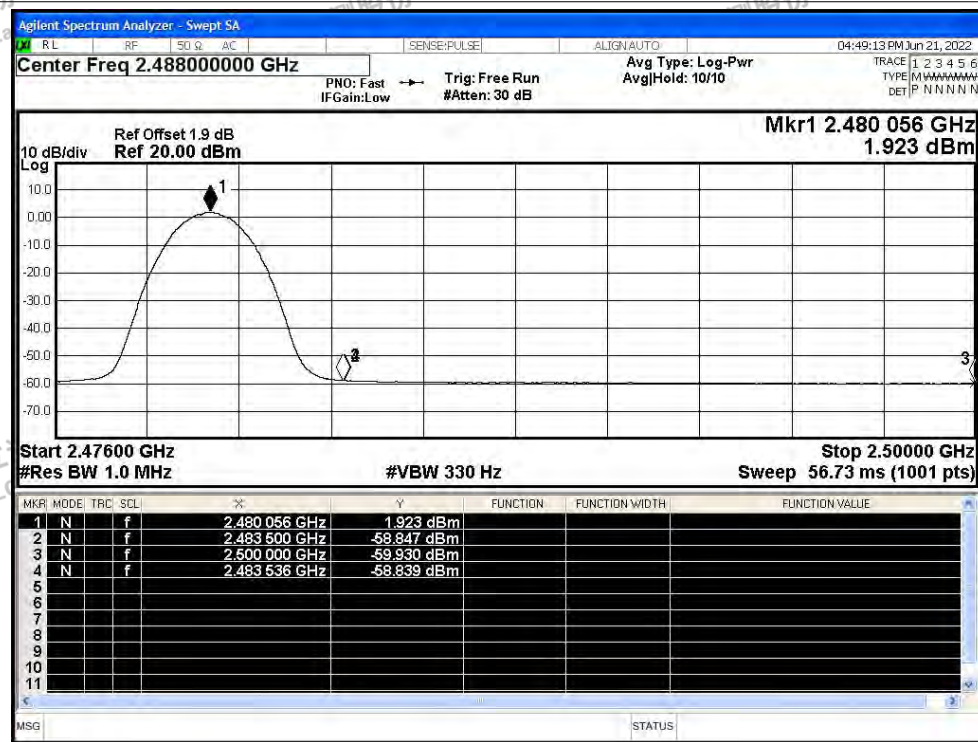




Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Peak

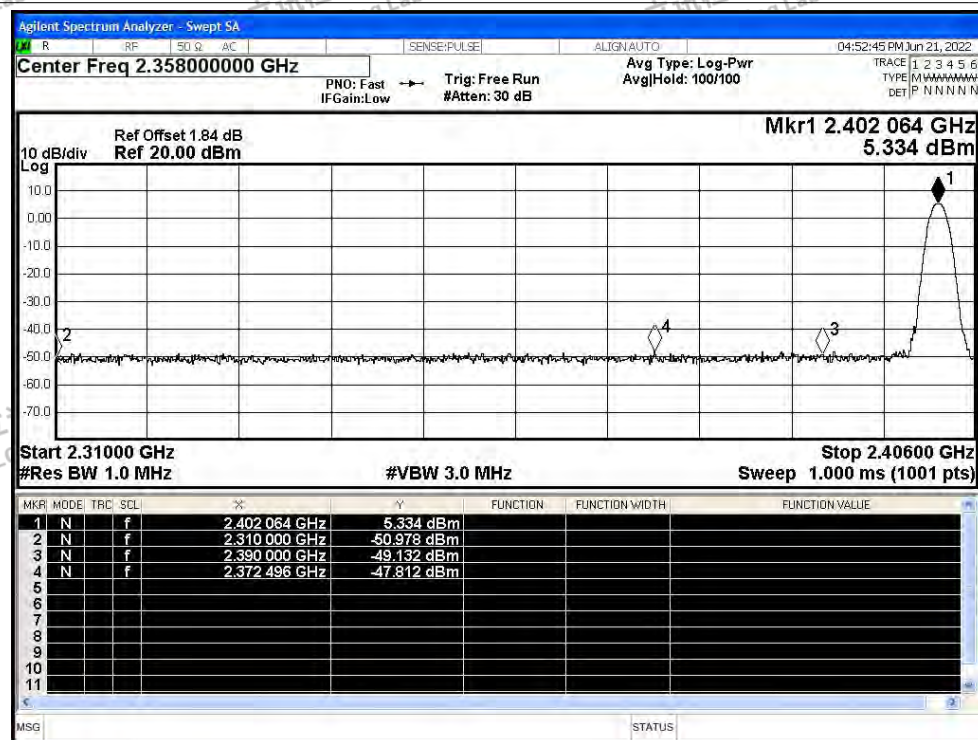


Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Average

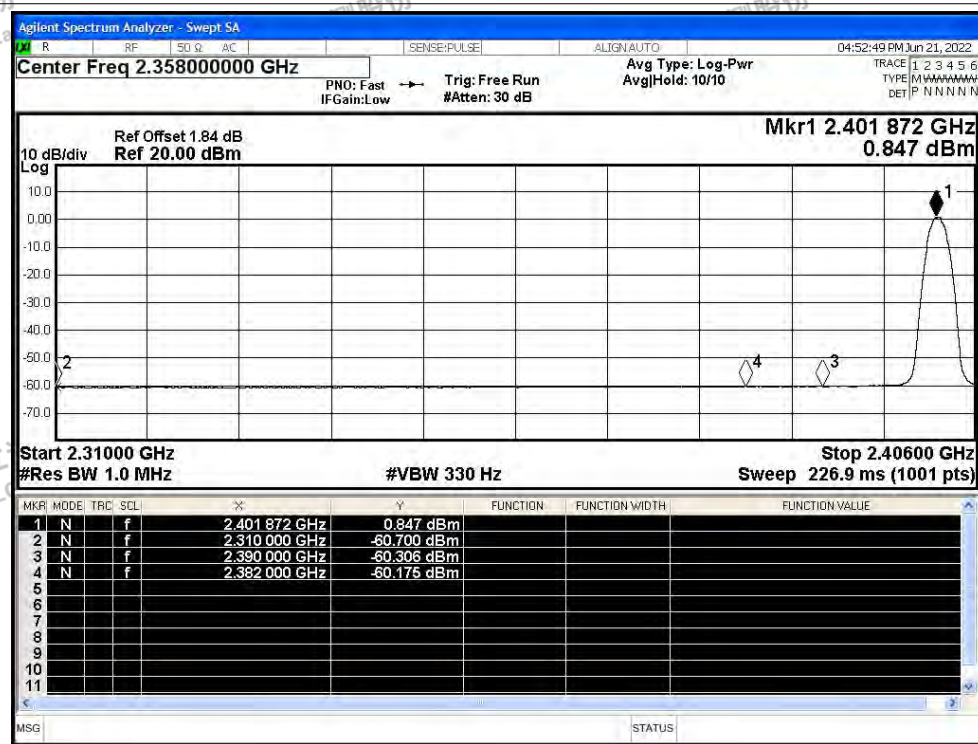



Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Peak

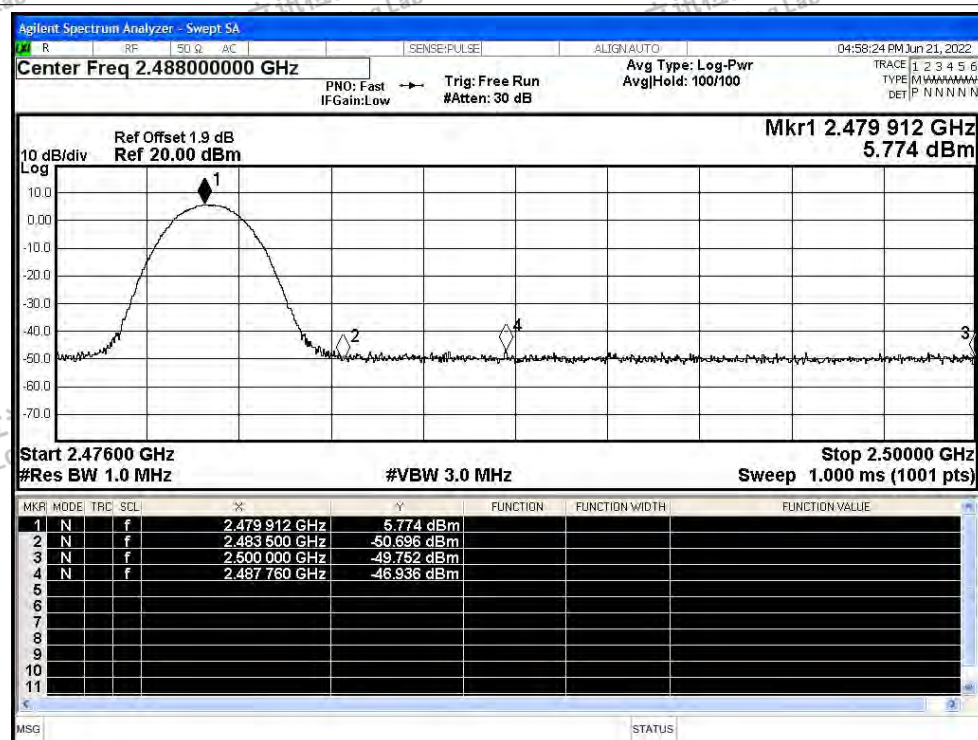

Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Average

