

材质	封面100g书写纸 内页80g书写纸	装订方式	骑马钉
语言	英，日	尺寸	108x145mm

CUSTOMER SUPPORT

English sales@customerafter-sales.com

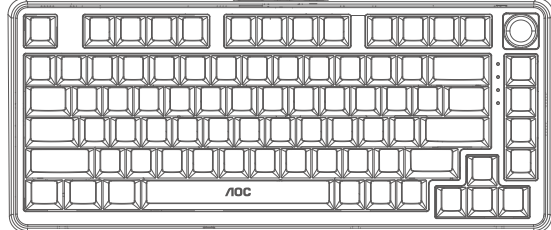
カスタマーサポート

日本語 j-service@customerafter-sales.com

AOC

GAMING KEYBOARD

GK330





Please scan here to download keyboard driver.

USER MANUAL

V1.05

English01-10

日本語11-21

English >>

TABLE OF CONTENTS

PACKAGE CONTENTS..... 01


PRODUCT OVERVIEW 01

HOW TO CHARGE THE KEYBOARD..... 02

HOW TO USE YOUR KEYBOARD..... 03

TROUBLESHOOTING GUIDE 10

PACKAGE CONTENTS


GK330 Keyboard

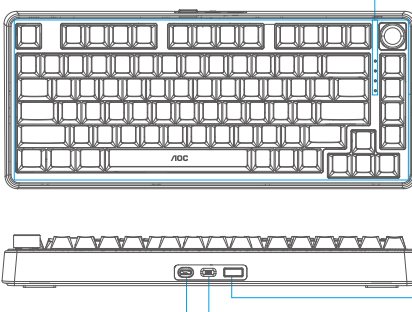

USB Type-C Charging Cable


User Manual


Keycap Puller


Receiver

PRODUCT OVERVIEW


⑤
①
③
④

① Keyboard Keycaps

③ Toggle switch


⑤ Indicator Light Functions

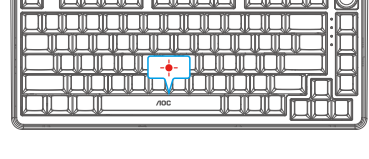
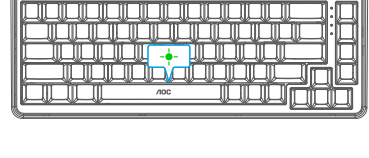
- CAPS
- WIN
- 2.4G
- Bluetooth

② Type-C Charging Port

④ Receiver Storage Compartment

HOW TO CHARGE THE KEYBOARD

1. The charging indicator is integrated in the space bar. Status indicators are as follows: When the battery is low, the red indicator on the space bar will flash.



2. While charging, the green indicator on the space bar will stay on. When fully charged, the space bar returns to the normal backlight mode.


Note:

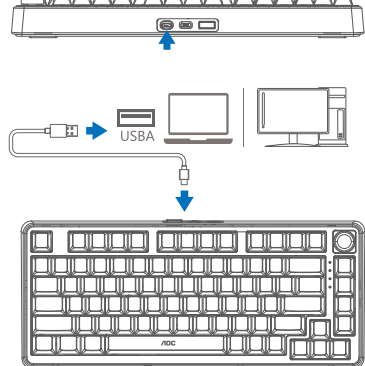
① A full charge takes approximately 3~4 hours.

② When the battery is low, the charging indicator will flash red.

HOW TO USE THE KEYBOARD

Option 1: Wired Connection

1. Slide the switch to Wired Mode.

2. Insert the USB-C connector into the keyboard and the USB-A connector into your computer to start using.


Option 2: 2.4G Wireless Mode

2.4G mode supports connection with one USB receiver device at a time.


1. Slide the switch to 2.4G Mode, then follow the steps below to connect to a Bluetooth device.

2. Insert the USB-C connector into the keyboard and the USB-A connector into your computer to start using.


Option 3: Triple-Channel Bluetooth Connection

Slide the switch to BT Mode, then follow the steps below to connect to a Bluetooth device.

Only one Bluetooth device can be connected at a time, and the pairing information will be remembered.

Bluetooth device name: AOCGK330BT1 AOCGK330BT2 AOCGK330BT3


Bluetooth 1: Press Fn + 1 (Short press: switch channel; Long press: enter pairing mode)

Indicator: Cyan light

Fast flashing: pairing

Slow flashing: reconnecting

Solid for 2 seconds: connection successful, then returns to normal backlight

Enters sleep mode if pairing fails after 1 minute or reconnection fails after 20 seconds


Bluetooth 2: Press Fn + 2 (Short press: switch channel; Long press: enter pairing mode)

Indicator: Blue light

Fast flashing: pairing

Slow flashing: reconnecting

Solid for 2 seconds: connection successful, then returns to normal backlight

Enters sleep mode if pairing fails after 1 minute or reconnection fails after 20 seconds


Bluetooth 3: Press Fn + 3

Indicator: Purple light

Fast flashing: pairing

Slow flashing: reconnecting

Solid for 2 seconds: connection successful, then returns to normal backlight

Enters sleep mode if pairing fails after 1 minute or reconnection fails after 20 seconds


Battery Level Check in Wireless Mode


Press Fn + Right Ctrl. The backlight will turn off, and the number keys (1 to 0) will light up to indicate the remaining battery level.

Example: If only 1 is lit, it means the battery is at 10%. If 1 + 2B are lit, it indicates 20%, and so on.

LED Color Indicators:
Red: below 30%
Yellow: below 50%
Green: above 50%

Quick Volume Adjustment

1. Press Mute/Unmute


2. Turn clockwise to increase volume.


3. Turn counterclockwise to decrease volume.


Multimedia and Function Controls via FN Key Combinations

FN+	ESC	Press and hold for 3 seconds to reset the Windows function.
	F1	This PC / My Computer
	F2	Home
	F3	Calculator
	F4	Media Player
	F5	Previous Track
	F6	Next Track
	F7	Play / Pause
	F8	Stop
	F9	Mute
	F10	Volume +
	F11	Volume -
	F12	Email
	Backlight	On/Off

END	Change Lighting Color
↑	Increase Brightness
↓	Decrease Brightness
1/	Bluetooth Device 1(AOC GK330 BT1)
2/	Bluetooth Device 2(AOC GK330 BT2)
3/	Bluetooth Device 3(AOC GK330 BT3)
4/	2.4G Wireless Receiver Mode
→	Increase Lighting Speed
←	Decrease Lighting Speed
INS	Switch lighting mode
0	Delete
P	Home
Win+	L Lock the computer screen

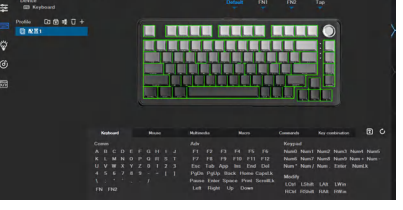
Driver Download Usage

1. Scan the QR code on the cover page to download the keyboard driver


2. After downloading, install the driver and the desktop will display the icon.

3. Access Google Drive and download GK330 Keyboard Setup v2.0 20251016.

4. The driver can only be used in wired and 2.4G mode.

5. Enter the driver interface.


6. Device Information: Includes language selection, start, exit, tap, sleep, key debounce, restore 

7. Profile Macro Function: Editing 

8. RGB Light Selection 

9. The keyboard backlight changes in sync with the rhythm of system sounds. 

10. Import the well-edited macro functions. 

11. After completing the setup each time, click this icon to save 

System Requirements

Product Requirements

1. Available USB port.

2. Supported Operating Systems:

Microsoft Windows 7, Windows 8, Windows 10 or later

Android 3.2 or later

macOS X 10.5 or later

TROUBLESHOOTING GUIDE

Q1. Unable to connect to the keyboard via Bluetooth

1. If the keyboard is in Bluetooth mode, ensure the Bluetooth indicator is flashing. Search for "AOC GK330" in your device's Bluetooth list and tap to connect.

2. Check the remaining battery level. If the battery is low, Bluetooth functionality may not work properly. Please charge the keyboard and try again.

3. Try connecting to another device (e.g., another PC) to determine if the issue is device-specific.

4. Restart the keyboard. Turn it off and back on, then attempt to re-pair.

5. If the problem persists, please provide your device model, operating system, Bluetooth version, and a description of the situation so that we can offer more detailed support.

WARRANTY POLICY

1. 24/7 Priority Customer Support aoc-after-sales@customerafter-sales.com

2. 24/7 Technical Assistance

Our support team is available around the clock to assist you with any issues.

3. Warranty Coverage

12-month product quality warranty

45-day return and refund service

日本語 >>

目次

パッケージ内容..... 11


製品概要..... 11

キーボードの充電方法..... 12

キーボードの使い方..... 13

トラブルシューティング..... 20

パッケージ内容


GK330
メカニカルキーボード

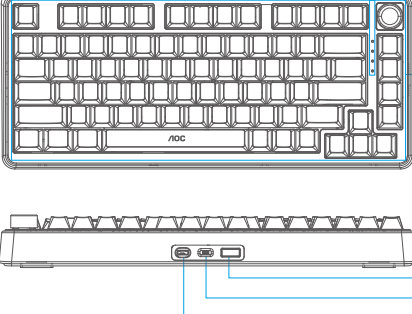

Type-C
充電ケーブル


ユーザーマニュアル


キーキャッププラー


レシーバー

製品概要


⑤
①
③
④

① キーボードとキーキャップ

③ スイッチ


⑤ インジケータライト

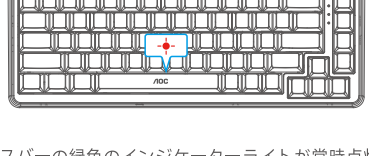
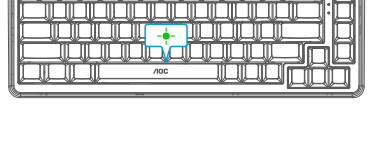
- CAPS
- WIN
- 2.4G
- Bluetooth

② Type-C充電ケーブルポート

④ レシーバー収納

キーボードの充電方法

1. スペースバーの緑色のインジケータライトは充電インジケータです。バッテリー残量が少なくなると、スペースバーのインジケータライトが赤く点滅します。



2. 充電中は、スペースバーの緑色のインジケータライトが常時点灯します。充電が完了すると、スペースバーは通常のバックライト点灯に戻ります。


Note:

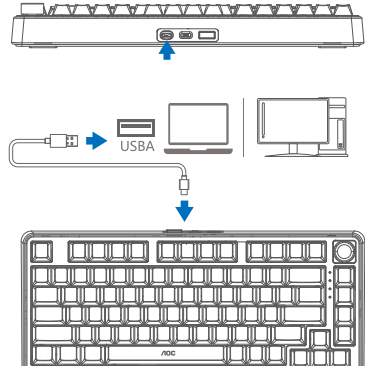
① フル充電には約3~4時間かかります。

② キーボードの電池残量が少なくなると、充電インジケータライトが赤く点滅します。

キーボードの使い方

接続方法 1：有線接続

1. キーボードのスイッチを有線接続モードに切り替えます。

2. ケーブルを接続し、Cポートをキーボードに接続し、Aポートをコンピュータに接続します。



接続方法 2：2.4G モード

1. スイッチを 2.4G にスライドします。

2. レシーバーをコンピュータのUSBポートに挿入します。


接続方法 3：3 チャンネル Bluetooth 接続

スイッチをBTモードにスライドし、以下の手順に従ってBluetoothデバイスに接続します。

1.一度に接続できるBluetoothデバイスは1台のみです。コード情報は記載されません。Bluetoothデバイス名：AOCGK330BT1 AOCGK330BT2 AOCGK330BT3


2. Fn+1（短押しで切り替え、長押しでペアリング）を押すと、Bluetooth独立インジケータライトの緑色に点灯し、ペアリング中は高速点滅、再接続時は低速点滅します。接続に成功すると、Bluetooth独立インジケータライトが2秒間点灯し、その後、全体のバックライト点滅に戻ります。ペアリングが成功しない場合は、スリープモードに入ります。再接続が成功しない場合は、スリープモードに入ります。


3. Bluetooth 2: Fn+2（短押しで切り替え、長押しでペアリング）。Bluetooth独立インジケータライトが青色に点灯し、ペアリング中は高速点滅、再接続時は低速点滅します。接続に成功すると、Bluetooth独立インジケータライトが2秒間点灯し、その後バックライト点滅に戻ります。ペアリングが成功しない場合はスリープモードに入ります。再接続が成功しない場合はスリープモードに入ります。


4. Bluetooth 3: Fn+3（短押しで切り替え、長押しでペアリング）。Bluetooth独立インジケータライトが紫色に点灯し、ペアリング中は高速点滅、再接続時は低速点滅します。接続に成功すると、Bluetooth独立インジケータライトが2秒間点灯し、その後バックライト点滅に戻ります。ペアリングが成功しない場合はスリープモードに入ります。再接続が成功しない場合はスリープモードに入ります。


睡眠モードでバッテリー残量の確認方法

1. キーボードを右クリックを押します。バックライトが消灯し、数字キー（1~0）の点灯が点灯してバッテリー残量を示します。例えば、バッテリー残量が10%の場合は1が点灯し、20%の場合は1 + 2Bが点灯します。（各色のLEDは30%未満、黄色は50%未満、緑色は50%以上を示します。）

Quick Volume Adjustment

1. 押す: ミュートのオン/オフ


2. 時計回りに回すと音量が上がります。


3. 反時計回りに回すと音量が下がります。


Fn+ キーの組み合わせのマルチ機能

FN+	ESC	リセット3Pc WIN
	F1	このコンピュータ
	F2	ホーム
	F3	電卓
	F4	プレーヤー
	F5	前の曲
	F6	次の曲
	F7	再送/一時停止
	F8	一時停止
	F9	ミュート
	F10	音量+
	F11	音量-
	F12	メール
	Backlight	バックライト オン/オフ

END	RGBの色調整
↑	RGB明るさアップ
↓	RGB明るさダウン
1/	AOC GK330 BT1
2/	AOC GK330 BT2
3/	AOC GK330 BT3
4/	2.4Gワイヤレスレシーバー
→	点灯速度アップ
←	点灯速度ダウン
INS	点灯モード切り替え
0	削除
P	ホーム
Win+	L キーの組み合わせでPCを電源ロックにする

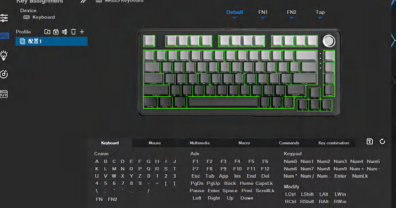
ドライバーのダウンロードと使用

1. 最新のQRコードをスマートフォンでドライバーをダウンロードします


2. Googleドライブにアクセスし、GK330キーボード セットアップ v2.0 20251016 をダウンロードします。

3. ドライバーをダウンロードしてインストールすると、デスクトップにアイコンが表示されます。

4. ドライバーは有線および2.4Gモードのみ使用できます。

5. ドライバーインターフェイスに入ります。


6. デバイス情報: 言語選択、起動、終了、タブ、スリープ、キーデバウンス、リセット 

7. 設定ファイルのマクロ編集 

8. RGBライトの選択 

9. キーボードの照明はシステムサウンドのリズムに合わせて変化します 

10. 編集したマクロ機能をインポートします。 

11. 設定を完了するたびにこのアイコンをクリックして保存します。 

システム対応条件

製品の条件

1. 利用可能な USB ポート。

2. Microsoft Windows 7、Windows 8、Windows 10 以降、Android 5.2 以降、Mac OS X 10.5 以降。

トラブルシューティング

Q1. キーボードのBluetoothに接続できない

1. キーボードがBluetoothモードになっている場合は、Bluetoothインジケータライトが点滅していることを確認してください。パソコンのBluetoothリストで“AOC GK330”を検出し、「接続」をクリックします。

2. キーボードの電池残量を確認してください。電池残量が少なくなるとBluetooth機能が正常に動作しない場合があります。充電ケーブルを接続し、バッテリーが完全に充電されていることを確認してください。

3. 別のデバイスで接続してみてください。キーボード自体に問題があるかどうかを確認するために、別のPCで接続してみてください。

4. キーボードの電源を一度オフにしてから再度オンにし、再接続をお試しください。電源オフ後、再度ペアリングを行ってください。

5. それでも問題が解決しない場合は、より詳細なサポートを請求できるよう、使用しているデバイスのモデル、オペレーティングシステム、Bluetoothバージョン、操作ビデオをご提供ください。

保証サービス

1. 無料カスタマーサービス j-service@customerafter-sales.com

2. 12ヶ月間の製品保証

保証書

型番 GK330 保証期間ご購入日より1年

お客様ご記入欄 ※保証書と併用し、全ての項目に規定の事項に記入してください。
お名前 電話番号 様 ()

ご住所 〒 —

販売店記入欄 ※ご購入の店舗名を記入する。ご購入の店舗でその店舗専任のサービス担当者またはその指定された、ご購入用電話でなく、電話対応可能な、次の住所を連絡、保護および保証責任は負いません。

ご購入日 年 月 日 電話番号 ()

FCC CAUTION

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.
This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The device has been evaluated to meet general RF exposure requirement.
The device can be used in portable exposure condition without restriction.