



Appendix Test Data for BT(BDR/EDR) (Conducted Measurement)

Product Name: Wanbo Projector

Trade Mark: wanbo

Test Model: X7 Pro Max

FCC ID: 2A7PI-WPAA4

Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Allen Lai
Supervised by:	Max Zhang
NOTE	N/A

Appendix A: 20dB Emission Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	20db EBW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
DH5	Ant1	2402	1.038	2401.454	2402.492	---	---
DH5	Ant1	2441	0.981	2440.502	2441.483	---	---
DH5	Ant1	2480	1.044	2479.454	2480.498	---	---
2DH5	Ant1	2402	1.287	2401.355	2402.642	---	---
2DH5	Ant1	2441	1.308	2440.343	2441.651	---	---
2DH5	Ant1	2480	1.290	2479.352	2480.642	---	---
3DH5	Ant1	2402	1.293	2401.346	2402.639	---	---
3DH5	Ant1	2441	1.272	2440.364	2441.636	---	---
3DH5	Ant1	2480	1.287	2479.361	2480.648	---	---

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs





DH5-Ant1-2480



2DH5-Ant1-2402





2DH5-Ant1-2441



2DH5-Ant1-2480





3DH5-Ant1-2402



3DH5-Ant1-2441





3DH5-Ant1-2480





Appendix B: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
DH5	Ant1	2402	0.90622	2401.5483	2402.4545	---	---
DH5	Ant1	2441	0.89713	2440.5573	2441.4544	---	---
DH5	Ant1	2480	0.91254	2479.5451	2480.4576	---	---
2DH5	Ant1	2402	1.1875	2401.4018	2402.5893	---	---
2DH5	Ant1	2441	1.1738	2440.4075	2441.5813	---	---
2DH5	Ant1	2480	1.1749	2479.4038	2480.5787	---	---
3DH5	Ant1	2402	1.1748	2401.4098	2402.5846	---	---
3DH5	Ant1	2441	1.1728	2440.4059	2441.5787	---	---
3DH5	Ant1	2480	1.1748	2479.4080	2480.5828	---	---

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs






DH5-Ant1-2480

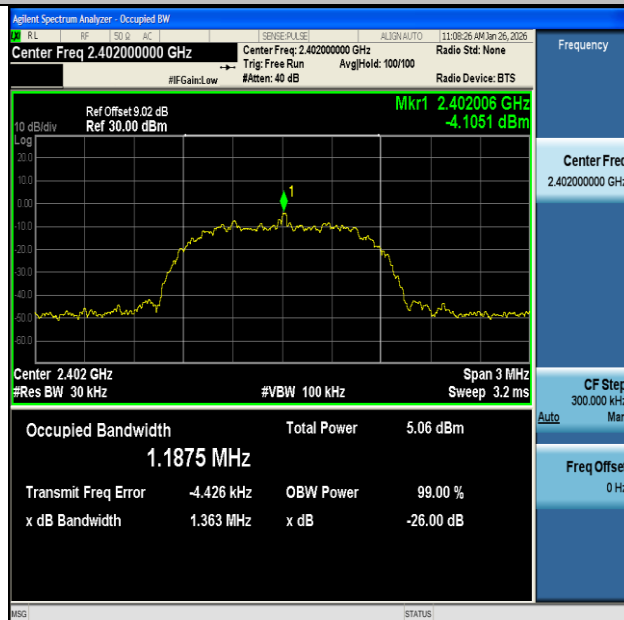


2DH5-Ant1-2402



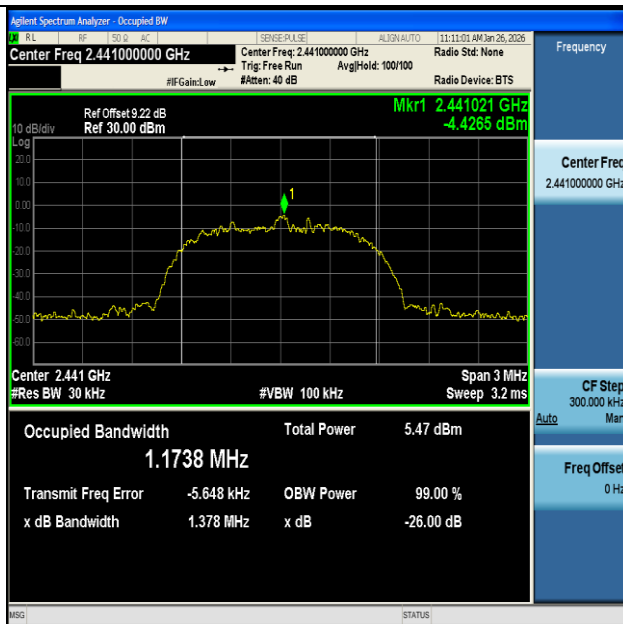


2DH5-Ant1-2441

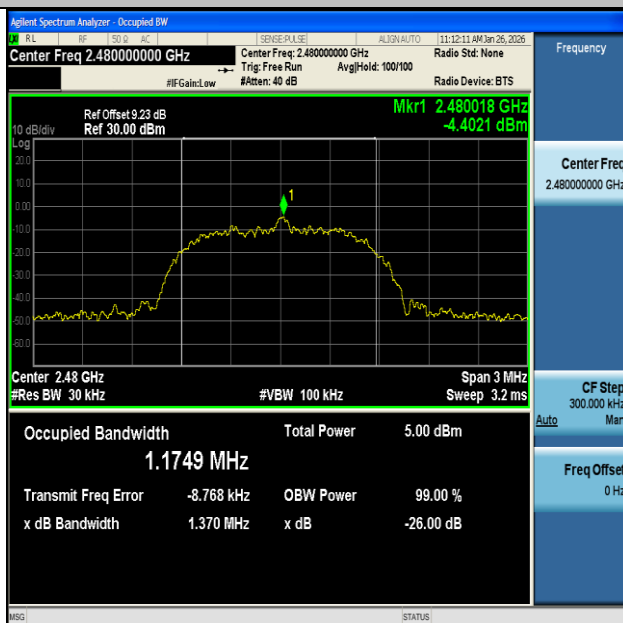

2DH5-Ant1-2480



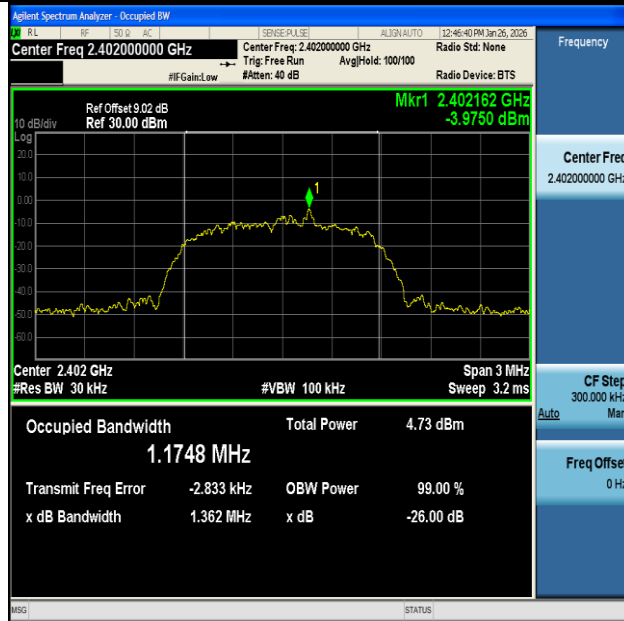


3DH5-Ant1-2402



3DH5-Ant1-2441



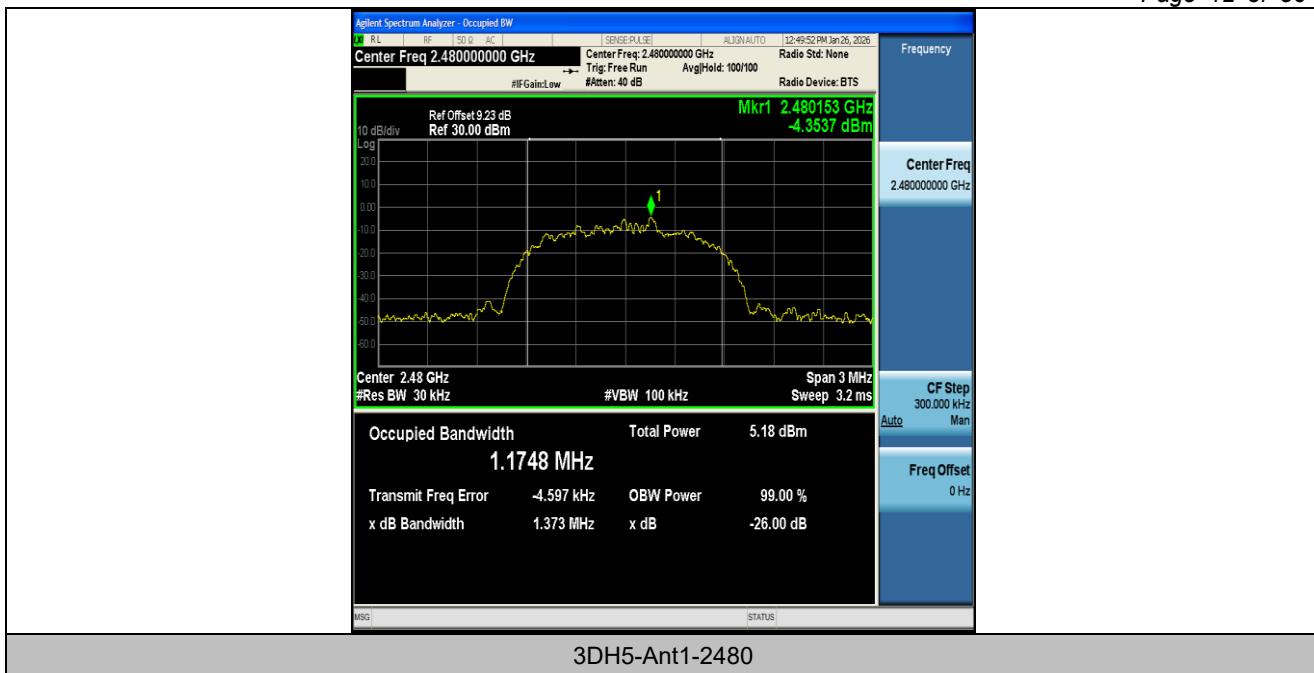



Appendix C: Maximum peak conducted output power

Test Result


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
DH5	Ant1	2402	1.80	≤30	PASS
DH5	Ant1	2441	1.88	≤30	PASS
DH5	Ant1	2480	1.81	≤30	PASS
2DH5	Ant1	2402	0.43	≤20.97	PASS
2DH5	Ant1	2441	0.47	≤20.97	PASS
2DH5	Ant1	2480	0.27	≤20.97	PASS
3DH5	Ant1	2402	0.90	≤20.97	PASS
3DH5	Ant1	2441	0.96	≤20.97	PASS
3DH5	Ant1	2480	0.78	≤20.97	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

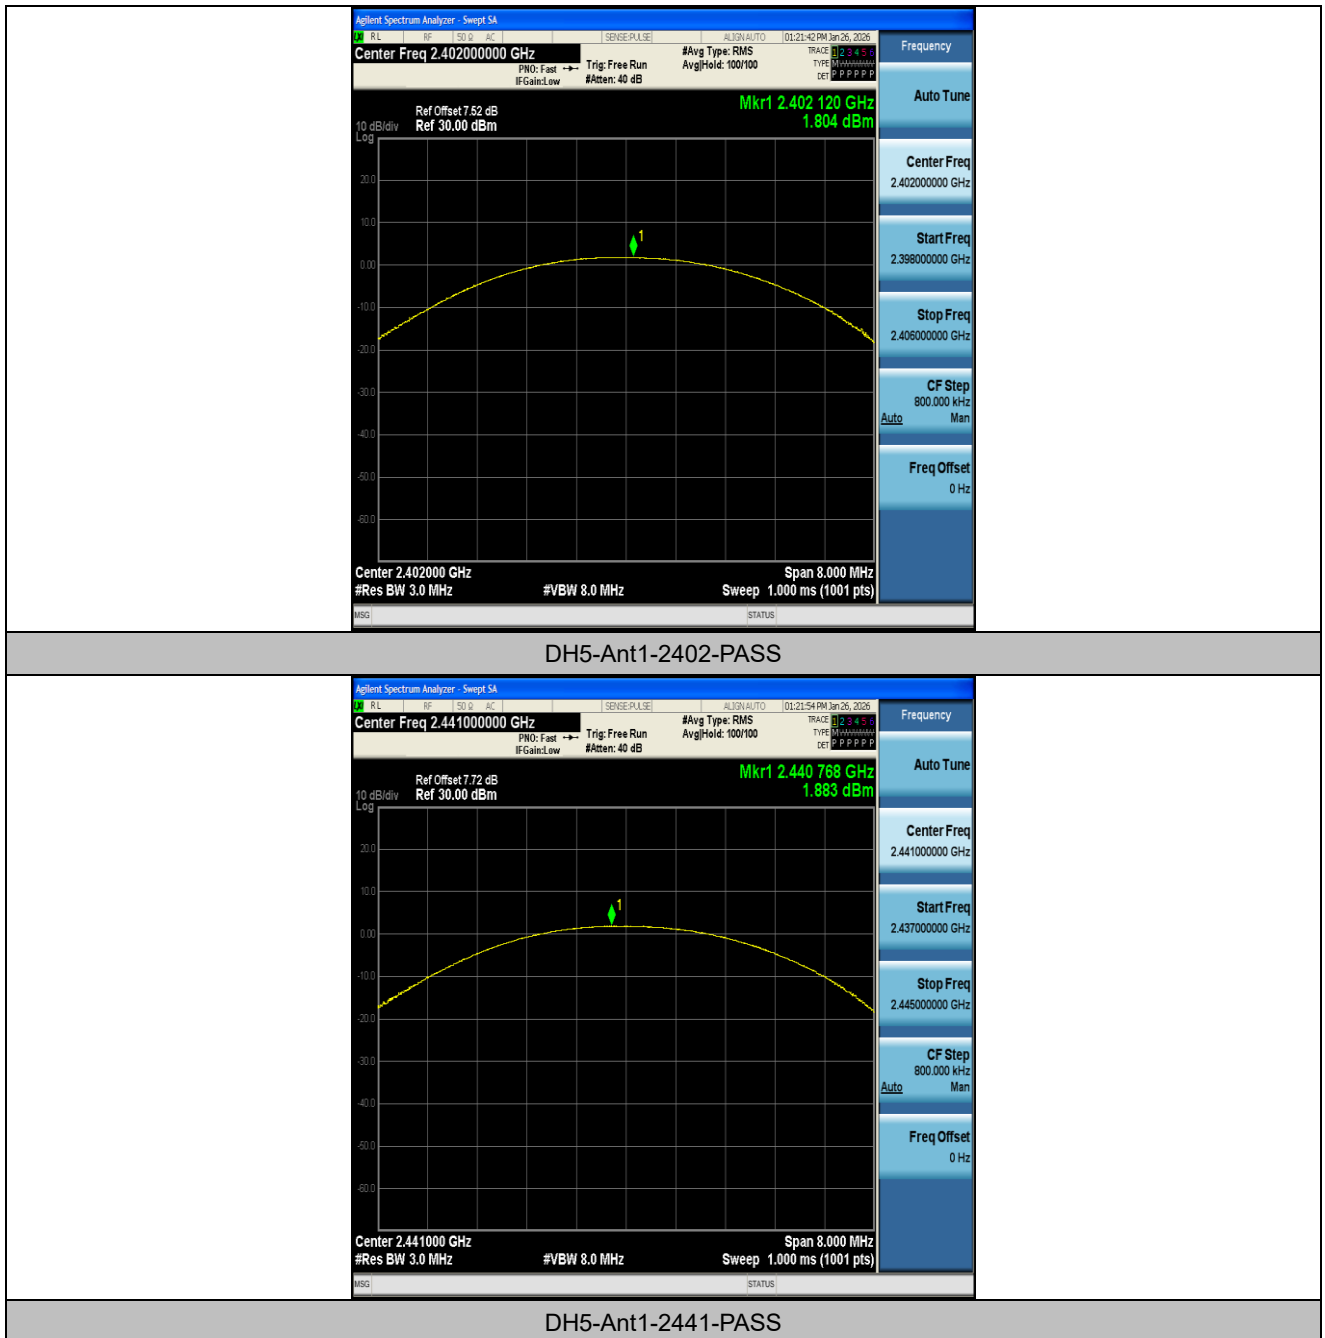

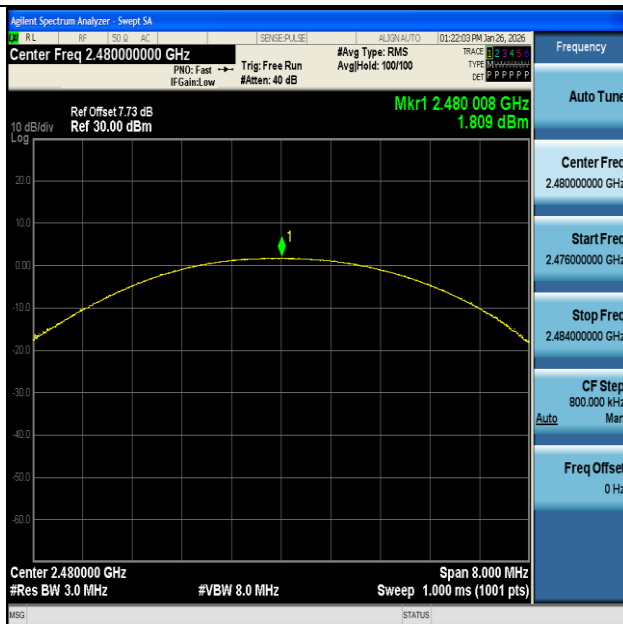


DH5-Ant1-2480-PASS

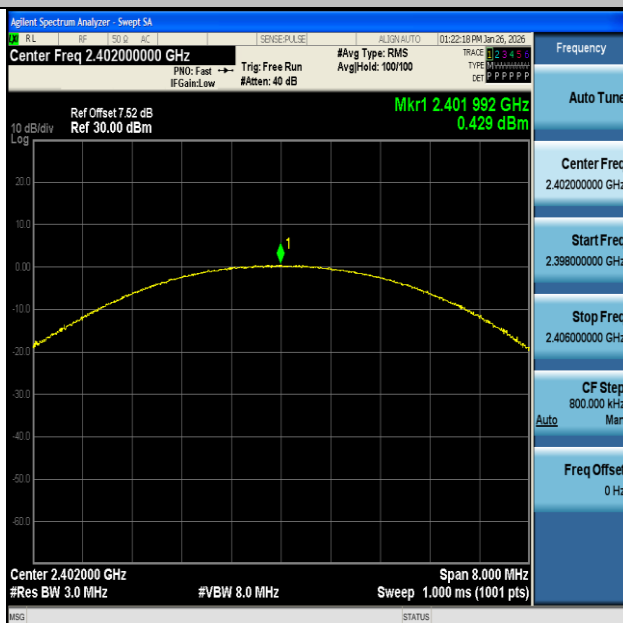


2DH5-Ant1-2402-PASS



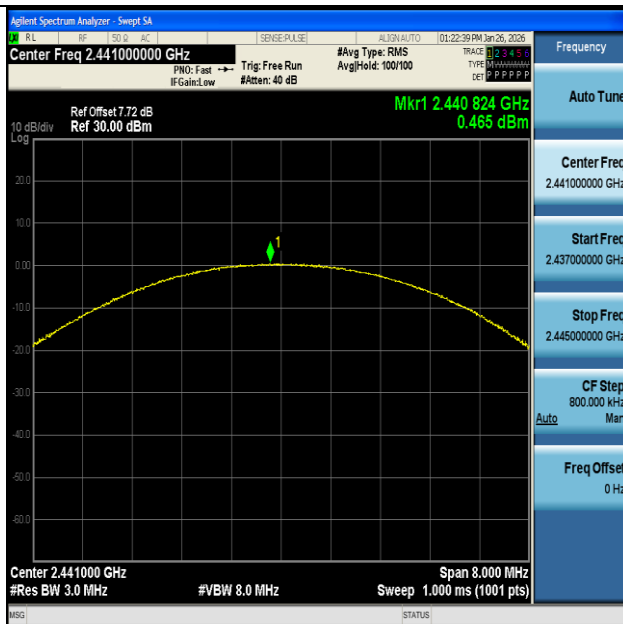


2DH5-Ant1-2441-PASS

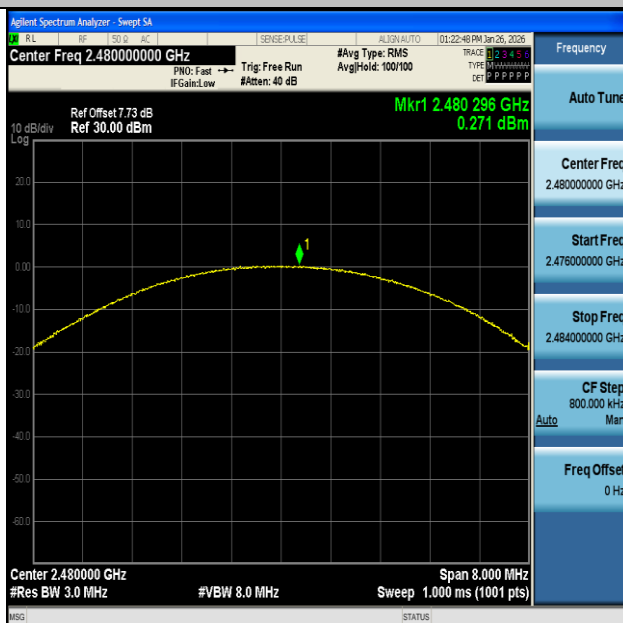


2DH5-Ant1-2480-PASS



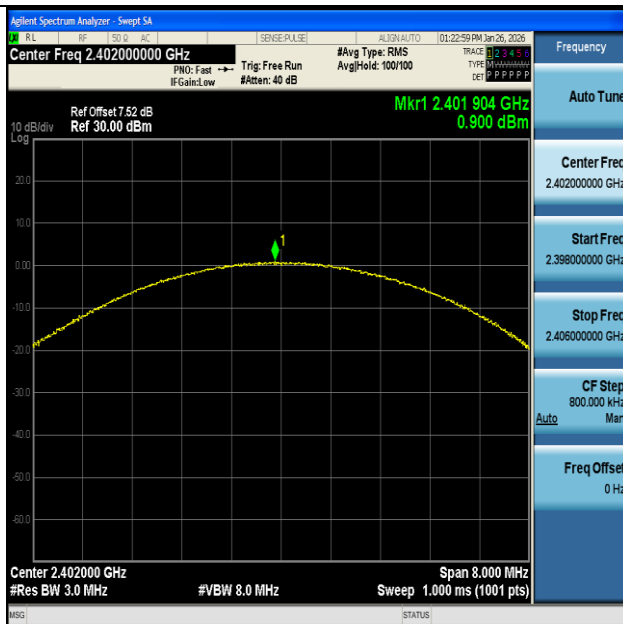


3DH5-Ant1-2402-PASS

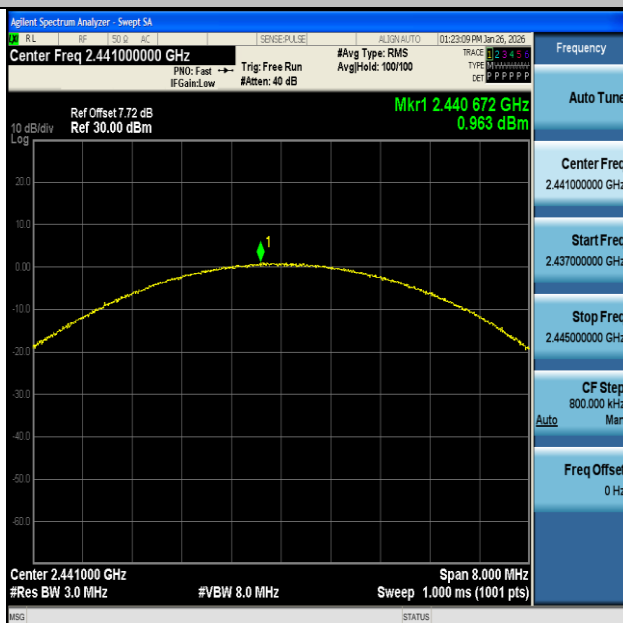

3DH5-Ant1-2441-PASS



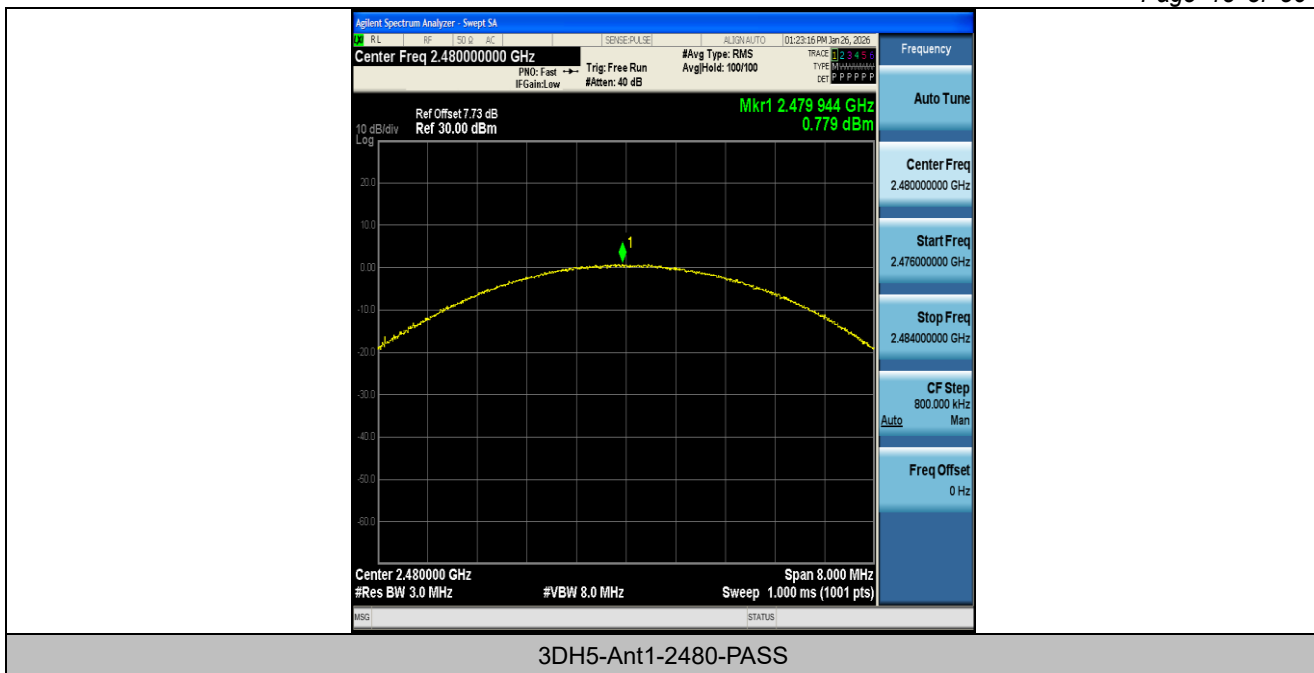



Appendix D: Carrier frequency separation

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	1.16	≥ 1.044	PASS
2DH5	Ant1	Hop	0.992	≥ 0.872	PASS
3DH5	Ant1	Hop	1.008	≥ 0.862	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs



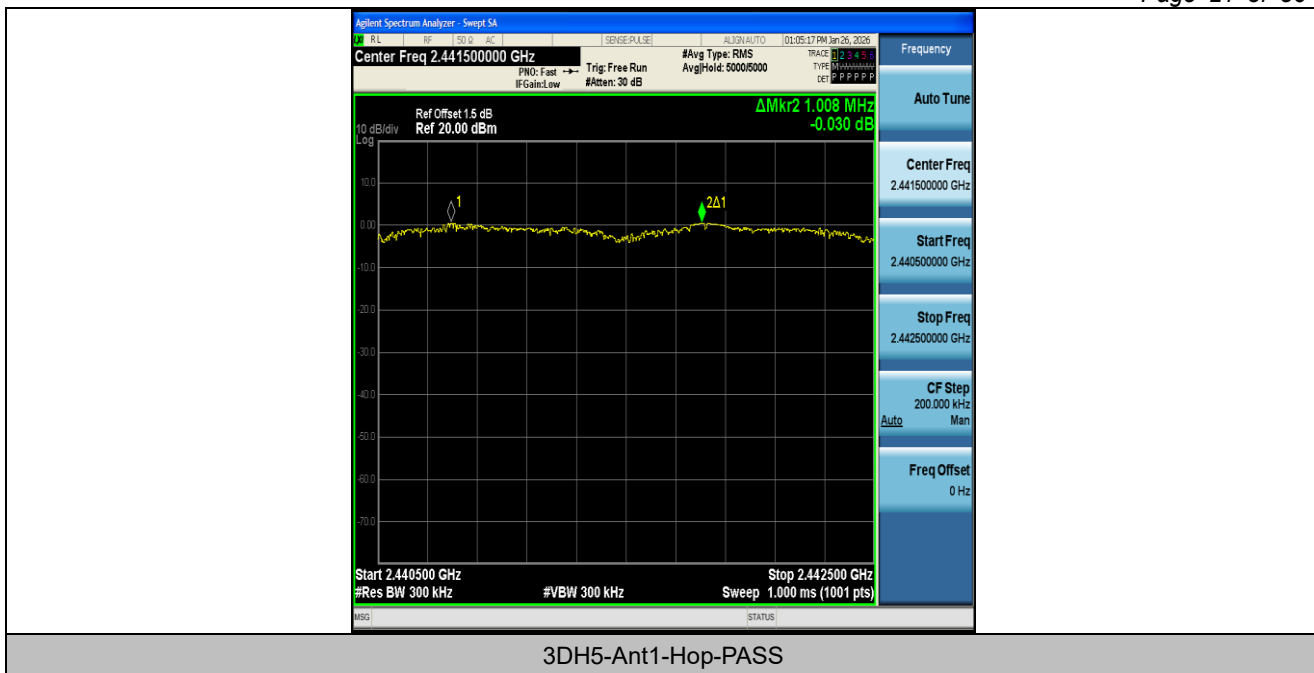



Appendix E: Time of occupancy

Test Result


Test Mode	Antenna	Frequency [MHz]	Burst Width [ms]	TotalHops [Num]	Result [s]	Limit [s]	Verdict
DH5	Ant1	Hop	2.885	90	0.26	≤0.4	PASS
2DH5	Ant1	Hop	2.891	80	0.231	≤0.4	PASS
3DH5	Ant1	Hop	2.892	110	0.318	≤0.4	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)







Test Graphs

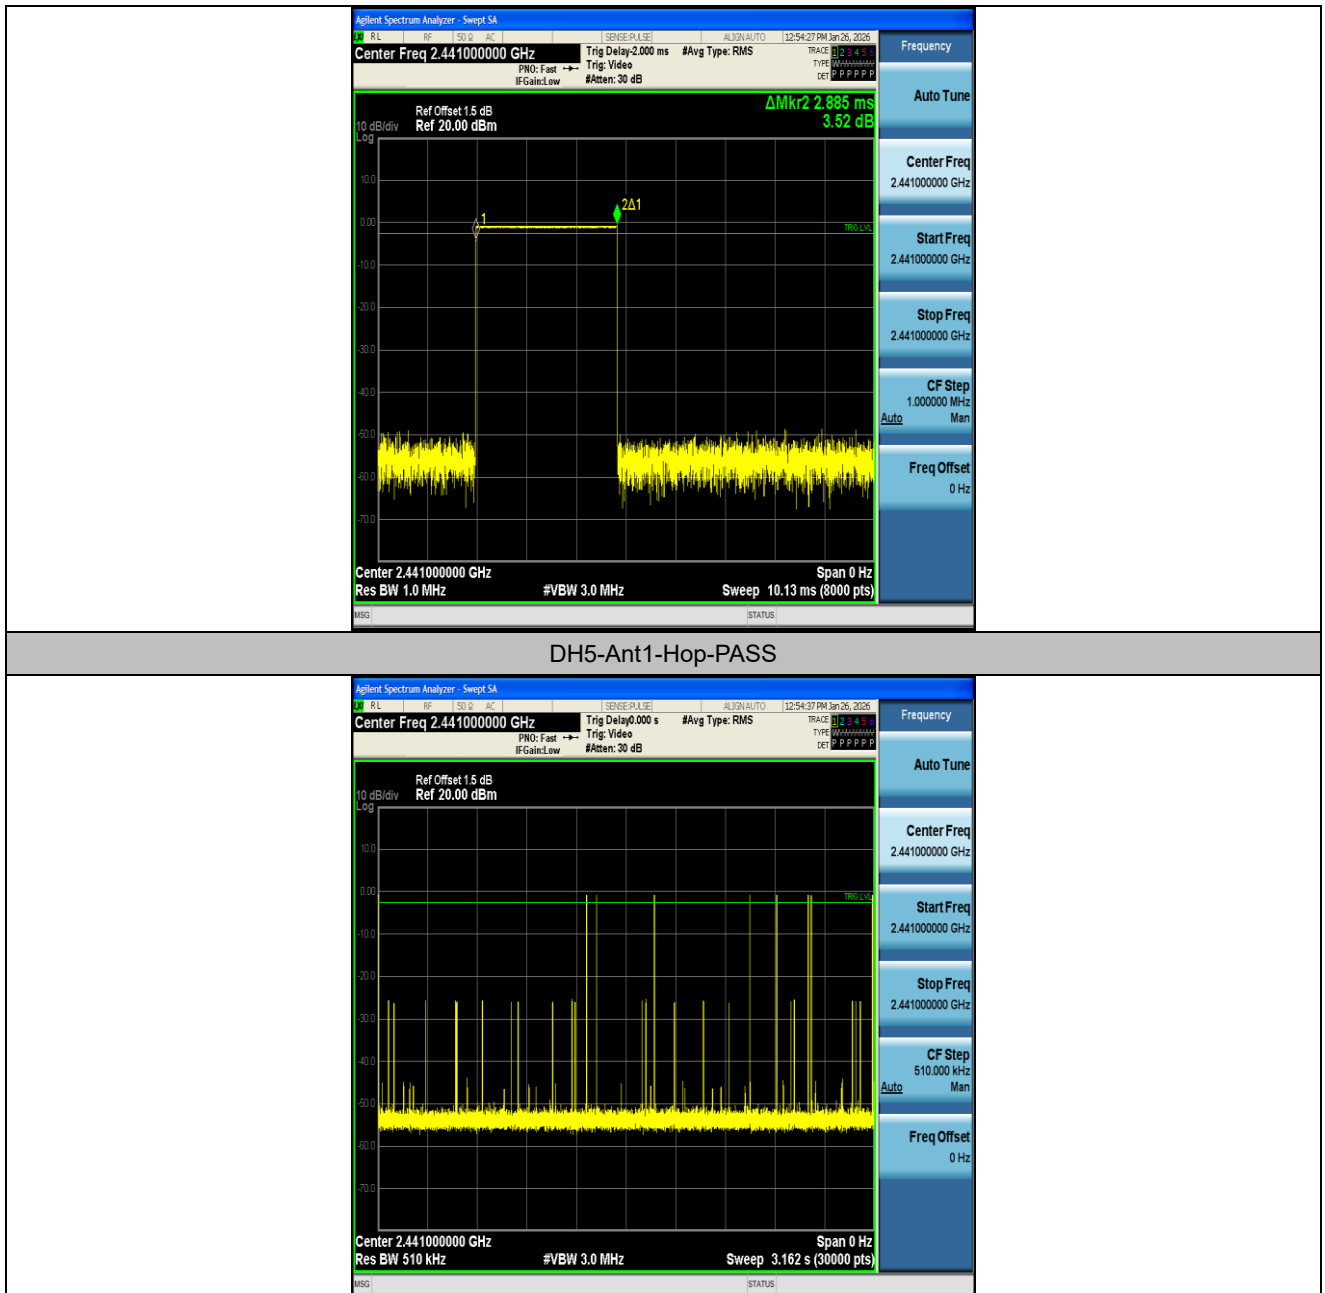

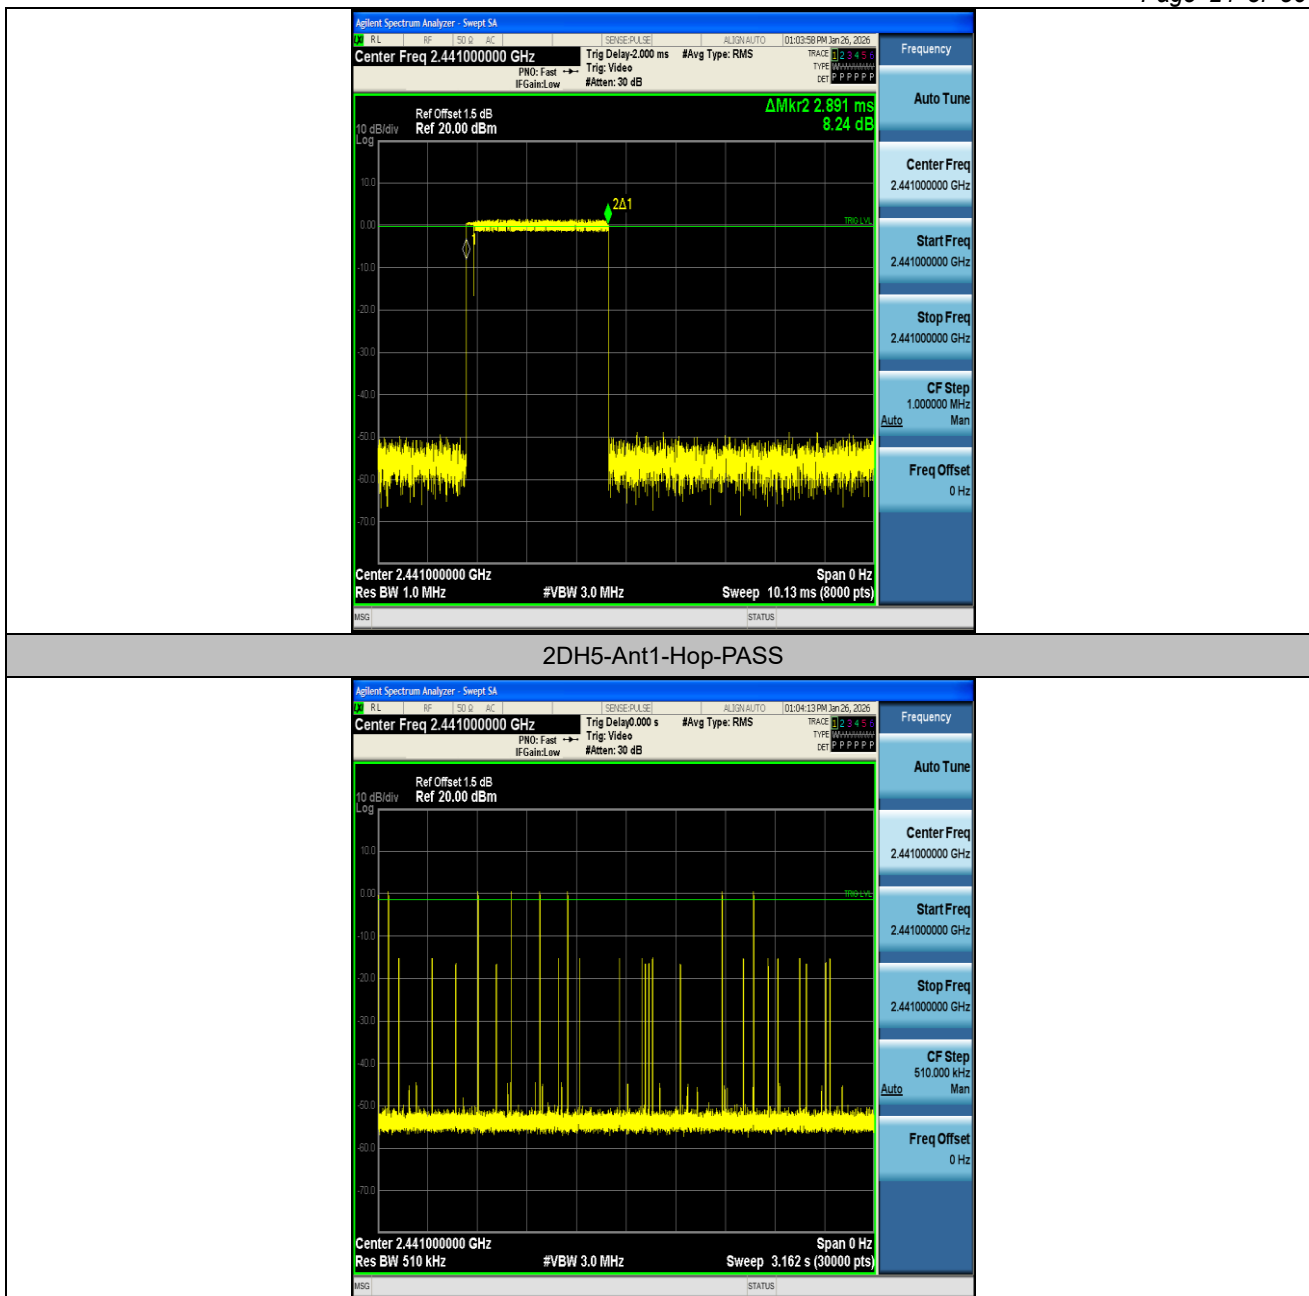

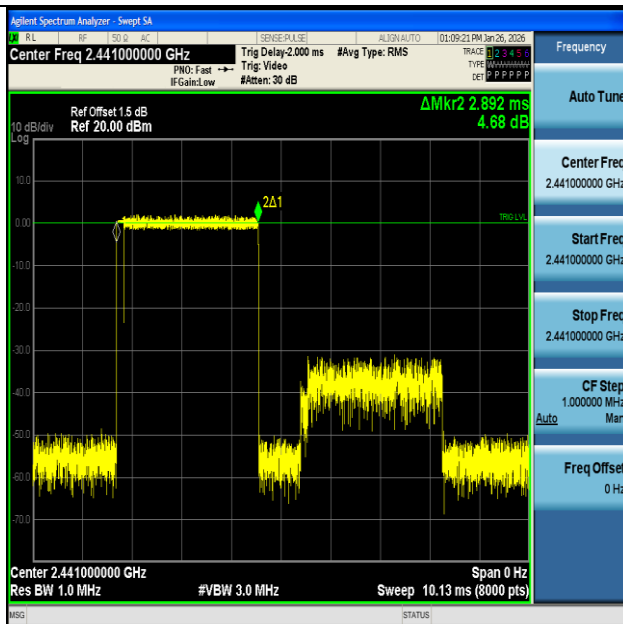

3DH5-Ant1-Hop-PASS

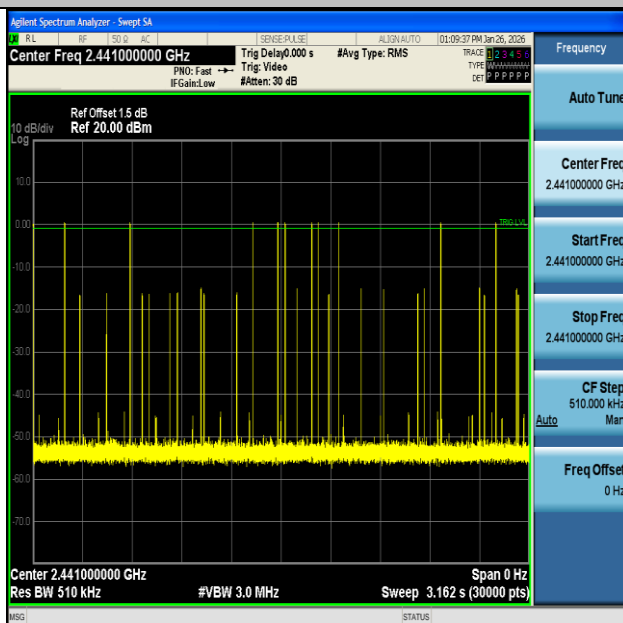



Appendix F: Number of hopping channels

Test Result


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs

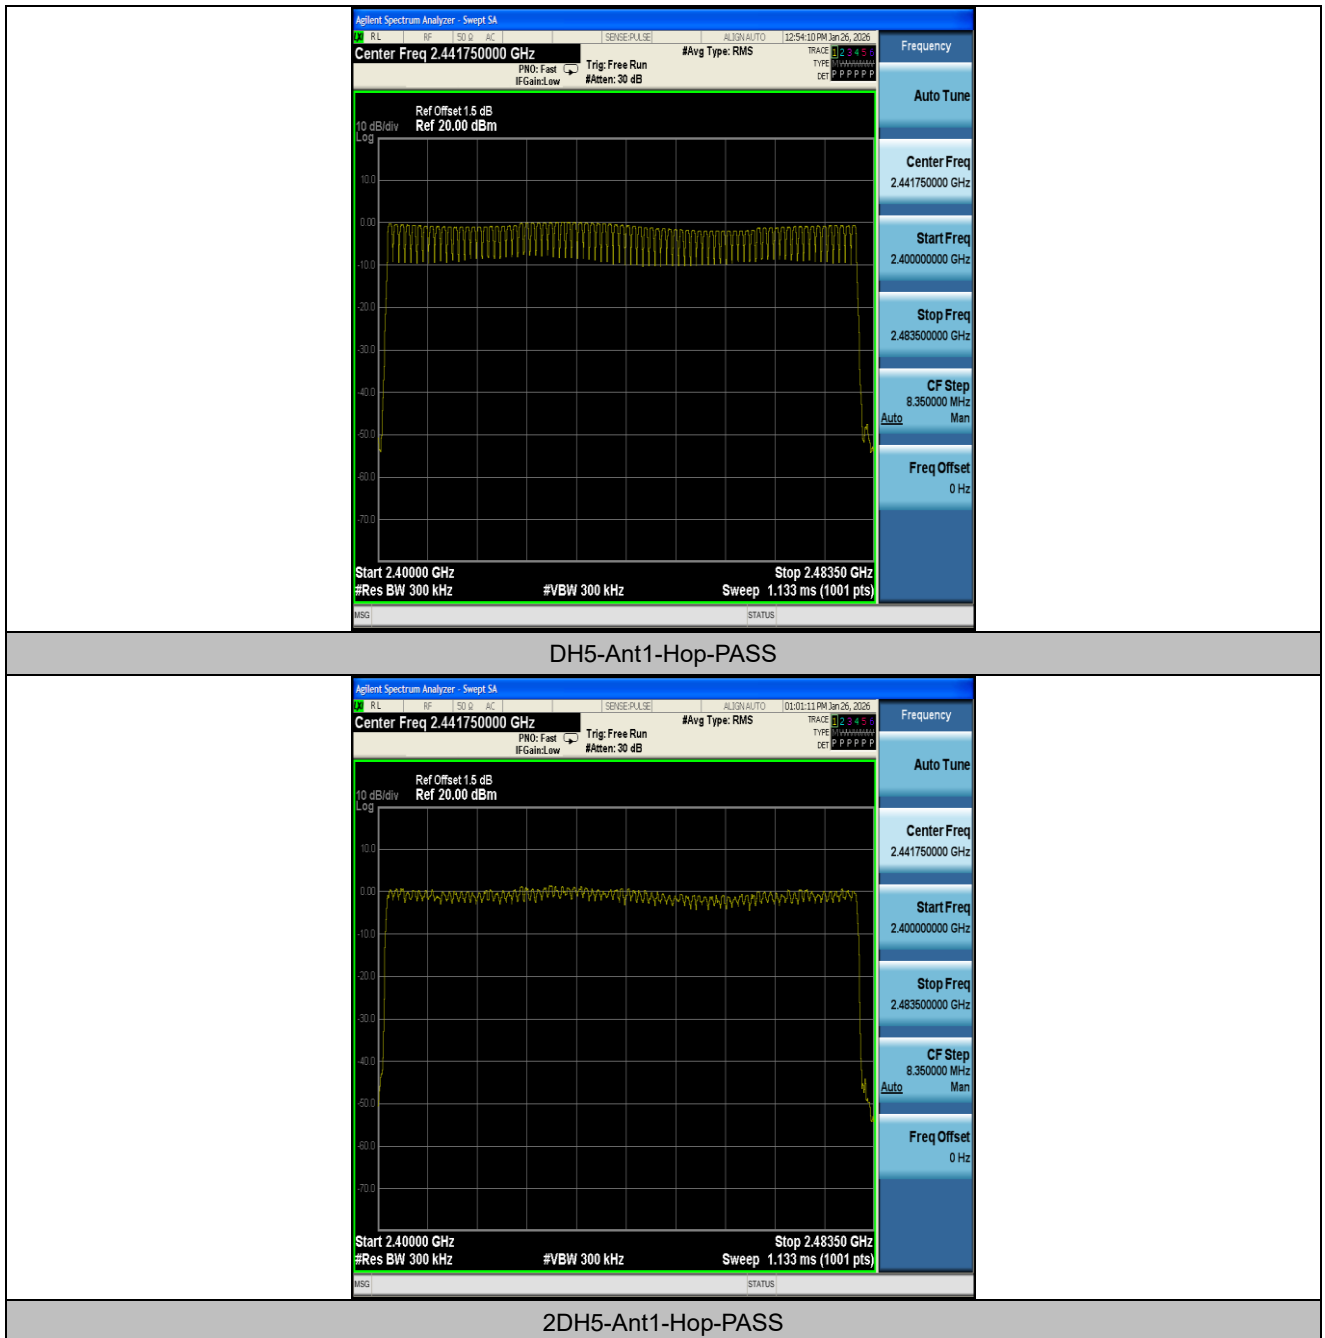

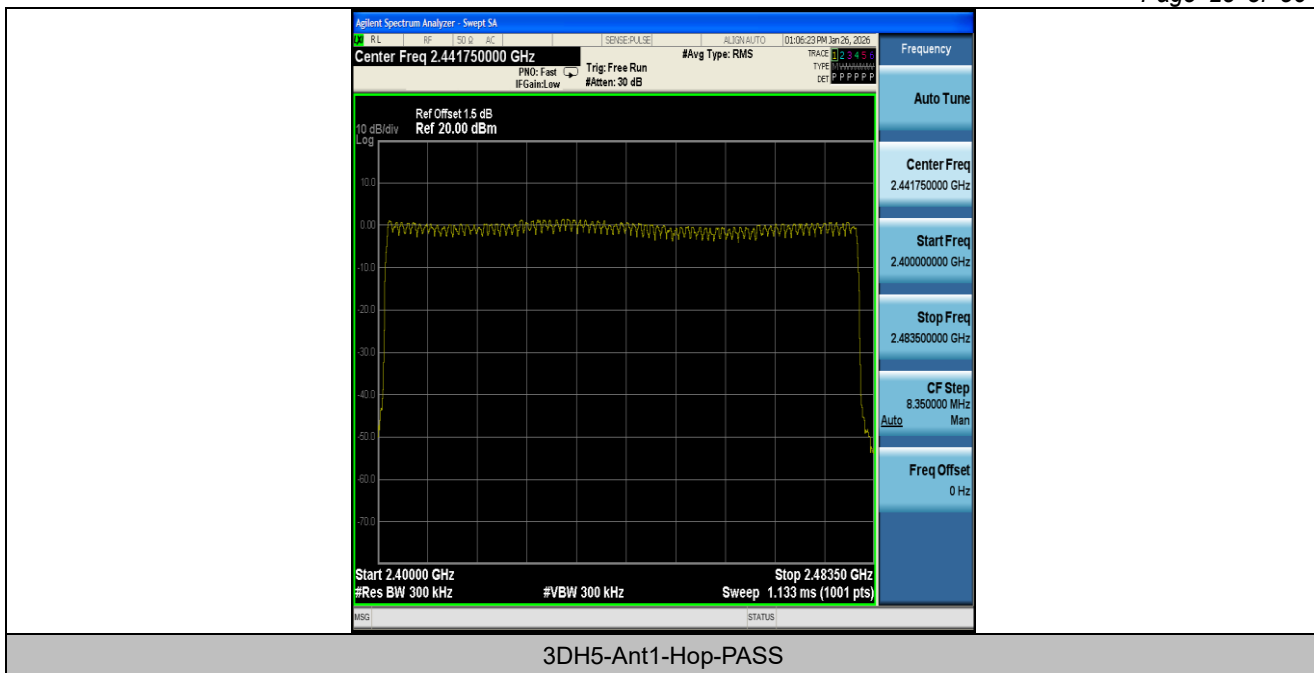



Appendix G: Band edge measurements

Test Result


Test Mode	Antenna	Ch.Name	Frequency [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	1.28	-46.81	≤-18.72	PASS
DH5	Ant1	High	2480	1.24	-47.99	≤-18.76	PASS
DH5	Ant1	Low	Hop_2402	-1.10	-57.14	≤-21.1	PASS
DH5	Ant1	High	Hop_2480	-1.50	-56.13	≤-21.5	PASS
2DH5	Ant1	Low	2402	-1.81	-49.35	≤-21.81	PASS
2DH5	Ant1	High	2480	-2.54	-48.54	≤-22.54	PASS
2DH5	Ant1	Low	Hop_2402	-2.36	-55.61	≤-22.36	PASS
2DH5	Ant1	High	Hop_2480	-0.61	-55.41	≤-20.61	PASS
3DH5	Ant1	Low	2402	-1.46	-48.54	≤-21.46	PASS
3DH5	Ant1	High	2480	-1.79	-48.24	≤-21.79	PASS
3DH5	Ant1	Low	Hop_2402	-3.39	-52.8	≤-23.39	PASS
3DH5	Ant1	High	Hop_2480	0.28	-55.86	≤-19.72	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

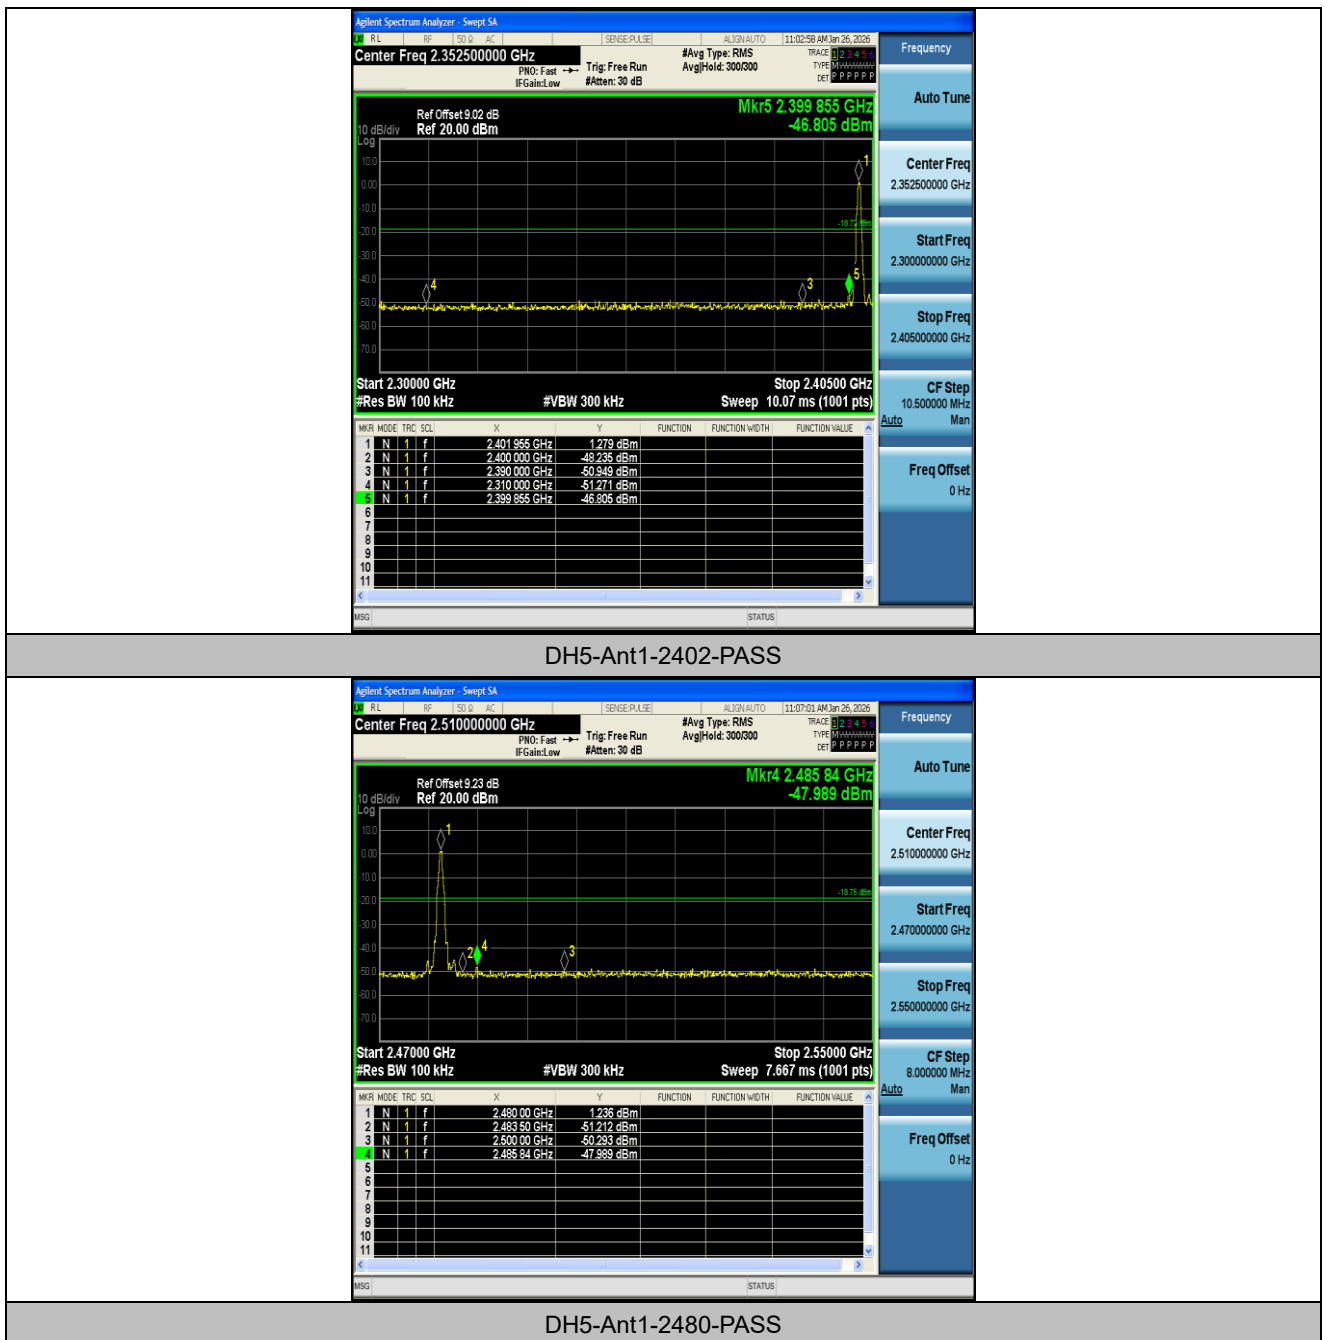

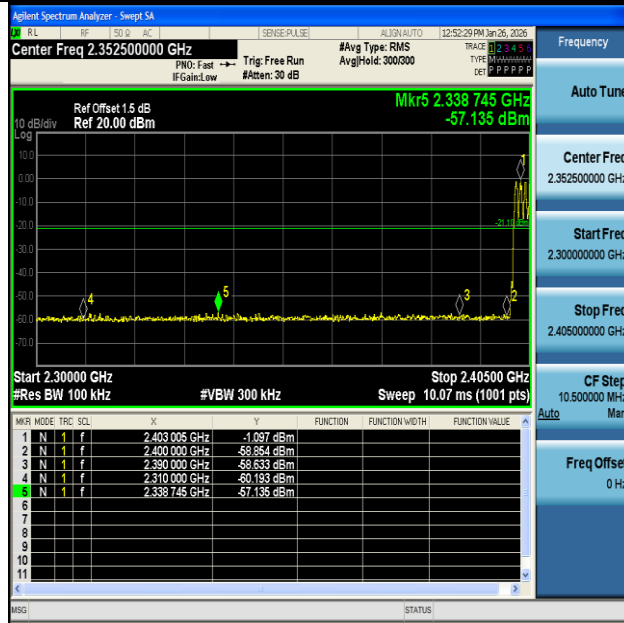


DH5-Ant1-Hop_2402-PASS

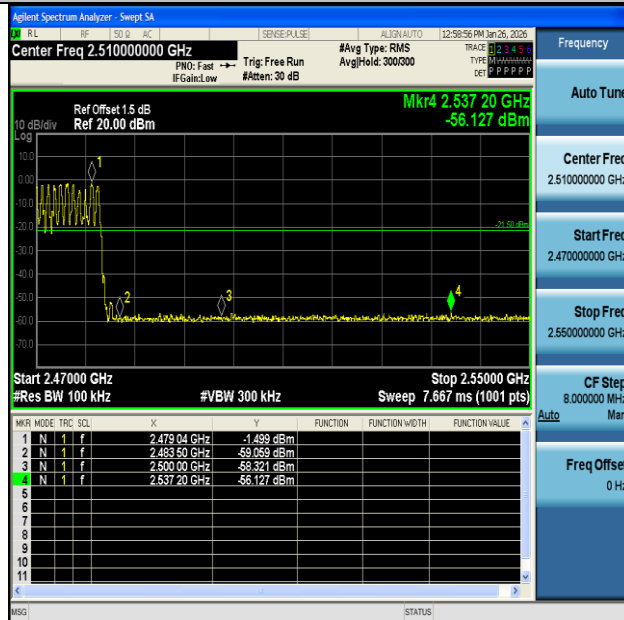


DH5-Ant1-Hop_2480-PASS



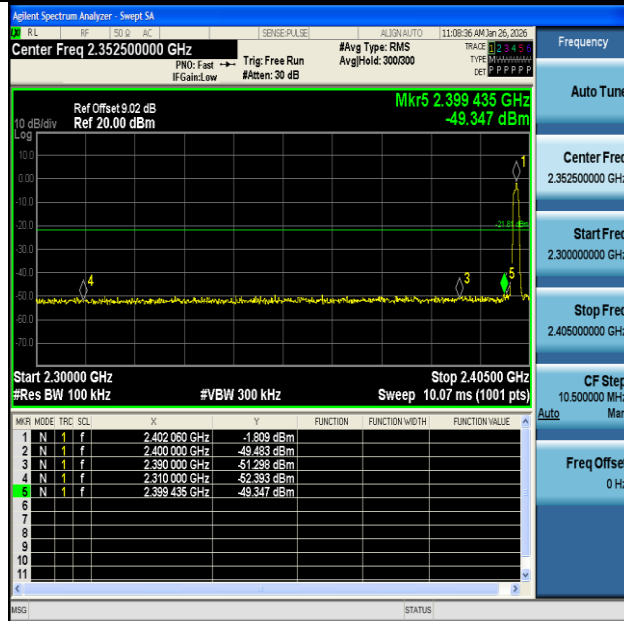


2DH5-Ant1-2402-PASS

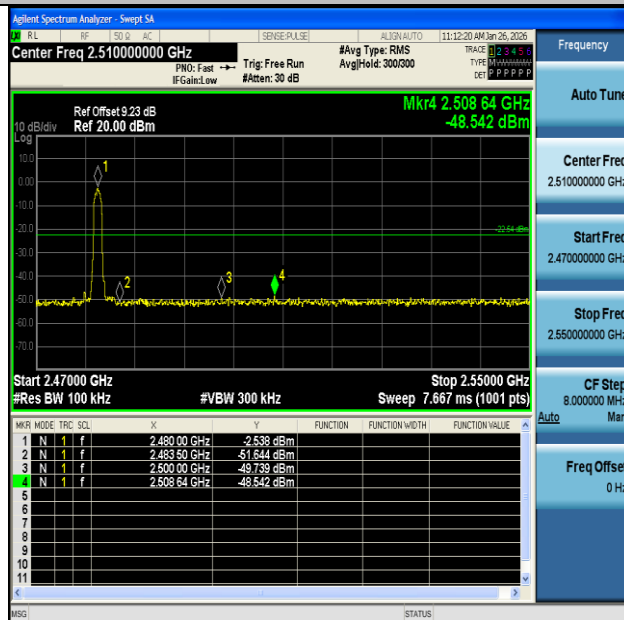


2DH5-Ant1-2480-PASS



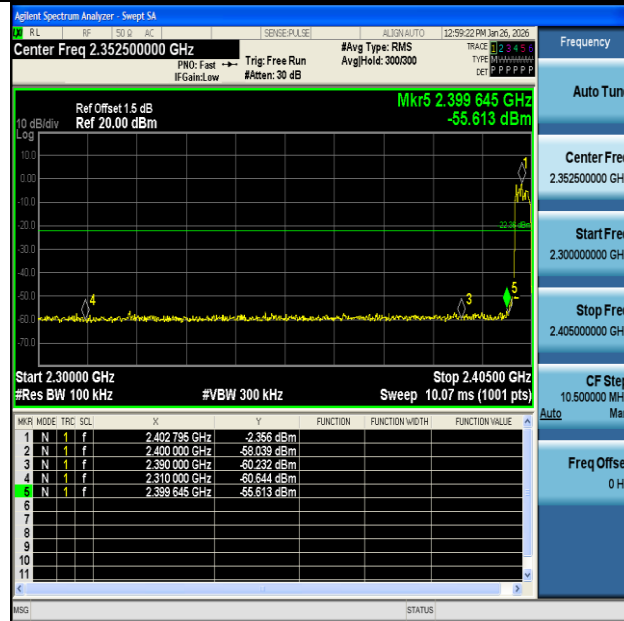


2DH5-Ant1-Hop_2402-PASS

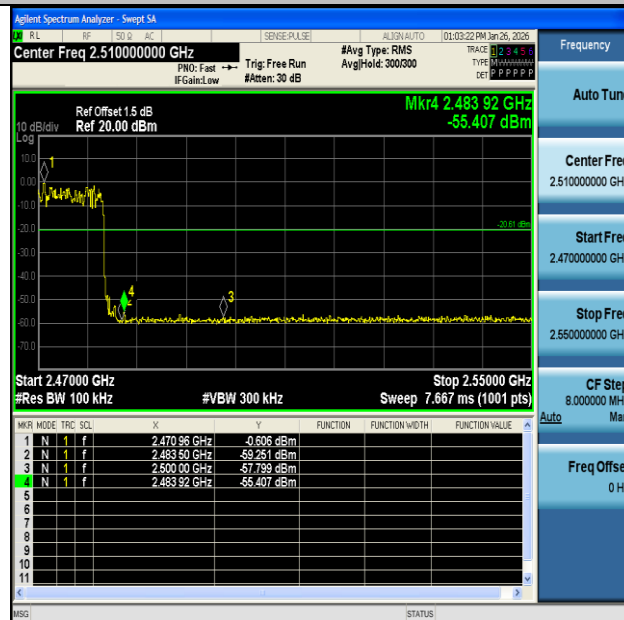


2DH5-Ant1-Hop_2480-PASS



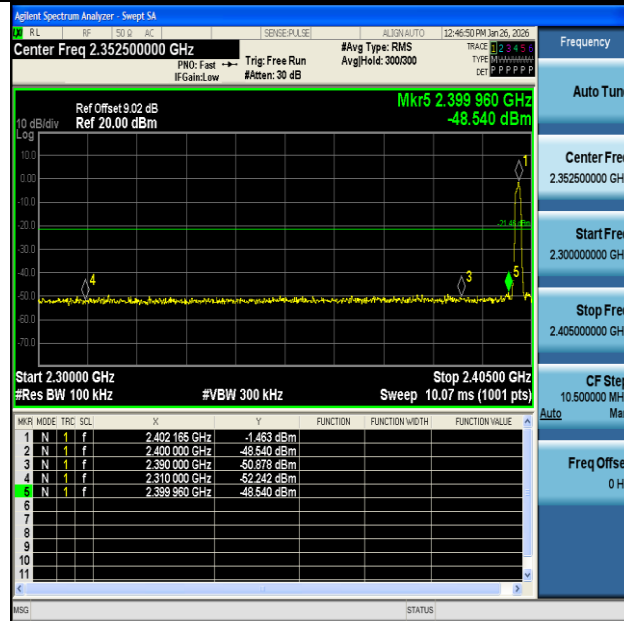


3DH5-Ant1-2402-PASS

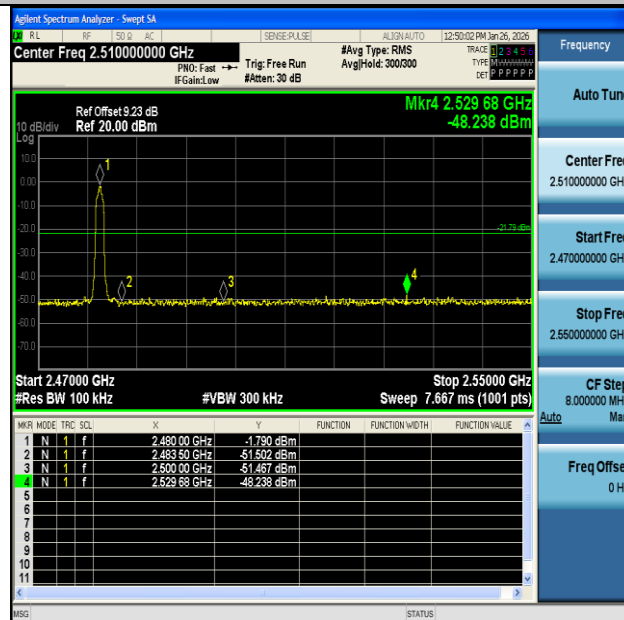


3DH5-Ant1-2480-PASS



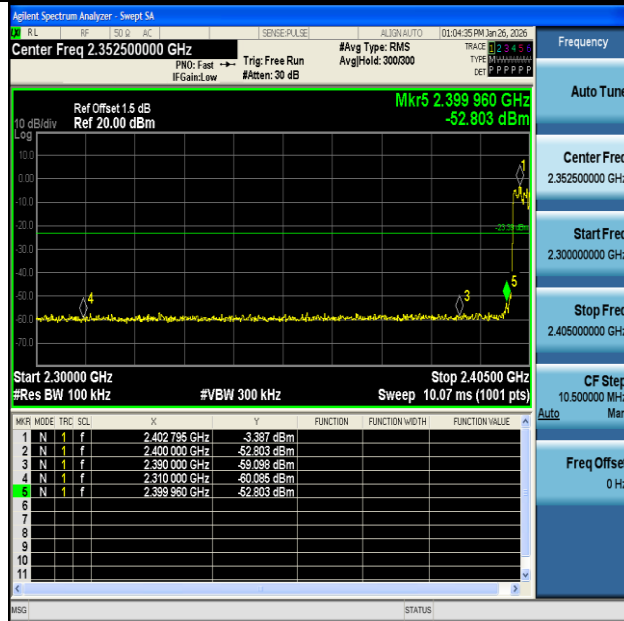

3DH5-Ant1-Hop_2402-PASS

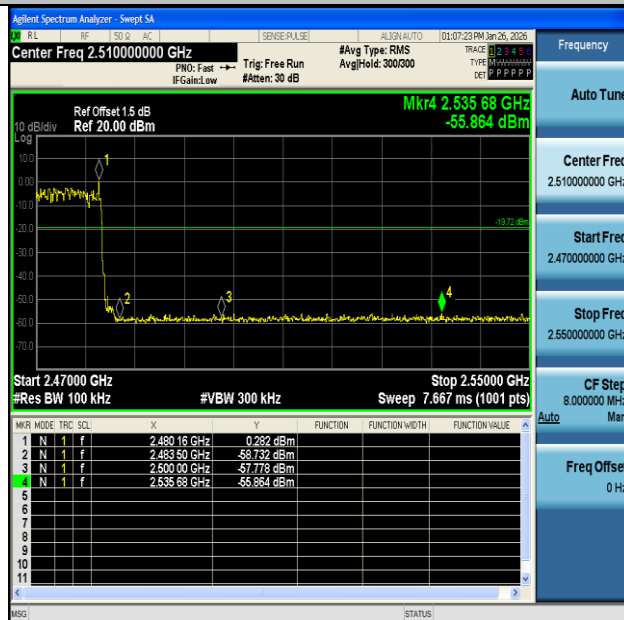

3DH5-Ant1-Hop_2480-PASS





Appendix H: Conducted Spurious Emission

Test Result


Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	1.03	1.03	---	PASS
DH5	Ant1	2402	30~1000	1.03	-63.02	≤-18.97	PASS
DH5	Ant1	2402	1000~26500	1.03	-37.94	≤-18.97	PASS
DH5	Ant1	2441	0~Reference	1.08	1.08	---	PASS
DH5	Ant1	2441	30~1000	1.08	-62.87	≤-18.92	PASS
DH5	Ant1	2441	1000~26500	1.08	-37.53	≤-18.92	PASS
DH5	Ant1	2480	0~Reference	0.54	0.54	---	PASS
DH5	Ant1	2480	30~1000	0.54	-63.14	≤-19.46	PASS
DH5	Ant1	2480	1000~26500	0.54	-36.99	≤-19.46	PASS
2DH5	Ant1	2402	0~Reference	-4.33	-4.33	---	PASS
2DH5	Ant1	2402	30~1000	-4.33	-62.26	≤-24.33	PASS
2DH5	Ant1	2402	1000~26500	-4.33	-37.32	≤-24.33	PASS
2DH5	Ant1	2441	0~Reference	-5.05	-5.05	---	PASS
2DH5	Ant1	2441	30~1000	-5.05	-62.34	≤-25.05	PASS
2DH5	Ant1	2441	1000~26500	-5.05	-36.69	≤-25.05	PASS
2DH5	Ant1	2480	0~Reference	-5.18	-5.18	---	PASS
2DH5	Ant1	2480	30~1000	-5.18	-63.16	≤-25.18	PASS
2DH5	Ant1	2480	1000~26500	-5.18	-37.45	≤-25.18	PASS
3DH5	Ant1	2402	0~Reference	-1.57	-1.57	---	PASS
3DH5	Ant1	2402	30~1000	-1.57	-61.96	≤-21.57	PASS
3DH5	Ant1	2402	1000~26500	-1.57	-37.62	≤-21.57	PASS
3DH5	Ant1	2441	0~Reference	-4.28	-4.28	---	PASS
3DH5	Ant1	2441	30~1000	-4.28	-62.32	≤-24.28	PASS
3DH5	Ant1	2441	1000~26500	-4.28	-37.52	≤-24.28	PASS
3DH5	Ant1	2480	0~Reference	-5.05	-5.05	---	PASS
3DH5	Ant1	2480	30~1000	-5.05	-62.64	≤-25.05	PASS
3DH5	Ant1	2480	1000~26500	-5.05	-38	≤-25.05	PASS


Note: offset(dB) in Reference test plots = cable loss(dB) + attenuator factor(dB); For spurious emissions plots from 30MHz to 26.5GHz, the cable loss and attenuator factors have been set in the 'Input Correction' of the Spectrum Analyzer during the test.






Test Graphs

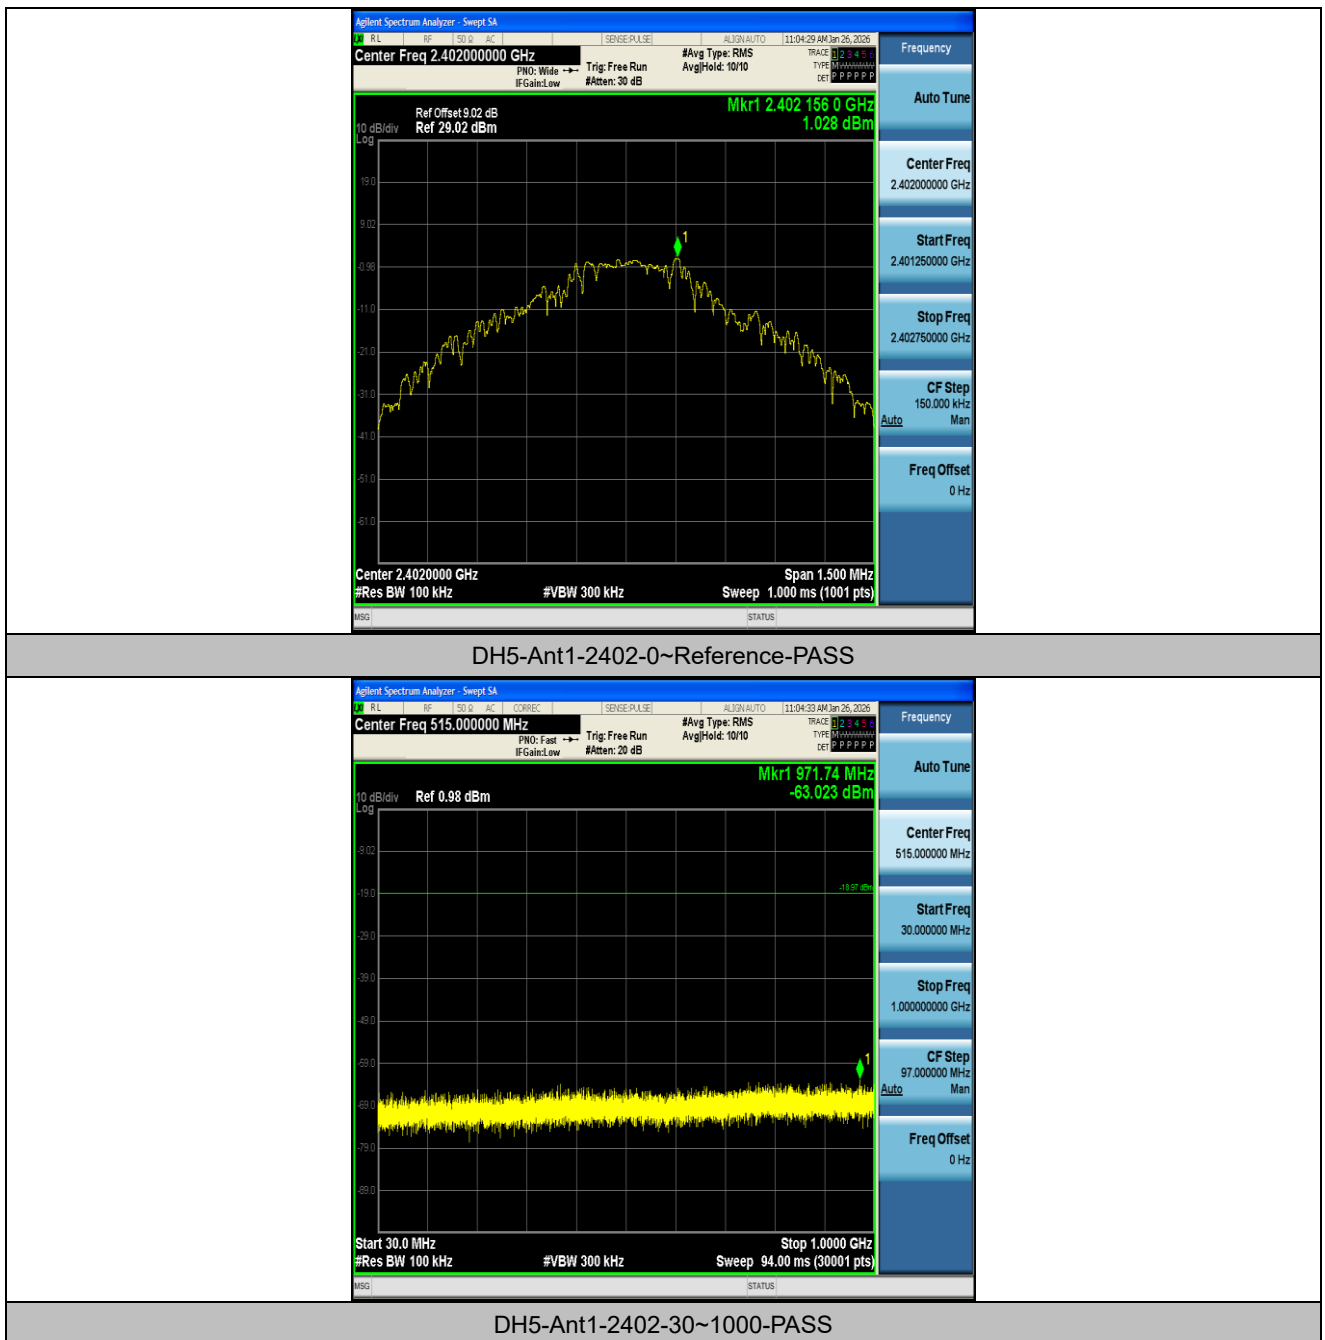

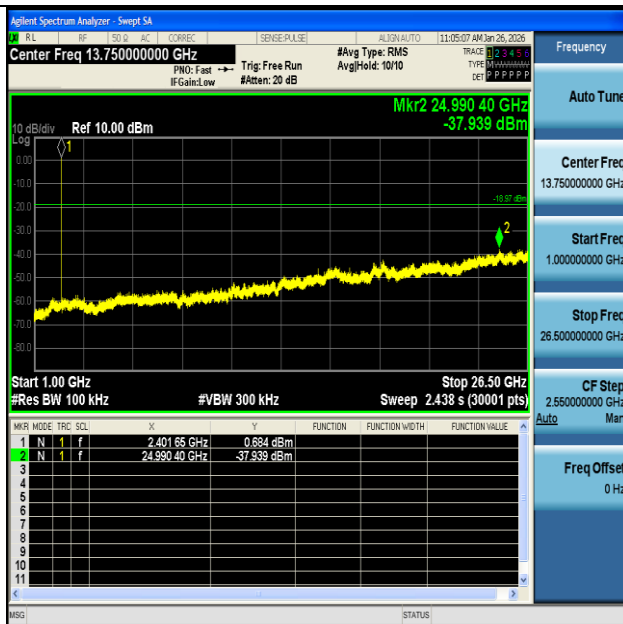


DH5-Ant1-2402-1000~26500-PASS

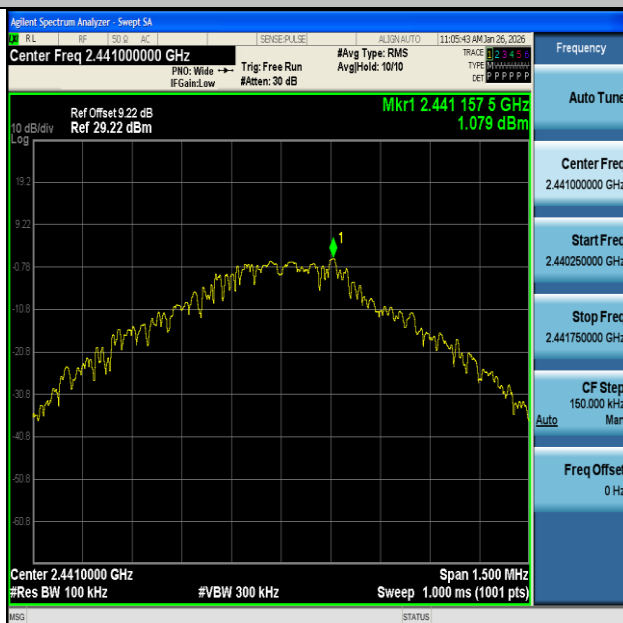


DH5-Ant1-2441-0~Reference-PASS



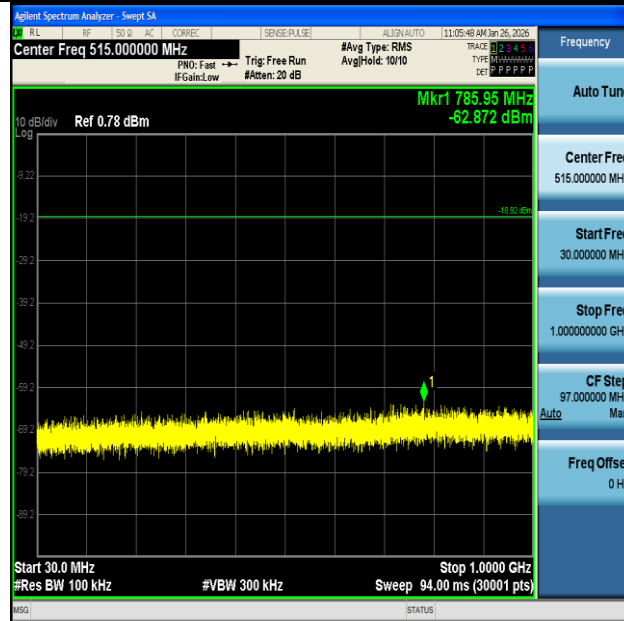

DH5-Ant1-2441-30~1000-PASS

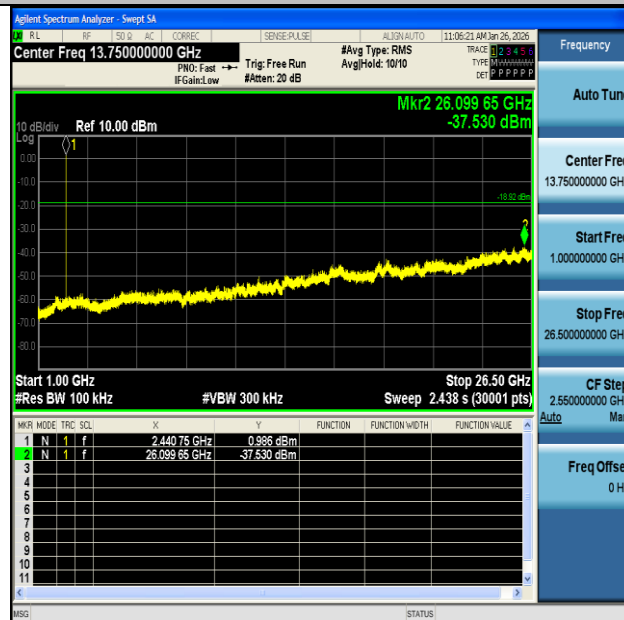


DH5-Ant1-2441-1000~26500-PASS






DH5-Ant1-2480-0~Reference-PASS

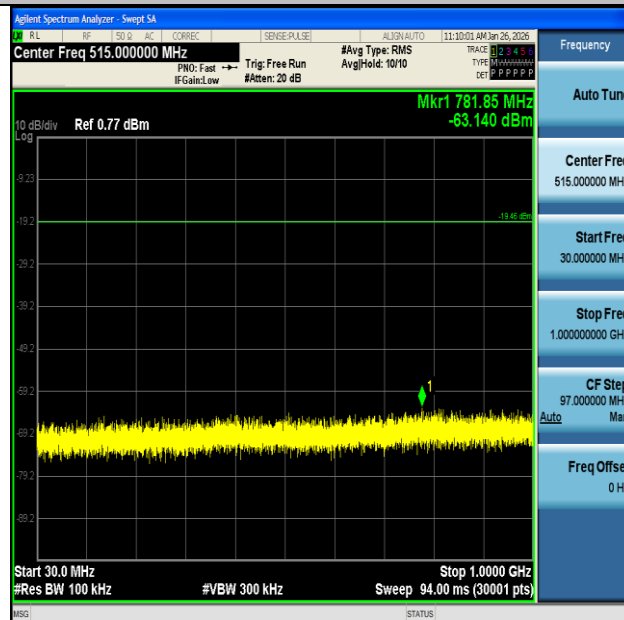


DH5-Ant1-2480-30~1000-PASS



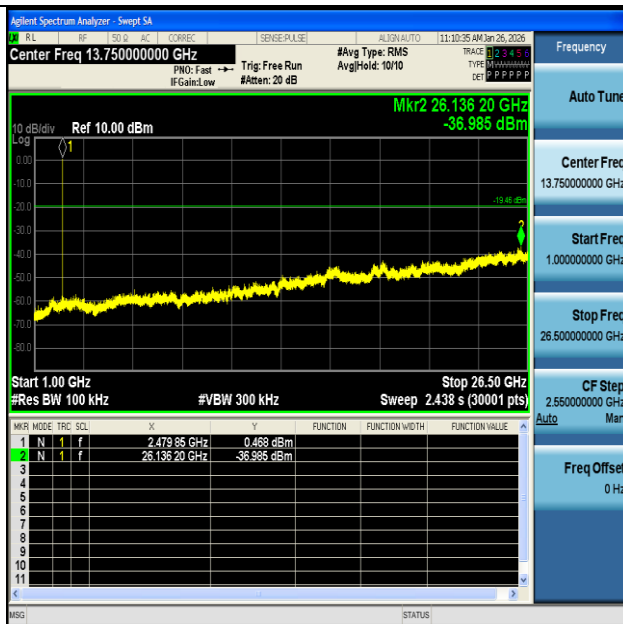


DH5-Ant1-2480-1000~26500-PASS

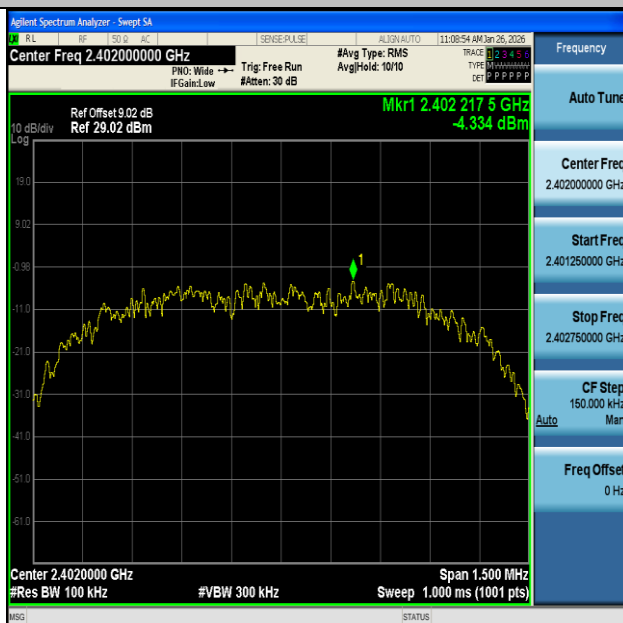

2DH5-Ant1-2402-0~Reference-PASS



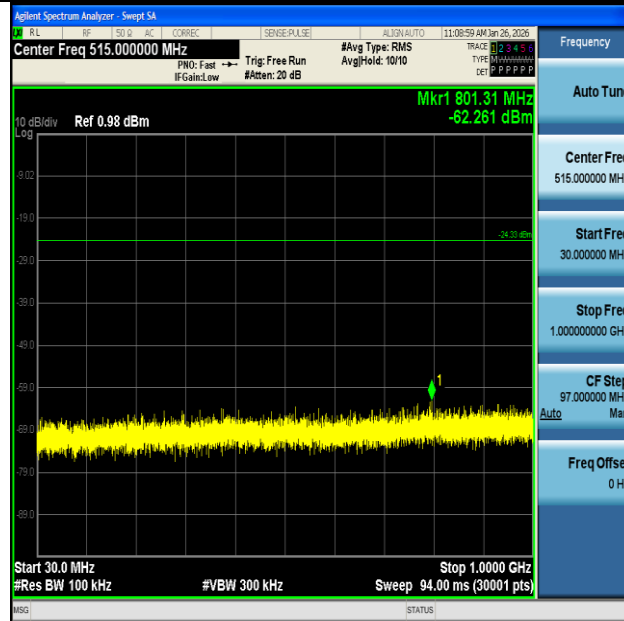


2DH5-Ant1-2402-30~1000-PASS




2DH5-Ant1-2402-1000~26500-PASS



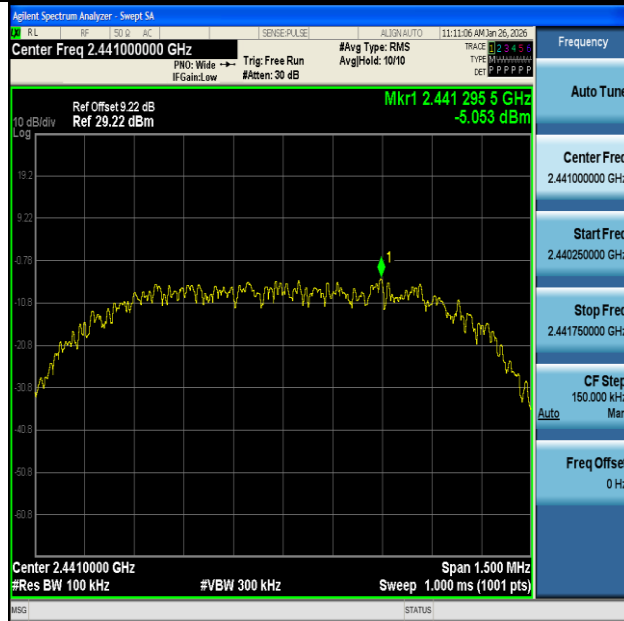

2DH5-Ant1-2441-0~Reference-PASS

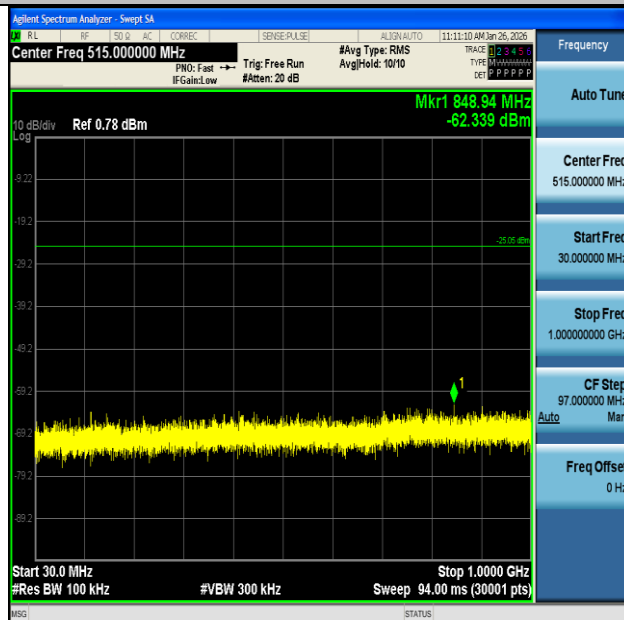

2DH5-Ant1-2441-30~1000-PASS





2DH5-Ant1-2441-1000~26500-PASS




2DH5-Ant1-2480-0~Reference-PASS





2DH5-Ant1-2480-30~1000-PASS

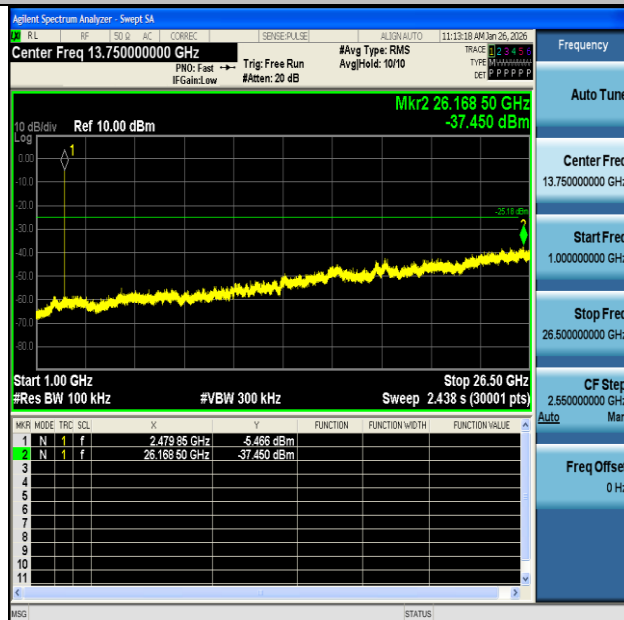


2DH5-Ant1-2480-1000~26500-PASS






3DH5-Ant1-2402-0~Reference-PASS

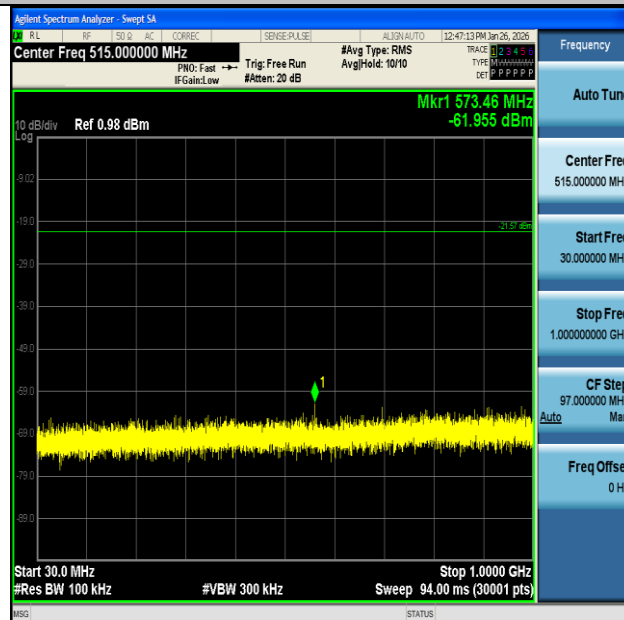


3DH5-Ant1-2402-30~1000-PASS



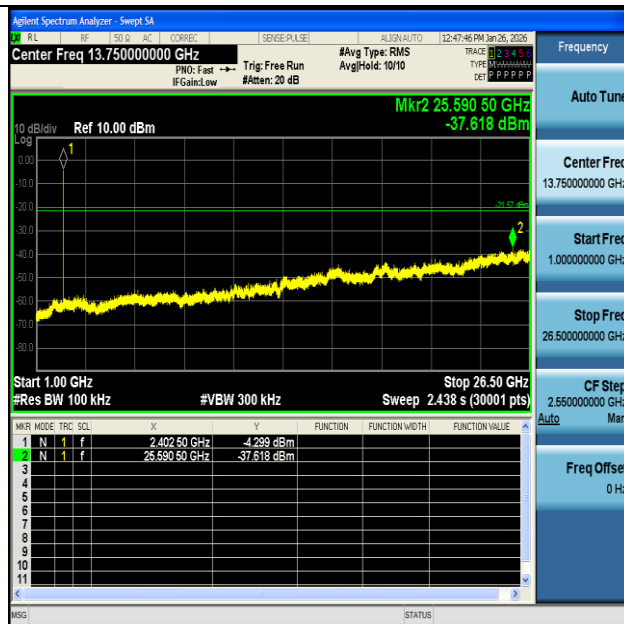

3DH5-Ant1-2402-1000~26500-PASS

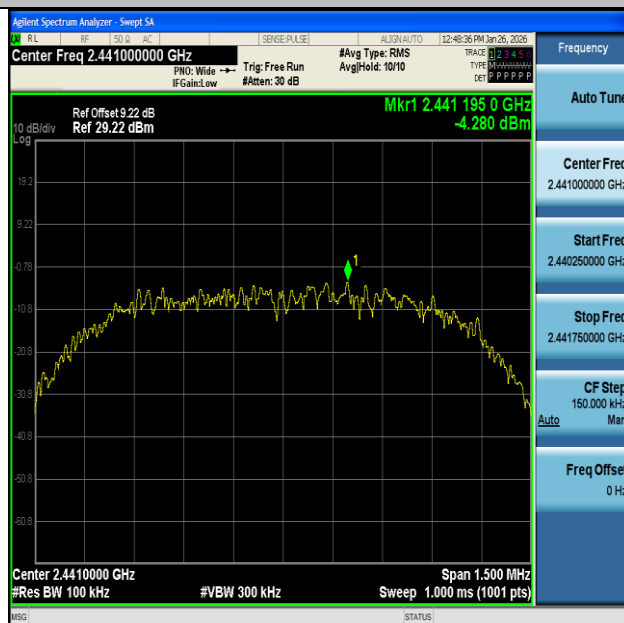


3DH5-Ant1-2441-0~Reference-PASS






3DH5-Ant1-2441-30~1000-PASS

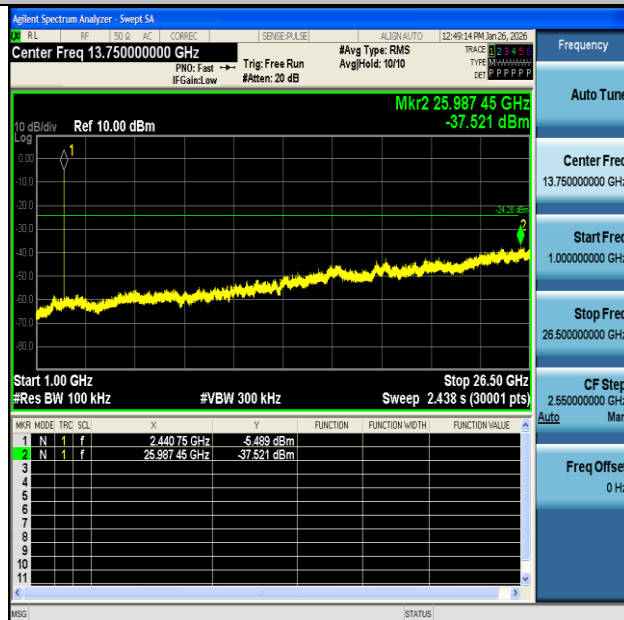


3DH5-Ant1-2441-1000~26500-PASS



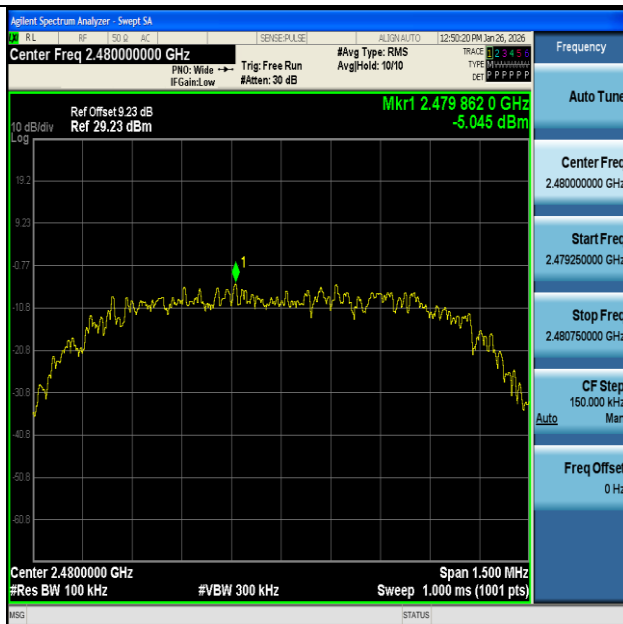


3DH5-Ant1-2480-0~Reference-PASS

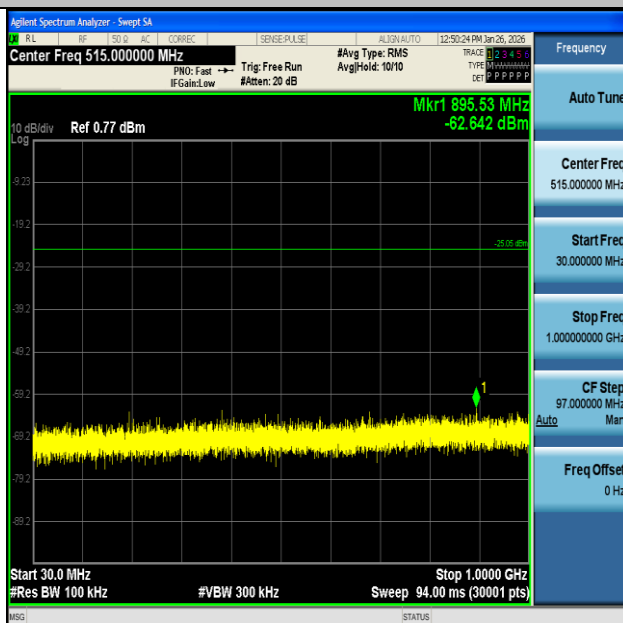

3DH5-Ant1-2480-30~1000-PASS



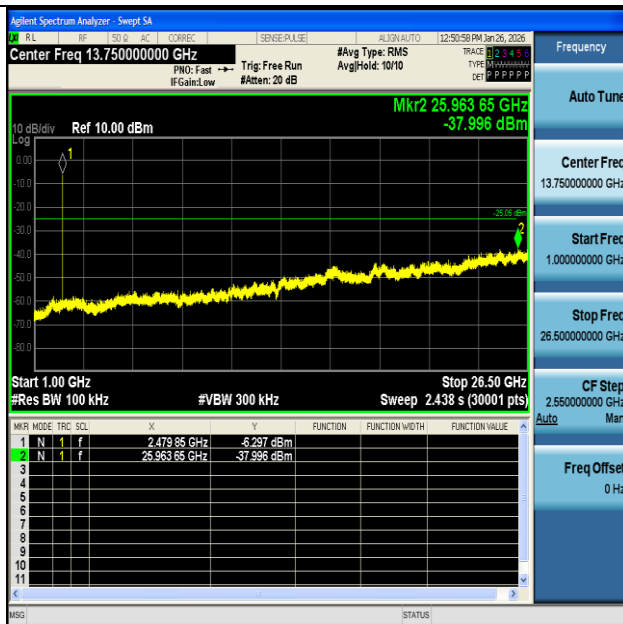

3DH5-Ant1-2480-1000~26500-PASS





Appendix I: Duty Cycle

Test Result

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
DH5	Ant1	2402	2.88	3.73	77.21	1.12
DH5	Ant1	2441	2.89	3.73	77.48	1.11
DH5	Ant1	2480	2.88	3.73	77.21	1.12
2DH5	Ant1	2402	2.88	3.73	77.21	1.12
2DH5	Ant1	2441	2.75	3.59	76.60	1.16
2DH5	Ant1	2480	2.89	3.73	77.48	1.11
3DH5	Ant1	2402	2.88	3.73	77.21	1.12
3DH5	Ant1	2441	2.89	3.74	77.27	1.12
3DH5	Ant1	2480	2.89	3.74	77.27	1.12


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs



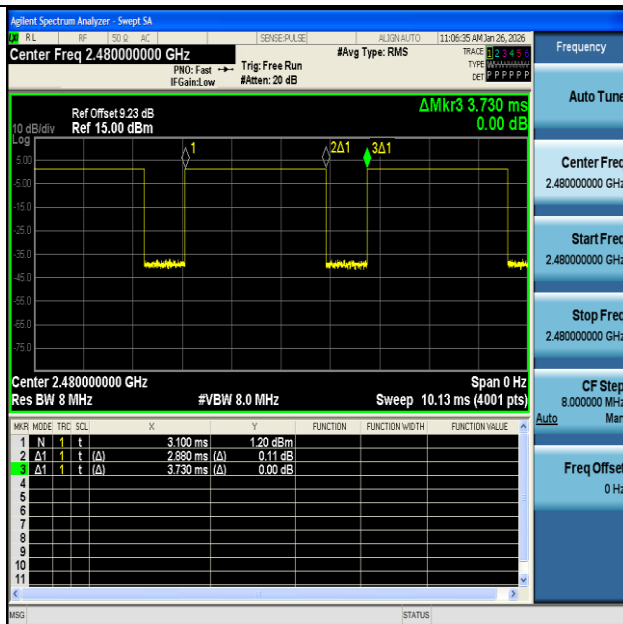


NTNV-DH5-Ant1-2480

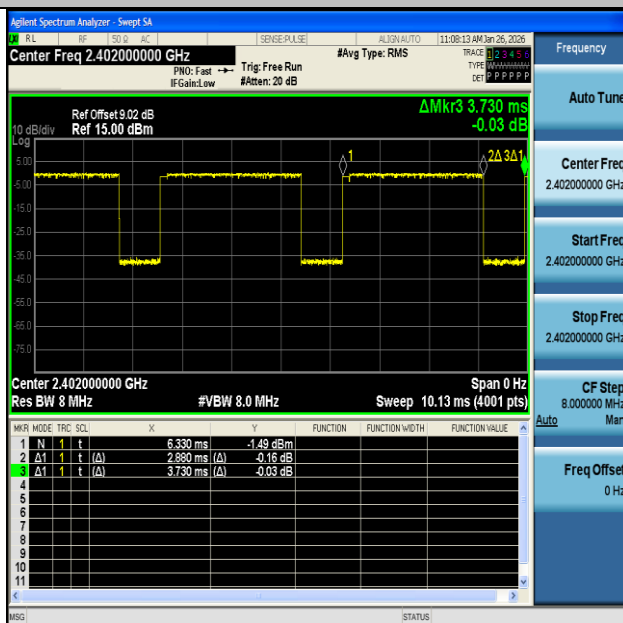


NTNV-2DH5-Ant1-2402



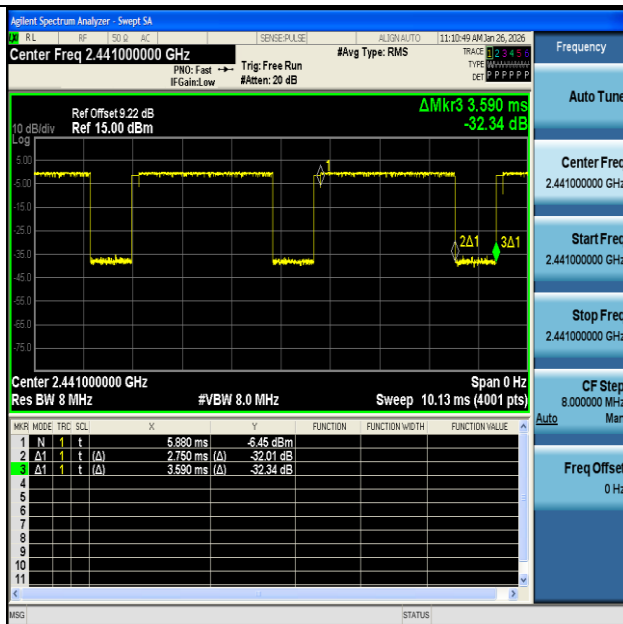


NTNV-2DH5-Ant1-2441

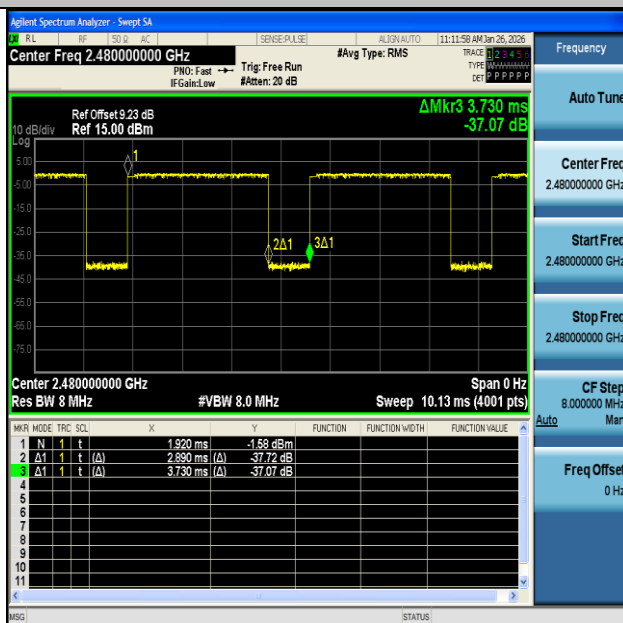


NTNV-2DH5-Ant1-2480



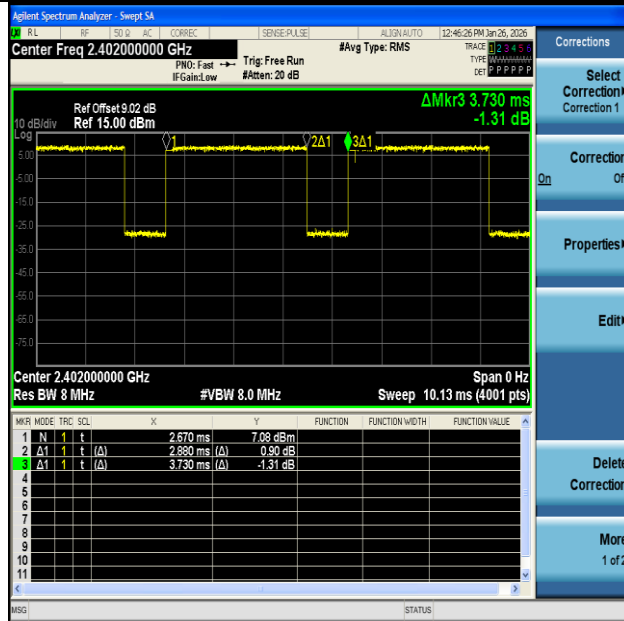


NTNV-3DH5-Ant1-2402

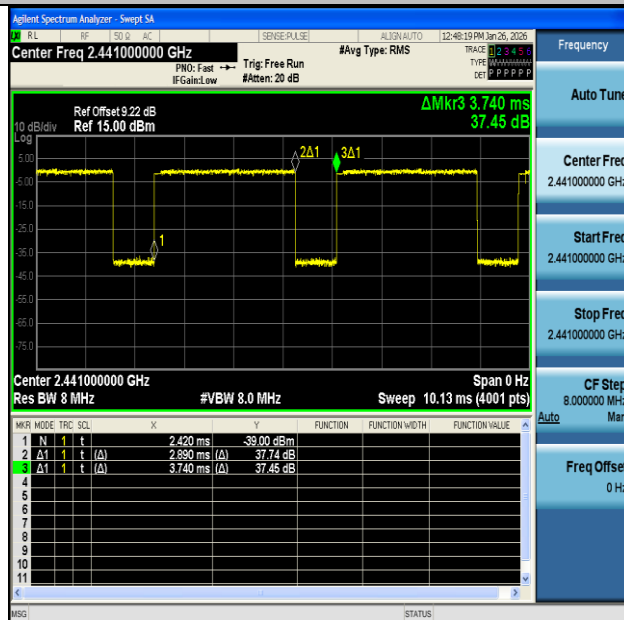

NTNV-3DH5-Ant1-2441



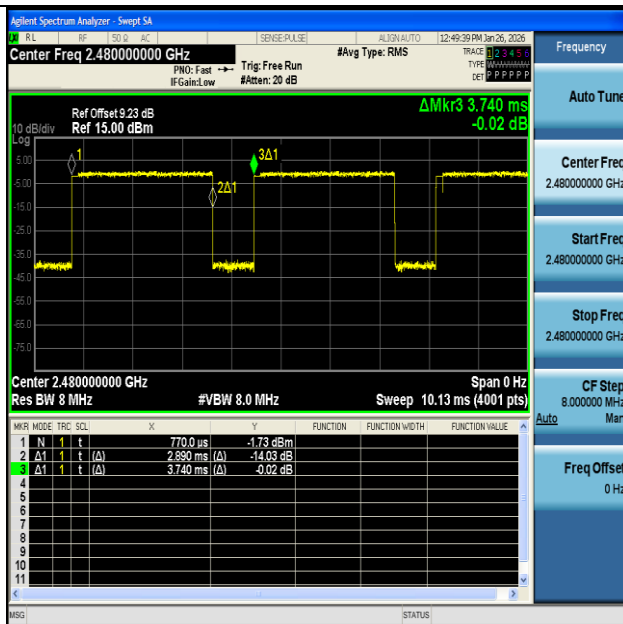

NTNV-3DH5-Ant1-2480

