

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

Electrical Verification Test Plan

EVBOX G5+ **BASE US** AC Chargers

Customer - Project

TC-60.66

Test ID

Electrical Verification Test Report

Test Name

Rev	Revision Date	Originator(s)	Change Details
A0	30-Jul-2021	Bosmans Stijn	Initial Draft
A1	03-Aug-2021	Bosmans Stijn	Added measurement results
A	25-Aug-2021	Filip Reenaers	Corrected Customer project name to 3EVBOX G5+ BASE US AC Chargers” + Released

Distribution List:	
Filip Reenaers	Lead Design Engineer
Frederik Petré	Project Manager
Dogan Gul	System Architect, EVbox
Erik Homs	Project Manager, EVbox
Erik Luyckx	Systems Architect
Product Verification Manager	Product Verification Manager
Patrick Achten	Lead Product Validation Engineer
Gijs Vanloffelt	Design Engineer
Peter Jans	Lead Design Engineer
Ronny Meuwis	Global Quality Manager
Bosmans Stijn	Design Engineer II

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

Approvals

Revision	Title	Print Name	Signature	Date
A	Lead Design Engineer	Filip Reenaers	APPROVED By ReenaerF at 1:29 pm, Aug 25, 2021	
	Lead Product Validation Engineer	Patrick Achten	APPROVED By Achten Patrick at 1:56 pm, Aug 25, 2021	
	Quality Engineer	Thomas Van Broeckhoven	APPROVED By Mahmoud Kocasan at 2:16 pm, Aug 25, 2021	

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

Table of Contents

1	Test Objective.....	4
2	Definitions/Terminology	4
3	Responsibilities	4
4	Referenced Documents.....	5
5	Management Summary	5
6	Equipment Requirements.....	6
7	Sample Configurations.....	6
7.1	Sample Configuration Overview	6
8	Test Planning and Reporting	6
8.1	TC-60.66/ Antenna performance (GPS, LTE, WIFI)	6
8.1.1	Purpose and Scope of Test	6
8.1.2	Reference Documents/Standards.....	7
8.1.3	Test Setup	8
8.1.4	Test Pass/Fail Criteria	11
8.1.5	Test Procedure	11
8.1.6	Test Result/Output.....	12

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

1 Test Objective

- 1.1 The purpose of this document is to document and communicate the **Electrical** Verification Test Report and Results for the **EVBOX G5+ BASE US AC Chargers** project during **B Sample / DVT** phase of the project.

2 Definitions/Terminology

Nr.	Term	Description
1.	ADC	Analog to Digital Converter
2.	CAN	Controller Area Network
3.	CCID	Charge Circuit Interrupting Devices
4.	DSW	Diagnostic Software
5.	EVT	Engineering Verification Tests
6.	GPIO	General Purpose Input Output
7.	I2C	Inter Integrated Circuit
8.	LED	Light Emitting Diode
9.	SDIO	Serial Digital Input Output
10.	SPI	Serial Peripheral Interface
11.	SW	Software
12.	UART	Universal Asynchronous Receiver Transmitter

3 Responsibilities

Item	Owner	Responsibility
1.	Originator	Responsible for the content of this document
2.	Quality Engineer	Responsible for organizing the review of this document
3.	Approvers	Responsible for approving this document

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

4 Referenced Documents

Item	Document Number	Description
4.1	00-PL20-82000	PLCQ-VV-Procedure-Product Verification Process
4.2	00-PL80-82020	PLCQ-VV-Template-Verification Test Procedure and Report
4.3	30-DS25-EV-Box-OEM_G5-MPVP-Master Product Verification Test Plan_revB	Master Product Verification Test Plan
4.4	Product Requirements EVBox_G5+_Base_Rev_C	Product Requirements Document
4.5	System_Architecture_EVBox_G5+_Base_Rev_E	System Architecture
4.6	PCB1061493_D-03.pdf	Design Schematics COM board Rev D – B-sample

5 Management Summary

Test ID	Test Name	Duration (Hrs)	Sample Size	Test Result	Defect No.
TC-60.66	Antenna performance (GPS, LTE, WIFI)	40	1	PASS	EVBG5P-299
	Comment: - The efficiency of the antenna is for every band above the minimum efficiency that is required to meet the AT&T TRP requirements → PASS - The GNSS antenna efficiency is around 46%. This is above ‘the rule of thumb’ of 30% → PASS Matching circuitry needs to be updated (see chapter 8.1.6.2.1). - For US, there is no issue with max power since +30 dBm is allowed. But the Band edges are important for the US. This is also influenced by the antenna gain. The antenna gain is higher than mentioned in the datasheet if the Murata IC (FCC ID-part). Therefore, additional measurements on this are recommended. The efficiency on the 5Ghz is not optimal but due to the gain additional improvements are not recommended. Conclusion WIFI antenna measurements: PASS				
	Rework: Yes		Re-measurement required in next phase: Yes		

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

6 Equipment Requirements

Item	Equipment Name	Equipment Model	Equipment S/N	Calibration Due Date
1	Antenna chamber	Antenna chamber ETS-Lindgren AMS-8100	JA0979	NA* *: self-calibration done (check done with calibrated reference dipoles) before measurement
2	VNA	Network analyzer R&S ZNB20	EM22033	12 Dec 2021

7 Sample Configurations

7.1 Sample Configuration Overview

Unit	Sample Description	HW/SW version	Sample ID (S/N)
1	B-sample complete BASE US SET	NA	JU_BA_U_FC_0007

8 Test Planning and Reporting

(Define each test procedure following the process below and record test result after test)

8.1 TC-60.66/ Antenna performance (GPS, LTE, WIFI)

8.1.1 Purpose and Scope of Test

All measurements necessary to conclude that the antennas (GPS, LTE, WIFI) are according to the expected return loss and efficiency. Checks will be done in free field on COM Board level but also built into the complete charger (set).

During the EVT phase of this project there was concluded that the Toaglass antenna that was placed in the design wasn't meeting the TRP carrier requirements. In order to meet those, the Toaglass antenna was replaced with a PCB antenna.

There was also noticed that the GPS antenna efficiency was very poor. To improve this, the GPS antenna was also replaced with a PCB antenna.

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66		Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers		A
			Release Date 25-08-2021

8.1.2 Reference Documents/Standards

ID	Document Number	Description
[Ref 1]	30-DS20-EVBG5P-BASE-Electrical-Verification-Test-Plan-COM Board-A2.docx	DVT test plan

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

8.1.3 Test Setup

8.1.3.1 Test setup Wifi measurements

(System setup, Test Configuration, Test profile, Test Environmental Conditions, etc)

Sample (COM board in a Wallbox) placed into the ETS-lindgren fully anechoic chamber.

Due to weight limitations, the long cable is sawn off at $\pm 10\text{cm}$.


Ambient room temperature: 23-25 degrees Celsius.



Figure 1: Measurement setup Wifi Antenna

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision A
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	Release Date 25-08-2021

84 Patterns, efficiency and gain of the antenna were measured with this set-up.

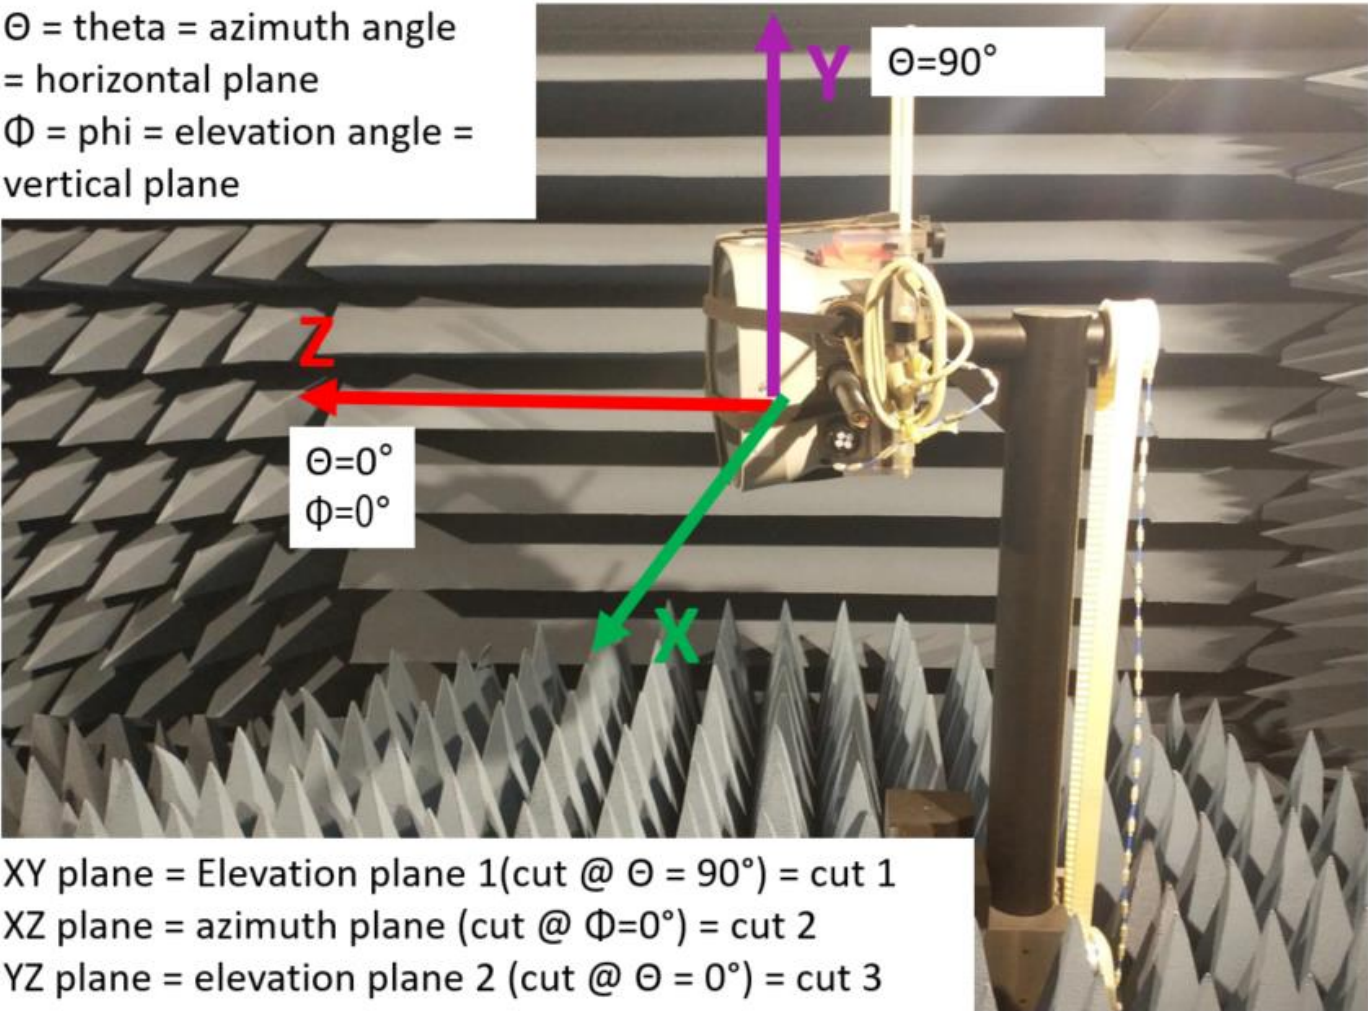

85
86 Figure 2: Wifi measurement axis setup
87

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

8.1.3.2 Test setup LTE/GPS Measurements

Sample (COM board in a Wallbox) placed into the ETS-lindgren fully anechoic chamber.
 Due to weight limitations, the long cable is sawn off at $\pm 10\text{cm}$.
 Ambient room temperature: 23-25 degrees Celsius.

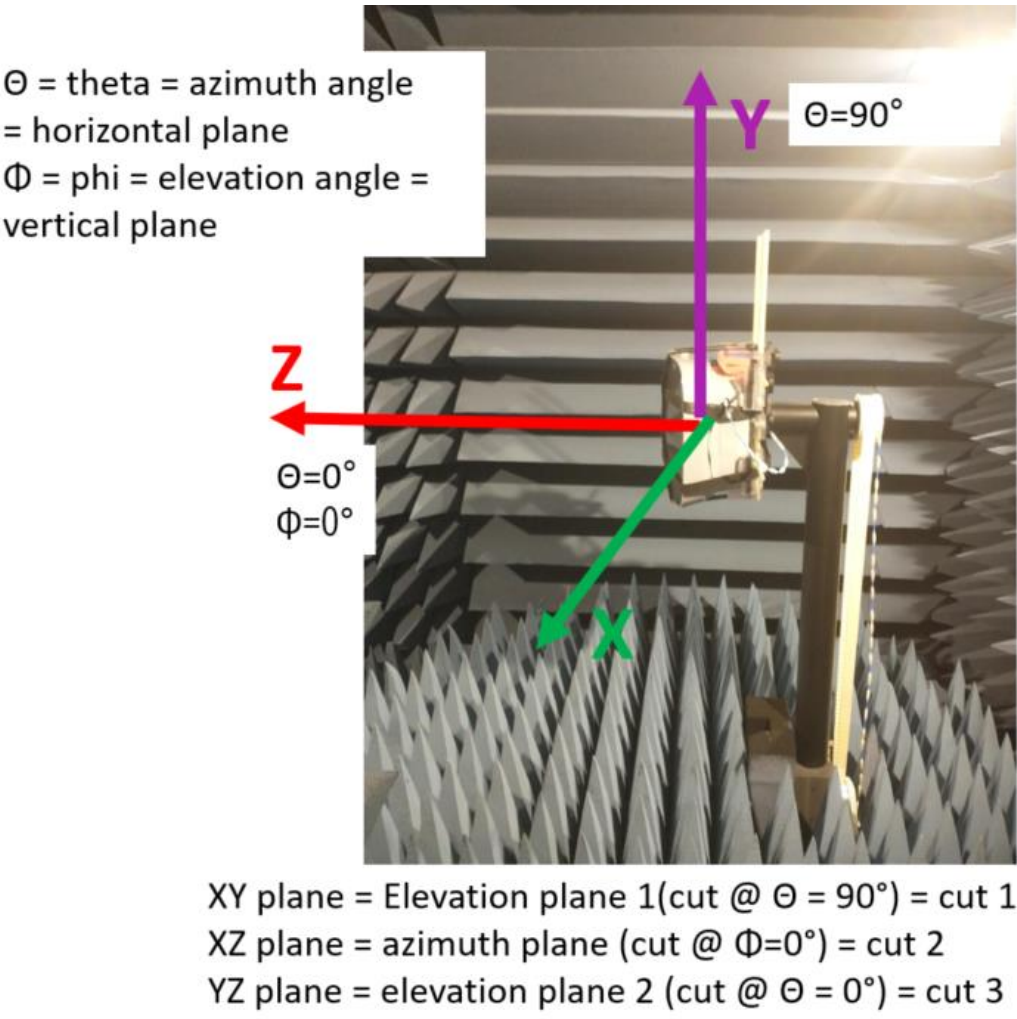


Figure 3: LTE/GNSS measurement axis setup

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

8.1.4 Test Pass/Fail Criteria

No real hard antenna requirements.

- In general, for all 3 (WIFI, GPS, LTE) antennas a return loss better than ~ 6-8 dB is good.
- To meet carrier requirements, the LTE antenna needs to have an efficiency bigger than 50% for the TX high bands (Band 2 and band 4) and 35% for the TX low band (Band 12 -700MHz).
- For GPS, efficiency better than 30%, the higher the better. For WIFI, efficiency of better than 40% is good for the 5GHz band 25% is acceptable.

8.1.5 Test Procedure

Coax (semi-rigid cable) connected to the antennas through the matching component structure. This is used for both network analyser (to measure return loss) and 3D antenna measurements in the antenna chamber (efficiency, gain, radiation patterns). The COM Board will be placed in the Wallbox Set for all these measurements since antenna matching can be influenced by plastic materials etc...

There is an Open-Short-Load calibration done on the VNA port. End of measurement semi-rigid will be calibrated as reference place to make sure that the VNA measures at the soldering point on the PCB (directly at the matching circuit input).

This is done by using a semi-rigid calibration kit(electrical & physical length of the cal. Coaxes are the same as the one used during the measurements).

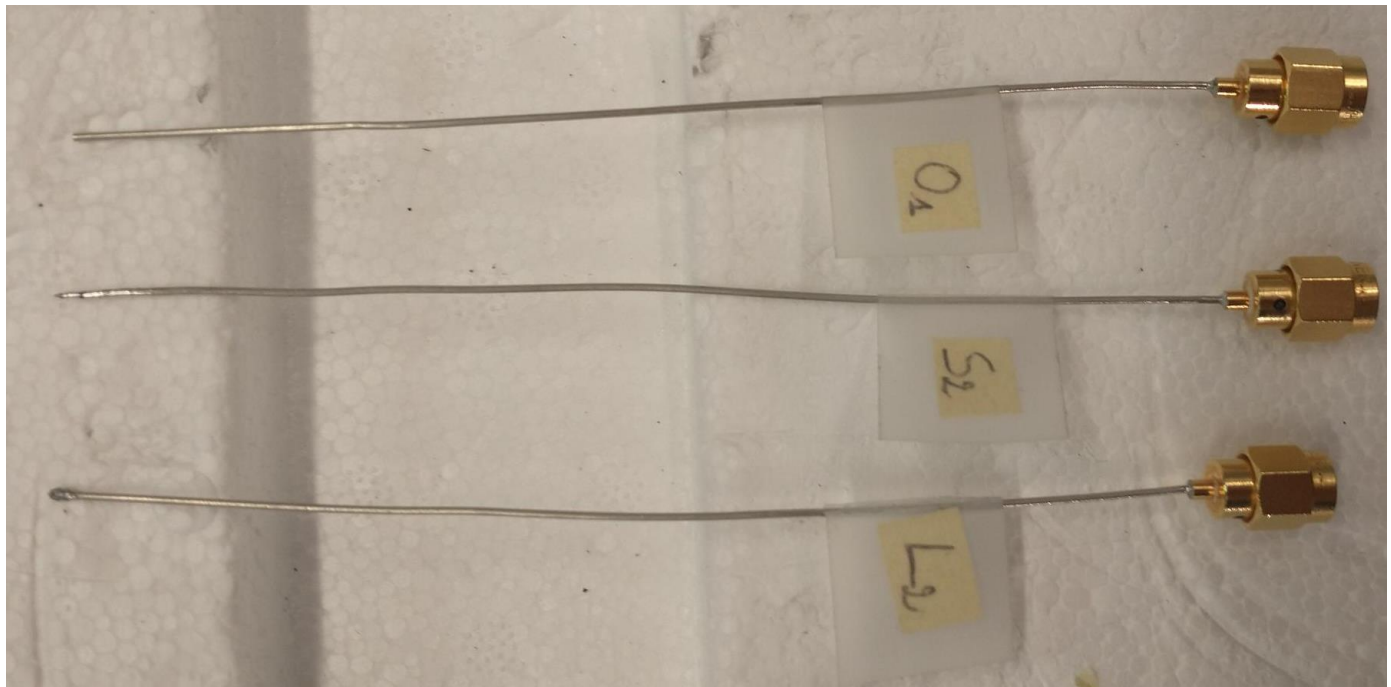


Figure 4: Calibration kit

8.1.6 Test Result/Output

8.1.6.1 LTE antenna measurements

8.1.6.1.1 LTE Matching

Matching for US LTE Bands B2, B4 and B12 in following range:

	RX (receive Freq)	TX (transit Freq)
B2	1930-1990	1850-1910
B4	2110-2155	1710-1755
B12	728-746	698-716

As outcoming of EVT, the next matching network has been implemented in the design.

LTE Antenna


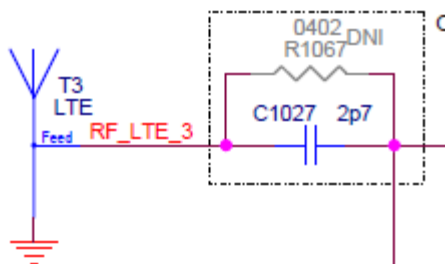


Figure 5: Matching network LTE

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision A
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	Release Date 25-08-2021

128 **8.1.6.1.2 S11 (Return Loss) of LTE antenna**

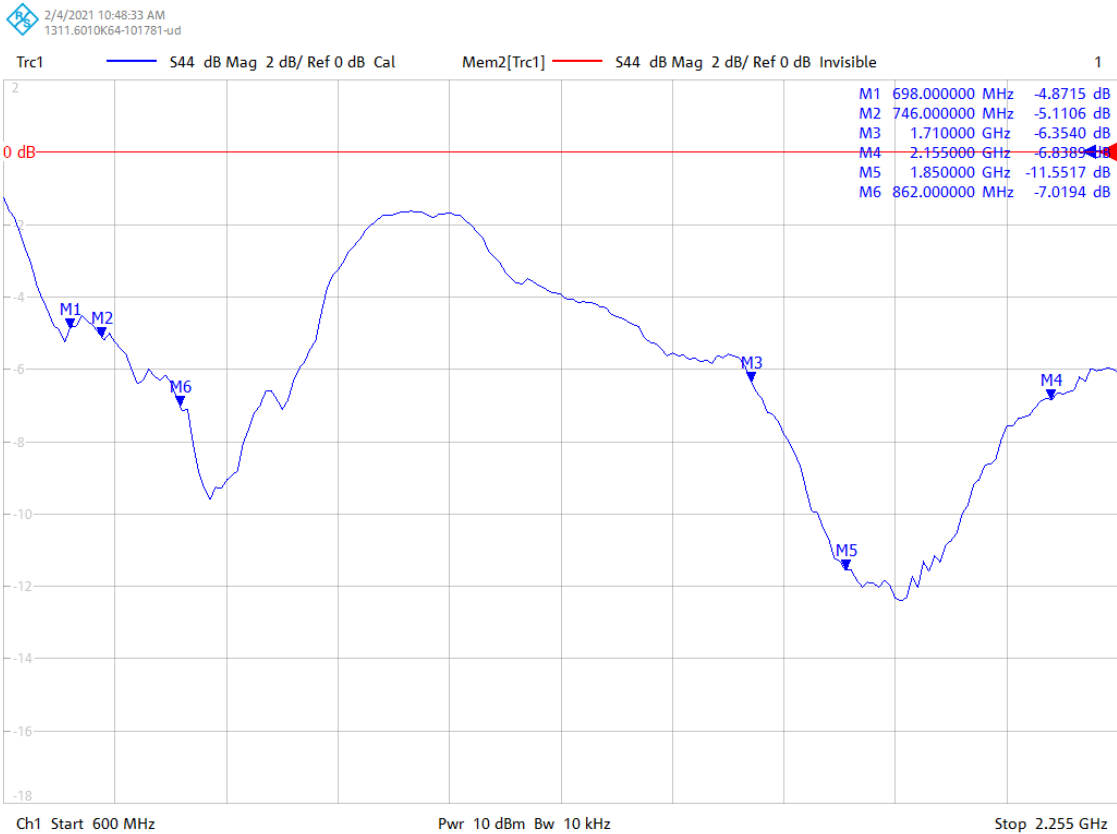

129
130 **Figure 6: Return loss measurement result**

131
132 The return loss is poor but acceptable for the low band. The main pass/fail criteria for these measurements
133 are the antenna efficiency results.
134

8.1.6.1.3 Efficiency

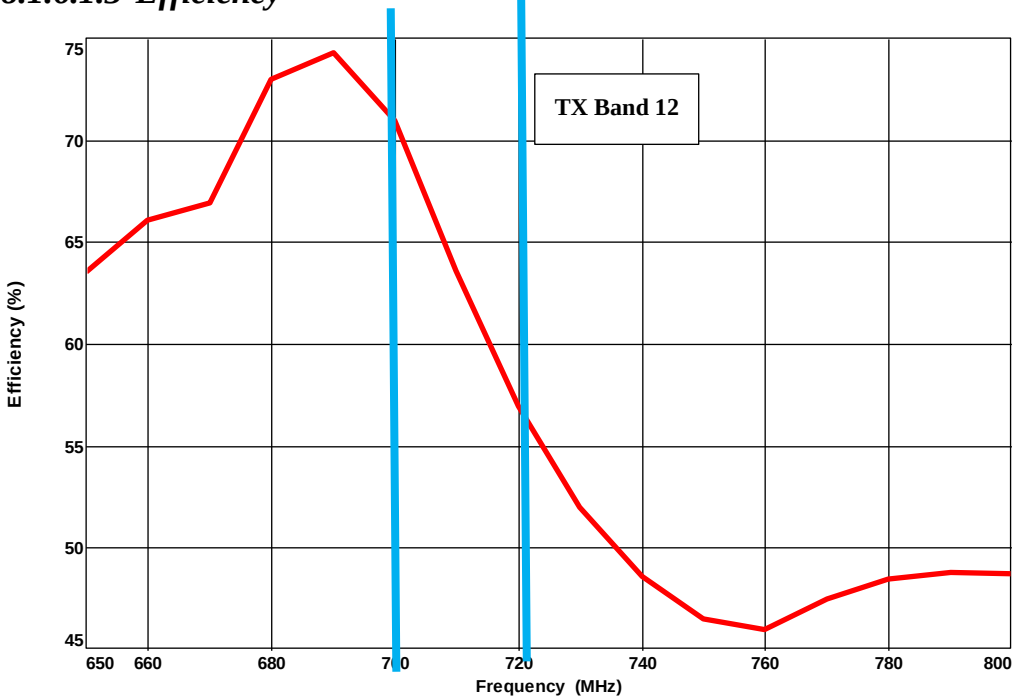


Figure 7: LTE Antenna - low band efficiency

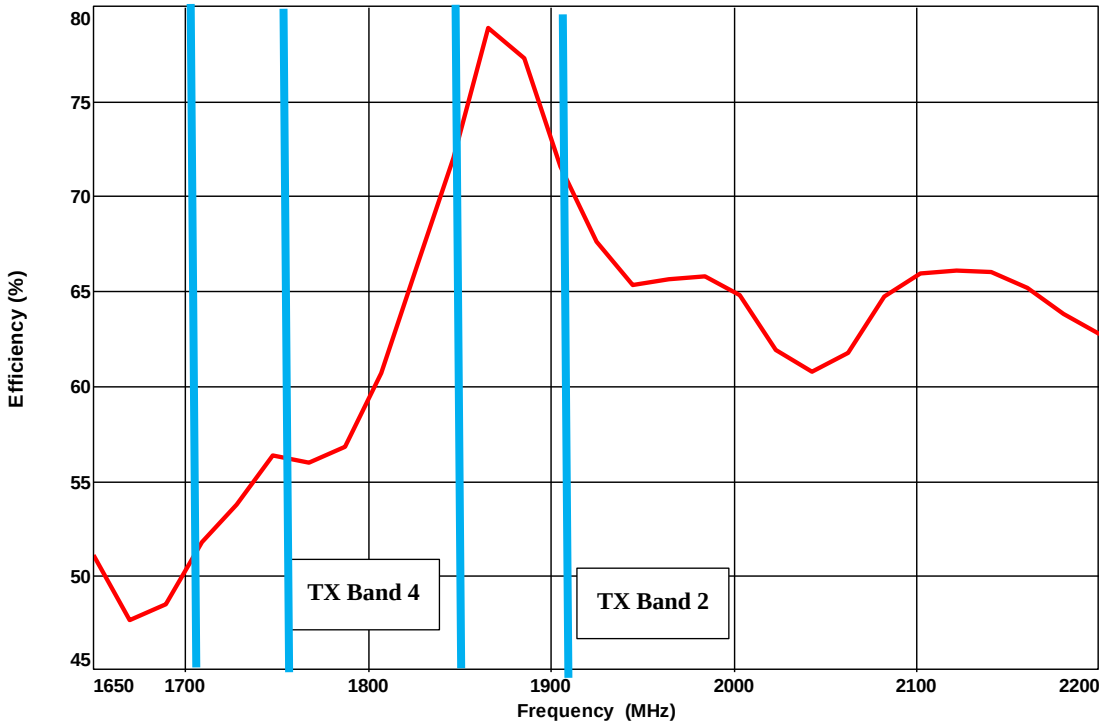


Figure 8: LTE Antenna - High band efficiency

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

Conclusion:
 The efficiency of the antenna is for every band above the minimum efficiency that is required to meet the
 AT&T TRP requirements → **PASS**

8.1.6.1.4 Peak Gain

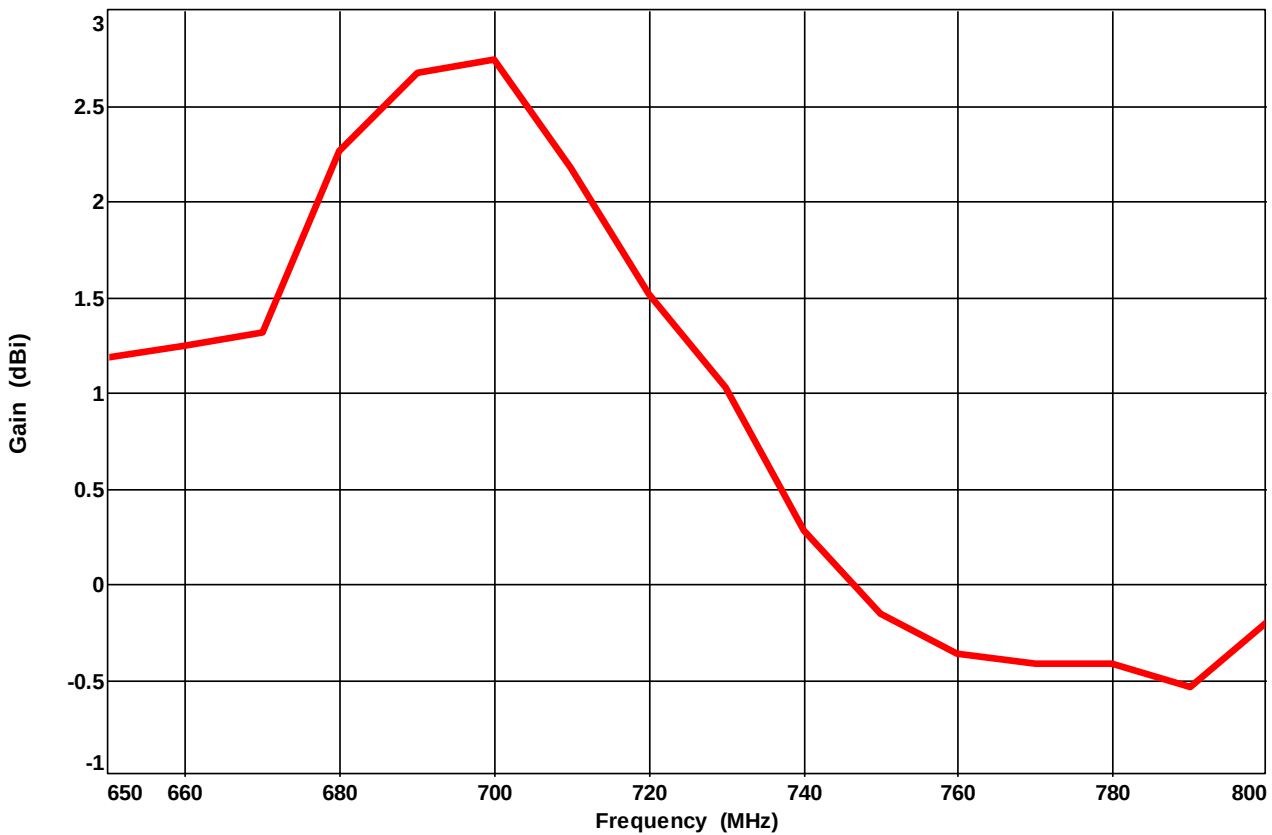


Figure 9: Peak gain LTE Antenna low band

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

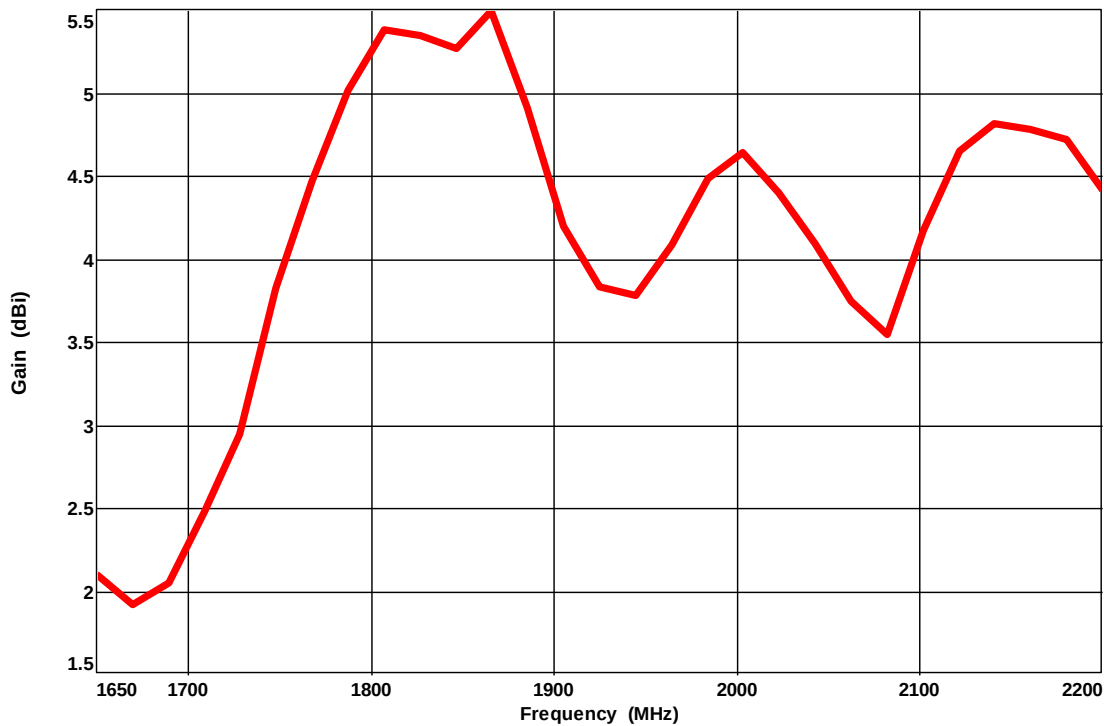


Figure 10: Peak gain LTE Antenna High band



2021.07.12.12.14.30.r
aw

Data result 1: Raw data LTE measurement results B12




2021.07.12.14.55.07.r
aw

Data result 2: Raw data LTE measurement results B2-B4

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

8.1.6.2 GPS antenna measurements

As outcoming of EVT, the next matching network has been implemented in the design.

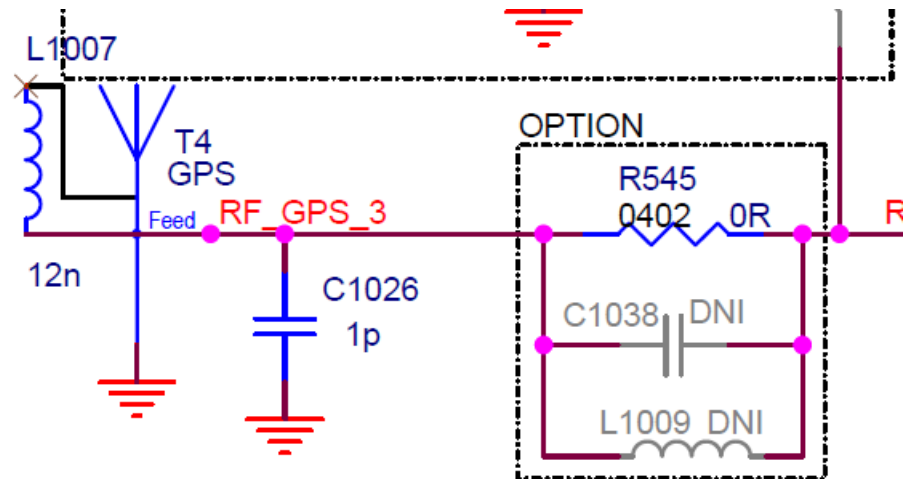


GPS Antenna

Figure 11: GPS Antenna matching circuit – outcoming of EVT

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

8.1.6.2.1 S11 (Return loss) of GPS antenna

During the measurements there was noticed that the antenna is not matched according to the GNSS frequency range. This can be due to the removed USB TypeC connector that isn’t stuffed for the DVT phase of this product.

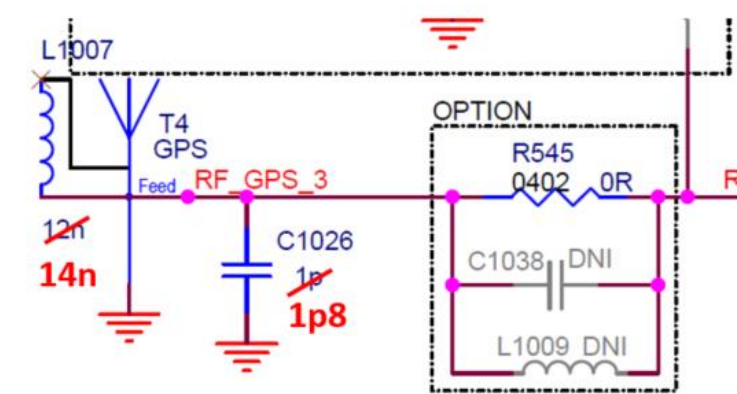

GPS Antenna

Figure 12: Adjusted matching GNSS Antenna

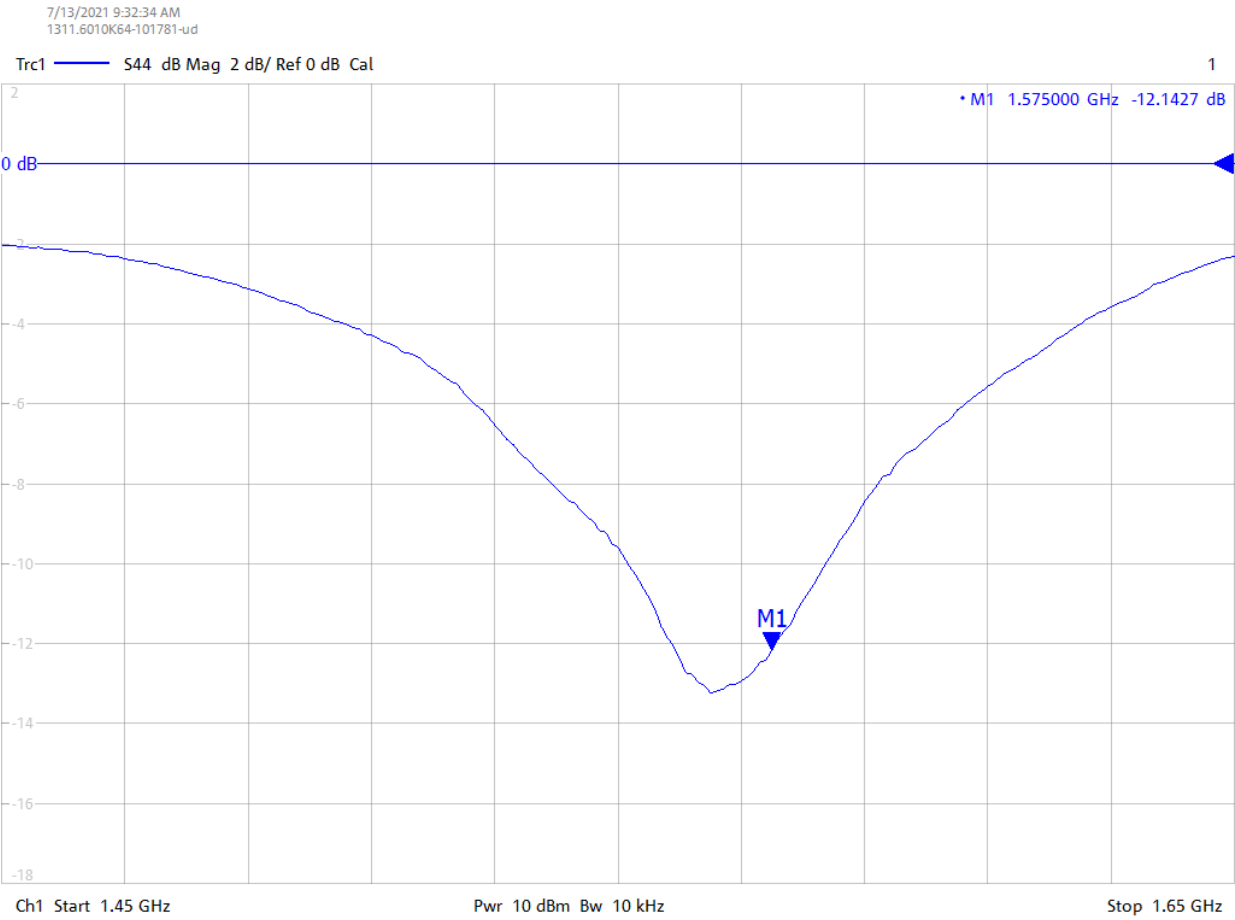


Figure 13: S11 GNSS Antenna adjusted

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021

8.1.6.2.2 Efficiency

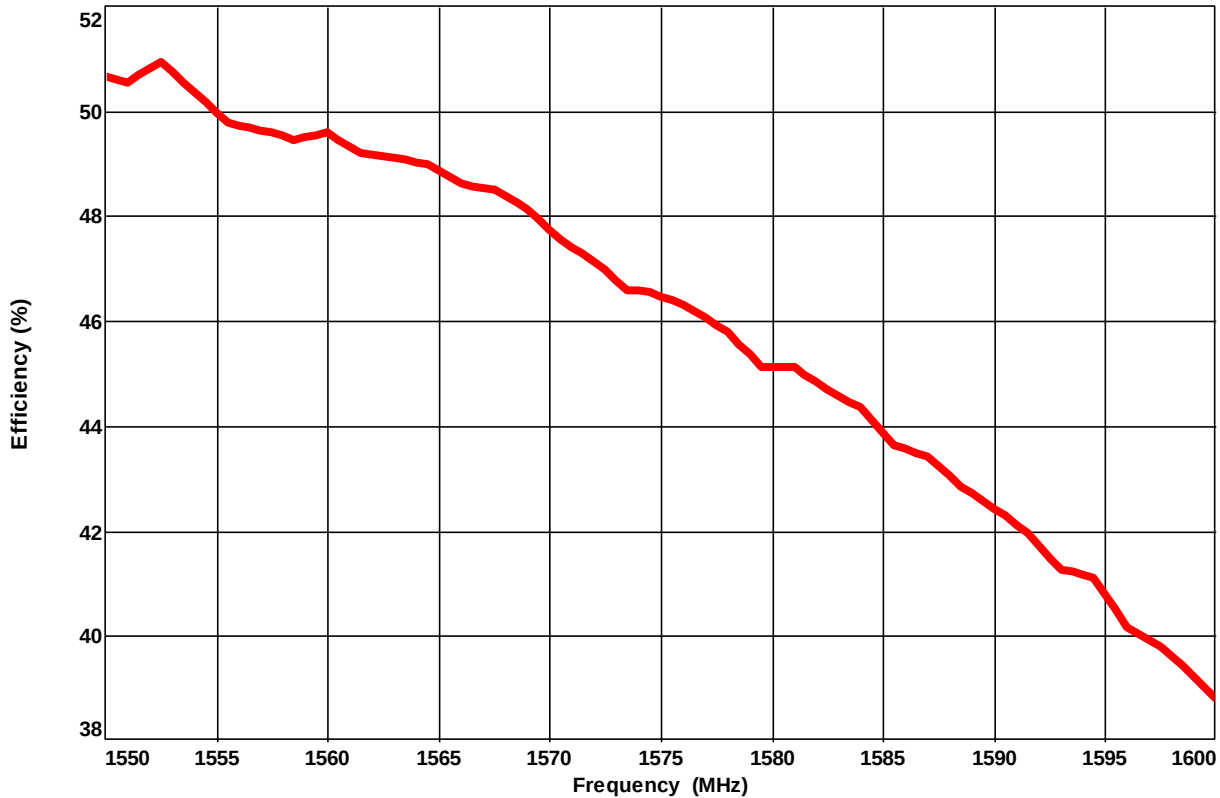


Figure 14: Efficiency GNSS antenna report

Conclusion:

The GNSS antenna efficiency is around 46%. This is above ‘the rule of thumb’ of 30% → **PASS**




2021.07.13.13.16.32.r
aw

Data result 3: Raw data GNSS results

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	A
		Release Date 25-08-2021


8.1.6.3 WIFI antenna measurements

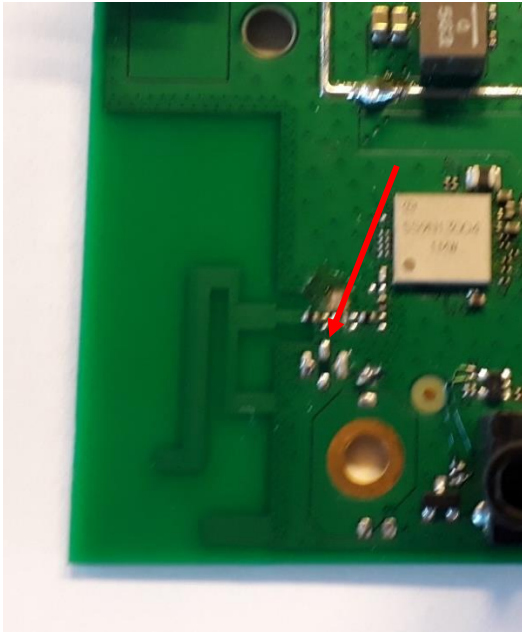

8.1.6.4 WIFI measurements

8.1.6.4.1.1 Matching

No matching need, nor for 2.4GHz, nor for 5GHz; so all series components stay 0 Ohm, other not stuffed.

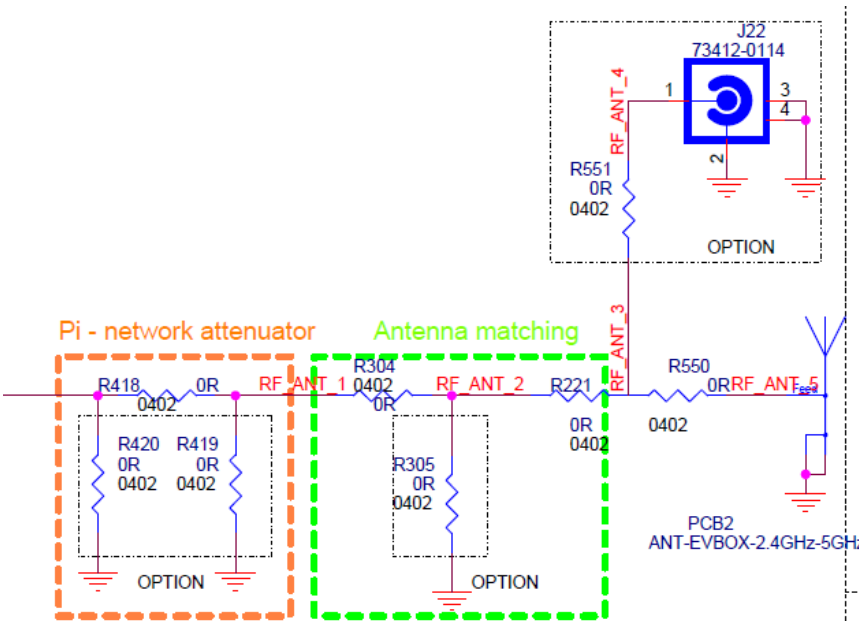

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66	Revision A
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers	Release Date 25-08-2021

8.1.6.4.2 WIFI antenna S11 (return loss)

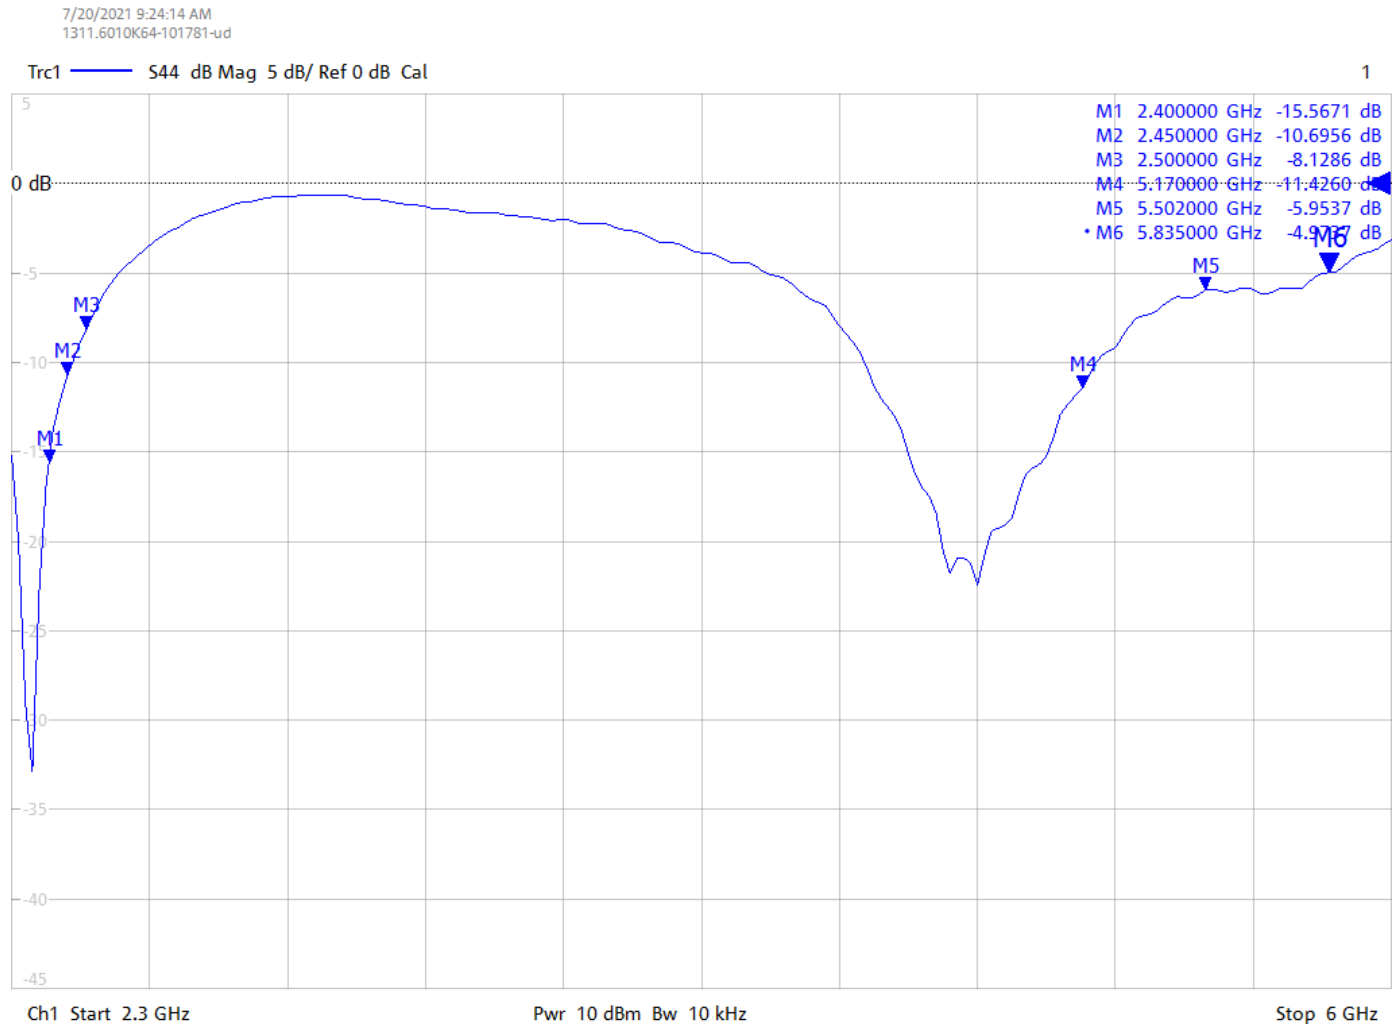


Figure 15: S11 Wi-Fi measurement result

8.1.6.4.3 Efficiency

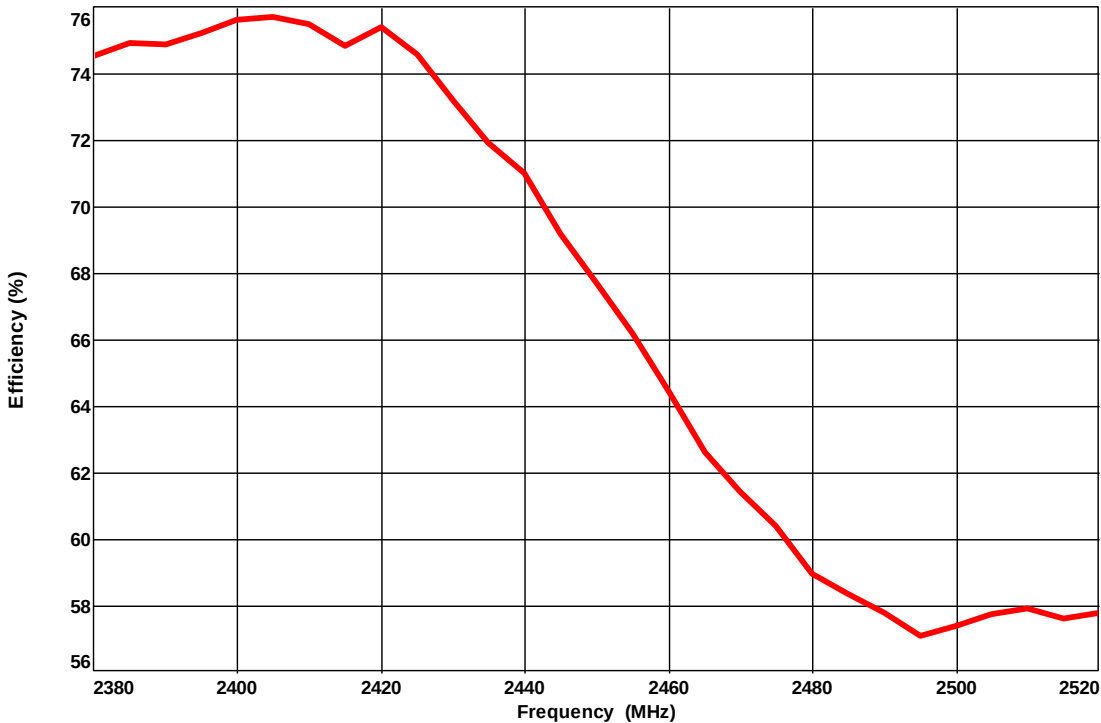


Figure 16: 2.4GHz Band efficiency WLAN Antenna

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66		Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers		A
			Release Date
			25-08-2021

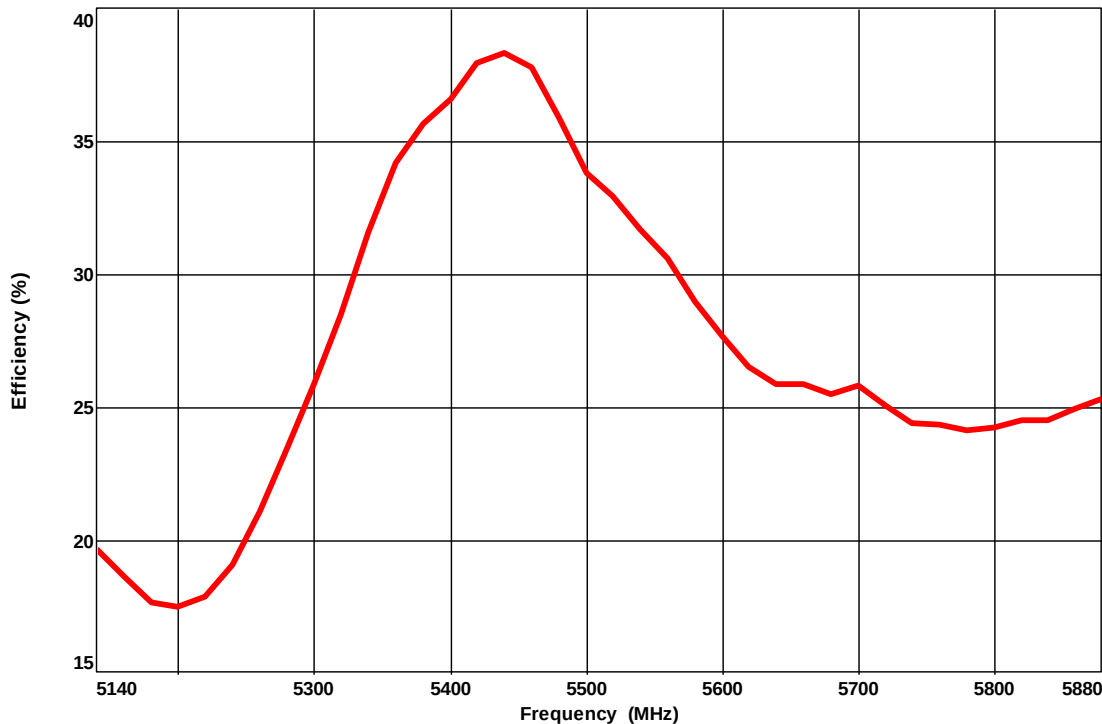


Figure 17: 5GHz Band efficiency WLAN Antenna

Conclusion:

WIFI antenna efficiency 2.4 GHz >50% → **PASS**

WIFI antenna efficiency 5 GHz > 20% → The 5GHz behavior of the antenna is not optimal, due to the high peak gain (next figures), it isn't advisable to improve this. Improving this will make the peak gain bigger (not good to meet FCC requirements).

8.1.6.4.4 Peak Gain

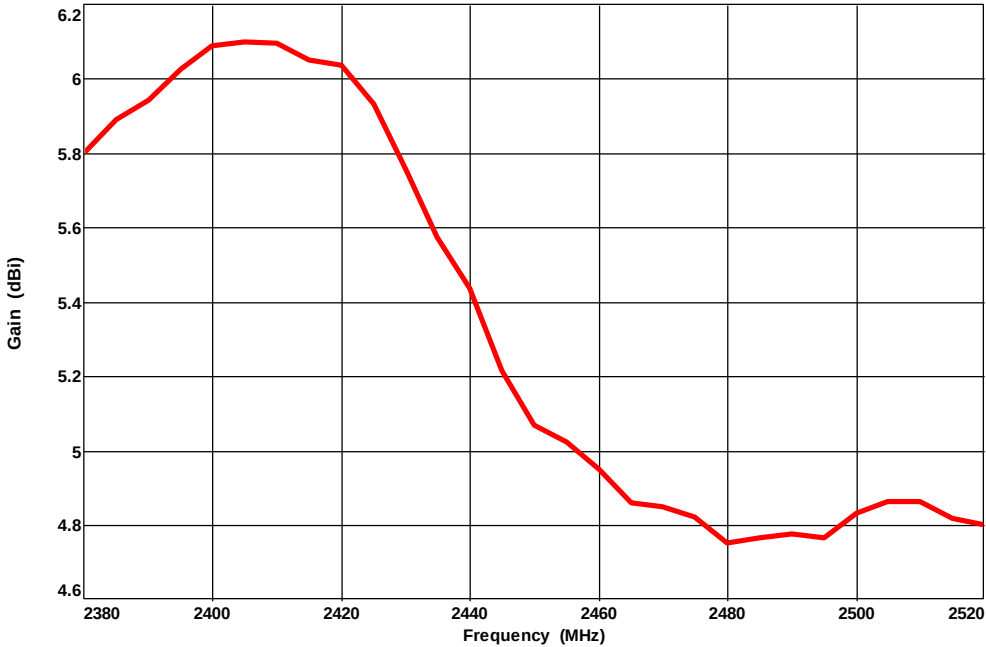


Figure 18: WLAN Peak Gain 2.4GHz

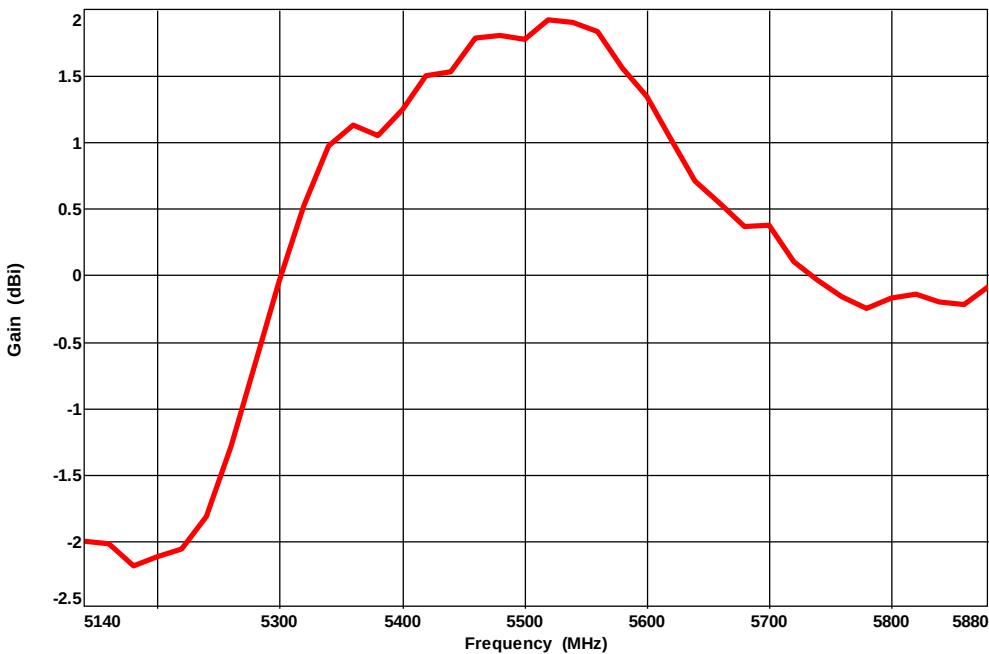


Figure 19: WLAN Peak Gain 5GHz

	30-DS25-EVBG5P-BASE US-Electrical-Verification-Test-Report-COM_Board-TC-60.66		Revision
	Electrical Verification Test Report COM Board TC-60.66– Project EVBOX G5+ BASE US AC Chargers		A
			Release Date 25-08-2021

The WIFI antenna peak gain for 2.4 G is ~**5.1 dBi**

The WIFI antenna peak gain for 5G is > 1 **dBi (Above the limit for FCC ID according to WLAN IC)**

Conclusion:

For US, there is no issue with max power since +30 dBm is allowed. But the **Band edges** are important for the US. This is also influenced by the antenna gain.

The antenna gain is higher than mentioned in the datasheet if the Murata IC (FCC ID-part). **Therefore additional measurements on this are recommended.**

The efficiency on the 5Ghz is not optimal but due to the gain additional improvements are not recommended.

Conclusion WIFI antenna measurements: **PASS**



2021.07.28.10.10.55.r
aw

Data result 4: Raw data measurement result Wifi 2.4GHz



2021.07.28.11.53.06.r
aw

Data result 5: Raw data measurement result Wifi 5GHz