



4.4. 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

4.4.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	No restriction limits
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth $RBW = 1\% \text{ EBW}$, $VBW \geq 3RBW$, In order to make an accurate measurement. 4. Measure and record the results in the test report.
Test Result:	N/A

4.4.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 18, 2022	Feb. 17, 2023
RF cable	Times	1-40G	HKE-034	Feb. 18, 2022	Feb. 17, 2023
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 18, 2022	Feb. 17, 2023

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4.4.3. Test Result

N/A



4.5. POWER SPECTRAL DENSITY

4.5.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F
Limit:	$\leq 30.00\text{dBm}/500\text{KHz}$ for Band IV 5725MHz-5850MHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 2. Set RBW = 510 kHz/1 MHz, VBW $\geq 3 \times$ RBW, Sweep time = Auto, Detector = RMS. 3. Allow the sweeps to continue until the trace stabilizes. 4. Use the peak marker function to determine the maximum amplitude level. 5. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.
Test Result:	PASS

4.5.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 18, 2022	Feb. 17, 2023
RF cable	Times	1-40G	HKE-034	Feb. 18, 2022	Feb. 17, 2023
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 18, 2022	Feb. 17, 2023

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.5.3. Test data

ANT 1

Configuration Band IV (5725 - 5850 MHz)						
Mode	Test channel	Level [dBm/510kHz]	10log(500/510)	Power Spectral Density	Limit (dBm/500kHz)	Result
11a	CH149	2.58	-0.086	2.49	30	PASS
11a	CH157	4.34	-0.086	4.25	30	PASS
11a	CH165	4.51	-0.086	4.42	30	PASS
11n HT20	CH149	0.57	-0.086	0.48	30	PASS
11n HT20	CH157	2.7	-0.086	2.61	30	PASS
11n HT20	CH165	1.7	-0.086	1.61	30	PASS
11n HT40	CH151	-0.82	-0.086	-0.91	30	PASS
11n HT40	CH159	-0.94	-0.086	-1.03	30	PASS
11ac HT20	CH149	1.16	-0.086	1.07	30	PASS
11ac HT20	CH157	2.06	-0.086	1.97	30	PASS
11ac HT20	CH165	2.39	-0.086	2.30	30	PASS
11ac HT40	CH151	-0.19	-0.086	-0.28	30	PASS
11ac HT40	CH159	0.62	-0.086	0.53	30	PASS
11ac HT80	CH155	-2.23	-0.086	-2.32	30	PASS
11ax HT20	CH149	3.28	-0.086	3.19	30	PASS
11ax HT20	CH157	3.82	-0.086	3.73	30	PASS
11ax HT20	CH165	3.76	-0.086	3.67	30	PASS
11ax HT40	CH151	1.2	-0.086	1.11	30	PASS
11ax HT40	CH159	0.75	-0.086	0.66	30	PASS
11ax HT80	CH155	-1.64	-0.086	-1.73	30	PASS

Note: Power Spectral Density= Level [dBm/510kHz]+ (10log(Limit RBW/Test RBW))

Test plots as follows:



Band IV (5725-5850 MHz)

802.11a



Low



Mid



High



802.11n(HT20)



Low



Mid



High



802.11n(HT40)



Low



High

802.11ac(HT20)



Low

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Mid



High

802.11ac(HT40)



Low



High

802.11ac(HT80)



802.11ax(HT20)



Low



Mid



High

802.11ax(HT40)



Low



High
802.11ax(HT80)





ANT 2

Configuration Band IV (5725 - 5850 MHz)						
Mode	Test channel	Level [dBm/510kHz]	$10\log(500/510)$	Power Spectral Density	Limit (dBm/500kHz)	Result
11a	CH149	2.14	-0.086	2.05	30	PASS
11a	CH157	2.99	-0.086	2.90	30	PASS
11a	CH161	3.37	-0.086	3.28	30	PASS
11n(HT20)	CH149	2.07	-0.086	1.98	30	PASS
11n(HT20)	CH157	2.8	-0.086	2.71	30	PASS
11n(HT20)	CH161	2.69	-0.086	2.60	30	PASS
11n(HT40)	CH151	-0.4	-0.086	-0.49	30	PASS
11n(HT40)	CH159	-0.01	-0.086	-0.10	30	PASS
11ac(HT20)	CH149	2.12	-0.086	2.03	30	PASS
11ac(HT20)	CH157	2.42	-0.086	2.33	30	PASS
11ac(HT20)	CH161	3.07	-0.086	2.98	30	PASS
11ac(HT40)	CH151	-0.02	-0.086	-0.11	30	PASS
11ac(HT40)	CH159	0.08	-0.086	-0.01	30	PASS
11ac(HT80)	CH155	-3.55	-0.086	-3.64	30	PASS
11ax(HT20)	CH149	3.18	-0.086	3.09	30	PASS
11ax(HT20)	CH157	3.5	-0.086	3.41	30	PASS
11ax(HT20)	CH161	4.37	-0.086	4.28	30	PASS
11ax(HT40)	CH151	0.05	-0.086	-0.04	30	PASS
11ax(HT40)	CH159	0.06	-0.086	-0.03	30	PASS
11ax(HT80)	CH155	-2.24	-0.086	-2.33	30	PASS

Note: Power Spectral Density= Level [dBm/510kHz]+ (10log(Limit RBW/Test RBW))

Test plots as follows:



Band IV (5725 – 5850 MHz)

802.11a



Low



Mid



High



802.11n(HT20)



Low



Mid



High



802.11n(HT40)



Low



High

802.11ac(HT20)



Low

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Mid



High

802.11ac(HT40)



Low



High
802.11ac(T80)



802.11ax(HT20)



Low



Mid



High


802.11ax(HT40)



Low



High
802.11ax(T80)

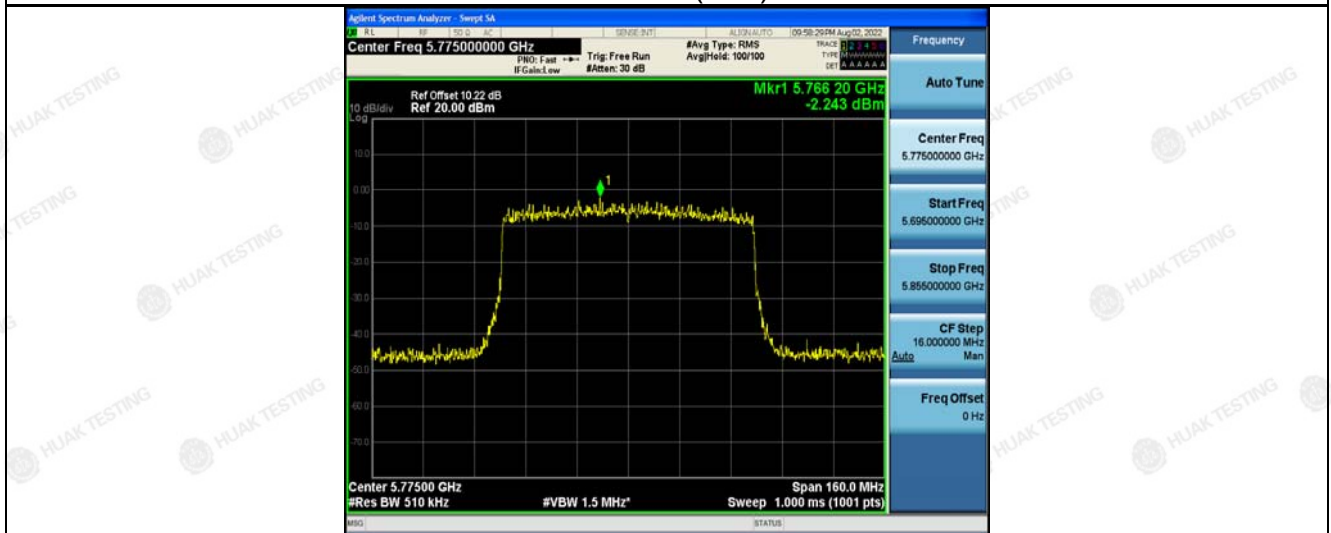



For MIMO antenna port 1+antenna port 2


Configuration Band IV (5725 - 5850 MHz)				
Mode	Test channel	Power Density (dBm)	Limit (dBm)	Result
11n(HT20)	CH149	4.30	27.99	PASS
11n(HT20)	CH157	5.67	27.99	PASS
11n(HT20)	CH161	5.14	27.99	PASS
11n(HT40)	CH151	2.32	27.99	PASS
11n(HT40)	CH159	2.47	27.99	PASS
11ac(HT20)	CH149	4.59	27.99	PASS
11ac(HT20)	CH157	5.16	27.99	PASS
11ac(HT20)	CH161	5.66	27.99	PASS
11ac(HT40)	CH151	2.82	27.99	PASS
11ac(HT40)	CH159	3.28	27.99	PASS
11ac(HT80)	CH155	0.08	27.99	PASS
11ax(HT20)	CH149	6.15	27.99	PASS
11ax(HT20)	CH157	6.58	27.99	PASS
11ax(HT20)	CH161	7.00	27.99	PASS
11ax(HT40)	CH151	3.58	27.99	PASS
11ax(HT40)	CH159	3.34	27.99	PASS
11ax(HT80)	CH155	0.99	27.99	PASS
Note: 1 According to KDB 662911, Result power = $10\log(10^{(\text{ant1}/10)} + 10^{(\text{ant2}/10)})$. 2 Result unit: W, The end result is converted to units of dBm. limit=30dBm-(direction gain-6dBi)=30-(5+10log2-6)=27.99dBm				

Note: This product supports antenna 1 and antenna 2 launch, but only support 802.11 n/ac/ax for MIMO mode, not support 802.11 a for MIMO mode.



4.6. BAND EDGE

4.6.1. Test Specification

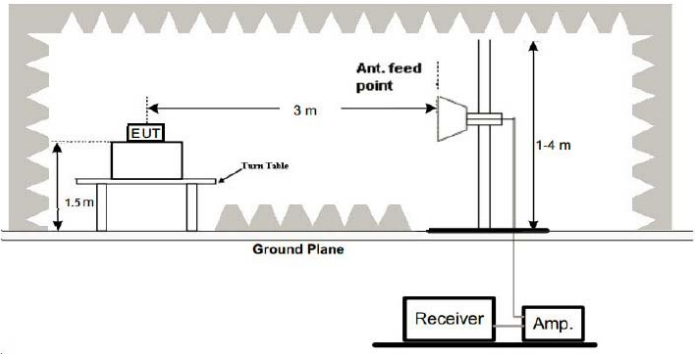Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10 2013
Limit:	(1)For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. The limit of frequency below 1GHz and which fall in restricted bands should complies 15.209.
Test Setup:	 The diagram illustrates the test setup. A Unit Under Test (EUT) is placed on a turn table at a height of 1.5 m. The turn table is positioned 3 m away from an antenna feed point. The antenna is mounted on a vertical structure with a height of 1-4 m. The entire setup is on a ground plane. A receiver and an amplifier are connected to the antenna feed point.
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi peak or average method as specified and then reported in a data sheet.
Test Result:	PASS



4.6.2. Test Instruments

Radiated Emission Test Site (966)

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Receiver	R&S	ESRP3	HKE-005	Feb. 18, 2022	Feb. 17, 2023
Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 18, 2022	Feb. 17, 2023
Preamplifier	EMCI	EMC051845S E	HKE-015	Feb. 18, 2022	Feb. 17, 2023
Preamplifier	Agilent	83051A	HKE-016	Feb. 18, 2022	Feb. 17, 2023
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Feb. 18, 2022	Feb. 17, 2023
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Feb. 18, 2022	Feb. 17, 2023
Horn antenna	Schwarzbeck	9120D	HKE-013	Feb. 18, 2022	Feb. 17, 2023
Antenna Mast	Keleto	CC-A-4M	N/A	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Feb. 18, 2022	Feb. 17, 2023
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A	N/A
Hf antenna	Schwarzbeck	LB-180400-KF	HKE-031	Feb. 18, 2022	Feb. 17, 2023
RF cable	Tonscend	1-18G	HKE-099	Feb. 18, 2022	Feb. 17, 2023
RF cable	Times	1-40G	HKE-034	Feb. 18, 2022	Feb. 17, 2023
Horn Antenna	Schwarzbeck	BBHA 9170	HKE-017	Feb. 18, 2022	Feb. 17, 2023
Spectrum analyzer	R&S	FSP40	HKE-025	Feb. 18, 2022	Feb. 17, 2023

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**4.6.3. Test Data****ANT 1**

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.31	-2.06	54.25	68.2	-13.95	peak
5700	87.18	-1.96	85.22	105.2	-19.98	peak
5720	92.23	-2.87	89.36	110.8	-21.44	peak
5725	109.07	-2.14	106.93	122.2	-15.27	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.81	-2.06	55.75	68.2	-12.45	peak
5700	85.74	-1.96	83.78	105.2	-21.42	peak
5720	93.99	-2.87	91.12	110.8	-19.68	peak
5725	109.07	-2.14	106.93	122.2	-15.27	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	108.25	-1.97	106.28	122.2	-15.92	peak
5855	91.17	-2.13	89.04	110.8	-21.76	peak
5875	87.1	-2.65	84.45	105.2	-20.75	peak
5925	51.39	-2.28	49.11	68.2	-19.09	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	102.6	-1.97	100.63	122.2	-21.57	peak
5855	93.1	-2.13	90.97	110.8	-19.83	peak
5875	85.3	-2.65	82.65	105.2	-22.55	peak
5925	53.48	-2.28	51.2	68.2	-17	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	55.16	-2.06	53.1	68.2	-15.1	peak
5700	89.25	-1.96	87.29	105.2	-17.91	peak
5720	95.5	-2.87	92.63	110.8	-18.17	peak
5725	112.83	-2.14	110.69	122.2	-11.51	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	55.96	-2.06	53.9	68.2	-14.3	peak
5700	94.74	-1.96	92.78	105.2	-12.42	peak
5720	97.17	-2.87	94.3	110.8	-16.5	peak
5725	111.06	-2.14	108.92	122.2	-13.28	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	108.26	-1.97	106.29	122.2	-15.91	peak
5855	93.7	-2.13	91.57	110.8	-19.23	peak
5875	94.07	-2.65	91.42	105.2	-13.78	peak
5925	50.96	-2.28	48.68	68.2	-19.52	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	104.75	-1.97	102.78	122.2	-19.42	peak
5855	92.9	-2.13	90.77	110.8	-20.03	peak
5875	87.71	-2.65	85.06	105.2	-20.14	peak
5925	54.69	-2.28	52.41	68.2	-15.79	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.63	-2.06	55.57	68.2	-12.63	peak
5700	92.63	-1.96	90.67	105.2	-14.53	peak
5720	92.37	-2.87	89.5	110.8	-21.3	peak
5725	110.66	-2.14	108.52	122.2	-13.68	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	59.12	-2.06	57.06	68.2	-11.14	peak
5700	92.13	-1.96	90.17	105.2	-15.03	peak
5720	94.71	-2.87	91.84	110.8	-18.96	peak
5725	110.24	-2.14	108.1	122.2	-14.1	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	103.82	-1.97	101.85	122.2	-20.35	peak
5855	92.08	-2.13	89.95	110.8	-20.85	peak
5875	87.39	-2.65	84.74	105.2	-20.46	peak
5925	52.03	-2.28	49.75	68.2	-18.45	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	106.88	-1.97	104.91	122.2	-17.29	peak
5855	92.59	-2.13	90.46	110.8	-20.34	peak
5875	88.06	-2.65	85.41	105.2	-19.79	peak
5925	54.09	-2.28	51.81	68.2	-16.39	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	55.82	-2.06	53.76	68.2	-14.44	peak
5700	85.65	-1.96	83.69	105.2	-21.51	peak
5720	93.69	-2.87	90.82	110.8	-19.98	peak
5725	110.85	-2.14	108.71	122.2	-13.49	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	55.65	-2.06	53.59	68.2	-14.61	peak
5700	90.69	-1.96	88.73	105.2	-16.47	peak
5720	94.84	-2.87	91.97	110.8	-18.83	peak
5725	109.52	-2.14	107.38	122.2	-14.82	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.2	-1.97	108.23	122.2	-13.97	peak
5855	93.29	-2.13	91.16	110.8	-19.64	peak
5875	88.93	-2.65	86.28	105.2	-18.92	peak
5925	52.34	-2.28	50.06	68.2	-18.14	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.48	-1.97	107.51	122.2	-14.69	peak
5855	94.78	-2.13	92.65	110.8	-18.15	peak
5875	85.05	-2.65	82.4	105.2	-22.8	peak
5925	53.89	-2.28	51.61	68.2	-16.59	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.29	-2.06	54.23	68.2	-13.97	peak
5700	85.82	-1.96	83.86	105.2	-21.34	peak
5720	92.23	-2.87	89.36	110.8	-21.44	peak
5725	108.38	-2.14	106.24	122.2	-15.96	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.2	-2.06	55.14	68.2	-13.06	peak
5700	88.38	-1.96	86.42	105.2	-18.78	peak
5720	92.98	-2.87	90.11	110.8	-20.69	peak
5725	111.23	-2.14	109.09	122.2	-13.11	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.58	-1.97	108.61	122.2	-13.59	peak
5855	93.61	-2.13	91.48	110.8	-19.32	peak
5875	88.25	-2.65	85.6	105.2	-19.6	peak
5925	54.56	-2.28	52.28	68.2	-15.92	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.19	-1.97	108.22	122.2	-13.98	peak
5855	91.94	-2.13	89.81	110.8	-20.99	peak
5875	88.28	-2.65	85.63	105.2	-19.57	peak
5925	59.33	-2.28	57.05	68.2	-11.15	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	55.66	-2.06	53.6	68.2	-14.6	peak
5700	88.28	-1.96	86.32	105.2	-18.88	peak
5720	93.52	-2.87	90.65	110.8	-20.15	peak
5725	109.13	-2.14	106.99	122.2	-15.21	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.4	-2.06	55.34	68.2	-12.86	peak
5700	88.3	-1.96	86.34	105.2	-18.86	peak
5720	93.16	-2.87	90.29	110.8	-20.51	peak
5725	110.54	-2.14	108.4	122.2	-13.8	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.15	-1.97	107.18	122.2	-15.02	peak
5855	94.53	-2.13	92.4	110.8	-18.4	peak
5875	87.6	-2.65	84.95	105.2	-20.25	peak
5925	49.93	-2.28	47.65	68.2	-20.55	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	107.72	-1.97	105.75	122.2	-16.45	peak
5855	94.03	-2.13	91.9	110.8	-18.9	peak
5875	89.24	-2.65	86.59	105.2	-18.61	peak
5925	53.7	-2.28	51.42	68.2	-16.78	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ax20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.44	-2.06	54.38	68.2	-13.82	peak
5700	88.92	-1.96	86.96	105.2	-18.24	peak
5720	92.6	-2.87	89.73	110.8	-21.07	peak
5725	109.33	-2.14	107.19	122.2	-15.01	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.69	-2.06	54.63	68.2	-13.57	peak
5700	91.2	-1.96	89.24	105.2	-15.96	peak
5720	94.38	-2.87	91.51	110.8	-19.29	peak
5725	109.12	-2.14	106.98	122.2	-15.22	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	108.02	-1.97	106.05	122.2	-16.15	peak
5855	94.2	-2.13	92.07	110.8	-18.73	peak
5875	86.63	-2.65	83.98	105.2	-21.22	peak
5925	55.29	-2.28	53.01	68.2	-15.19	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	107.7	-1.97	105.73	122.2	-16.47	peak
5855	92.67	-2.13	90.54	110.8	-20.26	peak
5875	89.26	-2.65	86.61	105.2	-18.59	peak
5925	54.23	-2.28	51.95	68.2	-16.25	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ax40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.85	-2.06	54.79	68.2	-13.41	peak
5700	84.79	-1.96	82.83	105.2	-22.37	peak
5720	95.1	-2.87	92.23	110.8	-18.57	peak
5725	107.61	-2.14	105.47	122.2	-16.73	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.95	-2.06	52.89	68.2	-15.31	peak
5700	87.65	-1.96	85.69	105.2	-19.51	peak
5720	92.9	-2.87	90.03	110.8	-20.77	peak
5725	110.21	-2.14	108.07	122.2	-14.13	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	111.4	-1.97	109.43	122.2	-12.77	peak
5855	95.61	-2.13	93.48	110.8	-17.32	peak
5875	87.9	-2.65	85.25	105.2	-19.95	peak
5925	53.5	-2.28	51.22	68.2	-16.98	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.49	-1.97	107.52	122.2	-14.68	peak
5855	93.97	-2.13	91.84	110.8	-18.96	peak
5875	88.6	-2.65	85.95	105.2	-19.25	peak
5925	58.67	-2.28	56.39	68.2	-11.81	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ax80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.39	-2.06	54.33	68.2	-13.87	peak
5700	87.83	-1.96	85.87	105.2	-19.33	peak
5720	92.67	-2.87	89.8	110.8	-21	peak
5725	108.12	-2.14	105.98	122.2	-16.22	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.79	-2.06	52.73	68.2	-15.47	peak
5700	91.83	-1.96	89.87	105.2	-15.33	peak
5720	94.09	-2.87	91.22	110.8	-19.58	peak
5725	109.18	-2.14	107.04	122.2	-15.16	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.43	-1.97	107.46	122.2	-14.74	peak
5855	95.36	-2.13	93.23	110.8	-17.57	peak
5875	87.39	-2.65	84.74	105.2	-20.46	peak
5925	51.97	-2.28	49.69	68.2	-18.51	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	111.01	-1.97	109.04	122.2	-13.16	peak
5855	92.13	-2.13	90	110.8	-20.8	peak
5875	89.79	-2.65	87.14	105.2	-18.06	peak
5925	56.31	-2.28	54.03	68.2	-14.17	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

**ANT 2**

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.18	-2.06	54.12	68.2	-14.08	peak
5700	90.45	-1.96	88.49	105.2	-16.71	peak
5720	93.87	-2.87	91	110.8	-19.8	peak
5725	108.66	-2.14	106.52	122.2	-15.68	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.21	-2.06	54.15	68.2	-14.05	peak
5700	88.94	-1.96	86.98	105.2	-18.22	peak
5720	94.45	-2.87	91.58	110.8	-19.22	peak
5725	108.84	-2.14	106.7	122.2	-15.5	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	107.93	-1.97	105.96	122.2	-16.24	peak
5855	95.02	-2.13	92.89	110.8	-17.91	peak
5875	86.8	-2.65	84.15	105.2	-21.05	peak
5925	56.65	-2.28	54.37	68.2	-13.83	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.35	-1.97	103.38	122.2	-18.82	peak
5855	92.9	-2.13	90.77	110.8	-20.03	peak
5875	86.03	-2.65	83.38	105.2	-21.82	peak
5925	53.06	-2.28	50.78	68.2	-17.42	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.8	-2.06	54.74	68.2	-13.46	peak
5700	90.14	-1.96	88.18	105.2	-17.02	peak
5720	94.48	-2.87	91.61	110.8	-19.19	peak
5725	109.62	-2.14	107.48	122.2	-14.72	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	58.06	-2.06	56	68.2	-12.2	peak
5700	91.23	-1.96	89.27	105.2	-15.93	peak
5720	93.8	-2.87	90.93	110.8	-19.87	peak
5725	108.4	-2.14	106.26	122.2	-15.94	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	107.99	-1.97	106.02	122.2	-16.18	peak
5855	90.87	-2.13	88.74	110.8	-22.06	peak
5875	87.15	-2.65	84.5	105.2	-20.7	peak
5925	51.2	-2.28	48.92	68.2	-19.28	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	104.51	-1.97	102.54	122.2	-19.66	peak
5855	93.5	-2.13	91.37	110.8	-19.43	peak
5875	85.95	-2.65	83.3	105.2	-21.9	peak
5925	55.65	-2.28	53.37	68.2	-14.83	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	49.35	-2.06	47.29	68.2	-20.91	peak
5700	89.81	-1.96	87.85	105.2	-17.35	peak
5720	91.49	-2.87	88.62	110.8	-22.18	peak
5725	106.78	-2.14	104.64	122.2	-17.56	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.1	-2.06	54.04	68.2	-14.16	peak
5700	93.11	-1.96	91.15	105.2	-14.05	peak
5720	93	-2.87	90.13	110.8	-20.67	peak
5725	107.73	-2.14	105.59	122.2	-16.61	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.95	-1.97	103.98	122.2	-18.22	peak
5855	92.91	-2.13	90.78	110.8	-20.02	peak
5875	88.13	-2.65	85.48	105.2	-19.72	peak
5925	53.72	-2.28	51.44	68.2	-16.76	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	106.03	-1.97	104.06	122.2	-18.14	peak
5855	93.45	-2.13	91.32	110.8	-19.48	peak
5875	87.58	-2.65	84.93	105.2	-20.27	peak
5925	51.08	-2.28	48.8	68.2	-19.4	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	59.4	-2.06	57.34	68.2	-10.86	peak
5700	88.12	-1.96	86.16	105.2	-19.04	peak
5720	94.68	-2.87	91.81	110.8	-18.99	peak
5725	109.7	-2.14	107.56	122.2	-14.64	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.22	-2.06	55.16	68.2	-13.04	peak
5700	89.18	-1.96	87.22	105.2	-17.98	peak
5720	94.72	-2.87	91.85	110.8	-18.95	peak
5725	109.56	-2.14	107.42	122.2	-14.78	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	111.04	-1.97	109.07	122.2	-13.13	peak
5855	92.72	-2.13	90.59	110.8	-20.21	peak
5875	89.22	-2.65	86.57	105.2	-18.63	peak
5925	52.12	-2.28	49.84	68.2	-18.36	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	103.98	-1.97	102.01	122.2	-20.19	peak
5855	94.28	-2.13	92.15	110.8	-18.65	peak
5875	88.75	-2.65	86.1	105.2	-19.1	peak
5925	53.19	-2.28	50.91	68.2	-17.29	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	55.5	-2.06	53.44	68.2	-14.76	peak
5700	86.44	-1.96	84.48	105.2	-20.72	peak
5720	95.64	-2.87	92.77	110.8	-18.03	peak
5725	105.86	-2.14	103.72	122.2	-18.48	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.68	-2.06	54.62	68.2	-13.58	peak
5700	91.53	-1.96	89.57	105.2	-15.63	peak
5720	95.81	-2.87	92.94	110.8	-17.86	peak
5725	110.4	-2.14	108.26	122.2	-13.94	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	108.22	-1.97	106.25	122.2	-15.95	peak
5855	91.95	-2.13	89.82	110.8	-20.98	peak
5875	86.84	-2.65	84.19	105.2	-21.01	peak
5925	52.68	-2.28	50.4	68.2	-17.8	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.31	-1.97	108.34	122.2	-13.86	peak
5855	92.62	-2.13	90.49	110.8	-20.31	peak
5875	84.79	-2.65	82.14	105.2	-23.06	peak
5925	56.95	-2.28	54.67	68.2	-13.53	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.38	-2.06	49.32	68.2	-18.88	peak
5700	86.37	-1.96	84.41	105.2	-20.79	peak
5720	93.76	-2.87	90.89	110.8	-19.91	peak
5725	108.36	-2.14	106.22	122.2	-15.98	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	59.32	-2.06	57.26	68.2	-10.94	peak
5700	88.61	-1.96	86.65	105.2	-18.55	peak
5720	92.84	-2.87	89.97	110.8	-20.83	peak
5725	109.38	-2.14	107.24	122.2	-14.96	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.8	-1.97	107.83	122.2	-14.37	peak
5855	93.26	-2.13	91.13	110.8	-19.67	peak
5875	91.68	-2.65	89.03	105.2	-16.17	peak
5925	52.55	-2.28	50.27	68.2	-17.93	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	107.29	-1.97	105.32	122.2	-16.88	peak
5855	91.22	-2.13	89.09	110.8	-21.71	peak
5875	89.2	-2.65	86.55	105.2	-18.65	peak
5925	54.94	-2.28	52.66	68.2	-15.54	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ax20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	58.27	-2.06	56.21	68.2	-11.99	peak
5700	88.26	-1.96	86.3	105.2	-18.9	peak
5720	91.66	-2.87	88.79	110.8	-22.01	peak
5725	110.91	-2.14	108.77	122.2	-13.43	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	58.82	-2.06	56.76	68.2	-11.44	peak
5700	90.5	-1.96	88.54	105.2	-16.66	peak
5720	94.14	-2.87	91.27	110.8	-19.53	peak
5725	109.04	-2.14	106.9	122.2	-15.3	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	107	-1.97	105.03	122.2	-17.17	peak
5855	92.53	-2.13	90.4	110.8	-20.4	peak
5875	90.45	-2.65	87.8	105.2	-17.4	peak
5925	53.88	-2.28	51.6	68.2	-16.6	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	104.57	-1.97	102.6	122.2	-19.6	peak
5855	96.2	-2.13	94.07	110.8	-16.73	peak
5875	91.49	-2.65	88.84	105.2	-16.36	peak
5925	53.24	-2.28	50.96	68.2	-17.24	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ax40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	53.24	-2.06	51.18	68.2	-17.02	peak
5700	88.17	-1.96	86.21	105.2	-18.99	peak
5720	94.3	-2.87	91.43	110.8	-19.37	peak
5725	105.78	-2.14	103.64	122.2	-18.56	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	58.1	-2.06	56.04	68.2	-12.16	peak
5700	89.79	-1.96	87.83	105.2	-17.37	peak
5720	93.73	-2.87	90.86	110.8	-19.94	peak
5725	109.36	-2.14	107.22	122.2	-14.98	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.19	-1.97	103.22	122.2	-18.98	peak
5855	93.61	-2.13	91.48	110.8	-19.32	peak
5875	86.06	-2.65	83.41	105.2	-21.79	peak
5925	52.52	-2.28	50.24	68.2	-17.96	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.03	-1.97	108.06	122.2	-14.14	peak
5855	92.4	-2.13	90.27	110.8	-20.53	peak
5875	86.26	-2.65	83.61	105.2	-21.59	peak
5925	53.49	-2.28	51.21	68.2	-16.99	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ax80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	53.43	-2.06	51.37	68.2	-16.83	peak
5700	88.81	-1.96	86.85	105.2	-18.35	peak
5720	92.35	-2.87	89.48	110.8	-21.32	peak
5725	109.3	-2.14	107.16	122.2	-15.04	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	58.9	-2.06	56.84	68.2	-11.36	peak
5700	88.75	-1.96	86.79	105.2	-18.41	peak
5720	94.64	-2.87	91.77	110.8	-19.03	peak
5725	110.53	-2.14	108.39	122.2	-13.81	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.76	-1.97	103.79	122.2	-18.41	peak
5855	94.26	-2.13	92.13	110.8	-18.67	peak
5875	91.37	-2.65	88.72	105.2	-16.48	peak
5925	50.99	-2.28	48.71	68.2	-19.49	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	107.38	-1.97	105.41	122.2	-16.79	peak
5855	91.56	-2.13	89.43	110.8	-21.37	peak
5875	88.79	-2.65	86.14	105.2	-19.06	peak
5925	53.28	-2.28	51	68.2	-17.2	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

**MIMO**

Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5650	56.71	-2.06	54.65	68.2	-13.55	
5700	90.51	-1.96	88.55	105.2	-16.65	peak
5720	94.62	-2.87	91.75	110.8	-19.05	peak
5725	111.81	-2.14	109.67	122.2	-12.53	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5650	61.62	-2.06	59.56	68.2	-8.64	
5700	94.83	-1.96	92.87	105.2	-12.33	peak
5720	97.38	-2.87	94.51	110.8	-16.29	peak
5725	111.51	-2.14	109.37	122.2	-12.83	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.56	-1.97	107.59	122.2	-14.61	peak
5855	93.97	-2.13	91.84	110.8	-18.96	peak
5875	87	-2.65	84.35	105.2	-20.85	peak
5925	53.19	-2.28	50.91	68.2	-17.29	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	104.9	-1.97	102.93	122.2	-19.27	peak
5855	92.75	-2.13	90.62	110.8	-20.18	peak
5875	86.09	-2.65	83.44	105.2	-21.76	peak
5925	57.15	-2.28	54.87	68.2	-13.33	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	55.16	-2.06	53.1	68.2	-15.1	peak
5700	92.34	-1.96	90.38	105.2	-14.82	peak
5720	90.87	-2.87	88	110.8	-22.8	peak
5725	110.85	-2.14	108.71	122.2	-13.49	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.44	-2.06	55.38	68.2	-12.82	peak
5700	94.14	-1.96	92.18	105.2	-13.02	peak
5720	94.56	-2.87	91.69	110.8	-19.11	peak
5725	110.02	-2.14	107.88	122.2	-14.32	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	103.92	-1.97	101.95	122.2	-20.25	peak
5855	91.08	-2.13	88.95	110.8	-21.85	peak
5875	85.77	-2.65	83.12	105.2	-22.08	peak
5925	53.7	-2.28	51.42	68.2	-16.78	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	107.64	-1.97	105.67	122.2	-16.53	peak
5855	93.43	-2.13	91.3	110.8	-19.5	peak
5875	86.58	-2.65	83.93	105.2	-21.27	peak
5925	52.72	-2.28	50.44	68.2	-17.76	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.68	-2.06	54.62	68.2	-13.58	peak
5700	87.21	-1.96	85.25	105.2	-19.95	peak
5720	93.87	-2.87	91	110.8	-19.8	peak
5725	109.09	-2.14	106.95	122.2	-15.25	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.36	-2.06	55.3	68.2	-12.9	peak
5700	91.44	-1.96	89.48	105.2	-15.72	peak
5720	93.25	-2.87	90.38	110.8	-20.42	peak
5725	108.29	-2.14	106.15	122.2	-16.05	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	108.89	-1.97	106.92	122.2	-15.28	peak
5855	94.55	-2.13	92.42	110.8	-18.38	peak
5875	89.52	-2.65	86.87	105.2	-18.33	peak
5925	52.73	-2.28	50.45	68.2	-17.75	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.35	-1.97	108.38	122.2	-13.82	peak
5855	95.29	-2.13	93.16	110.8	-17.64	peak
5875	87.75	-2.65	85.1	105.2	-20.1	peak
5925	54.86	-2.28	52.58	68.2	-15.62	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.16	-2.06	55.1	68.2	-13.1	peak
5700	87.39	-1.96	85.43	105.2	-19.77	peak
5720	91.91	-2.87	89.04	110.8	-21.76	peak
5725	109.97	-2.14	107.83	122.2	-14.37	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	58.92	-2.06	56.86	68.2	-11.34	peak
5700	86.93	-1.96	84.97	105.2	-20.23	peak
5720	92.89	-2.87	90.02	110.8	-20.78	peak
5725	110.41	-2.14	108.27	122.2	-13.93	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.25	-1.97	108.28	122.2	-13.92	peak
5855	91.91	-2.13	89.78	110.8	-21.02	peak
5875	89.04	-2.65	86.39	105.2	-18.81	peak
5925	52.52	-2.28	50.24	68.2	-17.96	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	111.91	-1.97	109.94	122.2	-12.26	peak
5855	93.03	-2.13	90.9	110.8	-19.9	peak
5875	87.96	-2.65	85.31	105.2	-19.89	peak
5925	59.96	-2.28	57.68	68.2	-10.52	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.02	-2.06	53.96	68.2	-14.24	peak
5700	87.22	-1.96	85.26	105.2	-19.94	peak
5720	96.23	-2.87	93.36	110.8	-17.44	peak
5725	110.58	-2.14	108.44	122.2	-13.76	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	55.53	-2.06	53.47	68.2	-14.73	peak
5700	91.89	-1.96	89.93	105.2	-15.27	peak
5720	94.63	-2.87	91.76	110.8	-19.04	peak
5725	110.72	-2.14	108.58	122.2	-13.62	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.74	-1.97	107.77	122.2	-14.43	peak
5855	94.33	-2.13	92.2	110.8	-18.6	peak
5875	89.98	-2.65	87.33	105.2	-17.87	peak
5925	49.41	-2.28	47.13	68.2	-21.07	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.32	-1.97	107.35	122.2	-14.85	peak
5855	93.28	-2.13	91.15	110.8	-19.65	peak
5875	89.04	-2.65	86.39	105.2	-18.81	peak
5925	54.37	-2.28	52.09	68.2	-16.11	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ax20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.35	-2.06	55.29	68.2	-12.91	peak
5700	86.94	-1.96	84.98	105.2	-20.22	peak
5720	96.19	-2.87	93.32	110.8	-17.48	peak
5725	109.43	-2.14	107.29	122.2	-14.91	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.75	-2.06	55.69	68.2	-12.51	peak
5700	91.02	-1.96	89.06	105.2	-16.14	peak
5720	93.23	-2.87	90.36	110.8	-20.44	peak
5725	107.17	-2.14	105.03	122.2	-17.17	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.37	-1.97	107.4	122.2	-14.8	peak
5855	92.7	-2.13	90.57	110.8	-20.23	peak
5875	87.61	-2.65	84.96	105.2	-20.24	peak
5925	51.87	-2.28	49.59	68.2	-18.61	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.24	-1.97	107.27	122.2	-14.93	peak
5855	95.54	-2.13	93.41	110.8	-17.39	peak
5875	84.89	-2.65	82.24	105.2	-22.96	peak
5925	56.1	-2.28	53.82	68.2	-14.38	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ax40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.4	-2.06	54.34	68.2	-13.86	peak
5700	86.44	-1.96	84.48	105.2	-20.72	peak
5720	95.49	-2.87	92.62	110.8	-18.18	peak
5725	108.37	-2.14	106.23	122.2	-15.97	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.74	-2.06	54.68	68.2	-13.52	peak
5700	88.58	-1.96	86.62	105.2	-18.58	peak
5720	92.12	-2.87	89.25	110.8	-21.55	peak
5725	109.49	-2.14	107.35	122.2	-14.85	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.47	-1.97	107.5	122.2	-14.7	peak
5855	92.81	-2.13	90.68	110.8	-20.12	peak
5875	87.07	-2.65	84.42	105.2	-20.78	peak
5925	53.7	-2.28	51.42	68.2	-16.78	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	112.96	-1.97	110.99	122.2	-11.21	peak
5855	93.63	-2.13	91.5	110.8	-19.3	peak
5875	89.28	-2.65	86.63	105.2	-18.57	peak
5925	59.44	-2.28	57.16	68.2	-11.04	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: 802.11ax80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.21	-2.06	55.15	68.2	-13.05	peak
5700	88.97	-1.96	87.01	105.2	-18.19	peak
5720	96.61	-2.87	93.74	110.8	-17.06	peak
5725	109.95	-2.14	107.81	122.2	-14.39	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.59	-2.06	54.53	68.2	-13.67	peak
5700	91.95	-1.96	89.99	105.2	-15.21	peak
5720	93.89	-2.87	91.02	110.8	-19.78	peak
5725	110.65	-2.14	108.51	122.2	-13.69	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	110.06	-1.97	108.09	122.2	-14.11	peak
5855	95.6	-2.13	93.47	110.8	-17.33	peak
5875	87.32	-2.65	84.67	105.2	-20.53	peak
5925	50.43	-2.28	48.15	68.2	-20.05	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.5	-1.97	107.53	122.2	-14.67	peak
5855	94.8	-2.13	92.67	110.8	-18.13	peak
5875	87.89	-2.65	85.24	105.2	-19.96	peak
5925	55.65	-2.28	53.37	68.2	-14.83	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						




4.7. SPURIOUS EMISSION

4.7.1.1. Test Specification

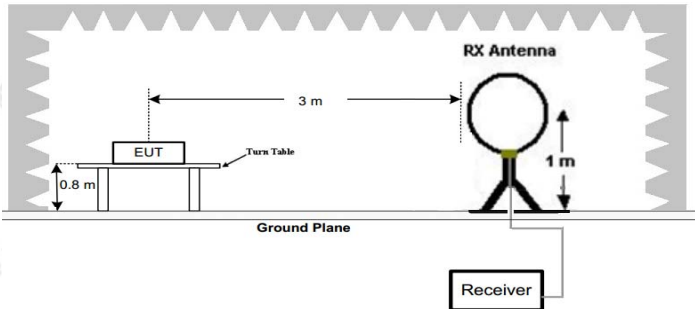Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
Test Method:	KDB 789033 D02 v02r01				
Frequency Range:	9kHz to 40GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. The limit of frequency below 1GHz and which fall in restricted bands should comply 15.209.				
Test setup:	For radiated emissions below 30MHz  30MHz to 1GHz				

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

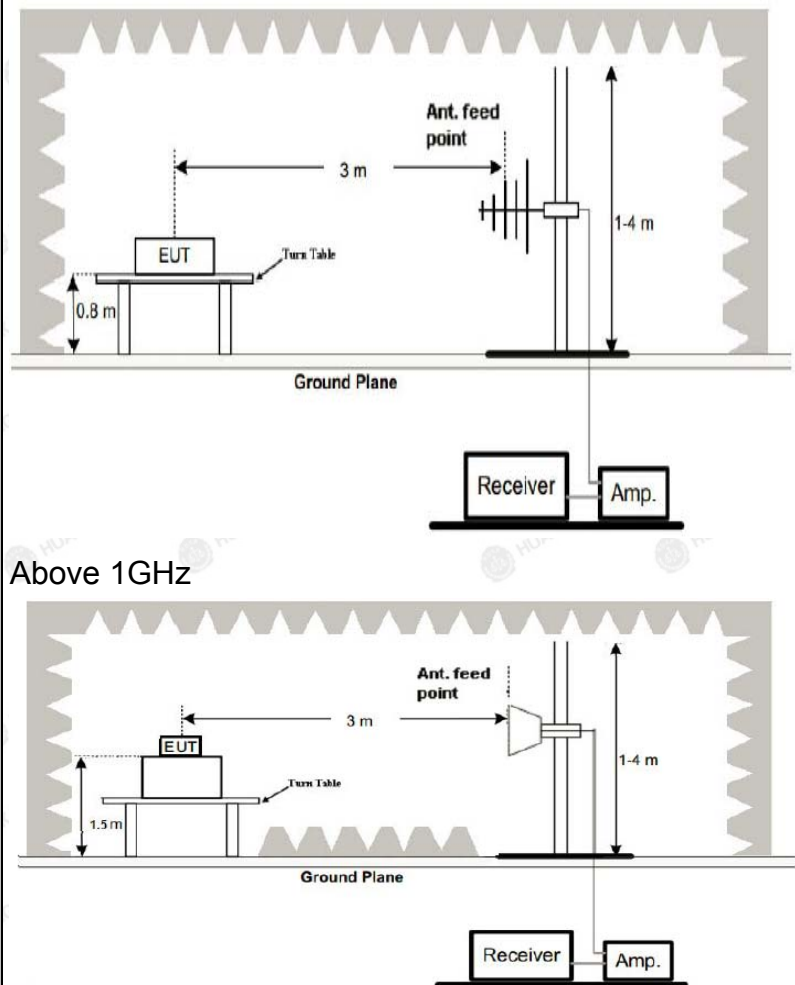**Test Procedure:**

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would bere-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test results:	PASS




4.7.2. Test Data

test mode: TX 802.11a 5745MHz

All the test modes completed for test. The worst case of Radiated Emission; the test data of this mode was reported.

Below 1GHz

Horizontal

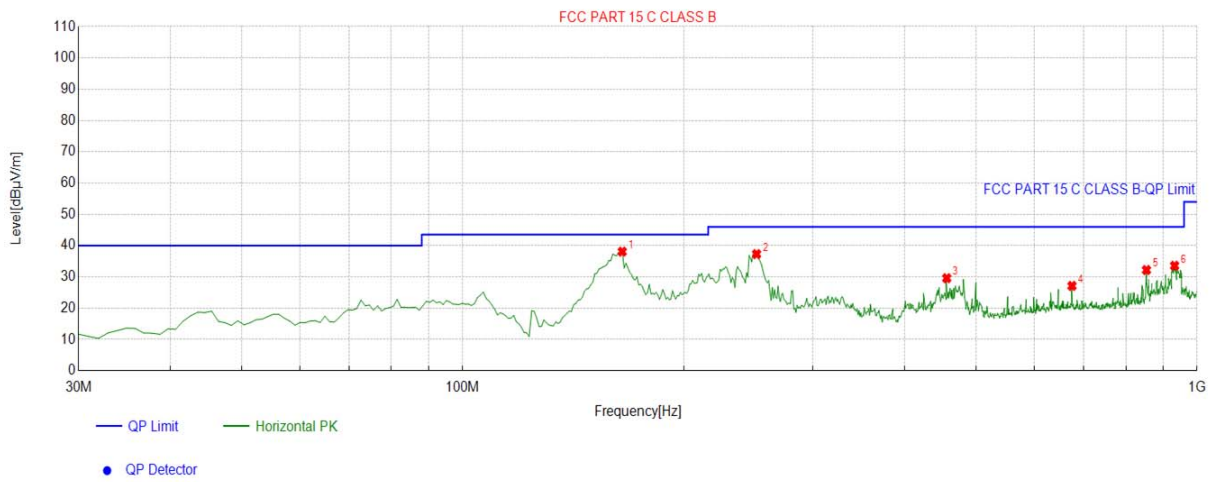


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	164.9650	-17.19	55.26	38.07	43.50	5.43	100	238	Horizontal
2	251.3814	-12.81	50.09	37.28	46.00	8.72	100	156	Horizontal
3	456.2563	-7.97	37.54	29.57	46.00	16.43	100	338	Horizontal
4	675.6957	-3.82	30.93	27.11	46.00	18.89	100	238	Horizontal
5	853.3834	-1.05	33.24	32.19	46.00	13.81	100	143	Horizontal
6	932.0320	-0.25	33.81	33.56	46.00	12.44	100	117	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Vertical

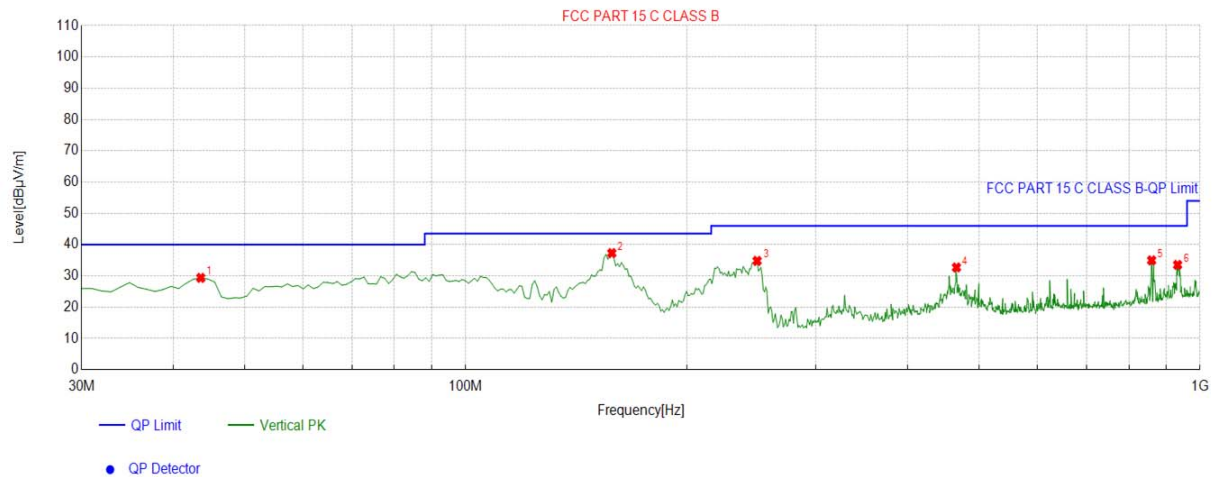

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.5936	-14.98	44.33	29.35	40.00	10.65	100	181	Vertical
2	158.1682	-17.48	54.75	37.27	43.50	6.23	100	173	Vertical
3	249.4394	-12.84	47.63	34.79	46.00	11.21	100	294	Vertical
4	465.9660	-7.71	40.40	32.69	46.00	13.31	100	254	Vertical
5	859.2092	-0.97	35.93	34.96	46.00	11.04	100	138	Vertical
6	932.0320	-0.25	33.77	33.52	46.00	12.48	100	166	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Harmonics and Spurious Emissions

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement



Above 1GHz

RADIATED EMISSION TEST

LOW CH 149 (802.11 a Mode with 5.8G)/5745

All modes of operation were investigated and the worst-case of Ant 1 are reported.

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	52.94	-4.59	48.35	68.2	-19.85	peak
11096	49.6	4.21	53.81	74	-20.19	peak
11096	37.75	4.21	41.96	54	-12.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	59.37	-4.59	54.78	68.2	-13.42	peak
11096	54.83	4.21	59.04	74	-14.96	peak
11096	35.01	4.21	39.22	54	-14.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH157 (802.11 a Mode with 5.8G)/5785

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	58.2	-4.59	53.61	68.2	-14.59	peak
10523	52.63	4.21	56.84	68.2	-11.36	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	55.65	-4.59	51.06	68.2	-17.14	peak
10523	53.18	4.21	57.39	68.2	-10.81	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH 165 (802.11a Mode with 5.8G)/5825

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	59.15	-4.59	54.56	74	-19.44	peak
2705	47.36	-4.59	42.77	54	-11.23	AVG
11717	54.28	4.84	59.12	74	-14.88	peak
11717	37.68	4.84	42.52	54	-11.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	57.15	-4.59	52.56	74	-21.44	peak
2705	45.44	-4.59	40.85	54	-13.15	AVG
11717	50.78	4.84	55.62	74	-18.38	peak
11717	40.13	4.84	44.97	54	-9.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



5.8G 802.11n20 Mode

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 149

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	60	-4.59	55.41	68.2	-12.79	peak
11096	55.69	4.21	59.9	74	-14.1	peak
11096	39.88	4.21	44.09	54	-9.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	61.05	-4.59	56.46	68.2	-11.74	peak
11096	54.38	4.21	58.59	74	-15.41	peak
11096	35.48	4.21	39.69	54	-14.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH157

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	63.07	-4.59	58.48	68.2	-9.72	peak
10523	53.5	4.21	57.71	68.2	-10.49	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	57.53	-4.59	52.94	68.2	-15.26	peak
10523	54.7	4.21	58.91	68.2	-9.29	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH165

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	59.93	-4.59	55.34	74	-18.66	peak
2705	48.48	-4.59	43.89	54	-10.11	AVG
11717	53.38	4.84	58.22	74	-15.78	peak
11717	38.85	4.84	43.69	54	-10.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	59.58	-4.59	54.99	74	-19.01	peak
2705	46.84	-4.59	42.25	54	-11.75	AVG
11717	50.89	4.84	55.73	74	-18.27	peak
11717	36.31	4.84	41.15	54	-12.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**5.8G 802.11n40 Mode**

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 151**Horizontal:**

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	63.69	-4.59	59.1	68.2	-9.1	peak
11096	58.74	4.21	62.95	74	-11.05	peak
11096	37.51	4.21	41.72	54	-12.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	63.46	-4.59	58.87	68.2	-9.33	peak
11096	55.31	4.21	59.52	74	-14.48	peak
11096	36.33	4.21	40.54	54	-13.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH159

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	63.77	-4.59	59.18	68.2	-9.02	peak
10523	53.67	4.21	57.88	68.2	-10.32	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	57.03	-4.59	52.44	68.2	-15.76	peak
10523	50.01	4.21	54.22	68.2	-13.98	peak

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



5.8G 802.11ac20 Mode

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 149

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	60.68	-4.59	56.09	68.2	-12.11	peak
11096	51.44	4.21	55.65	74	-18.35	peak
11096	38.23	4.21	42.44	54	-11.56	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	59.67	-4.59	55.08	68.2	-13.12	peak
11096	56.5	4.21	60.71	74	-13.29	peak
11096	37.23	4.21	41.44	54	-12.56	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH157

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	61.15	-4.59	56.56	68.2	-11.64	peak
10523	52.33	4.21	56.54	68.2	-11.66	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	58.4	-4.59	53.81	68.2	-14.39	peak
10523	52.01	4.21	56.22	68.2	-11.98	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH165

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	59.52	-4.59	54.93	74	-19.07	peak
2705	50.17	-4.59	45.58	54	-8.42	AVG
11717	55.03	4.84	59.87	74	-14.13	peak
11717	38.65	4.84	43.49	54	-10.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	58.75	-4.59	54.16	74	-19.84	peak
2705	46.26	-4.59	41.67	54	-12.33	AVG
11717	52.25	4.84	57.09	74	-16.91	peak
11717	34.95	4.84	39.79	54	-14.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**5.8G 802.11ac40 Mode**

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 151**Horizontal:**

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	61.71	-4.59	57.12	68.2	-11.08	peak
11096	56.6	4.21	60.81	74	-13.19	peak
11096	36.55	4.21	40.76	54	-13.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	64.19	-4.59	59.6	68.2	-8.6	peak
11096	55.73	4.21	59.94	74	-14.06	peak
11096	38.87	4.21	43.08	54	-10.92	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



5.8G 802.11ac80 Mode

All modes of operation were investigated and the worst-case of MIMO are reported.

CH 155

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	57.88	-4.59	53.29	68.2	-14.91	peak
11096	53.4	4.21	57.61	74	-16.39	peak
11096	36.75	4.21	40.96	54	-13.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	61.41	-4.59	56.82	68.2	-11.38	peak
11096	54.55	4.21	58.76	74	-15.24	peak
11096	37.52	4.21	41.73	54	-12.27	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



5.8G 802.11ax20 Mode

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 149

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	59.68	-4.59	55.09	68.2	-13.11	peak
11096	50.77	4.21	54.98	74	-19.02	peak
11096	36.91	4.21	41.12	54	-12.88	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	60.86	-4.59	56.27	68.2	-11.93	peak
11096	56.67	4.21	60.88	74	-13.12	peak
11096	37.79	4.21	42	54	-12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH157

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	61.07	-4.59	56.48	68.2	-11.72	peak
10523	52.75	4.21	56.96	68.2	-11.24	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	58.8	-4.59	54.21	68.2	-13.99	peak
10523	53.16	4.21	57.37	68.2	-10.83	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH165

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	59.73	-4.59	55.14	74	-18.86	peak
2705	48.92	-4.59	44.33	54	-9.67	AVG
11717	56.56	4.84	61.4	74	-12.6	peak
11717	37.89	4.84	42.73	54	-11.27	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	59.22	-4.59	54.63	74	-19.37	peak
2705	46.23	-4.59	41.64	54	-12.36	AVG
11717	51.1	4.84	55.94	74	-18.06	peak
11717	36.14	4.84	40.98	54	-13.02	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**5.8G 802.11ax40 Mode**

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 151**Horizontal:**

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	61.26	-4.59	56.67	68.2	-11.53	peak
11096	60.16	4.21	64.37	74	-9.63	peak
11096	35.5	4.21	39.71	54	-14.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	62.8	-4.59	58.21	68.2	-9.99	peak
11096	57.29	4.21	61.5	74	-12.5	peak
11096	37.27	4.21	41.48	54	-12.52	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH159

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3172	61.74	-4.59	57.15	68.2	-11.05	peak
10523	51.54	4.21	55.75	68.2	-12.45	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3172	58.87	-4.59	54.28	68.2	-13.92	peak
10523	51.1	4.21	55.31	68.2	-12.89	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



MID CH159

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3172	62.41	-4.59	57.82	68.2	-10.38	peak
10523	53.83	4.21	58.04	68.2	-10.16	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3172	58.8	-4.59	54.21	68.2	-13.99	peak
10523	51.22	4.21	55.43	68.2	-12.77	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) <54 dB μ V/m(AV Limit), the Average Detected not need to completed.



5.8G 802.11ax80 Mode

All modes of operation were investigated and the worst-case of MIMO are reported.

CH 155

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	59.57	-4.59	54.98	68.2	-13.22	peak
11096	54.21	4.21	58.42	74	-15.58	peak
11096	36.39	4.21	40.6	54	-13.4	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	59.49	-4.59	54.9	68.2	-13.3	peak
11096	54.86	4.21	59.07	74	-14.93	peak
11096	39.38	4.21	43.59	54	-10.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



4.8. FREQUENCY STABILITY MEASUREMENT

4.8.1. Test Specification

Test Requirement:	FCC Part15 Section 15.407(g)
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	<pre>graph LR; SA[Spectrum Analyzer] --- EUT[EUT]; EUT --- P[AC/DC Power supply]; EUT --- TC[Temperature Chamber]; P --- TC;</pre>
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	N/A

**Test Result as follows:**

Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	10.2V	5744.974	-26	5825.002	2
	12V	5745.023	23	5824.958	-42
	13.8V	5744.974	-26	5824.961	-39

Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	-30	5744.974	-26	5825.051	51
	-20	5745.016	16	5825.042	42
	-10	5744.959	-41	5824.991	-9
	0	5744.971	-29	5824.969	-31
	10	5744.956	-44	5825.013	13
	20	5745.013	13	5824.984	-16
	30	5744.968	-32	5824.980	-20
	40	5744.987	-13	5824.982	-18
	50	5744.953	-47	5825.042	42



4.9. ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a External Antenna, which have non-standard antenna jack. It conforms to the standard requirements. and the best case gain of the antenna is Antenna port 1: 5dBi and Antenna port 2: 5dBi



ANTENNA

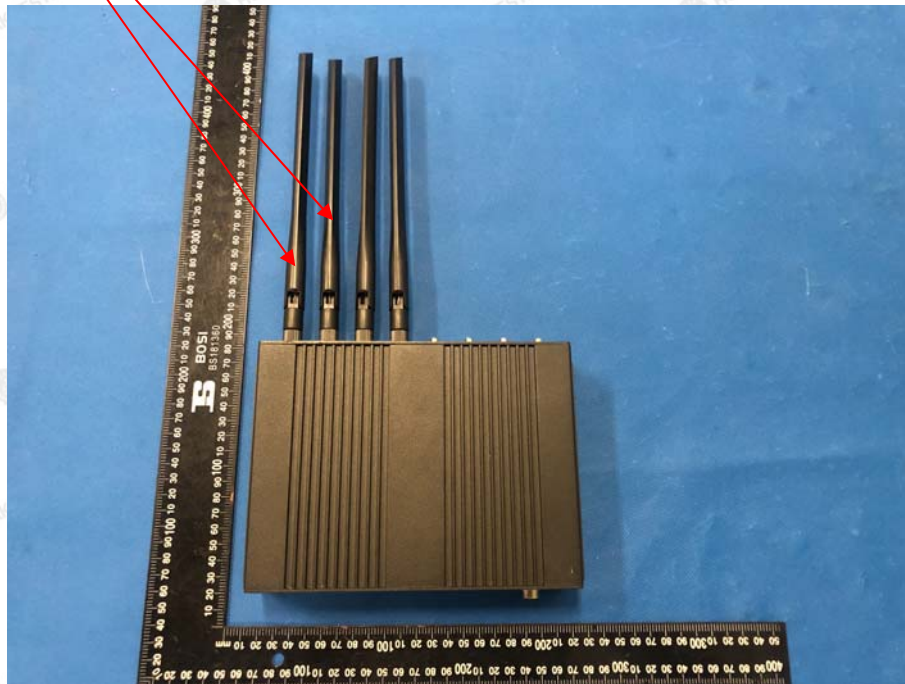




5. PHOTOGRAPHS OF TEST SETUP

Radiated Emission

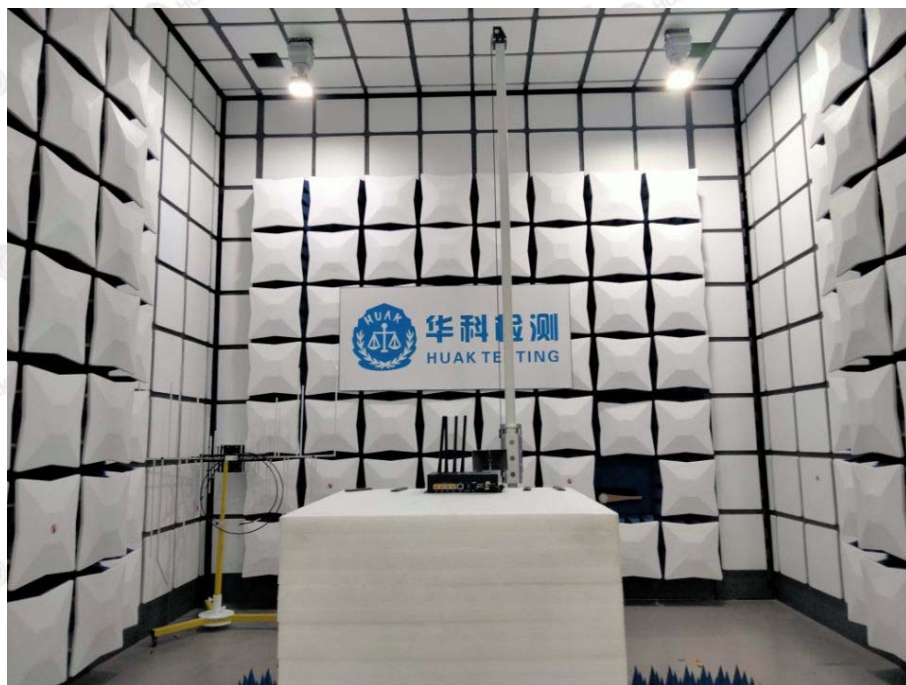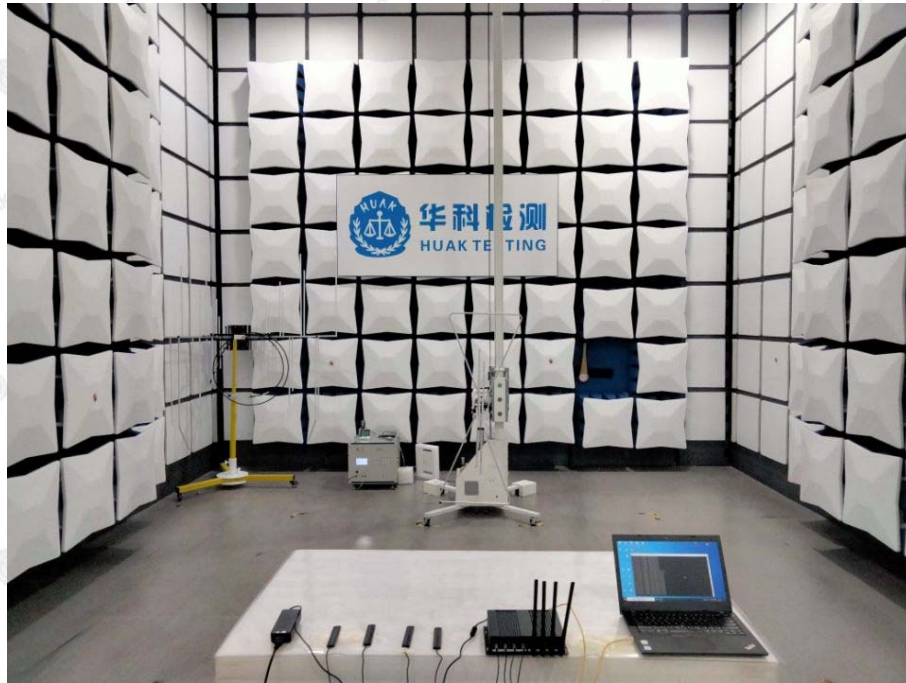



Conducted Emission

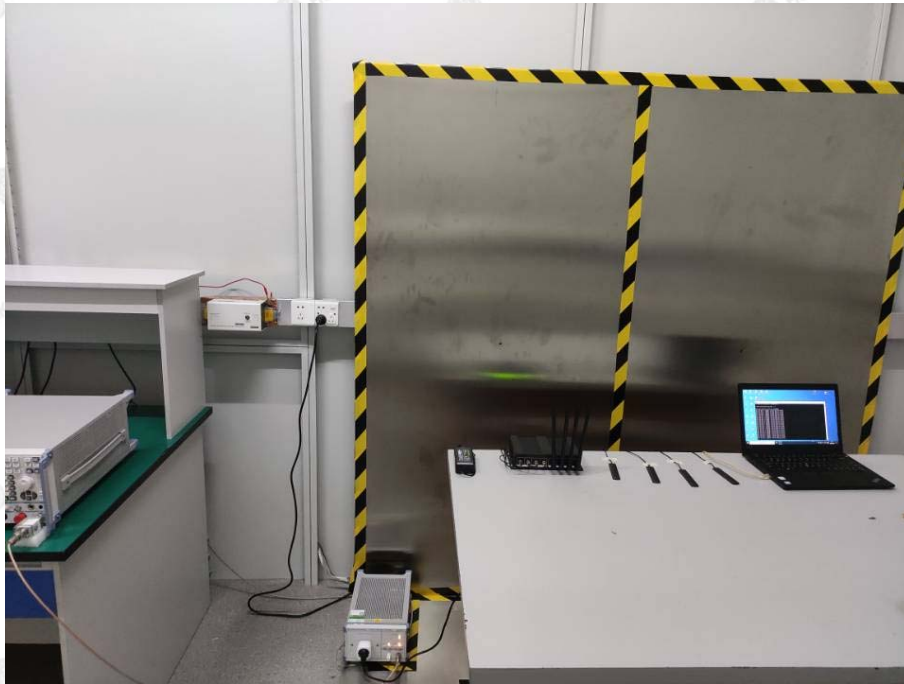

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



6. PHOTOS OF THE EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos

-----End of test report-----