

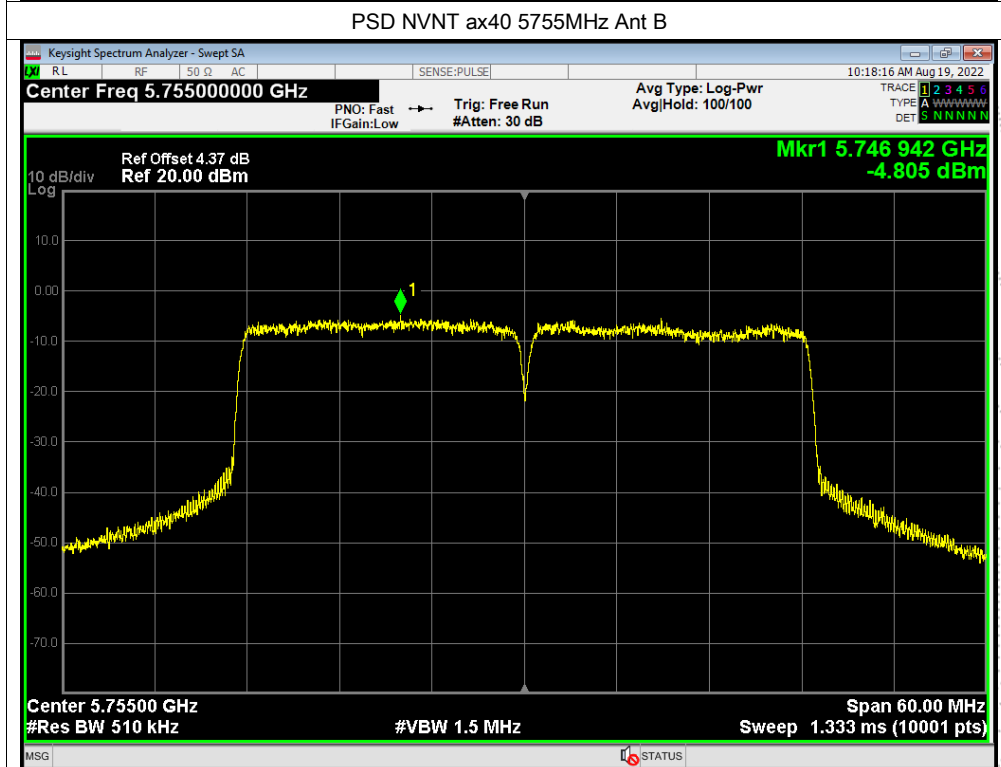
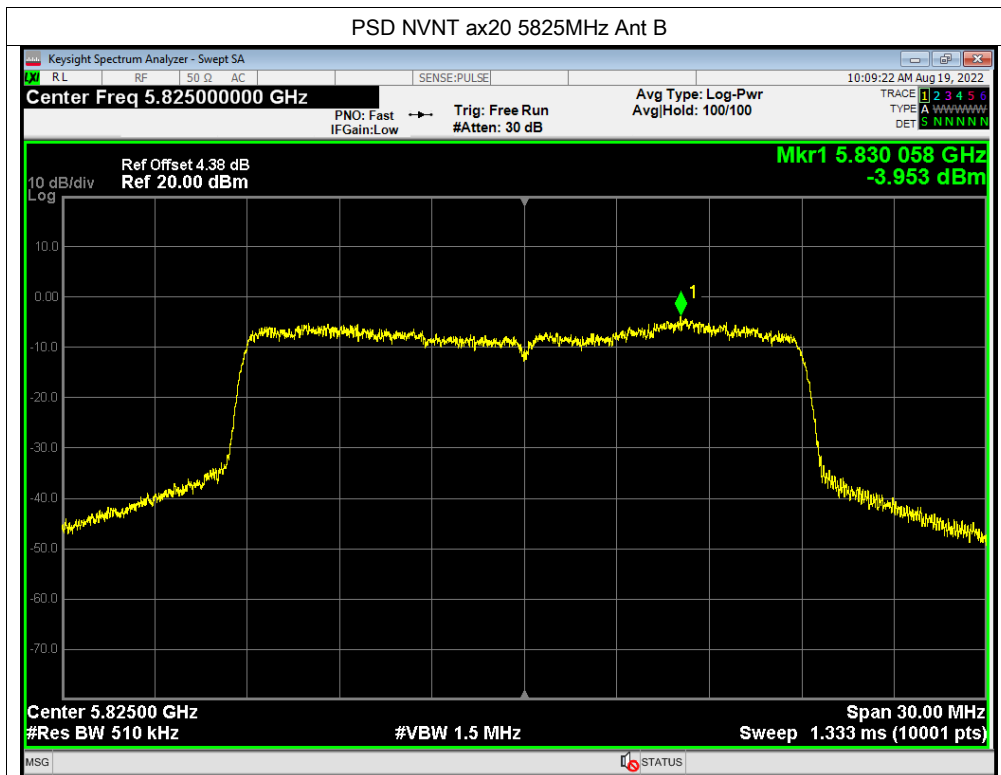


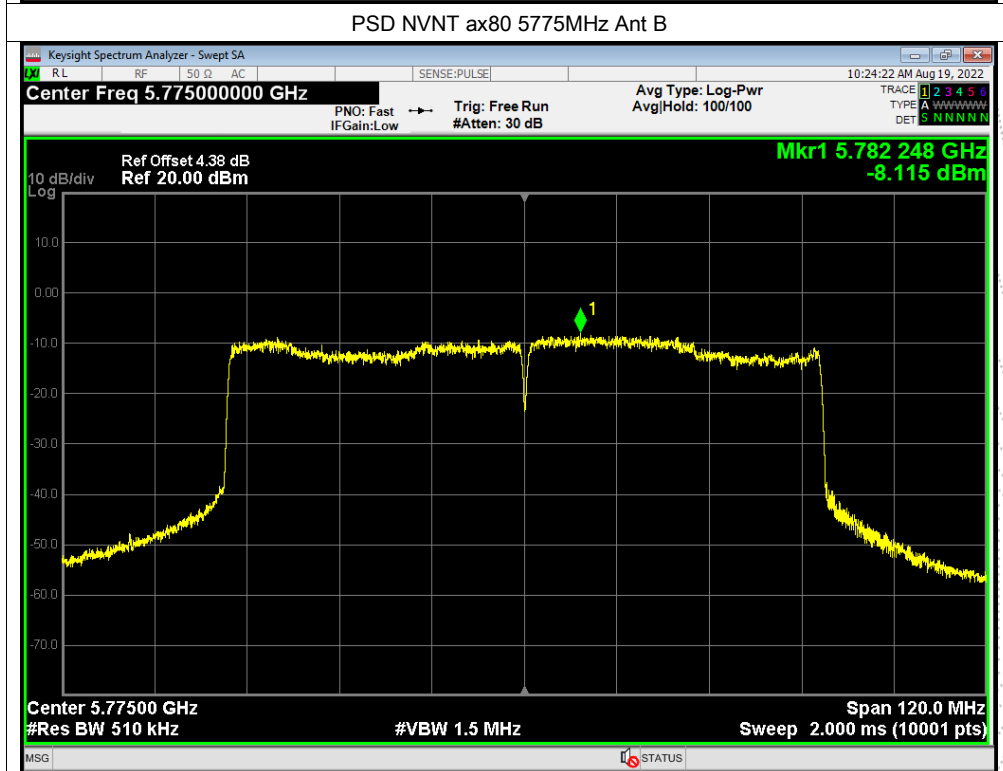



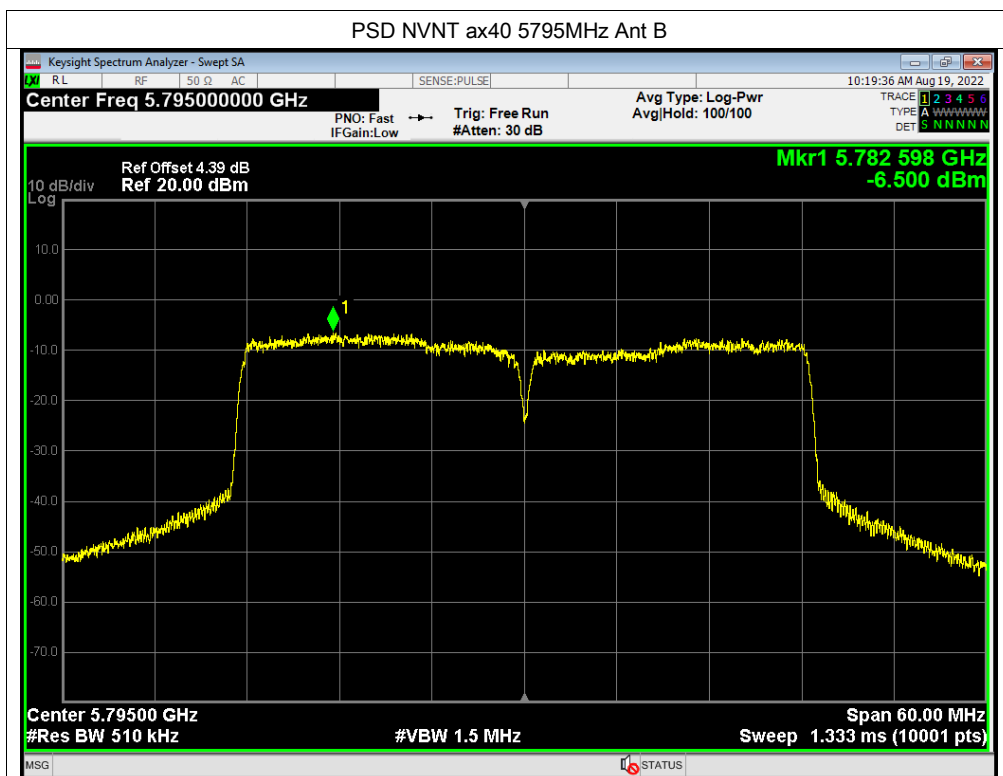




Antenna C



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	(5745-5825MHz)		



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	-1.67	30	Pass
NVNT	a	5785	-1.23	30	Pass
NVNT	a	5825	-1.75	30	Pass
NVNT	n20	5745	-1.91	30	Pass
NVNT	n20	5785	-0.99	30	Pass
NVNT	n20	5825	-1.23	30	Pass
NVNT	n40	5755	-5.87	30	Pass
NVNT	n40	5795	-7.78	30	Pass
NVNT	ac20	5745	-2.41	30	Pass
NVNT	ac20	5785	-4.56	30	Pass
NVNT	ac20	5825	-2.25	30	Pass
NVNT	ac40	5755	-5.57	30	Pass
NVNT	ac40	5795	-4.87	30	Pass
NVNT	ac80	5775	-10.07	30	Pass
NVNT	ax20	5745	-4.08	30	Pass
NVNT	ax20	5785	-4.26	30	Pass
NVNT	ax20	5825	-4.90	30	Pass
NVNT	ax40	5755	-6.73	30	Pass
NVNT	ax40	5795	-5.23	30	Pass
NVNT	ax80	5775	-8.33	30	Pass


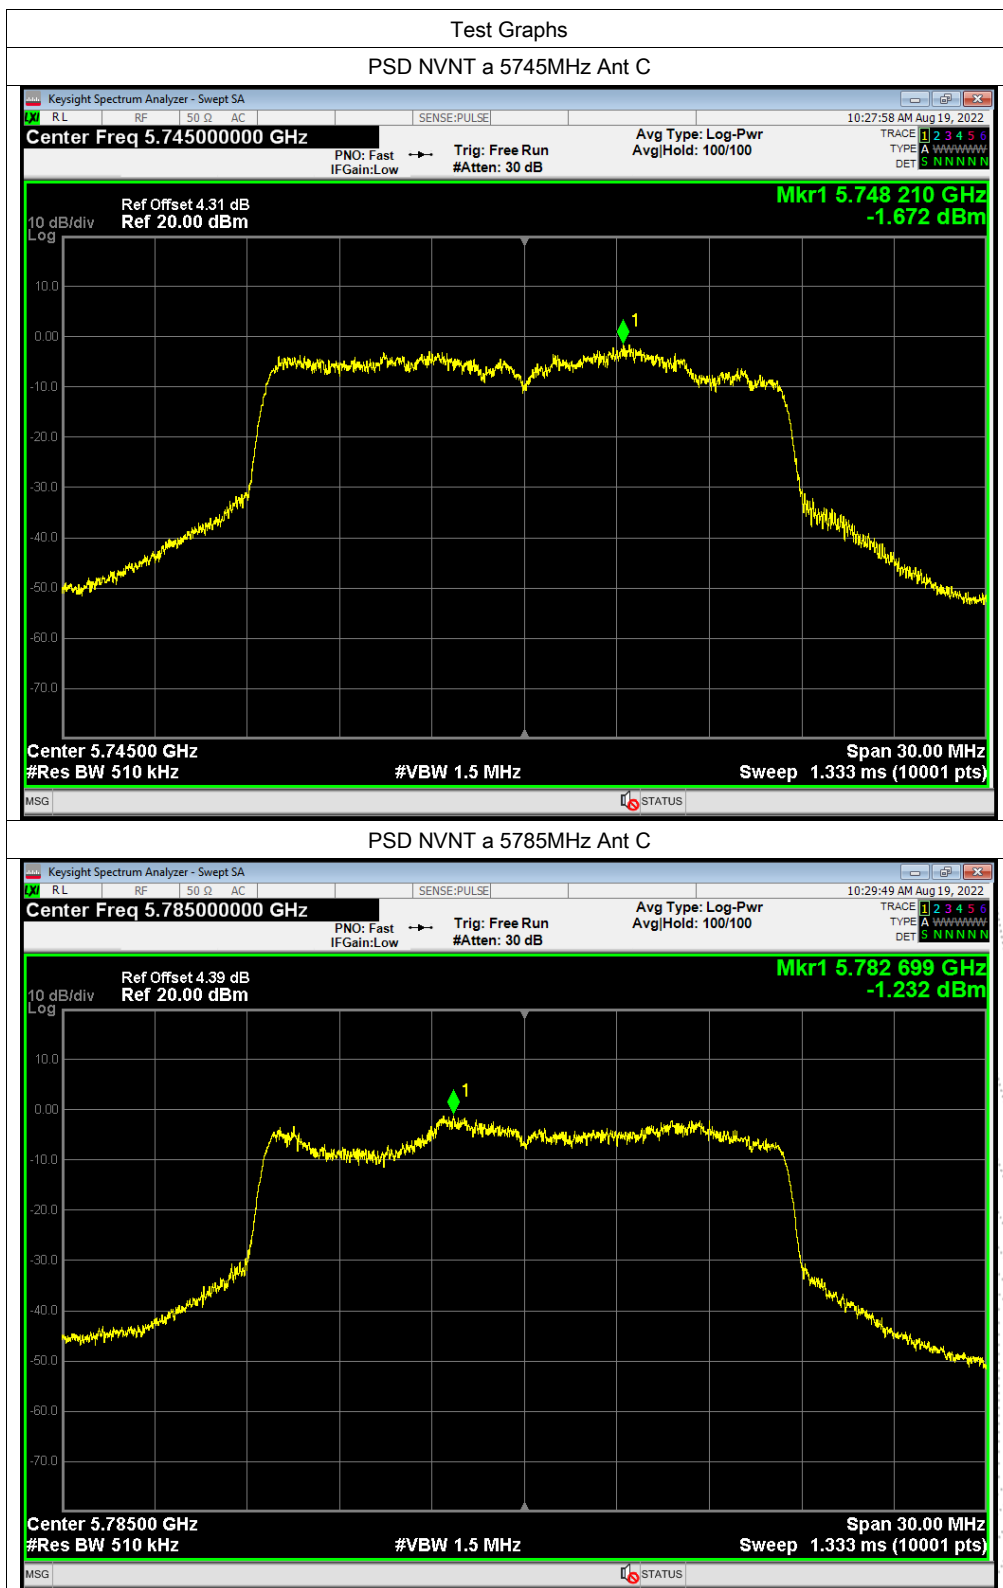


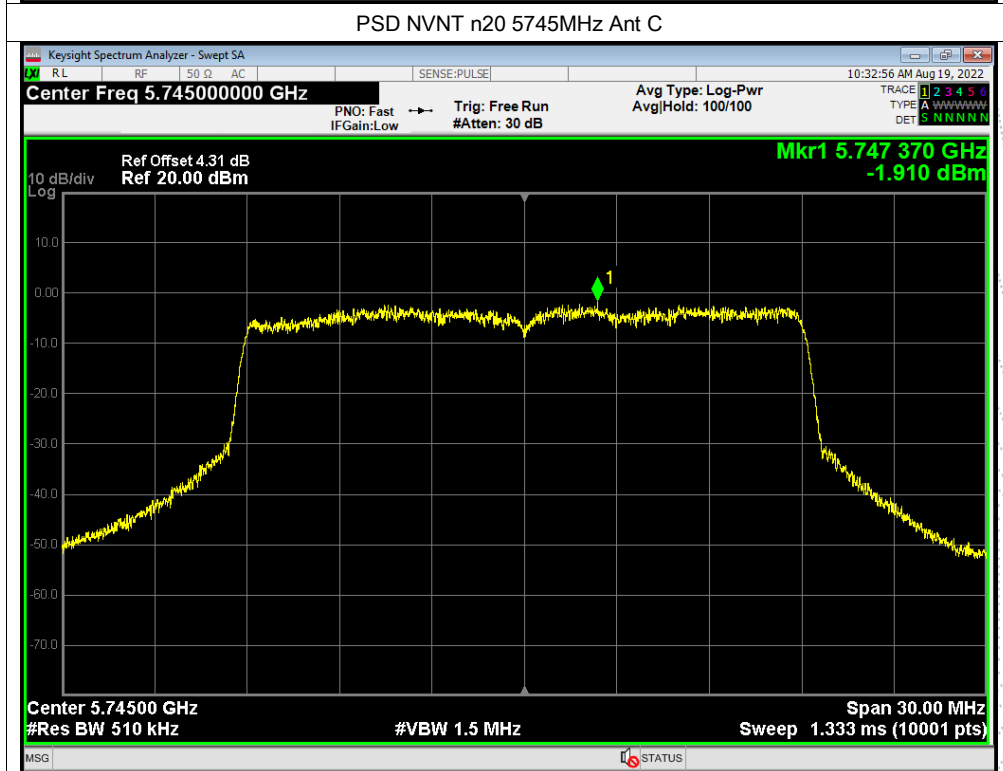
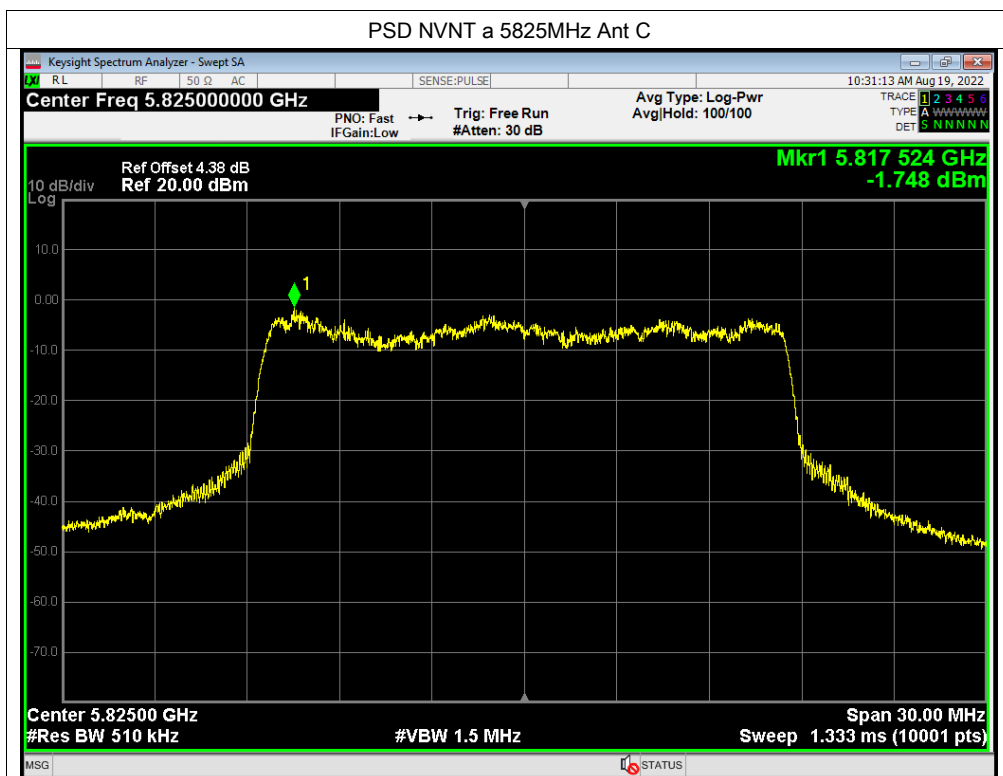


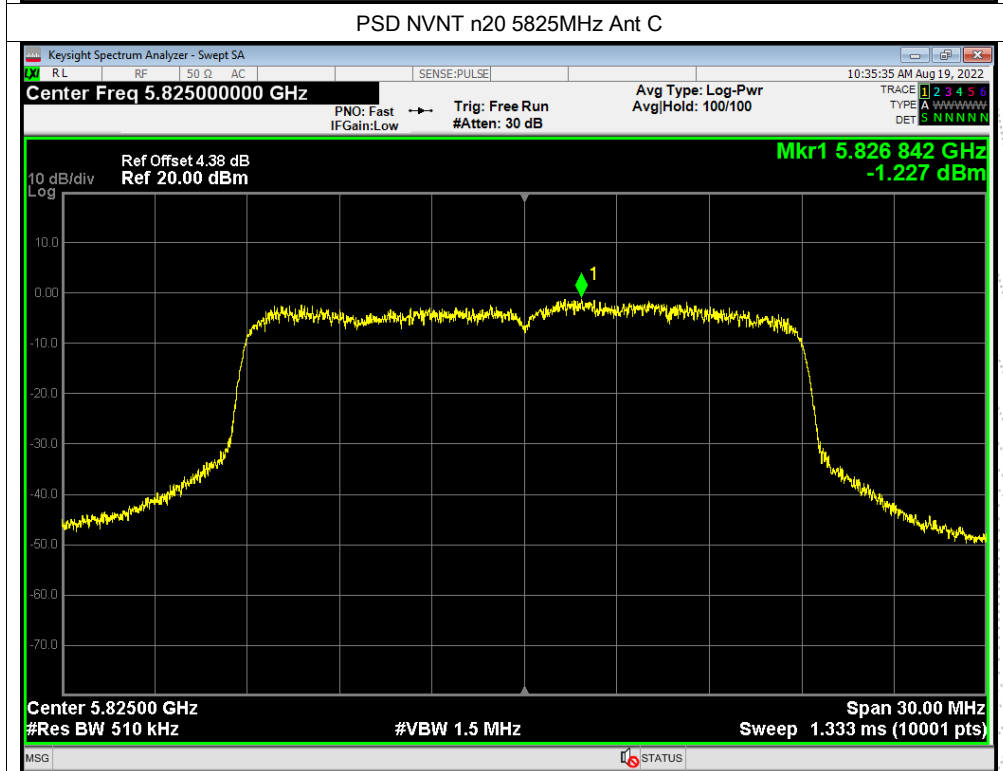
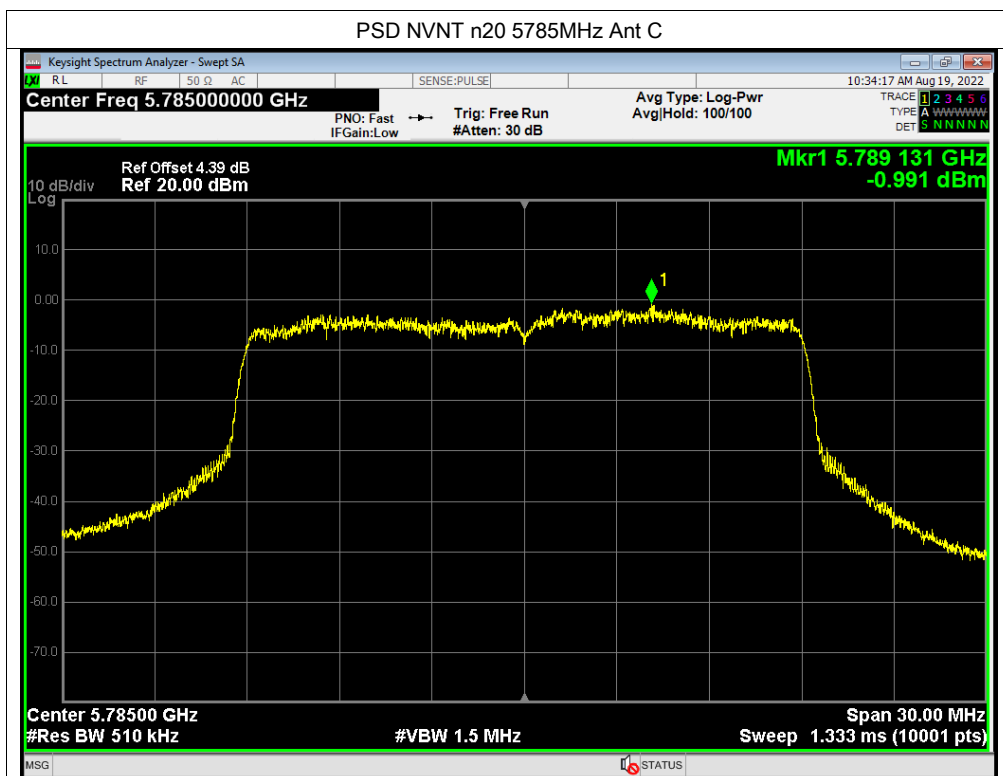


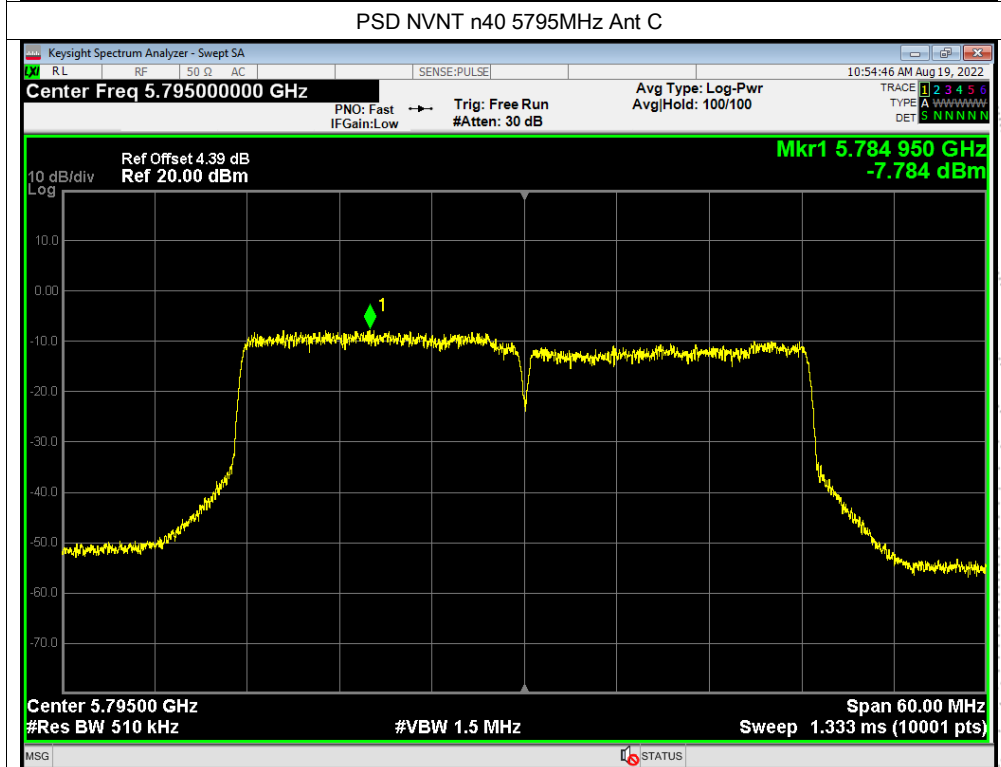
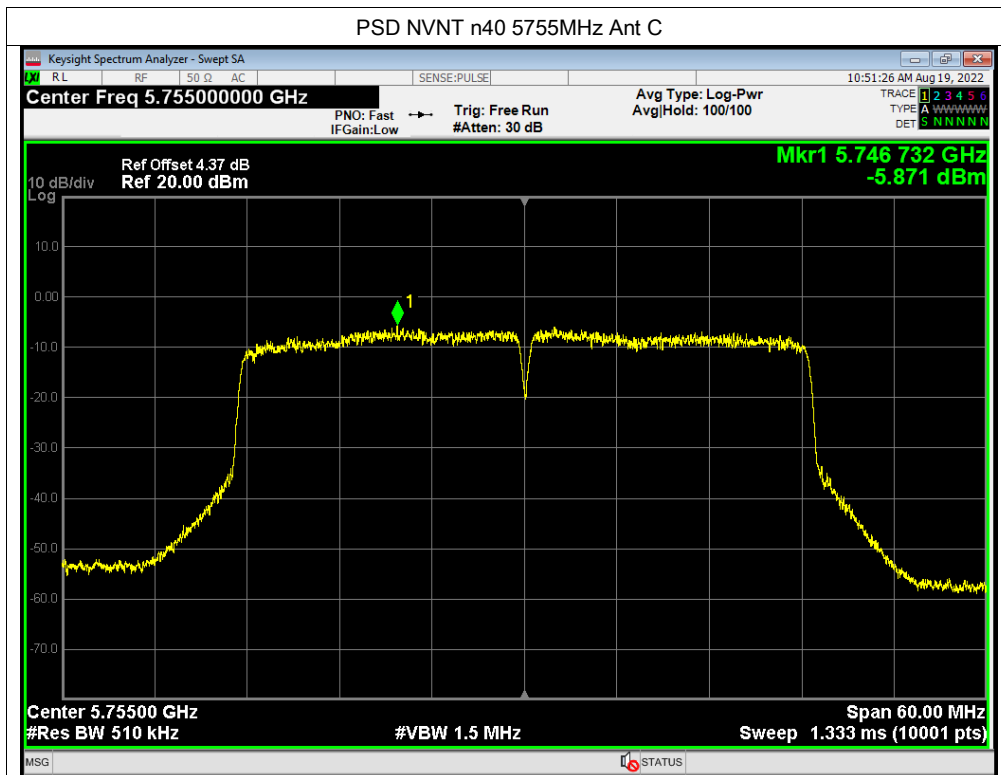


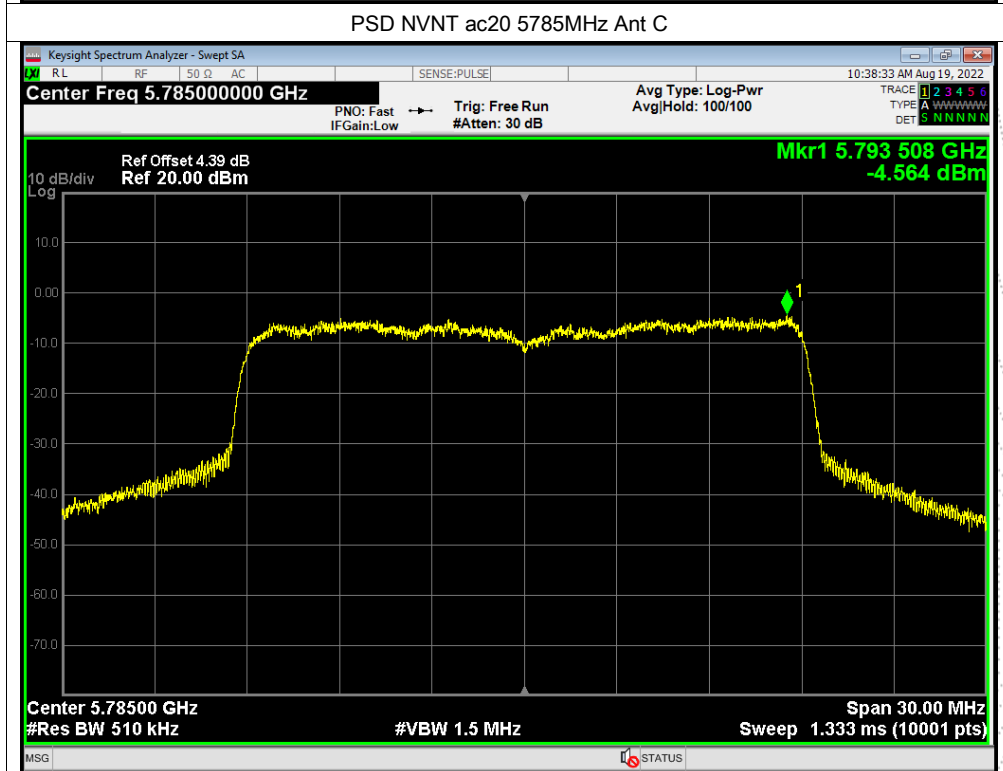
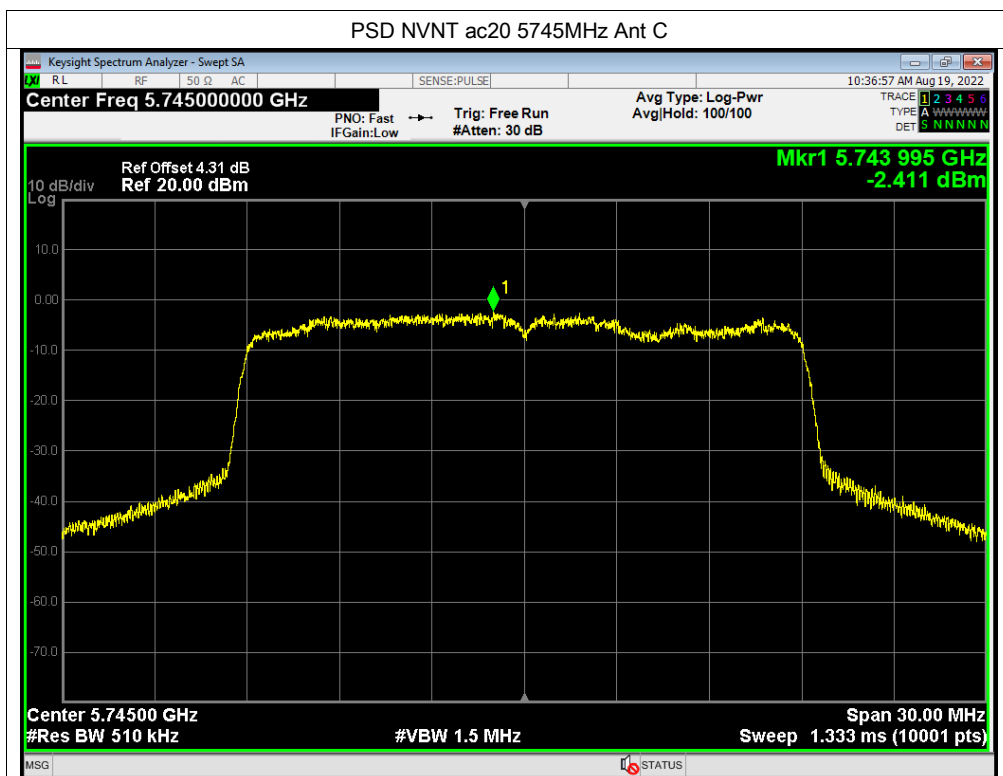


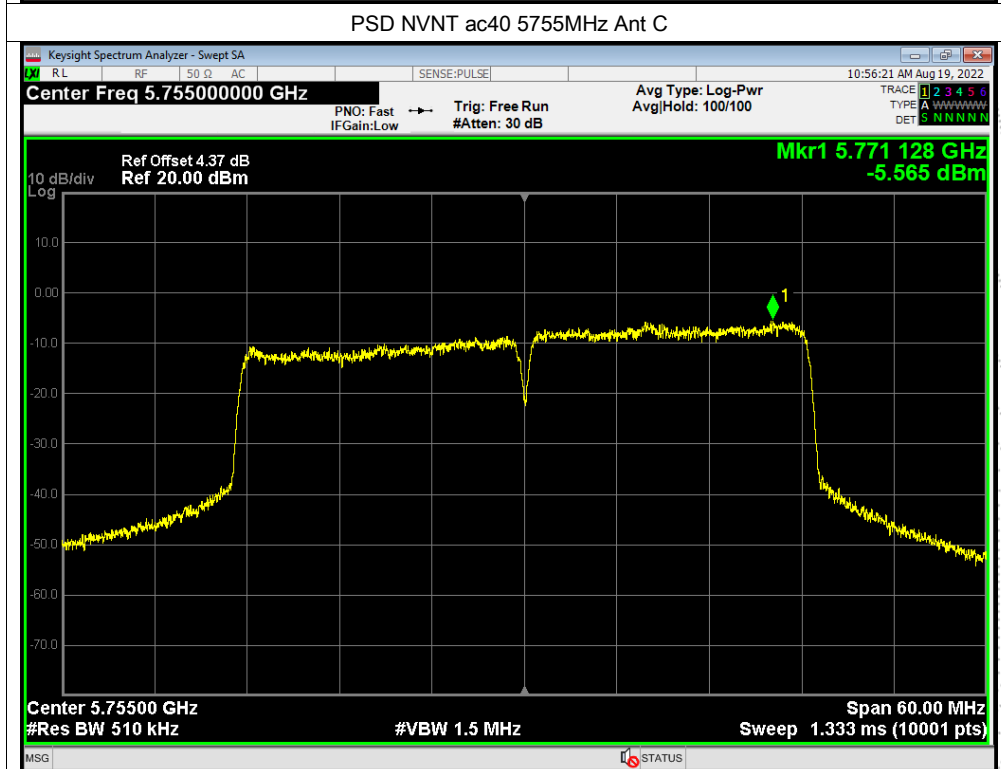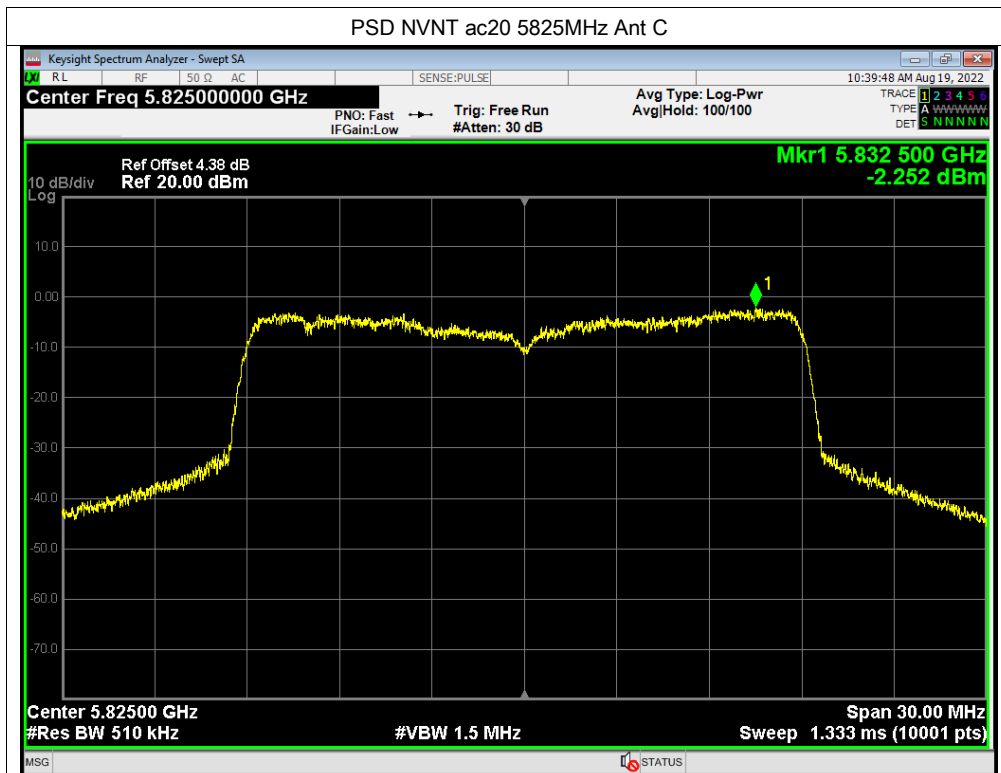

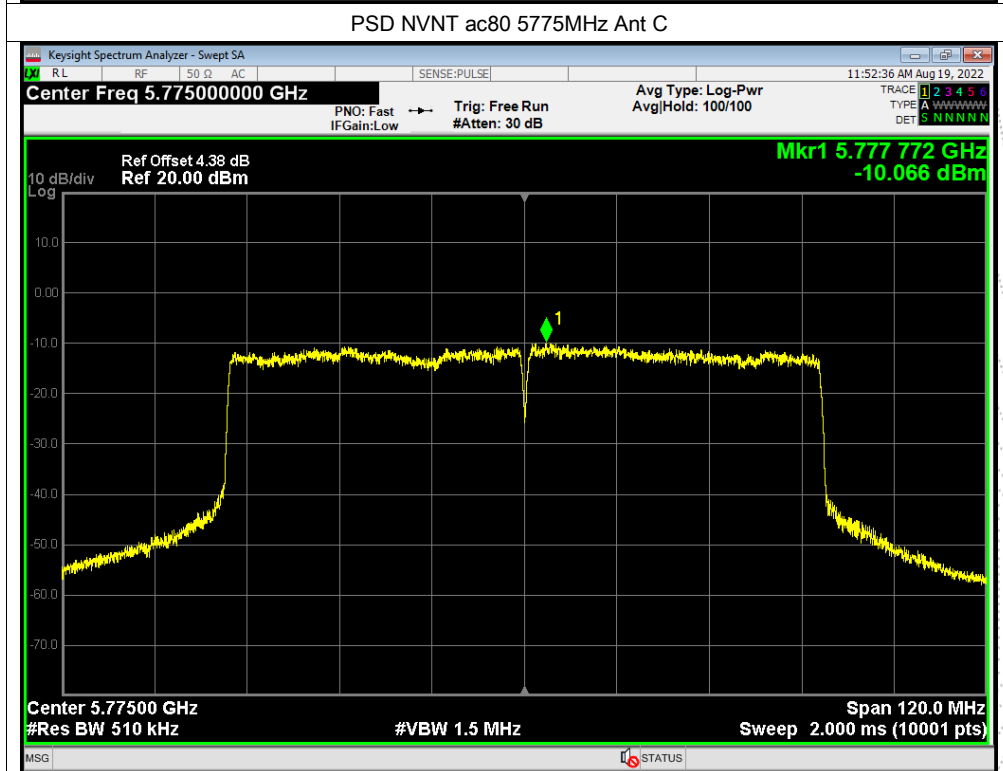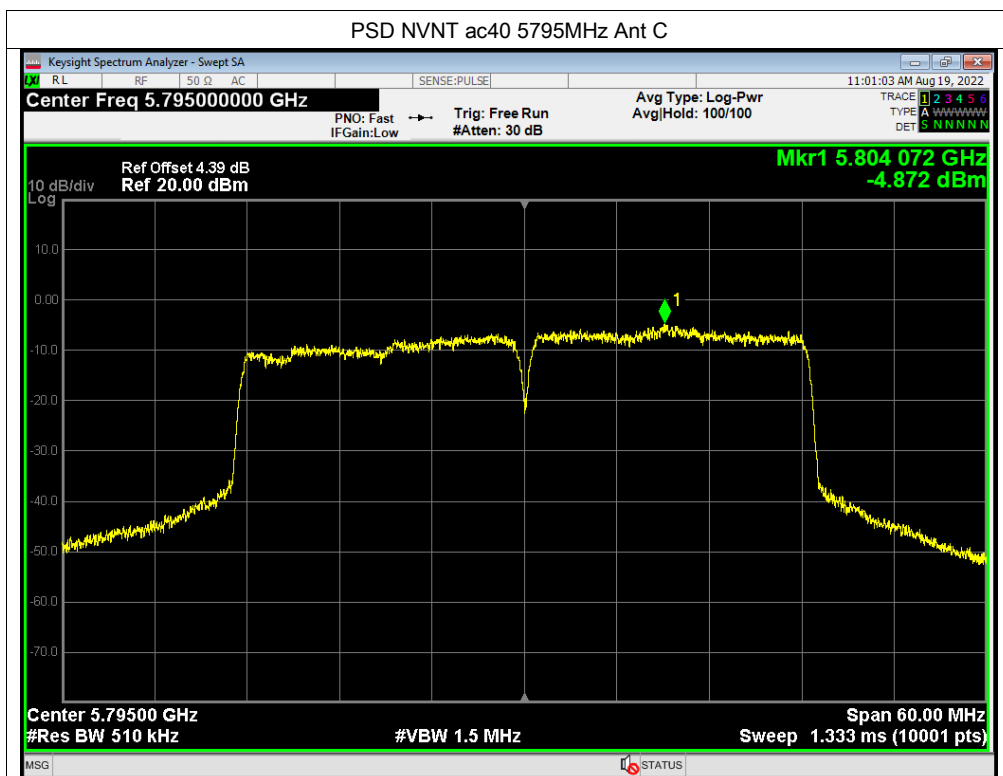

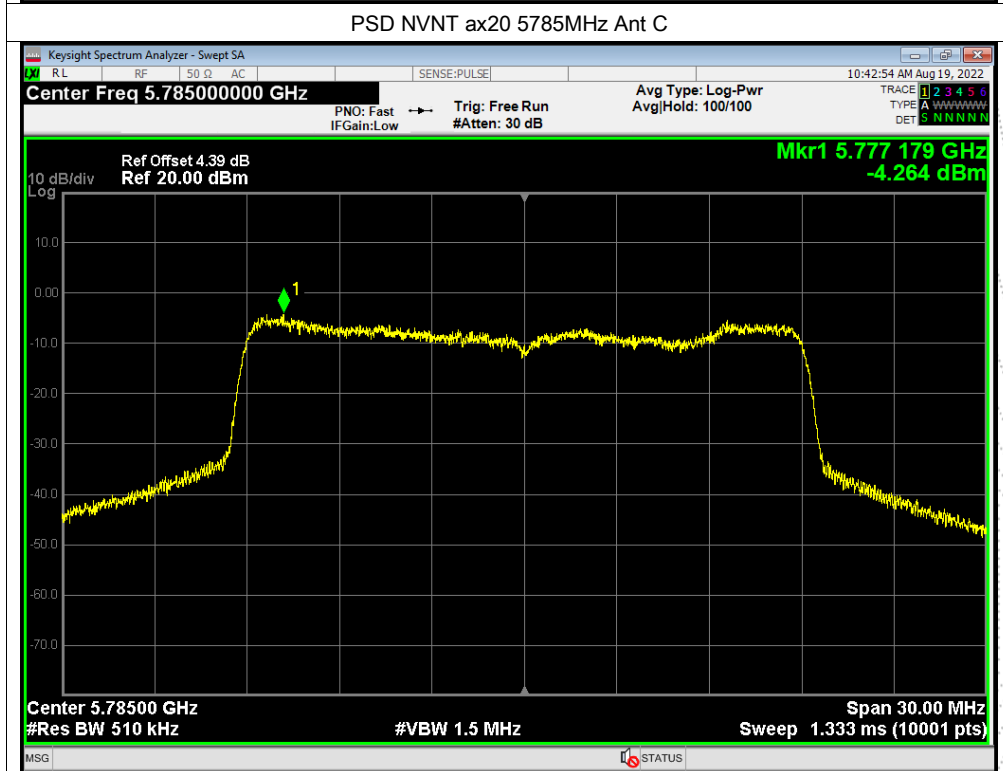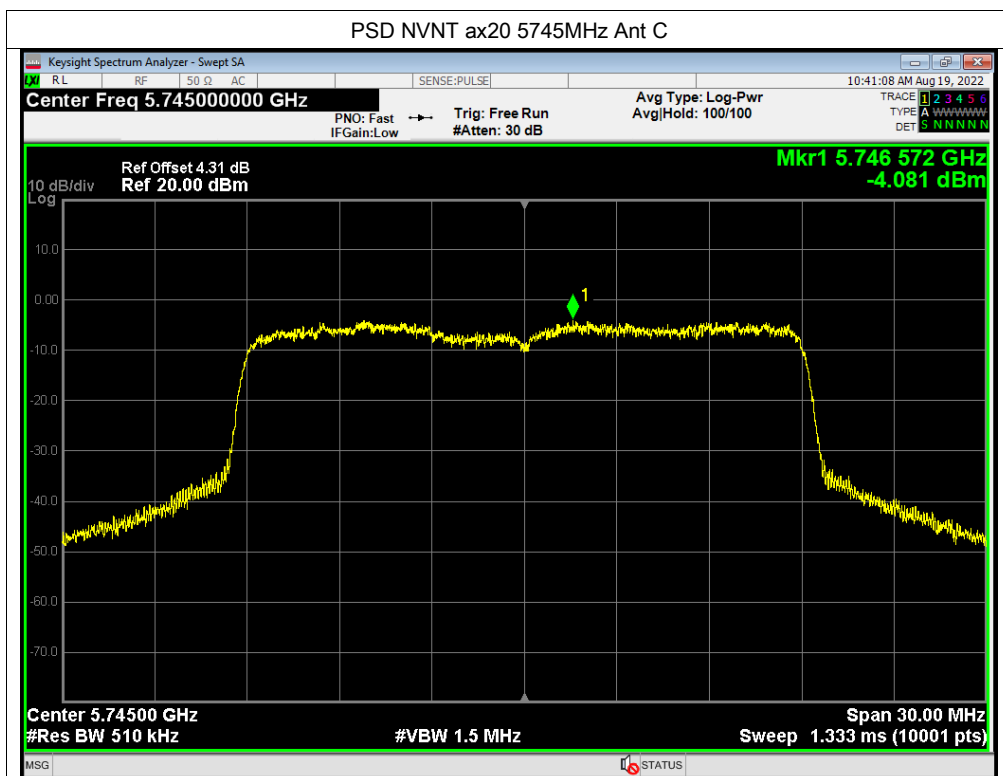

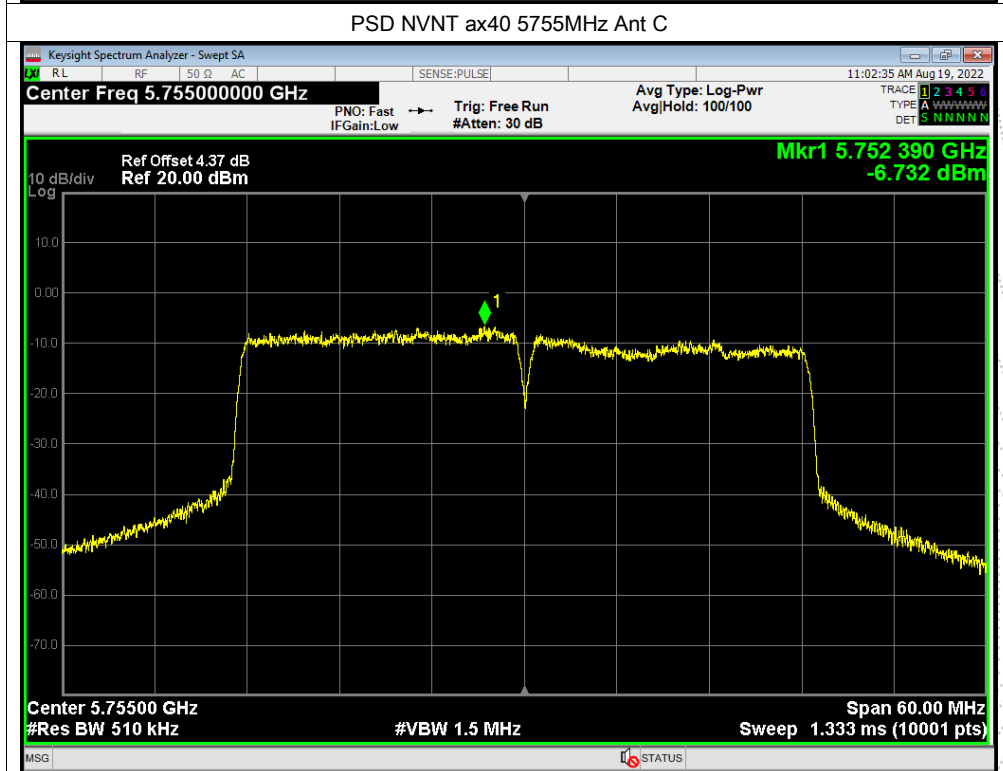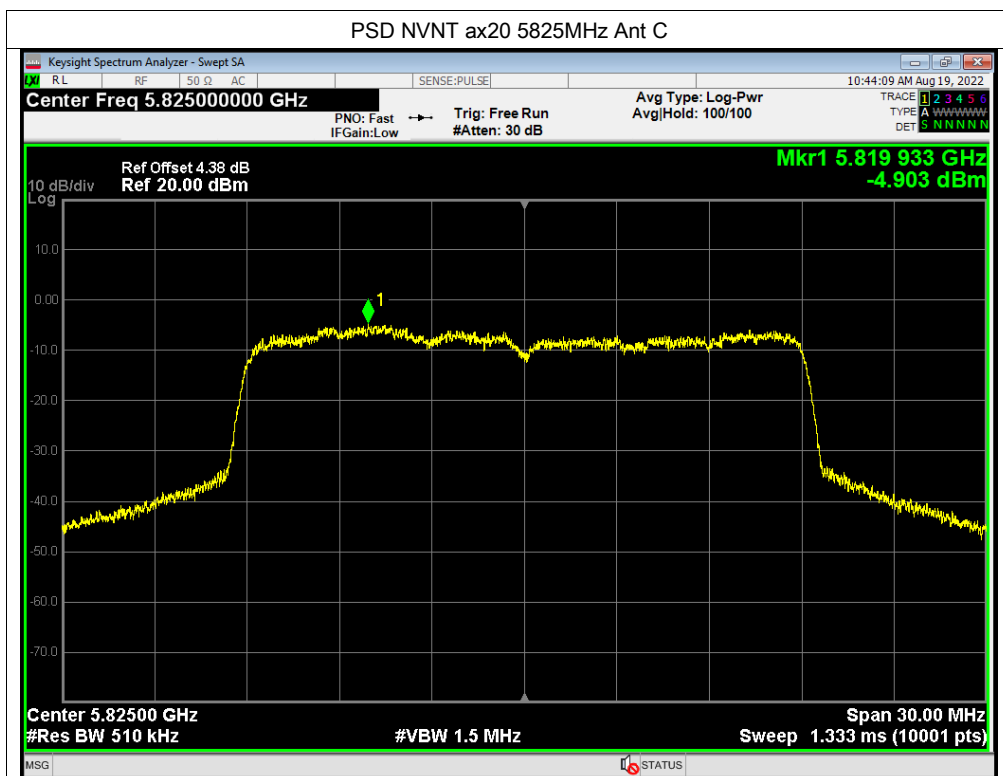


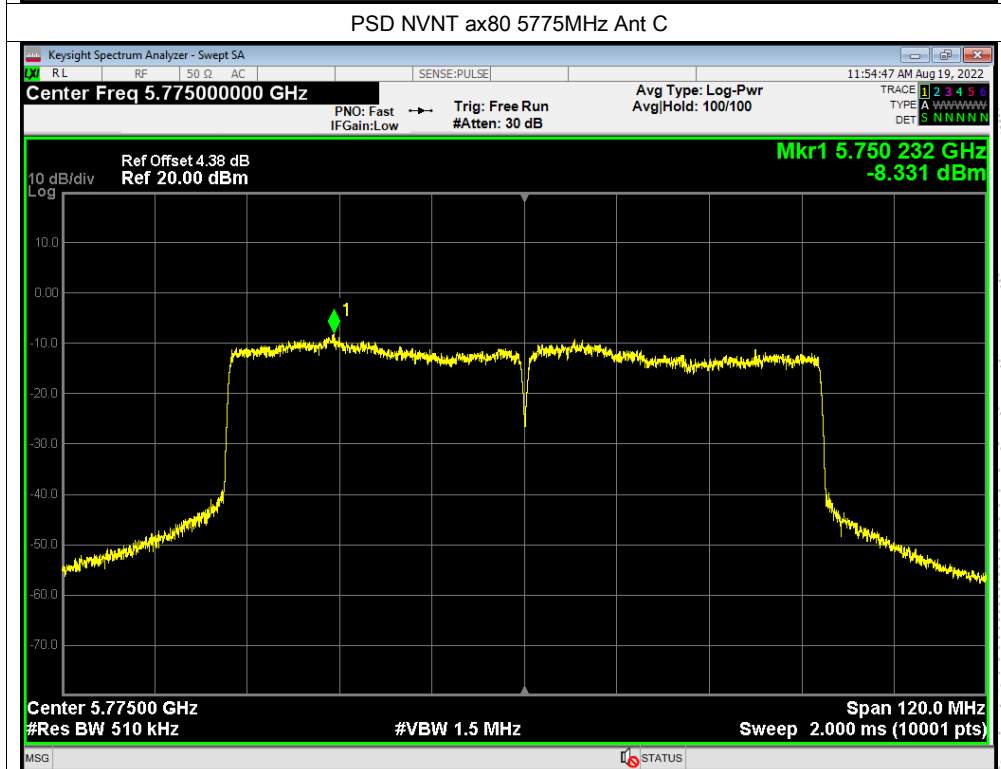
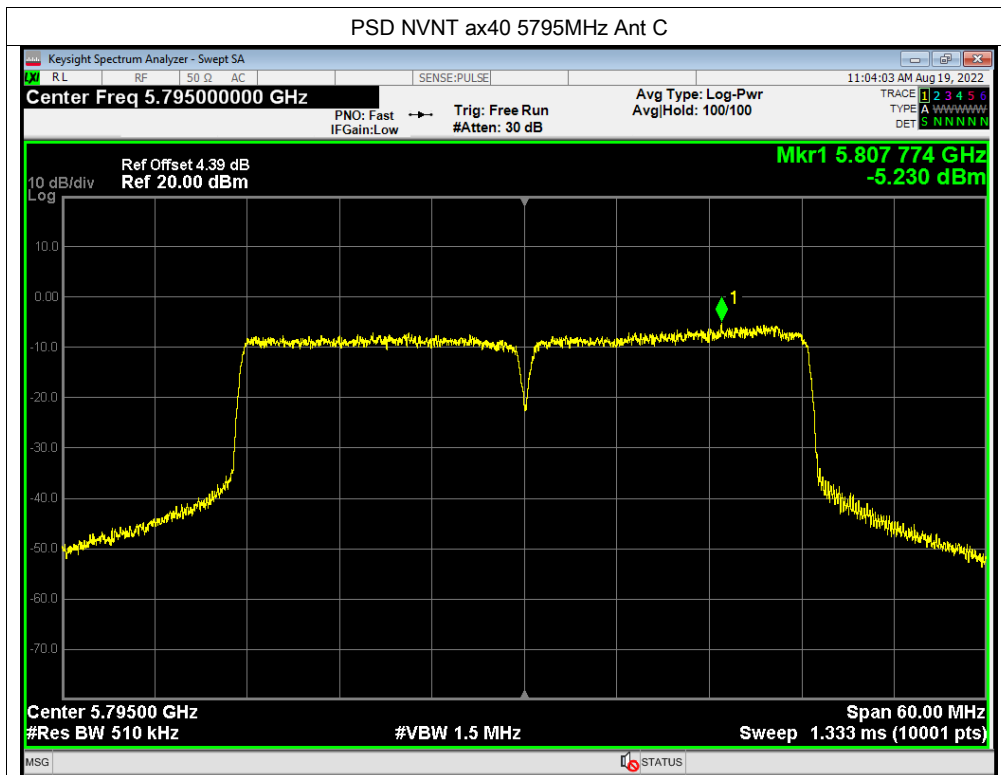




Antenna D



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	(5745-5825MHz)		



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	-1.60	30	Pass
NVNT	a	5785	-1.80	30	Pass
NVNT	a	5825	-1.09	30	Pass
NVNT	n20	5745	-1.34	30	Pass
NVNT	n20	5785	-1.02	30	Pass
NVNT	n20	5825	-1.10	30	Pass
NVNT	n40	5755	-4.97	30	Pass
NVNT	n40	5795	-6.55	30	Pass
NVNT	ac20	5745	-2.40	30	Pass
NVNT	ac20	5785	-2.61	30	Pass
NVNT	ac20	5825	-1.15	30	Pass
NVNT	ac40	5755	-6.43	30	Pass
NVNT	ac40	5795	-6.05	30	Pass
NVNT	ac80	5775	-8.71	30	Pass
NVNT	ax20	5745	-1.93	30	Pass
NVNT	ax20	5785	-2.19	30	Pass
NVNT	ax20	5825	-3.41	30	Pass
NVNT	ax40	5755	-8.00	30	Pass
NVNT	ax40	5795	-8.06	30	Pass
NVNT	ax80	5775	-8.70	30	Pass


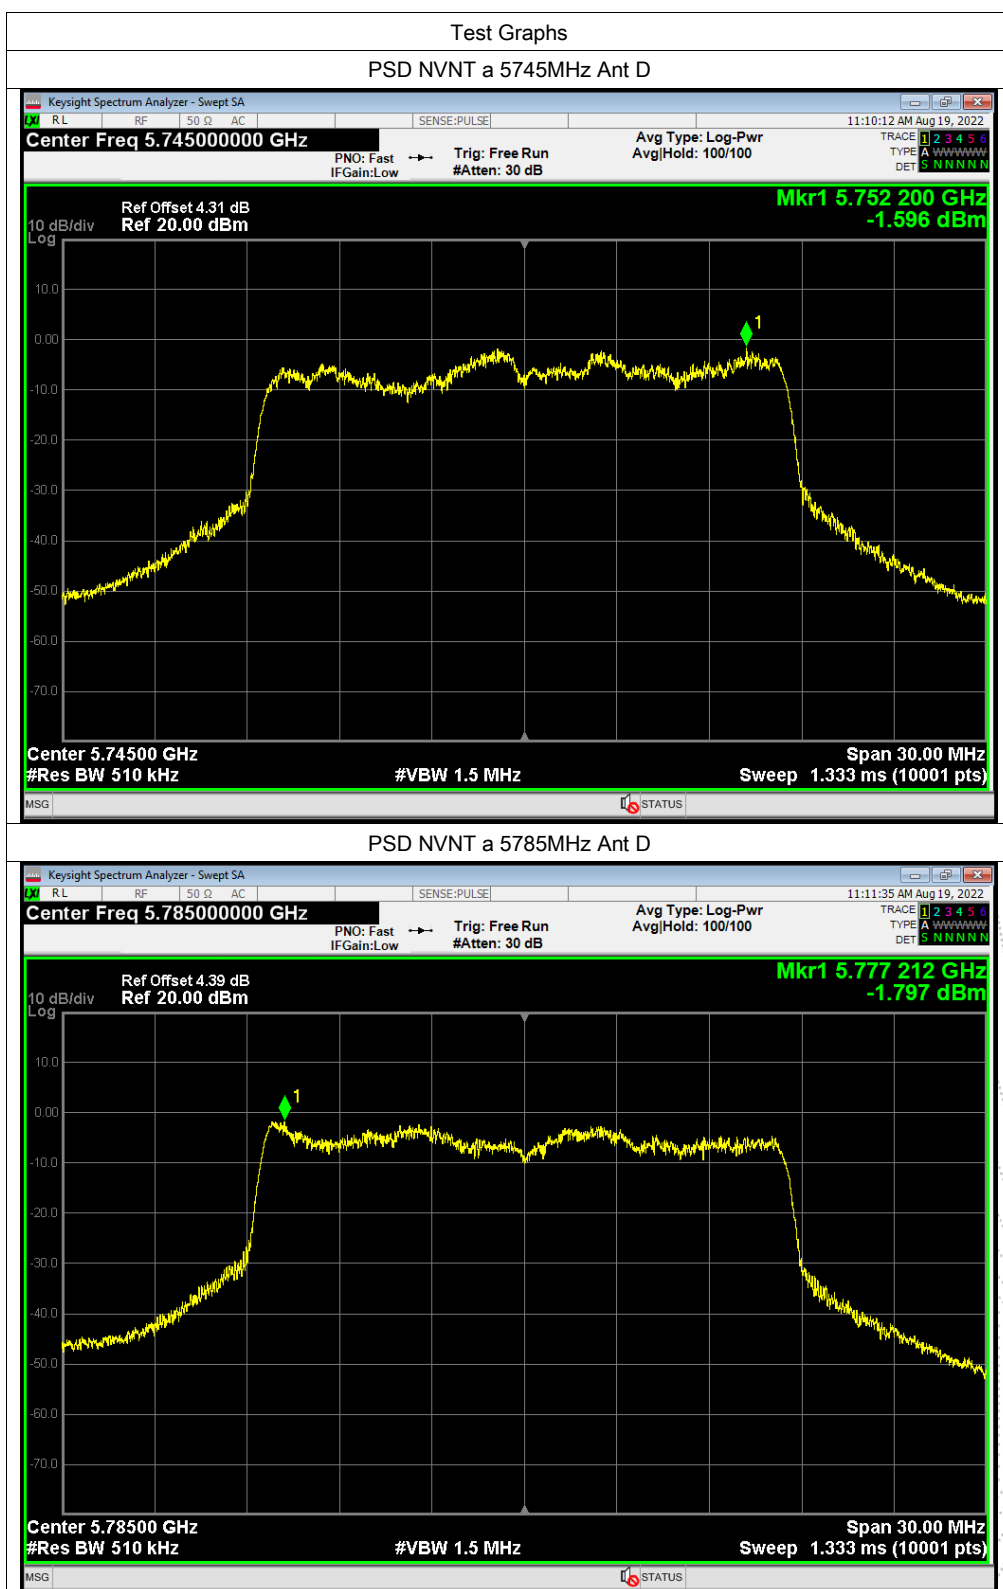


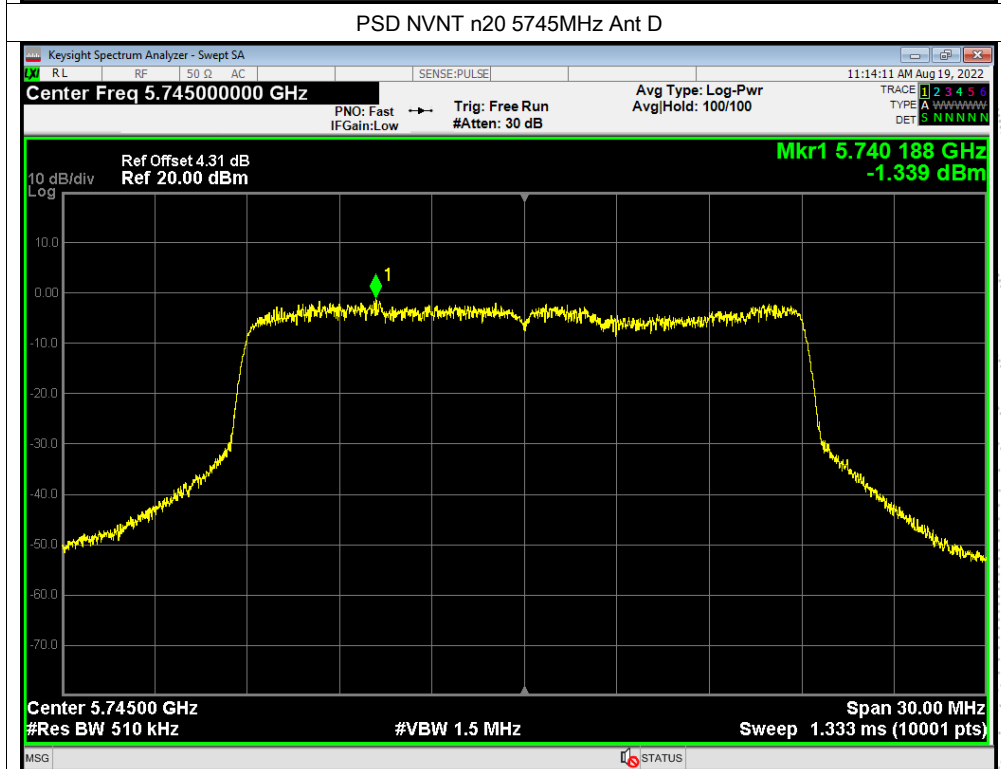
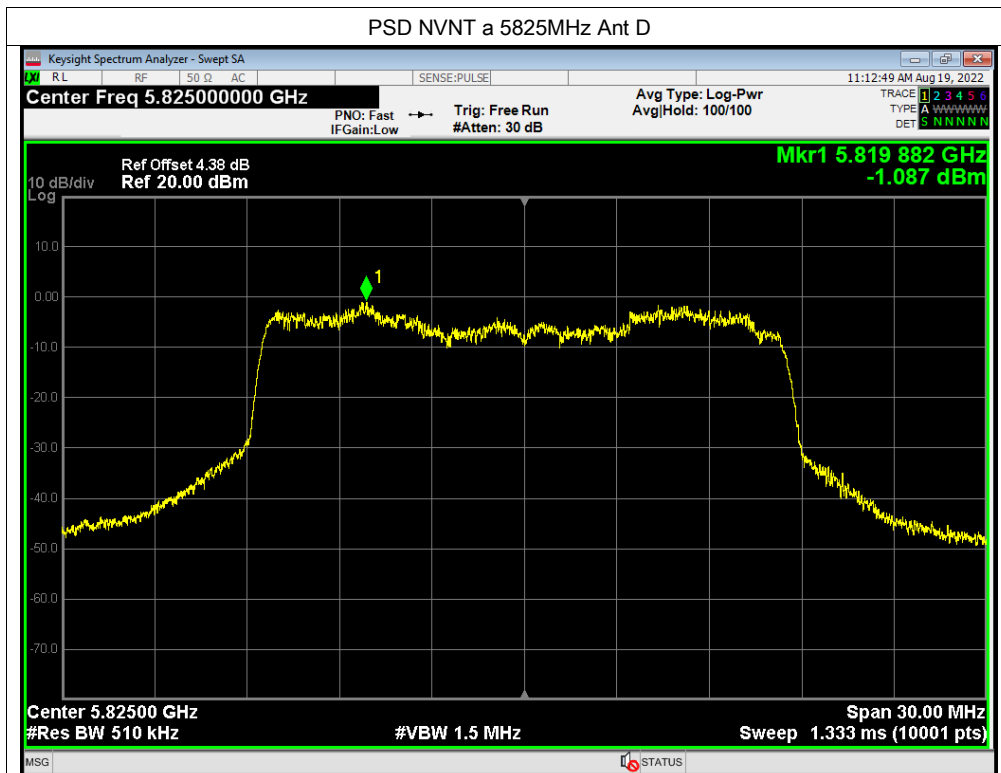


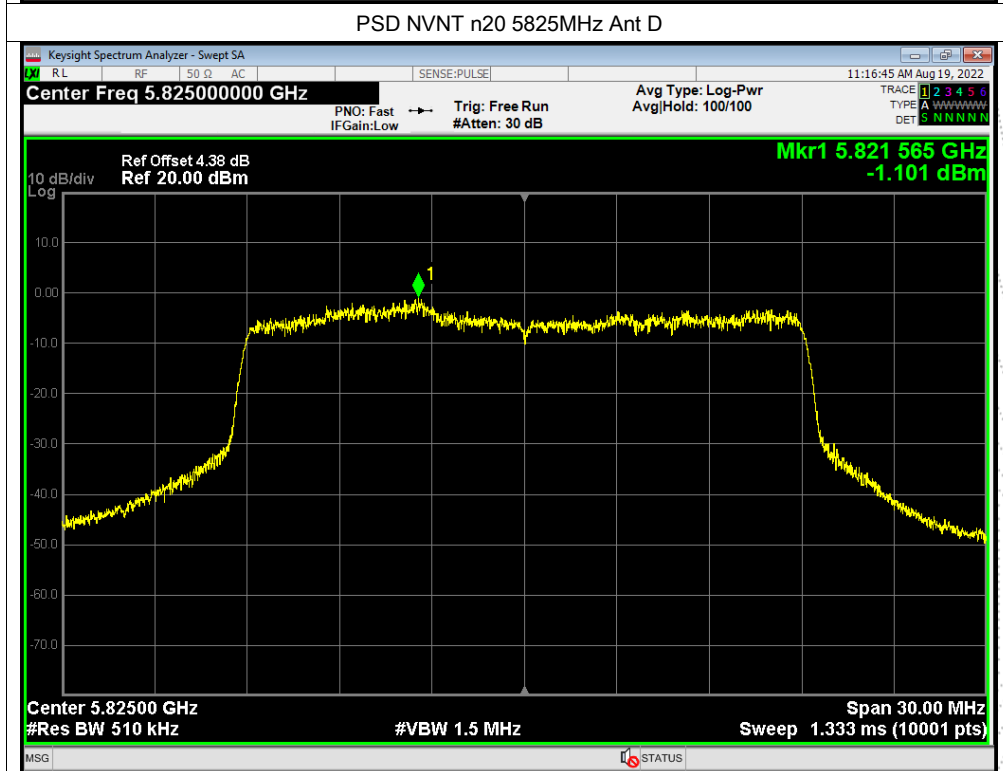
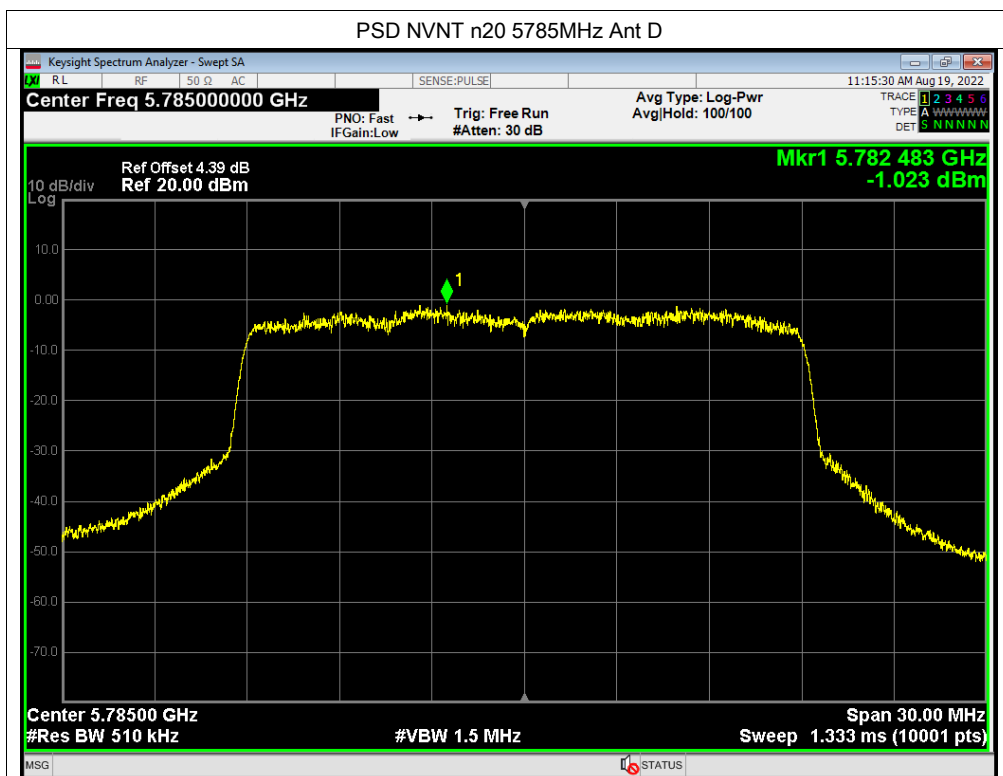


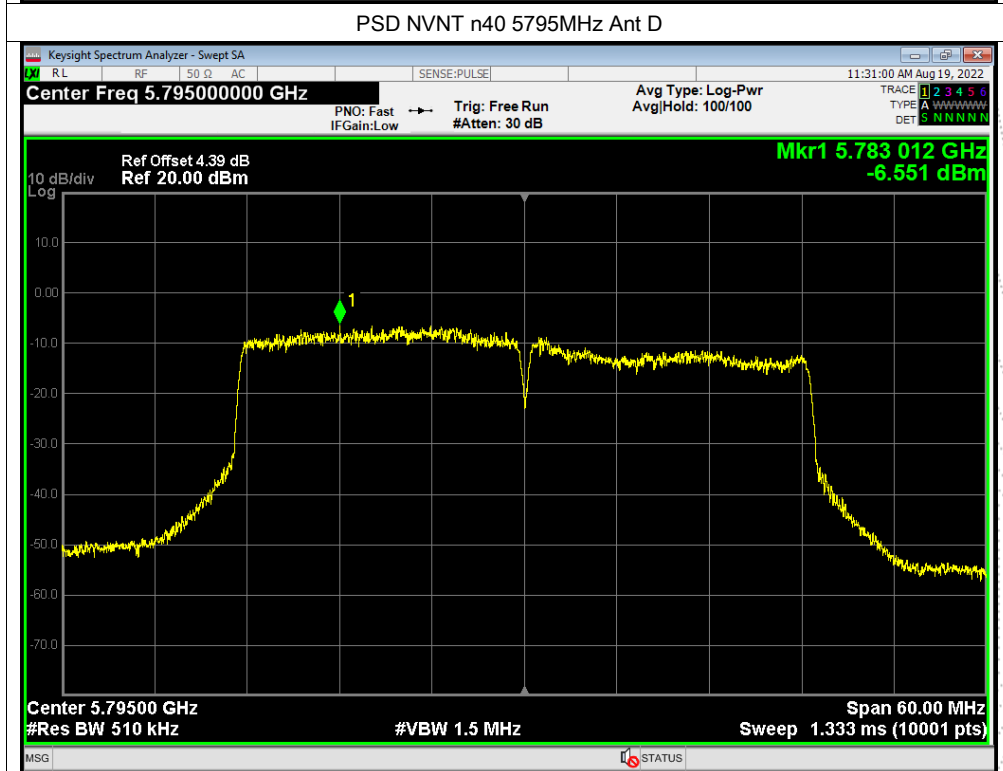
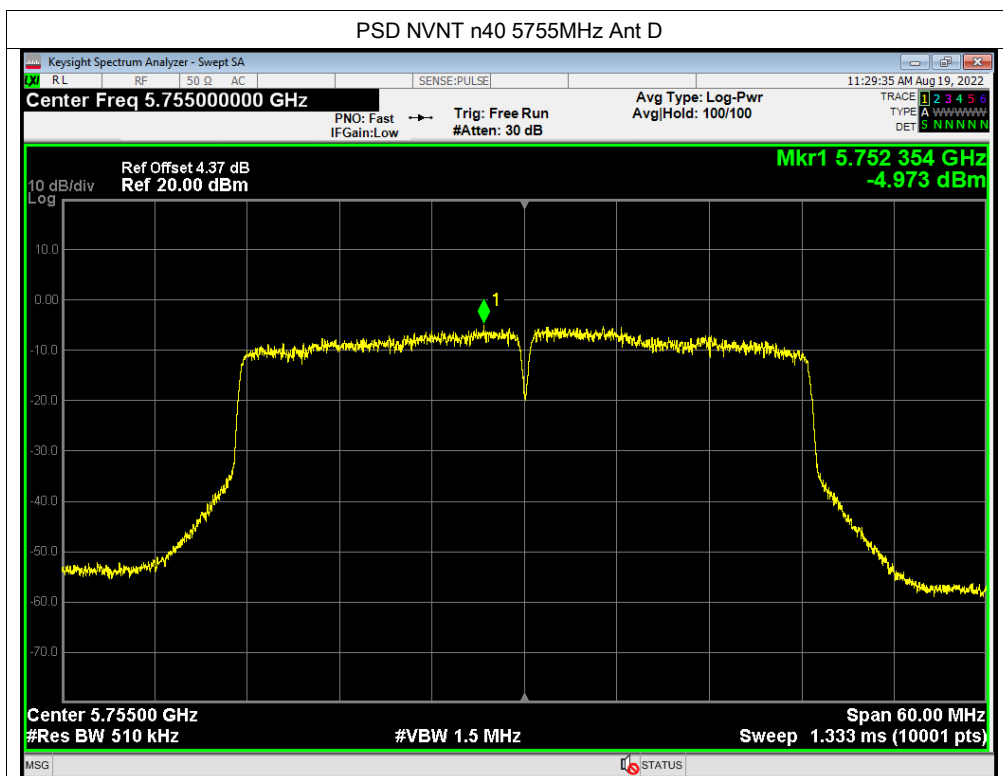


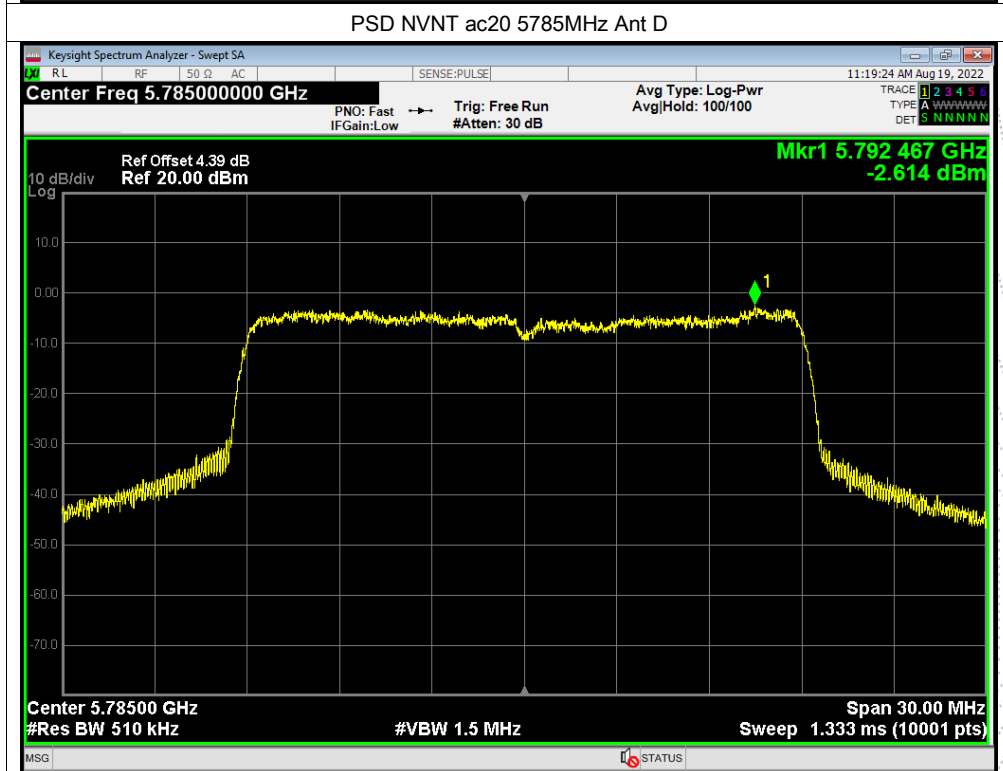
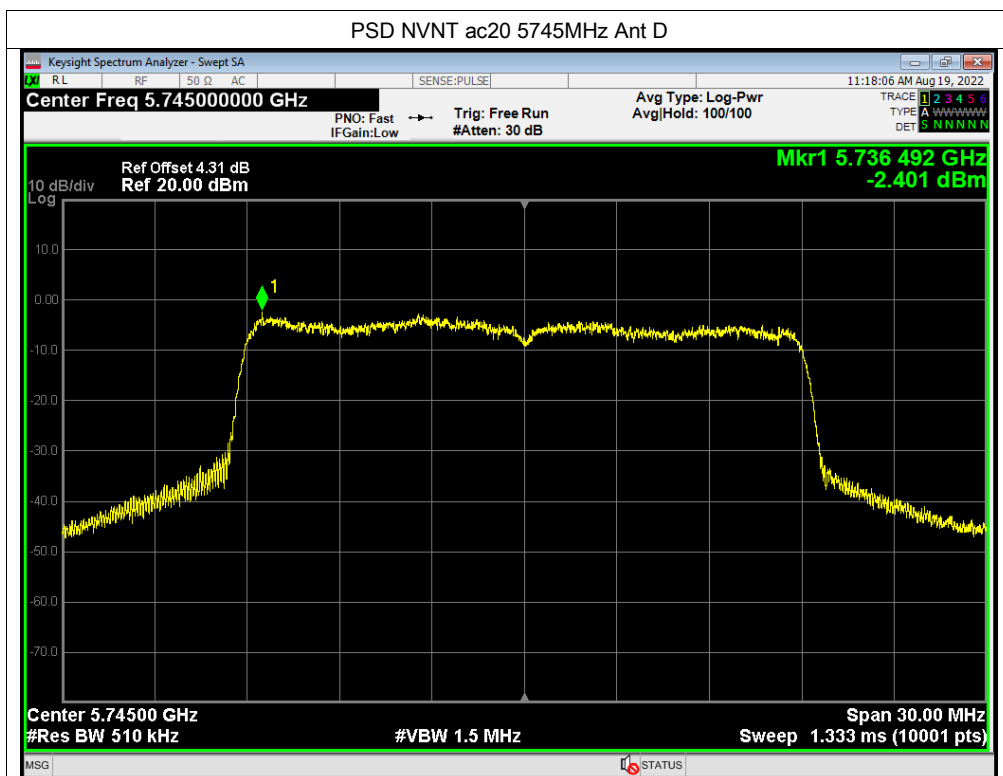


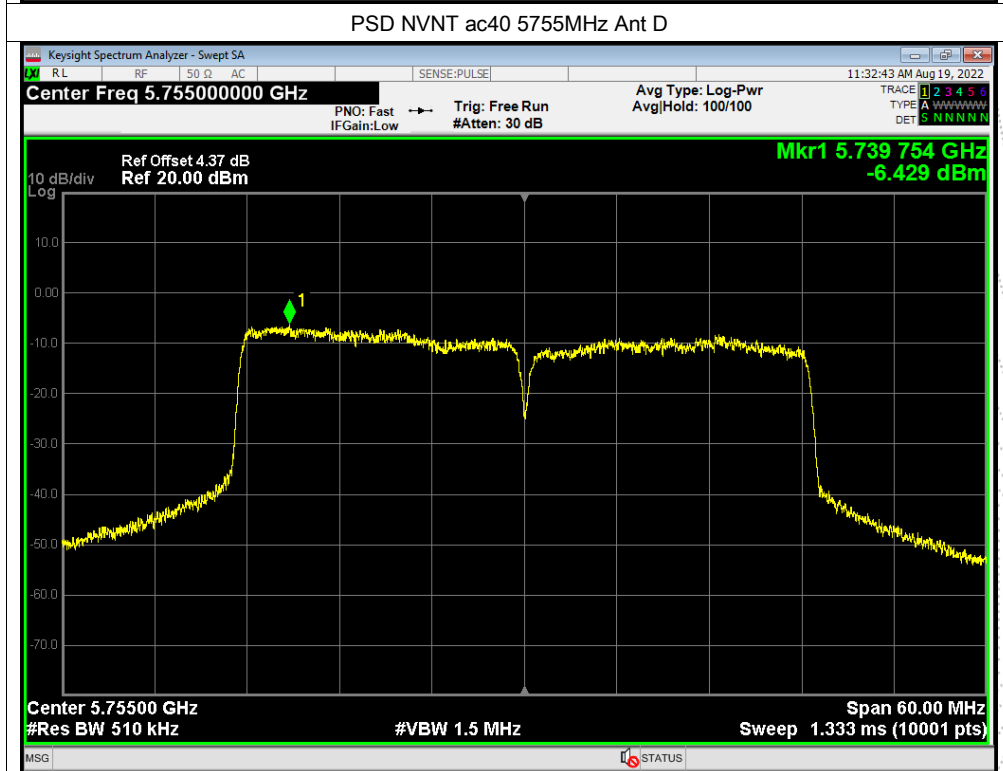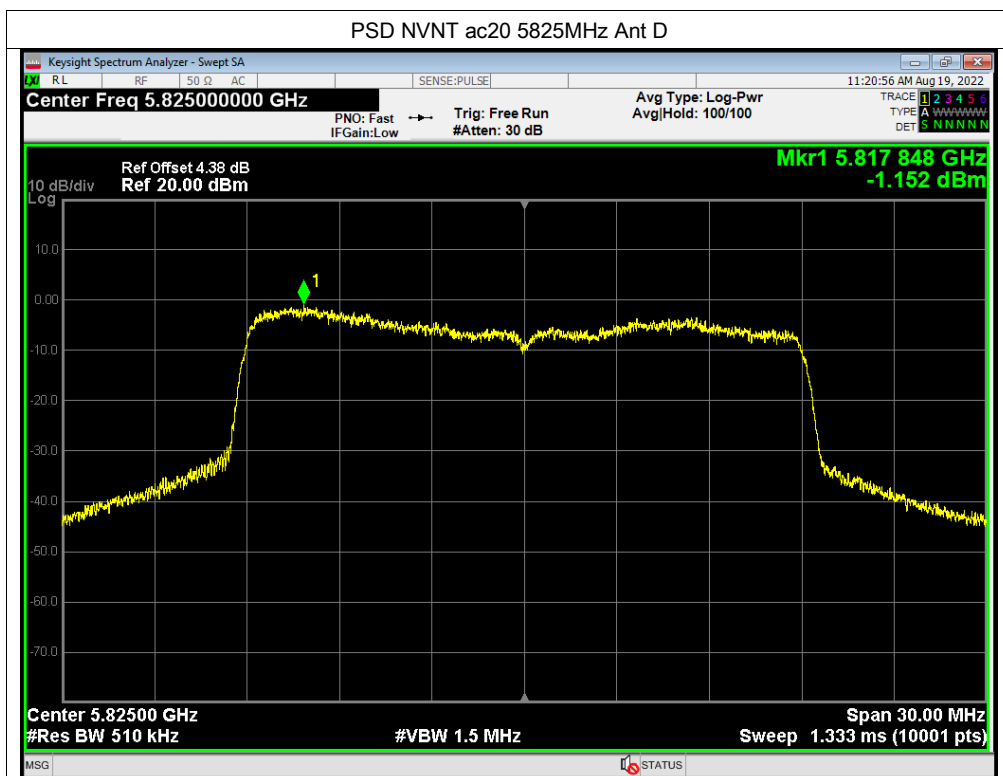

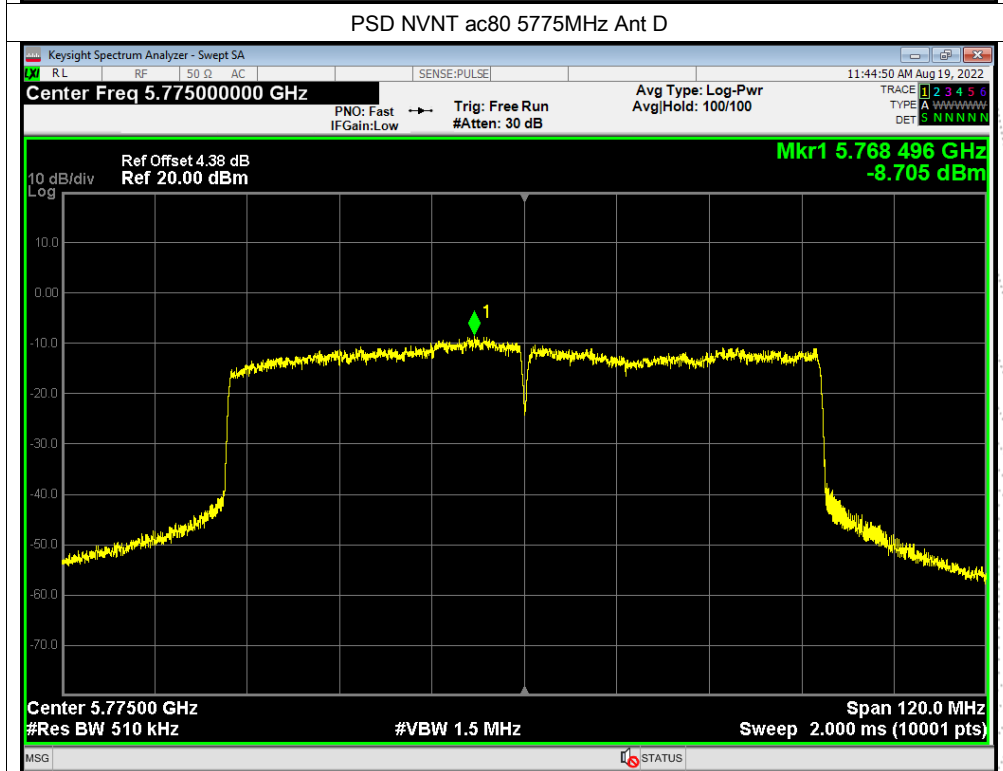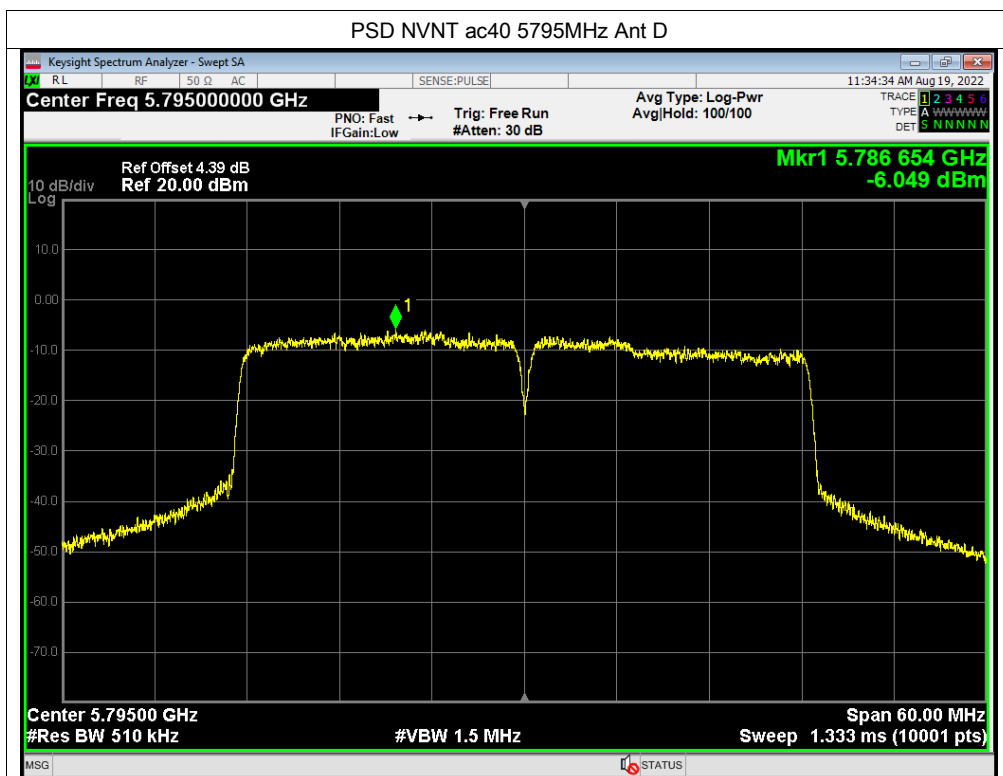

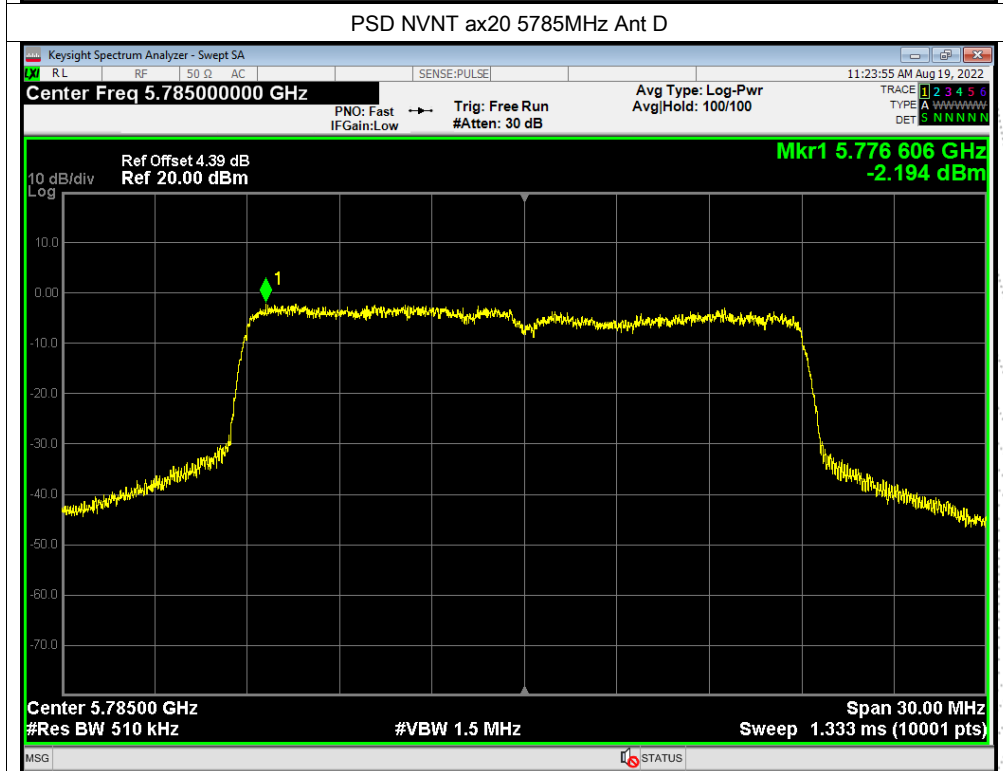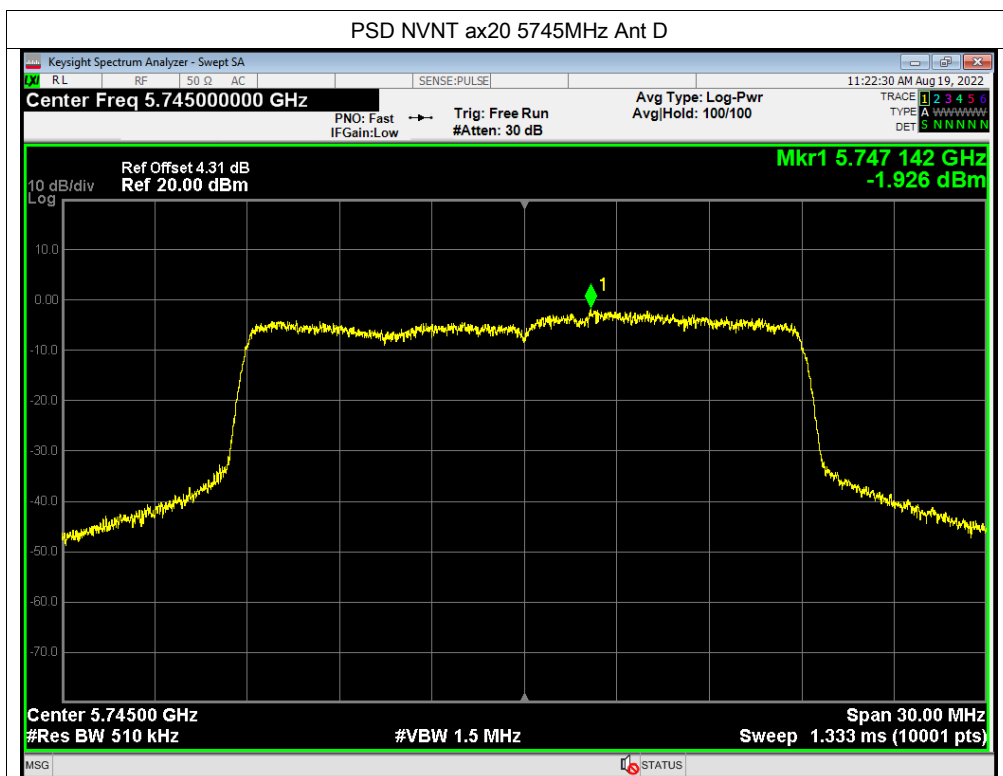

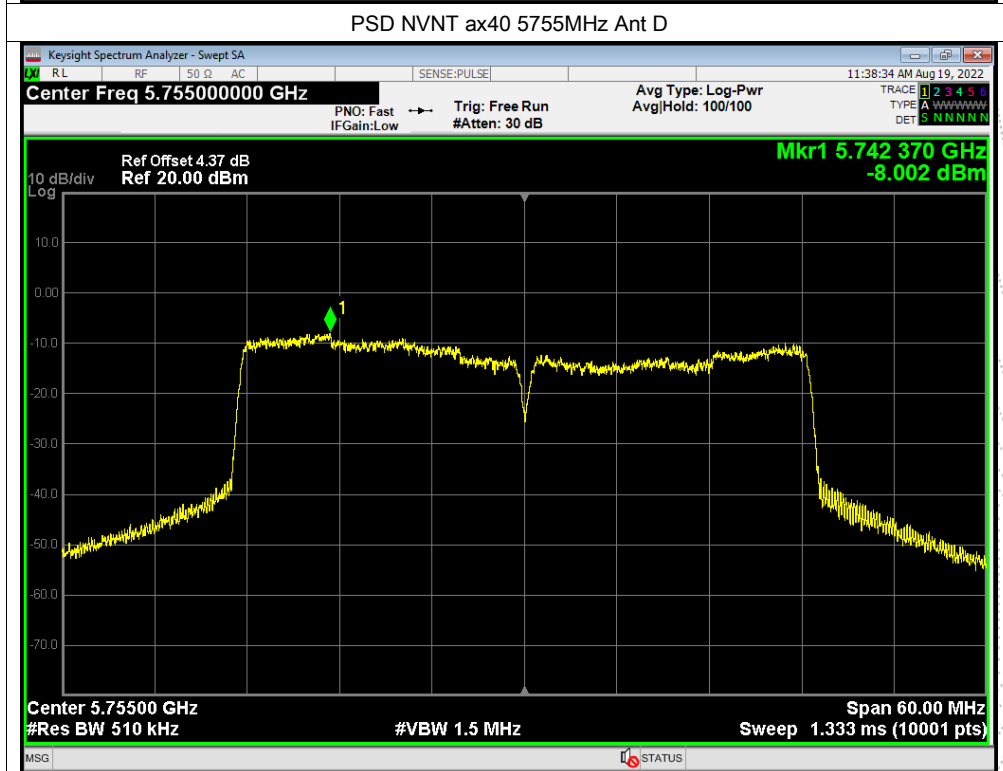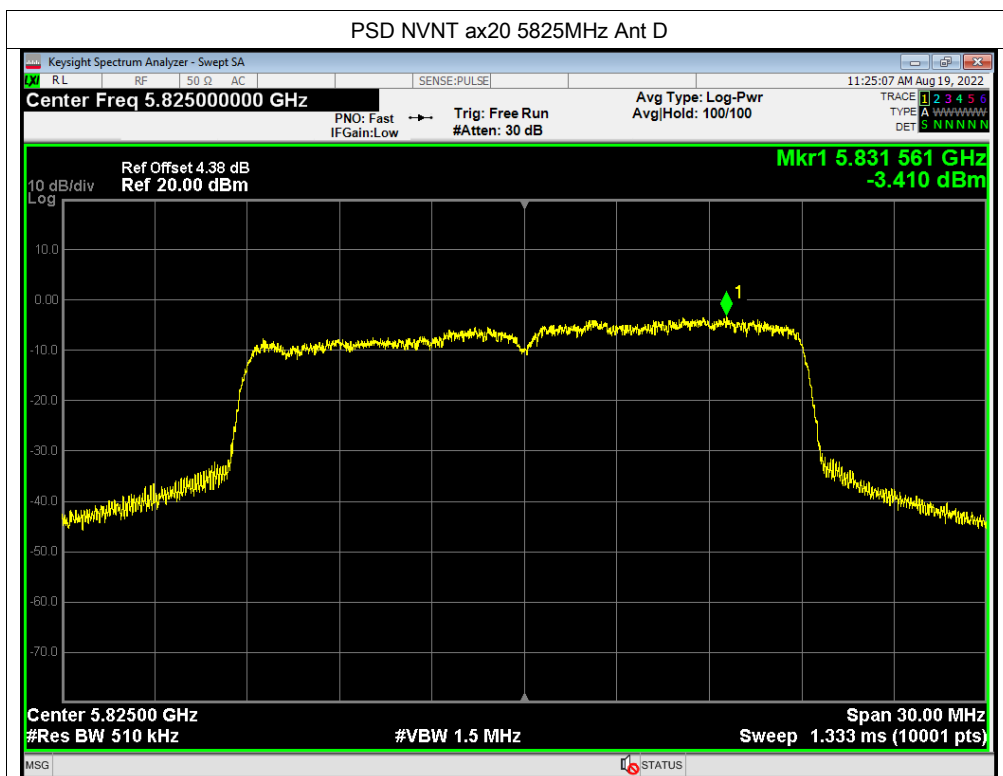

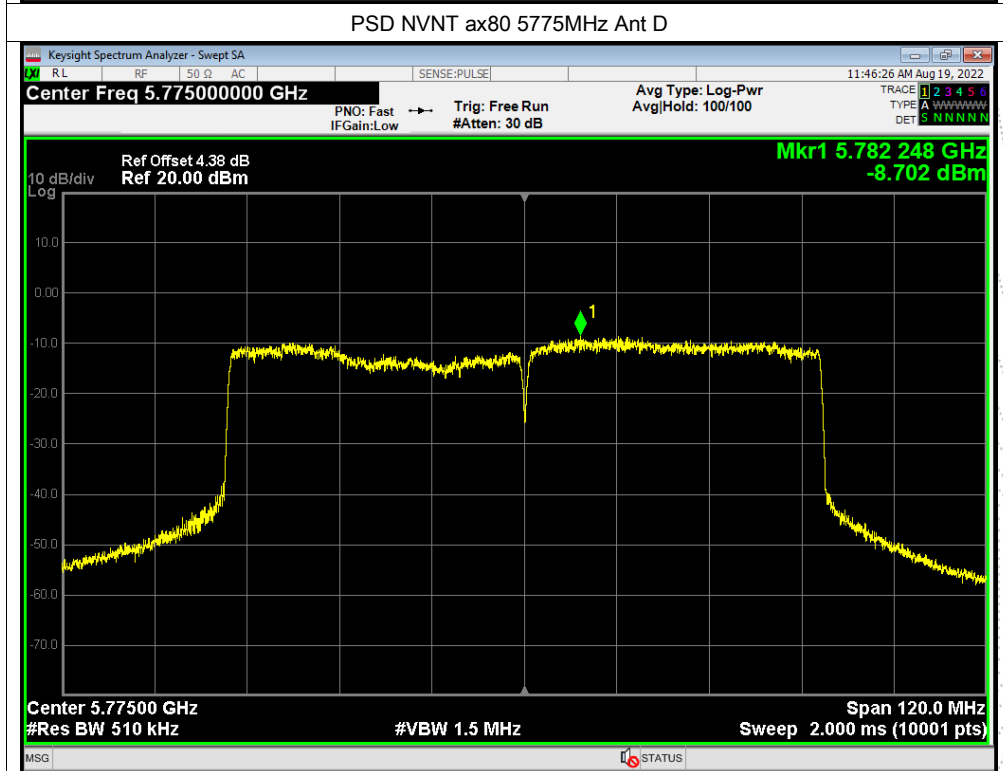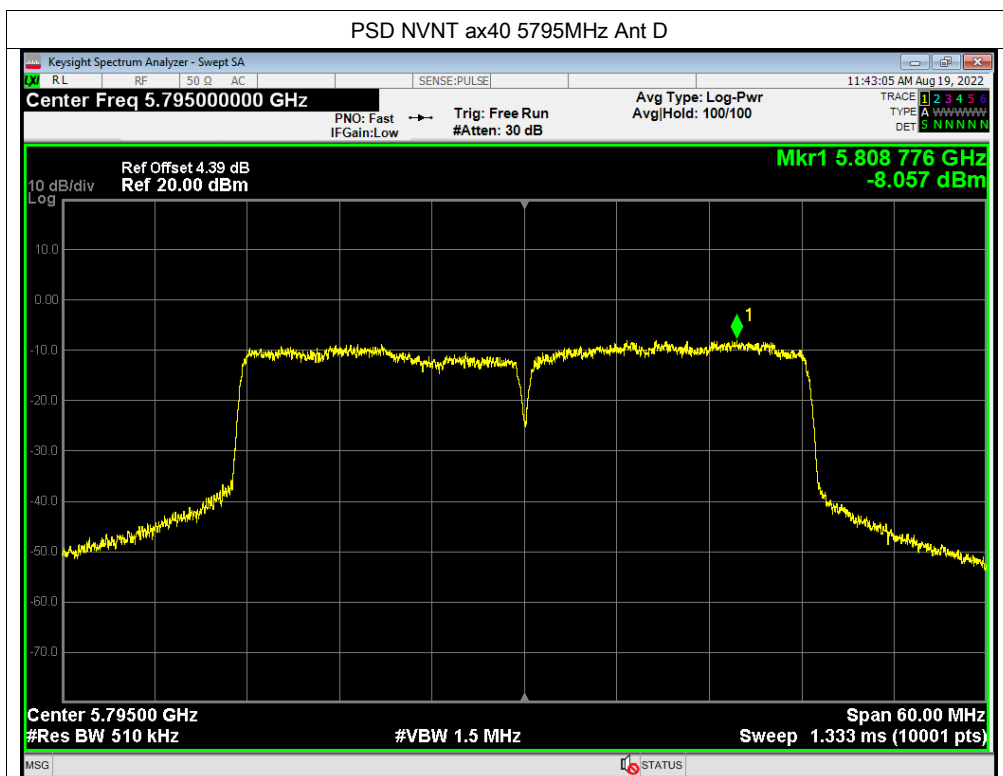

For 2T2R

Antenna A +antenna B

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	n20	5745	2.43	28.5	Pass
NVNT	n20	5785	1.45	28.5	Pass
NVNT	n20	5825	2.93	28.5	Pass
NVNT	n40	5755	-2.86	28.5	Pass
NVNT	n40	5795	-5.37	28.5	Pass
NVNT	ac20	5745	-1.31	28.5	Pass
NVNT	ac20	5785	0.21	28.5	Pass
NVNT	ac20	5825	-2.38	28.5	Pass
NVNT	ac40	5755	-3.36	28.5	Pass
NVNT	ac40	5795	-4.37	28.5	Pass
NVNT	ac80	5775	-7.19	28.5	Pass
NVNT	ax20	5745	0.04	28.5	Pass
NVNT	ax20	5785	-0.29	28.5	Pass
NVNT	ax20	5825	-1.99	28.5	Pass
NVNT	ax40	5755	-3.21	28.5	Pass
NVNT	ax40	5795	-3.91	28.5	Pass
NVNT	ax80	5775	-6.87	28.5	Pass

For those cases where the rule specifies that the Power Spectral Density be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6 dBi, the applicable output power limit shall be calculated as follows: $\text{Limit} = P_{\text{limit}} - (\text{Gain} - 6)$

Antenna A +antenna C

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	n20	5745	2.06	28.5	Pass
NVNT	n20	5785	1.63	28.5	Pass
NVNT	n20	5825	2.42	28.5	Pass
NVNT	n40	5755	-4.45	28.5	Pass
NVNT	n40	5795	-5.41	28.5	Pass
NVNT	ac20	5745	-1.17	28.5	Pass
NVNT	ac20	5785	-1.21	28.5	Pass
NVNT	ac20	5825	-1.36	28.5	Pass
NVNT	ac40	5755	-2.89	28.5	Pass
NVNT	ac40	5795	-3.53	28.5	Pass
NVNT	ac80	5775	-7.42	28.5	Pass
NVNT	ax20	5745	-0.22	28.5	Pass
NVNT	ax20	5785	-0.94	28.5	Pass
NVNT	ax20	5825	-2.57	28.5	Pass
NVNT	ax40	5755	-4.45	28.5	Pass
NVNT	ax40	5795	-3.16	28.5	Pass
NVNT	ax80	5775	-7.02	28.5	Pass

For those cases where the rule specifies that the Power Spectral Density be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6 dBi, the applicable output power limit shall be calculated as follows: $\text{Limit} = P_{\text{limit}} - (\text{Gain} - 6)$

Antenna A +antenna D

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	n20	5745	2.29	28.5	Pass
NVNT	n20	5785	1.61	28.5	Pass
NVNT	n20	5825	2.48	28.5	Pass
NVNT	n40	5755	-3.79	28.5	Pass
NVNT	n40	5795	-4.66	28.5	Pass
NVNT	ac20	5745	-1.16	28.5	Pass
NVNT	ac20	5785	-0.20	28.5	Pass
NVNT	ac20	5825	-0.44	28.5	Pass
NVNT	ac40	5755	-3.33	28.5	Pass
NVNT	ac40	5795	-4.36	28.5	Pass
NVNT	ac80	5775	-6.63	28.5	Pass
NVNT	ax20	5745	0.80	28.5	Pass
NVNT	ax20	5785	0.14	28.5	Pass
NVNT	ax20	5825	-1.64	28.5	Pass
NVNT	ax40	5755	-5.15	28.5	Pass
NVNT	ax40	5795	-4.70	28.5	Pass
NVNT	ax80	5775	-7.29	28.5	Pass

For those cases where the rule specifies that the Power Spectral Density be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6 dBi, the applicable output power limit shall be calculated as follows: $\text{Limit} = P_{\text{limit}} - (\text{Gain} - 6)$

Antenna B +antenna C

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	n20	5745	1.56	28.5	Pass
NVNT	n20	5785	1.86	28.5	Pass
NVNT	n20	5825	2.37	28.5	Pass
NVNT	n40	5755	-1.70	28.5	Pass
NVNT	n40	5795	-4.73	28.5	Pass
NVNT	ac20	5745	0.50	28.5	Pass
NVNT	ac20	5785	-0.03	28.5	Pass
NVNT	ac20	5825	0.16	28.5	Pass
NVNT	ac40	5755	-3.00	28.5	Pass
NVNT	ac40	5795	-2.41	28.5	Pass
NVNT	ac80	5775	-6.84	28.5	Pass
NVNT	ax20	5745	-0.76	28.5	Pass
NVNT	ax20	5785	-0.55	28.5	Pass
NVNT	ax20	5825	-1.39	28.5	Pass
NVNT	ax40	5755	-2.65	28.5	Pass
NVNT	ax40	5795	-2.81	28.5	Pass
NVNT	ax80	5775	-5.21	28.5	Pass

For those cases where the rule specifies that the Power Spectral Density be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6 dBi, the applicable output power limit shall be calculated as follows: $\text{Limit} = P_{\text{limit}} - (\text{Gain} - 6)$

Antenna B +antenna D

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	n20	5745	1.82	28.5	Pass
NVNT	n20	5785	1.84	28.5	Pass
NVNT	n20	5825	2.42	28.5	Pass
NVNT	n40	5755	-1.33	28.5	Pass
NVNT	n40	5795	-4.08	28.5	Pass
NVNT	ac20	5745	0.51	28.5	Pass
NVNT	ac20	5785	0.76	28.5	Pass
NVNT	ac20	5825	0.83	28.5	Pass
NVNT	ac40	5755	-3.45	28.5	Pass
NVNT	ac40	5795	-3.04	28.5	Pass
NVNT	ac80	5775	-6.14	28.5	Pass
NVNT	ax20	5745	0.37	28.5	Pass
NVNT	ax20	5785	0.45	28.5	Pass
NVNT	ax20	5825	-0.66	28.5	Pass
NVNT	ax40	5755	-3.11	28.5	Pass
NVNT	ax40	5795	-4.20	28.5	Pass
NVNT	ax80	5775	-5.39	28.5	Pass

For those cases where the rule specifies that the Power Spectral Density be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6 dBi, the applicable output power limit shall be calculated as follows: $\text{Limit} = P_{\text{limit}} - (\text{Gain} - 6)$

Antenna C +antenna D

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	n20	5745	1.39	28.5	Pass
NVNT	n20	5785	2.01	28.5	Pass
NVNT	n20	5825	1.85	28.5	Pass
NVNT	n40	5755	-2.39	28.5	Pass
NVNT	n40	5795	-4.11	28.5	Pass
NVNT	ac20	5745	0.61	28.5	Pass
NVNT	ac20	5785	-0.47	28.5	Pass
NVNT	ac20	5825	1.35	28.5	Pass
NVNT	ac40	5755	-2.97	28.5	Pass
NVNT	ac40	5795	-2.41	28.5	Pass
NVNT	ac80	5775	-6.33	28.5	Pass
NVNT	ax20	5745	0.14	28.5	Pass
NVNT	ax20	5785	-0.09	28.5	Pass
NVNT	ax20	5825	-1.08	28.5	Pass
NVNT	ax40	5755	-4.31	28.5	Pass
NVNT	ax40	5795	-3.41	28.5	Pass
NVNT	ax80	5775	-5.50	28.5	Pass

For those cases where the rule specifies that the Power Spectral Density be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6 dBi, the applicable output power limit shall be calculated as follows: $\text{Limit} = P_{\text{limit}} - (\text{Gain} - 6)$

For 3T3R

Antenna A +Antenna B +antenna C

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	n20	5745	3.79	26.7	Pass
NVNT	n20	5785	3.41	26.7	Pass
NVNT	n20	5825	4.34	26.7	Pass
NVNT	n40	5755	-1.10	26.7	Pass
NVNT	n40	5795	-3.40	26.7	Pass
NVNT	ac20	5745	1.18	26.7	Pass
NVNT	ac20	5785	1.46	26.7	Pass
NVNT	ac20	5825	0.70	26.7	Pass
NVNT	ac40	5755	-1.32	26.7	Pass
NVNT	ac40	5795	-1.60	26.7	Pass
NVNT	ac80	5775	-5.38	26.7	Pass
NVNT	ax20	5745	1.46	26.7	Pass
NVNT	ax20	5785	1.17	26.7	Pass
NVNT	ax20	5825	-0.19	26.7	Pass
NVNT	ax40	5755	-1.61	26.7	Pass
NVNT	ax40	5795	-1.51	26.7	Pass
NVNT	ax80	5775	-4.53	26.7	Pass

For those cases where the rule specifies that the Power Spectral Density be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6 dBi, the applicable output power limit shall be calculated as follows: $\text{Limit} = P_{\text{limit}} - (\text{Gain} - 6)$

Antenna A +Antenna B +antenna D

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	n20	5745	3.95	26.7	Pass
NVNT	n20	5785	3.40	26.7	Pass
NVNT	n20	5825	4.38	26.7	Pass
NVNT	n40	5755	-0.78	26.7	Pass
NVNT	n40	5795	-2.91	26.7	Pass
NVNT	ac20	5745	1.19	26.7	Pass
NVNT	ac20	5785	2.04	26.7	Pass
NVNT	ac20	5825	1.29	26.7	Pass
NVNT	ac40	5755	-1.62	26.7	Pass
NVNT	ac40	5795	-2.12	26.7	Pass
NVNT	ac80	5775	-4.87	26.7	Pass
NVNT	ax20	5745	2.17	26.7	Pass
NVNT	ax20	5785	1.87	26.7	Pass
NVNT	ax20	5825	0.37	26.7	Pass
NVNT	ax40	5755	-1.97	26.7	Pass
NVNT	ax40	5795	-2.49	26.7	Pass
NVNT	ax80	5775	-4.68	26.7	Pass

For those cases where the rule specifies that the Power Spectral Density be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6 dBi, the applicable output power limit shall be calculated as follows: $\text{Limit} = P_{\text{limit}} - (\text{Gain} - 6)$

Antenna B +Antenna C +antenna D

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	n20	5745	3.36	26.7	Pass
NVNT	n20	5785	3.66	26.7	Pass
NVNT	n20	5825	3.98	26.7	Pass
NVNT	n40	5755	-0.02	26.7	Pass
NVNT	n40	5795	-2.53	26.7	Pass
NVNT	ac20	5745	2.30	26.7	Pass
NVNT	ac20	5785	1.88	26.7	Pass
NVNT	ac20	5825	2.57	26.7	Pass
NVNT	ac40	5755	-1.37	26.7	Pass
NVNT	ac40	5795	-0.85	26.7	Pass
NVNT	ac80	5775	-4.67	26.7	Pass
NVNT	ax20	5745	1.70	26.7	Pass
NVNT	ax20	5785	1.72	26.7	Pass
NVNT	ax20	5825	0.73	26.7	Pass
NVNT	ax40	5755	-1.54	26.7	Pass
NVNT	ax40	5795	-1.67	26.7	Pass
NVNT	ax80	5775	-3.61	26.7	Pass

For those cases where the rule specifies that the Power Spectral Density be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6 dBi, the applicable output power limit shall be calculated as follows: $\text{Limit} = P_{\text{limit}} - (\text{Gain} - 6)$

For 4T4R

Antenna A +Antenna B+ Antenna C +antenna D


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	n20	5745	4.95	25.5	Pass
NVNT	n20	5785	4.75	25.5	Pass
NVNT	n20	5825	5.43	25.5	Pass
NVNT	n40	5755	0.39	25.5	Pass
NVNT	n40	5795	-1.68	25.5	Pass
NVNT	ac20	5745	2.76	25.5	Pass
NVNT	ac20	5785	2.90	25.5	Pass
NVNT	ac20	5825	2.88	25.5	Pass
NVNT	ac40	5755	-0.15	25.5	Pass
NVNT	ac40	5795	-0.27	25.5	Pass
NVNT	ac80	5775	-3.72	25.5	Pass
NVNT	ax20	5745	3.10	25.5	Pass
NVNT	ax20	5785	2.82	25.5	Pass
NVNT	ax20	5825	1.50	25.5	Pass
NVNT	ax40	5755	-0.72	25.5	Pass
NVNT	ax40	5795	-0.64	25.5	Pass
NVNT	ax80	5775	-3.12	25.5	Pass

For those cases where the rule specifies that the Power Spectral Density be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6 dBi, the applicable output power limit shall be calculated as follows: $\text{Limit} = P_{\text{limit}} - (\text{Gain} - 6)$

9. 26dB & 6dB & 99% Emission Bandwidth

9.1 Block Diagram Of Test Setup

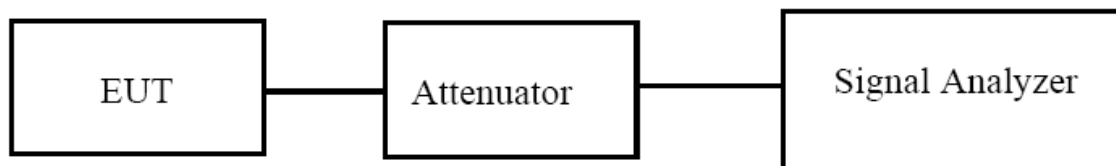

9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

9.3 Test Procedure

- a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set the VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- The following procedure shall be used for measuring (99 %) power bandwidth:
1. Set center frequency to the nominal EUT channel center frequency.
 2. Set span = 1.5 times to 5.0 times the OBW.
 3. Set RBW = 1 % to 5 % of the OBW
 4. Set VBW $\geq 3 \cdot$ RBW
 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
 6. Use the 99 % power bandwidth function of the instrument (if available).
 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

9.4 EUT Operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



9.5 Test Result



Note: A(B/C/D) Represent the value of antenna A and B/C/D, The worst data is Antenna A, only shown Antenna A Plot.



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	(5745-5825MHz)		



Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	16.043	0.5	Pass
NVNT	a	5785	16.321	0.5	Pass
NVNT	a	5825	16.266	0.5	Pass
NVNT	n20	5745	16.700	0.5	Pass
NVNT	n20	5785	17.592	0.5	Pass
NVNT	n20	5825	17.547	0.5	Pass
NVNT	n40	5755	36.280	0.5	Pass
NVNT	n40	5795	36.308	0.5	Pass
NVNT	ac20	5745	17.730	0.5	Pass
NVNT	ac20	5785	17.741	0.5	Pass
NVNT	ac20	5825	17.798	0.5	Pass
NVNT	ac40	5755	36.490	0.5	Pass
NVNT	ac40	5795	36.494	0.5	Pass
NVNT	ac80	5775	76.455	0.5	Pass
NVNT	ax20	5745	17.747	0.5	Pass
NVNT	ax20	5785	17.674	0.5	Pass
NVNT	ax20	5825	17.729	0.5	Pass
NVNT	ax40	5755	36.490	0.5	Pass
NVNT	ax40	5795	36.502	0.5	Pass
NVNT	ax80	5775	76.449	0.5	Pass


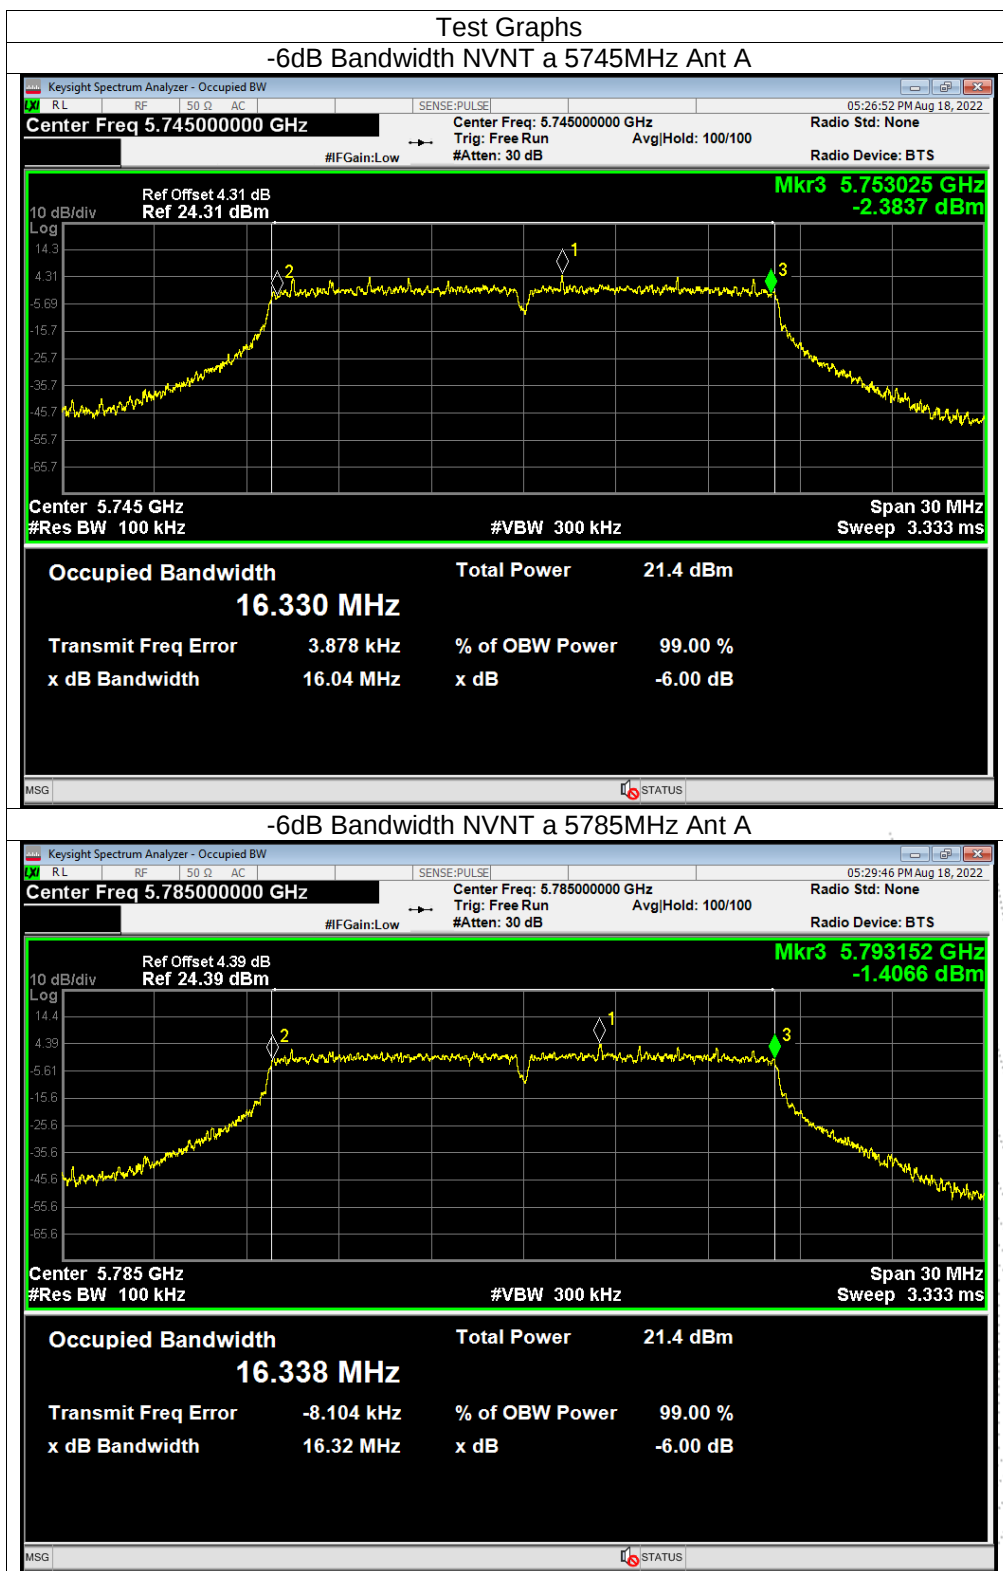


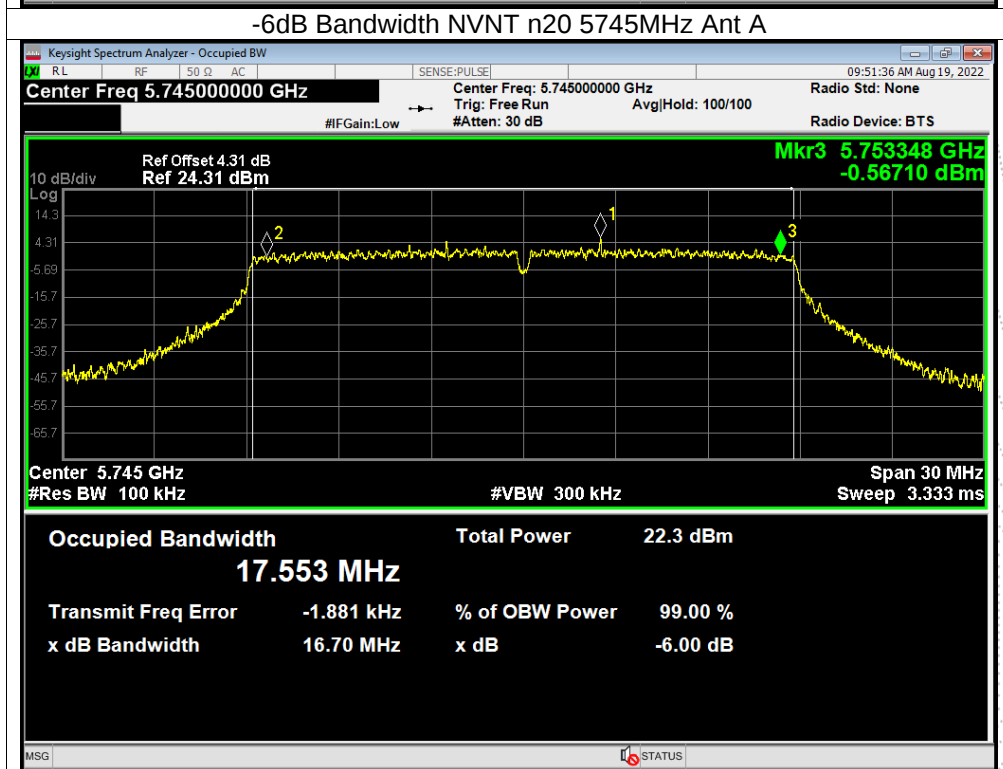
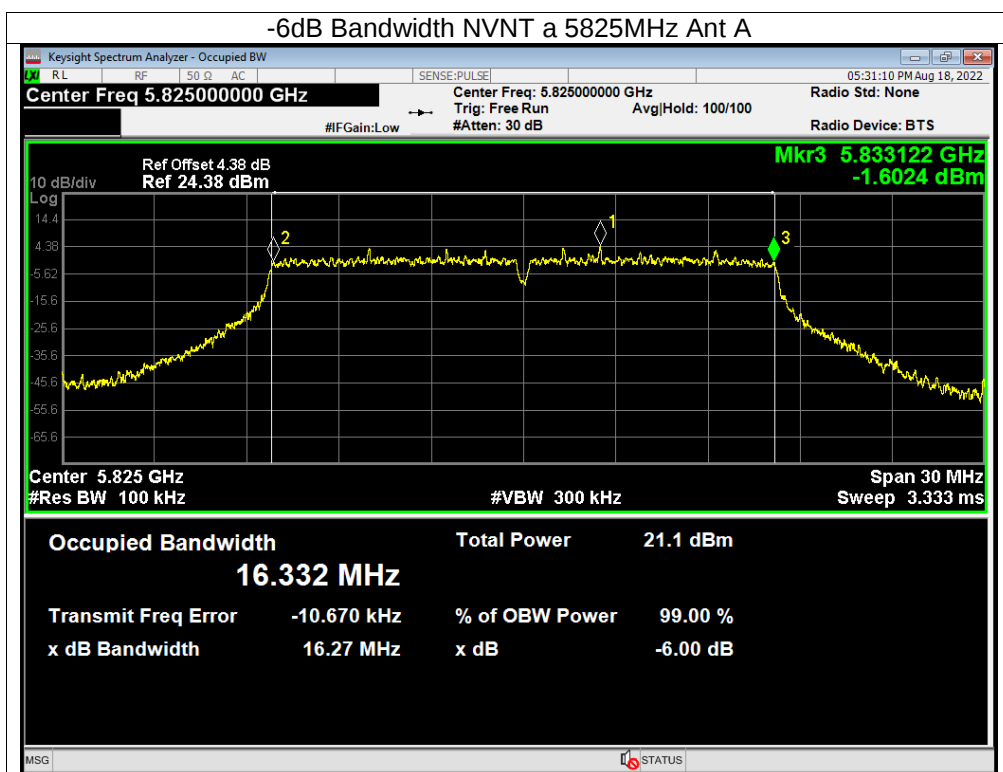


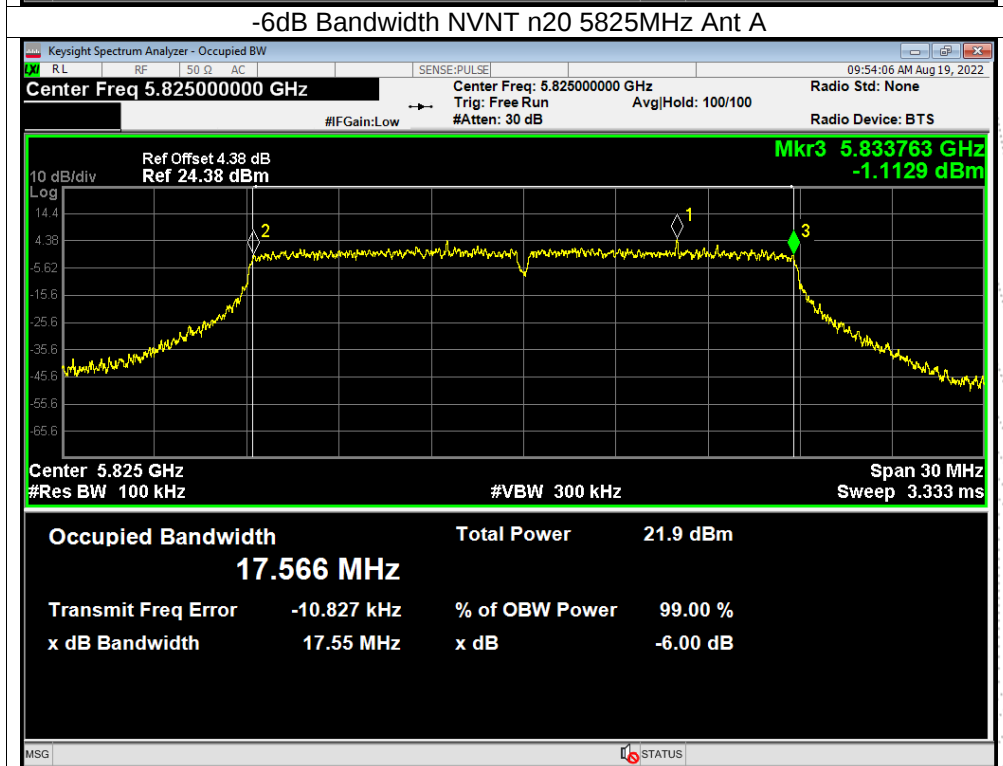
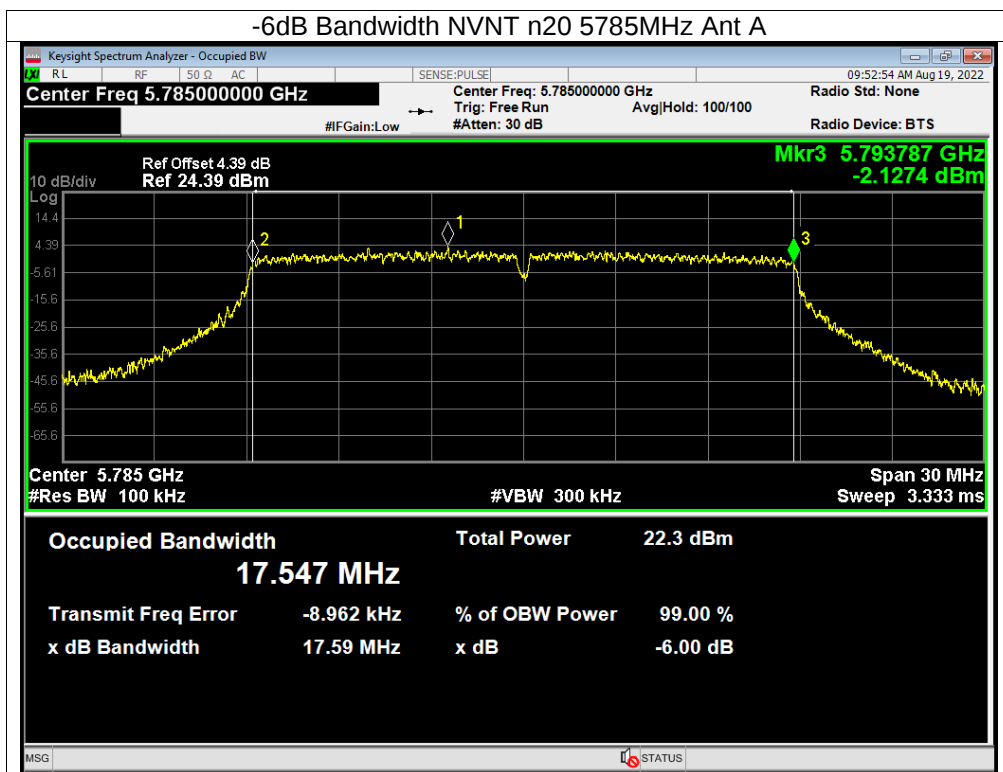


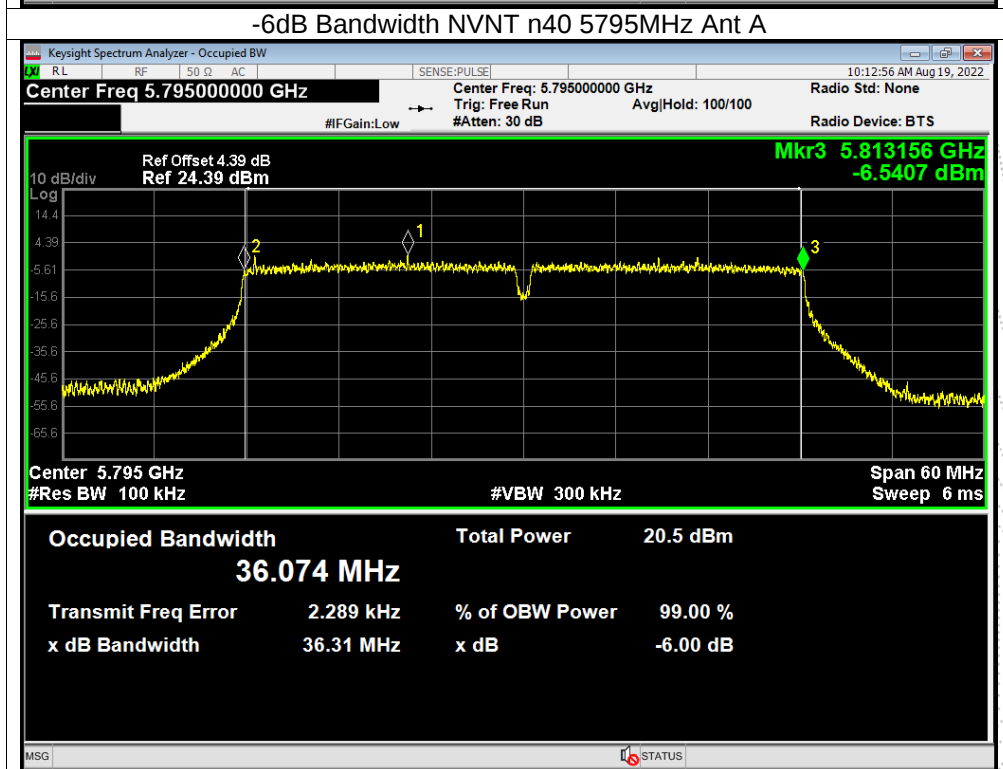
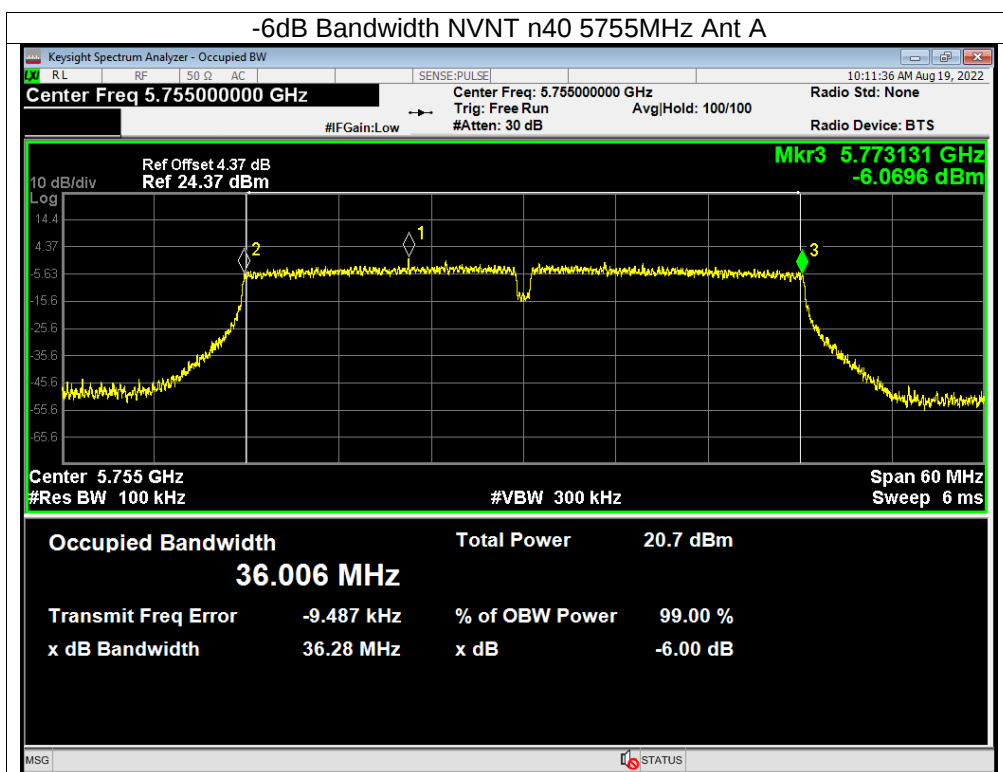


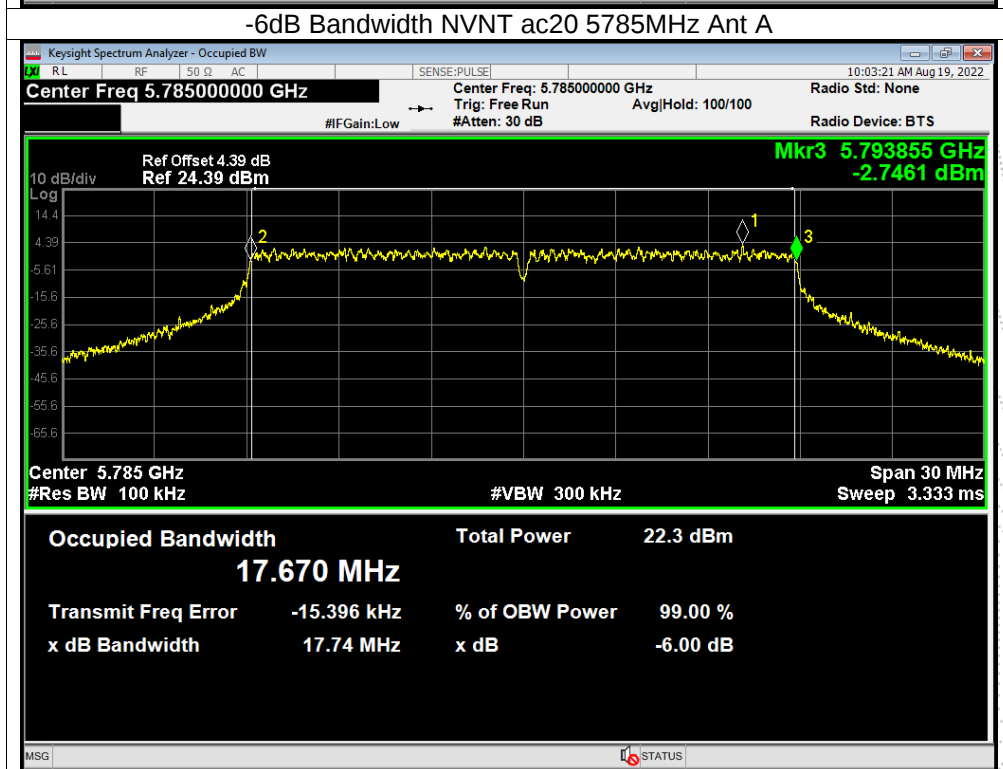
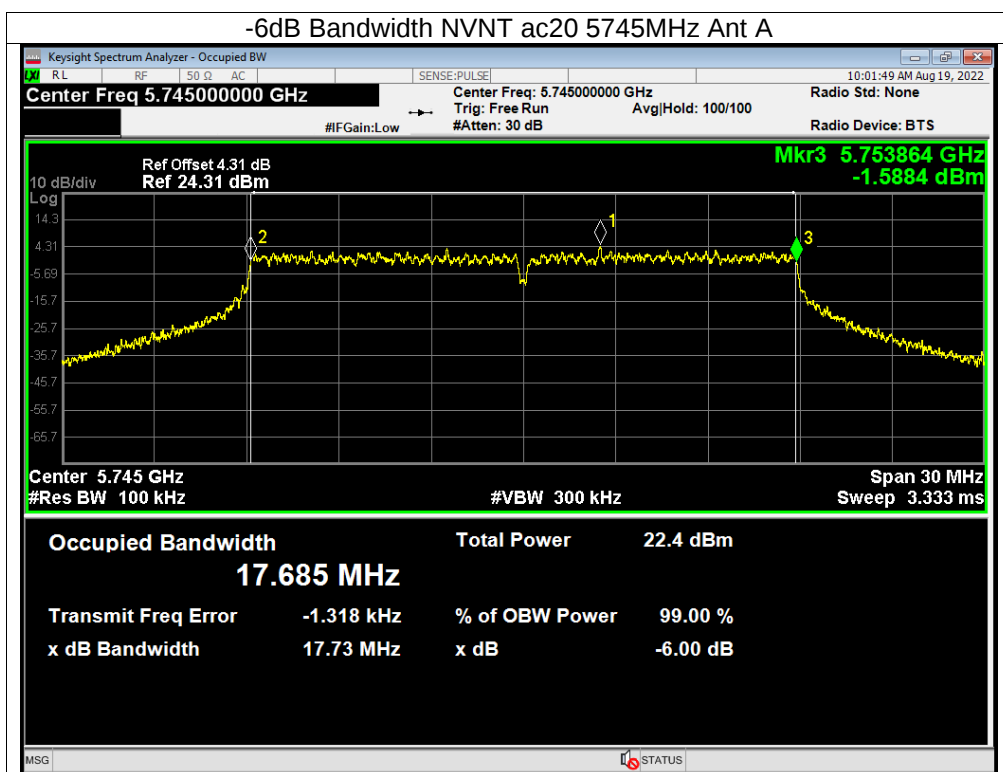


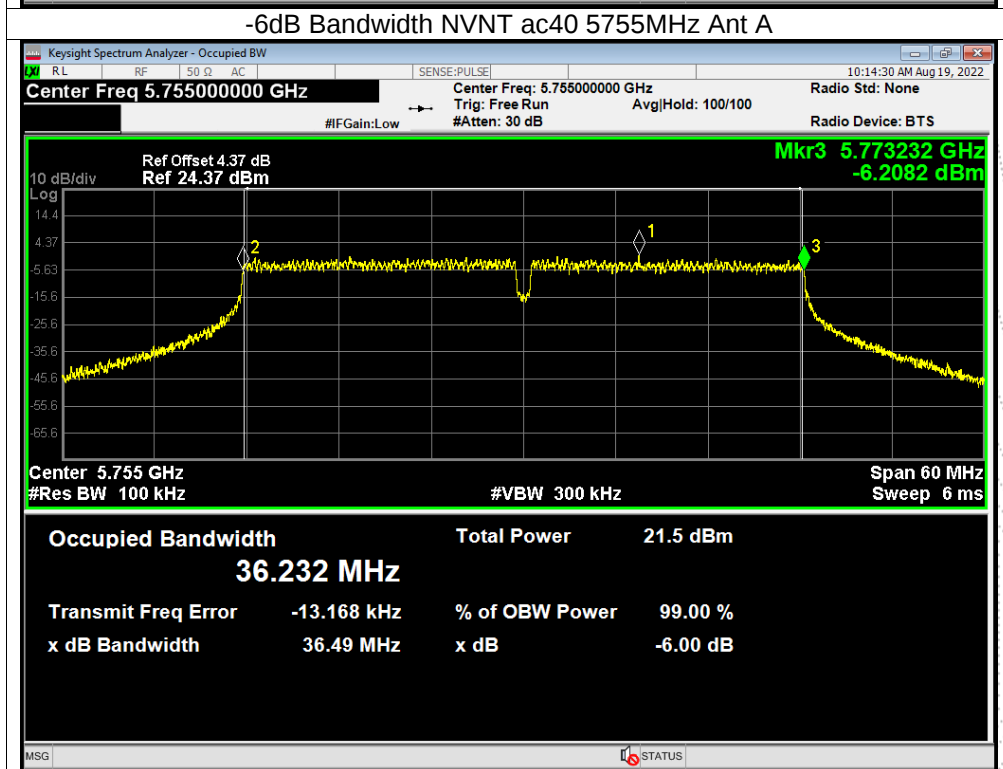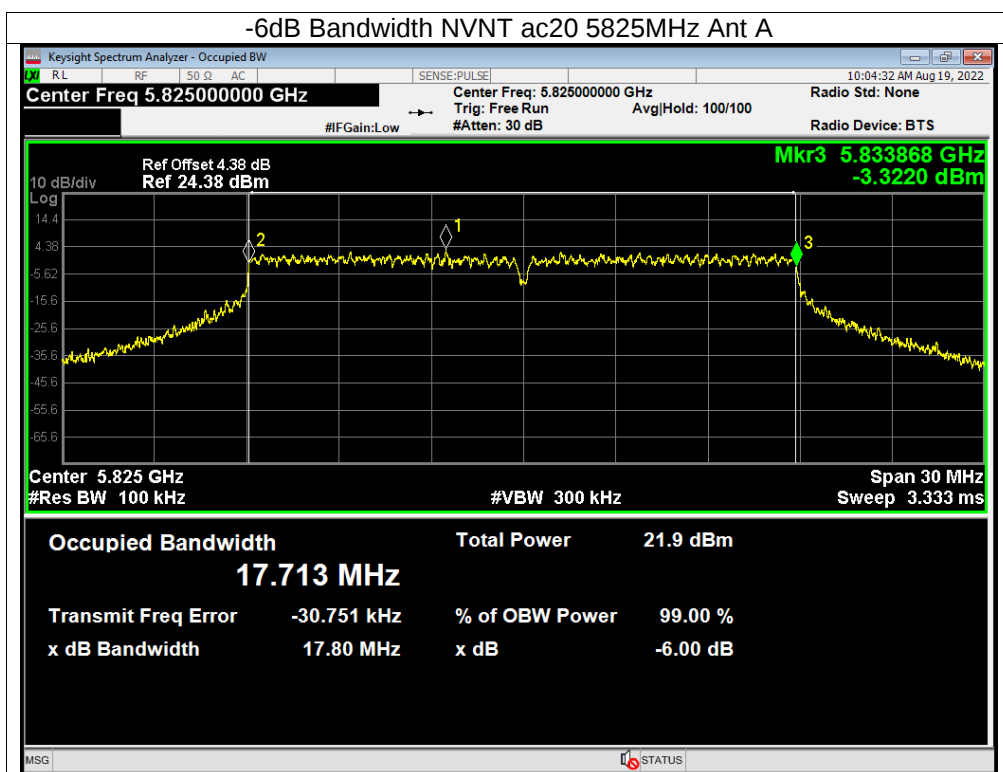

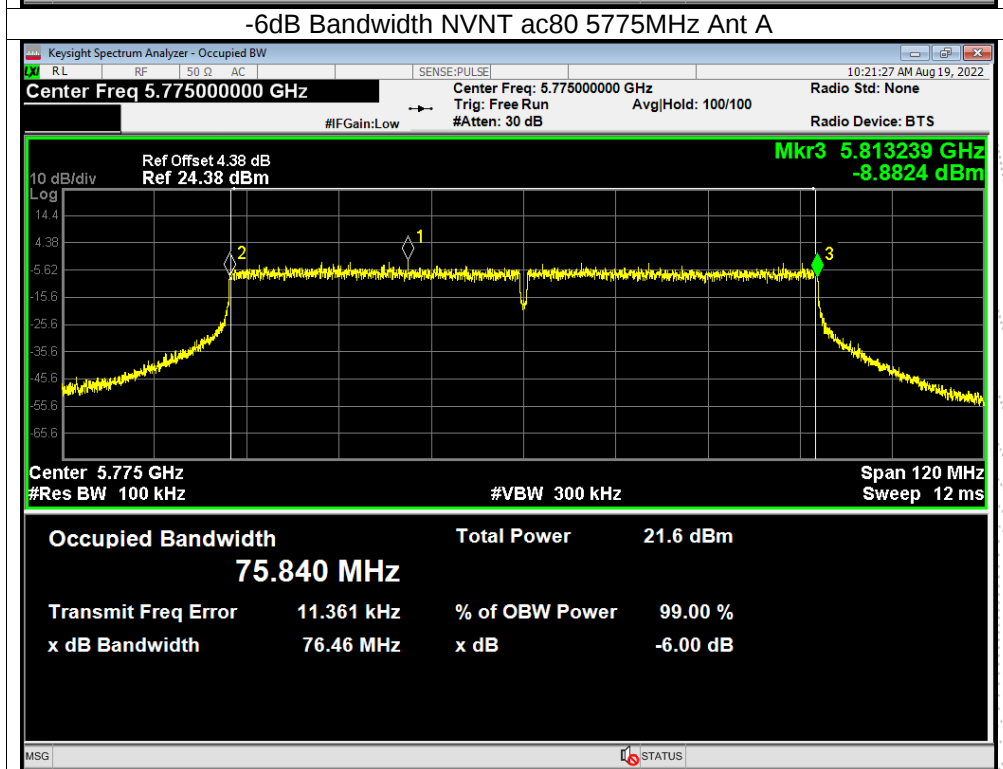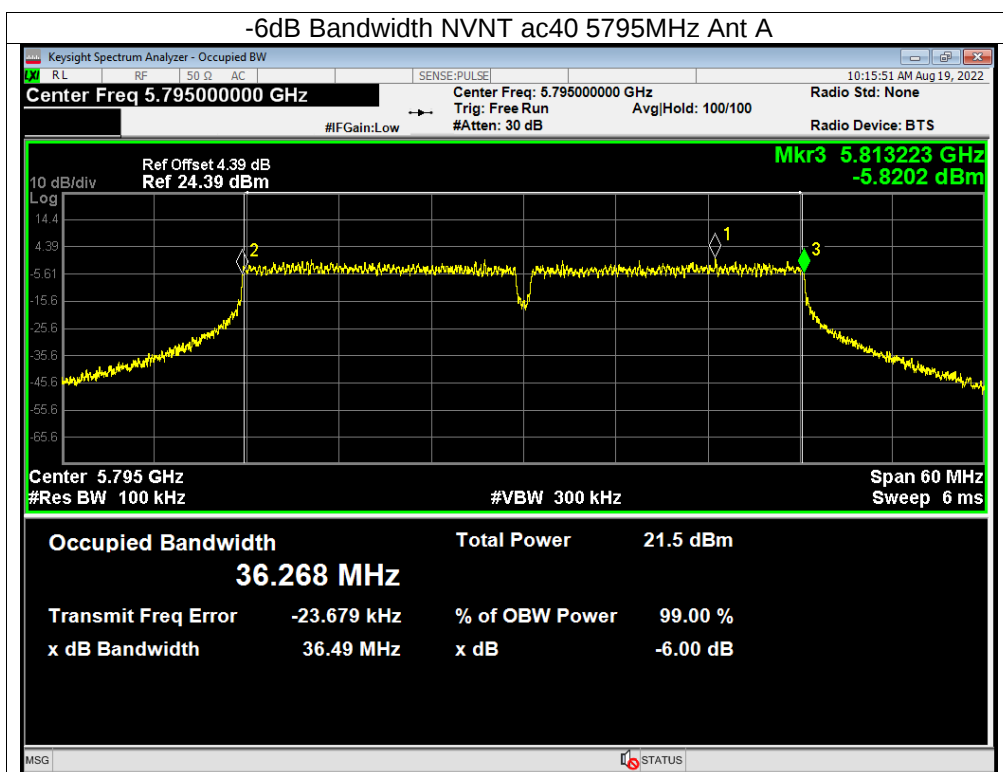

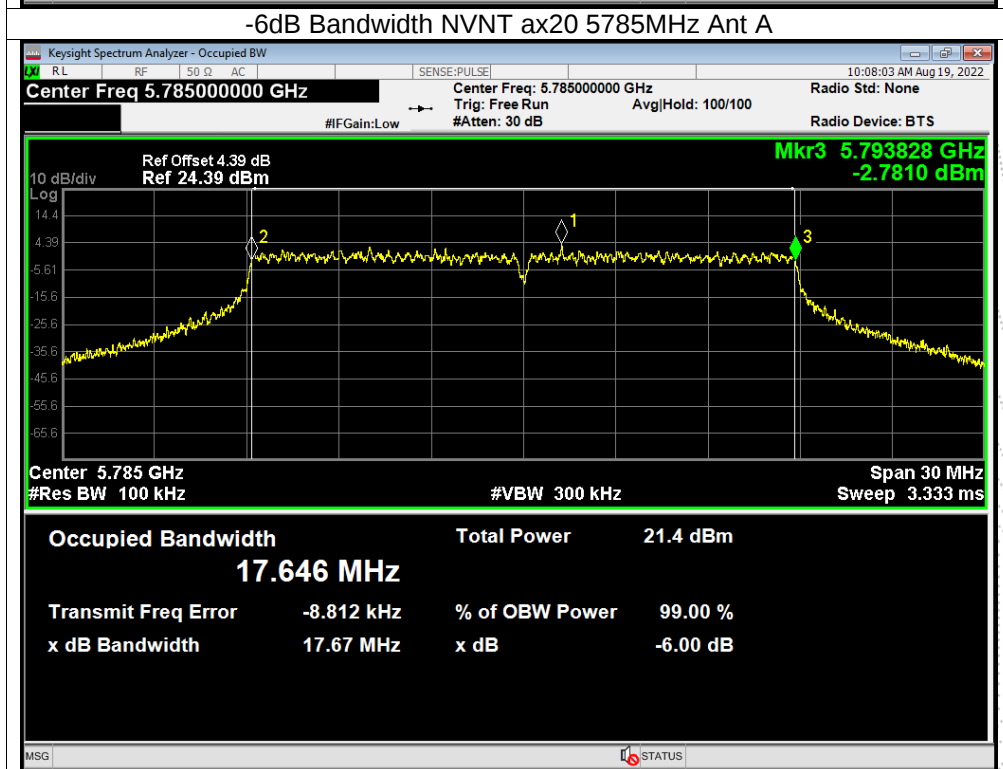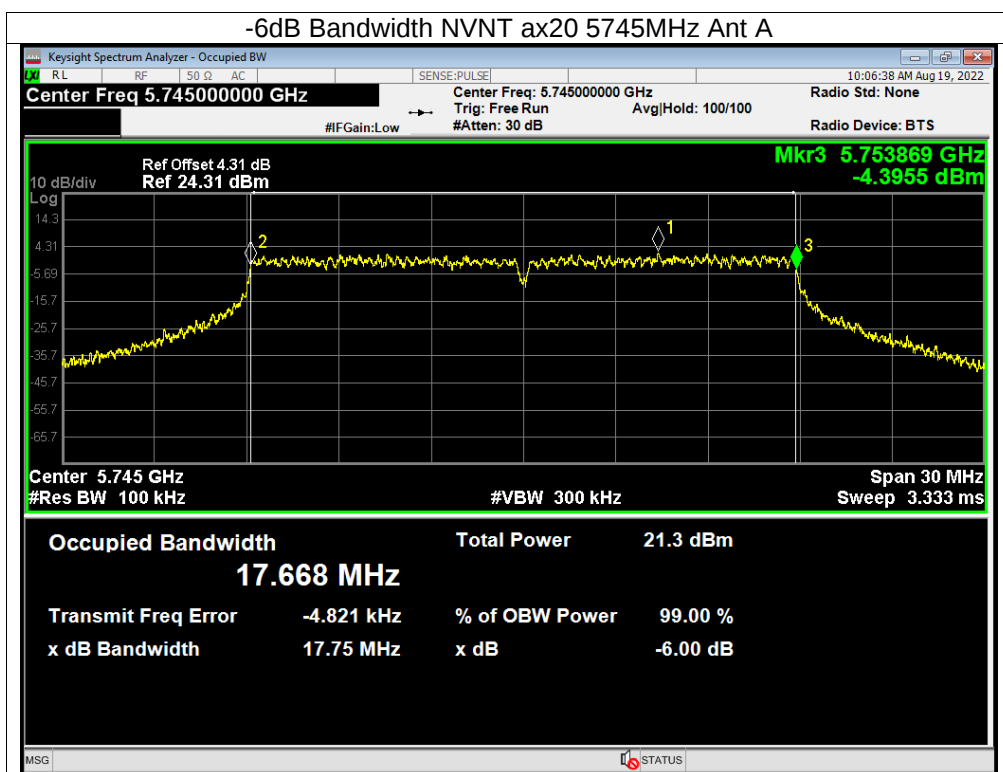

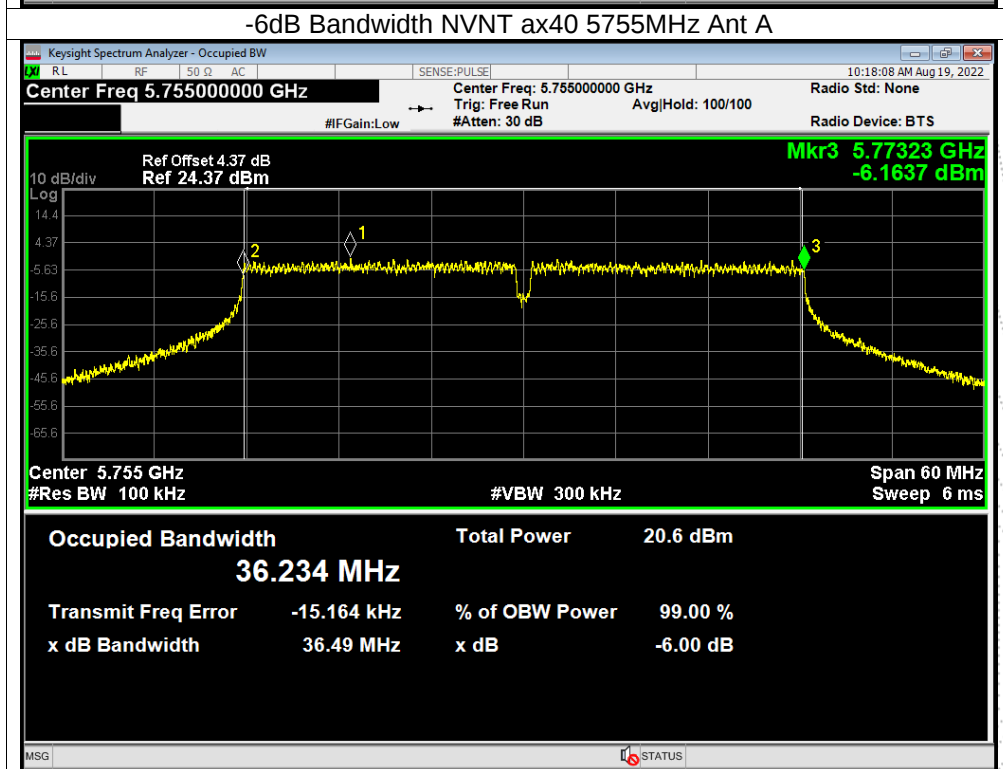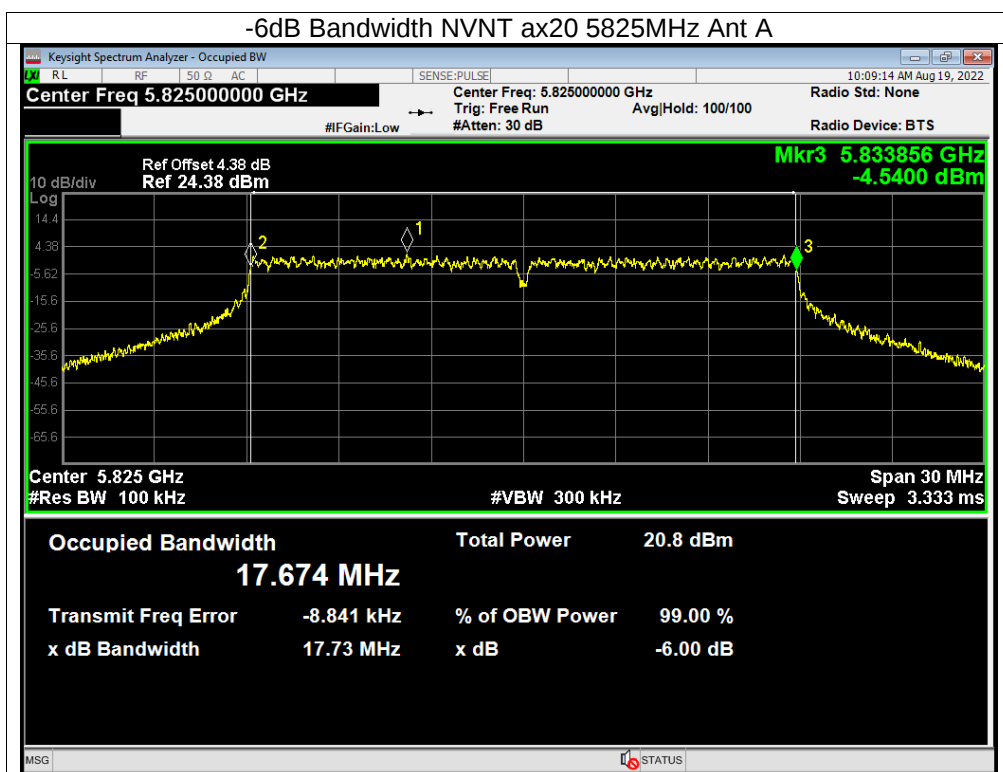

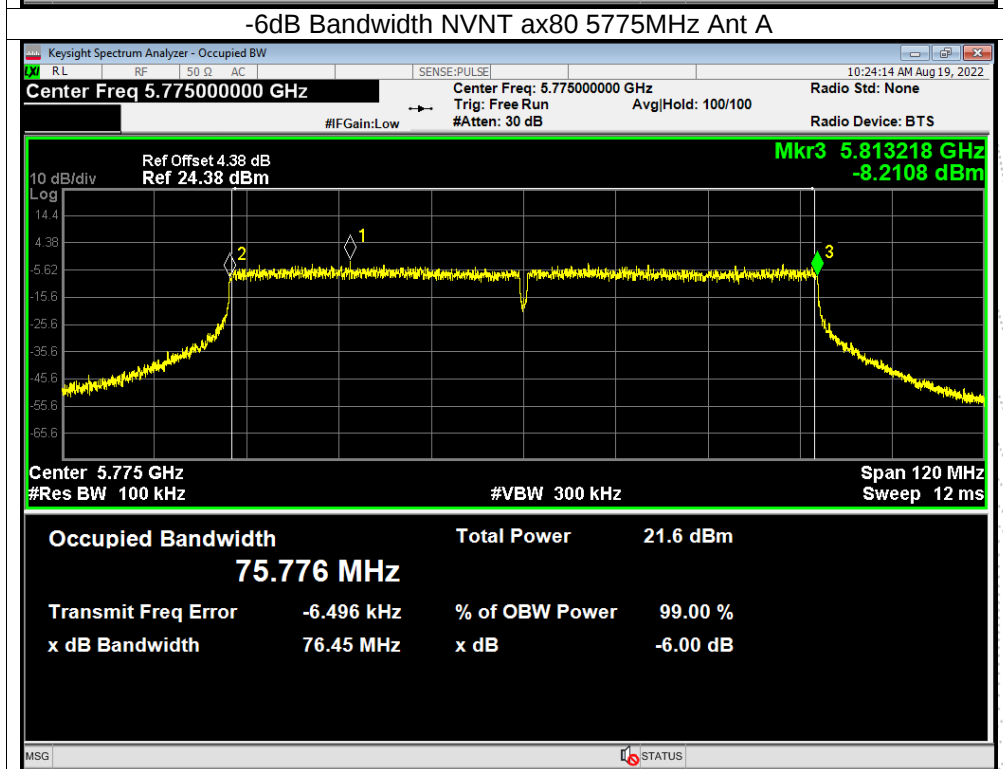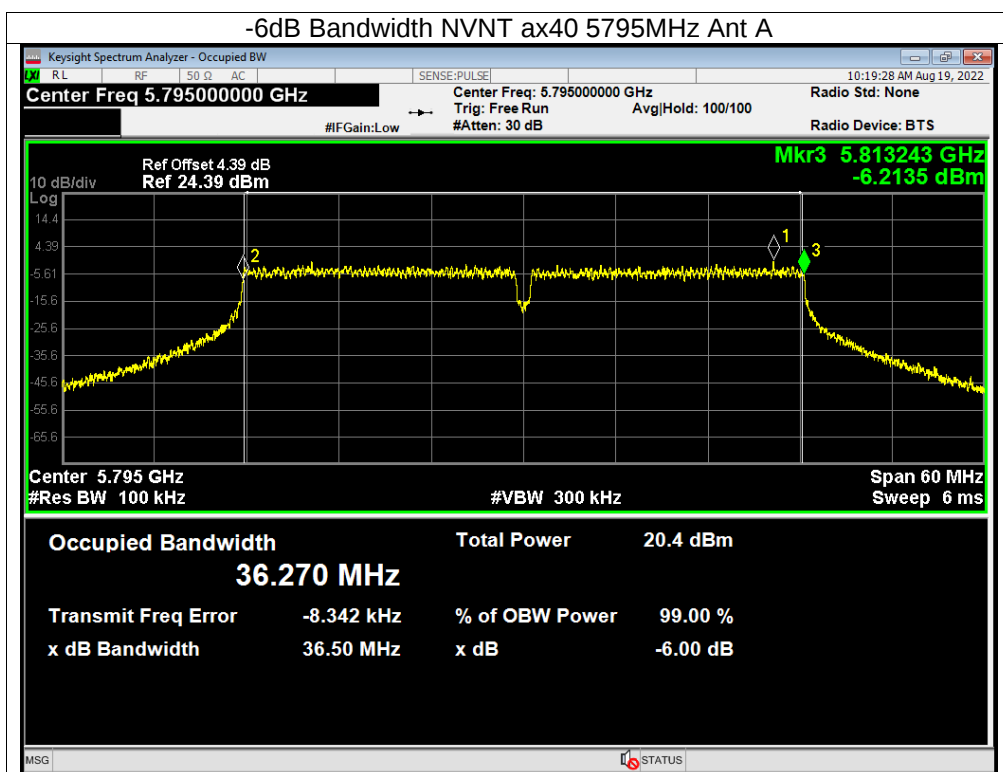

Note: A(B/C/D) Represent the value of antenna A and B/C/D, The worst data is Antenna A, only shown Antenna A Plot.

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	(5745-5825MHz)		

Condition	Mode	Frequency (MHz)	99% dB Bandwidth (MHz)	26 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	16.366	18.84	Pass
NVNT	a	5785	16.352	18.81	Pass
NVNT	a	5825	16.36	18.95	Pass
NVNT	n20	5745	17.571	20.10	Pass
NVNT	n20	5785	17.542	20.06	Pass
NVNT	n20	5825	17.577	20.13	Pass
NVNT	n40	5755	36.041	39.83	Pass
NVNT	n40	5795	36.121	40.08	Pass
NVNT	ac20	5745	17.755	21.42	Pass
NVNT	ac20	5785	17.728	21.73	Pass
NVNT	ac20	5825	17.764	21.74	Pass
NVNT	ac40	5755	36.405	43.38	Pass
NVNT	ac40	5795	36.459	44.04	Pass
NVNT	ac80	5775	76.008	88.92	Pass
NVNT	ax20	5745	17.745	21.57	Pass
NVNT	ax20	5785	17.739	22.43	Pass
NVNT	ax20	5825	17.767	21.70	Pass
NVNT	ax40	5755	36.382	41.79	Pass
NVNT	ax40	5795	36.436	44.27	Pass
NVNT	ax80	5775	76.057	88.67	Pass

