



Appendix F

RF Test Data for 5.5GWIFI(Conducted Measurement)

Product Name: AAWireless Nano

Test Model: A3BN

Environmental Conditions

Temperature:	24.2° C
Relative Humidity:	53.5%
ATM Pressure:	100.0 kPa
Test Engineer:	Jerry Chu
Supervised by:	Can Kun



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



F.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)
NVNT	a	5500	Ant1	29.17
NVNT	a	5580	Ant1	29.2
NVNT	a	5700	Ant1	28.87
NVNT	n20	5500	Ant1	28.96
NVNT	n20	5580	Ant1	29.85
NVNT	n20	5700	Ant1	29.53
NVNT	n40	5510	Ant1	55.16
NVNT	n40	5550	Ant1	52.69
NVNT	n40	5670	Ant1	51.93
NVNT	ac20	5500	Ant1	29.79
NVNT	ac20	5580	Ant1	29.48
NVNT	ac20	5700	Ant1	28.2
NVNT	ac40	5510	Ant1	55.43
NVNT	ac40	5550	Ant1	55.39
NVNT	ac40	5670	Ant1	57.65
NVNT	ac80	5530	Ant1	86.55
NVNT	ac80	5610	Ant1	86.72
NVNT	ax20	5500	Ant1	28.81
NVNT	ax20	5580	Ant1	29.83
NVNT	ax20	5700	Ant1	29.32
NVNT	ax40	5510	Ant1	57.69
NVNT	ax40	5550	Ant1	53.01
NVNT	ax40	5670	Ant1	55.05
NVNT	ax80	5530	Ant1	85.35
NVNT	ax80	5610	Ant1	86.43



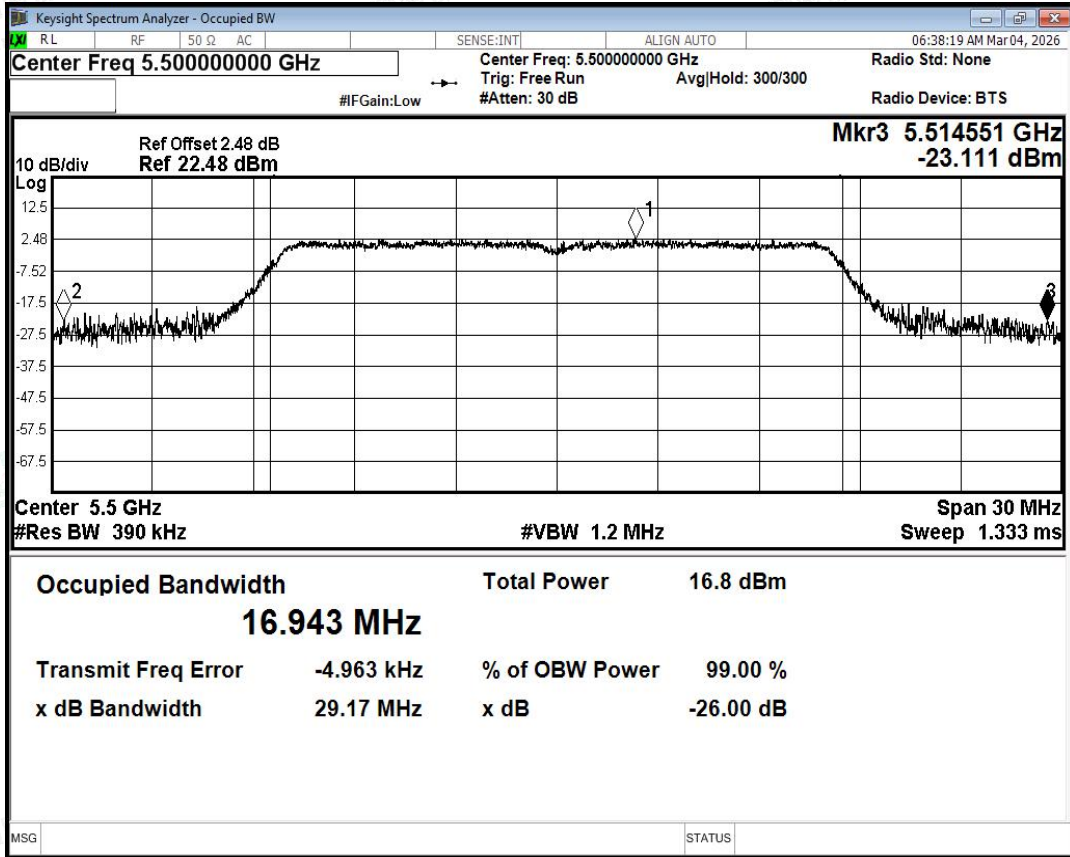

-26dB Bandwidth NVNT a 5500MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

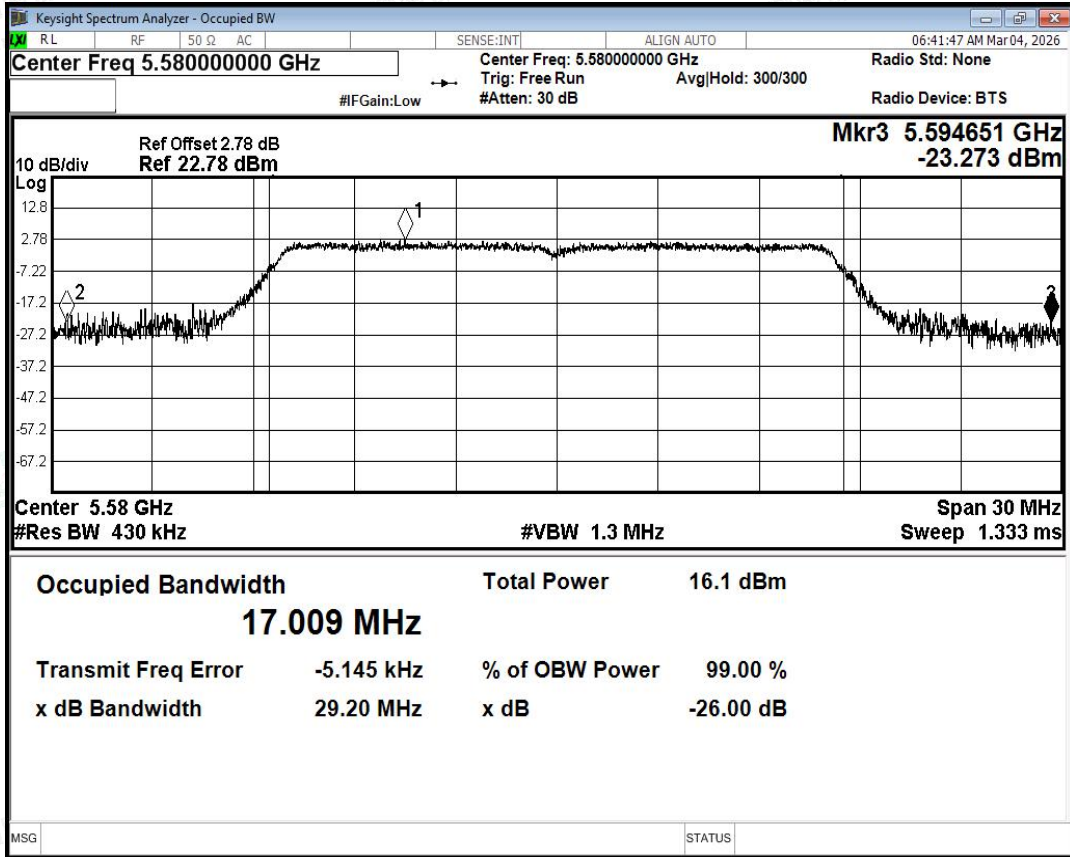

-26dB Bandwidth NVNT a 5580MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

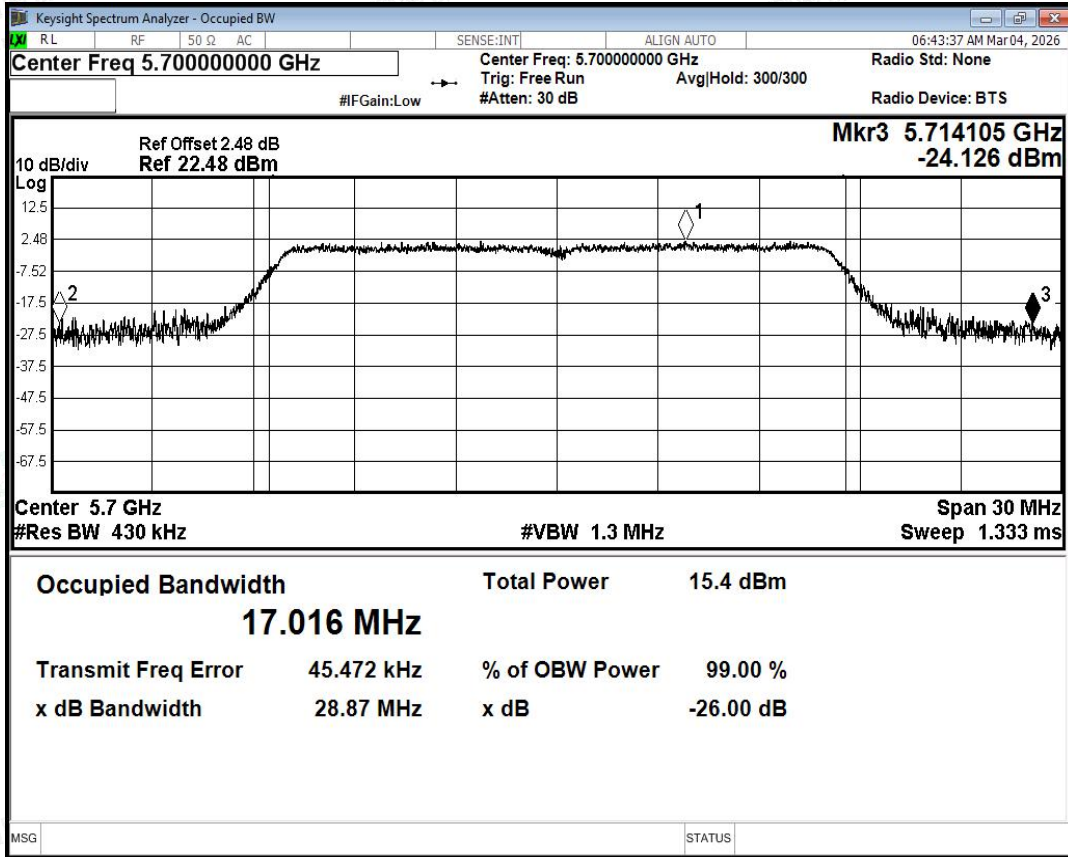

-26dB Bandwidth NVNT a 5700MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

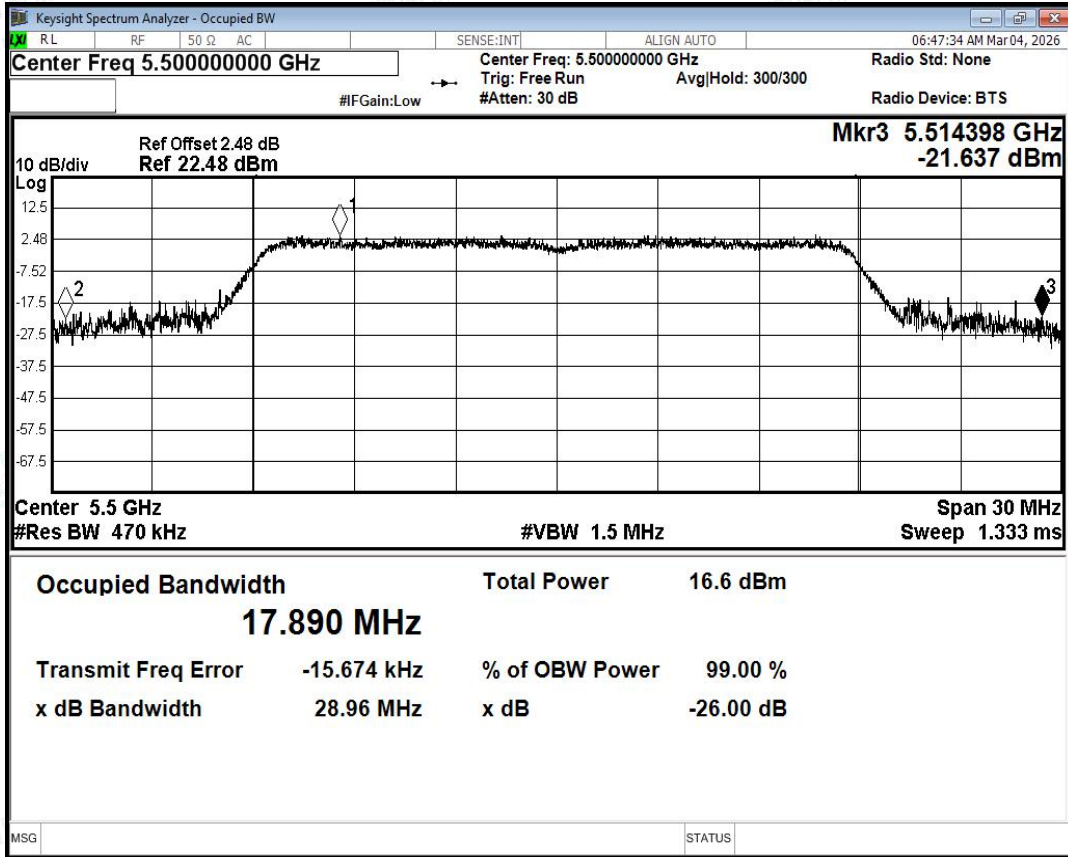

-26dB Bandwidth NVNT n20 5500MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

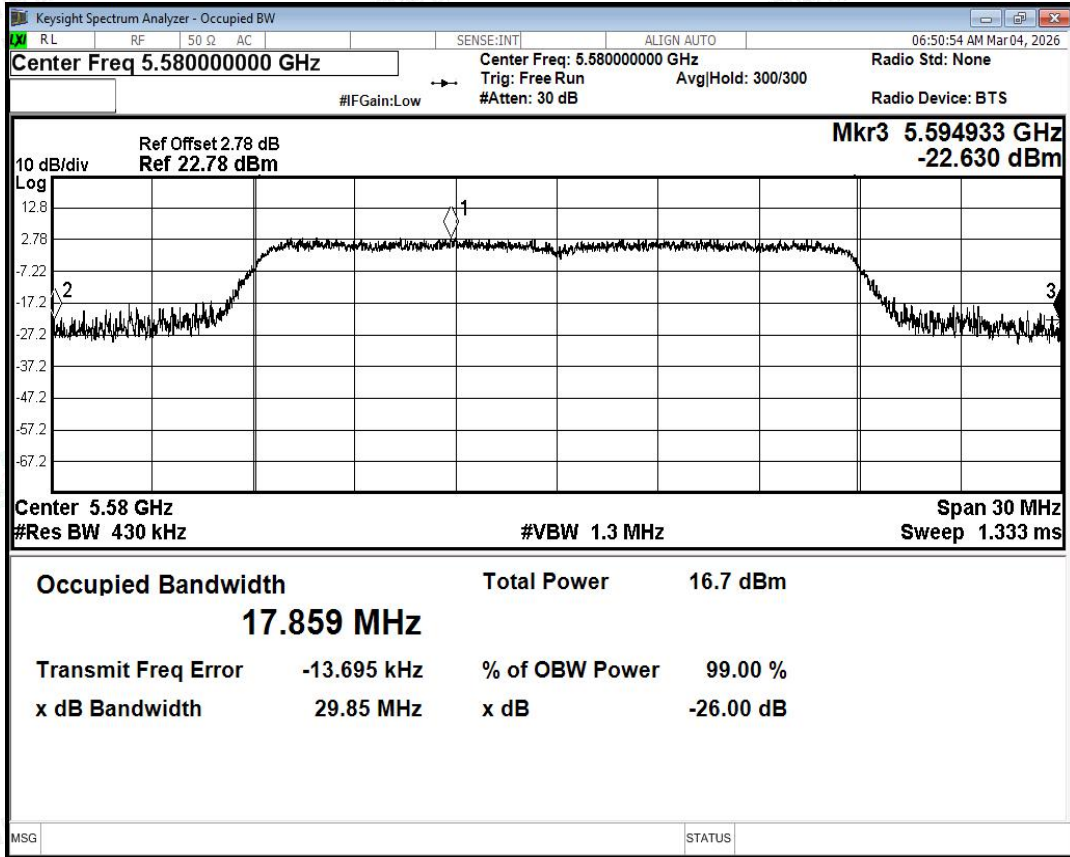

-26dB Bandwidth NVNT n20 5580MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

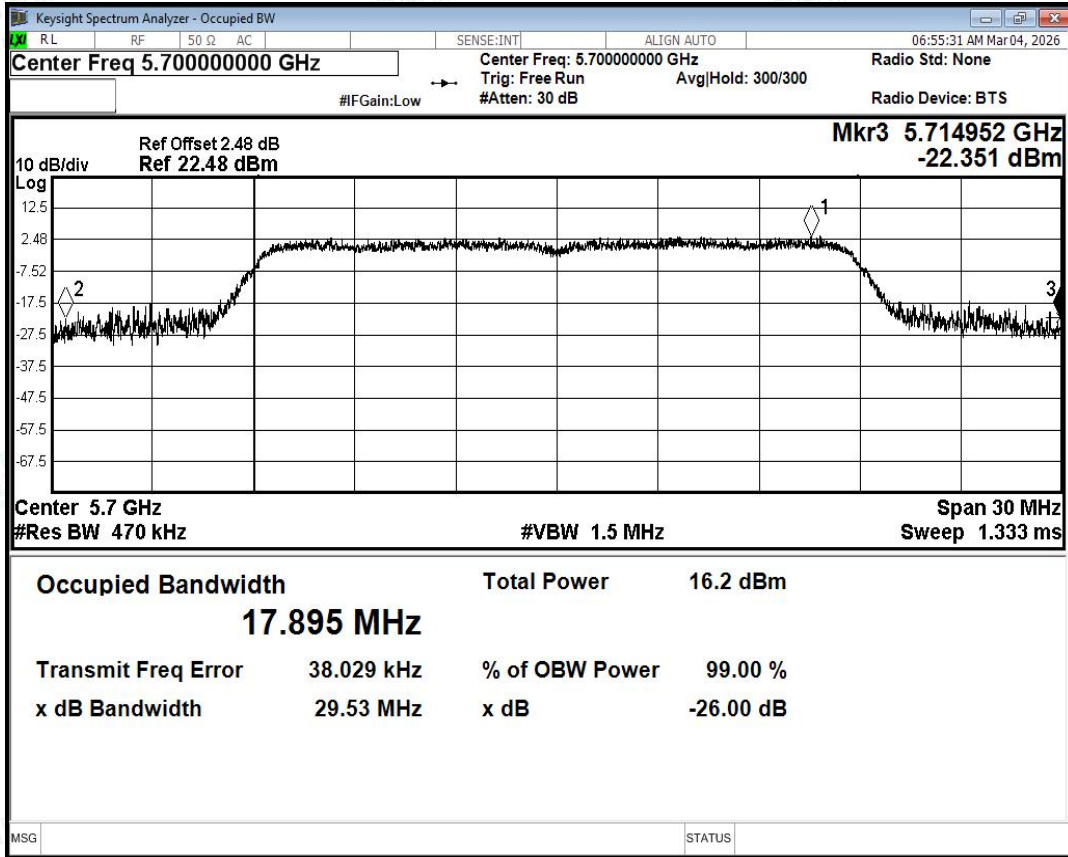

-26dB Bandwidth NVNT n20 5700MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

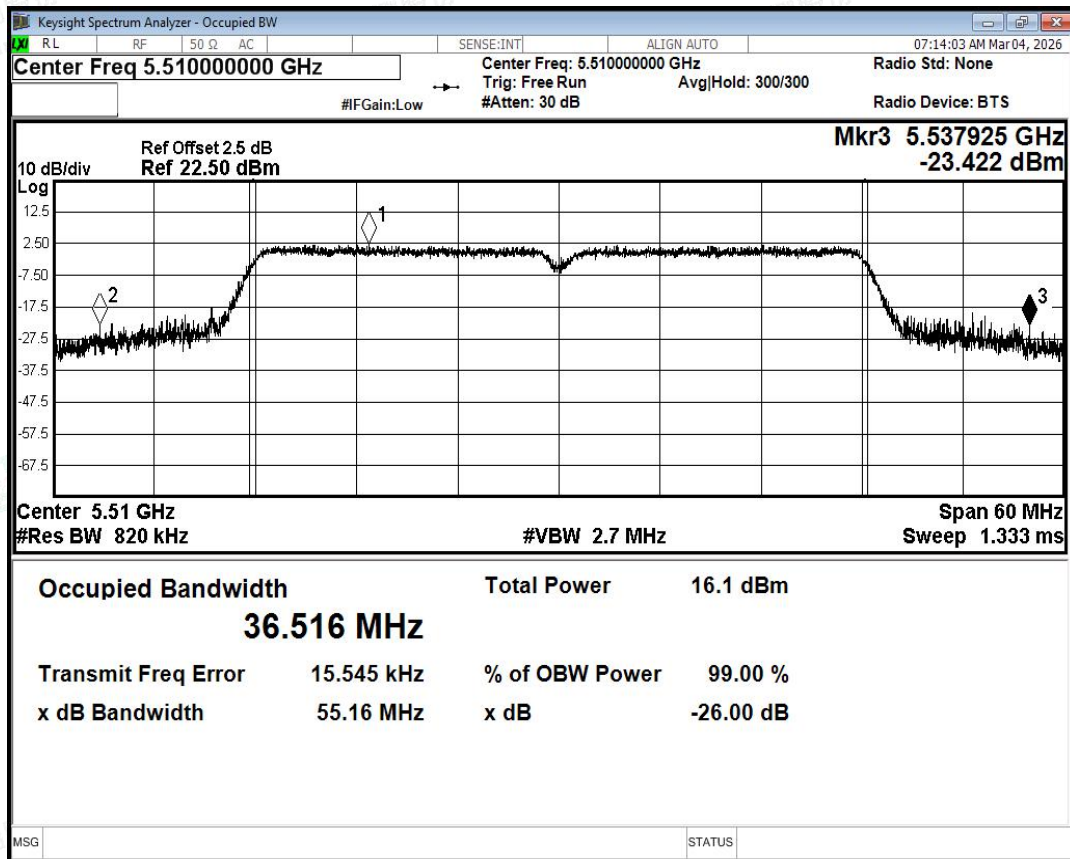

-26dB Bandwidth NVNT n40 5510MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

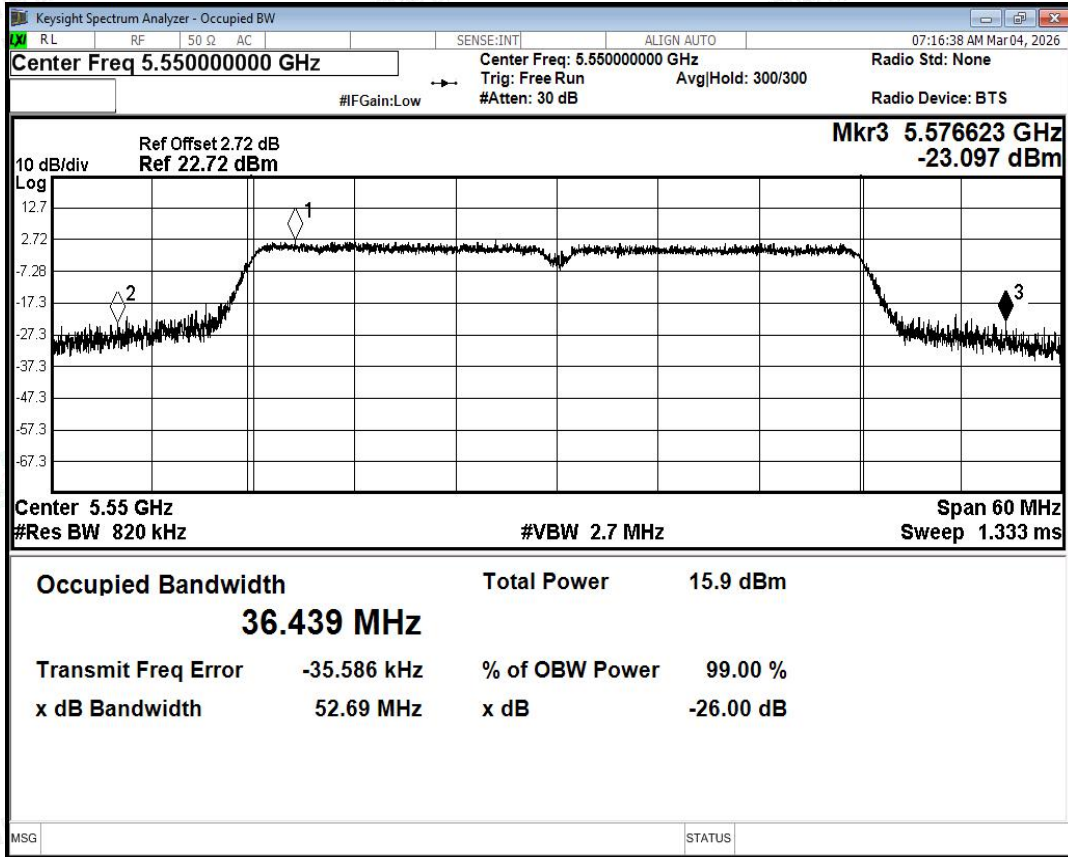

-26dB Bandwidth NVNT n40 5550MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

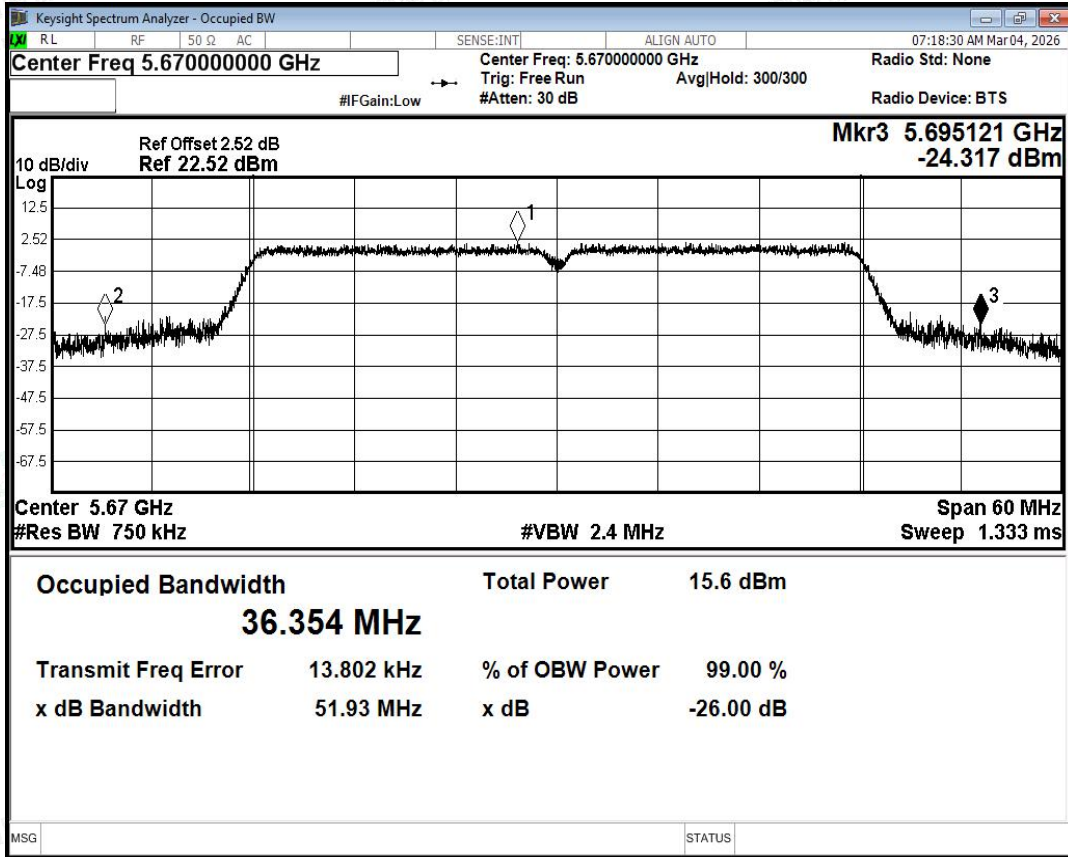

-26dB Bandwidth NVNT n40 5670MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

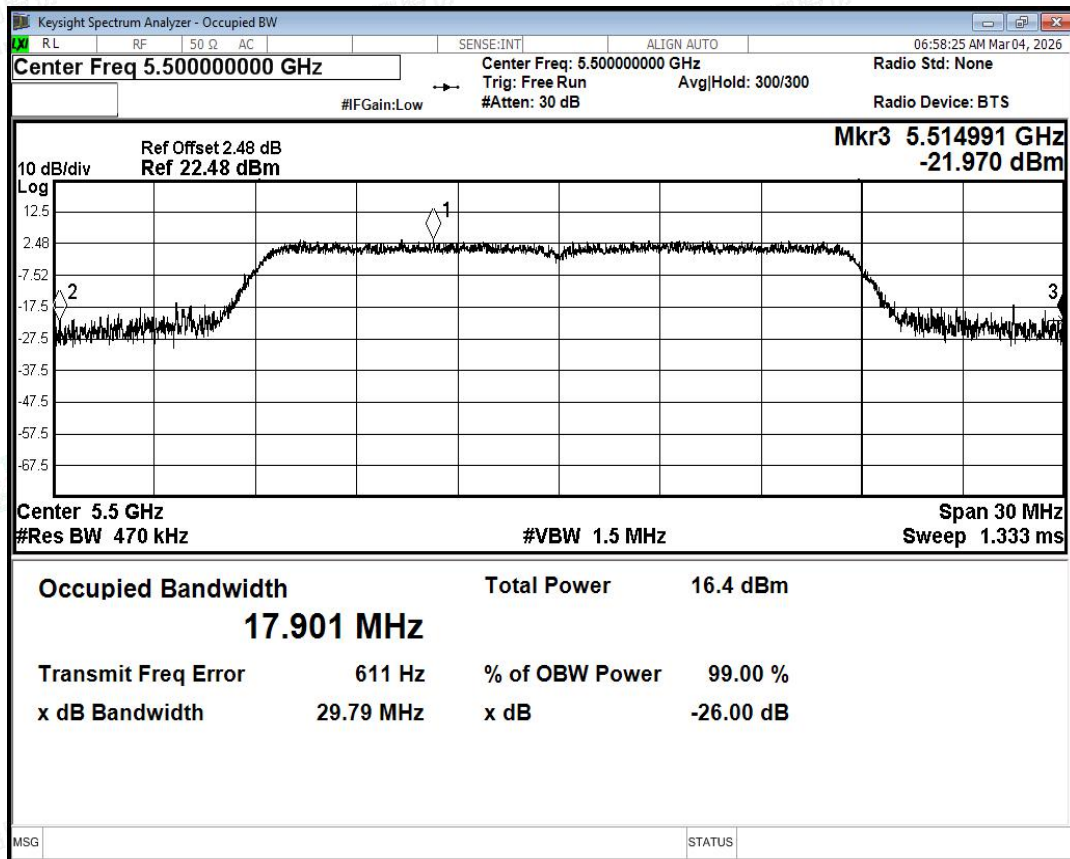

-26dB Bandwidth NVNT ac20 5500MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

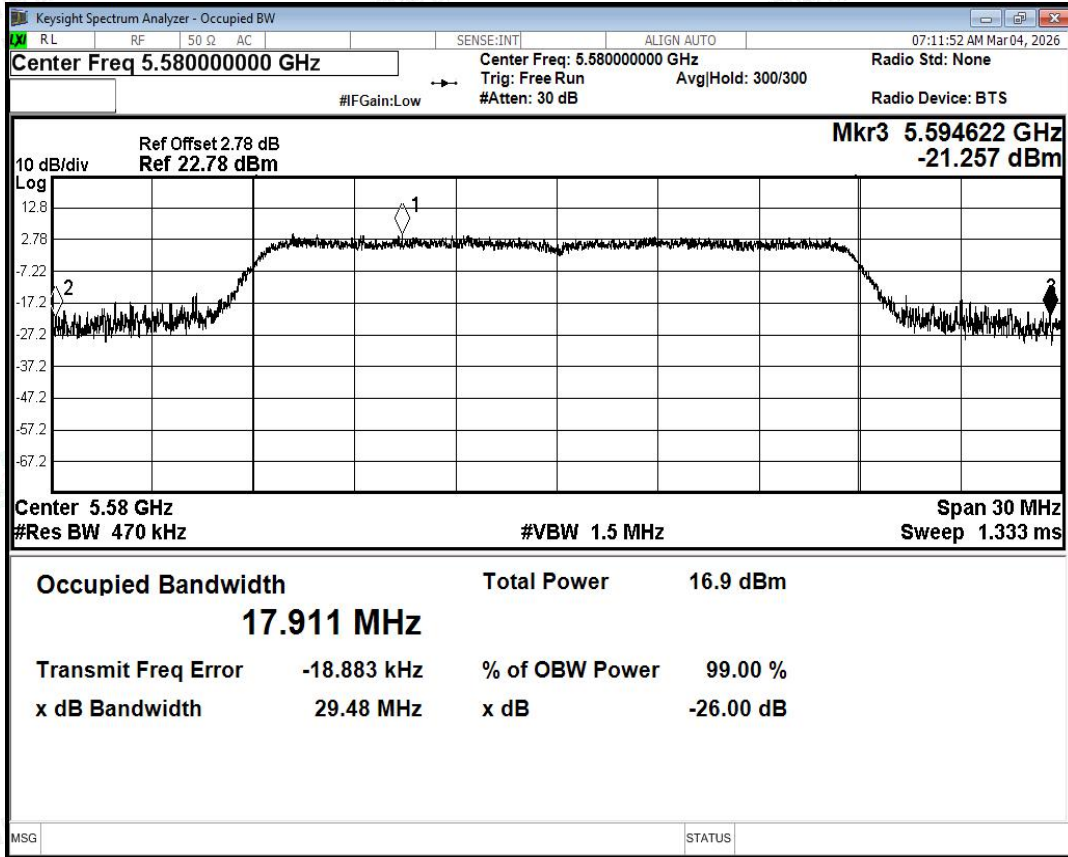

-26dB Bandwidth NVNT ac20 5580MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

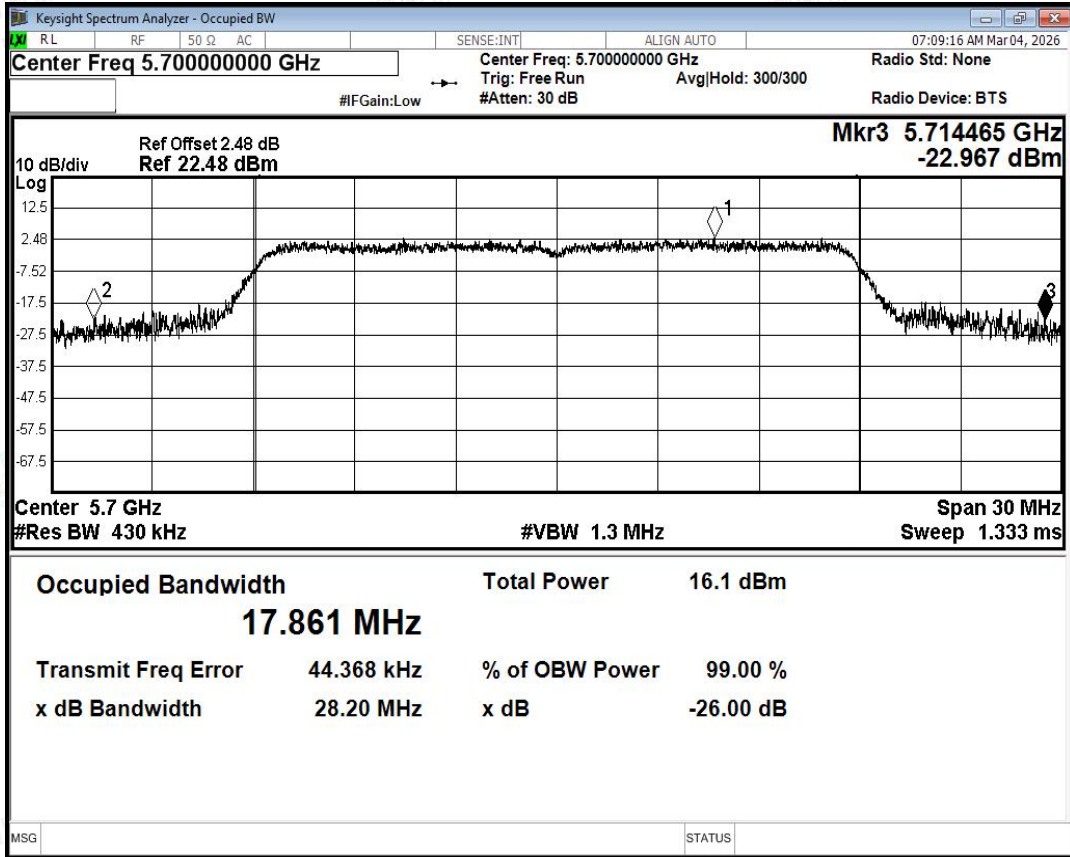

-26dB Bandwidth NVNT ac20 5700MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

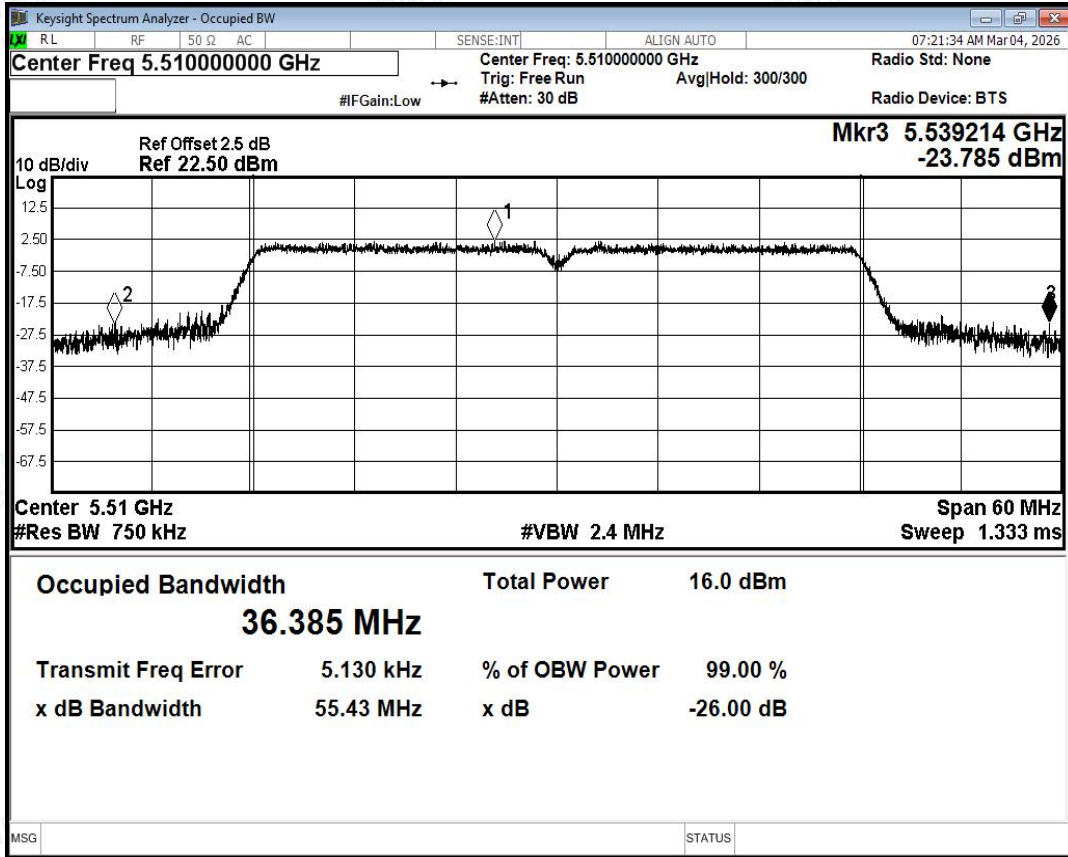

-26dB Bandwidth NVNT ac40 5510MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

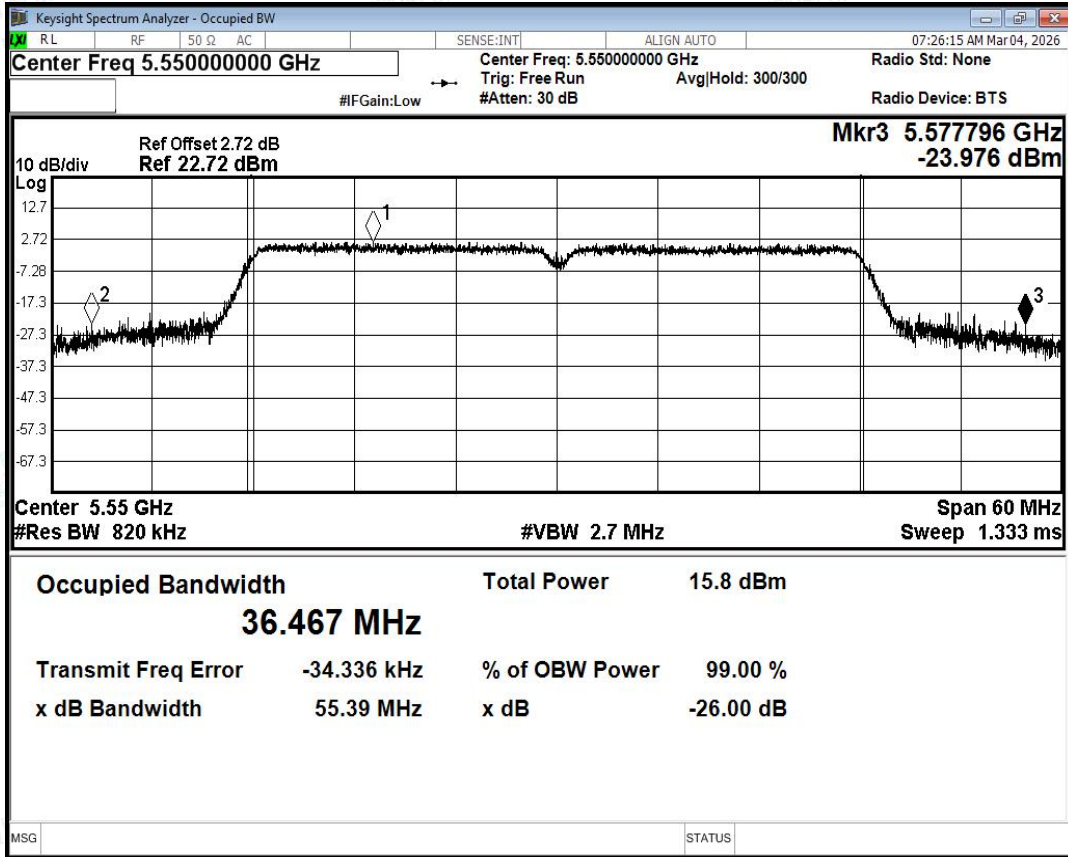

-26dB Bandwidth NVNT ac40 5550MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

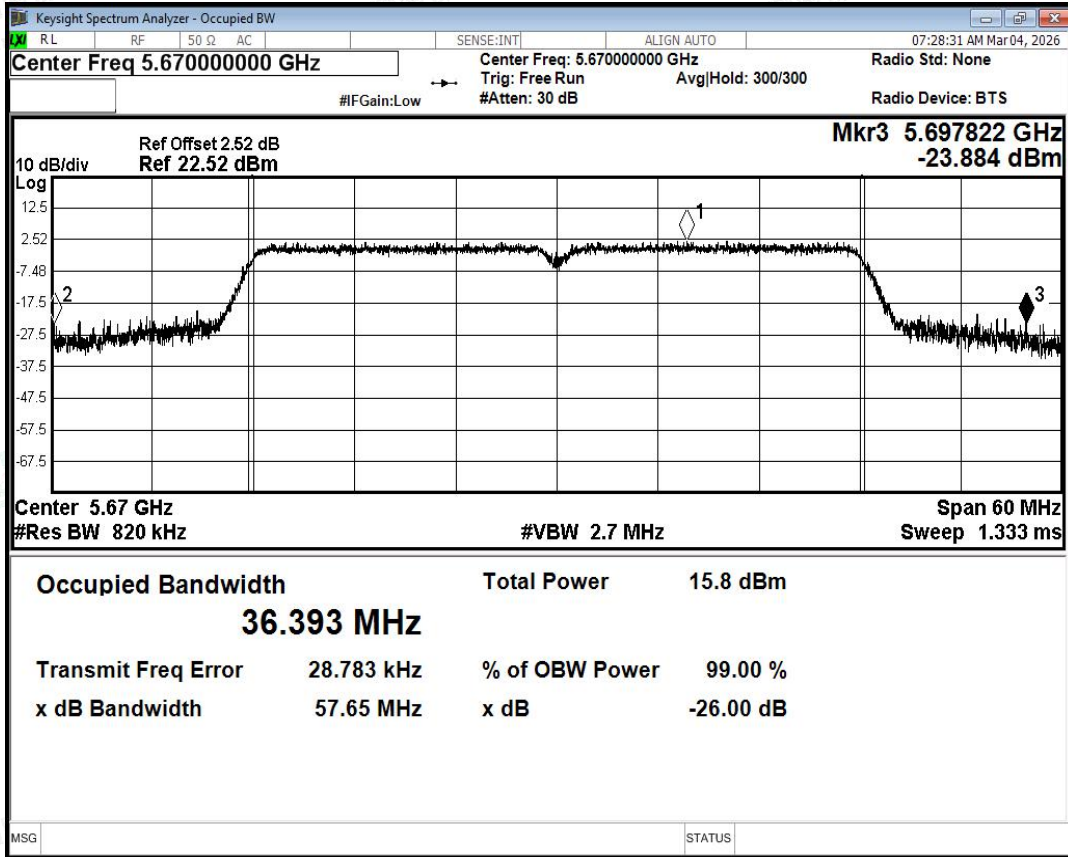

-26dB Bandwidth NVNT ac40 5670MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

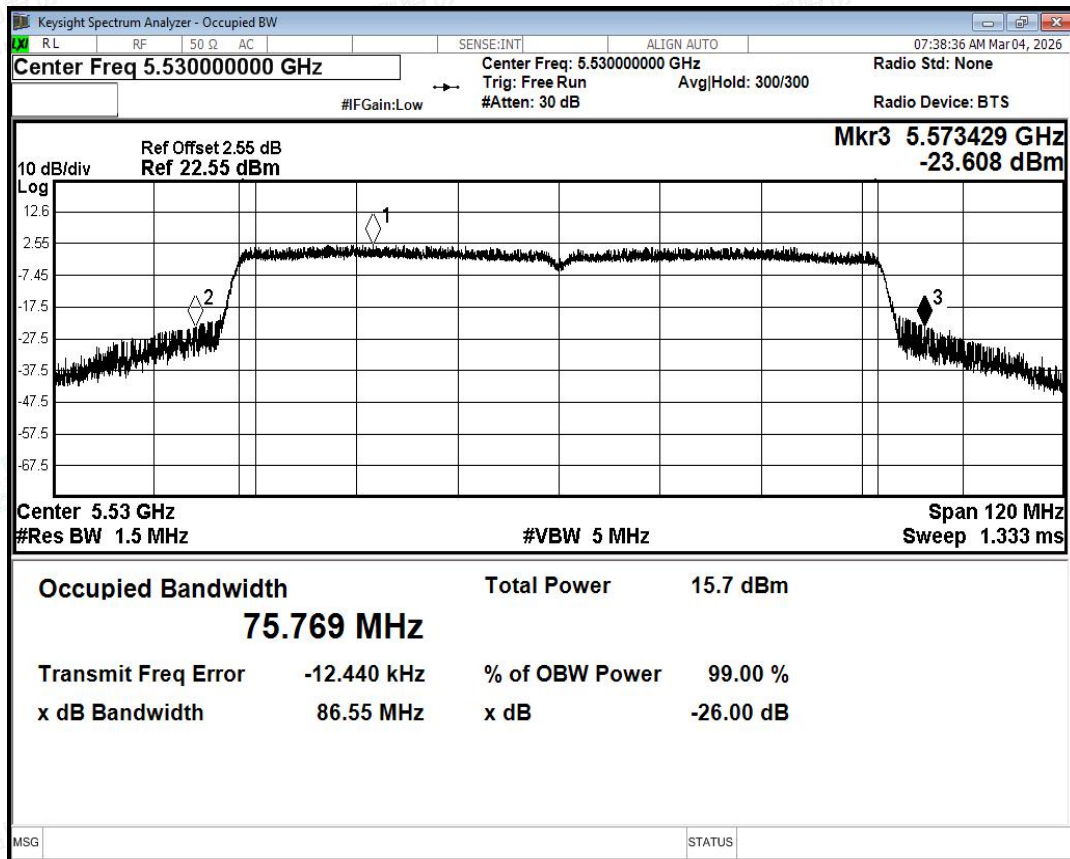

-26dB Bandwidth NVNT ac80 5530MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

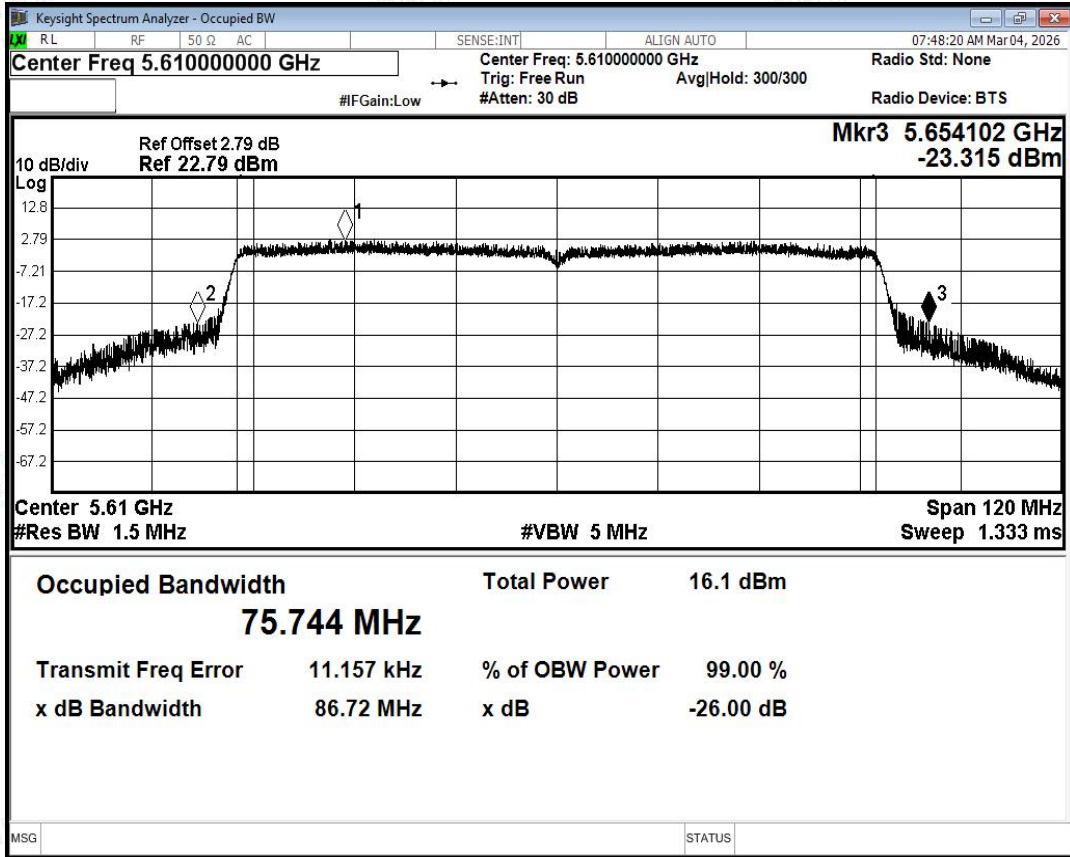

-26dB Bandwidth NVNT ac80 5610MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

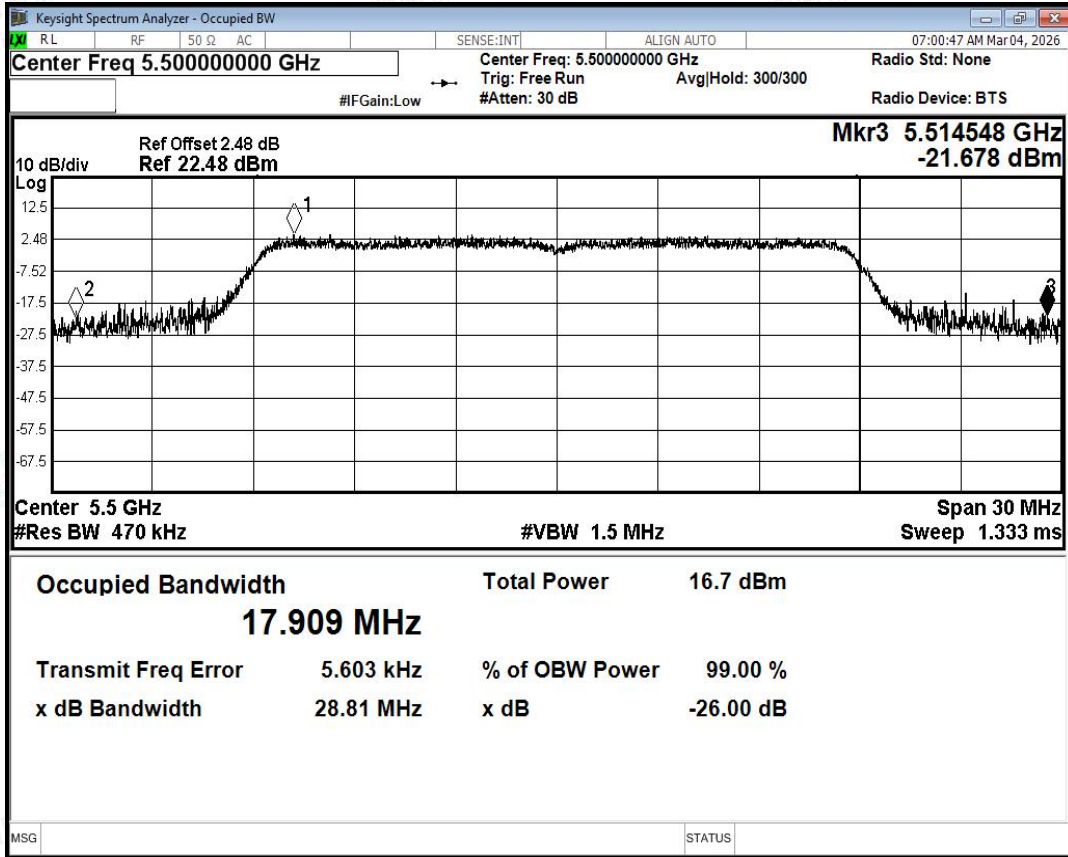

-26dB Bandwidth NVNT ax20 5500MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

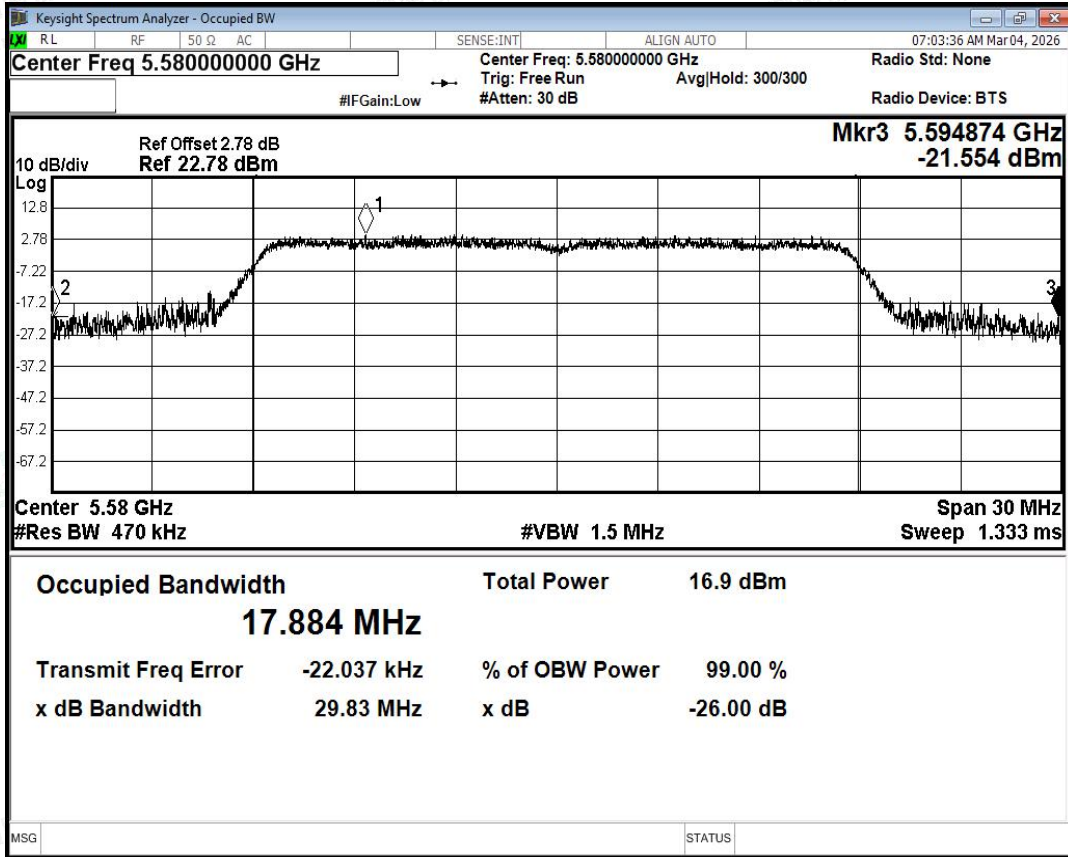

-26dB Bandwidth NVNT ax20 5580MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

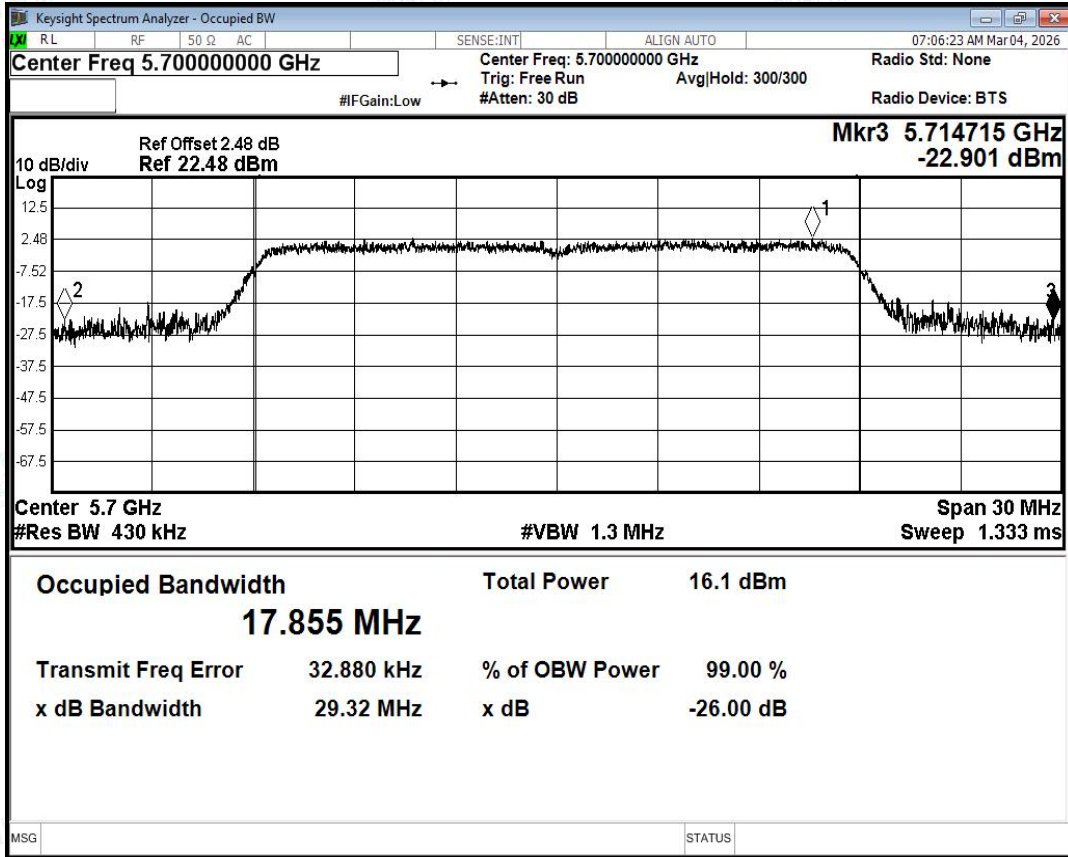

-26dB Bandwidth NVNT ax20 5700MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

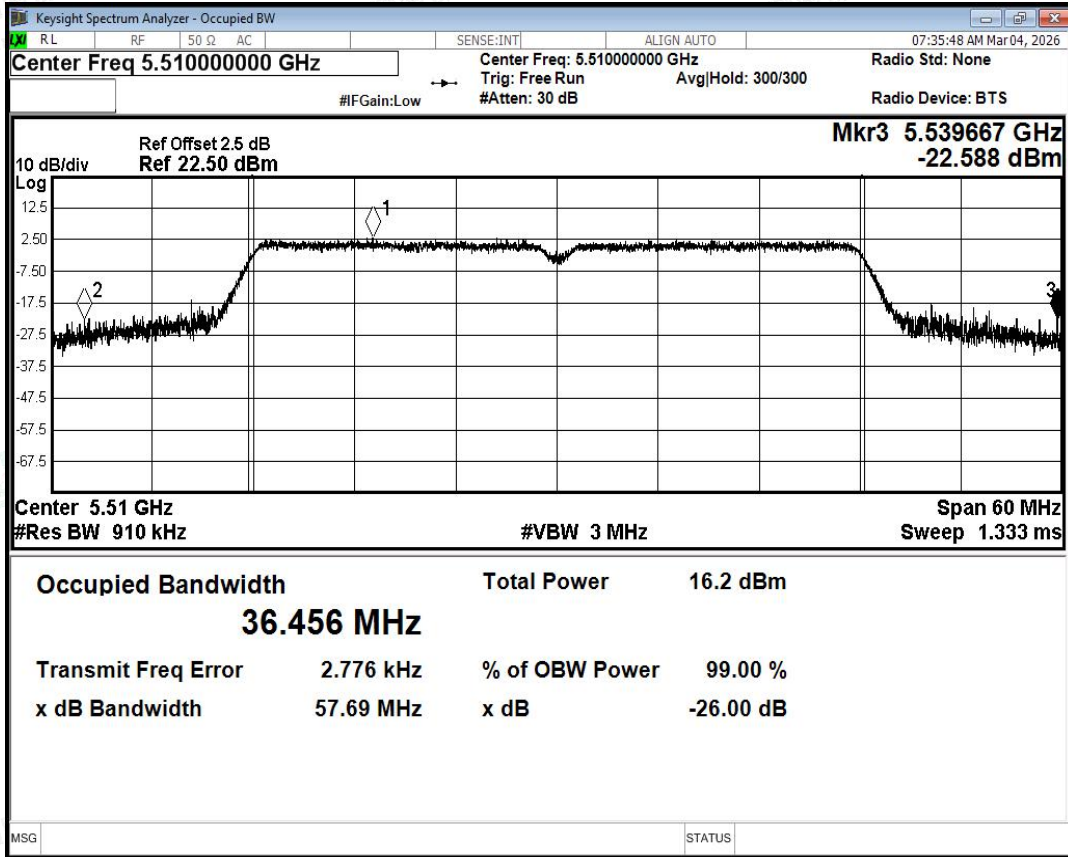

-26dB Bandwidth NVNT ax40 5510MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

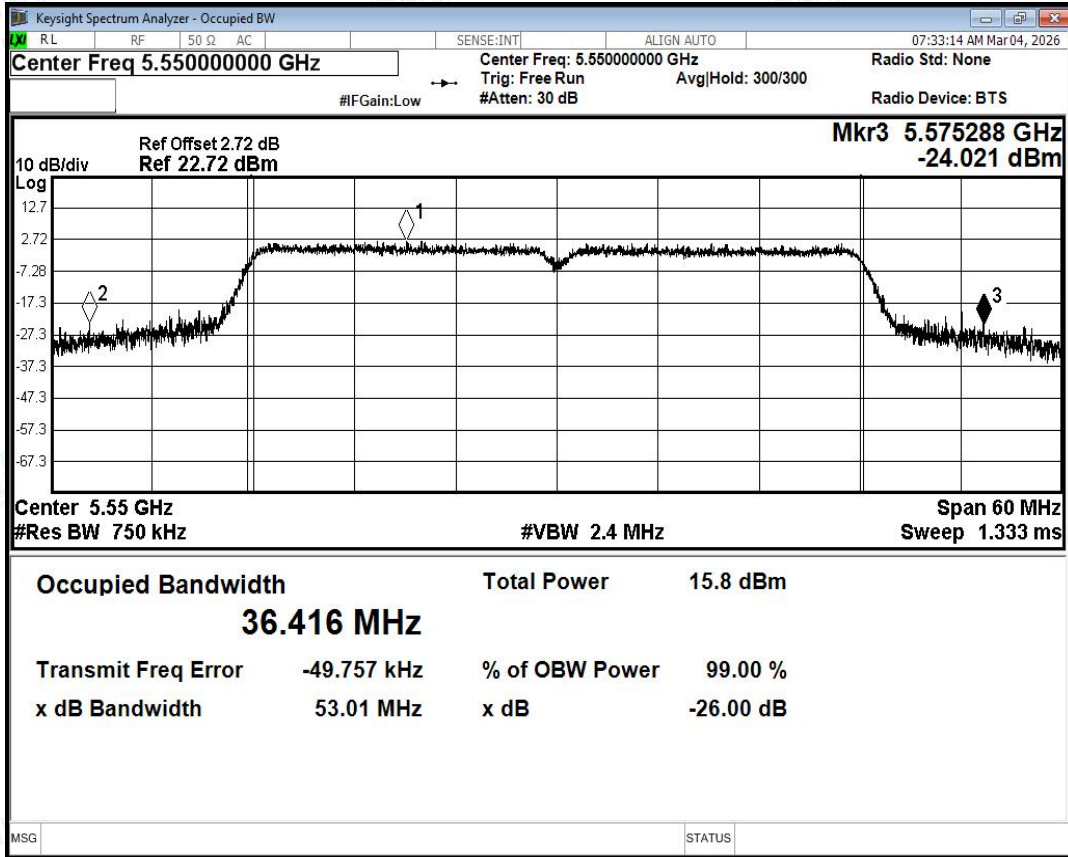

-26dB Bandwidth NVNT ax40 5550MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

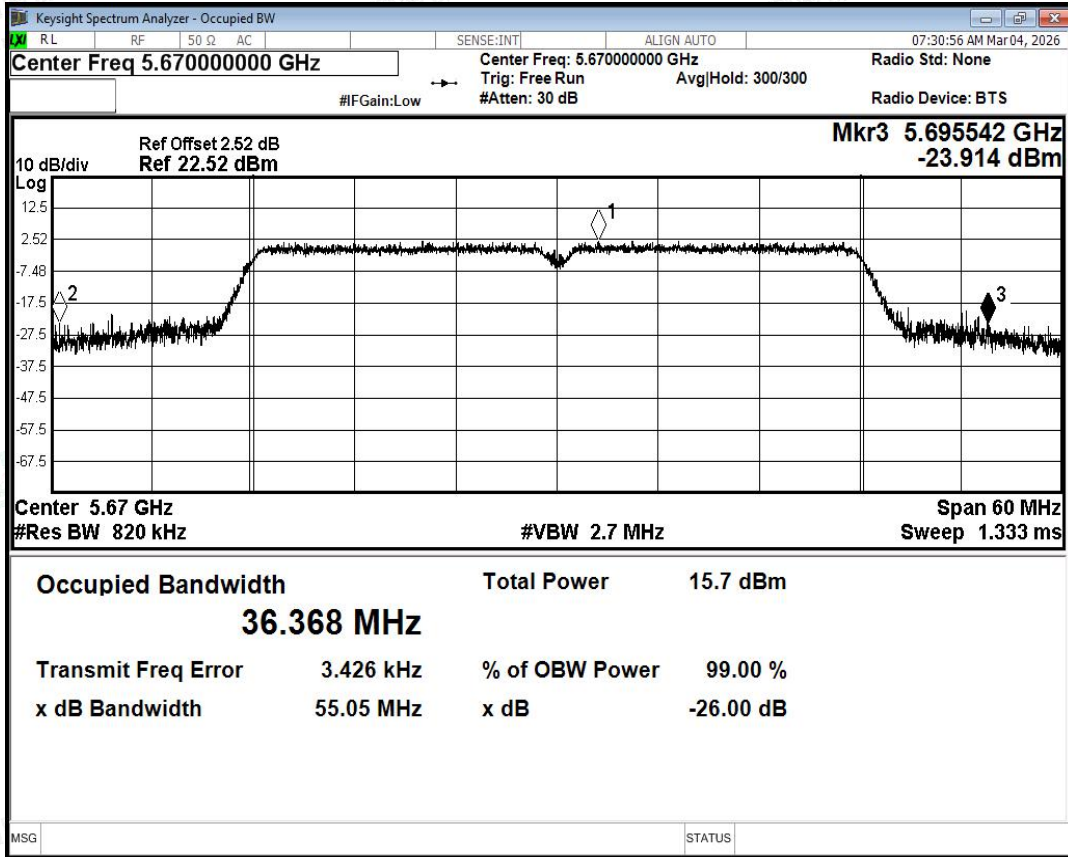

-26dB Bandwidth NVNT ax40 5670MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

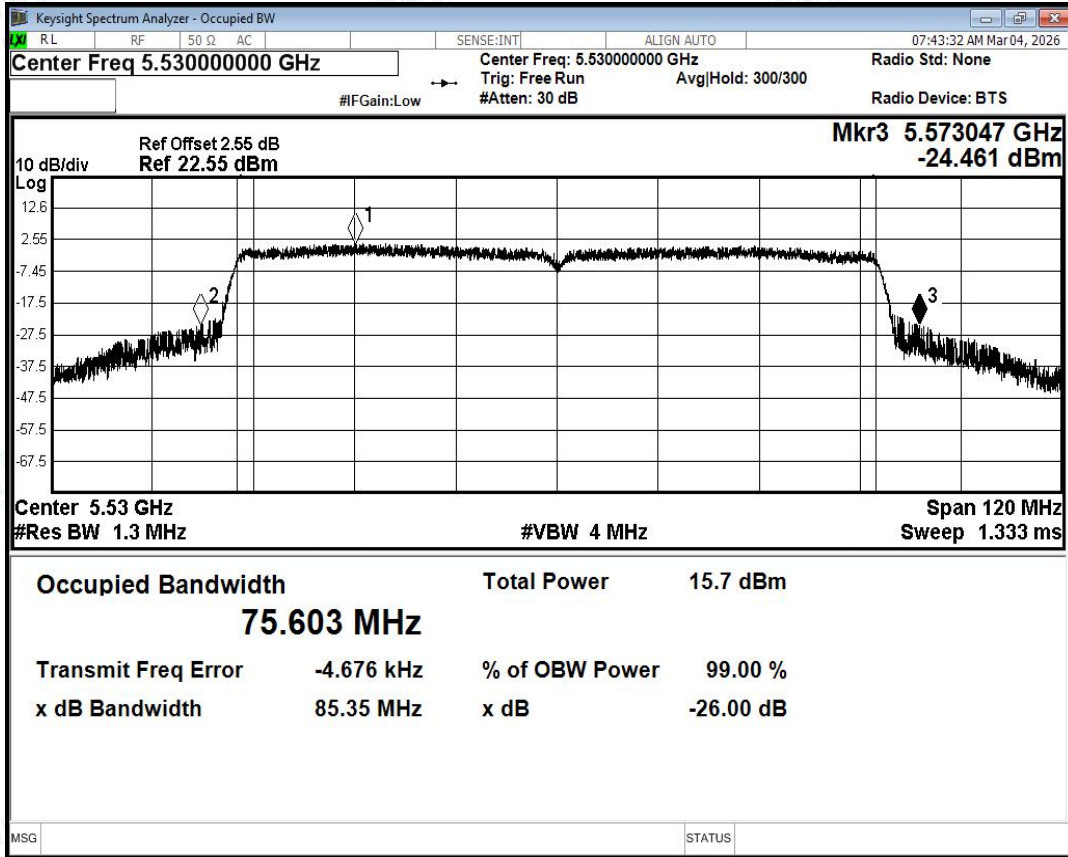

-26dB Bandwidth NVNT ax80 5530MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

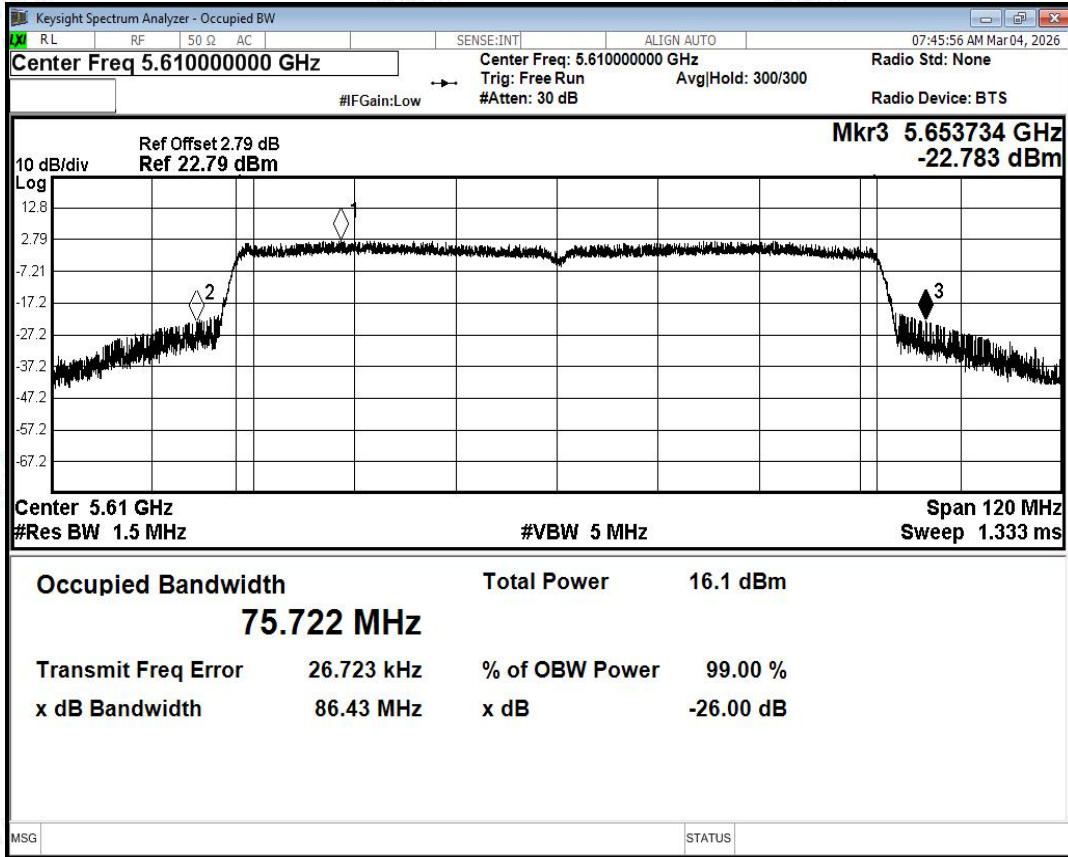

-26dB Bandwidth NVNT ax80 5610MHz Ant1



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



F.2 Maximum Conducted Output Power

26-tone RU

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted (dBm)	Verdict
NVNT	ax20	5500	Ant1	12.68	0.11	12.79	24	Pass
NVNT	ax20	5580	Ant1	12.59	0.11	12.70	24	Pass
NVNT	ax20	5700	Ant1	12.33	0.11	12.44	24	Pass
NVNT	ax40	5510	Ant1	11.52	0.27	11.79	24	Pass
NVNT	ax40	5550	Ant1	11.37	0.27	11.64	24	Pass
NVNT	ax40	5670	Ant1	11.18	0.23	11.41	24	Pass
NVNT	ax80	5530	Ant1	10.88	0.46	11.34	24	Pass
NVNT	ax80	5610	Ant1	11.12	0.54	11.66	24	Pass

52-tone RU

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted (dBm)	Verdict
NVNT	ax20	5500	Ant1	12.35	0.11	12.46	24	Pass
NVNT	ax20	5580	Ant1	12.13	0.11	12.24	24	Pass
NVNT	ax20	5700	Ant1	12.38	0.11	12.49	24	Pass
NVNT	ax40	5510	Ant1	11.55	0.27	11.82	24	Pass
NVNT	ax40	5550	Ant1	11.34	0.27	11.61	24	Pass
NVNT	ax40	5670	Ant1	10.98	0.23	11.21	24	Pass
NVNT	ax80	5530	Ant1	10.79	0.46	11.25	24	Pass
NVNT	ax80	5610	Ant1	11.01	0.54	11.55	24	Pass

106-tone RU

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted (dBm)	Verdict
NVNT	ax20	5500	Ant1	12.62	0.11	12.73	24	Pass
NVNT	ax20	5580	Ant1	12.42	0.11	12.53	24	Pass
NVNT	ax20	5700	Ant1	11.39	0.11	11.50	24	Pass
NVNT	ax40	5510	Ant1	11.12	0.27	11.39	24	Pass
NVNT	ax40	5550	Ant1	11.24	0.27	11.51	24	Pass
NVNT	ax40	5670	Ant1	11.40	0.23	11.63	24	Pass
NVNT	ax80	5530	Ant1	10.94	0.46	11.40	24	Pass
NVNT	ax80	5610	Ant1	10.99	0.54	11.53	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



242-tone RU

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted (dBm)	Verdict
NVNT	ax20	5500	Ant1	12.42	0.11	12.53	24	Pass
NVNT	ax20	5580	Ant1	12.19	0.11	12.30	24	Pass
NVNT	ax20	5700	Ant1	12.31	0.11	12.42	24	Pass
NVNT	ax40	5510	Ant1	11.09	0.27	11.36	24	Pass
NVNT	ax40	5550	Ant1	11.15	0.27	11.42	24	Pass
NVNT	ax40	5670	Ant1	10.98	0.23	11.21	24	Pass
NVNT	ax80	5530	Ant1	10.59	0.46	11.05	24	Pass
NVNT	ax80	5610	Ant1	11.14	0.54	11.68	24	Pass

484-tone RU

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted (dBm)	Verdict
NVNT	ax40	5510	Ant1	11.30	0.27	11.57	24	Pass
NVNT	ax40	5550	Ant1	11.55	0.27	11.82	24	Pass
NVNT	ax40	5670	Ant1	11.39	0.23	11.62	24	Pass
NVNT	ax80	5530	Ant1	10.48	0.46	10.94	24	Pass
NVNT	ax80	5610	Ant1	10.47	0.54	11.01	24	Pass

996-tone RU

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted (dBm)	Verdict
NVNT	ax80	5530	Ant1	10.39	0.46	10.85	24	Pass
NVNT	ax80	5610	Ant1	10.42	0.54	10.96	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Full RU

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted (dBm)	Verdict
NVNT	a	5500	Ant1	12.29	0.1	12.39	24	Pass
NVNT	a	5580	Ant1	12.56	0.11	12.67	24	Pass
NVNT	a	5700	Ant1	11.87	0.11	11.98	24	Pass
NVNT	n20	5500	Ant1	12.7	0.11	12.81	24	Pass
NVNT	n20	5580	Ant1	12.89	0.11	13	24	Pass
NVNT	n20	5700	Ant1	12.27	0.13	12.4	24	Pass
NVNT	n40	5510	Ant1	11.71	0.23	11.94	24	Pass
NVNT	n40	5550	Ant1	11.45	0.23	11.68	24	Pass
NVNT	n40	5670	Ant1	11.29	0.23	11.52	24	Pass
NVNT	ac20	5500	Ant1	12.5	0.11	12.61	24	Pass
NVNT	ac20	5580	Ant1	12.95	0.11	13.06	24	Pass
NVNT	ac20	5700	Ant1	12.21	0.11	12.32	24	Pass
NVNT	ac40	5510	Ant1	11.59	0.27	11.86	24	Pass
NVNT	ac40	5550	Ant1	11.5	0.23	11.73	24	Pass
NVNT	ac40	5670	Ant1	11.31	0.27	11.58	24	Pass
NVNT	ac80	5530	Ant1	10.9	0.47	11.37	24	Pass
NVNT	ac80	5610	Ant1	11.32	0.46	11.78	24	Pass
NVNT	ax20	5500	Ant1	12.78	0.11	12.89	24	Pass
NVNT	ax20	5580	Ant1	13.06	0.11	13.17	24	Pass
NVNT	ax20	5700	Ant1	12.32	0.11	12.43	24	Pass
NVNT	ax40	5510	Ant1	11.71	0.27	11.98	24	Pass
NVNT	ax40	5550	Ant1	11.5	0.27	11.77	24	Pass
NVNT	ax40	5670	Ant1	11.31	0.23	11.54	24	Pass
NVNT	ax80	5530	Ant1	10.79	0.46	11.25	24	Pass
NVNT	ax80	5610	Ant1	11.24	0.54	11.78	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



F.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5500	Ant1	-0.7	0.1	-0.6	11	Pass
NVNT	a	5580	Ant1	-1.34	0.11	-1.23	11	Pass
NVNT	a	5700	Ant1	-1.99	0.11	-1.88	11	Pass
NVNT	n20	5500	Ant1	-1.63	0.11	-1.52	11	Pass
NVNT	n20	5580	Ant1	-1.35	0.11	-1.24	11	Pass
NVNT	n20	5700	Ant1	-1.87	0.13	-1.74	11	Pass
NVNT	n40	5510	Ant1	-5.61	0.23	-5.38	11	Pass
NVNT	n40	5550	Ant1	-5.6	0.23	-5.37	11	Pass
NVNT	n40	5670	Ant1	-6.09	0.23	-5.86	11	Pass
NVNT	ac20	5500	Ant1	-1.59	0.11	-1.48	11	Pass
NVNT	ac20	5580	Ant1	-1.27	0.11	-1.16	11	Pass
NVNT	ac20	5700	Ant1	-1.9	0.11	-1.79	11	Pass
NVNT	ac40	5510	Ant1	-5.76	0.27	-5.49	11	Pass
NVNT	ac40	5550	Ant1	-5.67	0.23	-5.44	11	Pass
NVNT	ac40	5670	Ant1	-6.18	0.27	-5.91	11	Pass
NVNT	ac80	5530	Ant1	-9.1	0.47	-8.63	11	Pass
NVNT	ac80	5610	Ant1	-9.08	0.46	-8.62	11	Pass
NVNT	ax20	5500	Ant1	-1.5	0.11	-1.39	11	Pass
NVNT	ax20	5580	Ant1	-1.26	0.11	-1.15	11	Pass
NVNT	ax20	5700	Ant1	-1.82	0.11	-1.71	11	Pass
NVNT	ax40	5510	Ant1	-5.56	0.27	-5.29	11	Pass
NVNT	ax40	5550	Ant1	-5.56	0.27	-5.29	11	Pass
NVNT	ax40	5670	Ant1	-6.27	0.23	-6.04	11	Pass
NVNT	ax80	5530	Ant1	-9.15	0.46	-8.69	11	Pass
NVNT	ax80	5610	Ant1	-9.1	0.54	-8.56	11	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

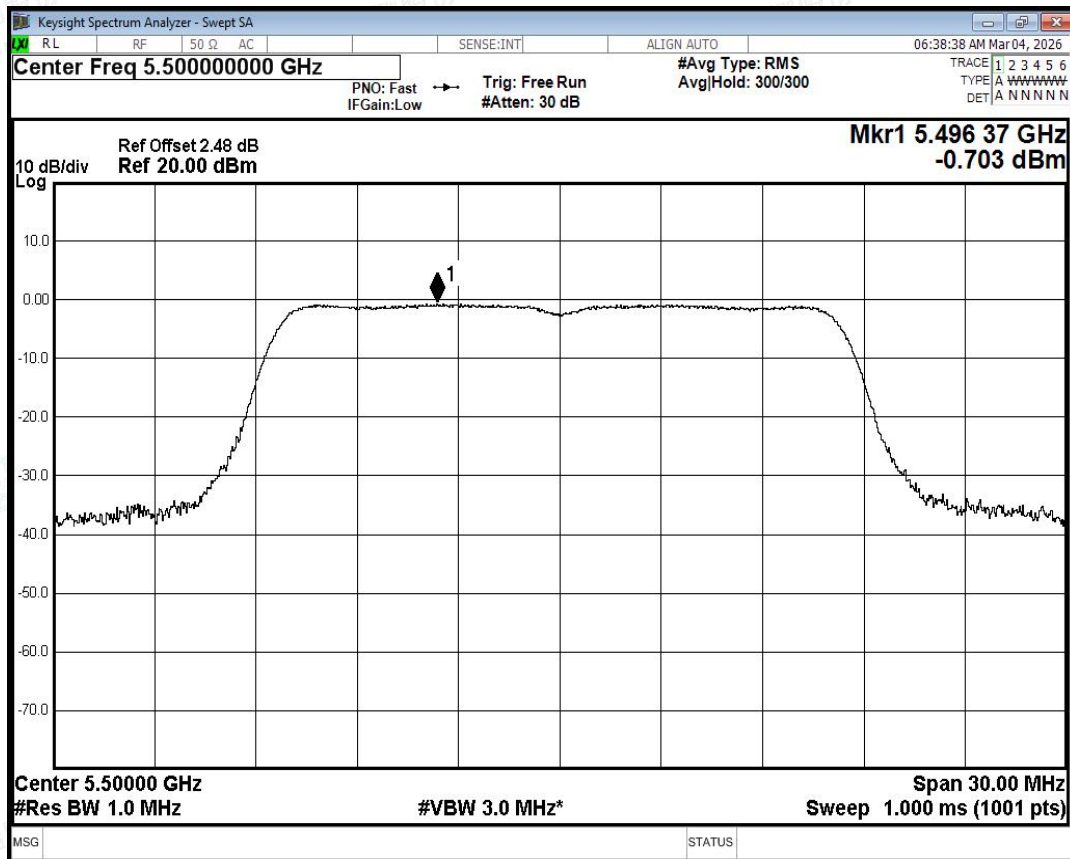


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

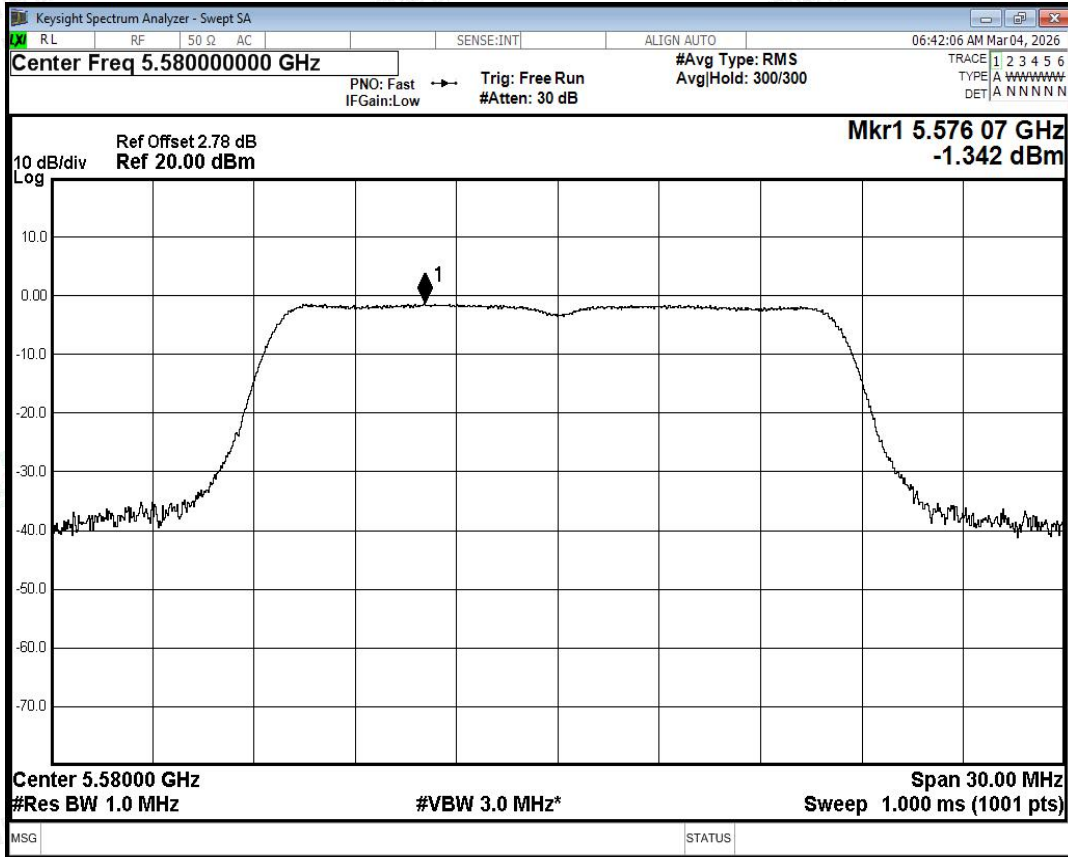


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

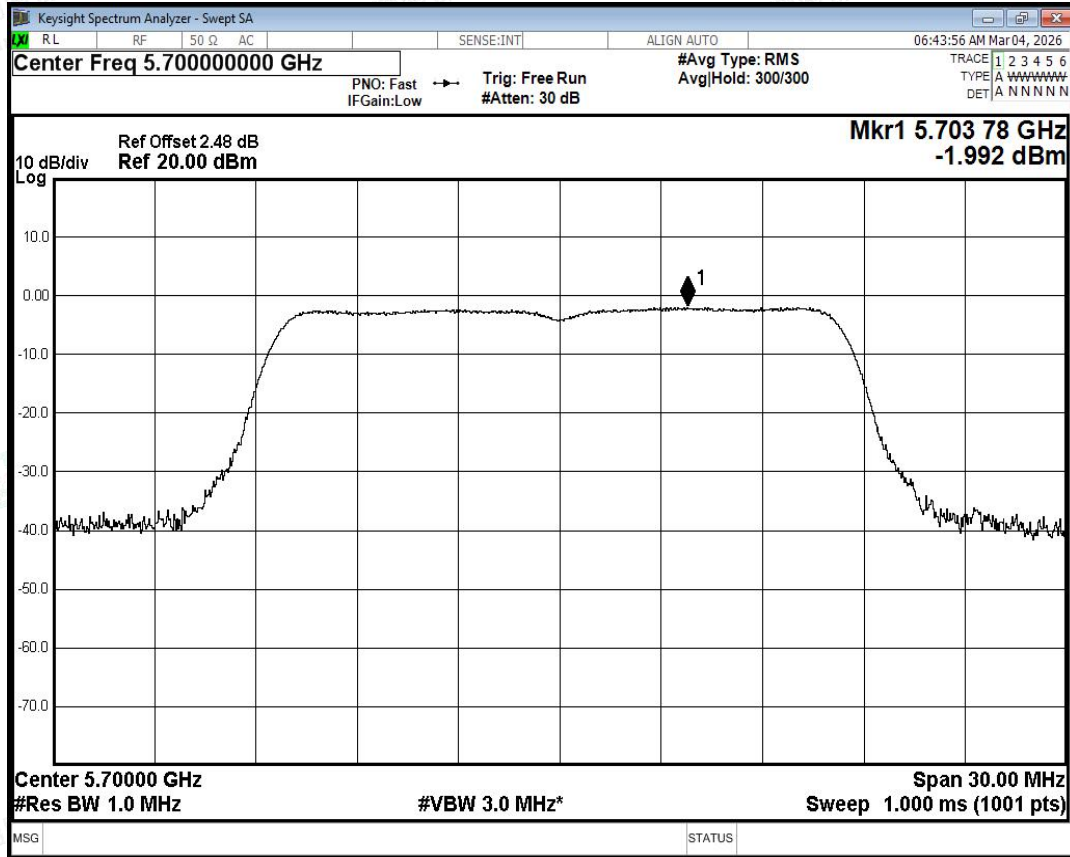


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

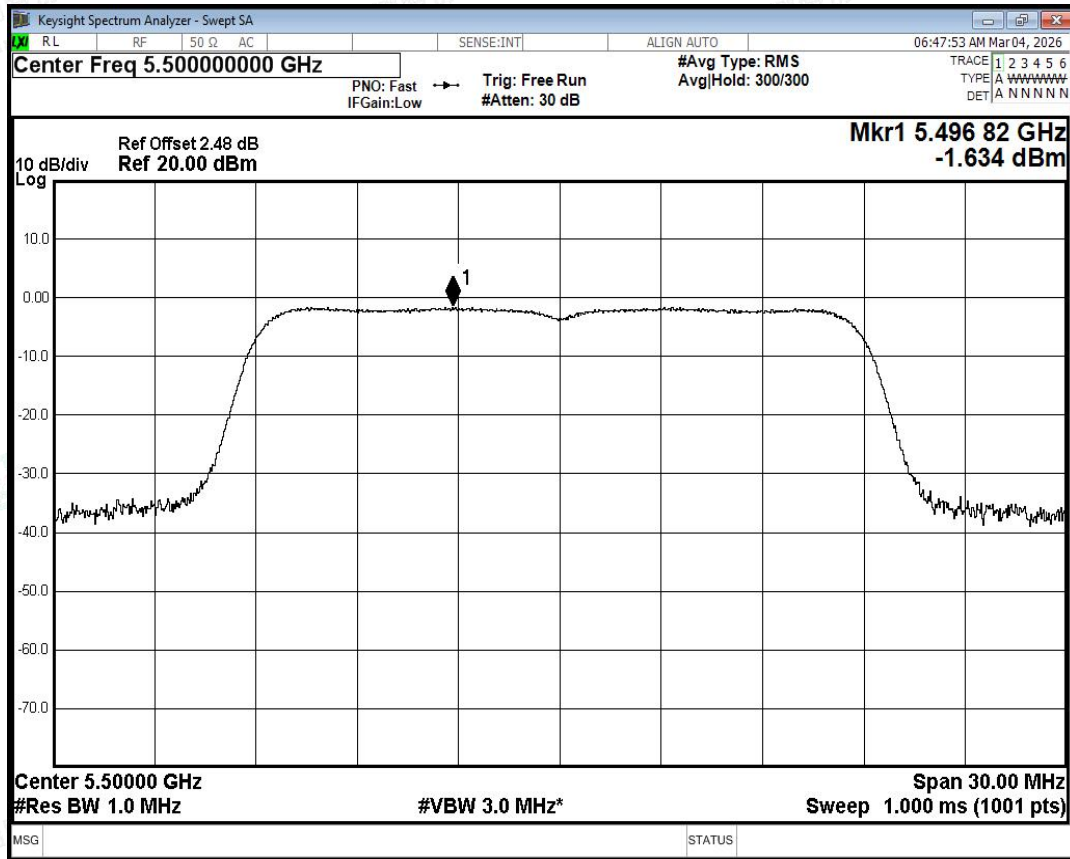


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

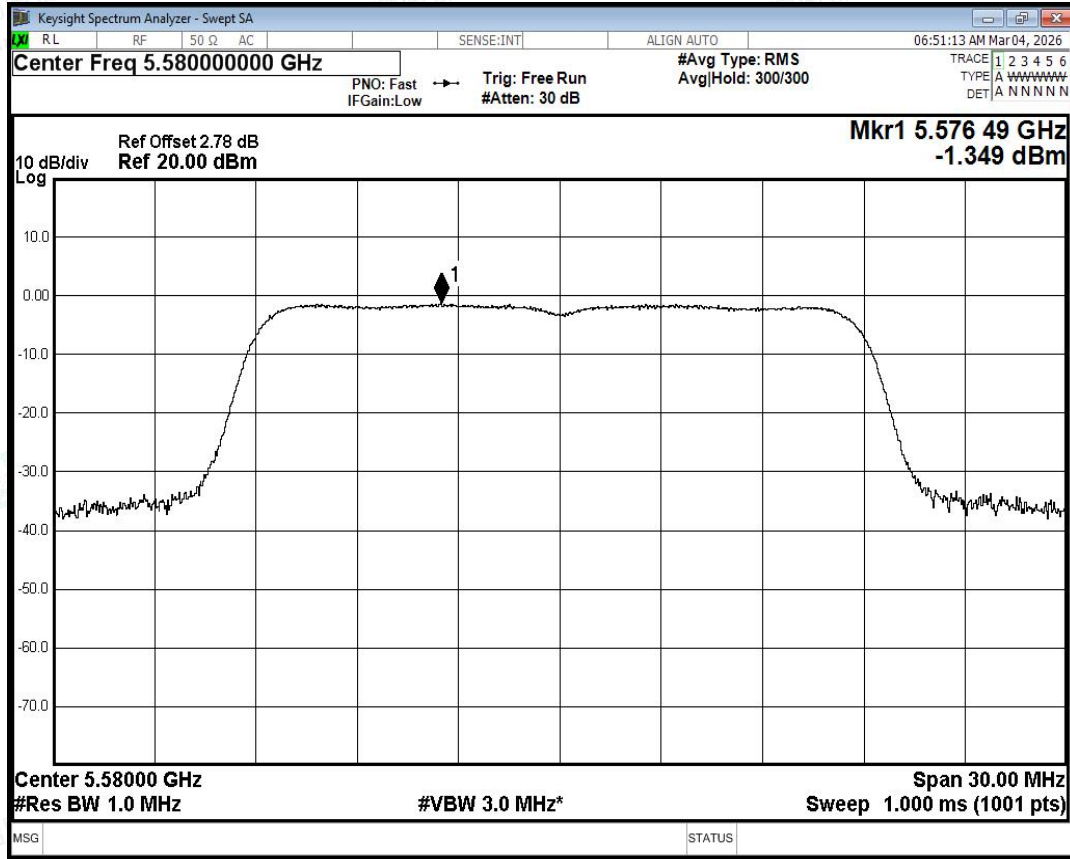


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

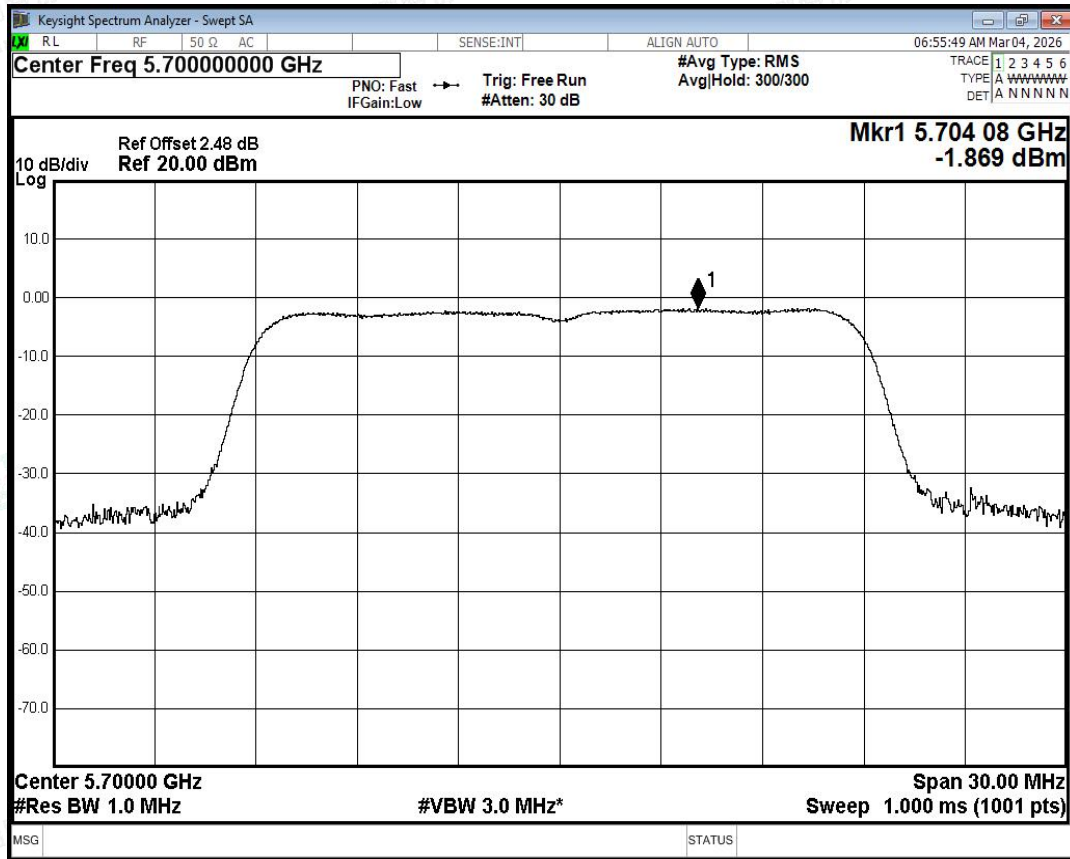

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity