



ONE PLUS ONE
Wireless Communication

深圳市一加一无线通讯技术有限公司

**7th Floor, Building B1, Hangcheng Jinchu Industrial
Park, Hangcheng Street, Baoan District, Shenzhen
City.**

承认书

APPROVAL SHEET

客户 Customer	爱保护
项目名 Project	B10 蓝牙天线
料号 Part NO.	
规格 Specification	BT Antennas

Project:B10	Author: Haiou.Zhu	File Name: B10_APP_A.doc
Date: 2026-3-18		
Revision:		
	A	
CONFIDENTIAL Shenzhen OnePlusOne Wireless Communication Technology Co.,Ltd.		

APPROVAL			
OnePlusOne:			
RF Check	ME Check	QC Check	Confirm By
Customer:			
EE Check	PM Check	QC Check	Confirm By

承认鉴章后请寄回承认书一份

Please return to us one copy of “APPROVAL SHEET” with your approved signatures

Date:	Revision:	Updates and changes:	Issued by:
2026-3-18	A	Initial sheet	Haiou.Zhu

Contents

1	ANTENNA DESCRIPTION	1-3
1.1	Part number	1-3
2	ELECTRICAL PERFORMANCE.....	2-3
2.1	Specification	2-3
2.2	Measurement Set-up.....	2-3
2.2.1	VSWR and Return Loss	2-3
2.2.2	Efficiency and Gain.....	2-3
3	REFERENCE MEASUREMENT DATA	3-3
3.1	Passive	3-3
3.2	Active.....	3-4
4	MECHANICAL DESCRIPTION.....	4-5
4.1	Drawings.....	4-5

Project:B10	Author:	File Name:
Date: 2026-3-18	Haiou.Zhu	B10_APP_A.doc
Revision:	A	
CONFIDENTIAL Shenzhen OnePlusOne Wireless Communication Technology Co.,Ltd.		

1 Antenna description

It summarize **BT** antennas for project B10 .**BT** antenna's frequency band is **2400-2500MHz**. **BT**antenna's type is **单级**

1.1 Part number

Part number of antenna: **B10 蓝牙天线**

2 Electrical Performance

2.1 Specification

BT	
Frequency Range	2400MHz~2500MHz <-5 >15%
Return Loss	
Efficiency	

2.2 Measurement Set-up

2.2.1 VSWR and Return Loss

VSWR measurements (S_{11}) were performed using an Agilent ENA series Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

2.2.2 Efficiency and Gain

The gain of the antenna was measured in OPO's 3D anechoic chamber in Shenzhen, China. The chamber is a ETS system capable of doing tests from 380MHz to 6GHz. Coaxial chokes on the feed cable were used to mitigate surface currents during passive tests. The measurement results are calibrated using dipole standards. For TRP and TIS the chamber uses a 8960 / MT8820C to establish the connection with the mobile device and read the power.


3 Reference measurement data

3.1 Passive

Project:B10	Author: Haiou.Zhu	File Name: B10_APP_A.doc
Date: 2026-3-18		
Revision:	A	
CONFIDENTIAL Shenzhen OnePlusOne Wireless Communication Technology Co.,Ltd.		

Return

SWR

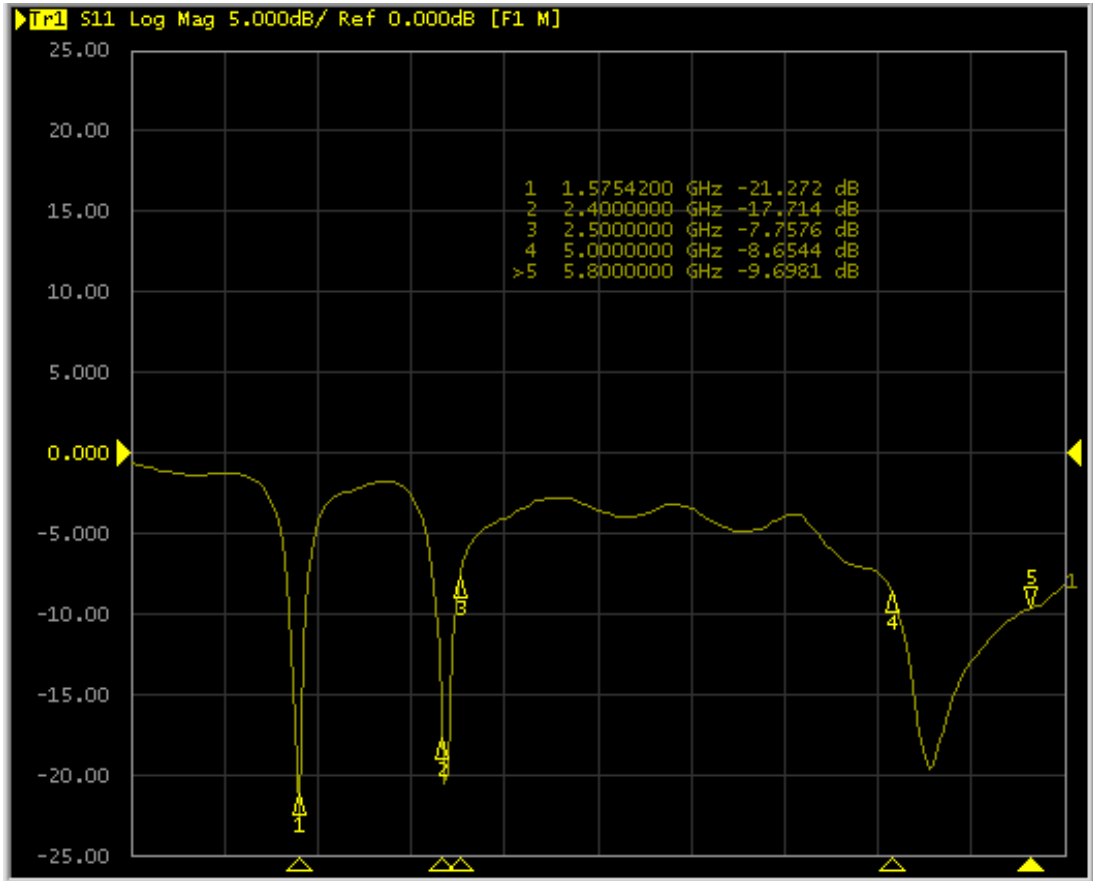


3.2 Active

Project:B10	Author: Haiou.Zhu	File Name: B10_APP_A.doc
Date: 2026-3-18		
Revision:	A	
CONFIDENTIAL		
Shenzhen OnePlusOne Wireless Communication Technology Co.,Ltd.		


BT

Freq	Effi	Effi	Gain
(MHz)	(%)	(dB)	(dBi)
2400	15.52	-8.09	-12.5
2410	15.9	-7.99	-11.7
2420	16.21	-7.90	-13.82
2430	16.67	-7.78	-12.78
2440	17.14	-7.66	-15.09
2450	18.24	-7.39	-14.61
2460	18.27	-7.38	-14.38
2470	17.03	-7.69	-15.14
2480	16.54	-7.81	-13.33
2490	15.98	-7.96	-15.06
2500	15.36	-8.14	-13.94


2400.000MHz

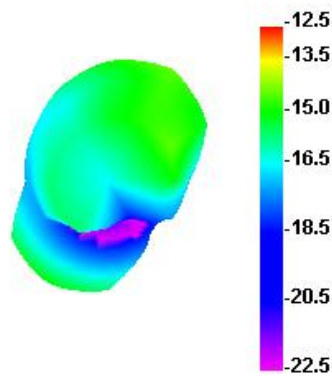

2500.000MHz

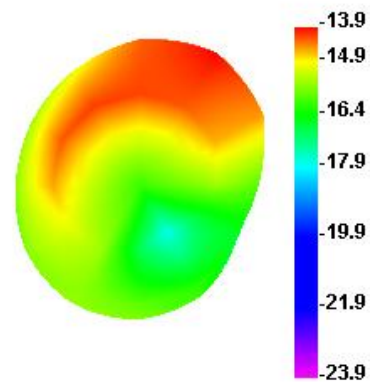


2450.000MHz

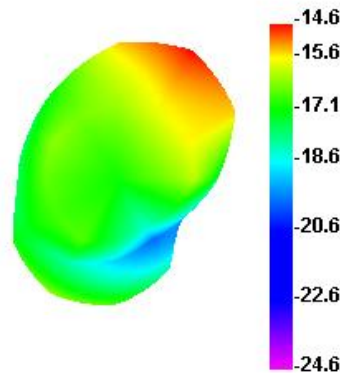

4 Mechanical description

4.1 Drawings

Project: B10	Author:	File Name:
Date: 2026-3-18	Haiou.Zhu	B10_APP_A.doc
Revision:	A	
CONFIDENTIAL Shenzhen OnePlusOne Wireless Communication Technology Co.,Ltd.		

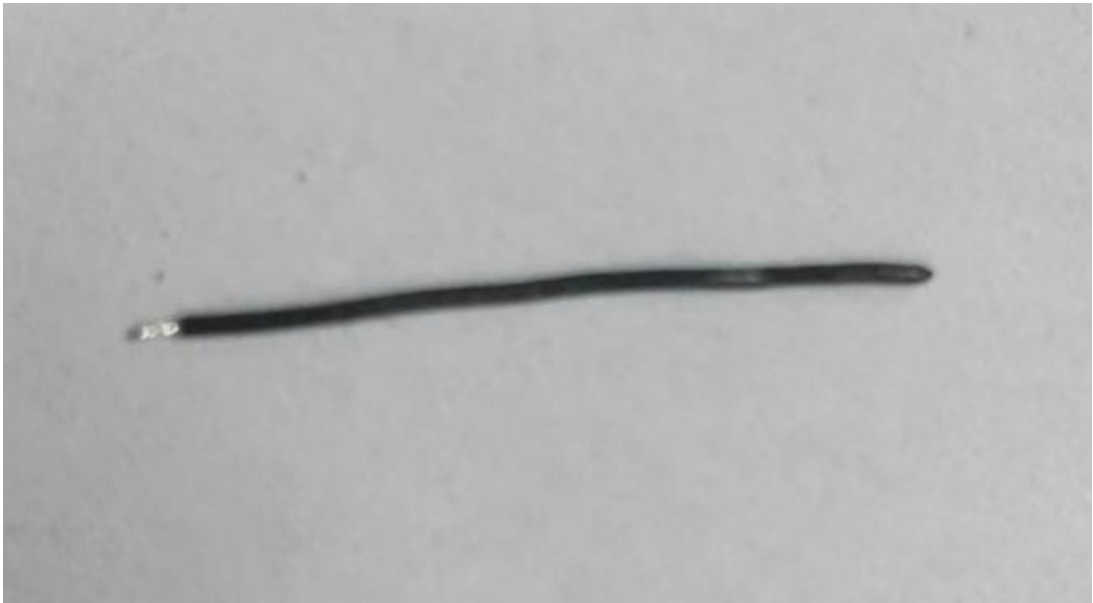

Project:B10	Author: Haiou.Zhu	File Name: B10_APP_A.doc
Date: 2026-3-18		
Revision:		
	A	
CONFIDENTIAL Shenzhen OnePlusOne Wireless Communication Technology Co.,Ltd.		