



REPORT No.: SZ26040002W01

# TEST REPORT

**APPLICANT** : Shenzhen Libro Technology Co., Ltd.

**PRODUCT NAME** : Smart Feeder (Granary 2 Vision),  
Smart Feeder (Granary 2 Vision Duo),  
Smart Feeder (Granary 2 X)

**MODEL NAME** : PLAF205,6216205,  
PLAF305,6216305

**BRAND NAME** : PETLIBRO

**FCC ID** : 2A3DE-PLAFX05

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**RECEIPT DATE** : 2026-04-02

**TEST DATE** : 2026-04-03 to 2026-04-15

**ISSUE DATE** : 2026-07-01



Edited by:

*Zeng Xiaoying*  
Zeng Xiaoying (Rapporteur)

Approved by:

*Shen Junsheng*  
Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB**

Shenzhen Morlab Communications Technology Co., Ltd.  
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





# DIRECTORY

|                                                                          |           |
|--------------------------------------------------------------------------|-----------|
| <b>1. Technical Information</b>                                          | <b>3</b>  |
| <b>1.1. Applicant and Manufacturer Information</b>                       | <b>3</b>  |
| <b>1.2. Equipment Under Test (EUT) Description</b>                       | <b>3</b>  |
| <b>1.3. The Channel Number and Frequency</b>                             | <b>4</b>  |
| <b>1.4. Test Standards and Results</b>                                   | <b>4</b>  |
| <b>1.5. Environmental Conditions</b>                                     | <b>4</b>  |
| <b>2. 47 CFR Part 15C Requirements</b>                                   | <b>5</b>  |
| <b>2.1. Antenna Requirement</b>                                          | <b>5</b>  |
| <b>2.2. Occupied Bandwidth</b>                                           | <b>6</b>  |
| <b>2.3. Conducted Emission</b>                                           | <b>8</b>  |
| <b>2.4. Field Strength of Fundamental and Restricted Frequency Bands</b> | <b>12</b> |
| <b>2.5. Radiated Emission and Field Strength of Harmonic</b>             | <b>17</b> |
| <b>Annex A Test Uncertainty</b>                                          | <b>33</b> |
| <b>Annex B Testing Laboratory Information</b>                            | <b>34</b> |
| <b>Notes</b>                                                             | <b>38</b> |

| Change History |            |                   |
|----------------|------------|-------------------|
| Version        | Date       | Reason for change |
| 1.0            | 2026-07-01 | First edition     |
|                |            |                   |



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

|                              |                                                                                                                                           |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant:</b>            | Shenzhen Libro Technology Co., Ltd.                                                                                                       |
| <b>Applicant Address:</b>    | Room 501, West Tower, Twin Towers, Galaxy World, No. 8 Yaxing Road, Nankeng Community, Bantian Street, Longgang District, Shenzhen, China |
| <b>Manufacturer:</b>         | Shenzhen Libro Technology Co., Ltd.                                                                                                       |
| <b>Manufacturer Address:</b> | Room 501, West Tower, Twin Towers, Galaxy World, No. 8 Yaxing Road, Nankeng Community, Bantian Street, Longgang District, Shenzhen, China |

## 1.2. Equipment Under Test (EUT) Description

|                             |                                                                                                  |
|-----------------------------|--------------------------------------------------------------------------------------------------|
| <b>Product Name:</b>        | Smart Feeder (Granary 2 Vision), Smart Feeder (Granary 2 Vision Duo), Smart Feeder (Granary 2 X) |
| <b>Sample No.:</b>          | 1#                                                                                               |
| <b>Hardware Version:</b>    | V0.7                                                                                             |
| <b>Software Version:</b>    | 1.1.15                                                                                           |
| <b>Operating Frequency:</b> | 24.125GHz                                                                                        |
| <b>Channel Number:</b>      | 1                                                                                                |
| <b>Antenna Type:</b>        | Microstrip Antenna                                                                               |
| <b>Antenna Gain:</b>        | 3.90dBi                                                                                          |

**Note 1:** The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

**Note 2:** According to the certificate holder, they declared that the models PLAF205, 6216205, PLAF305, 6216305 have the same hardware and software.

The PLAF205 and PLAF305 only different for product name, model number and food bowls.

The PLAF205 and 6216205 only different for model number.

The PLAF305 and 6216305 only different for model number.

All RF parameters remain the same. The main measuring model is PLAF205, only the results for PLAF205 were recorded in this report.



### 1.3. The Channel Number and Frequency

| Channel | Frequency (GHz) |
|---------|-----------------|
| 1       | 24.125          |

### 1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

| No. | Identity       | Document Title          |
|-----|----------------|-------------------------|
| 1   | 47 CFR Part 15 | Radio Frequency Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section           | Description                                      | Test Date     | Test Engineer | Result | Remark |
|-----|-------------------|--------------------------------------------------|---------------|---------------|--------|--------|
| 1   | 15.203            | Antenna Requirement                              | N/A           | N/A           | PASS   | /      |
| 2   | 15.215<br>2.1049  | Occupied Bandwidth                               | Apr. 14, 2026 | Zhu Peihong   | PASS   | /      |
| 3   | 15.207            | Conducted Emission                               | Apr. 21, 2026 | Wang Yapeng   | PASS   | /      |
| 4   | 15.249            | Field Strength and Restricted Frequency Bands    | Apr. 03, 2026 | Tian Xin      | PASS   | /      |
| 5   | 15.209,<br>15.249 | Radiated Emission and Field Strength of Harmonic | Apr. 03, 2026 | Tian Xin      | PASS   | /      |

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSI C63.10-2020.

**Note 2:** Any additions, deviation, or exclusions from the method shall be noted in the "Remark".

### 1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

|                             |        |
|-----------------------------|--------|
| Temperature (°C):           | 15-35  |
| Relative Humidity (%):      | 30-60  |
| Atmospheric Pressure (kPa): | 86-106 |



## **2. 47 CFR Part 15C Requirements**

### **2.1. Antenna Requirement**

#### **2.1.1. Applicable Standard**

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **2.1.2. Result: Compliant**

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


## 2.2. Occupied Bandwidth

### 2.2.1. Requirement

Refer to FCC 15.215

### 2.2.2. Test Description

#### Test Setup:

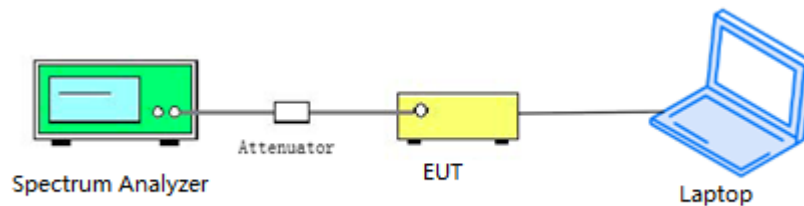

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) in the range of 1% to 5% of the measured bandwidth and video bandwidth (VBW) shall be approximately three times RBW.




### 2.2.3. Test Result

#### A.Test Verdict:

| Channel | Frequency (GHz) | 20 dB Bandwidth (MHz) | Result |
|---------|-----------------|-----------------------|--------|
| 1       | 24.125          | 195.9                 | PASS   |

#### B.Test Plot:

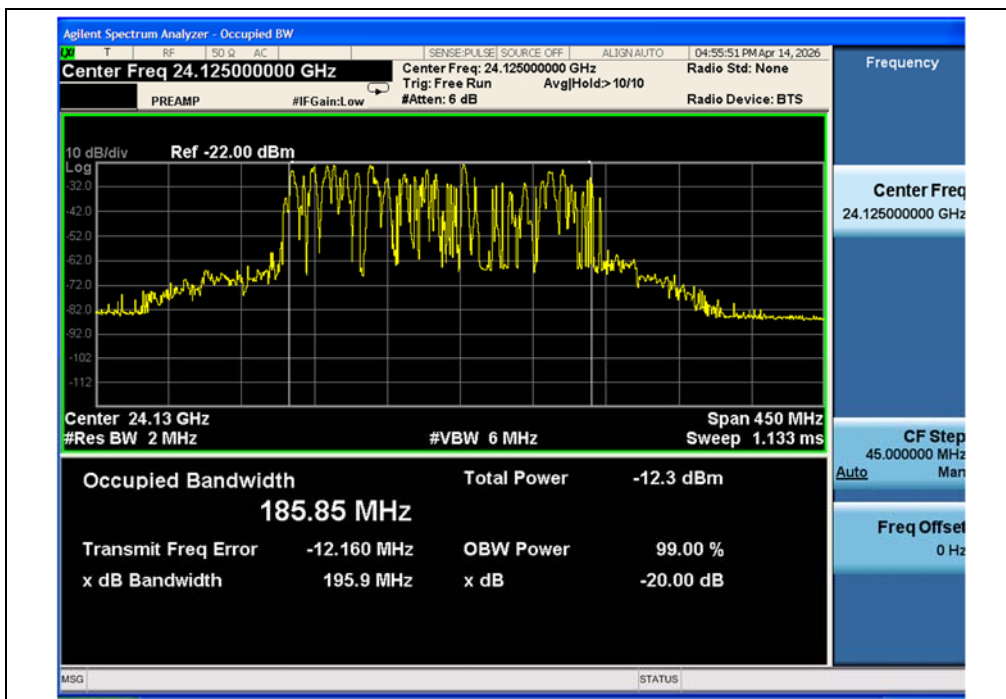

(24.125GHz)

## 2.3. Conducted Emission

### 2.3.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


| Frequency Range (MHz) | Conducted Limit (dB $\mu$ V) |          |
|-----------------------|------------------------------|----------|
|                       | Quai-peak                    | Average  |
| 0.15 - 0.50           | 66 to 56                     | 56 to 46 |
| 0.50 - 5              | 56                           | 46       |
| 5 - 30                | 60                           | 50       |

Note:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.3.2. Test Description

Test Setup:

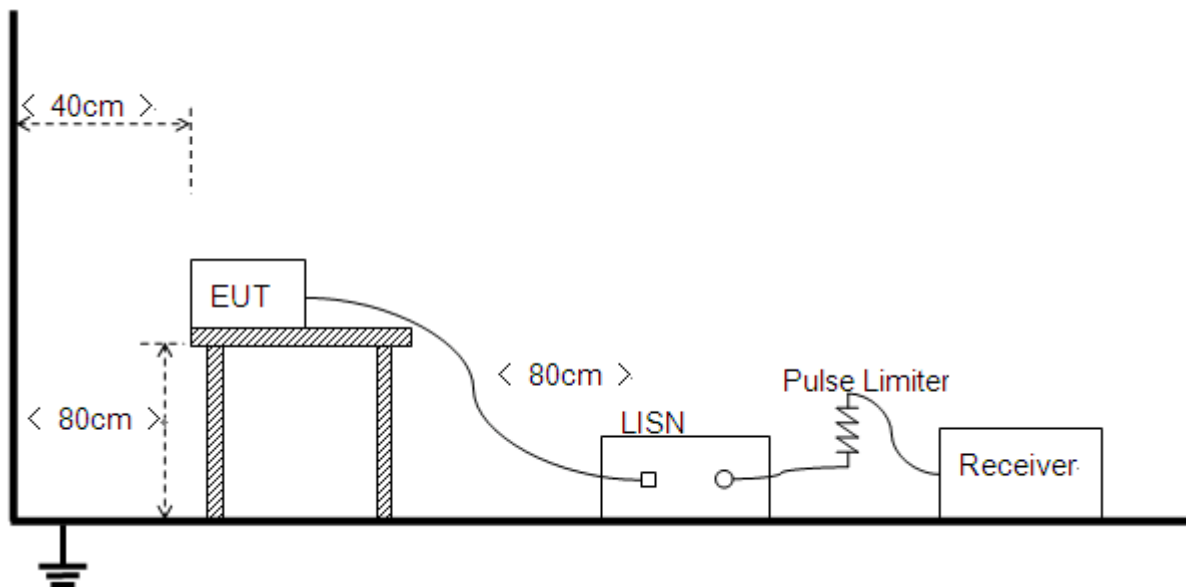

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10.



### 2.3.3. Test Procedure

Use the following receiver settings:

Span = wide enough to fully capture the emission being measured

RBW = 9 kHz

VBW = 30 kHz

Sweep = auto

Detector function = Quasi peak and Average

Trace = max hold

### 2.3.4. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the Average and Quasi peak limits, and that have narrow margins from the Average and Quasi peak limits will be re-measured with Average and Quasi peak detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### A.Test Setup:

Test Mode: EUT+Adapter+Data Cable+24GHz TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R \text{ [dB}\mu\text{V]} + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}} \text{ [dB]}$$

$U_R$ : Receiver Reading


$A_{\text{Factor}}$ : Voltage division factor of LISN

### B.Test Plot:

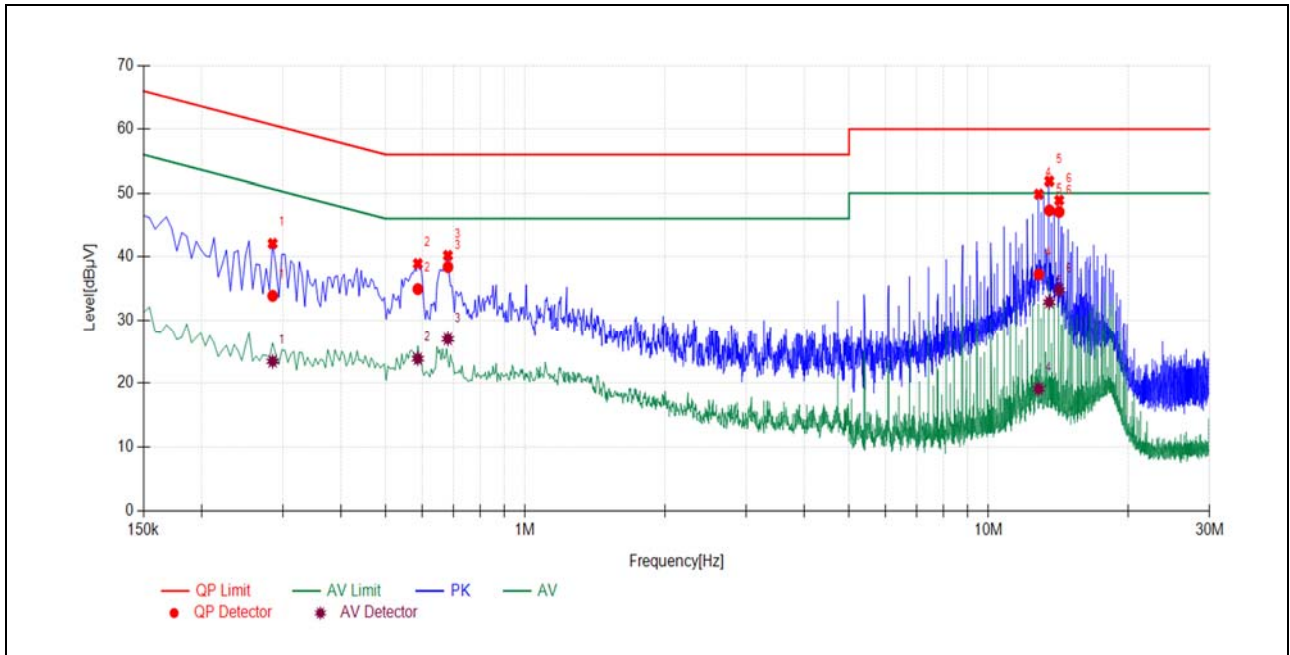

(L Phase)

| No. | Fre.<br>(MHz) | Emission Level (dBμV) |         | Limit (dBμV) |         | Power-line | Verdict |
|-----|---------------|-----------------------|---------|--------------|---------|------------|---------|
|     |               | Quai-peak             | Average | Quai-peak    | Average |            |         |
| 1   | 0.2850        | 33.85                 | 23.40   | 60.67        | 50.67   | Line       | PASS    |
| 2   | 0.5864        | 34.91                 | 23.82   | 56.00        | 46.00   |            | PASS    |
| 3   | 0.6810        | 38.39                 | 26.94   | 56.00        | 46.00   |            | PASS    |
| 4   | 12.8400       | 37.23                 | 19.09   | 60.00        | 50.00   |            | PASS    |
| 5   | 13.5298       | 47.31                 | 32.86   | 60.00        | 50.00   |            | PASS    |
| 6   | 14.2080       | 47.07                 | 34.72   | 60.00        | 50.00   |            | PASS    |

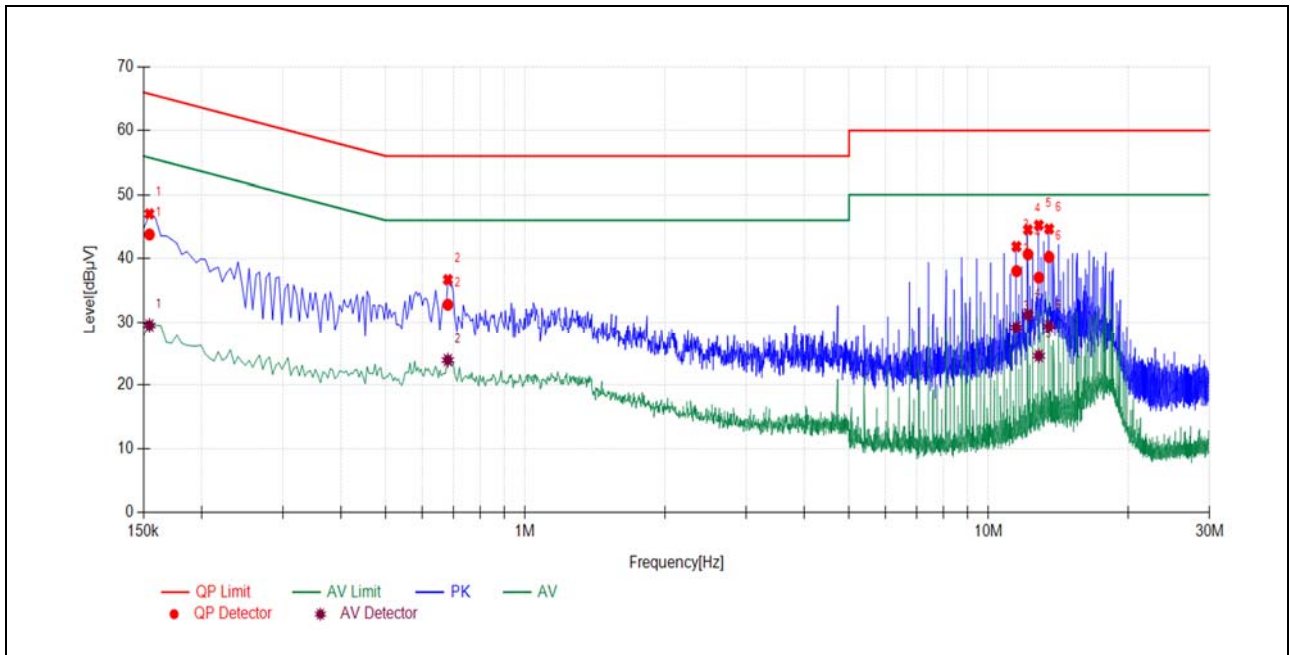

(N Phase)

| No. | Fre.<br>(MHz) | Emission Level (dBμV) |         | Limit (dBμV) |         | Power-line | Verdict |
|-----|---------------|-----------------------|---------|--------------|---------|------------|---------|
|     |               | Quai-peak             | Average | Quai-peak    | Average |            |         |
| 1   | 0.1545        | 43.79                 | 29.50   | 65.75        | 55.75   | Neutral    | PASS    |
| 2   | 0.6809        | 32.76                 | 23.90   | 56.00        | 46.00   |            | PASS    |
| 3   | 11.4900       | 38.03                 | 29.15   | 60.00        | 50.00   |            | PASS    |
| 4   | 12.1661       | 40.67                 | 31.16   | 60.00        | 50.00   |            | PASS    |
| 5   | 12.8407       | 37.01                 | 24.58   | 60.00        | 50.00   |            | PASS    |
| 6   | 13.5145       | 40.24                 | 29.33   | 60.00        | 50.00   |            | PASS    |

## 2.4. Field Strength of Fundamental and Restricted Frequency Bands

### 2.4.1. Requirement

According to FCC section 15.249(a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental frequency | Field strength of fundamental (millivolts/meter) | Field strength of harmonics (microvolts/meter) |
|-----------------------|--------------------------------------------------|------------------------------------------------|
| 902-928 MHz           | 50                                               | 500                                            |
| 2400-2483.5 MHz       | 50                                               | 500                                            |
| 5725-5875 MHz         | 50                                               | 500                                            |
| 24.0-24.25 GHz        | 250                                              | 2500                                           |

The field strength of emissions appearing within the restricted frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements.

Devices operated in the 24.0-24.25 GHz band under § 15.249 are exempt from complying with the restricted frequency bands requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in § 15.249(a).


| Frequency       | Field strength of fundamental (microvolts/meter) | Field strength of harmonics (dB $\mu$ V/m) |
|-----------------|--------------------------------------------------|--------------------------------------------|
| 23.6 - 24.0 GHz | 500                                              | 54                                         |

The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

Limitation expressed in  $\mu$ V/m is calculated by  $20\log$  Emission Level( $\mu$ V/m). Limitation expressed in mV/m is calculated by  $20\log$  Emission Level(mV/m) + 60dB.

### 2.4.2. Test Description

#### Test Setup:

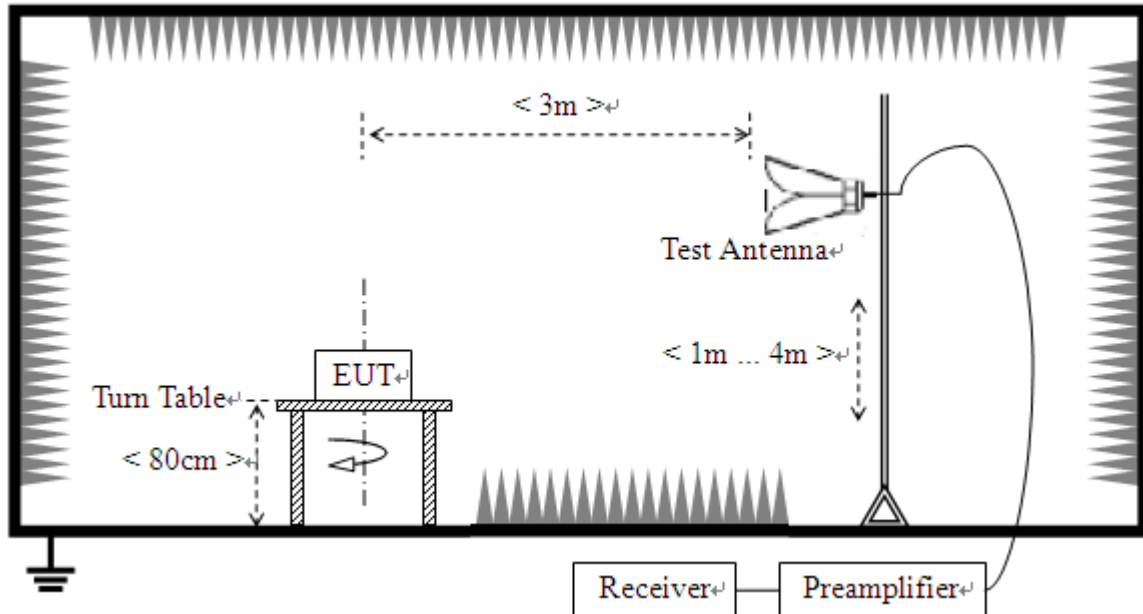

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

### 2.4.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold



#### 2.4.4. Test Result

**Note:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition(Y) was recorded in this test report.

Final Emission level(dB  $\mu$  V/m) = Prescan peak level(dB $\mu$ V/m) + FMCW Desensitization factor (dB)

Prescan Emission level(dB $\mu$ V/m) =  $U_R$ [dB  $\mu$  V] +  $A_T$ [dB] +  $A_{Factor}$  [dB/m];  $A_T$  =  $L_{Cable\ loss}$  [dB] -  $G_{preamp}$  [dB]

$L_{Cable\ loss}$  [dB] =  $L_{Mixer}$ [dB] +  $L_{IF}$ [dB]


$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading


$G_{preamp}$ : Preamplifier Gain

$A_{Factor}$ : Antenna Factor at 3m

| Freq.<br>(GHz) | Prescan<br>peak level<br>(dB $\mu$ V/m) | Factor<br>(dB/m) | FMCW<br>Desensitization<br>factor (dB) | Final<br>Emission<br>level<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Detector | Margin<br>(dB) | Antenna<br>Polar. |
|----------------|-----------------------------------------|------------------|----------------------------------------|----------------------------------------------|-------------------------|----------|----------------|-------------------|
| 23.885168      | 57.21                                   | -2.52            | -                                      | 54.69                                        | 74                      | PK       | 19.31          | Horizontal        |
| 23.941096      | 61.569                                  | -2.409           | -                                      | 59.16                                        | 74                      | PK       | 14.84          | Horizontal        |
| 23.997674      | 71.31                                   | -2.03            | -                                      | 69.28                                        | 74                      | PK       | 4.72           | Horizontal        |
| 24.021736      | 99.38                                   | -1.988           | 0                                      | 99.38                                        | 128                     | PK       | -25.38         | Horizontal        |
| 23.86956       | 41.879                                  | -2.519           | -                                      | 39.36                                        | 54                      | AV       | 14.64          | Horizontal        |
| 23.947274      | 41.04                                   | -2.41            | -                                      | 38.63                                        | 54                      | AV       | 15.37          | Horizontal        |
| 23.99995       | 40.22                                   | -2.03            | -                                      | 38.19                                        | 54                      | AV       | 15.81          | Horizontal        |
| 23.877689      | 55.559                                  | -2.519           | -                                      | 53.04                                        | 74                      | PK       | 20.96          | Vertical          |
| 23.96971       | 60.239                                  | -2.319           | -                                      | 57.92                                        | 74                      | PK       | 16.08          | Vertical          |
| 23.998324      | 64.988                                  | -2.238           | -                                      | 62.75                                        | 74                      | PK       | 11.25          | Vertical          |
| 24.022386      | 94.80                                   | -1.988           | 0                                      | 94.8                                         | 128                     | PK       | -20.8          | Vertical          |
| 23.876713      | 41.929                                  | -1.735           | -                                      | 39.41                                        | 54                      | AV       | 14.59          | Vertical          |
| 23.969385      | 40.899                                  | -2.519           | -                                      | 38.58                                        | 54                      | AV       | 15.42          | Vertical          |
| 23.9993        | 40.418                                  | -2.319           | -                                      | 38.18                                        | 54                      | AV       | 15.82          | Vertical          |

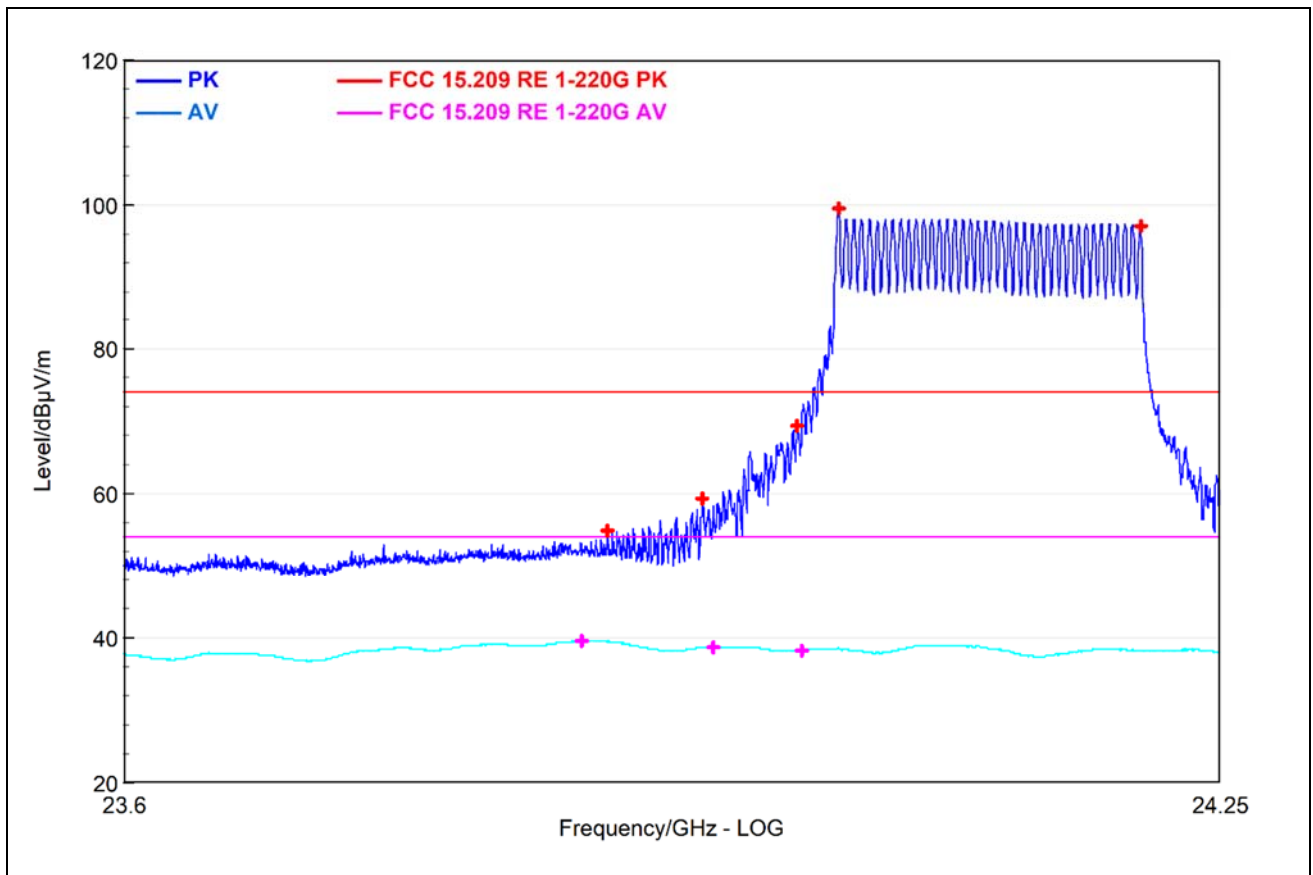

(Test Antenna Horizontal)

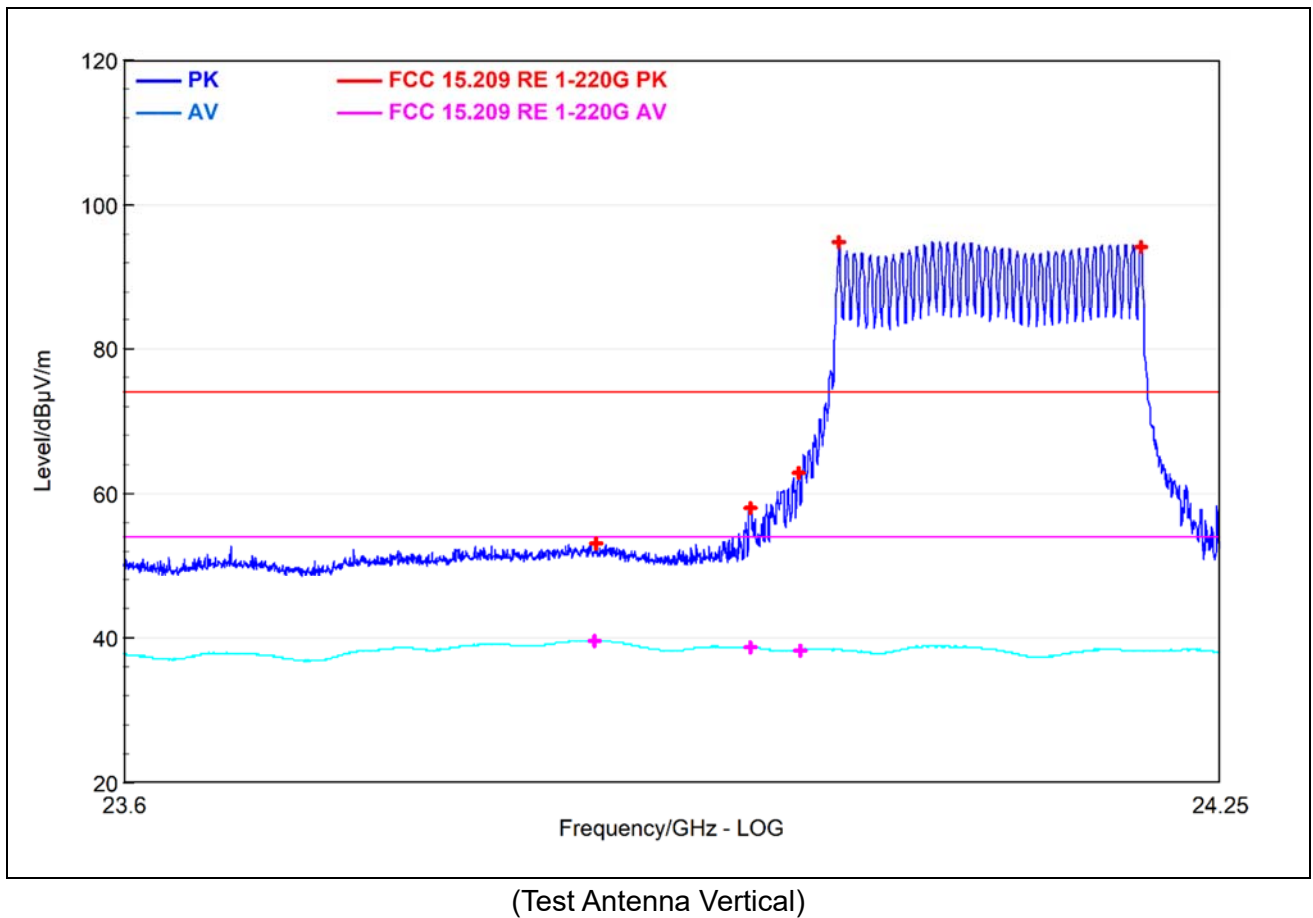

## 2.5. Radiated Emission and Field Strength of Harmonic

### 2.5.1. Requirement

According to section 15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental frequency | Field strength of fundamental (millivolts/meter) | Field strength of harmonics (microvolts/meter) |
|-----------------------|--------------------------------------------------|------------------------------------------------|
| 902-928 MHz           | 50                                               | 500                                            |
| 2400-2483.5 MHz       | 50                                               | 500                                            |
| 5725-5875 MHz         | 50                                               | 500                                            |
| 24.0-24.25 GHz        | 250                                              | 2500                                           |

According to section 15.249(d), Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209:

| Frequency (MHz) | Field Strength (μV/m) | Measurement Distance (m) | Field Strength Limitation at 3m Measurement Distance |                        |
|-----------------|-----------------------|--------------------------|------------------------------------------------------|------------------------|
|                 |                       |                          | (uV/m)                                               | (dBuV/m)               |
| 0.009 - 0.490   | 2400/F(kHz)           | 300                      | 10000*<br>2400/F(KHz)                                | 20log 2400/F(KHz) + 80 |
| 0.490 - 1.705   | 24000/F(kHz)          | 30                       | 100* 2400/F(KHz)                                     | 20log 2400/F(KHz) + 40 |
| 1.705 - 30.0    | 30                    | 30                       | 100*30                                               | 20log 30 + 40          |
| 30 - 88         | 100                   | 3                        | 100                                                  | 20log 100              |
| 88 - 216        | 150                   | 3                        | 150                                                  | 20log 150              |
| 216 - 960       | 200                   | 3                        | 200                                                  | 20log 200              |
| Above 960       | 500                   | 3                        | 500                                                  | 20log 500              |

According to section 15.249(e), for frequencies above 1000MHz, the above field strength limits are based on average limits. The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

#### Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by 20log Emission Level(uV/m).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $L_{d1} = L_{d2} * (d_2/d_1)^2$ .


Example: F.S Limit at 30m distance is 30uV/m, then F.S Limitation at 3m distance is adjusted as

$$L_{d1} = L_1 = 30\text{uV/m} * (10)^2 = 100 * 30\text{uV/m}$$


## 2.5.2. Test Description

### Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

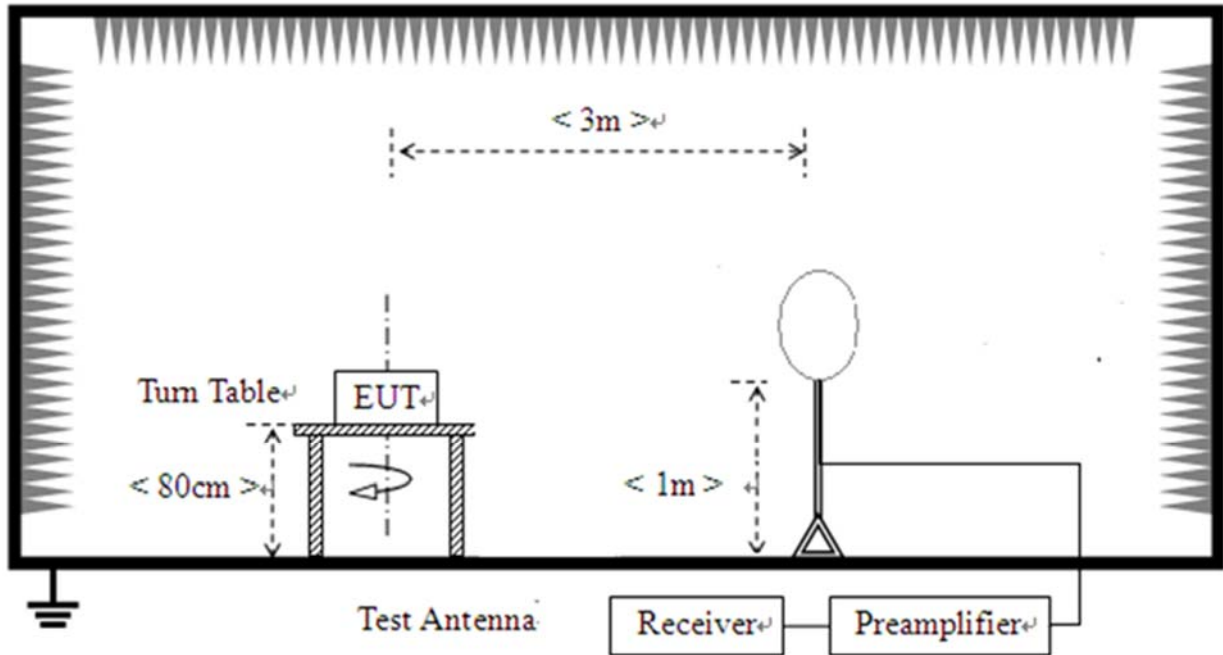

- 2) For radiated emissions from 30MHz to 1GHz

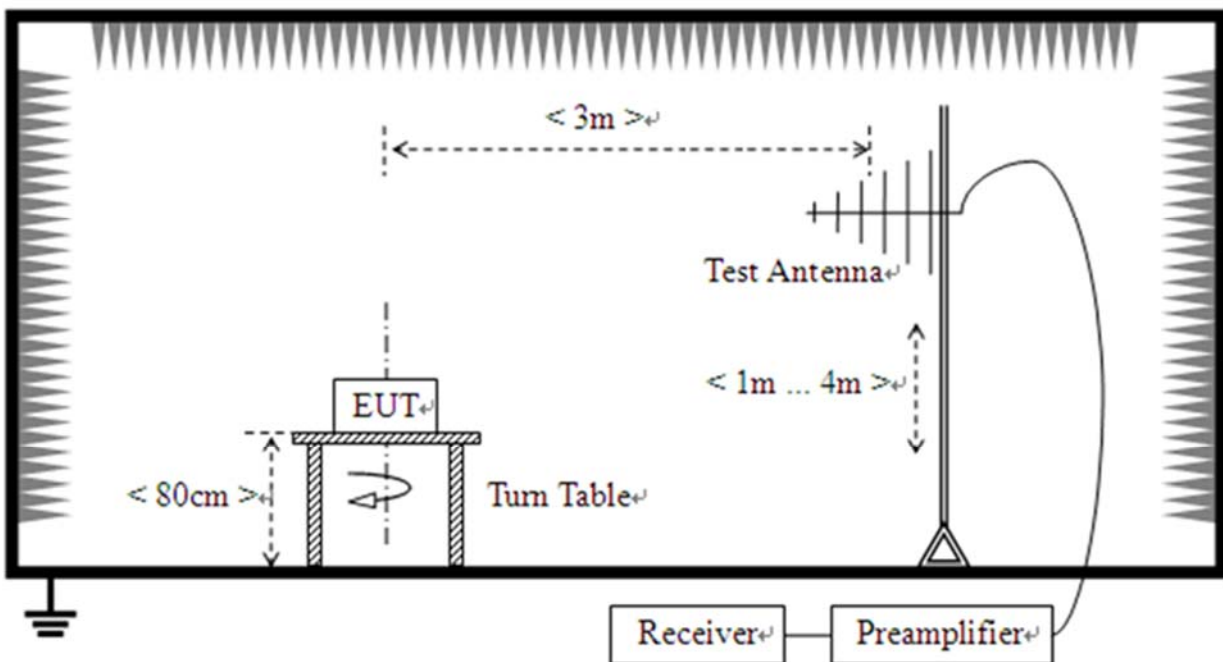

### 3) For radiated emissions above 1GHz

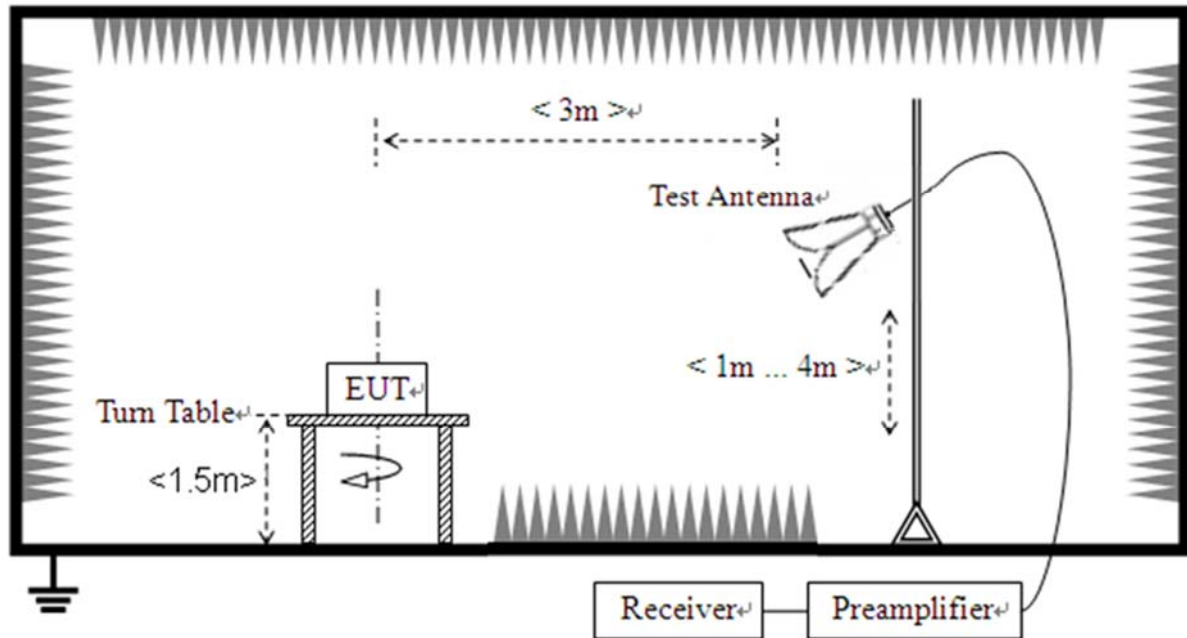

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.



### 2.5.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R [\text{dB} \mu \text{V}] + A_T [\text{dB}] + A_{\text{Factor}} [\text{dB/m}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

$$L_{\text{Cable loss}} [\text{dB}] = L_{\text{Mixer}} [\text{dB}] + L_{\text{IF}} [\text{dB}]$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

When testing above 40GHz:


$L_{\text{mixer}} [\text{dB}]$ : Conversion Loss of Mixer.

$L_{\text{IF}} [\text{dB}]$ : Cable loss of the RF cable that connects the IF output of the mixer to the IF input of the spectrum.

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.


**Note 1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note 2:** The low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

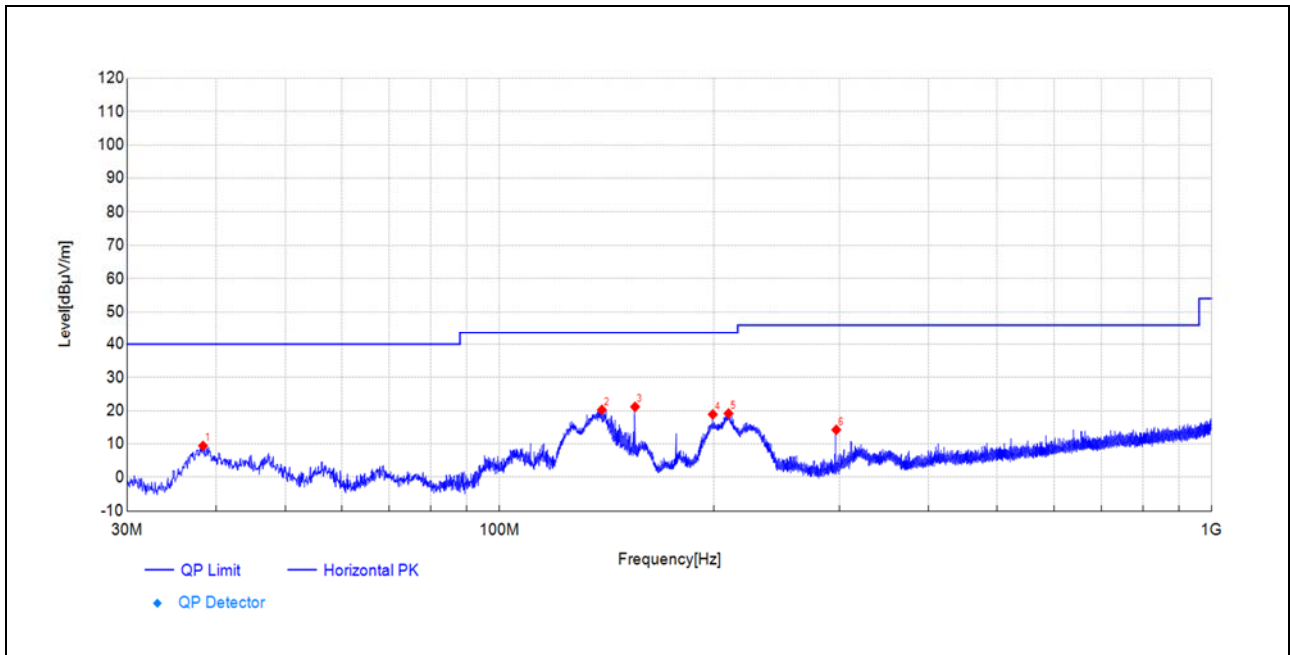


(30MHz – 1GHz, Test Antenna Horizontal)

| Fre.<br>(MHz) | Reading<br>[dBμV] | Level<br>[dBμV/m] | Factor<br>[dB/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Detector | Verdict |
|---------------|-------------------|-------------------|------------------|-------------------|----------------|----------------|--------------|----------|---------|
| 38.35         | 39.0              | 9.38              | -29.62           | 40.00             | 30.60          | 165            | 124          | PK       | PASS    |
| 139.23        | 53.8              | 20.21             | -33.59           | 43.50             | 23.25          | 165            | 62           | PK       | PASS    |
| 154.99        | 54.3              | 21.18             | -33.12           | 43.50             | 22.35          | 165            | 263          | PK       | PASS    |
| 199.26        | 49.0              | 18.92             | -30.08           | 43.50             | 24.63          | 165            | 74           | PK       | PASS    |
| 209.67        | 49.0              | 19.15             | -29.85           | 43.50             | 24.35          | 165            | 250          | PK       | PASS    |
| 297.03        | 41.3              | 14.27             | -27.03           | 46.00             | 31.75          | 165            | 200          | PK       | PASS    |

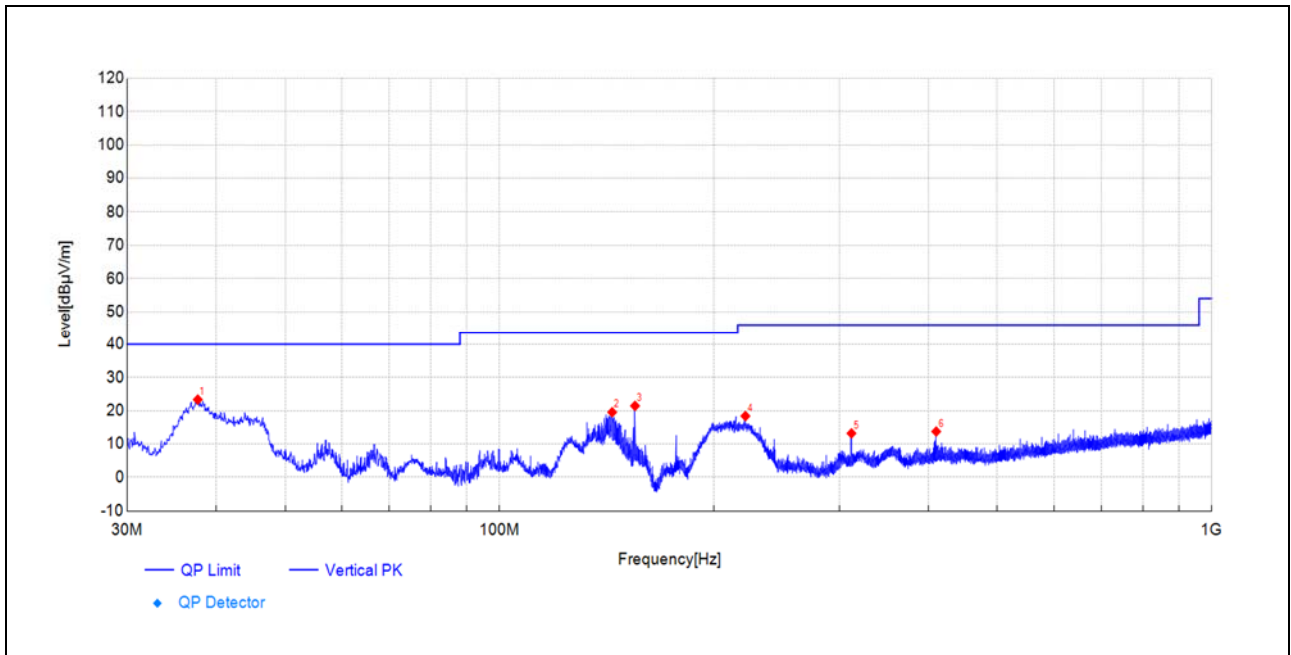


(30MHz – 1GHz, Test Antenna Vertical)

| Fre.<br>(MHz) | Reading<br>[dBμV] | Level<br>[dBμV/m] | Factor<br>[dB/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Detector | Verdict |
|---------------|-------------------|-------------------|------------------|-------------------|----------------|----------------|--------------|----------|---------|
| 37.70         | 53.1              | 23.28             | -29.82           | 40.00             | 16.68          | 165            | 258          | PK       | PASS    |
| 143.94        | 53.1              | 19.55             | -33.55           | 43.50             | 23.98          | 165            | 130          | PK       | PASS    |
| 154.99        | 54.6              | 21.48             | -33.12           | 43.50             | 22.07          | 165            | 335          | PK       | PASS    |
| 221.42        | 47.5              | 18.36             | -29.14           | 46.00             | 27.62          | 165            | 208          | PK       | PASS    |
| 311.96        | 39.8              | 13.13             | -26.67           | 46.00             | 32.83          | 165            | 5            | PK       | PASS    |
| 410.32        | 37.5              | 13.71             | -23.79           | 46.00             | 32.28          | 165            | 1            | PK       | PASS    |

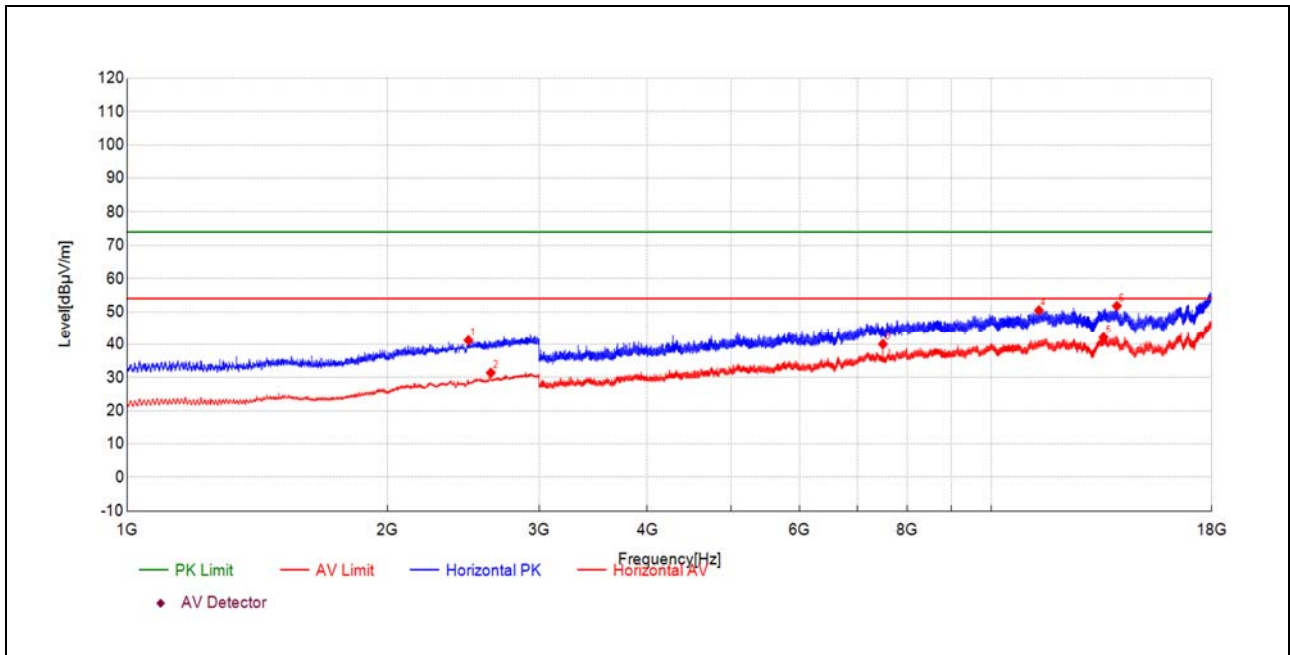


(1GHz – 18GHz, Test Antenna Horizontal)

| Fre.<br>(MHz) | Reading<br>[dBμV] | Level<br>[dBμV/m] | Factor<br>[dB/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Detector | Verdict |
|---------------|-------------------|-------------------|------------------|-------------------|----------------|----------------|--------------|----------|---------|
| 2483.27       | 40.3              | 41.2              | 0.90             | 74.00             | 32.83          | 165            | 165          | PK       | PASS    |
| 2635.65       | 30.8              | 31.39             | 0.59             | 54.00             | 22.63          | 165            | 88           | AV       | PASS    |
| 7493.27       | 44.6              | 40.06             | -4.54            | 54.00             | 13.97          | 165            | 48           | AV       | PASS    |
| 11356.54      | 48.0              | 50.41             | 2.41             | 74.00             | 23.57          | 165            | 349          | PK       | PASS    |
| 13491.28      | 37.4              | 42.11             | 4.71             | 54.00             | 11.89          | 165            | 349          | AV       | PASS    |
| 13977.24      | 46.5              | 51.79             | 5.29             | 74.00             | 22.24          | 165            | 305          | PK       | PASS    |

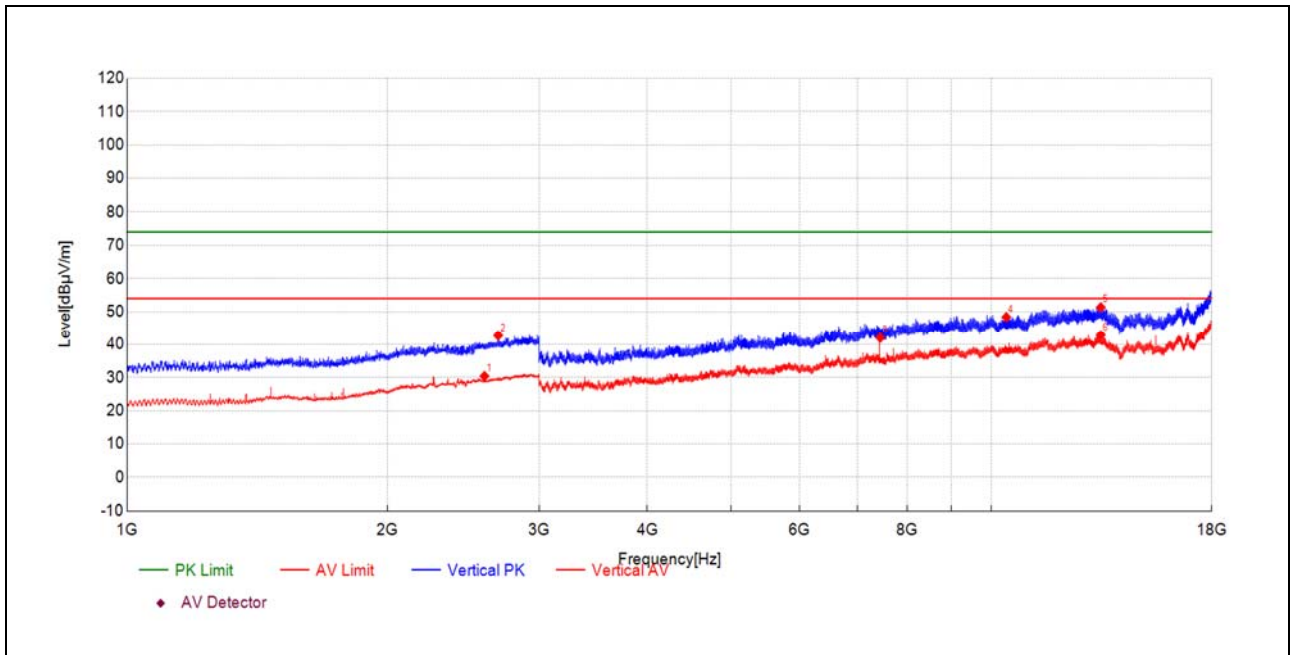


(1GHz – 18GHz, Test Antenna Vertical)

| Fre.<br>(MHz) | Reading<br>[dBμV] | Level<br>[dBμV/m] | Factor<br>[dB/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Height<br>[cm] | Angle<br>[°] | Detector | Verdict |
|---------------|-------------------|-------------------|------------------|-------------------|----------------|----------------|--------------|----------|---------|
| 2591.70       | 30.1              | 30.41             | 0.31             | 54.00             | 23.63          | 165            | 11           | AV       | PASS    |
| 2687.91       | 42.0              | 42.72             | 0.72             | 74.00             | 31.32          | 165            | 55           | PK       | PASS    |
| 7439.94       | 46.5              | 42.04             | -4.46            | 54.00             | 12.01          | 165            | 139          | AV       | PASS    |
| 10410.53      | 49.1              | 48.33             | -0.77            | 74.00             | 25.65          | 165            | 1            | PK       | PASS    |
| 13391.09      | 46.5              | 51.3              | 4.80             | 74.00             | 22.67          | 165            | 184          | PK       | PASS    |
| 13391.59      | 38.0              | 42.8              | 4.80             | 54.00             | 11.18          | 165            | 257          | AV       | PASS    |

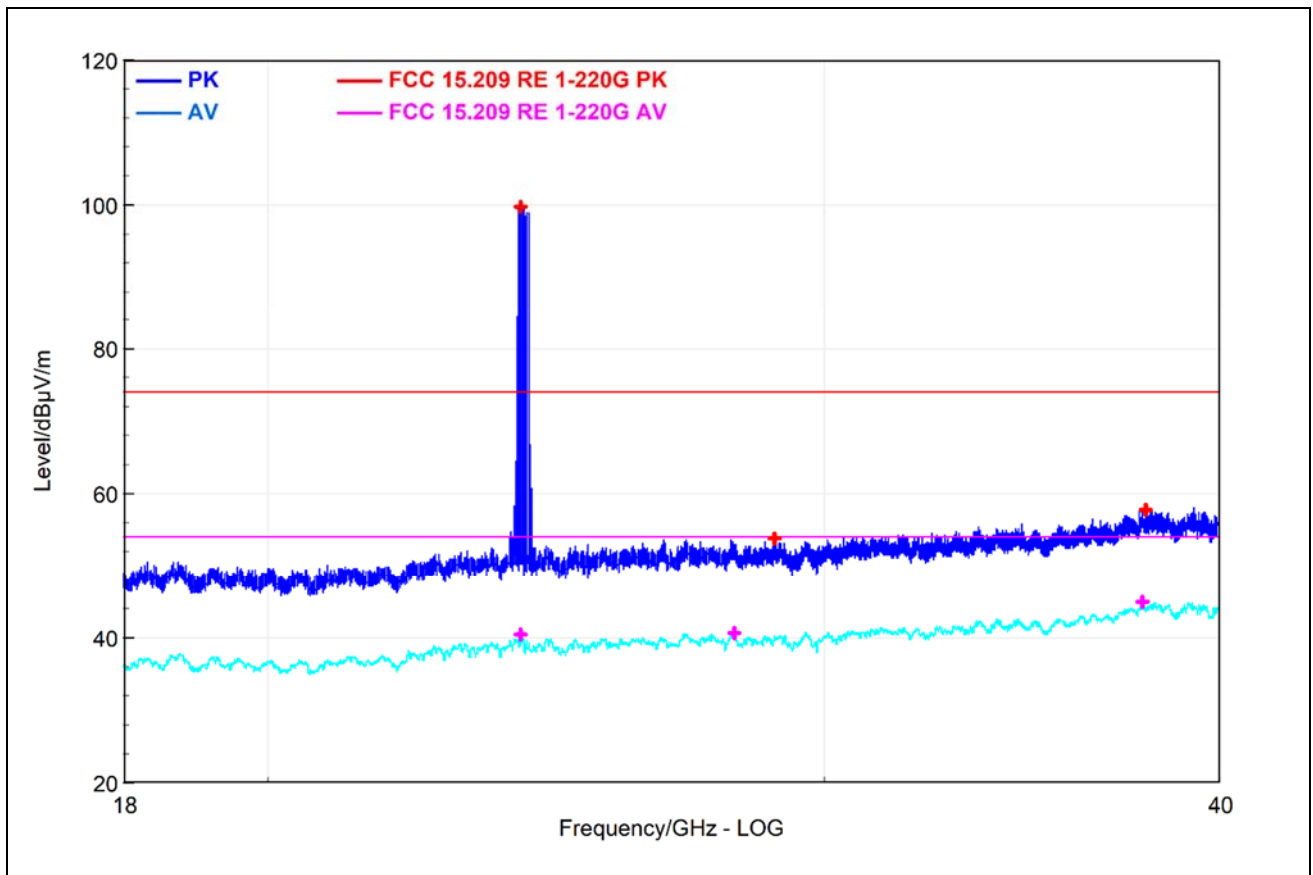


(18GHz – 40GHz, Test Antenna Horizontal)

| Frequency (GHz) | Reading (dBμV) | Factor (dB/m) | Level (dBμV/m) | Detector | Limit (dBμV/m) | Margin(dB) | Verdict |
|-----------------|----------------|---------------|----------------|----------|----------------|------------|---------|
| 24.073276       | 101.784        | -2.224        | 99.56          | PK       | 74             | -25.56     | NA      |
| 28.954498       | 54.835         | -1.195        | 53.64          | PK       | 74             | 20.36      | PASS    |
| 37.960907       | 54.958         | 2.782         | 57.74          | PK       | 74             | 16.26      | PASS    |
| 24.073276       | 42.278         | -1.988        | 40.29          | AV       | 54             | 13.71      | PASS    |
| 28.102459       | 41.189         | -0.589        | 40.6           | AV       | 54             | 13.4       | PASS    |
| 37.846902       | 41.638         | 3.082         | 44.72          | AV       | 54             | 9.28       | PASS    |

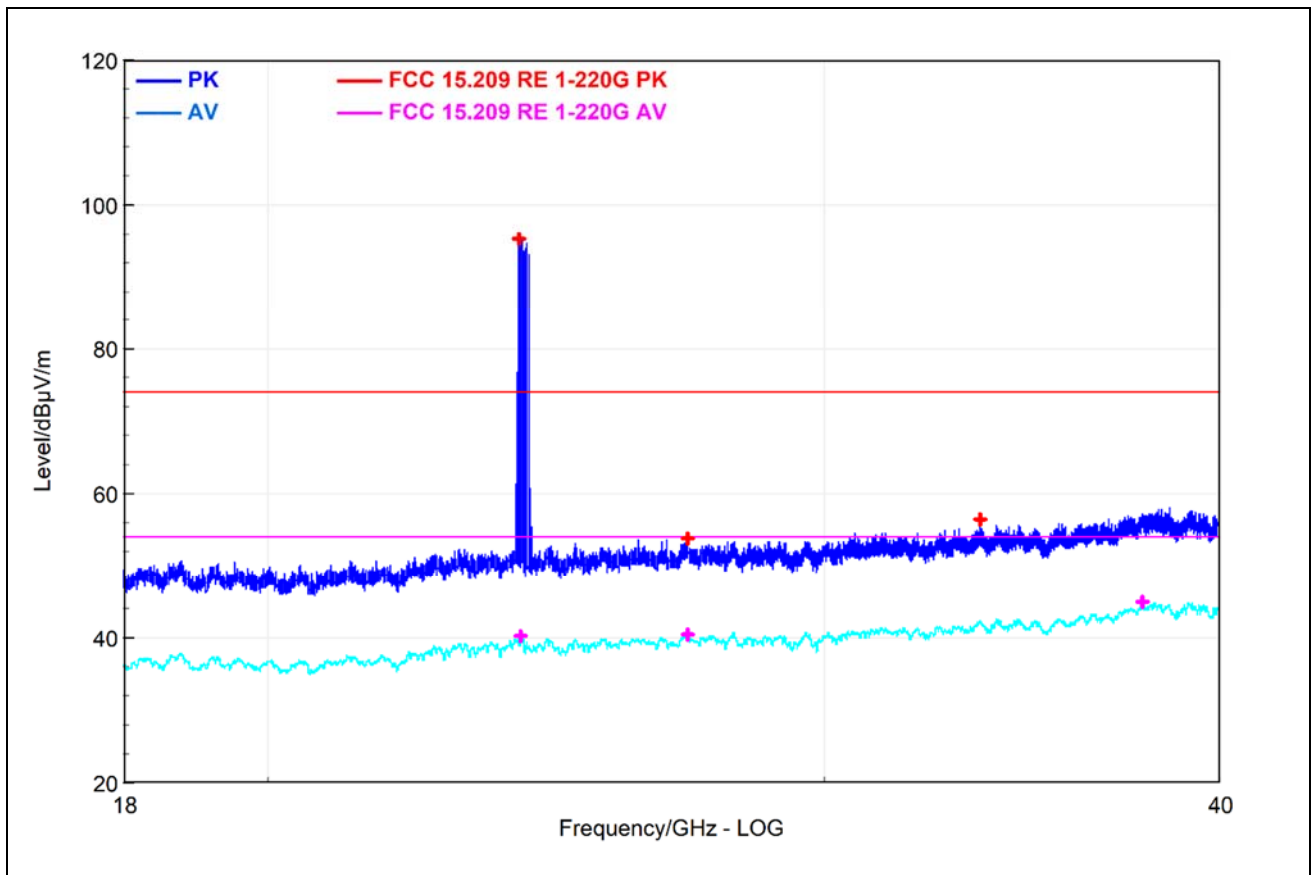


(18GHz – 40GHz, Test Antenna Vertical)

| Frequency (GHz) | Reading (dBμV) | Factor (dB/m) | Level (dBμV/m) | Detector | Limit (dBμV/m) | Margin(dB) | Verdict |
|-----------------|----------------|---------------|----------------|----------|----------------|------------|---------|
| 24.02227        | 97.258         | -1.988        | 95.27          | PK       | 74             | -21.27     | NA      |
| 27.18042        | 54.232         | -0.602        | 53.63          | PK       | 74             | 20.37      | PASS    |
| 33.64671        | 54.92          | 1.51          | 56.43          | PK       | 74             | 17.57      | PASS    |
| 24.07328        | 41.918         | -1.888        | 40.03          | AV       | 54             | 13.97      | PASS    |
| 27.17142        | 40.882         | -0.602        | 40.28          | AV       | 54             | 13.72      | PASS    |
| 37.8439         | 41.608         | 3.082         | 44.69          | AV       | 54             | 9.31       | PASS    |

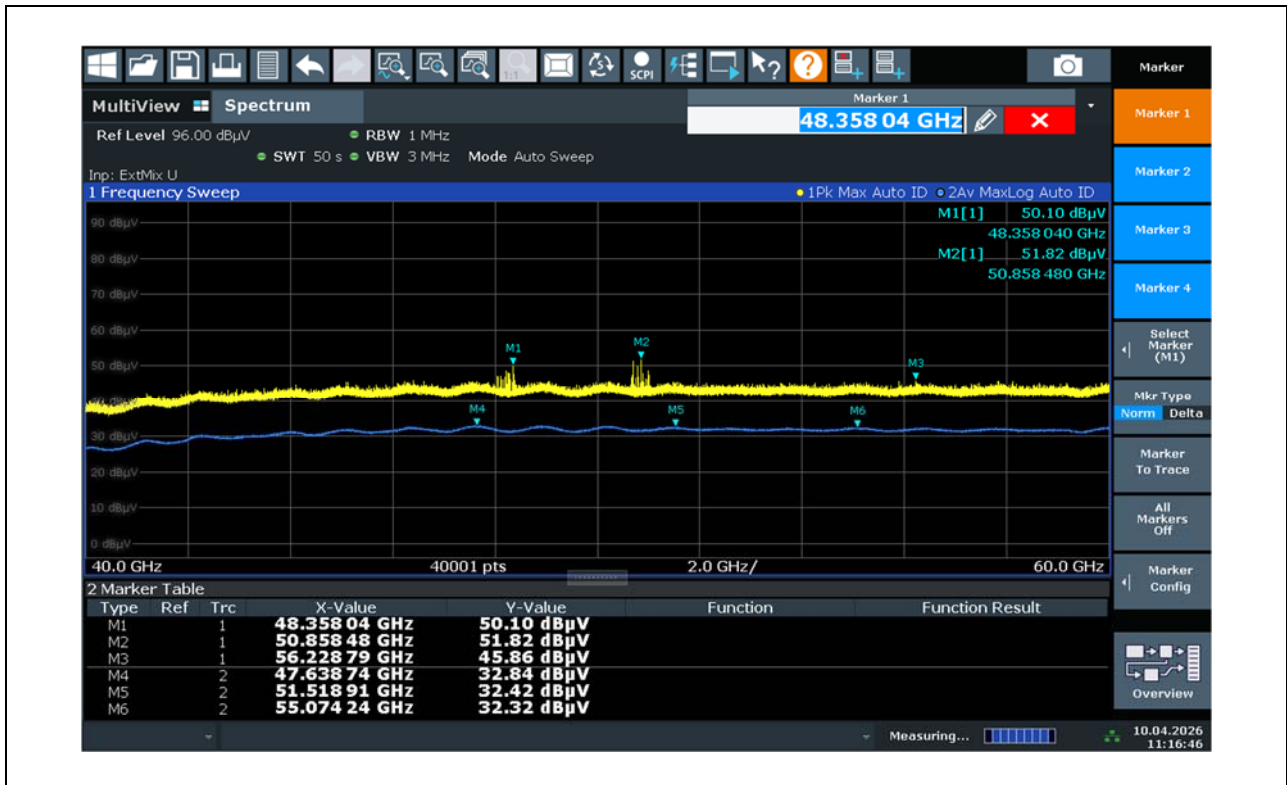


(40GHz – 60GHz, Test Antenna Horizontal)

| Freq.<br>[MHz] | Reading<br>[dBμV] | Pre-amp<br>Gain<br>[dB] | Conversion<br>Loss [dB] | Cable<br>Loss<br>[dB] | Antenna<br>Factor<br>[dB/m] | Level<br>@1.5m<br>[dBμV/m] | Level<br>@3m<br>[dBμV/m] | AV-Limit<br>@3m<br>[dBμV/m] | Detector | Verdict |
|----------------|-------------------|-------------------------|-------------------------|-----------------------|-----------------------------|----------------------------|--------------------------|-----------------------------|----------|---------|
| 48.35804       | 50.1              | 40.2                    | 6.1                     | 0.6                   | 42.8                        | 59.4                       | 53.4                     | 88                          | PK       | PASS    |
| 50.85848       | 51.82             | 40.2                    | 6.1                     | 0.6                   | 42.8                        | 61.12                      | 55.12                    | 74                          | PK       | PASS    |
| 56.22879       | 45.86             | 40.2                    | 6.1                     | 0.6                   | 42.8                        | 55.16                      | 49.16                    | 74                          | PK       | PASS    |
| 47.63874       | 32.84             | 40.2                    | 6.1                     | 0.6                   | 42.8                        | 42.14                      | 36.14                    | 54                          | AV       | PASS    |
| 51.51891       | 32.42             | 40.2                    | 6.1                     | 0.6                   | 42.8                        | 41.72                      | 35.72                    | 54                          | AV       | PASS    |
| 55.07424       | 32.32             | 40.2                    | 6.1                     | 0.6                   | 42.8                        | 41.62                      | 35.62                    | 54                          | AV       | PASS    |

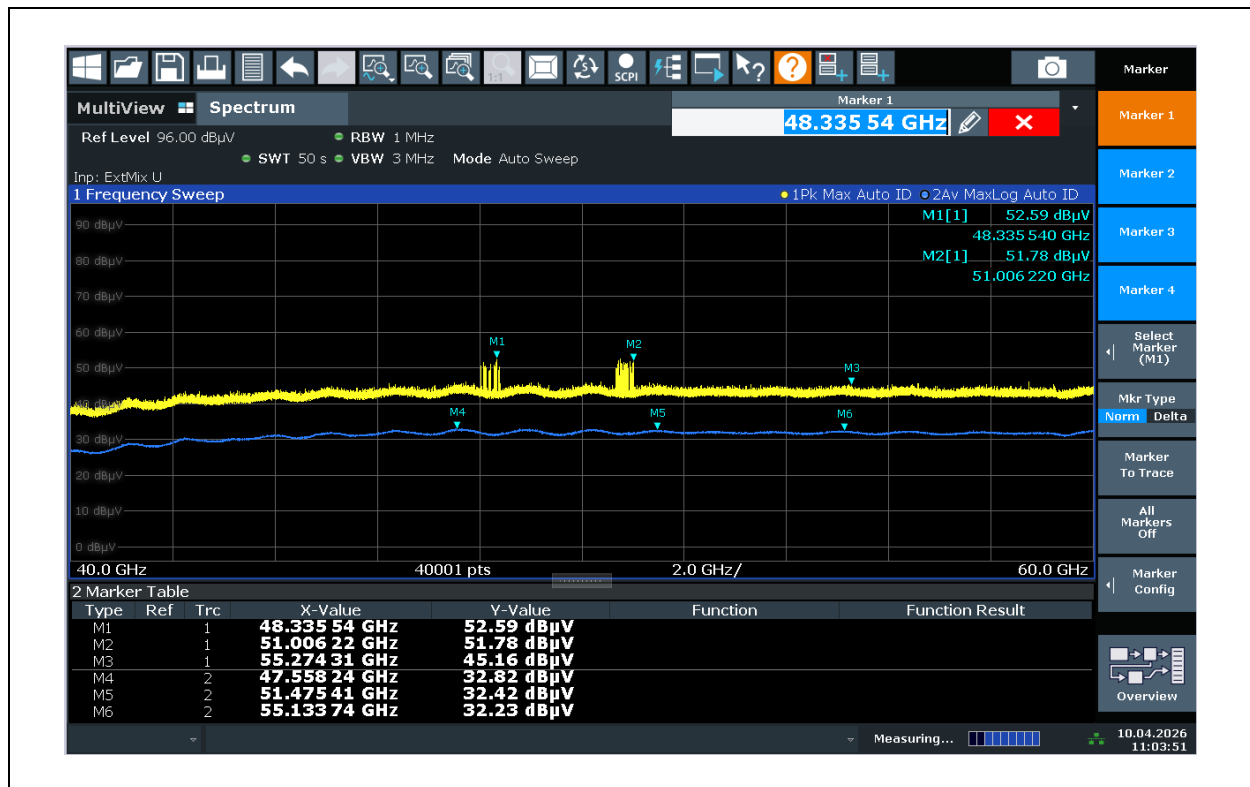


(40GHz – 60GHz, Test Antenna Vertical)

| Freq.<br>[MHz] | Reading<br>[dBμV] | Pre-amp<br>Gain<br>[dB] | Conversion<br>Loss [dB] | Cable<br>Loss<br>[dB] | Antenna<br>Factor<br>[dB/m] | Level<br>@1.5m<br>[dBμV/m] | Level<br>@3m<br>[dBμV/m] | AV-Limit<br>@3m<br>[dBμV/m] | Detector | Verdict |
|----------------|-------------------|-------------------------|-------------------------|-----------------------|-----------------------------|----------------------------|--------------------------|-----------------------------|----------|---------|
| 48.33554       | 52.59             | 40.2                    | 6.1                     | 0.6                   | 42.8                        | 61.89                      | 55.89                    | 88                          | PK       | PASS    |
| 51.00622       | 51.78             | 40.2                    | 6.1                     | 0.6                   | 42.8                        | 61.08                      | 55.08                    | 74                          | PK       | PASS    |
| 55.27431       | 45.16             | 40.2                    | 6.1                     | 0.6                   | 42.8                        | 54.46                      | 48.46                    | 74                          | PK       | PASS    |
| 47.55824       | 32.82             | 40.2                    | 6.1                     | 0.6                   | 42.8                        | 42.12                      | 36.12                    | 54                          | AV       | PASS    |
| 51.47541       | 32.42             | 40.2                    | 6.1                     | 0.6                   | 42.8                        | 41.72                      | 35.72                    | 54                          | AV       | PASS    |
| 55.13374       | 32.23             | 40.2                    | 6.1                     | 0.6                   | 42.8                        | 41.53                      | 35.53                    | 54                          | AV       | PASS    |

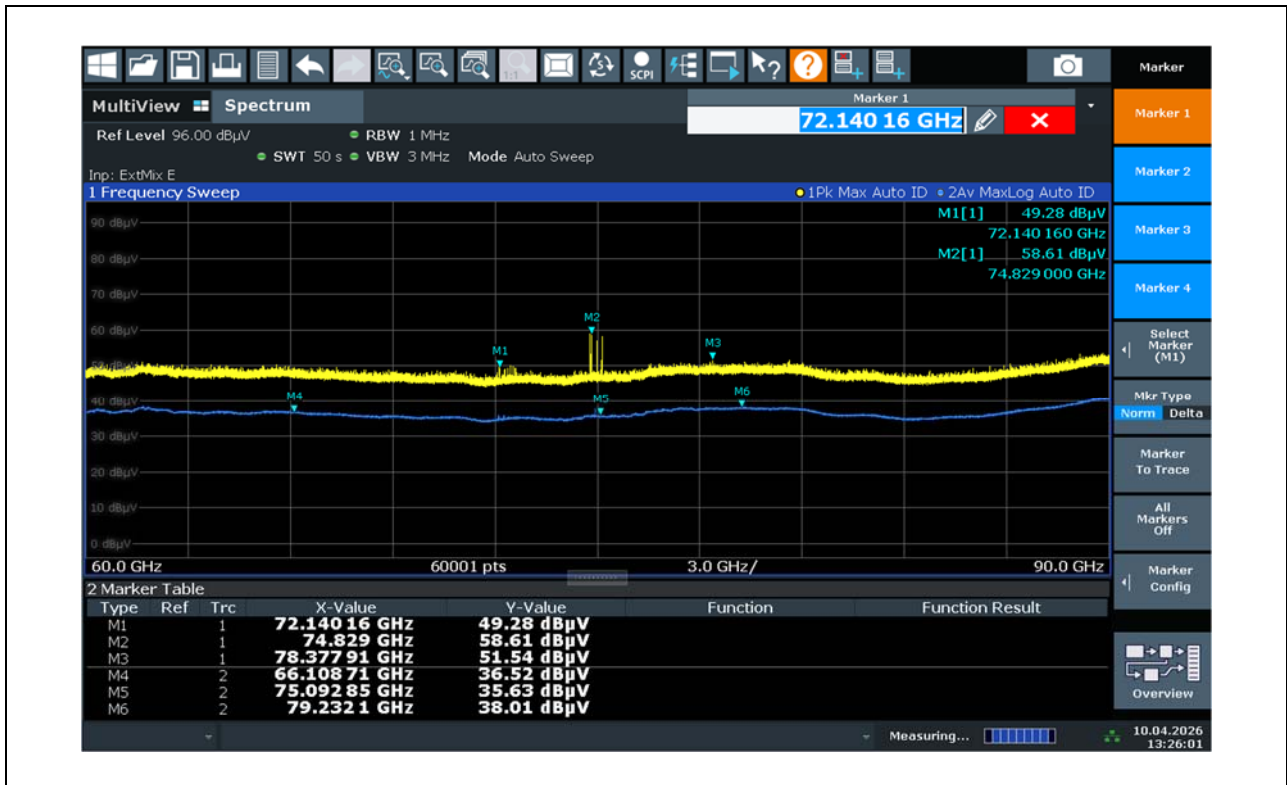


(60GHz – 90GHz, Test Antenna Horizontal)

| Freq.<br>[MHz] | Reading<br>[dBμV] | Pre-amp<br>Gain<br>[dB] | Conversion<br>Loss [dB] | Cable<br>Loss<br>[dB] | Antenna<br>Factor<br>[dB/m] | Level<br>@1.5m<br>[dBμV/m] | Level<br>@3m<br>[dBμV/m] | AV-Limit<br>@3m<br>[dBμV/m] | Detector | Verdict |
|----------------|-------------------|-------------------------|-------------------------|-----------------------|-----------------------------|----------------------------|--------------------------|-----------------------------|----------|---------|
| 72.14016       | 49.28             | 42.8                    | 6.3                     | 0.6                   | 46.5                        | 59.88                      | 53.88                    | 74                          | PK       | PASS    |
| 74.829         | 58.61             | 42.8                    | 6.3                     | 0.6                   | 46.5                        | 69.21                      | 63.21                    | 74                          | PK       | PASS    |
| 78.37791       | 51.54             | 42.8                    | 6.3                     | 0.6                   | 46.5                        | 62.14                      | 56.14                    | 74                          | PK       | PASS    |
| 66.10871       | 36.52             | 42.8                    | 6.3                     | 0.6                   | 46.5                        | 47.12                      | 41.12                    | 54                          | AV       | PASS    |
| 75.09285       | 35.63             | 42.8                    | 6.3                     | 0.6                   | 46.5                        | 46.23                      | 40.23                    | 54                          | AV       | PASS    |
| 79.2321        | 38.01             | 42.8                    | 6.3                     | 0.6                   | 46.5                        | 48.61                      | 42.61                    | 54                          | AV       | PASS    |

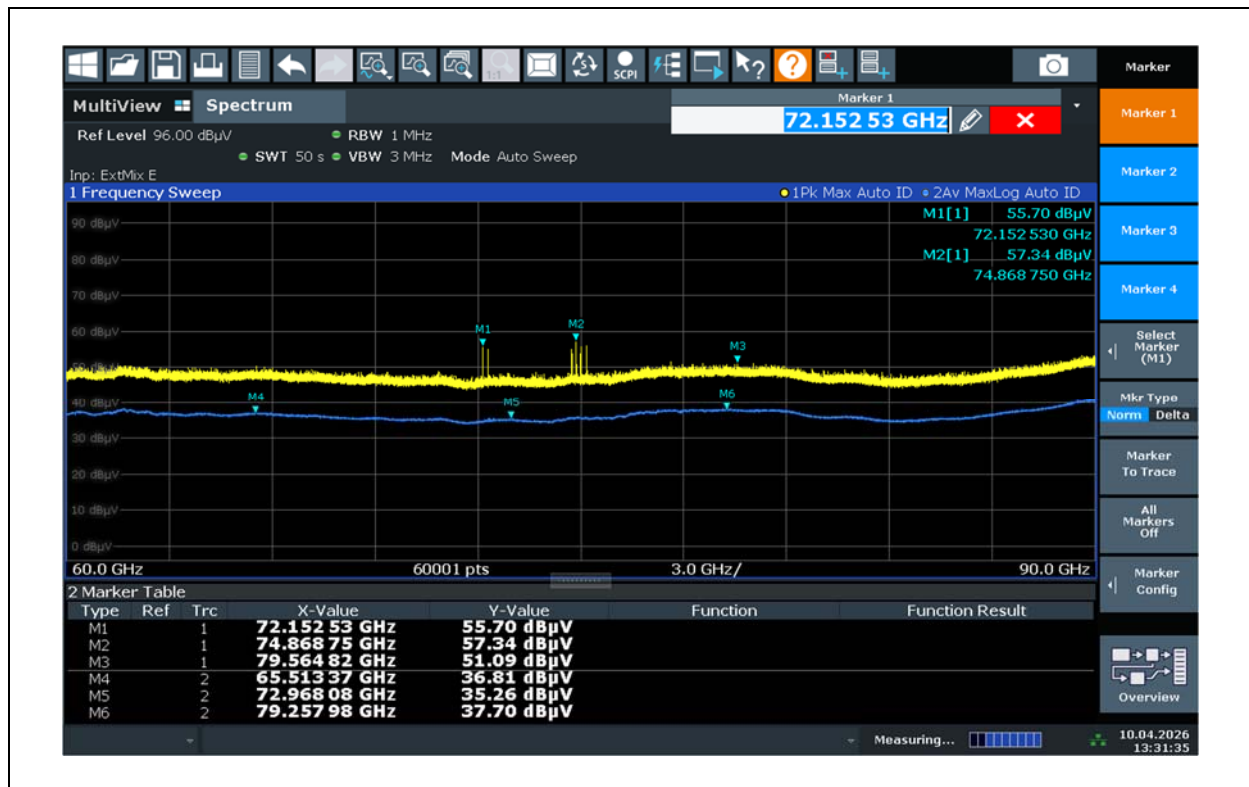


(60GHz – 90GHz, Test Antenna Vertical)

| Freq.<br>[MHz] | Reading<br>[dBμV] | Pre-amp<br>Gain<br>[dB] | Conversion<br>Loss [dB] | Cable<br>Loss<br>[dB] | Antenna<br>Factor<br>[dB/m] | Level<br>@1.5m<br>[dBμV/m] | Level<br>@3m<br>[dBμV/m] | AV-Limit<br>@3m<br>[dBμV/m] | Detector | Verdict |
|----------------|-------------------|-------------------------|-------------------------|-----------------------|-----------------------------|----------------------------|--------------------------|-----------------------------|----------|---------|
| 72.15253       | 55.7              | 42.8                    | 6.3                     | 0.6                   | 46.5                        | 66.3                       | 60.3                     | 74                          | PK       | PASS    |
| 74.86875       | 57.34             | 42.8                    | 6.3                     | 0.6                   | 46.5                        | 67.94                      | 61.94                    | 74                          | PK       | PASS    |
| 79.56482       | 51.09             | 42.8                    | 6.3                     | 0.6                   | 46.5                        | 61.69                      | 55.69                    | 74                          | PK       | PASS    |
| 65.51337       | 36.81             | 42.8                    | 6.3                     | 0.6                   | 46.5                        | 47.41                      | 41.41                    | 54                          | AV       | PASS    |
| 72.96808       | 35.26             | 42.8                    | 6.3                     | 0.6                   | 46.5                        | 45.86                      | 39.86                    | 54                          | AV       | PASS    |
| 79.25798       | 37.7              | 42.8                    | 6.3                     | 0.6                   | 46.5                        | 48.3                       | 42.3                     | 54                          | AV       | PASS    |

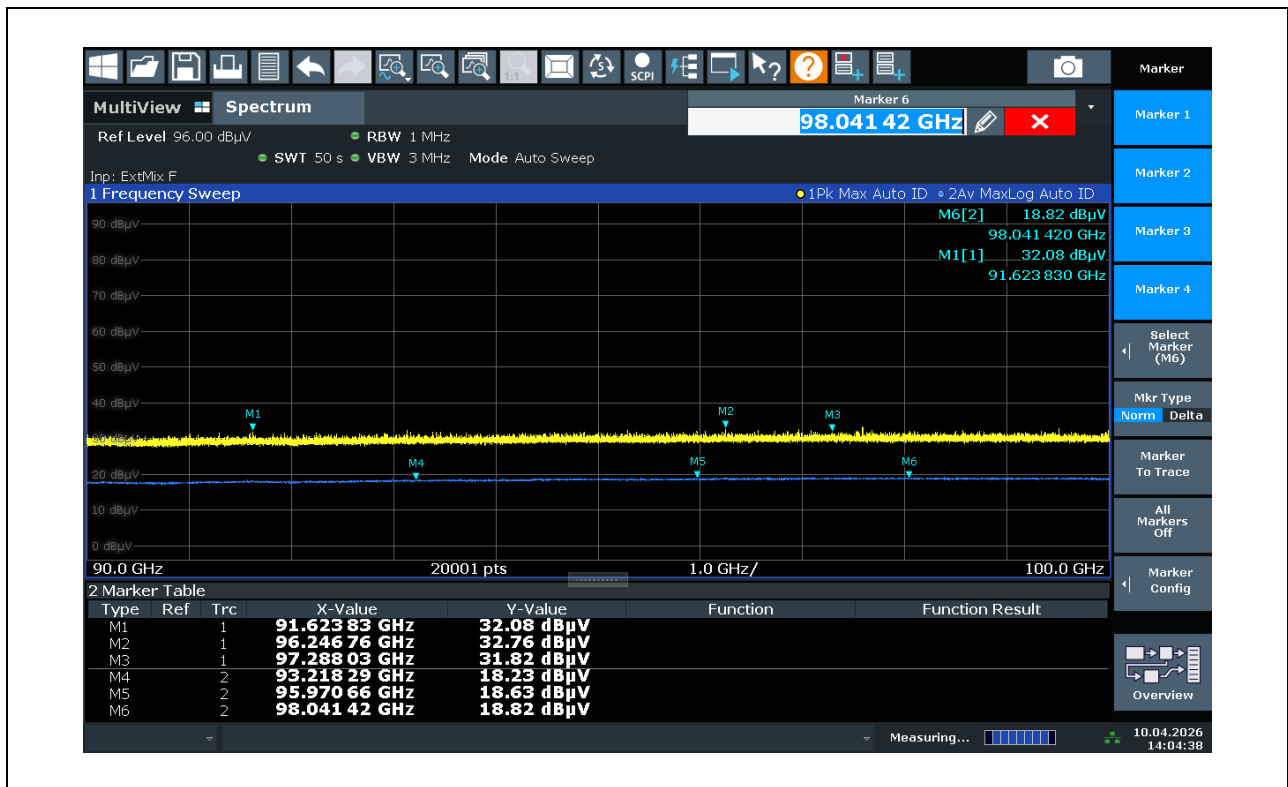

(90GHz – 100GHz, Test Antenna Horizontal)

| Freq.<br>[MHz] | Reading<br>[dBμV] | Pre-amp<br>Gain<br>[dB] | Conversion<br>Loss [dB] | Cable<br>Loss<br>[dB] | Antenna<br>Factor<br>[dB/m] | Level<br>@1.5m<br>[dBμV/m] | Level<br>@3m<br>[dBμV/m] | AV-Limit<br>@3m<br>[dBμV/m] | Detector | Verdict |
|----------------|-------------------|-------------------------|-------------------------|-----------------------|-----------------------------|----------------------------|--------------------------|-----------------------------|----------|---------|
| 91.62383       | 32.08             | 18.2                    | 6.4                     | 0.6                   | 45.7                        | 66.58                      | 60.58                    | 74                          | PK       | PASS    |
| 96.24676       | 32.76             | 18.2                    | 6.4                     | 0.6                   | 45.7                        | 67.26                      | 61.26                    | 74                          | PK       | PASS    |
| 97.28803       | 31.82             | 18.2                    | 6.4                     | 0.6                   | 45.7                        | 66.32                      | 60.32                    | 74                          | PK       | PASS    |
| 93.21829       | 18.23             | 18.2                    | 6.4                     | 0.6                   | 45.7                        | 52.73                      | 46.73                    | 54                          | AV       | PASS    |
| 95.97066       | 18.63             | 18.2                    | 6.4                     | 0.6                   | 45.7                        | 53.13                      | 47.13                    | 54                          | AV       | PASS    |
| 98.04142       | 18.82             | 18.2                    | 6.4                     | 0.6                   | 45.7                        | 53.32                      | 47.32                    | 54                          | AV       | PASS    |

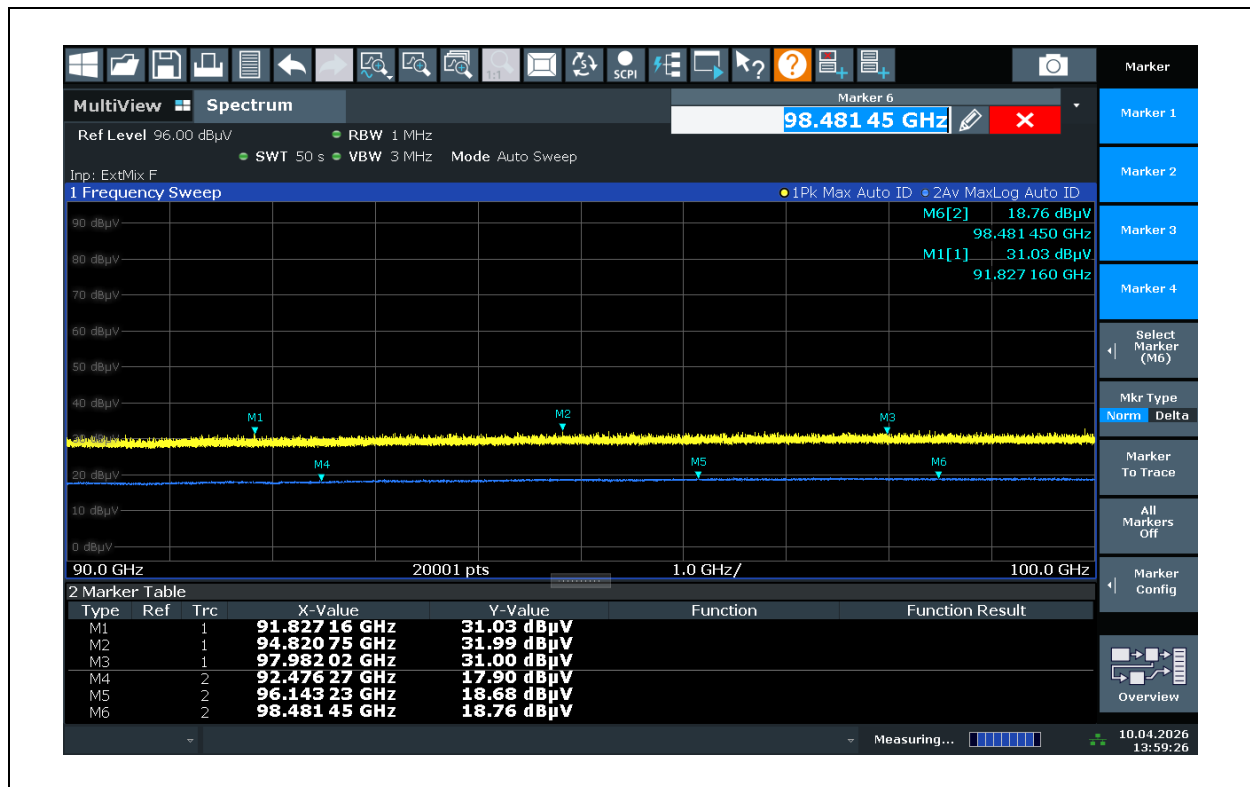

(90GHz – 100GHz, Test Antenna Vertical)

| Freq.<br>[MHz] | Reading<br>[dBμV] | Pre-amp<br>Gain<br>[dB] | Conversion<br>Loss [dB] | Cable<br>Loss<br>[dB] | Antenna<br>Factor<br>[dB/m] | Level<br>@1.5m<br>[dBμV/m] | Level<br>@3m<br>[dBμV/m] | AV-Limit<br>@3m<br>[dBμV/m] | Detector | Verdict |
|----------------|-------------------|-------------------------|-------------------------|-----------------------|-----------------------------|----------------------------|--------------------------|-----------------------------|----------|---------|
| 91.82716       | 31.03             | 18.2                    | 6.4                     | 0.6                   | 45.7                        | 65.53                      | 59.53                    | 74                          | PK       | PASS    |
| 94.82075       | 31.99             | 18.2                    | 6.4                     | 0.6                   | 45.7                        | 66.49                      | 60.49                    | 74                          | PK       | PASS    |
| 97.98202       | 31                | 18.2                    | 6.4                     | 0.6                   | 45.7                        | 65.5                       | 59.5                     | 74                          | PK       | PASS    |
| 92.47602       | 17.9              | 18.2                    | 6.4                     | 0.6                   | 45.7                        | 52.4                       | 46.4                     | 54                          | AV       | PASS    |
| 96.143         | 18.68             | 18.2                    | 6.4                     | 0.6                   | 45.7                        | 53.18                      | 47.18                    | 54                          | AV       | PASS    |
| 98.48145       | 18.76             | 18.2                    | 6.4                     | 0.6                   | 45.7                        | 53.26                      | 47.26                    | 54                          | AV       | PASS    |



## Annex A Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.:

### Uncertainty of Radiated Emission Measurement

| Test Items                                                       | Uncertainty |
|------------------------------------------------------------------|-------------|
| Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y)) | ±5%         |

### Uncertainty of Radiated Emission Measurement

| Test Items                                                       | Uncertainty    |         |
|------------------------------------------------------------------|----------------|---------|
| Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y)) | 30MHz-200MHz   | ±5.06dB |
|                                                                  | 200MHz-1000MHz | ±5.04dB |
|                                                                  | 1GHz-6GHz      | ±5.18dB |
|                                                                  | 6GHz-18GHz     | ±5.48dB |



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

|                            |                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>Laboratory Name:</b>    | Shenzhen Morlab Communications Technology Co., Ltd.                                                                                |
| <b>Laboratory Address:</b> | FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |
| <b>Telephone:</b>          | +86 755 36698555                                                                                                                   |
| <b>Facsimile:</b>          | +86 755 36698525                                                                                                                   |

### 2. Identification of the Responsible Testing Location

|                 |                                                                                                                                    |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>Name:</b>    | Shenzhen Morlab Communications Technology Co., Ltd.                                                                                |
| <b>Address:</b> | FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.1-3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2020 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipment Utilized

##### 4.1 Radiated Test Equipment

| Equipment                                | Serial No.                 | Model No.             | Manufacturer                                               | Cal. Date  | Due Date   |
|------------------------------------------|----------------------------|-----------------------|------------------------------------------------------------|------------|------------|
| Signal Analyzer                          | 1331.5003K4<br>3-102271-zt | FSW                   | R&S                                                        | 2025.05.13 | 2026.05.12 |
| Test Antenna -<br>Horn                   | 02634                      | BBHA 9120D            | Schwarzbeck                                                | 2025.06.29 | 2026.06.28 |
| Test Antenna<br>-Horn                    | BBHA9170#7<br>73           | BBHA9170              | Schwarzbeck                                                | 2025.06.20 | 2026.06.19 |
| Test Antenna<br>-Loop                    | 00131                      | FMZB 1519B            | Schwarzbeck                                                | 2025.09.08 | 2026.09.07 |
| Test Antenna<br>- Bi-Log                 | 01267                      | VULB9163              | Schwarzbeck                                                | 2025.07.16 | 2026.07.15 |
| Test Antenna<br>-Horn<br>(40GHz -60GHz)  | 2020036000<br>036          | LB-19-20-A            | A-INFOMW                                                   | 2022.06.16 | 2027.06.15 |
| Test Antenna<br>-Horn<br>(60GHz -90GHz)  | J202026347                 | LB-19-20-A            | A-INFOMW                                                   | 2022.06.16 | 2027.06.15 |
| Test Antenna<br>-Horn<br>(90GHz -140GHz) | J202062617                 | LB-19-20-A            | A-INFOMW                                                   | 2022.06.16 | 2027.06.15 |
| Signal Generator                         | 203403                     | MG3692C               | anritsu                                                    | 2025.09.03 | 2026.09.02 |
| Preamplifier<br>(10MHz-6GHz)             | 46732                      | S10M100L38<br>02      | LUCIX CORP.                                                | 2025.05.13 | 2026.05.12 |
| Preamplifier<br>(2GHz-18GHz)             | 61171/61172                | S020180L32<br>03      | LUCIX CORP.                                                | 2025.05.13 | 2026.05.12 |
| Preamplifier<br>(18GHz-40GHz)            | DS77209                    | DCLNA0118-<br>40C-S   | Decentest                                                  | 2025.05.13 | 2026.05.12 |
| Low Noise Amplifier<br>(40GHz-60GHz)     | ADSE01                     | OQ-LNA-406<br>0-3805C | Shanghai<br>Ouqiao<br>Electronics<br>Technology<br>Co.,Ltd | 2024.08.17 | 2026.08.17 |
| Low Noise Amplifier<br>(60GHz-90GHz)     | ADJU05                     | OQ-LNA-609<br>0-3805T | Shanghai<br>Ouqiao<br>Electronics<br>Technology            | 2024.08.17 | 2026.08.17 |



|                                                                          |            |                        |                                                             |            |            |
|--------------------------------------------------------------------------|------------|------------------------|-------------------------------------------------------------|------------|------------|
|                                                                          |            |                        | Co.,Ltd                                                     |            |            |
| Low Noise Amplifier<br>(90GHz-140GHz)                                    | AEMA02     | AT-LNA-9014<br>0-1806E | Shanghai AT<br>Microwave Ltd.                               | 2025.02.26 | 2027.02.25 |
| Spectrum Analyzer<br>Frequency<br>Conversion<br>Module(40GHz-60<br>GHz)  | 2022081902 | SAFC19                 | Nanjing<br>Nuozhijie<br>Electronic<br>Technology<br>Co.,Ltd | 2025.06.11 | 2026.06.10 |
| Spectrum Analyzer<br>Frequency<br>Conversion<br>Module(60GHz-90<br>GHz)  | 2022081904 | SAFC12                 | Nanjing<br>Nuozhijie<br>Electronic<br>Technology<br>Co.,Ltd | 2025.06.11 | 2026.06.10 |
| Spectrum Analyzer<br>Frequency<br>Conversion<br>Module(90GHz-140<br>GHz) | 2023022002 | SAFC08                 | Nanjing<br>Nuozhijie<br>Electronic<br>Technology<br>Co.,Ltd | 2025.02.28 | 2027.02.27 |
| RF Coaxial Cable<br>(DC-18GHz)                                           | MRE001     | PE330                  | Pasternack                                                  | 2025.05.13 | 2026.05.12 |
| RF Coaxial Cable<br>(DC-18GHz)                                           | MRE002     | CLU18                  | Pasternack                                                  | 2025.05.13 | 2026.05.12 |
| RF Coaxial Cable<br>(DC-18GHz)                                           | MRE003     | CLU18                  | Pasternack                                                  | 2025.05.13 | 2026.05.12 |
| RF Coaxial Cable<br>(DC-40GHz)                                           | 22290045   | QA360-40-K<br>K-0.5    | Qualwave                                                    | 2025.09.03 | 2026.09.02 |
| RF Coaxial Cable<br>(DC-40GHz)                                           | 22290046   | QA360-40-K<br>KF-2     | Qualwave                                                    | 2025.09.03 | 2026.09.02 |
| RF Coaxial Cable<br>(DC-18GHz)                                           | 22120181   | QA500-18-N<br>N-5      | Qualwave                                                    | 2025.09.03 | 2026.09.02 |
| Anechoic Chamber                                                         | N/A        | 9m*6m*6m               | CRT                                                         | 2025.06.21 | 2028.06.20 |
| Anechoic Chamber                                                         | N/A        | 9m*6m*6m               | CRT                                                         | 2025.04.19 | 2028.04.18 |

**4.2 Conducted Emission Test Equipment**

| Equipment                                        | Serial No.   | Type        | Manufacturer | Cal. Date  | Due Date   |
|--------------------------------------------------|--------------|-------------|--------------|------------|------------|
| Receiver                                         | 101052       | ESPI        | R&S          | 2025.05.15 | 2026.05.14 |
| LISN                                             | 103131       | ENV 216     | R&S          | 2025.04.18 | 2026.04.17 |
| INTELLIGENT<br>PURE<br>SINE-WAVE<br>POWER SUPPLY | 1008004      | TPS<br>500B | EVERFINE     | 2025.09.11 | 2026.09.10 |
| RF Coaxial Cable<br>(DC-100MHz)                  | EMC-CE-00514 | N/A         | N/A          | 2025.05.06 | 2026.05.05 |

**4.3 Test Software Utilized**

| Description     | Manufacturer | Software Version |
|-----------------|--------------|------------------|
| TS+ -[JS36-RSE] | Tonscend     | 5.0.0            |
| TS+ -[JS32-CE]  | Tonscend     | 2.5.0.0          |
| DC-EMC          | Decentest    | V01.30           |



## Notes

1. The report shall have report stamp or our company stamp.
2. The report shall be invalid without all the signatures of the editor and approver.
3. The report shall not be changed.
4. Any objections must be raised to Morlab within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.
5. Conformity declaration:
  - ☒ Morlab issues a statement of conformity based on the corresponding standards (default)
  - ☐ Morlab issues a statement of conformity based on the applicant requirement
6. Use of uncertainty of measurement for decisions on conformity (decision rule):

No decision rule is specified by the testing standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule).

\_\_\_\_\_ END OF REPORT \_\_\_\_\_