


1. Duty Cycle


1.1 Ant1

1.1.1 Test Result


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.106	0.625	16.96	7.71	0.03
		2440	0.107	0.625	17.12	7.66	0.00
		2480	0.107	0.625	17.12	7.66	0.00
2M	SISO	2402	1.088	1.875	58.03	2.36	0.03
		2440	1.090	1.875	58.13	2.36	0.02
		2480	1.090	1.875	58.13	2.36	0.02

1.1.2 Test Graph

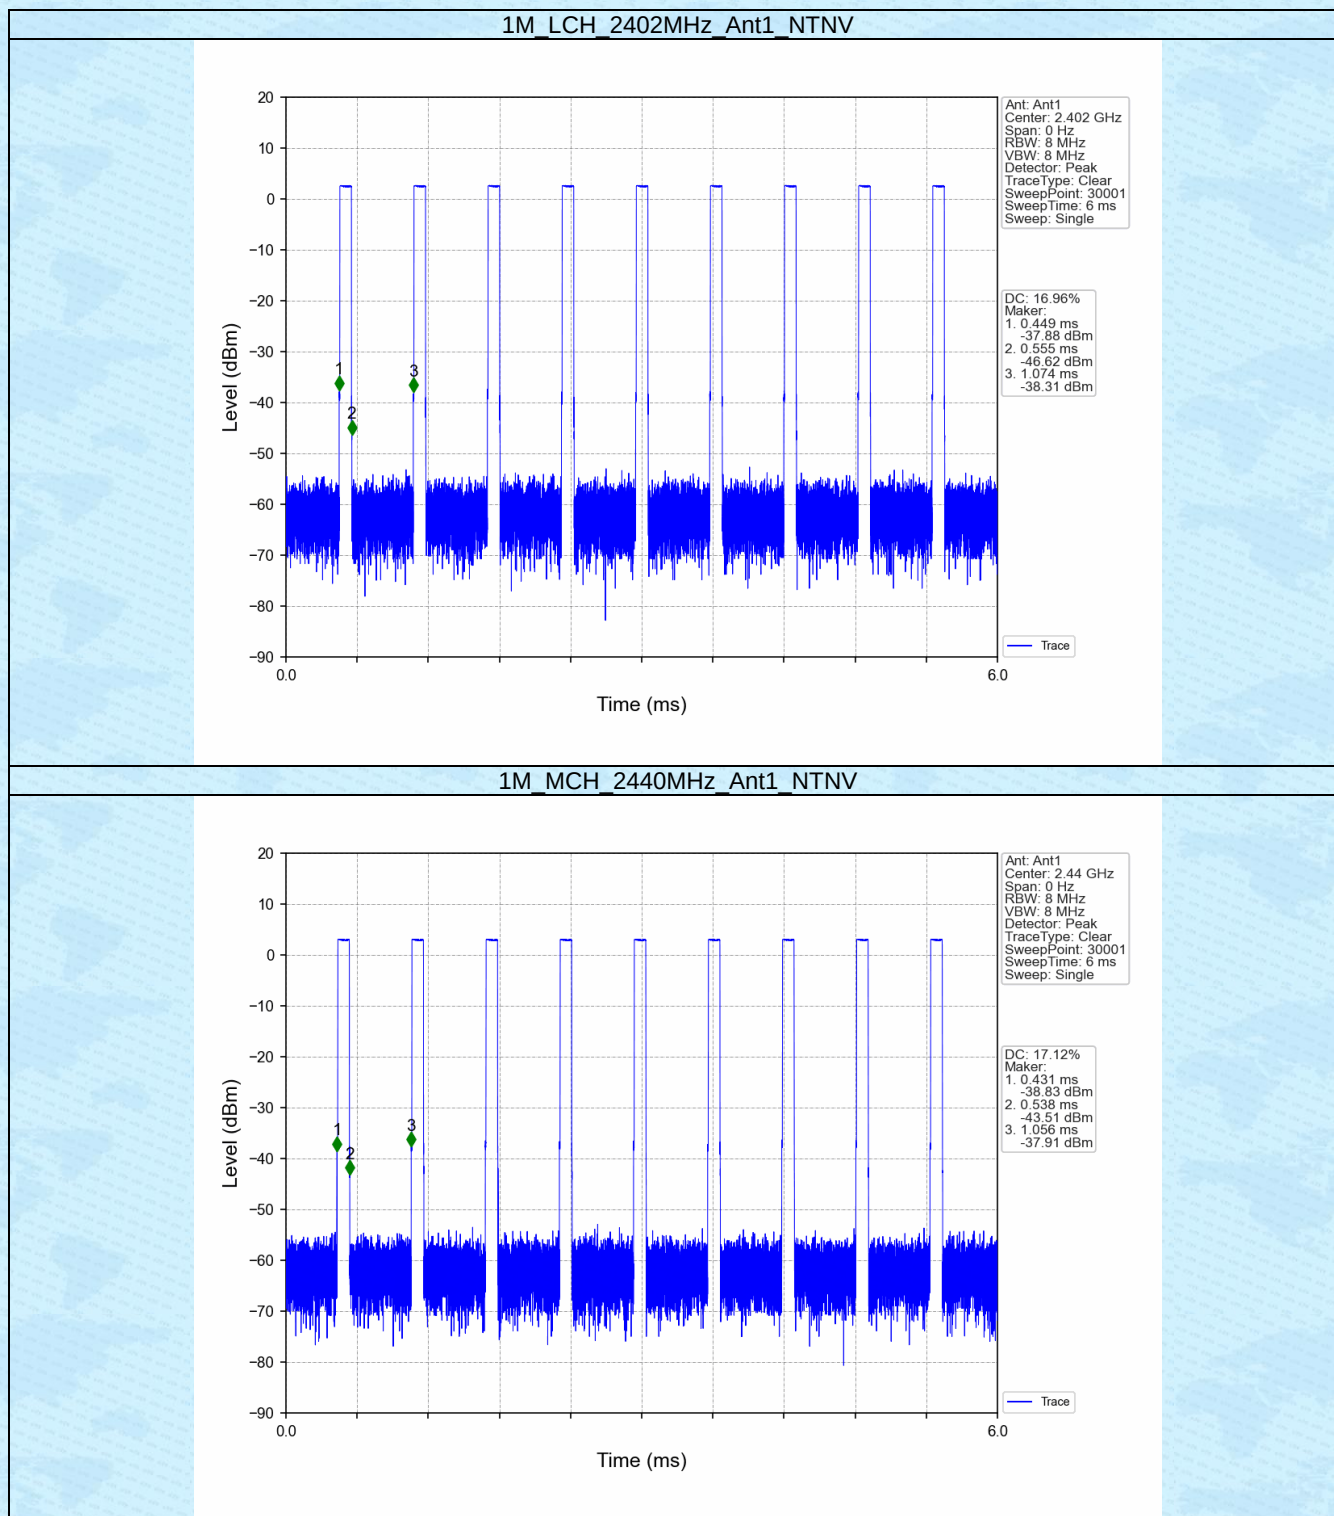


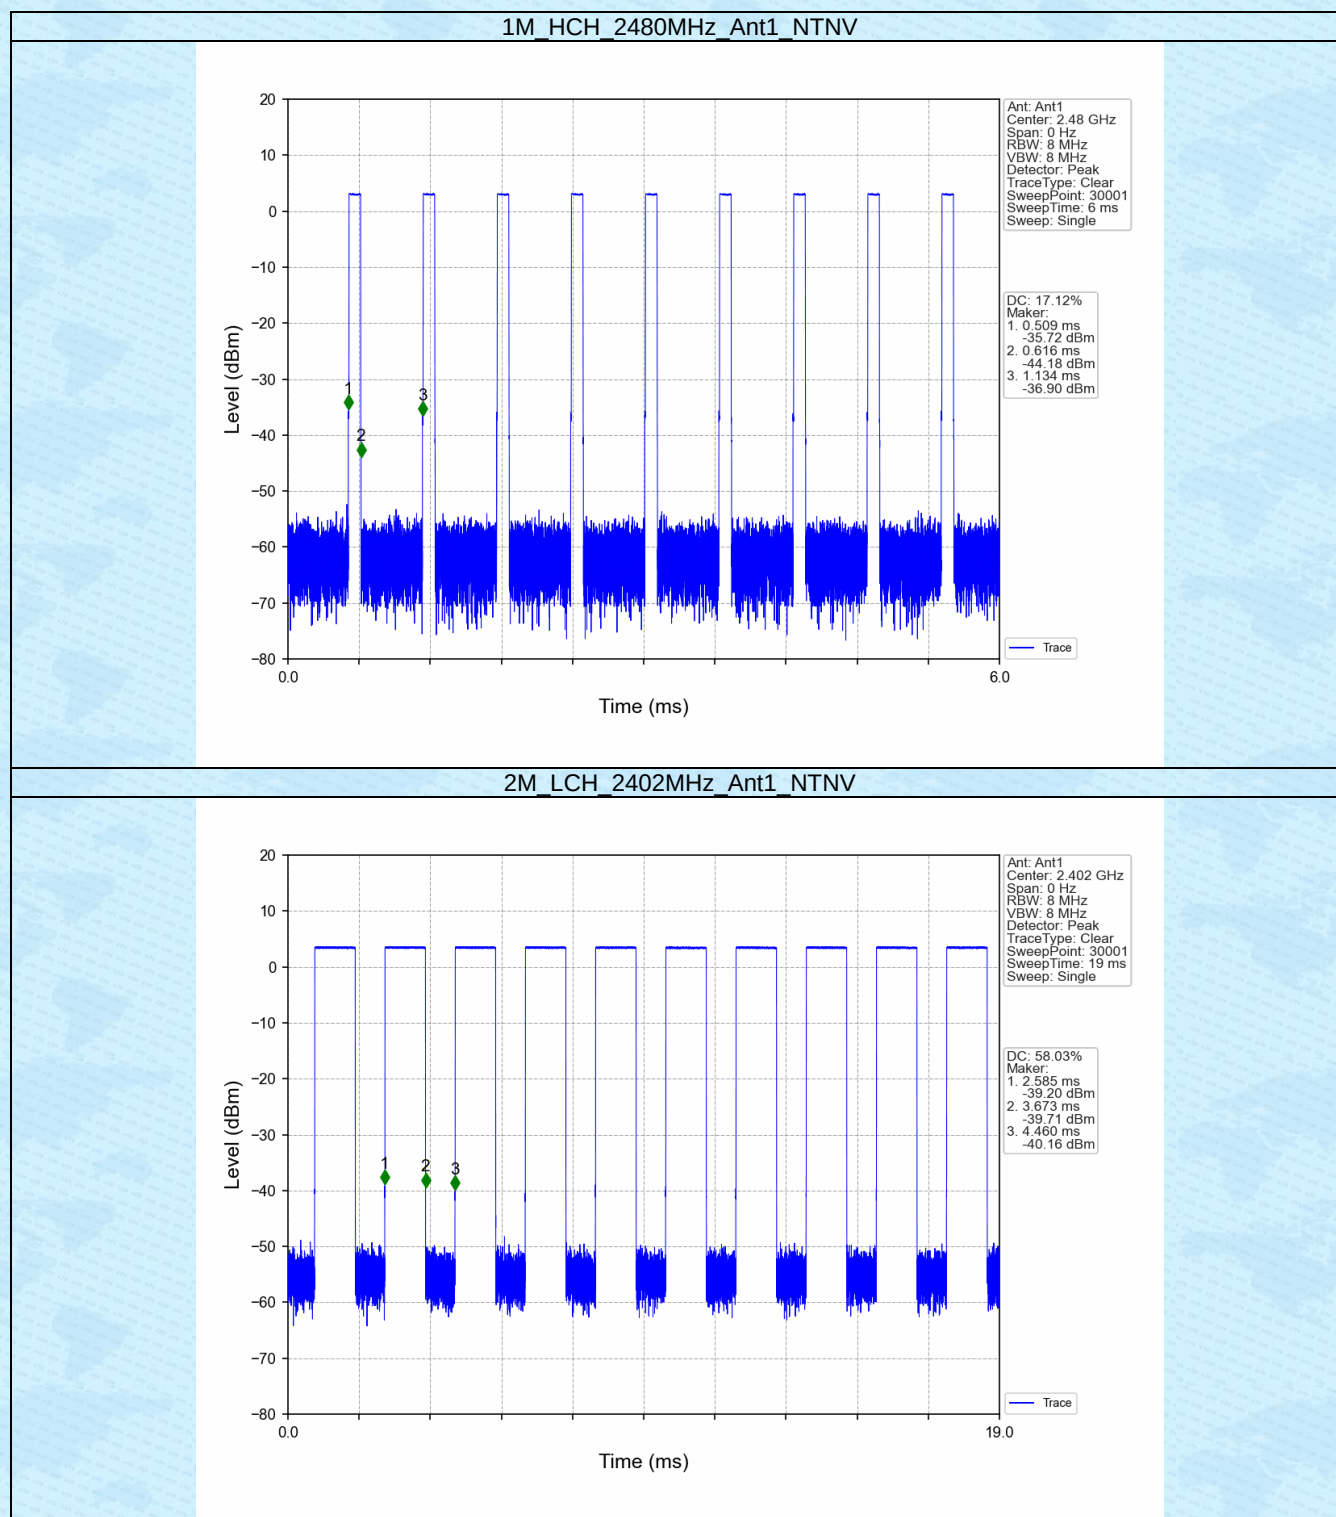

2M_MCH_2440MHz_Ant1_NTNV

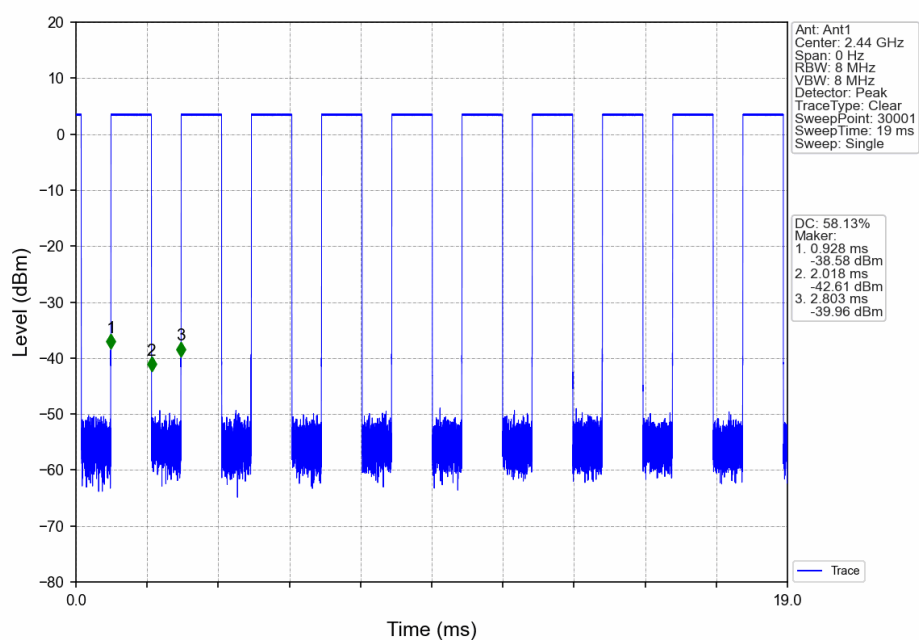

2M_HCH_2480MHz_Ant1_NTNV

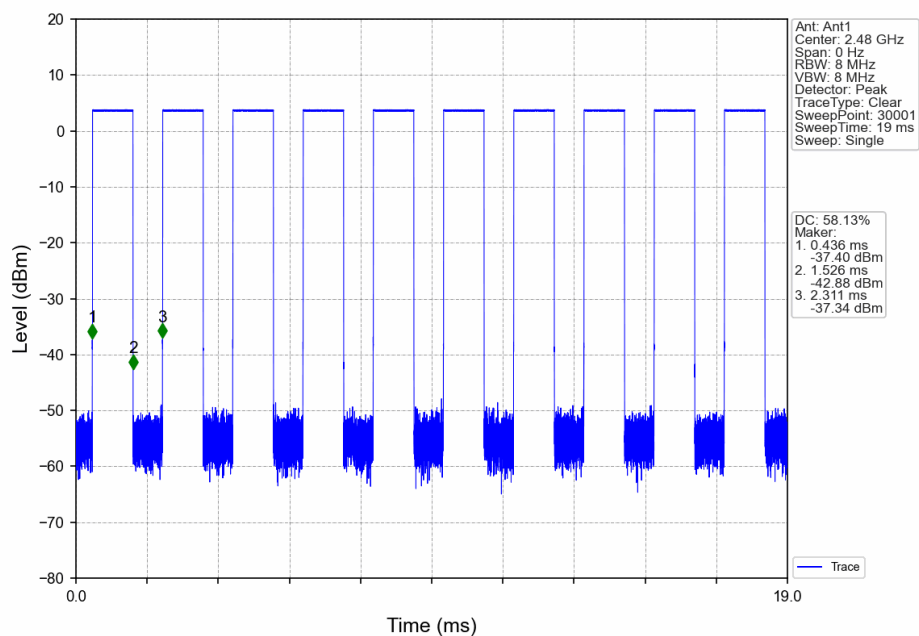


2. Bandwidth


2.1 OBW

2.1.1 Test Result


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
1M	SISO	2402	1	1.014	Pass
		2440	1	1.013	Pass
		2480	1	1.014	Pass
2M	SISO	2402	1	2.058	Pass
		2440	1	2.061	Pass
		2480	1	2.059	Pass

2.1.2 Test Graph

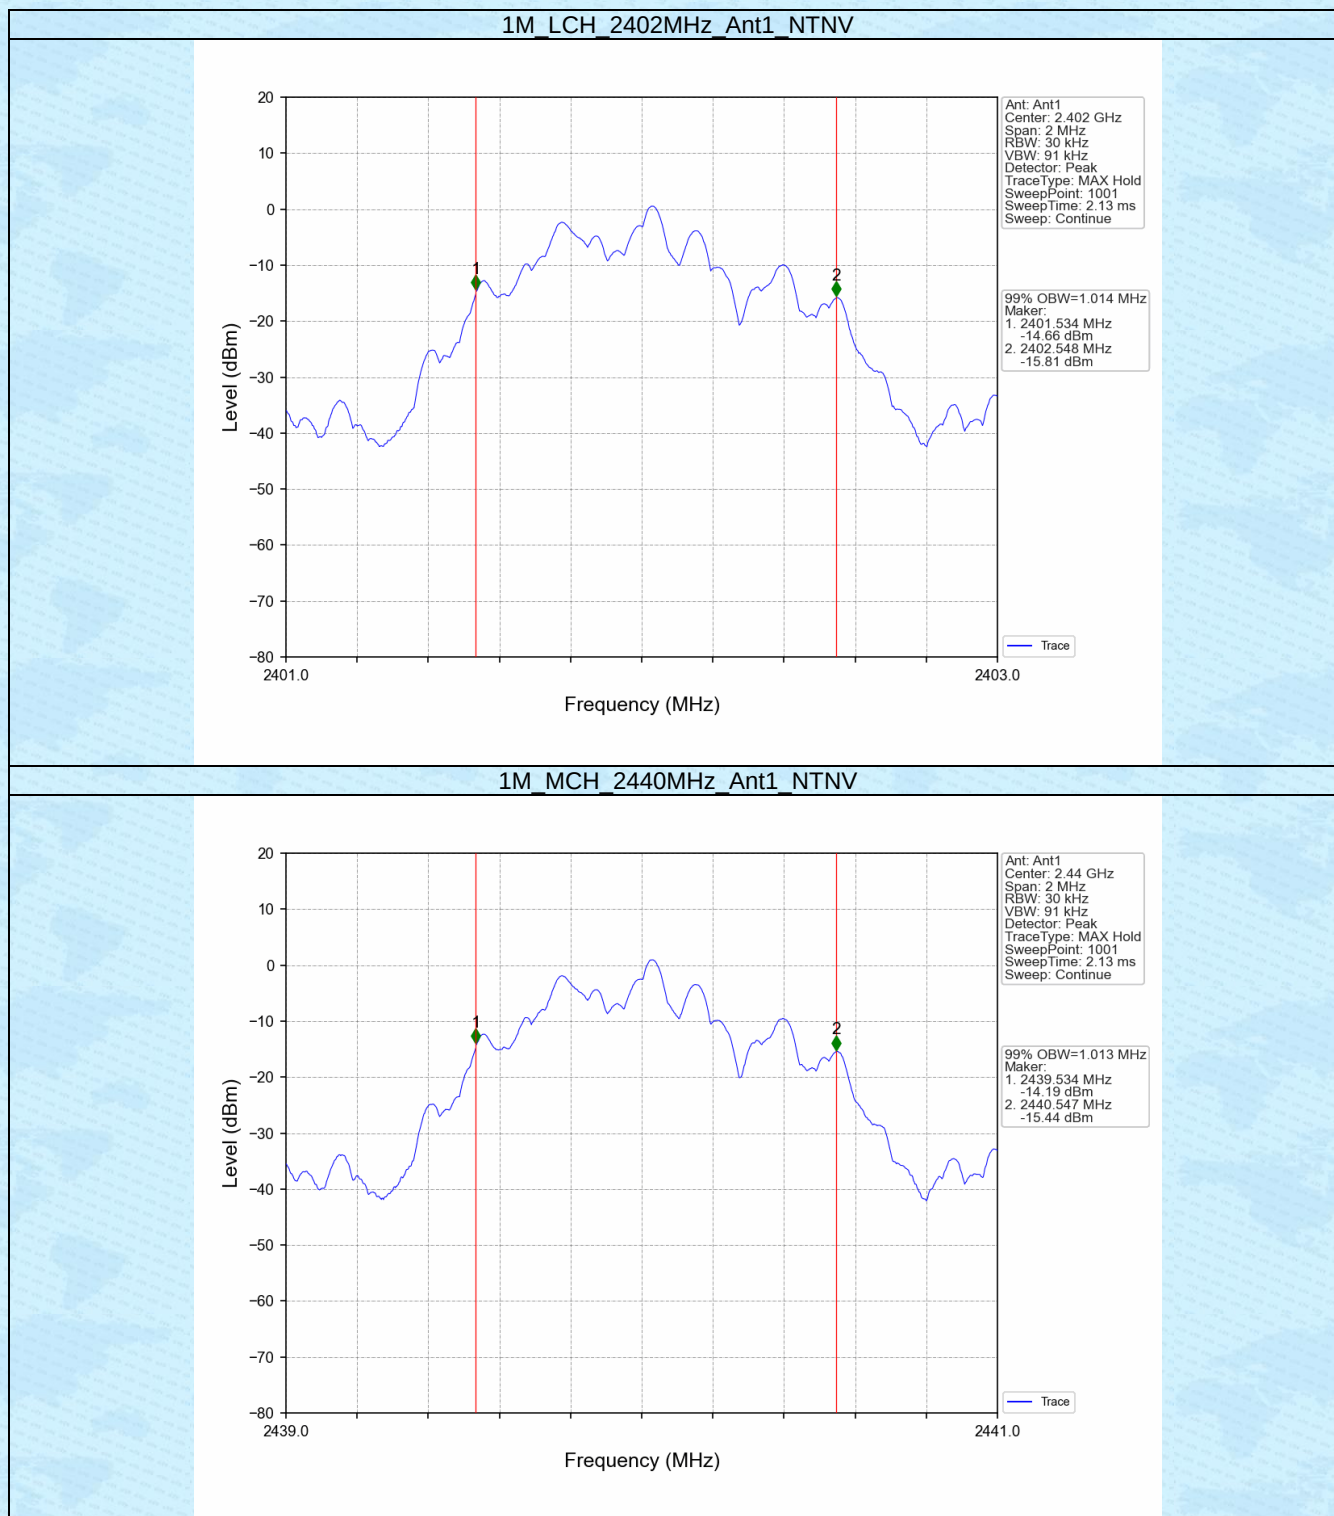


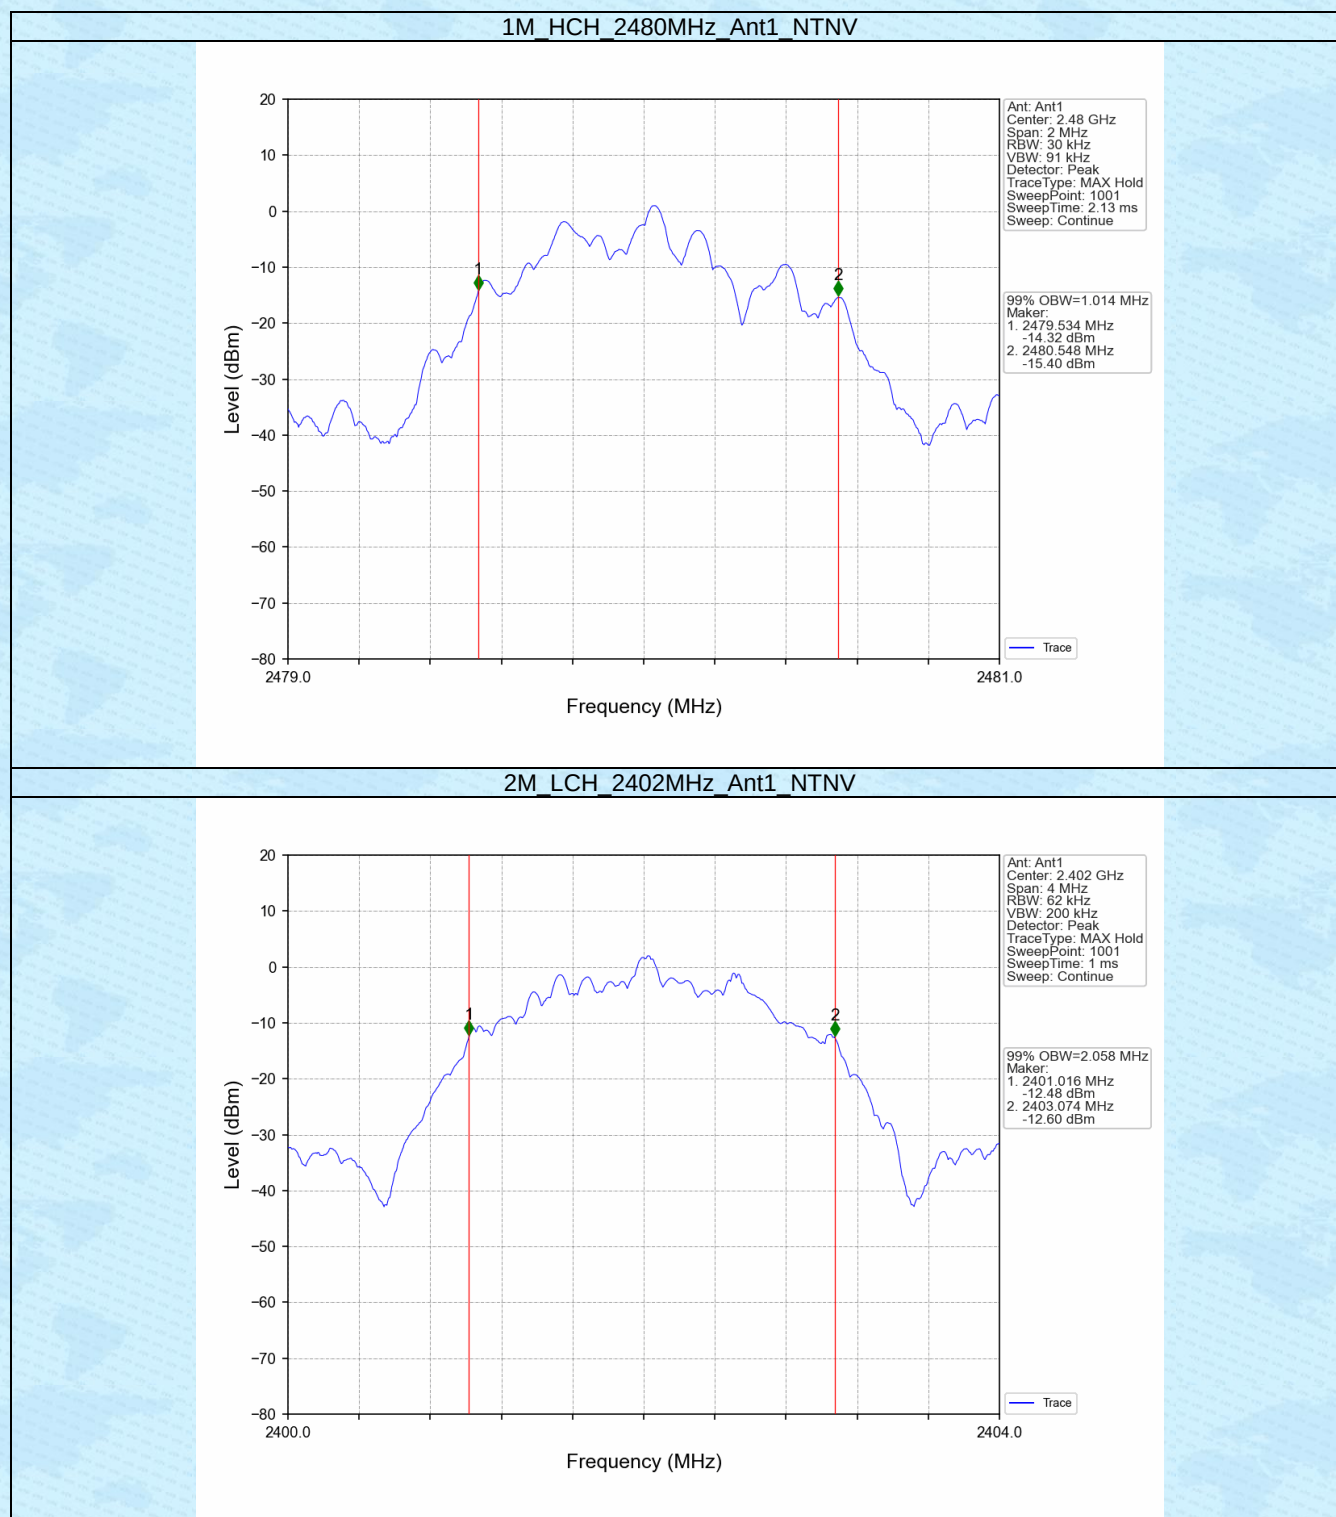

2M_MCH_2440MHz_Ant1_NTNV

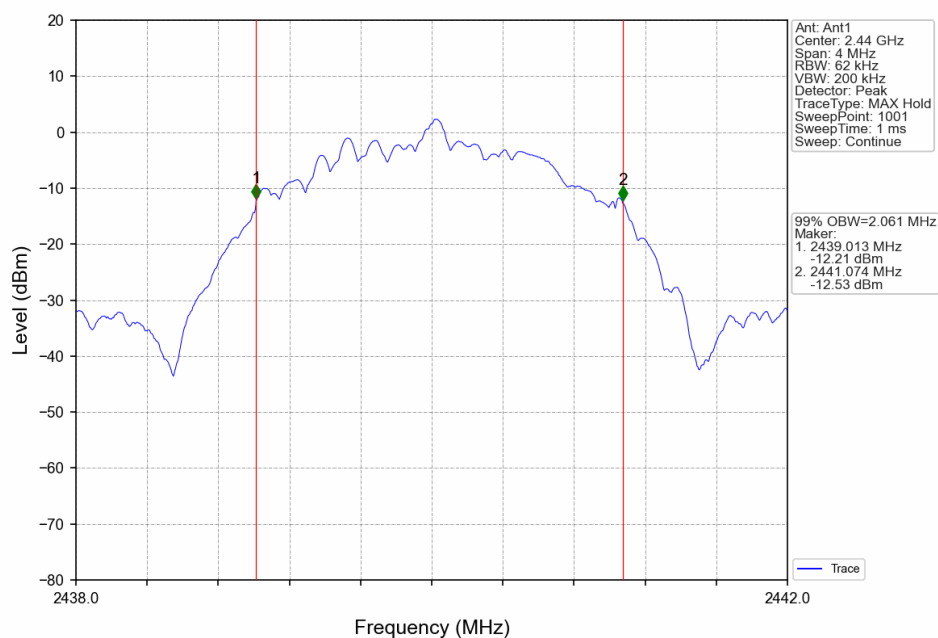

2M_HCH_2480MHz_Ant1_NTNV

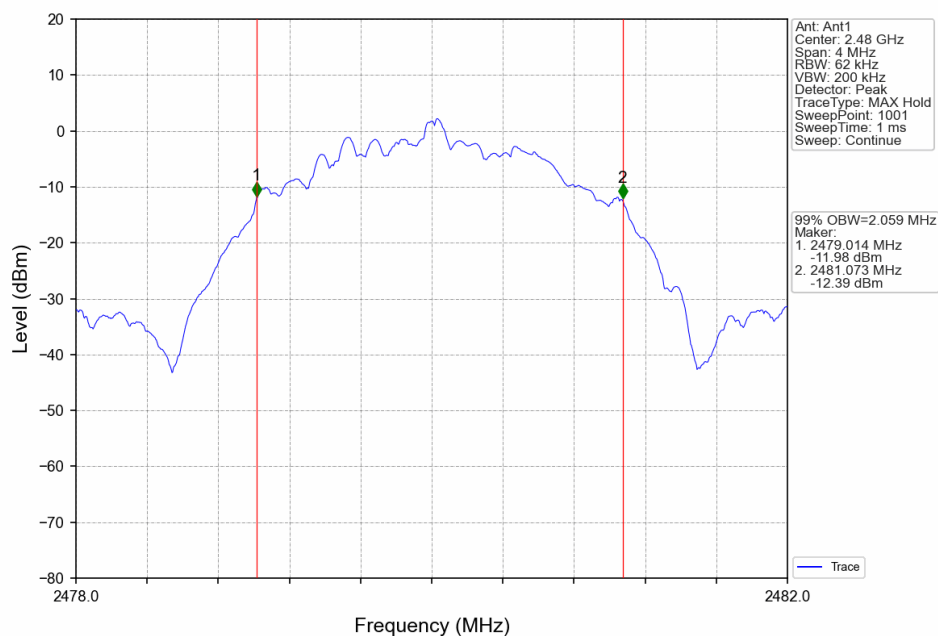



2.2 6dB BW


2.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.521	≥ 0.5	Pass
		2440	1	0.523	≥ 0.5	Pass
		2480	1	0.523	≥ 0.5	Pass
2M	SISO	2402	1	1.142	≥ 0.5	Pass
		2440	1	1.138	≥ 0.5	Pass
		2480	1	1.136	≥ 0.5	Pass

2.2.2 Test Graph

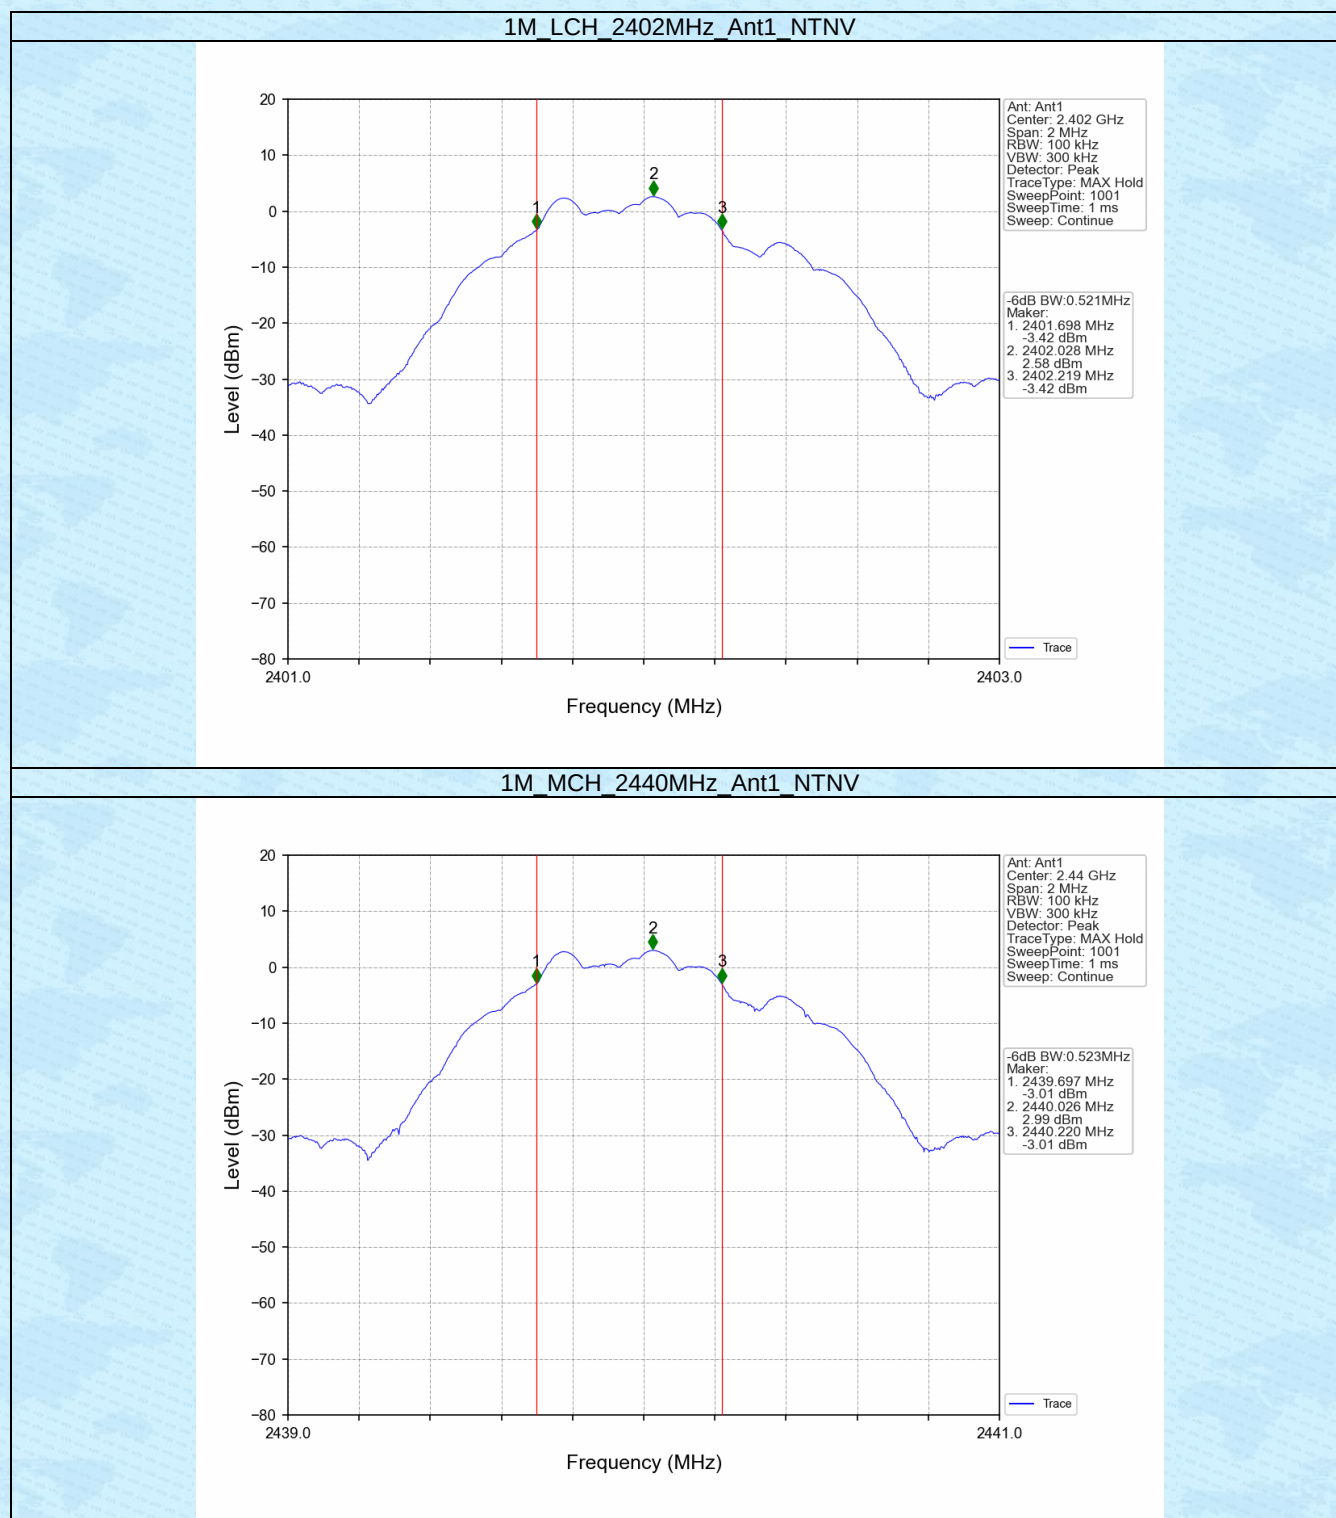

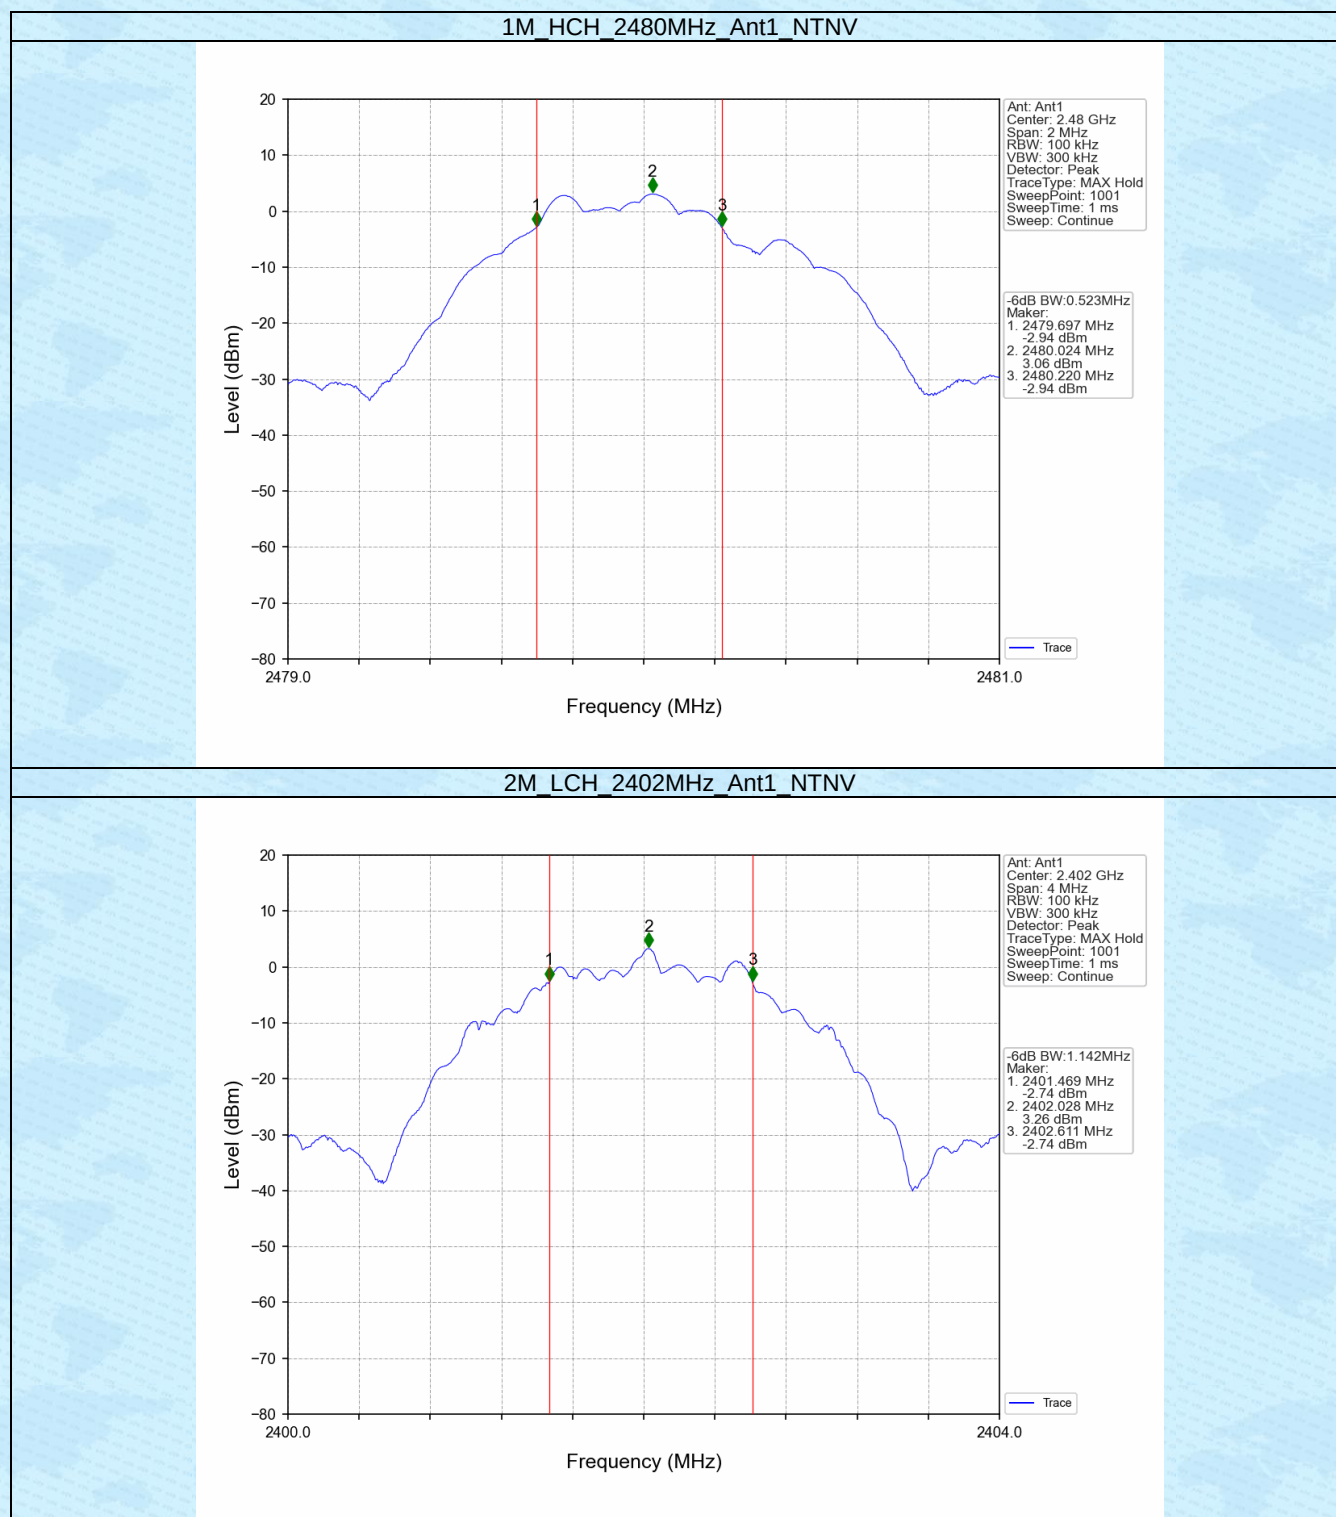

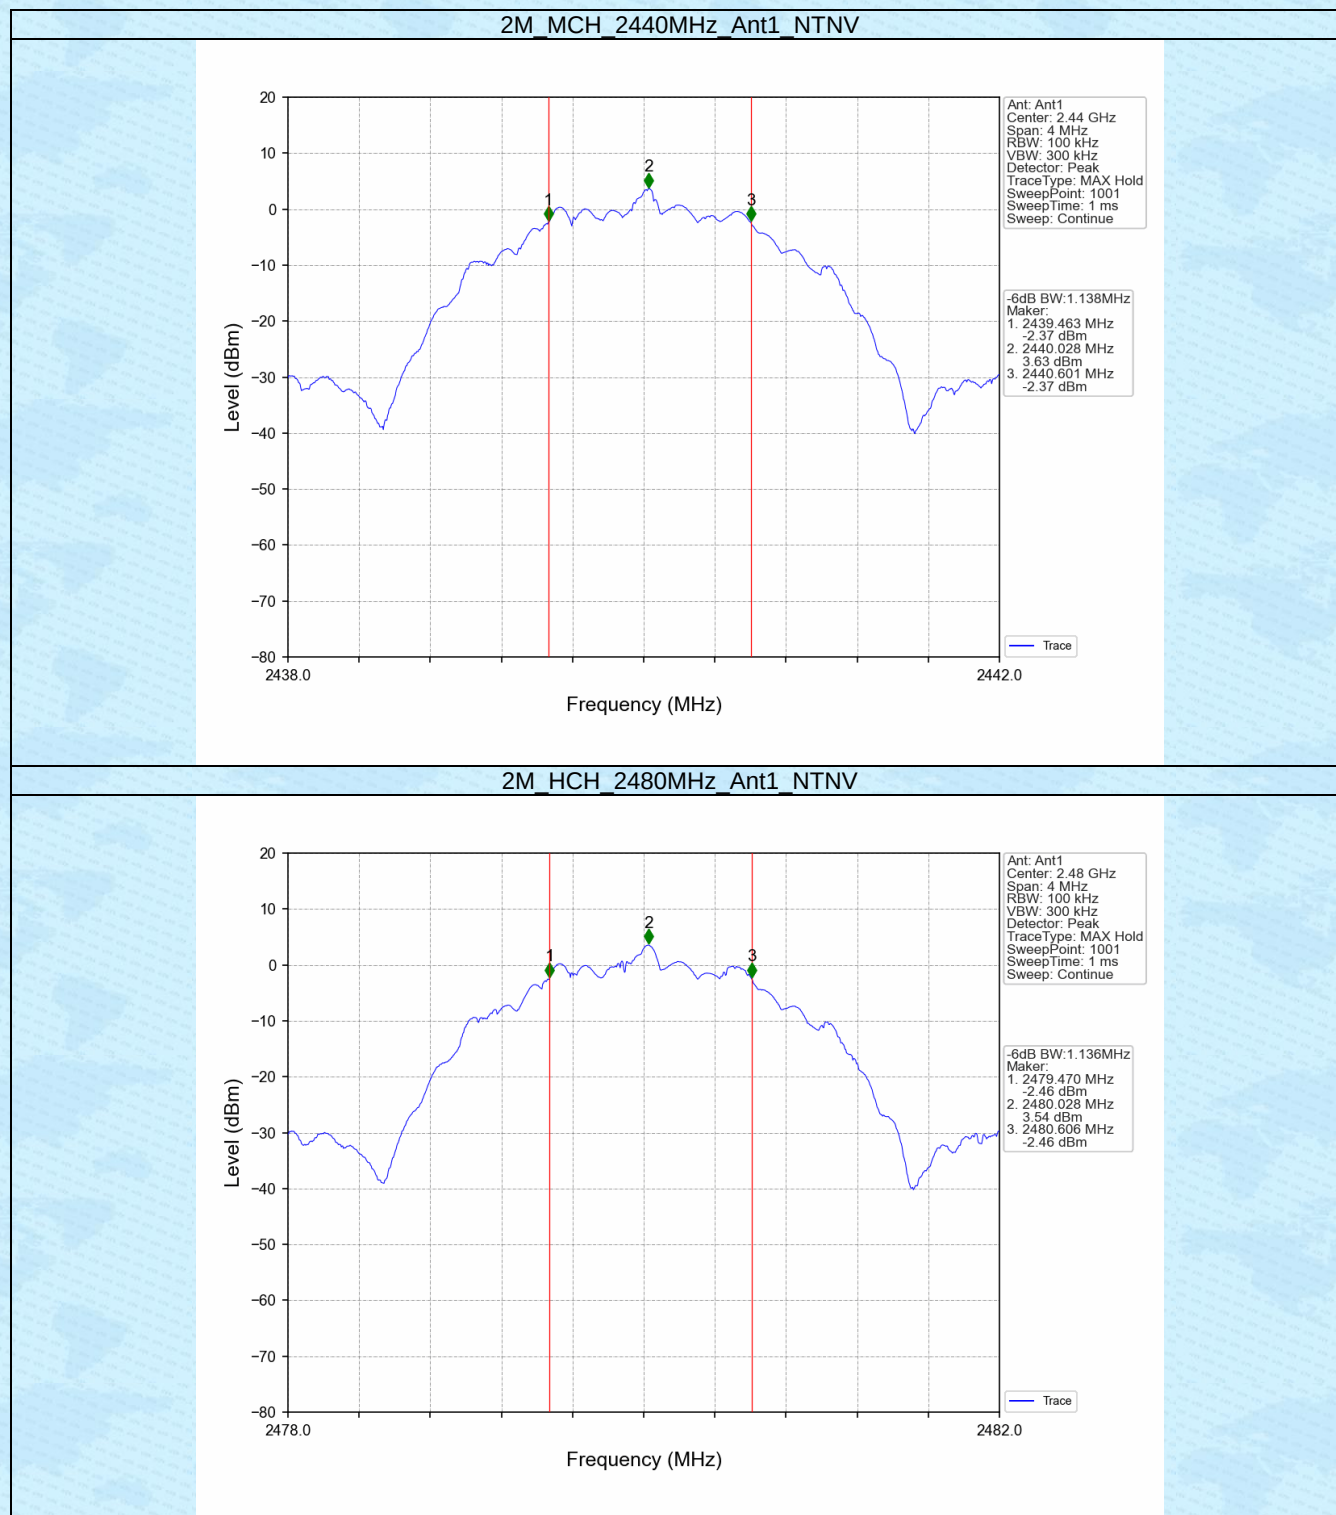

3. Maximum Conducted Output Power


3.1 Power


3.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	2.67	<=30	Pass
		2440	3.06	<=30	Pass
		2480	3.11	<=30	Pass
2M	SISO	2402	3.50	<=30	Pass
		2440	3.87	<=30	Pass
		2480	3.74	<=30	Pass

Note1: Antenna Gain: Ant1: 2.41dBi;

3.1.2 Test Graph

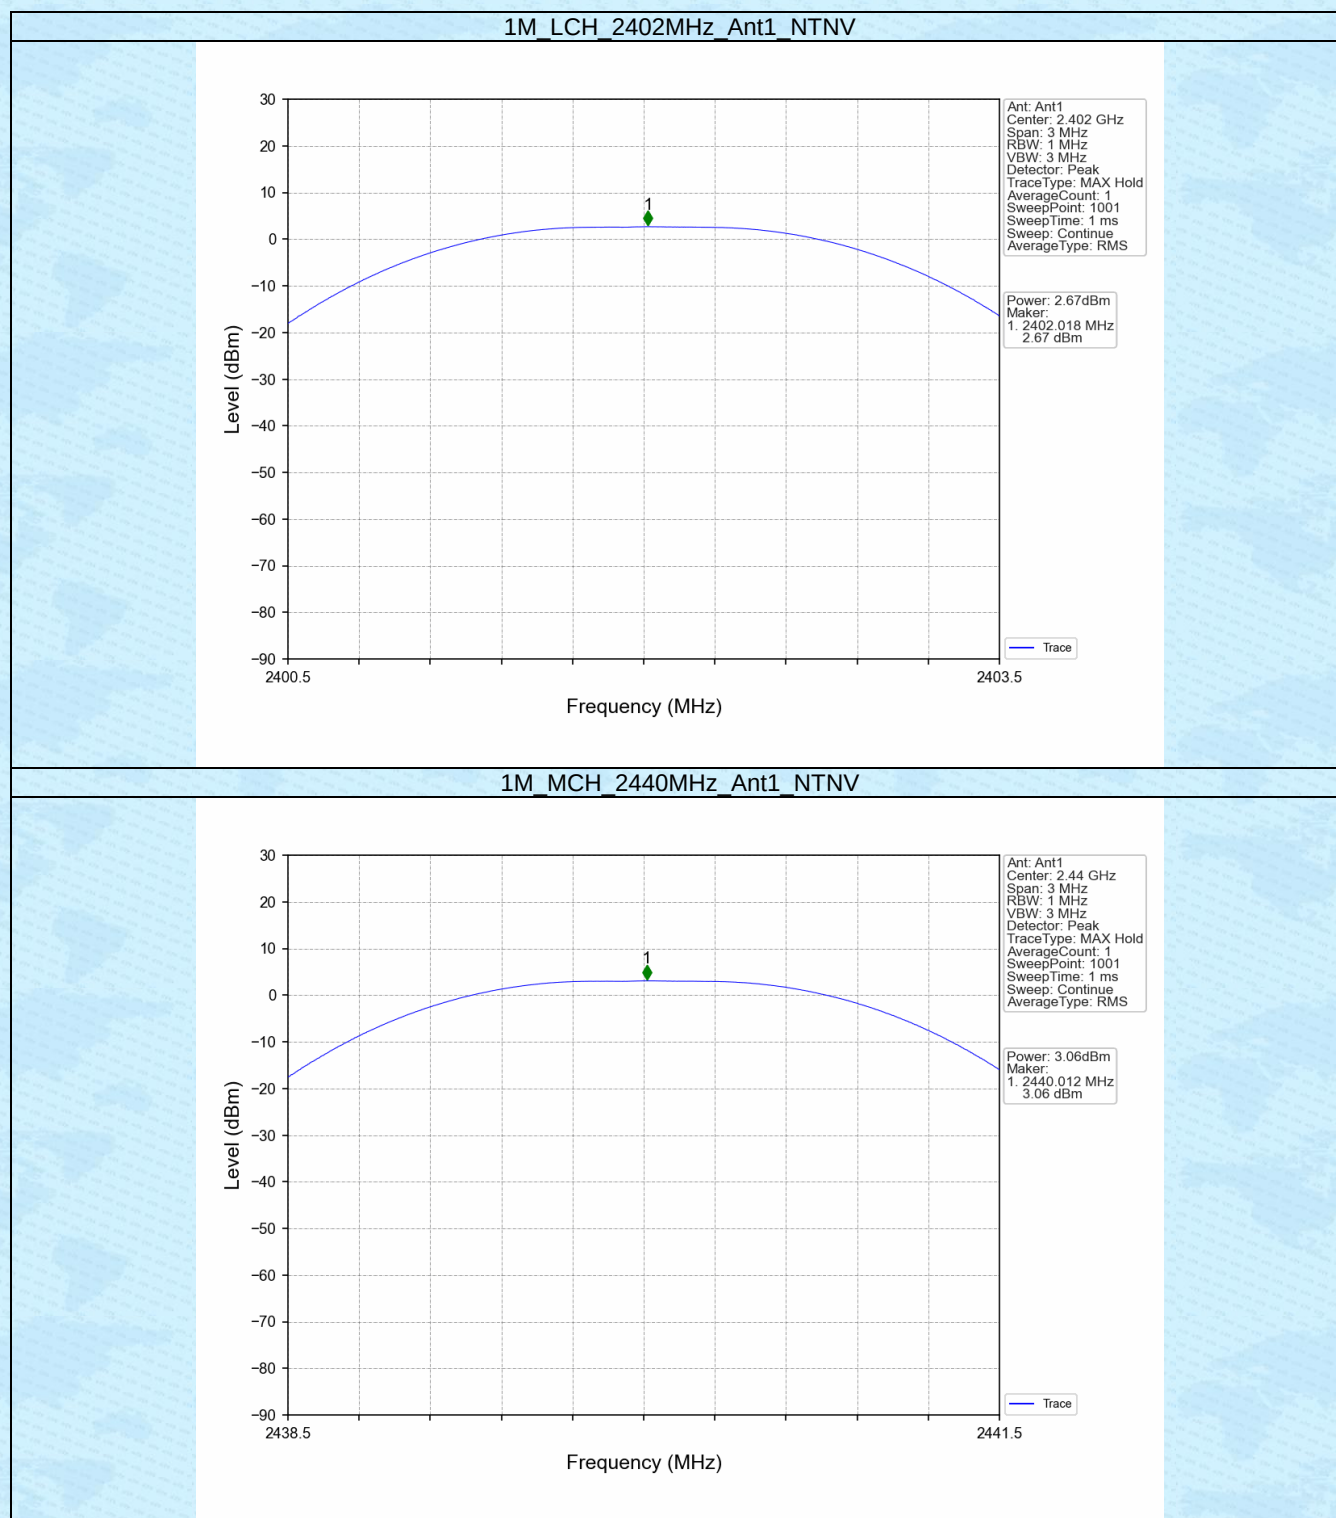

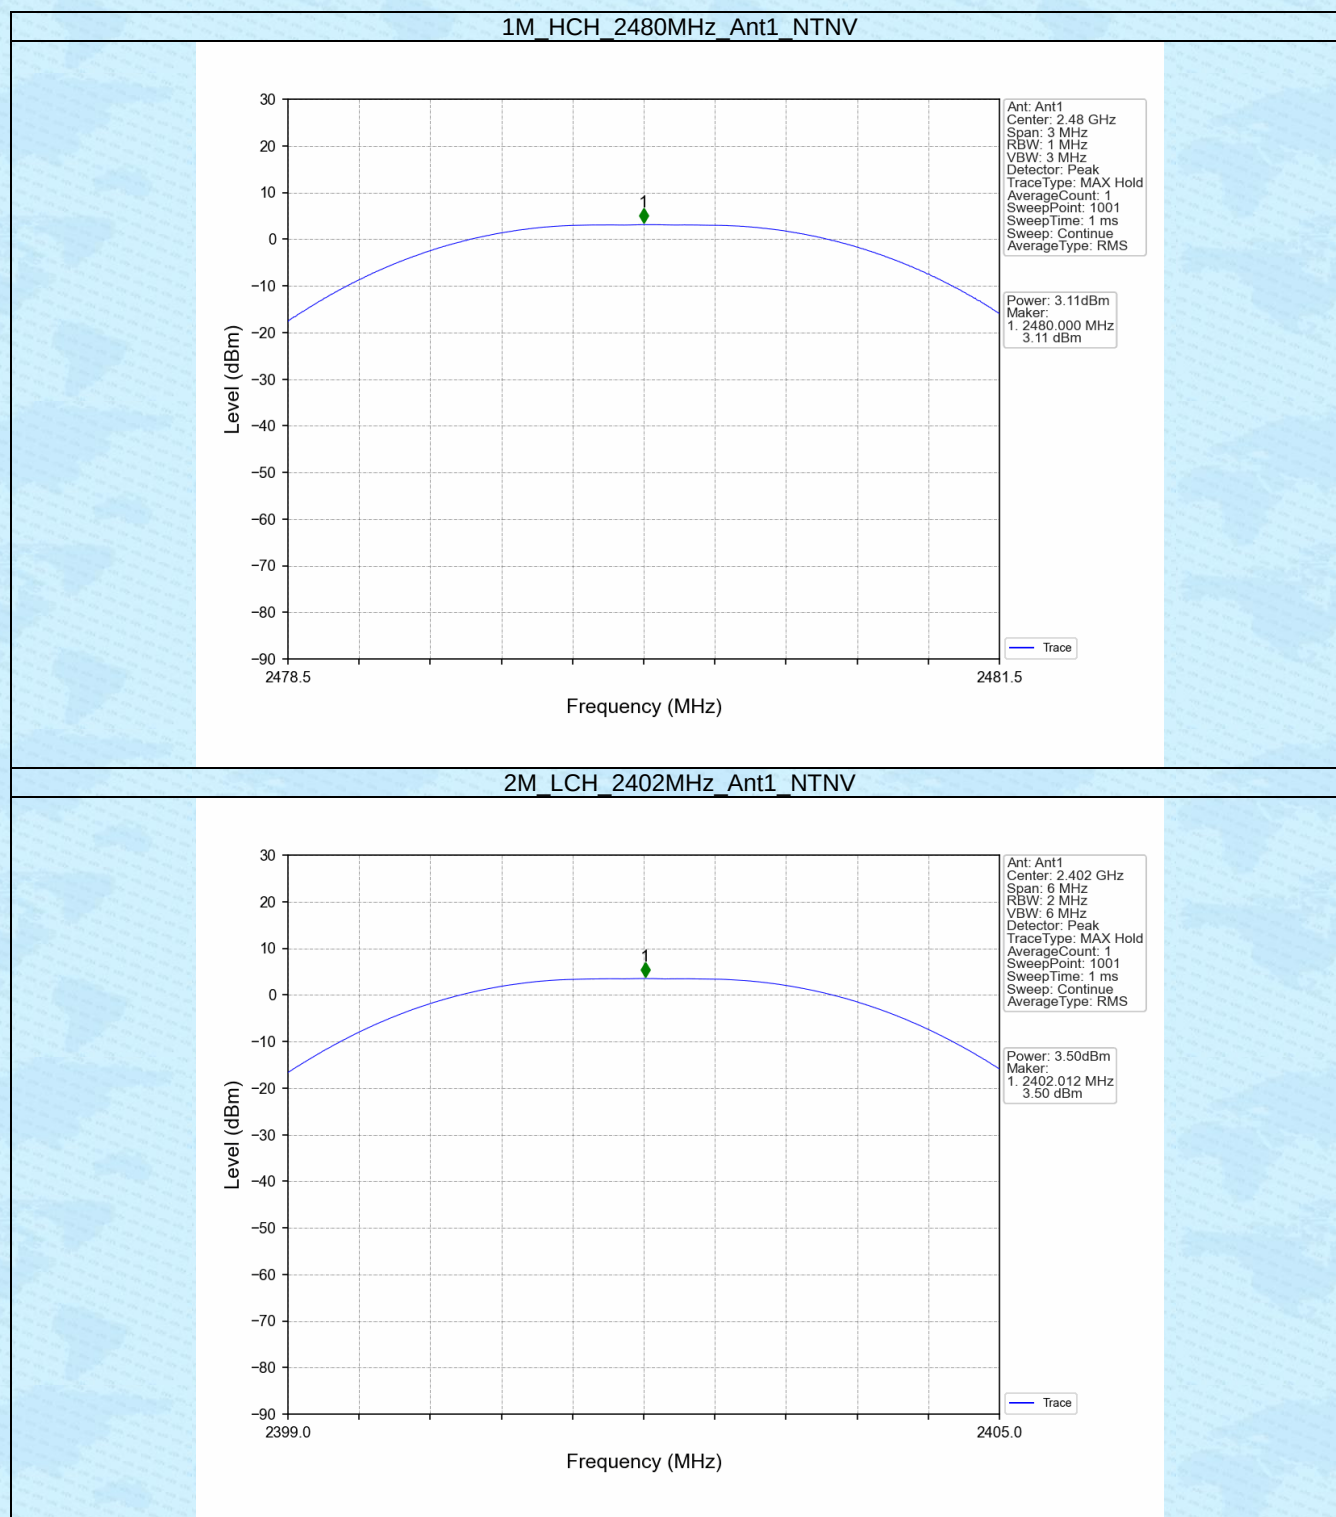

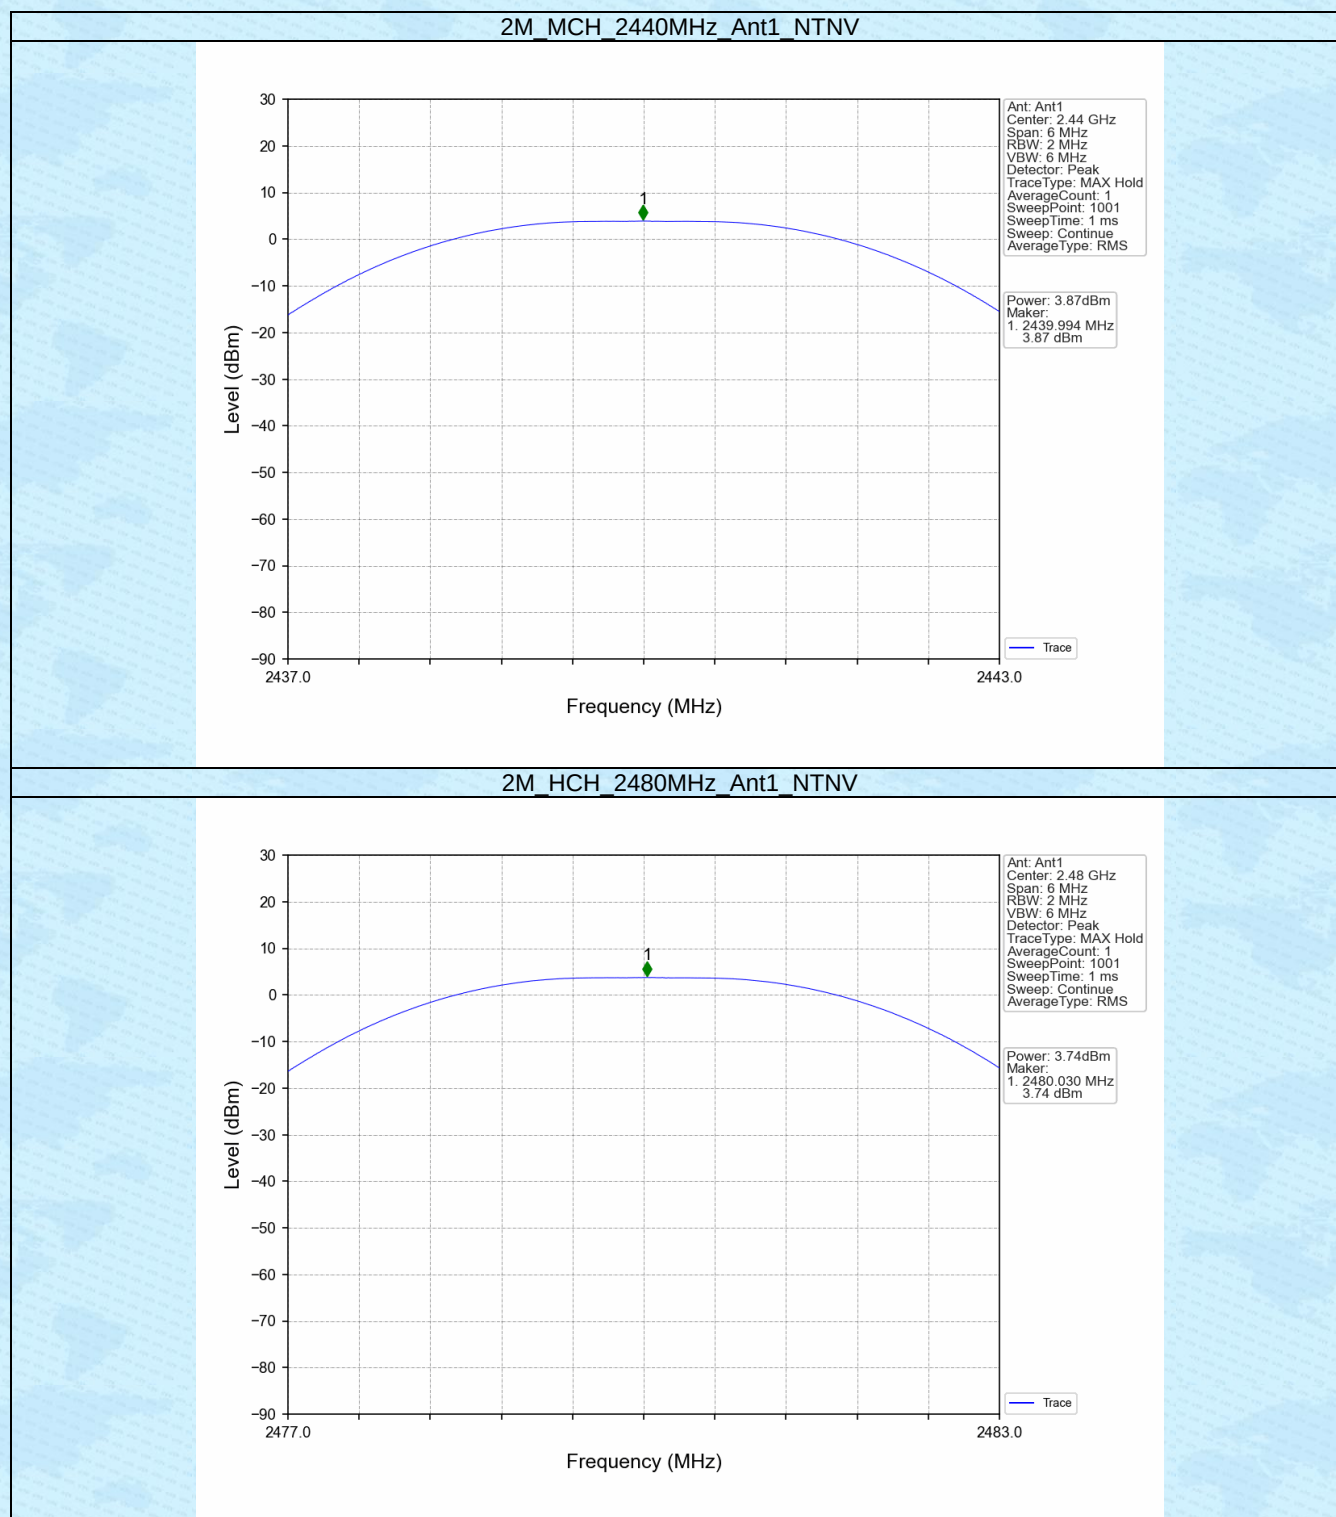

4. Maximum Power Spectral Density


4.1 PSD


4.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-15.13	<=8	Pass
		2440	-14.72	<=8	Pass
		2480	-14.76	<=8	Pass
2M	SISO	2402	-13.66	<=8	Pass
		2440	-12.88	<=8	Pass
		2480	-14.23	<=8	Pass

Note1: Antenna Gain: Ant1: 2.41dBi;

4.1.2 Test Graph

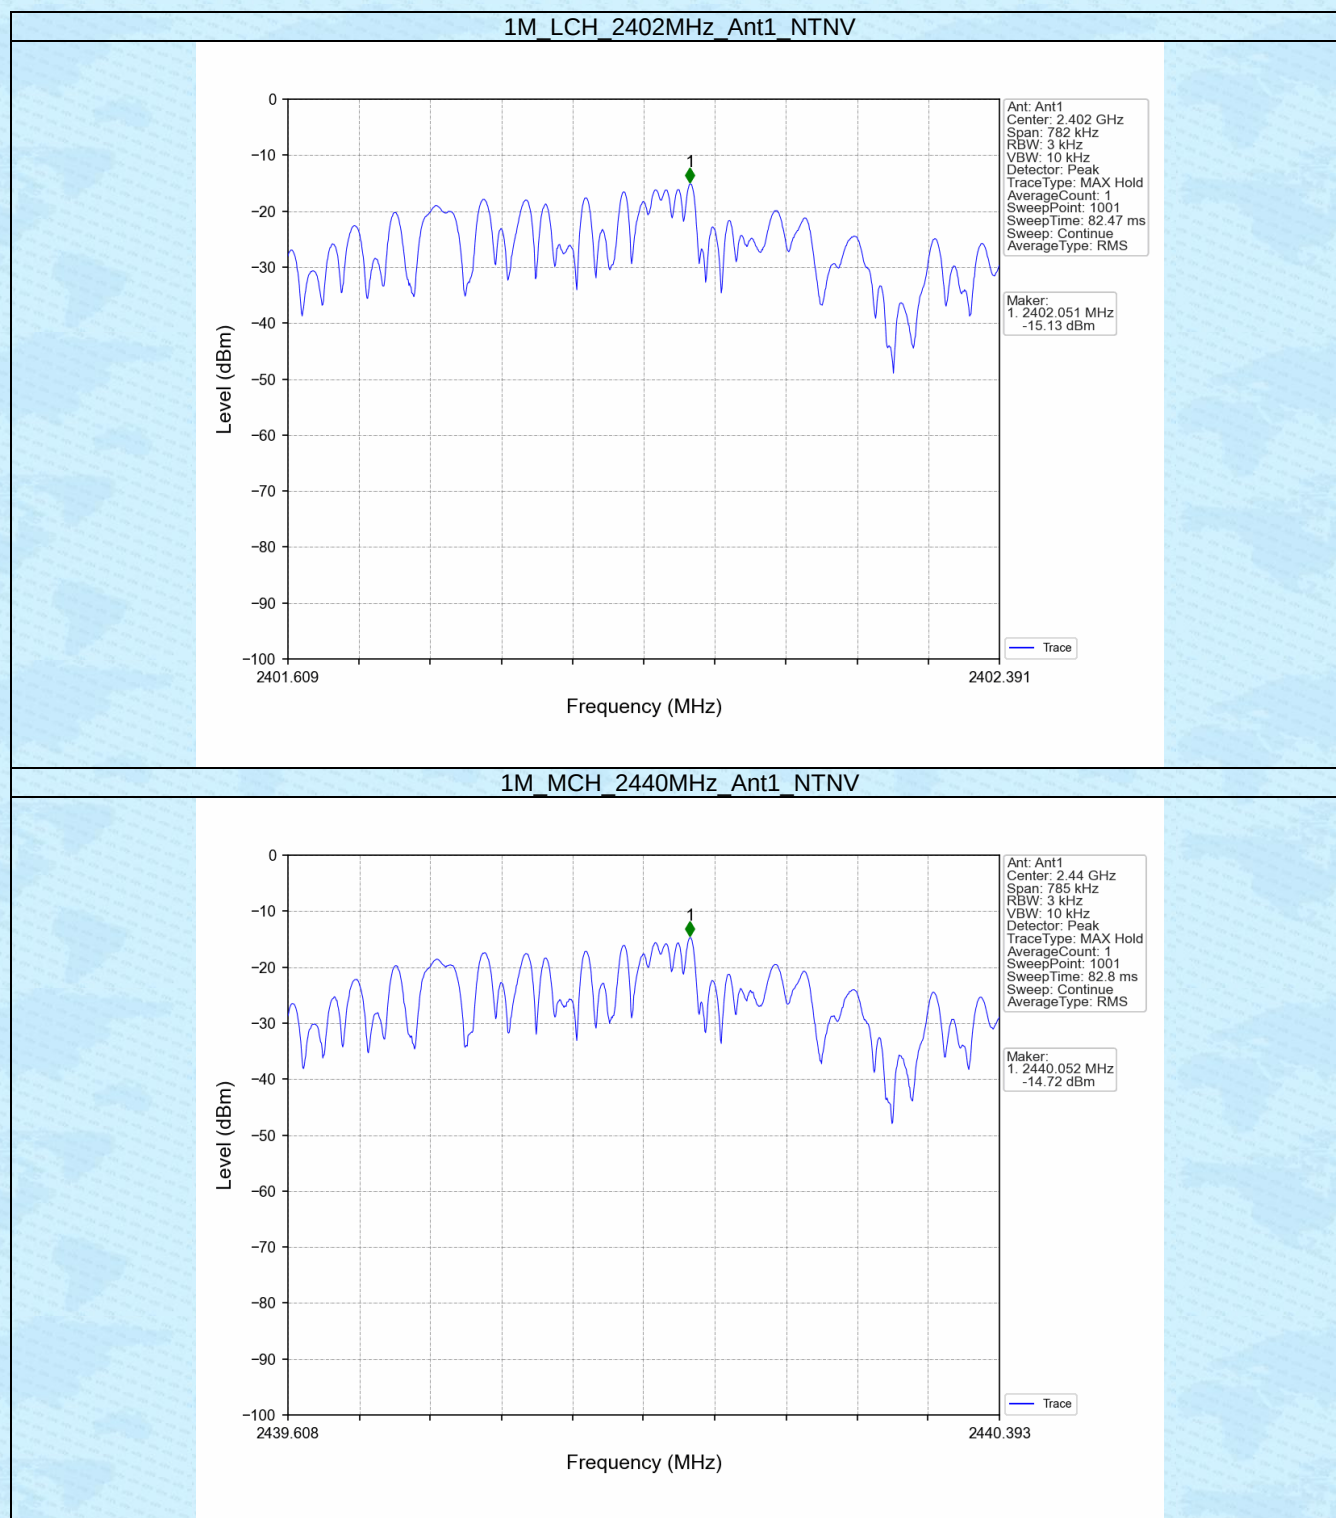

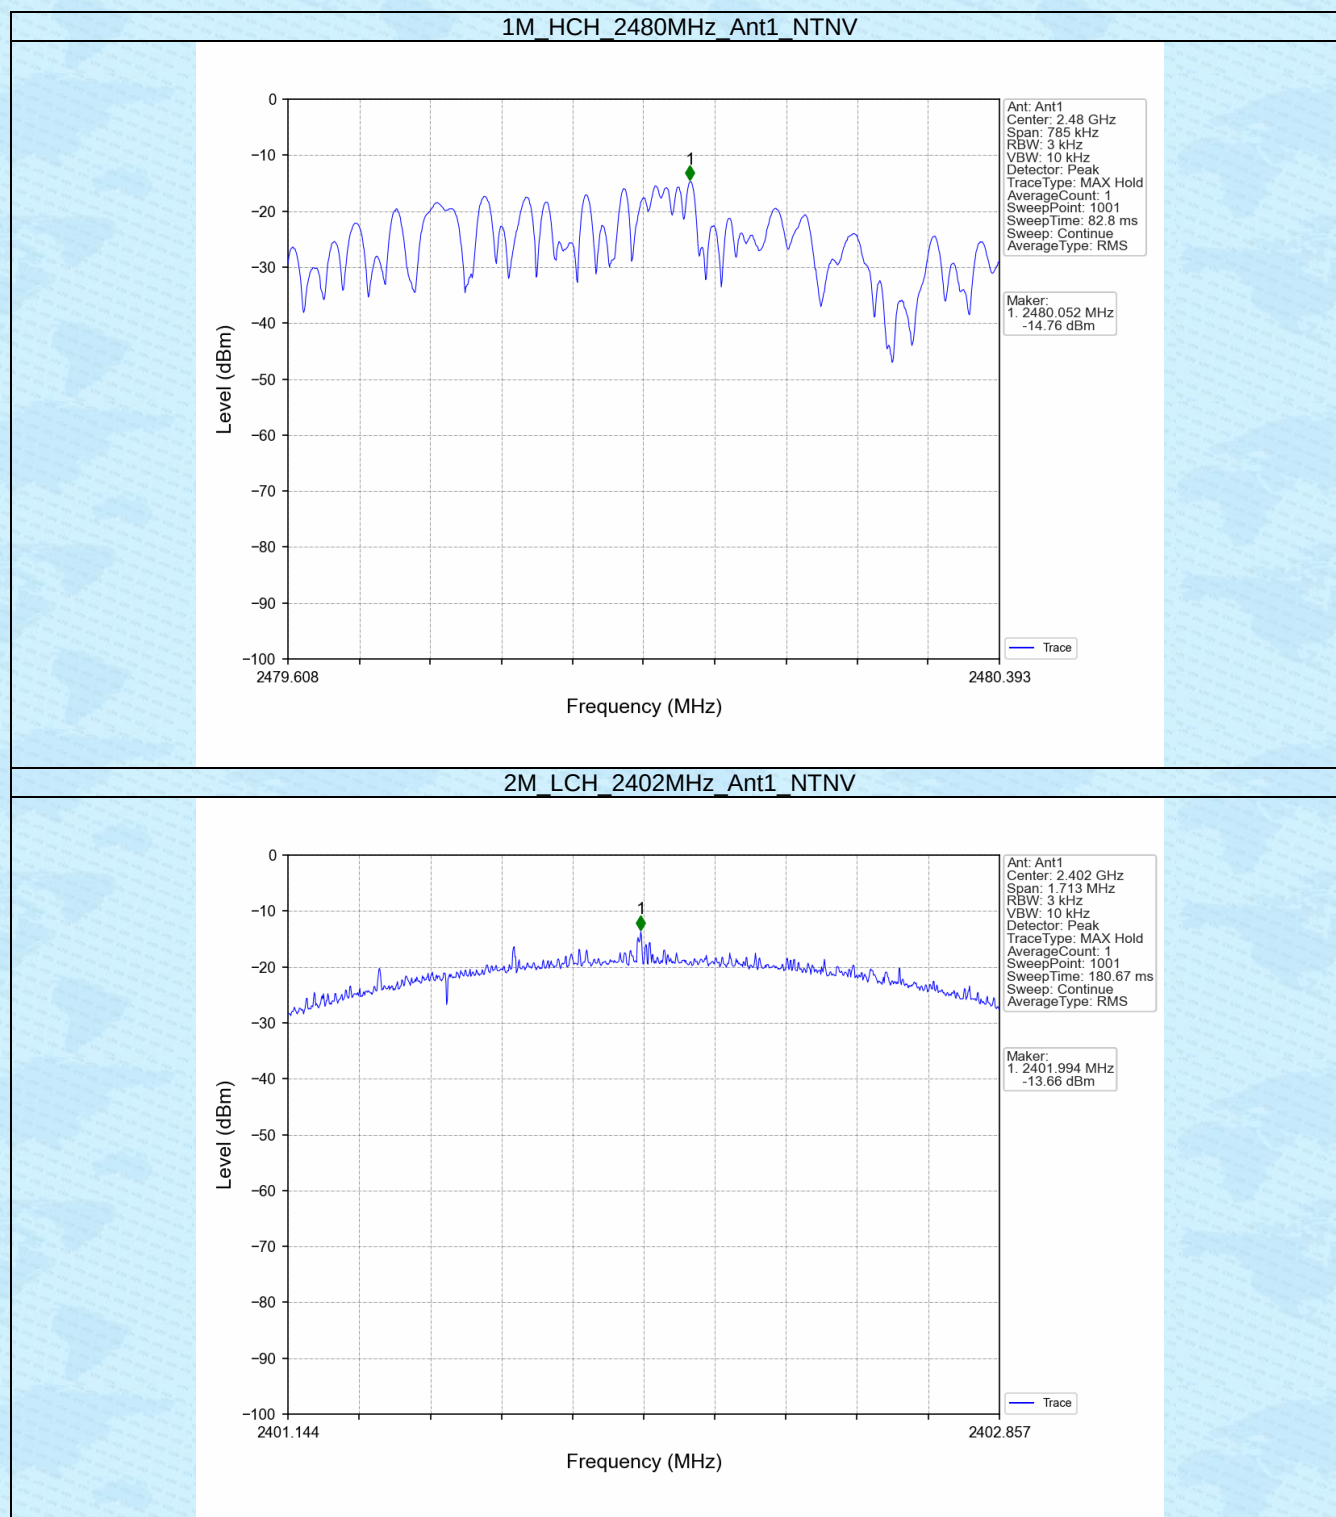

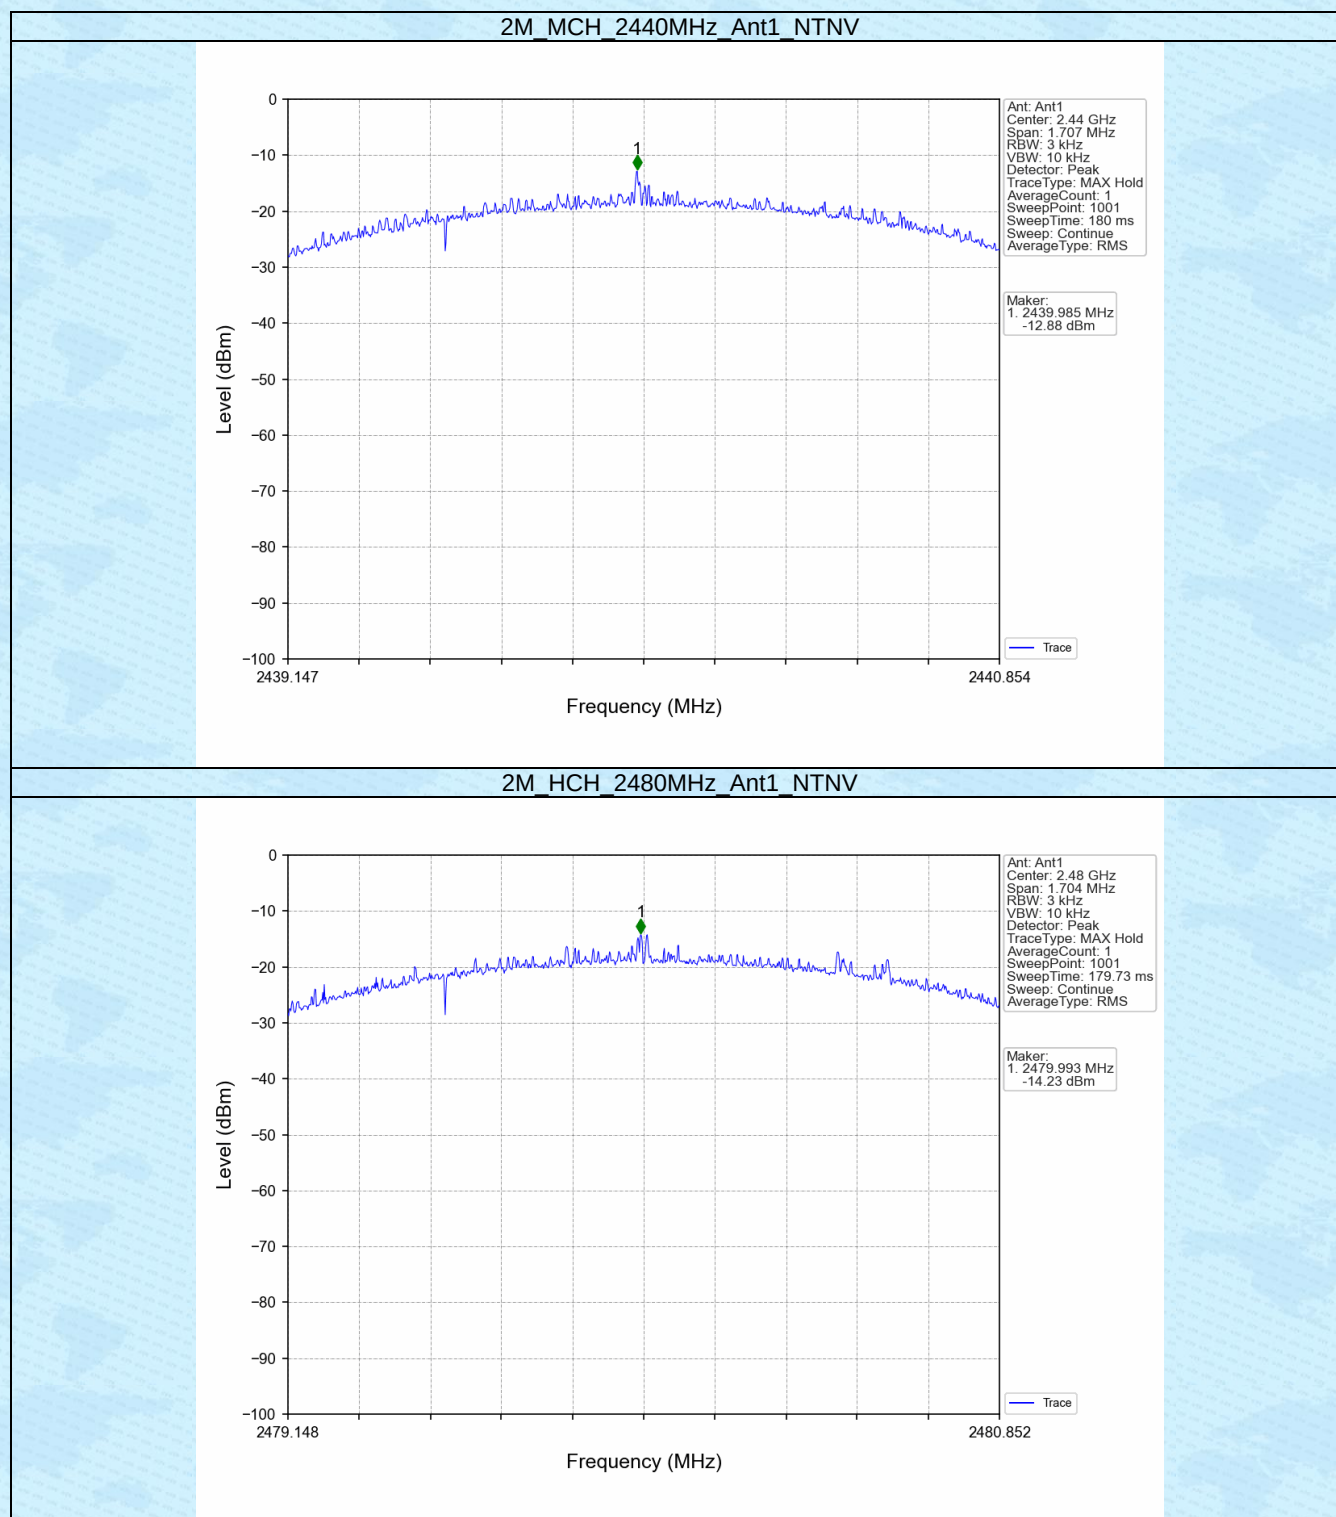

5. Unwanted Emissions In Non-restricted Frequency Bands


5.1 Ref


5.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	2.53
		2440	1	2.99
		2480	1	3.06
2M	SISO	2402	1	3.27
		2440	1	3.67
		2480	1	3.44


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

5.1.2 Test Graph

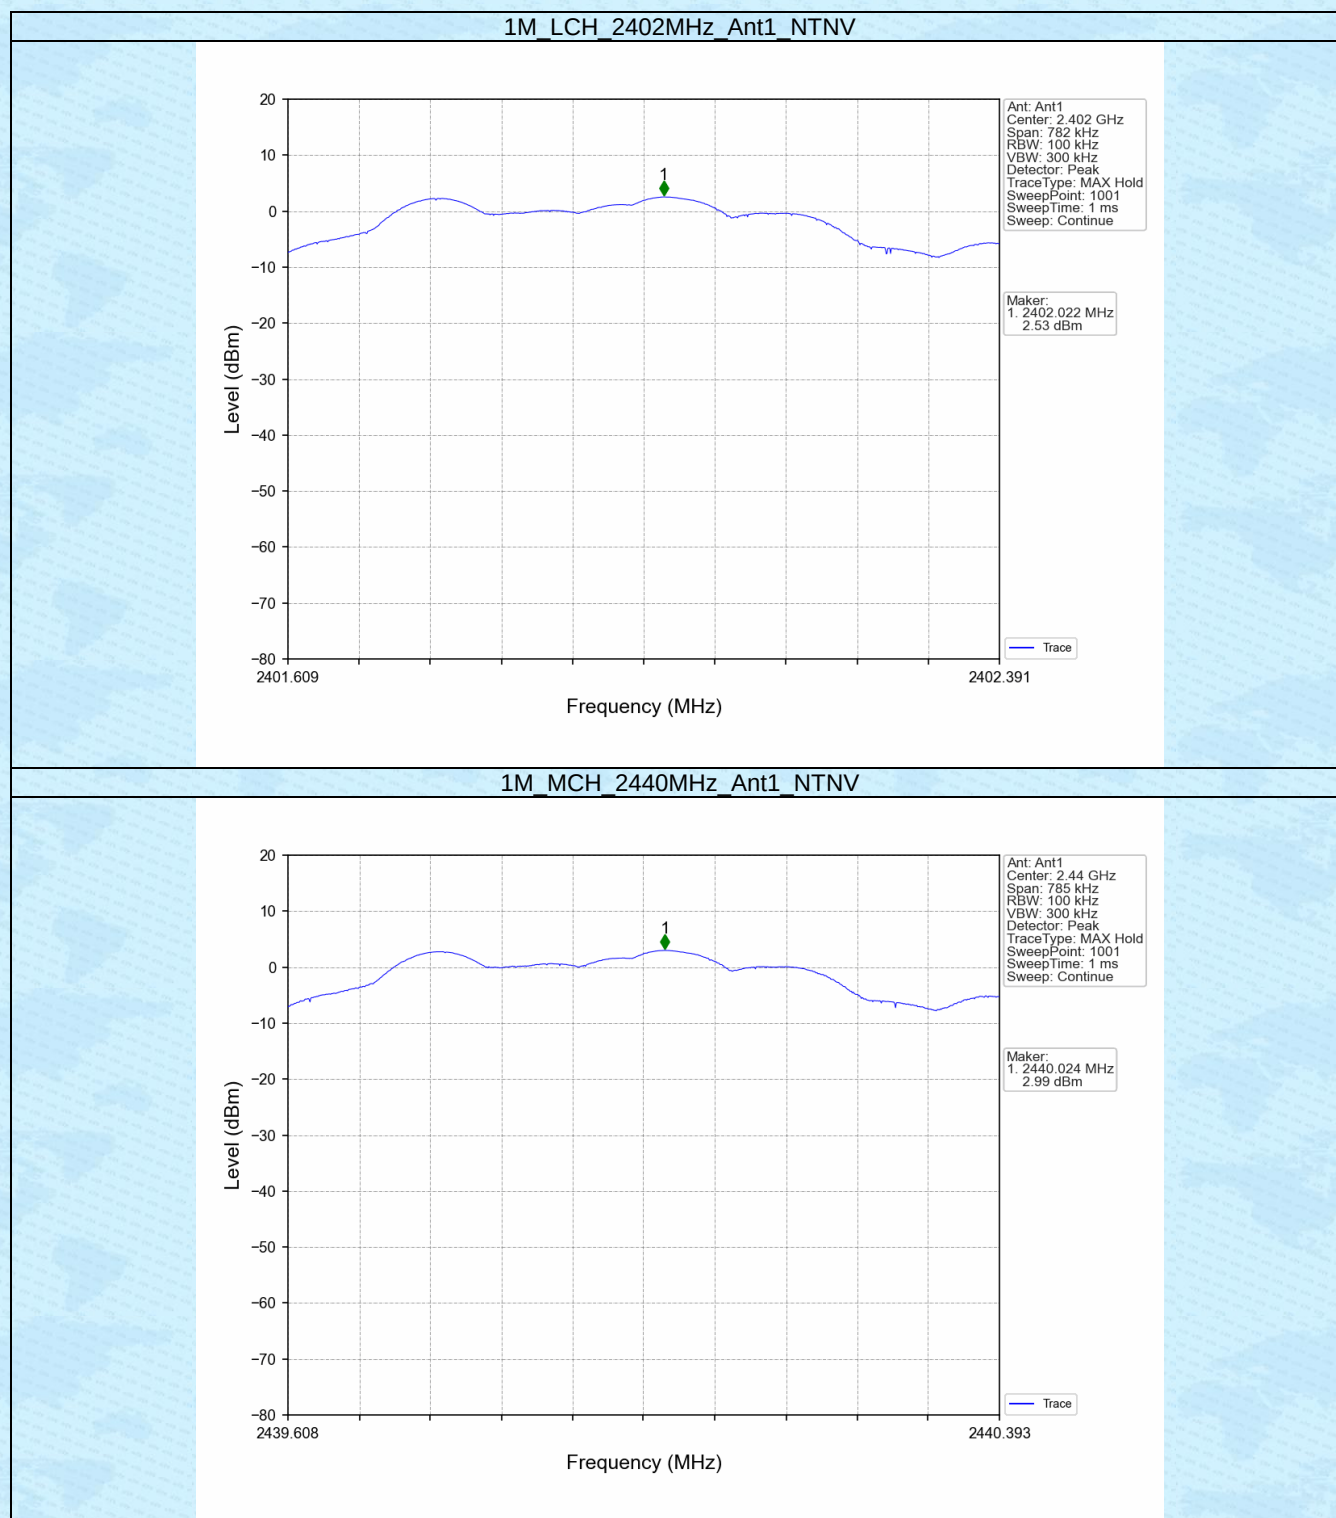


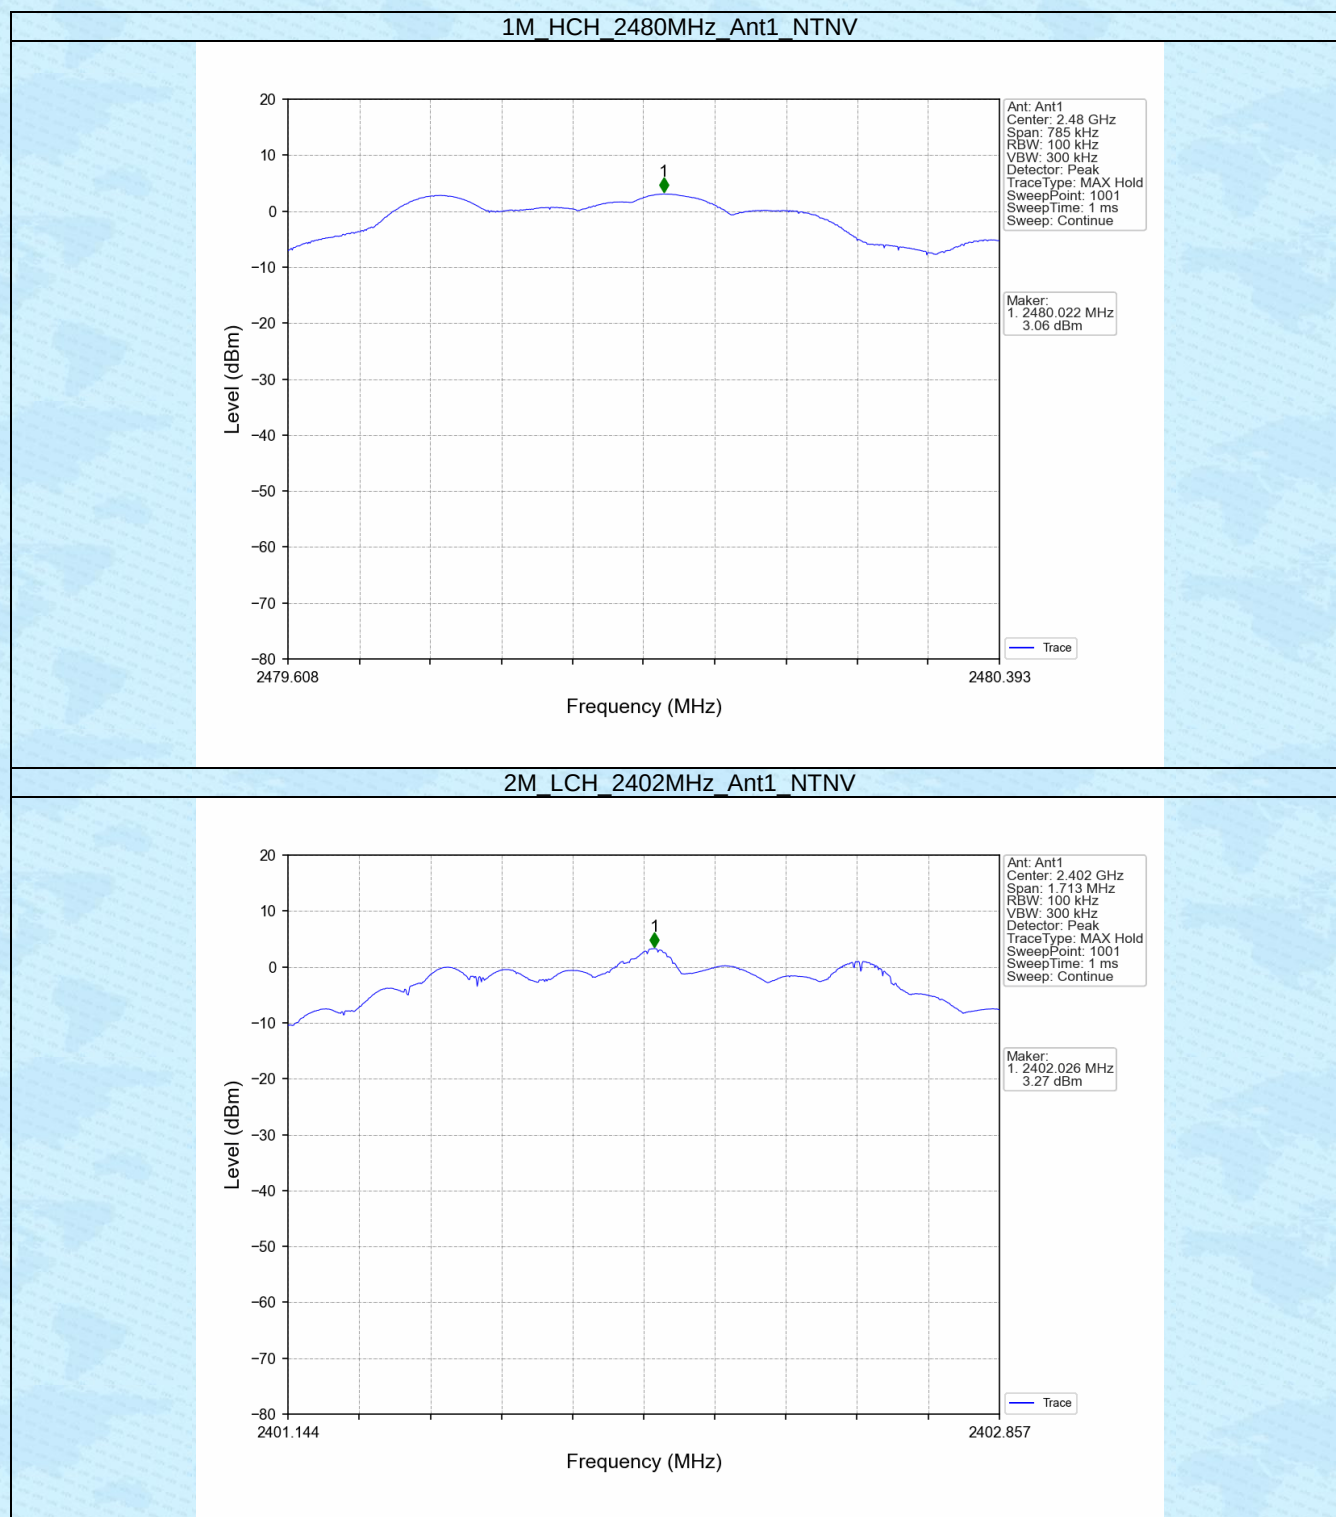

2M_MCH_2440MHz_Ant1_NTNV

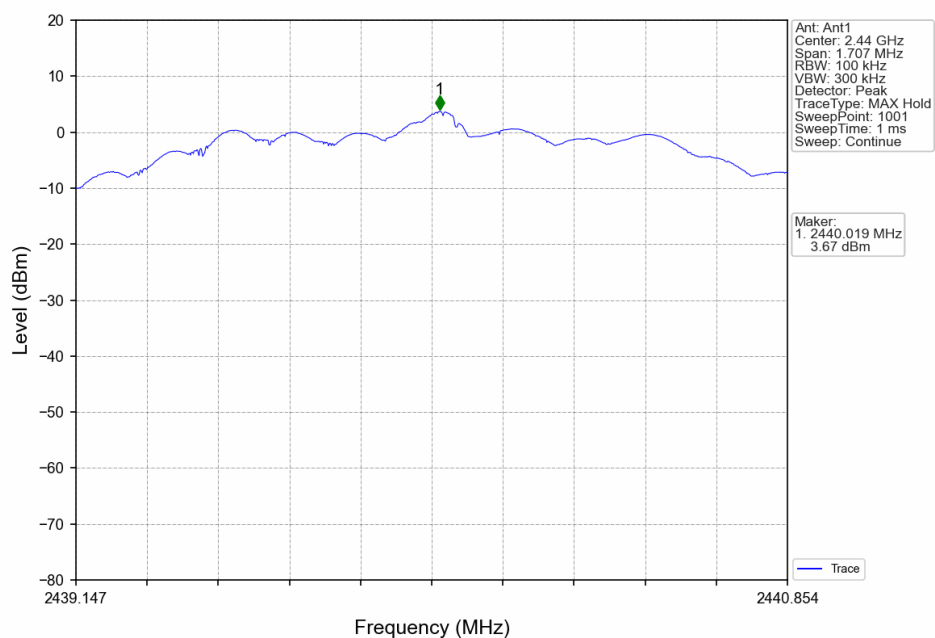

2M_HCH_2480MHz_Ant1_NTNV

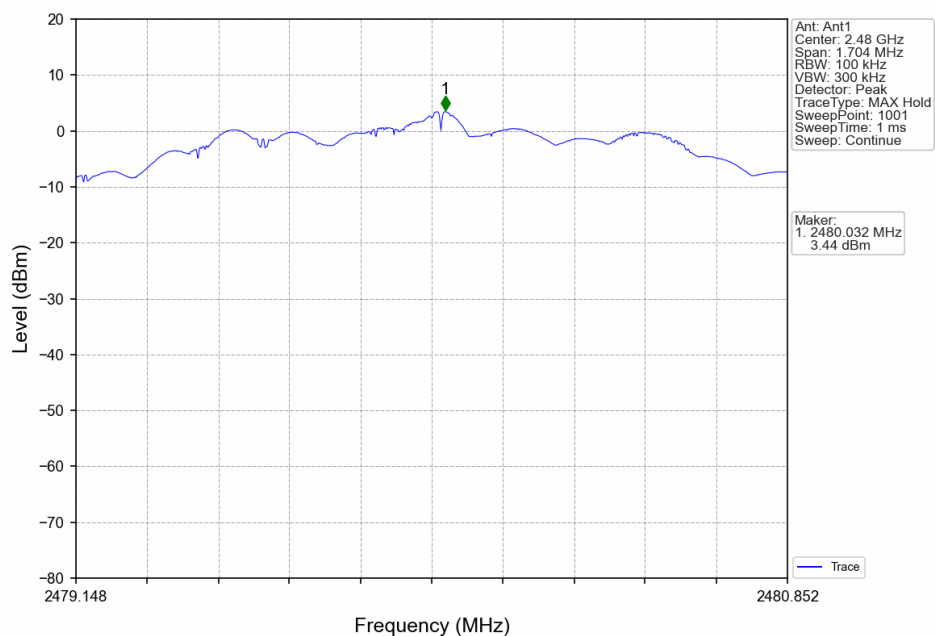



5.2 CSE


5.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	3.06	-16.94	Pass
		2440	1	3.06	-16.94	Pass
		2480	1	3.06	-16.94	Pass
2M	SISO	2402	1	3.67	-16.33	Pass
		2440	1	3.67	-16.33	Pass
		2480	1	3.67	-16.33	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.						


5.2.2 Test Graph

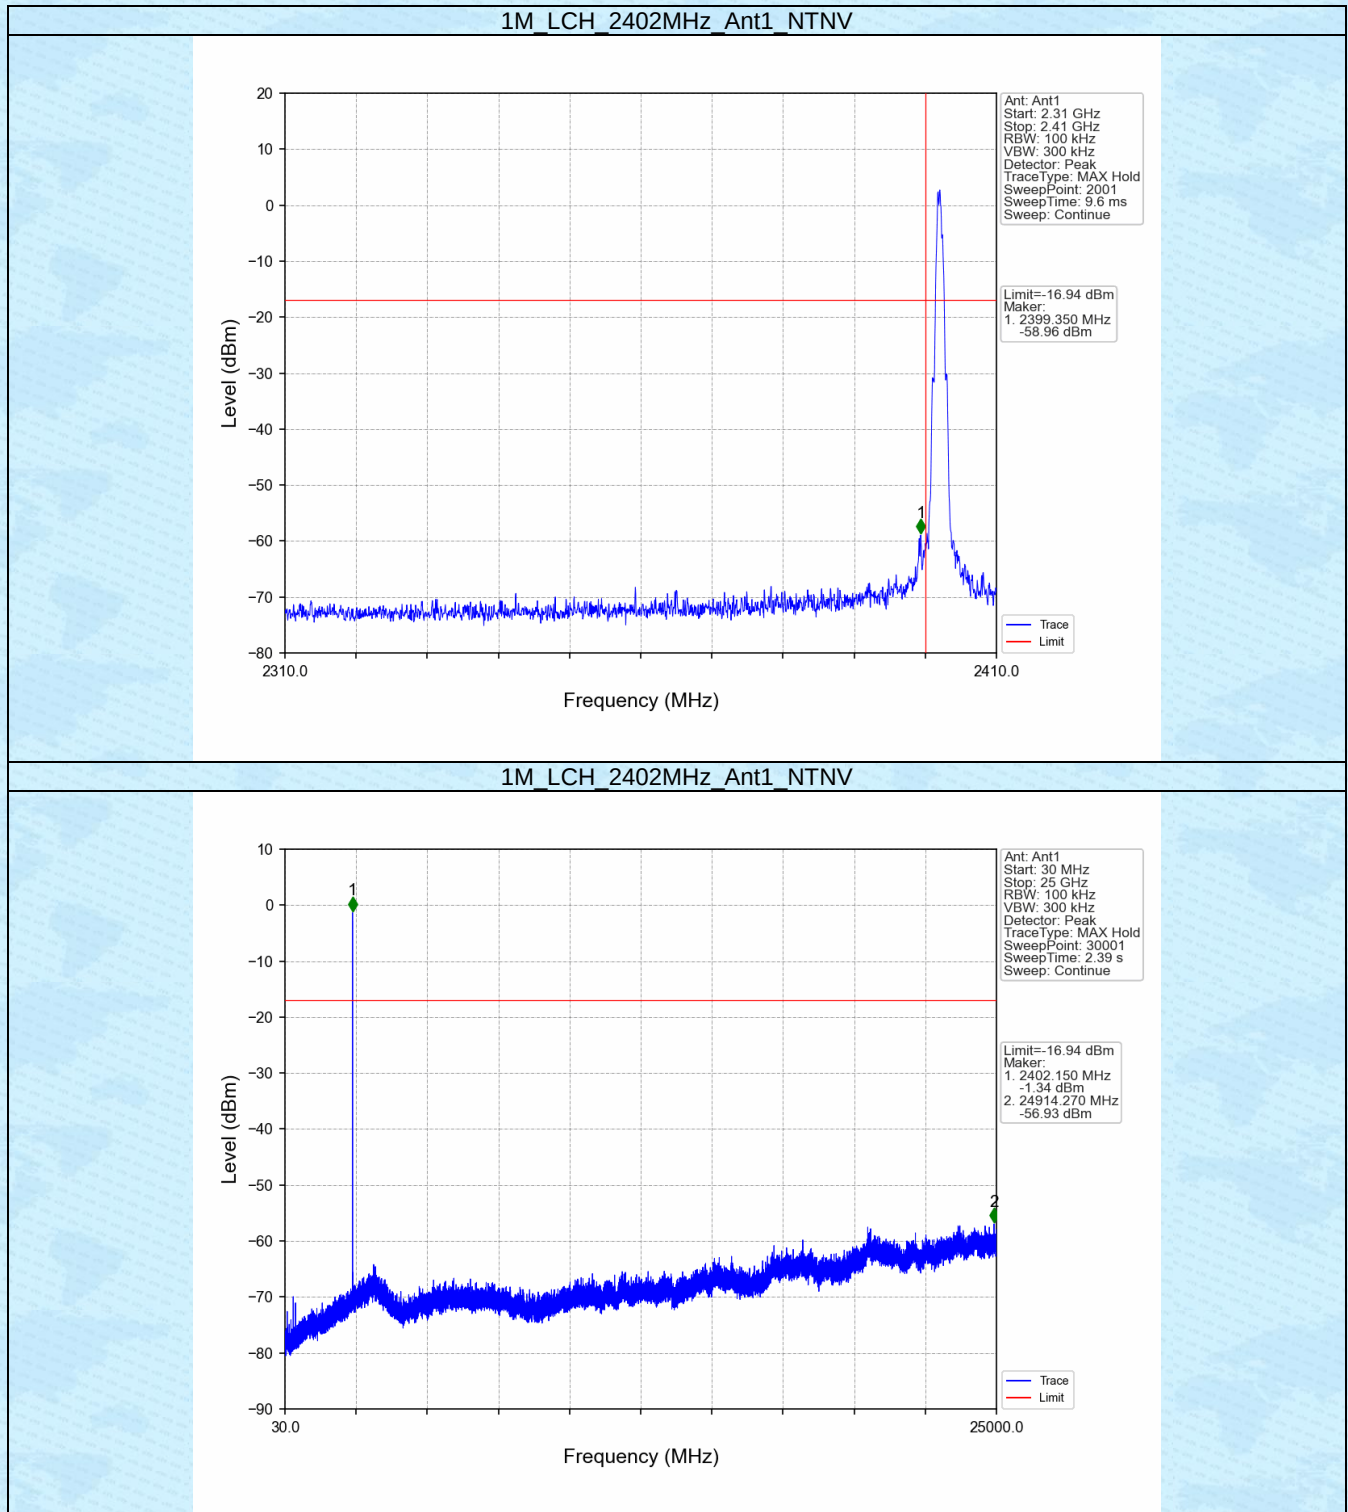

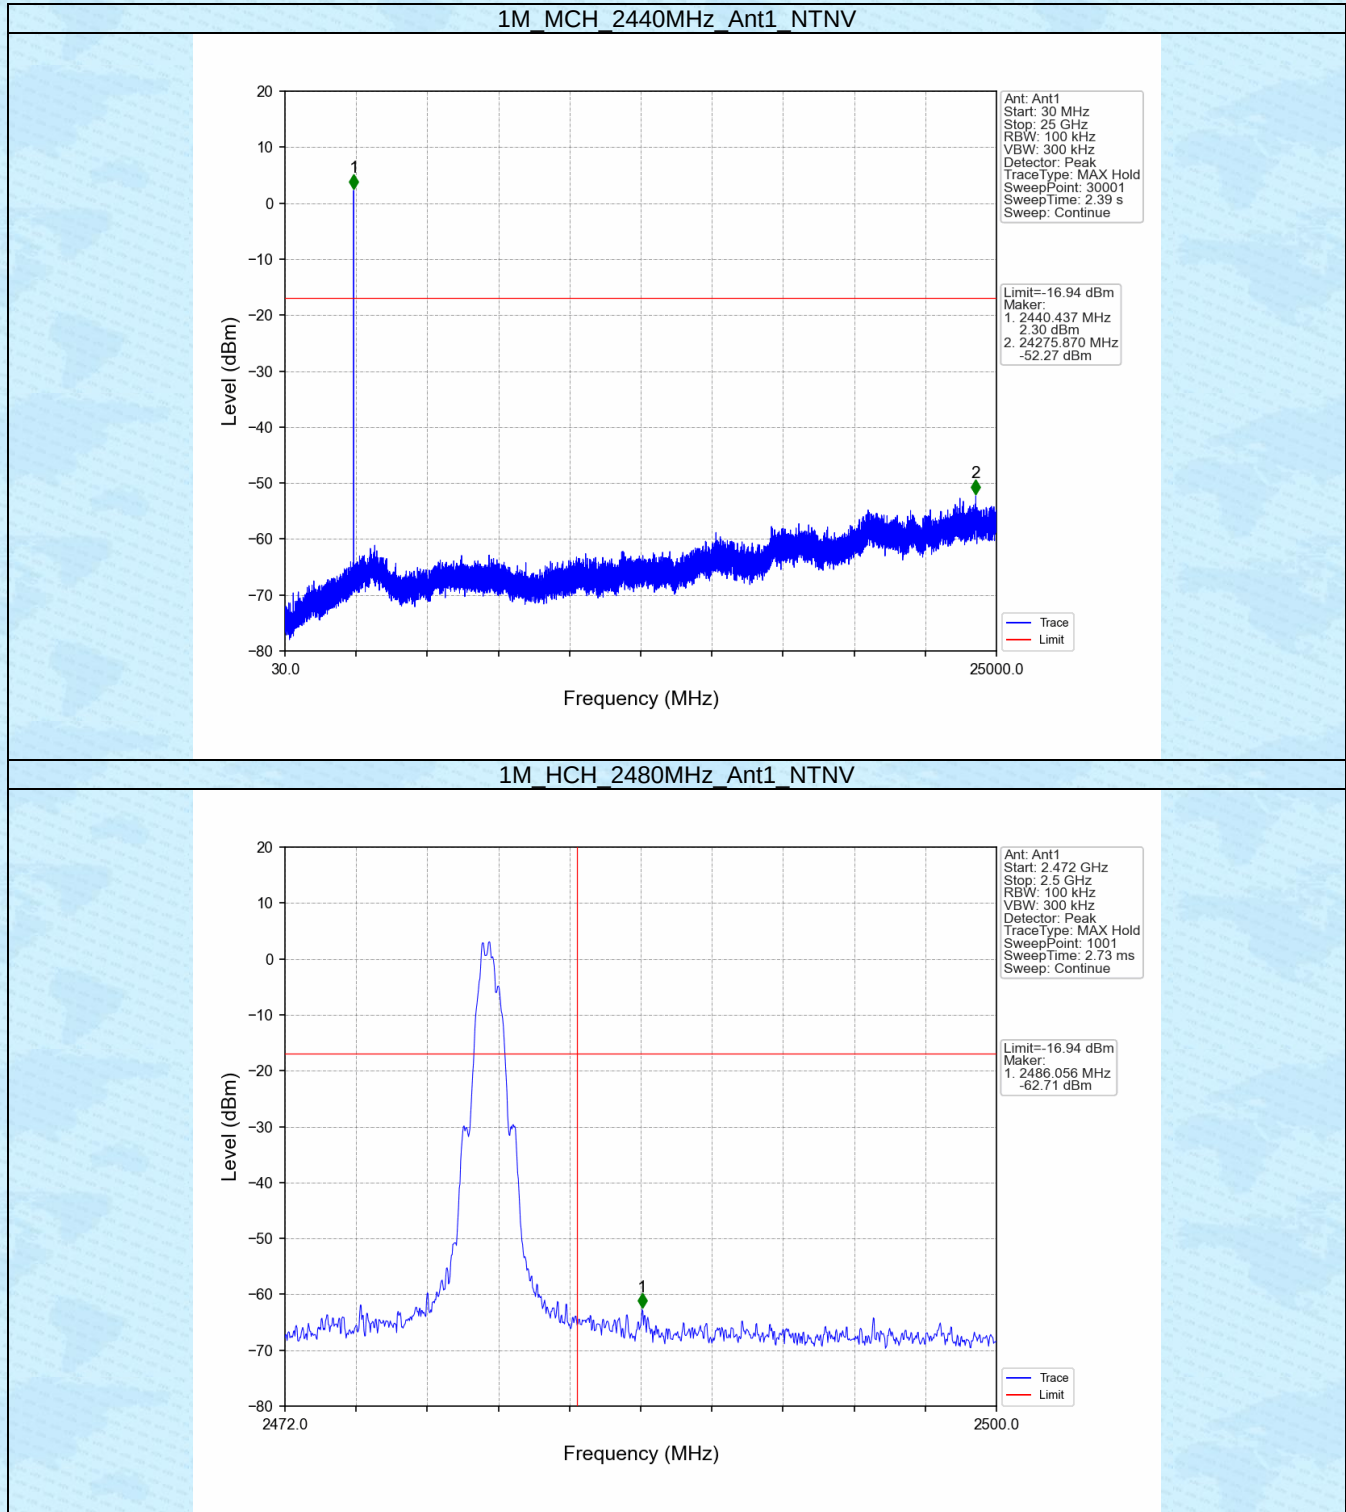


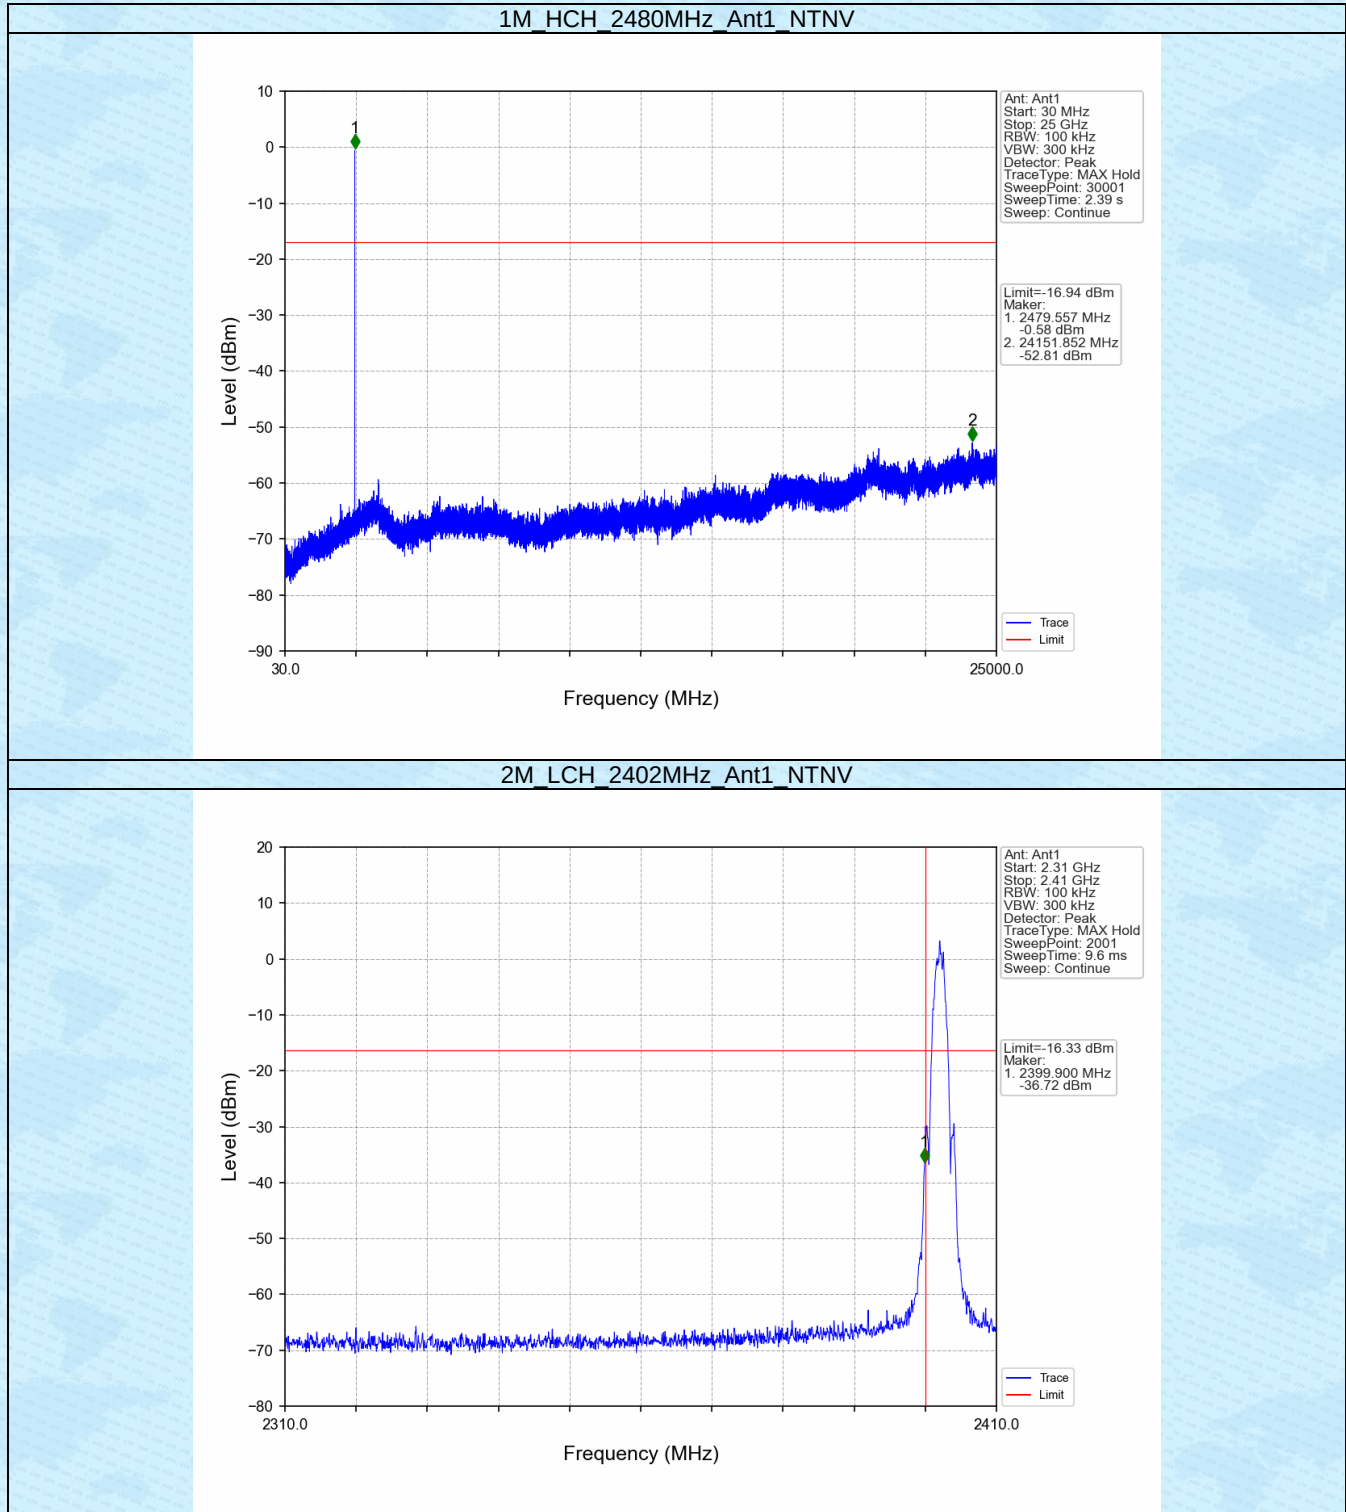


2M_LCH_2402MHz_Ant1_NTNV

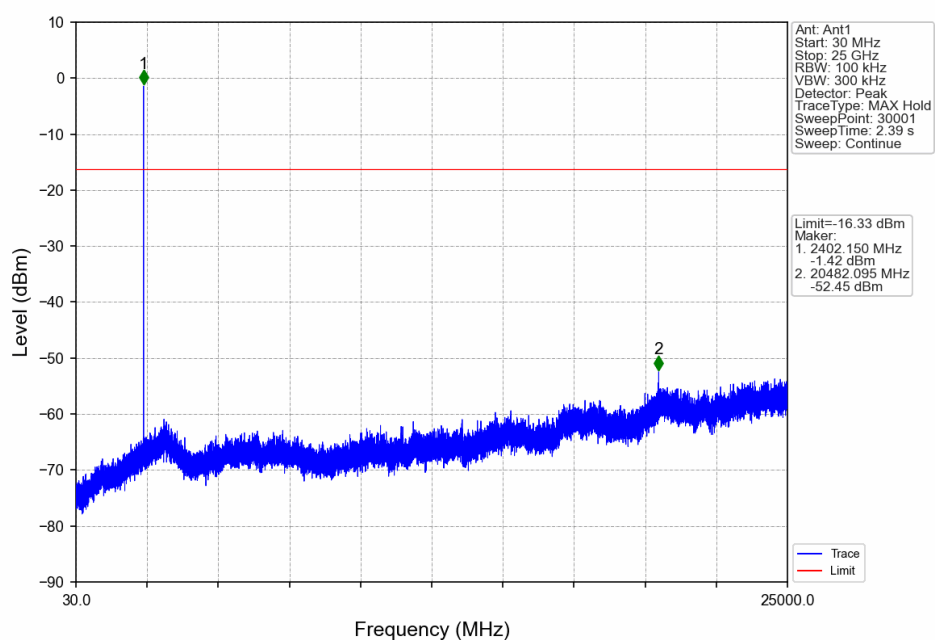

2M_MCH_2440MHz_Ant1_NTNV

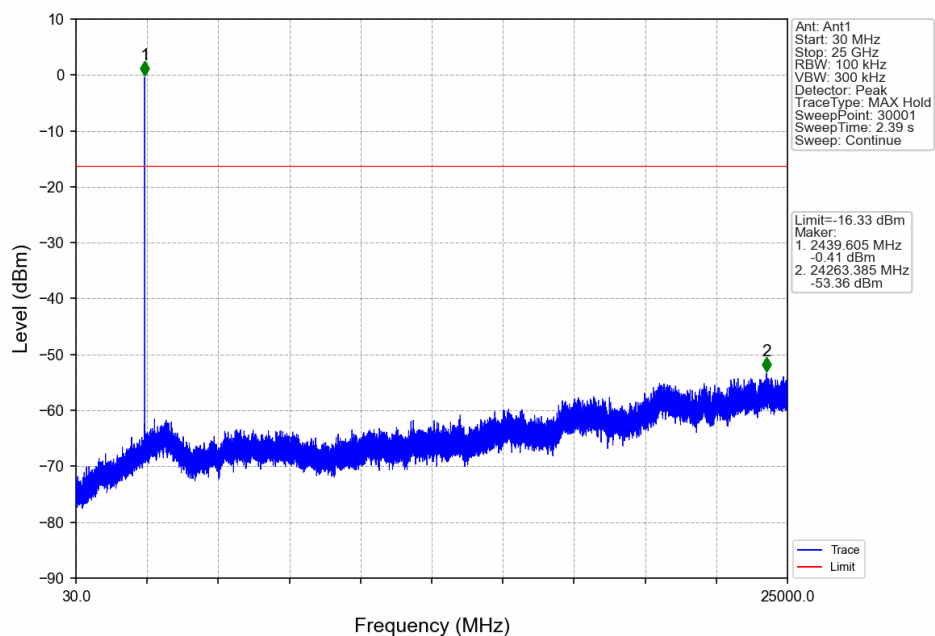

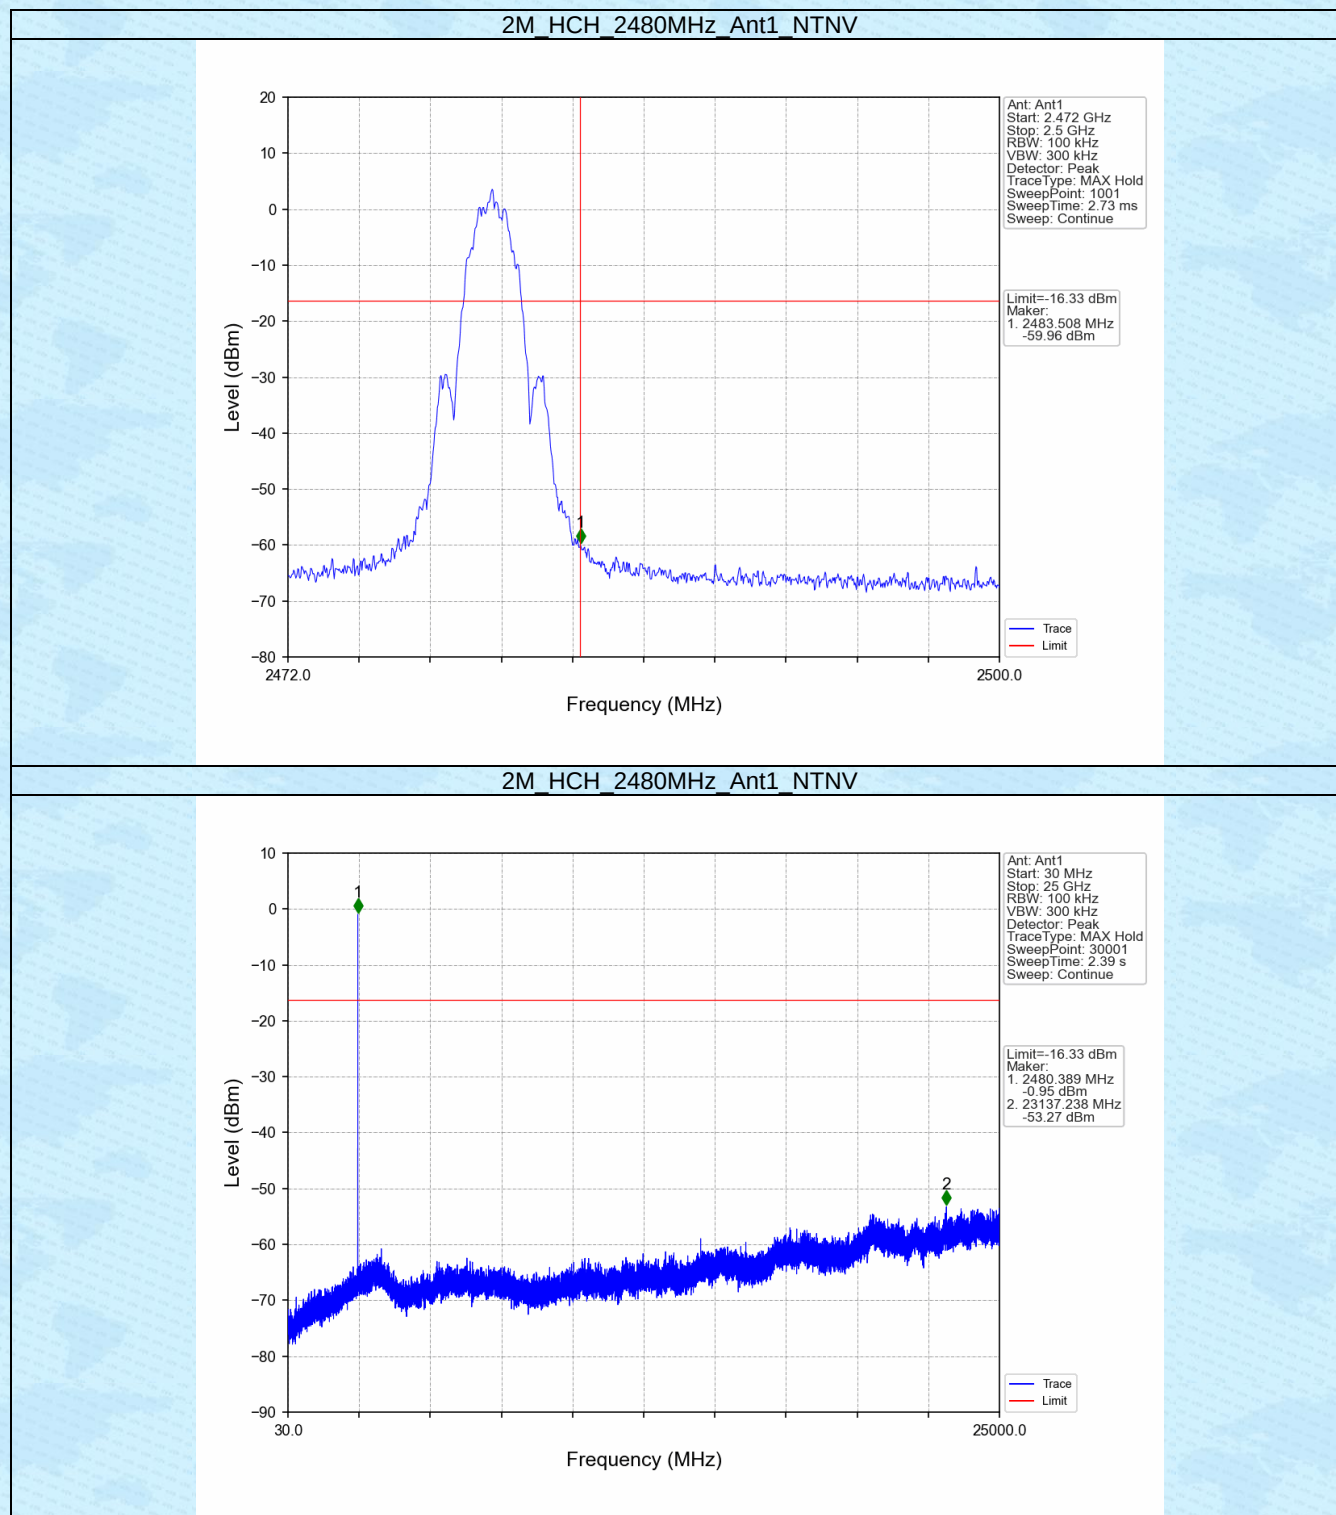

-----End-----