



RADIO TEST REPORT

FCC ID : 2A8MT-AP7PRO
Equipment : Tri-Band WiFi 7 Enterprise Access Point
Brand Name : [A] ALTA LABS
Model Name : AP7-Pro
Applicant : Alta Networks, LLC
192 N. Old Highway 91, Unit 1 Hurricane, Utah,
United States 84737
Manufacturer : Alta Networks, LLC
192 N. Old Highway 91, Unit 1 Hurricane, Utah,
United States 84737
Standard : 47 CFR FCC Part 15.407

The product was received on Dec. 26, 2025, and testing was started from Dec. 30, 2025 and completed on May 23, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	10
2 Test Configuration of EUT	11
2.1 Test Channel Mode	11
2.2 The Worst Case Measurement Configuration	13
2.3 EUT Operation during Test	15
2.4 Accessories	15
2.5 Support Equipment.....	15
2.6 Test Setup Diagram	18
3 Transmitter Test Result	22
3.1 AC Power-line Conducted Emissions	22
3.2 Emission Bandwidth	24
3.3 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	25
3.4 Peak Power Spectral Density (E.I.R.P.)	28
3.5 Unwanted Emissions.....	31
3.6 Contention Based Protocol.....	36
4 Test Equipment and Calibration Data	37
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Contention-Based Protocol	
Appendix G. Test Photos	
Photographs of EUT v01	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	PASS	-
-	15.407(a)	Proper Power Adjustment	N/A	Non-Dual Client Device / non-Standard Client Device w/o test
-	15.407(a)	Transmit Power Control	N/A	Non-Very Low Power Device w/o test
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
3.6	15.407(d)	Contention-Based Protocol	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Wendy Pan**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-7125	ax (HEW20), be (EHT20)	5955-7095	1-229 [57]
5925-7125	ax (HEW40), be (EHT40)	5965-7085	3-227 [29]
5925-7125	ax (HEW80), be (EHT80)	5985-7025	7-215 [14]
5925-7125	ax (HEW160), be (EHT160)	6025-6985	15-207 [7]
5925-7125	be (EHT320)	6105-6905	31-191 [6]

Band	Mode	BWch (MHz)	Nant
5.925-7.125GHz	802.11 ax HEW20, 802.11 be EHT20	20	2TX
	802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2TX
	802.11 ax HEW40, 802.11 be EHT40	40	2TX
	802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2TX
	802.11 ax HEW80, 802.11 be EHT80	80	2TX
	802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2TX
	802.11 ax HEW160, 802.11 be EHT160	160	2TX
	802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	2TX
	802.11 be EHT320	320	2TX
	802.11 be EHT320-BF	320	2TX

Note:

- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Ant.	Port				Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth					
1	2	1	-	-	AOT	ANT-M2458-CBT04	METAL PIFA	I-PEX	Note 1
2	1	2	-	-	AOT	ANT-M2458-CBT02	METAL PIFA	I-PEX	
3	-	3	-	-	AOT	ANT-M5158-CBT05	METAL PIFA	I-PEX	
4	-	4	-	1	AOT	ANT-M2458-CBT03	METAL PIFA	I-PEX	
5	-	-	1	-	AOT	ANT-M5172-CBT06	METAL PIFA	I-PEX	
6	-	-	2	-	AOT	ANT-M5172-CBT07	METAL PIFA	I-PEX	

Note 1:

Ant.	Antenna Gain (dBi)									
	WLAN 2.4GHz	WLAN 5GHz				WLAN 6GHz				Bluetooth
		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8	
1	3.20	3.48	3.77	3.72	3.38	-	-	-	-	-
2	4.00	5.09	4.99	4.83	3.60	-	-	-	-	-
3	-	3.36	3.37	4.71	4.49	-	-	-	-	-
4	-	3.82	3.59	4.42	3.20	-	-	-	-	3.5
5	-	-	-	-	-	4.50	4.50	4.30	4.10	-
6	-	-	-	-	-	4.30	4.50	4.50	4.50	-

Item	Directional Gain (dBi)			
	WLAN 5GHz			
	UNII 1	UNII 2A	UNII 2C	UNII 3
4T1S	6.75	6.90	6.96	6.24

Note 2: The above information was declared by the manufacturer, with the exception of the WLAN 5GHz antenna gain and directional gain.

Note 3: WLAN 5GHz Maximum Directional Gain following KDB662911 D03.

Note 4: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left[\sum_{k=1}^{N_{ant}} g_{j,k} \right]^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left[\sum_{k=1}^{N_{ant}} g_{j,k} \right]^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left[\sum_{k=1}^{N_{ant}} g_{j,k} \right]^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left[\sum_{k=1}^{N_{ant}} g_{j,k} \right]^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

$$2.4G \ G1 = 4 \text{ dBi} ; G2 = 3.2 \text{ dBi} ; DG = 6.62 \text{ dBi}$$

<For 2.4GHz function>

For IEEE 802.11b/g/n/VHT/ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For 5GHz function>

For IEEE 802.11a/n/ac/ax/be (4TX/4RX):

Port 1 ~ Port 4 can be used as transmitting/receiving antenna.

Port 1 ~ Port 4 could transmit/receive simultaneously.

<For 6GHz function>

For IEEE 802.11ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For Bluetooth function> (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

Port 1 could transmit/receive simultaneously.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss 1,(M0)	0.922	0.35	5.185m	300
802.11be EHT40-BF_Nss 1,(M0)	0.936	0.29	5.183m	300
802.11be EHT80-BF_Nss 1,(M0)	0.923	0.35	5.185m	300
802.11be EHT160-BF_Nss 1,(M0)	0.924	0.34	5.185m	300
802.11be EHT320-BF_Nss 1,(M0)	0.963	0.16	5.185m	300

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From PoE	
Beamforming Function	☒ With beamforming	☐ Without beamforming
	The product has beamforming function for 11n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz.	
Device Type	☒ Indoor Access Point	☒ Subordinate
	☐ Indoor Client	☐ Standard Power Access Point
	☐ Dual Client	☐ Standard Client
	☐ Fixed Client	☐ Very Low Power
Condition of EUT	☒ Indoor	☐ Outdoor
Channel Puncturing Function	☐ Supported Static Puncturing	
	☐ Supported Dynamic Puncturing (Reduce BW)	
	☒ Unsupported	
	Note: The EUT doesn't support puncturing for CBP	
Support RU	☒ Full RU	☐ Partial RU
Test Software Version	QRCT 4.0.00185.1, DOS [ver 6.1.7601]	
Software / Firmware Version for CBP	3.0c-dfs	

Note: The above information was declared by manufacturer.

1.1.5 Table for EUT Support Function

Function	Support
AP	WLAN 2.4GHz, 5GHz UNII 1~3, 6GHz UNII 5~8 and Bluetooth
Mesh	WLAN 5GHz UNII 1~3 and 6GHz UNII 5~8

Note 1: Form above table list, only AP mode was tested and recorded in this test.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 987594 D02 v03
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted (For other tests)	TH01-CB	Serway Lee	19.8~20.3 / 62~67	Jan. 19, 2026~ Feb. 03, 2026
Radiated <1GHz	10CH01-CB	Richard Pai	23~24 / 56~57	Jan. 16, 2026
RF Radiated (E.I.R.P. Power/PSD) and Radiated >1GHz	03CH01-CB	Paul Hu	21.3~22.3 / 58~61	Jan. 09, 2026~ Feb. 07, 2026
	03CH06-CB		21.6~23.1 / 58~62	
	03CH01-CB		21.9~23.1 / 60~62	
AC Conduction	CO01-CB	Scott Tseng	22~23 / 53~54	Dec. 30, 2025
RF Conducted (Contention-Based Protocol test)	DF02-CB	Kevin Huang	21.9~23.2 / 61~62	Mar. 30, 2026~ May 21, 2026
		Young Yang	25.7~27.1 / 52~55	Apr. 14, 2026~ May 23, 2026

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.9 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11be EHT20-BF_Nss1,(MCS0)_2TX
5955MHz
6195MHz
6415MHz
6435MHz
6475MHz
6515MHz
6535MHz
6695MHz
6875MHz
6895MHz
6995MHz
7095MHz
802.11be EHT40-BF_Nss1,(MCS0)_2TX
5965MHz
6205MHz
6405MHz
6445MHz
6485MHz
6525MHz
6565MHz
6685MHz
6885MHz
6925MHz
7005MHz
7085MHz
802.11be EHT80-BF_Nss1,(MCS0)_2TX
5985MHz
6225MHz
6385MHz
6465MHz
6545MHz
6625MHz
6705MHz
6785MHz
6865MHz
6945MHz
7025MHz
802.11be EHT160-BF_Nss1,(MCS0)_2TX
6025MHz
6185MHz
6345MHz



6505MHz
6665MHz
6825MHz
6985MHz
802.11be EHT320-BF_Nss1,(MCS0)_2TX
6105MHz
6265MHz
6425MHz
6585MHz
6745MHz
6905MHz

Note:

- ♦ EHT20 / EHT40 / EHT80 / EHT160 covers HEW20 / HEW40 / HEW80 / HEW160 due to similar modulation. The power setting for HEW20 / HEW40 / HEW80 / HEW160 is the same or lower than EHT20 / EHT40 / EHT80 / EHT160.
- ♦ The EUT supports non-beamforming and beamforming modes. After evaluating, the beamforming mode was selected to test.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT + PoE

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Emission MASK
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Contention Based Protocol
Test Condition	Conducted measurement at transmit chains
1	EUT + AP Mode
2	EUT + Mesh Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.)
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
	After evaluating, the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis



The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
	After evaluating, the worst case was found at Z axis. So the measurement will follow this same test configuration.
1	EUT in Z axis + PoE
Operating Mode > 1GHz	CTX
	After evaluating, and the worst case was found as below. So the measurement will follow this same test configuration.
1	EUT in Y axis for bandedge / EUT in Z axis for harmonic

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + Bluetooth
Refer to Sporton Test Report No.: FA5D3013 for Co-location RF Exposure Evaluation.	

Note: The PoE below are for measurement only, would not be marketed.

The PoE information as below:

Support Unit	Brand	Model Name
PoE	Delta	ADH-65AR P



2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

During the test, the following programs under WIN 10 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS [ver 6.1.7601].
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by Device and transmit duty cycle no less than 98%.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

Wall-mounted*1

2.5 Support Equipment

For AC Conduction and Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	Delta	ADH-65AR P	N/A
B	PoE PC	ASUS	S300TA	TX2-RTL8821CE
C	5G NB	Lenovo	X260	N/A
D	2.4G NB	Lenovo	X260	N/A
E	6G Device	INTEL	BE200	PD9BE200NG
F	6G NB	DELL	E7240	N/A
G	Smart phone	Redmi	M1810F6LH	2AFZZ-RMSF6LG



For Radiated (above 1GHz other tests) and RF Radiated (Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) and Peak Power Spectral Density (E.I.R.P.):

Non-beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	Delta	ADH-65AR P	N/A
B	Notebook	DELL	E4300	N/A

Beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	Delta	ADH-65AR P	N/A
B	NB	DELL	E4300	N/A
C	Client	ALTA LABS	AP7-Pro	2A8MT-AP7PRO
D	NB	DELL	E4300	N/A

For RF Conducted (Other tests):

Non-beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
C	PoE	Delta	ADH-65AR P	N/A

Beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	Client	ALTA LABS	AP7-Pro	2A8MT-AP7PRO
C	PoE	Delta	ADH-65AR P	N/A
D	NB	DELL	E4300	N/A


**For RF Conducted (Contention Based Protocol test):****Test Mode: Mode 1**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	WLAN AP	CyberTAN	Pinnacle 2.1	N/A
D	WLAN AP	ASUS	RT-AX88U	MSQ-RTAXHP00
E	WLAN AP	ASUS	RT-AX88U	MSQ-RTAXHP00
F	PoE	Delta	ADH-65AR P	N/A

Test Mode: Mode 2


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	Notebook	DELL	E4300	N/A
D	WLAN AP	CyberTAN	Pinnacle 2.1	N/A
E	WLAN AP	ALTA LABS	AP7-Pro	2A8MT-AP7PRO
F	WLAN AP	ASUS	RT-AX88U	MSQ-RTAXHP00
G	PoE	Delta	ADH-65AR P	N/A

2.6 Test Setup Diagram

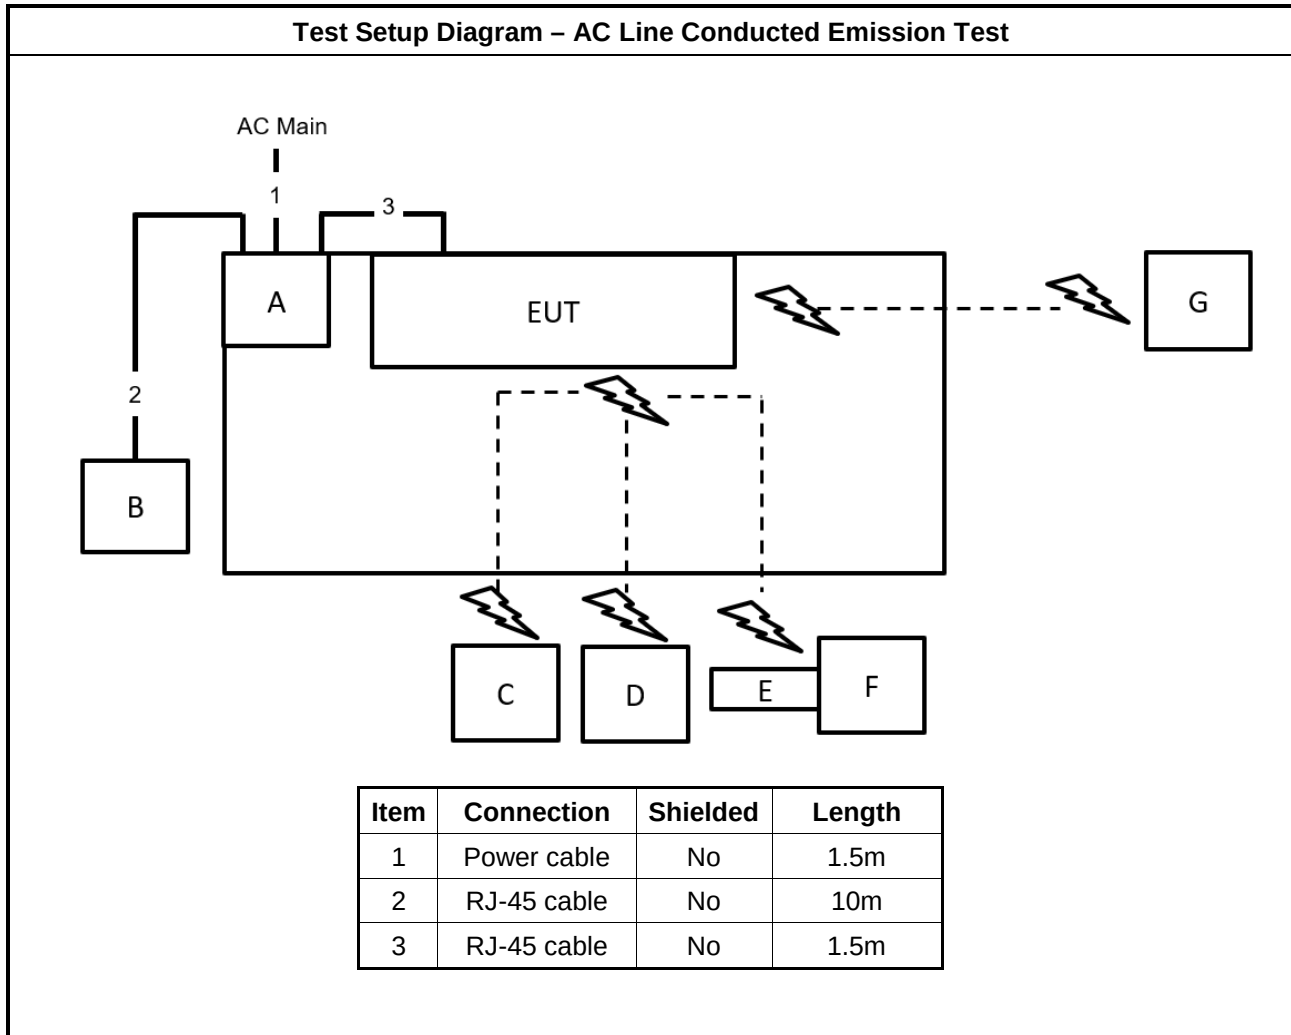


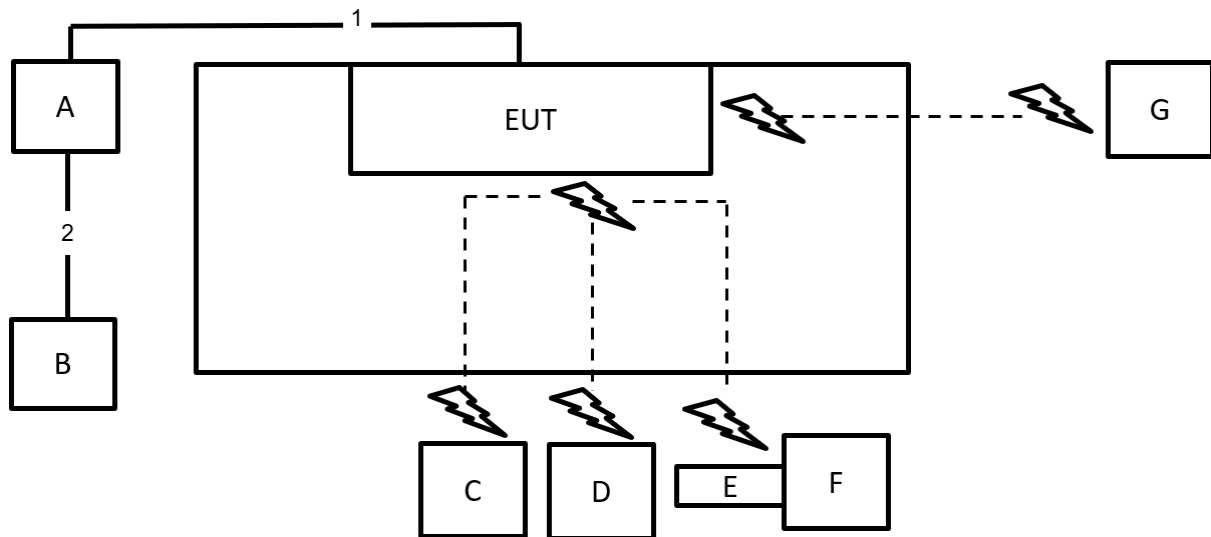Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	3m

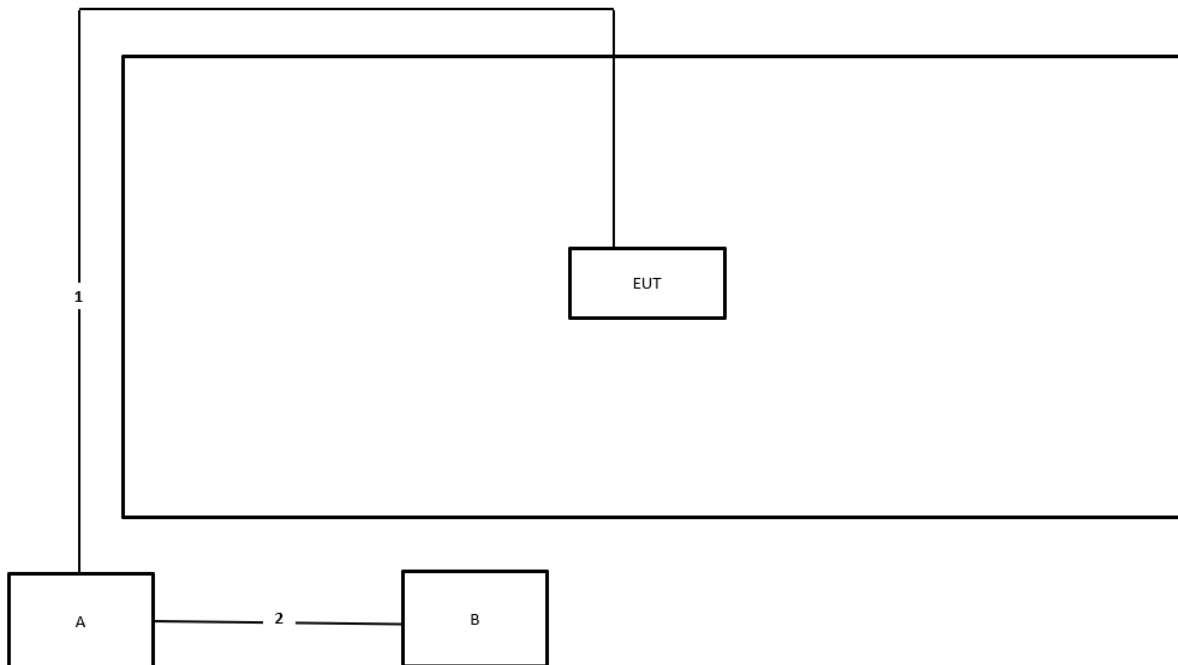Test Setup Diagram - Radiated Test > 1GHz / Non-beamforming mode


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m

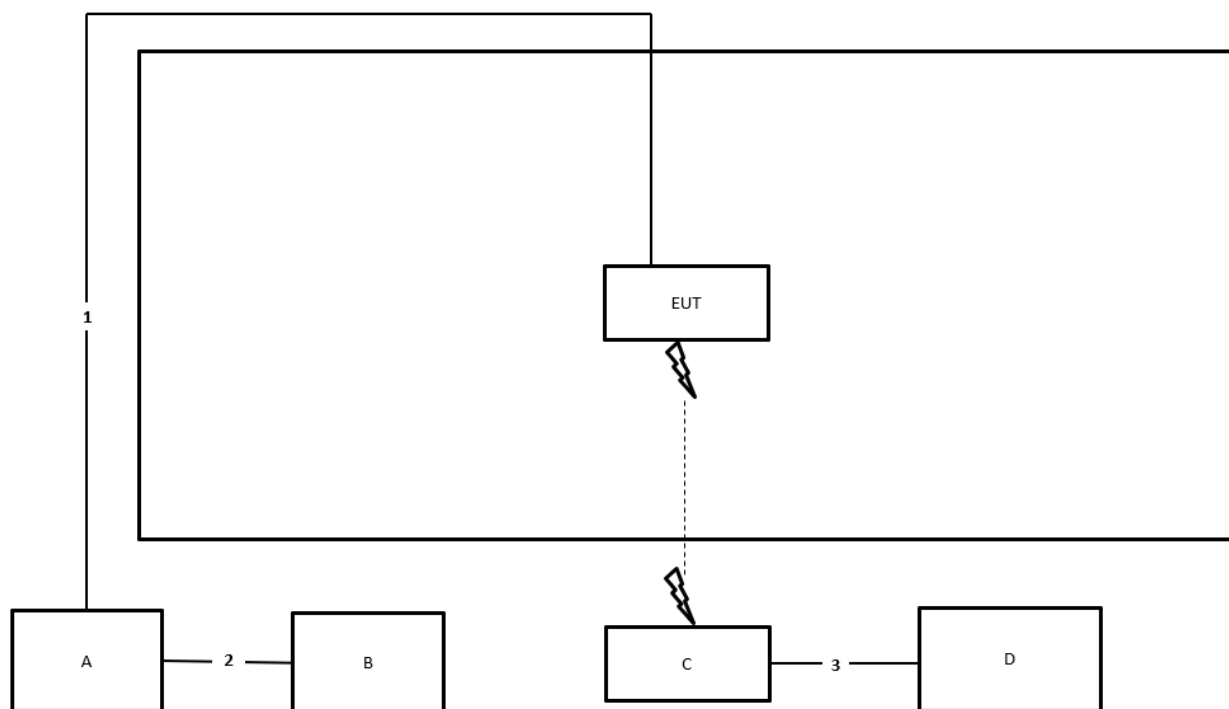Test Setup Diagram - Radiated Test > 1GHz / Beamforming mode


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	1.5m

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

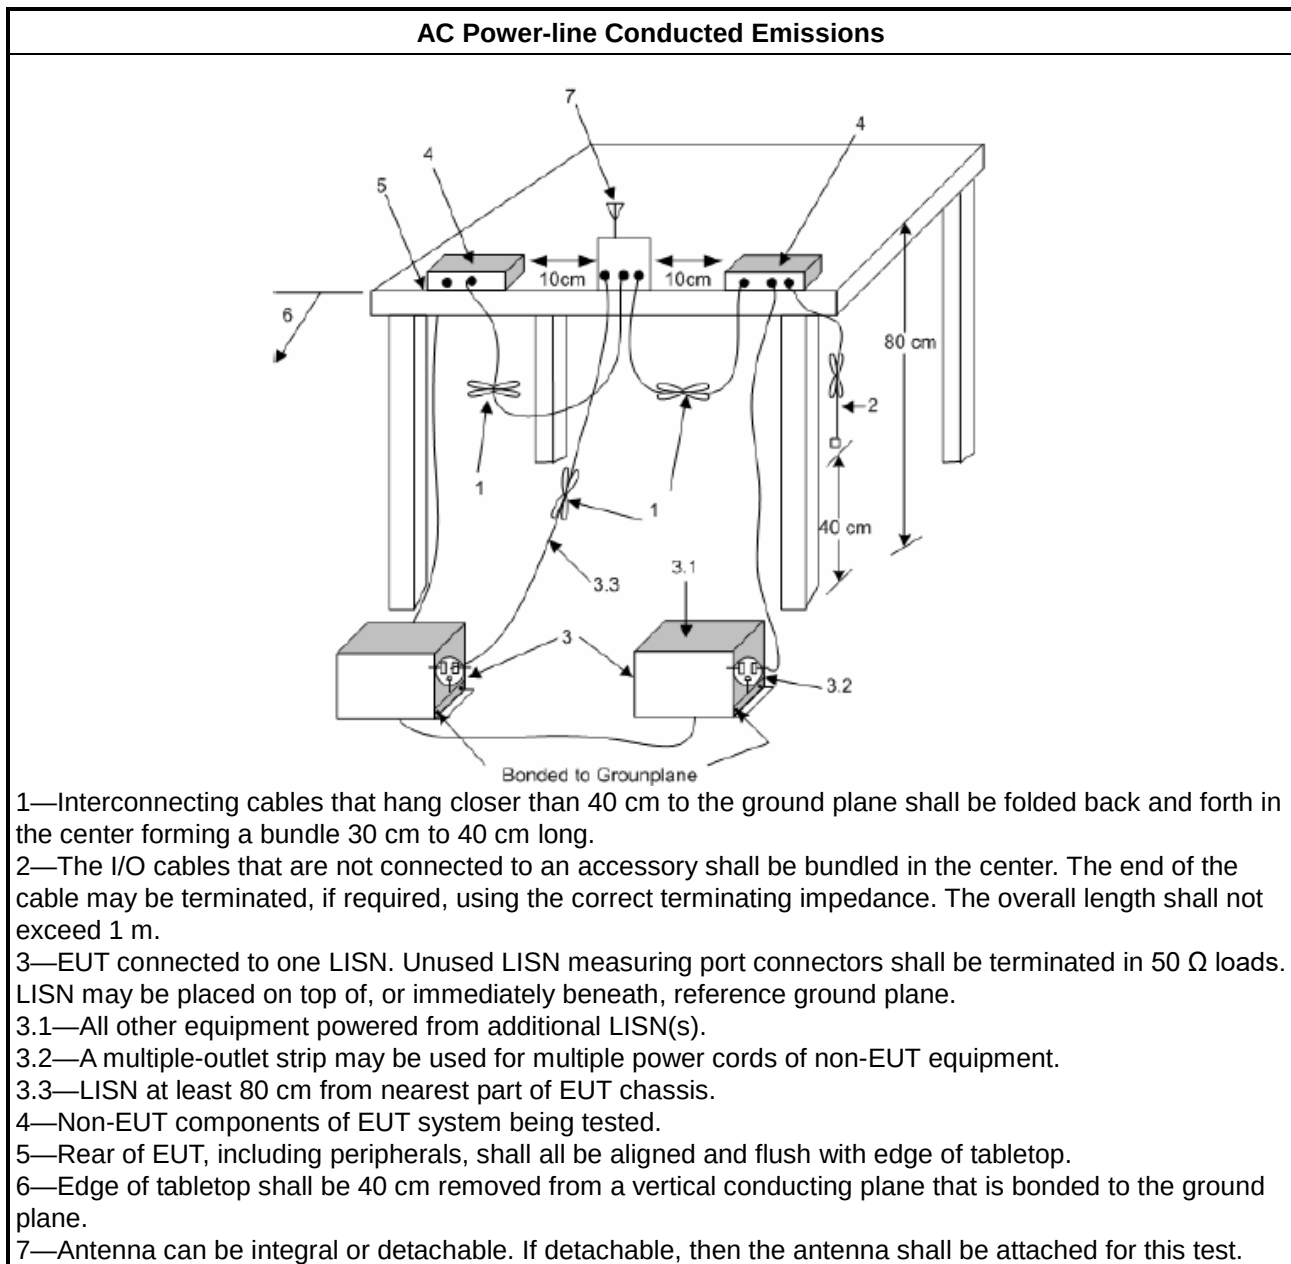

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level
- Margin = - Limit + (Read Level + LISN Factor + Cable Loss)

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☒	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☒	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☒	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.
RLAN Devices	
☐	For the 5925-6425 GHz band, need less than 320 MHz bandwidth.
☐	For the 6425-6525 GHz band, need less than 320 MHz bandwidth.
☐	For the 6525-6875 GHz band, need less than 320 MHz bandwidth.
☐	For the 6875-7125 GHz band, need less than 320 MHz bandwidth.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

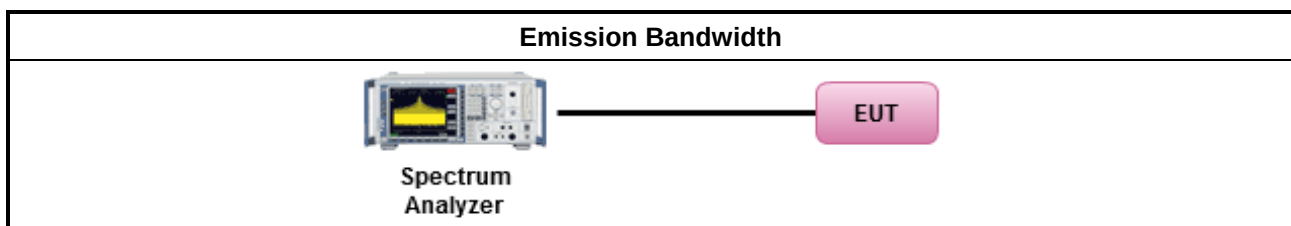

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

Note:

The 99% OBW of BW320 should be less than 320 MHz of limit, and the other BWs less than 320 MHz of limit are 26 dB EBW.



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 30 dBm .
	■ For low-power client devices < 24 dBm.
	■ For very low-power devices < 14 dBm.
☐ For the 5.925 ~ 6.875 GHz band:	



- | |
|--|
| <ul style="list-style-type: none">For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). |
| <ul style="list-style-type: none">For standard client devices < 30 dBm. |


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.	
	Average over on/off periods with duty factor
	☒ Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.
	☐ Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
	☐ Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☐ For conducted measurement.	
	If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☒ For radiated measurement.	
	Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

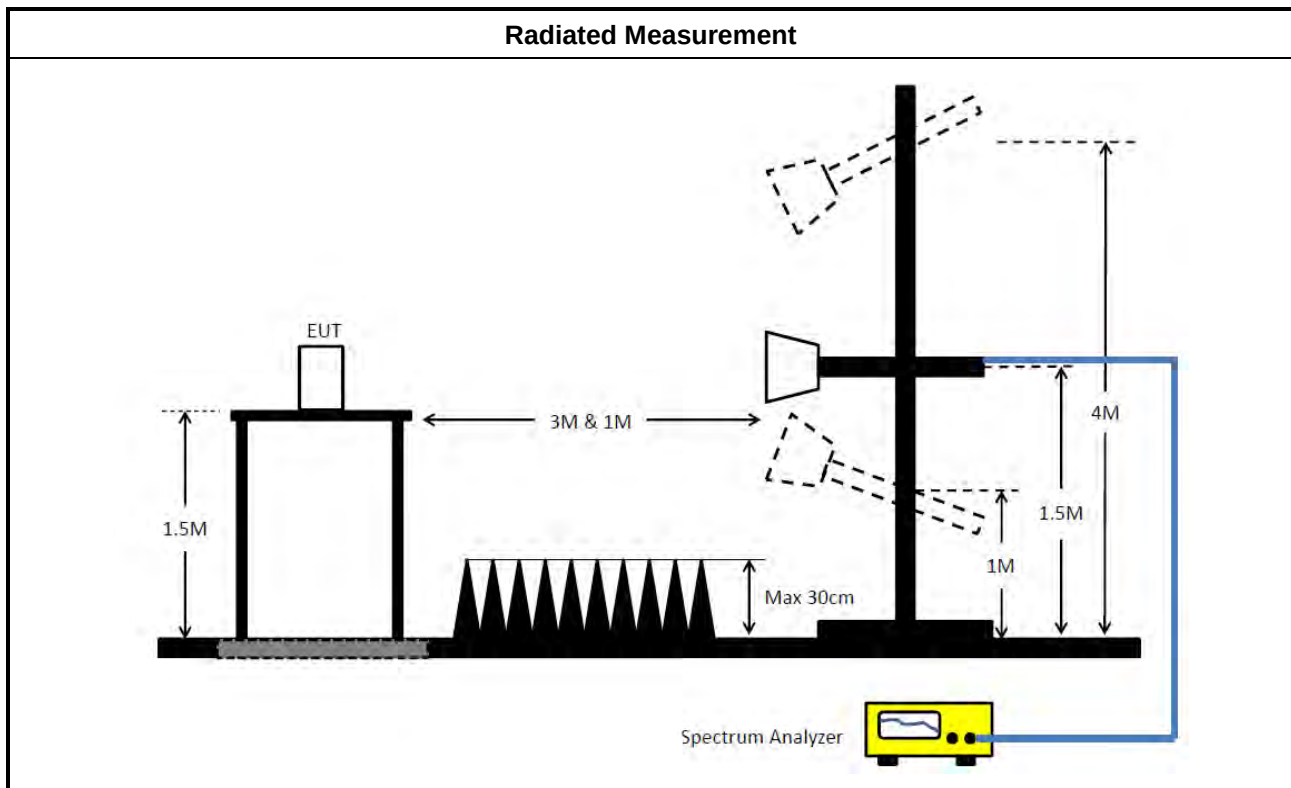

3.3.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p PSD < -5 dBm/MHz.
RLAN Devices	
☐ For the 5.925 ~ 7.125 GHz band:	
	■ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	■ For low-power client devices < -1 dBm / MHz.
	■ For very low-power devices < -5 dBm / MHz.
☐ For the 5.925 ~ 6.875 GHz band:	
	■ For standard-power access points & fixed client devices < 23 dBm / MHz.
	■ For standard client devices < 17 dBm / MHz.



3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☐ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

☒	For radiated measurement.
	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

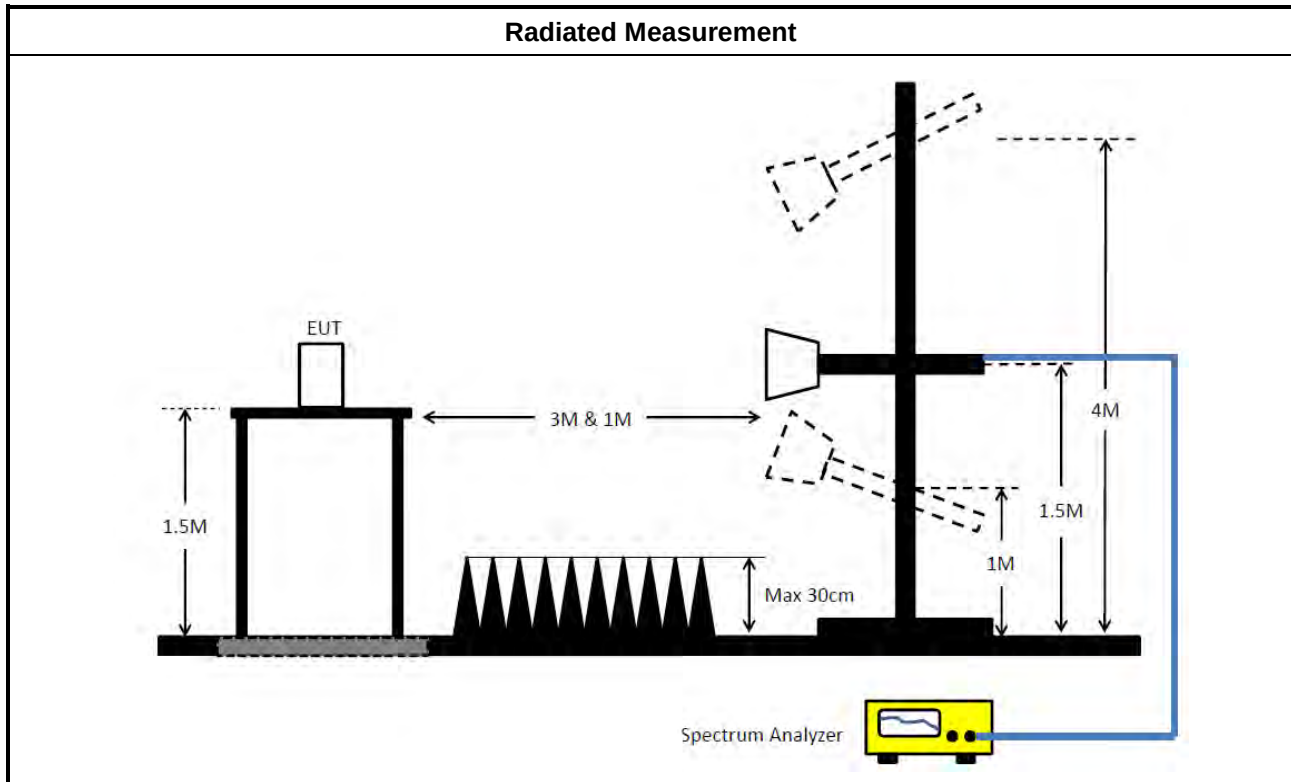

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit


Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at 3m} + 9.54\text{dB} = 63.54\text{ dBuV/m at 1m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.925 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at 3m} + 9.54\text{dB} = 77.74\text{ dBuV/m at 1m}$. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

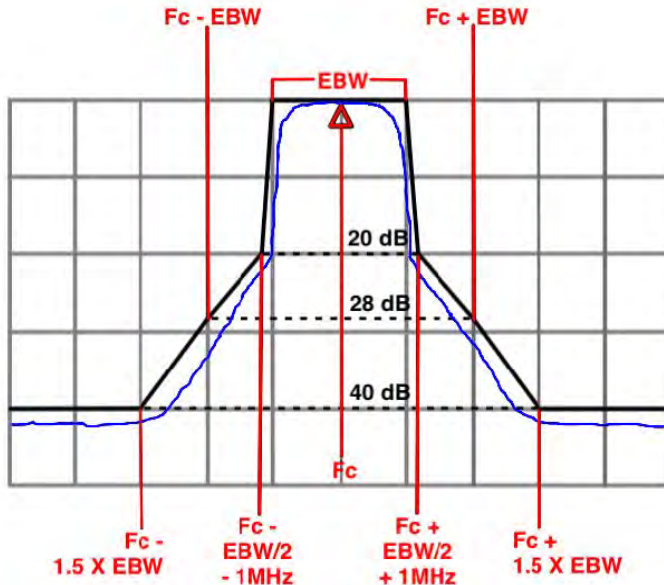Frequency	Emission MASK Limit
5.925 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 




3.5.2 Measuring Instruments



Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.	
For emission MASK shall be measured using following options below:	
	☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4 Test Setup

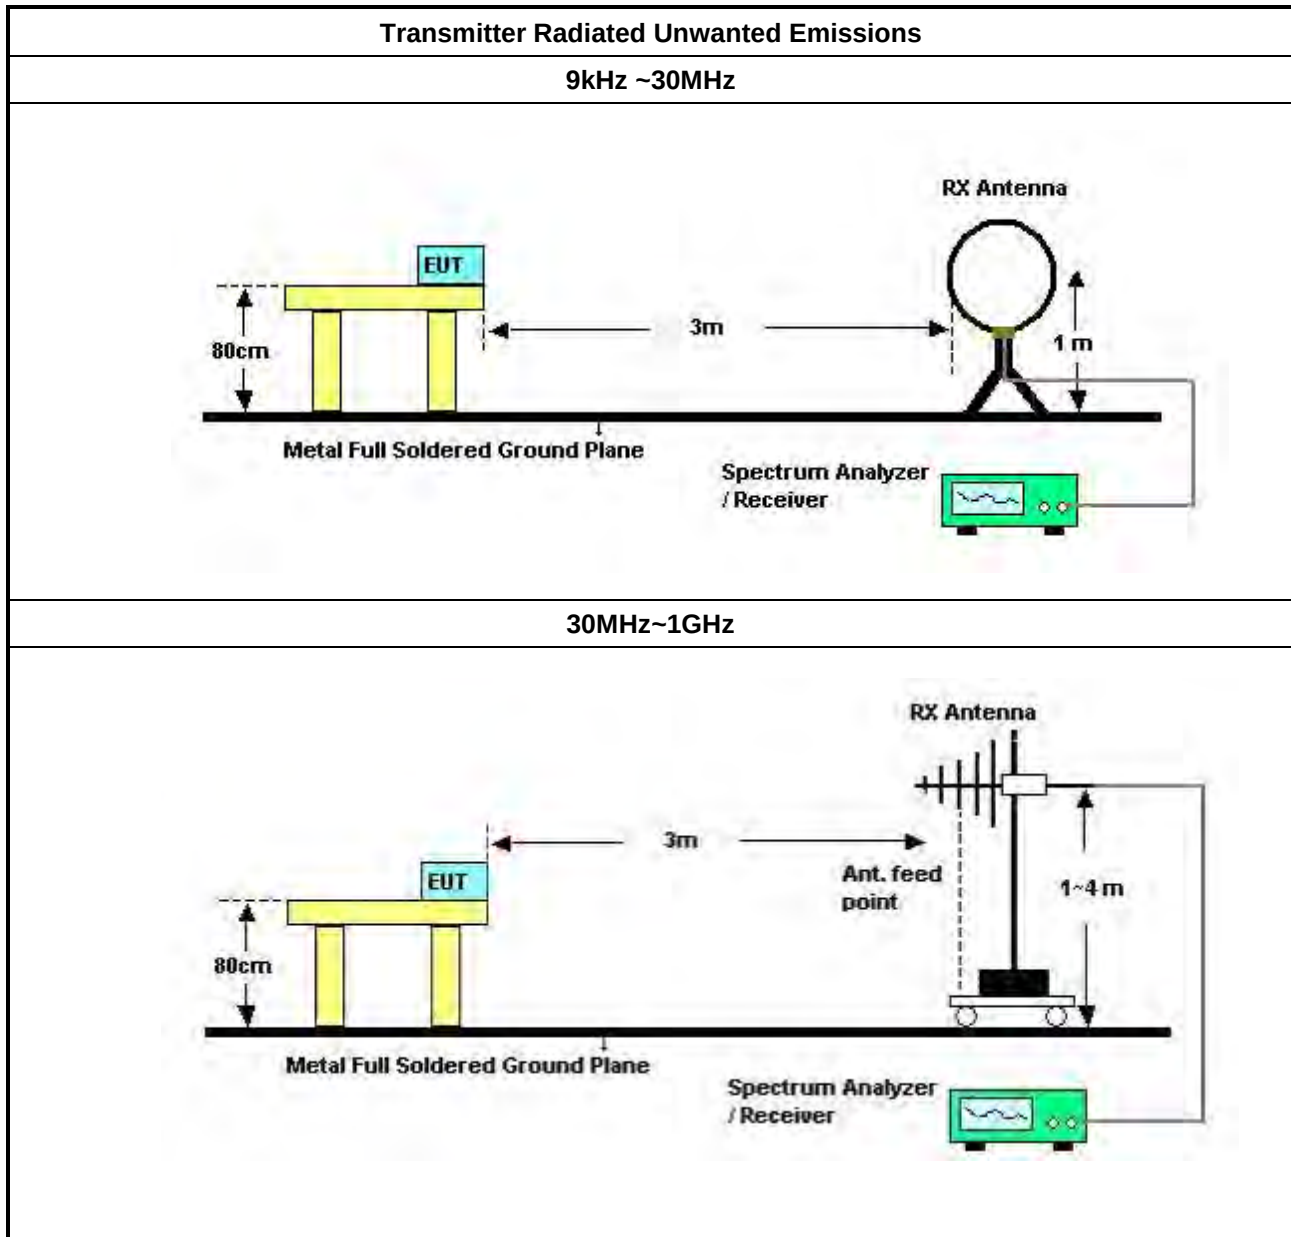

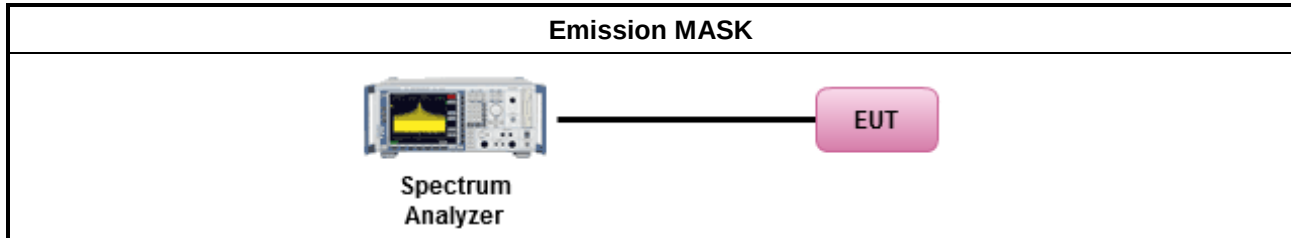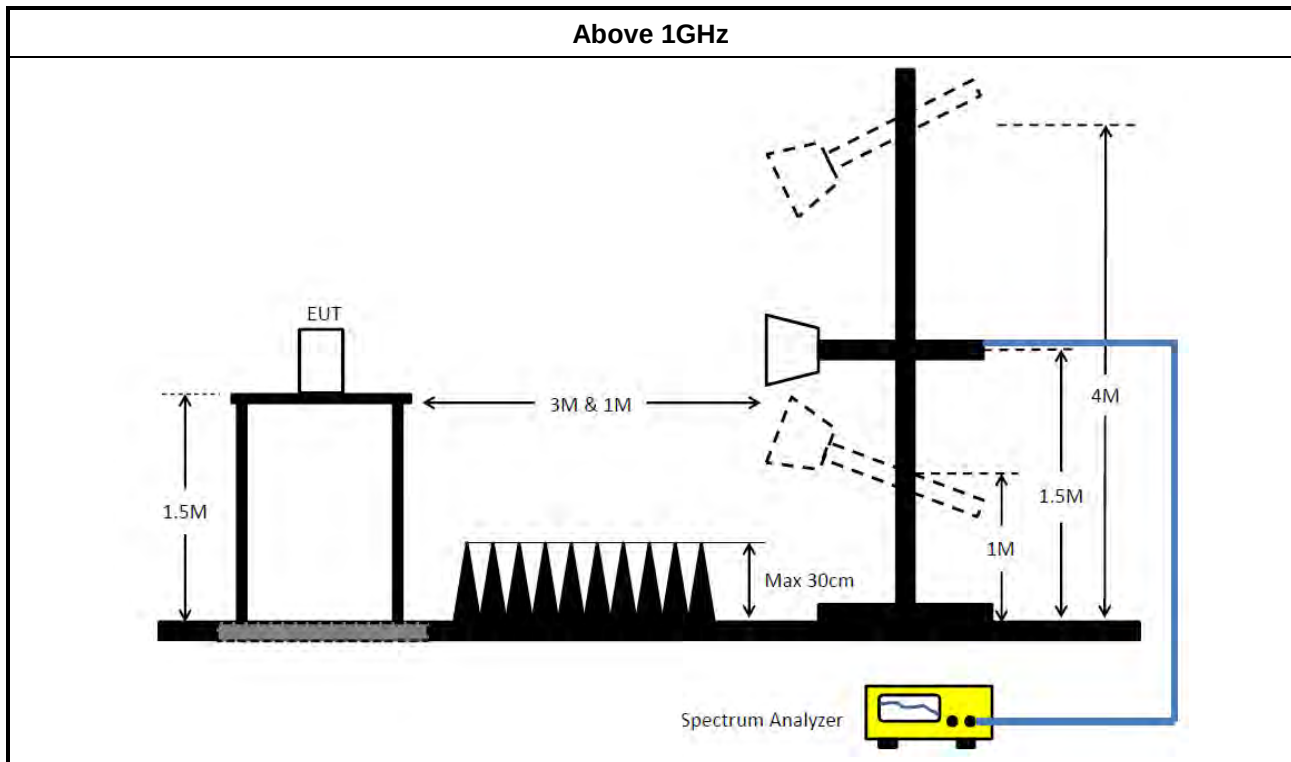

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Contention Based Protocol

3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
■	For Contention Based Protocol shall be measured using following options below:
☒	Refer as FCC KDB 987594 D02, I) Contention Based Protocol.

3.6.4 Test Setup

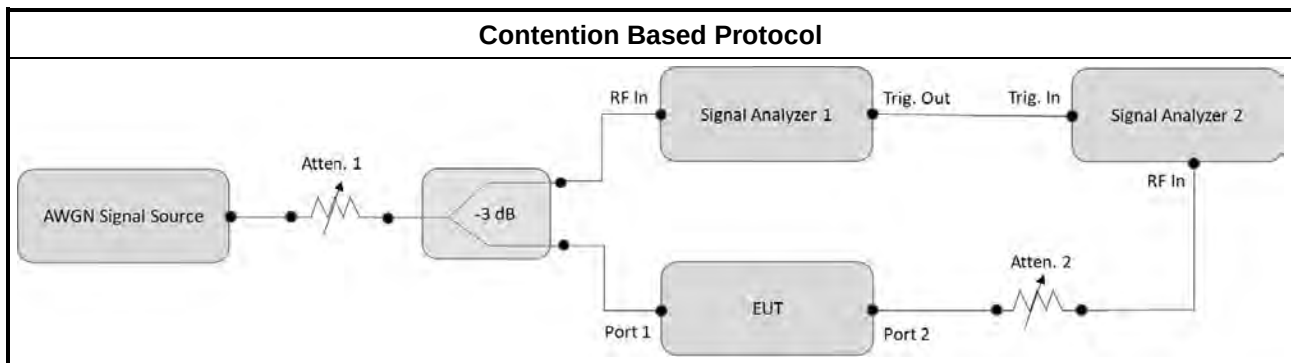

3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 06, 2025	Mar. 05, 2026	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 18, 2025	Feb. 17, 2026	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	May 10, 2025	May 09, 2026	Conduction (CO01-CB)
Pulse Limiter	Rohde& Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
COND Cable	Woken	Cable	CO01	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (10CH01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 14, 2026	Jan. 13, 2027	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 08, 2025	Mar. 07, 2026	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 08, 2025	Mar. 07, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
EMI Test Receiver	Rohde&Schwarz	ESR7	103076	9 kHz ~ 7GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (10CH01-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Sep. 03, 2025	Sep. 02, 2026	Radiation (10CH01-CB)
High Cable	TITAN	T318E	High cable01	30MHz ~ 18GHz	Feb. 04, 2025	Feb. 03, 2026	Radiation (10CH01-CB)
Bilog Ant & 6dB Attenuator	SCHWARZBECK & EMCI	VULB 9168 & N-6-06	1469 & AT-N06021	30MHz ~ 1GHz	Jan. 08, 2026	Jan. 07, 2027	Radiation (10CH01-CB)
Amplifier	EM	EM101	060703	10MHz ~ 1GHz	Oct. 15, 2025	Oct. 14, 2026	Radiation (10CH01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 03, 2025	May 02, 2026	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 16, 2025	May 15, 2026	Radiation (03CH01-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV3044	101437	10kHz ~ 44GHz	Dec. 12, 2025	Dec. 11, 2026	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH01-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH01-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH01-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115G Hz	N.C.R.	N.C.R.	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Pre-Amplifier	EMCI	EMC12630SE	980383	1GHz ~ 18GHz	Jul. 30, 2025	Jul. 29, 2026	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH5265	20240911-1	1~ 26.5GHz	Sep. 18, 2025	Sep. 17, 2026	Radiation (03CH06-CB)
Signal analyzer	R&S	FSV3044	101667	9kHz~44GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH06-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1GHz ~ 7.4GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH06-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1GHz ~ 8GHz	Sep. 10, 2025	Sep. 09, 2026	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115G Hz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2025	May 26, 2026	Conducted (TH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Switch	SPTCB	SP-SWI	SWI-01	1~18 GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Jul. 04, 2025	Jul. 03, 2026	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	MY45100745	50MHz~18GHz	Jul. 04, 2025	Jul. 03, 2026	Conducted (TH01-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-01	1 ~ 18GHz	Sep. 10, 2025	Sep. 09, 2026	Conducted (TH01-CB)
Band Rejector	MTJ	6G Band Rejector	BRJ-02	1~ 18GHz	Sep. 10, 2025	Sep. 09, 2026	Conducted (TH01-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz~7.115G Hz	N.C.R.	N.C.R.	Conducted (TH01-CB)
Spectrum Analyzer	R&S	FSV40	101025	9kHz ~ 40GHz	Nov. 12, 2025	Nov. 11, 2026	Conduction (DF02-CB)
Signal generator	R&S	SMB100A	181239	1MHz-40GHz	Jan. 21, 2026	Jan. 20, 2027	Conduction (DF02-CB)
Vector Signal Generator	R&S	SMM100A	101894	100kHz ~ 7.5GHz	Nov. 04, 2025	Nov. 03, 2026	Conduction (DF02-CB)
RF Cable-high	Woken	RG402	Cable-60	1~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conduction (DF02-CB)
RF Cable-high	Woken	RG402	Cable-61	1~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conduction (DF02-CB)
RF Cable-high	Woken	RG402	Cable-63	1~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conduction (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -05	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conduction (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -06	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conduction (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -07	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conduction (DF02-CB)
RF Power Divider	STI	2 Way	DV-8G -08	1 ~ 8GHz	Sep. 20, 2025	Sep. 19, 2026	Conduction (DF02-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	154.5k	48.33	65.75	-17.42	Neutral

Mode 1

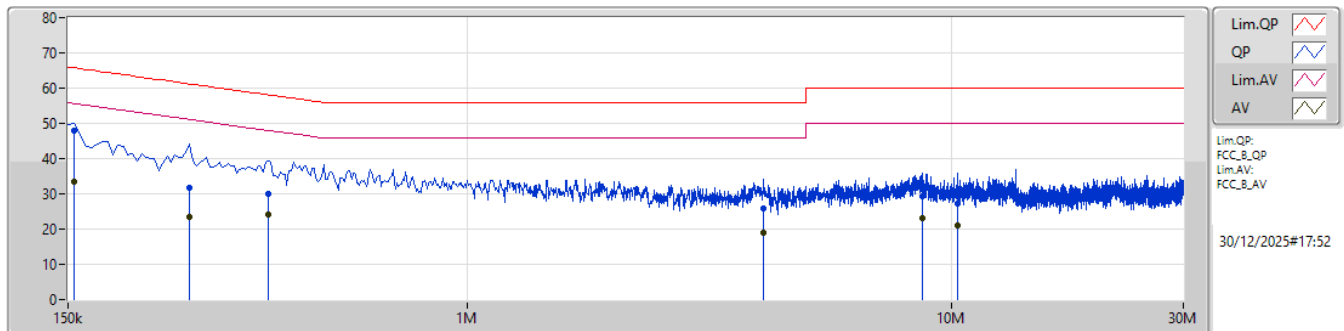

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	PA (dB)	AT (dB)				
QP	154.5k	47.95	65.75	-17.80	10.00	Line	"Worst"	37.95	0.05	0.09	-	9.86				
AV	154.5k	33.43	55.75	-22.32	10.00	Line	-	23.43	0.05	0.09	-	9.86				
QP	267k	31.80	61.20	-29.40	9.97	Line	-	21.83	0.06	0.09	-	9.82				
AV	267k	23.45	51.20	-27.75	9.97	Line	-	13.48	0.06	0.09	-	9.82				
QP	388.5k	29.93	58.10	-28.17	10.06	Line	-	19.87	0.05	0.12	-	9.89				
AV	388.5k	24.25	48.10	-23.85	10.06	Line	-	14.19	0.05	0.12	-	9.89				
QP	4.083M	25.73	56.00	-30.27	10.04	Line	-	15.69	0.13	0.14	-	9.77				
AV	4.083M	19.01	46.00	-26.99	10.04	Line	-	8.97	0.13	0.14	-	9.77				
QP	8.7M	29.43	60.00	-30.57	10.52	Line	-	18.91	0.21	0.25	-	10.06				
AV	8.7M	22.95	50.00	-27.05	10.52	Line	-	12.43	0.21	0.25	-	10.06				
QP	10.271M	27.38	60.00	-32.62	10.64	Line	-	16.74	0.23	0.28	-	10.13				
AV	10.271M	21.02	50.00	-28.98	10.64	Line	-	10.38	0.23	0.28	-	10.13				

Mode 1

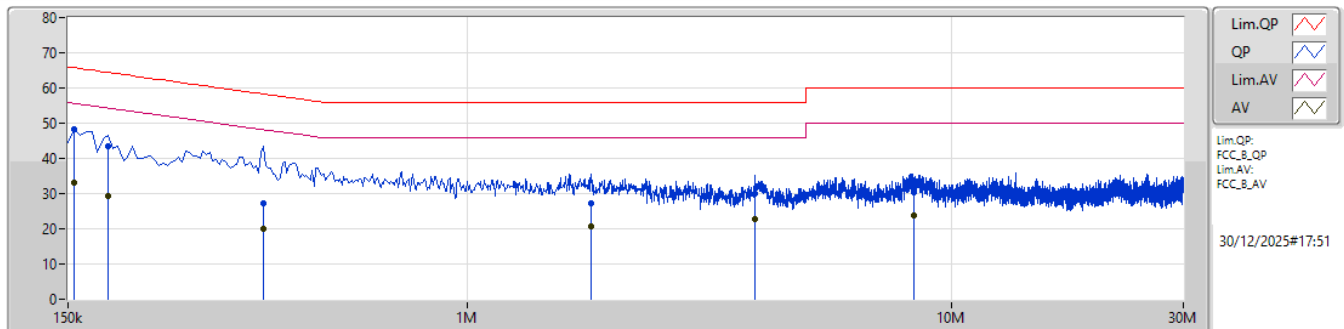

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	PA (dB)	AT (dB)				
QP	154.5k	48.33	65.75	-17.42	10.03	Neutral	"Worst"	38.30	0.08	0.09	-	9.86				
AV	154.5k	32.98	55.75	-22.77	10.03	Neutral	-	22.95	0.08	0.09	-	9.86				
QP	181.5k	43.50	64.41	-20.91	9.95	Neutral	-	33.55	0.08	0.07	-	9.80				
AV	181.5k	29.23	54.41	-25.18	9.95	Neutral	-	19.28	0.08	0.07	-	9.80				
QP	379.5k	27.35	58.29	-30.94	10.09	Neutral	-	17.26	0.08	0.12	-	9.89				
AV	379.5k	19.90	48.29	-28.39	10.09	Neutral	-	9.81	0.08	0.12	-	9.89				
QP	1.797M	27.37	56.00	-28.63	10.01	Neutral	-	17.36	0.11	0.14	-	9.76				
AV	1.797M	20.63	46.00	-25.37	10.01	Neutral	-	10.62	0.11	0.14	-	9.76				
QP	3.93M	29.83	56.00	-26.17	10.06	Neutral	-	19.77	0.16	0.14	-	9.76				
AV	3.93M	22.84	46.00	-23.16	10.06	Neutral	-	12.78	0.16	0.14	-	9.76				
QP	8.318M	30.29	60.00	-29.71	10.52	Neutral	-	19.77	0.24	0.24	-	10.04				
AV	8.318M	23.89	50.00	-26.11	10.52	Neutral	-	13.37	0.24	0.24	-	10.04				

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.605M	19.121M	19M1D1D	22.055M	19.074M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	44.33M	38.09M	38M1D1D	42.35M	37.946M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	88.44M	77.869M	77M9D1D	84.48M	77.361M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	175.12M	157.221M	157MD1D	170.28M	156.431M
802.11be EHT320-BF_Nss1,(MCS0)_2TX	344.96M	316.874M	317MD1D	328.24M	314.667M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	23.43M	19.101M	19M1D1D	22.055M	19.052M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	45.1M	38.102M	38M1D1D	42.46M	37.957M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	88.88M	77.723M	77M7D1D	84.48M	77.568M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	176.44M	157.368M	157MD1D	173.8M	156.682M
802.11be EHT320-BF_Nss1,(MCS0)_2TX	337.92M	316.985M	317MD1D	335.28M	316.319M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.935M	19.127M	19M1D1D	21.395M	19.02M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	43.78M	38.069M	38M1D1D	42.9M	37.958M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	88.44M	77.811M	77M8D1D	82.06M	77.57M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	175.12M	157.302M	157MD1D	170.28M	156.653M
802.11be EHT320-BF_Nss1,(MCS0)_2TX	342.32M	316.419M	316MD1D	337.04M	315.688M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	23.595M	19.163M	19M2D1D	21.725M	19.063M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	44M	38.121M	38M1D1D	42.13M	37.928M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	88.44M	77.773M	77M8D1D	83.38M	77.653M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	169.84M	156.914M	157MD1D	168.96M	156.877M

Max-N dB = Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	320M	22.275M	19.077M	22.605M	19.074M
6195MHz	Pass	320M	22.055M	19.109M	22.275M	19.091M
6415MHz	Pass	320M	22.22M	19.092M	22.22M	19.121M
6435MHz	Pass	320M	23.43M	19.091M	22.715M	19.08M
6475MHz	Pass	320M	22.055M	19.058M	22.33M	19.052M
6515MHz	Pass	320M	22.715M	19.057M	22.22M	19.101M
6535MHz	Pass	320M	22.11M	19.02M	22.11M	19.127M
6695MHz	Pass	320M	22.935M	19.086M	21.505M	19.099M
6875MHz	Pass	320M	21.395M	19.053M	21.945M	19.026M
6895MHz	Pass	320M	21.725M	19.063M	23.595M	19.099M
6995MHz	Pass	320M	22.165M	19.143M	22.77M	19.163M
7095MHz	Pass	320M	22.22M	19.102M	22.605M	19.094M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	320M	42.46M	37.946M	42.9M	38.021M
6205MHz	Pass	320M	44.33M	37.993M	42.79M	37.998M
6405MHz	Pass	320M	42.35M	38.09M	44M	37.95M
6445MHz	Pass	320M	42.79M	37.983M	43.67M	38.016M
6485MHz	Pass	320M	45.1M	37.957M	44.33M	38.051M
6525MHz	Pass	320M	42.46M	38.078M	44M	38.102M
6565MHz	Pass	320M	42.9M	38.069M	43.56M	38.032M
6685MHz	Pass	320M	43.23M	37.958M	43.78M	38.002M
6885MHz	Pass	320M	43.12M	38.02M	43.23M	37.996M
6925MHz	Pass	320M	43.78M	38.053M	43.67M	38.053M
7005MHz	Pass	320M	42.68M	37.95M	43.34M	37.997M
7085MHz	Pass	320M	42.13M	38.121M	44M	37.928M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	320M	88.44M	77.61M	86.46M	77.533M
6225MHz	Pass	320M	85.14M	77.869M	84.48M	77.635M
6385MHz	Pass	320M	88.44M	77.722M	85.8M	77.361M
6465MHz	Pass	320M	86.9M	77.712M	84.48M	77.72M
6545MHz	Pass	320M	88.88M	77.723M	85.36M	77.568M
6625MHz	Pass	320M	82.06M	77.753M	88.44M	77.732M
6705MHz	Pass	320M	85.14M	77.741M	88M	77.609M
6785MHz	Pass	320M	88.44M	77.811M	87.12M	77.57M
6865MHz	Pass	320M	83.16M	77.706M	87.12M	77.586M
6945MHz	Pass	320M	88.44M	77.653M	84.04M	77.655M
7025MHz	Pass	320M	85.8M	77.773M	83.38M	77.664M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	320M	174.24M	156.891M	170.28M	156.549M
6185MHz	Pass	320M	170.72M	157.221M	171.6M	156.698M
6345MHz	Pass	320M	172.04M	157.067M	175.12M	156.431M
6505MHz	Pass	320M	176.44M	157.368M	173.8M	156.682M
6665MHz	Pass	320M	173.8M	157.302M	170.28M	157.202M
6825MHz	Pass	320M	175.12M	156.653M	174.24M	156.989M
6985MHz	Pass	320M	168.96M	156.914M	169.84M	156.877M
802.11be EHT320-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	320M	333.52M	315.23M	334.4M	314.667M
6265MHz	Pass	320M	344.08M	316.15M	344.96M	316.294M
6425MHz	Pass	320M	328.24M	316.874M	333.52M	315.489M
6585MHz	Pass	320M	337.92M	316.319M	335.28M	316.985M
6745MHz	Pass	320M	342.32M	316.419M	339.68M	316.056M
6905MHz	Pass	320M	338.8M	316.27M	337.04M	315.688M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX
EBW
5955MHz

21/01/2026

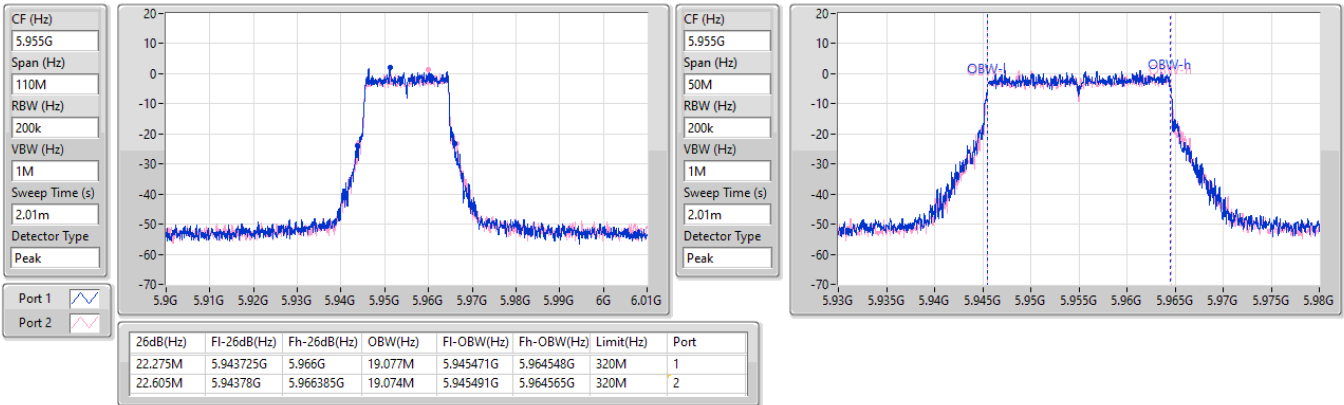

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX
EBW
6195MHz

23/01/2026

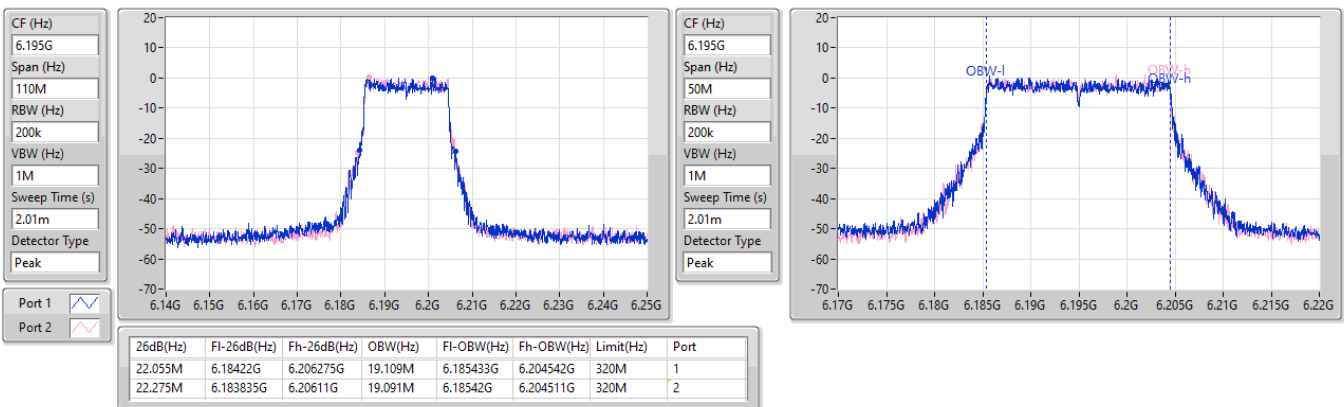


5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX
EBW
6415MHz

23/01/2026

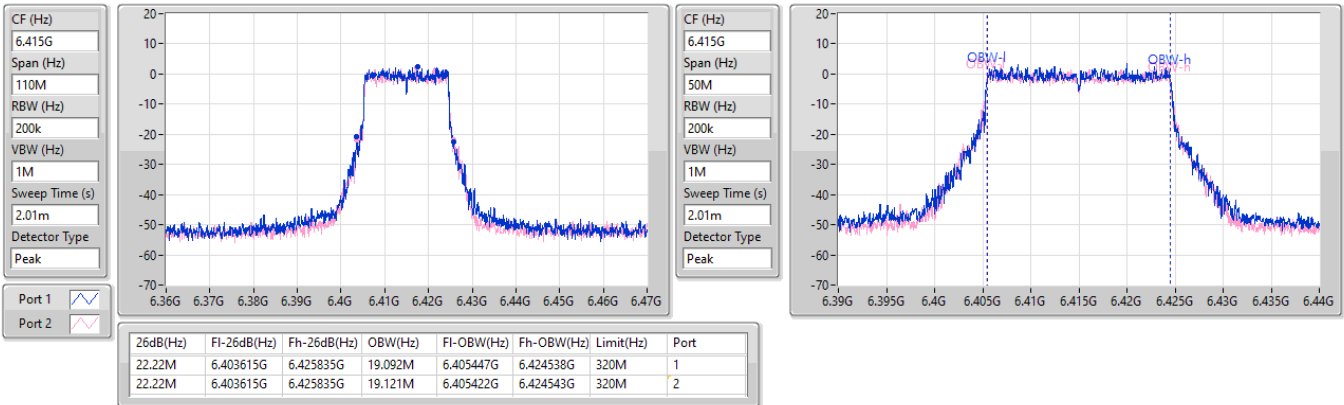

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX
EBW
6435MHz

23/01/2026

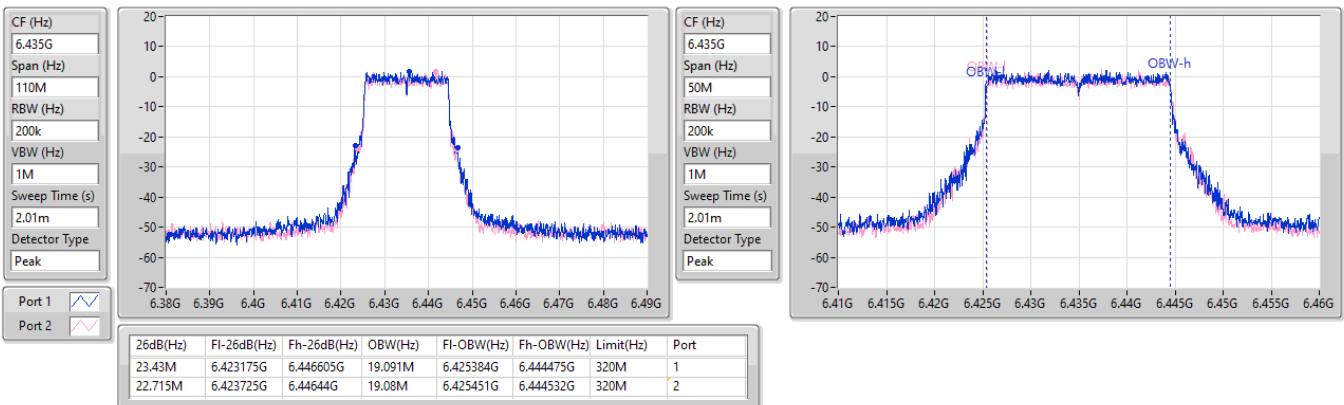


6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX
EBW
6475MHz

23/01/2026

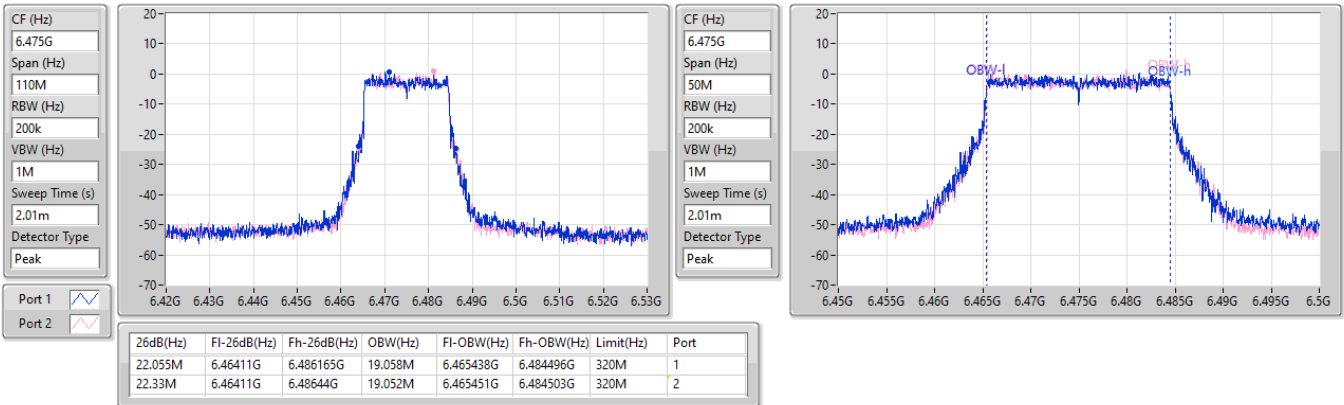

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX
EBW
6515MHz

23/01/2026

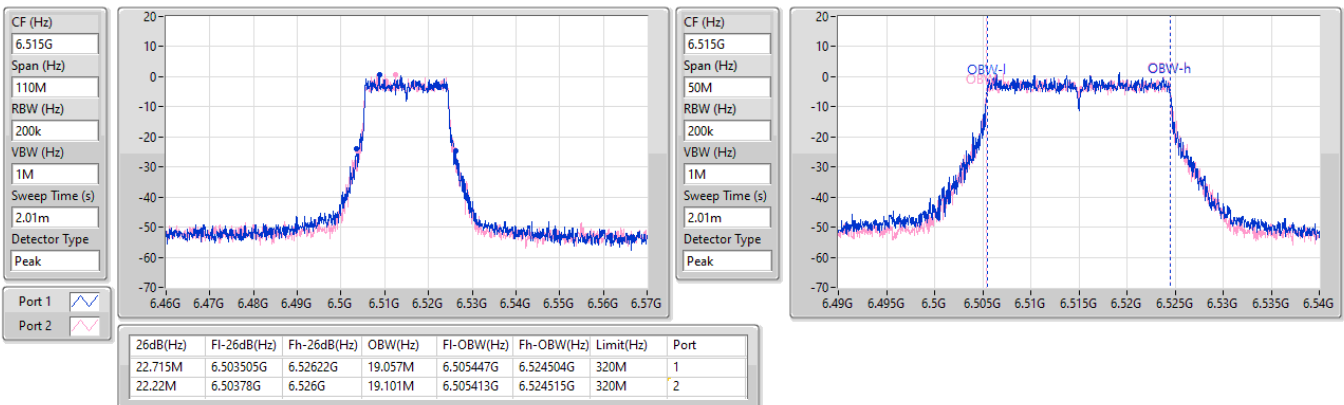


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX
EBW
6535MHz

23/01/2026

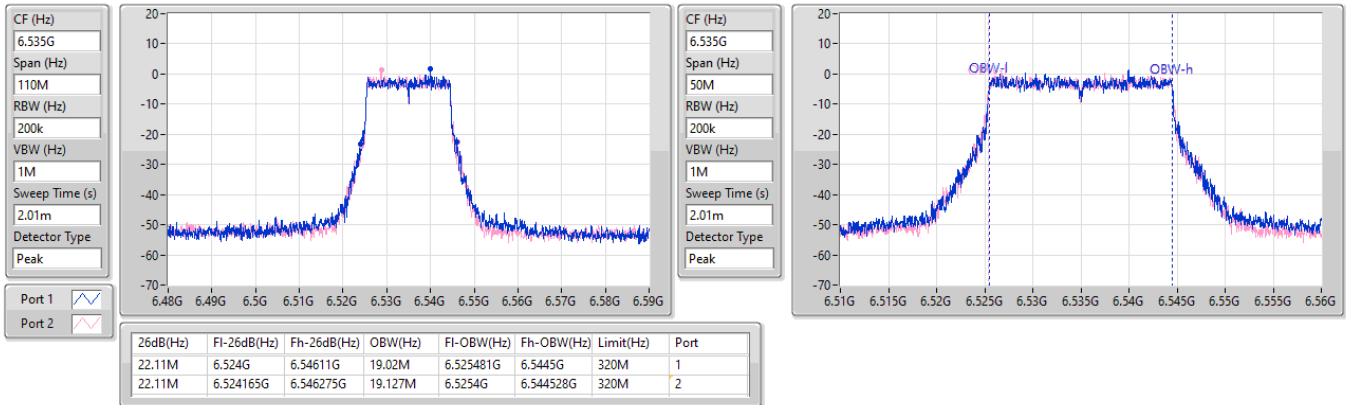
6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX
EBW
6695MHz

23/01/2026

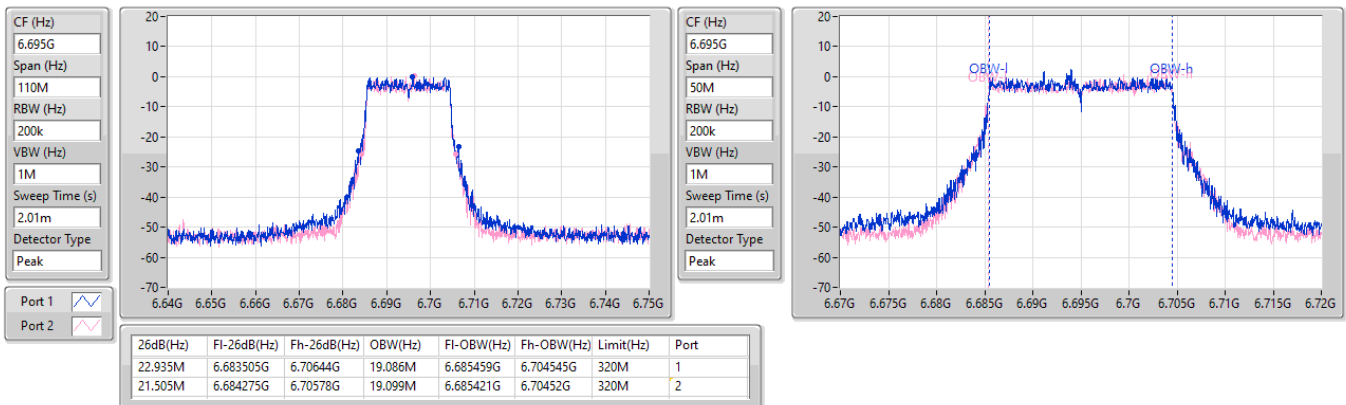


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6875MHz

23/01/2026

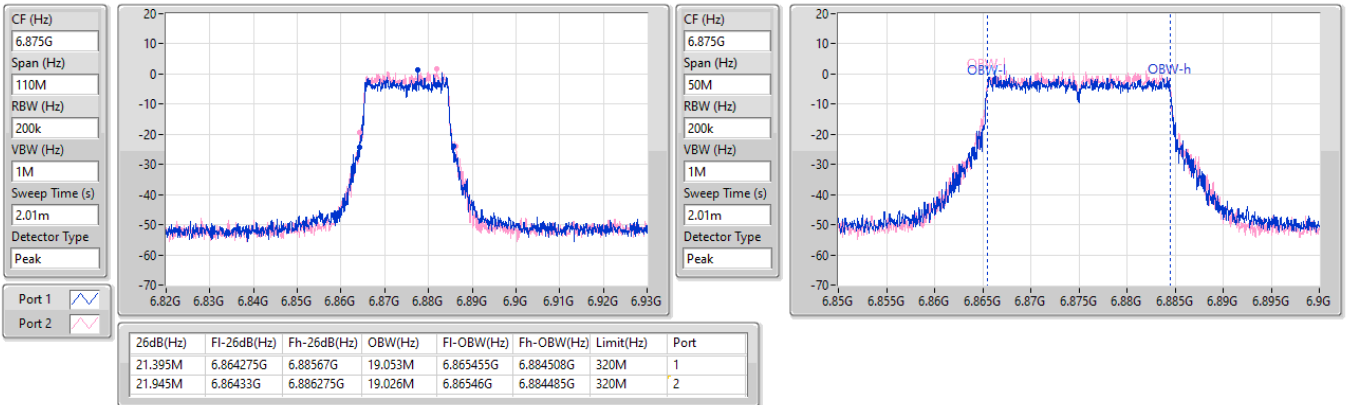


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6895MHz

23/01/2026

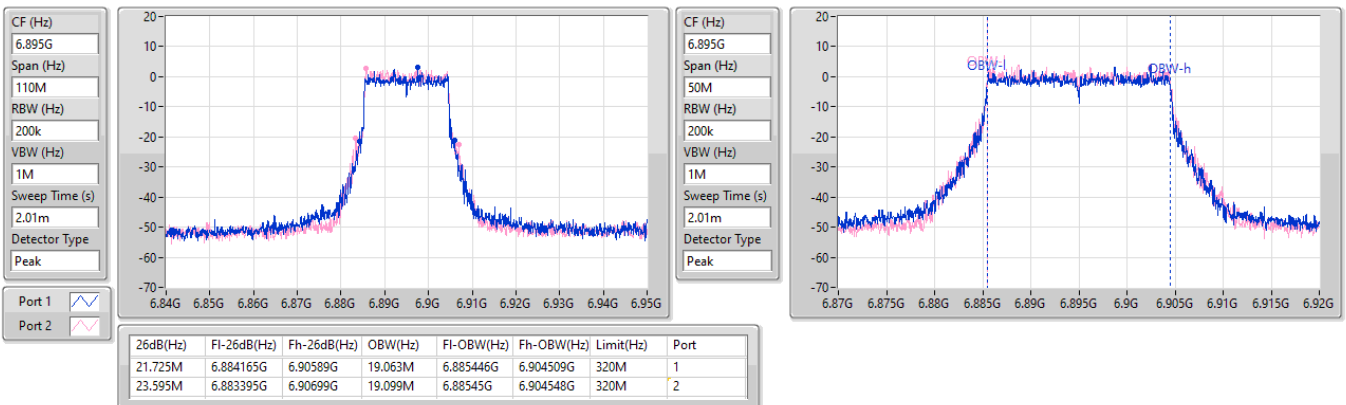


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6995MHz

23/01/2026

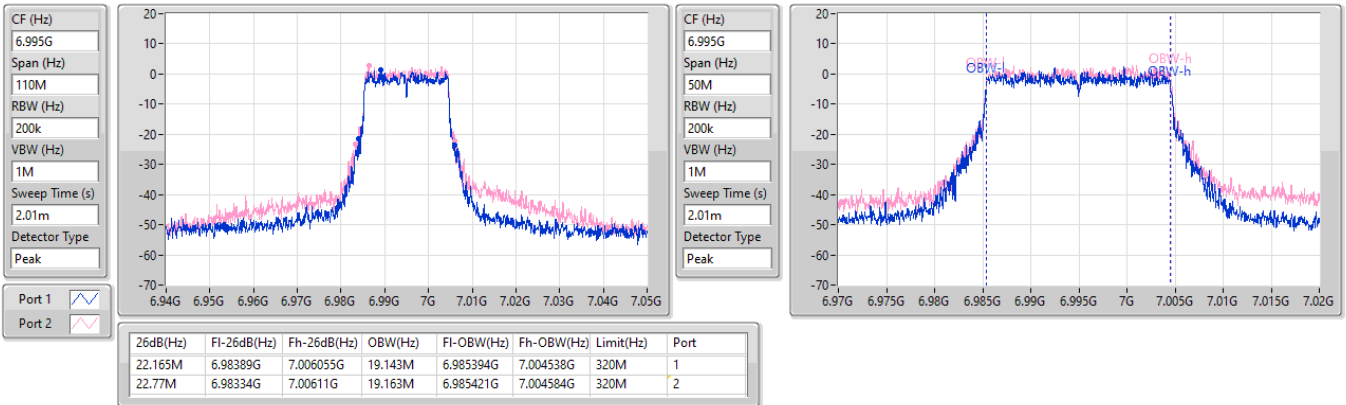


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW



7095MHz

21/01/2026


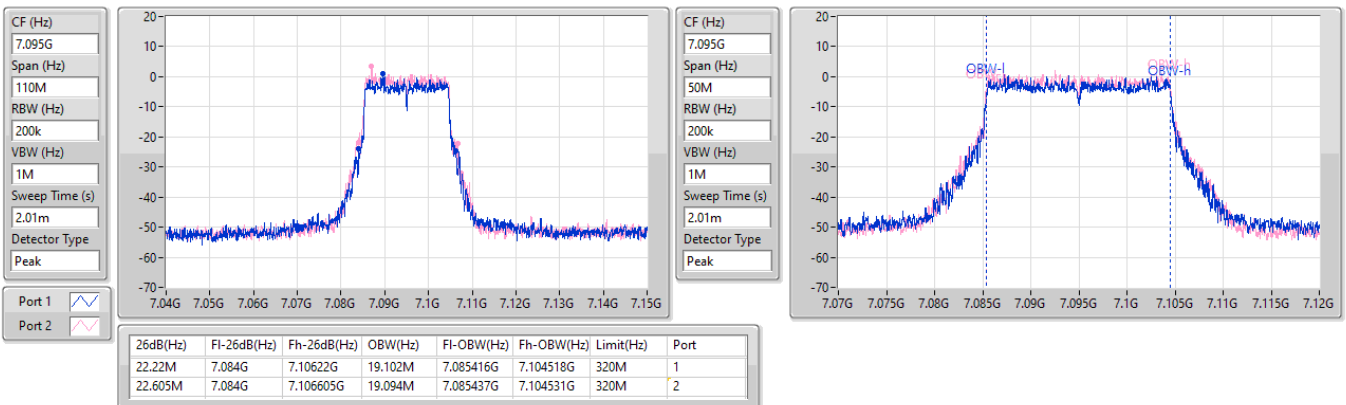


5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
5965MHz

21/01/2026

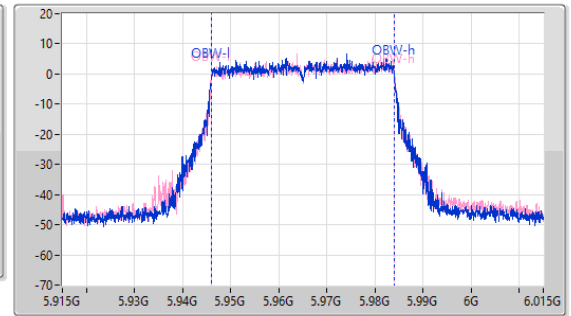
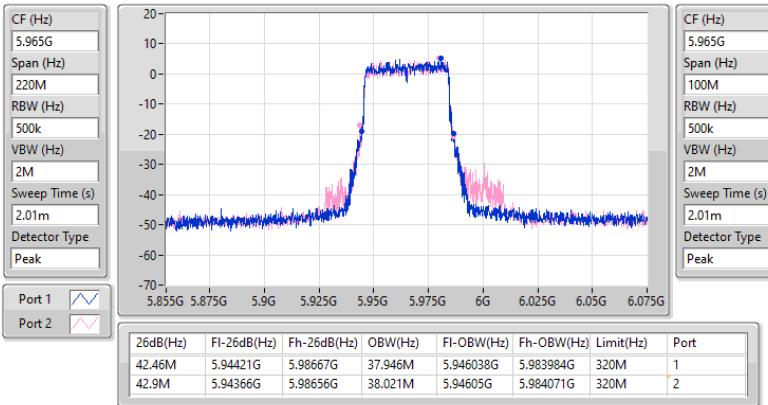

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6205MHz

21/01/2026

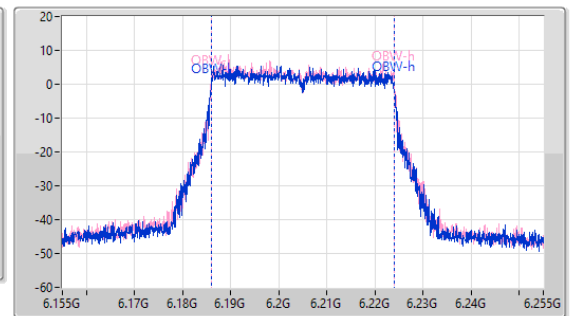
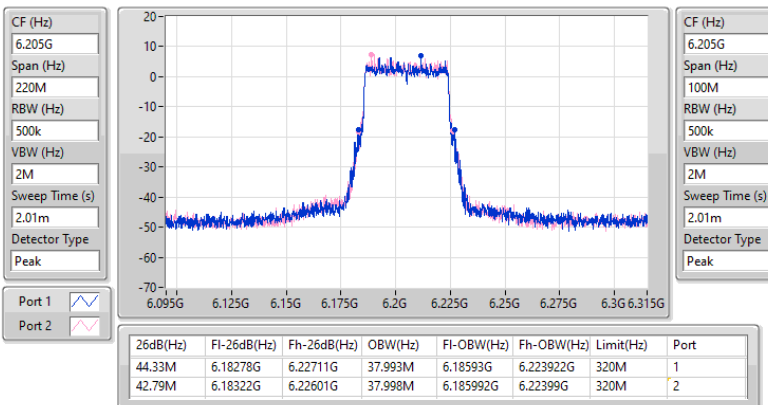


5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6405MHz

21/01/2026

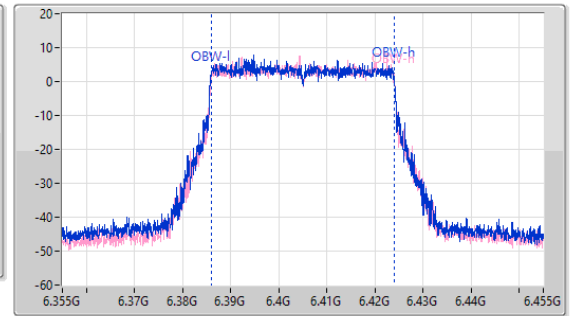
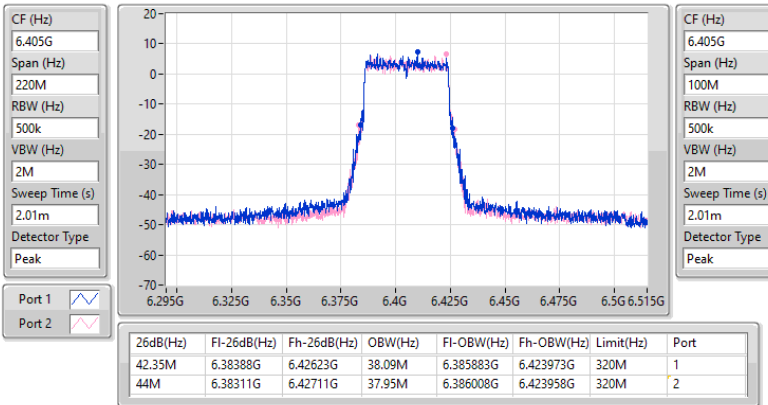

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6445MHz

21/01/2026

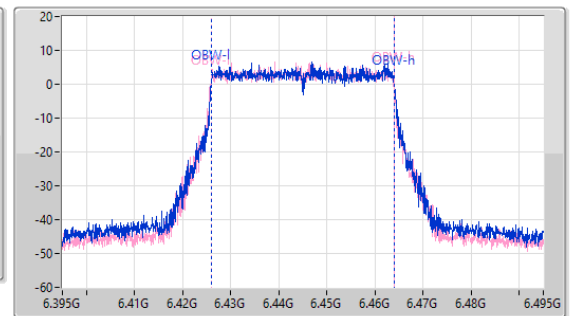
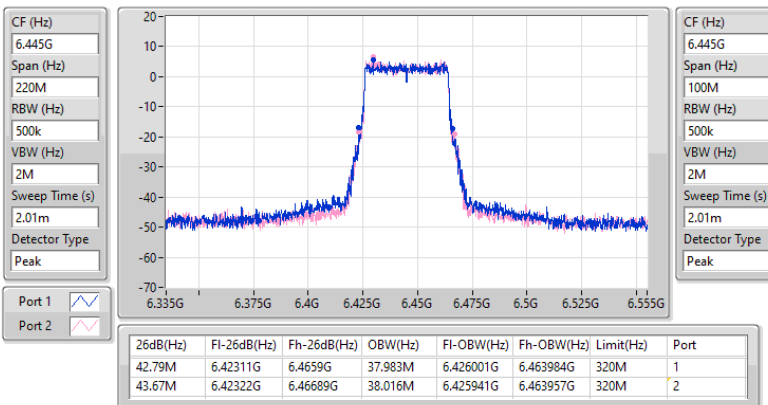


6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6485MHz

23/01/2026

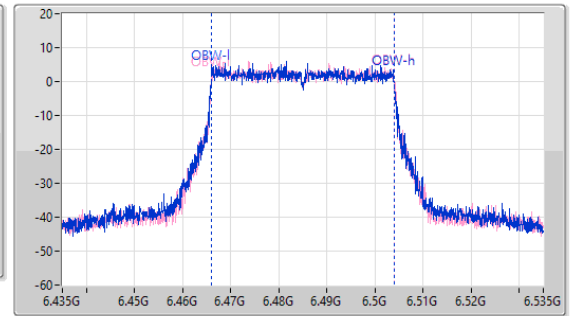
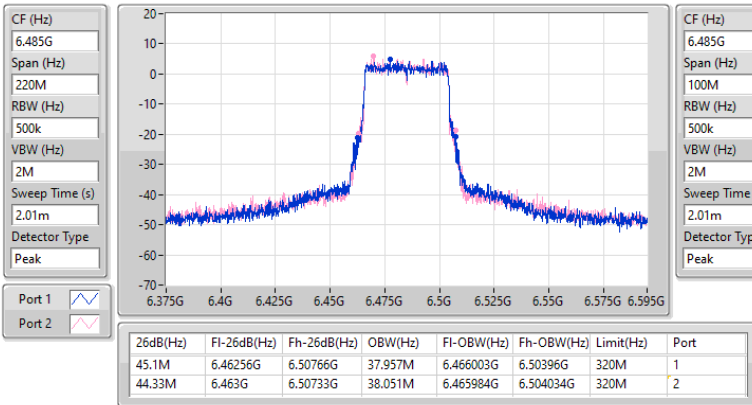

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6525MHz

23/01/2026

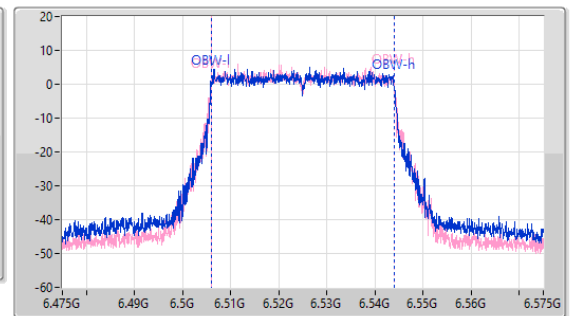
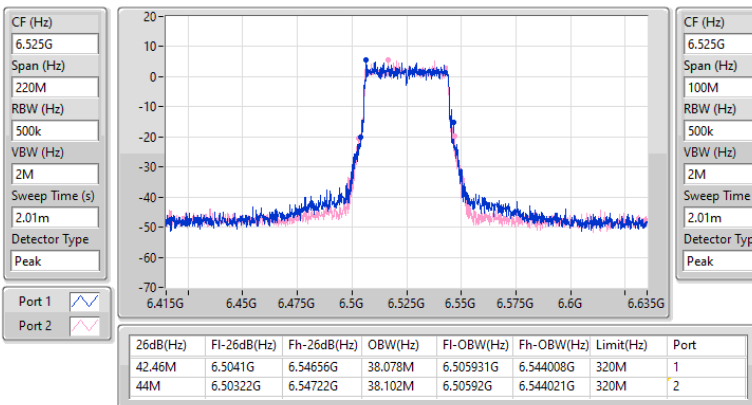


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6565MHz

23/01/2026

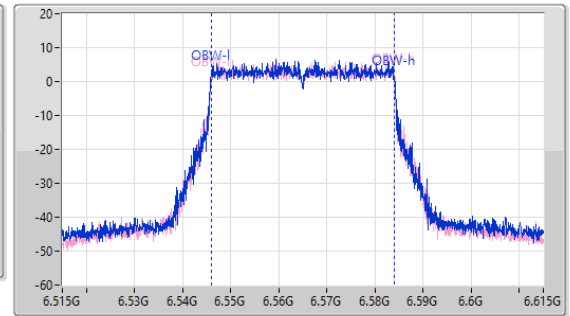
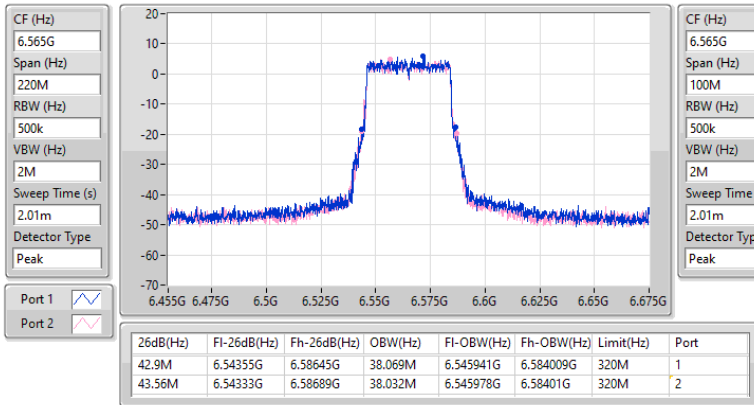

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6685MHz

23/01/2026

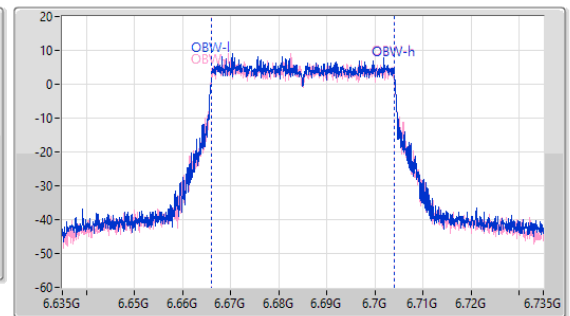
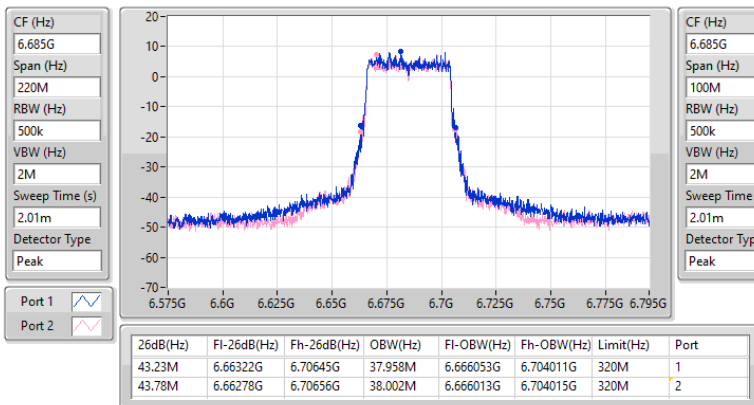


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6885MHz

23/01/2026

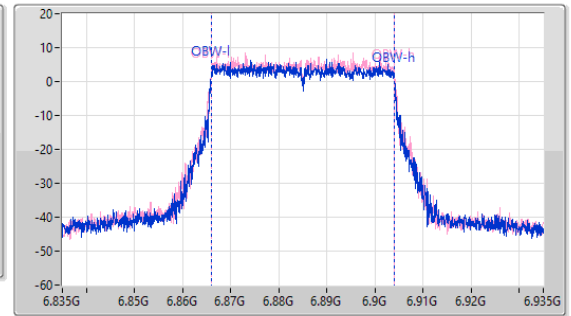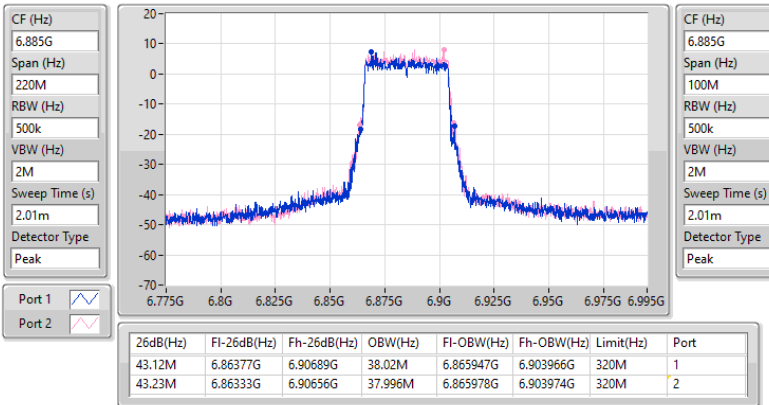

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
6925MHz

23/01/2026

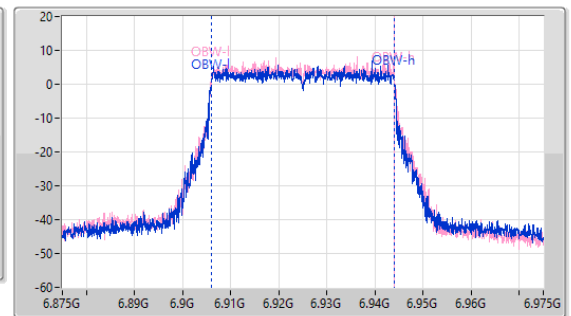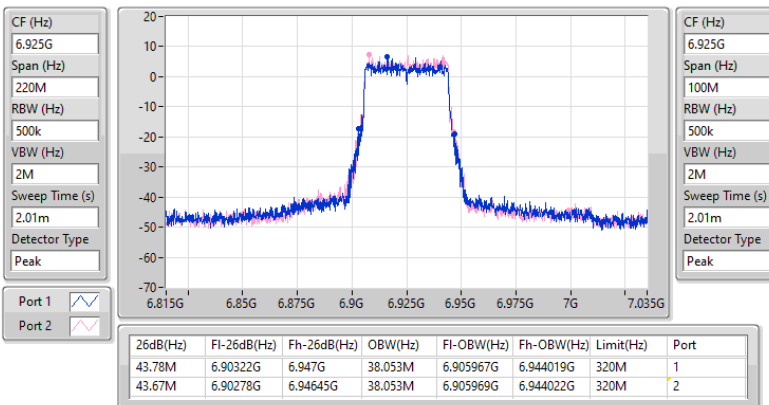


6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
7005MHz

23/01/2026

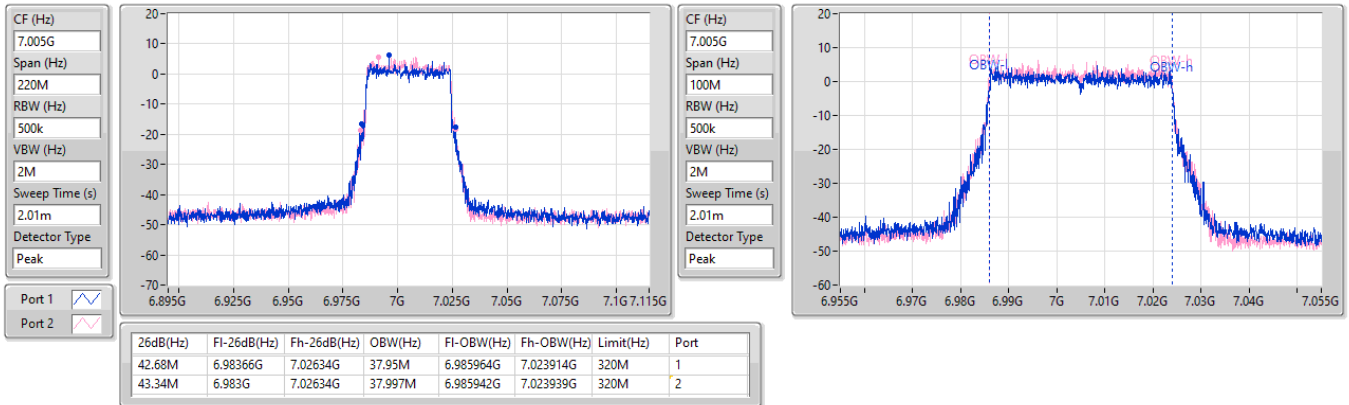

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX
EBW
7085MHz

21/01/2026

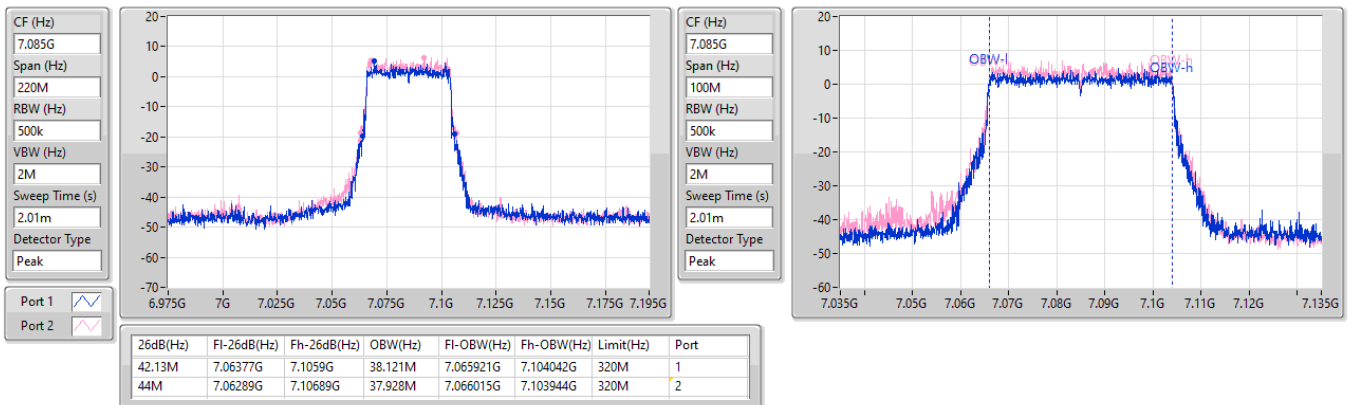


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX
EBW
5985MHz

21/01/2026


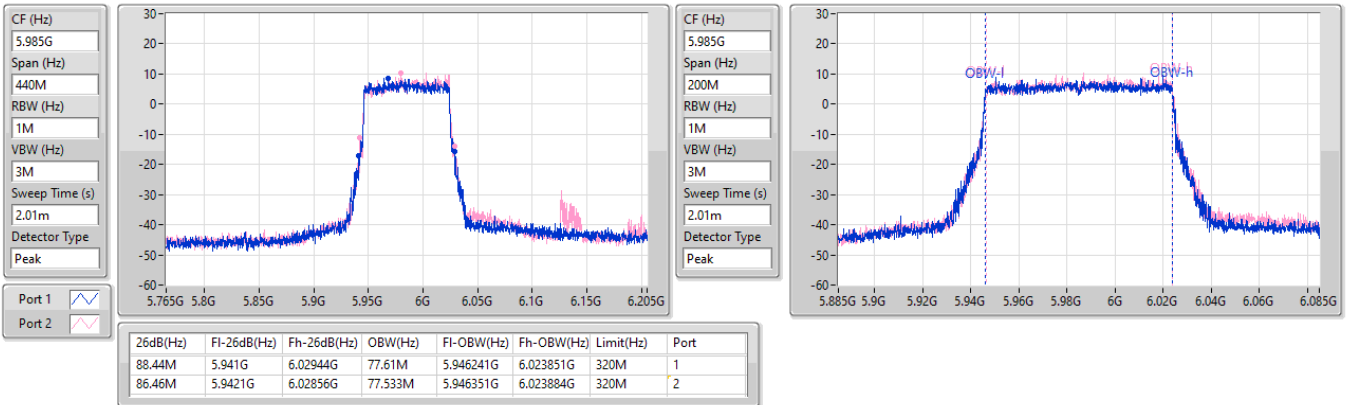

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX
EBW
6225MHz

21/01/2026


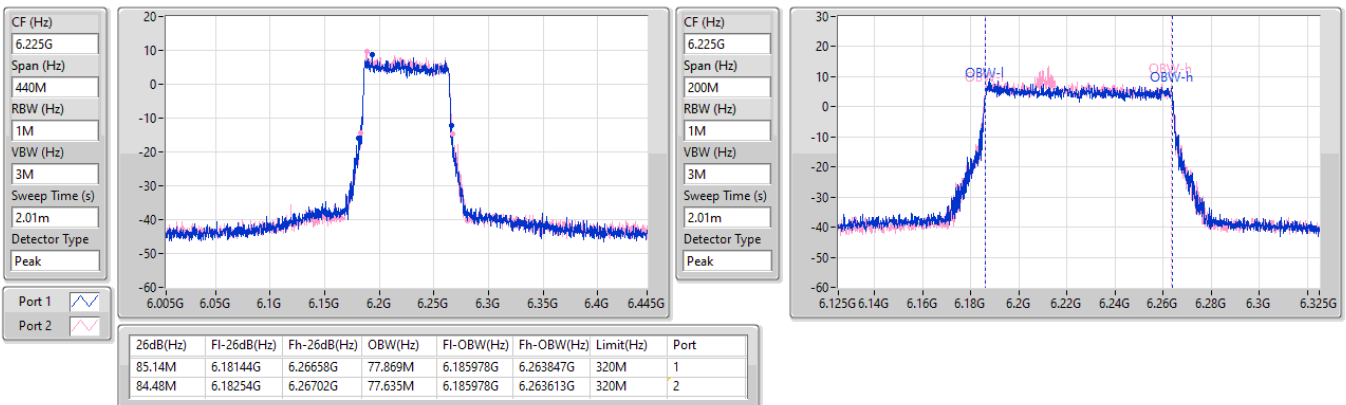


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX
EBW
6385MHz

21/01/2026

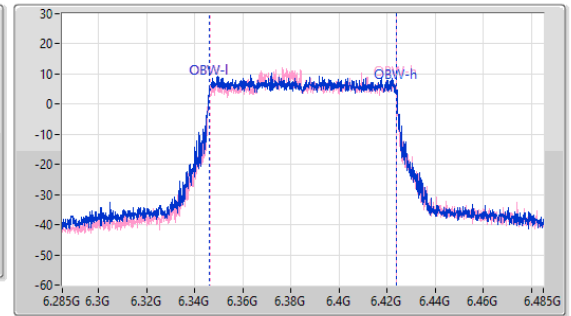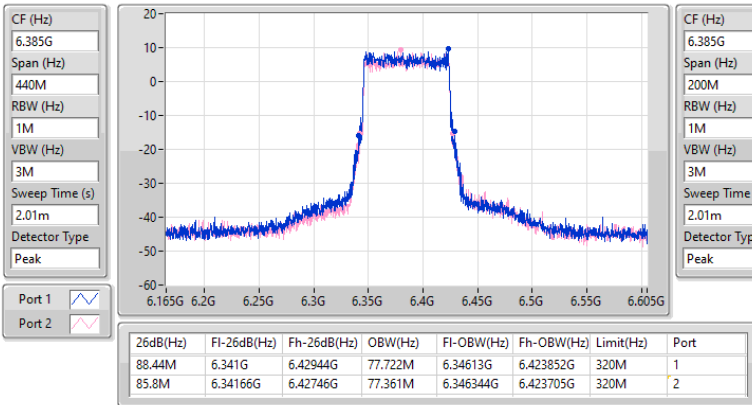
6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX
EBW
6465MHz

21/01/2026

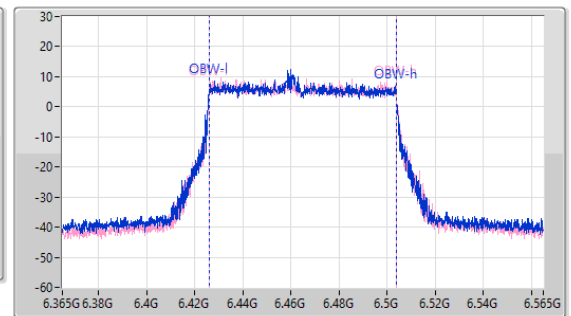
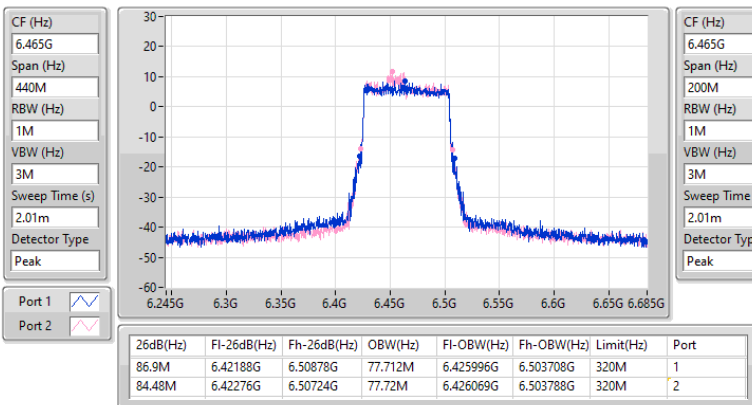


6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6545MHz

21/01/2026

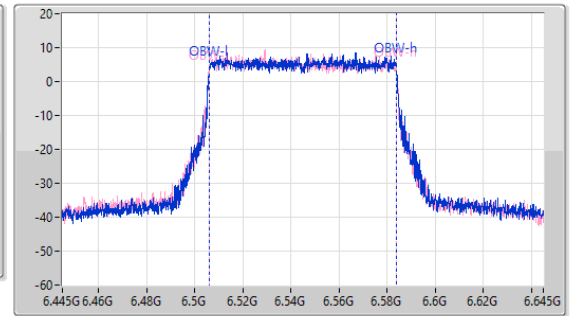
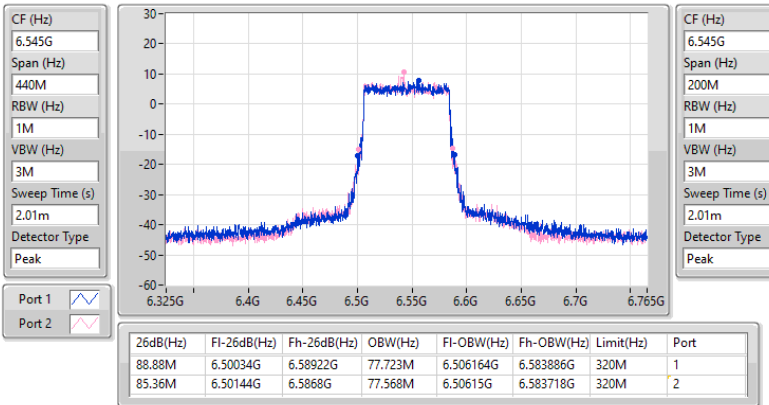


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW



6625MHz

21/01/2026

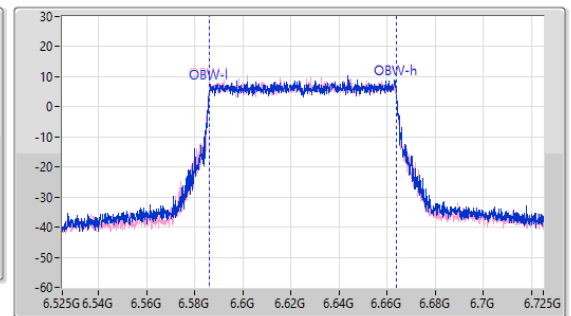
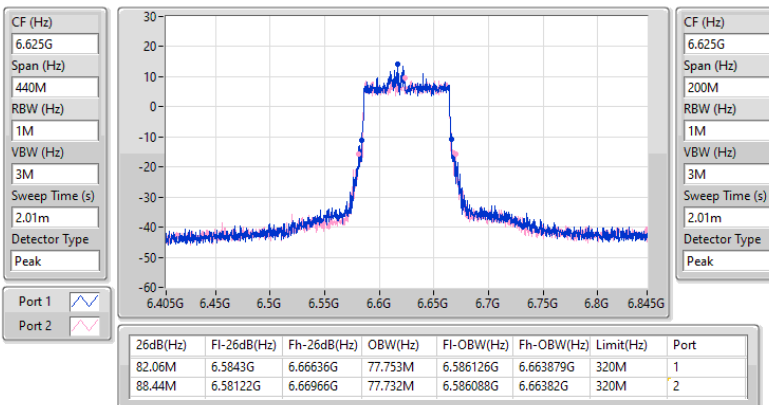


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX
EBW
6705MHz

21/01/2026

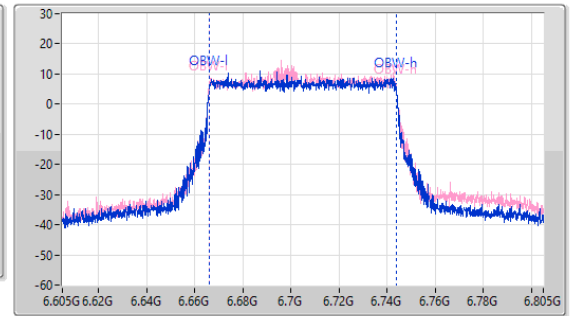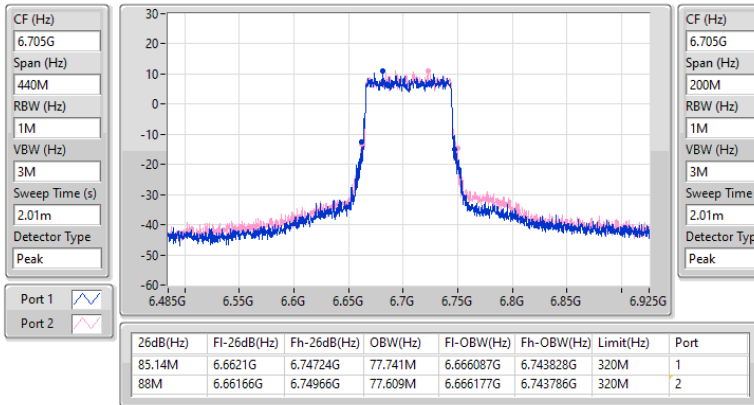

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX
EBW
6785MHz

21/01/2026

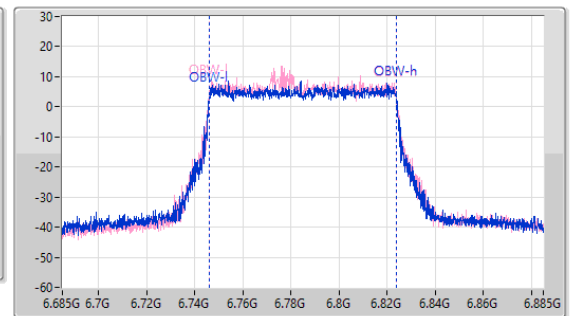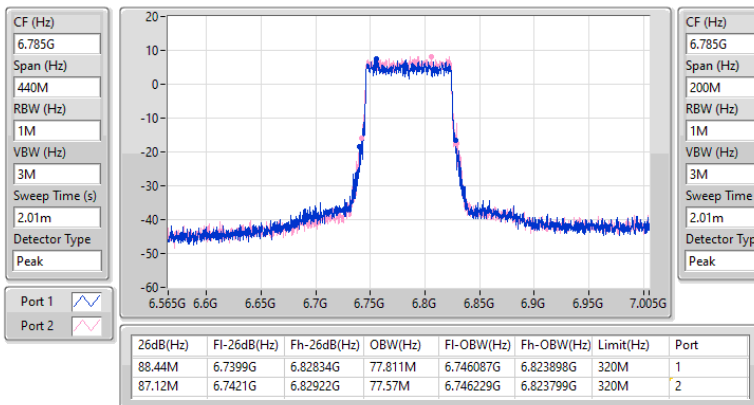


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX
EBW
6865MHz

21/01/2026


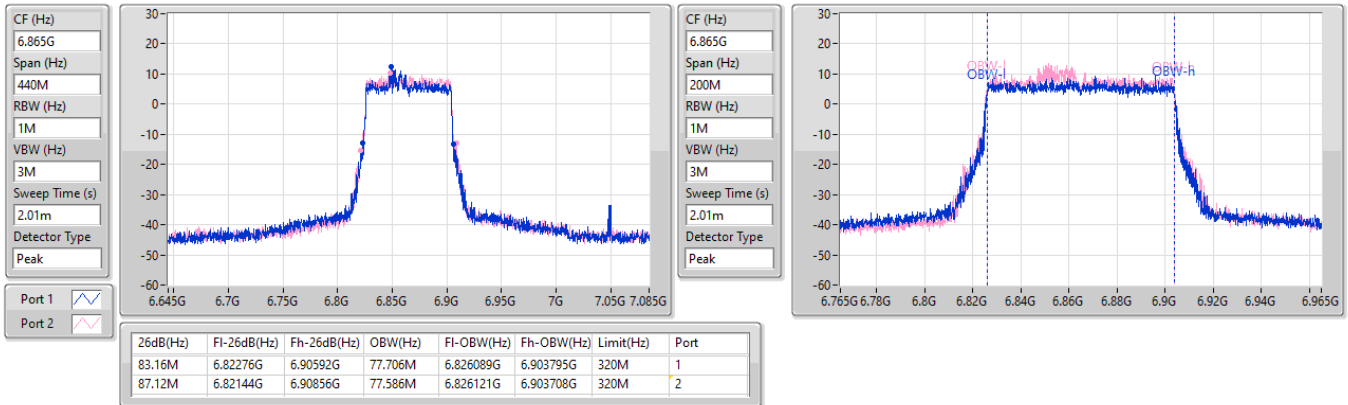

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX
EBW
6945MHz

21/01/2026


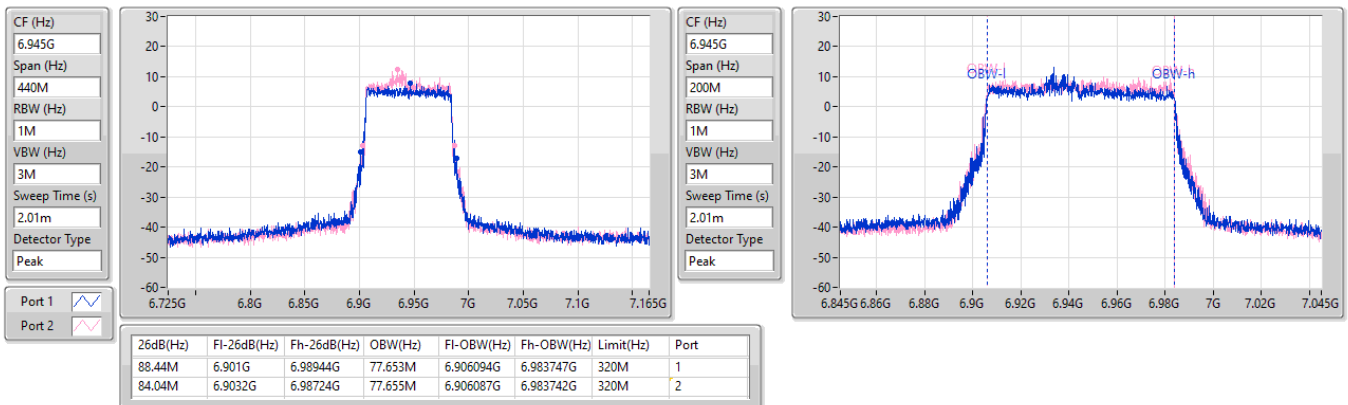


6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX
EBW
7025MHz

21/01/2026

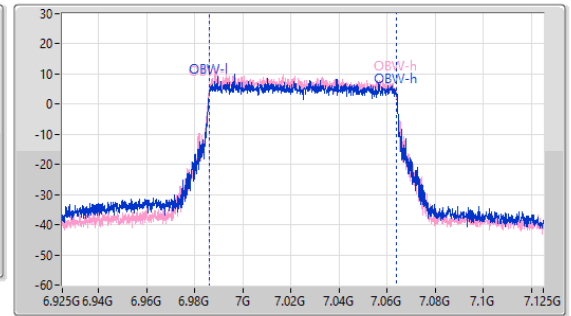
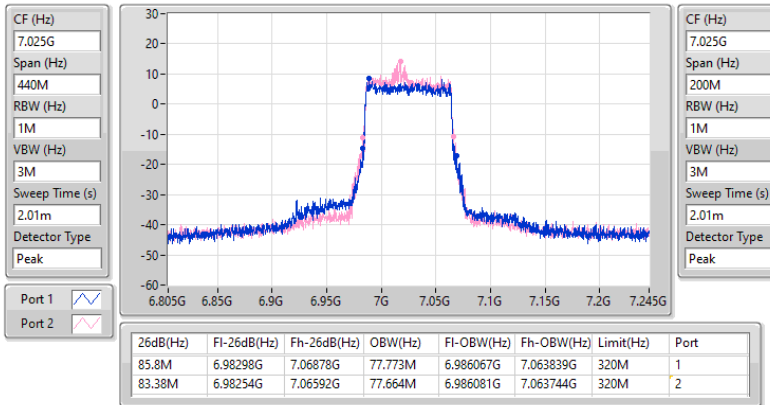

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX
EBW
6025MHz

21/01/2026

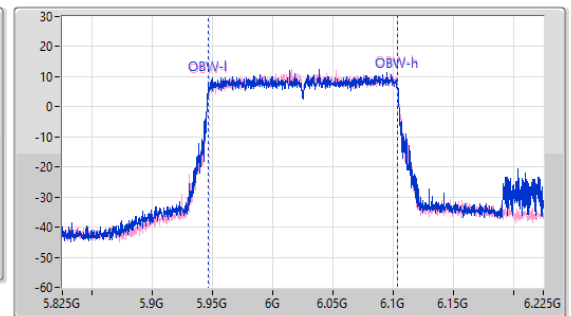
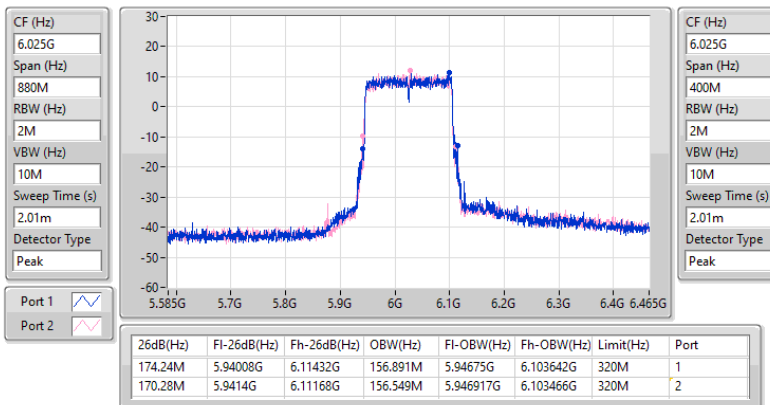


5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX
EBW
6185MHz

21/01/2026

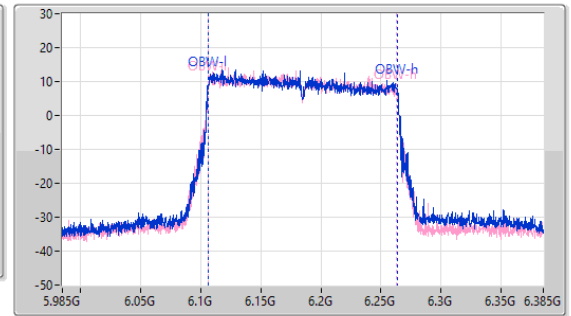
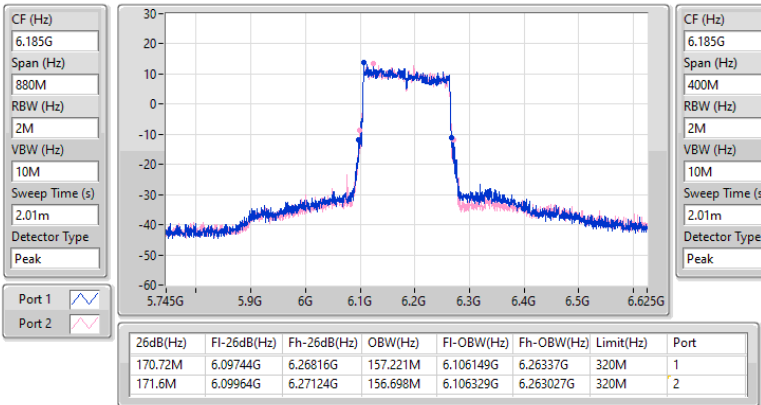

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX
EBW
6345MHz

21/01/2026

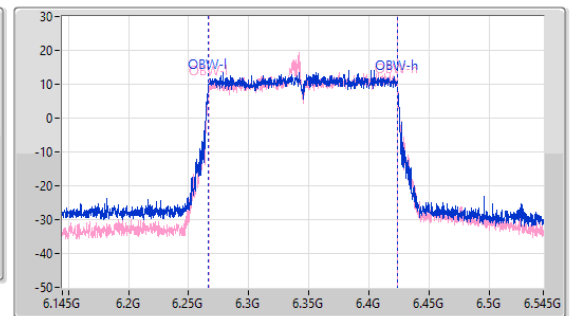
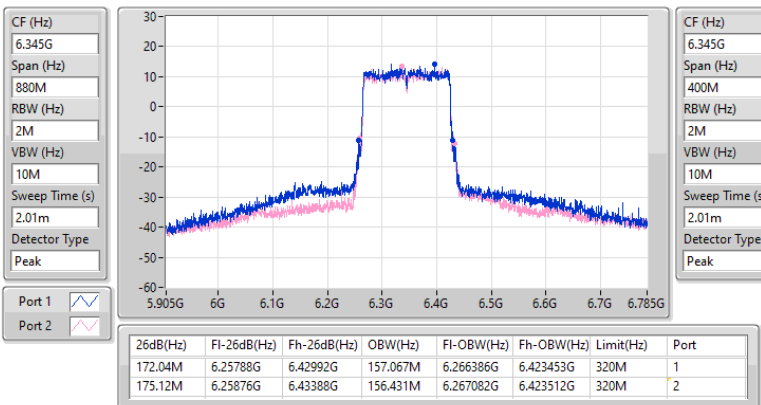


6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX
EBW
6505MHz

21/01/2026

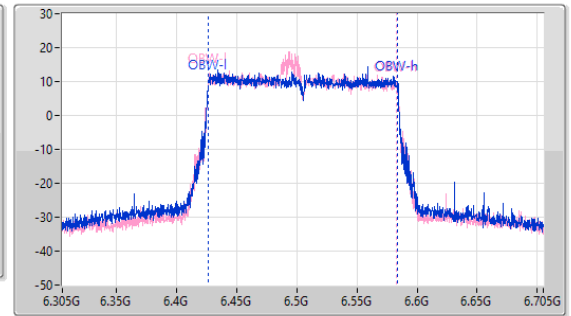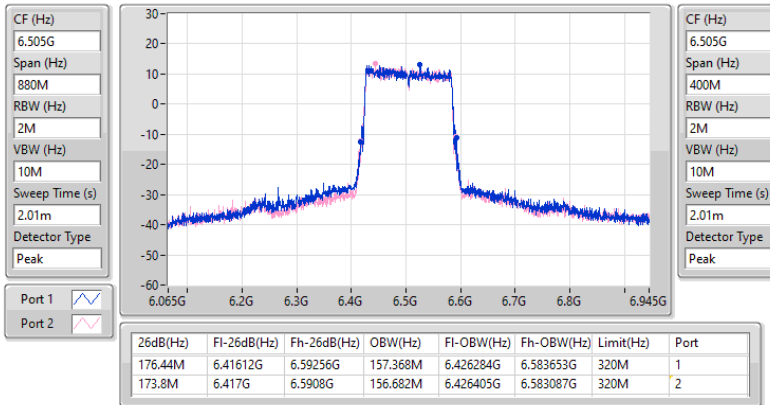
6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX
EBW
6665MHz

21/01/2026

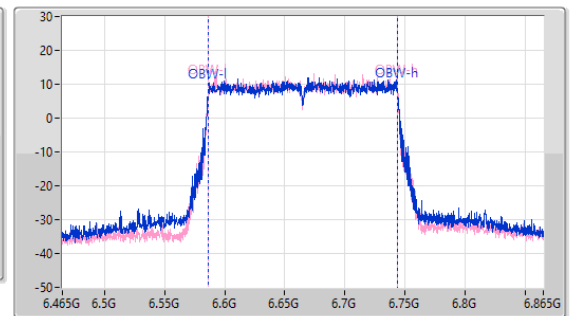
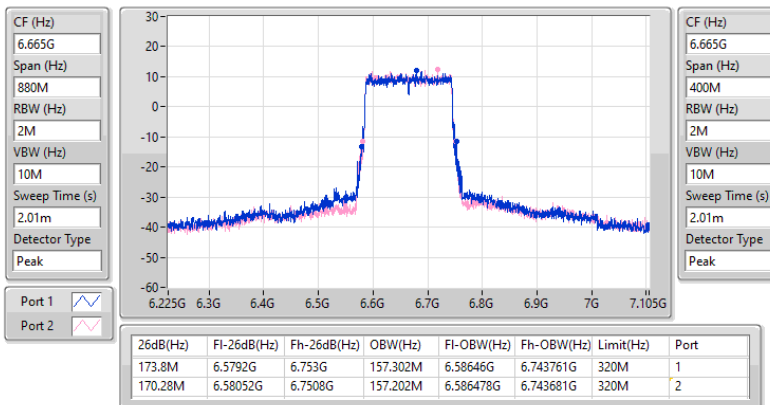


6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW

6825MHz

21/01/2026

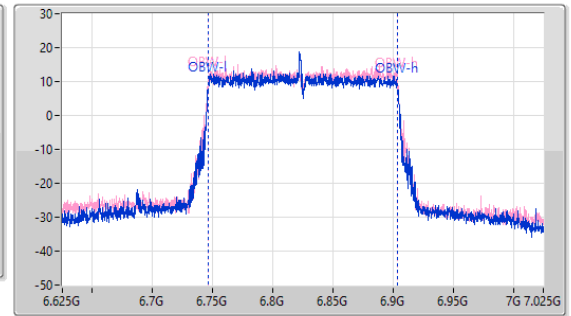
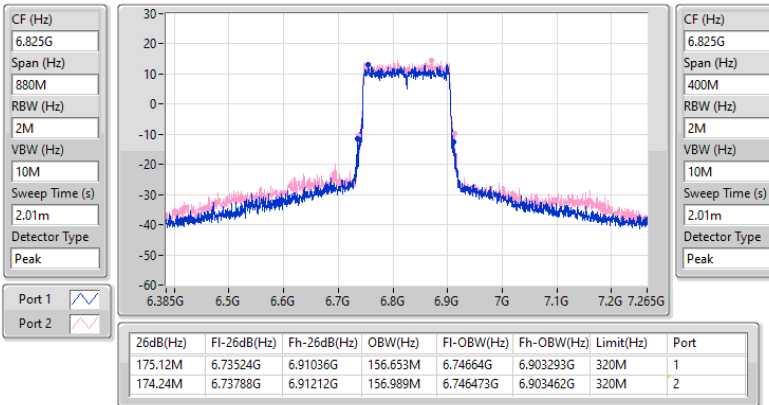


6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW



6985MHz

21/01/2026

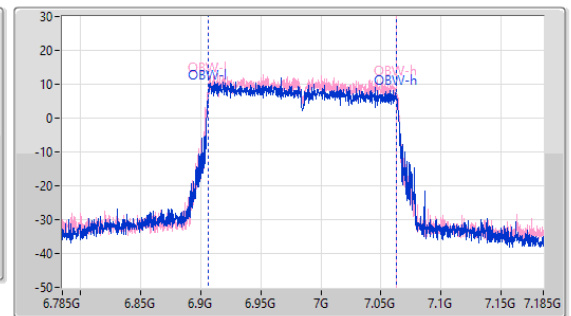
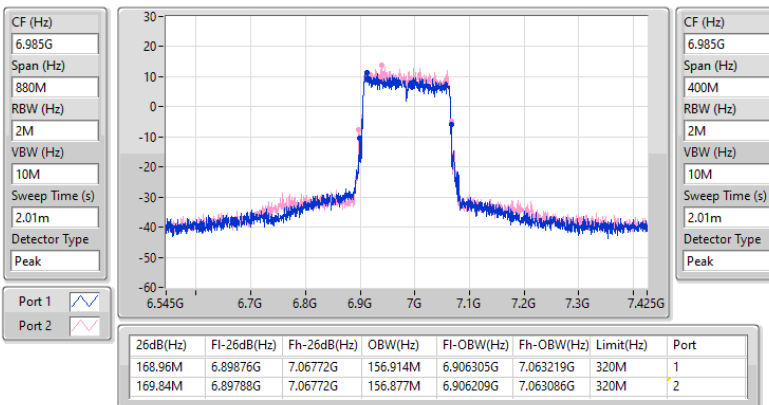


5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX
EBW
6105MHz

21/01/2026

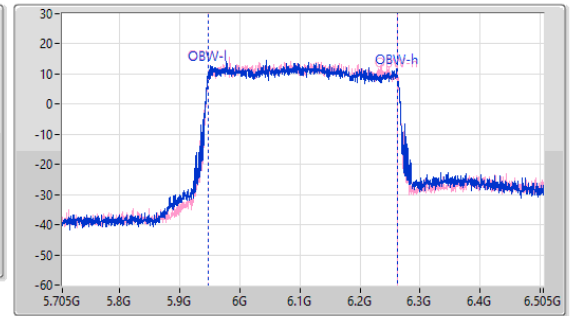
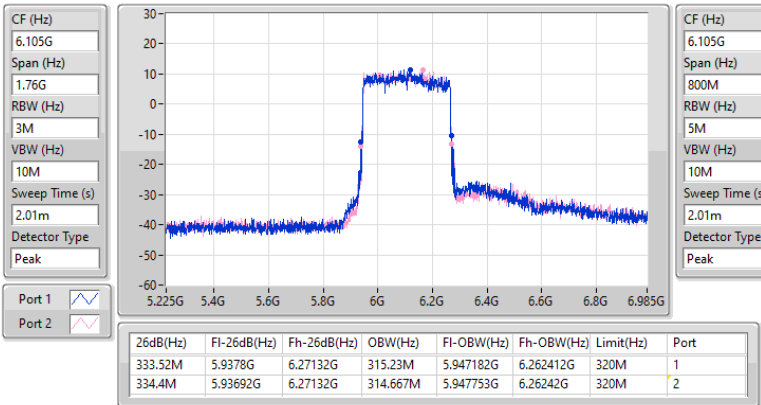

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX
EBW
6265MHz

21/01/2026

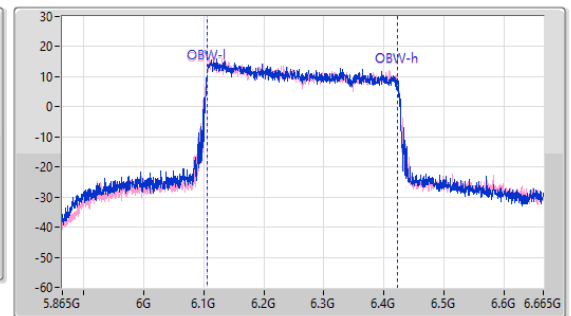
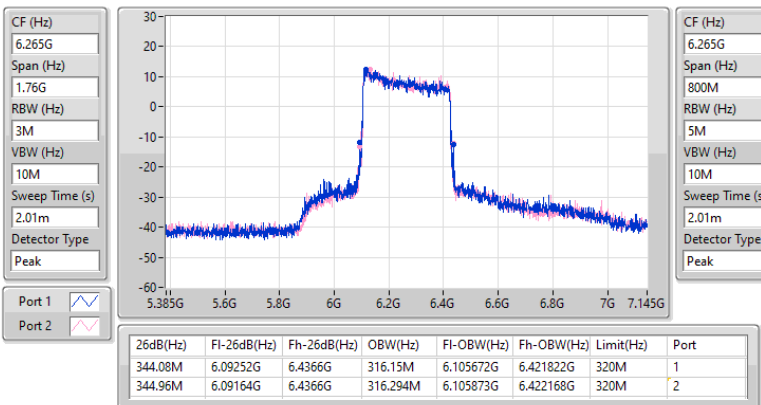


5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX
EBW
6425MHz

21/01/2026

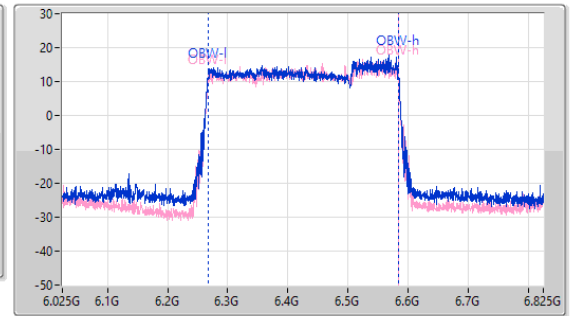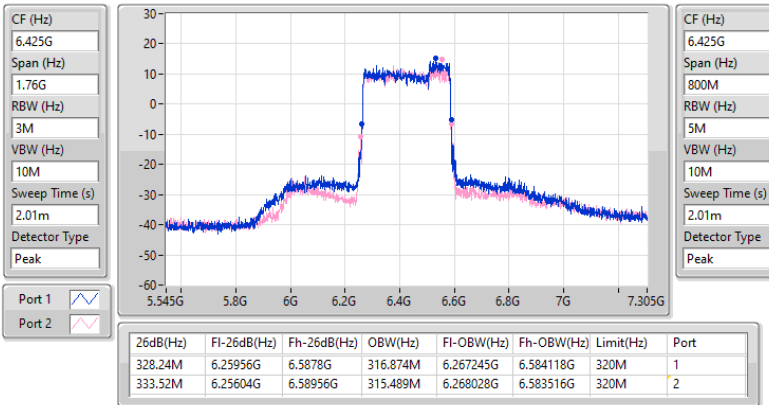
6.425-6.525GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX
EBW
6585MHz

21/01/2026

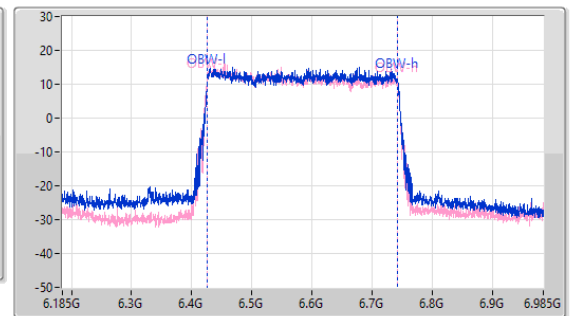
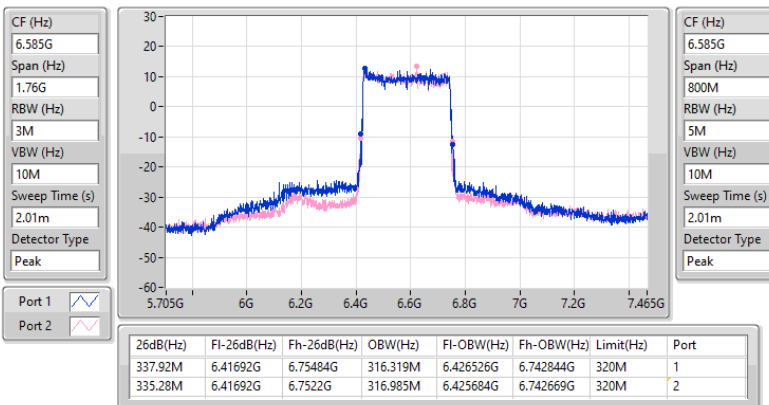


6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6745MHz

21/01/2026

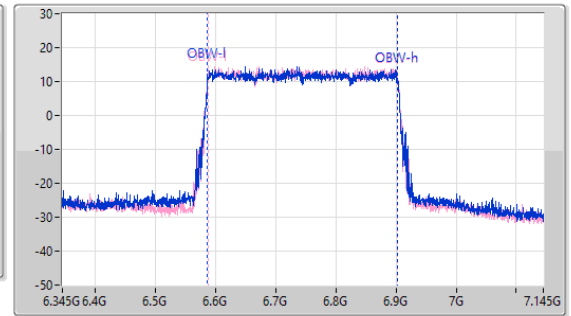
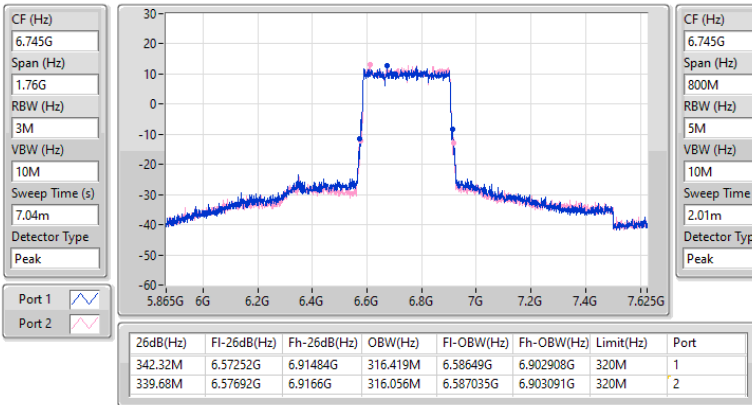


6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_2TX

EBW

6905MHz

21/01/2026

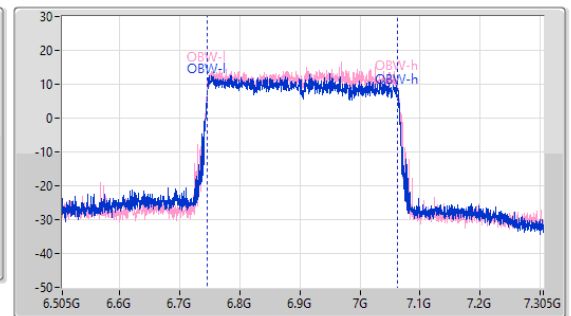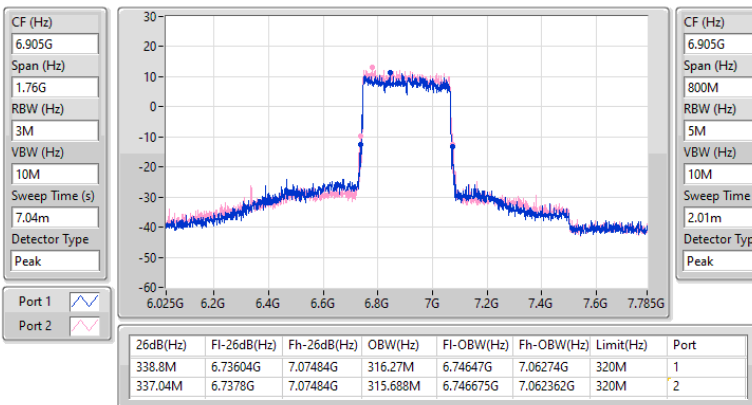

Summary

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	19.21	0.08337
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.01	0.12618
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.65	0.23174
802.11be EHT160-BF_Nss1,(MCS0)_2TX	27.74	0.59429
802.11be EHT320-BF_Nss1,(MCS0)_2TX	29.29	0.84918
6.425-6.525GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	19.30	0.08511
802.11be EHT40-BF_Nss1,(MCS0)_2TX	23.92	0.24660
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.74	0.23659
802.11be EHT160-BF_Nss1,(MCS0)_2TX	27.69	0.58749
802.11be EHT320-BF_Nss1,(MCS0)_2TX	24.95	0.31261
6.525-6.875GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	18.04	0.06368
802.11be EHT40-BF_Nss1,(MCS0)_2TX	22.79	0.19011
802.11be EHT80-BF_Nss1,(MCS0)_2TX	25.54	0.35810
802.11be EHT160-BF_Nss1,(MCS0)_2TX	27.29	0.53580
802.11be EHT320-BF_Nss1,(MCS0)_2TX	28.61	0.72611
6.875-7.125GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	19.51	0.08933
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.21	0.13213
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.51	0.22439
802.11be EHT160-BF_Nss1,(MCS0)_2TX	26.69	0.46666

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.

15/01/2026

EIRP;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5955MHz;TX

CF Freq
5.955GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

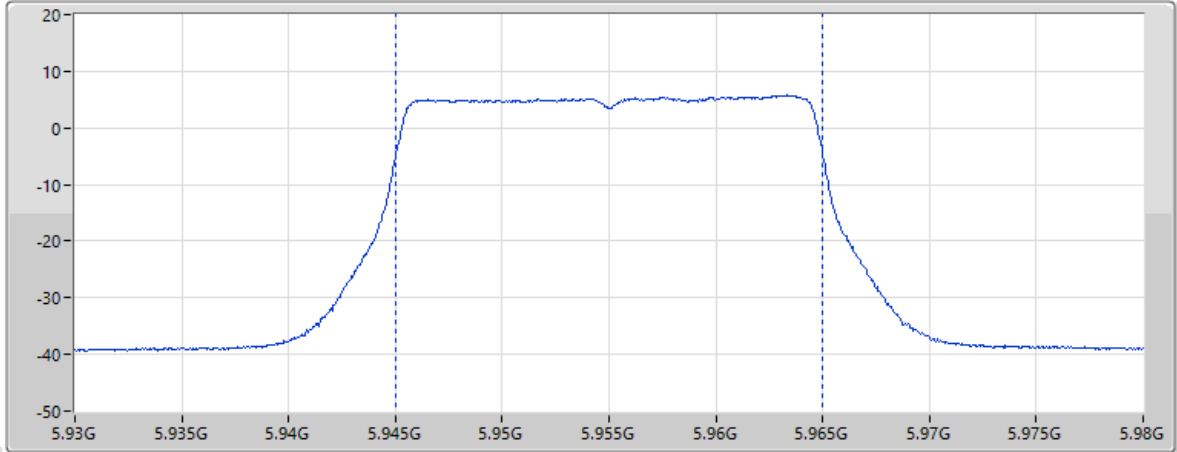

Page 9

Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
18.97		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-0.09	11.01	7.53	35.00	57.54

15/01/2026

EIRP;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6195MHz;TX

CF Freq
6.195GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

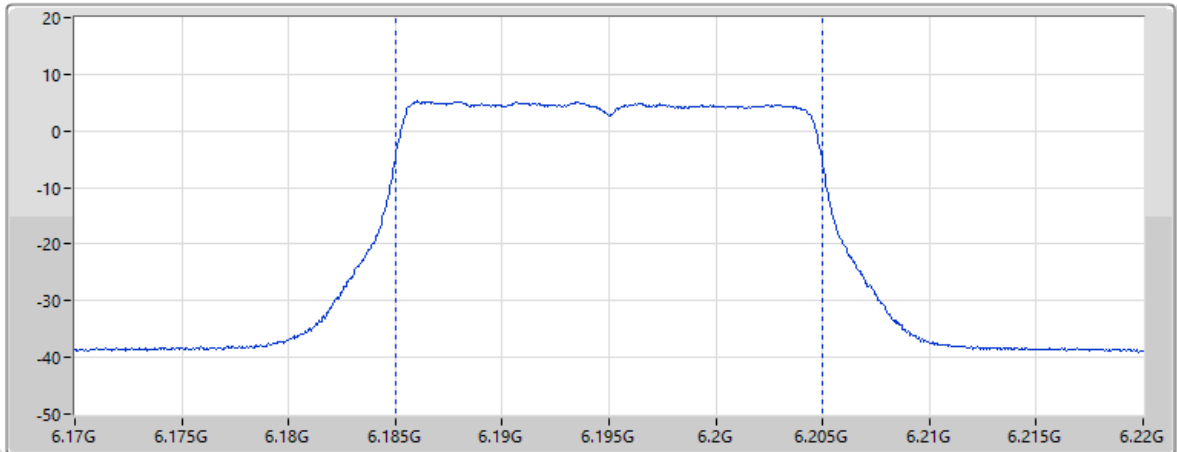


Page 9

Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
18.49		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-0.99	11.09	7.74	35.05	57.88


15/01/2026

EIRP:Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6415MHz;TX

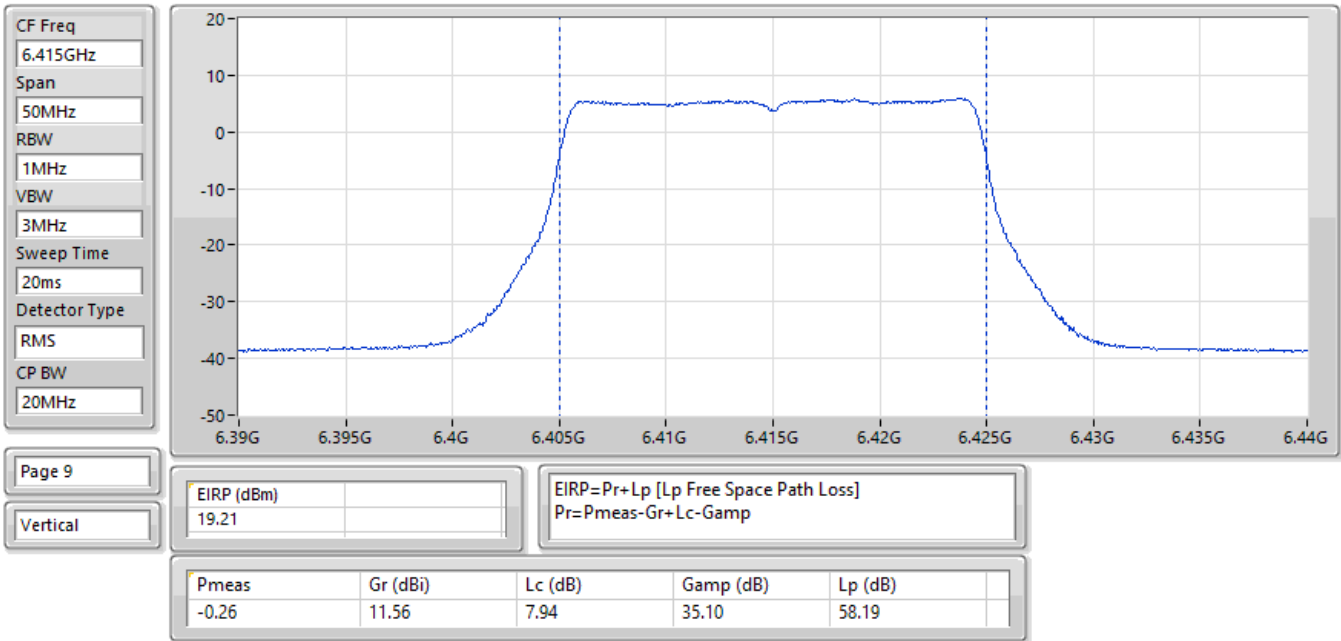


15/01/2026

EIRP:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6435MHz;TX

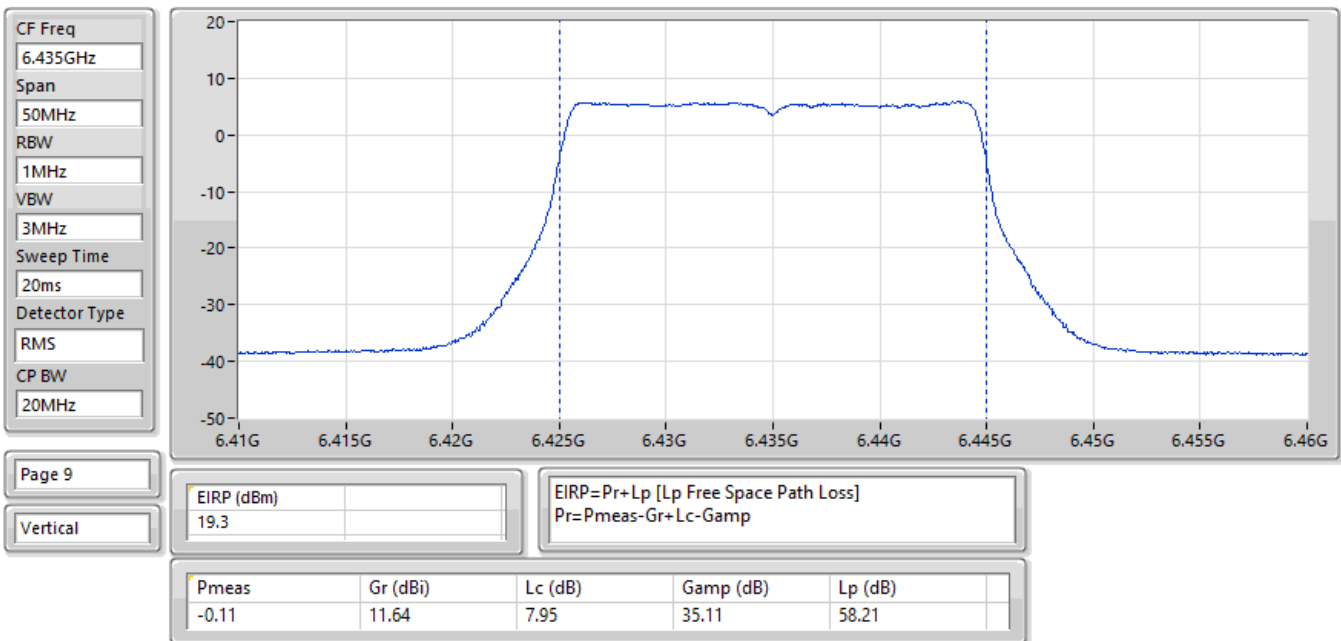


15/01/2026

EIRP:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6475MHz;TX

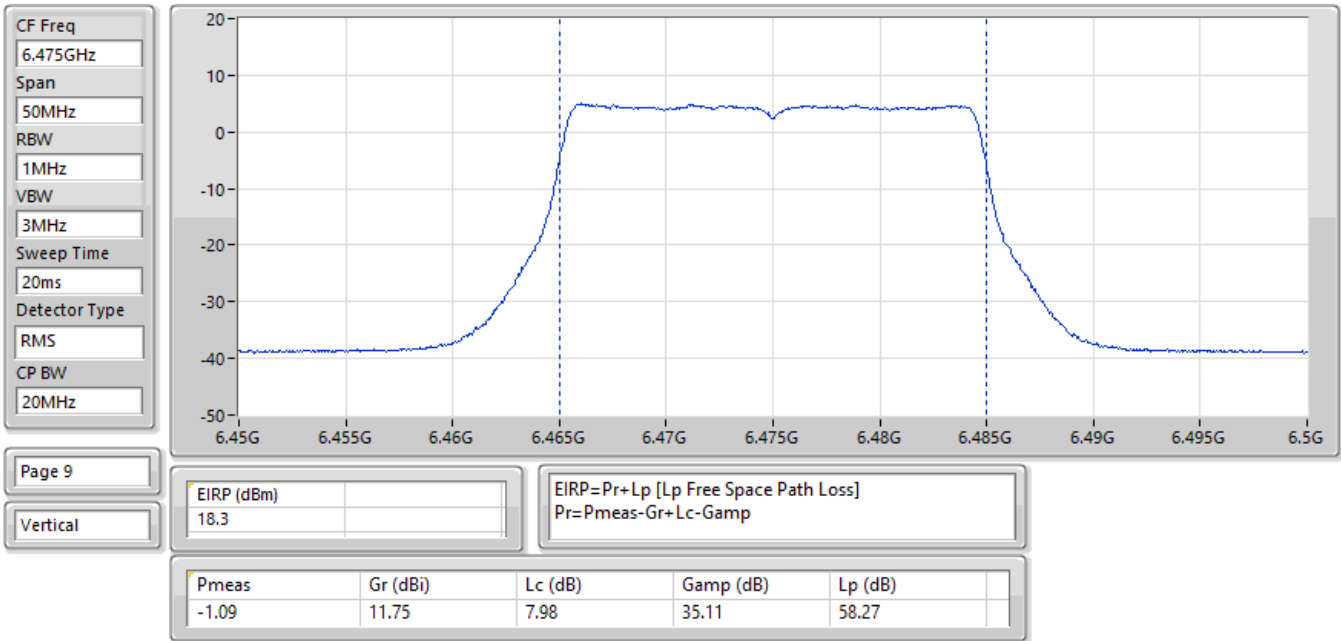

15/01/2026

EIRP:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6515MHz;TX

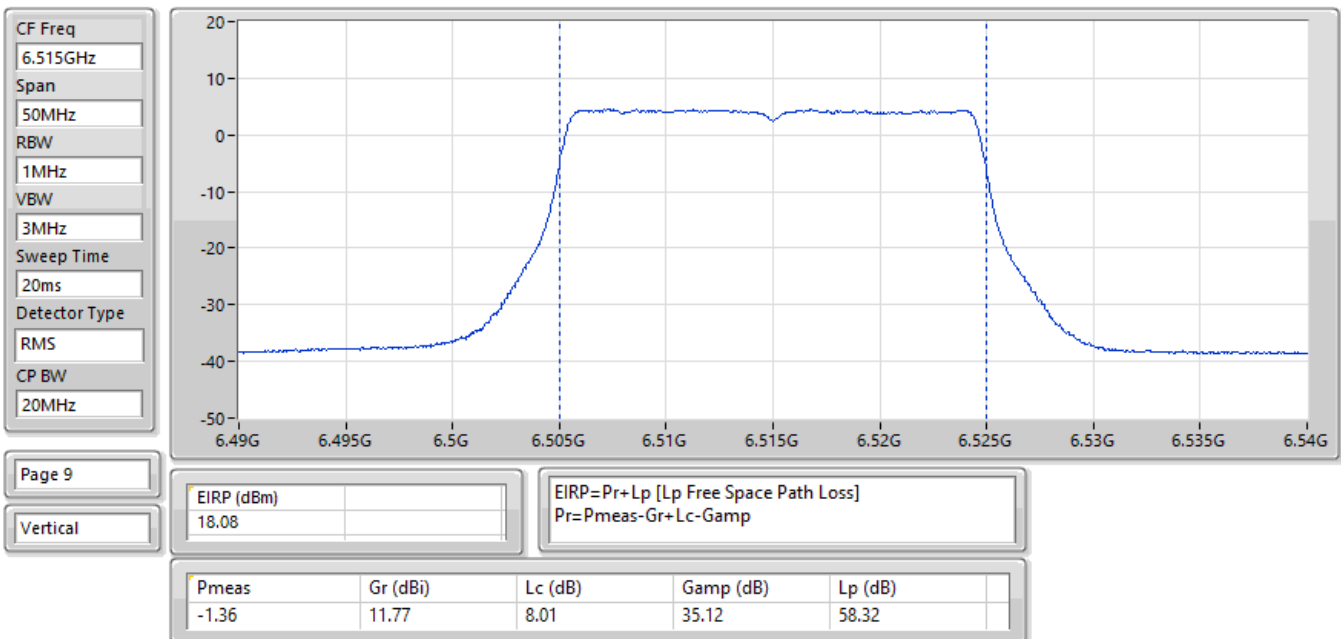

15/01/2026

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6535MHz;TX

CF Freq
6.535GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

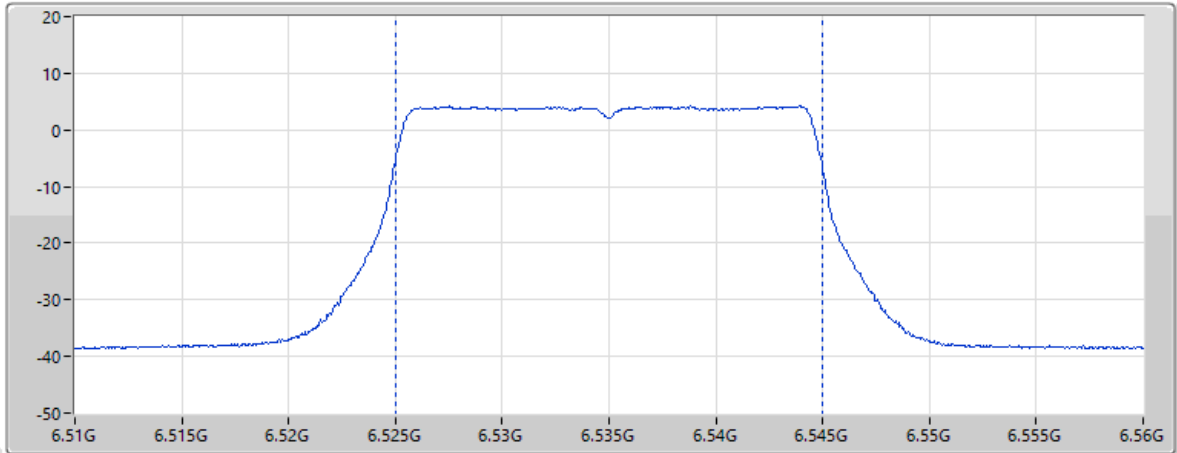

Page 9

Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
17.78				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-1.74	11.73	8.02	35.12	58.35

15/01/2026

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6695MHz;TX

CF Freq
6.695GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

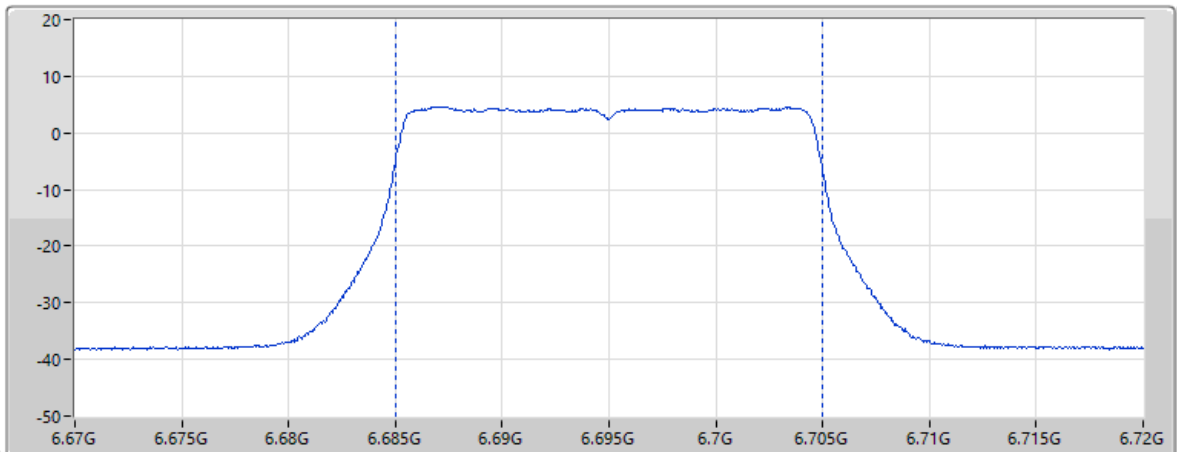

Page 9

Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
18.04				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-2.04	11.50	8.14	35.12	58.56

15/01/2026

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6875MHz;TX

CF Freq
6.875GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

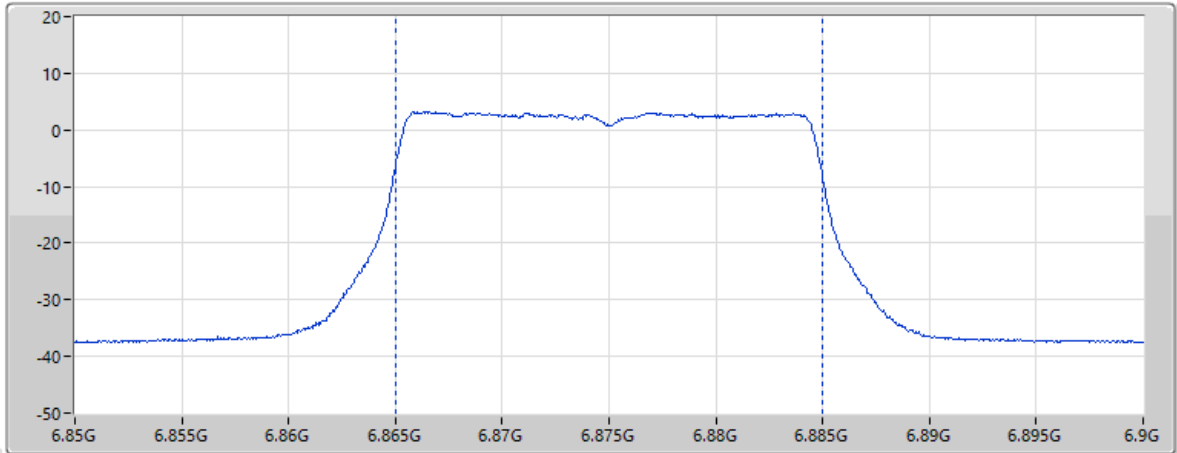

Page 9

Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
16.53		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-4.17	11.25	8.27	35.11	58.79

15/01/2026

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6895MHz;TX

CF Freq
6.895GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

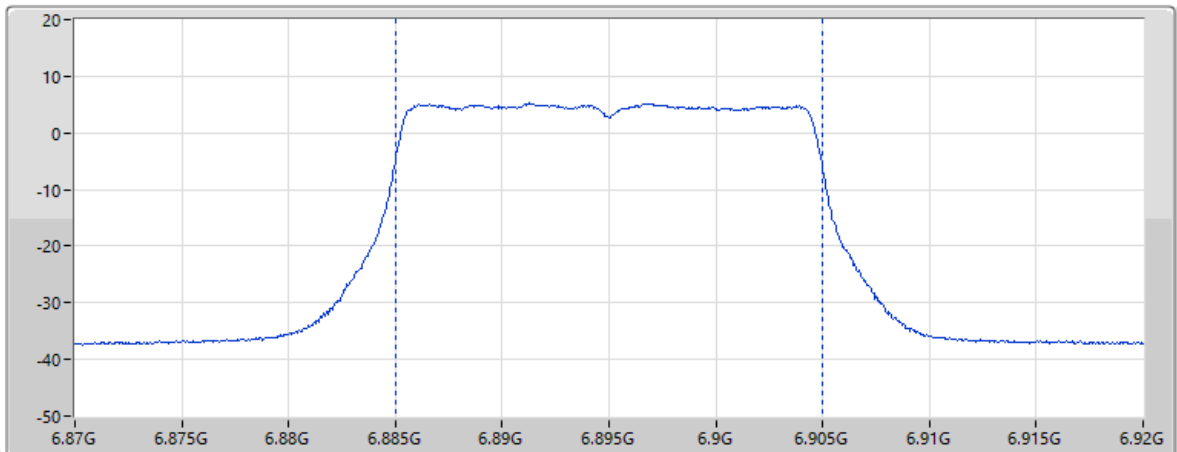

Page 9


Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
18.52		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-2.17	11.29	8.28	35.11	58.81

15/01/2026

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6995MHz;TX

CF Freq
6.995GHz
Span
50MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

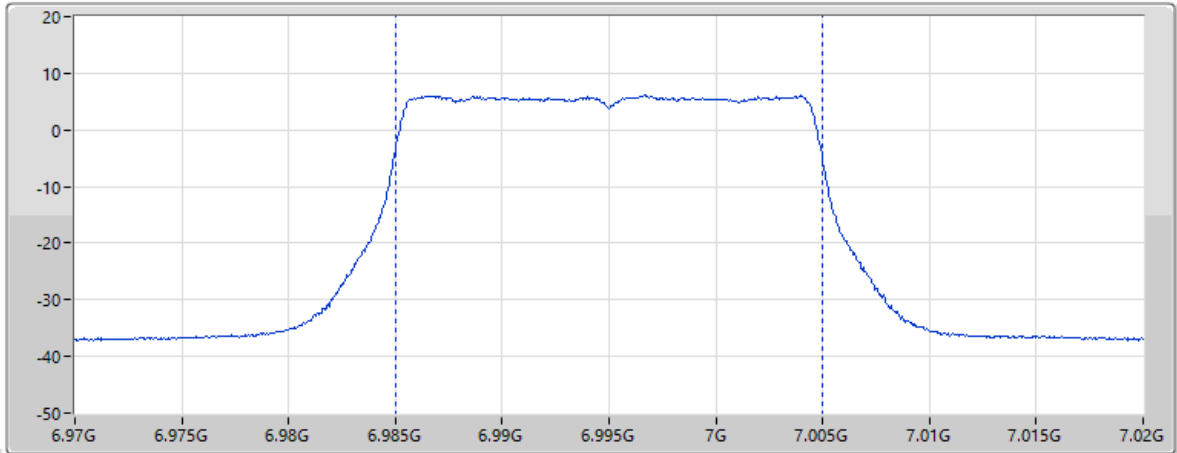


Page 9
Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
19.49				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-1.28	11.40	8.34	35.11	58.94

15/01/2026

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:7095MHz;TX

CF Freq
7.095GHz
Span
50MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

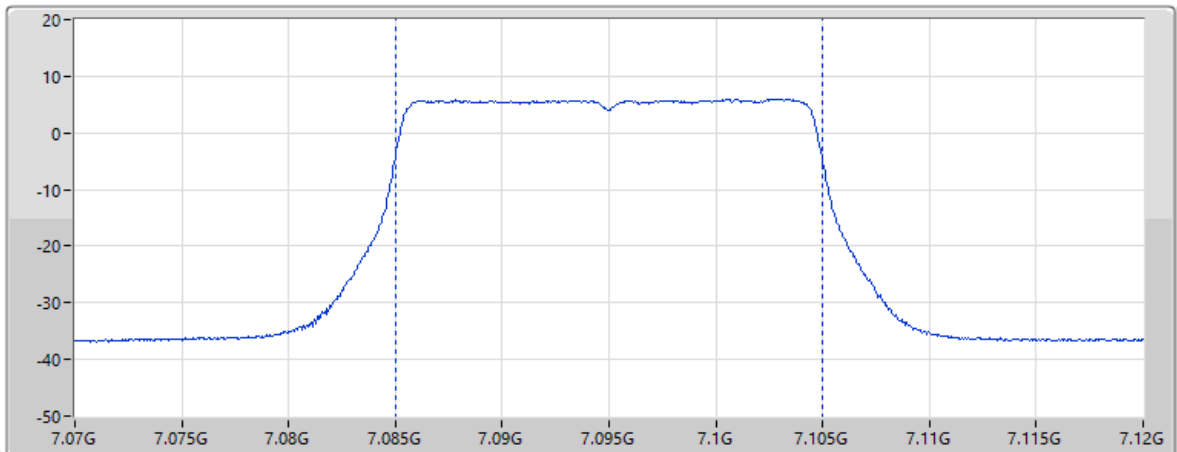

Page 9
Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
19.51				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-1.37	11.50	8.39	35.07	59.06

15/01/2026

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5965MHz;TX

CF Freq
5.965GHz

Span
100MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
40MHz

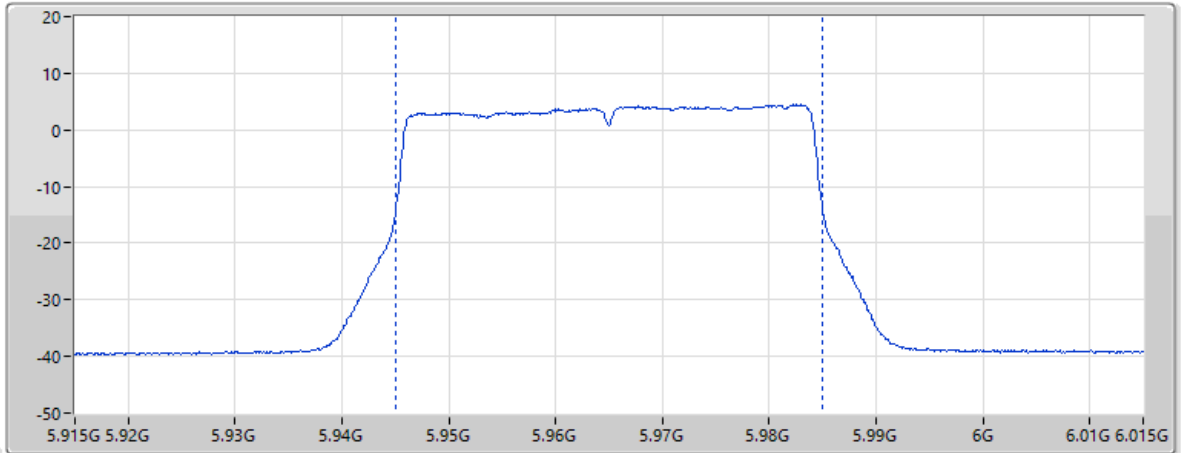

Page 9

Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
20.43		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
1.38	11.03	7.53	35.00	57.55

15/01/2026

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6205MHz;TX

CF Freq
6.205GHz

Span
100MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
40MHz

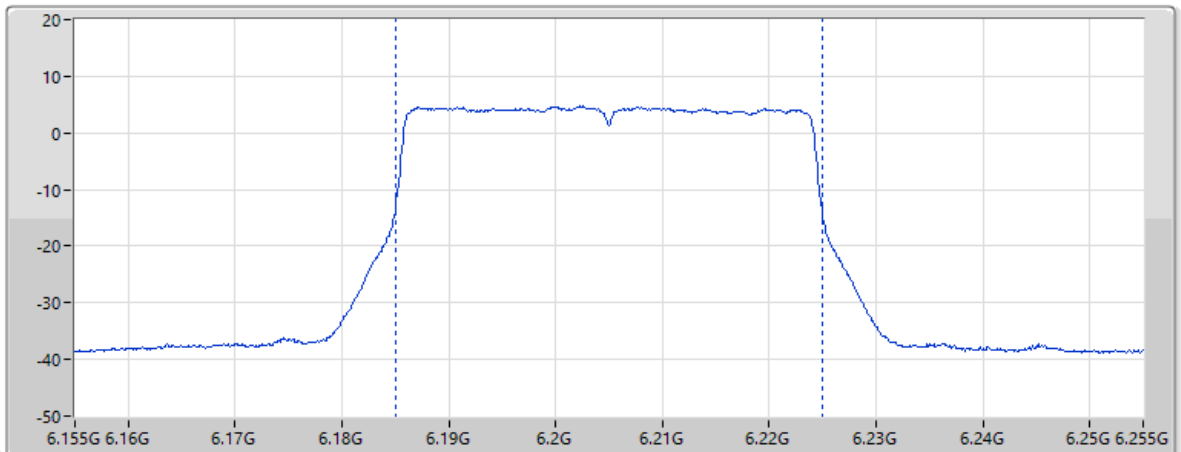

Page 9


Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
21.01		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
1.54	11.12	7.75	35.06	57.90

15/01/2026

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6405MHz;TX

CF Freq
6.405GHz
Span
100MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

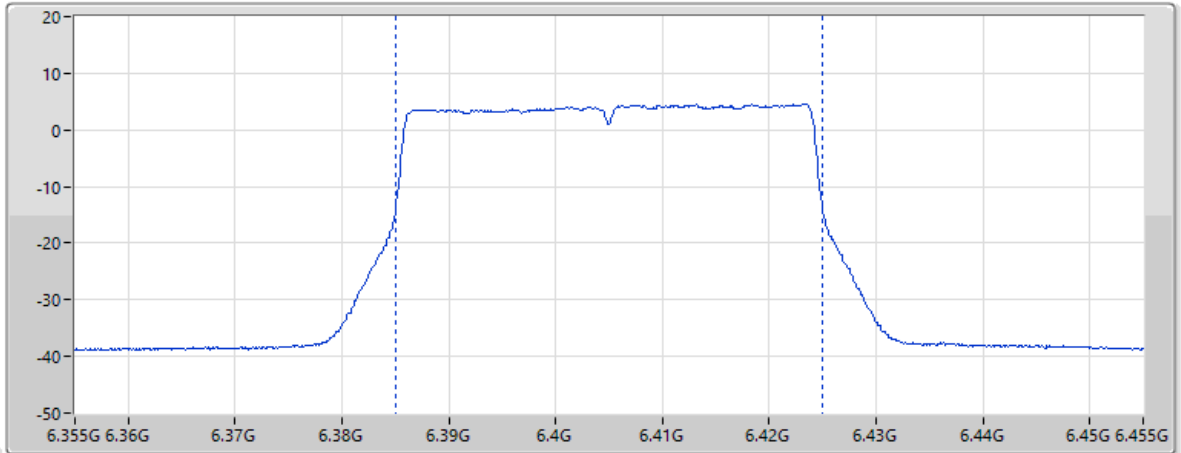


Page 9
Vertical

EIRP (dBm)	20.77	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
1.29	11.52	7.93	35.10	58.17

15/01/2026

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6445MHz;TX

CF Freq
6.445GHz
Span
100MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

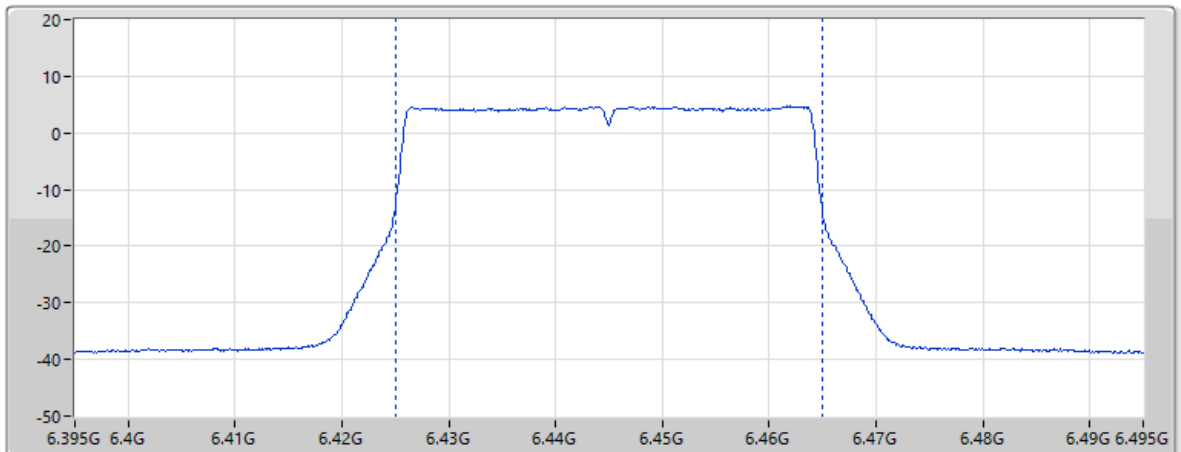


Page 9
Vertical

EIRP (dBm)	21.2	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
1.80	11.68	7.96	35.11	58.23


15/01/2026

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6485MHz;TX

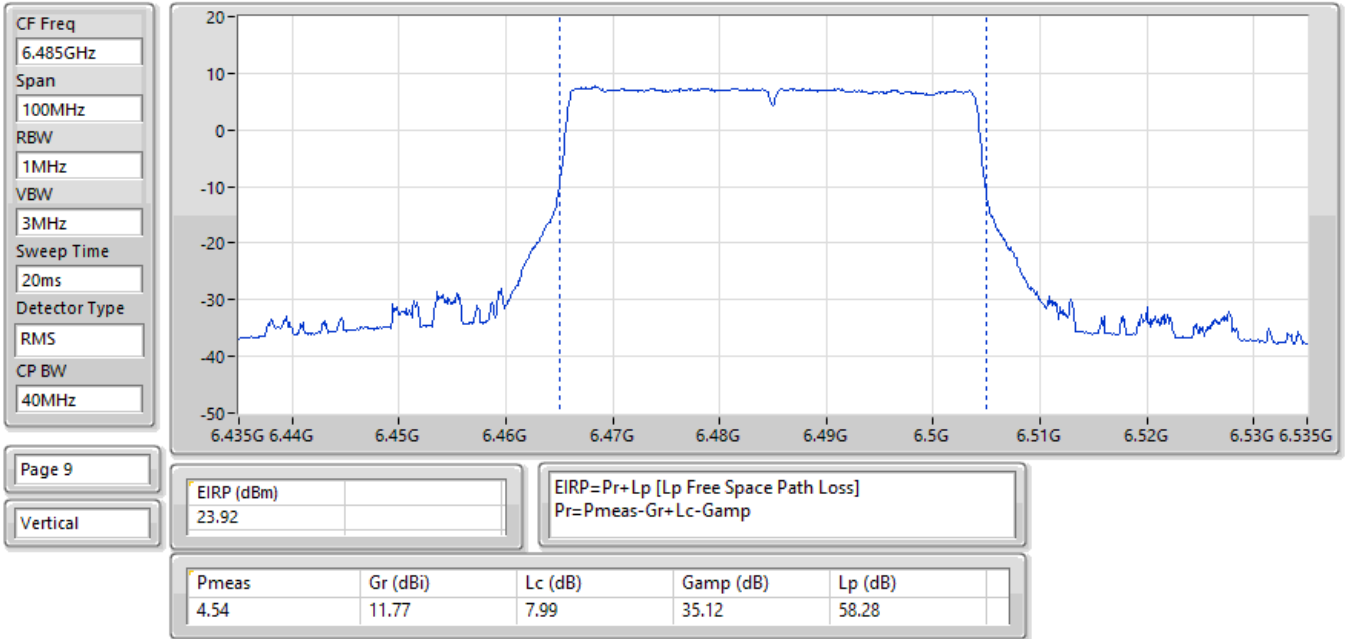


15/01/2026

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6525MHz;TX

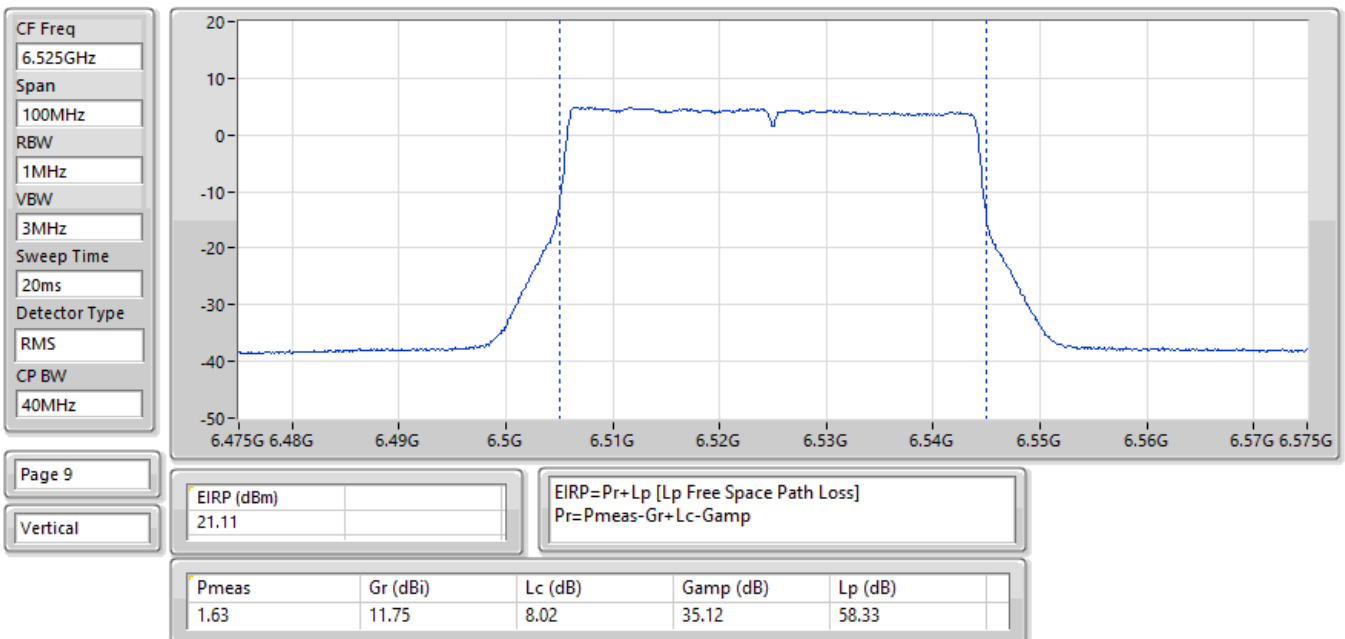


15/01/2026

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6565MHz;TX

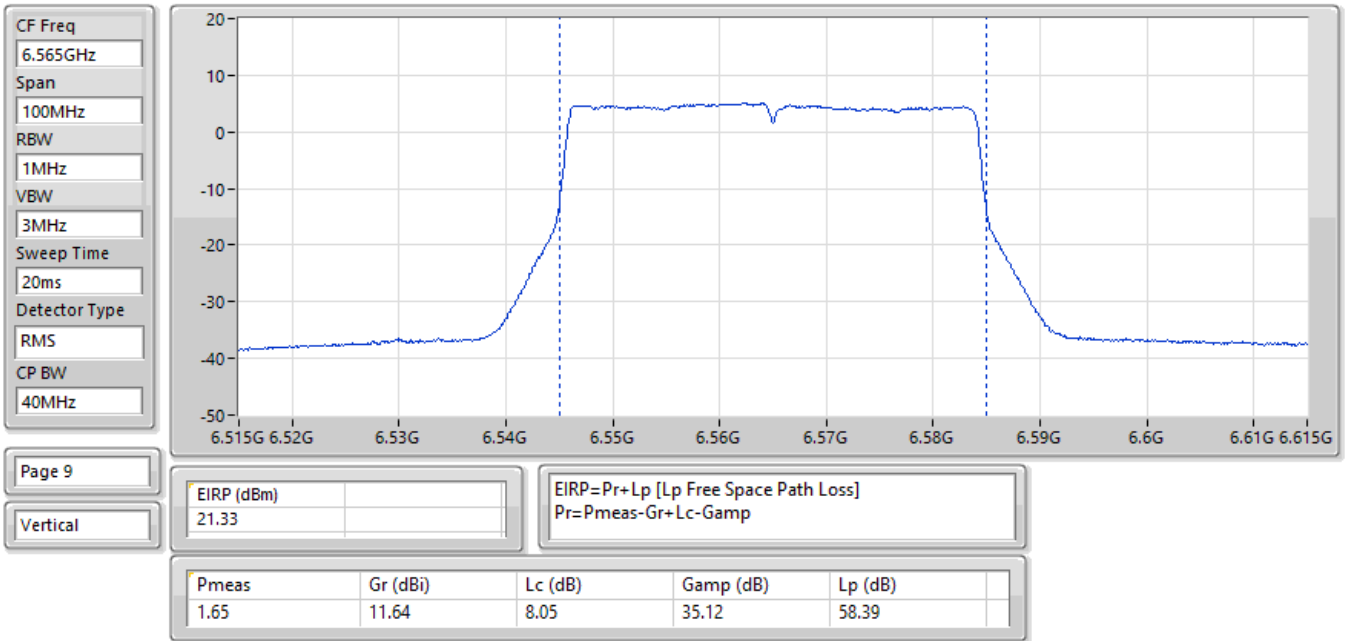


15/01/2026

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6685MHz;TX

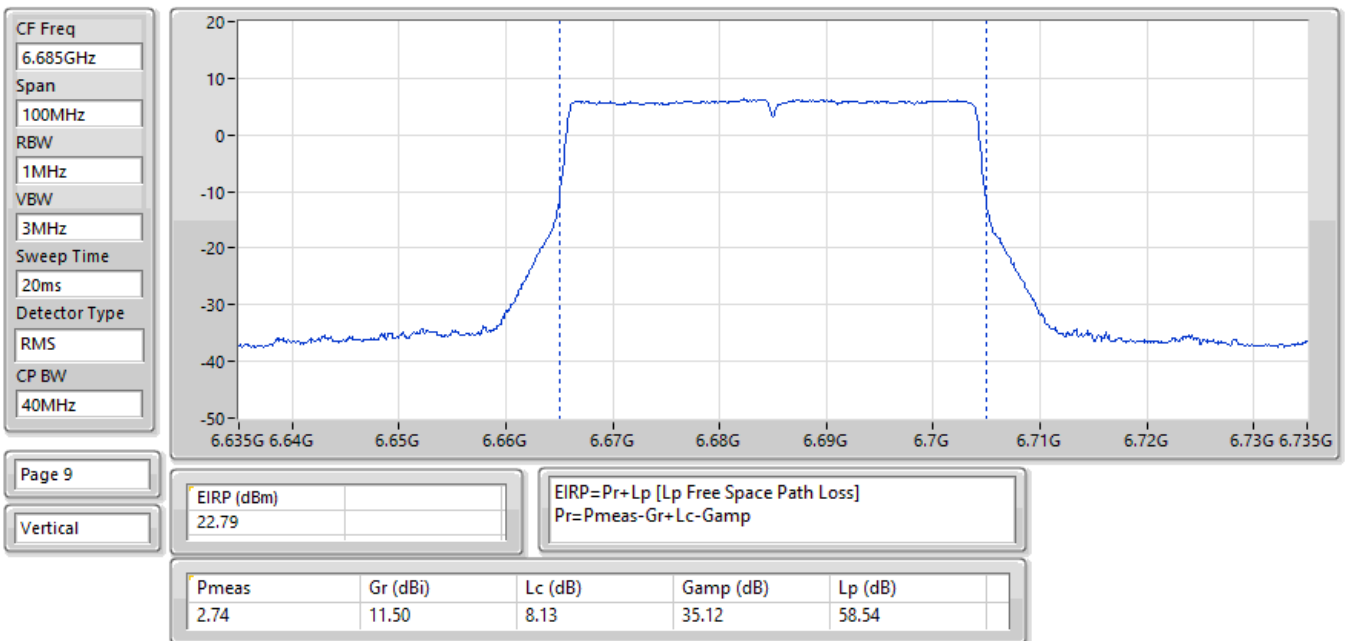


15/01/2026

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6885MHz;TX

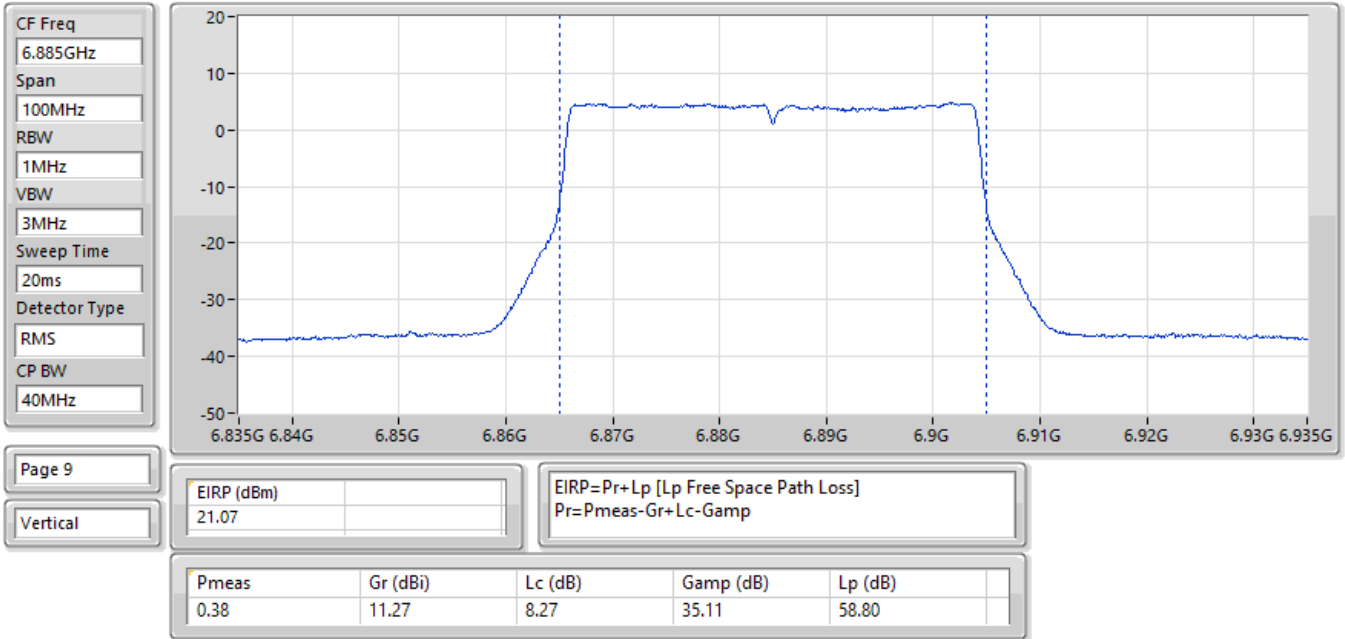


15/01/2026

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6925MHz;TX

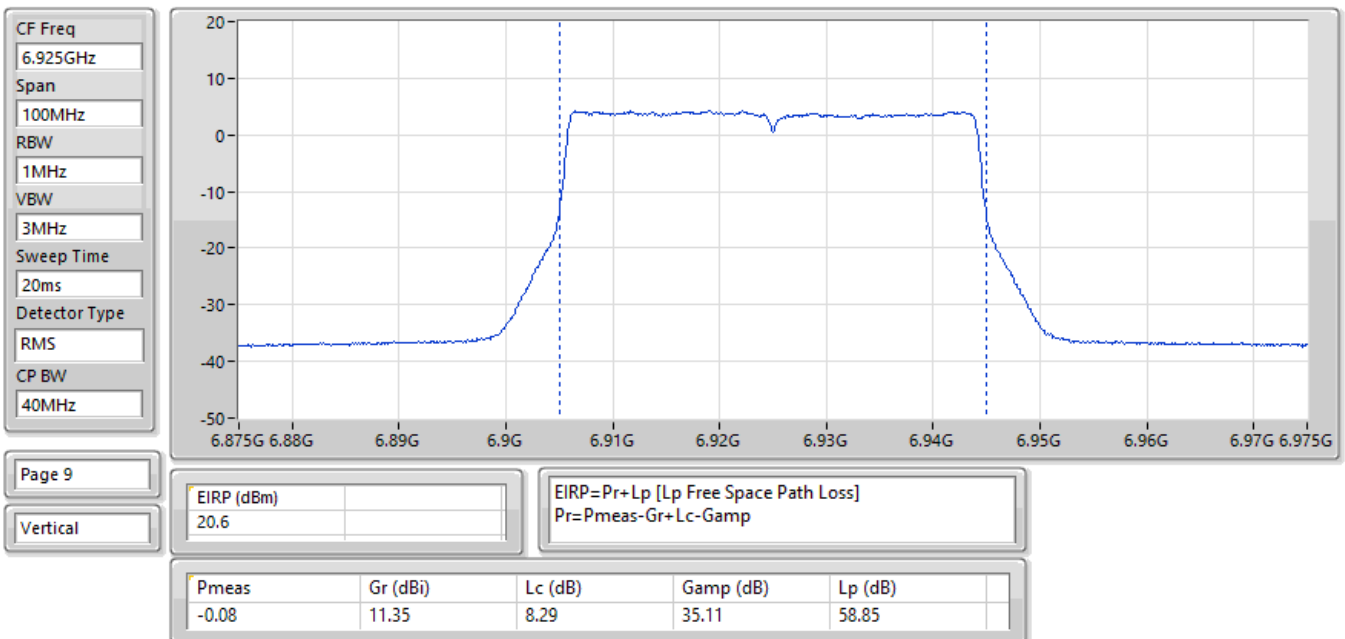


15/01/2026

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:7005MHz;TX

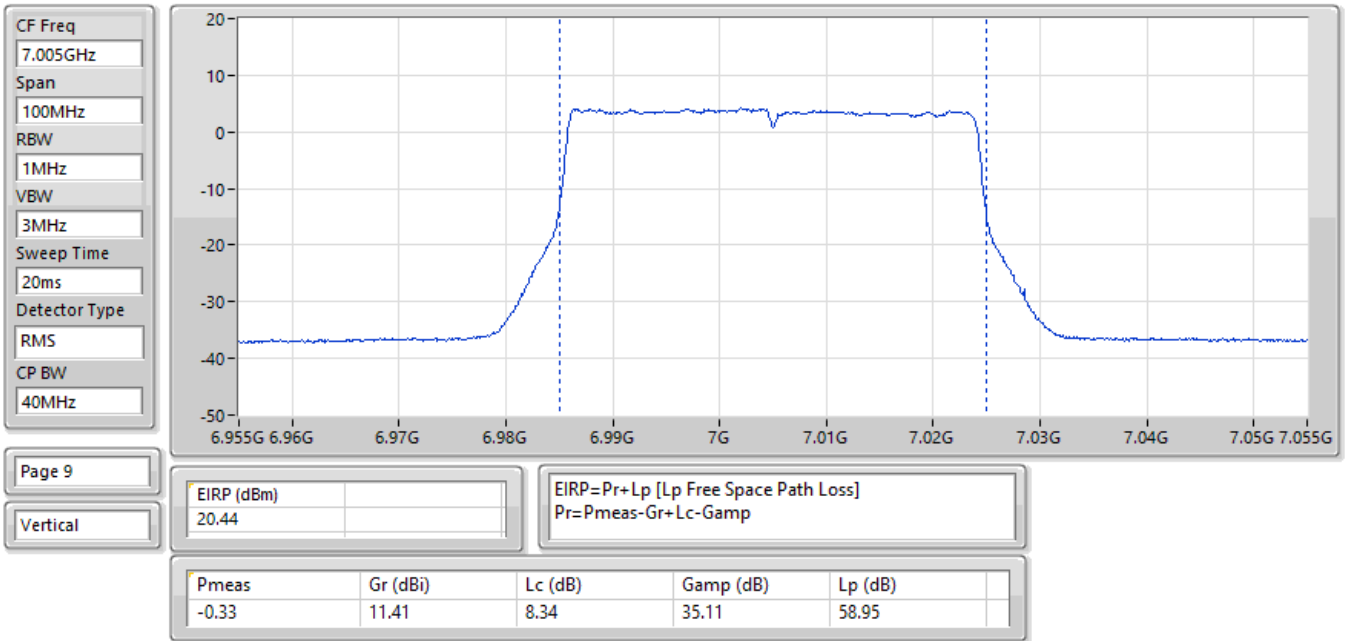


15/01/2026

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:7085MHz;TX

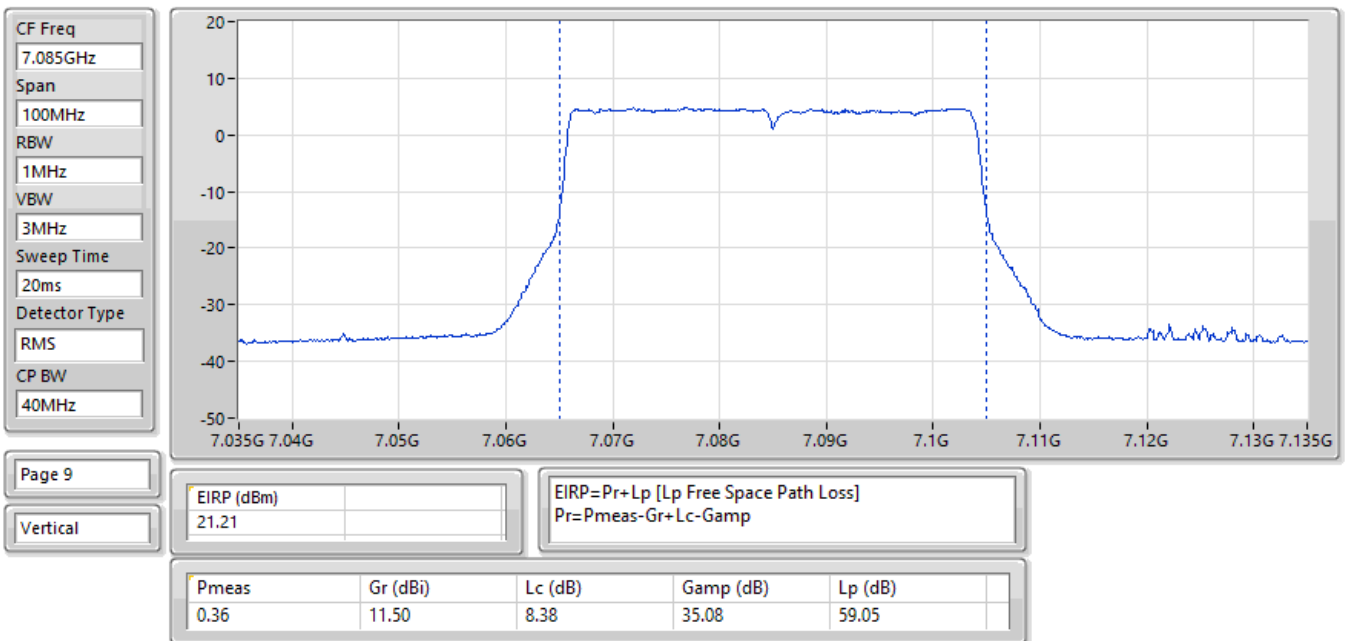


16/01/2026

EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:5985MHz;TX

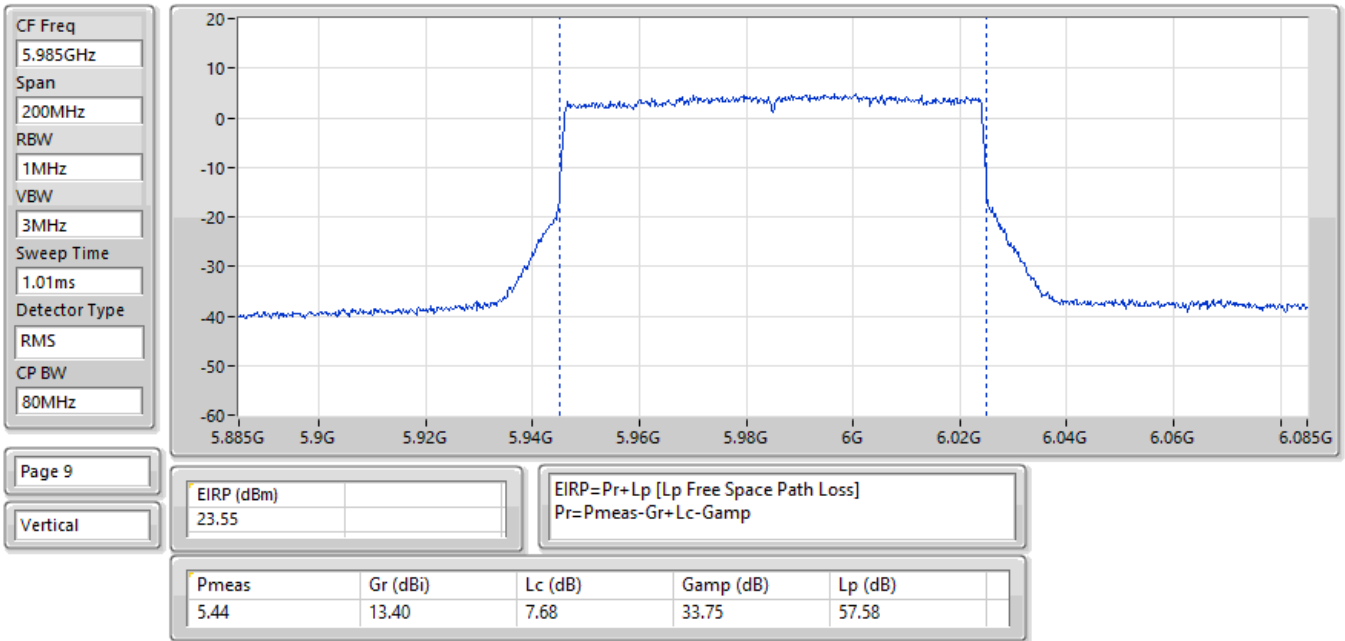


15/01/2026

EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6225MHz;TX

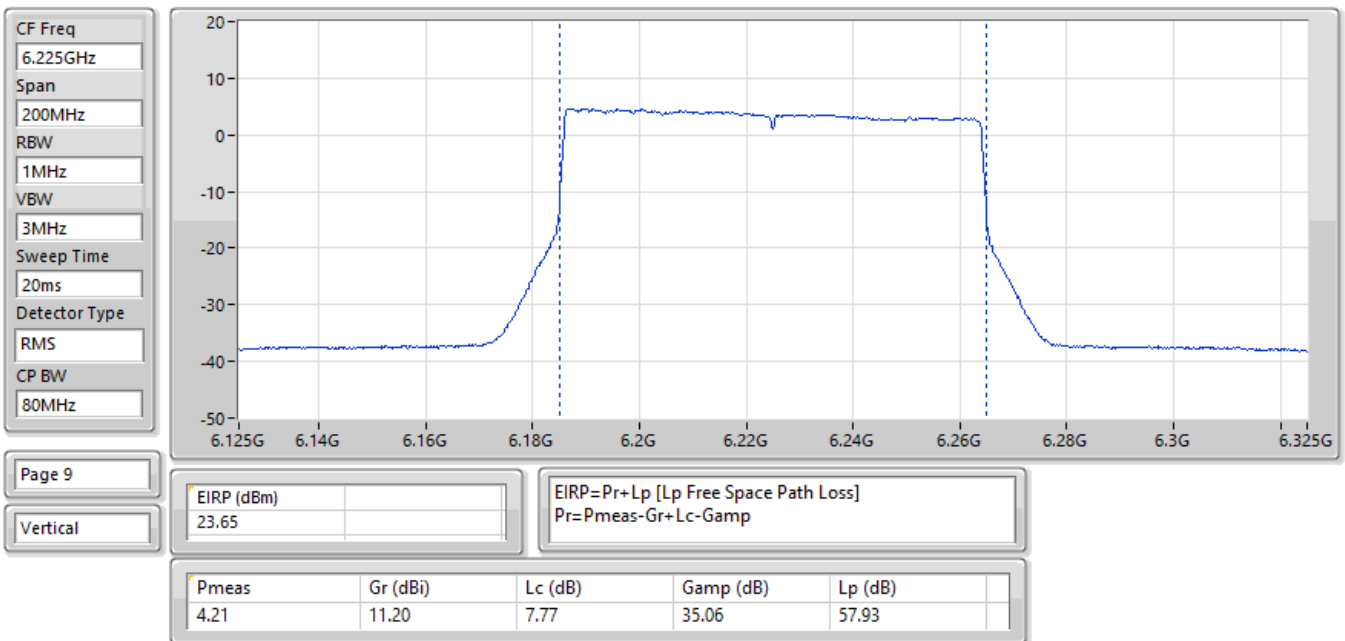


15/01/2026

EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6385MHz;TX

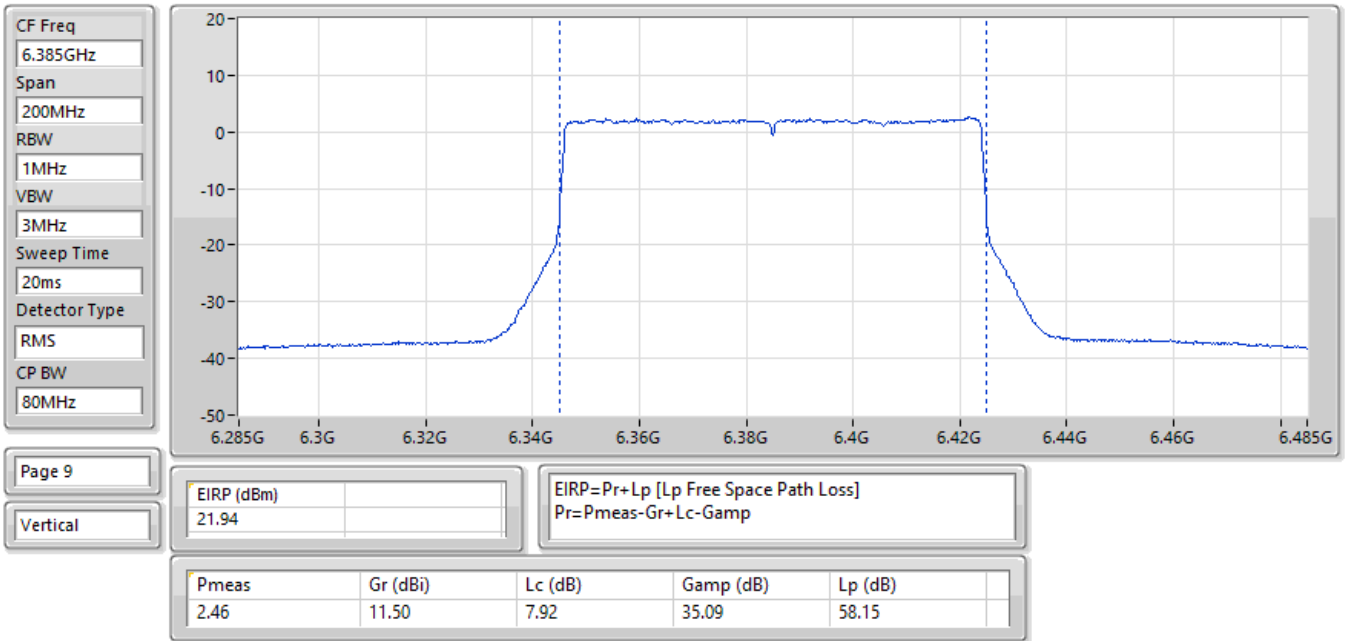

15/01/2026


EIRP:Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6465MHz;TX

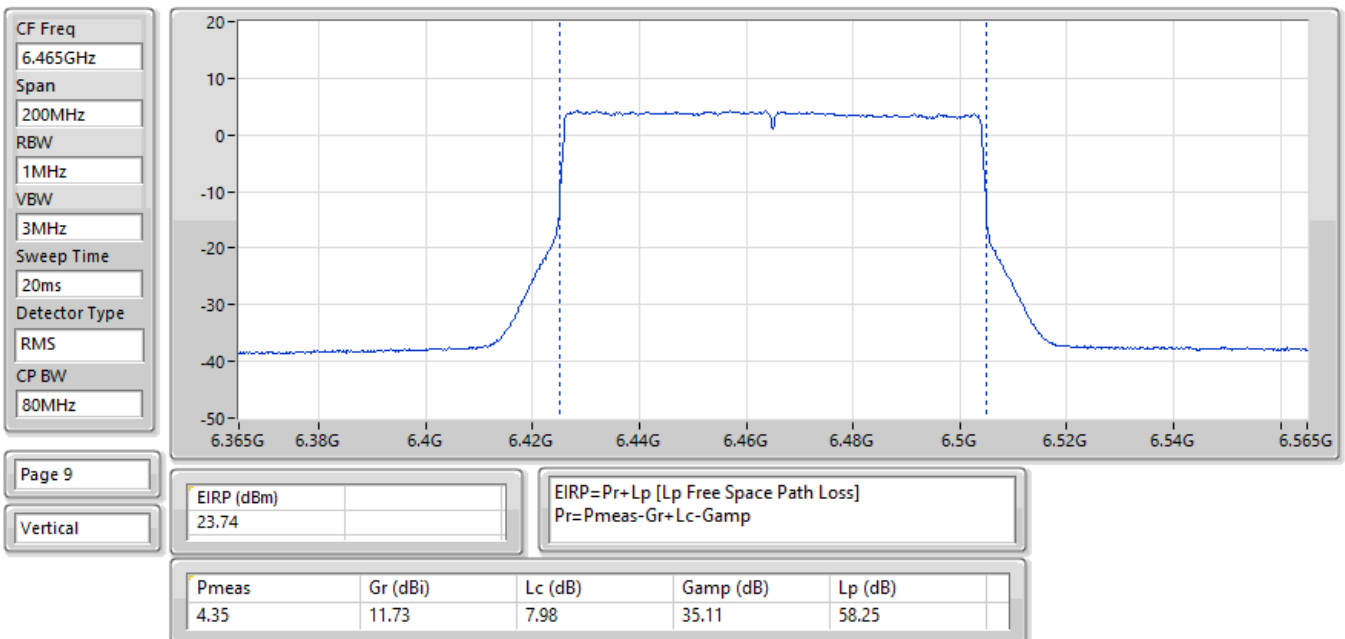

15/01/2026

EIRP:Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6545MHz;TX

CF Freq
6.545GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

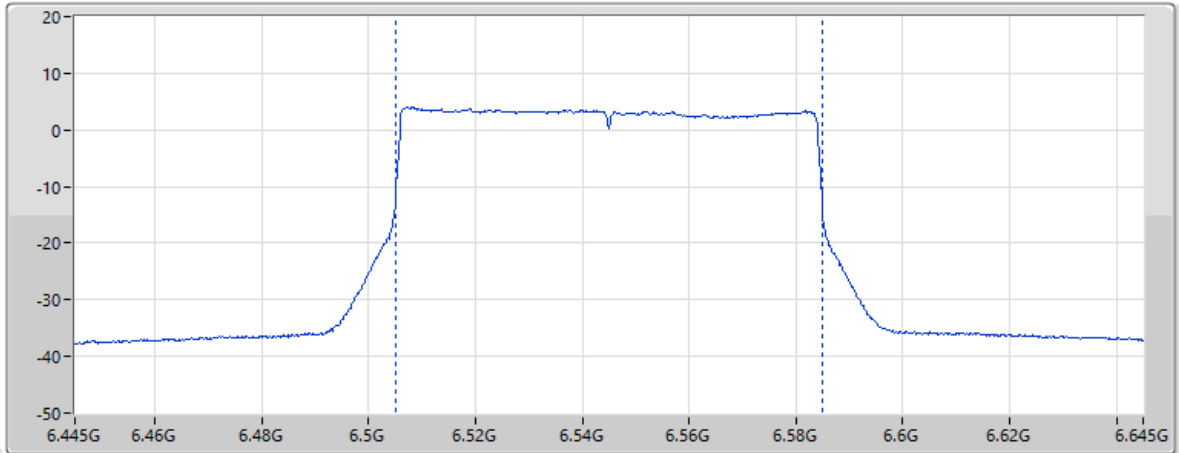


Page 9
Vertical

EIRP (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
23.13				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
3.57	11.71	8.03	35.12	58.36

15/01/2026

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6625MHz;TX

CF Freq
6.625GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

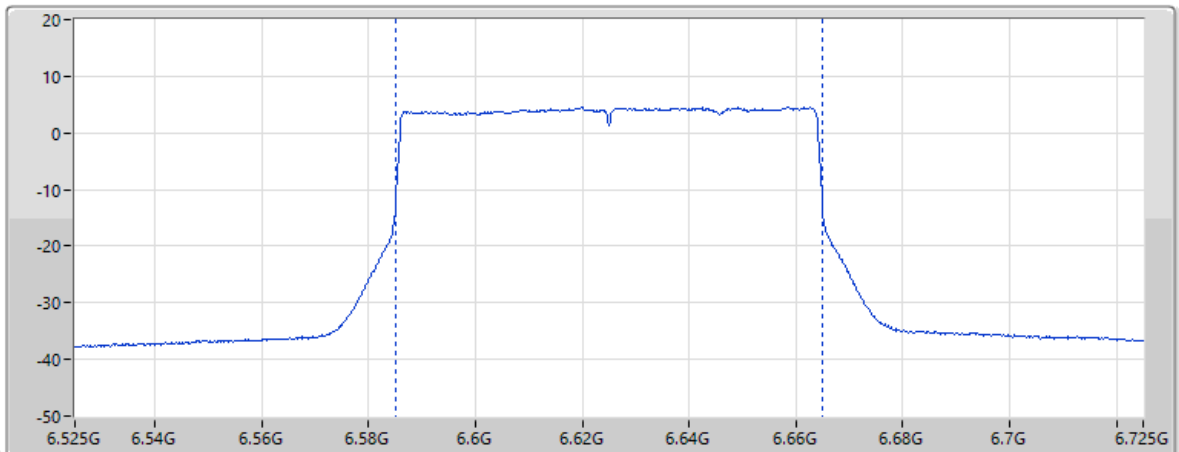


Page 9
Vertical

EIRP (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
24.03				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
4.09	11.50	8.09	35.12	58.47

15/01/2026

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6705MHz;TX

CF Freq
6.705GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

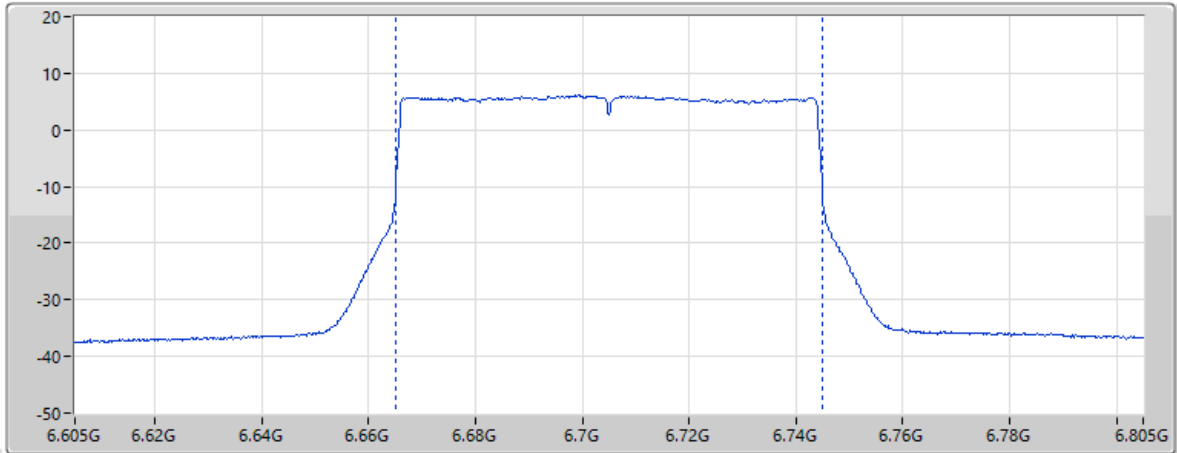


Page 9
Vertical

EIRP (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
25.54				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
5.42	11.48	8.15	35.12	58.57

28/01/2026

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6785MHz;TX

CF Freq
6.785GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

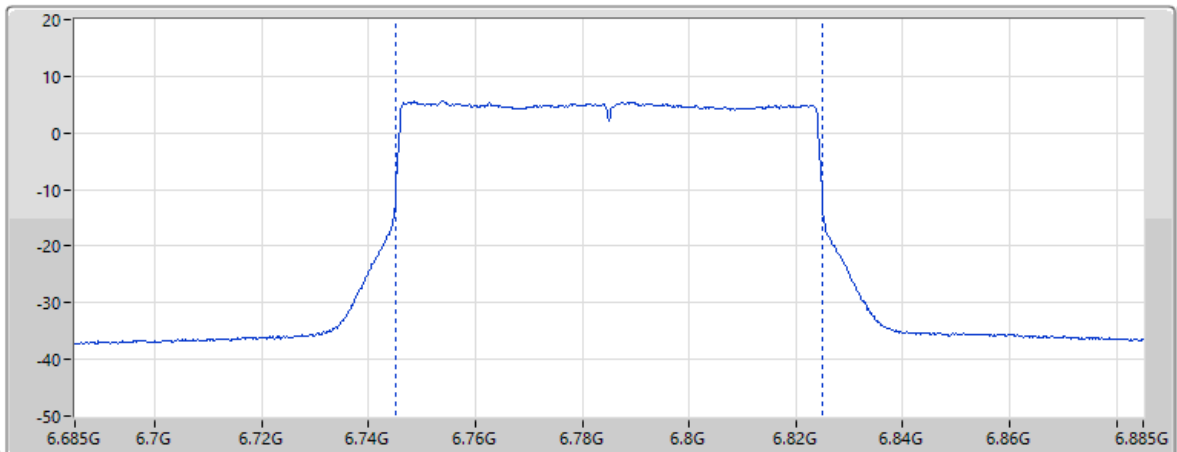


Page 9
Vertical

EIRP (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
24.87				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
4.33	11.23	8.21	35.11	58.67


15/01/2026

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6865MHz;TX

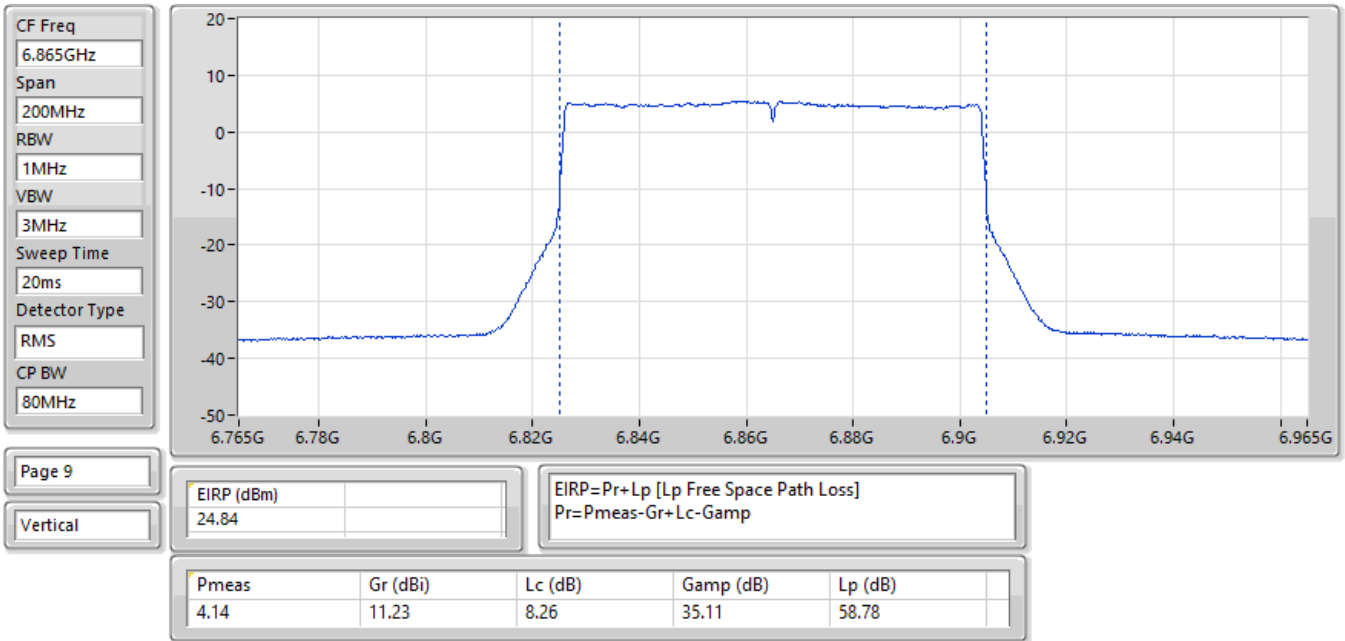


15/01/2026

EIRP:Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6945MHz;TX

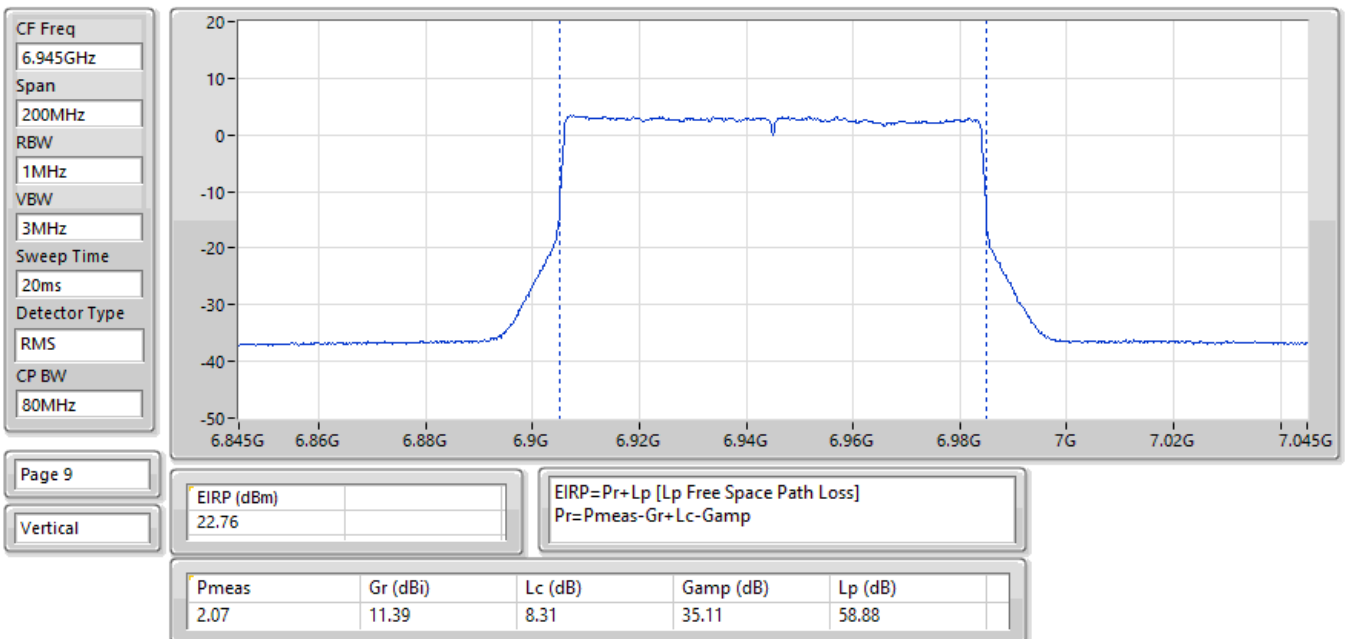


28/01/2026

EIRP;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:7025MHz;TX

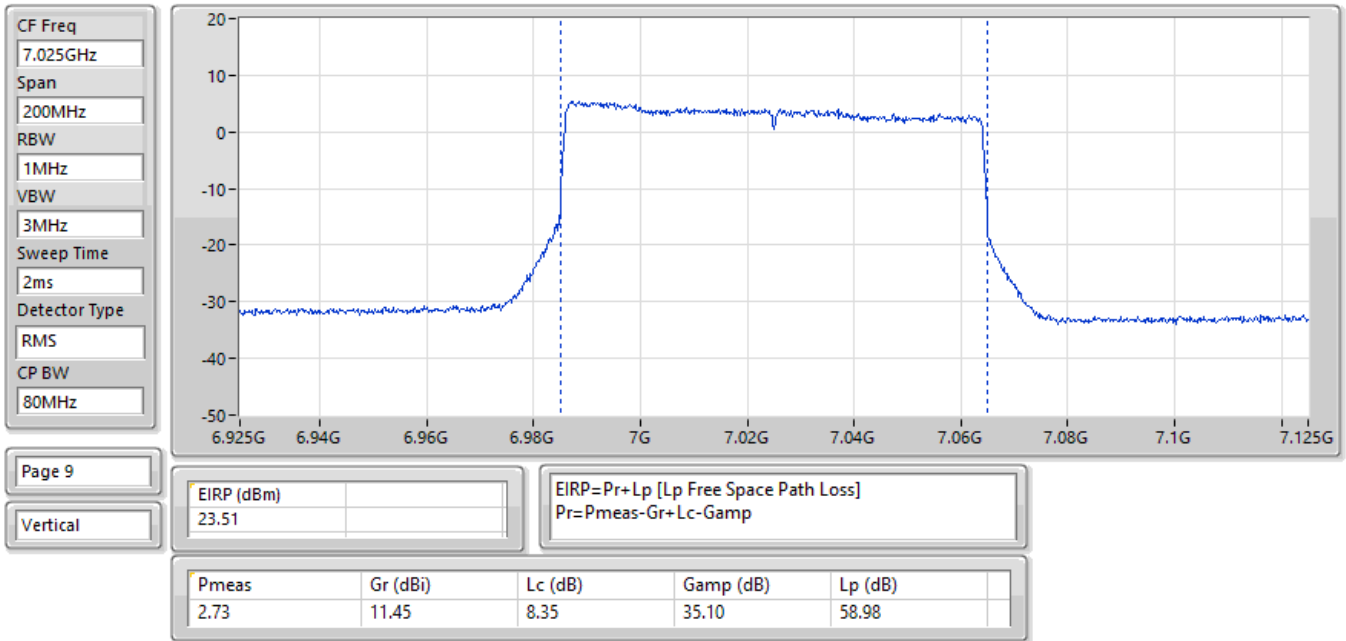

20/01/2026


EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6025MHz;TX

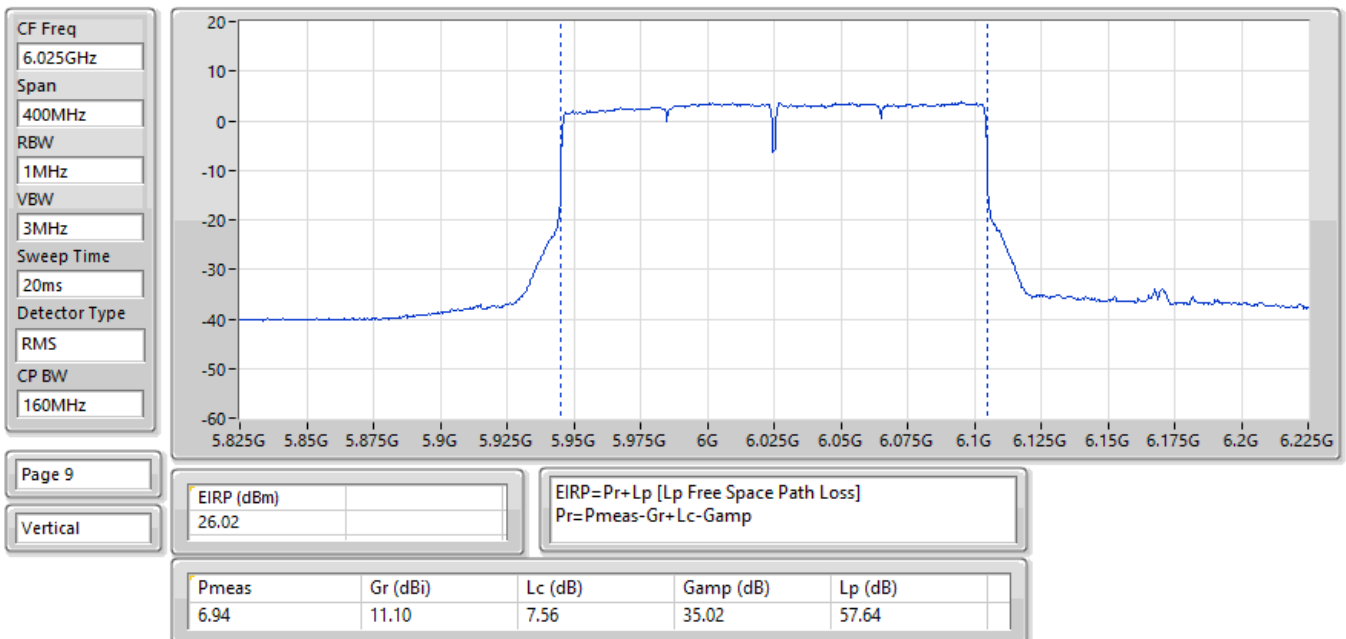

16/01/2026

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6185MHz;TX

CF Freq
6.185GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
160MHz

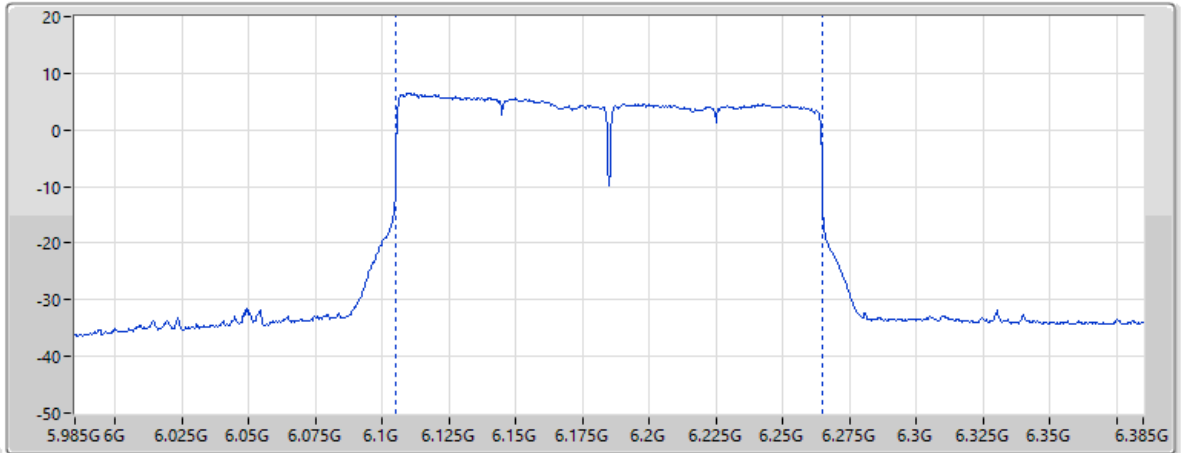


Page 9
Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
27.74				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
5.16	11.80	8.93	32.42	57.87

20/01/2026

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6345MHz;TX

CF Freq
6.345GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
160MHz

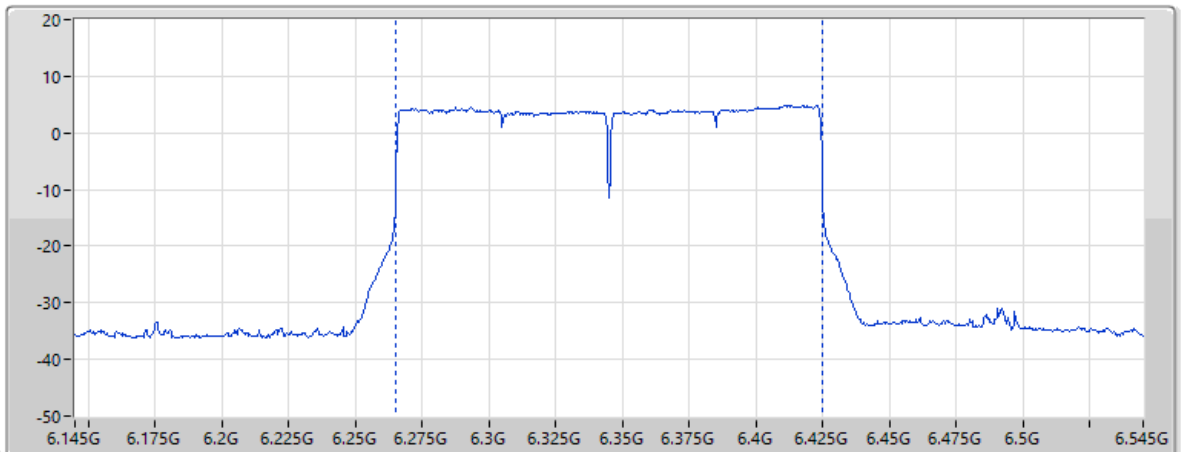


Page 9
Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
26.95				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
7.56	11.49	7.88	35.09	58.09

20/01/2026

EIRP;Band:6.4G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6505MHz;TX

CF Freq
6.505GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
160MHz

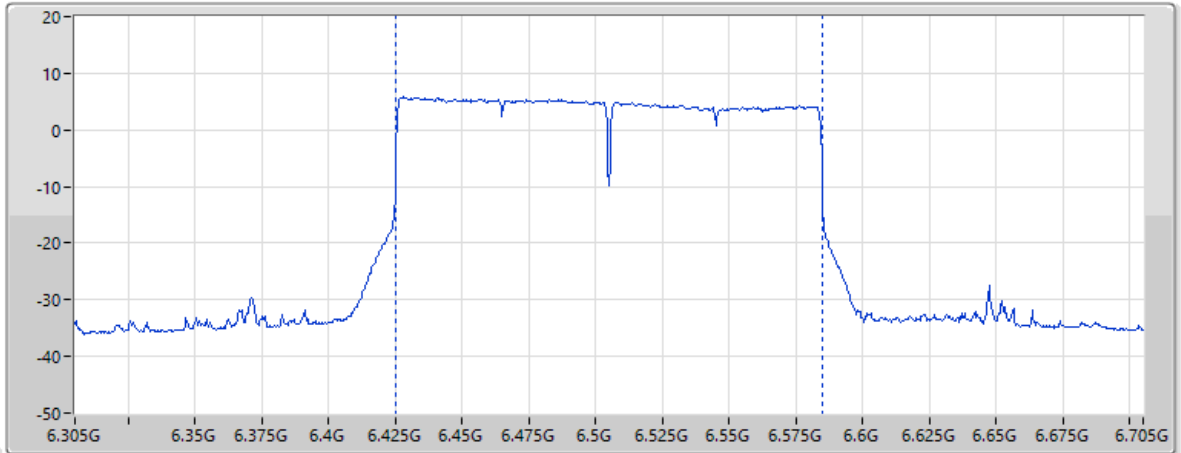


Page 9
Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
27.69				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
8.29	11.79	8.00	35.12	58.31

16/01/2026

EIRP;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6665MHz;TX

CF Freq
6.665GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
160MHz

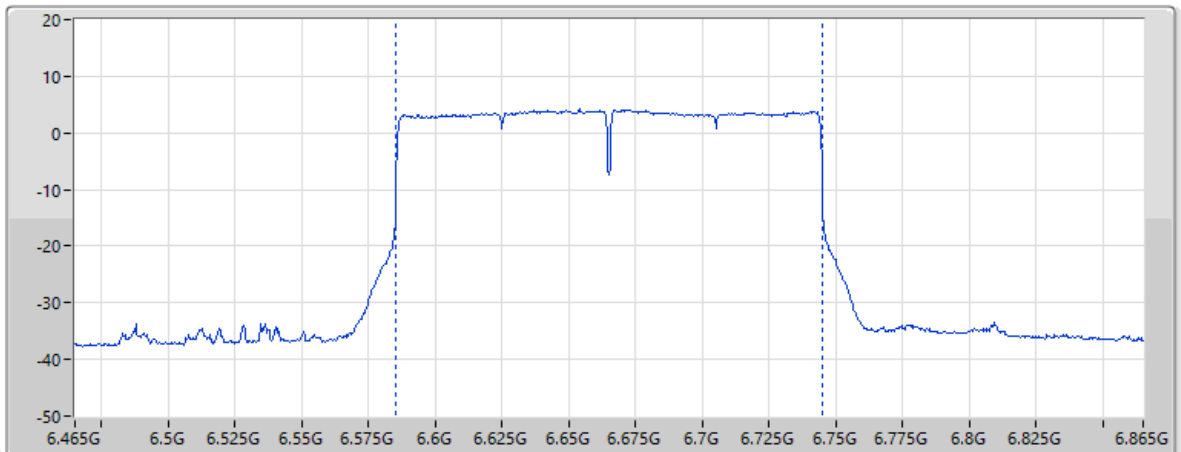


Page 9
Vertical


EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
26.48				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
6.46	11.50	8.12	35.12	58.52

31/01/2026

EIRP;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6825MHz;TX

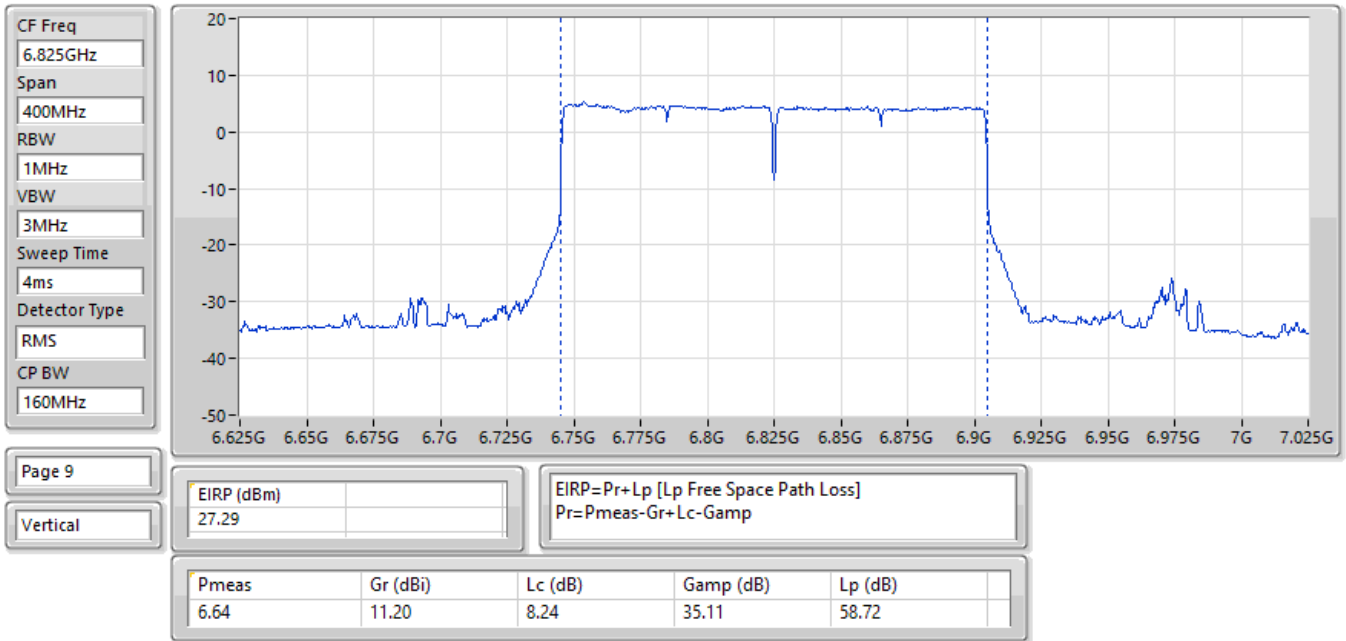


EIRP;Band:7.0G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6985MHz;TX

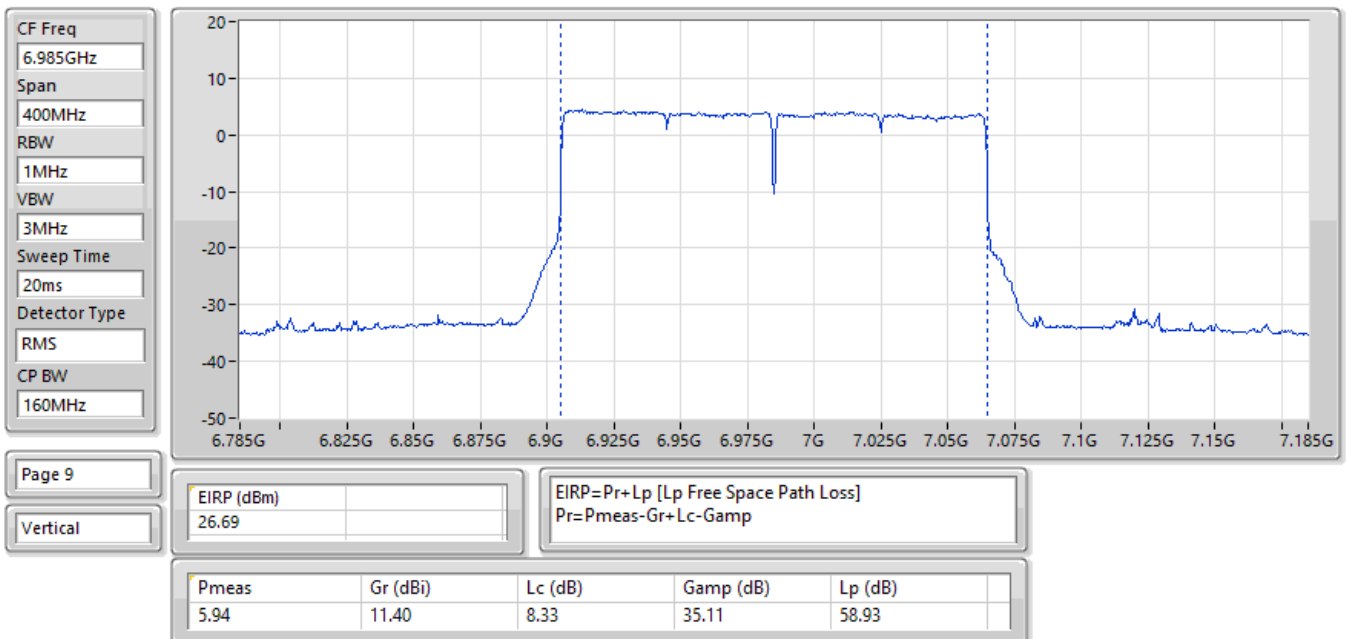


26/01/2026

EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6105MHz;TX

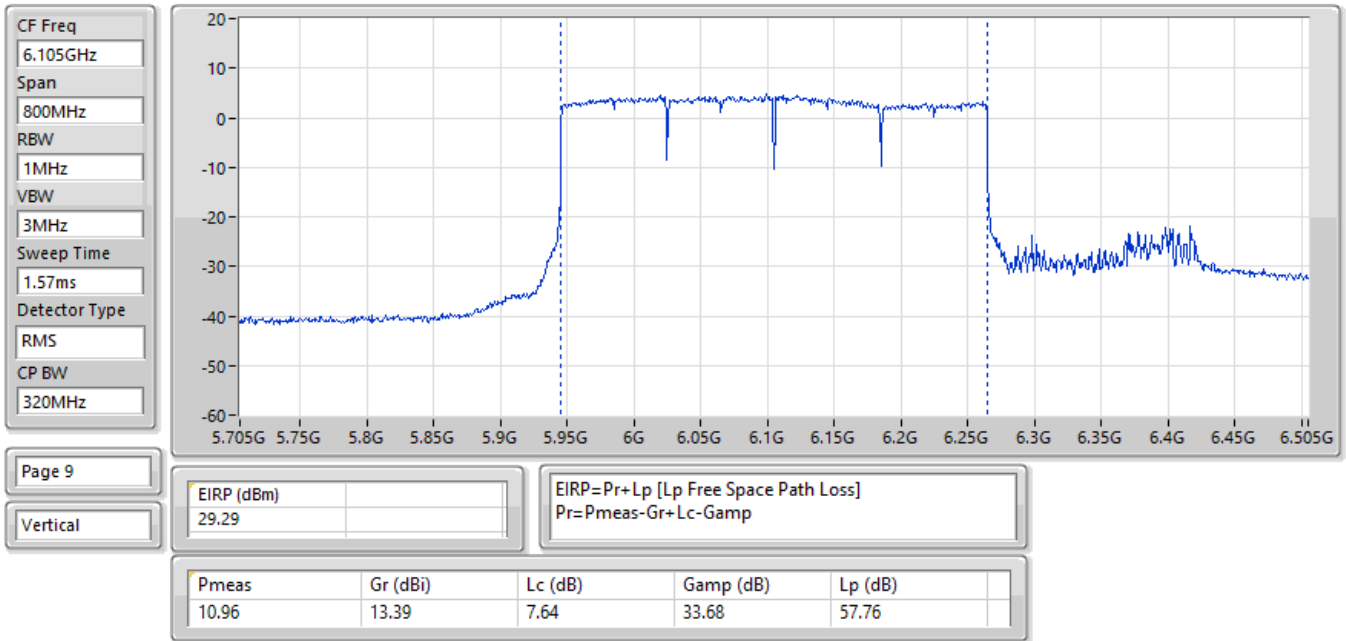


15/01/2026

EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6265MHz;TX

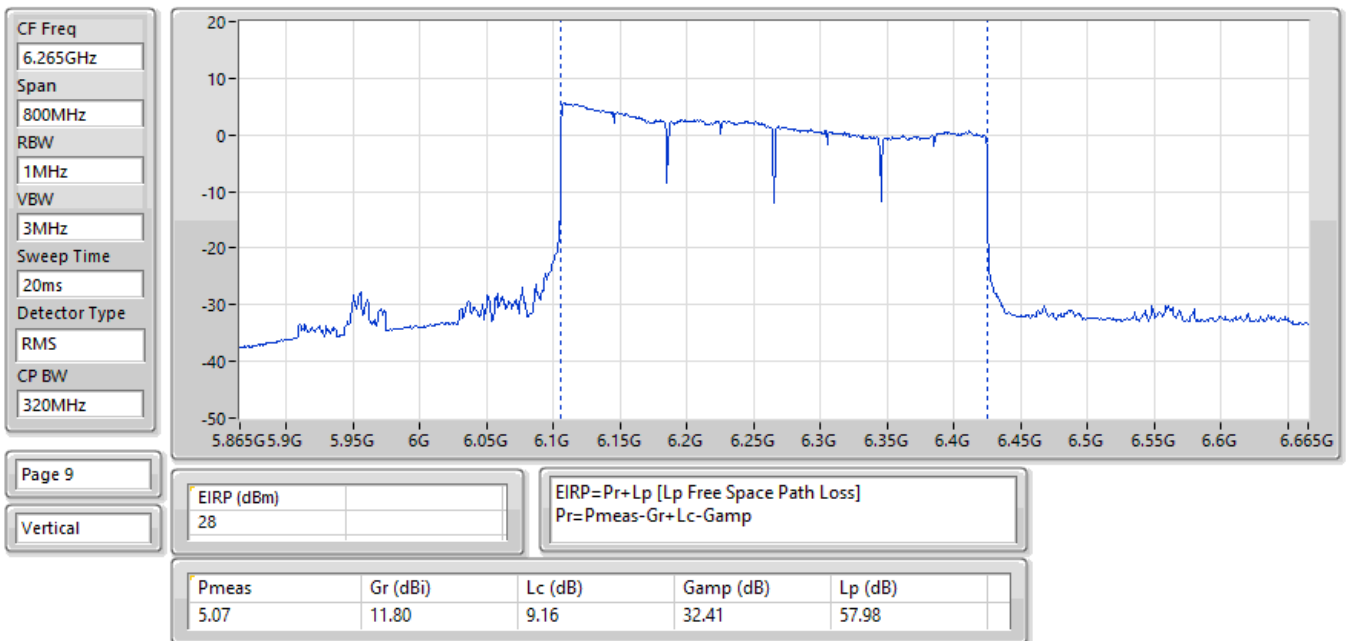


15/01/2026

EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6425MHz;TX

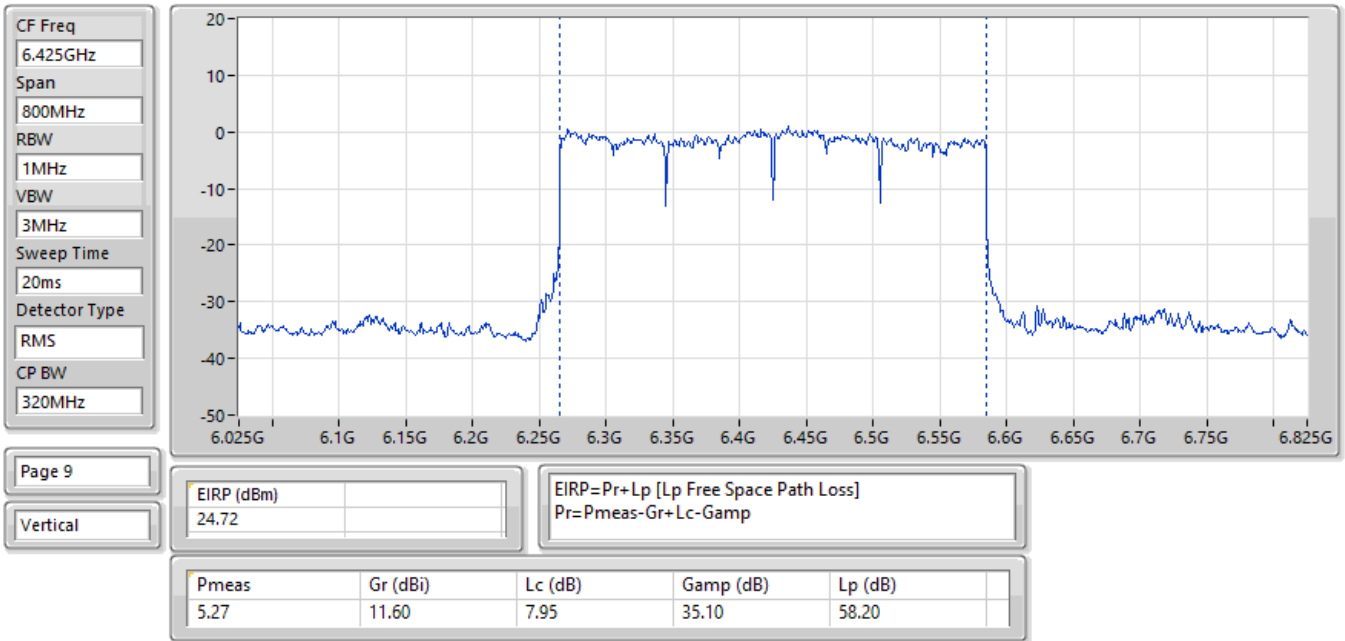

15/01/2026


EIRP;Band:6.4G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6585MHz;TX

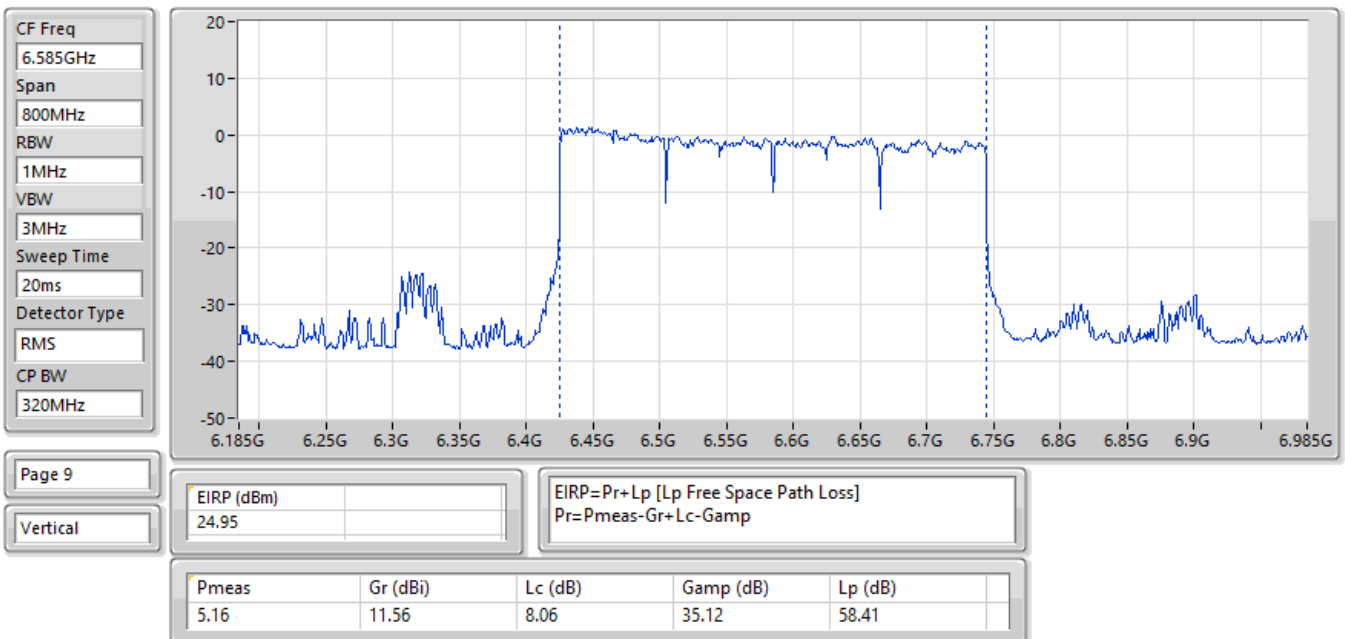

15/01/2026

EIRP;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6745MHz;TX

CF Freq
6.745GHz
Span
800MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
320MHz

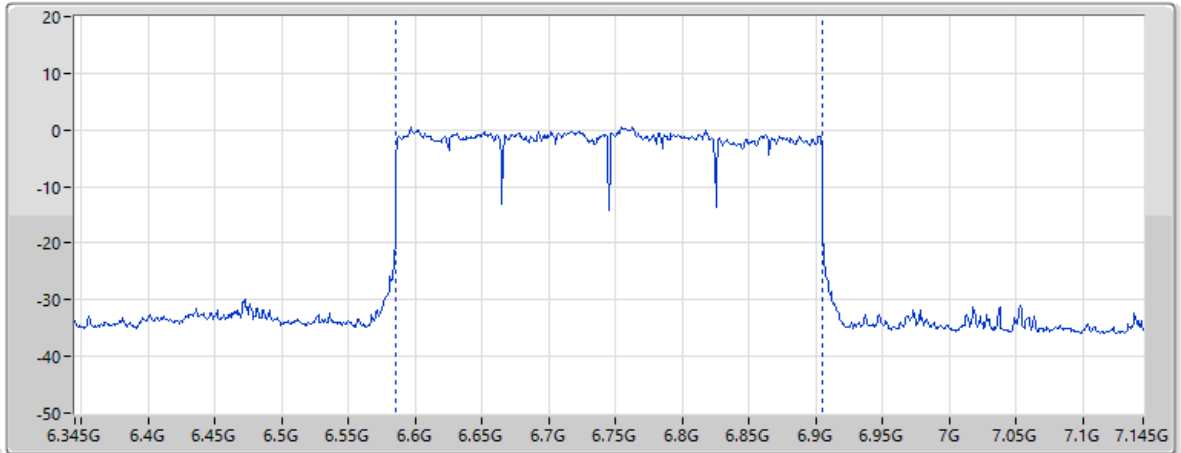


Page 9
Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
24.83				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
4.47	11.32	8.18	35.12	58.62

15/01/2026

EIRP;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6905MHz;TX

CF Freq
6.905GHz
Span
800MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.57ms
Detector Type
RMS
CP BW
320MHz

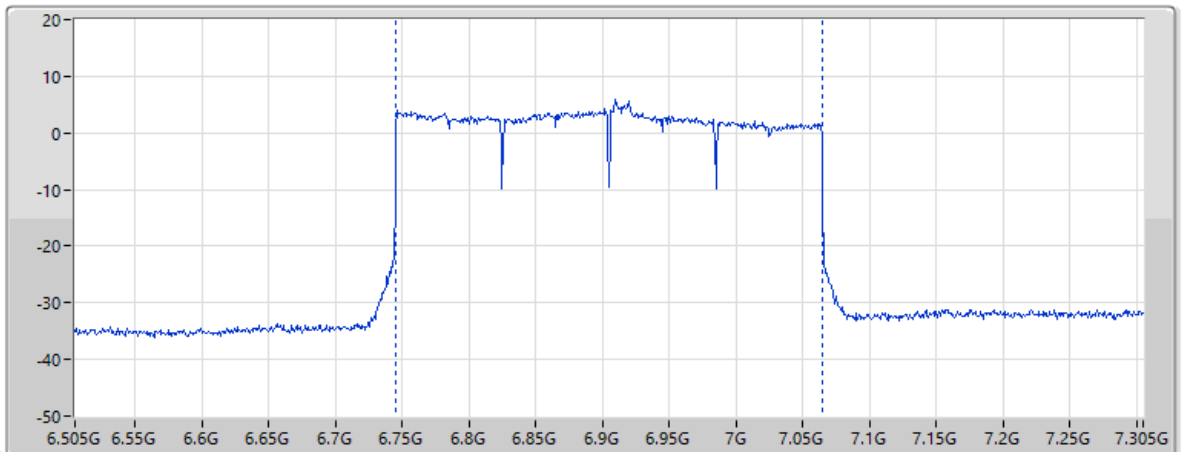

Page 9
Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
28.61				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
6.91	11.99	8.27	33.41	58.83

Summary

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.86
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.96
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.92
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.86
802.11be EHT320-BF_Nss1,(MCS0)_2TX	4.52
6.425-6.525GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.88
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.79
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.12
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.51
802.11be EHT320-BF_Nss1,(MCS0)_2TX	2.99
6.525-6.875GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.90
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.96
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.92
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.79
802.11be EHT320-BF_Nss1,(MCS0)_2TX	3.67
6.875-7.125GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.67
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.56
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.99
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.82

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

20/01/2026

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5955MHz;TX

CF Freq
5.955GHz

Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

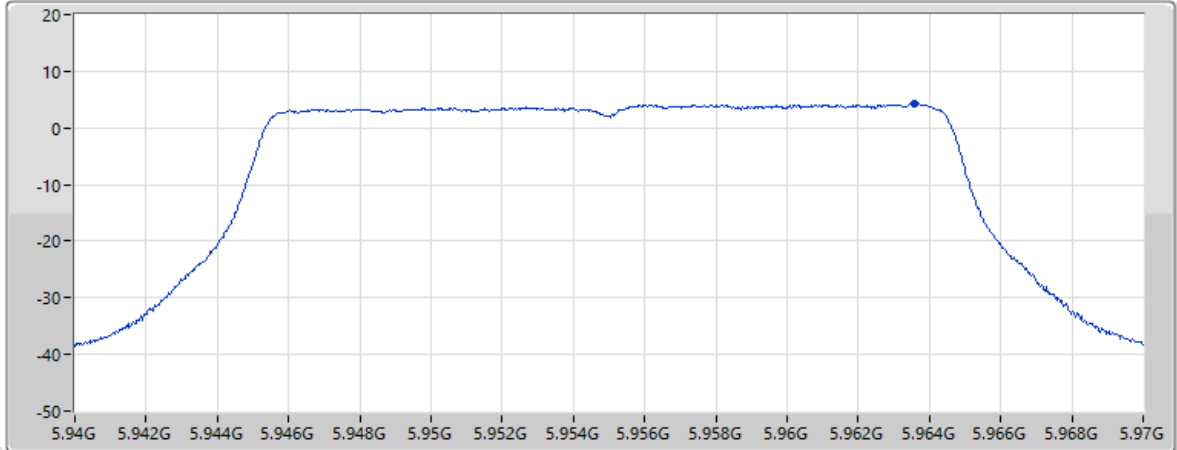

Page 7

Vertical

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
4.34		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-14.71	11.03	7.53	35.00	57.55

20/01/2026

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6195MHz;TX

CF Freq
6.195GHz

Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

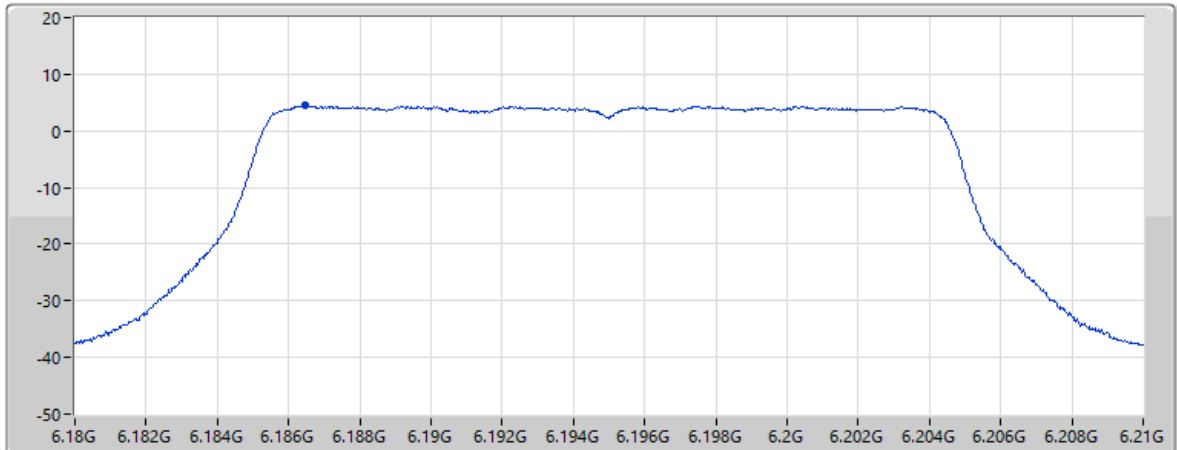


Page 7

Vertical

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
4.5		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-14.99	11.07	7.74	35.05	57.87


20/01/2026

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6415MHz;TX

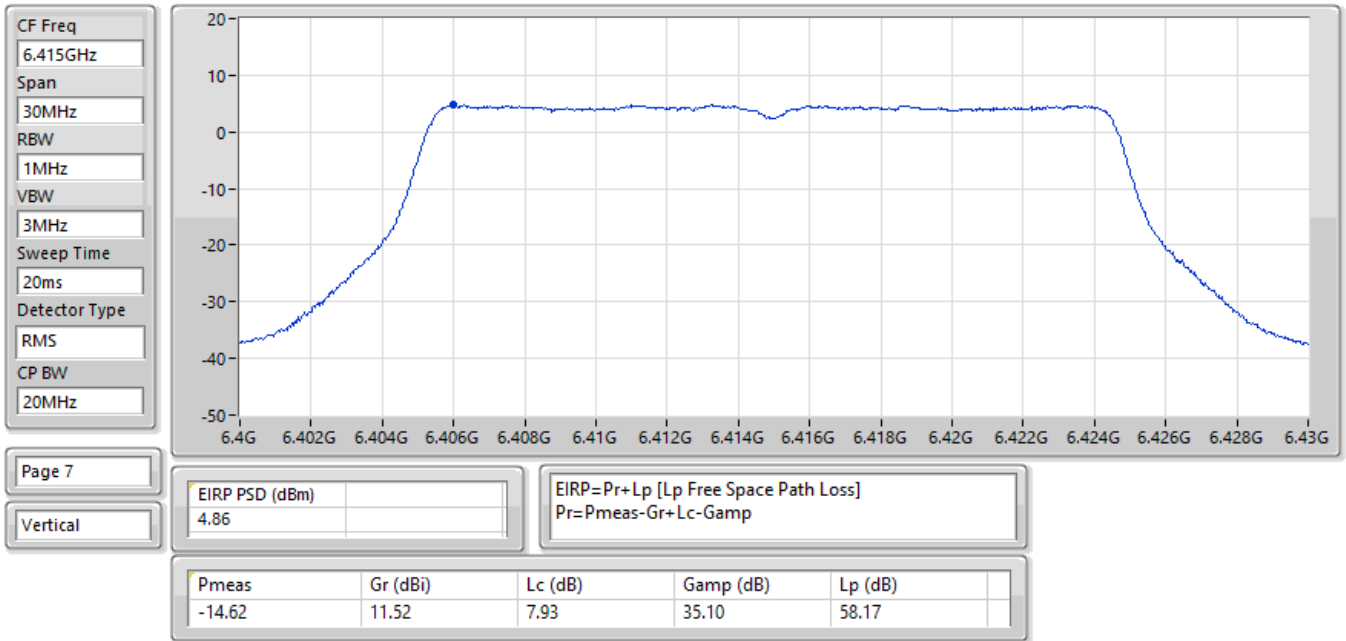

20/01/2026


EIRP PSD;Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6435MHz;TX

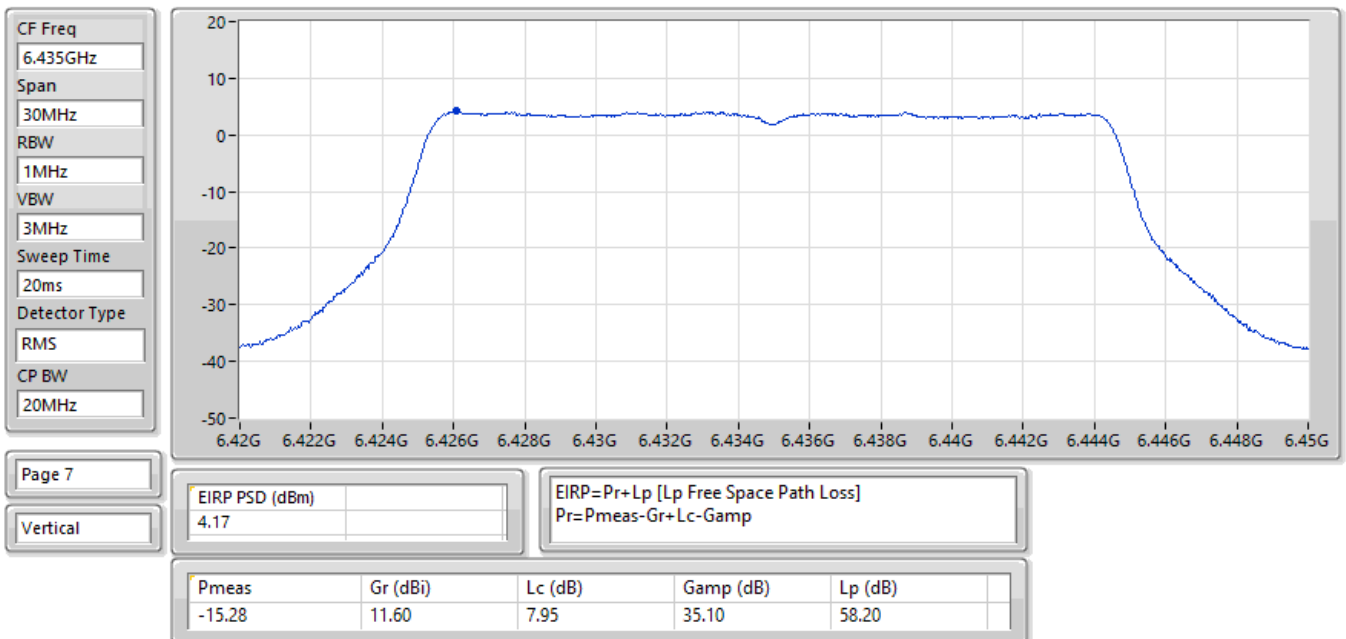

20/01/2026

EIRP PSD;Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6475MHz;TX

CF Freq
6.475GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

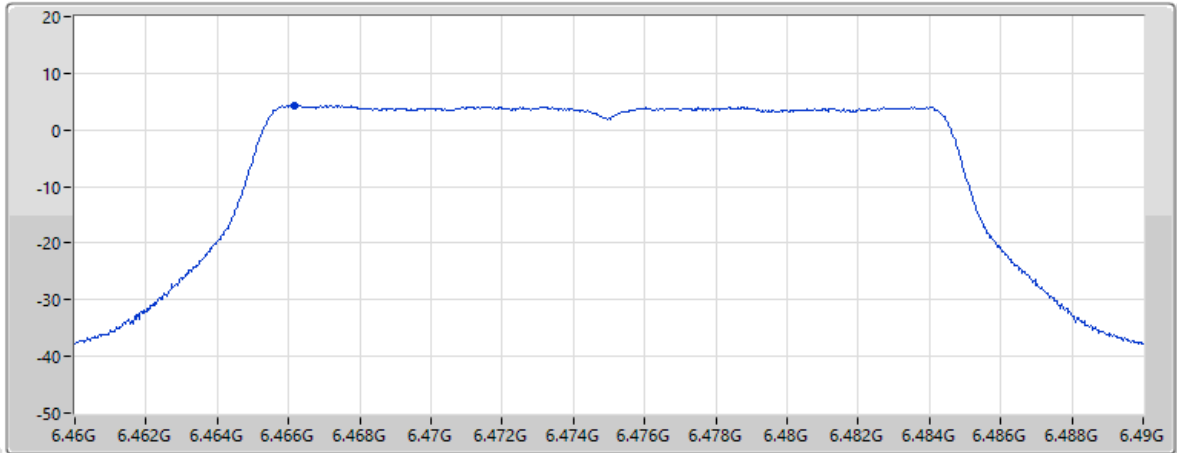


Page 7
Vertical

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.35				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.05	11.73	7.98	35.11	58.26

20/01/2026

EIRP PSD;Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6515MHz;TX

CF Freq
6.515GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

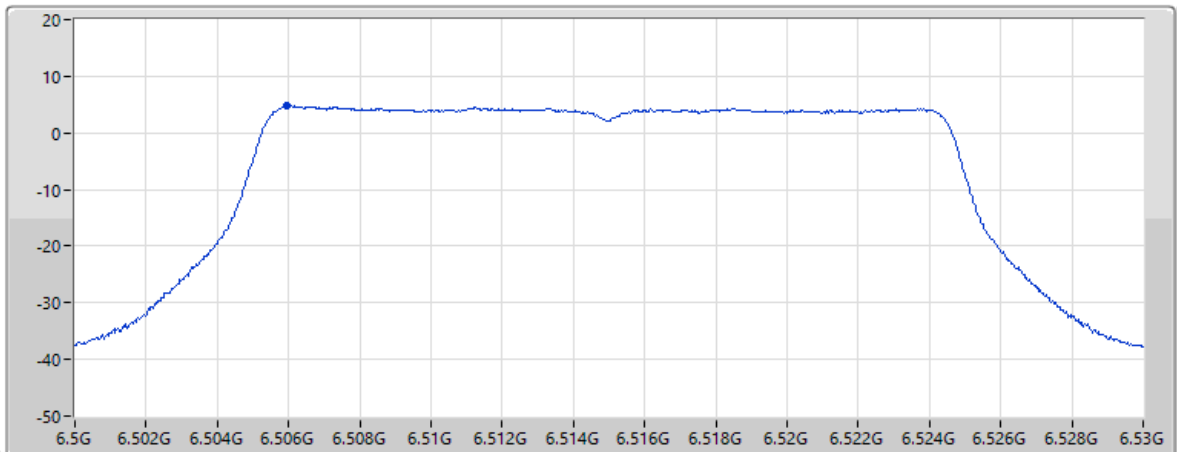


Page 7
Vertical

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
4.88				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-14.52	11.79	8.00	35.12	58.31


20/01/2026

EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6535MHz;TX

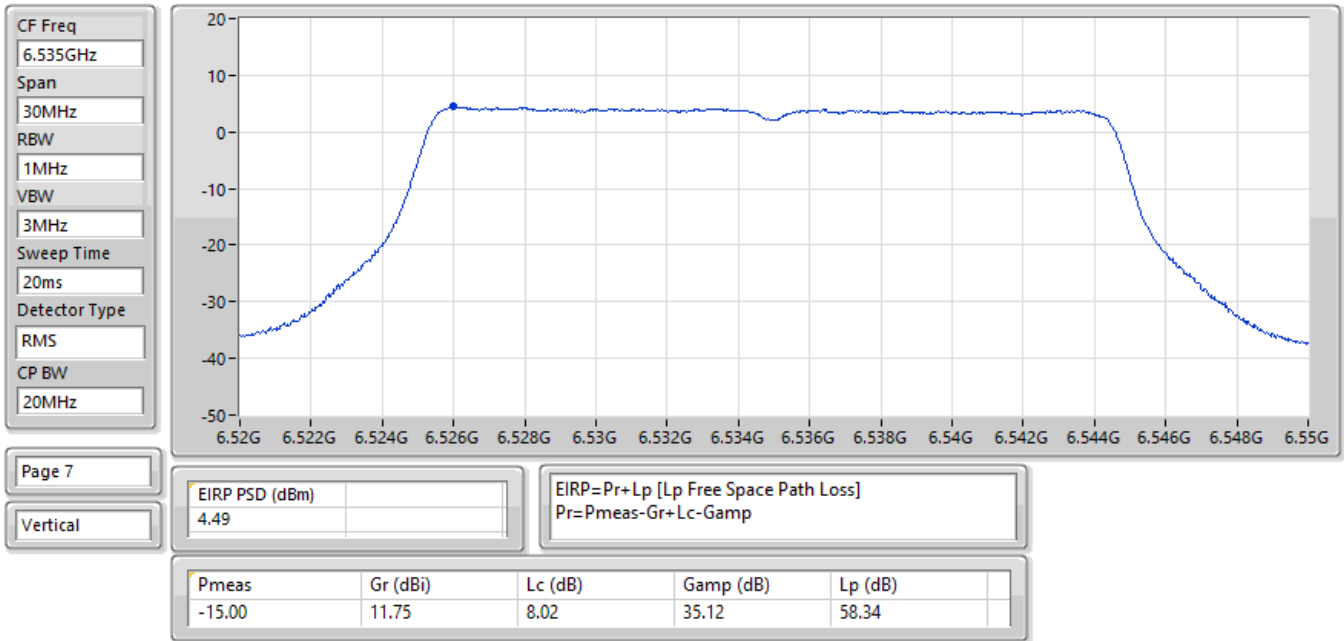


20/01/2026

EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6695MHz;TX

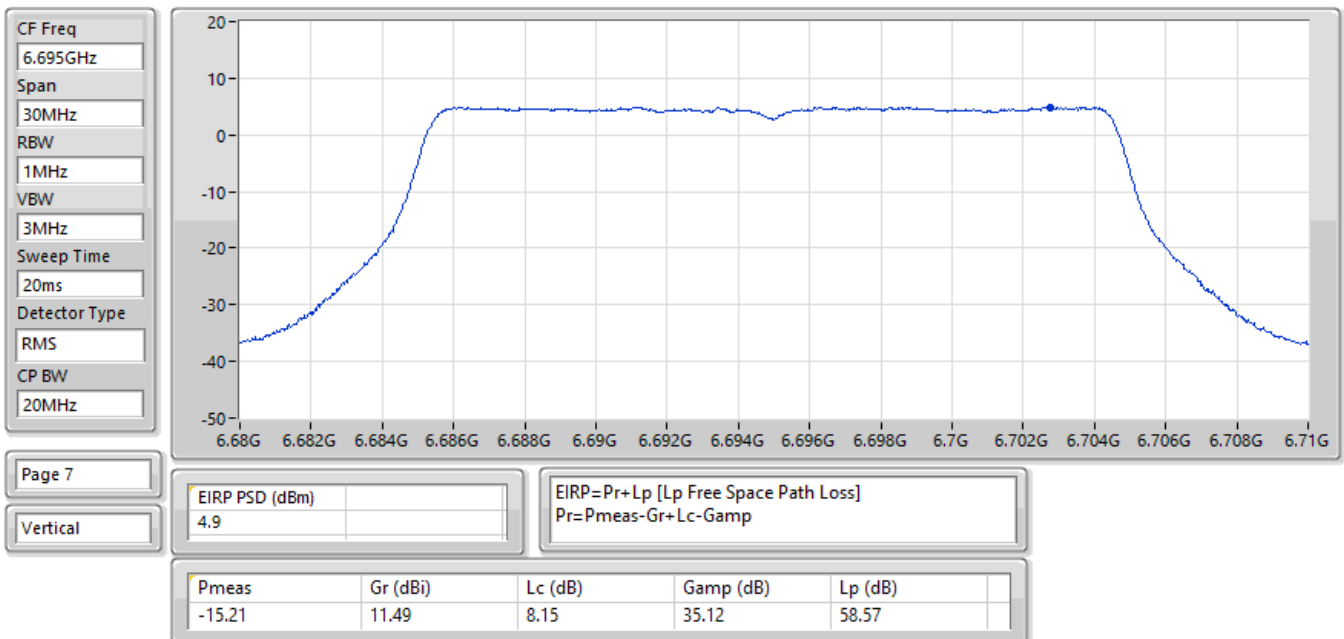


20/01/2026

EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6875MHz;TX

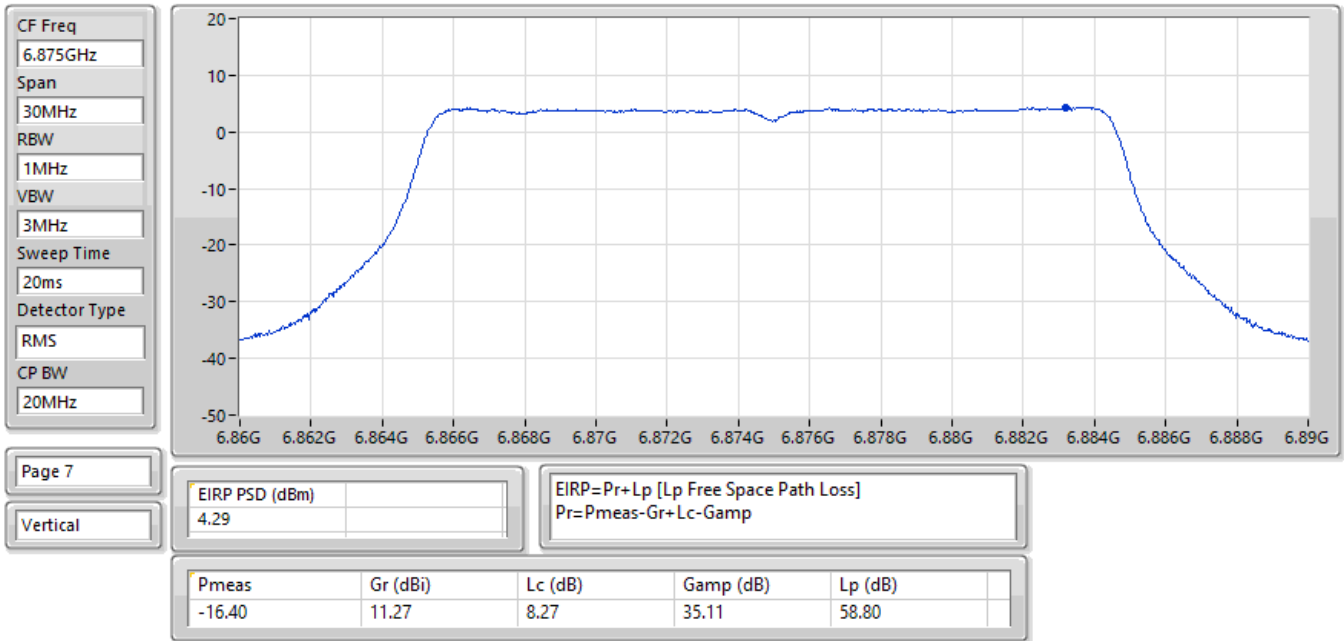


20/01/2026

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6895MHz;TX

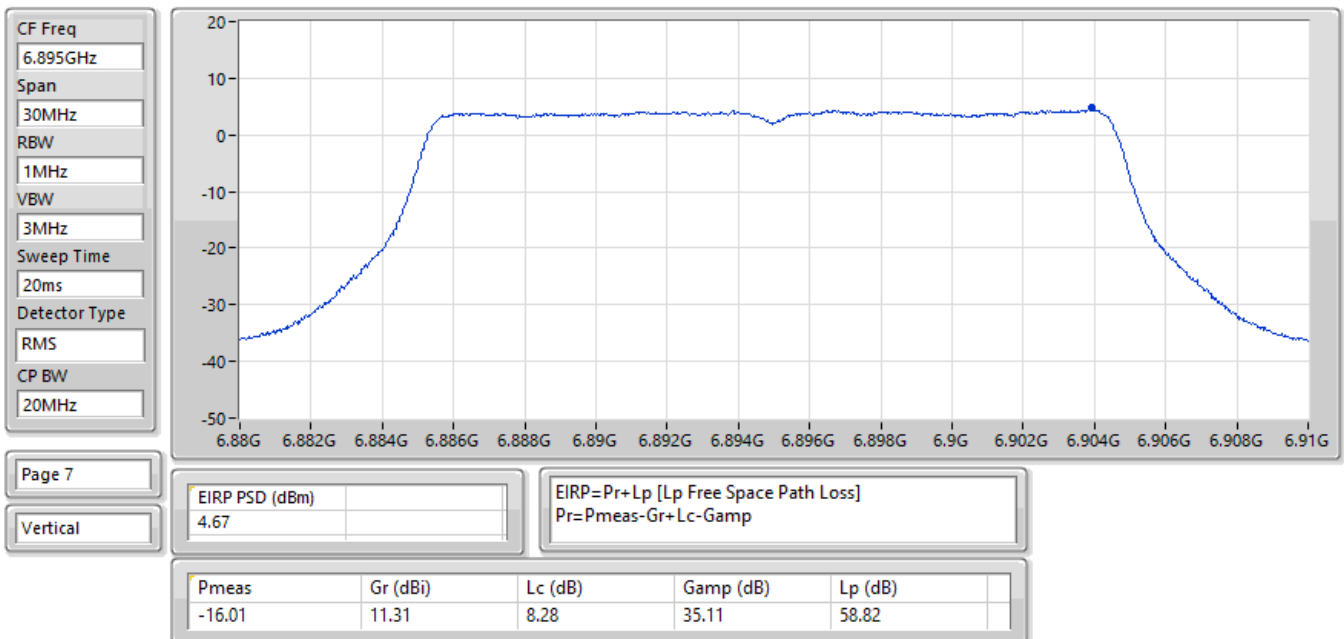


20/01/2026

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6995MHz;TX

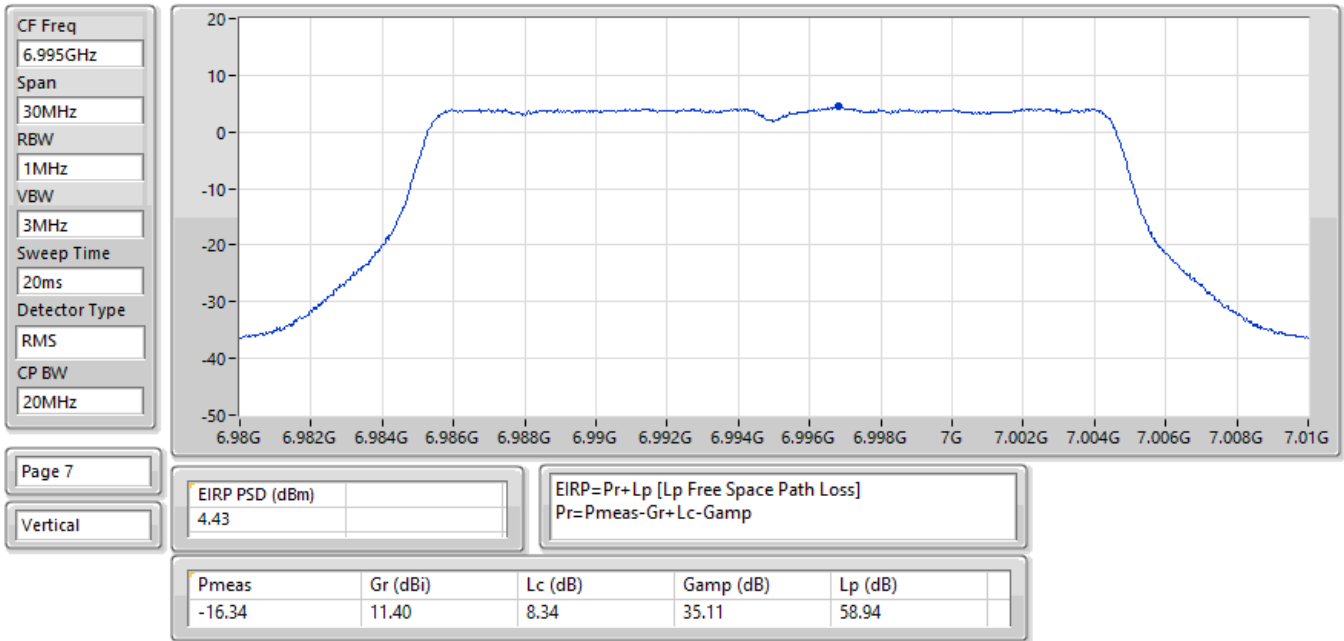


21/01/2026

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:7095MHz;TX

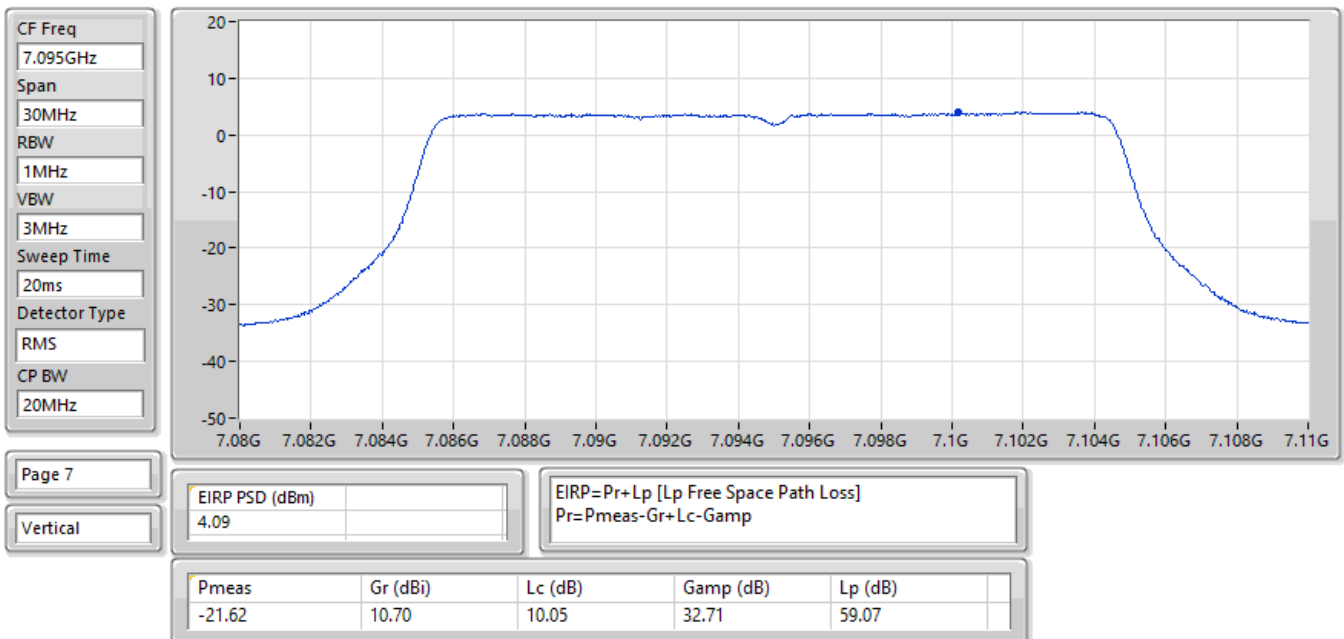


20/01/2026

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5965MHz;TX

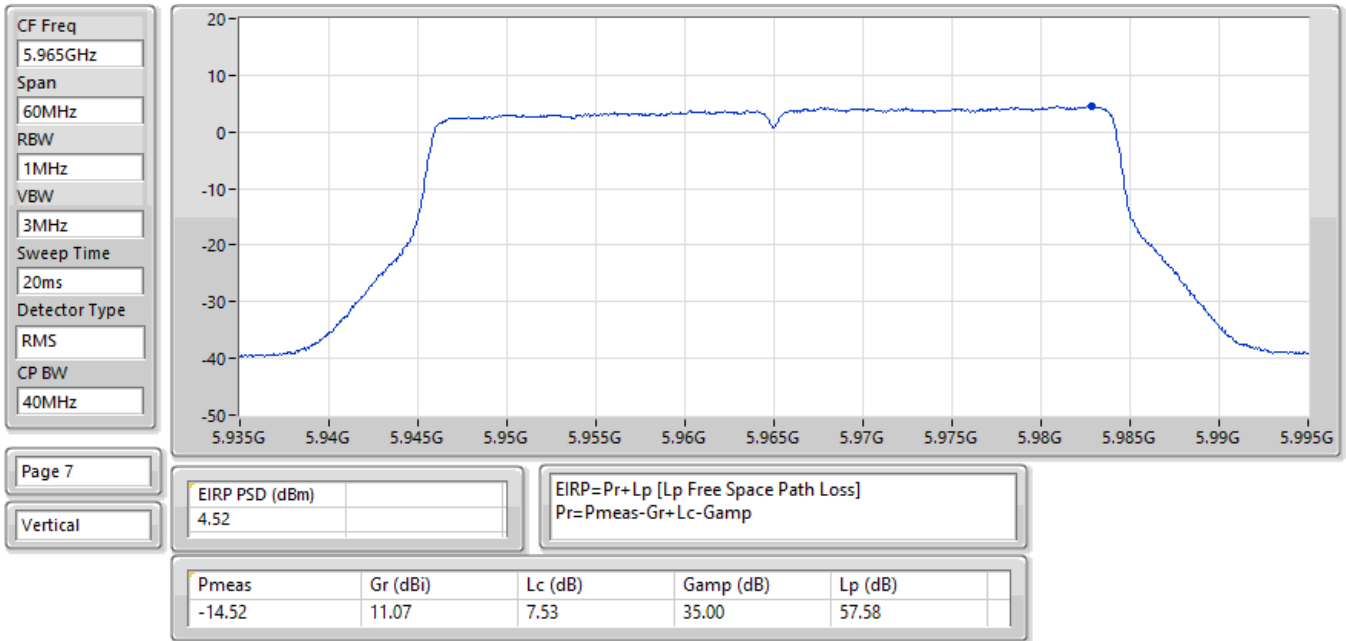


20/01/2026

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6205MHz;TX

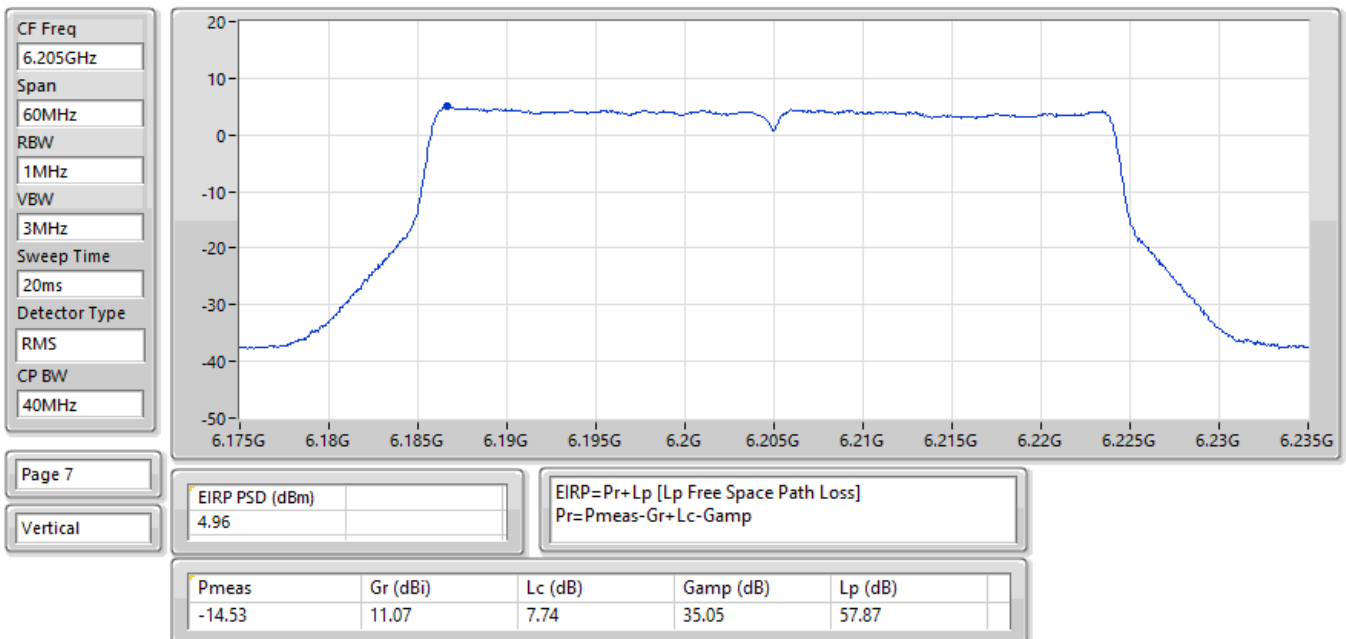


20/01/2026

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6405MHz;TX

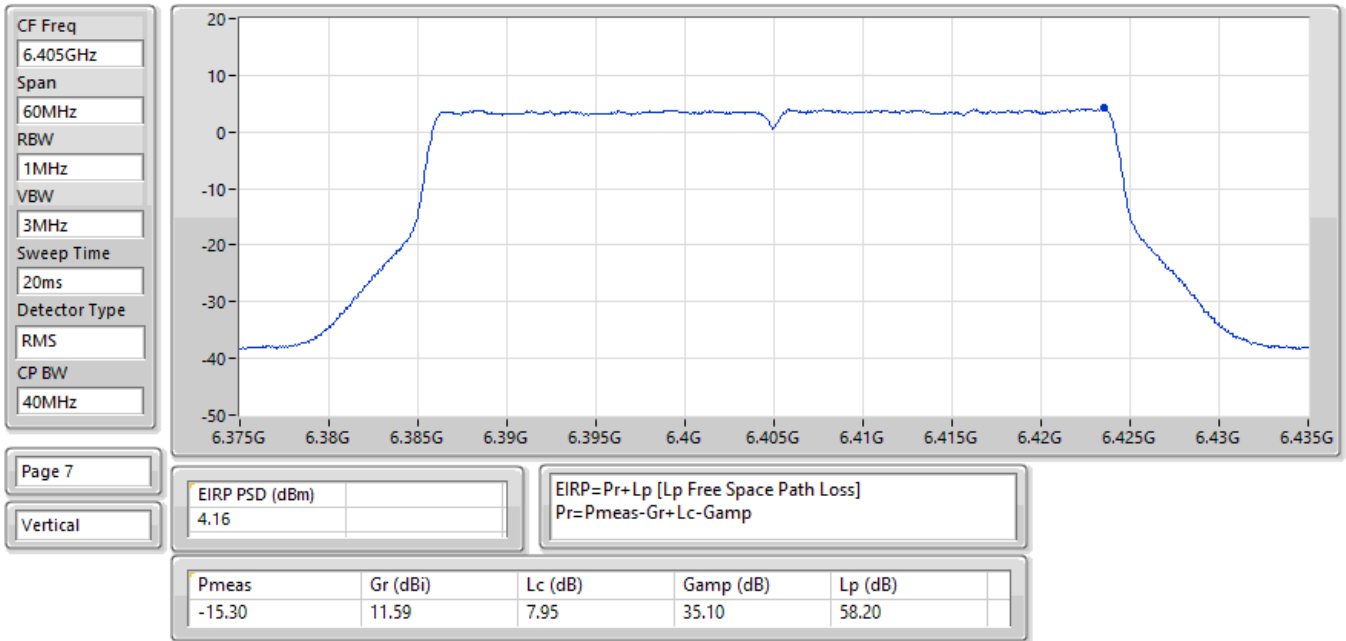


20/01/2026

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6445MHz;TX

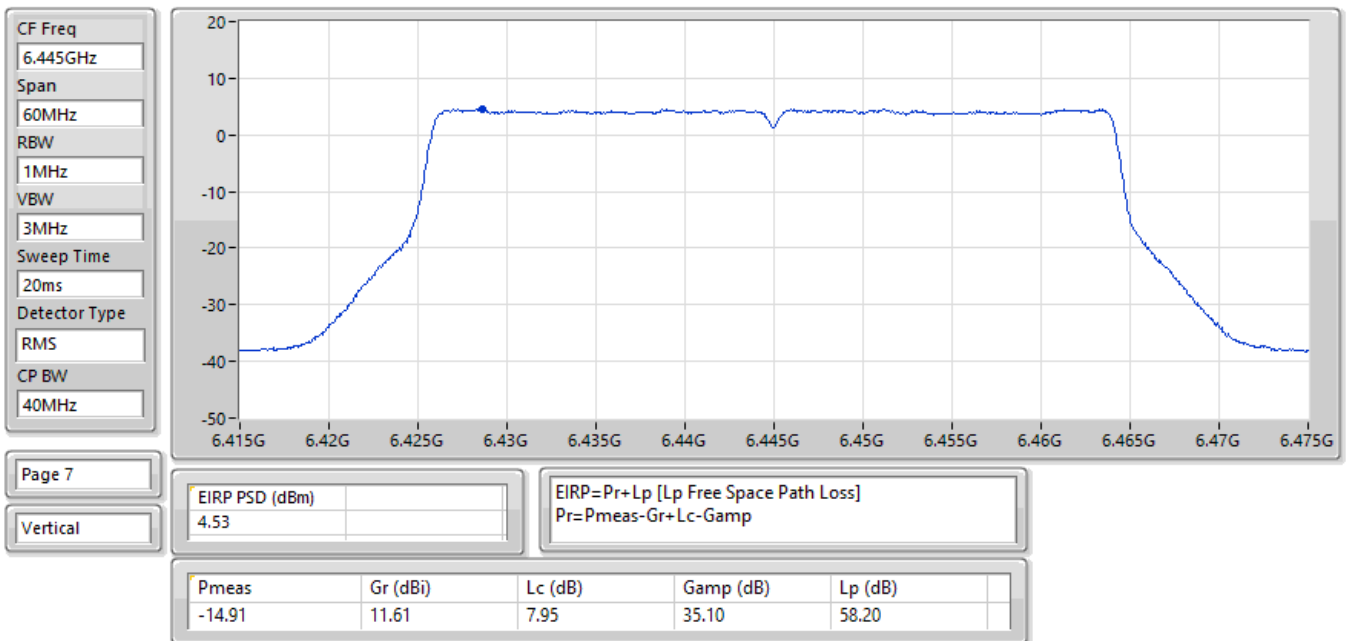


20/01/2026

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6485MHz;TX

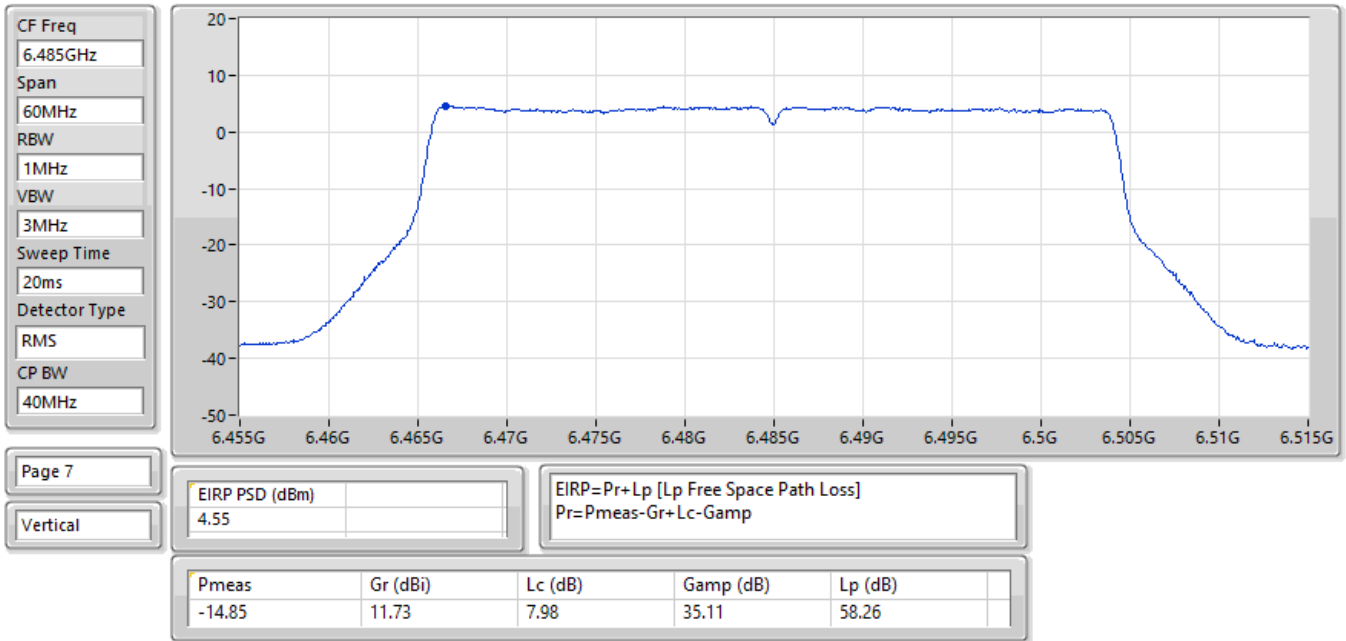


20/01/2026

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6525MHz;TX

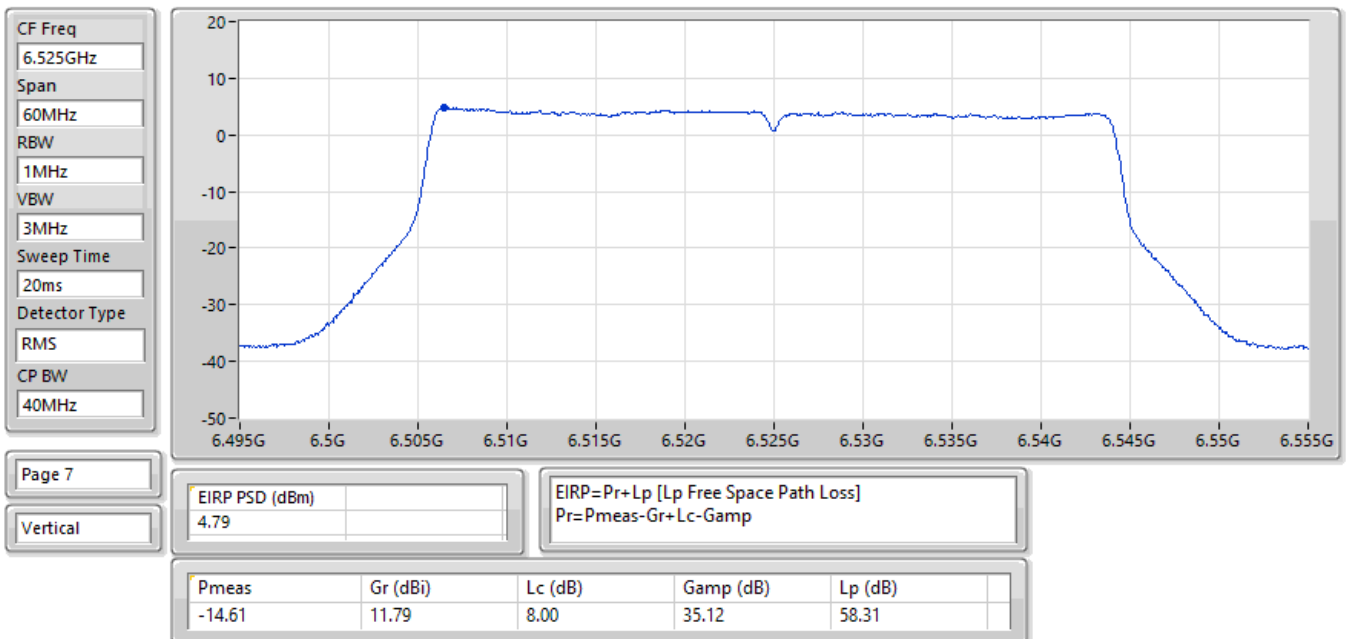


20/01/2026

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6565MHz;TX

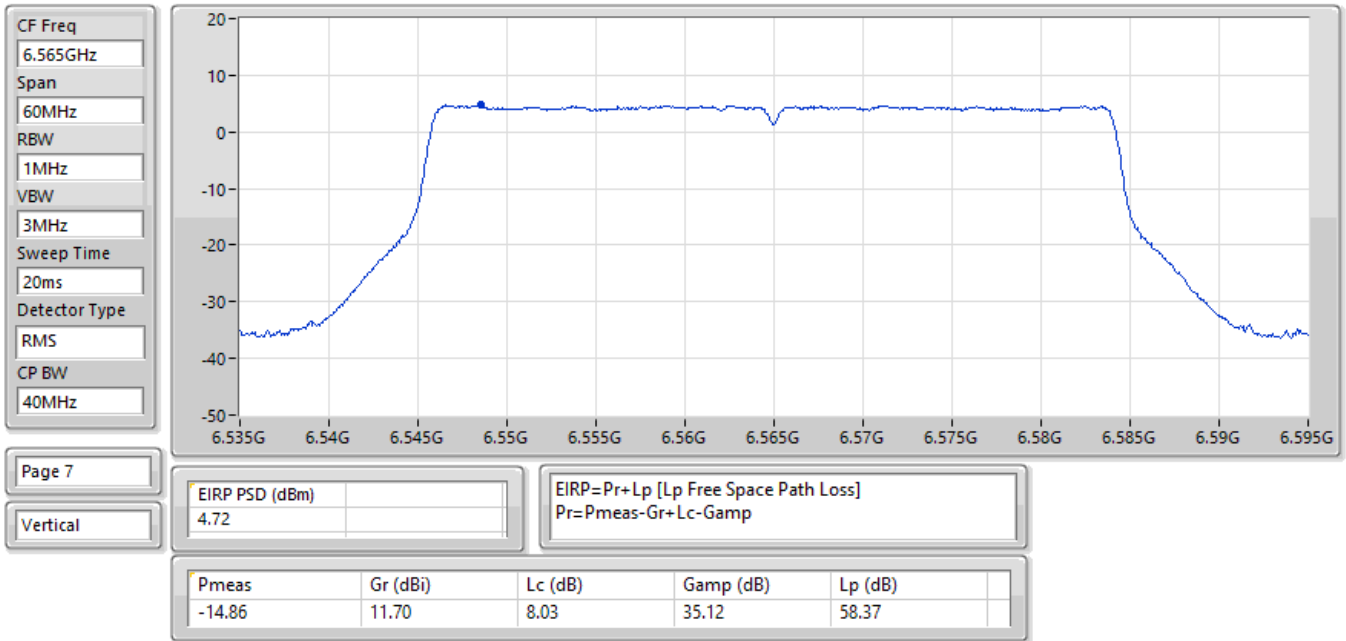


20/01/2026

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6685MHz;TX

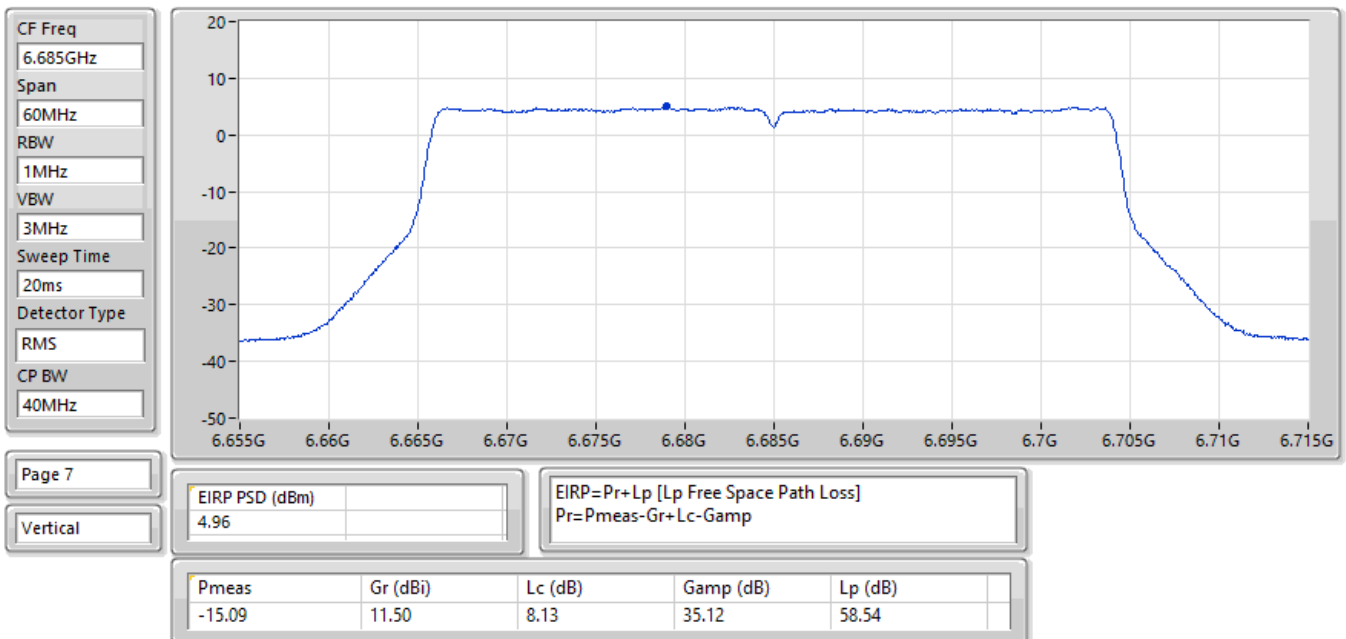


20/01/2026

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6885MHz;TX

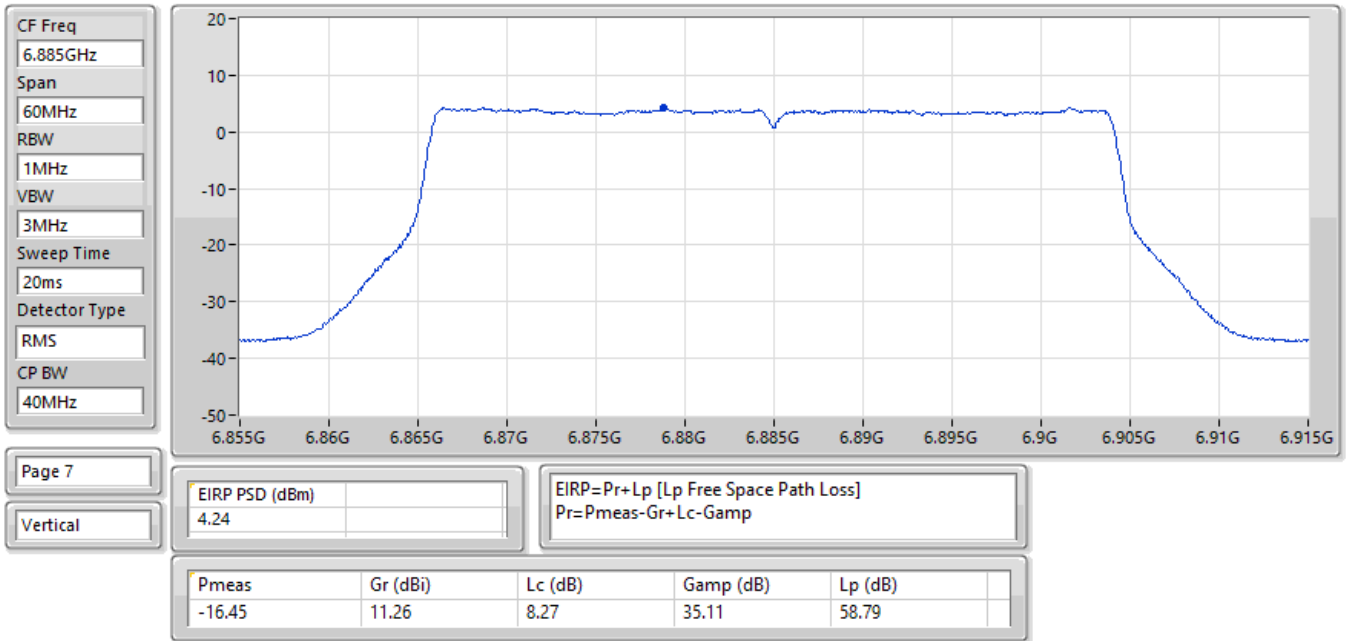


20/01/2026

EIRP PSD;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6925MHz;TX

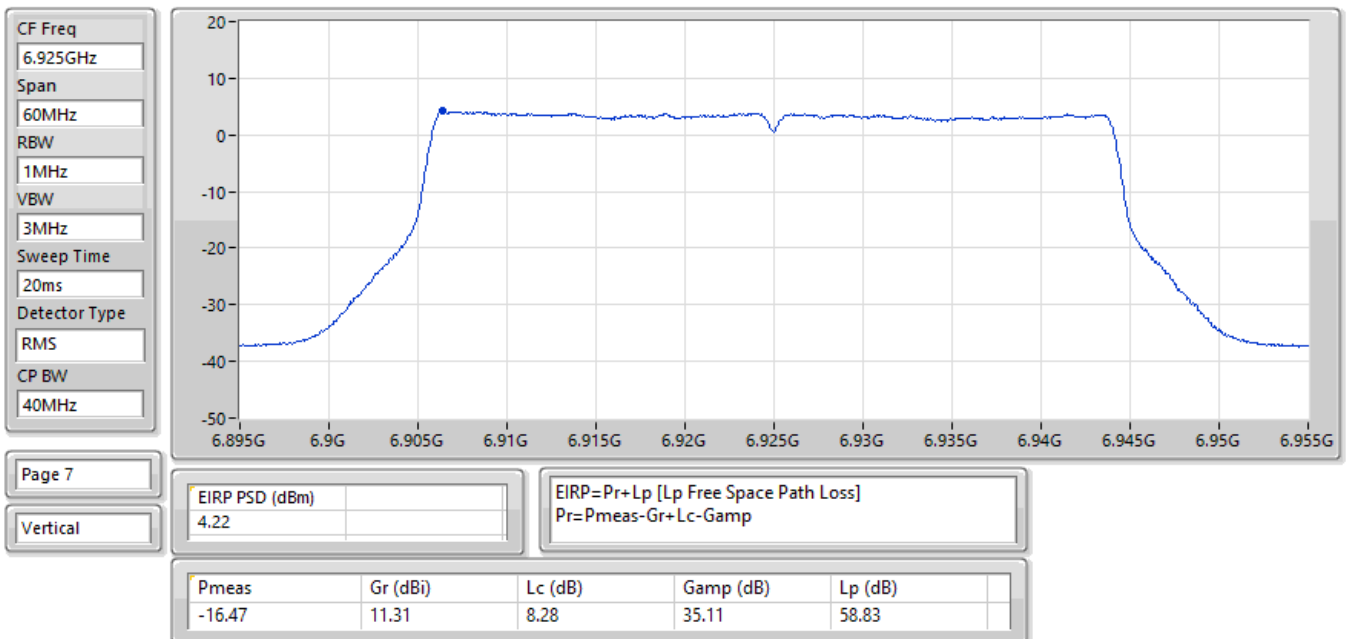


20/01/2026

EIRP PSD;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:7005MHz;TX

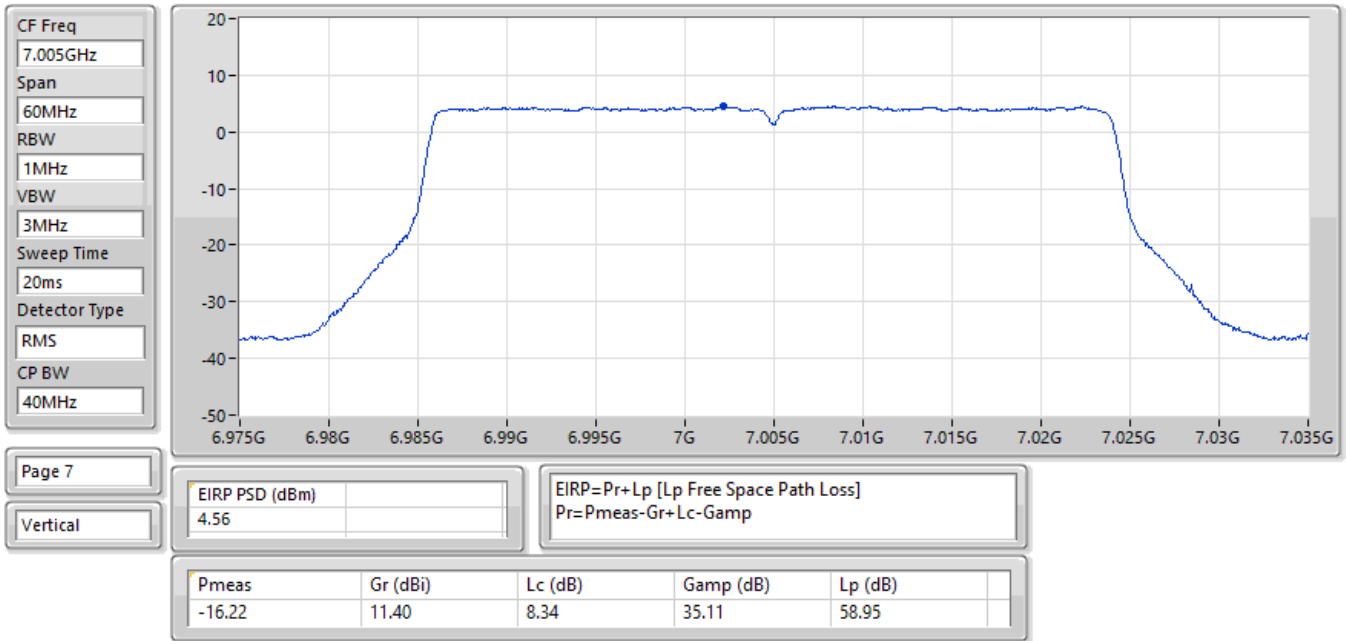


20/01/2026

EIRP PSD;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:7085MHz;TX

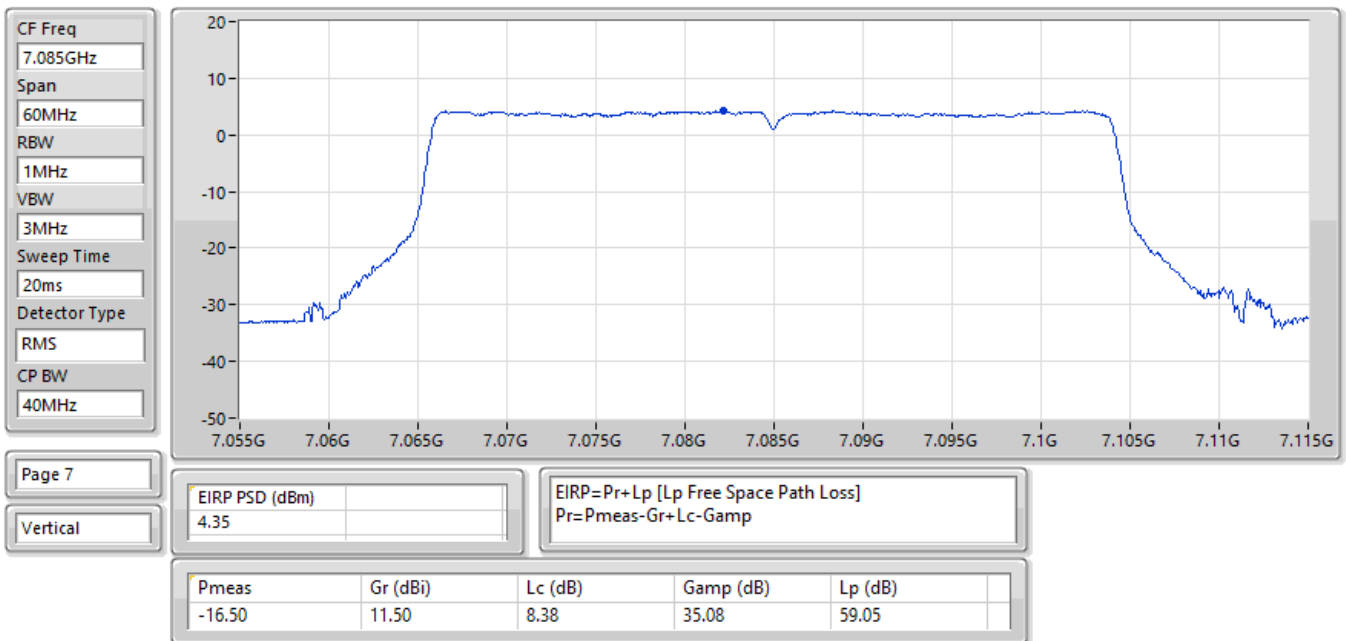


26/01/2026

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:5985MHz;TX

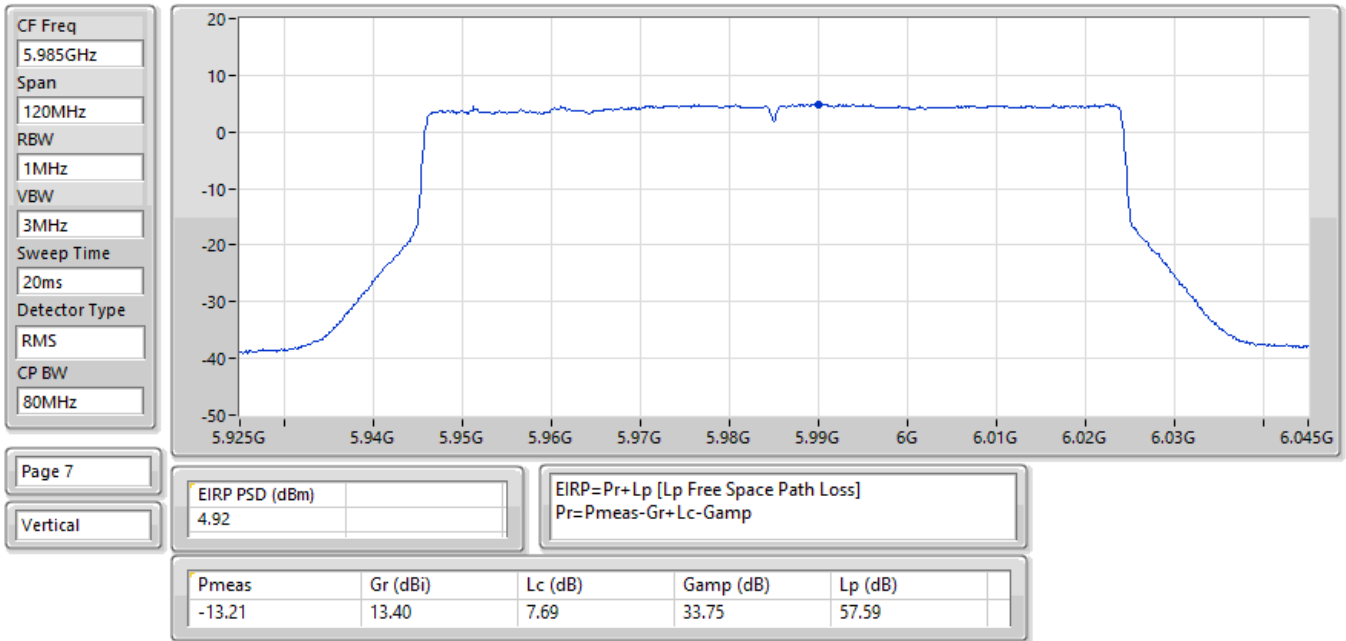


16/01/2026

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6225MHz;TX

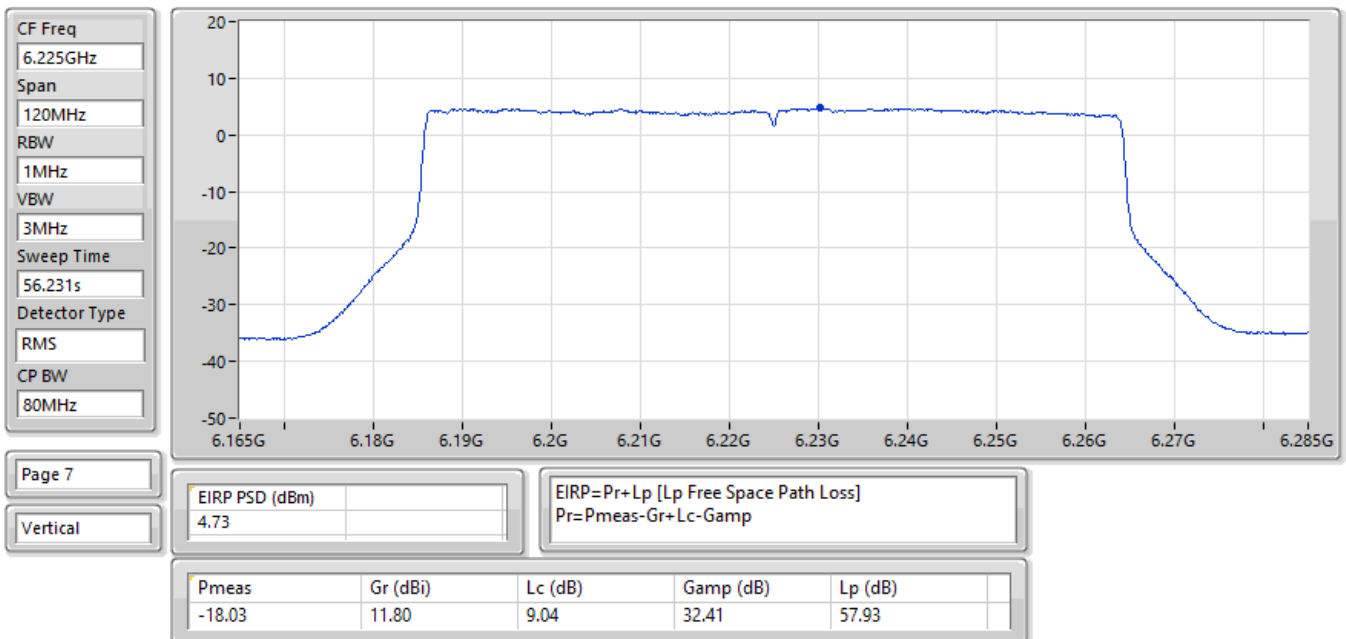


16/01/2026

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6385MHz;TX

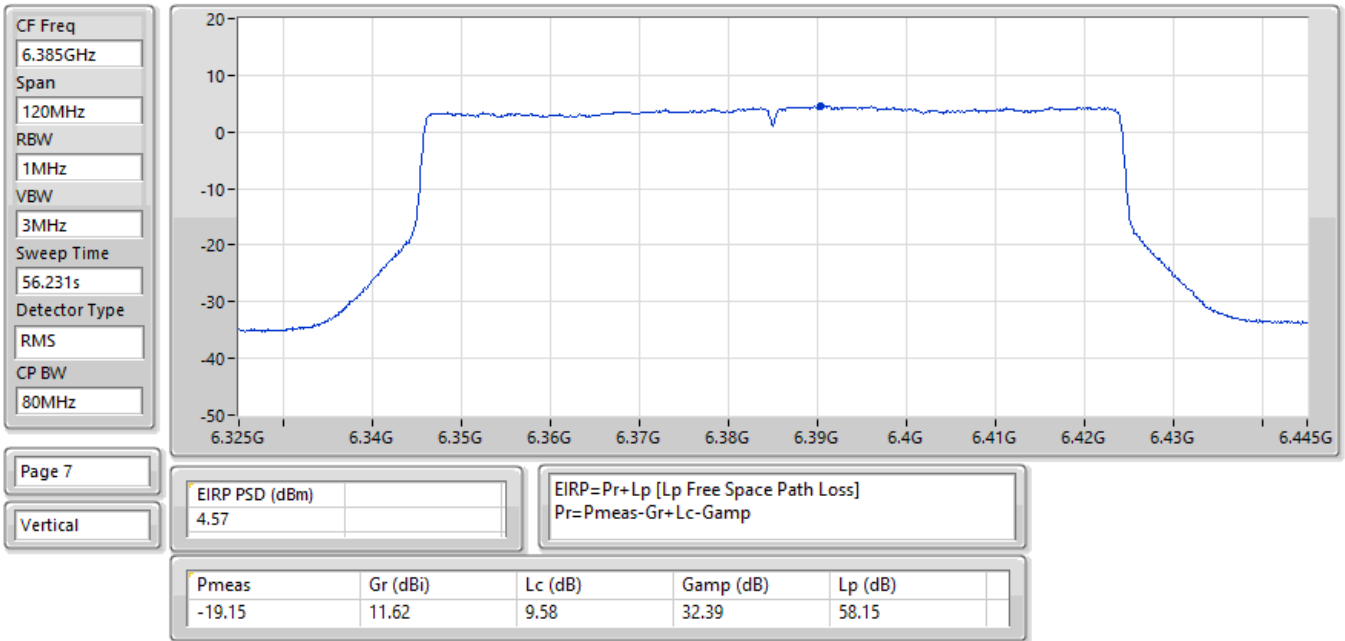


16/01/2026

EIRP PSD;Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6465MHz;TX

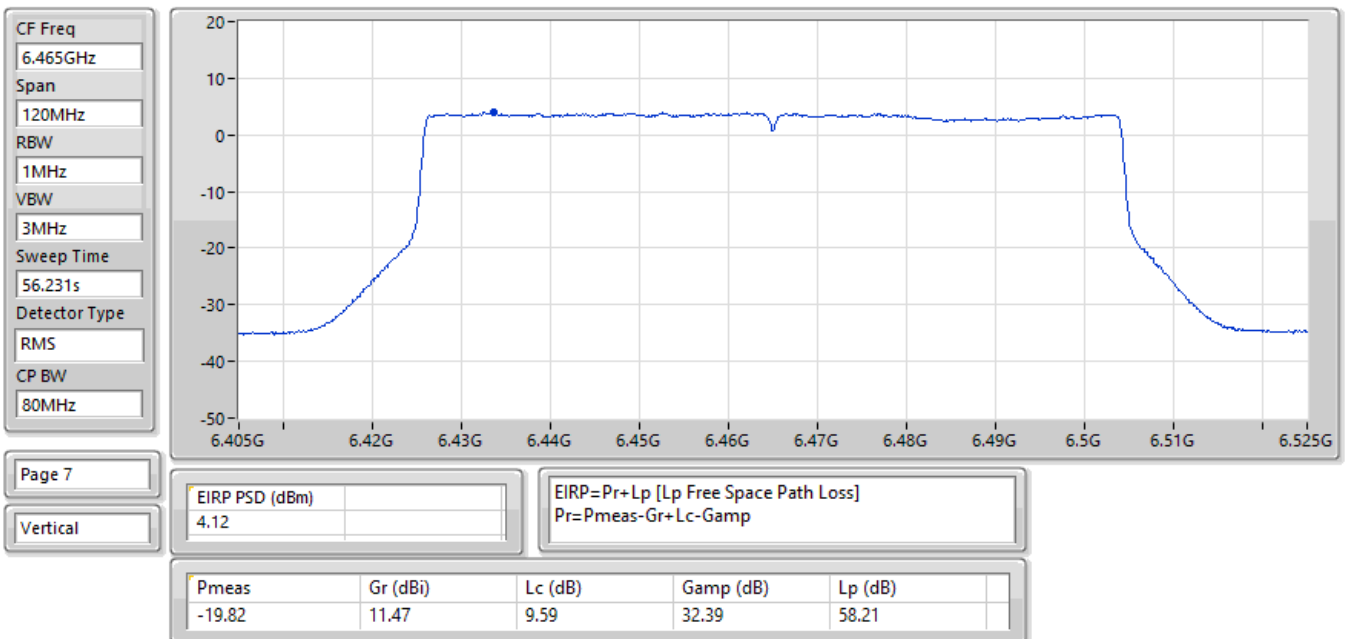


16/01/2026

EIRP PSD;Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6545MHz;TX

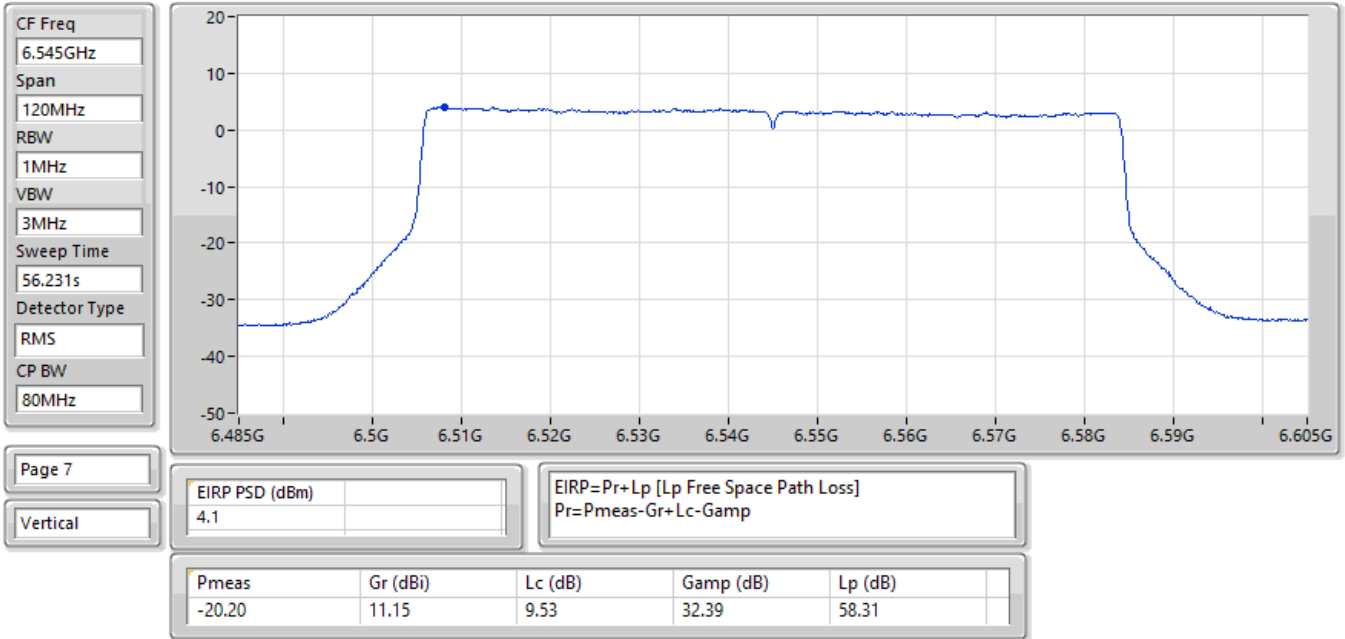


16/01/2026

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6625MHz;TX

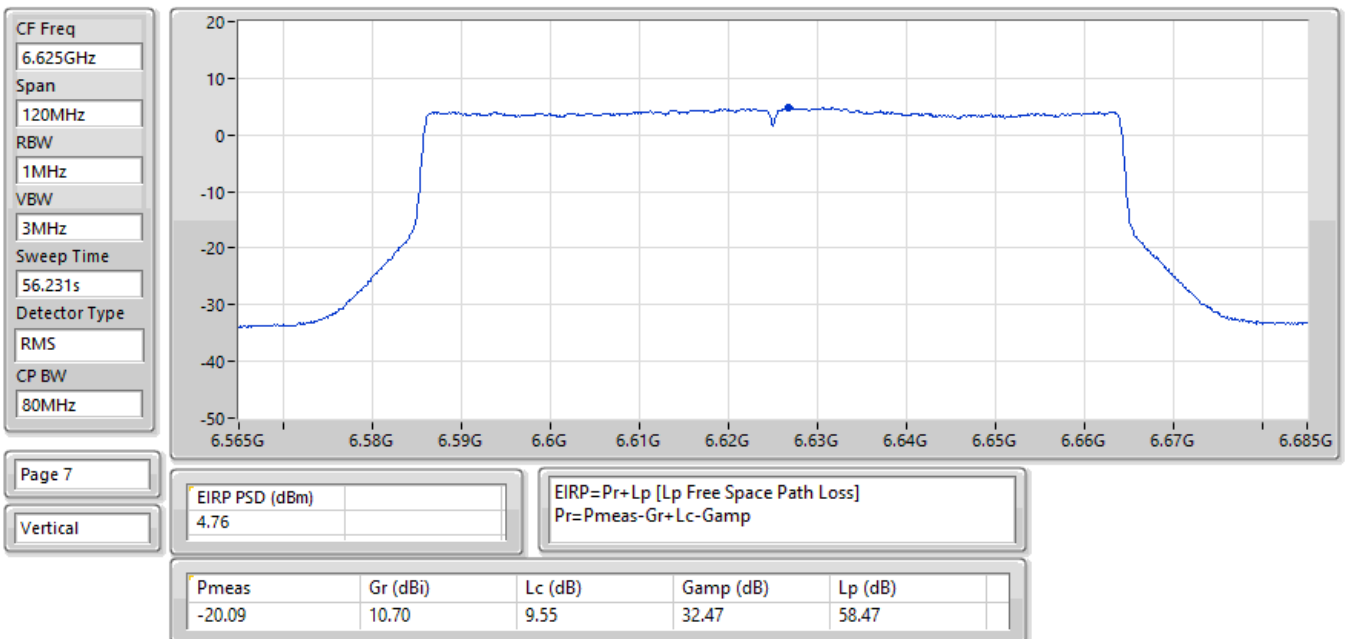


20/01/2026

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6705MHz;TX

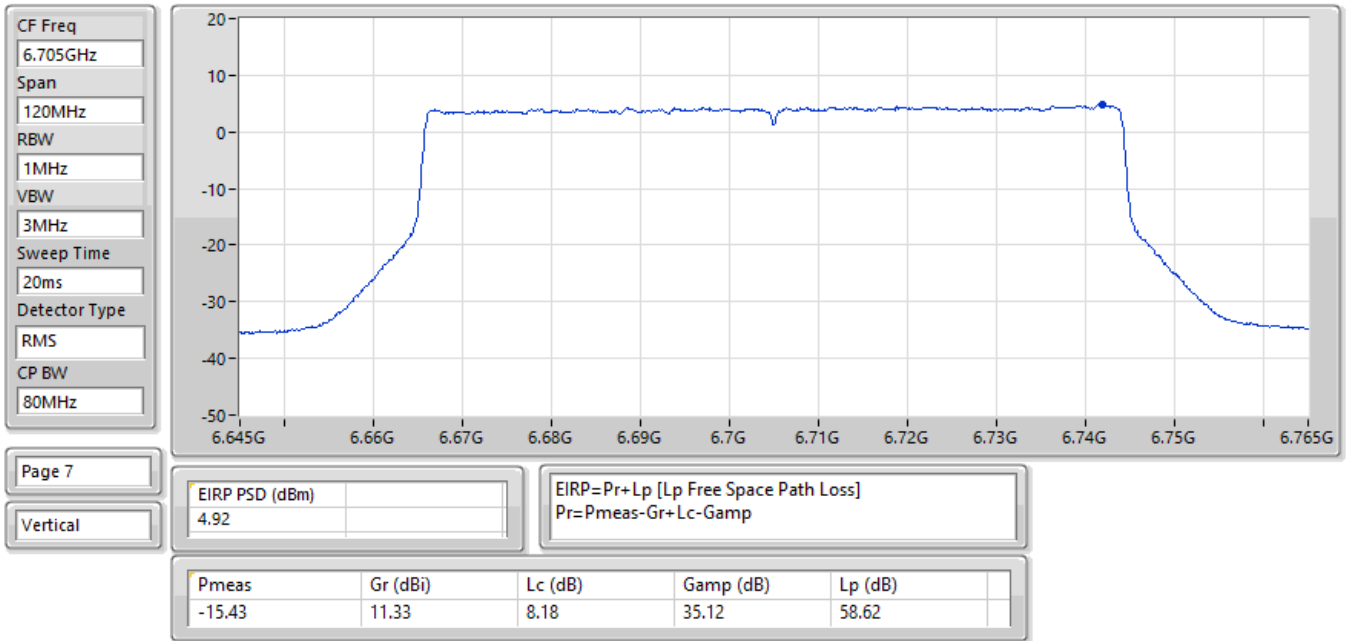


16/01/2026

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6785MHz;TX

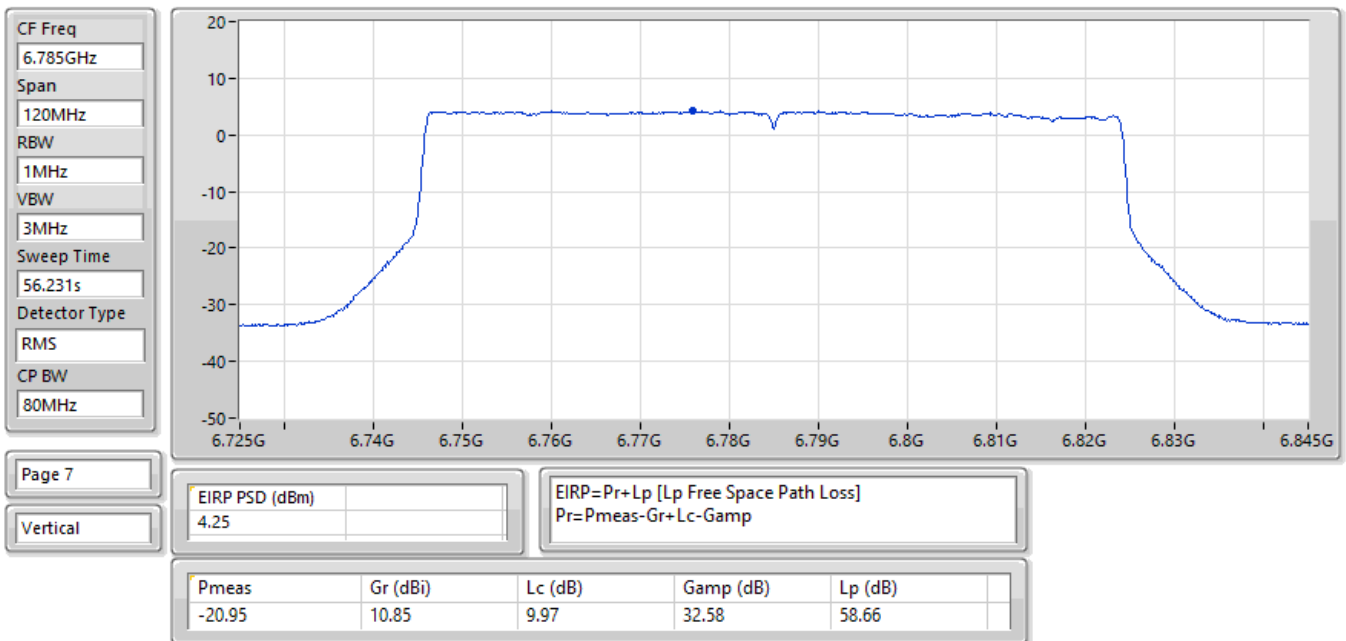


16/01/2026

EIRP PSD;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6865MHz;TX

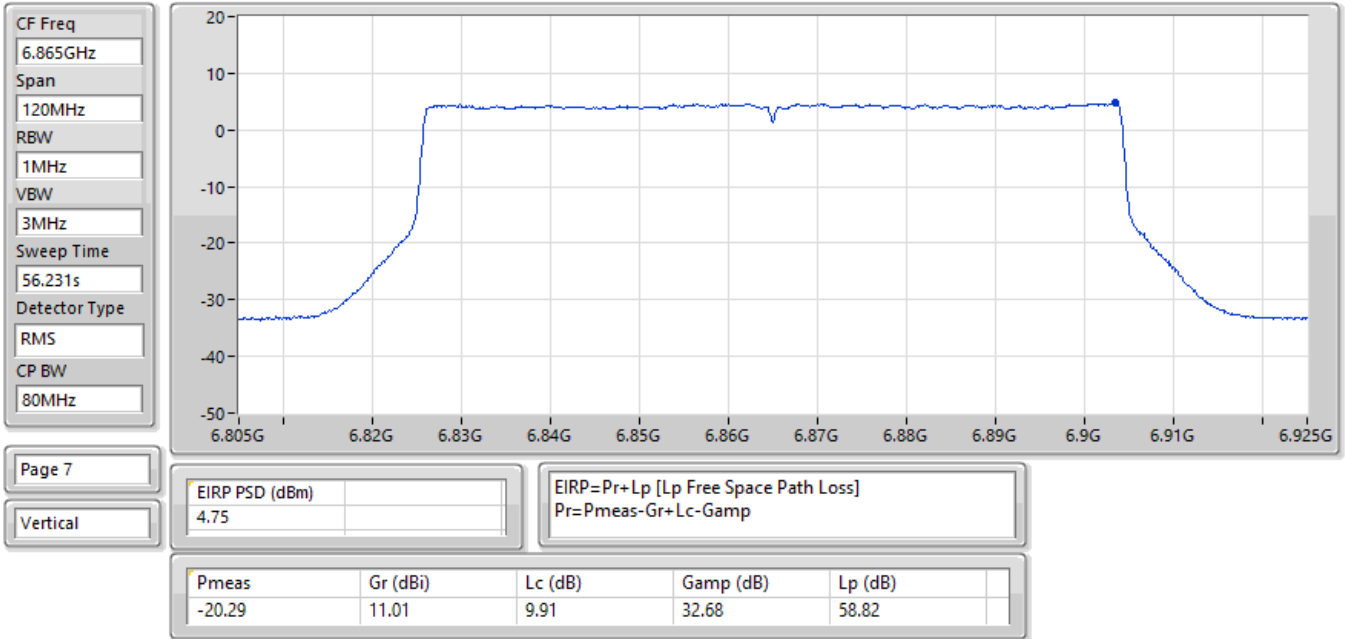


20/01/2026

EIRP PSD;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6945MHz;TX

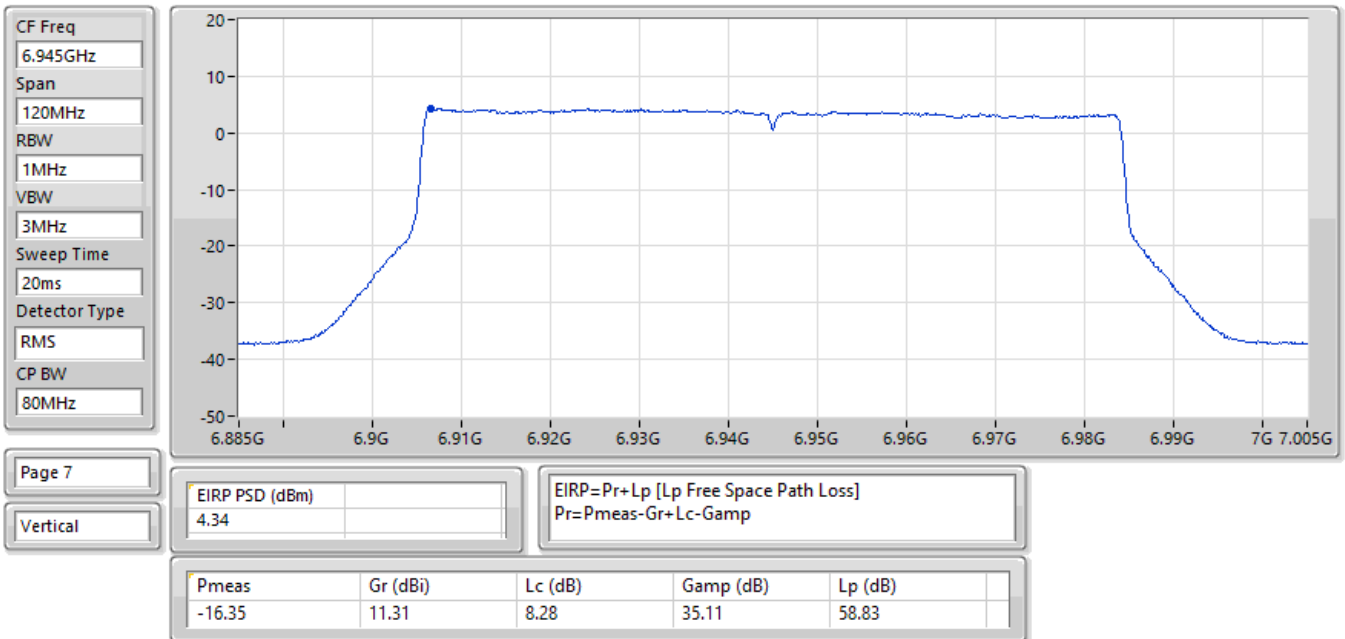


02/06/2025

EIRP PSD;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:7025MHz;TX

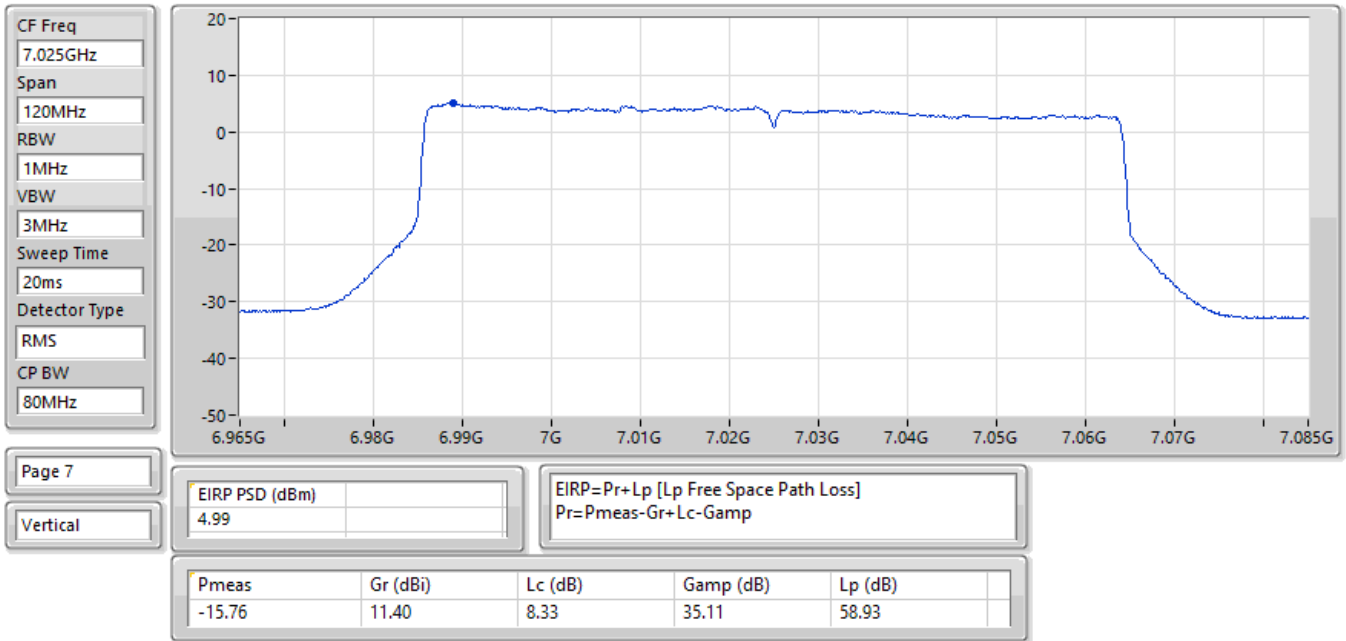


20/01/2026

EIRP PSD;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6025MHz;TX

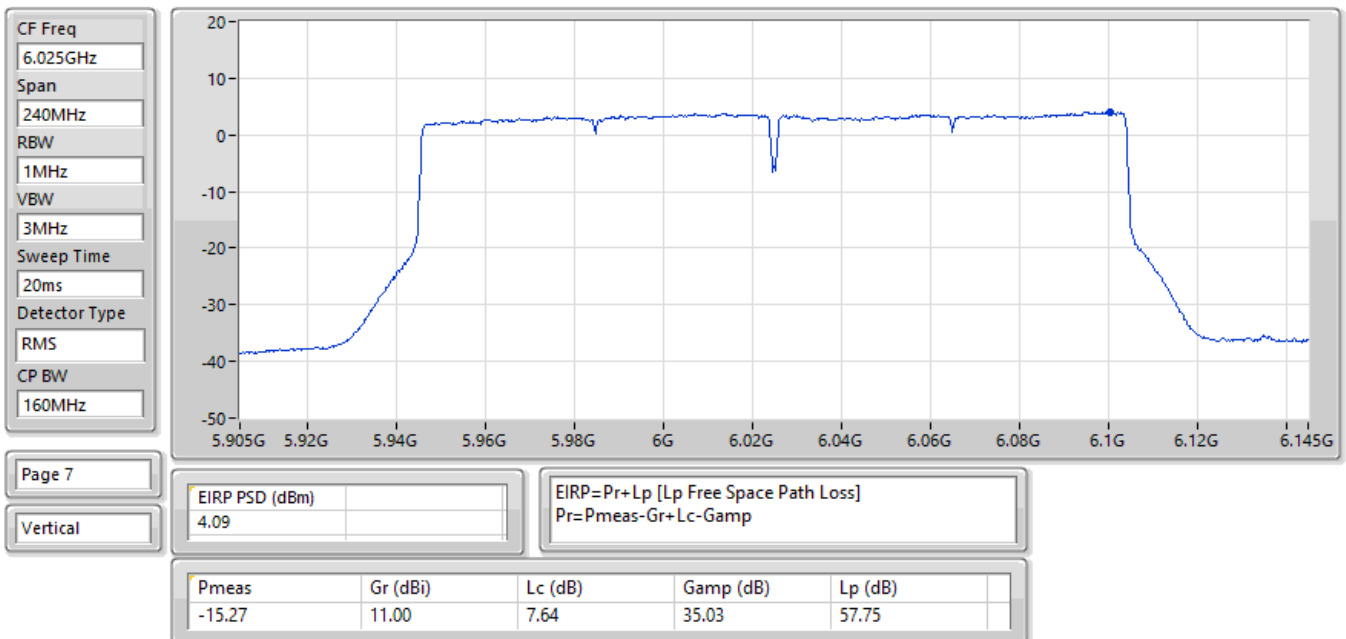


16/01/2026

EIRP PSD;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6185MHz;TX

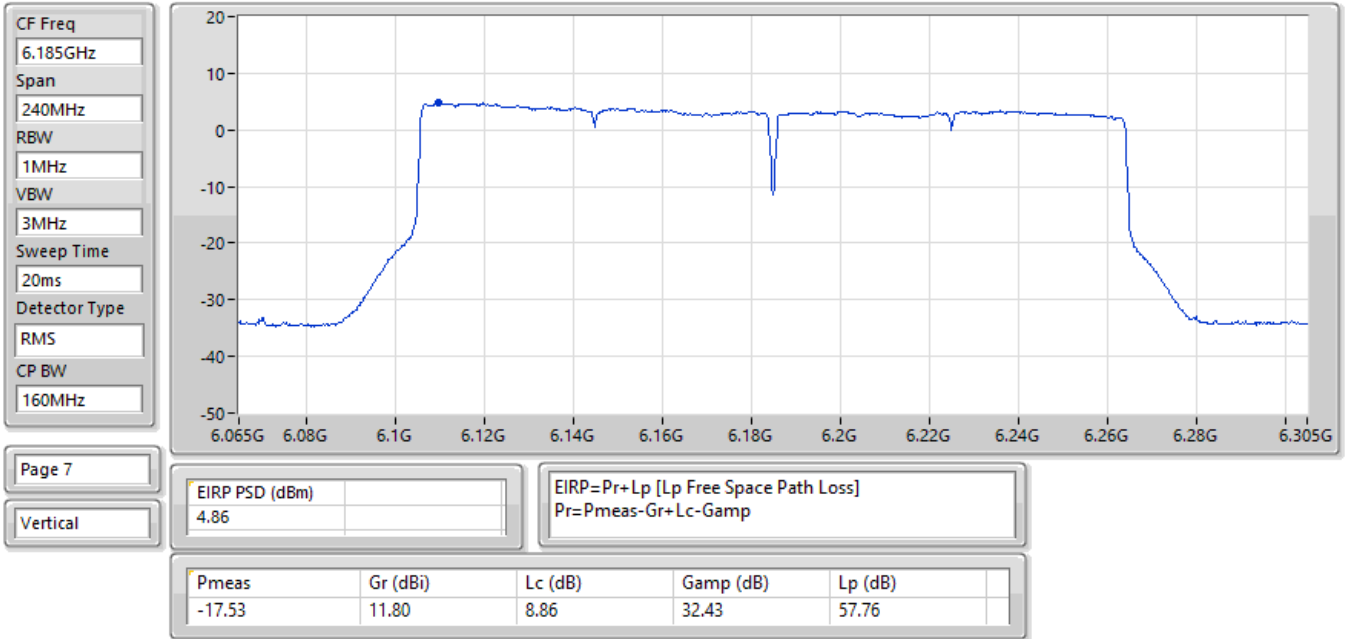


20/01/2026

EIRP PSD;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6345MHz;TX

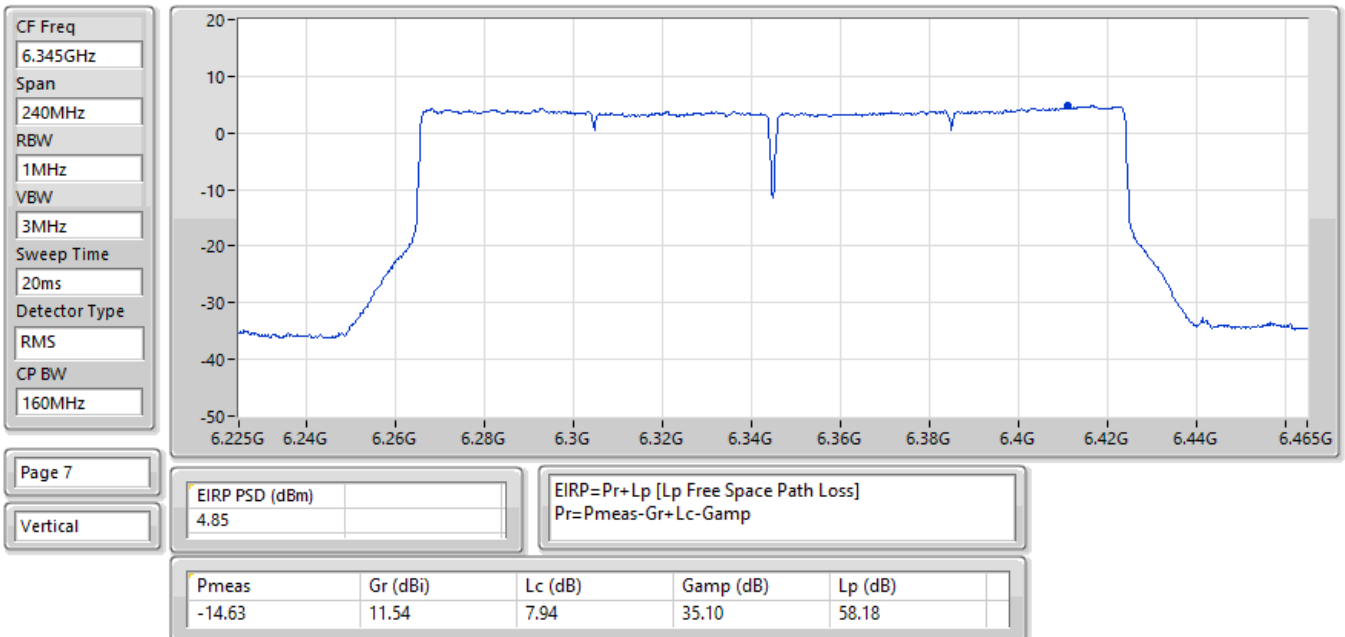


20/01/2026

EIRP PSD;Band:6.4G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6505MHz;TX

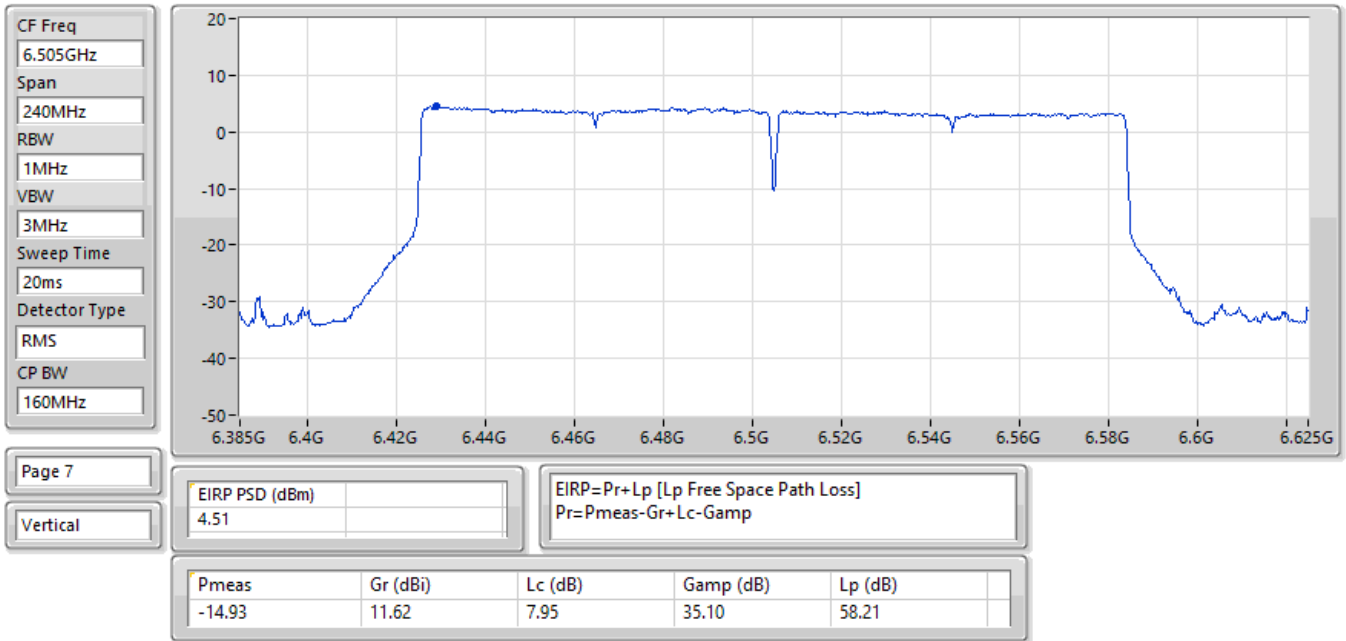


16/01/2026

EIRP PSD;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6665MHz;TX

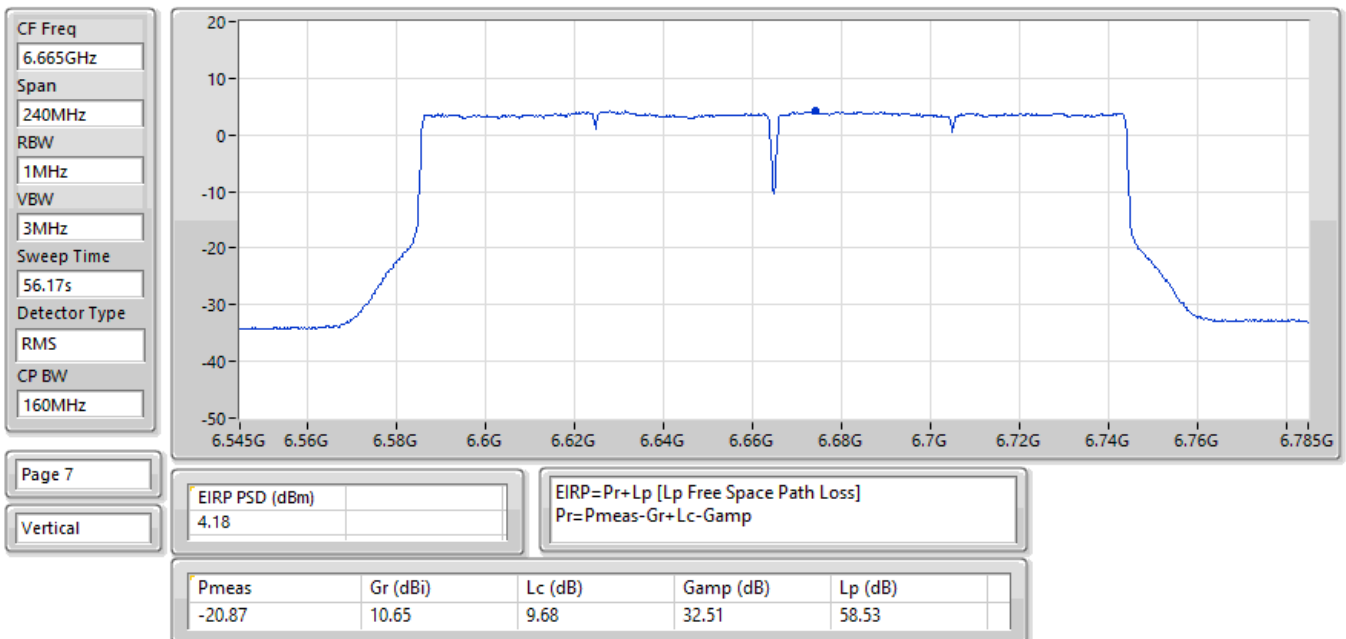


15/01/2026

EIRP PSD;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6825MHz;TX

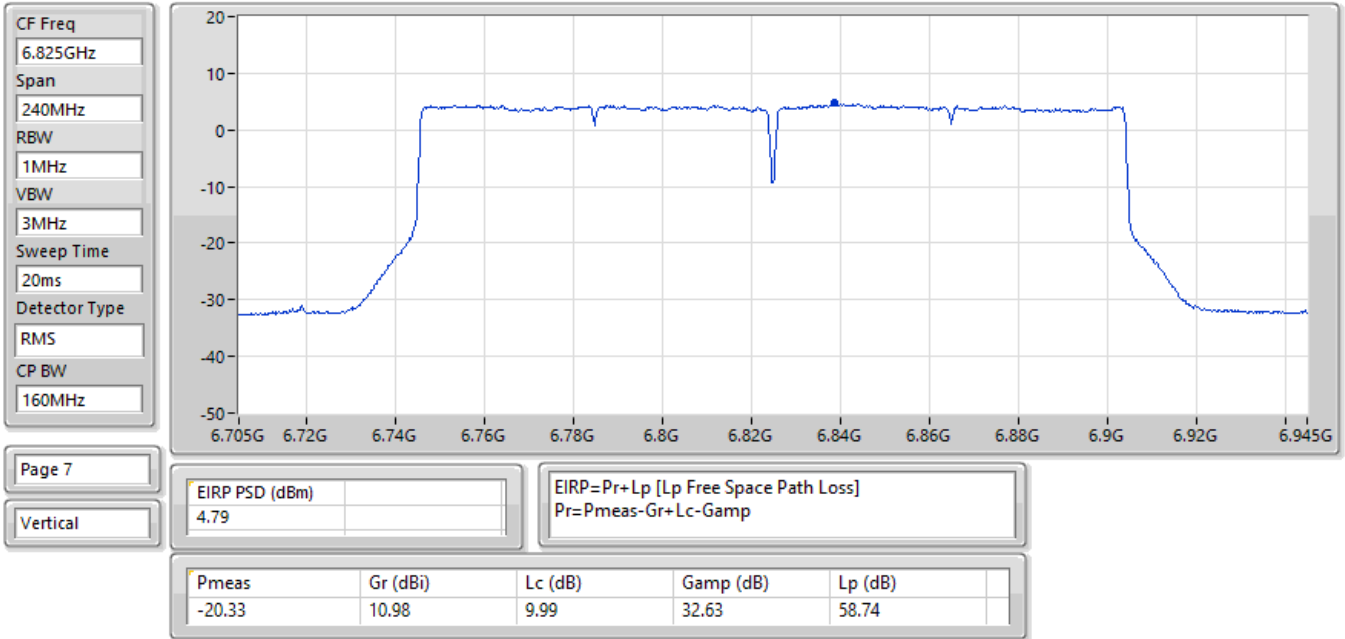


15/01/2026

EIRP PSD;Band:7.0G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6985MHz;TX

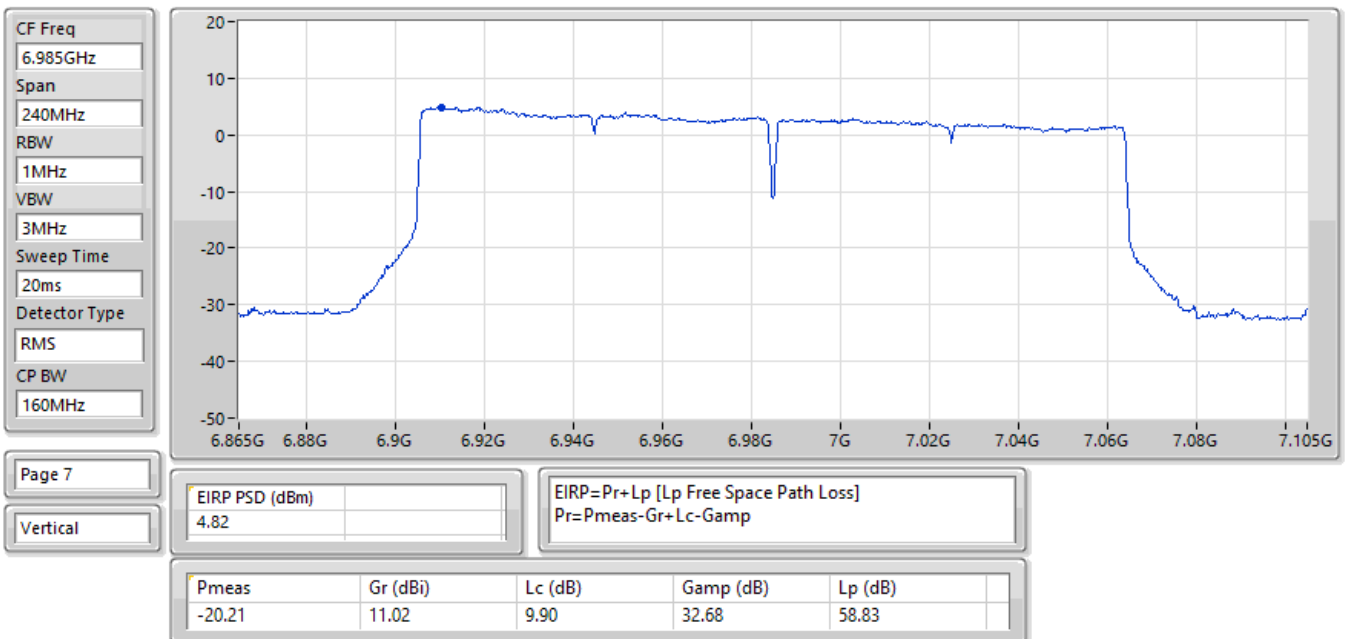


26/01/2026

EIRP PSD;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6105MHz;TX

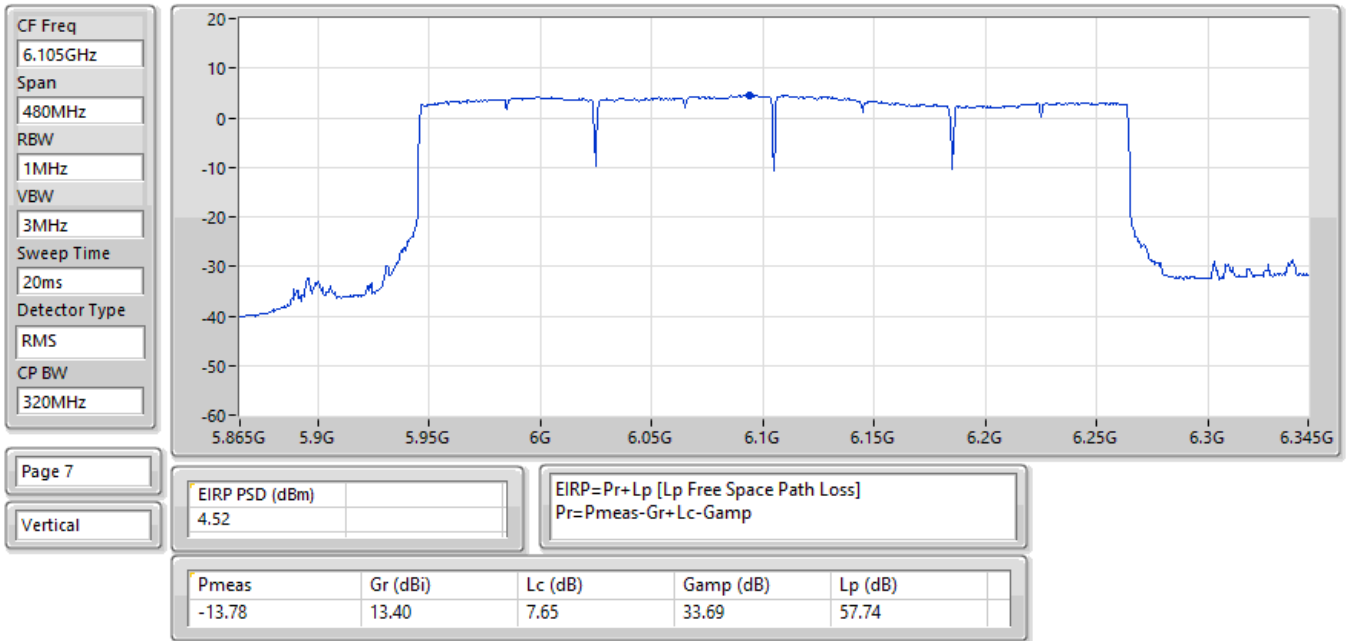


15/01/2026

EIRP PSD;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6265MHz;TX

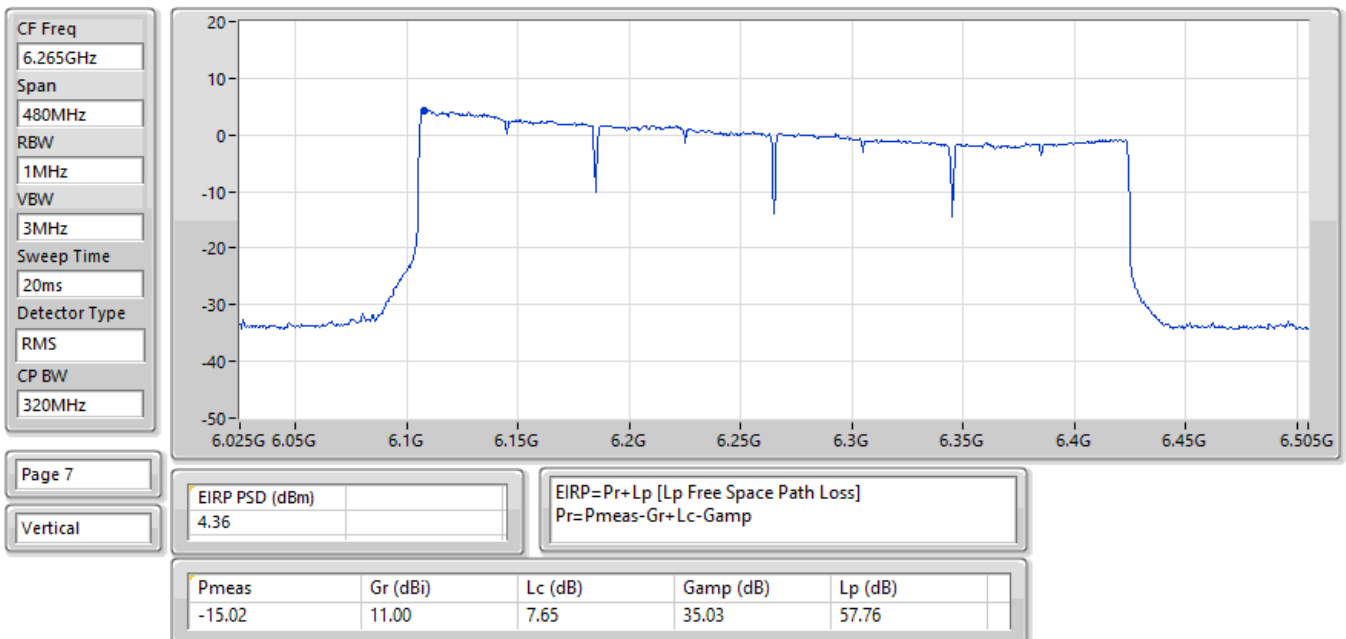


29/01/2026

EIRP PSD;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6425MHz;TX

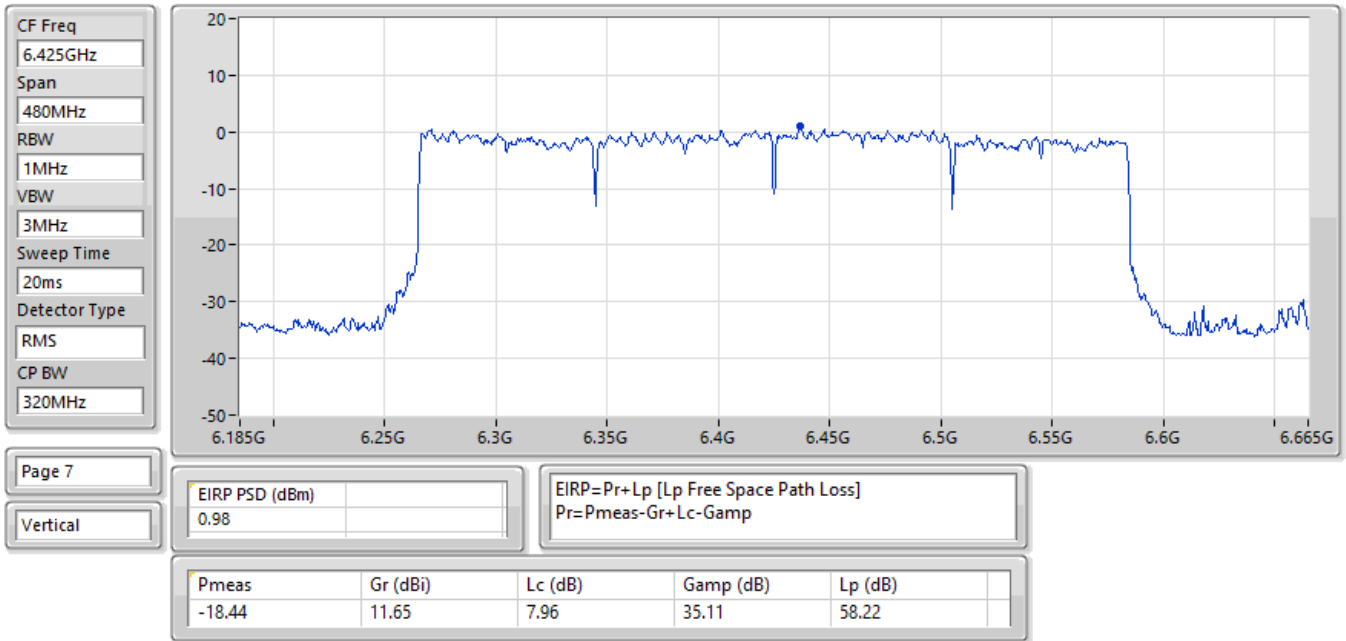


15/01/2026

EIRP PSD;Band:6.4G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6585MHz;TX

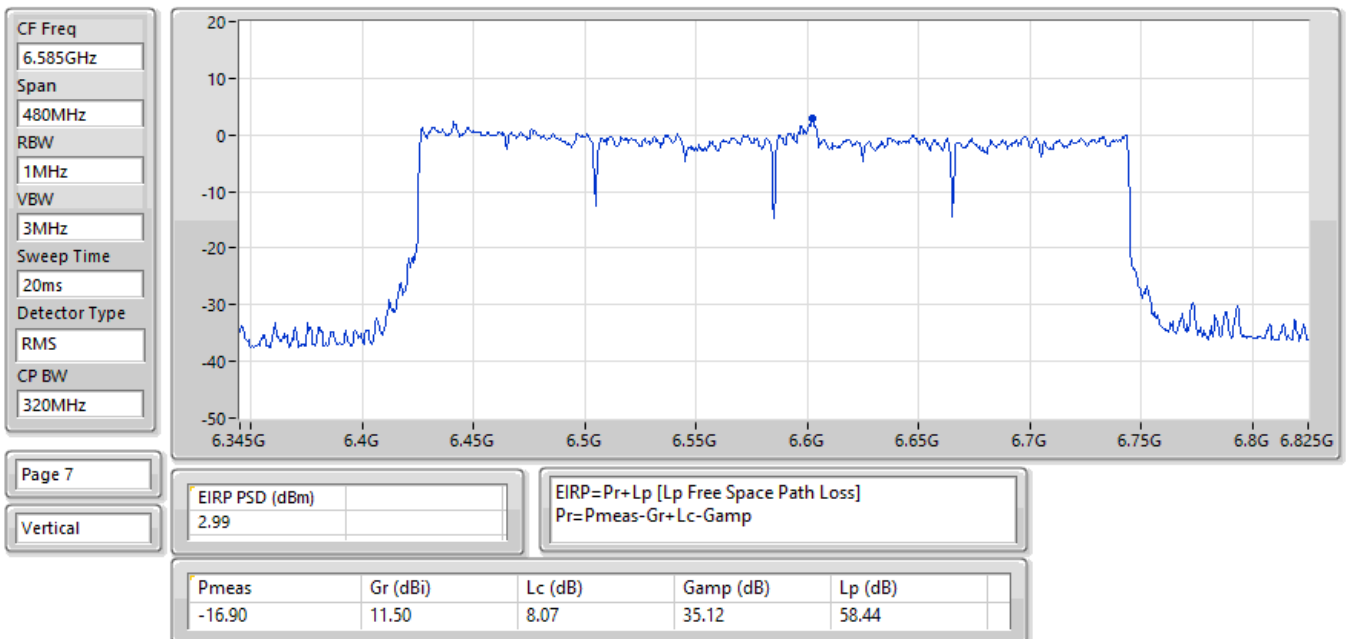


30/01/2026

EIRP PSD;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6745MHz;TX

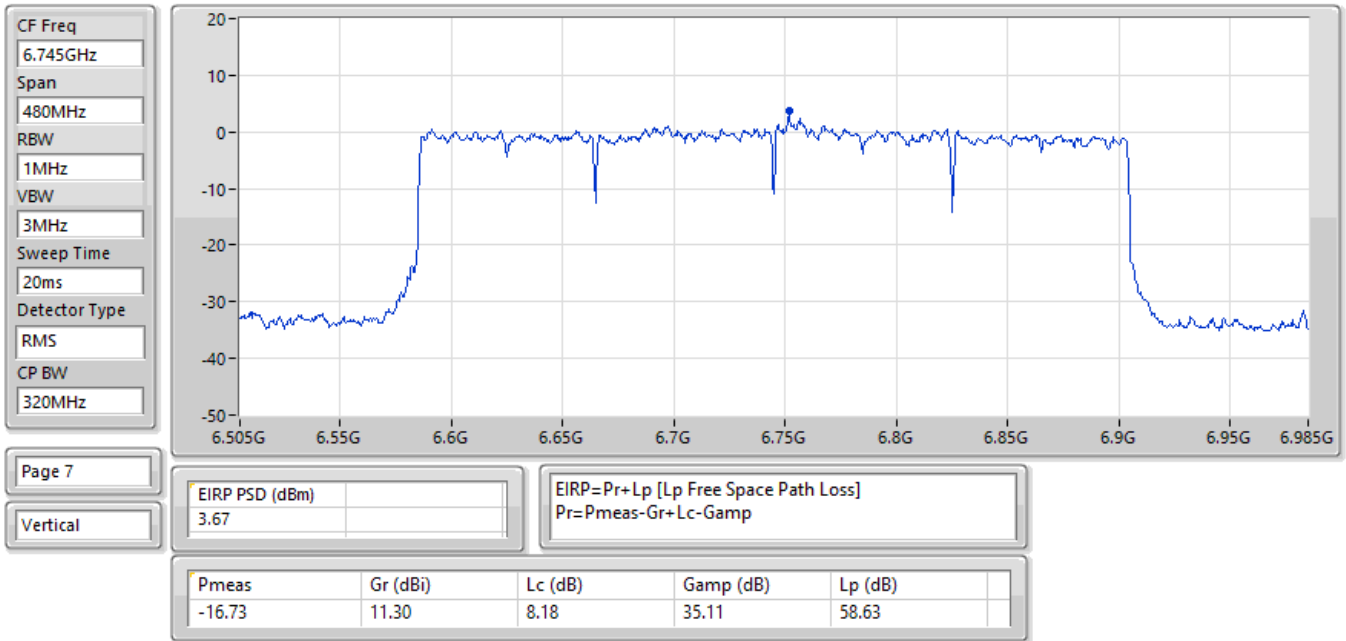

15/01/2026

EIRP PSD;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:2;Ch:6905MHz;TX

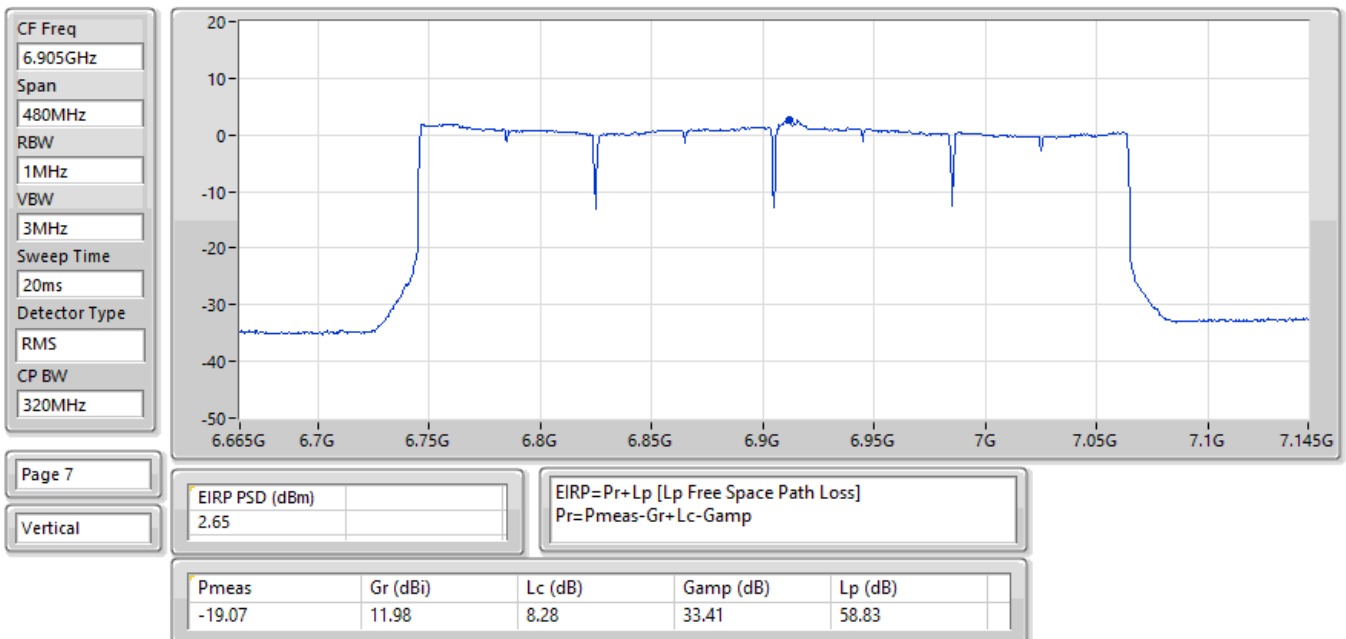




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	183.26M	39.16	43.50	-4.34	Vertical

Mode 1

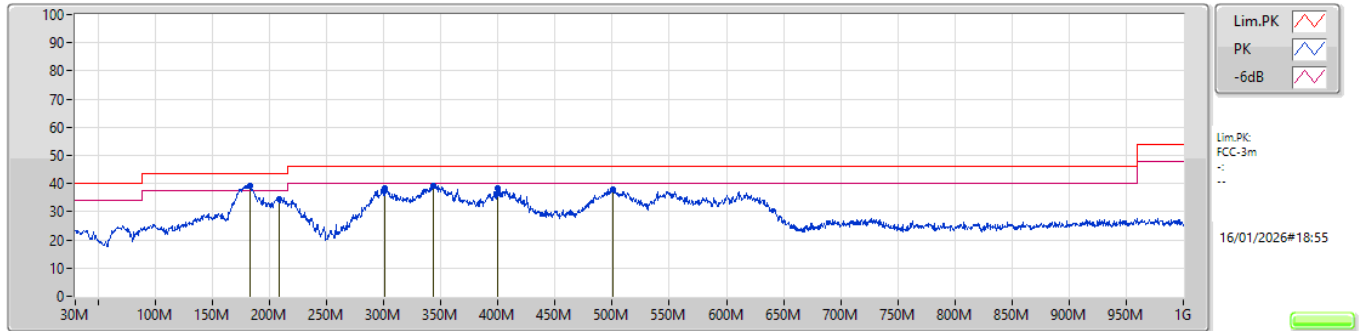

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	183.26M	39.16	43.50	-4.34	-34.86	3	Vertical	55	2.00	"Worst"	74.02	17.16	1.55	53.57		
PK	208.48M	34.49	43.50	-9.01	-36.62	3	Vertical	135	2.00	-	71.11	15.53	1.72	53.87		
PK	300.63M	38.24	46.00	-7.76	-32.26	3	Vertical	143	2.00	-	70.50	19.25	2.16	53.67		
PK	343.31M	39.17	46.00	-6.83	-31.40	3	Vertical	67	3.00	-	70.57	20.20	2.30	53.90		
PK	400.06M	38.27	46.00	-7.73	-29.70	3	Vertical	188	1.00	-	67.97	21.64	2.50	53.84		
PK	500.45M	37.90	46.00	-8.10	-27.04	3	Vertical	92	1.00	-	64.94	23.58	2.81	53.43		

Mode 1

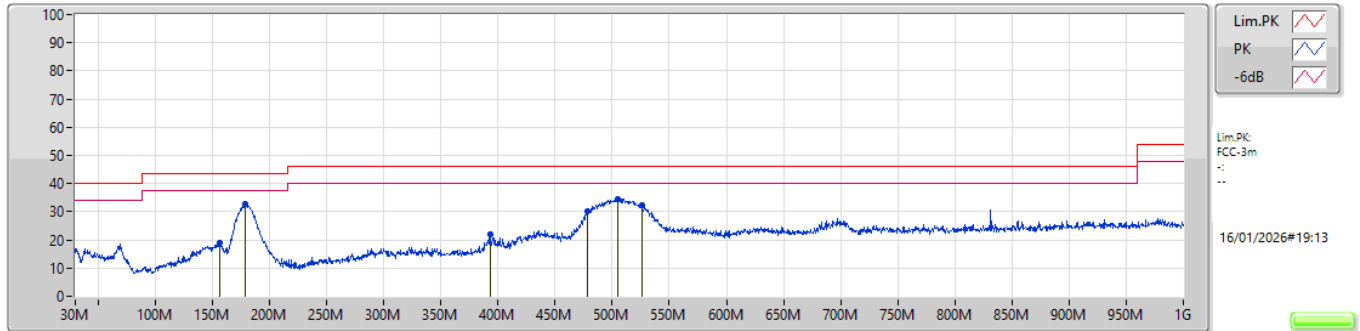

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	156.1M	18.97	43.50	-24.53	-33.04	3	Horizontal	88	1.00	-	52.01	19.21	1.48	53.73		
PK	178.9M	32.74	43.50	-10.76	-34.23	3	Horizontal	197	1.00	"Worst"	66.97	17.75	1.53	53.51		
PK	393.27M	21.82	46.00	-24.18	-29.83	3	Horizontal	143	3.00	-	51.65	21.54	2.48	53.85		
PK	478.14M	30.35	46.00	-15.65	-27.56	3	Horizontal	92	1.00	-	57.91	23.26	2.66	53.48		
PK	505.3M	34.62	46.00	-11.38	-26.80	3	Horizontal	13	1.00	-	61.42	23.75	2.84	53.39		
PK	526.16M	32.40	46.00	-13.60	-26.25	3	Horizontal	277	1.00	-	58.65	24.06	2.94	53.25		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
6.525-6.875GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT320-BF_Nss1,(MCS0)_2TX	Pass	AV	7.285G	52.92	54.00	-1.08	3	Vertical	359.9	2.50	-

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

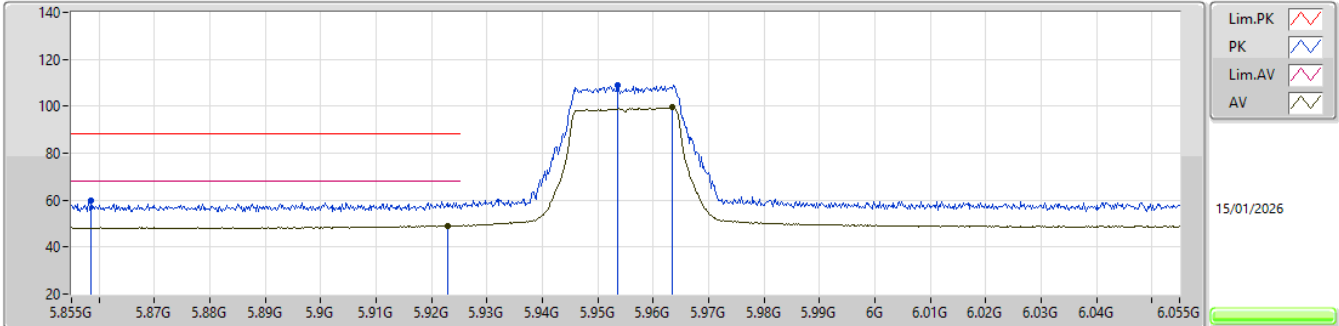


EUT_Y_2TX
Setting 15
03-E-I-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8586G	59.70	88.20	-28.50	52.82	3	Vertical	6	3.00	-	34.33	7.52	34.97			
RMS	5.923G	49.10	68.20	-19.10	41.98	3	Vertical	6	3.00	-	34.59	7.52	34.99			
PK	5.9536G	109.02	Inf	-Inf	101.79	3	Vertical	6	3.00	-	34.70	7.53	35.00			
RMS	5.9634G	99.42	Inf	-Inf	92.19	3	Vertical	6	3.00	-	34.70	7.53	35.00			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

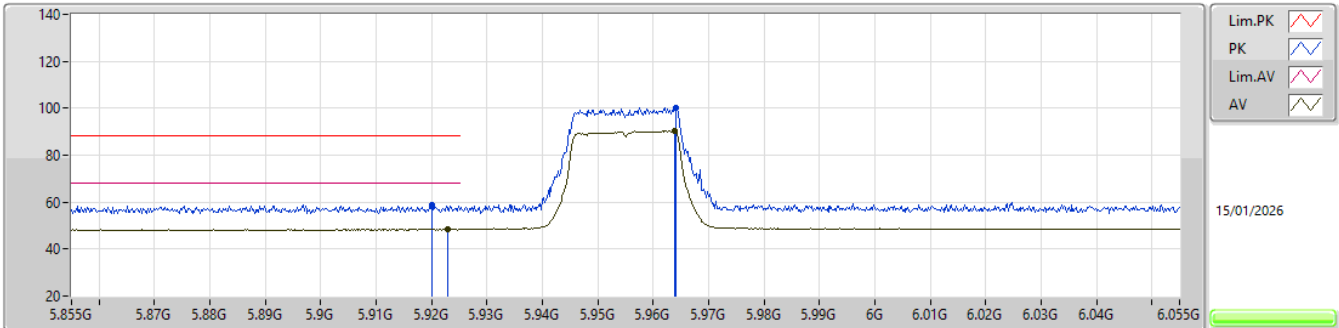


EUT_Y_2TX
Setting 15
03-E-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.92G	58.85	88.20	-29.35	51.74	3	Horizontal	195	2.63	-	34.58	7.52	34.99			
RMS	5.923G	48.51	68.20	-19.69	41.39	3	Horizontal	195	2.63	-	34.59	7.52	34.99			
PK	5.964G	100.41	Inf	-Inf	93.18	3	Horizontal	195	2.63	-	34.70	7.53	35.00			
RMS	5.9638G	90.54	Inf	-Inf	83.31	3	Horizontal	195	2.63	-	34.70	7.53	35.00			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

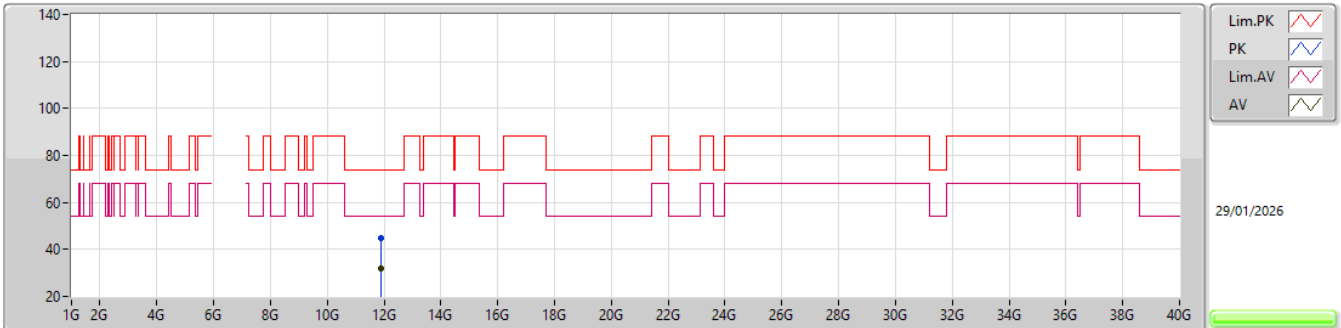


EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.89956G	45.02	74.00	-28.98	60.68	3	Vertical	314	2.33	-	39.30	10.88	65.84			
AV	11.90223G	32.13	54.00	-21.87	47.79	3	Vertical	314	2.33	-	39.30	10.88	65.84			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


5955MHz_TX

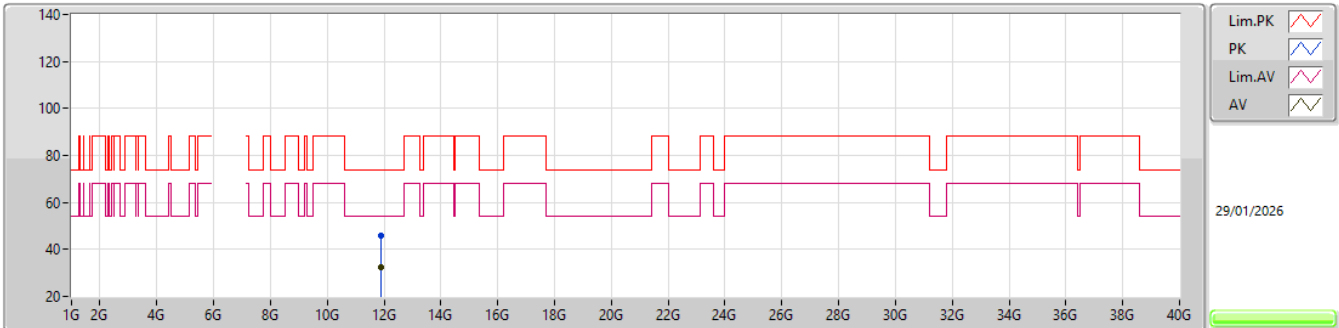EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.91315G	45.62	74.00	-28.38	61.30	3	Horizontal	294	2.42	-	39.27	10.88	65.83			
AV	11.91024G	32.16	54.00	-21.84	47.83	3	Horizontal	294	2.42	-	39.28	10.88	65.83			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

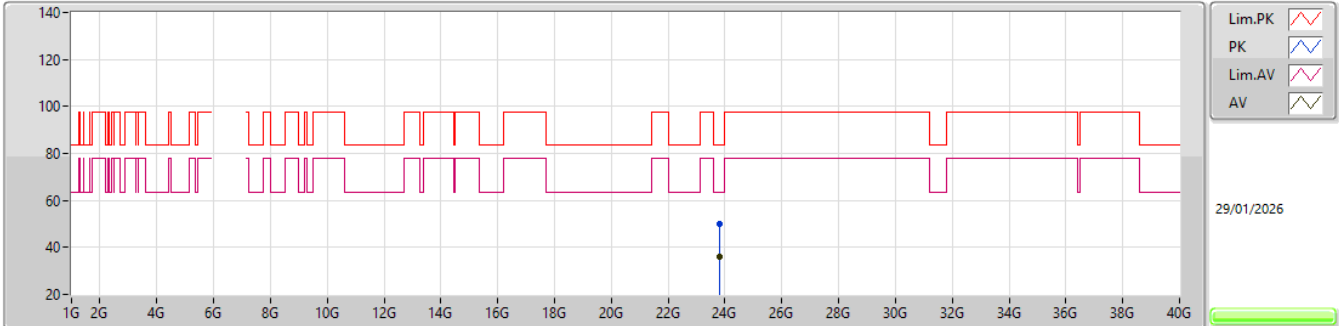


EUT_Z_2TX
Setting 15
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.79816G	50.01	83.54	-33.53	41.05	1	Vertical	187	1.84	-	38.90	17.96	47.90			
AV	23.7906G	36.00	63.54	-27.54	27.04	1	Vertical	187	1.84	-	38.90	17.96	47.90			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

5955MHz_TX

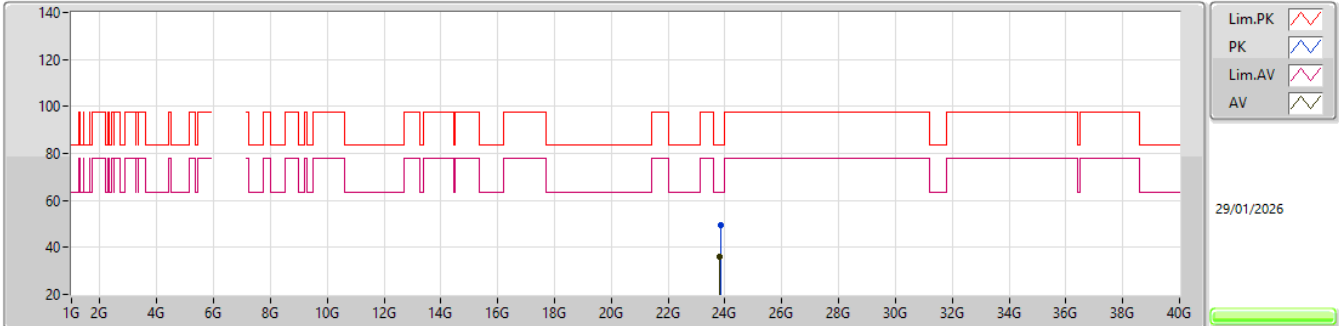


EUT_Z_2TX
Setting 15
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.84076G	49.28	83.54	-34.26	40.35	1	Horizontal	127	2.92	-	38.90	17.93	47.90			
AV	23.79684G	35.95	63.54	-27.59	26.99	1	Horizontal	127	2.92	-	38.90	17.96	47.90			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6195MHz_TX

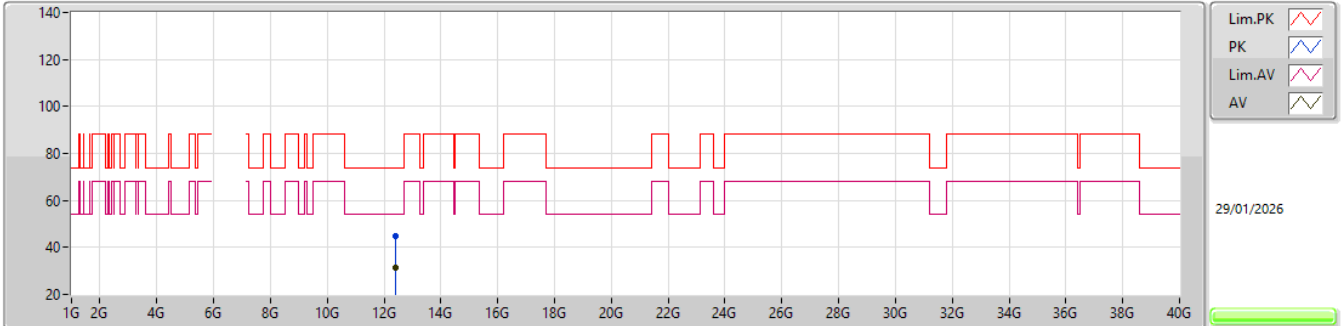


EUT_Z_2TX
Setting 23
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.40065G	44.84	74.00	-29.16	60.62	3	Vertical	17	2.82	-	38.80	11.03	65.61			
AV	12.40497G	31.56	54.00	-22.44	47.33	3	Vertical	17	2.82	-	38.80	11.03	65.60			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6195MHz_TX

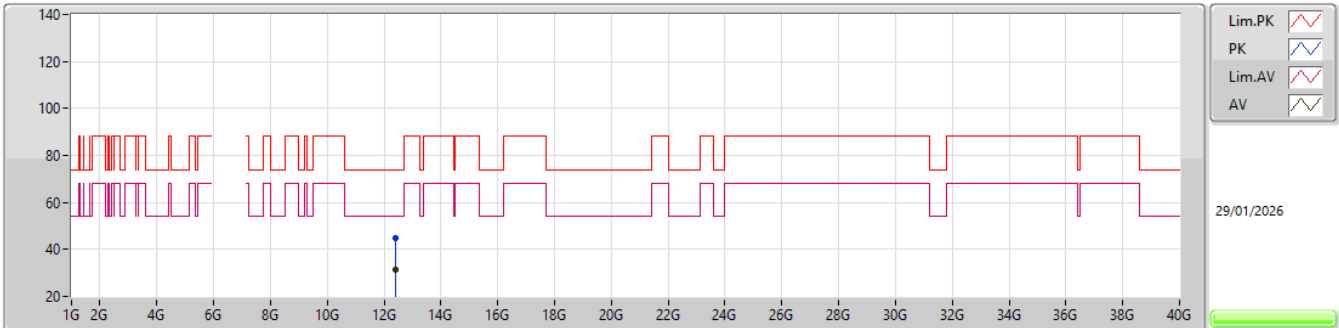EUT_Z_2TX
Setting 23
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.38658G	44.61	74.00	-29.39	60.40	3	Horizontal	163	1.36	-	38.80	11.02	65.61			
AV	12.40407G	31.61	54.00	-22.39	47.38	3	Horizontal	163	1.36	-	38.80	11.03	65.60			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6195MHz_TX

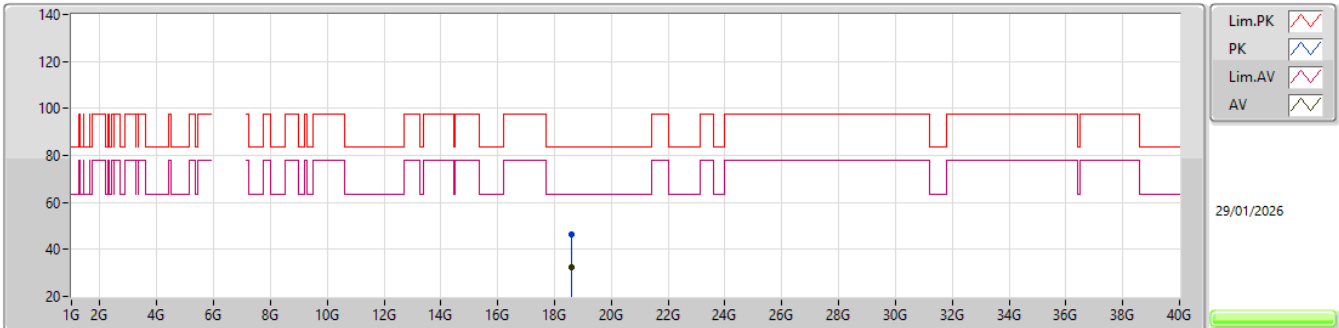EUT_Z_2TX
Setting 15
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5904G	46.55	83.54	-36.99	41.39	1	Vertical	217	1.44	-	37.66	16.15	48.65			
AV	18.5994G	32.63	63.54	-30.91	27.44	1	Vertical	217	1.44	-	37.70	16.15	48.66			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6195MHz_TX

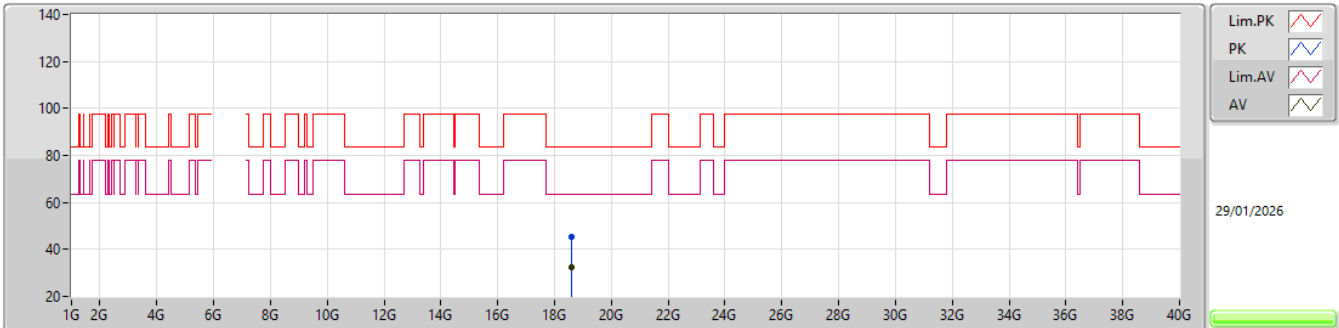EUT_Z_2TX
Setting 15
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6108G	45.60	83.54	-37.94	40.43	1	Horizontal	145	1.09	-	37.68	16.16	48.67			
AV	18.58632G	32.63	63.54	-30.91	27.49	1	Horizontal	145	1.09	-	37.65	16.14	48.65			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6415MHz_TX

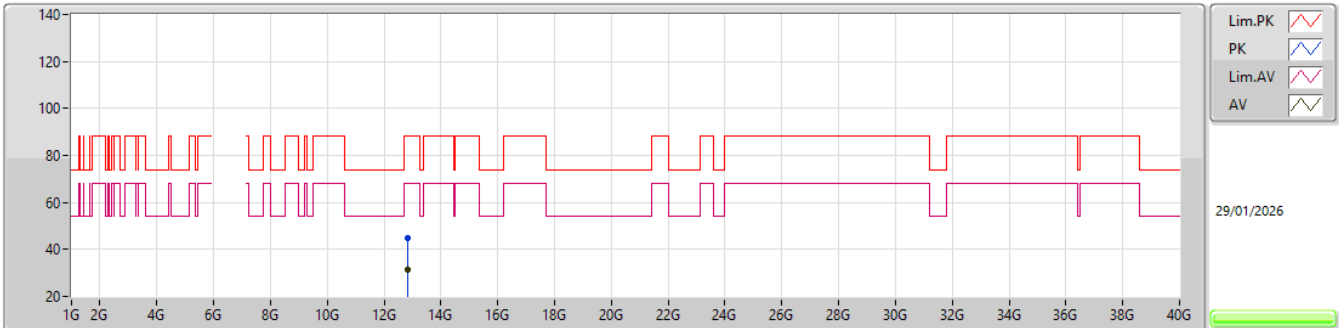EUT_Z_2TX
Setting 16
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.83096G	44.67	88.20	-43.53	59.47	3	Vertical	214	1.05	-	39.16	11.15	65.11			
RMS	12.84458G	31.62	68.20	-36.58	46.37	3	Vertical	214	1.05	-	39.19	11.15	65.09			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6415MHz_TX

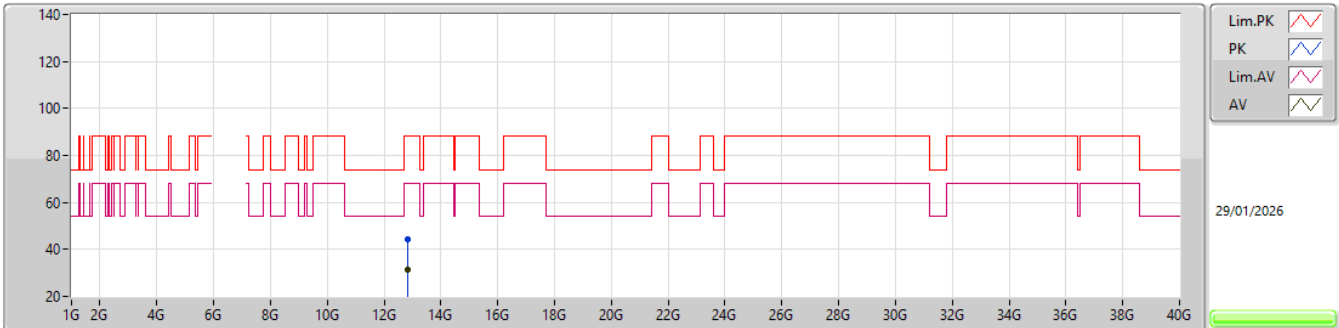EUT_Z_2TX
Setting 16
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.84032G	44.21	88.20	-43.99	58.98	3	Horizontal	59	2.55	-	39.18	11.15	65.10			
RMS	12.81509G	31.59	68.20	-36.61	46.45	3	Horizontal	59	2.55	-	39.13	11.15	65.14			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6415MHz_TX

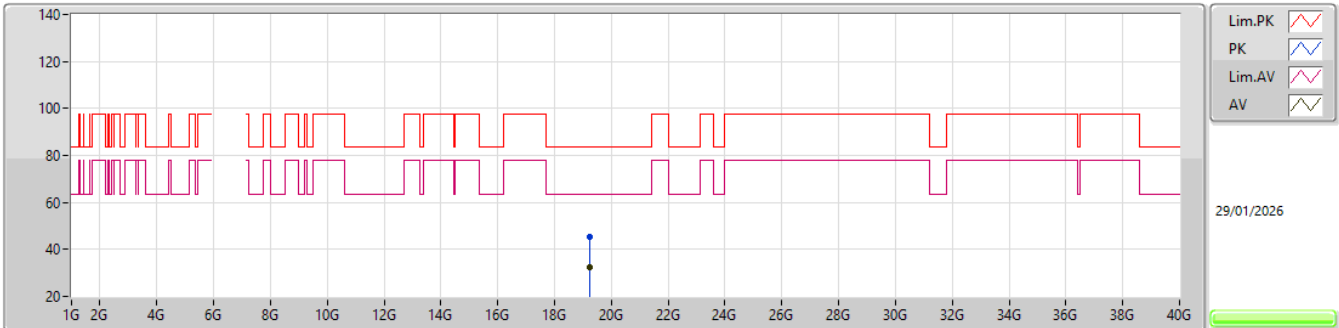EUT_Z_2TX
Setting 16
03-E-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.24248G	45.24	83.54	-38.30	39.73	1	Vertical	72	1.60	-	37.85	16.51	48.85			
AV	19.24364G	32.32	63.54	-31.22	26.80	1	Vertical	72	1.60	-	37.86	16.51	48.85			

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6415MHz_TX

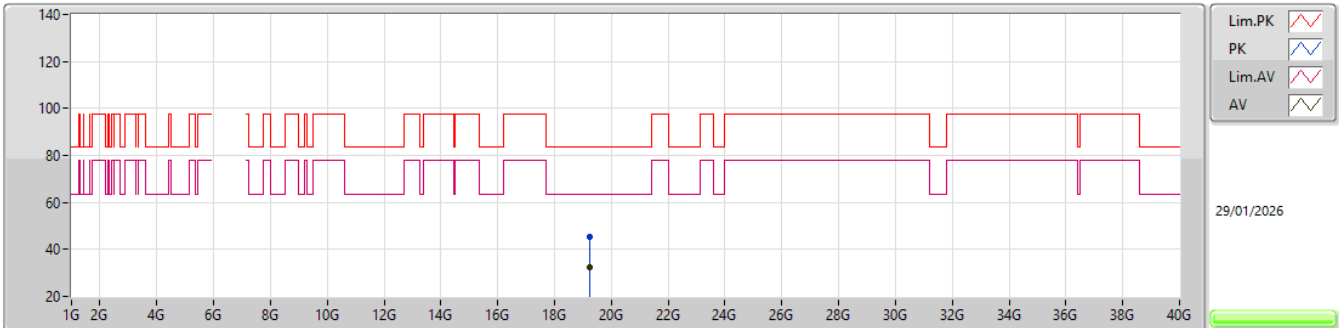EUT_Z_2TX
Setting 16
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.24988G	45.11	83.54	-38.43	39.55	1	Horizontal	178	2.71	-	37.90	16.51	48.85			
AV	19.24924G	32.17	63.54	-31.37	26.61	1	Horizontal	178	2.71	-	37.90	16.51	48.85			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6435MHz_TX

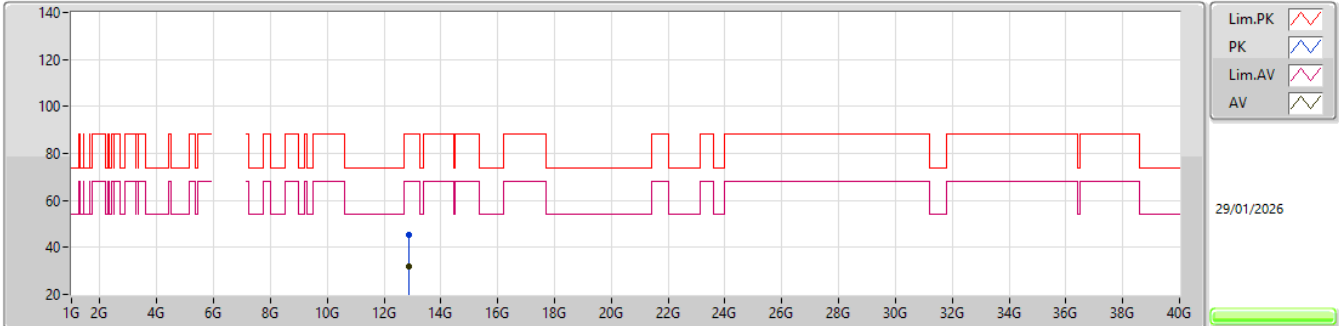


EUT_Z_2TX
Setting 16
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.85887G	45.53	88.20	-42.67	60.22	3	Vertical	3	2.12	-	39.22	11.16	65.07			
RMS	12.88257G	31.95	68.20	-36.25	46.55	3	Vertical	3	2.12	-	39.27	11.17	65.04			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6435MHz_TX

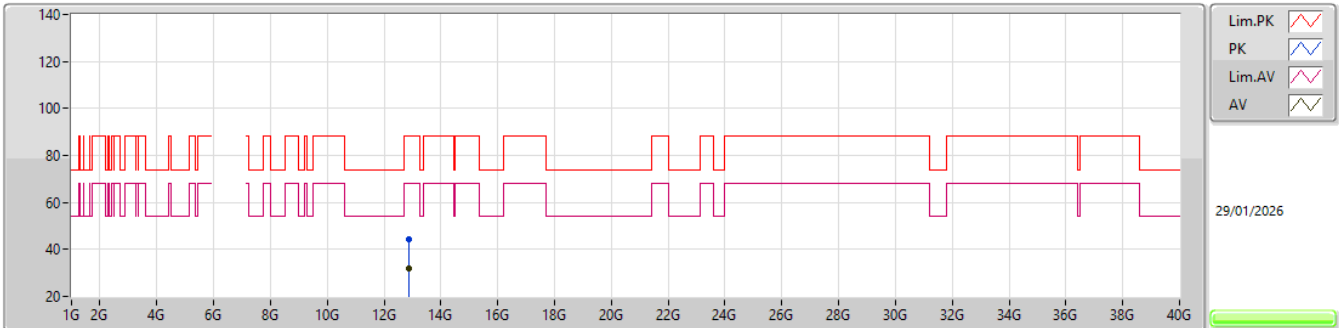EUT_Z_2TX
Setting 16
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.87306G	44.43	88.20	-43.77	59.08	3	Horizontal	281	1.54	-	39.25	11.16	65.06			
RMS	12.87624G	31.84	68.20	-36.36	46.48	3	Horizontal	281	1.54	-	39.25	11.16	65.05			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6475MHz_TX

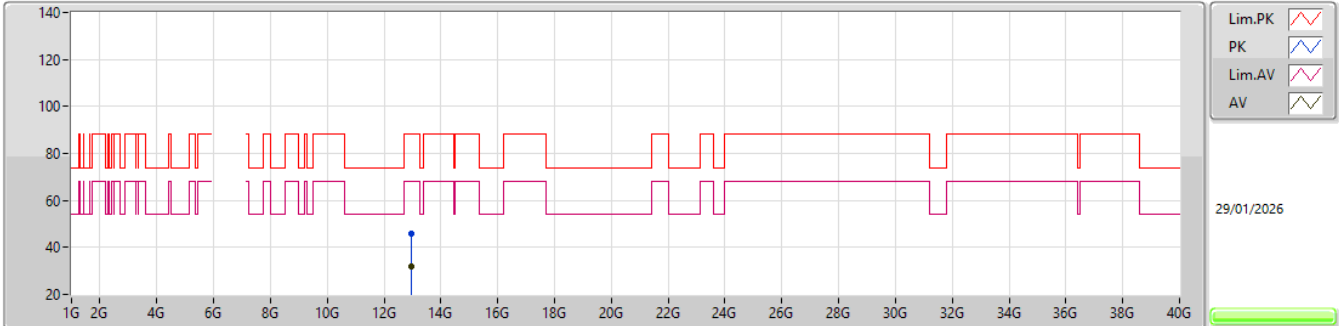EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.95735G	45.79	88.20	-42.41	60.04	3	Vertical	292	2.71	-	39.50	11.19	64.94			
RMS	12.95819G	32.06	68.20	-36.14	46.31	3	Vertical	292	2.71	-	39.50	11.19	64.94			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6475MHz_TX

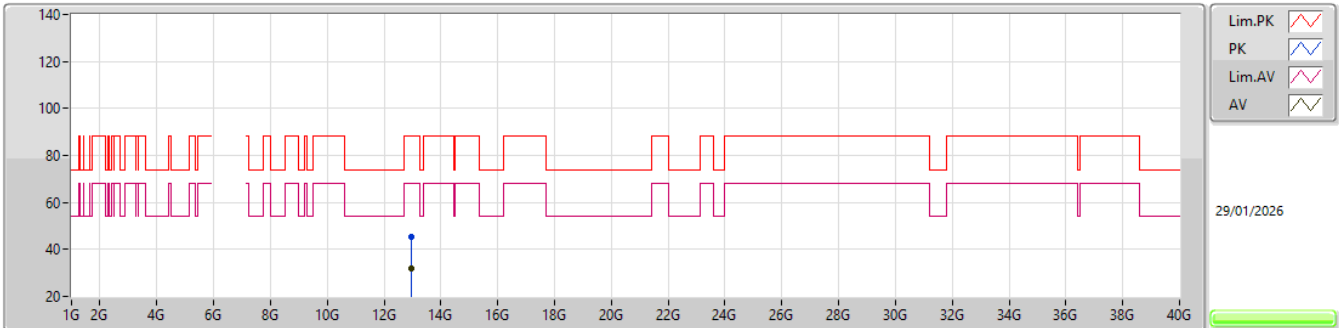EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9461G	45.18	88.20	-43.02	59.47	3	Horizontal	2	2.53	-	39.48	11.18	64.95			
RMS	12.95213G	32.04	68.20	-36.16	46.30	3	Horizontal	2	2.53	-	39.50	11.19	64.95			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6475MHz_TX

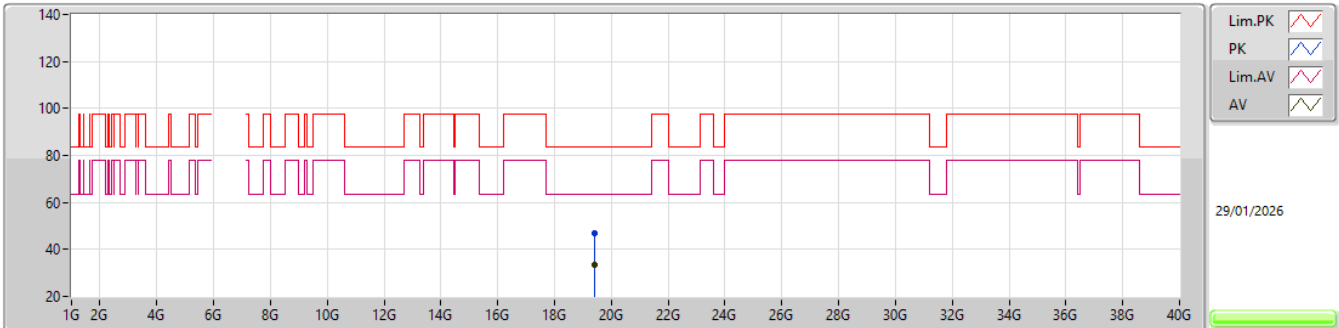EUT_Z_TX
Setting 15
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.42654G	47.08	83.54	-36.46	41.71	1	Vertical	216	2.07	-	37.65	16.53	48.81			
AV	19.42714G	33.61	63.54	-29.93	28.24	1	Vertical	216	2.07	-	37.65	16.53	48.81			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6475MHz_TX

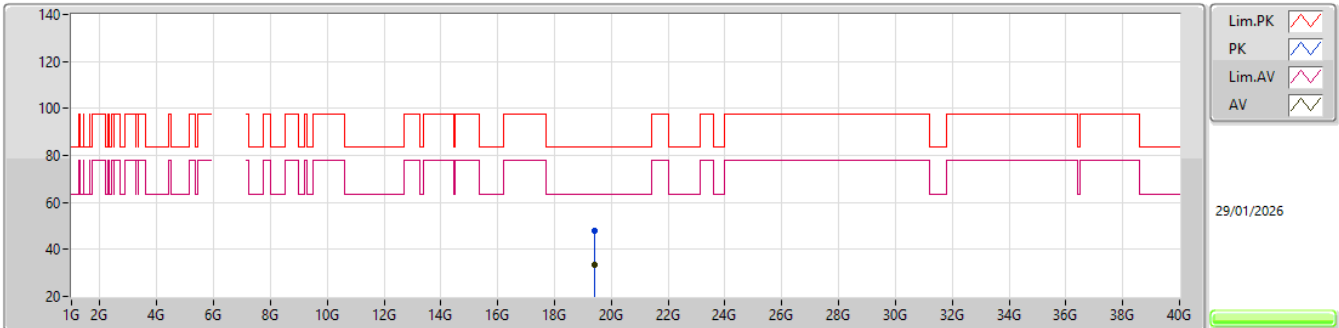EUT_Z_TX
Setting 15
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.42718G	48.08	83.54	-35.46	42.71	1	Horizontal	316	1.65	-	37.65	16.53	48.81			
AV	19.42812G	33.70	63.54	-29.84	28.34	1	Horizontal	316	1.65	-	37.64	16.53	48.81			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6515MHz_TX

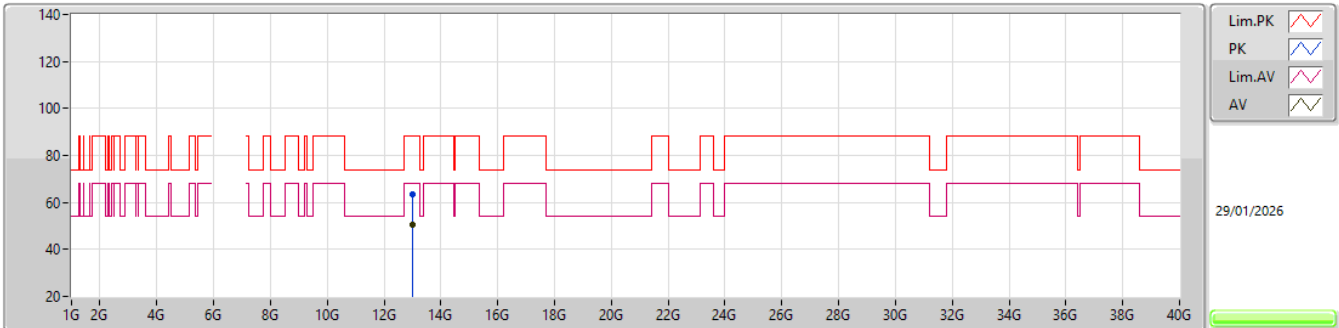


EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.02343G	63.27	88.20	-24.93	58.44	3	Vertical	147	2.60	-	39.50	11.21	45.88			
RMS	13.01578G	50.60	68.20	-17.60	45.79	3	Vertical	147	2.60	-	39.50	11.20	45.89			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6515MHz_TX

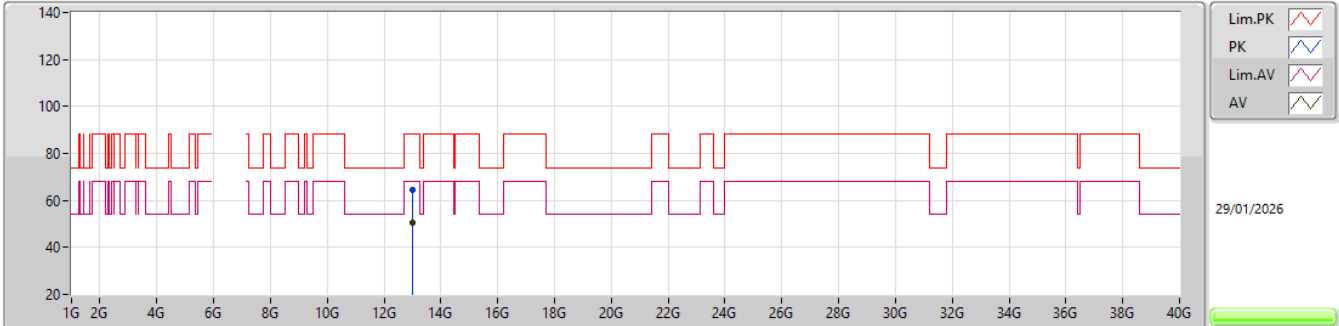


EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.01731G	64.66	88.20	-23.54	59.84	3	Horizontal	126	2.09	-	39.50	11.21	45.89			
RMS	13.01746G	50.57	68.20	-17.63	45.75	3	Horizontal	126	2.09	-	39.50	11.21	45.89			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6515MHz_TX

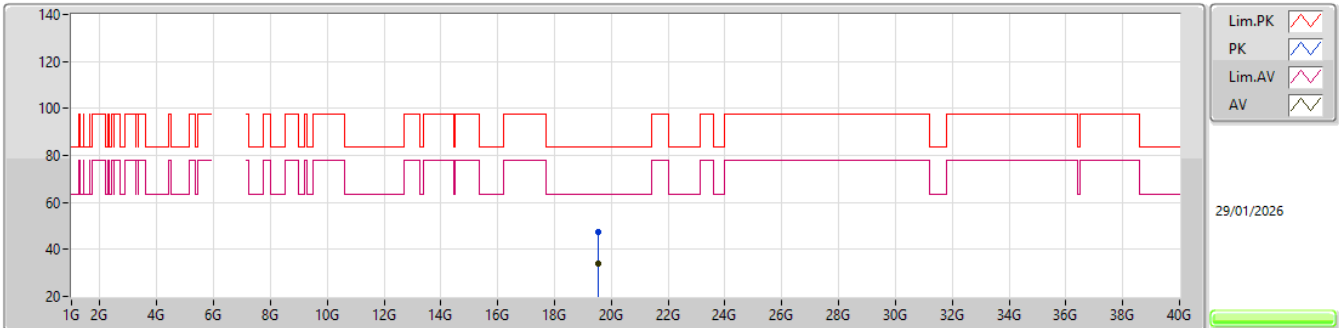EUT_Z_2TX
Setting 15
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.54274G	47.17	83.54	-36.37	41.85	1	Vertical	129	1.42	-	37.59	16.55	48.82			
AV	19.548G	34.07	63.54	-29.47	28.74	1	Vertical	129	1.42	-	37.60	16.55	48.82			

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6515MHz_TX

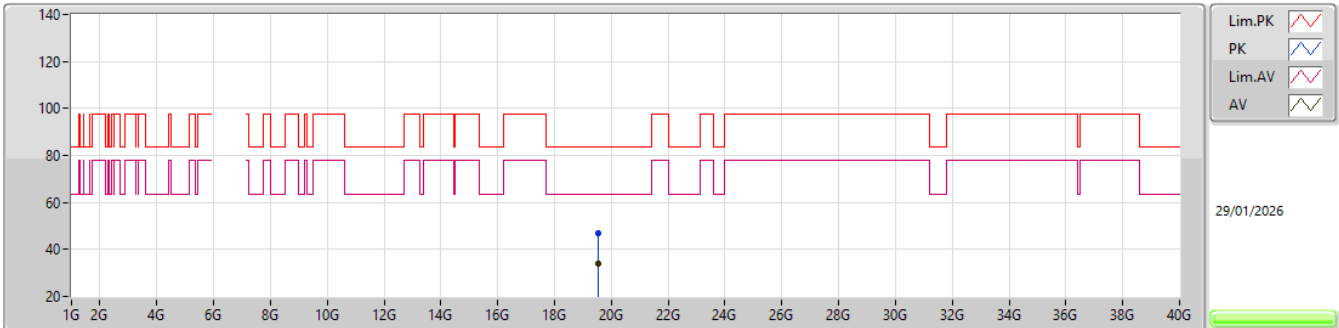EUT_Z_2TX
Setting 15
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.54016G	47.13	83.54	-36.41	41.82	1	Horizontal	181	1.44	-	37.58	16.55	48.82			
AV	19.54052G	33.95	63.54	-29.59	28.64	1	Horizontal	181	1.44	-	37.58	16.55	48.82			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6535MHz_TX

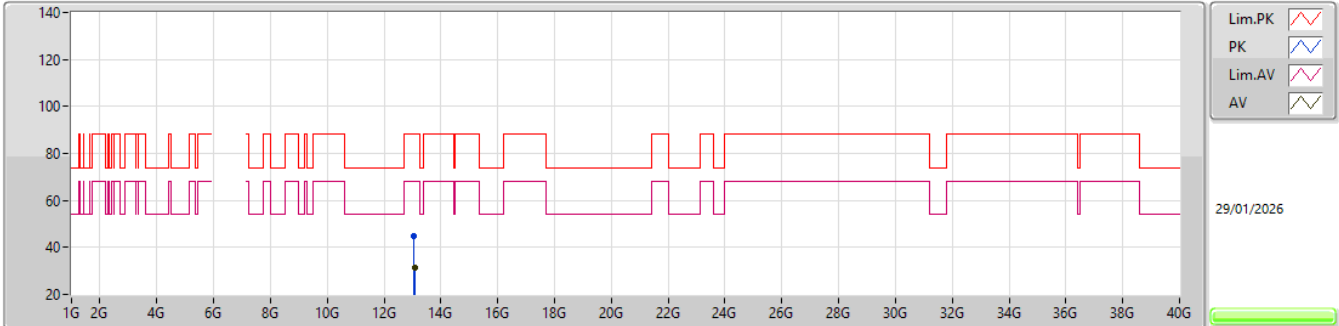


EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0658G	44.73	88.20	-43.47	58.85	3	Vertical	343	1.61	-	39.53	11.22	64.87			
RMS	13.07921G	31.46	68.20	-36.74	45.55	3	Vertical	343	1.61	-	39.56	11.22	64.87			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6535MHz_TX

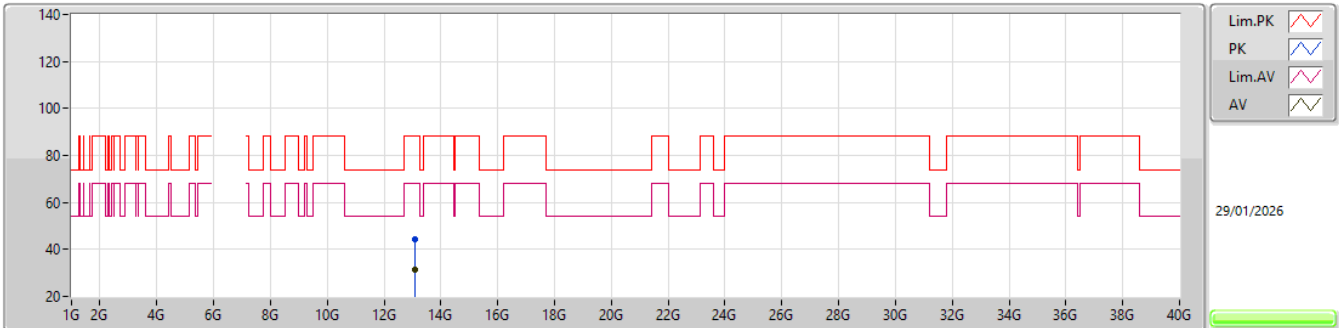


EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06961G	44.30	88.20	-43.90	58.41	3	Horizontal	133	1.78	-	39.54	11.22	64.87			
RMS	13.07546G	31.52	68.20	-36.68	45.62	3	Horizontal	133	1.78	-	39.55	11.22	64.87			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6535MHz_TX

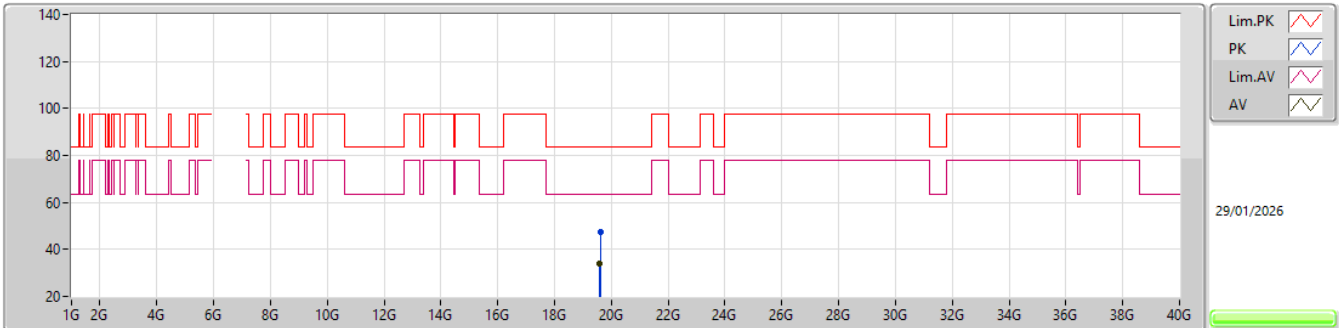EUT_Z_2TX
Setting 15
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60306G	47.30	83.54	-36.24	41.99	1	Vertical	266	1.67	-	37.59	16.56	48.84			
RMS	19.60054G	33.72	63.54	-29.82	28.40	1	Vertical	266	1.67	-	37.60	16.56	48.84			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6535MHz_TX

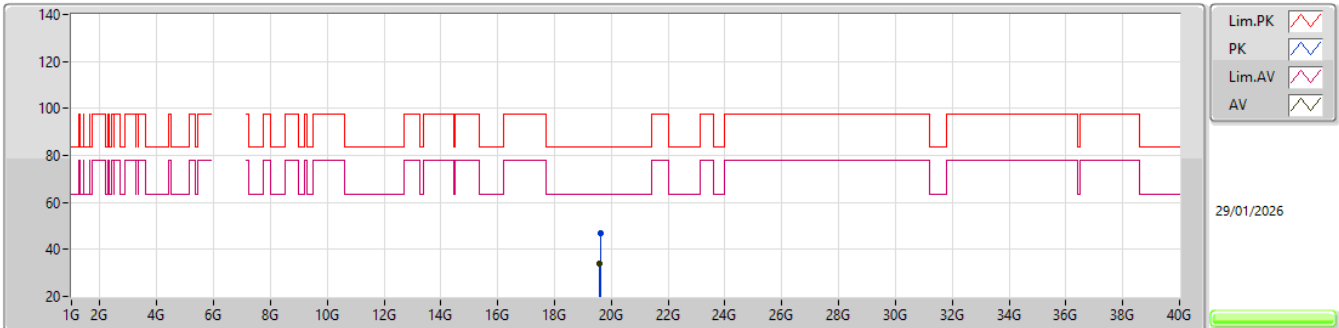EUT_Z_TX
Setting 15
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60552G	46.79	83.54	-36.75	41.48	1	Horizontal	314	1.57	-	37.59	16.56	48.84			
RMS	19.60242G	33.79	63.54	-29.75	28.47	1	Horizontal	314	1.57	-	37.60	16.56	48.84			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6695MHz_TX

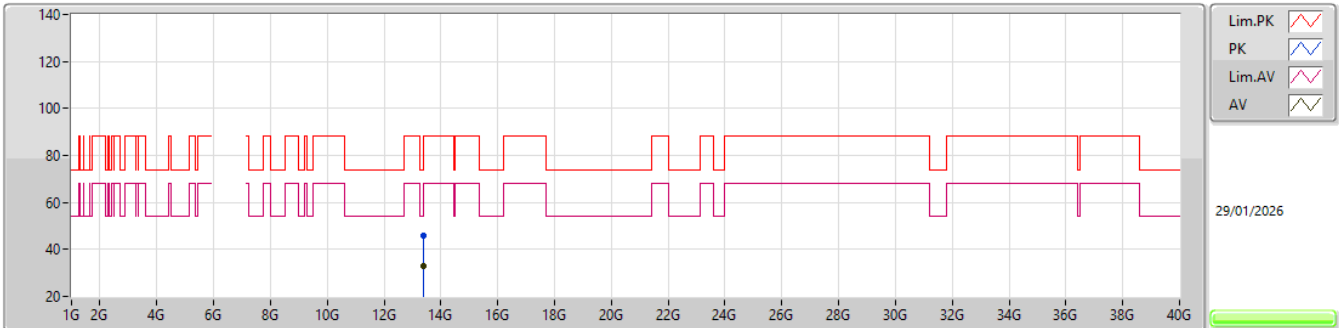


EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.38016G	46.03	74.00	-27.97	59.40	3	Vertical	20	1.98	-	40.16	11.31	64.84			
AV	13.39717G	33.18	54.00	-20.82	46.51	3	Vertical	20	1.98	-	40.19	11.32	64.84			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6695MHz_TX

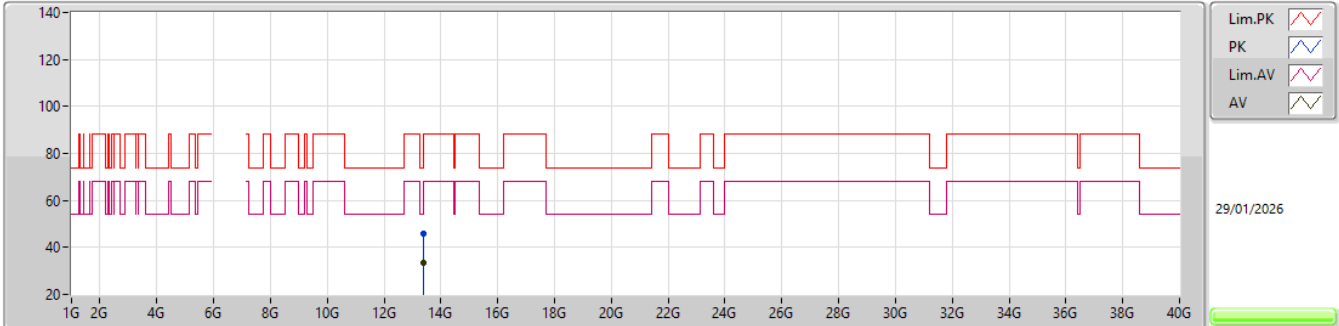


EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.39918G	45.88	74.00	-28.12	59.20	3	Horizontal	129	2.53	-	40.20	11.32	64.84			
RMS	13.40254G	33.19	68.20	-35.01	46.50	3	Horizontal	129	2.53	-	40.21	11.32	64.84			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6875MHz_TX

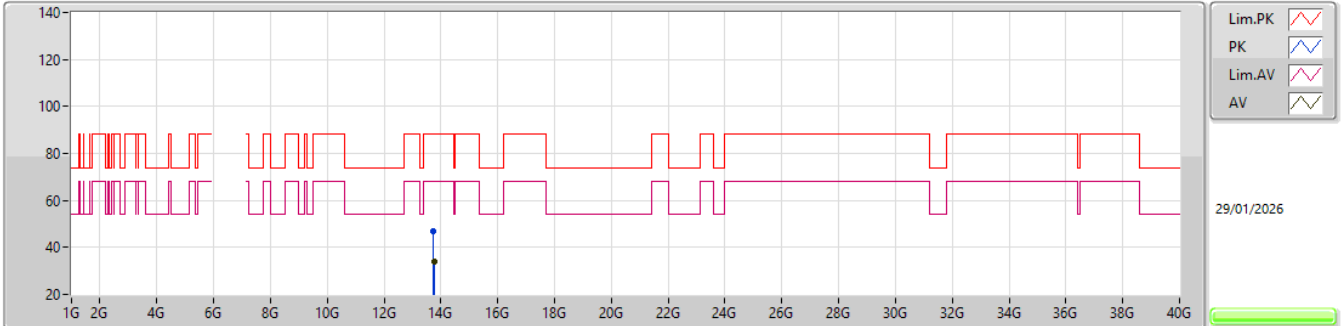


EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.74943G	47.01	88.20	-41.19	59.61	3	Vertical	48	1.89	-	40.70	11.42	64.72			
RMS	13.75534G	34.02	68.20	-34.18	46.61	3	Vertical	48	1.89	-	40.70	11.42	64.71			

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6875MHz_TX

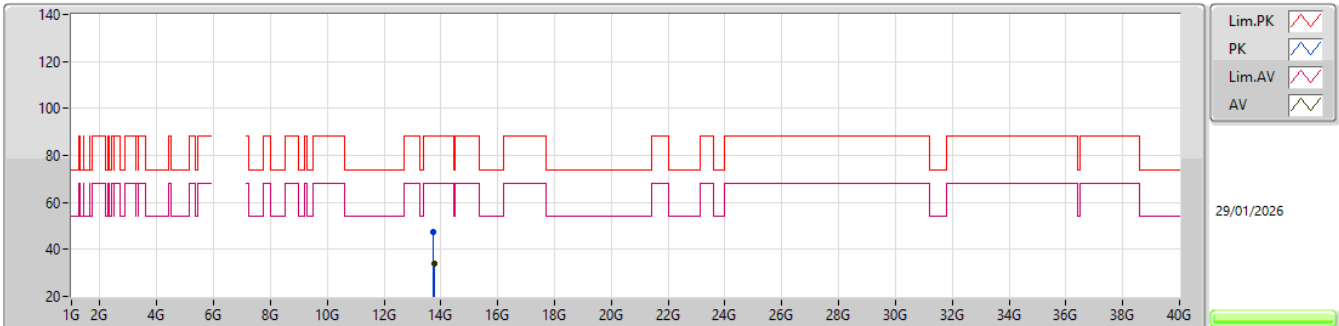EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.744G	47.58	88.20	-40.62	60.20	3	Horizontal	294	1.50	-	40.68	11.42	64.72			
RMS	13.75282G	33.99	68.20	-34.21	46.58	3	Horizontal	294	1.50	-	40.70	11.42	64.71			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

6895MHz_TX

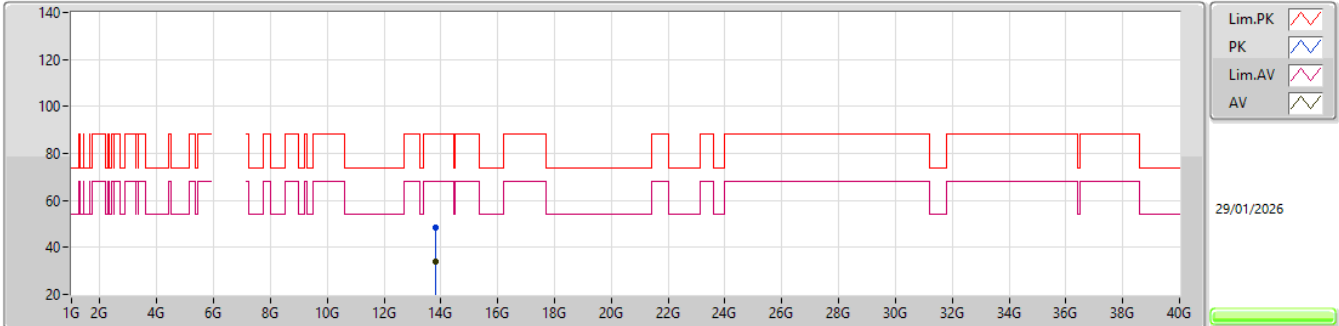


EUT_Z_2TX
Setting 17
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.79423G	48.58	88.20	-39.62	61.14	3	Vertical	20	1.98	-	40.70	11.43	64.69			
AV	13.7984G	33.86	68.20	-34.34	46.42	3	Vertical	20	1.98	-	40.70	11.43	64.69			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6895MHz_TX

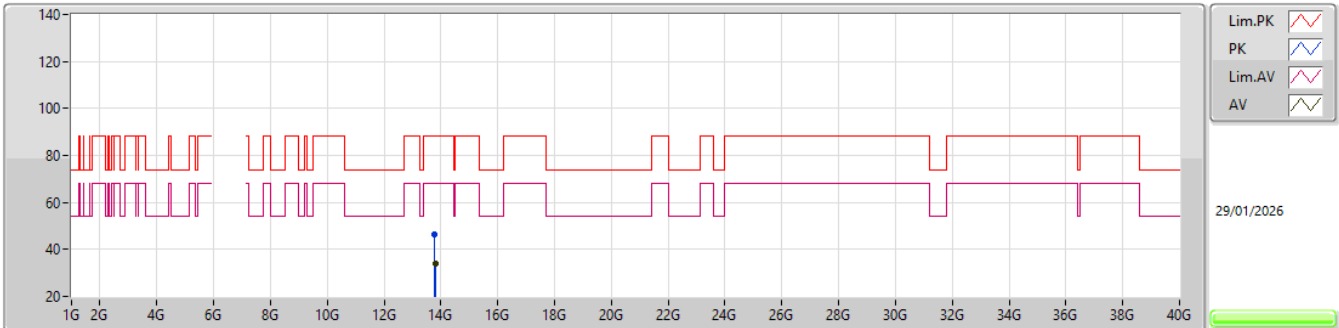EUT_Z_2TX
Setting 17
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.78433G	46.27	88.20	-41.93	58.84	3	Horizontal	201	2.18	-	40.70	11.43	64.70			
RMS	13.79567G	33.79	68.20	-34.41	46.35	3	Horizontal	201	2.18	-	40.70	11.43	64.69			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6995MHz_TX

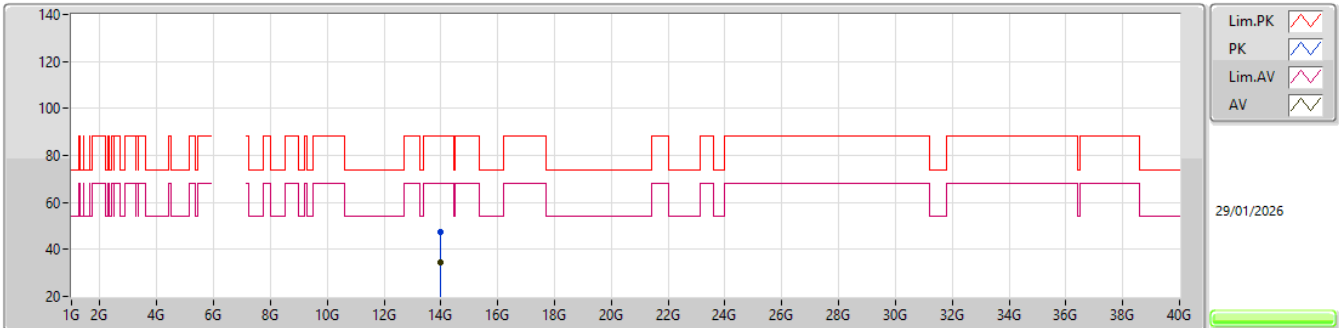EUT_Z_2TX
Setting 16
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.99738G	47.59	88.20	-40.61	59.61	3	Vertical	313	1.39	-	41.09	11.49	64.60			
RMS	13.98346G	34.61	68.20	-33.59	46.70	3	Vertical	313	1.39	-	41.03	11.49	64.61			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


6995MHz_TX

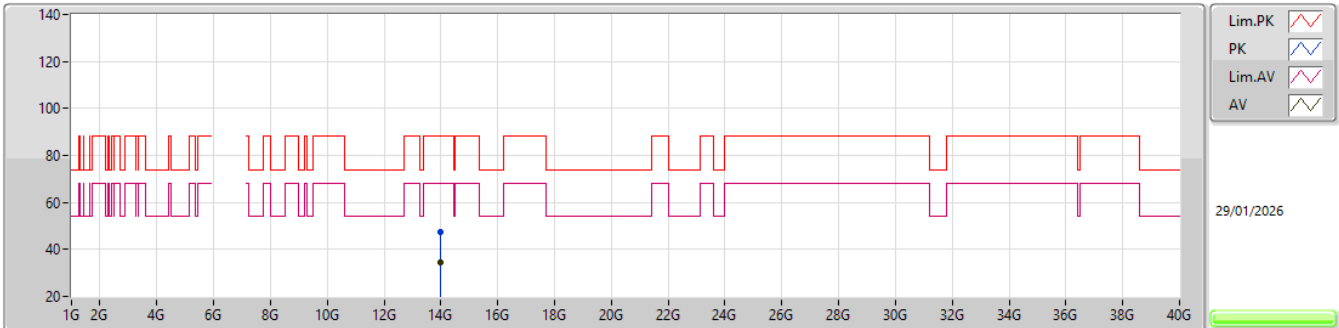EUT_Z_2TX
Setting 16
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.97893G	47.21	88.20	-40.99	59.32	3	Horizontal	241	1.30	-	41.02	11.48	64.61			
RMS	13.98445G	34.64	68.20	-33.56	46.72	3	Horizontal	241	1.30	-	41.04	11.49	64.61			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

7095MHz_TX

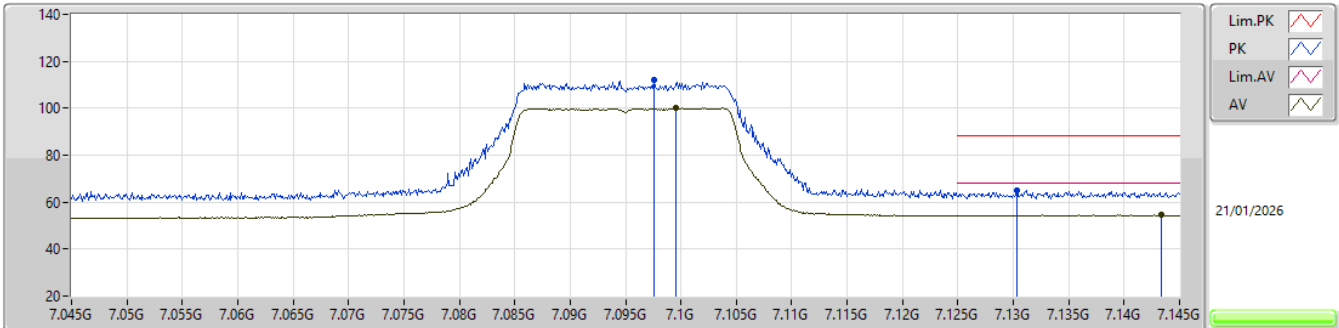


EUT_Y_2TX
Setting 15
01-C-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0976G	111.86	Inf	-Inf	98.04	3	Vertical	353	2.65	-	36.49	10.04	32.71			
RMS	7.0996G	99.98	Inf	-Inf	86.15	3	Vertical	353	2.65	-	36.50	10.04	32.71			
PK	7.1303G	65.05	88.20	-23.15	50.95	3	Vertical	353	2.65	-	36.68	10.12	32.70			
RMS	7.1434G	54.52	68.20	-13.68	40.30	3	Vertical	353	2.65	-	36.76	10.16	32.70			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

7095MHz_TX

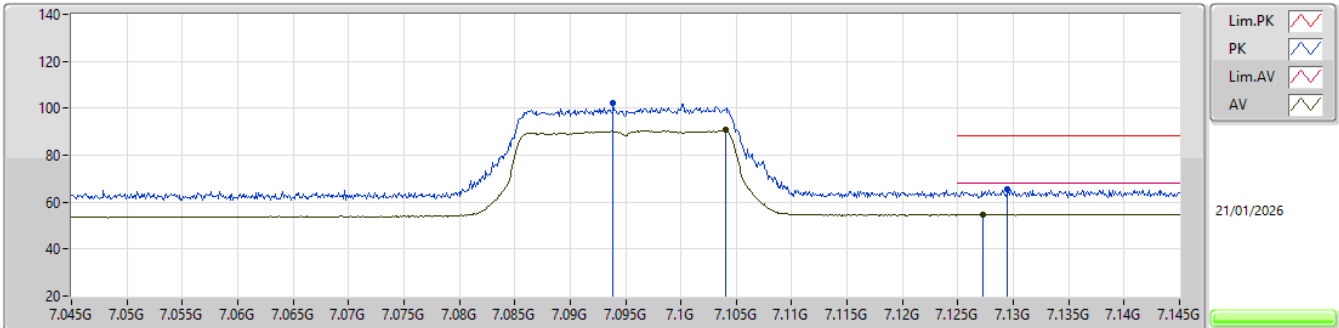


EUT_Y_2TX
Setting 15
01-C-L-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0939G	102.15	Inf	-Inf	88.37	3	Horizontal	329	2.09	-	36.46	10.03	32.71			
RMS	7.104G	90.84	Inf	-Inf	76.97	3	Horizontal	329	2.09	-	36.52	10.06	32.71			
PK	7.1295G	65.30	88.20	-22.90	51.20	3	Horizontal	329	2.09	-	36.68	10.12	32.70			
RMS	7.1273G	54.88	68.20	-13.32	40.81	3	Horizontal	329	2.09	-	36.66	10.11	32.70			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

7095MHz_TX

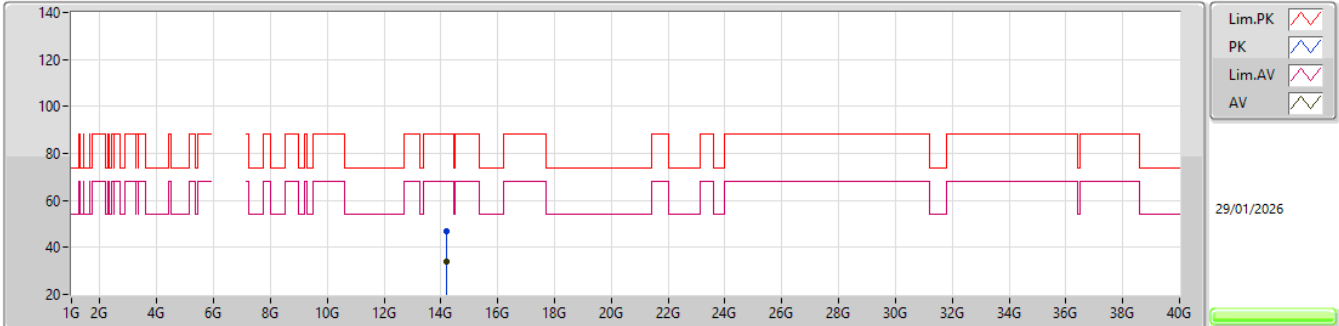


EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.19645G	46.96	88.20	-41.24	58.27	3	Vertical	328	1.40	-	41.59	11.58	64.48			
AV	14.1912G	33.89	68.20	-34.31	45.24	3	Vertical	328	1.40	-	41.56	11.58	64.49			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

7095MHz_TX

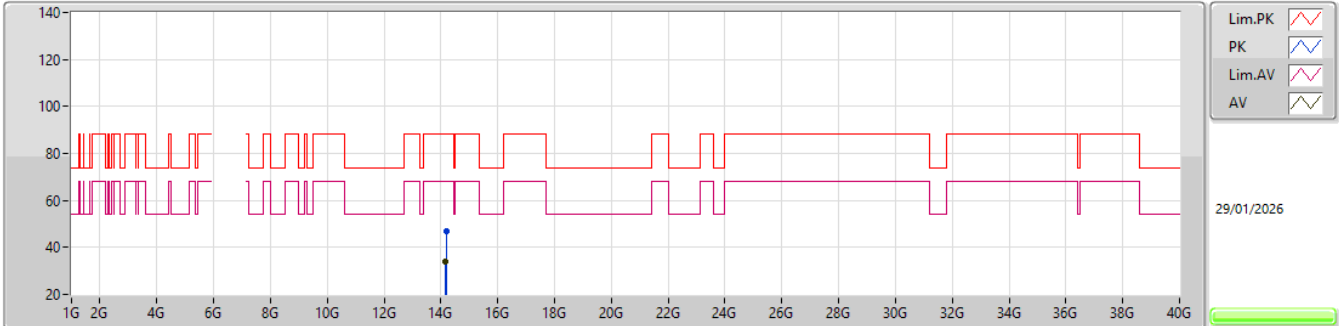


EUT_Z_2TX
Setting 15
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.1837G	46.83	88.20	-41.37	58.22	3	Horizontal	344	2.34	-	41.53	11.57	64.49			
RMS	14.17785G	33.84	68.20	-34.36	45.25	3	Horizontal	344	2.34	-	41.51	11.57	64.49			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX


7095MHz_TX

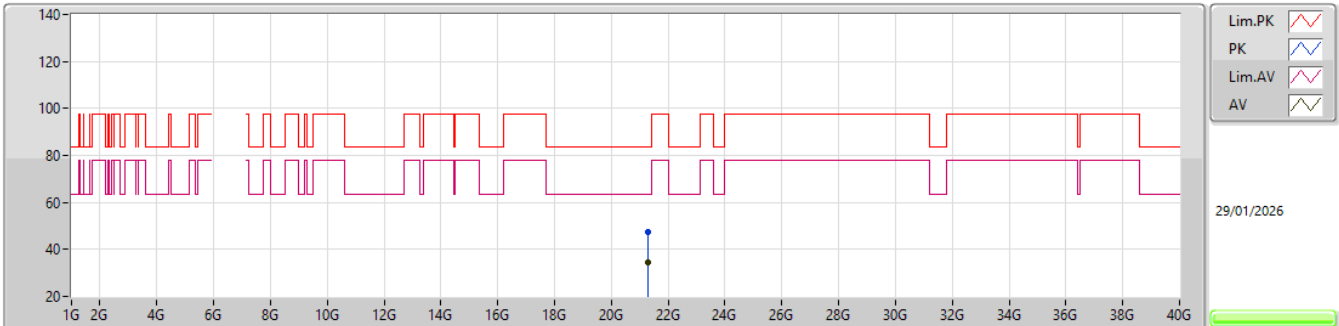EUT_Z_2TX
Setting 15
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.28718G	47.51	83.54	-36.03	41.20	1	Vertical	172	1.81	-	37.68	17.42	48.79			
AV	21.2814G	34.24	63.54	-29.30	27.89	1	Vertical	172	1.81	-	37.71	17.43	48.79			

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

7095MHz_TX

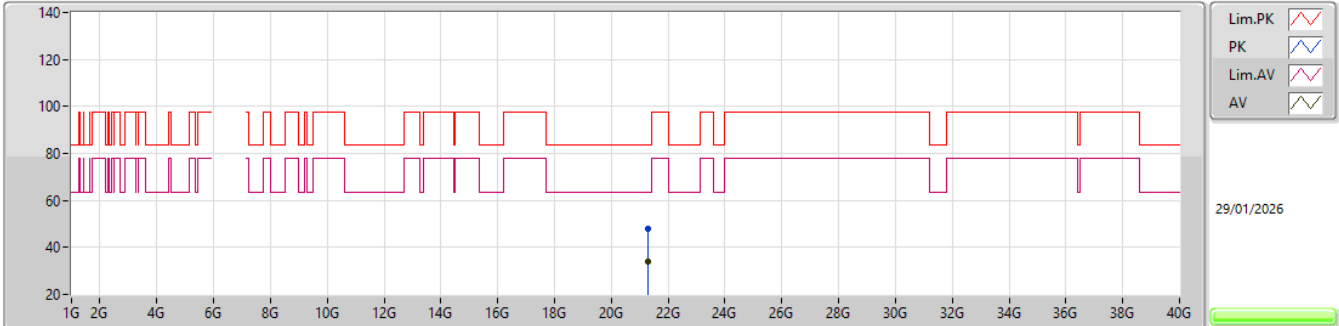


EUT_Z_2TX
Setting 15
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.28158G	47.73	83.54	-35.81	41.38	1	Horizontal	343	2.09	-	37.71	17.43	48.79			
AV	21.28676G	34.11	63.54	-29.43	27.80	1	Horizontal	343	2.09	-	37.68	17.42	48.79			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

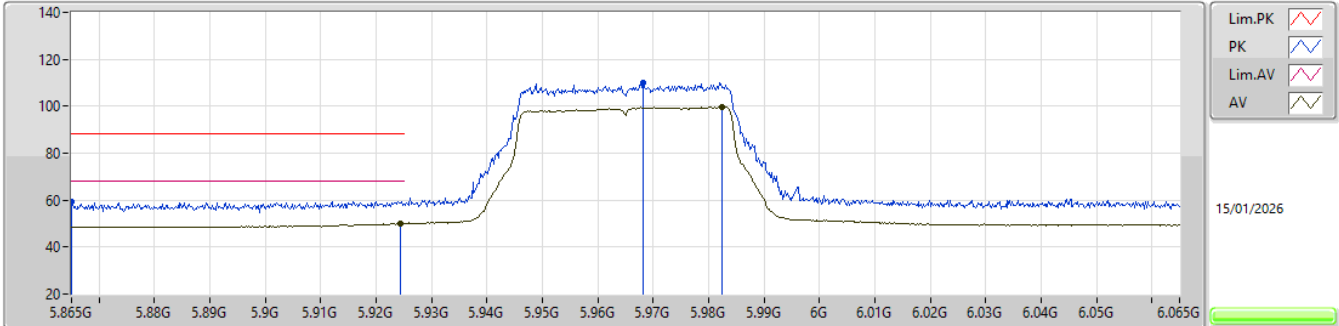


EUT_Y_2TX
Setting 17
03-E-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.865G	59.56	88.20	-28.64	52.65	3	Vertical	360	2.74	-	34.36	7.52	34.97			
RMS	5.9244G	50.05	68.20	-18.15	42.92	3	Vertical	360	2.74	-	34.60	7.52	34.99			
PK	5.9682G	110.14	Inf	-Inf	102.91	3	Vertical	360	2.74	-	34.70	7.53	35.00			
RMS	5.9824G	99.78	Inf	-Inf	92.55	3	Vertical	360	2.74	-	34.70	7.53	35.00			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

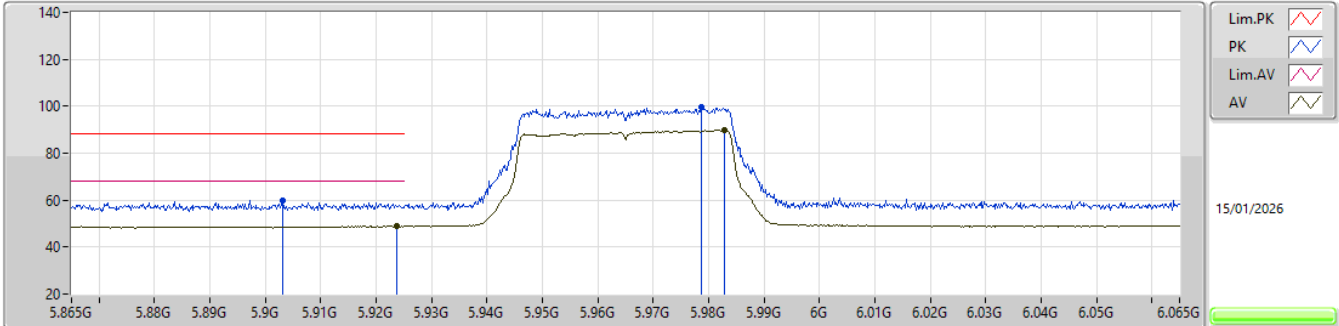


EUT_Y_2TX
Setting 17
03-E-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9032G	59.84	88.20	-28.36	52.79	3	Horizontal	189	2.79	-	34.51	7.52	34.98			
RMS	5.9236G	48.96	68.20	-19.24	41.84	3	Horizontal	189	2.79	-	34.59	7.52	34.99			
PK	5.9786G	99.56	Inf	-Inf	92.33	3	Horizontal	189	2.79	-	34.70	7.53	35.00			
RMS	5.9828G	89.86	Inf	-Inf	82.63	3	Horizontal	189	2.79	-	34.70	7.53	35.00			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

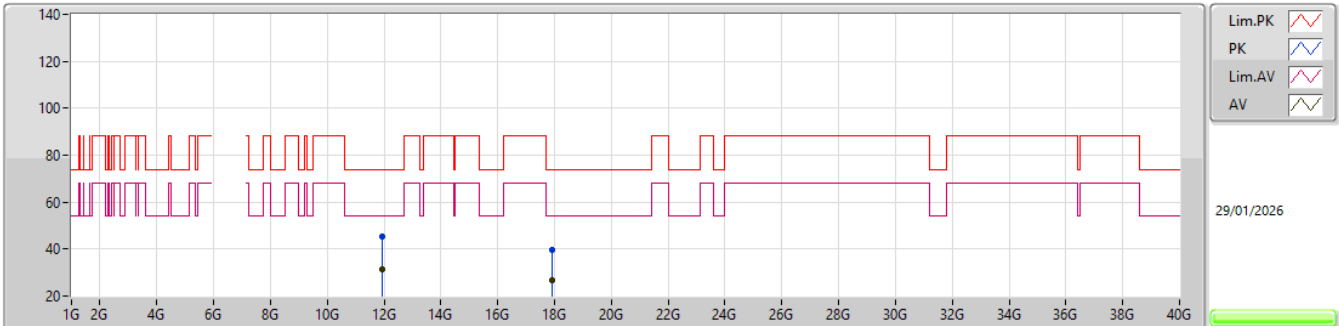


EUT_Z_2TX
Setting 17
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.92196G	45.40	74.00	-28.60	61.08	3	Vertical	226	1.84	-	39.26	10.88	65.82				
AV	11.91866G	31.57	54.00	-22.43	47.25	3	Vertical	226	1.84	-	39.26	10.88	65.82				
PK	17.89821G	39.54	74.00	-34.46	45.42	3	Vertical	267	2.47	-	44.89	13.23	64.00				
AV	17.90133G	26.55	54.00	-27.45	32.43	3	Vertical	267	2.47	-	44.89	13.23	64.00				

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

5965MHz_TX

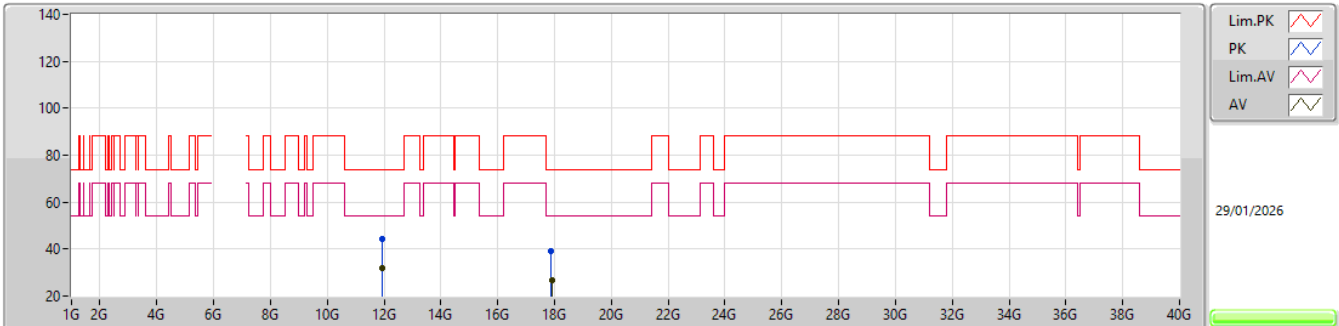


EUT_Z_2TX
Setting 17
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.91533G	44.36	74.00	-29.64	60.04	3	Horizontal	351	2.70	-	39.27	10.88	65.83				
AV	11.91533G	31.76	54.00	-22.24	47.44	3	Horizontal	351	2.70	-	39.27	10.88	65.83				
PK	17.88591G	39.38	74.00	-34.62	45.33	3	Horizontal	264	2.72	-	44.84	13.22	64.01				
AV	17.90709G	26.48	54.00	-27.52	32.37	3	Horizontal	264	2.72	-	44.87	13.23	63.99				

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


5965MHz_TX

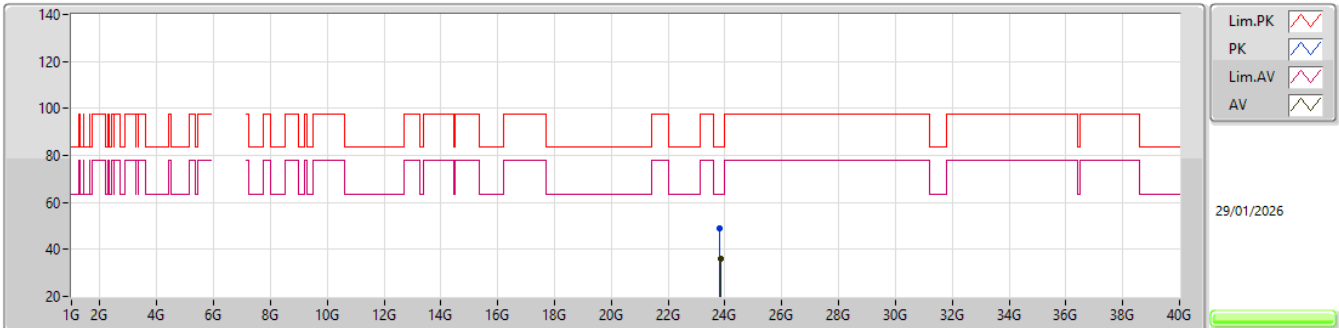EUT_Z_2TX
Setting 17
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.83108G	48.75	83.54	-34.79	39.82	1	Vertical	3	2.47	-	38.90	17.93	47.90			
AV	23.8384G	36.09	63.54	-27.45	27.16	1	Vertical	3	2.47	-	38.90	17.93	47.90			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


5965MHz_TX

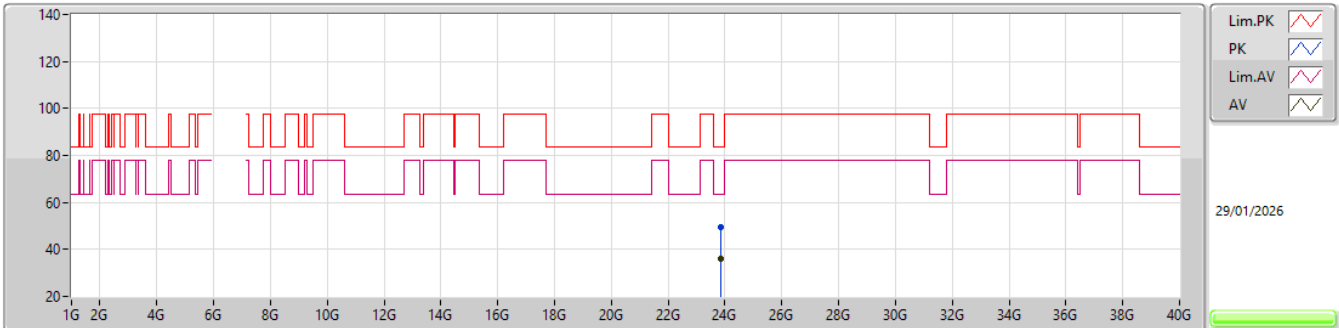EUT_Z_2TX
Setting 17
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.87356G	49.61	83.54	-33.93	40.70	1	Horizontal	202	2.10	-	38.90	17.91	47.90			
AV	23.83372G	36.17	63.54	-27.37	27.24	1	Horizontal	202	2.10	-	38.90	17.93	47.90			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6205MHz_TX

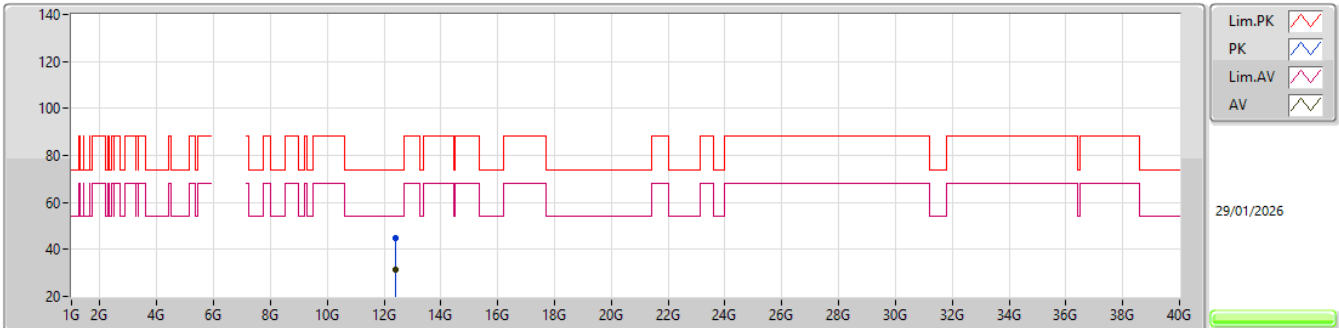EUT_Z_2TX
Setting 18
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.42299G	44.86	74.00	-29.14	60.63	3	Vertical	119	1.02	-	38.80	11.03	65.60			
AV	12.40478G	31.38	54.00	-22.62	47.15	3	Vertical	119	1.02	-	38.80	11.03	65.60			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6205MHz_TX

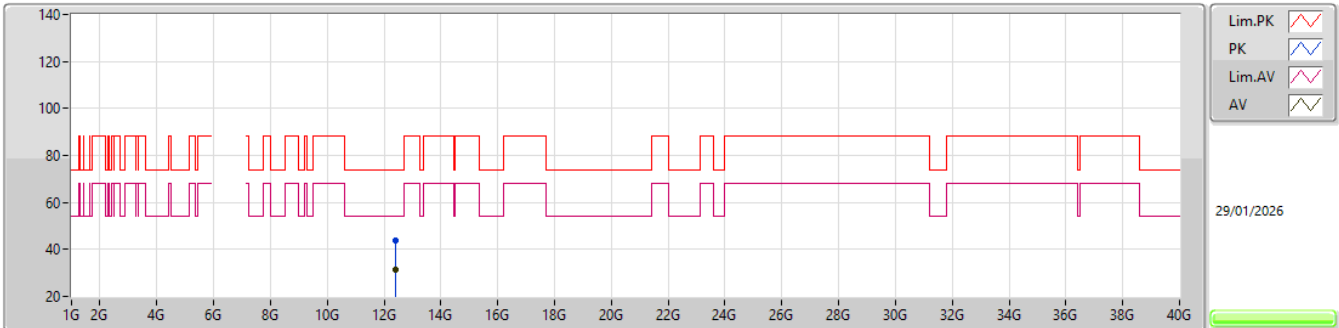EUT_Z_2TX
Setting 18
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.41717G	43.88	74.00	-30.12	59.65	3	Horizontal	156	2.62	-	38.80	11.03	65.60			
AV	12.40262G	31.59	54.00	-22.41	47.37	3	Horizontal	156	2.62	-	38.80	11.03	65.61			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6405MHz_TX

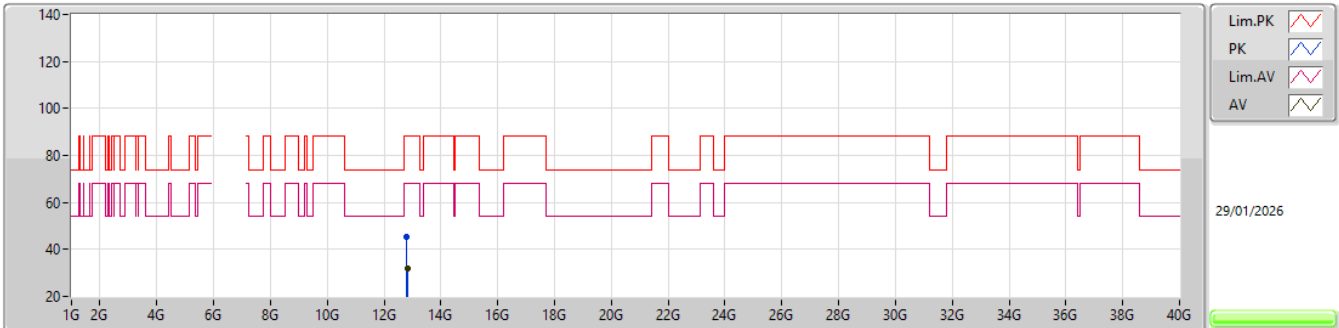EUT_Z_2TX
Setting 18
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.80709G	45.36	88.20	-42.84	60.26	3	Vertical	28	2.32	-	39.11	11.14	65.15			
RMS	12.81528G	31.93	68.20	-36.27	46.78	3	Vertical	28	2.32	-	39.13	11.15	65.13			

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6405MHz_TX

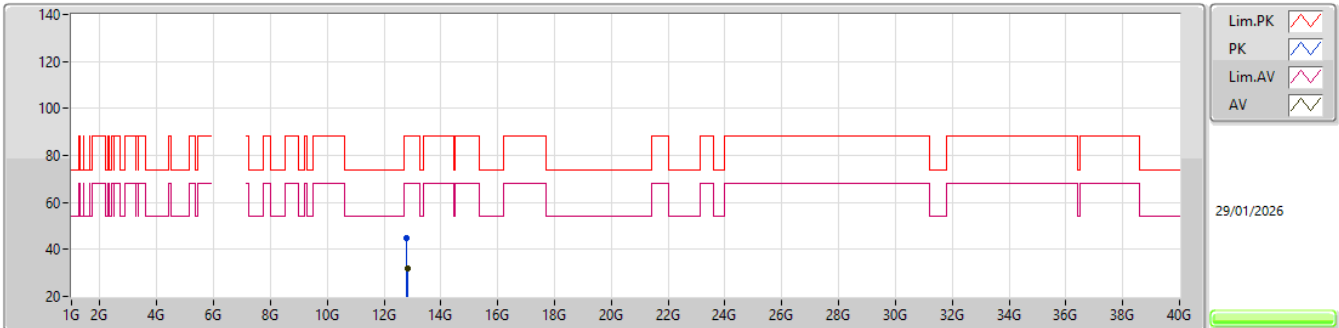EUT_Z_2TX
Setting 18
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.80973G	44.72	88.20	-43.48	59.60	3	Horizontal	314	1.63	-	39.12	11.14	65.14			
RMS	12.81702G	31.80	68.20	-36.40	46.65	3	Horizontal	314	1.63	-	39.13	11.15	65.13			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6445MHz_TX

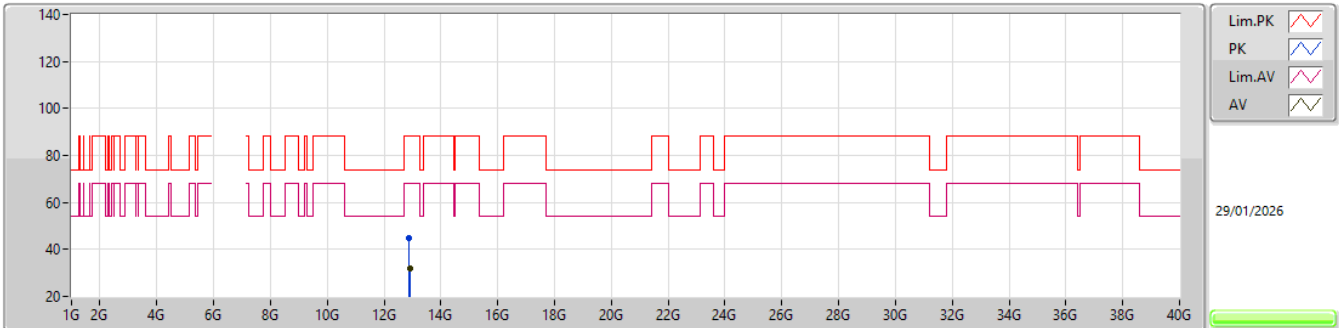EUT_Z_2TX
Setting 18
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.88433G	44.73	88.20	-43.47	59.33	3	Vertical	154	2.64	-	39.27	11.17	65.04			
RMS	12.89879G	32.03	68.20	-36.17	46.58	3	Vertical	154	2.64	-	39.30	11.17	65.02			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6445MHz_TX

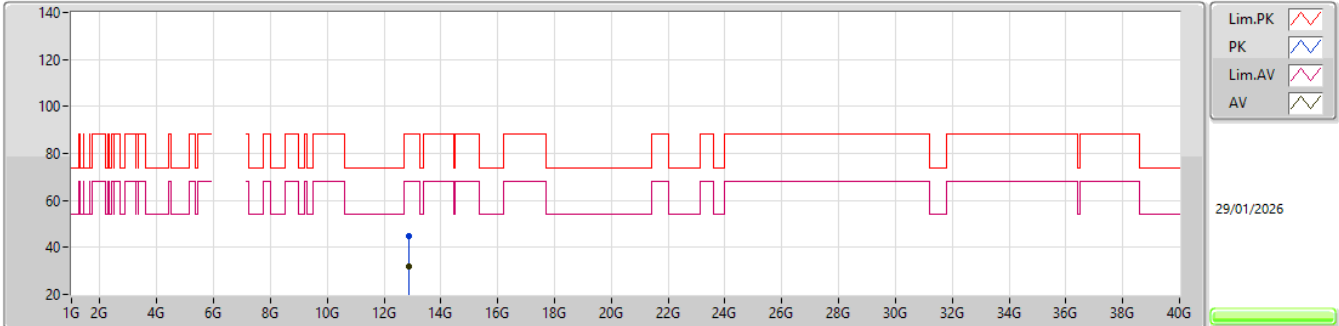EUT_Z_2TX
Setting 18
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.89504G	44.59	88.20	-43.61	59.15	3	Horizontal	213	2.91	-	39.29	11.17	65.02			
RMS	12.89072G	32.04	68.20	-36.16	46.62	3	Horizontal	213	2.91	-	39.28	11.17	65.03			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6485MHz_TX

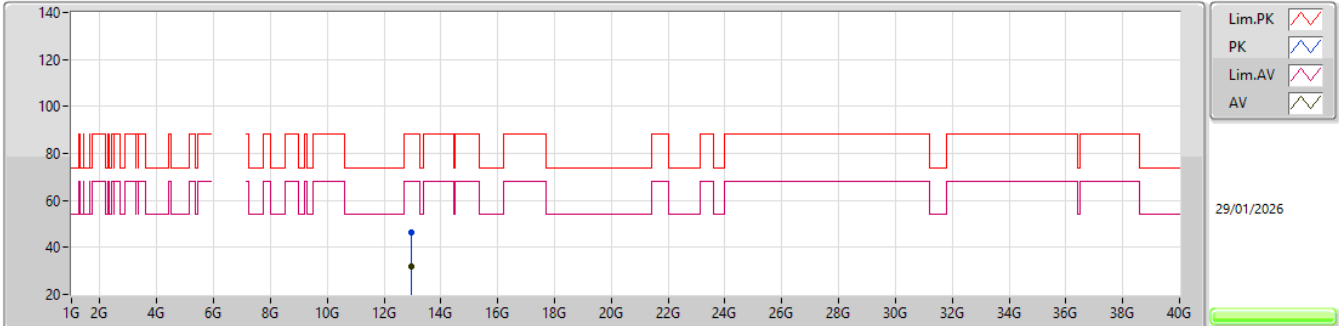


EUT_Z_2TX
Setting 18
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.96592G	46.17	88.20	-42.03	60.41	3	Vertical	148	1.06	-	39.50	11.19	64.93			
RMS	12.9799G	31.97	68.20	-36.23	46.19	3	Vertical	148	1.06	-	39.50	11.19	64.91			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6485MHz_TX

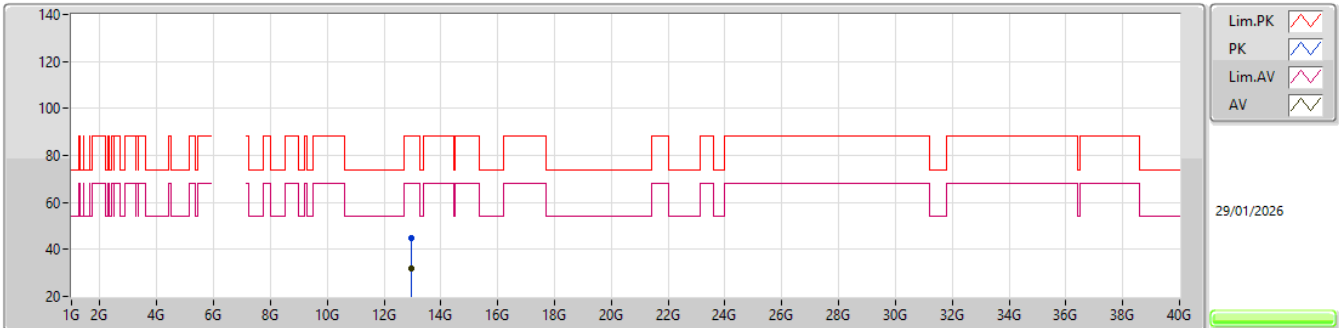EUT_Z_2TX
Setting 18
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.96946G	45.06	88.20	-43.14	59.29	3	Horizontal	241	2.35	-	39.50	11.19	64.92			
RMS	12.95977G	31.96	68.20	-36.24	46.21	3	Horizontal	241	2.35	-	39.50	11.19	64.94			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6525MHz_TX

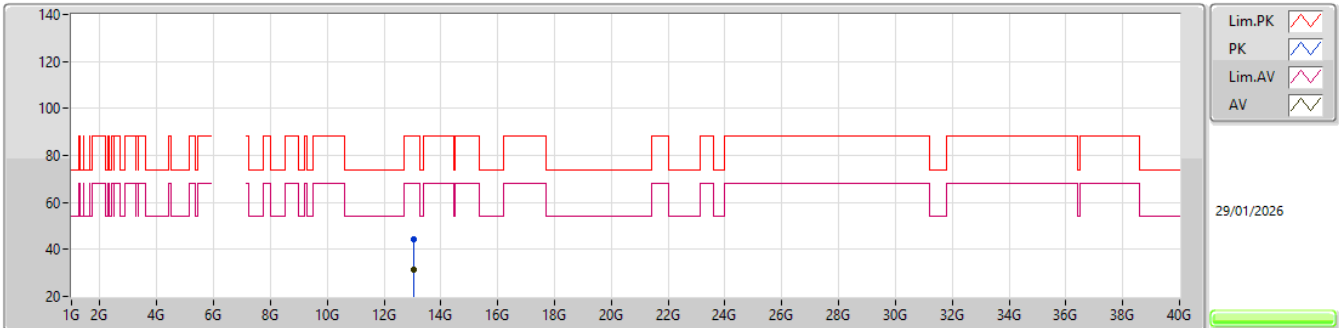EUT_Z_2TX
Setting 18
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.04544G	44.47	88.20	-43.73	58.64	3	Vertical	299	2.37	-	39.50	11.21	64.88			
RMS	13.03923G	31.41	68.20	-36.79	45.58	3	Vertical	299	2.37	-	39.50	11.21	64.88			

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6525MHz_TX

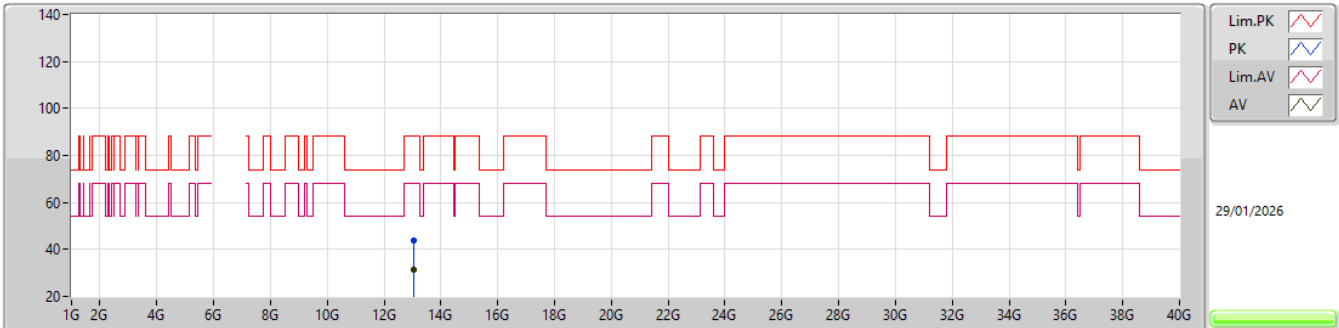EUT_Z_2TX
Setting 18
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.05813G	43.85	88.20	-44.35	57.98	3	Horizontal	157	1.76	-	39.52	11.22	64.87			
RMS	13.04262G	31.33	68.20	-36.87	45.50	3	Horizontal	157	1.76	-	39.50	11.21	64.88			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6565MHz_TX

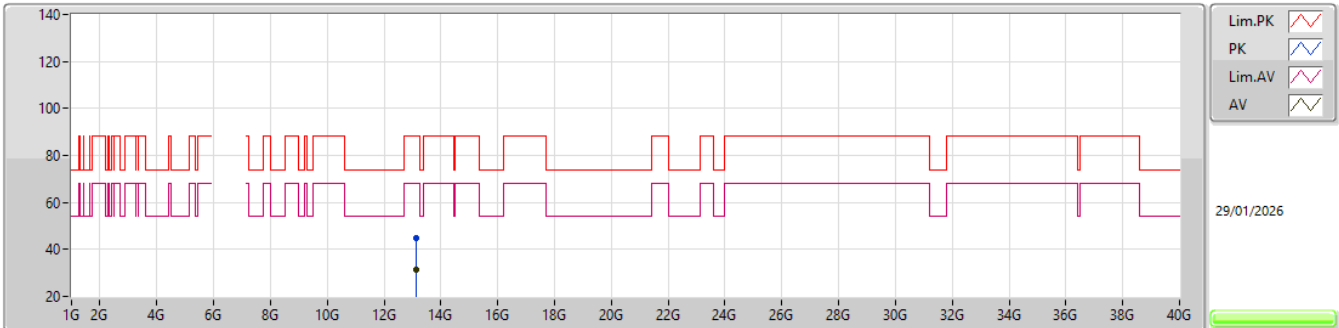EUT_Z_2TX
Setting 19
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.13093G	44.60	88.20	-43.60	58.63	3	Vertical	89	2.38	-	39.60	11.24	64.87			
RMS	13.1183G	31.40	68.20	-36.80	45.44	3	Vertical	89	2.38	-	39.60	11.23	64.87			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6565MHz_TX

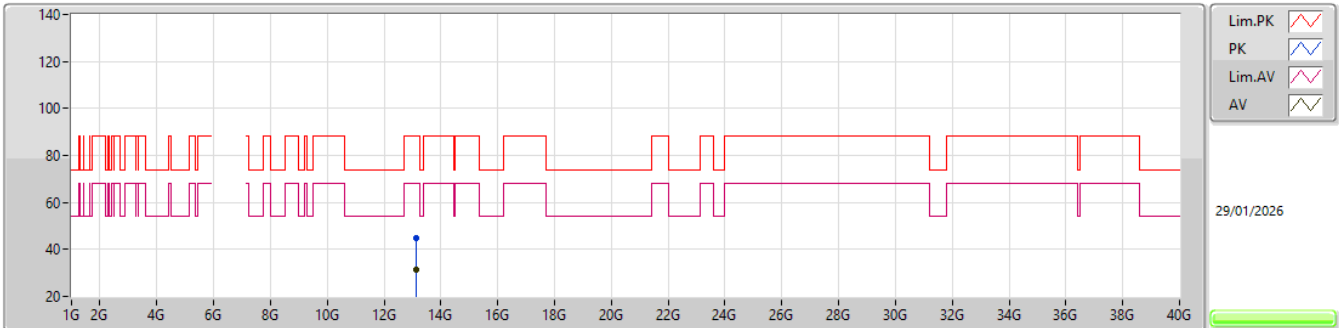EUT_Z_2TX
Setting 19
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.12622G	44.76	88.20	-43.44	58.79	3	Horizontal	226	2.23	-	39.60	11.24	64.87			
RMS	13.12616G	31.37	68.20	-36.83	45.40	3	Horizontal	226	2.23	-	39.60	11.24	64.87			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6685MHz_TX

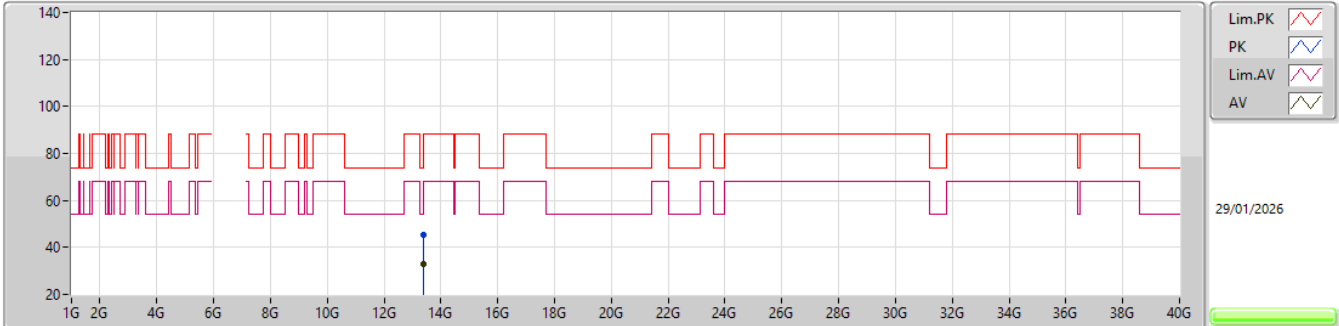


EUT_Z_2TX
Setting 20
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.37654G	45.28	74.00	-28.72	58.66	3	Vertical	247	1.35	-	40.15	11.31	64.84			
AV	13.38299G	33.09	54.00	-20.91	46.45	3	Vertical	247	1.35	-	40.17	11.31	64.84			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6685MHz_TX

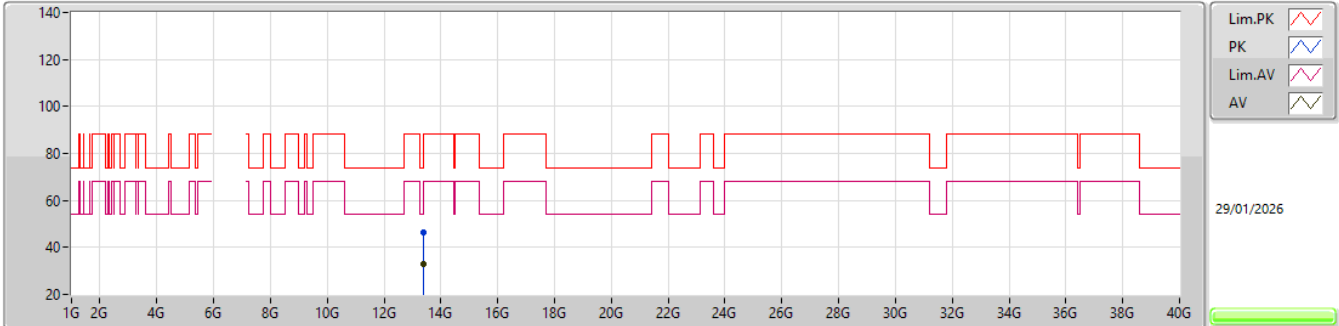


EUT_Z_2TX
Setting 20
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.38266G	46.45	74.00	-27.55	59.81	3	Horizontal	20	1.83	-	40.17	11.31	64.84			
AV	13.38011G	33.00	54.00	-21.00	46.37	3	Horizontal	20	1.83	-	40.16	11.31	64.84			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

6885MHz_TX

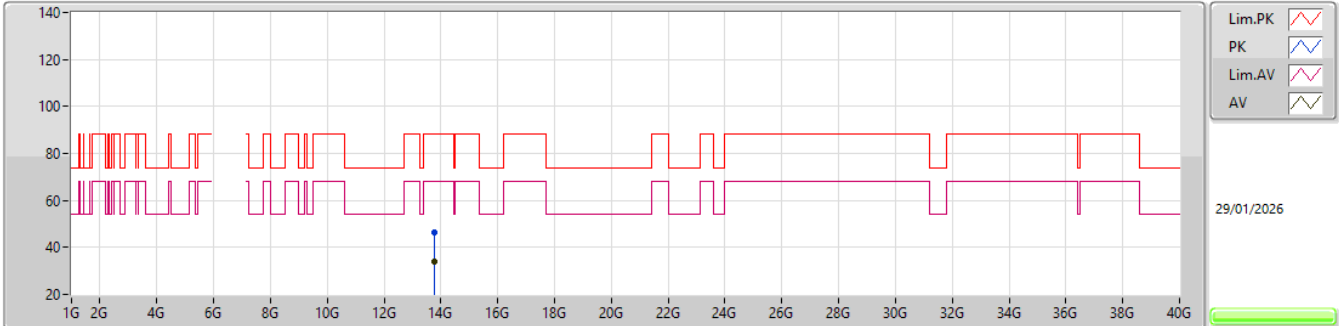


EUT_Z_2TX
Setting 20
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.76763G	46.62	88.20	-41.58	59.21	3	Vertical	32	2.10	-	40.70	11.42	64.71			
RMS	13.77798G	33.71	68.20	-34.49	46.28	3	Vertical	32	2.10	-	40.70	11.43	64.70			

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6885MHz_TX

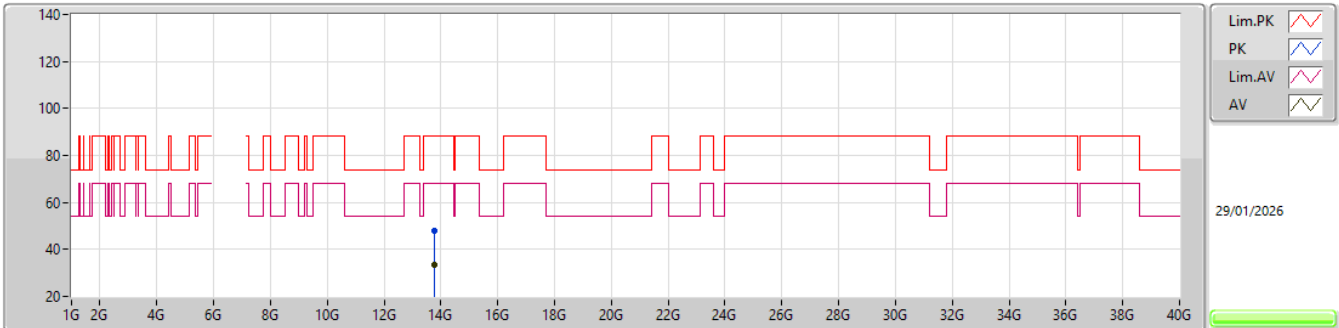EUT_Z_2TX
Setting 20
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.77435G	47.82	88.20	-40.38	60.40	3	Horizontal	57	1.12	-	40.70	11.42	64.70			
RMS	13.78098G	33.64	68.20	-34.56	46.21	3	Horizontal	57	1.12	-	40.70	11.43	64.70			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6925MHz_TX

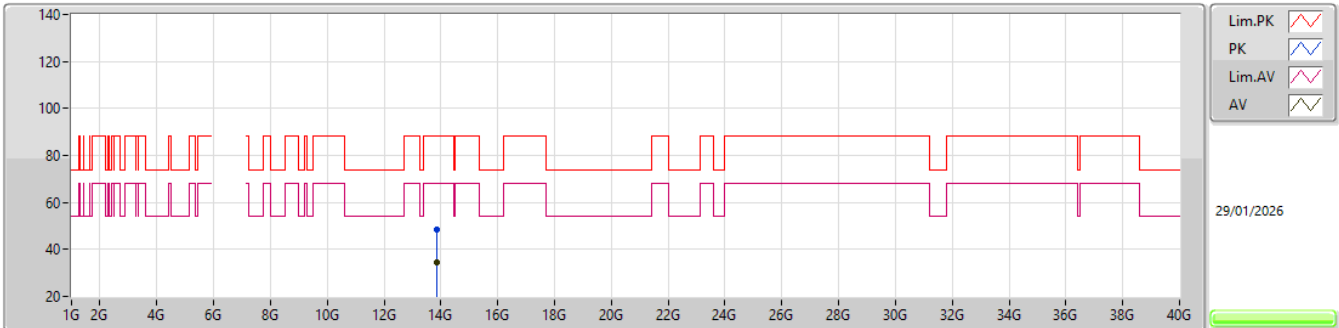EUT_Z_2TX
Setting 19
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.85171G	48.63	88.20	-39.57	61.05	3	Vertical	257	1.35	-	40.80	11.45	64.67			
RMS	13.84349G	34.54	68.20	-33.66	46.98	3	Vertical	257	1.35	-	40.79	11.44	64.67			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


6925MHz_TX

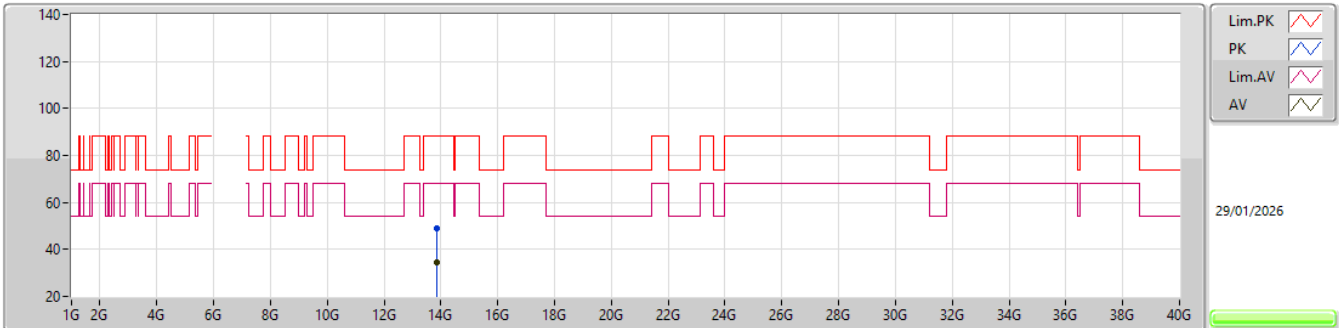EUT_Z_2TX
Setting 19
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.84232G	49.16	88.20	-39.04	61.61	3	Horizontal	203	1.31	-	40.78	11.44	64.67			
RMS	13.85576G	34.53	68.20	-33.67	46.95	3	Horizontal	203	1.31	-	40.80	11.45	64.67			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

7005MHz_TX

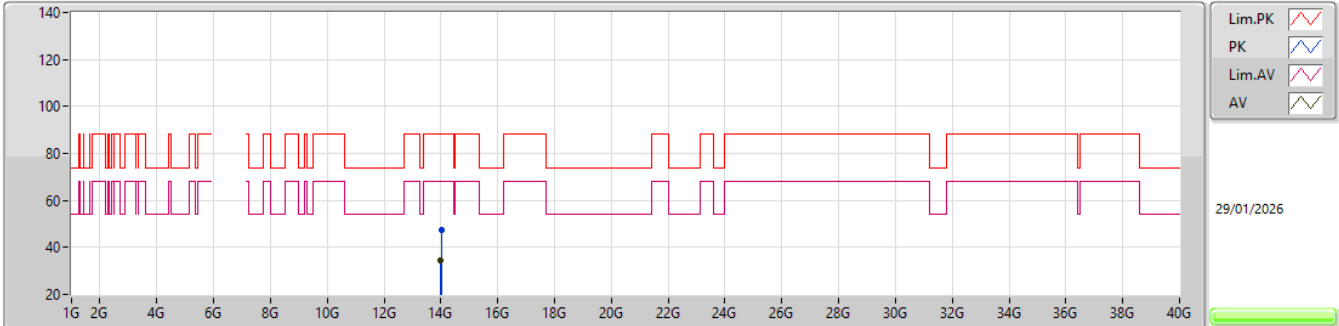


EUT_Z_2TX
Setting 17
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.02245G	47.21	88.20	-40.99	59.16	3	Vertical	229	1.32	-	41.14	11.50	64.59			
RMS	13.99917G	34.48	68.20	-33.72	46.49	3	Vertical	229	1.32	-	41.10	11.49	64.60			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

7005MHz_TX

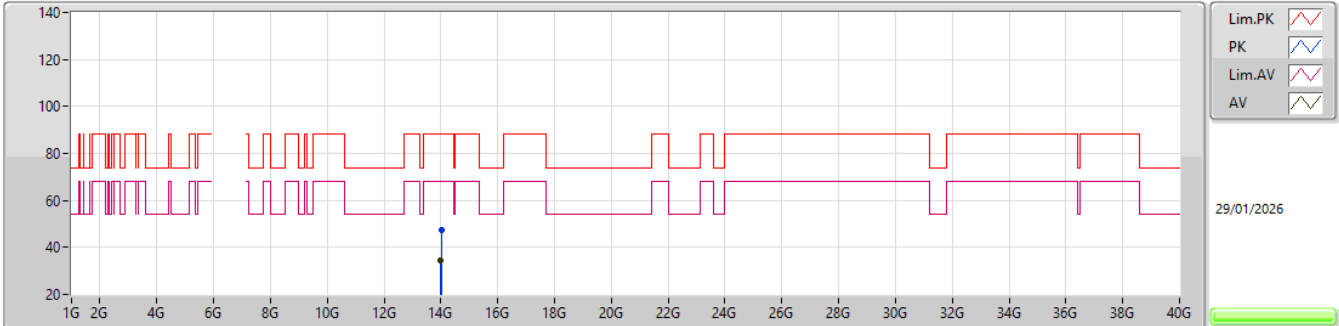


EUT_Z_2TX
Setting 17
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.00853G	47.63	88.20	-40.57	59.61	3	Horizontal	127	1.71	-	41.12	11.49	64.59			
RMS	14.00289G	34.56	68.20	-33.64	46.56	3	Horizontal	127	1.71	-	41.11	11.49	64.60			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

7085MHz_TX

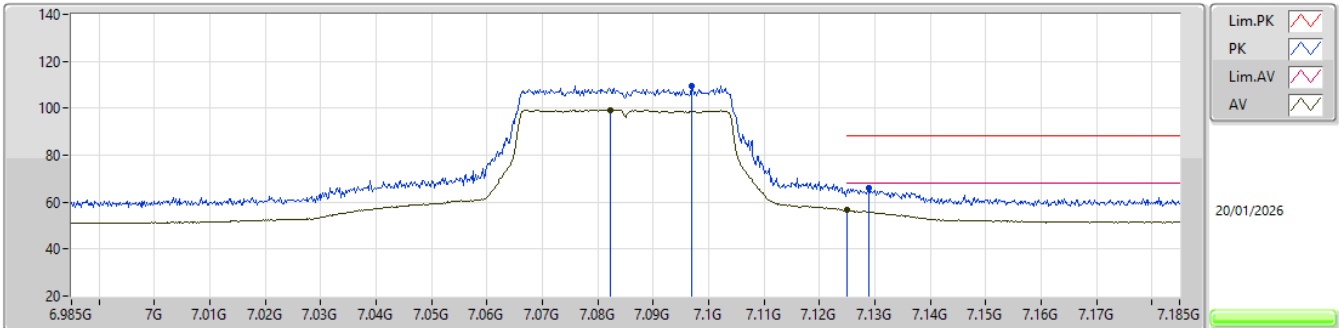


EUT_Y_2TX
Setting 18
03-E-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	7.097G	109.69	Inf	-Inf	100.67	3	Vertical	219	2.63	-	35.70	8.39	35.07				
RMS	7.0822G	99.25	Inf	-Inf	90.25	3	Vertical	219	2.63	-	35.70	8.38	35.08				
PK	7.129G	66.11	88.20	-22.09	56.90	3	Vertical	219	2.63	-	35.87	8.40	35.06				
RMS	7.125G	56.52	68.20	-11.68	47.33	3	Vertical	219	2.63	-	35.85	8.40	35.06				

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

7085MHz_TX

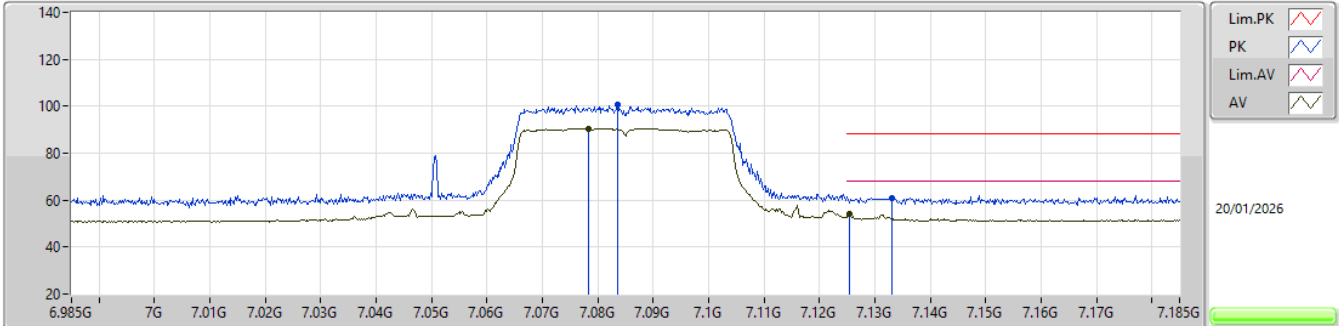


EUT_Y_2TX
Setting 18
03-E-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0836G	100.85	Inf	-Inf	91.85	3	Horizontal	199	2.25	-	35.70	8.38	35.08			
RMS	7.0784G	90.57	Inf	-Inf	81.57	3	Horizontal	199	2.25	-	35.70	8.38	35.08			
PK	7.133G	60.65	88.20	-27.55	51.40	3	Horizontal	199	2.25	-	35.90	8.41	35.06			
RMS	7.1254G	53.97	68.20	-14.23	44.78	3	Horizontal	199	2.25	-	35.85	8.40	35.06			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


7085MHz_TX

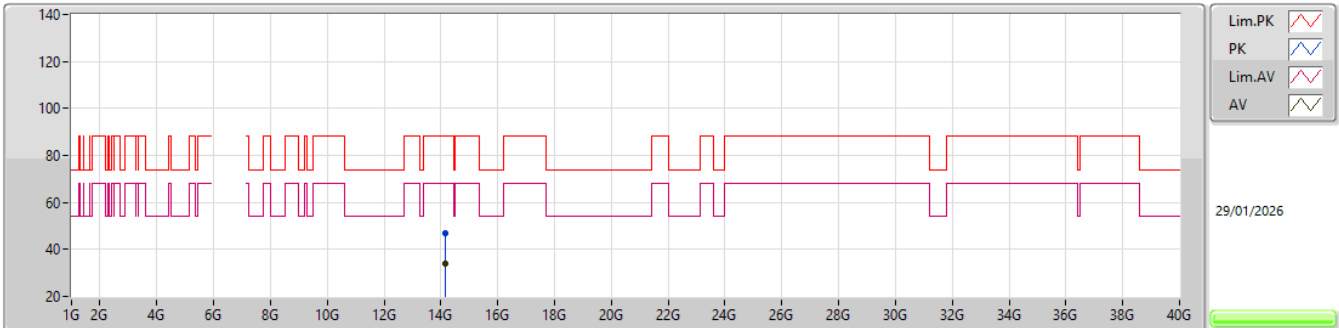EUT_Z_2TX
Setting 18
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.1559G	47.02	88.20	-41.18	58.55	3	Vertical	54	2.25	-	41.42	11.56	64.51			
RMS	14.16724G	33.93	68.20	-34.27	45.39	3	Vertical	54	2.25	-	41.47	11.57	64.50			

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX


7085MHz_TX

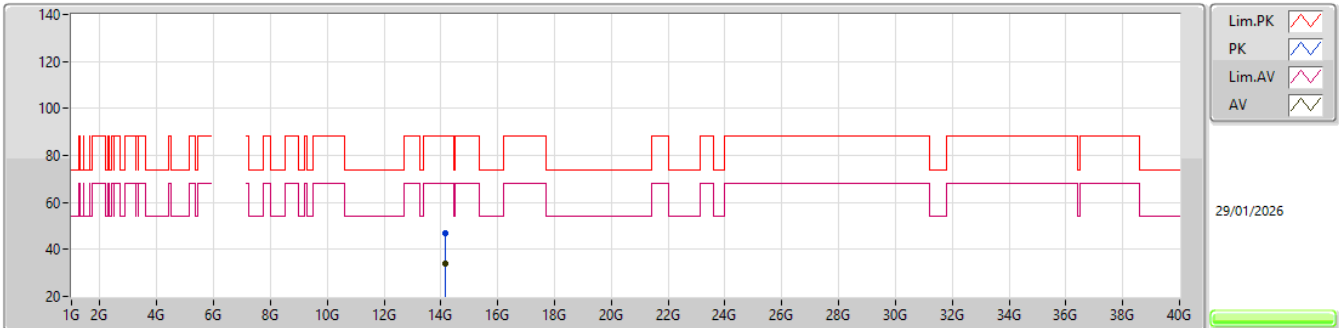EUT_Z_2TX
Setting 18
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.16694G	46.94	88.20	-41.26	58.40	3	Horizontal	142	1.55	-	41.47	11.57	64.50			
RMS	14.15611G	33.96	68.20	-34.24	45.49	3	Horizontal	142	1.55	-	41.42	11.56	64.51			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5985MHz_TX

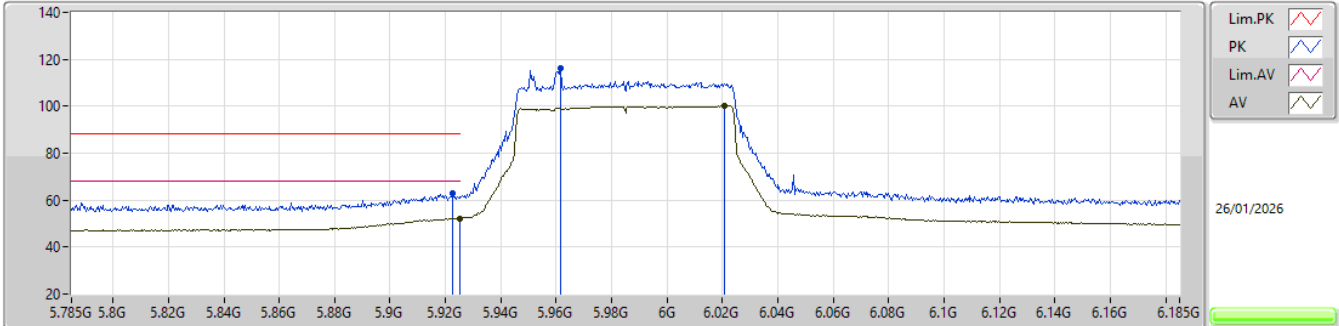


EUT_Y_2TX
Setting 21
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9226G	62.92	88.20	-25.28	56.86	3	Vertical	0	2.75	-	32.25	7.57	33.76			
RMS	5.925G	52.28	68.20	-15.92	46.21	3	Vertical	0	2.75	-	32.25	7.58	33.76			
PK	5.9614G	116.06	Inf	-Inf	109.85	3	Vertical	0	2.75	-	32.32	7.64	33.75			
RMS	6.0206G	100.13	Inf	-Inf	93.73	3	Vertical	0	2.75	-	32.44	7.70	33.74			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


5985MHz_TX

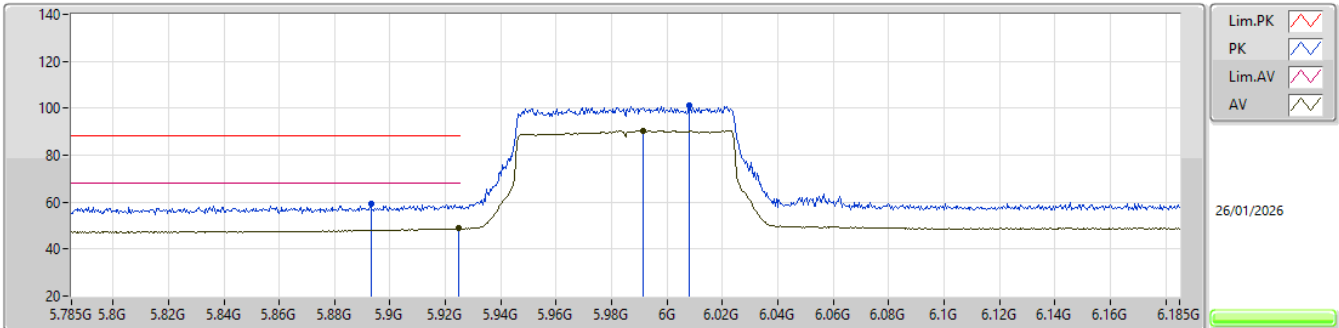EUT_Y_2TX
Setting 21
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.893G	59.19	88.20	-29.01	53.24	3	Horizontal	191	2.68	-	32.19	7.52	33.76			
RMS	5.9246G	48.79	68.20	-19.41	42.73	3	Horizontal	191	2.68	-	32.25	7.57	33.76			
PK	6.0078G	101.25	Inf	-Inf	94.88	3	Horizontal	191	2.68	-	32.42	7.70	33.75			
RMS	5.9914G	90.41	Inf	-Inf	84.09	3	Horizontal	191	2.68	-	32.38	7.69	33.75			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5985MHz_TX

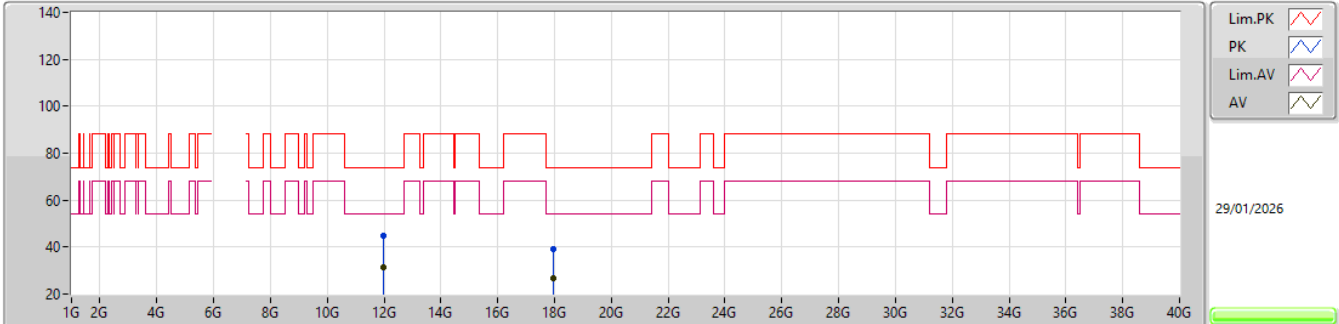


EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.96703G	44.99	74.00	-29.01	60.67	3	Vertical	231	1.02	-	39.20	10.90	65.78			
AV	11.97228G	31.52	54.00	-22.48	47.19	3	Vertical	231	1.02	-	39.20	10.90	65.77			
PK	17.95044G	39.28	74.00	-34.72	45.29	3	Vertical	343	2.61	-	44.70	13.25	63.96			
AV	17.96856G	26.61	54.00	-27.39	32.56	3	Vertical	343	2.61	-	44.74	13.26	63.95			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

5985MHz_TX

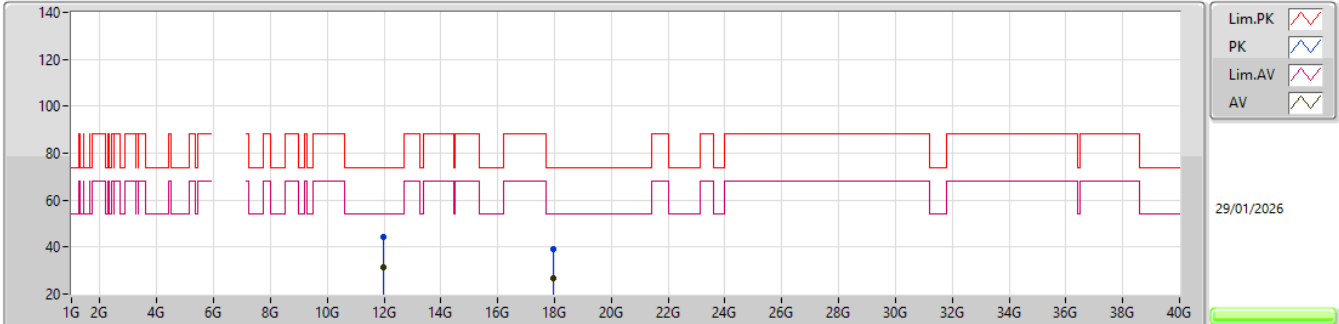


EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.96802G	44.11	74.00	-29.89	59.79	3	Horizontal	5	2.14	-	39.20	10.90	65.78			
AV	11.958G	31.41	54.00	-22.59	47.10	3	Horizontal	5	2.14	-	39.20	10.90	65.79			
PK	17.95641G	39.39	74.00	-34.61	45.39	3	Horizontal	112	1.86	-	44.71	13.25	63.96			
AV	17.96823G	26.47	54.00	-27.53	32.42	3	Horizontal	112	1.86	-	44.74	13.26	63.95			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


5985MHz_TX

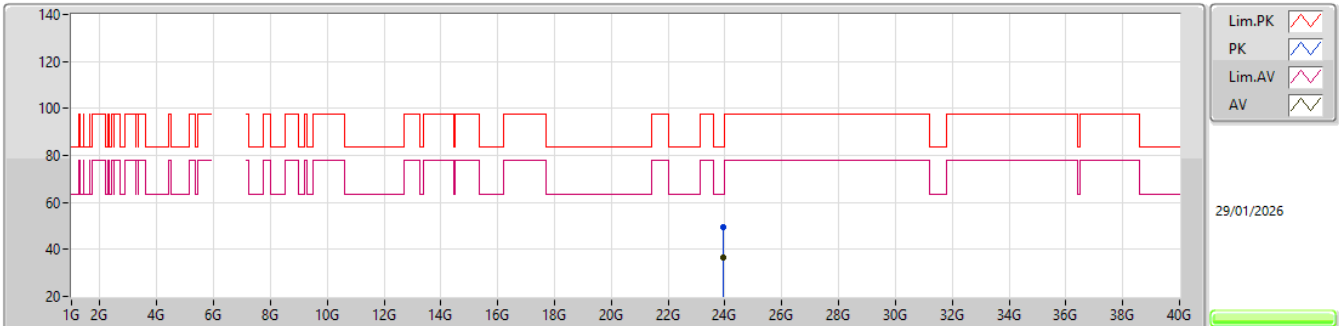EUT_Z_2TX
Setting 21
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.93616G	49.62	83.54	-33.92	40.69	1	Vertical	66	2.75	-	38.97	17.86	47.90			
AV	23.95404G	36.32	63.54	-27.22	27.38	1	Vertical	66	2.75	-	38.99	17.85	47.90			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


5985MHz_TX

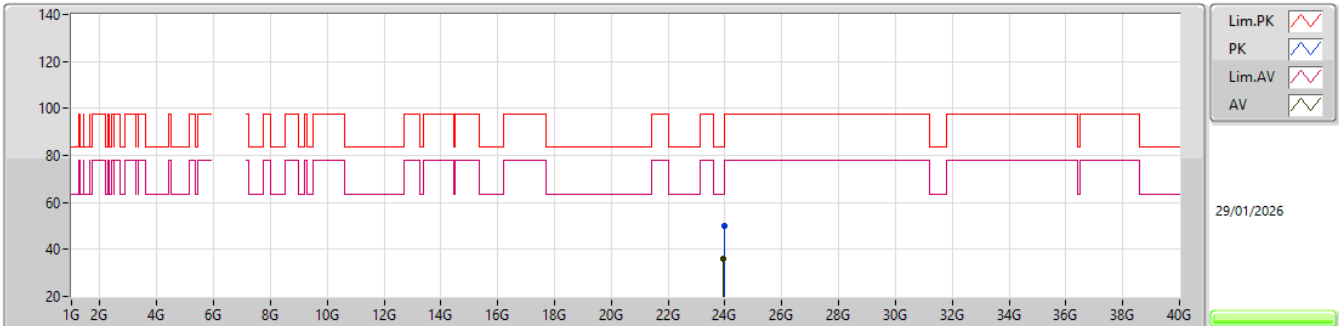EUT_Z_2TX
Setting 21
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.96064G	49.89	83.54	-33.65	40.96	1	Horizontal	262	2.13	-	38.98	17.85	47.90			
AV	23.94576G	36.25	63.54	-27.29	27.30	1	Horizontal	262	2.13	-	38.99	17.86	47.90			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6225MHz_TX

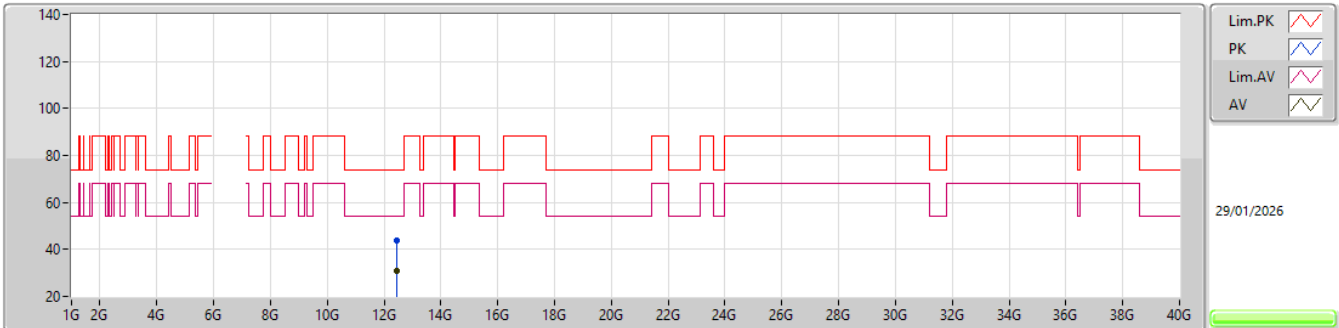EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.44385G	43.70	74.00	-30.30	59.45	3	Vertical	350	2.20	-	38.80	11.04	65.59			
AV	12.43662G	31.02	54.00	-22.98	46.77	3	Vertical	350	2.20	-	38.80	11.04	65.59			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6225MHz_TX

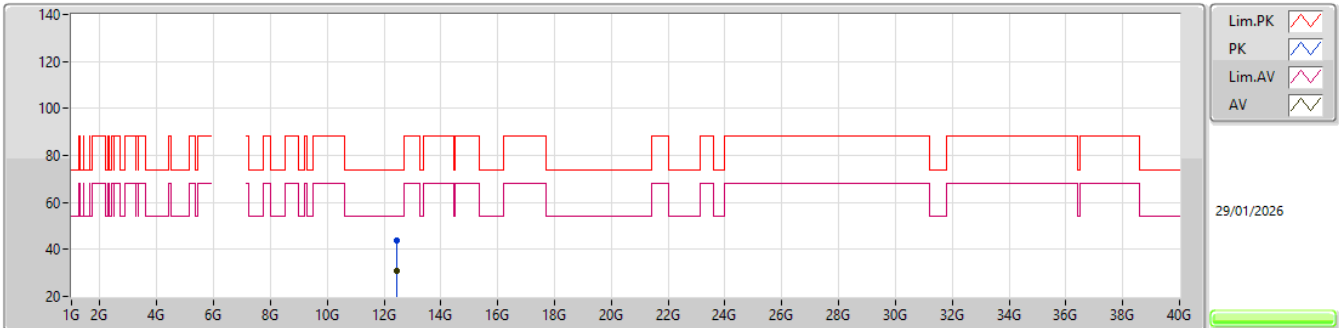EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.45714G	43.90	74.00	-30.10	59.65	3	Horizontal	300	1.44	-	38.80	11.04	65.59			
AV	12.43545G	30.86	54.00	-23.14	46.61	3	Horizontal	300	1.44	-	38.80	11.04	65.59			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6225MHz_TX

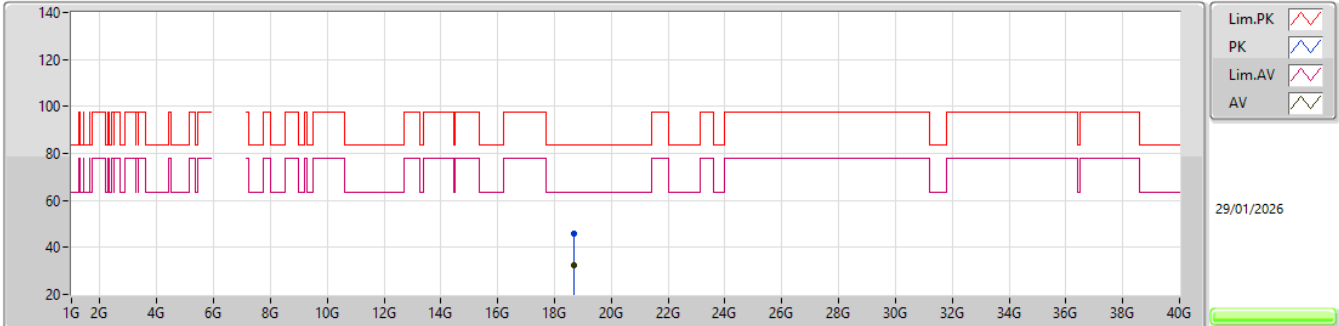EUT_Z_2TX
Setting 21
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.67498G	45.85	83.54	-37.69	40.79	1	Vertical	256	1.55	-	37.55	16.21	48.70			
AV	18.6757G	32.40	63.54	-31.14	27.35	1	Vertical	256	1.55	-	37.55	16.21	48.71			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

6225MHz_TX

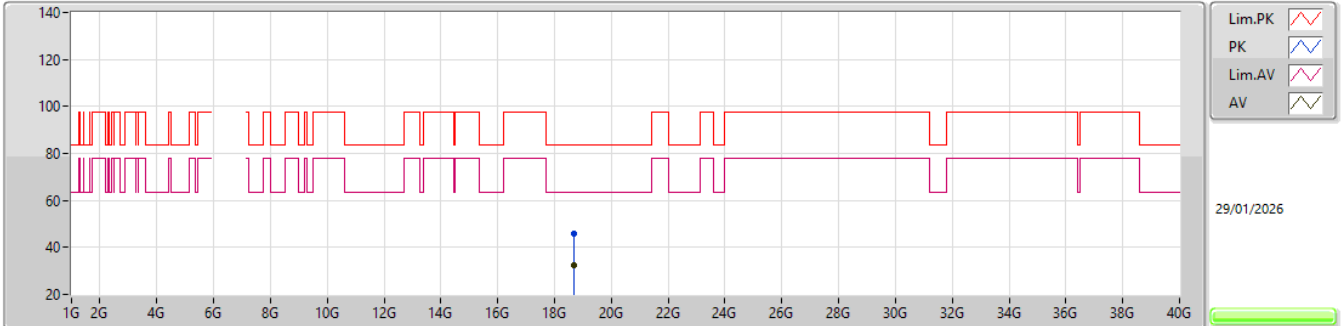


EUT_Z_2TX
Setting 21
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	18.67222G	45.83	83.54	-37.71	40.76	1	Horizontal	206	1.96	-	37.56	16.21	48.70				
AV	18.67654G	32.38	63.54	-31.16	27.33	1	Horizontal	206	1.96	-	37.55	16.21	48.71				

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6385MHz_TX

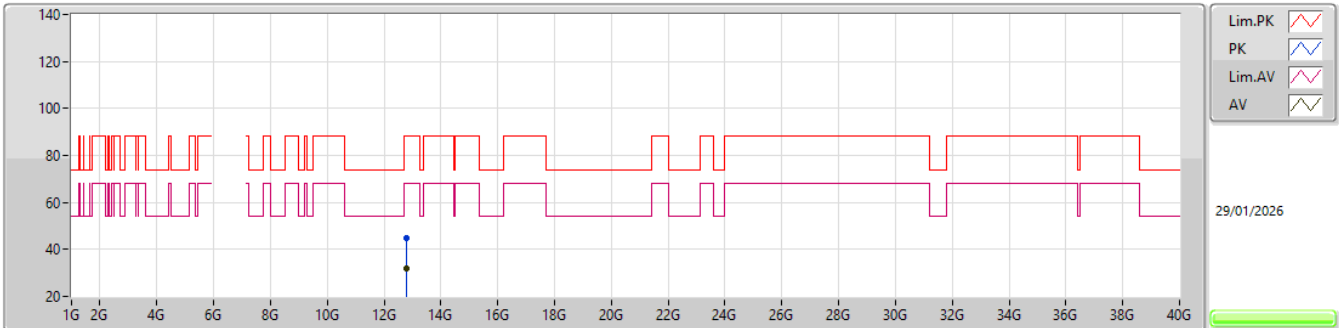EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.77744G	44.77	88.20	-43.43	59.77	3	Vertical	34	1.60	-	39.05	11.14	65.19			
RMS	12.77048G	31.87	68.20	-36.33	46.90	3	Vertical	34	1.60	-	39.04	11.13	65.20			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6385MHz_TX

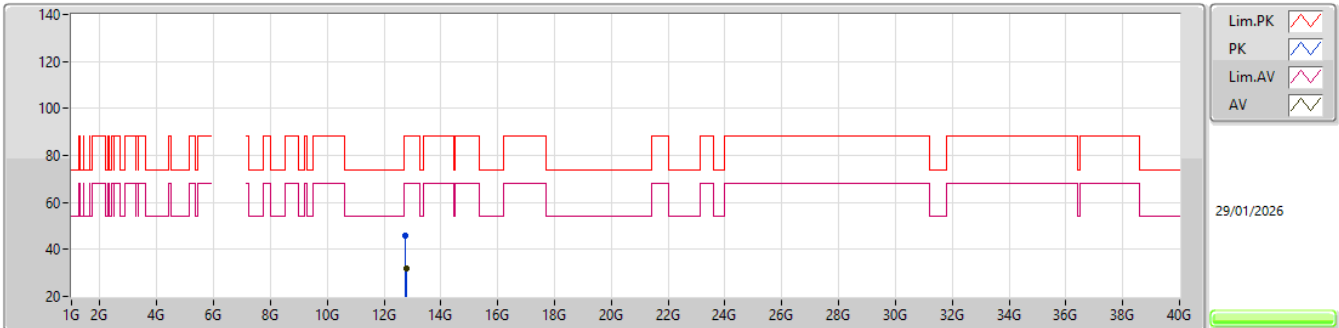EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.75779G	45.79	88.20	-42.41	60.85	3	Horizontal	315	1.51	-	39.02	11.13	65.21			
RMS	12.77594G	31.85	68.20	-36.35	46.85	3	Horizontal	315	1.51	-	39.05	11.14	65.19			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

6385MHz_TX

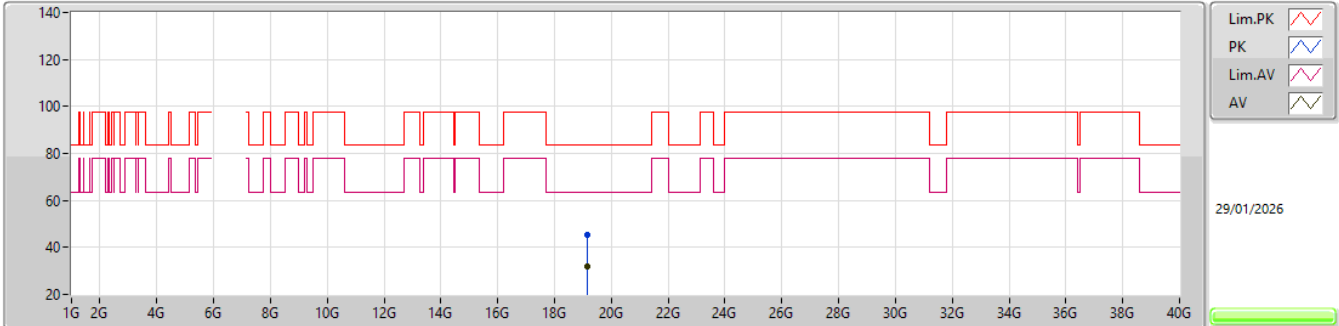


EUT_Z_2TX
Setting 21
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.15268G	45.28	83.54	-38.26	39.87	1	Vertical	299	1.47	-	37.79	16.49	48.87			
AV	19.15184G	32.07	63.54	-31.47	26.66	1	Vertical	299	1.47	-	37.79	16.49	48.87			

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6385MHz_TX

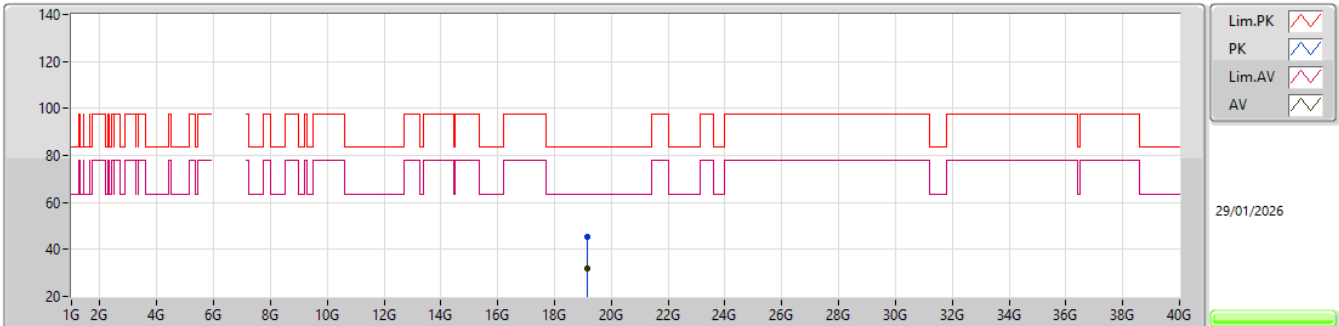EUT_Z_2TX
Setting 21
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.15244G	45.56	83.54	-37.98	40.15	1	Horizontal	28	1.61	-	37.79	16.49	48.87			
AV	19.15316G	32.05	63.54	-31.49	26.64	1	Horizontal	28	1.61	-	37.79	16.49	48.87			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

6465MHz_TX

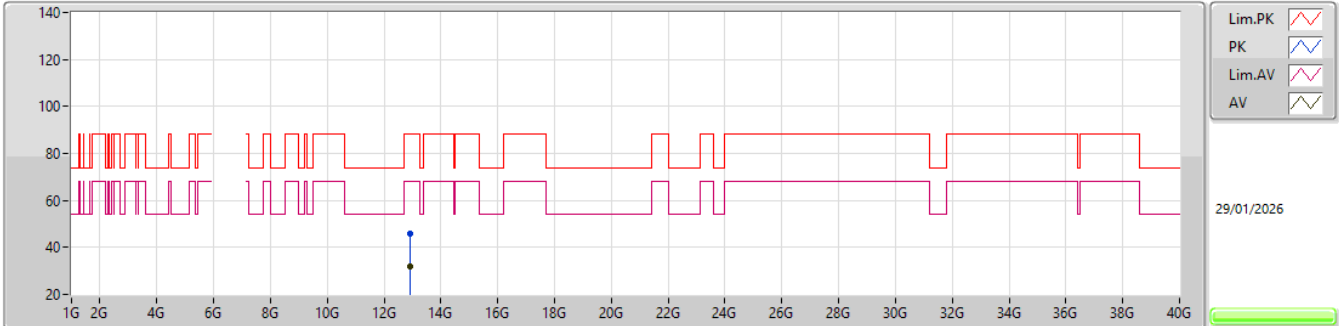


EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.92142G	45.94	88.20	-42.26	60.36	3	Vertical	110	2.81	-	39.39	11.18	64.99			
RMS	12.91695G	32.02	68.20	-36.18	46.46	3	Vertical	110	2.81	-	39.37	11.18	64.99			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6465MHz_TX

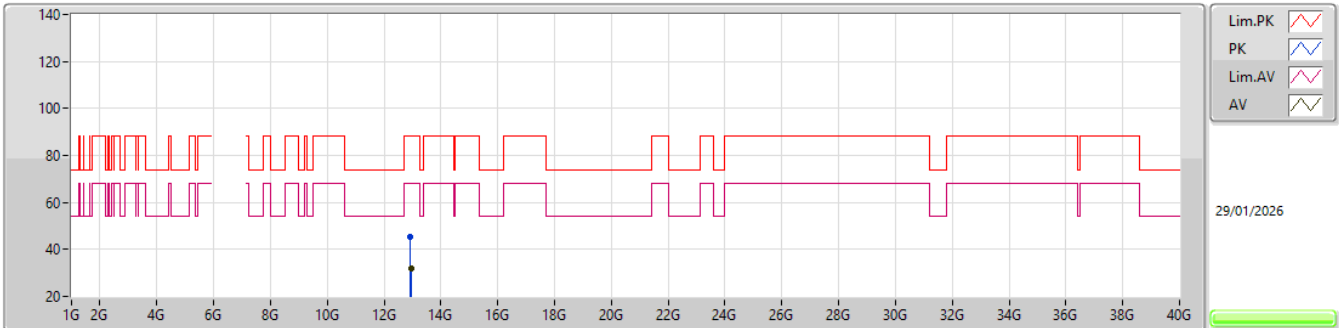EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.92493G	45.32	88.20	-42.88	59.72	3	Horizontal	301	2.04	-	39.40	11.18	64.98			
RMS	12.94437G	32.08	68.20	-36.12	46.38	3	Horizontal	301	2.04	-	39.48	11.18	64.96			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

6545MHz_TX

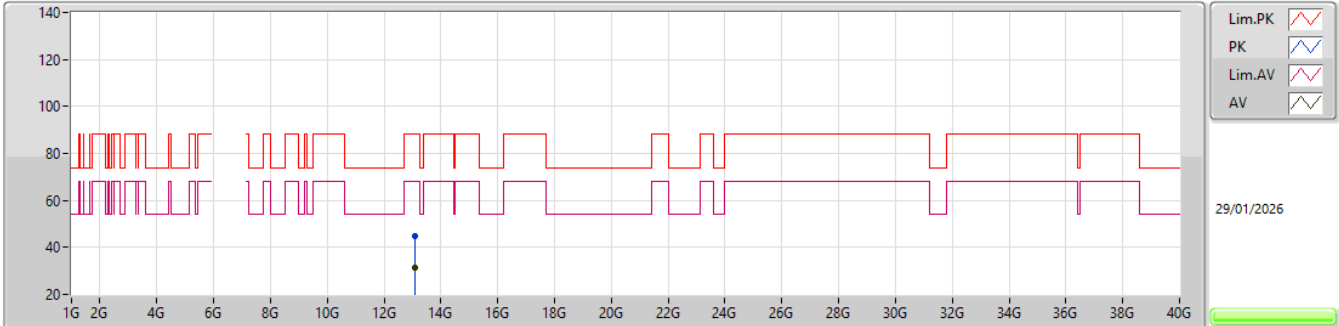


EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.08175G	44.82	88.20	-43.38	58.91	3	Vertical	249	2.74	-	39.56	11.22	64.87			
RMS	13.08418G	31.46	68.20	-36.74	45.54	3	Vertical	249	2.74	-	39.57	11.22	64.87			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

6545MHz_TX

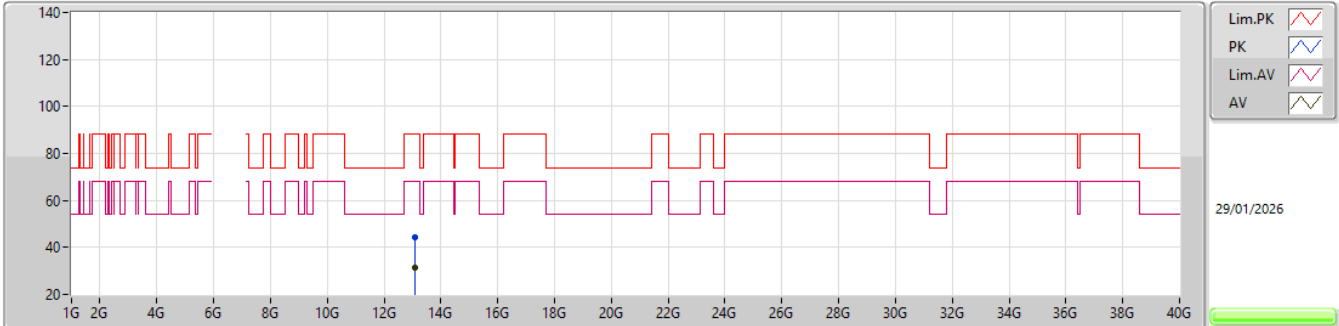


EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.07707G	44.39	88.20	-43.81	58.49	3	Horizontal	33	1.44	-	39.55	11.22	64.87			
RMS	13.08949G	31.55	68.20	-36.65	45.61	3	Horizontal	33	1.44	-	39.58	11.23	64.87			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6545MHz_TX

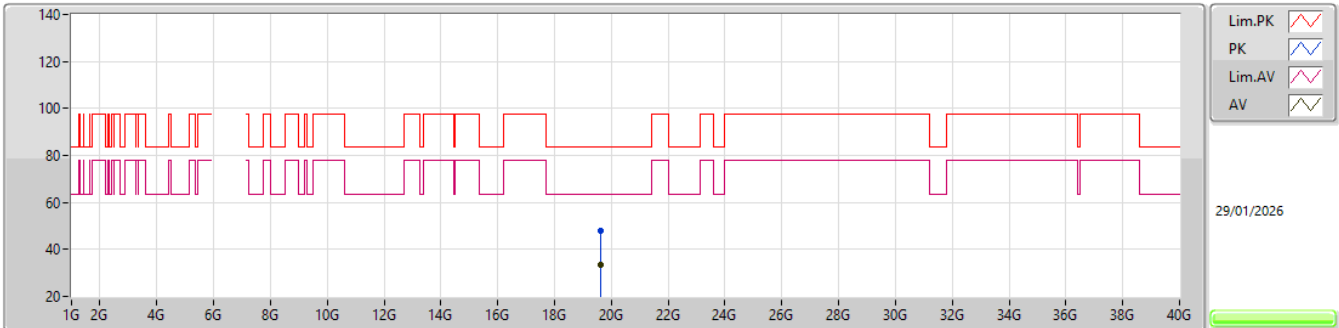EUT_Z_TX
Setting 21
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6323G	47.74	83.54	-35.80	42.49	1	Vertical	99	1.92	-	37.54	16.56	48.85			
AV	19.63004G	33.39	63.54	-30.15	28.14	1	Vertical	99	1.92	-	37.54	16.56	48.85			

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

6545MHz_TX

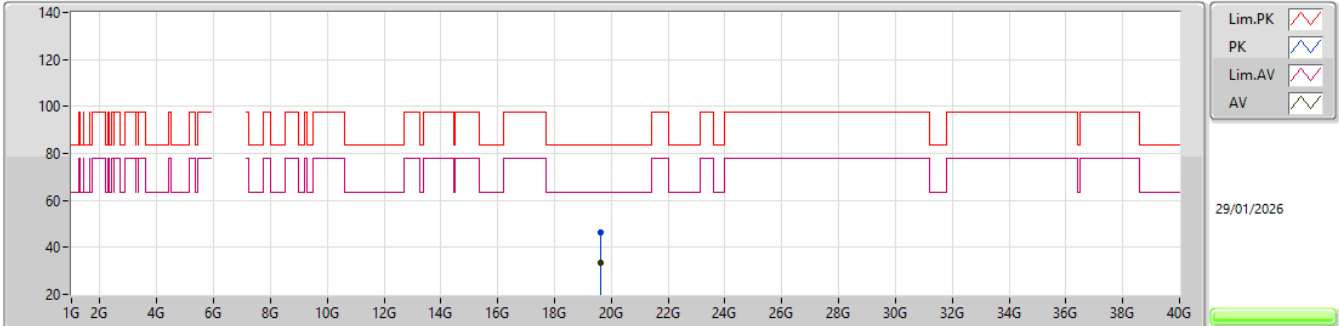


EUT_Z_TX
Setting 21
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.63592G	46.48	83.54	-37.06	41.23	1	Horizontal	134	1.96	-	37.53	16.57	48.85			
AV	19.63826G	33.31	63.54	-30.23	28.08	1	Horizontal	134	1.96	-	37.52	16.57	48.86			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6625MHz_TX

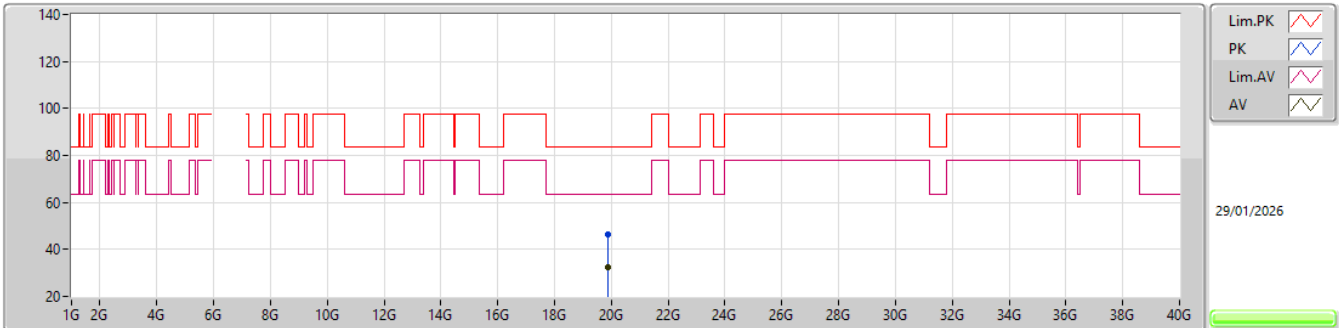EUT_Z_2TX
Setting 22
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.87578G	46.18	83.54	-37.36	40.93	1	Vertical	304	1.62	-	37.60	16.60	48.95			
AV	19.87318G	32.54	63.54	-31.00	27.28	1	Vertical	304	1.62	-	37.61	16.60	48.95			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6625MHz_TX

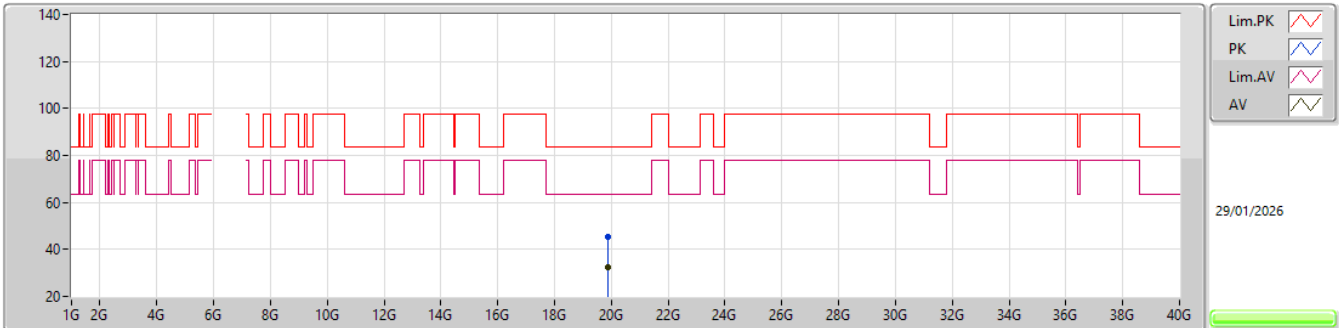EUT_Z_2TX
Setting 22
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.87812G	45.56	83.54	-37.98	40.32	1	Horizontal	302	1.84	-	37.59	16.60	48.95			
AV	19.87642G	32.67	63.54	-30.87	27.43	1	Horizontal	302	1.84	-	37.59	16.60	48.95			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

6705MHz_TX

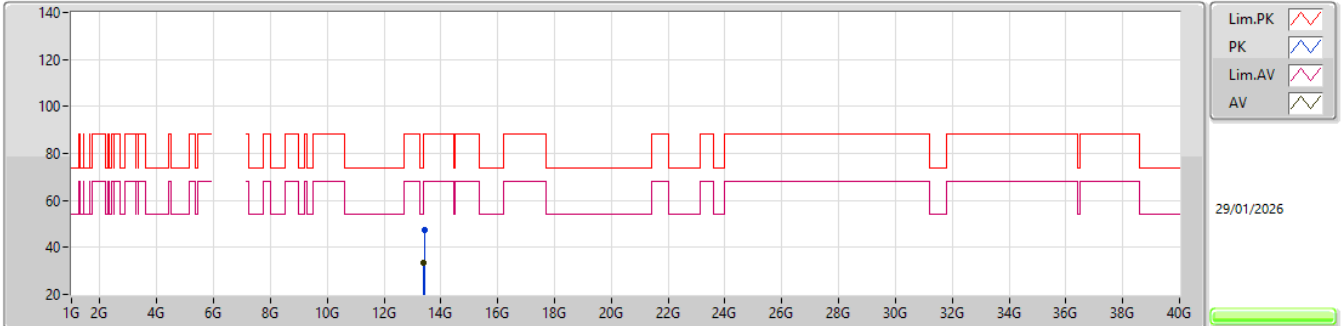


EUT_Z_2TX
Setting 23
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.42074G	47.27	88.20	-40.93	60.55	3	Vertical	52	1.03	-	40.24	11.32	64.84			
RMS	13.40805G	33.55	68.20	-34.65	46.85	3	Vertical	52	1.03	-	40.22	11.32	64.84			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6705MHz_TX

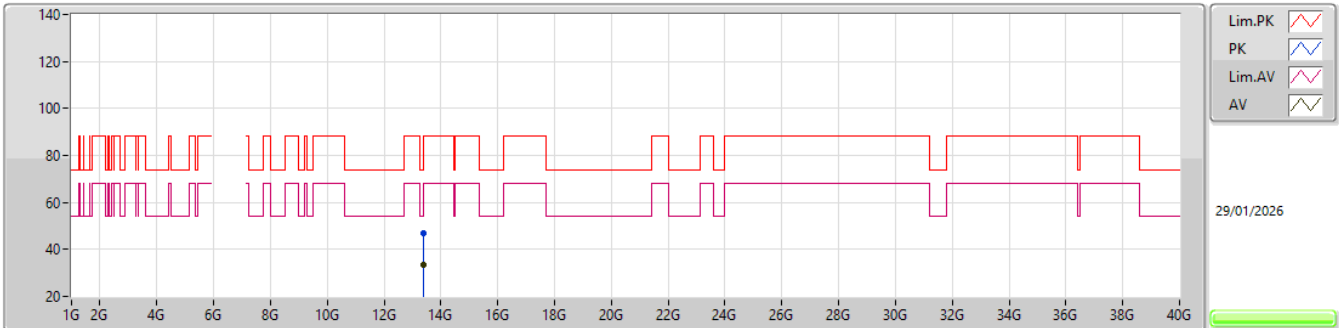EUT_Z_2TX
Setting 23
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.40706G	46.76	88.20	-41.44	60.07	3	Horizontal	186	2.90	-	40.21	11.32	64.84			
RMS	13.40259G	33.44	68.20	-34.76	46.75	3	Horizontal	186	2.90	-	40.21	11.32	64.84			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6705MHz_TX

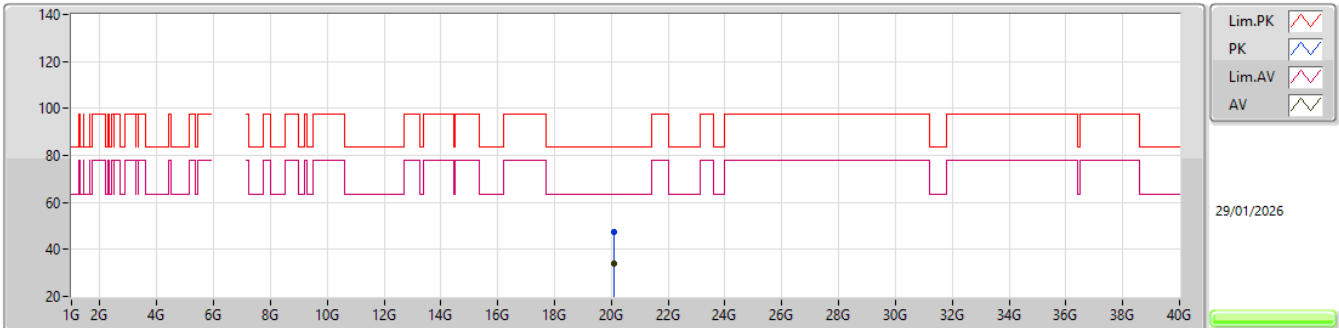EUT_Z_2TX
Setting 23
03-E-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.11178G	47.52	83.54	-36.02	42.48	1	Vertical	358	1.30	-	37.30	16.72	48.98			
AV	20.11052G	34.20	63.54	-29.34	29.16	1	Vertical	358	1.30	-	37.30	16.72	48.98			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6705MHz_TX

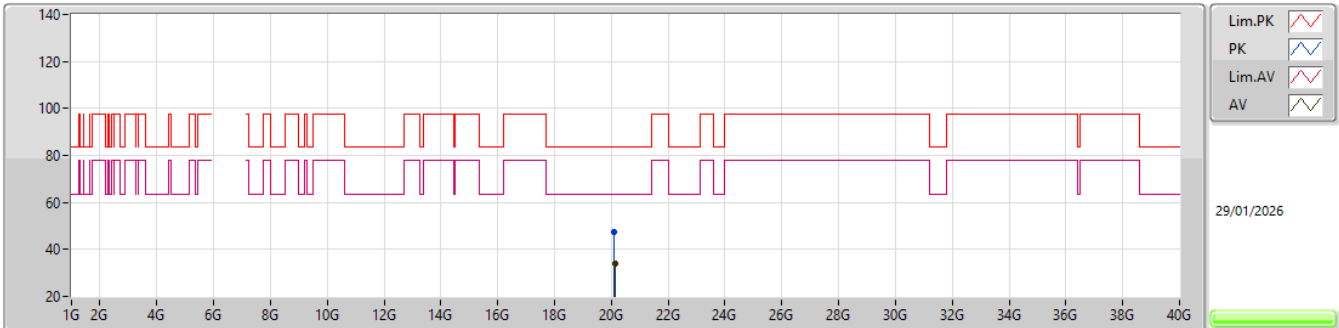EUT_Z_2TX
Setting 23
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.1108G	47.53	83.54	-36.01	42.49	1	Horizontal	175	2.00	-	37.30	16.72	48.98			
AV	20.11662G	34.16	63.54	-29.38	29.11	1	Horizontal	175	2.00	-	37.30	16.73	48.98			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

6785MHz_TX

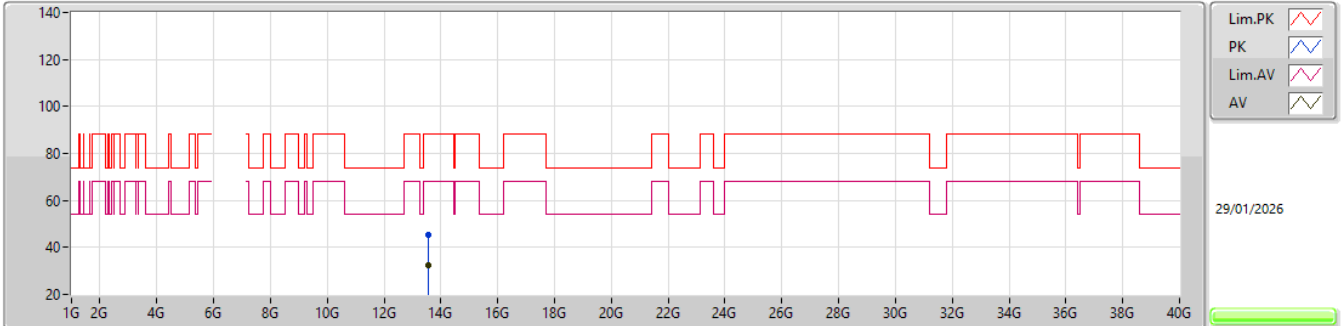


EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.56694G	45.43	88.20	-42.77	58.54	3	Vertical	354	2.56	-	40.33	11.36	64.80			
RMS	13.55542G	32.50	68.20	-35.70	45.63	3	Vertical	354	2.56	-	40.31	11.36	64.80			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6785MHz_TX

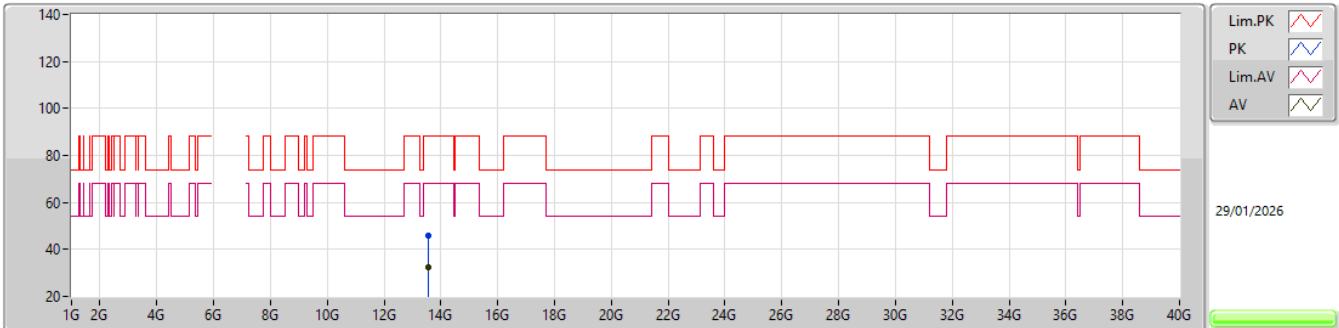EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.55689G	45.76	88.20	-42.44	58.89	3	Horizontal	104	1.18	-	40.31	11.36	64.80			
RMS	13.55536G	32.63	68.20	-35.57	45.76	3	Horizontal	104	1.18	-	40.31	11.36	64.80			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6785MHz_TX

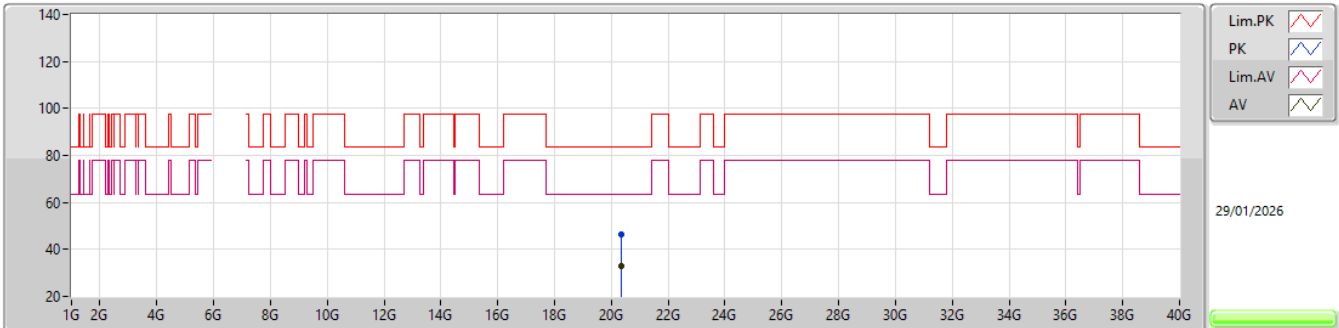EUT_Z_2TX
Setting 21
03-E-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.35856G	46.43	83.54	-37.11	40.91	1	Vertical	279	1.85	-	37.50	16.95	48.93			
AV	20.35114G	33.09	63.54	-30.45	27.58	1	Vertical	279	1.85	-	37.50	16.94	48.93			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6785MHz_TX

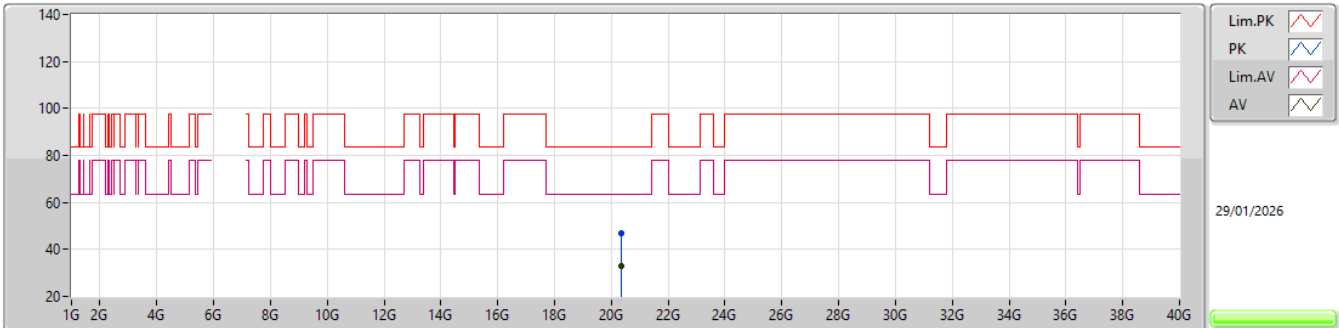EUT_Z_2TX
Setting 21
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.35576G	46.70	83.54	-36.84	41.19	1	Horizontal	50	1.41	-	37.50	16.94	48.93			
AV	20.35832G	33.12	63.54	-30.42	27.60	1	Horizontal	50	1.41	-	37.50	16.95	48.93			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

6865MHz_TX

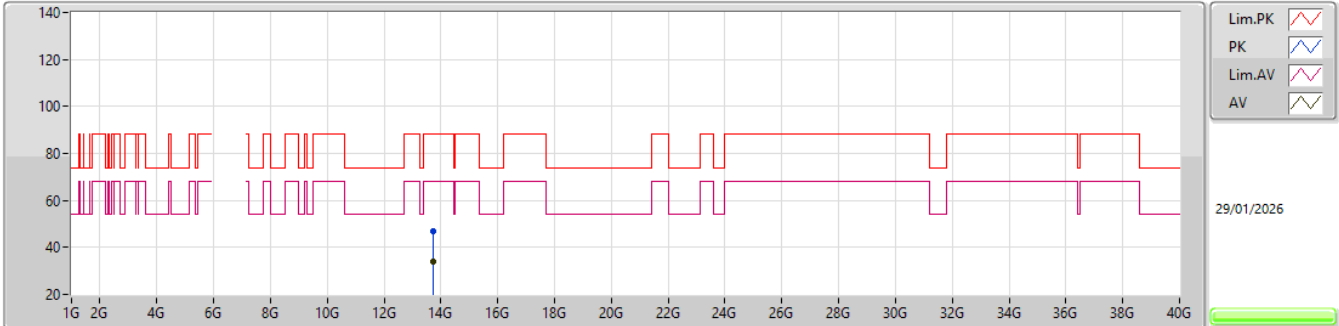


EUT_Z_2TX
Setting 22
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.73468G	46.92	88.20	-41.28	59.59	3	Vertical	204	2.89	-	40.64	11.41	64.72			
RMS	13.74425G	33.77	68.20	-34.43	46.39	3	Vertical	204	2.89	-	40.68	11.42	64.72			

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


6865MHz_TX

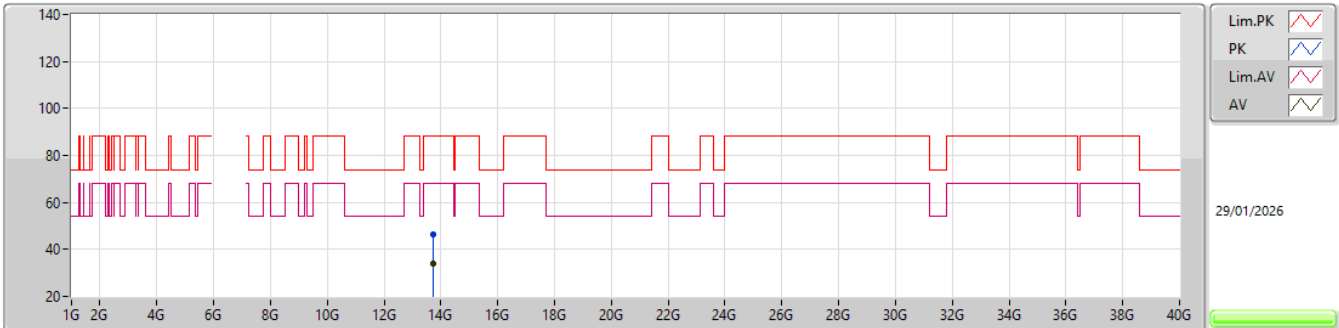EUT_Z_2TX
Setting 22
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.74107G	46.32	88.20	-41.88	58.97	3	Horizontal	100	1.19	-	40.66	11.41	64.72			
RMS	13.74395G	33.81	68.20	-34.39	46.43	3	Horizontal	100	1.19	-	40.68	11.42	64.72			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

6945MHz_TX

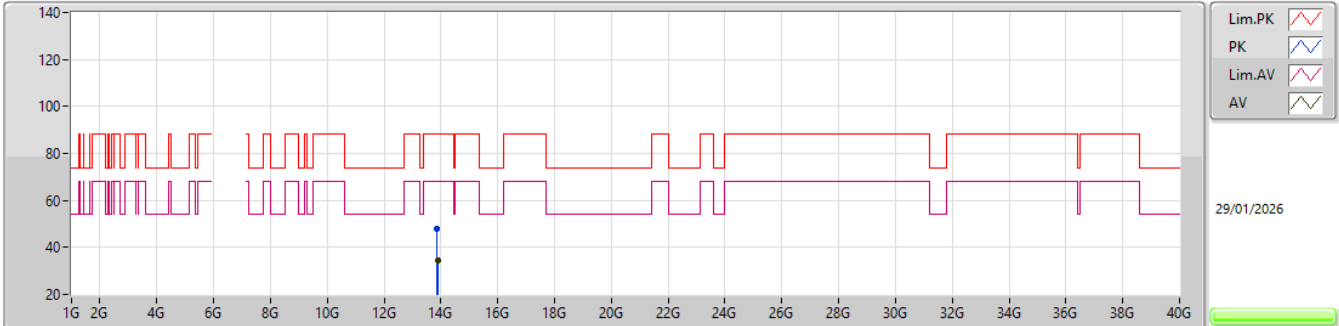


EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.87662G	47.96	88.20	-40.24	60.37	3	Vertical	54	2.77	-	40.80	11.45	64.66			
RMS	13.89843G	34.60	68.20	-33.60	46.99	3	Vertical	54	2.77	-	40.80	11.46	64.65			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

6945MHz_TX

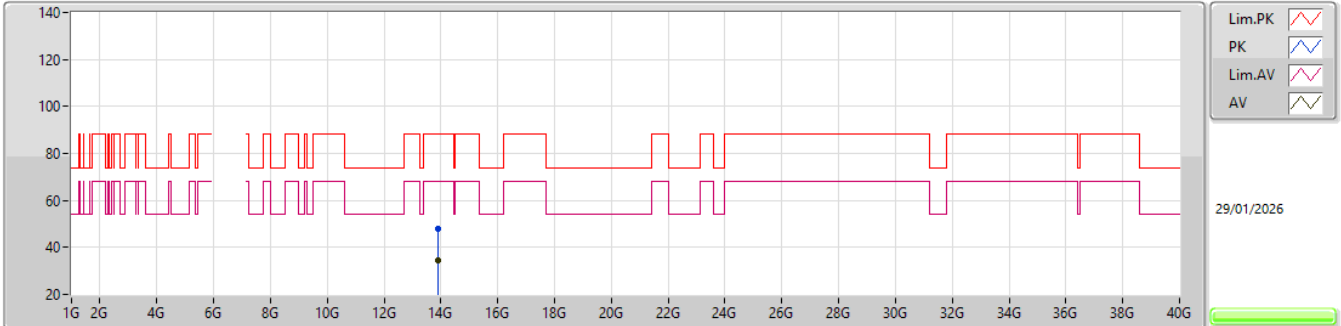


EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.89285G	47.79	88.20	-40.41	60.18	3	Horizontal	127	1.06	-	40.80	11.46	64.65			
RMS	13.88091G	34.59	68.20	-33.61	46.98	3	Horizontal	127	1.06	-	40.80	11.46	64.65			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

7025MHz_TX

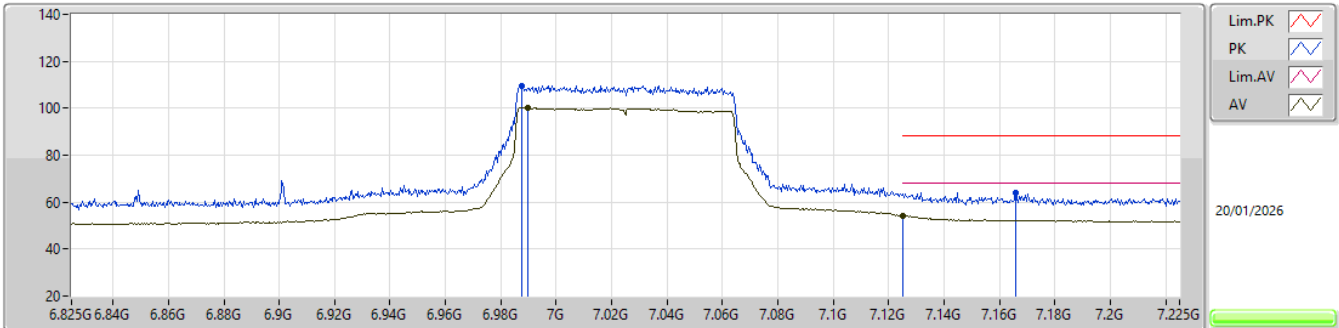


EUT_Y_2TX
Setting 21
03-E-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	6.9874G	109.69	Inf	-Inf	100.80	3	Vertical	345	1.95	-	35.67	8.33	35.11				
RMS	6.9898G	100.17	Inf	-Inf	91.27	3	Vertical	345	1.95	-	35.68	8.33	35.11				
PK	7.1658G	64.20	88.20	-24.00	54.73	3	Vertical	345	1.95	-	36.09	8.42	35.04				
RMS	7.125G	54.21	68.20	-13.99	45.02	3	Vertical	345	1.95	-	35.85	8.40	35.06				

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

7025MHz_TX

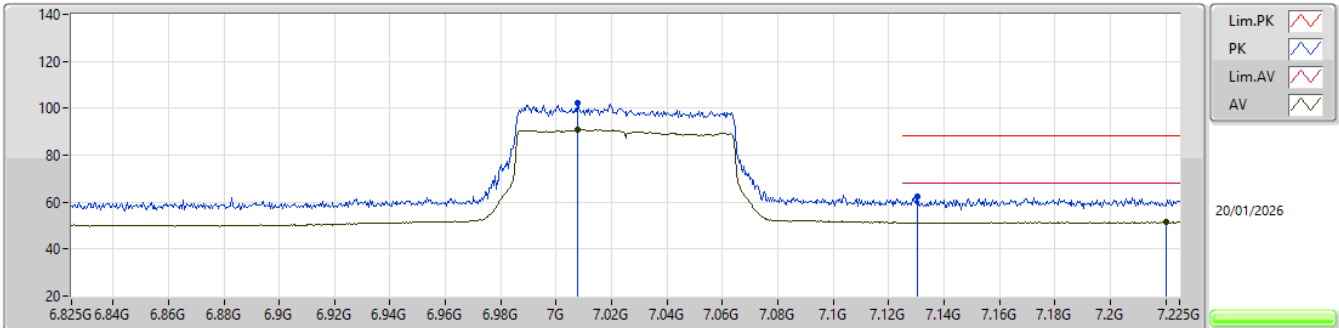


EUT_Y_2TX
Setting 21
03-E-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0078G	102.18	Inf	-Inf	93.25	3	Horizontal	194	2.57	-	35.70	8.34	35.11			
RMS	7.0078G	90.91	Inf	-Inf	81.98	3	Horizontal	194	2.57	-	35.70	8.34	35.11			
PK	7.1302G	62.32	88.20	-25.88	53.09	3	Horizontal	194	2.57	-	35.88	8.41	35.06			
RMS	7.2202G	51.48	68.20	-16.72	41.62	3	Horizontal	194	2.57	-	36.42	8.46	35.02			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

7025MHz_TX

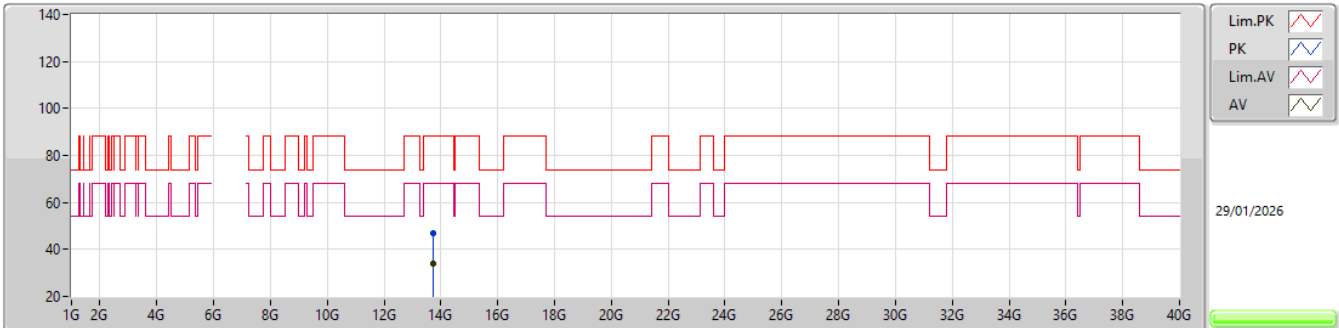


EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.73468G	46.92	88.20	-41.28	59.59	3	Vertical	204	2.89	-	40.64	11.41	64.72			
RMS	13.74425G	33.77	68.20	-34.43	46.39	3	Vertical	204	2.89	-	40.68	11.42	64.72			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


7025MHz_TX

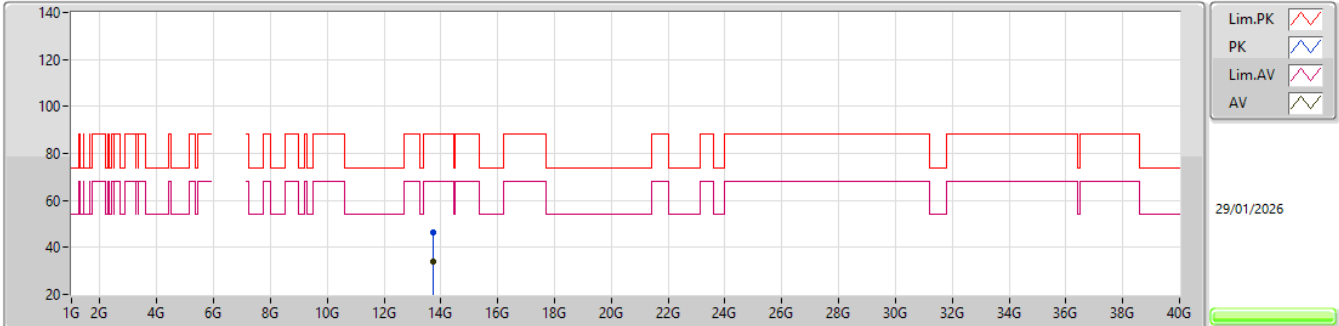EUT_Z_2TX
Setting 21
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.74107G	46.32	88.20	-41.88	58.97	3	Horizontal	100	1.19	-	40.66	11.41	64.72			
RMS	13.74395G	33.81	68.20	-34.39	46.43	3	Horizontal	100	1.19	-	40.68	11.42	64.72			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


7025MHz_TX

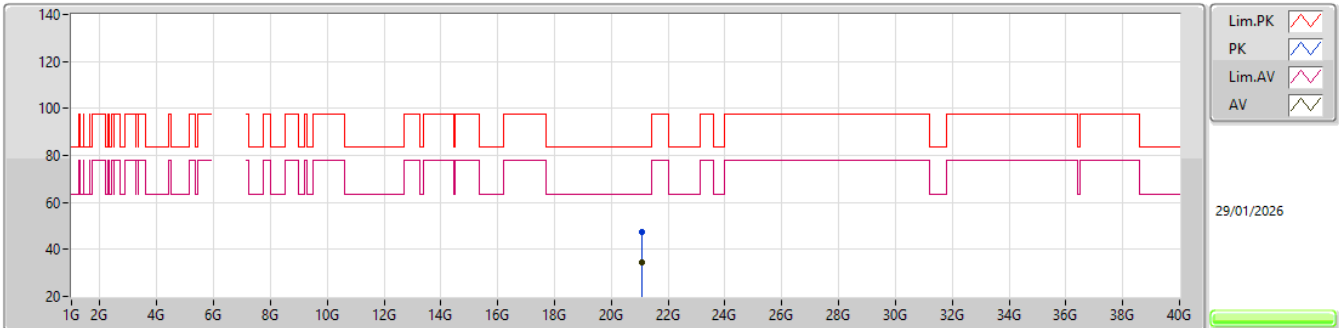EUT_Z_2TX
Setting 21
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.07054G	47.18	83.54	-36.36	40.79	1	Vertical	200	2.05	-	37.76	17.50	48.87			
AV	21.078G	34.45	63.54	-29.09	28.08	1	Vertical	200	2.05	-	37.74	17.50	48.87			

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX


7025MHz_TX

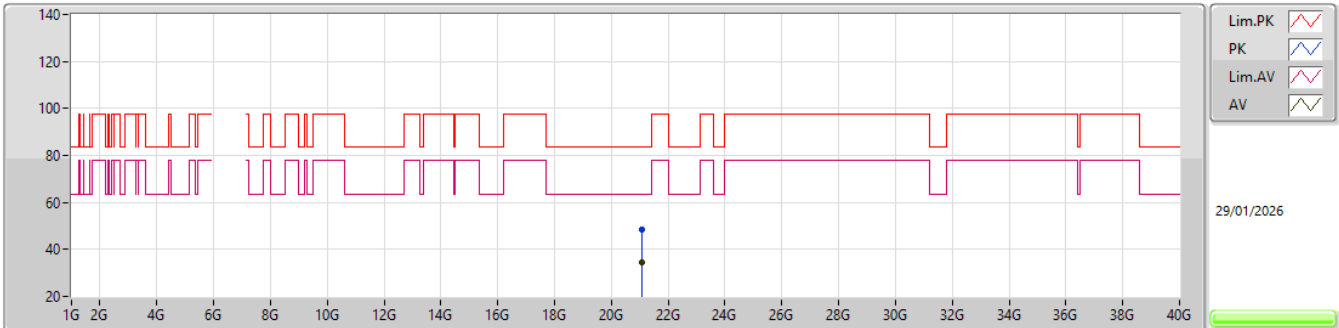EUT_Z_2TX
Setting 21
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.07624G	48.38	83.54	-35.16	42.00	1	Horizontal	268	1.45	-	37.75	17.50	48.87			
AV	21.07896G	34.57	63.54	-28.97	28.20	1	Horizontal	268	1.45	-	37.74	17.50	48.87			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

6025MHz_TX

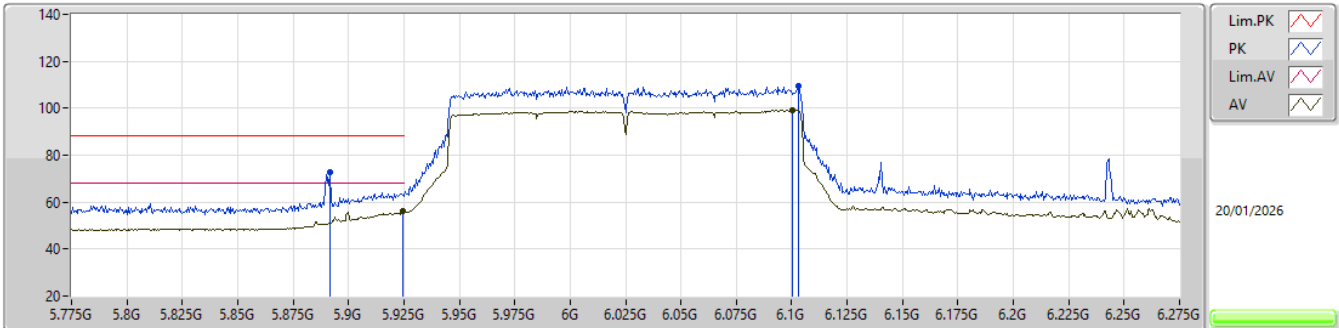


EUT_Y_2TX
Setting 23
03-E-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.8915G	72.81	88.20	-15.39	65.80	3	Vertical	3	2.89	-	34.47	7.52	34.98			
RMS	5.9245G	55.96	68.20	-12.24	48.83	3	Vertical	3	2.89	-	34.60	7.52	34.99			
PK	6.103G	109.29	Inf	-Inf	101.68	3	Vertical	3	2.89	-	35.00	7.64	35.03			
RMS	6.1005G	99.26	Inf	-Inf	91.65	3	Vertical	3	2.89	-	35.00	7.64	35.03			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

6025MHz_TX

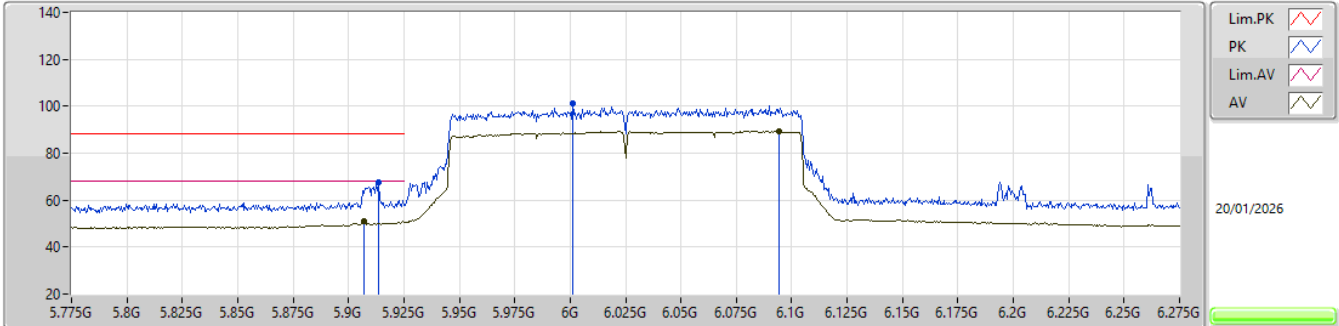


EUT_Y_2TX
Setting 23
03-E-I-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9135G	67.40	88.20	-20.80	60.31	3	Horizontal	190	2.55	-	34.55	7.52	34.98			
RMS	5.907G	50.95	68.20	-17.25	43.88	3	Horizontal	190	2.55	-	34.53	7.52	34.98			
PK	6.001G	101.29	Inf	-Inf	94.07	3	Horizontal	190	2.55	-	34.70	7.53	35.01			
RMS	6.0945G	89.38	Inf	-Inf	81.80	3	Horizontal	190	2.55	-	34.98	7.63	35.03			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6025MHz_TX

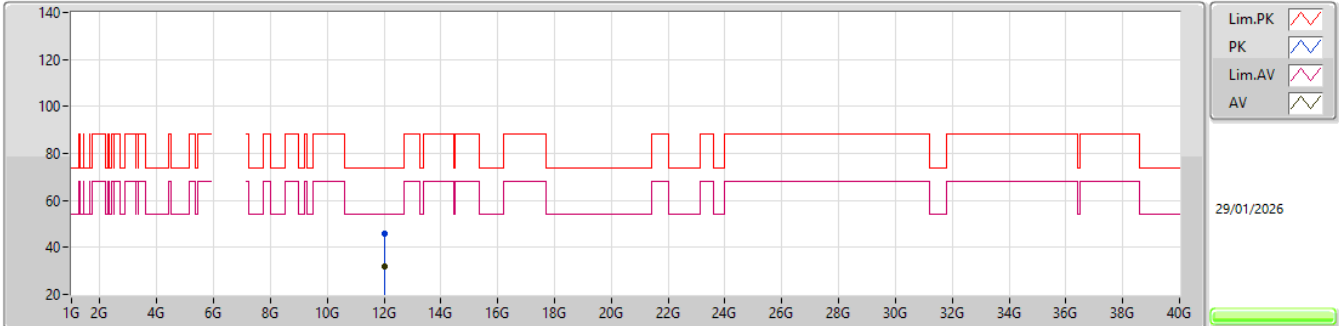EUT_Z_2TX
Setting 23
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.03917G	45.67	74.00	-28.33	61.37	3	Vertical	10	2.96	-	39.12	10.92	65.74			
AV	12.03995G	31.67	54.00	-22.33	47.37	3	Vertical	10	2.96	-	39.12	10.92	65.74			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6025MHz_TX

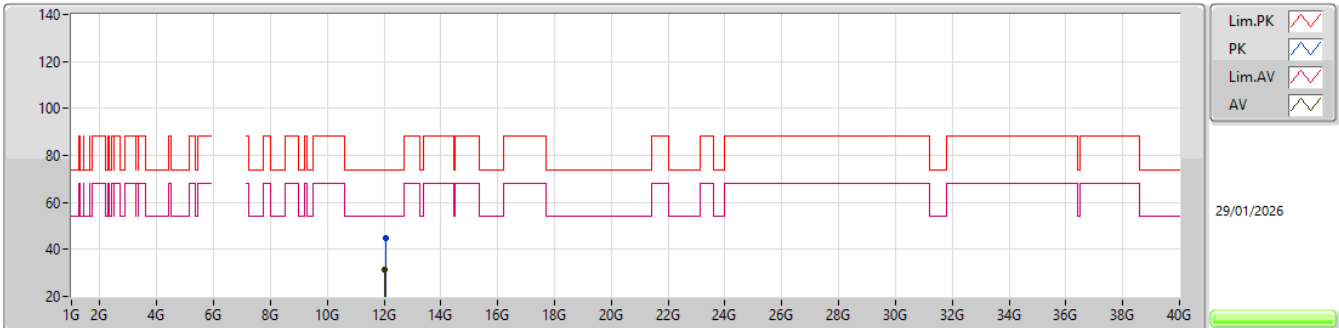EUT_Z_2TX
Setting 23
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.05573G	44.98	74.00	-29.02	60.70	3	Horizontal	183	2.50	-	39.08	10.93	65.73			
AV	12.0356G	31.52	54.00	-22.48	47.21	3	Horizontal	183	2.50	-	39.13	10.92	65.74			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

6025MHz_TX

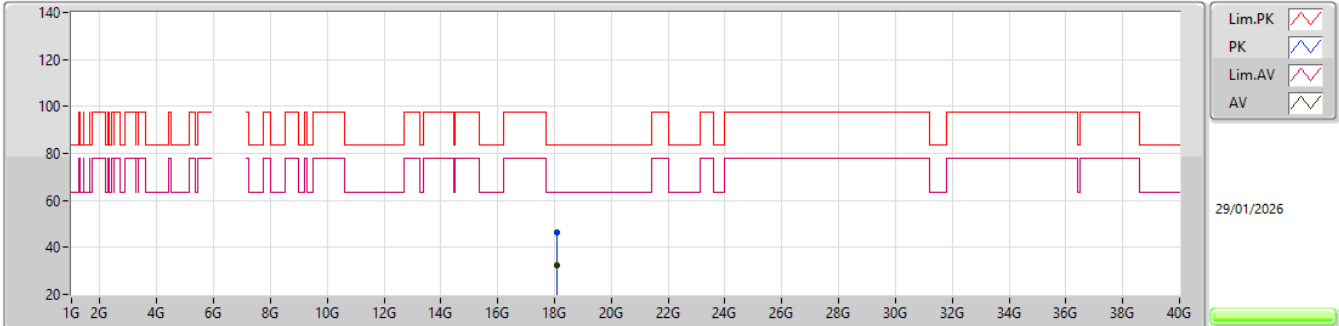


EUT_Z_2TX
Setting 23
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.07648G	46.30	83.54	-37.24	41.74	1	Vertical	156	1.76	-	37.25	15.74	48.43			
AV	18.07866G	32.59	63.54	-30.95	28.02	1	Vertical	156	1.76	-	37.26	15.74	48.43			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6025MHz_TX

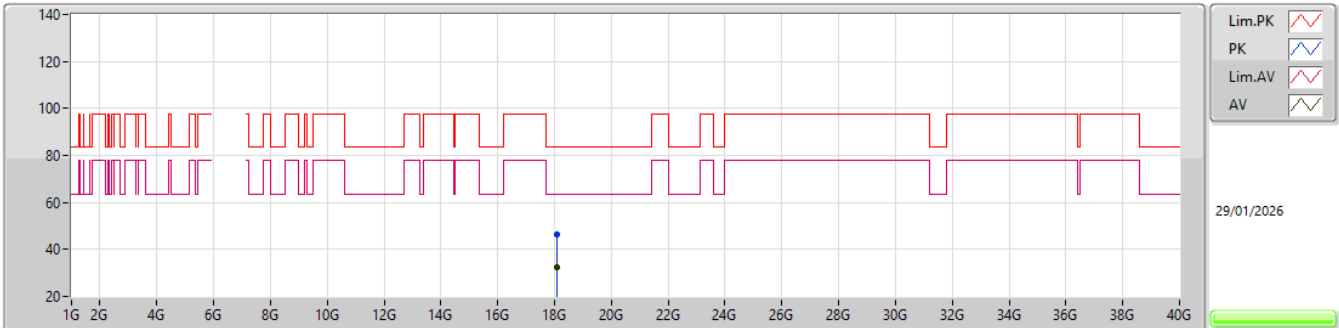EUT_Z_2TX
Setting 23
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.07712G	46.17	83.54	-37.37	41.61	1	Horizontal	70	1.57	-	37.25	15.74	48.43			
AV	18.07832G	32.47	63.54	-31.07	27.90	1	Horizontal	70	1.57	-	37.26	15.74	48.43			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6185MHz_TX

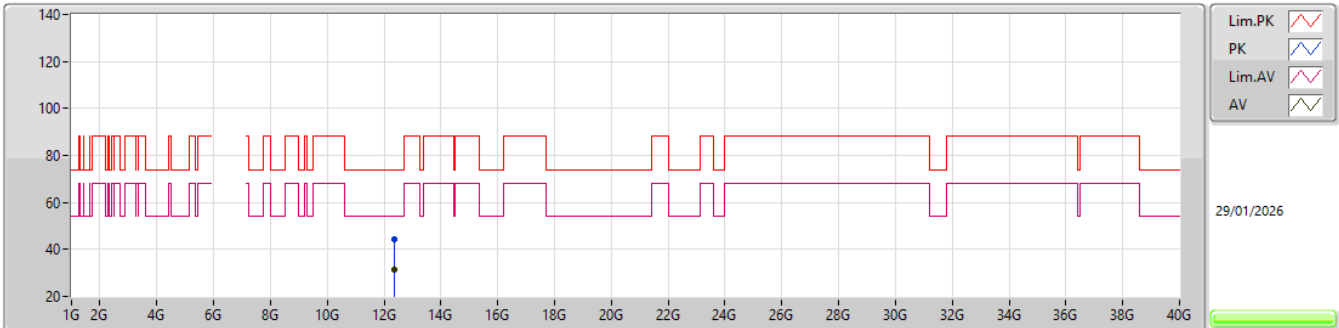EUT_Z_2TX
Setting 24
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.3718G	44.09	74.00	-29.91	59.89	3	Vertical	129	2.78	-	38.80	11.02	65.62			
AV	12.37168G	31.18	54.00	-22.82	46.98	3	Vertical	129	2.78	-	38.80	11.02	65.62			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6185MHz_TX

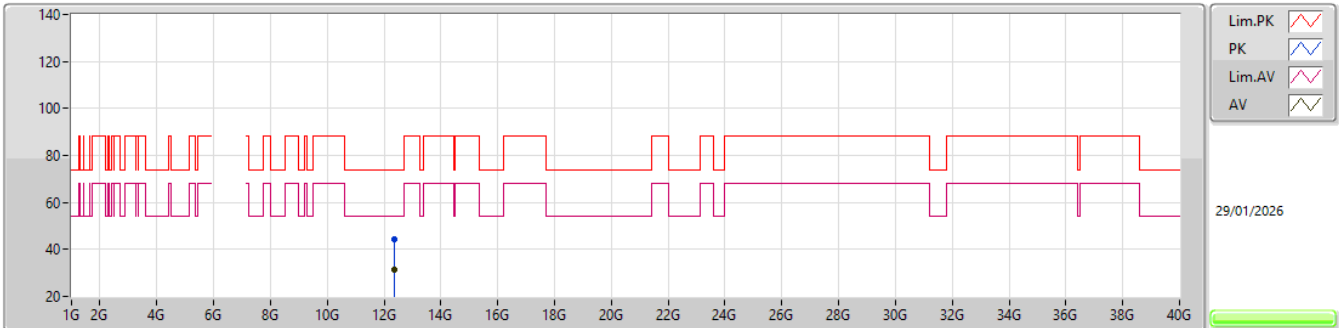EUT_Z_2TX
Setting 24
03-E-J-11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.35716G	44.51	74.00	-29.49	60.32	3	Horizontal	181	1.70	-	38.80	11.01	65.62			
AV	12.38215G	31.23	54.00	-22.77	47.02	3	Horizontal	181	1.70	-	38.80	11.02	65.61			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6185MHz_TX

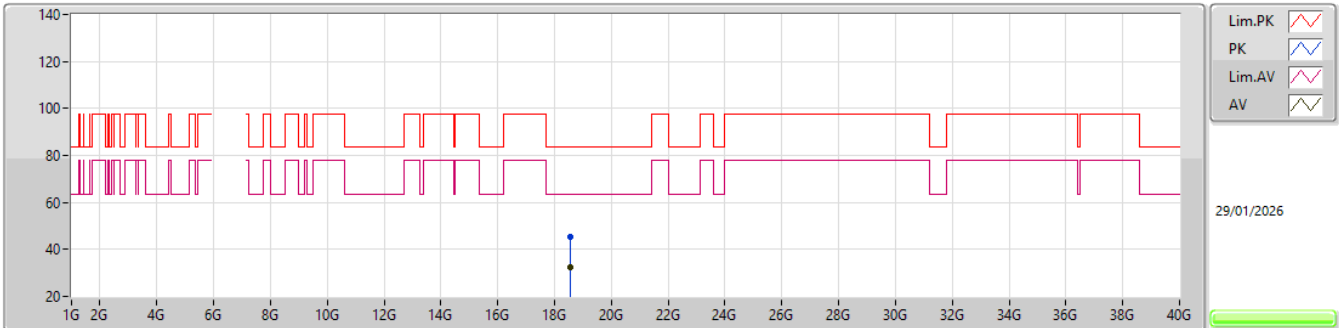EUT_Z_2TX
Setting 24
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.55034G	45.46	83.54	-38.08	40.48	1	Vertical	90	1.54	-	37.50	16.11	48.63			
AV	18.55608G	32.38	63.54	-31.16	27.37	1	Vertical	90	1.54	-	37.52	16.12	48.63			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6185MHz_TX

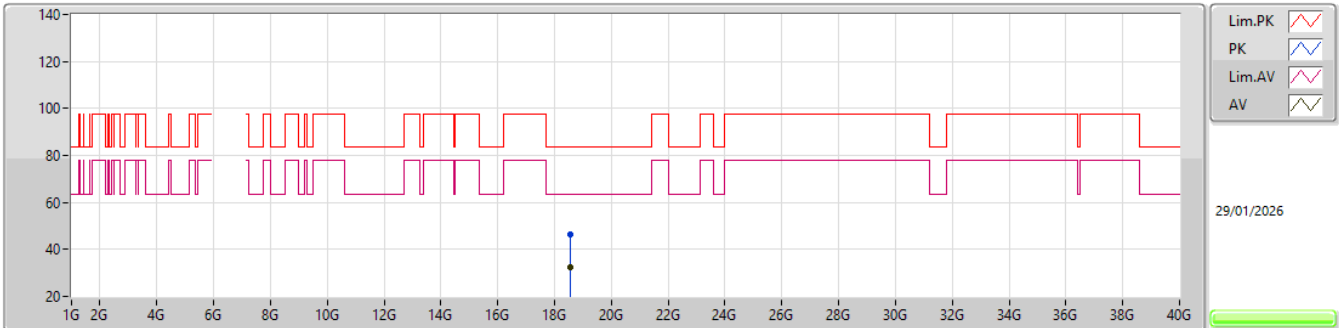EUT_Z_2TX
Setting 24
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.55554G	46.51	83.54	-37.03	41.50	1	Horizontal	26	1.59	-	37.52	16.12	48.63			
AV	18.55266G	32.30	63.54	-31.24	27.30	1	Horizontal	26	1.59	-	37.51	16.12	48.63			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6345MHz_TX

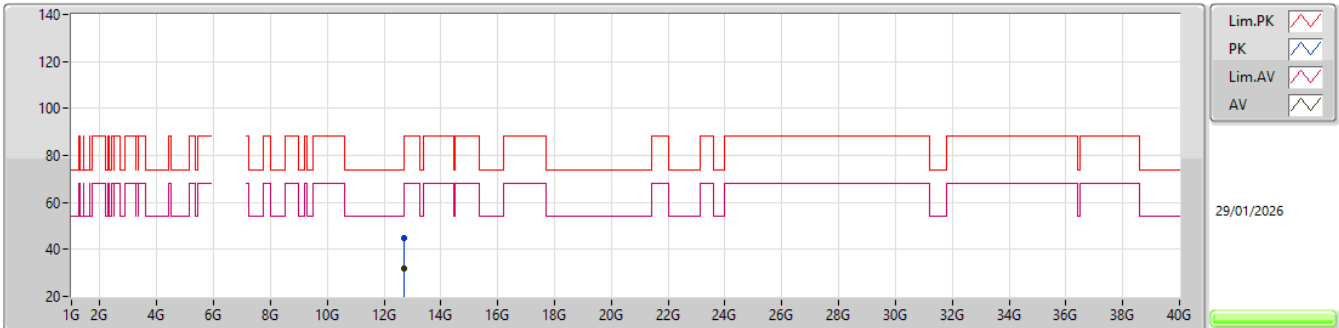EUT_Z_2TX
Setting 25
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.69333G	44.86	74.00	-29.14	60.15	3	Vertical	173	2.16	-	38.90	11.11	65.30			
RMS	12.69684G	31.74	54.00	-22.26	47.03	3	Vertical	173	2.16	-	38.90	11.11	65.30			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6345MHz_TX

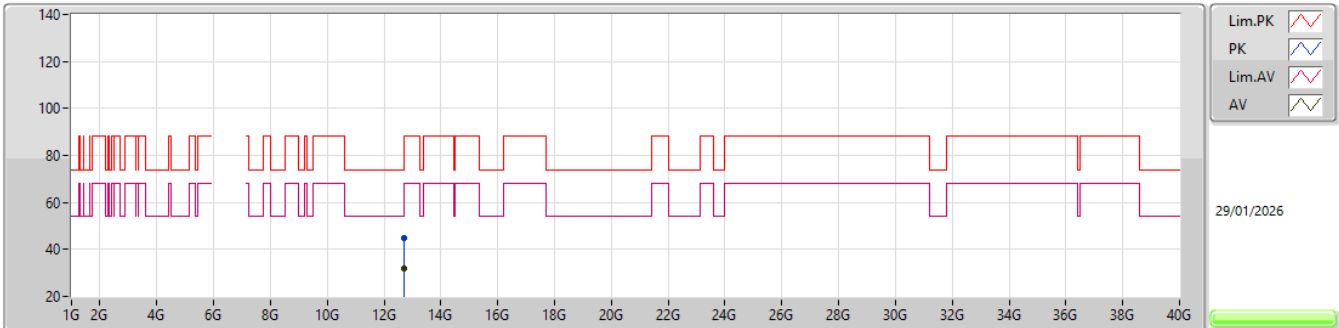EUT_Z_2TX
Setting 25
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.68853G	45.03	74.00	-28.97	60.33	3	Horizontal	36	1.25	-	38.90	11.11	65.31			
RMS	12.70269G	31.72	68.20	-36.48	46.99	3	Horizontal	36	1.25	-	38.91	11.11	65.29			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6345MHz_TX

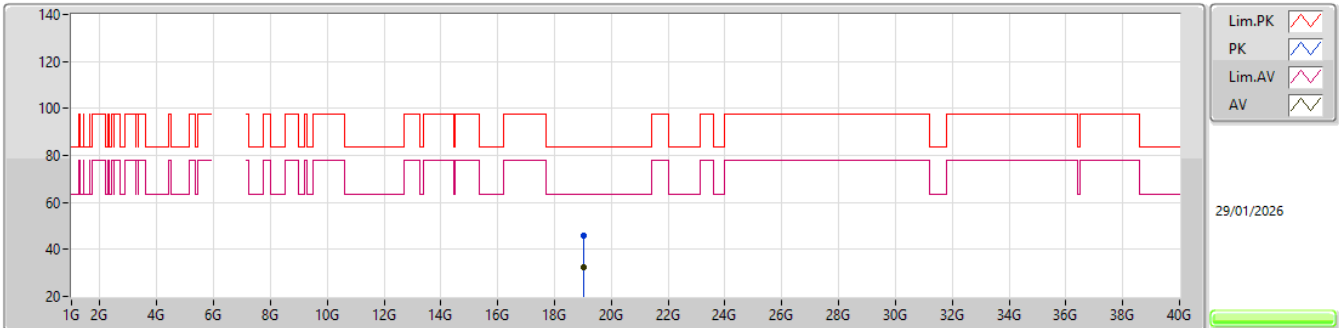EUT_Z_2TX
Setting 25
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.0366G	45.81	83.54	-37.73	40.45	1	Vertical	291	1.58	-	37.77	16.48	48.89			
AV	19.03786G	32.50	63.54	-31.04	27.13	1	Vertical	291	1.58	-	37.78	16.48	48.89			

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6345MHz_TX

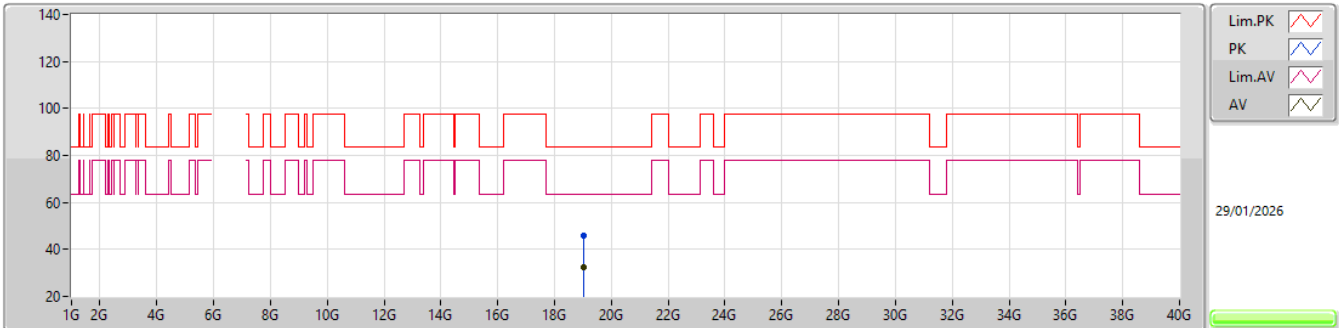EUT_Z_2TX
Setting 25
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.03474G	46.01	83.54	-37.53	40.65	1	Horizontal	329	1.31	-	37.77	16.48	48.89			
AV	19.03614G	32.54	63.54	-31.00	27.18	1	Horizontal	329	1.31	-	37.77	16.48	48.89			

6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6505MHz_TX

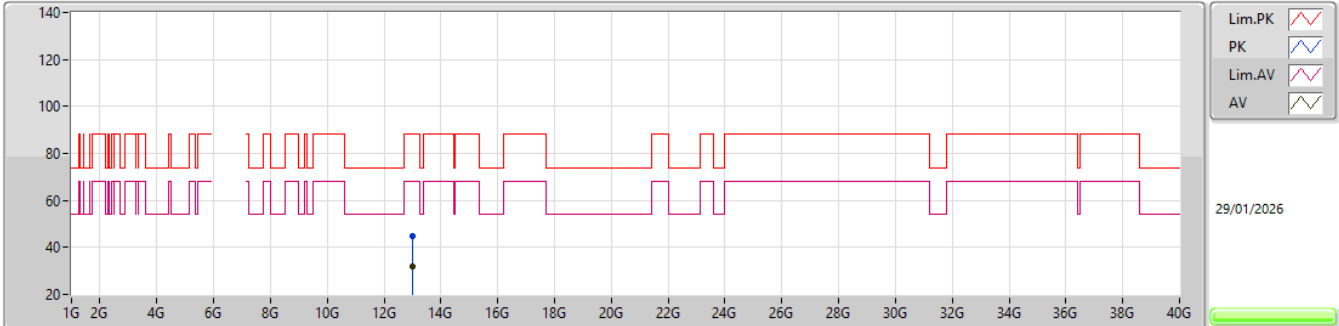EUT_Z_2TX
Setting 25
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.01036G	44.74	88.20	-43.46	58.92	3	Vertical	355	1.30	-	39.50	11.20	64.88			
RMS	12.99644G	31.85	68.20	-36.35	46.03	3	Vertical	355	1.30	-	39.50	11.20	64.88			

6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6505MHz_TX

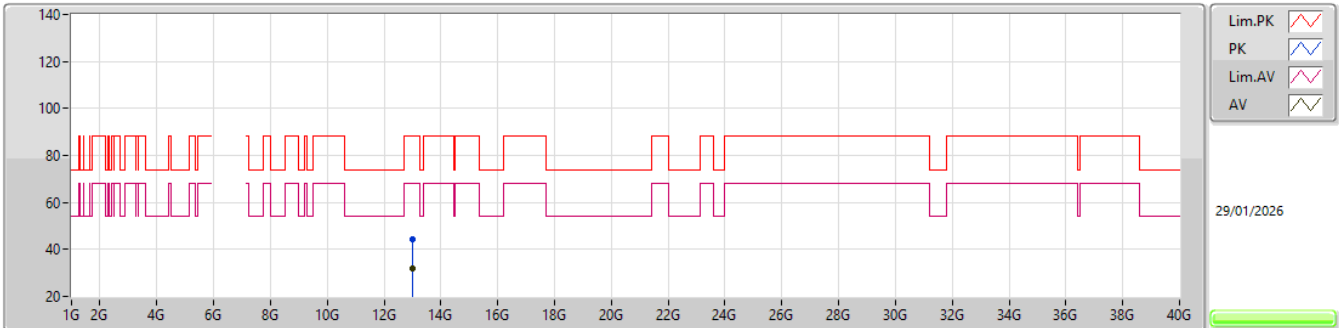EUT_Z_2TX
Setting 25
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.01975G	44.29	88.20	-43.91	58.46	3	Horizontal	108	2.65	-	39.50	11.21	64.88			
RMS	12.99977G	31.82	68.20	-36.38	46.00	3	Horizontal	108	2.65	-	39.50	11.20	64.88			

6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6505MHz_TX

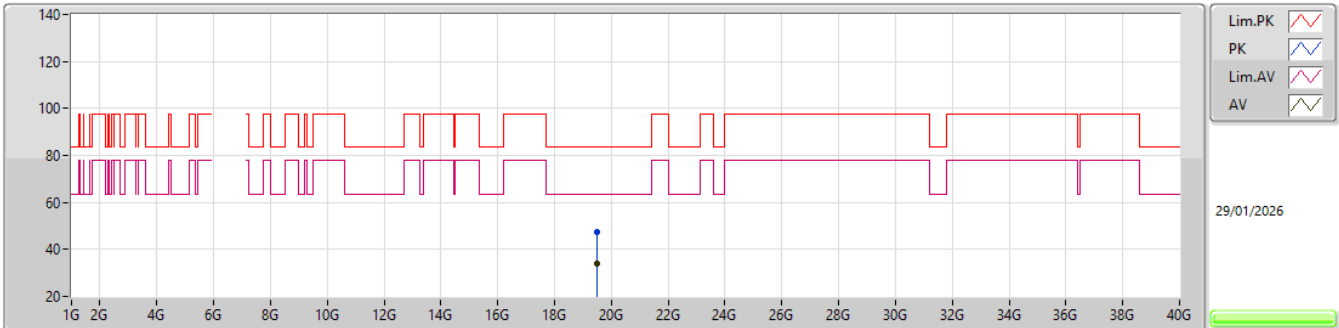EUT_Z_2TX
Setting 25
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.51658G	47.33	83.54	-36.21	42.06	1	Vertical	329	1.67	-	37.53	16.55	48.81			
AV	19.51376G	34.12	63.54	-29.42	28.85	1	Vertical	329	1.67	-	37.53	16.55	48.81			

6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX


6505MHz_TX

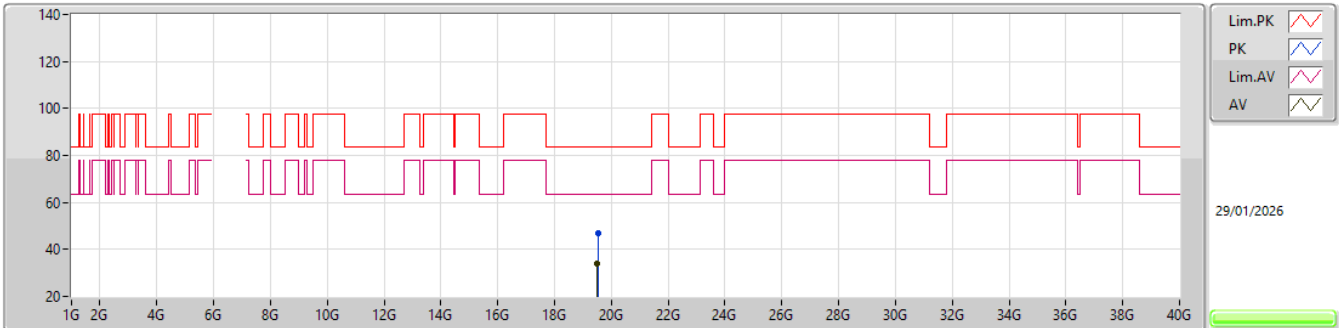EUT_Z_2TX
Setting 25
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.51904G	47.07	83.54	-36.47	41.79	1	Horizontal	137	1.59	-	37.54	16.55	48.81			
AV	19.5113G	34.02	63.54	-29.52	28.75	1	Horizontal	137	1.59	-	37.52	16.55	48.80			

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

6665MHz_TX

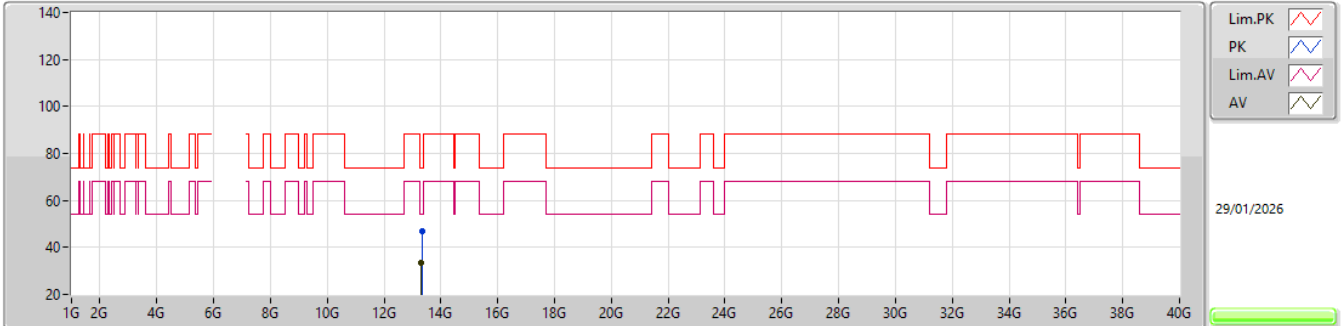


EUT_Z_2TX
Setting 24
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.34281G	46.76	74.00	-27.24	60.21	3	Vertical	89	2.64	-	40.10	11.30	64.85			
AV	13.32094G	33.38	54.00	-20.62	46.84	3	Vertical	89	2.64	-	40.10	11.29	64.85			

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

6665MHz_TX

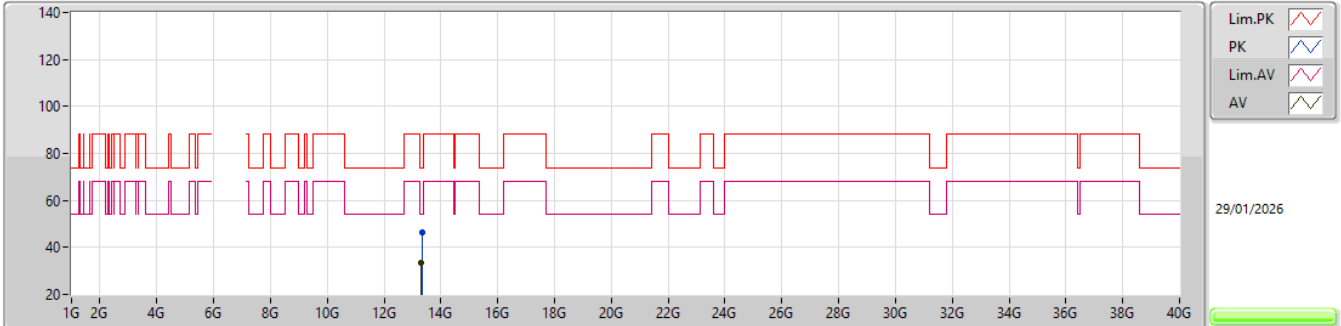


EUT_Z_2TX
Setting 24
03-E-J-11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.33504G	46.63	74.00	-27.37	60.08	3	Horizontal	35	1.74	-	40.10	11.30	64.85			
AV	13.32091G	33.20	54.00	-20.80	46.66	3	Horizontal	35	1.74	-	40.10	11.29	64.85			

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

6665MHz_TX

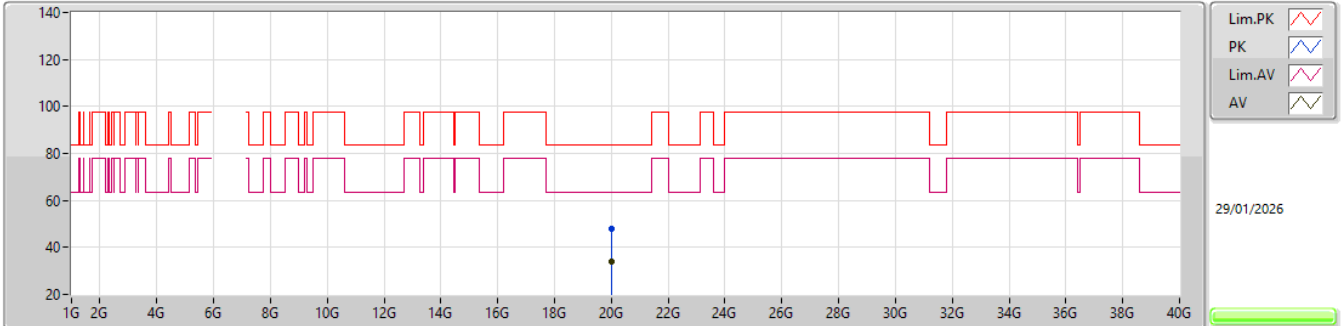

EUT_Z_2TX
Setting 24
03-E-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.99474G	48.17	83.54	-35.37	43.13	1	Vertical	335	1.56	-	37.42	16.62	49.00			
AV	19.9932G	33.91	63.54	-29.63	28.86	1	Vertical	335	1.56	-	37.43	16.62	49.00			