


5000 mAh 15W MagClick™ Power Bank with Detachable Wall Charger

Instruction Manual
Item 7122-36
Model AST-WR352AC

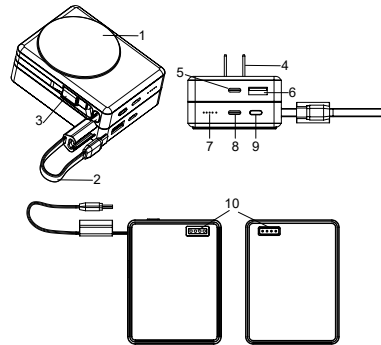

Functions

1. Magnetic Wireless Charging Surface
2. Type-C Built-in Cable Input&output
3. Lightning Built-in Cable Output
4. AC Plug
5. AC Plug Type-C Output
6. AC Plug USB-A Output
7. LED Indicators
8. Type-C Output Port
9. Power Button
10. Metal Connect tip

WHAT IS INCLUDED

- 1 x 5000mAh Magclick Wireless Power Bank
- 1 x Instruction Manual (electronic manual)

Tech Specification:

Power bank:

1. Capacity: 5000mAh/3.85V/19.25Wh
2. Type-C Tip Input: DC 5V/3A, 9V/2A (18W Max.)
3. Type-C output: DC 5V/3A, 9V/2A, 12V/1.5A
4. Type-C Tip Output: DC 5V/3A, 9V/2.22A, 12V/1.67A (20W Max.)
5. Lightning Tip Output: DC 5V/2A
6. Wireless Output: 15W Max.
7. The Metal Connect Tip Input: DC 5V/2A AC Plug
1. Type-C Output: DC 5V/3A 9V/2.22A 12V/1.67A (20W Max.)
2. USB-A Output: DC 5V/3A, 9V/2A, 12V/1.5A (18W max.)
3. Input: 100-240Vac 50/60Hz, 1A

Instructions:

1. Charging Powerbank:

- Be sure the power bank is fully charged before usage.
- Using the AC plug(4) or the built-in Type-C cable(2) to charge the Power bank directly. The charging will begin automatically.
- Once the power bank is fully charged, the LED indicators will stop flashing, remove the AC plug or device from the power source.

- The Green indicator shows fast charging mode.

2. Cable Charging Your Mobile Device:

- Press the ON/OFF button(9) to turn ON the power bank
- Once power bank is ON, using the built-in Type-C cable(2) to connect your device directly. Or you can also connect your own charging cable to your mobile phone/device using the appropriate connector. Connect the Type-C tip to Type-C output(8).
- Phone will begin to charge automatically, the LED indicators will show the balance capacity in the power bank.
- Disconnect the charging cable from your mobile device when it is fully charged.
- The green indicator will be on once do fast charging.
- The power bank will be automatically off after 32s if without any operation.

3. Wireless Charging Mobile phones and other electronic devices:

- Press the ON/OFF button(9) once to turn ON the power bank, the LED indicators(7) will show the remaining power.
- Place the wireless charging supported mobile device on the wireless charging surface(1), it will begin to charge automatically and the Blue indicator will be breathing flash. The Blue indicator will be on when in standby mode.
- Once fully charged remove the device.
- Double press the button to turn off the power bank.

4. Wireless Charging with Magnetic Surface:

- If your device supports MagSafe, the magnets in your iPhone will connect to the magnetic surface(1) of the pad for a more secure charging.
- This item is also compatible with other items, the magnetic function just won't work.

****Note:** When wireless charging, if the Blue indicator is flashing quickly the device is either NOT a wireless charging device or there is an object between the device and charging surface interfering with the charging process.

SAFETY PRECAUTIONS:

WARNING-When using this product, basic precautions should always be followed, including the following:

1. Read all the instructions before using the product.
2. Charge the power bank fully before initial use. The unit's full performance is achieved only after 2 or 3 completed charge and discharge cycles.
3. To reduce the risk of injury, close supervision is necessary when the product is used near children.
4. Do not expose the device to moisture.
5. Do not use the device in excess of its output rating. Overload outputs above rating may result in a risk of fire or injury.
6. Do not use the device if damaged or modified.
7. Damaged or modified batteries may exhibit unpredictable behavior resulting in fire, explosion or risk of injury.
8. Do not disassemble the device. Take it to a qualified service person when service or repair is required. Incorrect reassembly may result in a risk of fire or injury.

9. Do not expose the device to fire or excessive temperature. Exposure to fire or temperatures above 212°F may cause explosion.
10. Have servicing performed by a qualified repair person using only identical replacement parts.
11. This will ensure that the safety of the product is maintained. Do not overcharge Phone. Unit may get hot With excessive use. Remove Phone when it is fully charged. Never charge for more than 7 hours at a time. Attachments on the back of your phone can Impede the effectiveness of the wireless charger, And lead to overheating. Please remove attachments from the phone before charging on this device.

FCC Statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

※Warning:

Changes or modifications not expressly Approved by the party responsible for compliance could void the user's authority To operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC RF Exposure Warning Statement: This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment can be used in portable exposure conditions.

Name of the Distributor:
Leedsworld Inc
Address of the Distributor:
400 Hunt Valley Road,
New Kensington,
PA 15068 USA.
WWW.PCNA.COM
FCC ID: 2A92I-AST-WR352AC
Made in China

