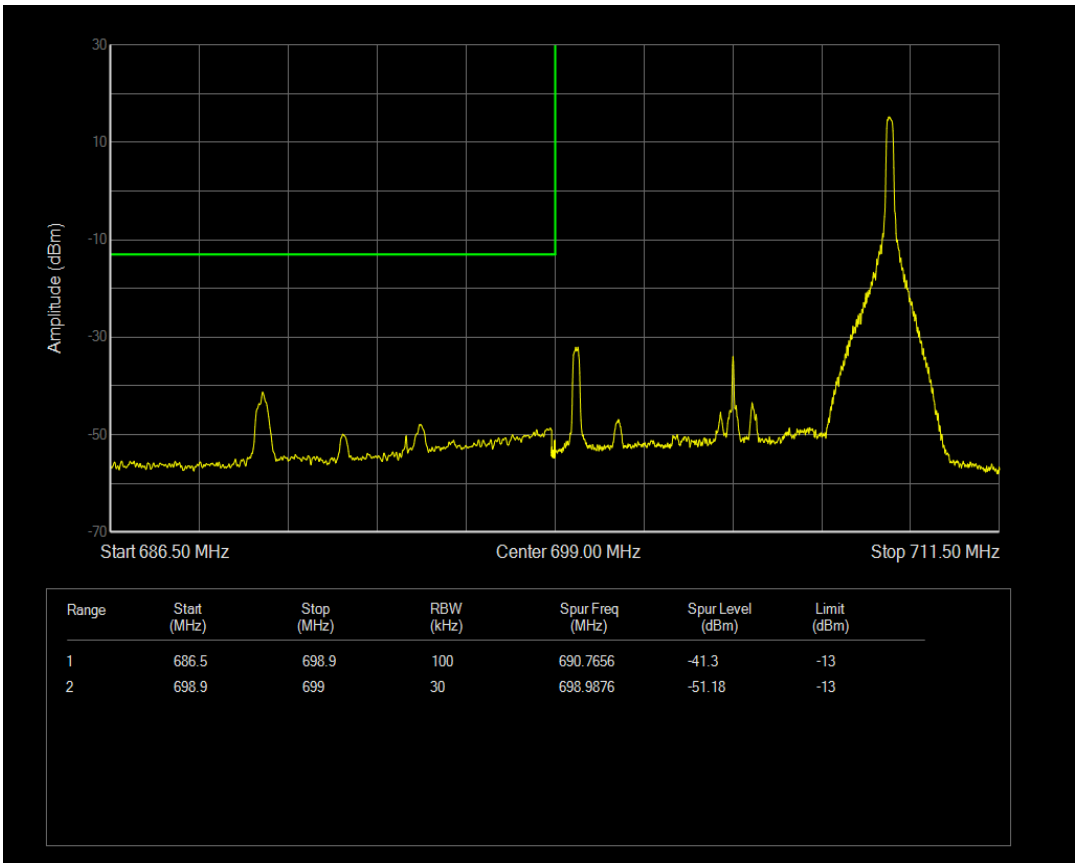

Band12 QAM16 BW=10MHz Channel=23060 RB Size=50 Position=#0

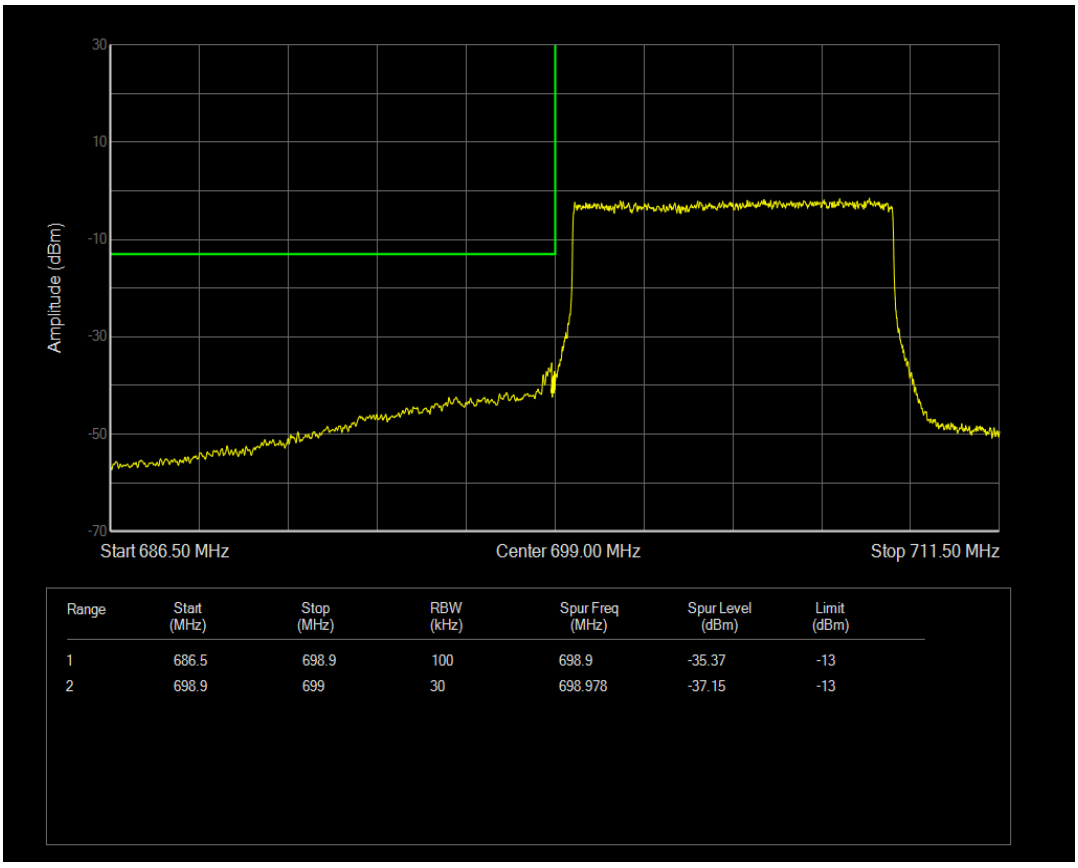

Band12 QPSK BW=10MHz Channel=23130 RB Size=1 Position=#0

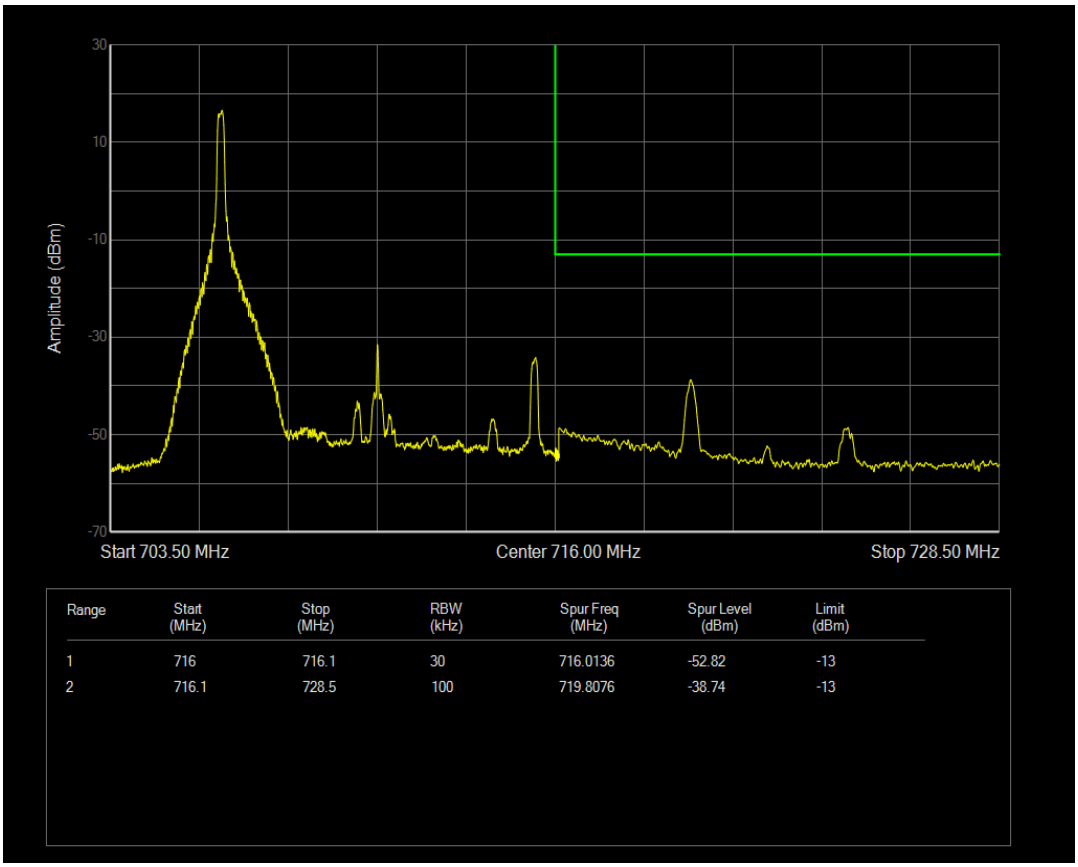

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0136	-52.82	-13
2	716.1	728.5	100	719.8076	-38.74	-13

Band12 QPSK BW=10MHz Channel=23130 RB Size=1 Position=#Max

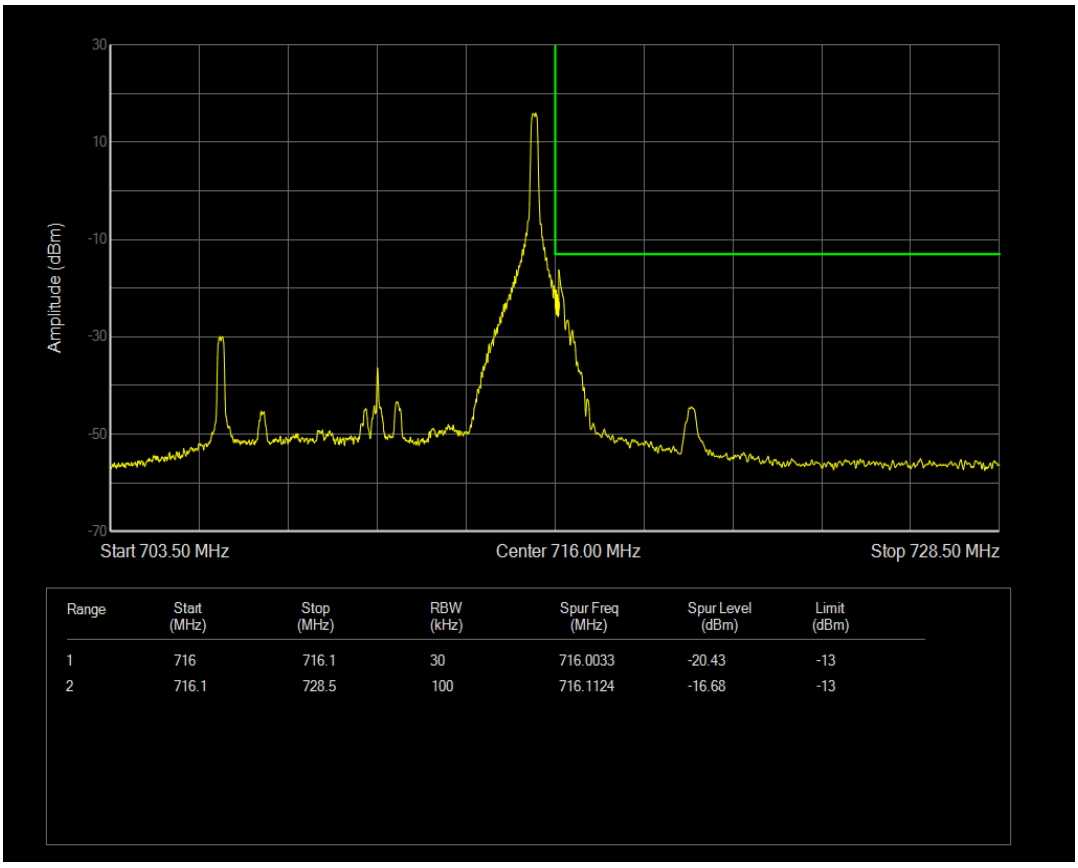

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0033	-20.43	-13
2	716.1	728.5	100	716.1124	-16.68	-13

Band12 QPSK BW=10MHz Channel=23130 RB Size=50 Position=#0

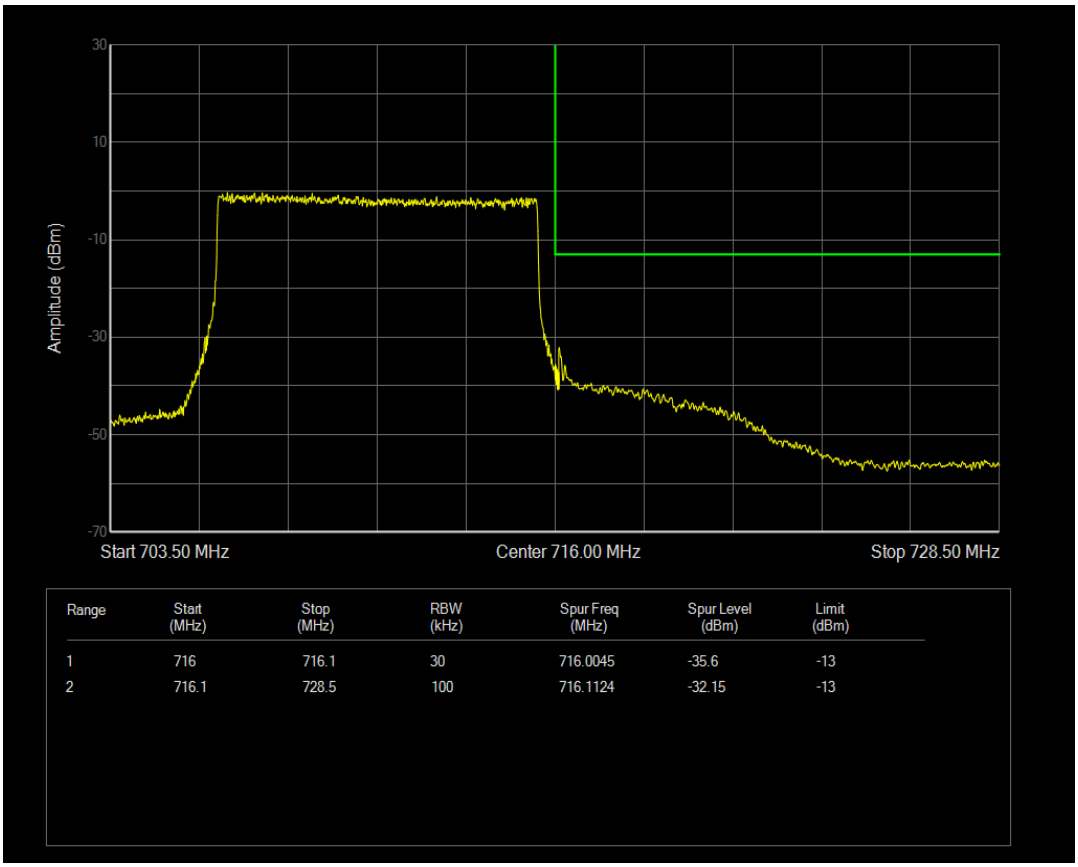

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0045	-35.6	-13
2	716.1	728.5	100	716.1124	-32.15	-13

Band12 QAM16 BW=10MHz Channel=23130 RB Size=1 Position=#0

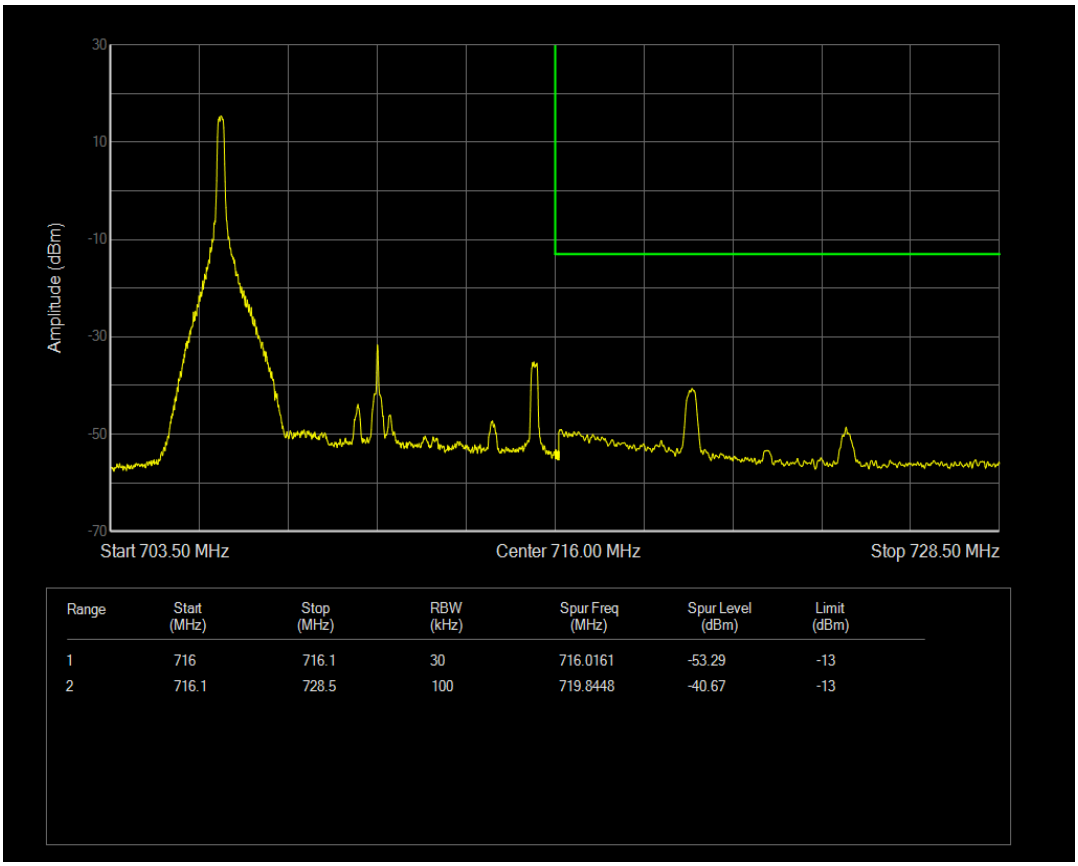

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0161	-53.29	-13
2	716.1	728.5	100	719.8448	-40.67	-13

Band12 QAM16 BW=10MHz Channel=23130 RB Size=1 Position=#Max

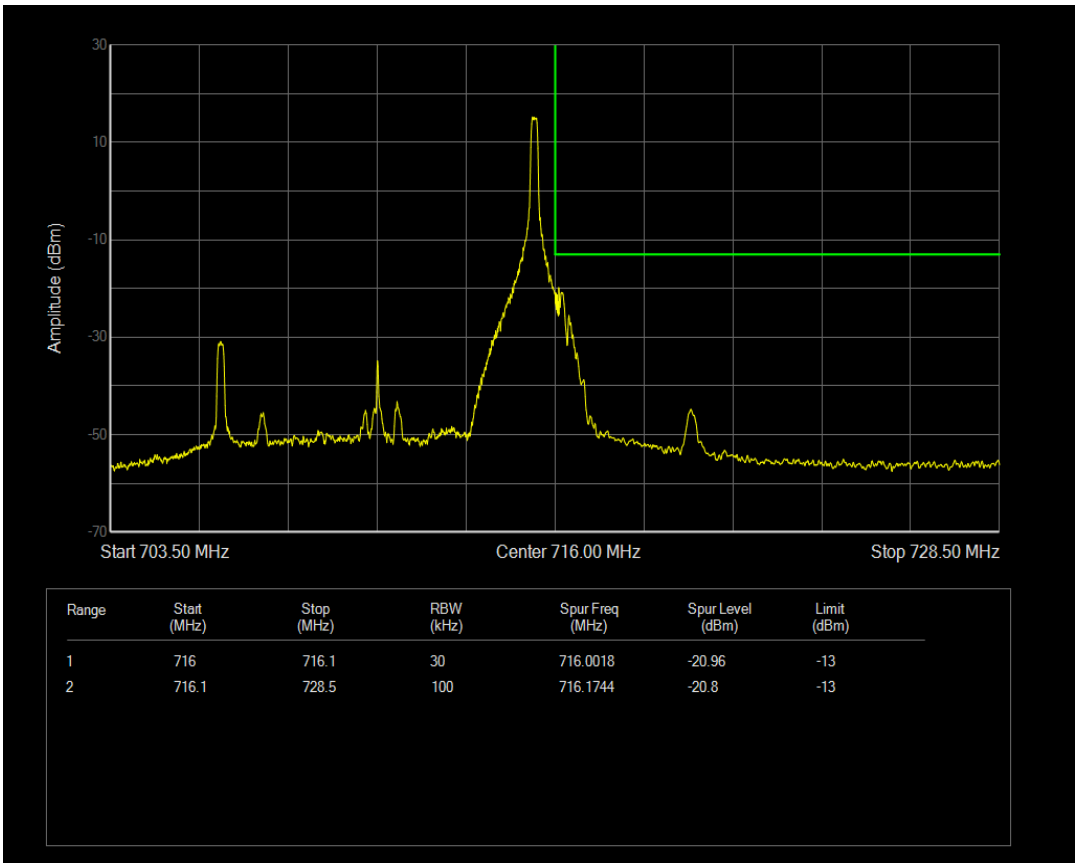

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0018	-20.96	-13
2	716.1	728.5	100	716.1744	-20.8	-13

Band12 QAM16 BW=10MHz Channel=23130 RB Size=50 Position=#0

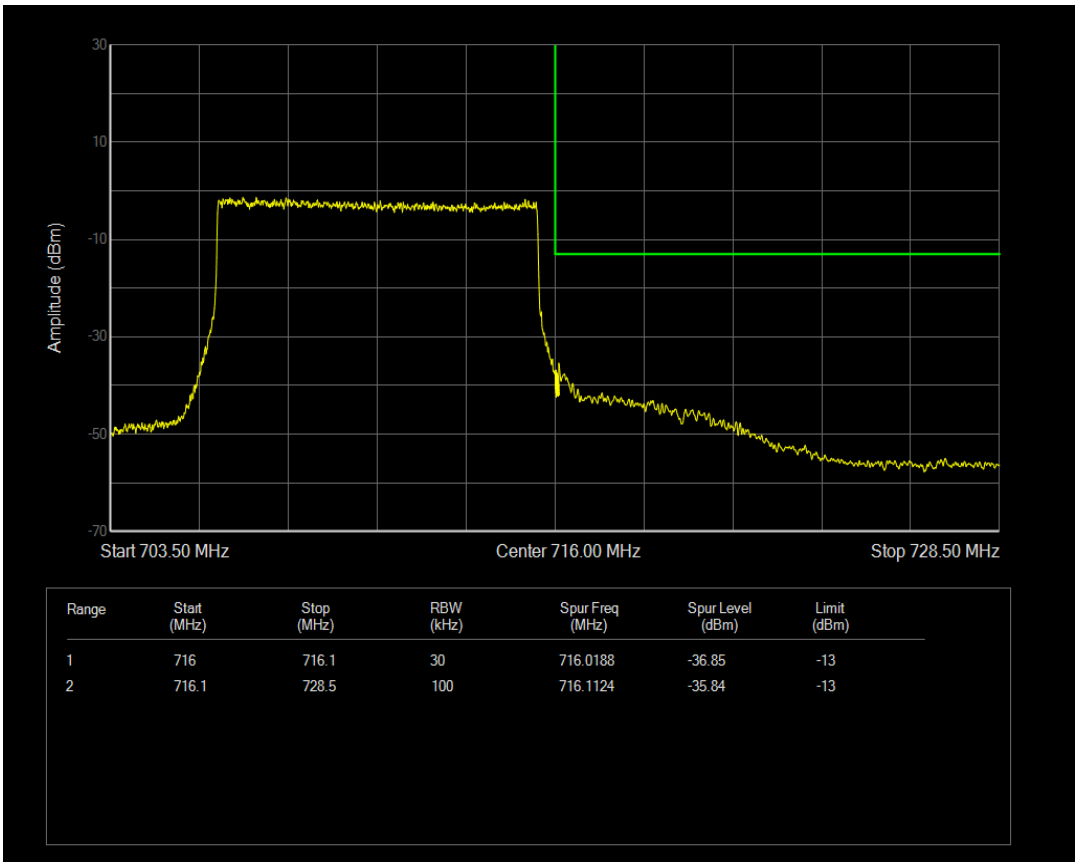

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0188	-36.85	-13
2	716.1	728.5	100	716.1124	-35.84	-13

Band13 QPSK BW=5MHz Channel=23205 RB Size=1 Position=#Max

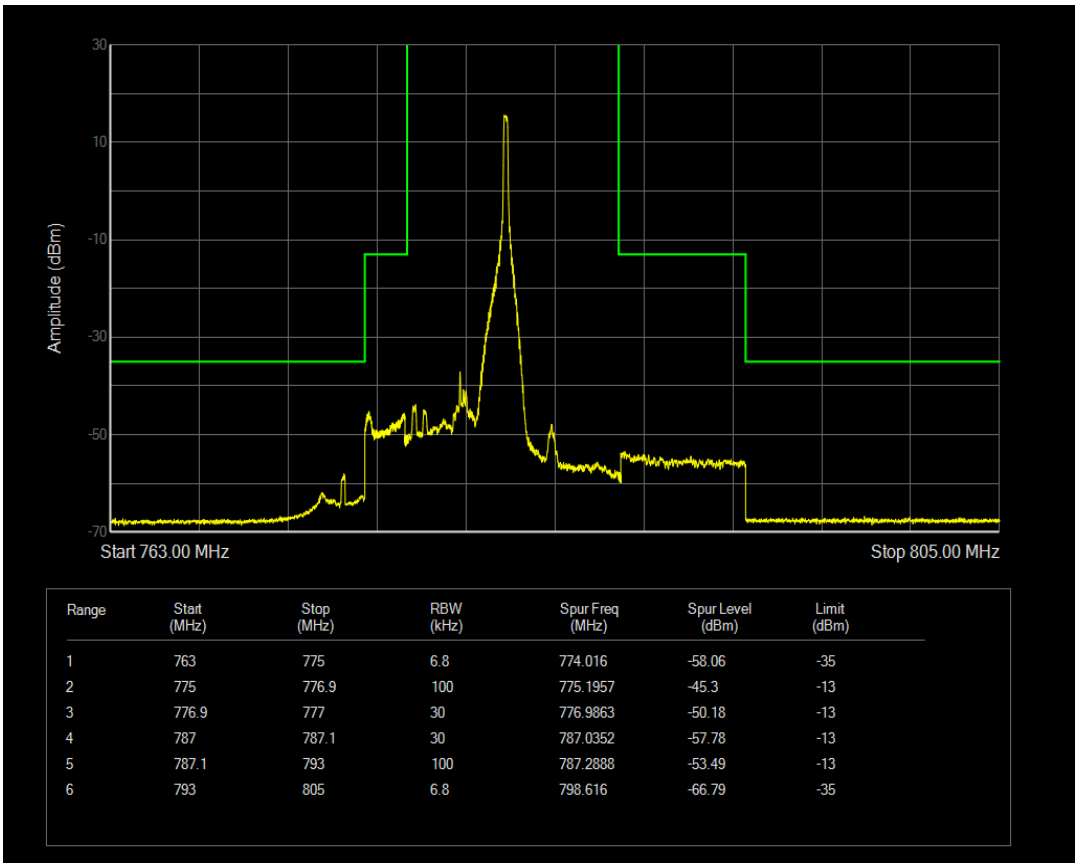

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	774.016	-58.06	-35
2	775	776.9	100	775.1957	-45.3	-13
3	776.9	777	30	776.9863	-50.18	-13
4	787	787.1	30	787.0352	-57.78	-13
5	787.1	793	100	787.2888	-53.49	-13
6	793	805	6.8	798.616	-66.79	-35

Band13 QPSK BW=5MHz Channel=23205 RB Size=1 Position=#0

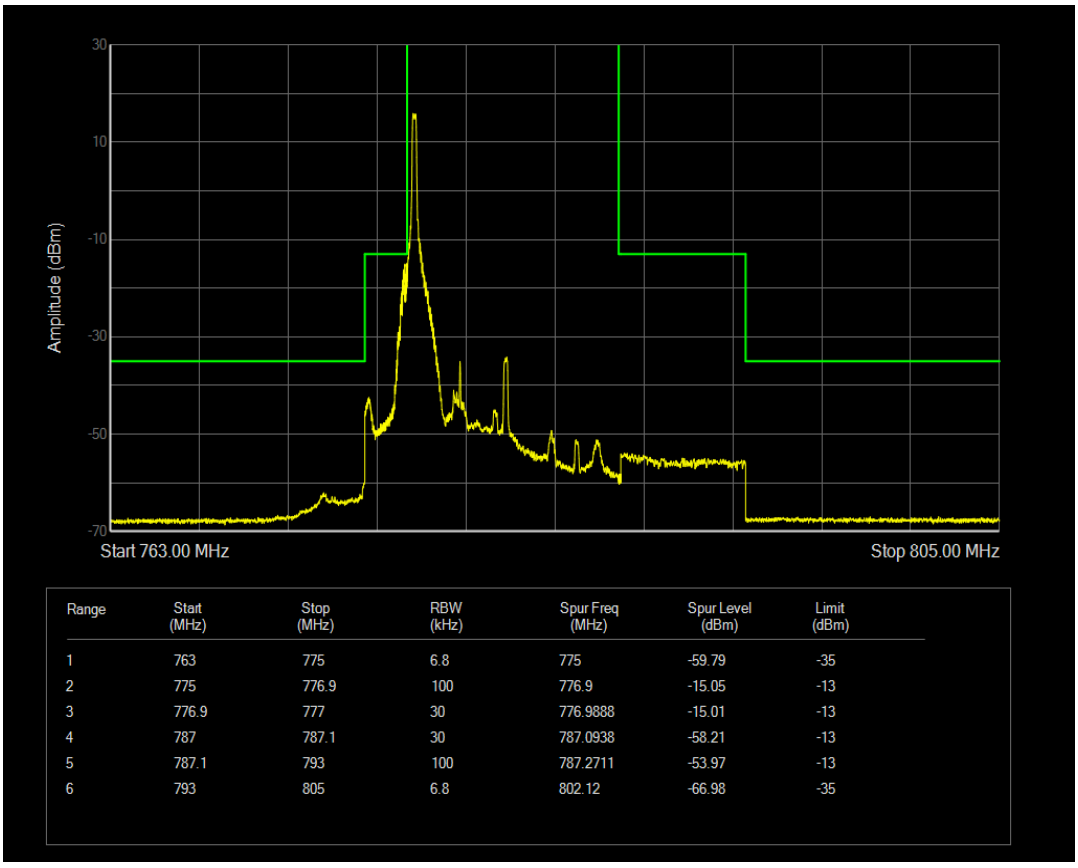

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	775	-59.79	-35
2	775	776.9	100	776.9	-15.05	-13
3	776.9	777	30	776.9888	-15.01	-13
4	787	787.1	30	787.0938	-58.21	-13
5	787.1	793	100	787.2711	-53.97	-13
6	793	805	6.8	802.12	-66.98	-35

Band13 QPSK BW=5MHz Channel=23205 RB Size=25 Position=#0

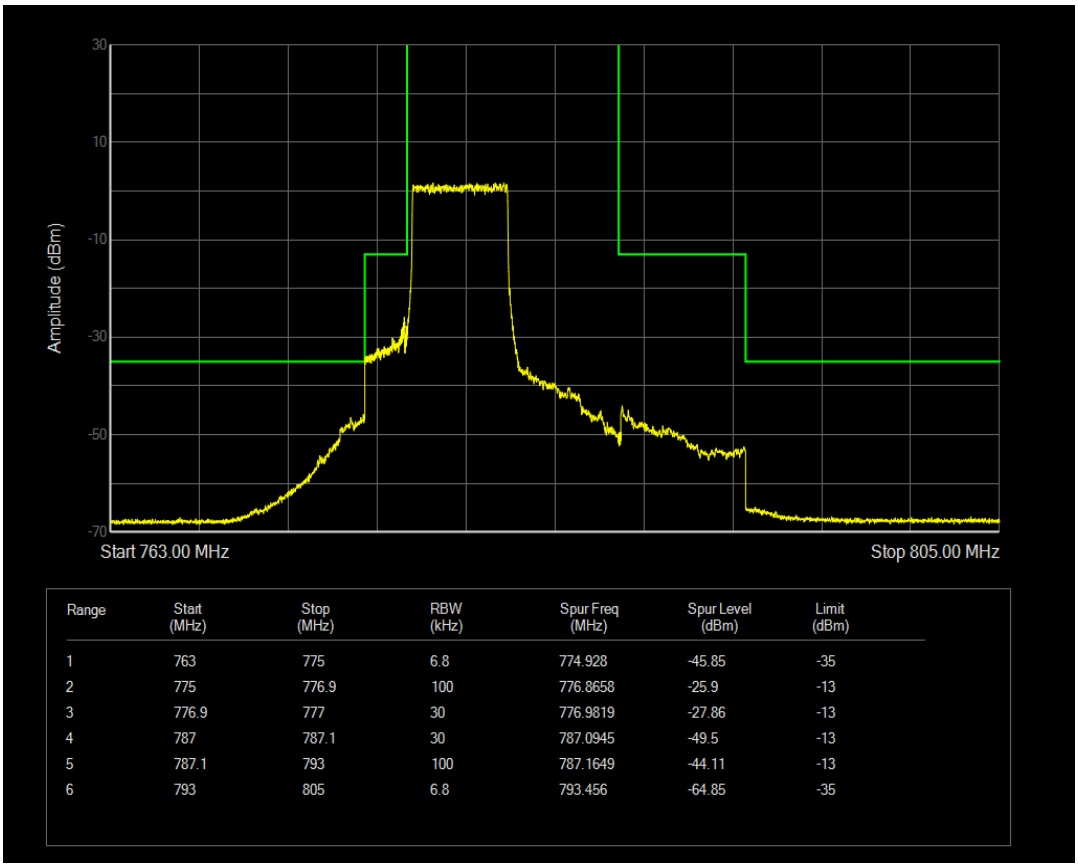

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	774.928	-45.85	-35
2	775	776.9	100	776.8658	-25.9	-13
3	776.9	777	30	776.9819	-27.86	-13
4	787	787.1	30	787.0945	-49.5	-13
5	787.1	793	100	787.1649	-44.11	-13
6	793	805	6.8	793.456	-64.85	-35

Band13 QAM16 BW=5MHz Channel=23205 RB Size=1 Position=#Max

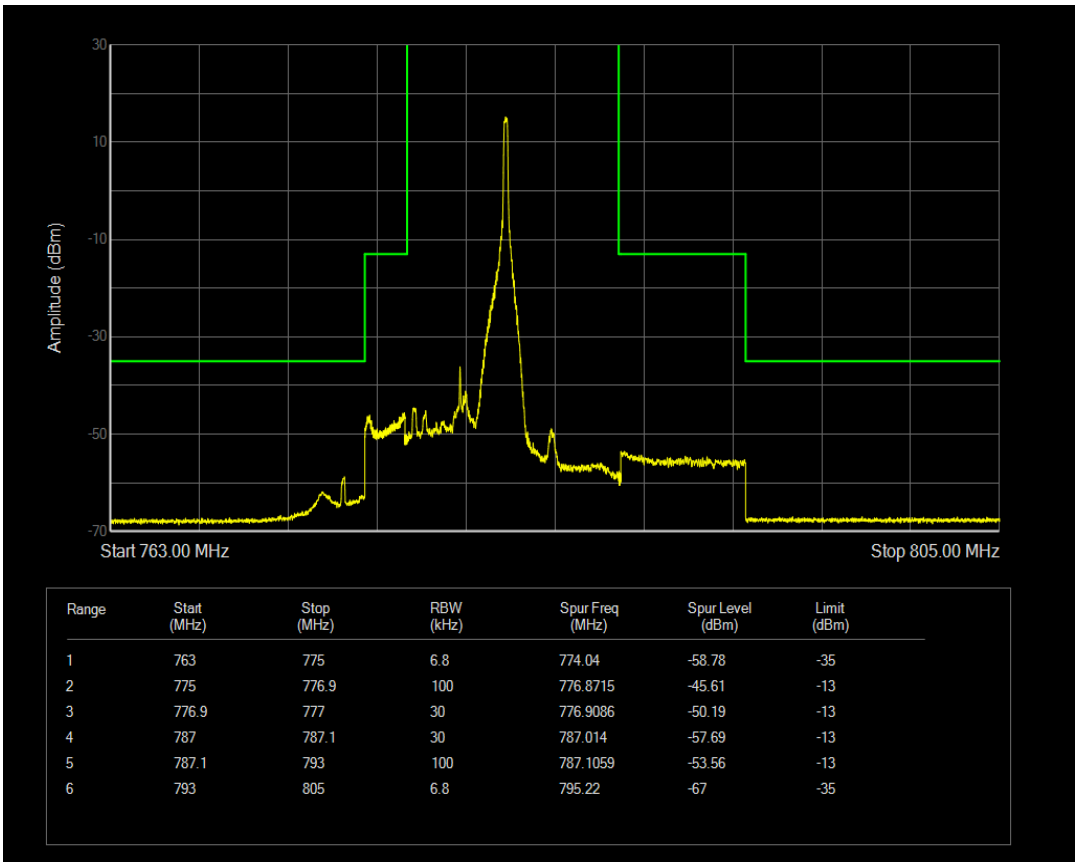

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	774.04	-58.78	-35
2	775	776.9	100	776.8715	-45.61	-13
3	776.9	777	30	776.9086	-50.19	-13
4	787	787.1	30	787.014	-57.69	-13
5	787.1	793	100	787.1059	-53.56	-13
6	793	805	6.8	795.22	-67	-35

Band13 QAM16 BW=5MHz Channel=23205 RB Size=1 Position=#0

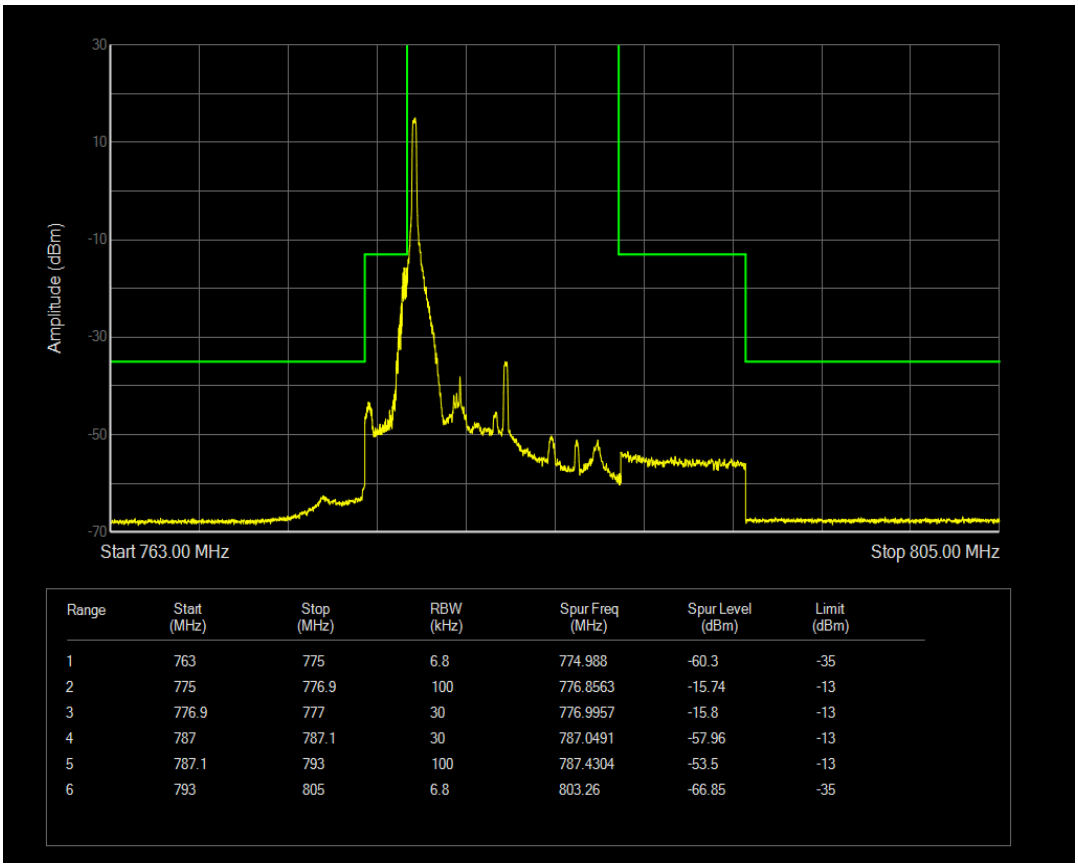

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	774.988	-60.3	-35
2	775	776.9	100	776.8563	-15.74	-13
3	776.9	777	30	776.9957	-15.8	-13
4	787	787.1	30	787.0491	-57.96	-13
5	787.1	793	100	787.4304	-53.5	-13
6	793	805	6.8	803.26	-66.85	-35

Band13 QPSK BW=5MHz Channel=23255 RB Size=1 Position=#0

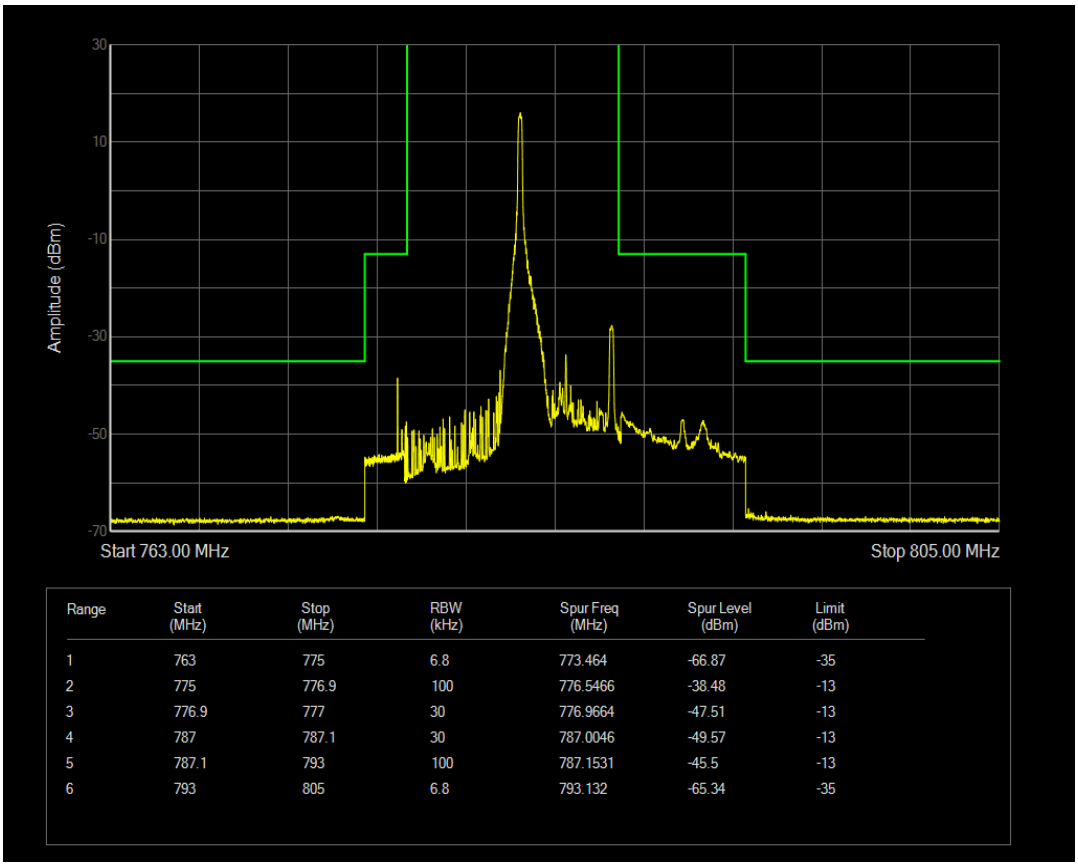

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	773.464	-66.87	-35
2	775	776.9	100	776.5466	-38.48	-13
3	776.9	777	30	776.9664	-47.51	-13
4	787	787.1	30	787.0046	-49.57	-13
5	787.1	793	100	787.1531	-45.5	-13
6	793	805	6.8	793.132	-65.34	-35

Band13 QAM16 BW=5MHz Channel=23205 RB Size=25 Position=#0

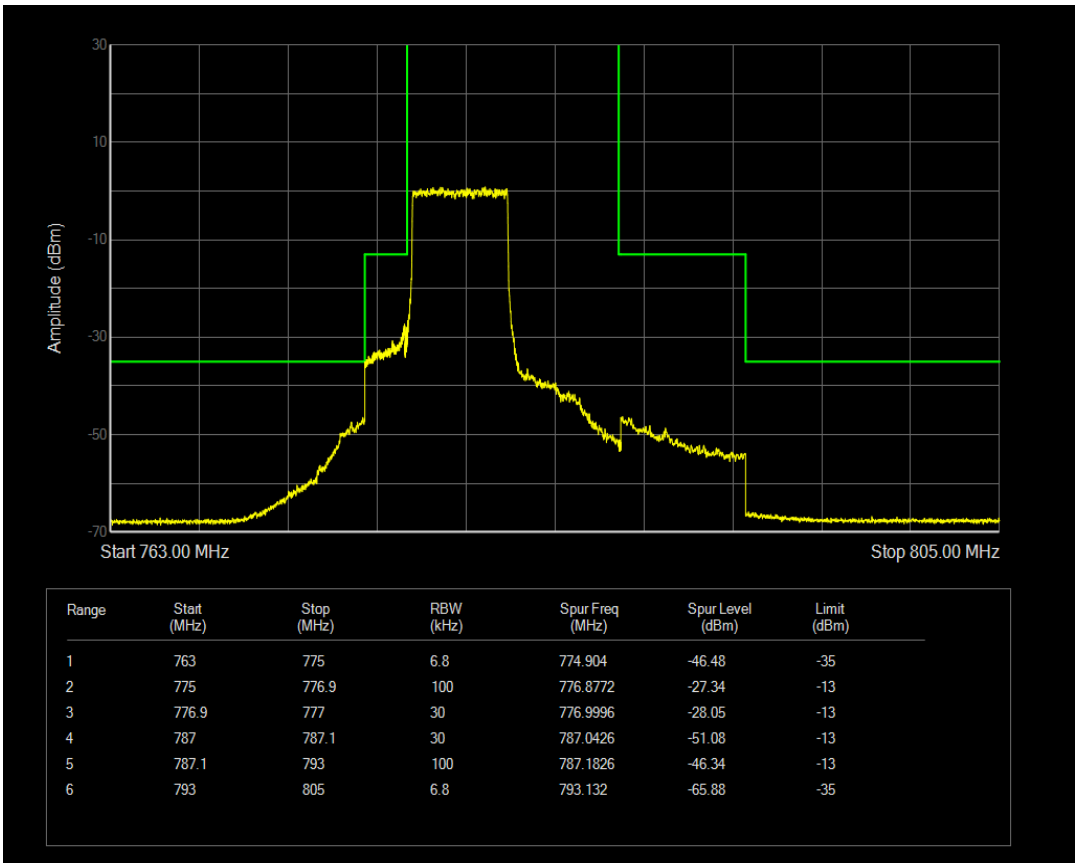

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	774.904	-46.48	-35
2	775	776.9	100	776.8772	-27.34	-13
3	776.9	777	30	776.9996	-28.05	-13
4	787	787.1	30	787.0426	-51.08	-13
5	787.1	793	100	787.1826	-46.34	-13
6	793	805	6.8	793.132	-65.88	-35

Band13 QPSK BW=5MHz Channel=23255 RB Size=1 Position=#Max

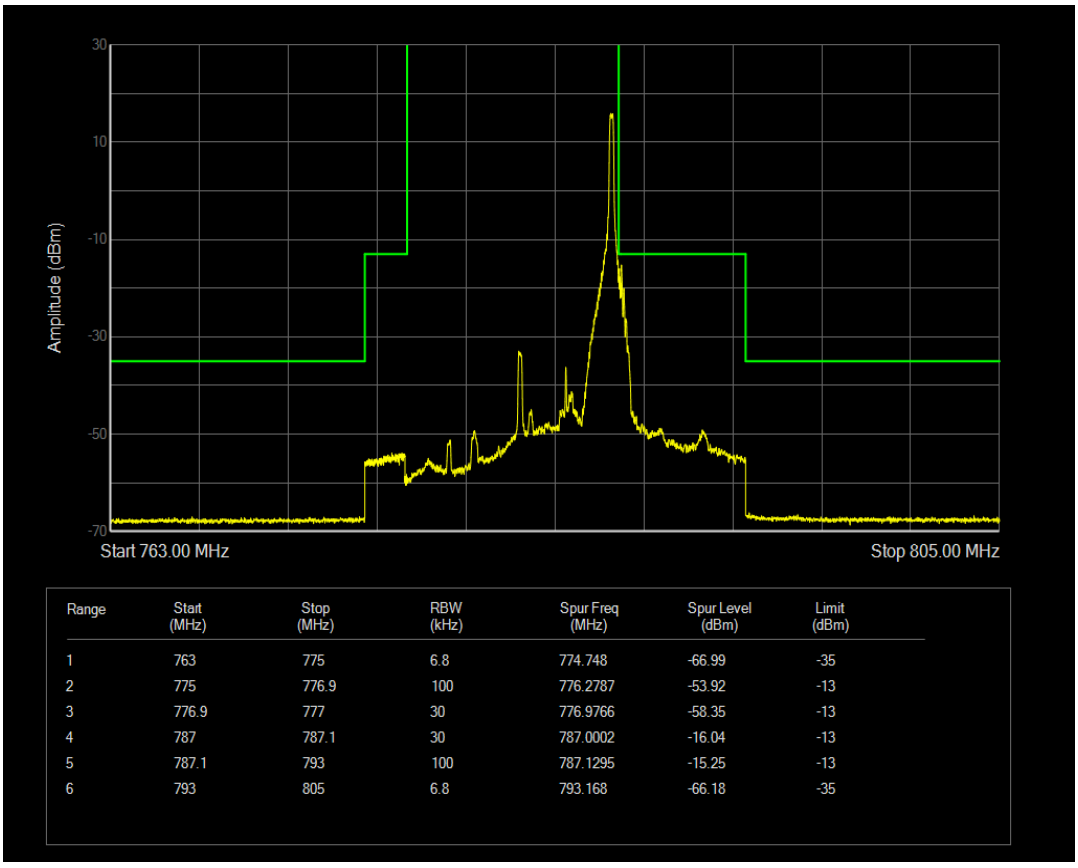

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	774.748	-66.99	-35
2	775	776.9	100	776.2787	-53.92	-13
3	776.9	777	30	776.9766	-58.35	-13
4	787	787.1	30	787.0002	-16.04	-13
5	787.1	793	100	787.1295	-15.25	-13
6	793	805	6.8	793.168	-66.18	-35

Band13 QPSK BW=5MHz Channel=23255 RB Size=25 Position=#0

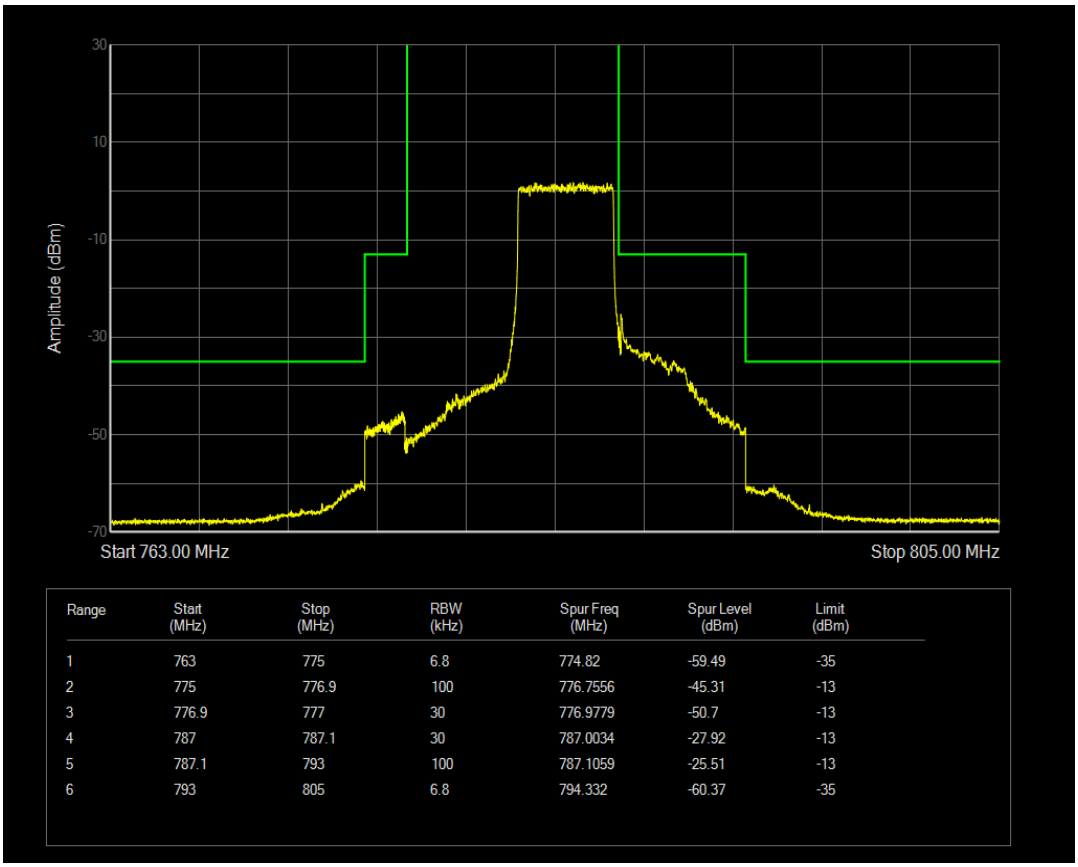

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	774.82	-59.49	-35
2	775	776.9	100	776.7556	-45.31	-13
3	776.9	777	30	776.9779	-50.7	-13
4	787	787.1	30	787.0034	-27.92	-13
5	787.1	793	100	787.1059	-25.51	-13
6	793	805	6.8	794.332	-60.37	-35

Band13 QAM16 BW=5MHz Channel=23255 RB Size=1 Position=#0

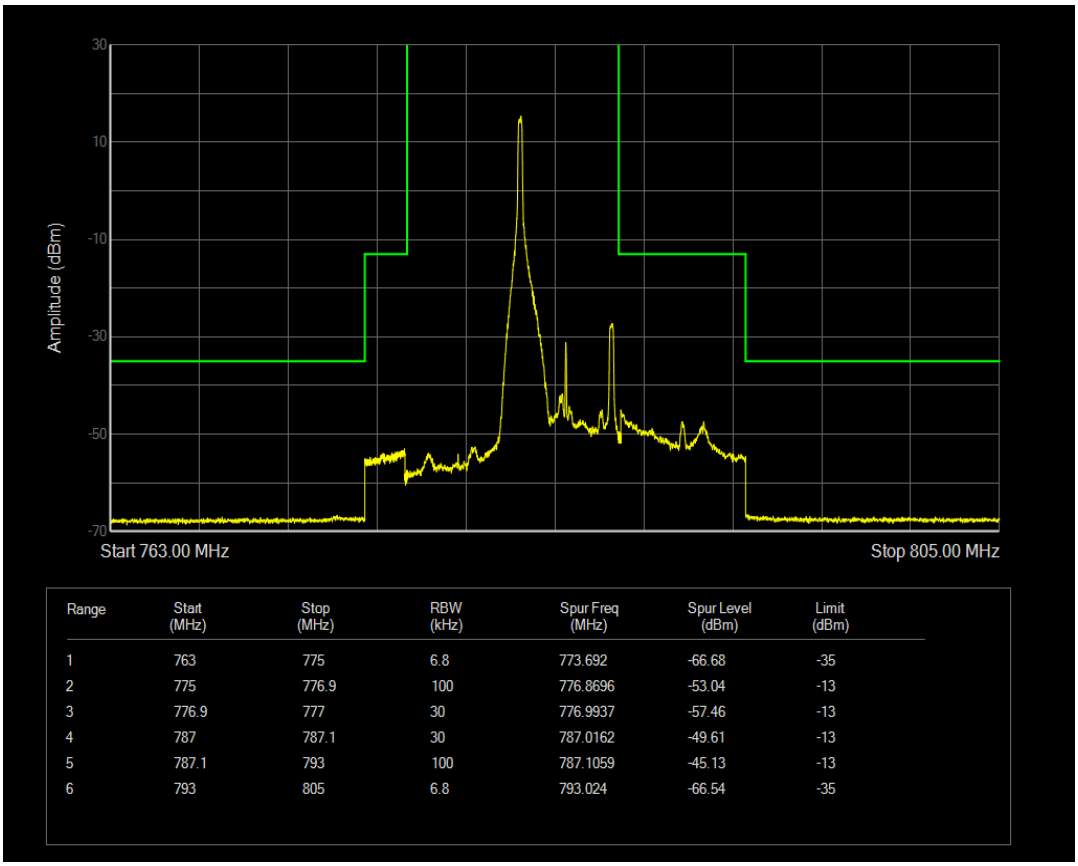

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	773.692	-66.68	-35
2	775	776.9	100	776.8696	-53.04	-13
3	776.9	777	30	776.9937	-57.46	-13
4	787	787.1	30	787.0162	-49.61	-13
5	787.1	793	100	787.1059	-45.13	-13
6	793	805	6.8	793.024	-66.54	-35

Band13 QAM16 BW=5MHz Channel=23255 RB Size=1 Position=#Max

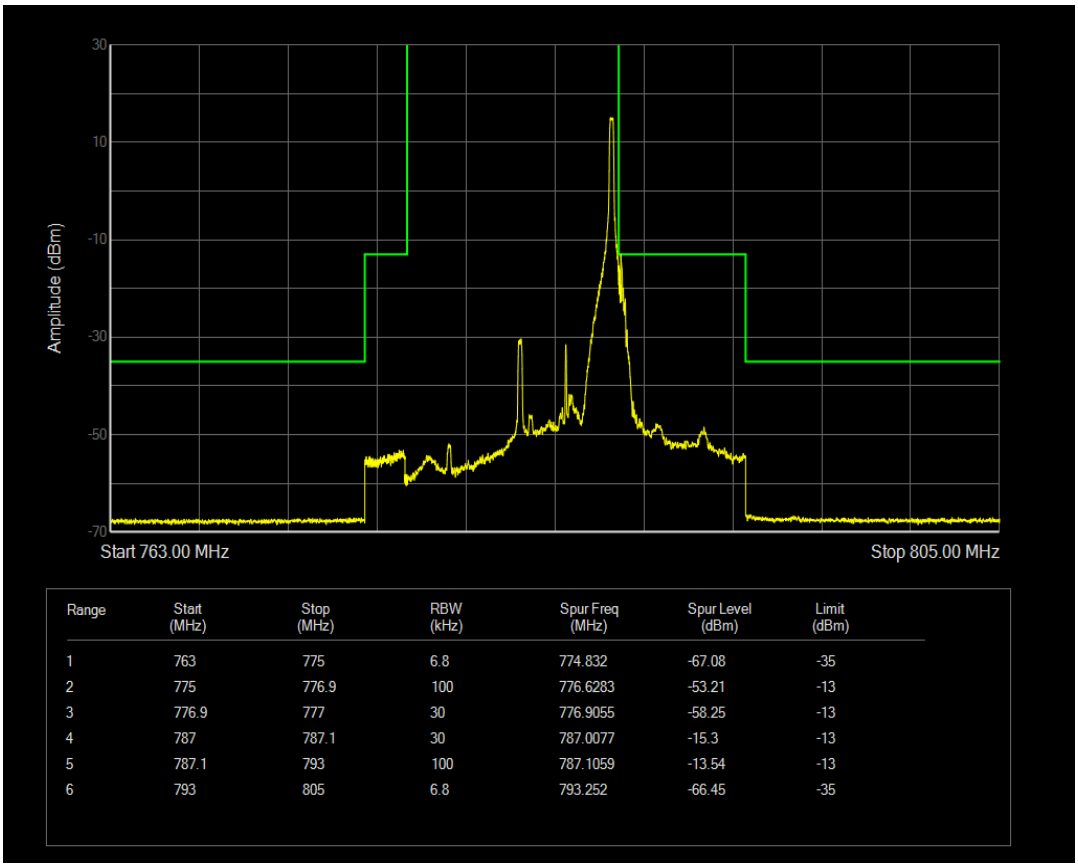

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	774.832	-67.08	-35
2	775	776.9	100	776.6283	-53.21	-13
3	776.9	777	30	776.9055	-58.25	-13
4	787	787.1	30	787.0077	-15.3	-13
5	787.1	793	100	787.1059	-13.54	-13
6	793	805	6.8	793.252	-66.45	-35

Band13 QAM16 BW=5MHz Channel=23255 RB Size=25 Position=#0

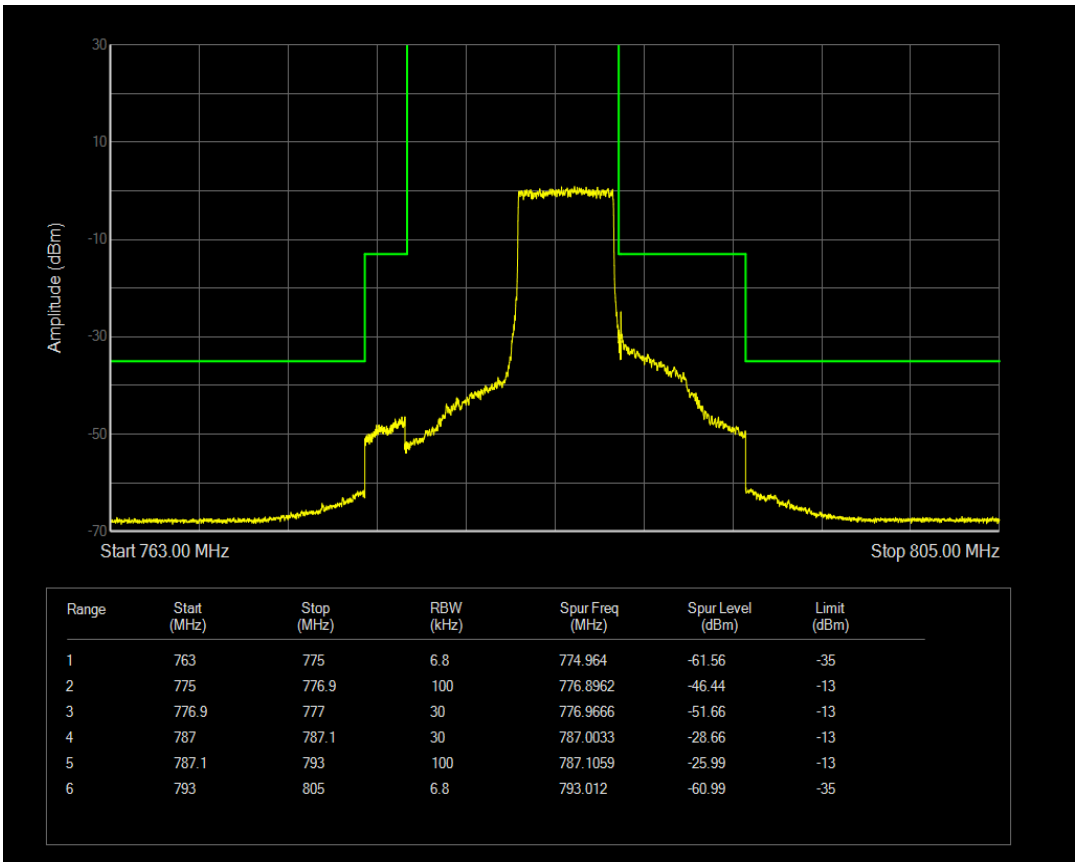

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	774.964	-61.56	-35
2	775	776.9	100	776.8962	-46.44	-13
3	776.9	777	30	776.9666	-51.66	-13
4	787	787.1	30	787.0033	-28.66	-13
5	787.1	793	100	787.1059	-25.99	-13
6	793	805	6.8	793.012	-60.99	-35

Band13 QPSK BW=10MHz Channel=23230 RB Size=1 Position=#0

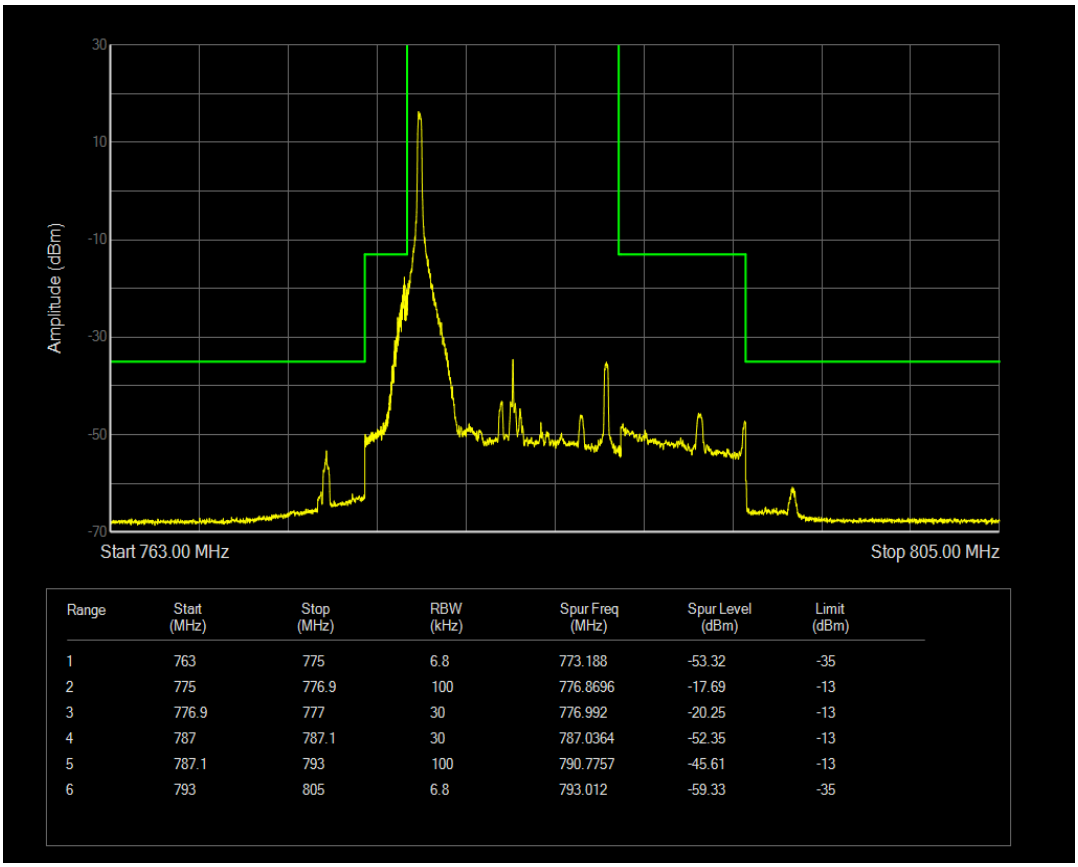

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	773.188	-53.32	-35
2	775	776.9	100	776.8696	-17.69	-13
3	776.9	777	30	776.992	-20.25	-13
4	787	787.1	30	787.0364	-52.35	-13
5	787.1	793	100	790.7757	-45.61	-13
6	793	805	6.8	793.012	-59.33	-35

Band13 QPSK BW=10MHz Channel=23230 RB Size=1 Position=#Max

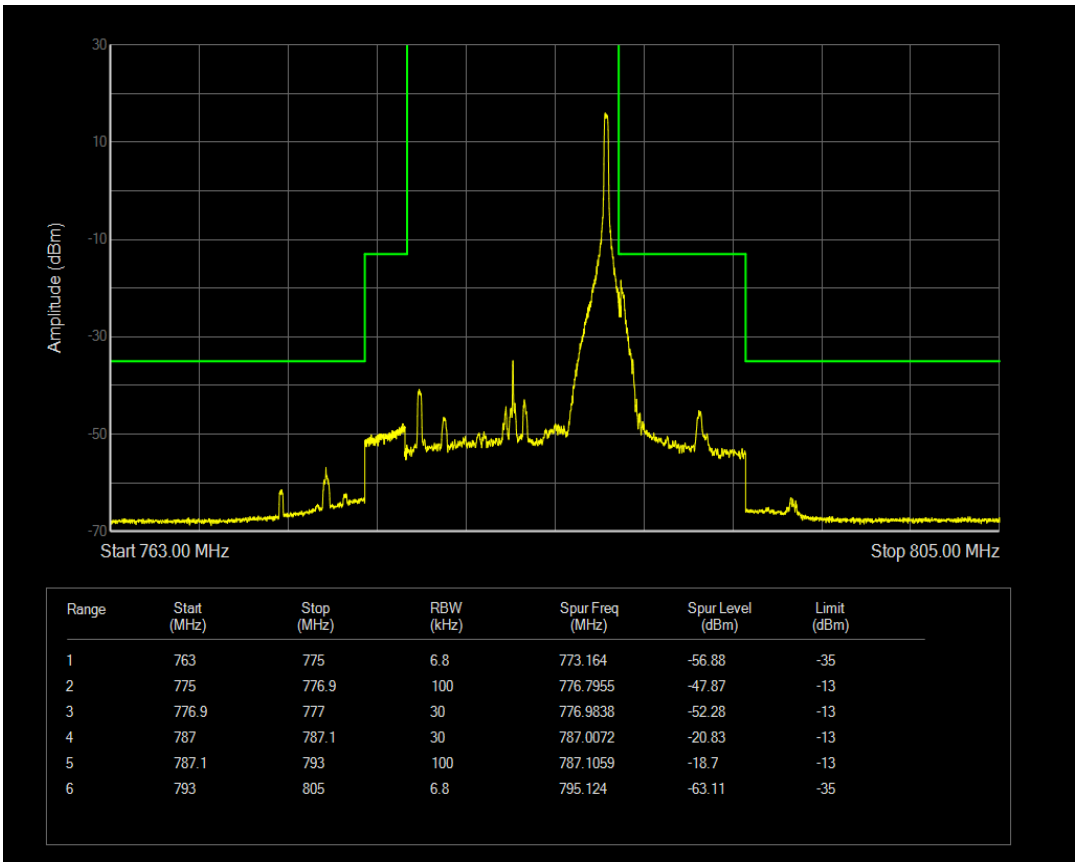

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	773.164	-56.88	-35
2	775	776.9	100	776.7955	-47.87	-13
3	776.9	777	30	776.9838	-52.28	-13
4	787	787.1	30	787.0072	-20.83	-13
5	787.1	793	100	787.1059	-18.7	-13
6	793	805	6.8	795.124	-63.11	-35

Band13 QPSK BW=10MHz Channel=23230 RB Size=50 Position=#0

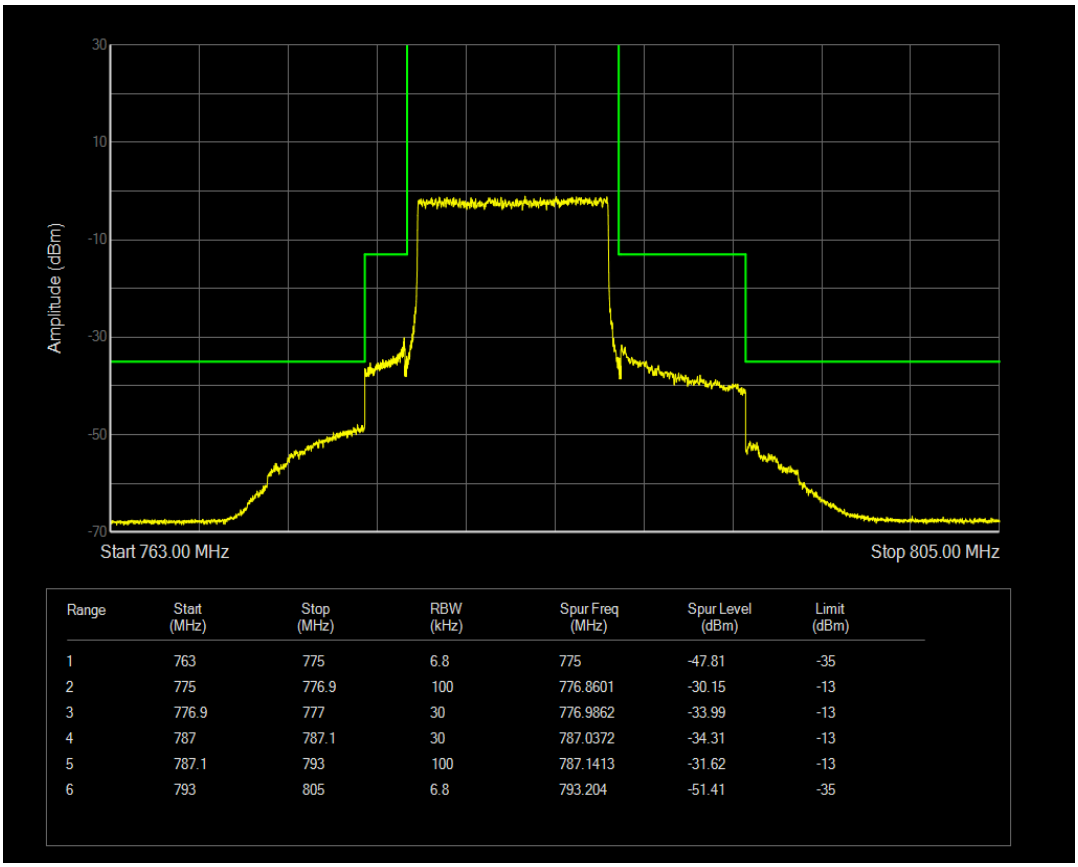

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	775	-47.81	-35
2	775	776.9	100	776.8601	-30.15	-13
3	776.9	777	30	776.9862	-33.99	-13
4	787	787.1	30	787.0372	-34.31	-13
5	787.1	793	100	787.1413	-31.62	-13
6	793	805	6.8	793.204	-51.41	-35

Band13 QAM16 BW=10MHz Channel=23230 RB Size=1 Position=#0

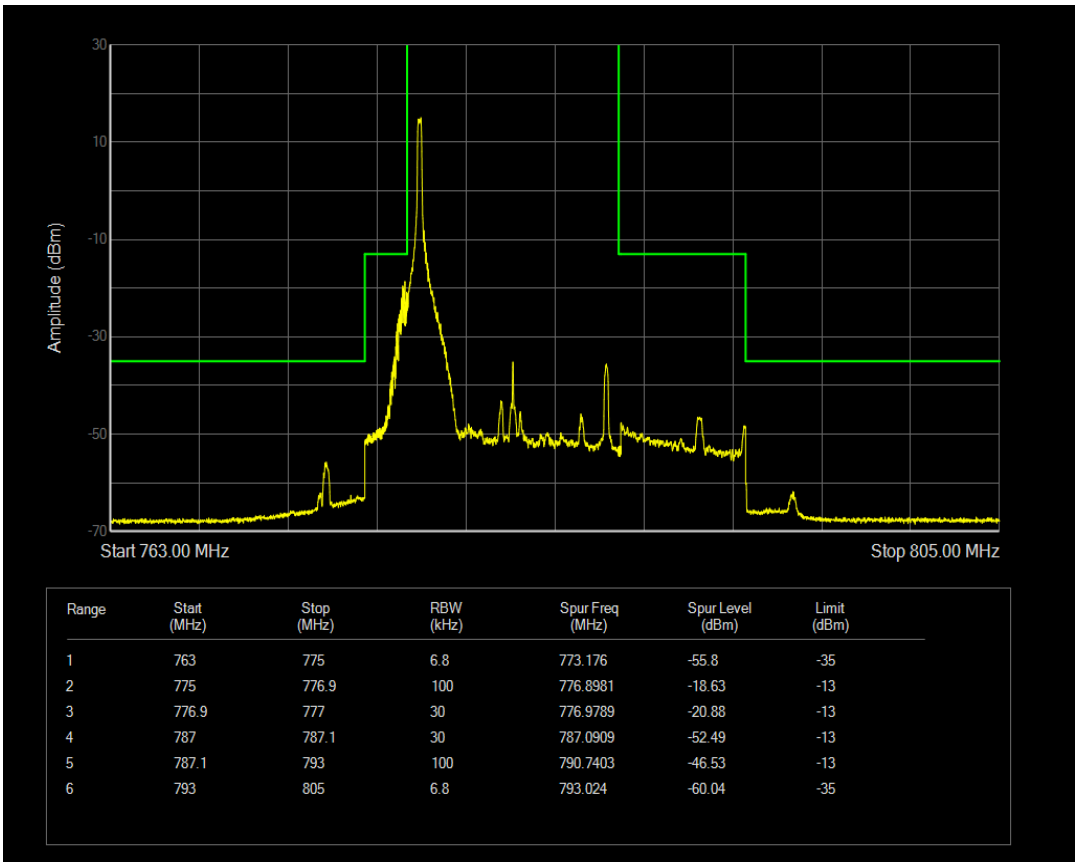

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	773.176	-55.8	-35
2	775	776.9	100	776.8981	-18.63	-13
3	776.9	777	30	776.9789	-20.88	-13
4	787	787.1	30	787.0909	-52.49	-13
5	787.1	793	100	790.7403	-46.53	-13
6	793	805	6.8	793.024	-60.04	-35

Band13 QAM16 BW=10MHz Channel=23230 RB Size=1 Position=#Max

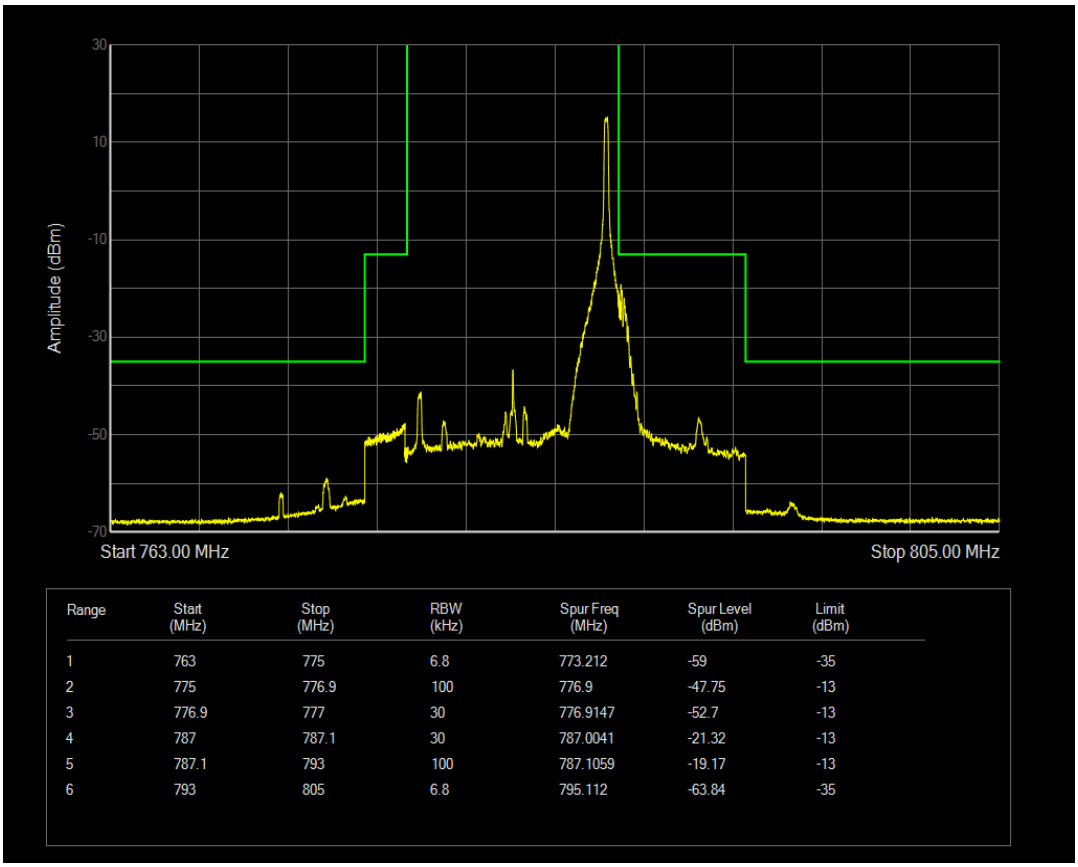

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	773.212	-59	-35
2	775	776.9	100	776.9	-47.75	-13
3	776.9	777	30	776.9147	-52.7	-13
4	787	787.1	30	787.0041	-21.32	-13
5	787.1	793	100	787.1059	-19.17	-13
6	793	805	6.8	795.112	-63.84	-35

Band13 QAM16 BW=10MHz Channel=23230 RB Size=50 Position=#0

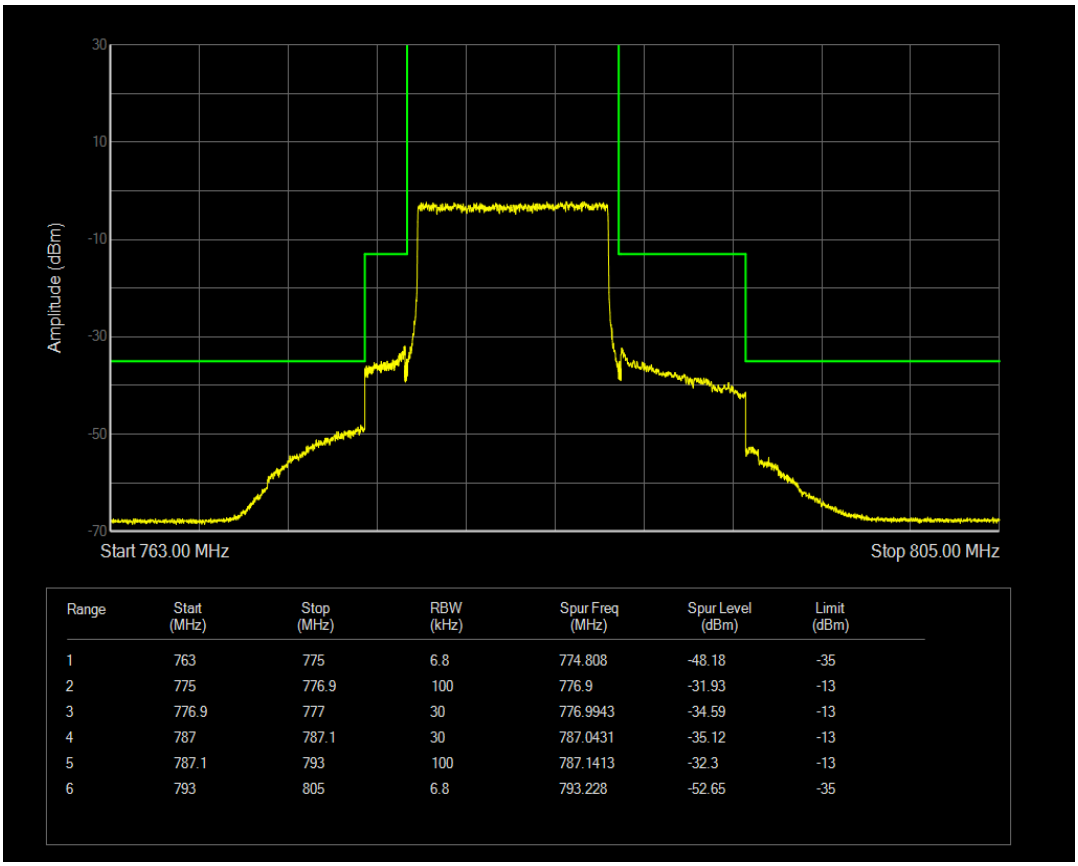

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	763	775	6.8	774.808	-48.18	-35
2	775	776.9	100	776.9	-31.93	-13
3	776.9	777	30	776.9943	-34.59	-13
4	787	787.1	30	787.0431	-35.12	-13
5	787.1	793	100	787.1413	-32.3	-13
6	793	805	6.8	793.228	-52.65	-35

Band14 QPSK BW=5MHz Channel=23355 RB Size=1 Position=#Max

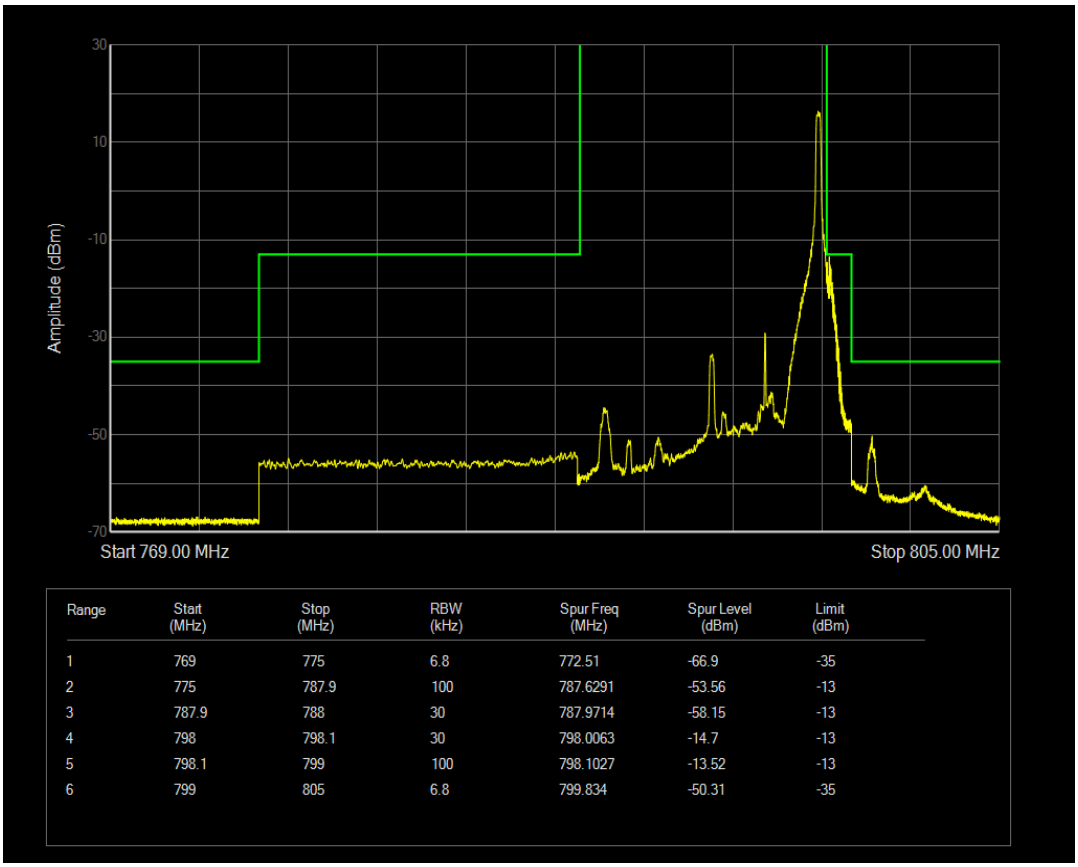

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	769	775	6.8	772.51	-66.9	-35
2	775	787.9	100	787.6291	-53.56	-13
3	787.9	788	30	787.9714	-58.15	-13
4	798	798.1	30	798.0063	-14.7	-13
5	798.1	799	100	798.1027	-13.52	-13
6	799	805	6.8	799.834	-50.31	-35

Band17 QPSK BW=5MHz Channel=23755 RB Size=1 Position=#0

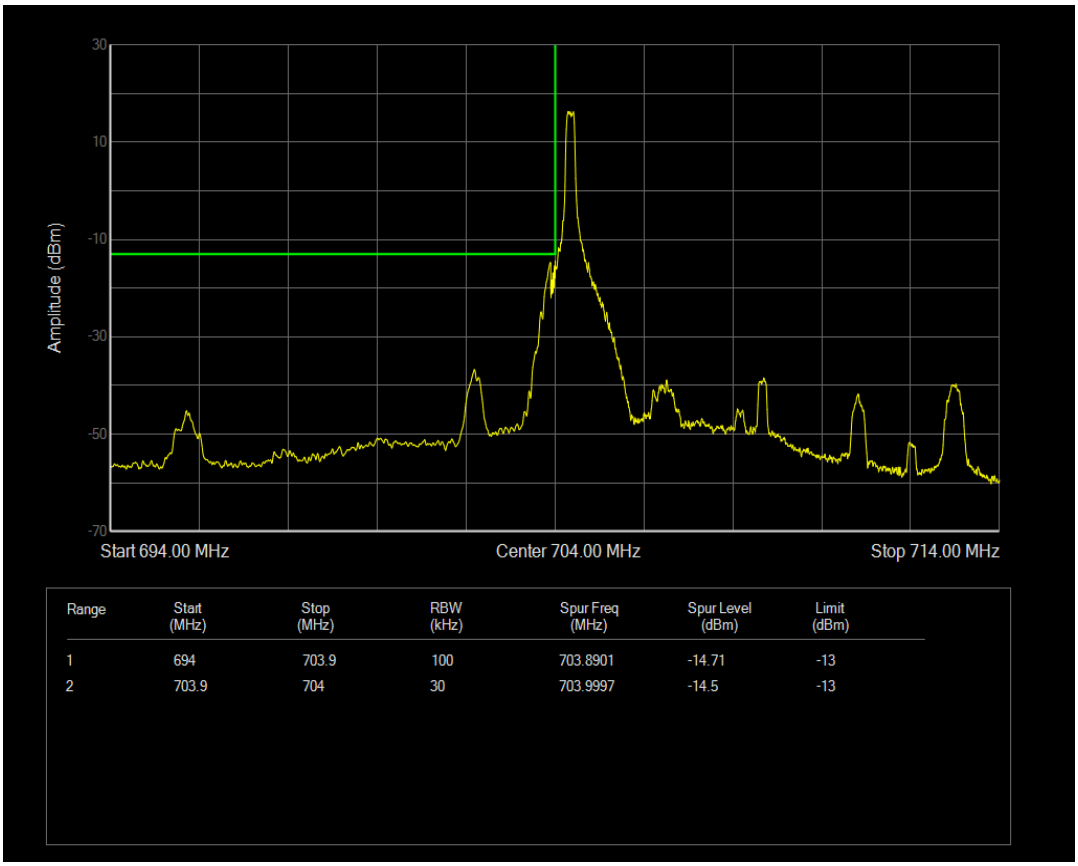

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	694	703.9	100	703.8901	-14.71	-13
2	703.9	704	30	703.9997	-14.5	-13

Band17 QPSK BW=5MHz Channel=23755 RB Size=1 Position=#Max

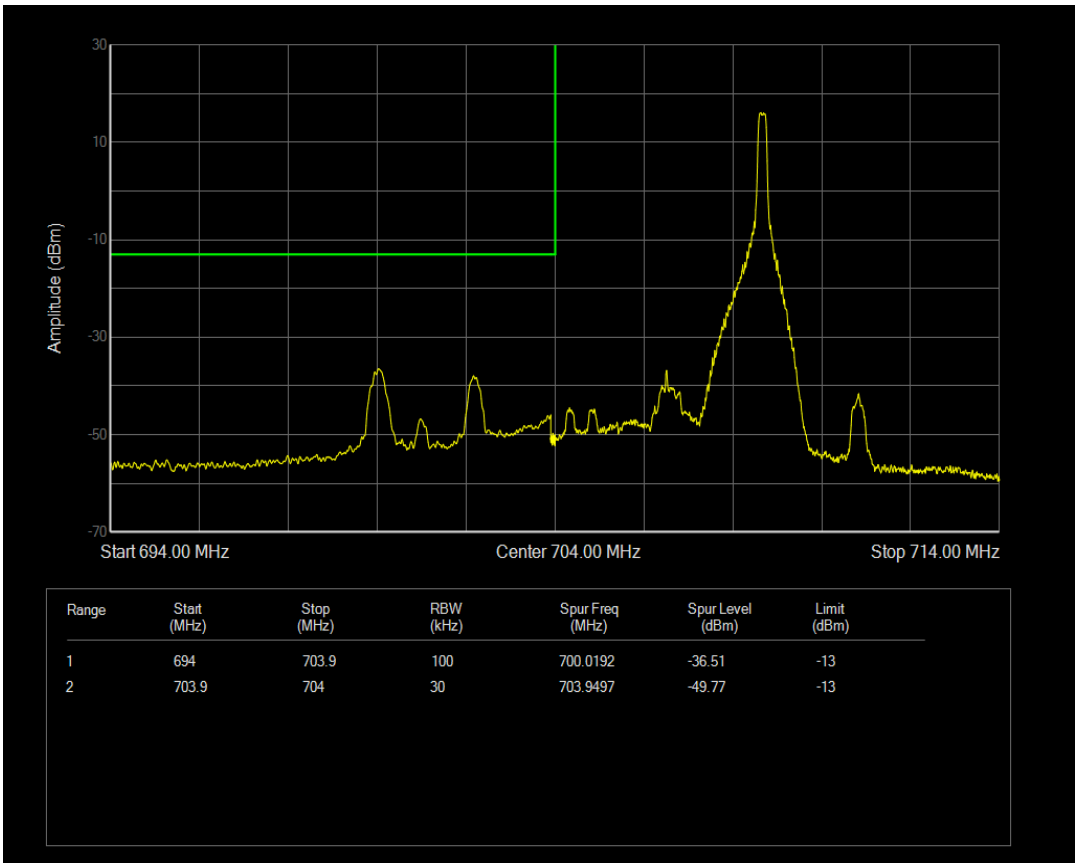

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	694	703.9	100	700.0192	-36.51	-13
2	703.9	704	30	703.9497	-49.77	-13

Band17 QPSK BW=5MHz Channel=23755 RB Size=25 Position=#0

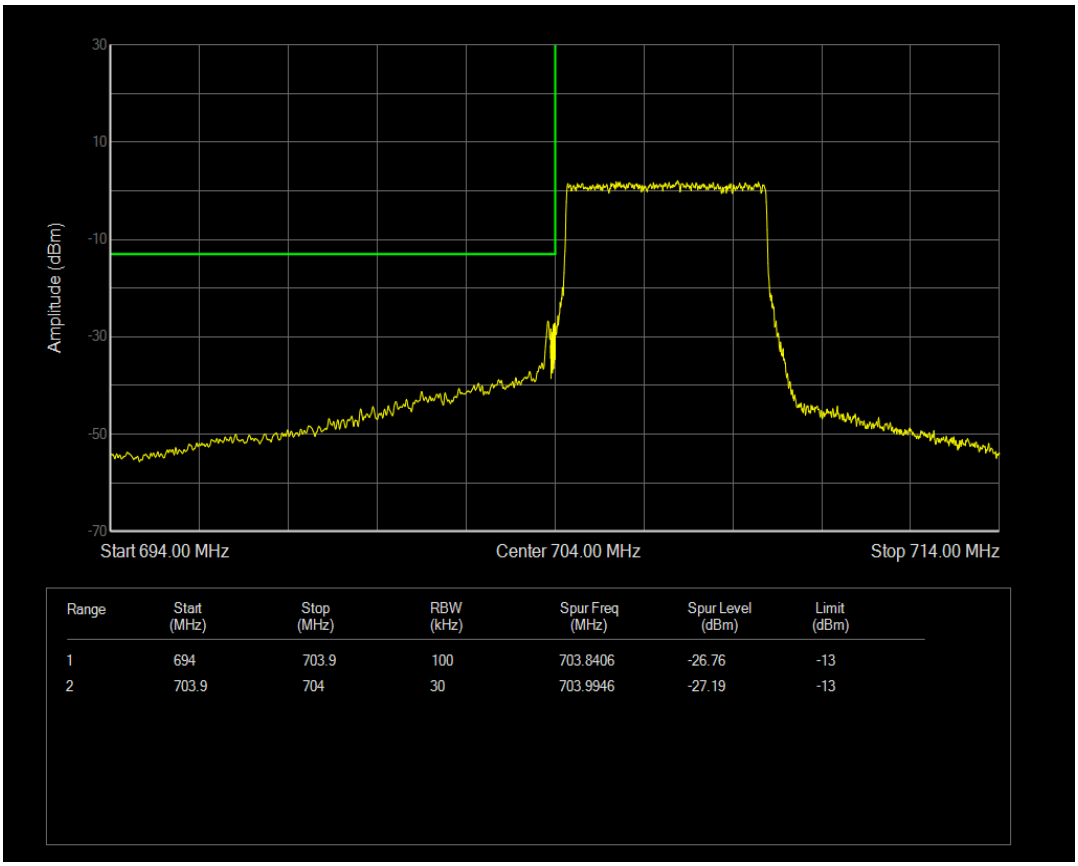

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	694	703.9	100	703.8406	-26.76	-13
2	703.9	704	30	703.9946	-27.19	-13

Band17 QAM16 BW=5MHz Channel=23755 RB Size=1 Position=#0

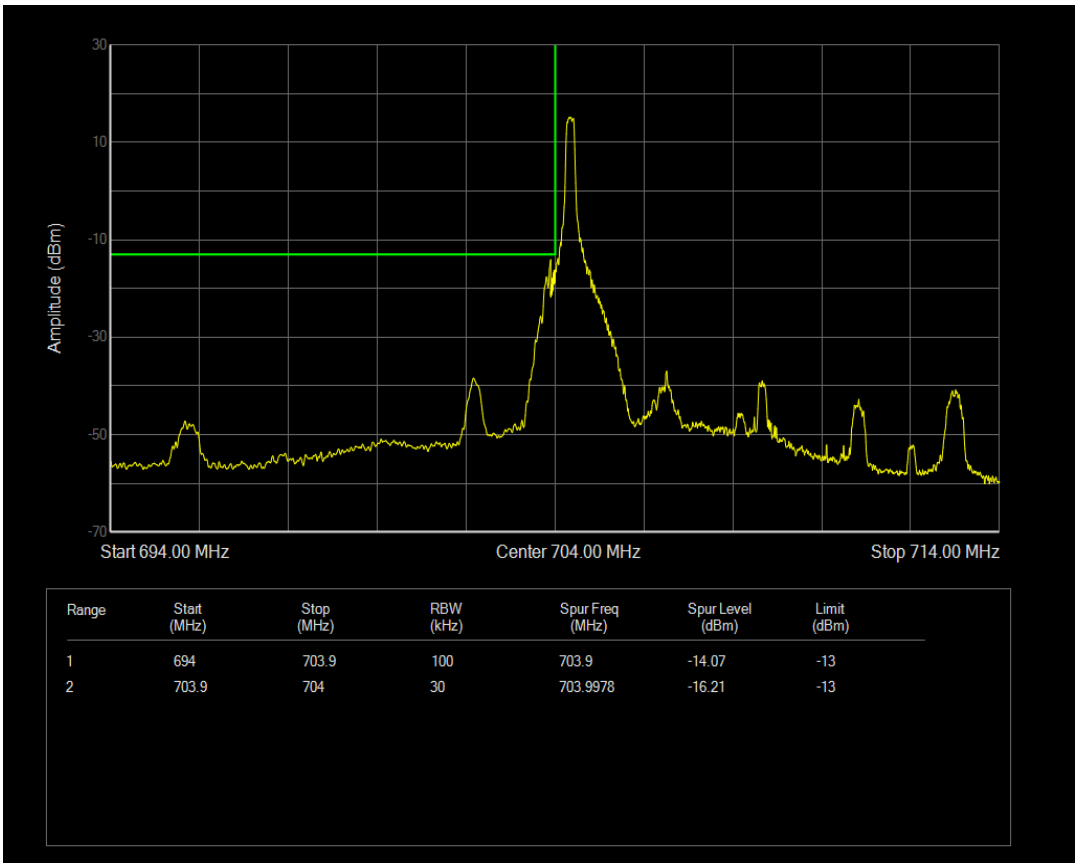

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	694	703.9	100	703.9	-14.07	-13
2	703.9	704	30	703.9978	-16.21	-13

Band17 QAM16 BW=5MHz Channel=23755 RB Size=25 Position=#0

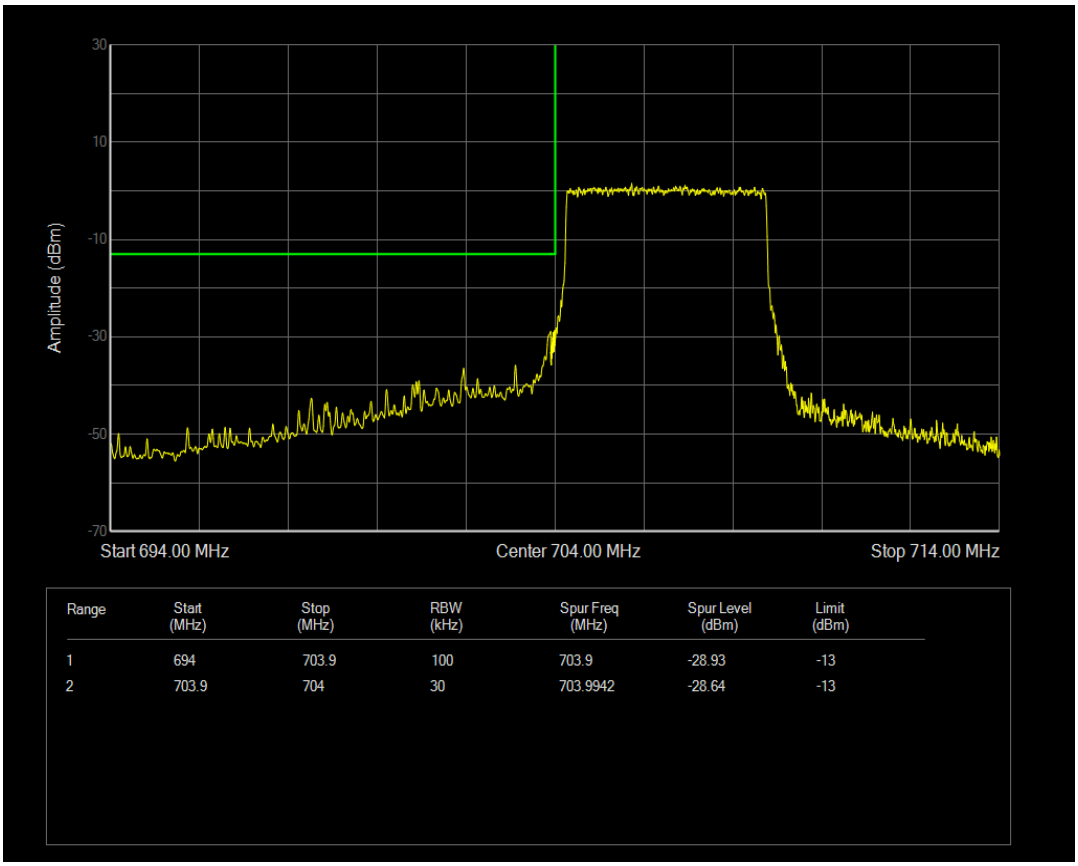

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	694	703.9	100	703.9	-28.93	-13
2	703.9	704	30	703.9942	-28.64	-13

Band17 QAM16 BW=5MHz Channel=23755 RB Size=1 Position=#Max

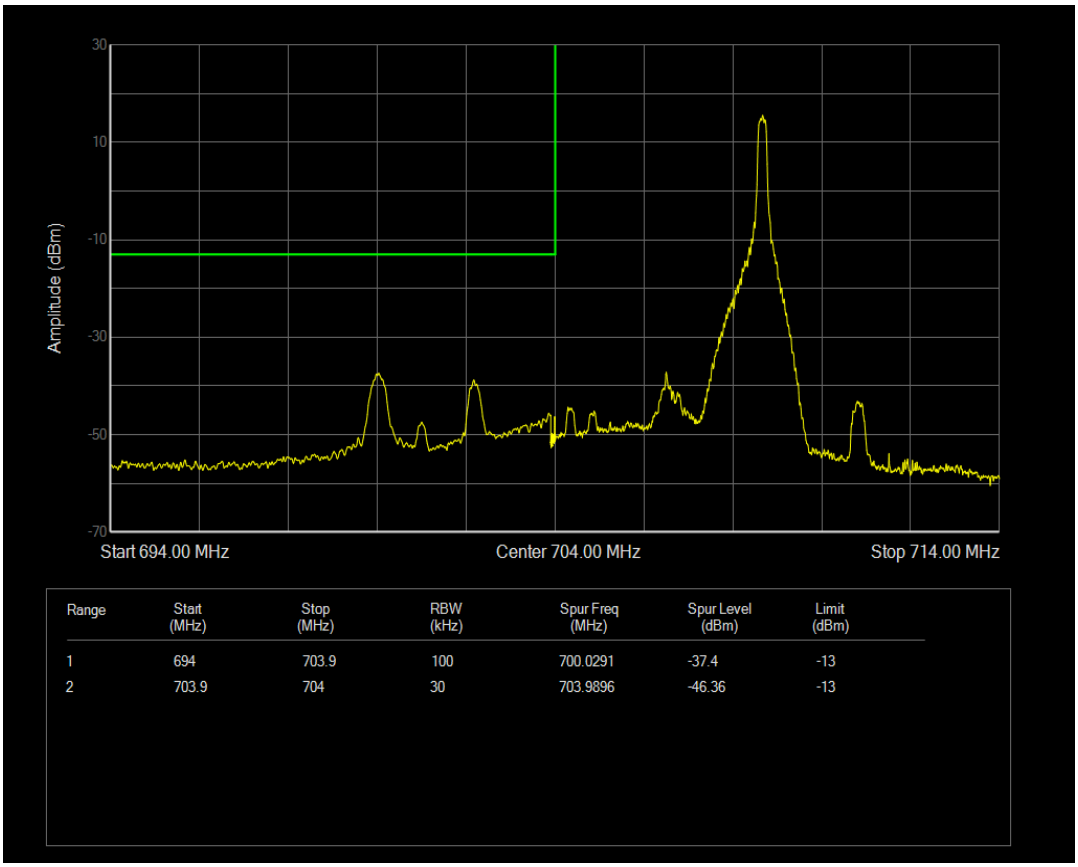

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	694	703.9	100	700.0291	-37.4	-13
2	703.9	704	30	703.9896	-46.36	-13

Band17 QPSK BW=5MHz Channel=23825 RB Size=1 Position=#0

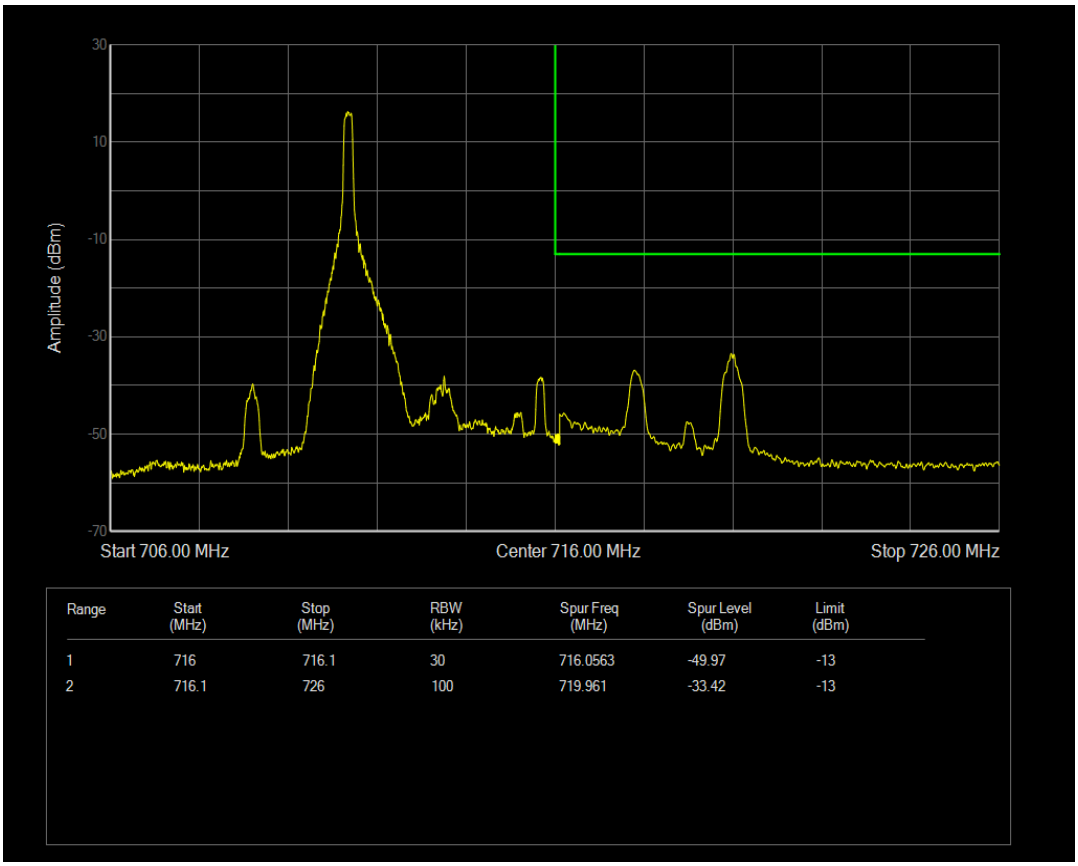

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0563	-49.97	-13
2	716.1	726	100	719.961	-33.42	-13

Band17 QPSK BW=5MHz Channel=23825 RB Size=1 Position=#Max

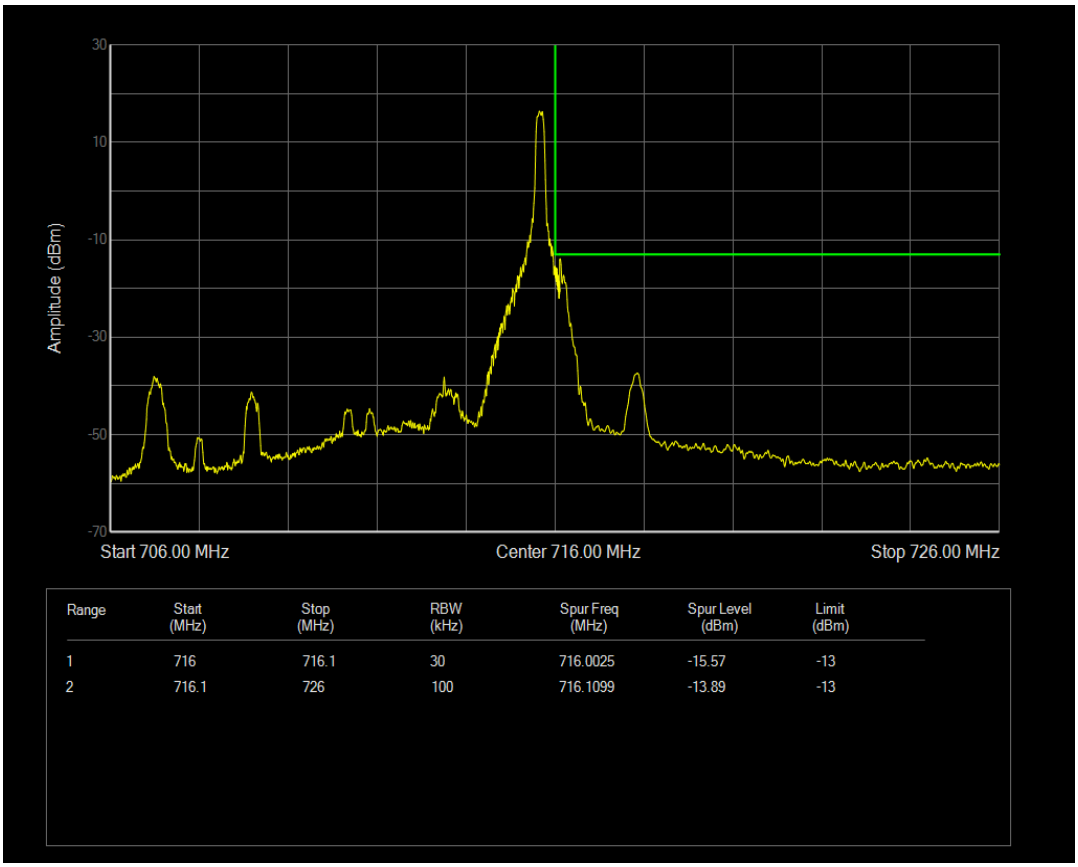

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0025	-15.57	-13
2	716.1	726	100	716.1099	-13.89	-13

Band17 QAM16 BW=5MHz Channel=23825 RB Size=1 Position=#0

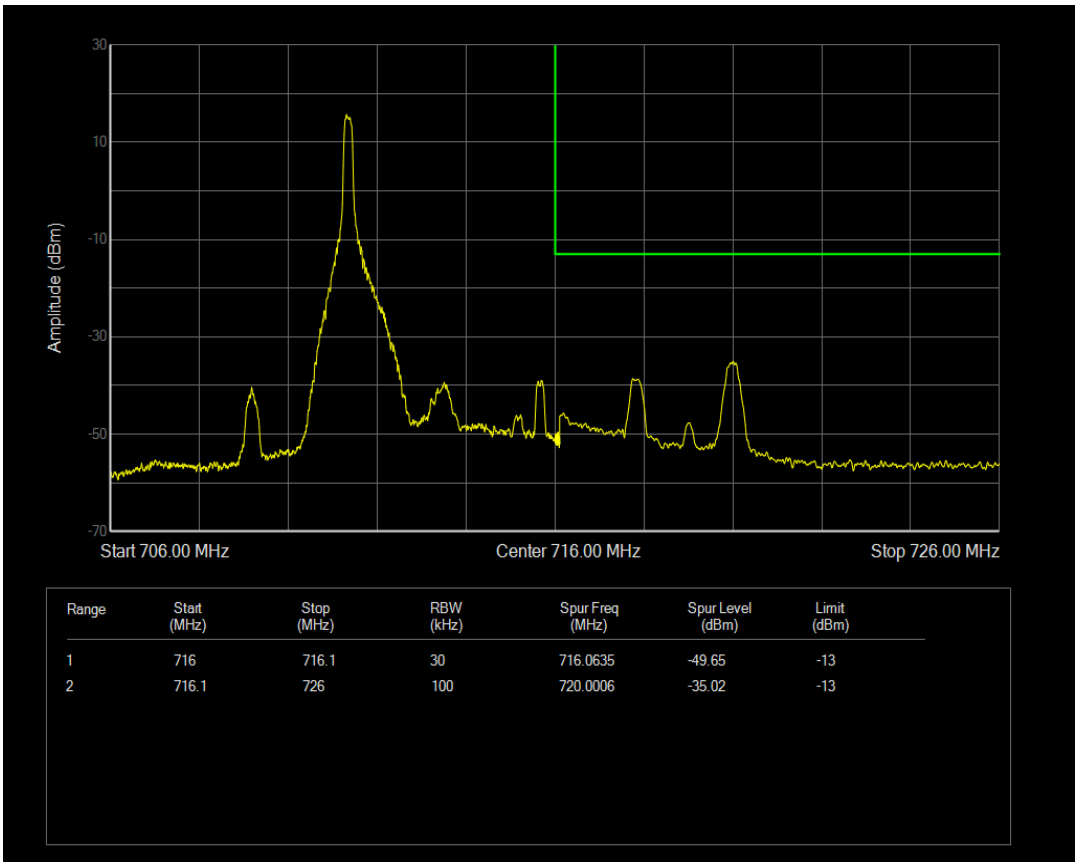

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0635	-49.65	-13
2	716.1	726	100	720.0006	-35.02	-13

Band17 QPSK BW=5MHz Channel=23825 RB Size=25 Position=#0

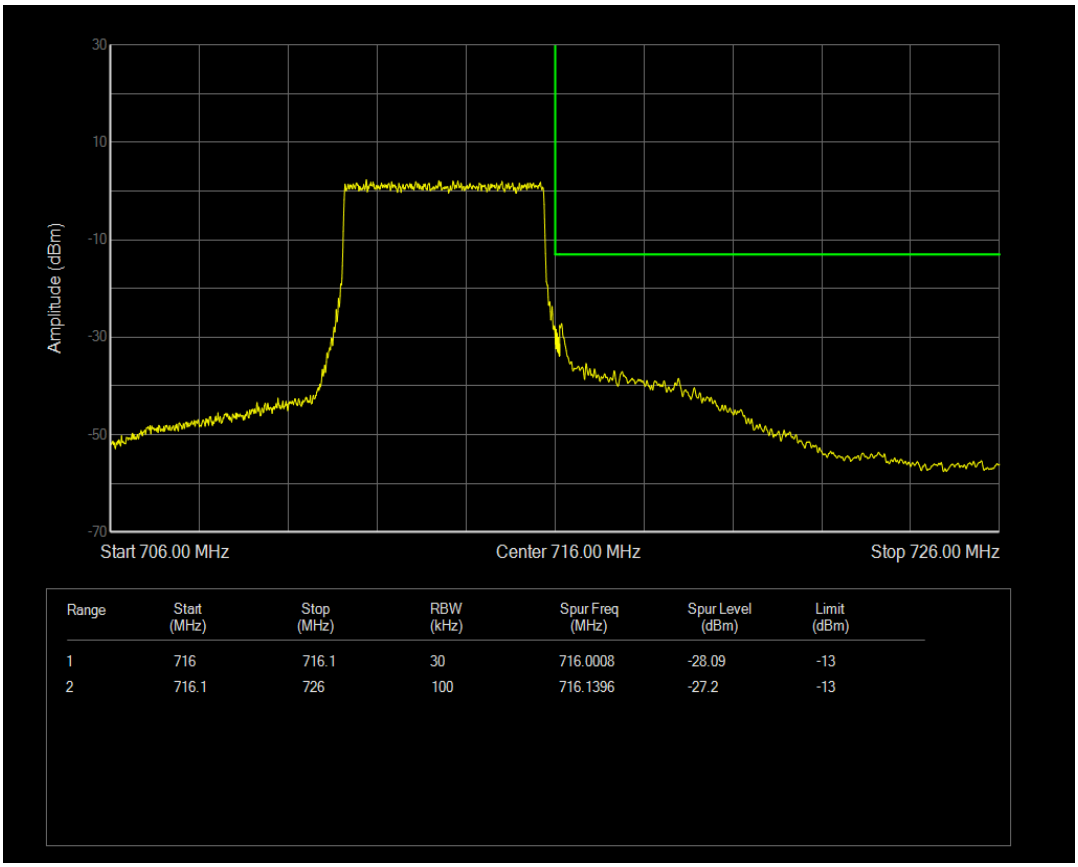

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0008	-28.09	-13
2	716.1	726	100	716.1396	-27.2	-13

Band17 QAM16 BW=5MHz Channel=23825 RB Size=25 Position=#0

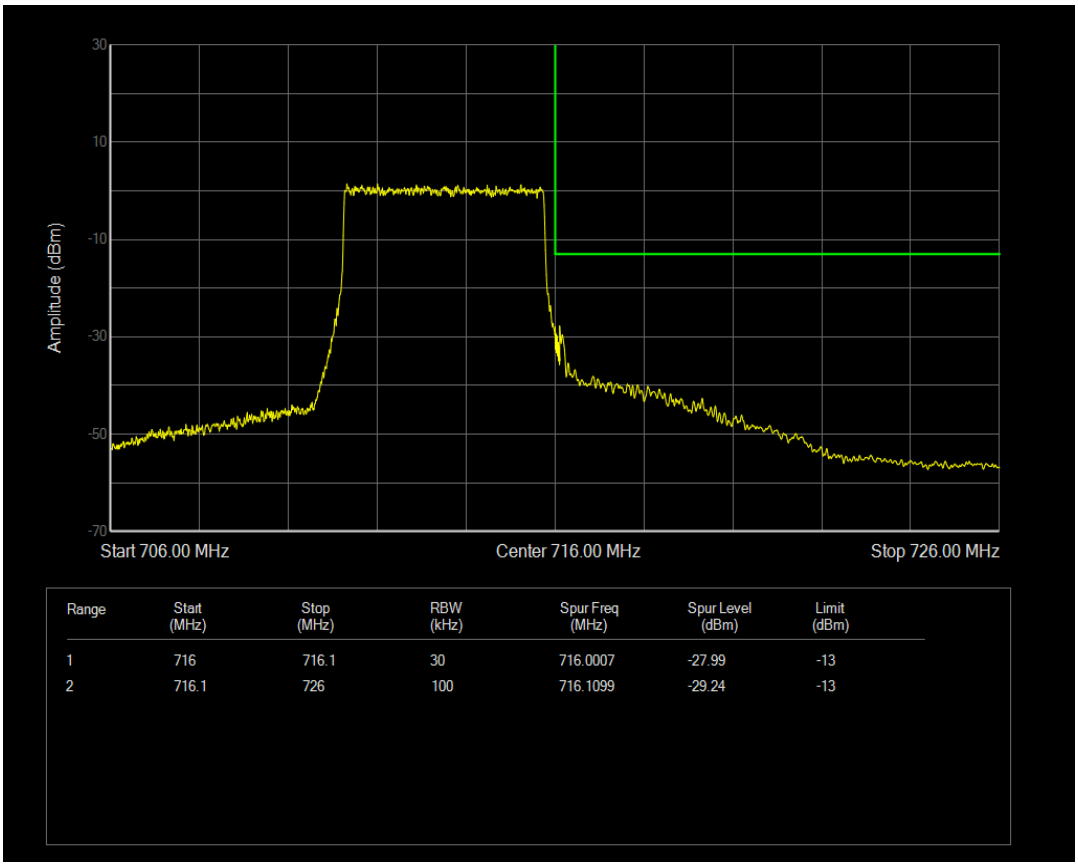

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0007	-27.99	-13
2	716.1	726	100	716.1099	-29.24	-13

Band17 QAM16 BW=5MHz Channel=23825 RB Size=1 Position=#Max

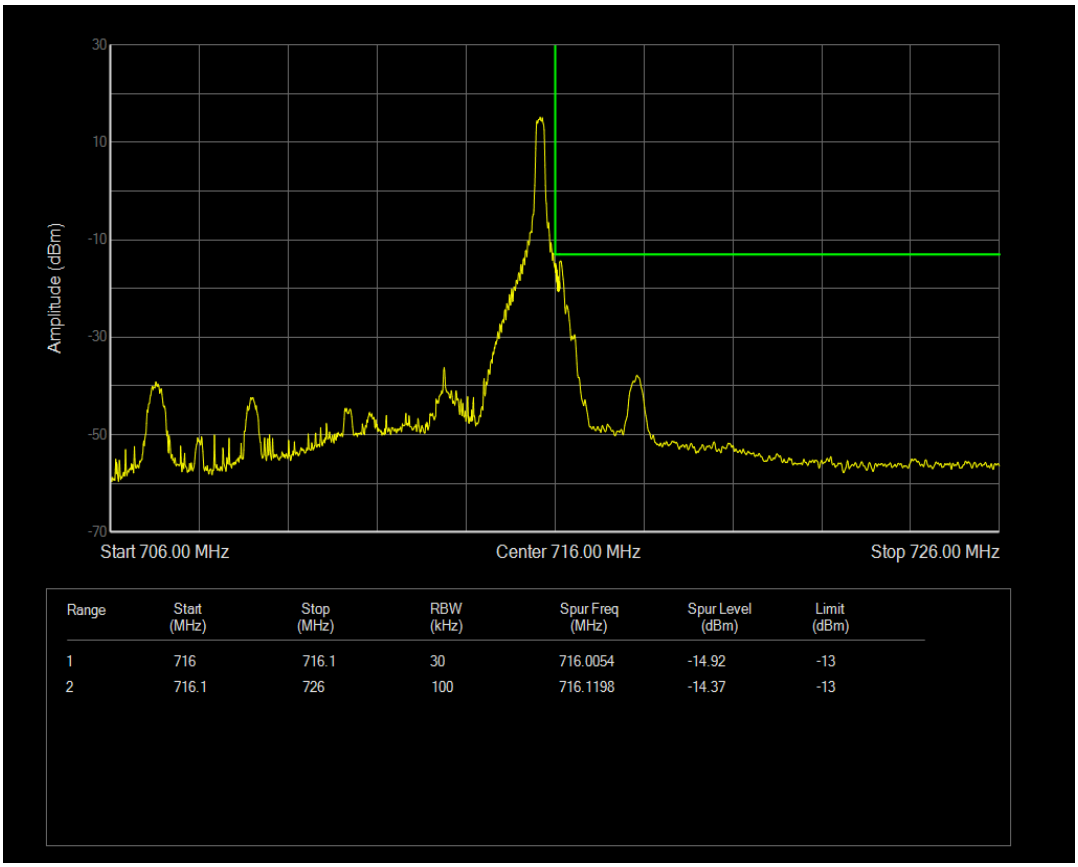

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0054	-14.92	-13
2	716.1	726	100	716.1198	-14.37	-13

Band17 QPSK BW=10MHz Channel=23780 RB Size=1 Position=#0

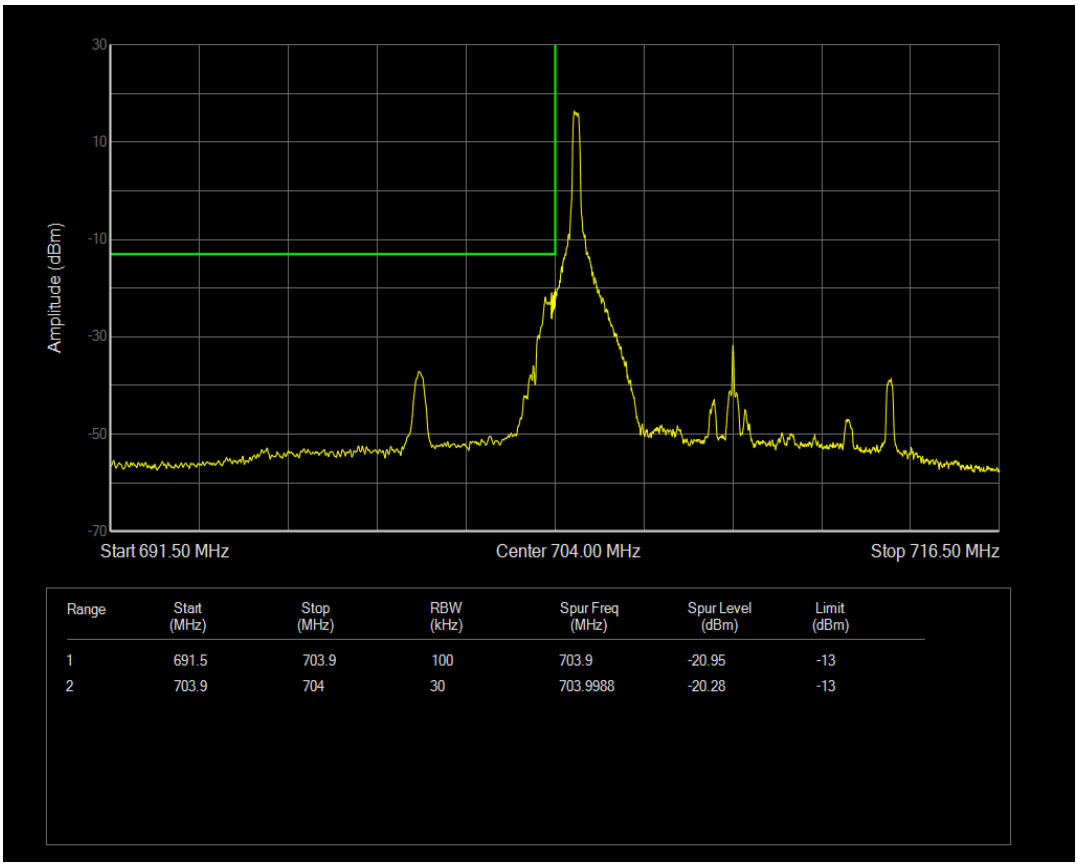

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	691.5	703.9	100	703.9	-20.95	-13
2	703.9	704	30	703.9988	-20.28	-13

Band17 QPSK BW=10MHz Channel=23780 RB Size=50 Position=#0

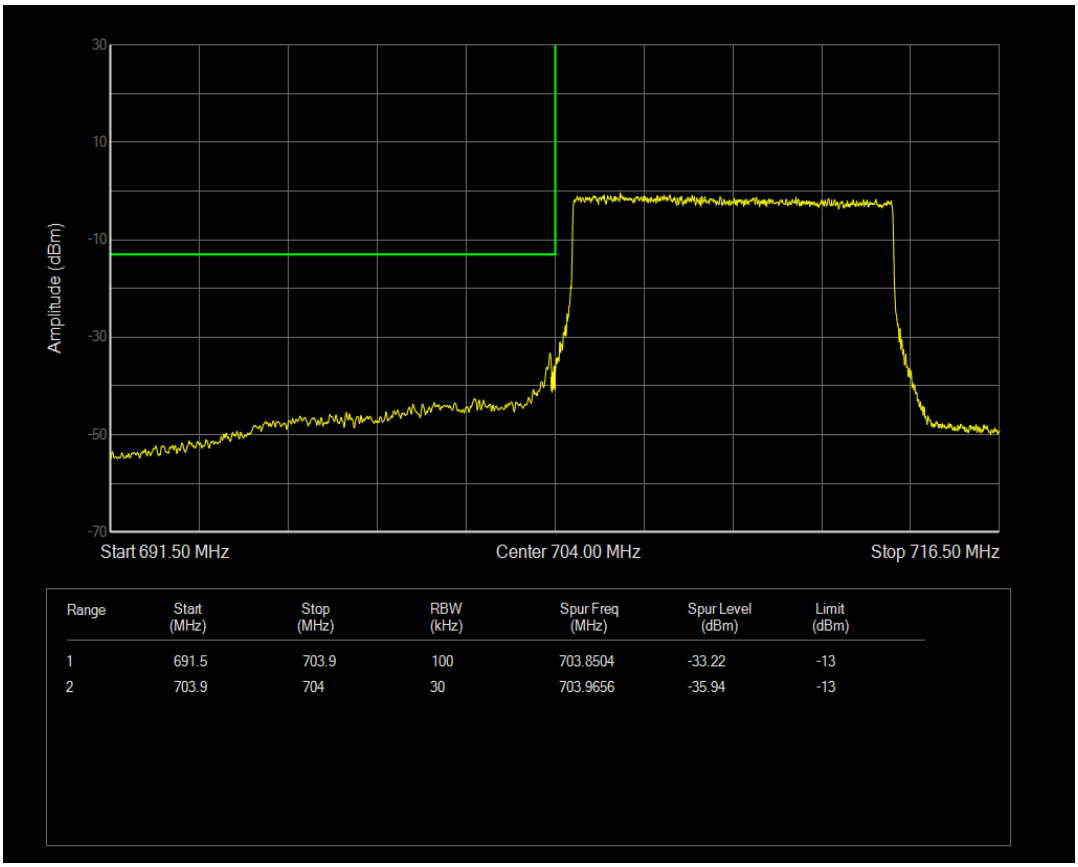

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	691.5	703.9	100	703.8504	-33.22	-13
2	703.9	704	30	703.9656	-35.94	-13

Band17 QPSK BW=10MHz Channel=23780 RB Size=1 Position=#Max

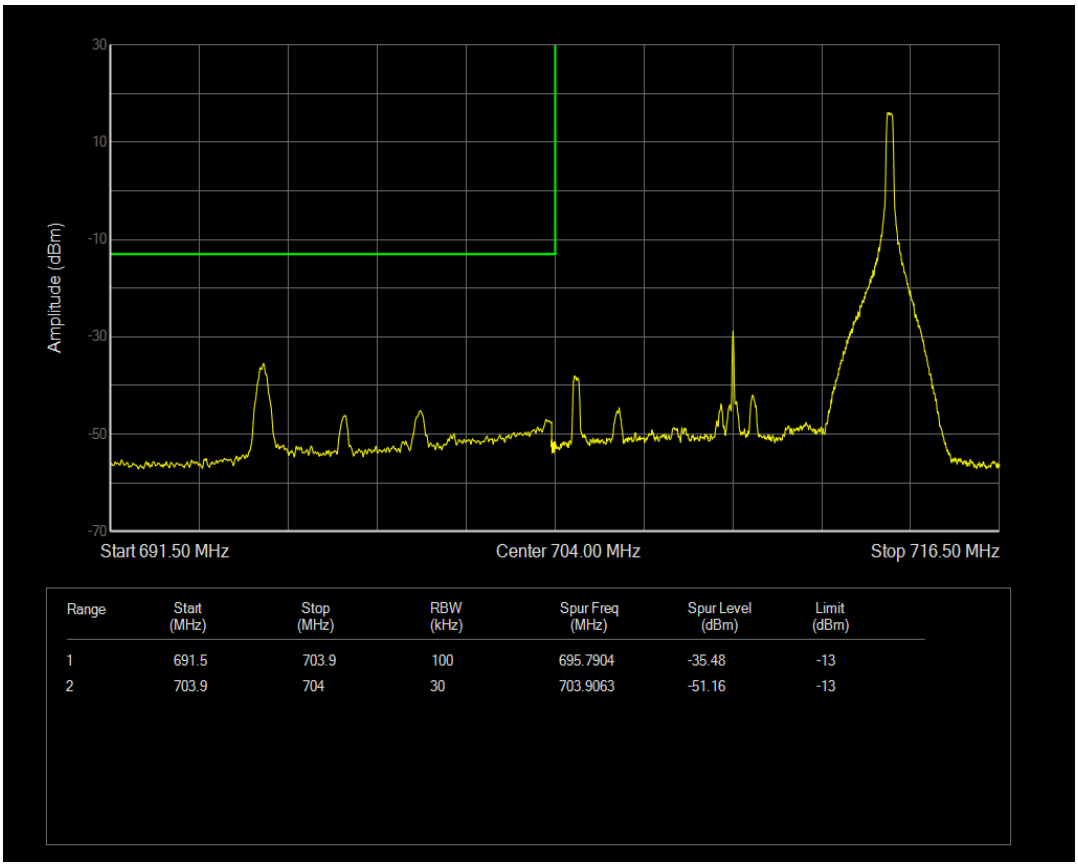

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	691.5	703.9	100	695.7904	-35.48	-13
2	703.9	704	30	703.9063	-51.16	-13

Band17 QAM16 BW=10MHz Channel=23780 RB Size=1 Position=#0

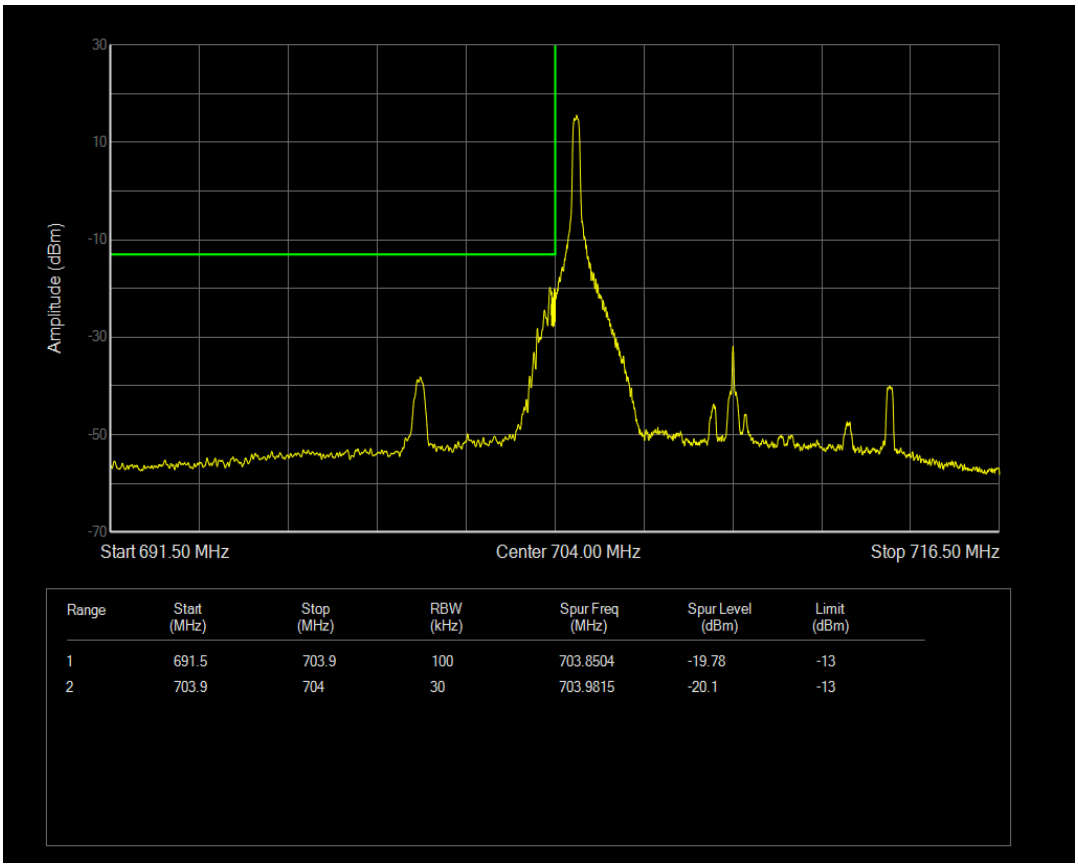

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	691.5	703.9	100	703.8504	-19.78	-13
2	703.9	704	30	703.9815	-20.1	-13

Band17 QAM16 BW=10MHz Channel=23780 RB Size=1 Position=#Max

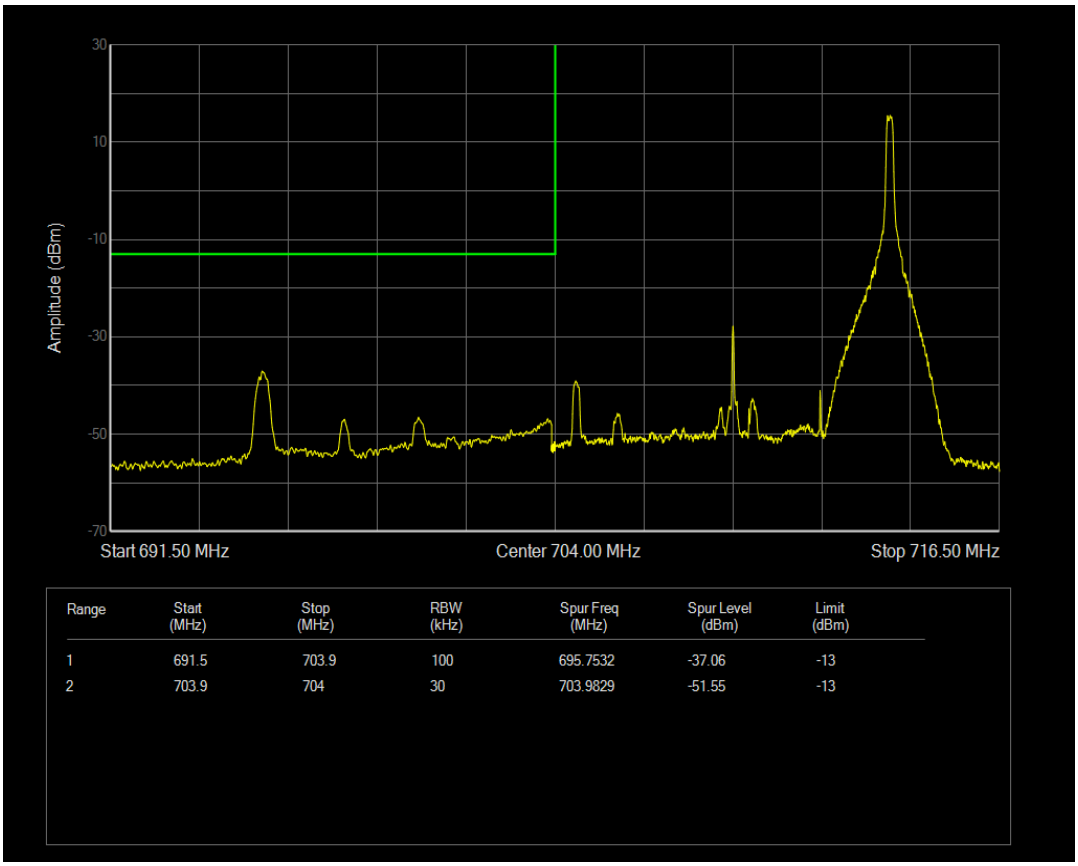

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	691.5	703.9	100	695.7532	-37.06	-13
2	703.9	704	30	703.9829	-51.55	-13

Band17 QAM16 BW=10MHz Channel=23780 RB Size=50 Position=#0

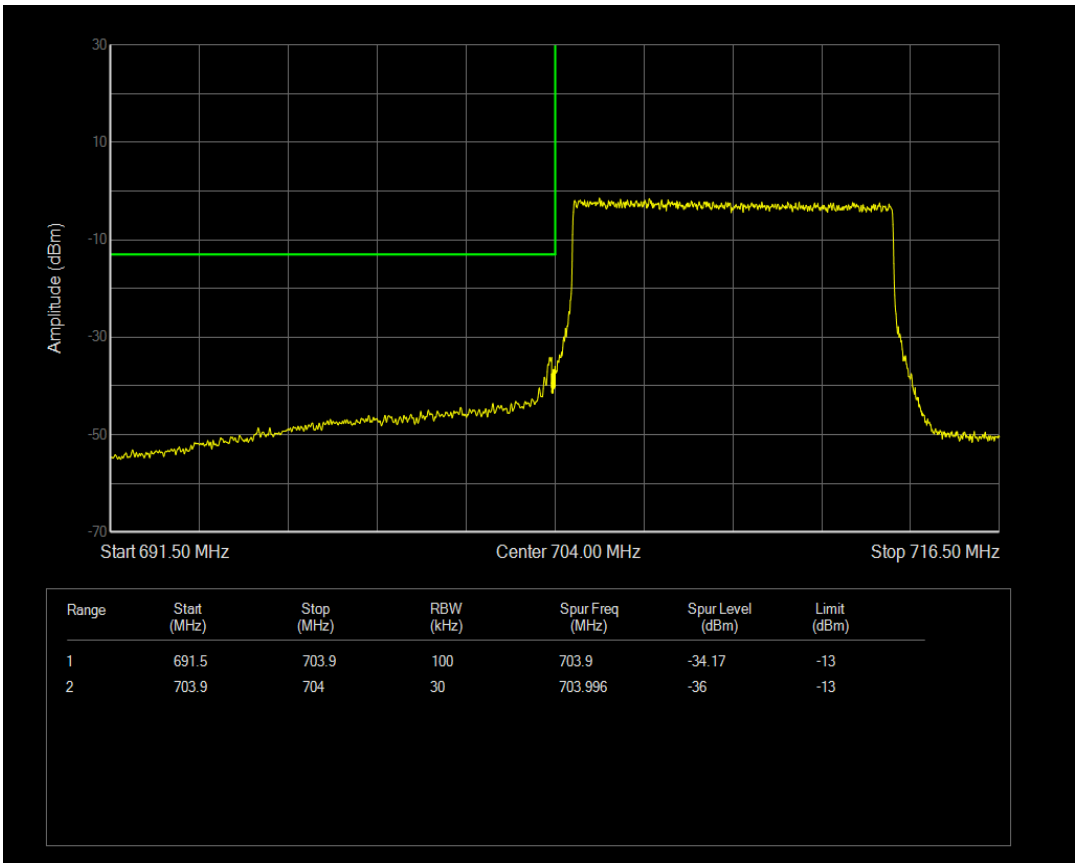

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	691.5	703.9	100	703.9	-34.17	-13
2	703.9	704	30	703.996	-36	-13

Band17 QPSK BW=10MHz Channel=23800 RB Size=1 Position=#Max

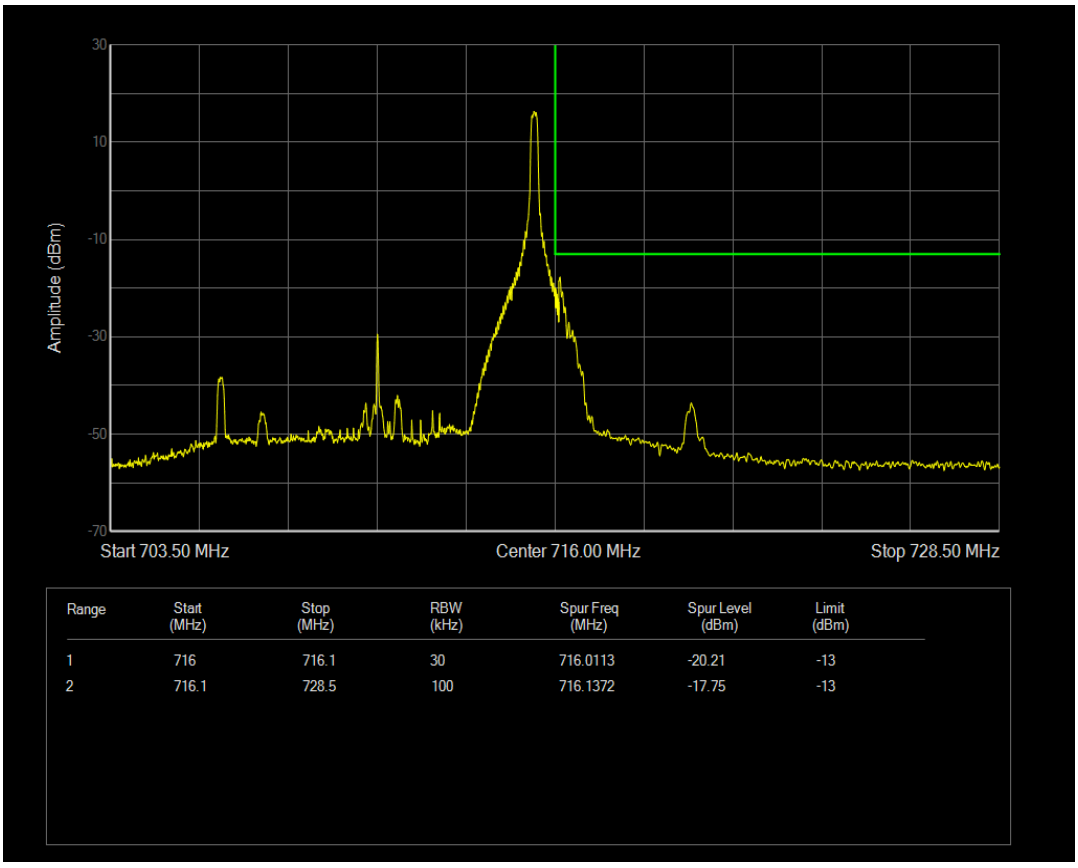

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0113	-20.21	-13
2	716.1	728.5	100	716.1372	-17.75	-13

Band17 QPSK BW=10MHz Channel=23800 RB Size=1 Position=#0

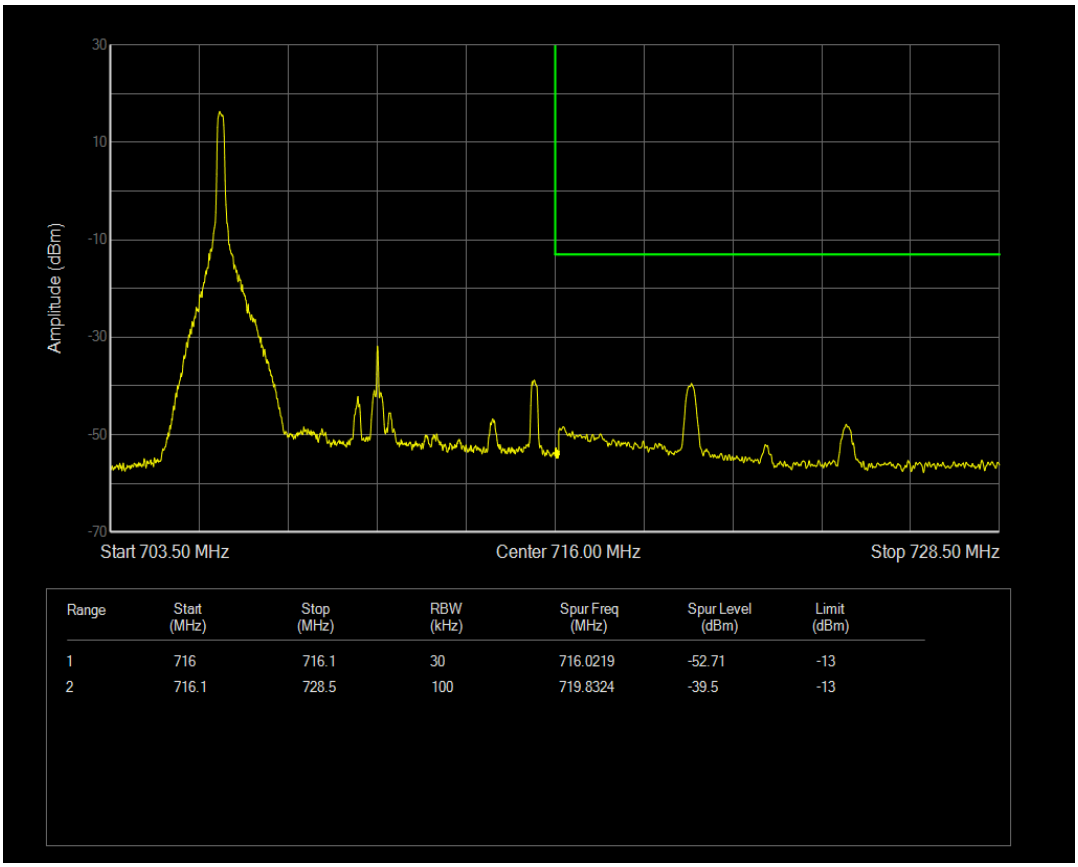

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0219	-52.71	-13
2	716.1	728.5	100	719.8324	-39.5	-13

Band17 QPSK BW=10MHz Channel=23800 RB Size=50 Position=#0

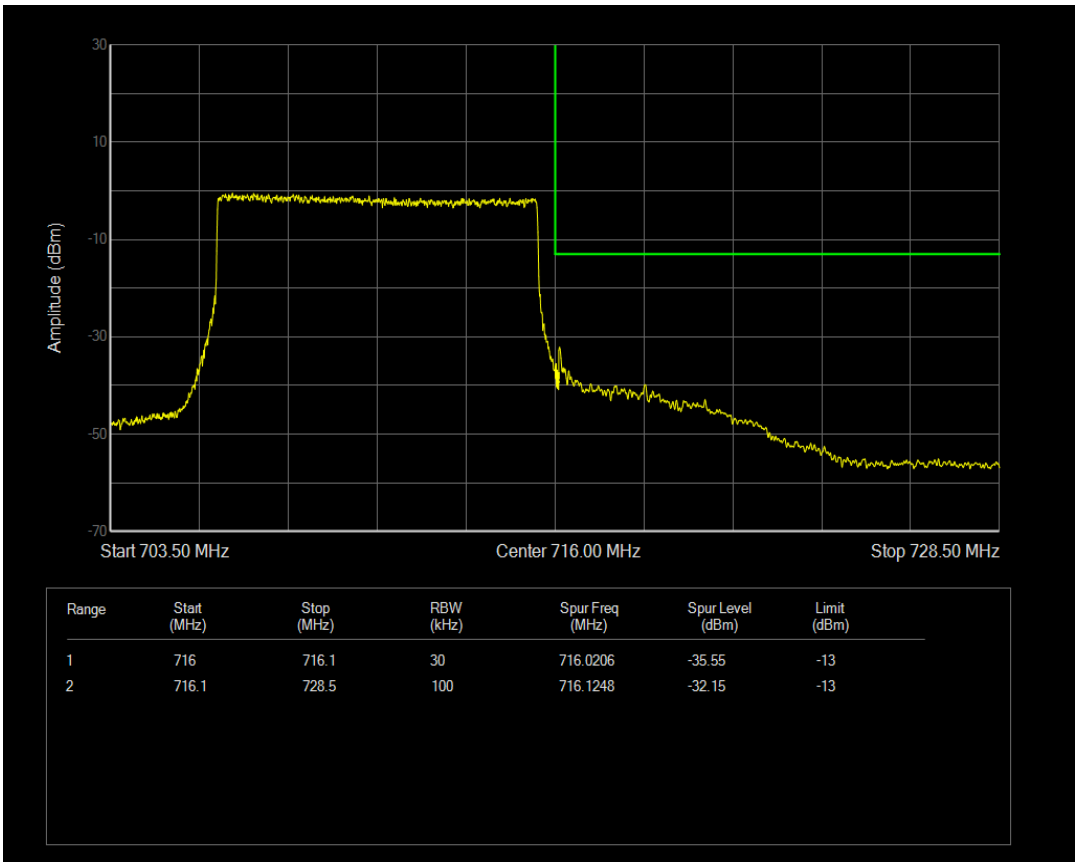

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0206	-35.55	-13
2	716.1	728.5	100	716.1248	-32.15	-13

Band17 QAM16 BW=10MHz Channel=23800 RB Size=1 Position=#0

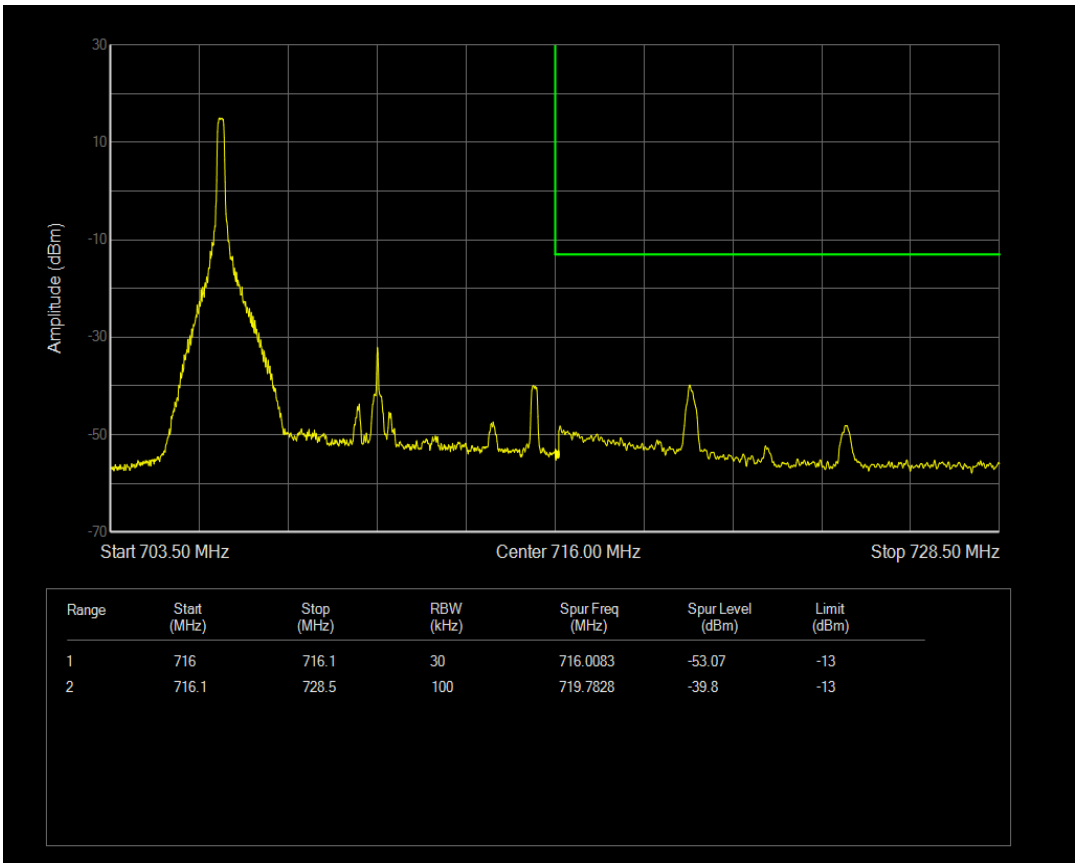

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0083	-53.07	-13
2	716.1	728.5	100	719.7828	-39.8	-13

Band17 QAM16 BW=10MHz Channel=23800 RB Size=1 Position=#Max

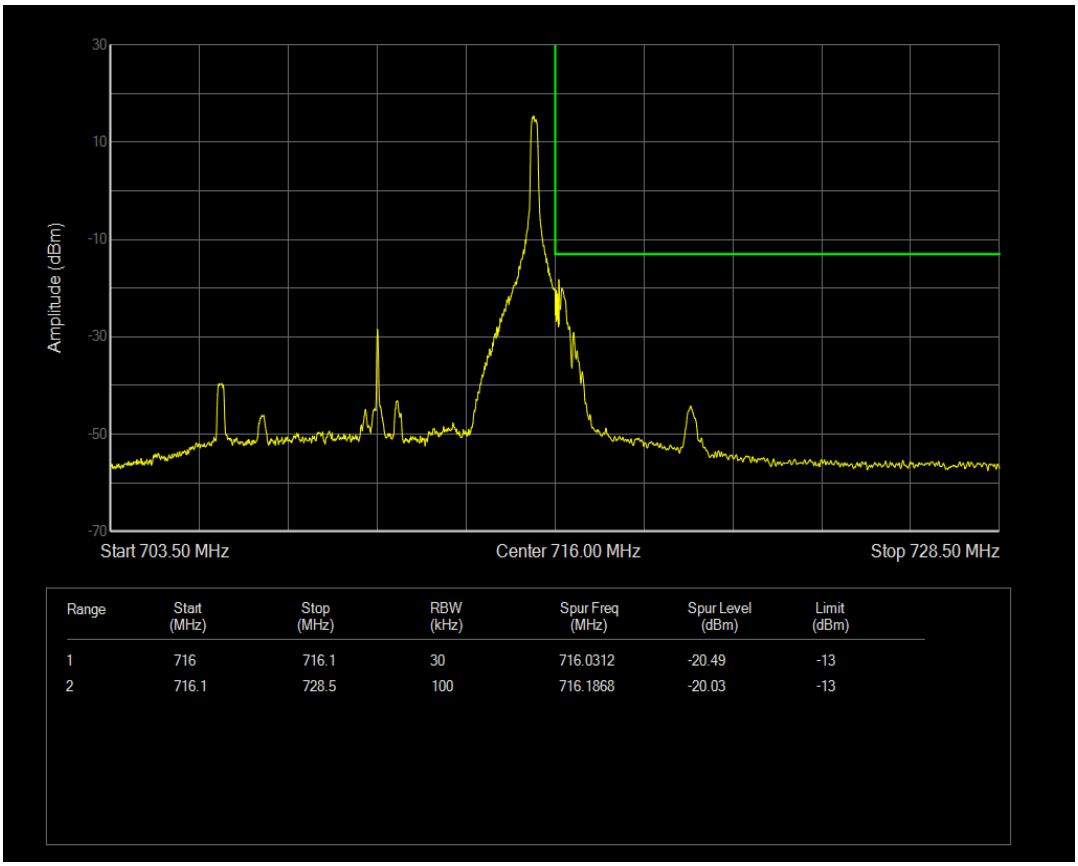

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	716	716.1	30	716.0312	-20.49	-13
2	716.1	728.5	100	716.1868	-20.03	-13

Band17 QAM16 BW=10MHz Channel=23800 RB Size=50 Position=#0

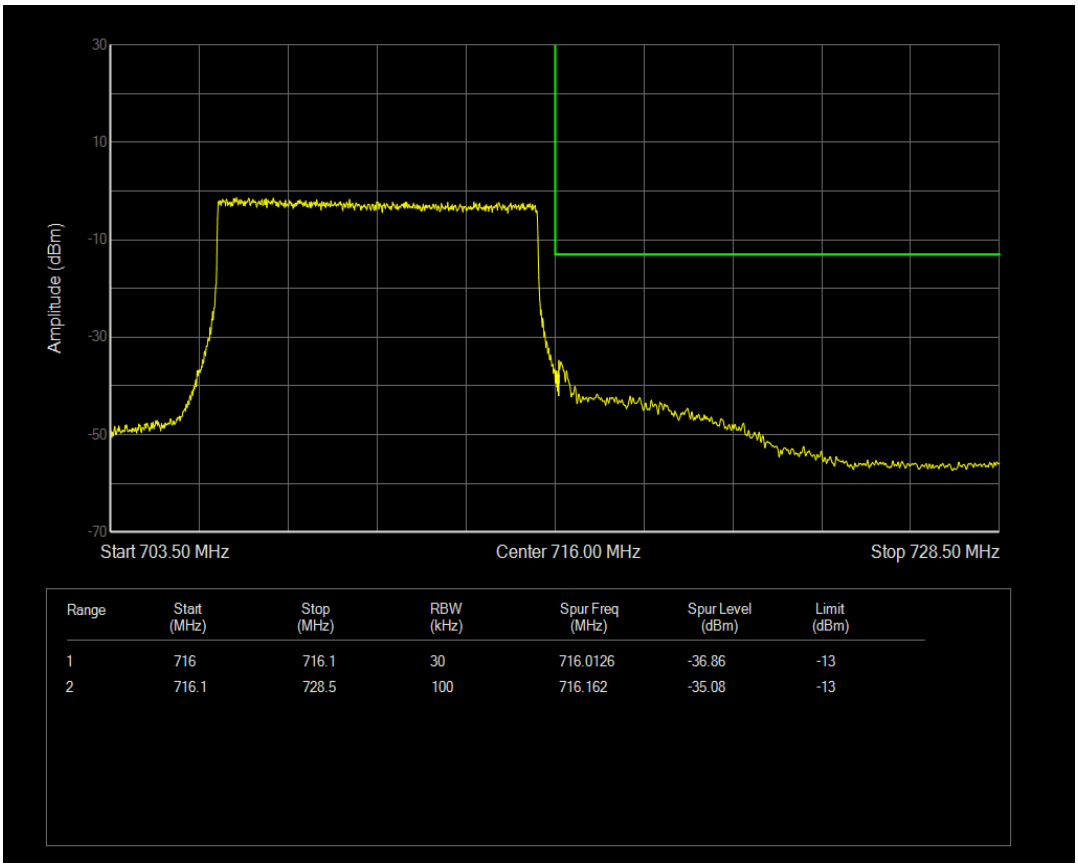

Band2 QPSK BW=1.4MHz Channel=18607 RB Size=1 Position=#0

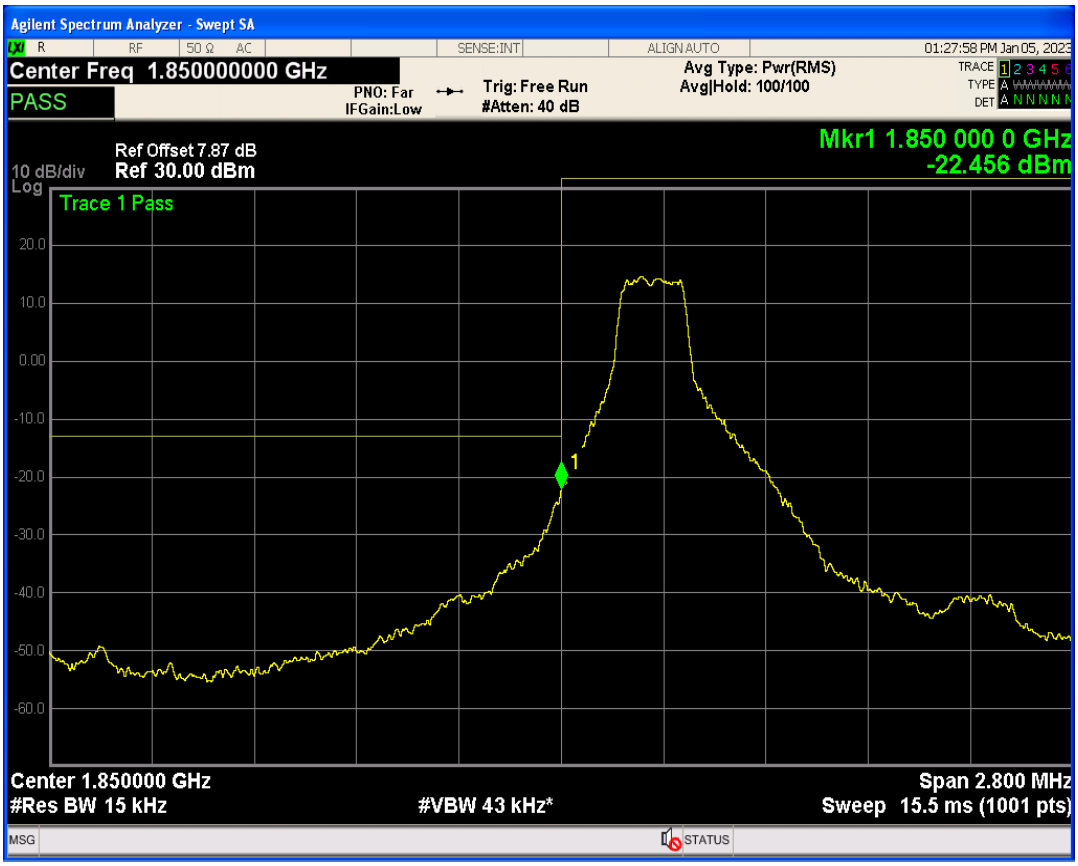

Band2 QPSK BW=1.4MHz Channel=18607 RB Size=1 Position=#Max

Band2 QPSK BW=1.4MHz Channel=18607 RB Size=6 Position=#0

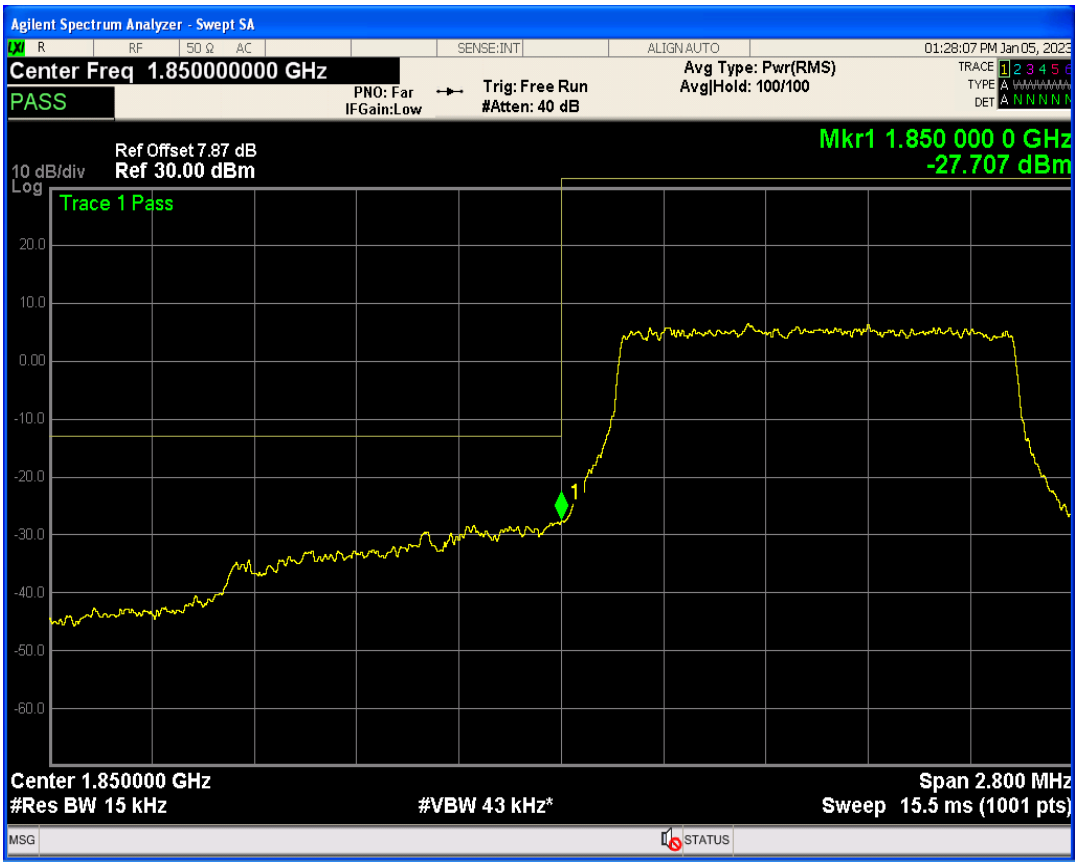

Band2 QAM16 BW=1.4MHz Channel=18607 RB Size=1 Position=#0

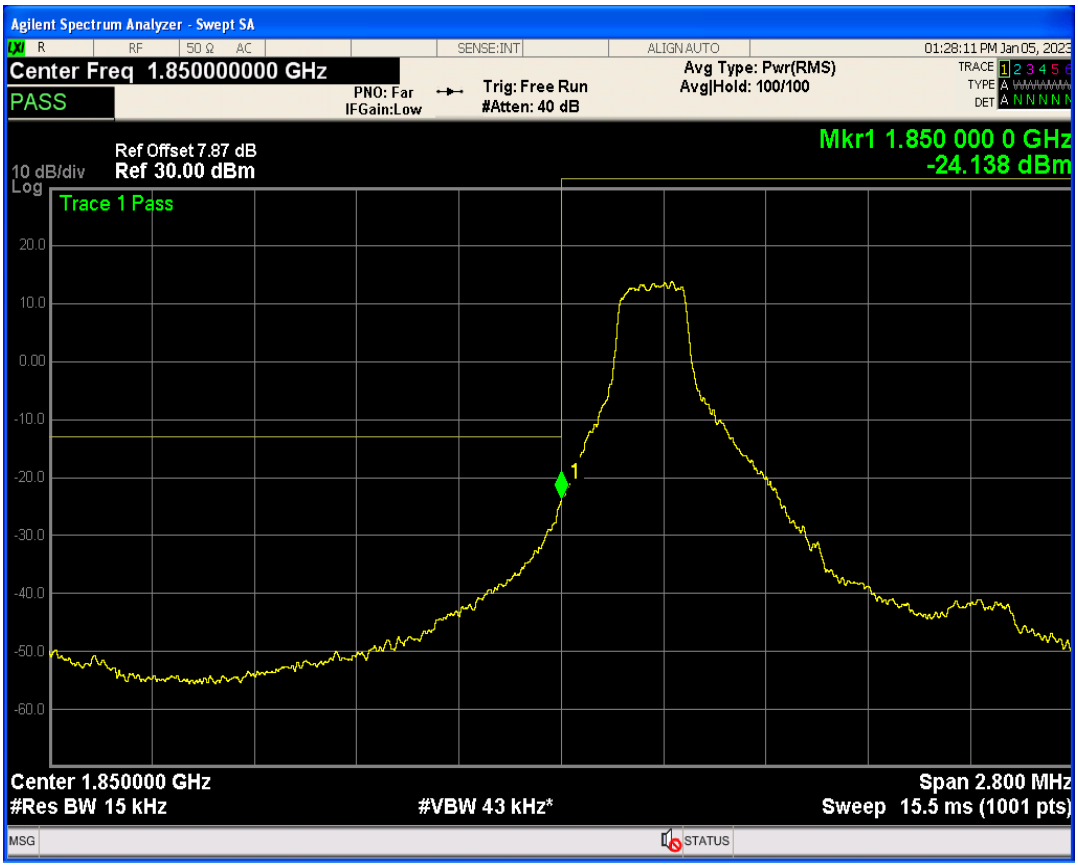

Band2 QAM16 BW=1.4MHz Channel=18607 RB Size=6 Position=#0

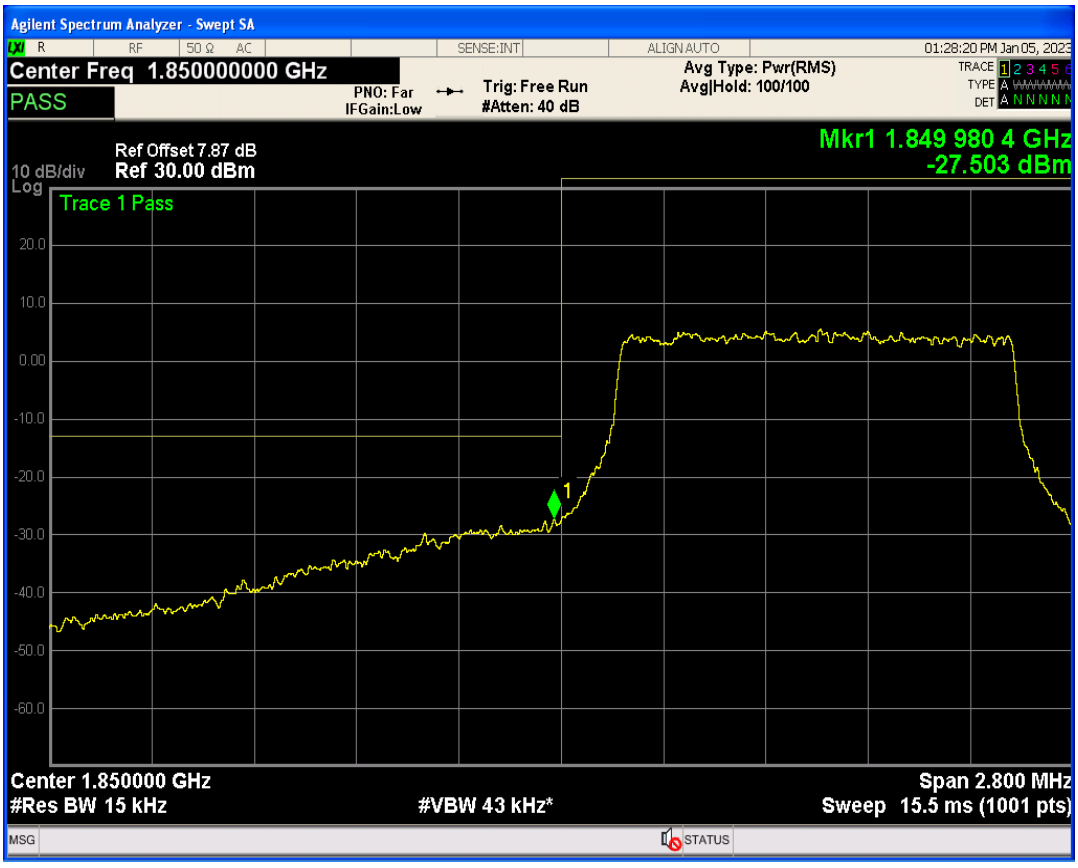

Band2 QAM16 BW=1.4MHz Channel=18607 RB Size=1 Position=#Max

Band2 QPSK BW=1.4MHz Channel=19193 RB Size=1 Position=#0

Band2 QPSK BW=1.4MHz Channel=19193 RB Size=1 Position=#Max

Band2 QPSK BW=1.4MHz Channel=19193 RB Size=6 Position=#0

Band2 QAM16 BW=1.4MHz Channel=19193 RB Size=1 Position=#0

Band2 QAM16 BW=1.4MHz Channel=19193 RB Size=6 Position=#0

Band2 QAM16 BW=1.4MHz Channel=19193 RB Size=1 Position=#Max

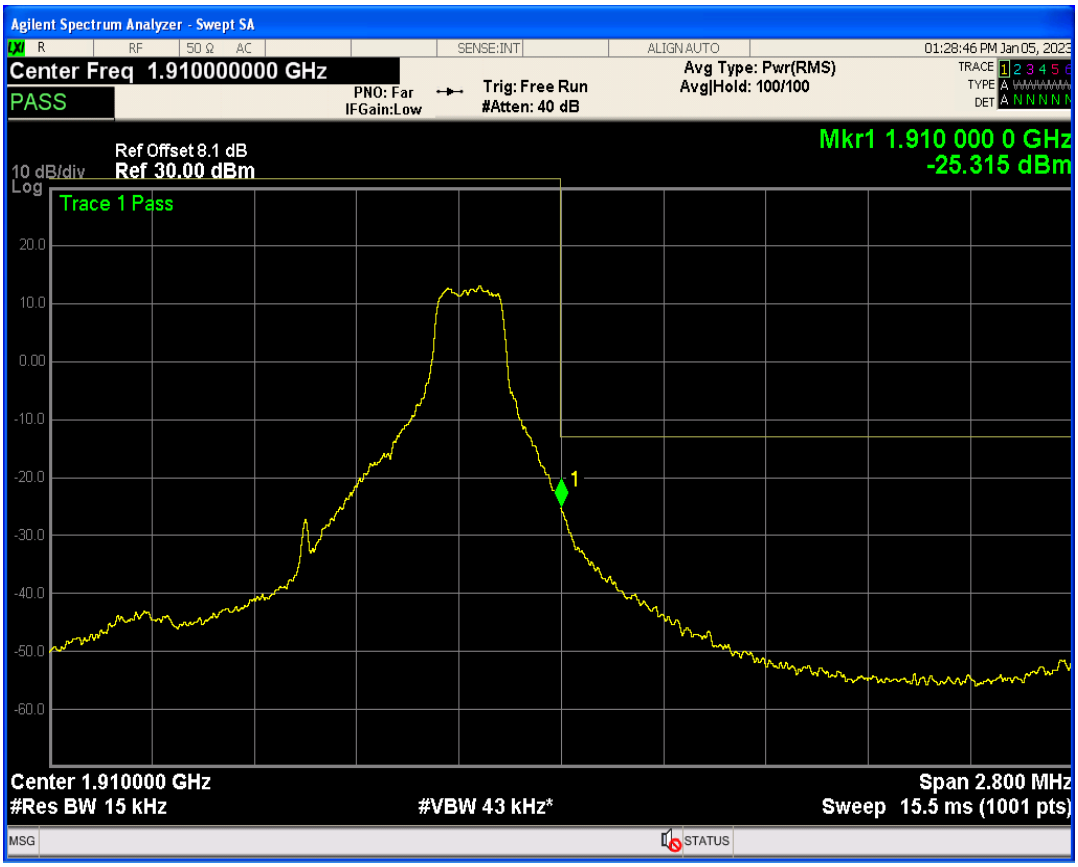

Band2 QPSK BW=3MHz Channel=18615 RB Size=1 Position=#0

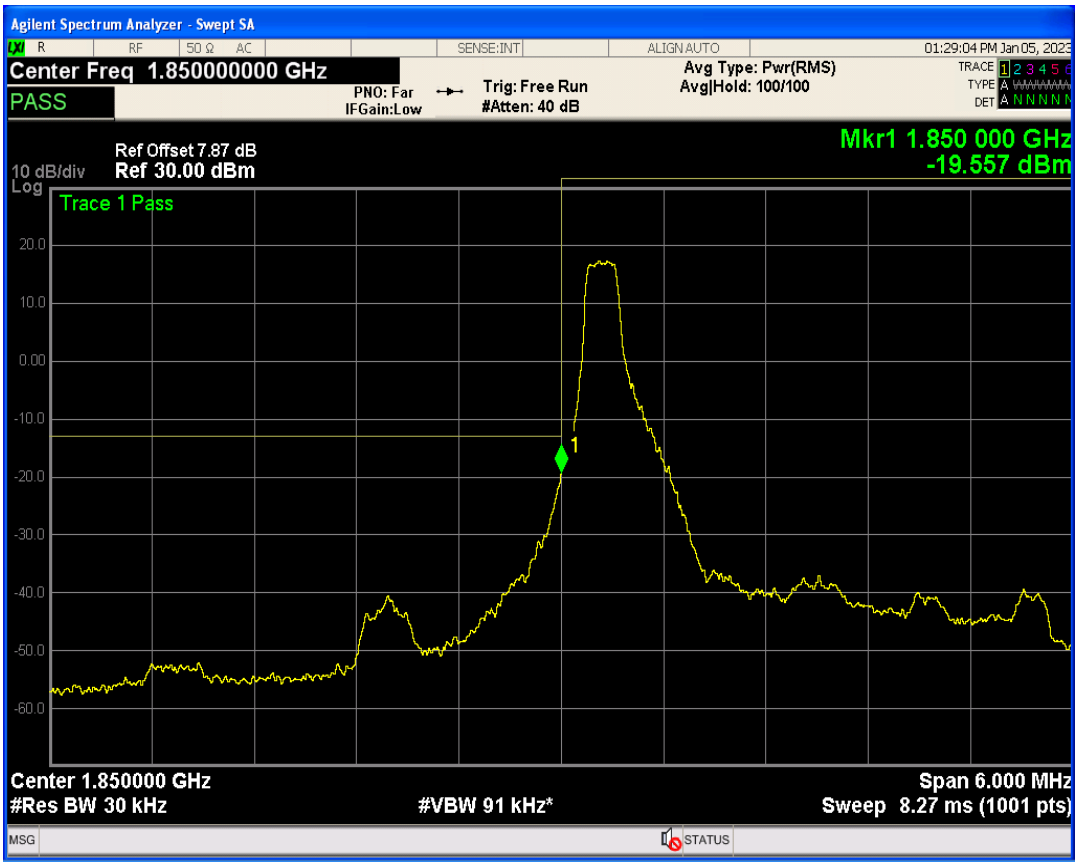

Band2 QPSK BW=3MHz Channel=18615 RB Size=15 Position=#0

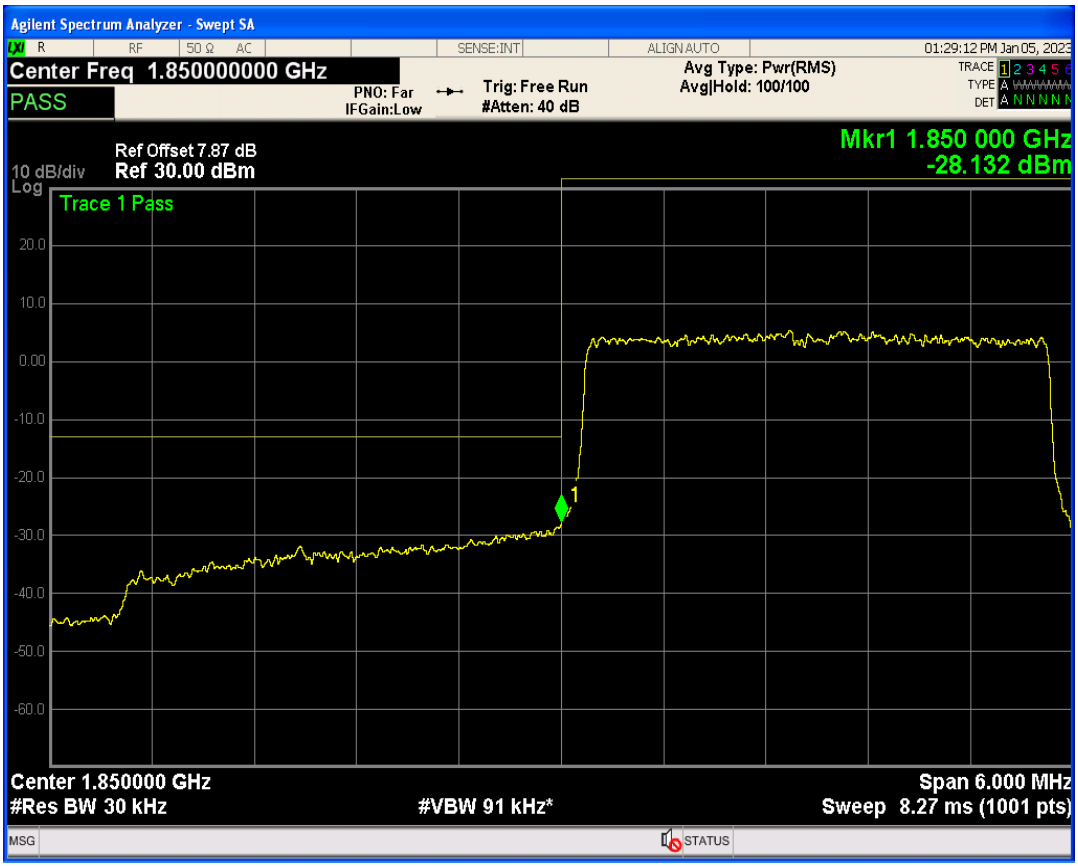

Band2 QPSK BW=3MHz Channel=18615 RB Size=1 Position=#Max

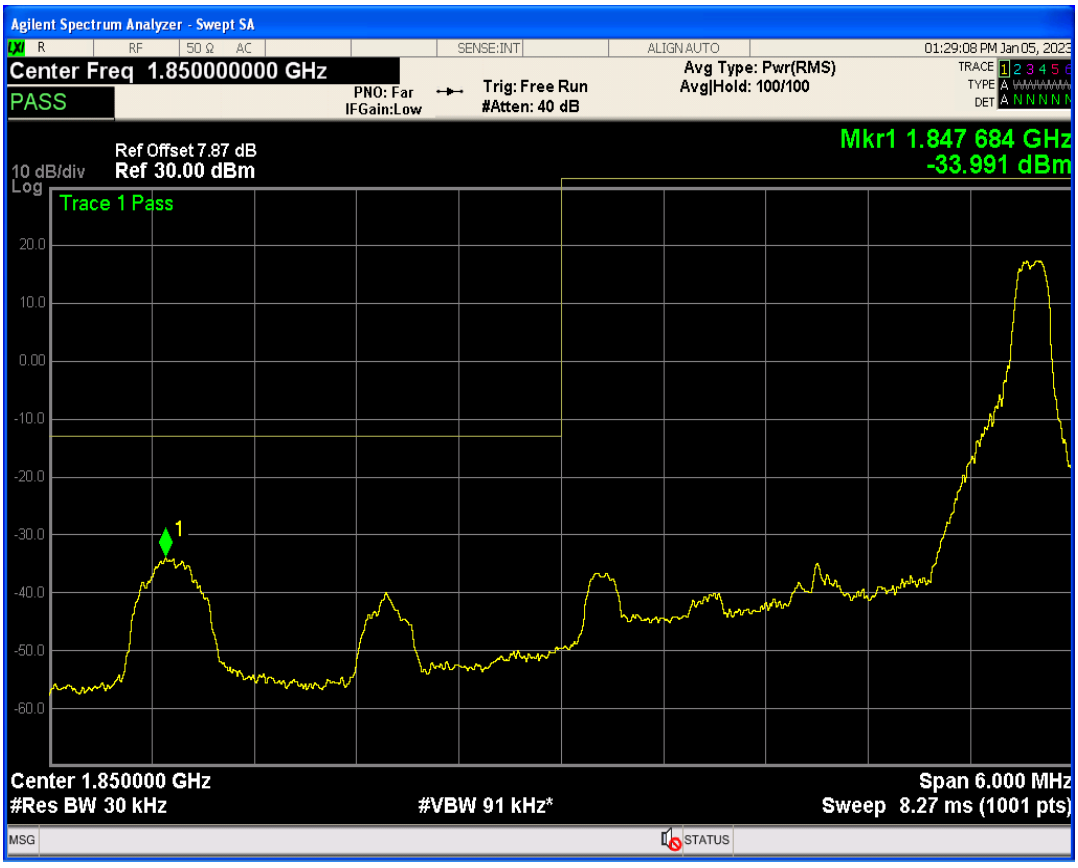

Band2 QAM16 BW=3MHz Channel=18615 RB Size=1 Position=#0

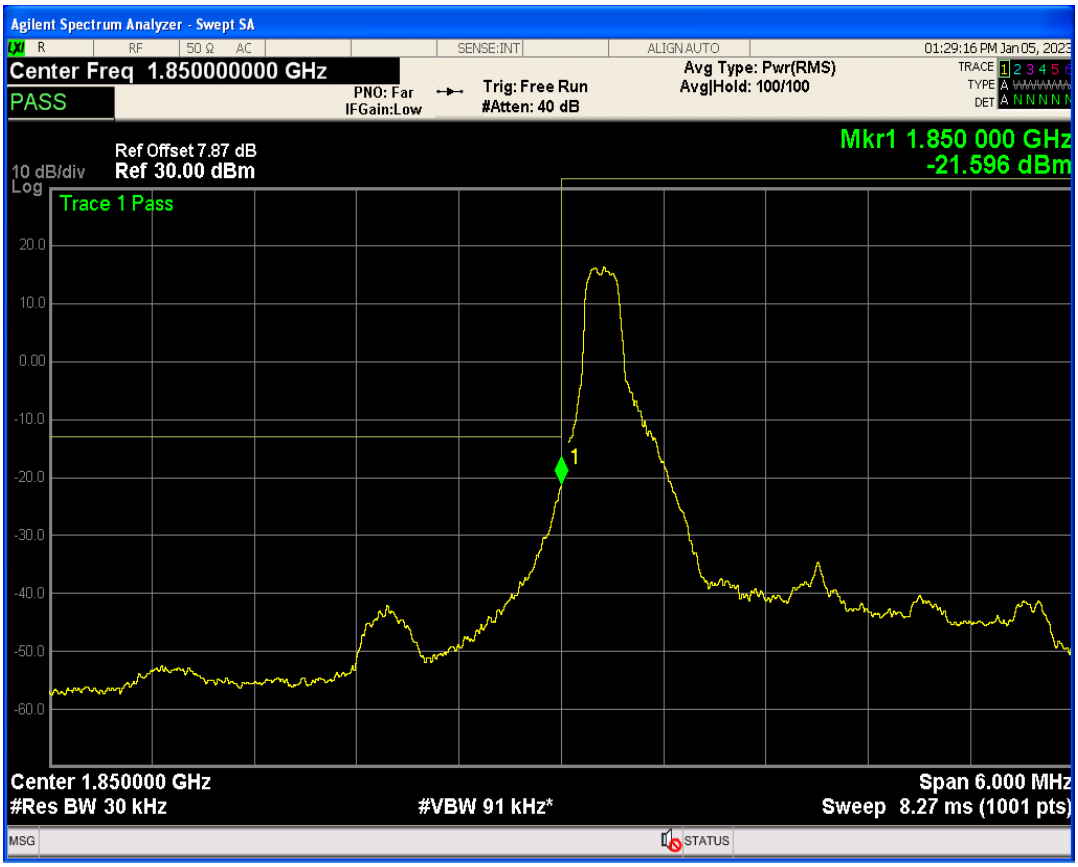

Band2 QAM16 BW=3MHz Channel=18615 RB Size=15 Position=#0

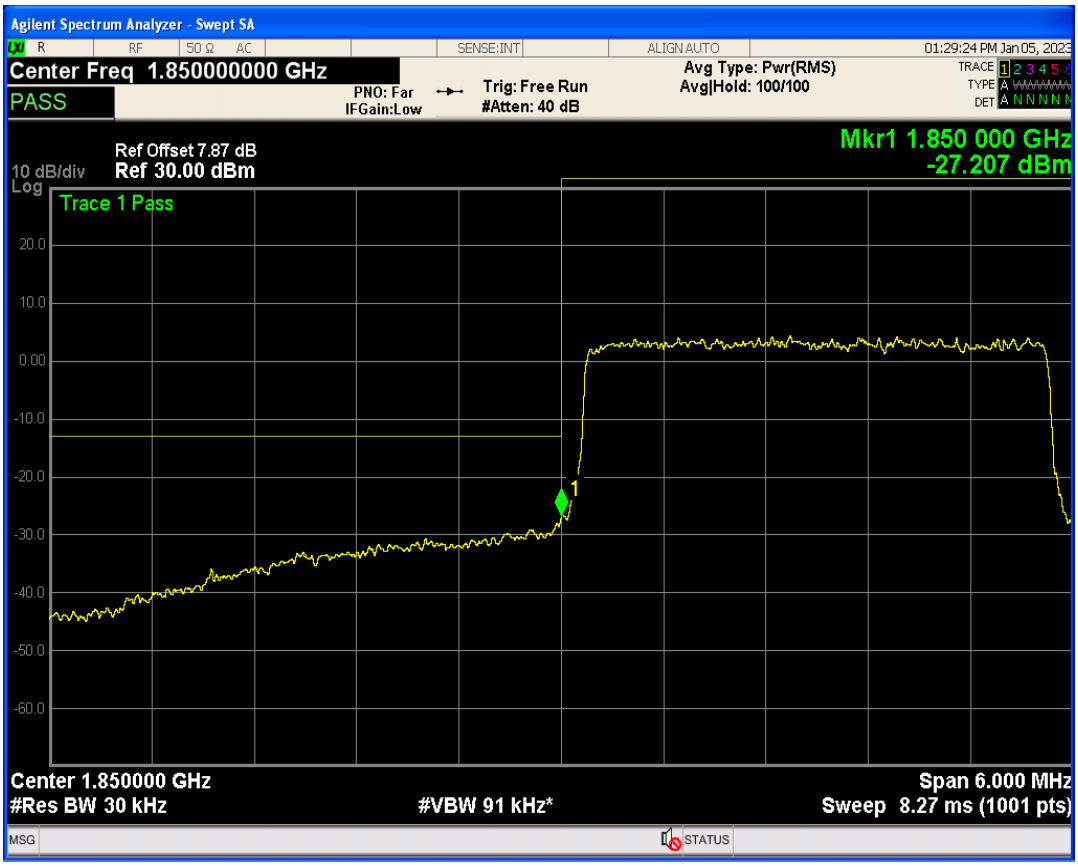

Band2 QAM16 BW=3MHz Channel=18615 RB Size=1 Position=#Max

Band2 QPSK BW=3MHz Channel=19185 RB Size=1 Position=#0

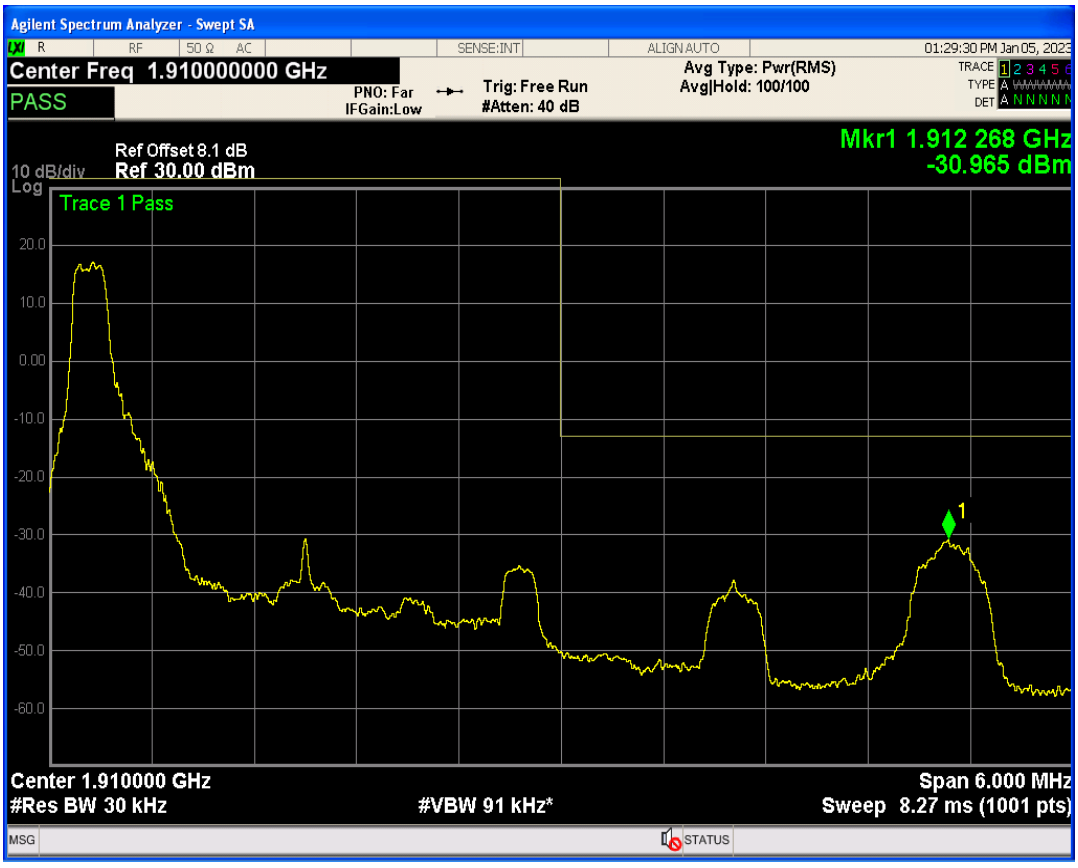

Band2 QPSK BW=3MHz Channel=19185 RB Size=1 Position=#Max

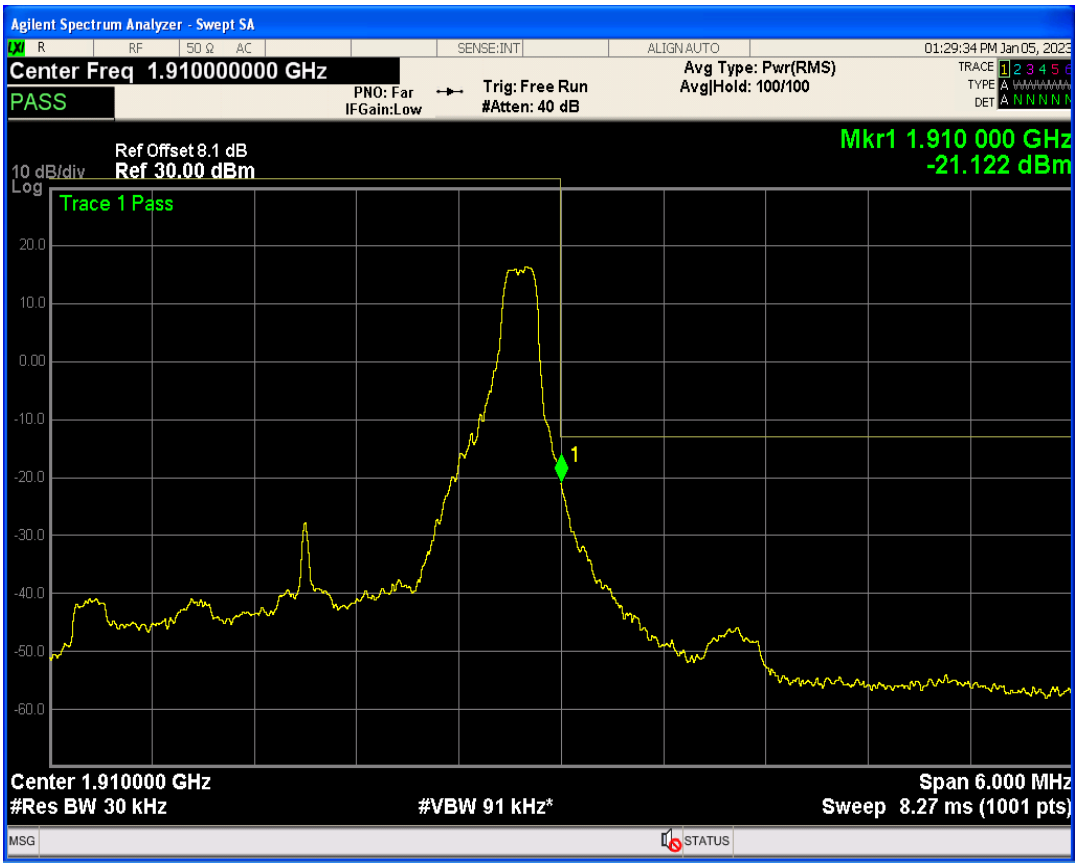

Band2 QPSK BW=3MHz Channel=19185 RB Size=15 Position=#0

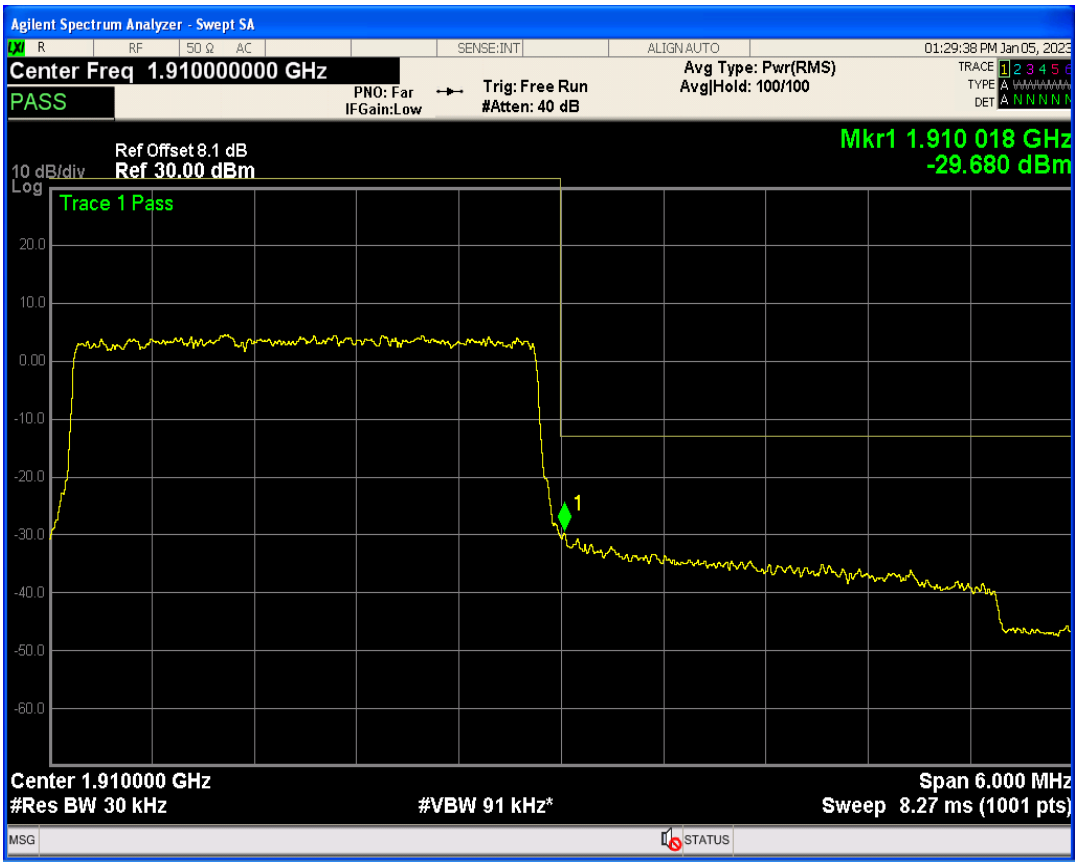

Band2 QAM16 BW=3MHz Channel=19185 RB Size=1 Position=#0

Band2 QAM16 BW=3MHz Channel=19185 RB Size=1 Position=#Max

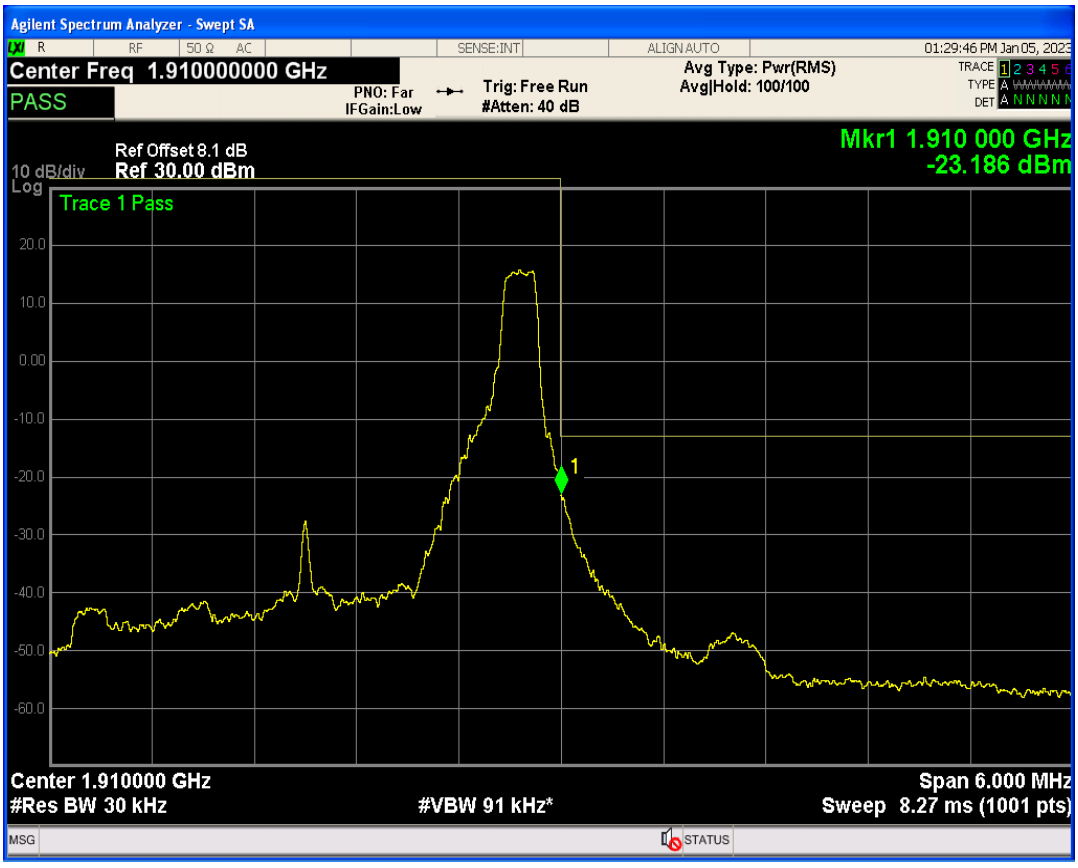

Band2 QAM16 BW=3MHz Channel=19185 RB Size=15 Position=#0

Band2 QPSK BW=5MHz Channel=18625 RB Size=1 Position=#Max

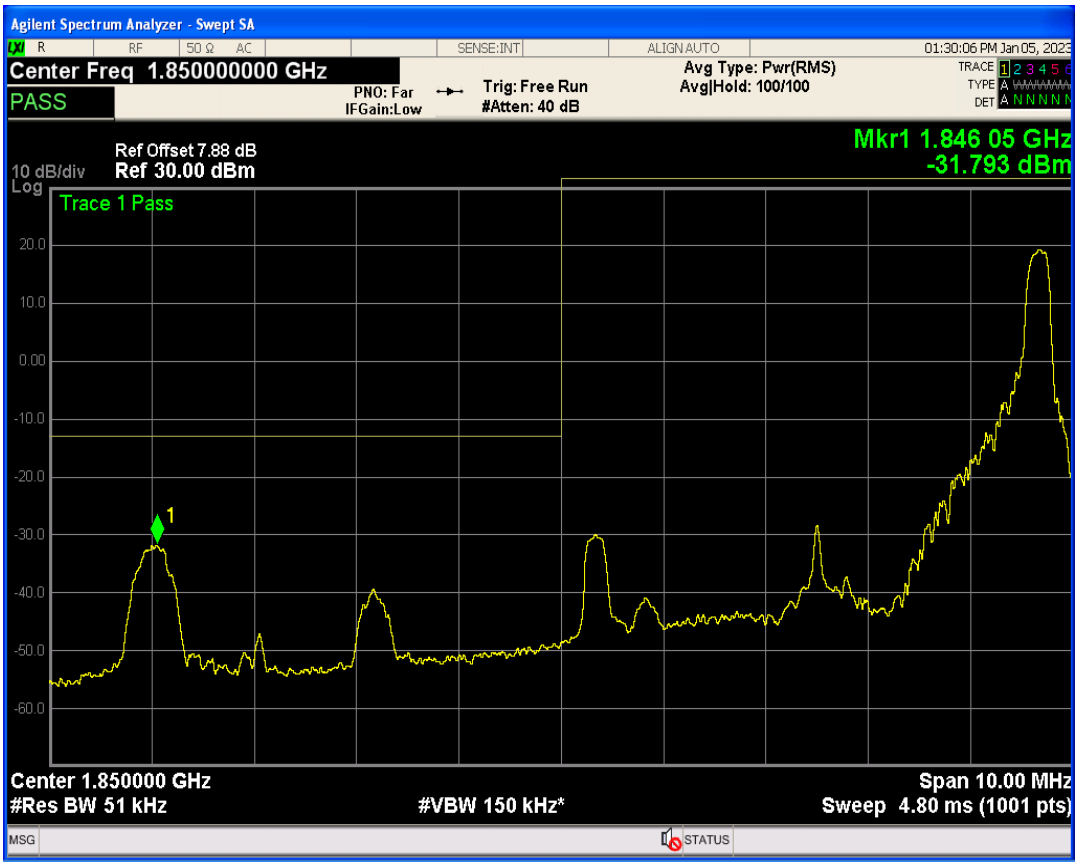

Band2 QPSK BW=5MHz Channel=18625 RB Size=1 Position=#0

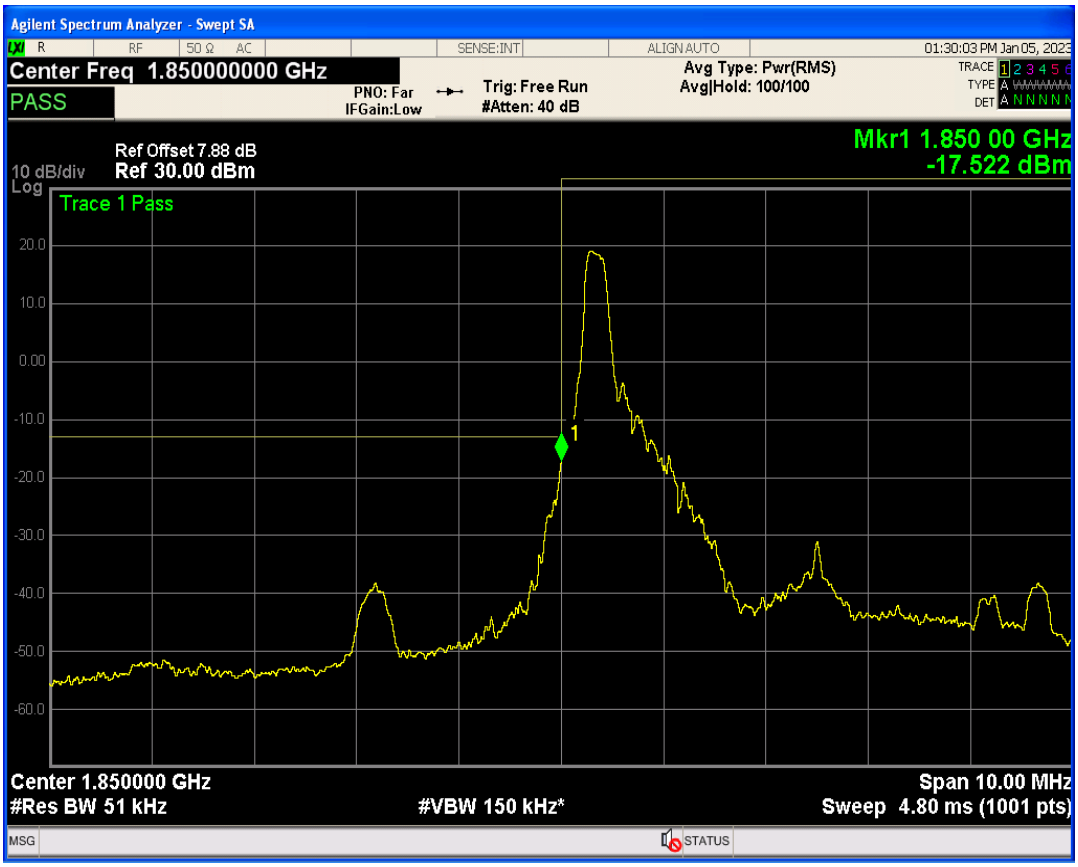

Band2 QPSK BW=5MHz Channel=18625 RB Size=25 Position=#0

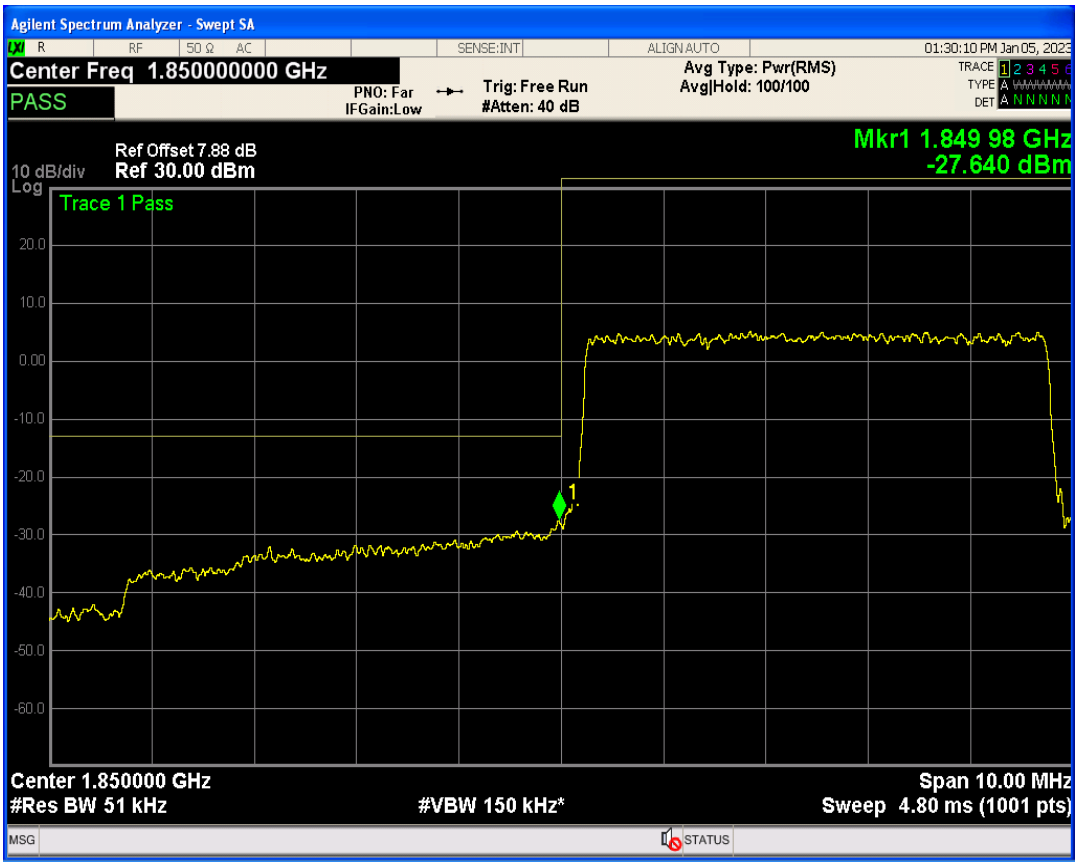

Band2 QAM16 BW=5MHz Channel=18625 RB Size=1 Position=#0

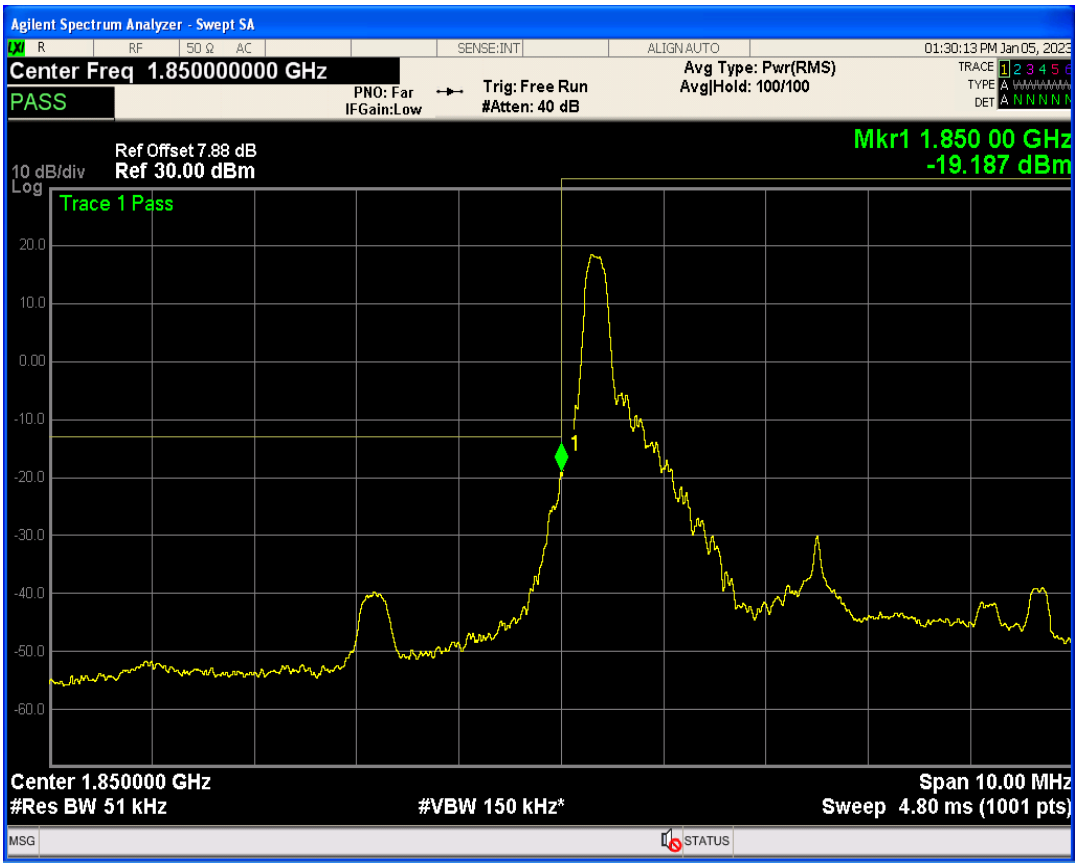

Band2 QAM16 BW=5MHz Channel=18625 RB Size=1 Position=#Max

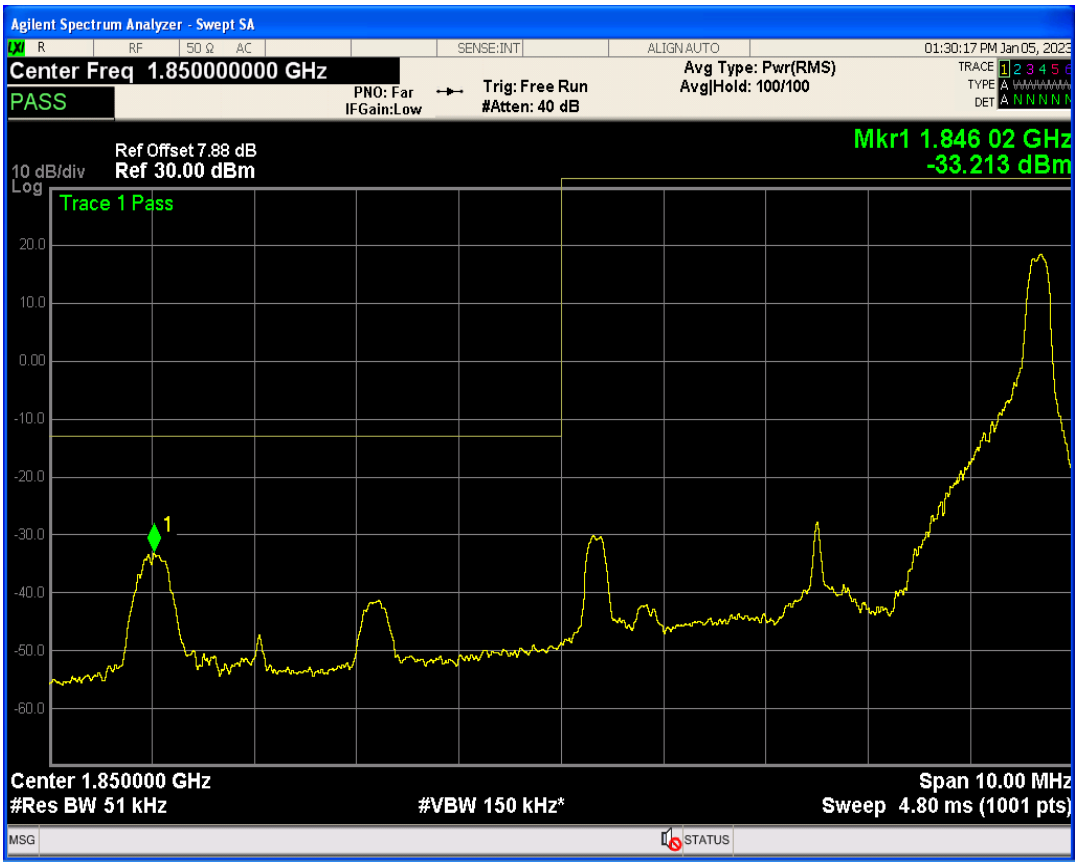

Band2 QPSK BW=5MHz Channel=19175 RB Size=1 Position=#0

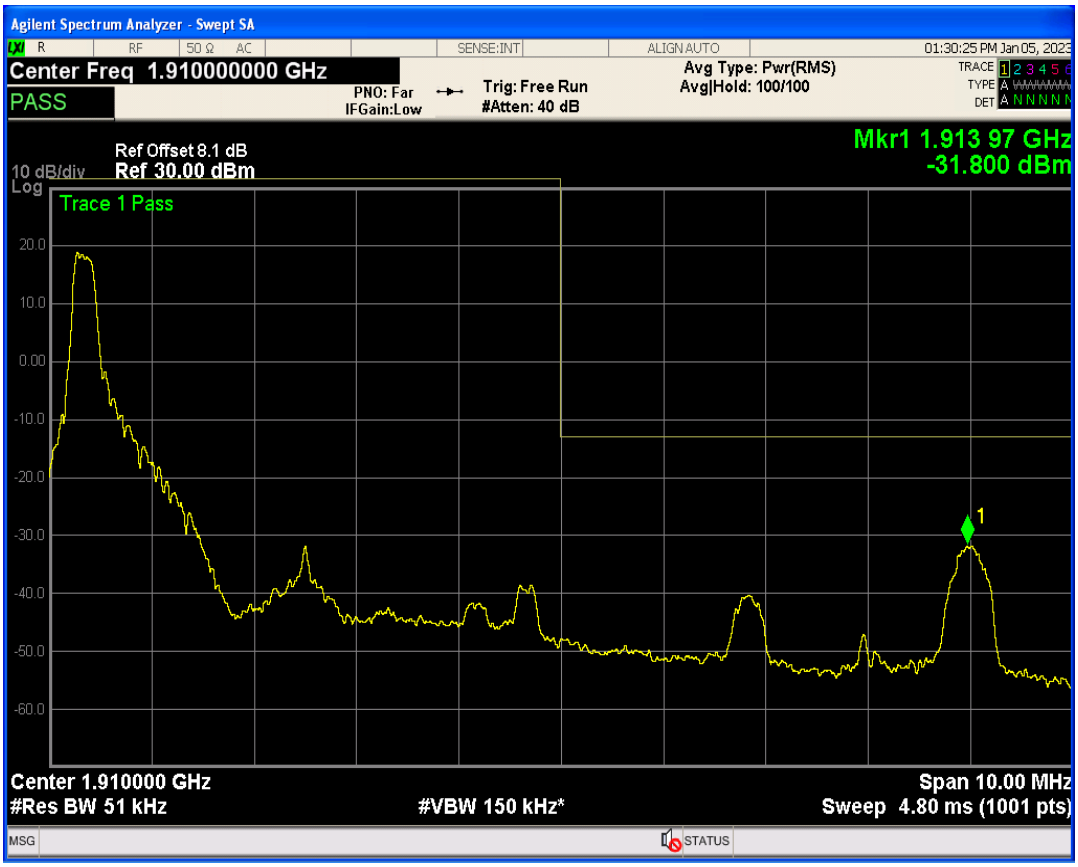

Band2 QAM16 BW=5MHz Channel=18625 RB Size=25 Position=#0

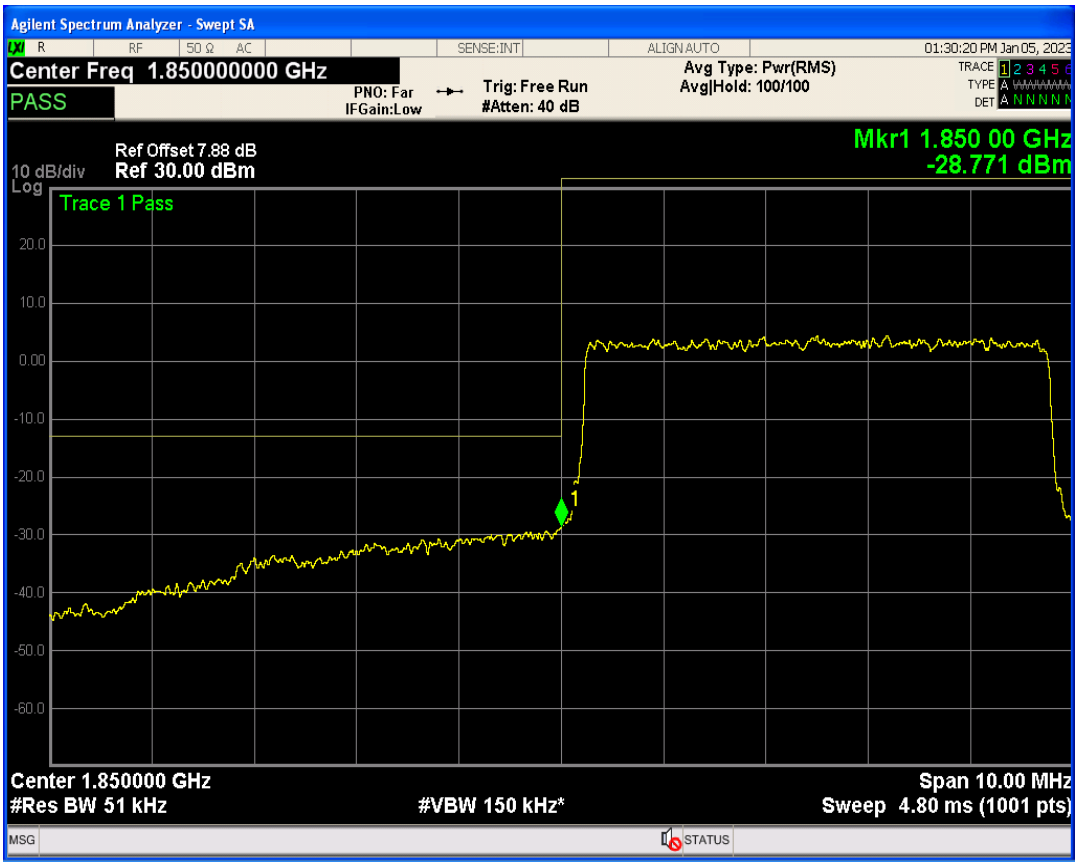

Band2 QPSK BW=5MHz Channel=19175 RB Size=1 Position=#Max

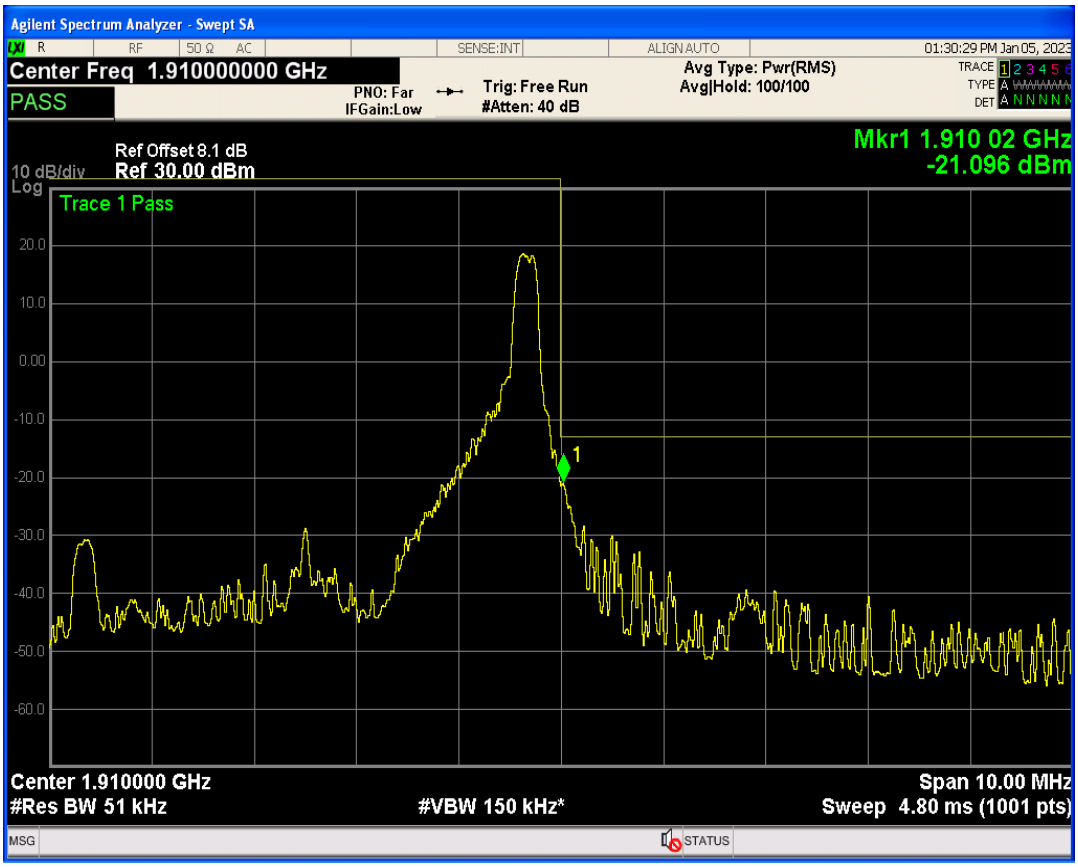

Band2 QPSK BW=5MHz Channel=19175 RB Size=25 Position=#0

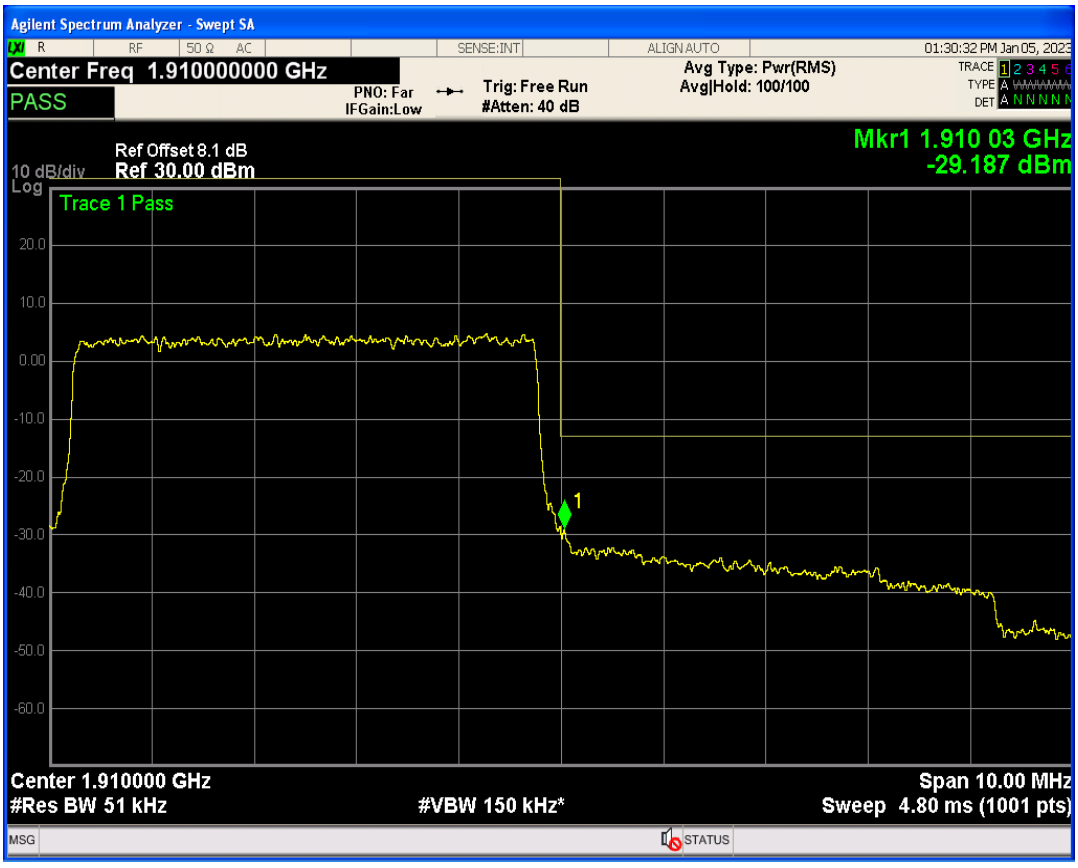

Band2 QAM16 BW=5MHz Channel=19175 RB Size=1 Position=#0

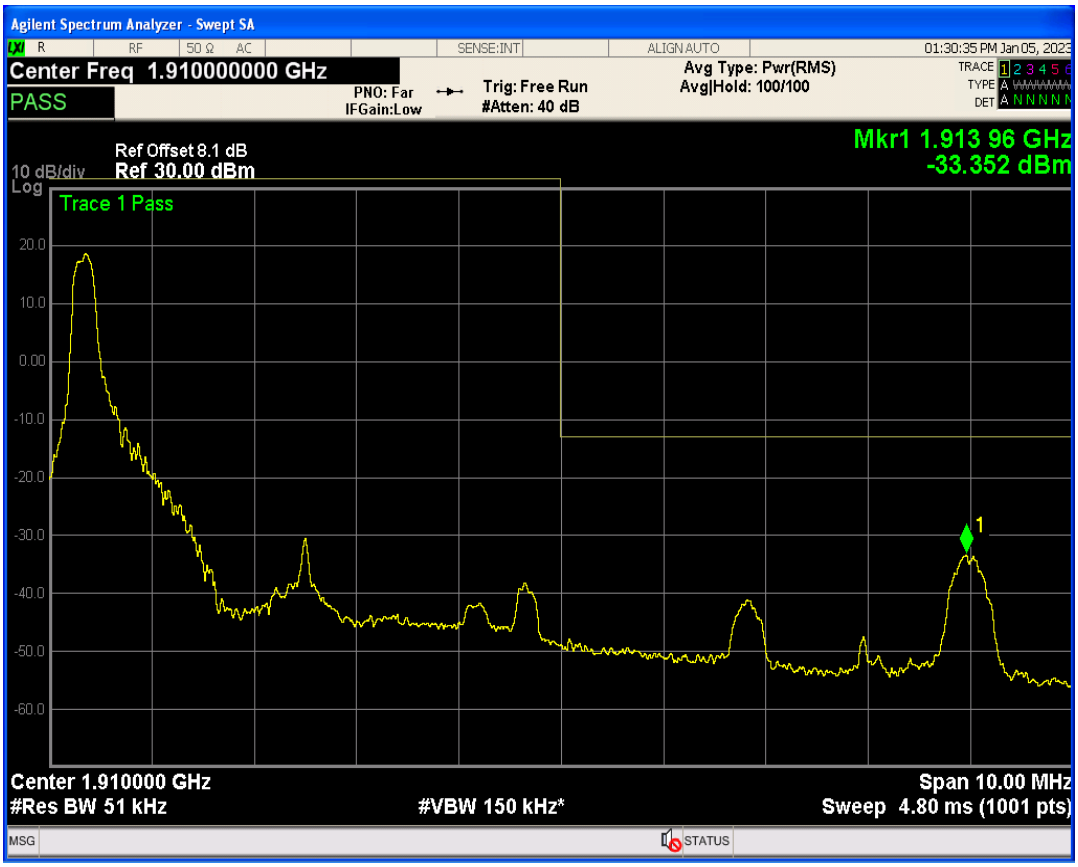

Band2 QAM16 BW=5MHz Channel=19175 RB Size=1 Position=#Max

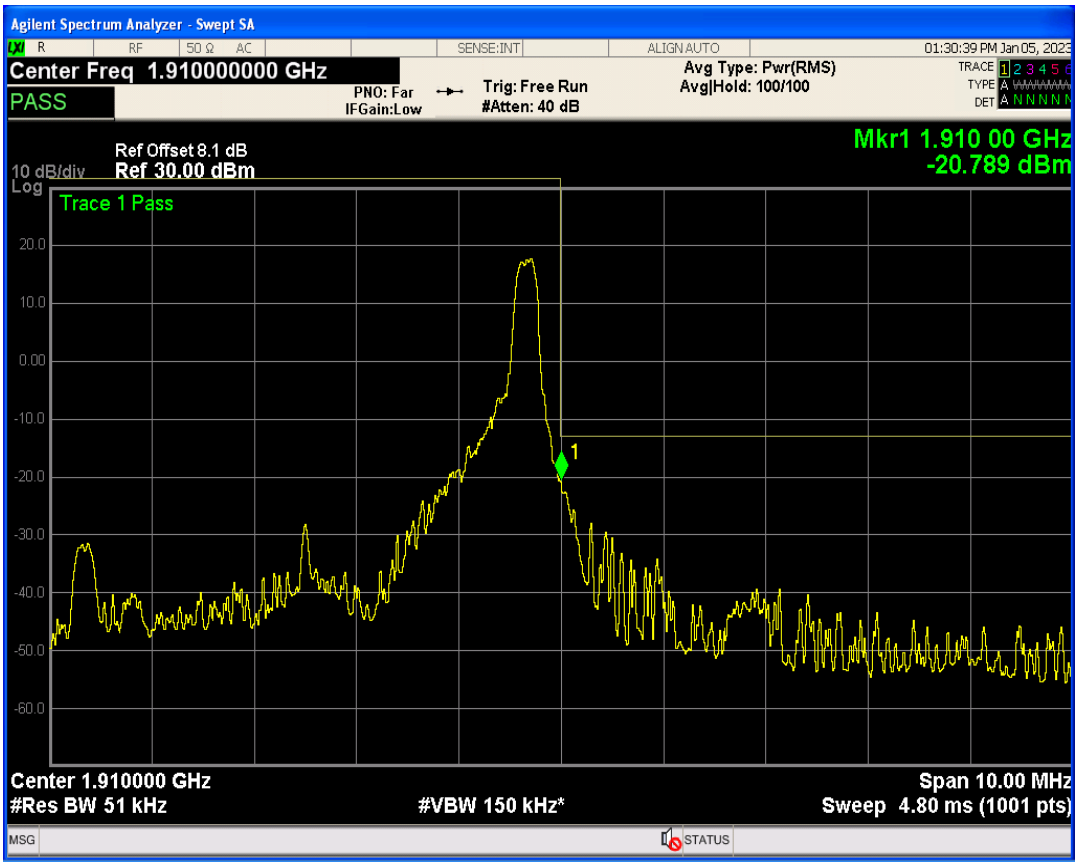

Band2 QPSK BW=10MHz Channel=18650 RB Size=1 Position=#0

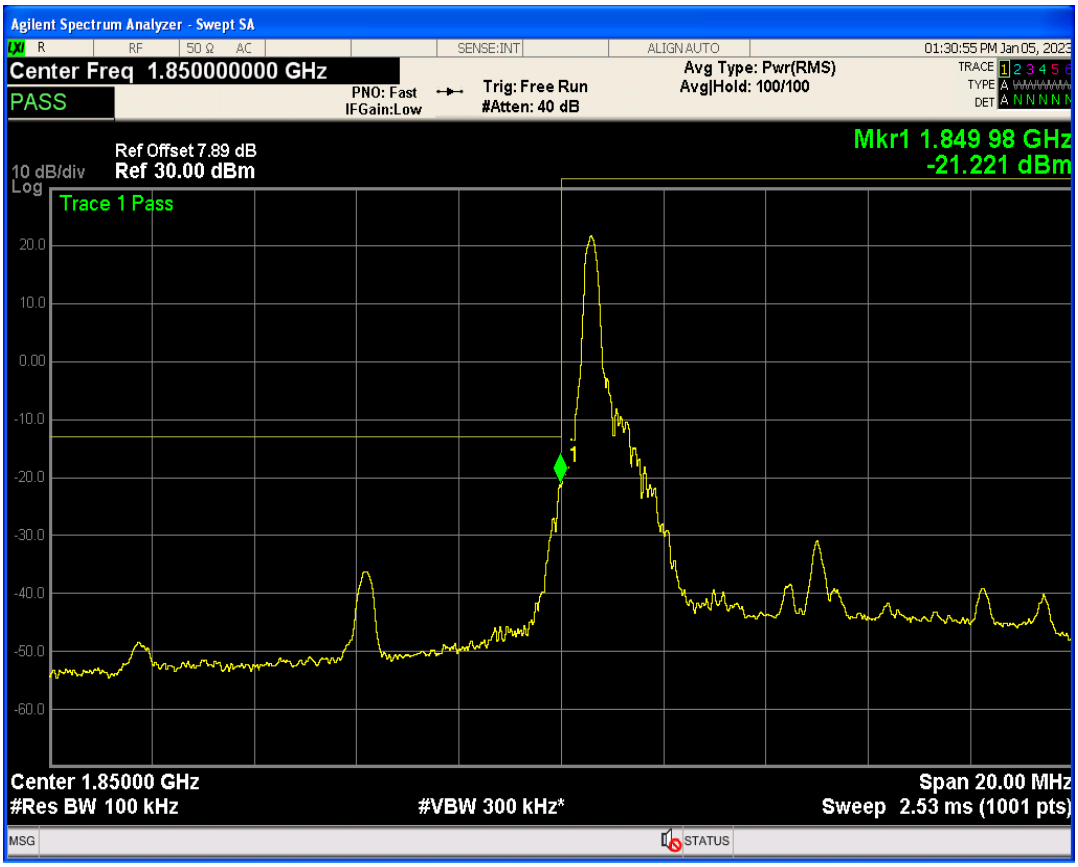

Band2 QAM16 BW=5MHz Channel=19175 RB Size=25 Position=#0

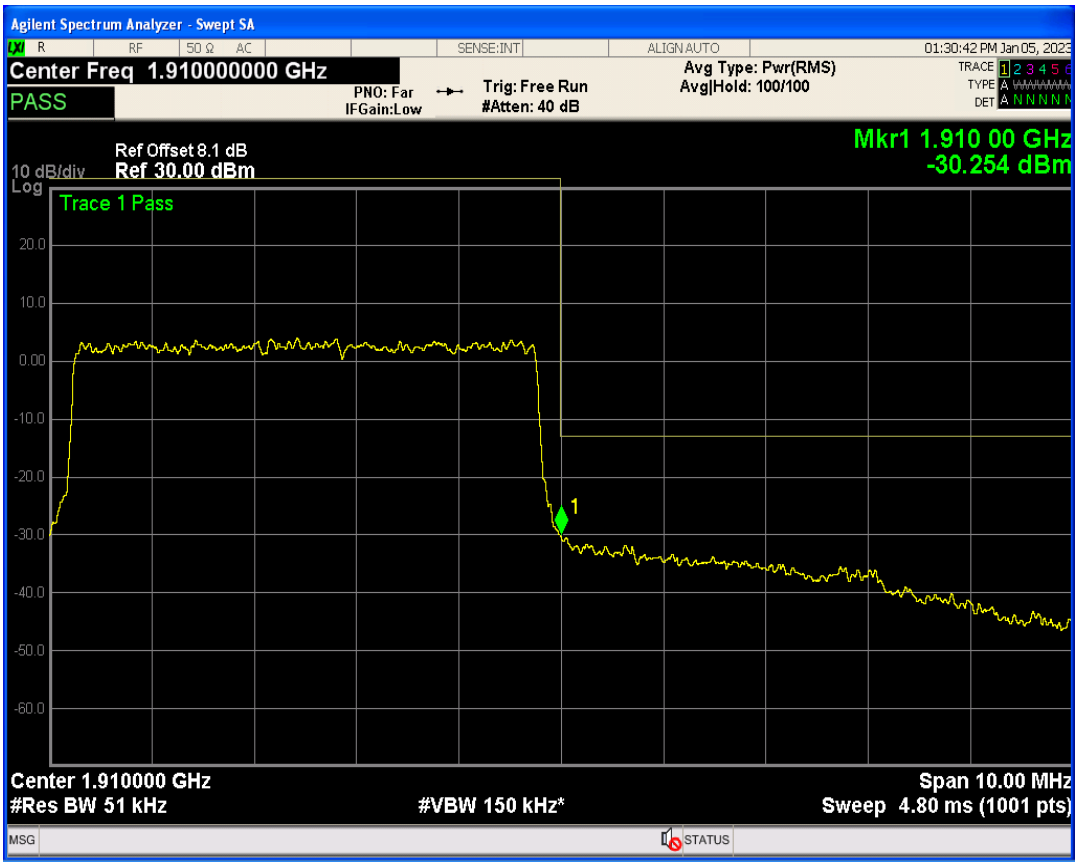

Band2 QPSK BW=10MHz Channel=18650 RB Size=1 Position=#Max

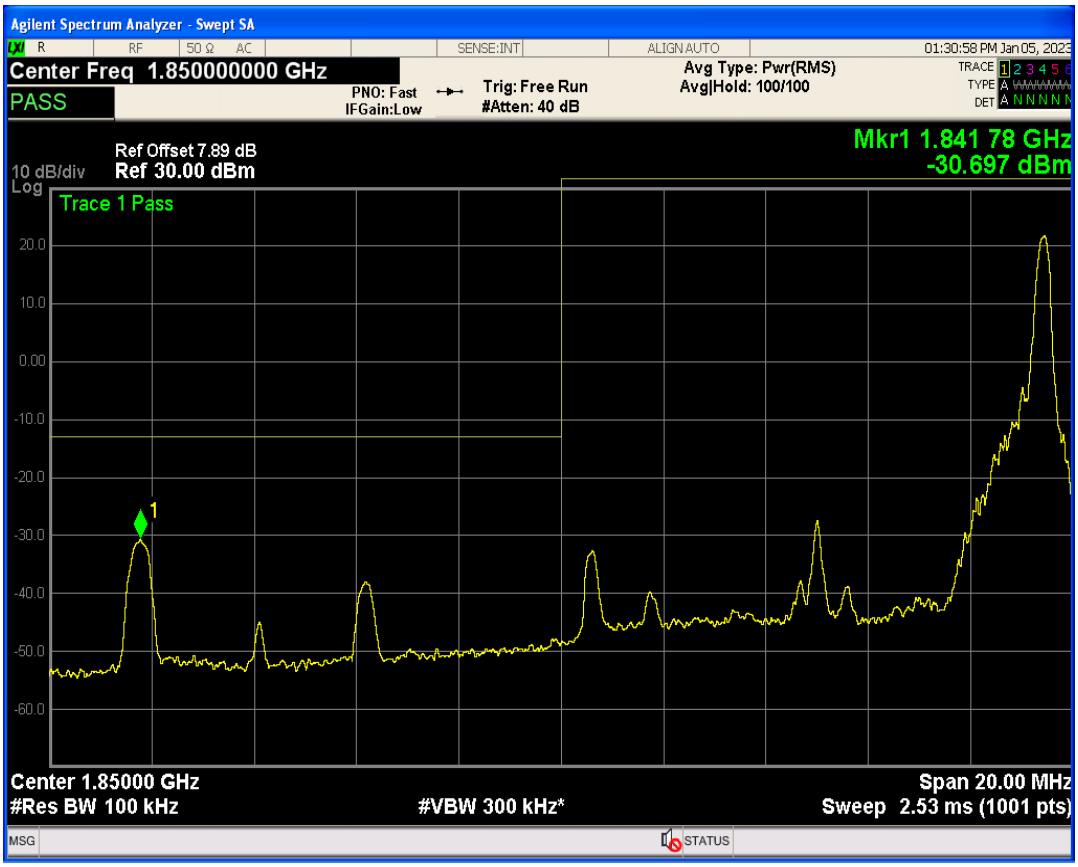

Band2 QPSK BW=10MHz Channel=18650 RB Size=50 Position=#0

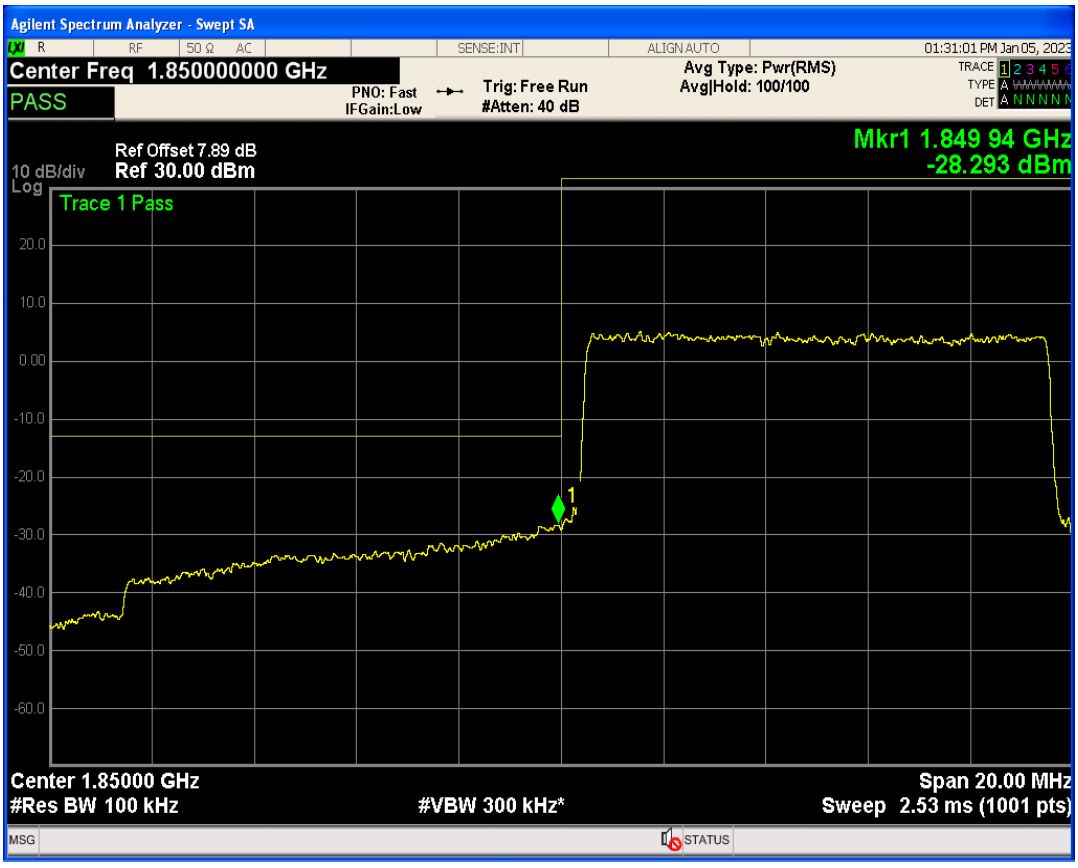

Band2 QAM16 BW=10MHz Channel=18650 RB Size=1 Position=#0

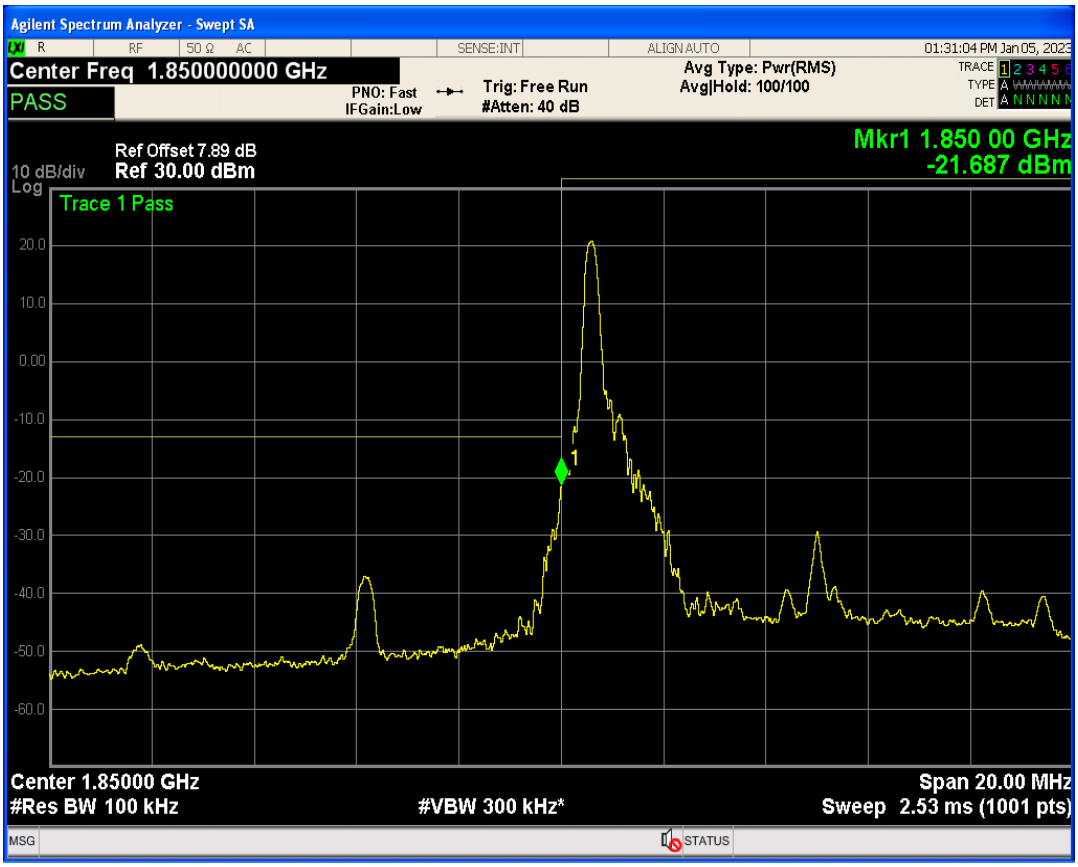

Band2 QAM16 BW=10MHz Channel=18650 RB Size=1 Position=#Max

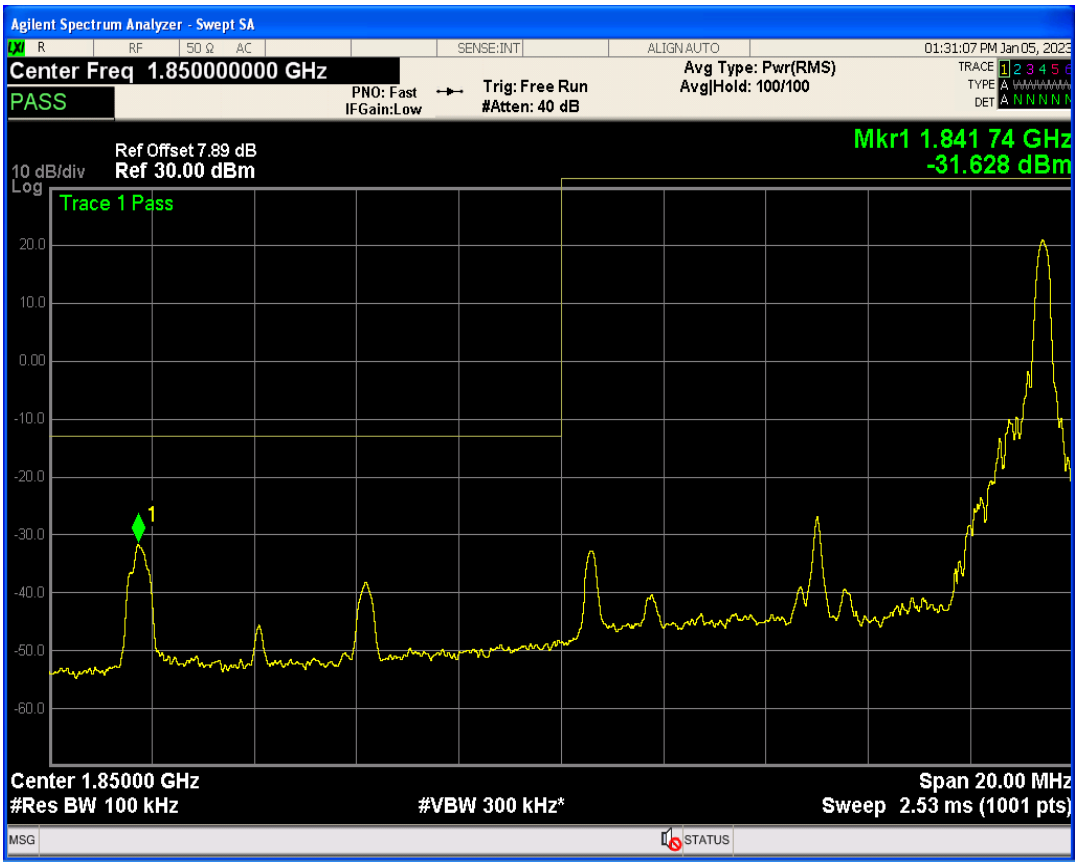

Band2 QPSK BW=10MHz Channel=19150 RB Size=1 Position=#0

Band2 QAM16 BW=10MHz Channel=18650 RB Size=50 Position=#0

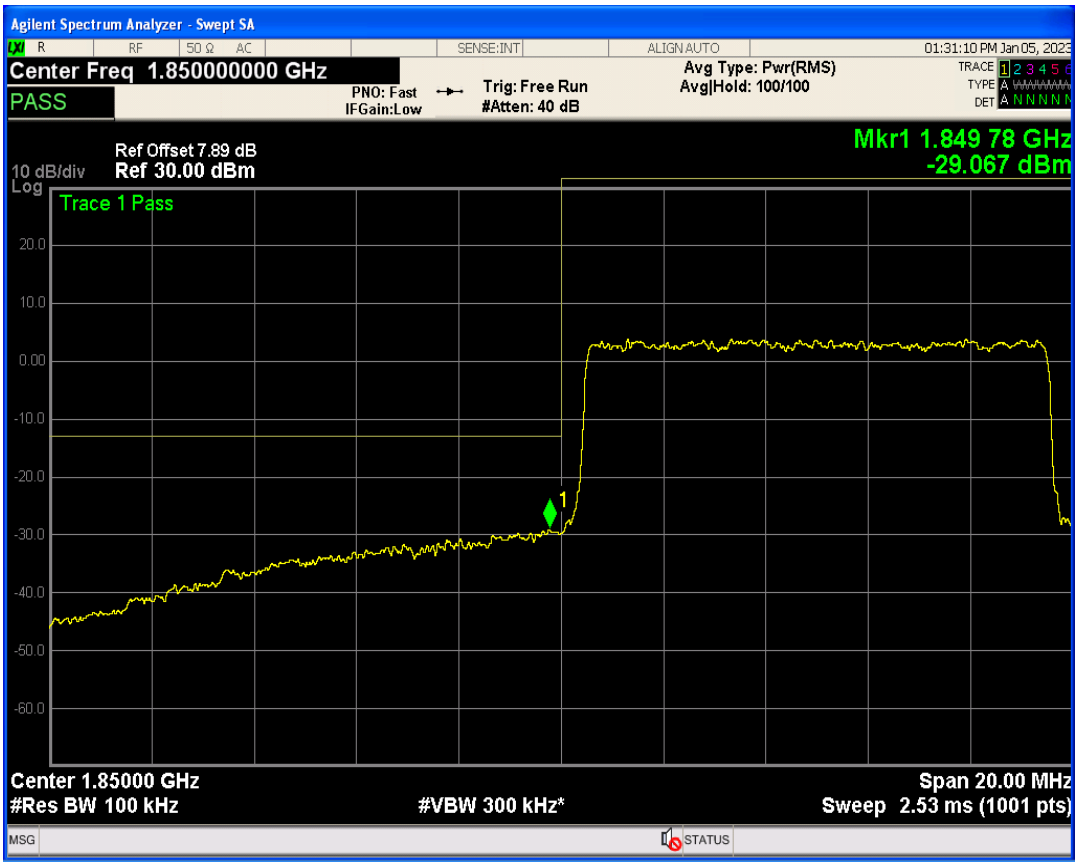

Band2 QPSK BW=10MHz Channel=19150 RB Size=50 Position=#0

Band2 QPSK BW=10MHz Channel=19150 RB Size=1 Position=#Max

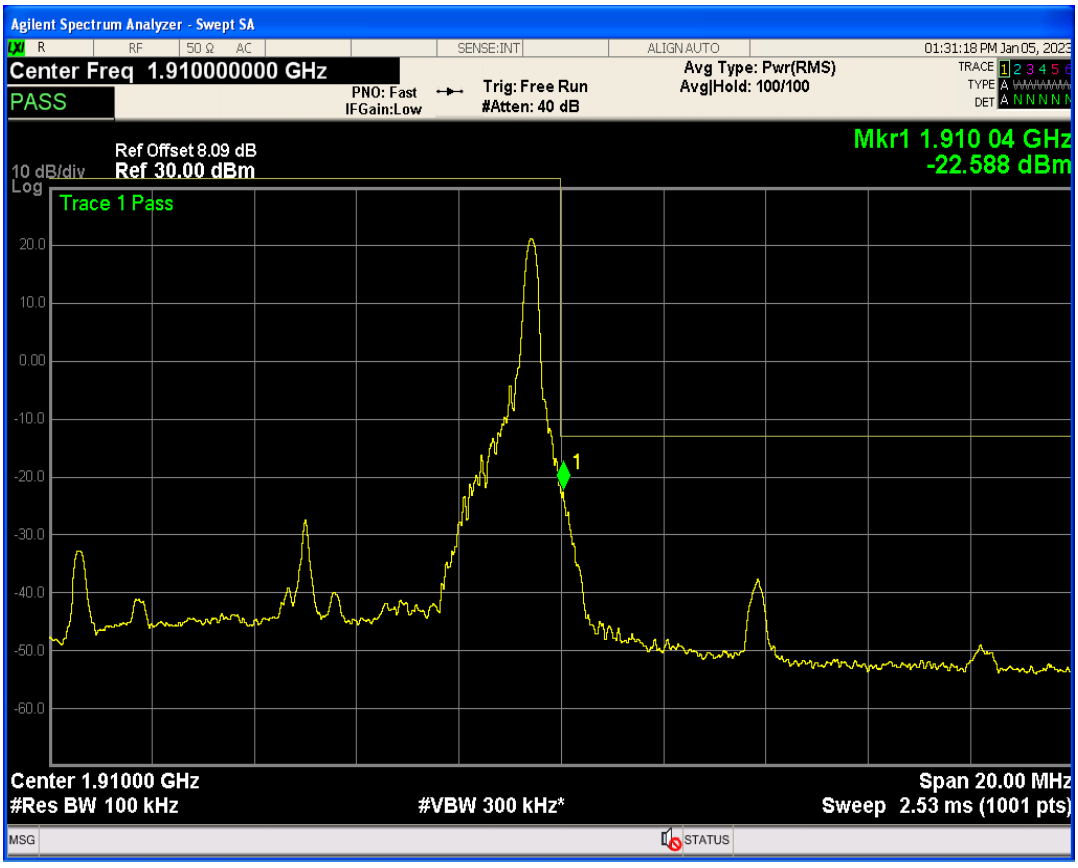

Band2 QAM16 BW=10MHz Channel=19150 RB Size=1 Position=#0

Band2 QAM16 BW=10MHz Channel=19150 RB Size=1 Position=#Max

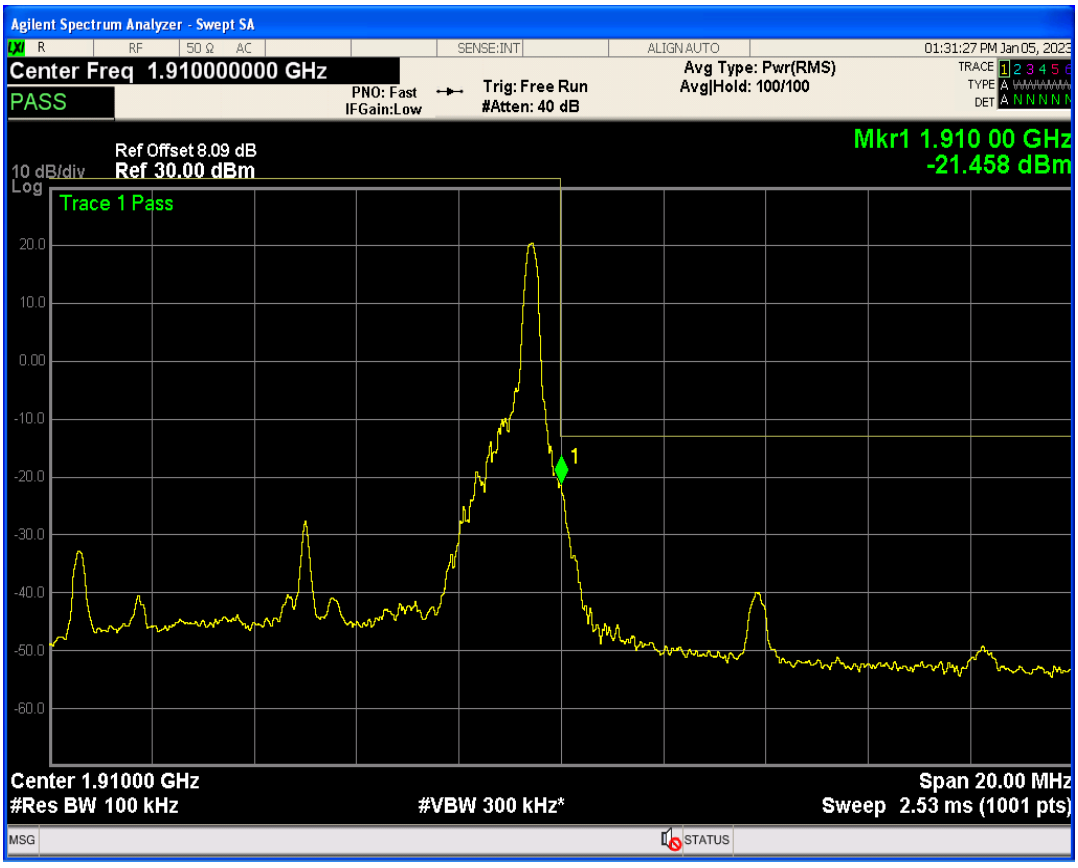

Band2 QAM16 BW=10MHz Channel=19150 RB Size=50 Position=#0

Band2 QPSK BW=15MHz Channel=18675 RB Size=1 Position=#0

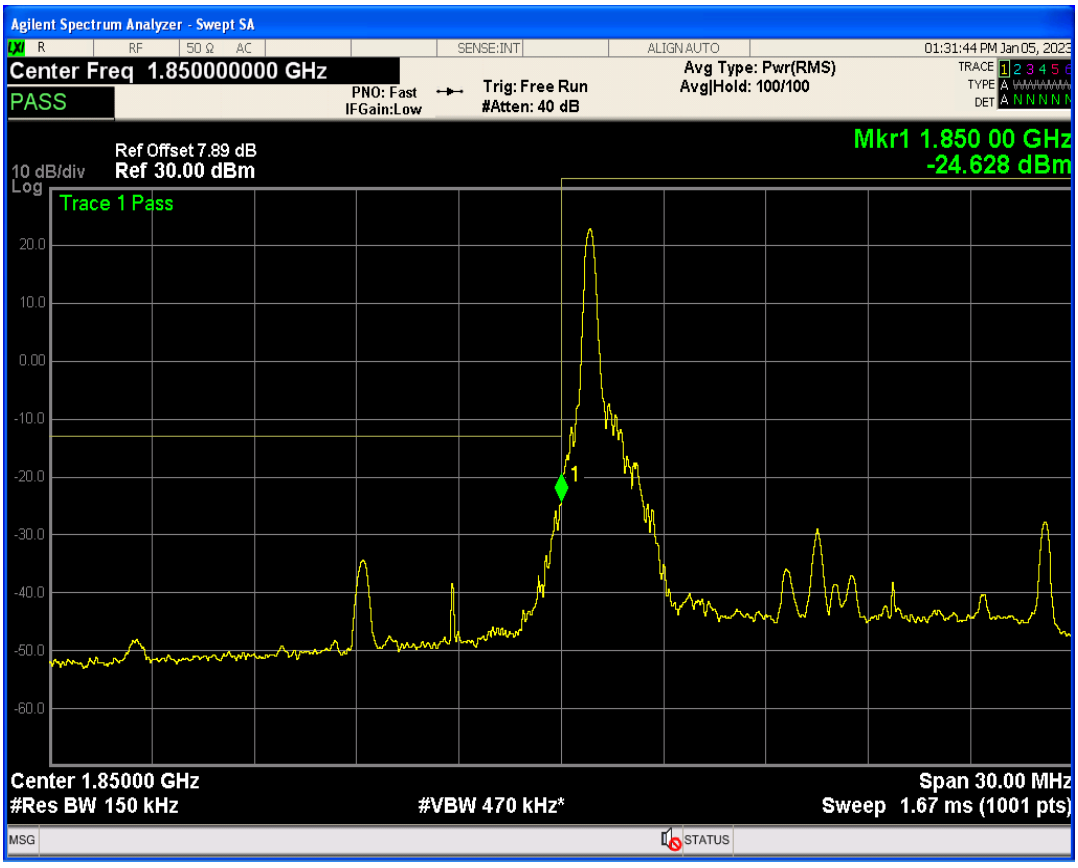

Band2 QPSK BW=15MHz Channel=18675 RB Size=75 Position=#0

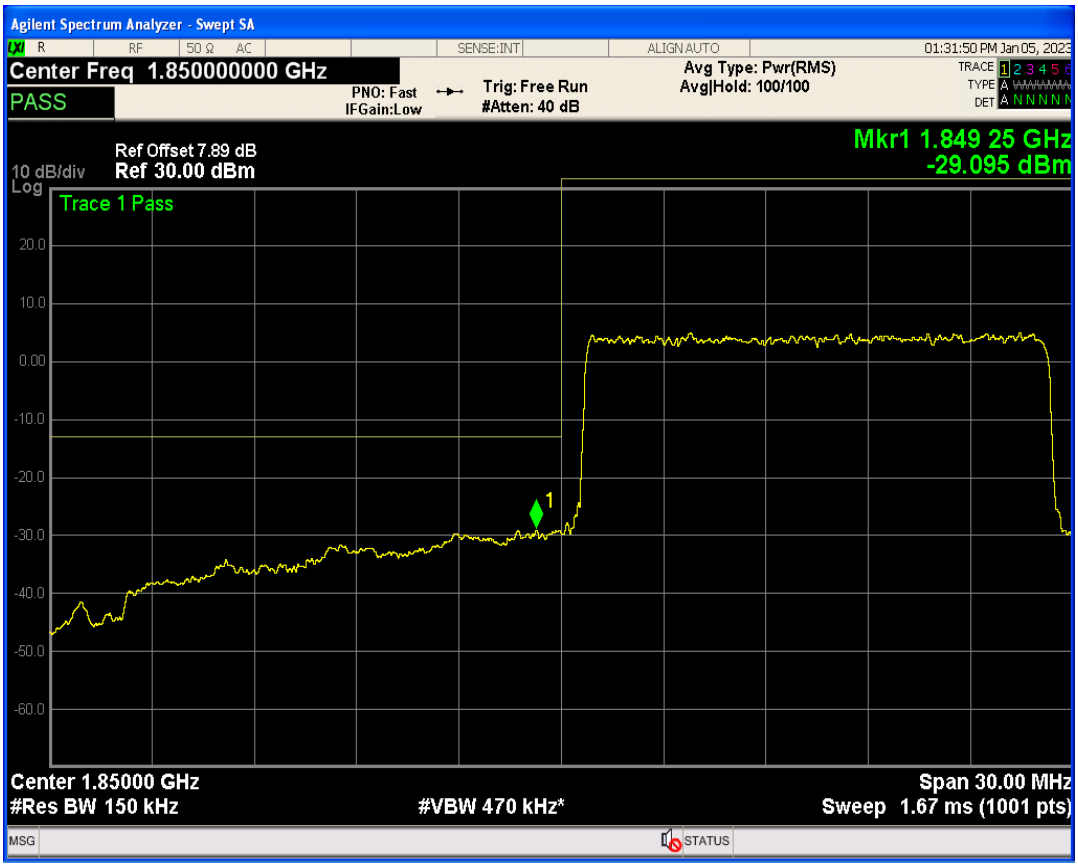

Band2 QPSK BW=15MHz Channel=18675 RB Size=1 Position=#Max

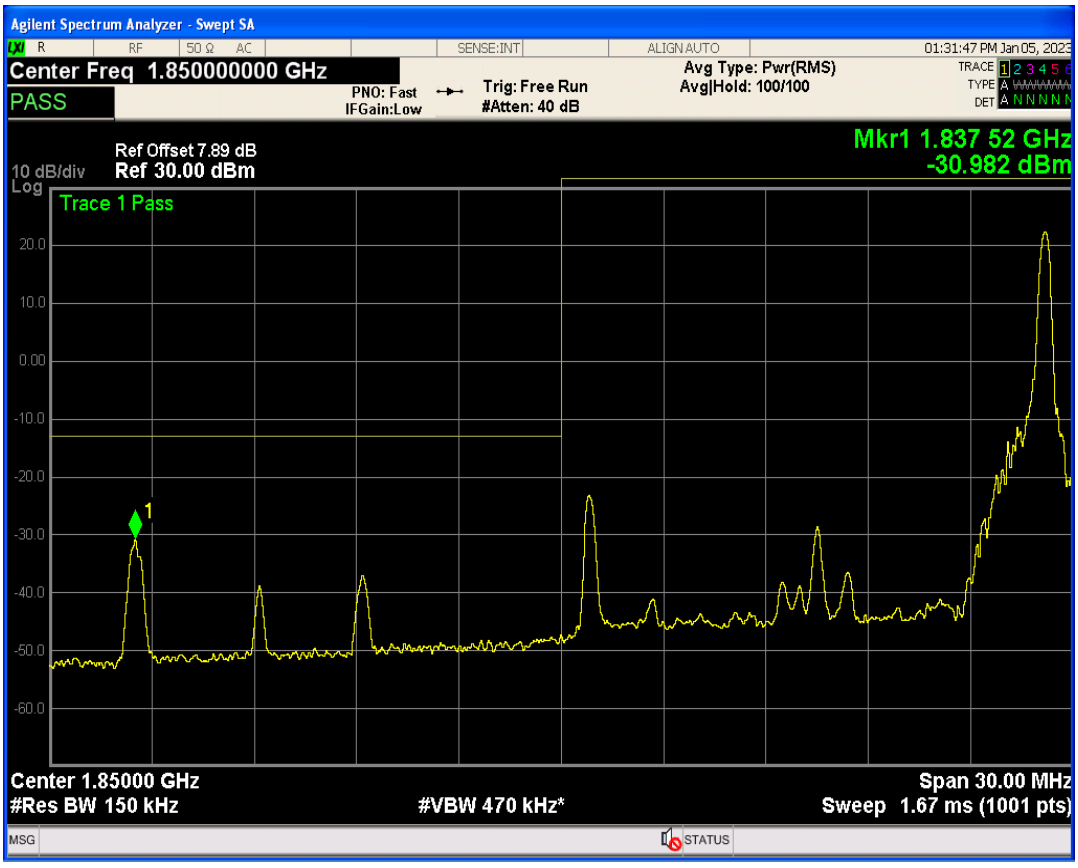

Band2 QAM16 BW=15MHz Channel=18675 RB Size=1 Position=#0

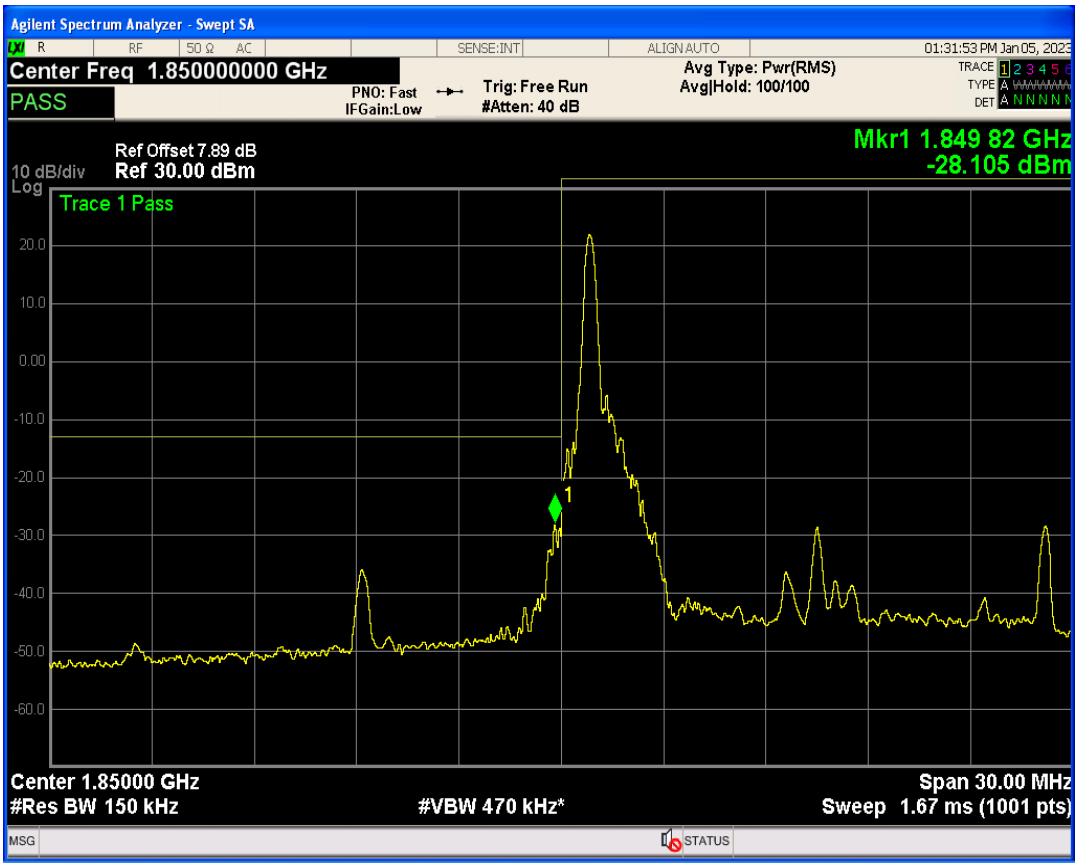

Band2 QAM16 BW=15MHz Channel=18675 RB Size=1 Position=#Max

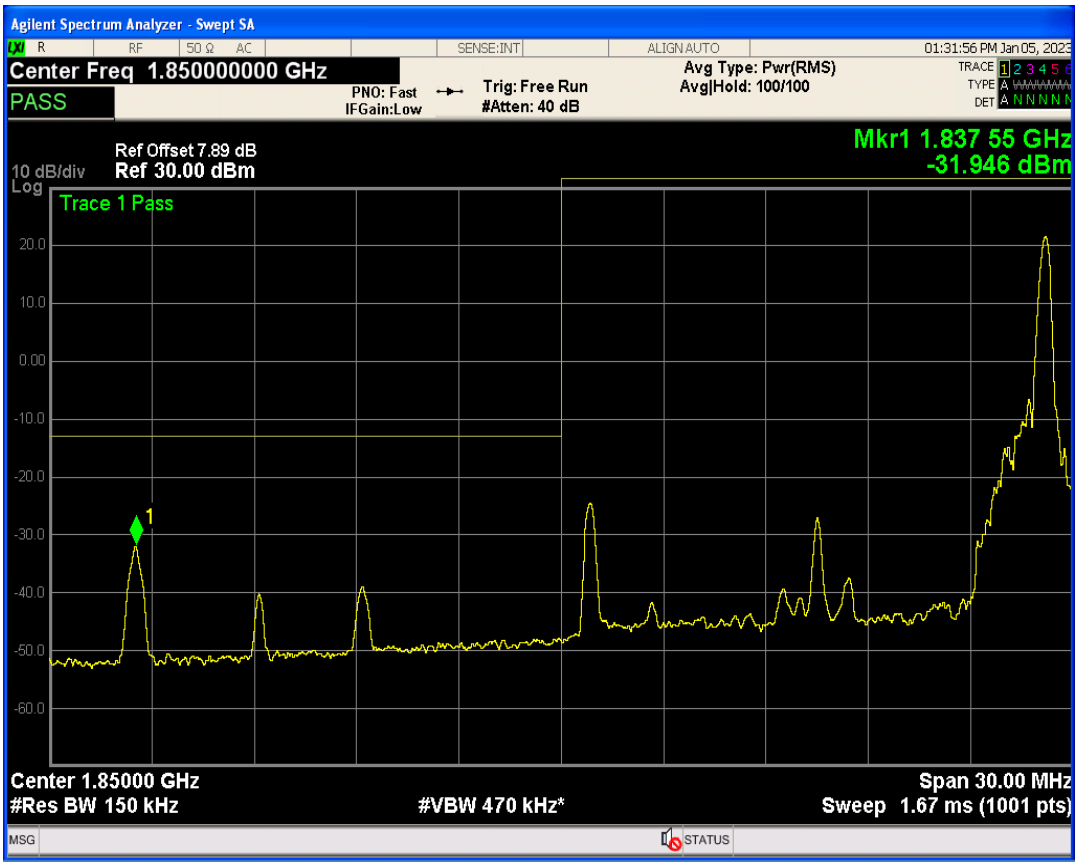

Band2 QAM16 BW=15MHz Channel=18675 RB Size=75 Position=#0

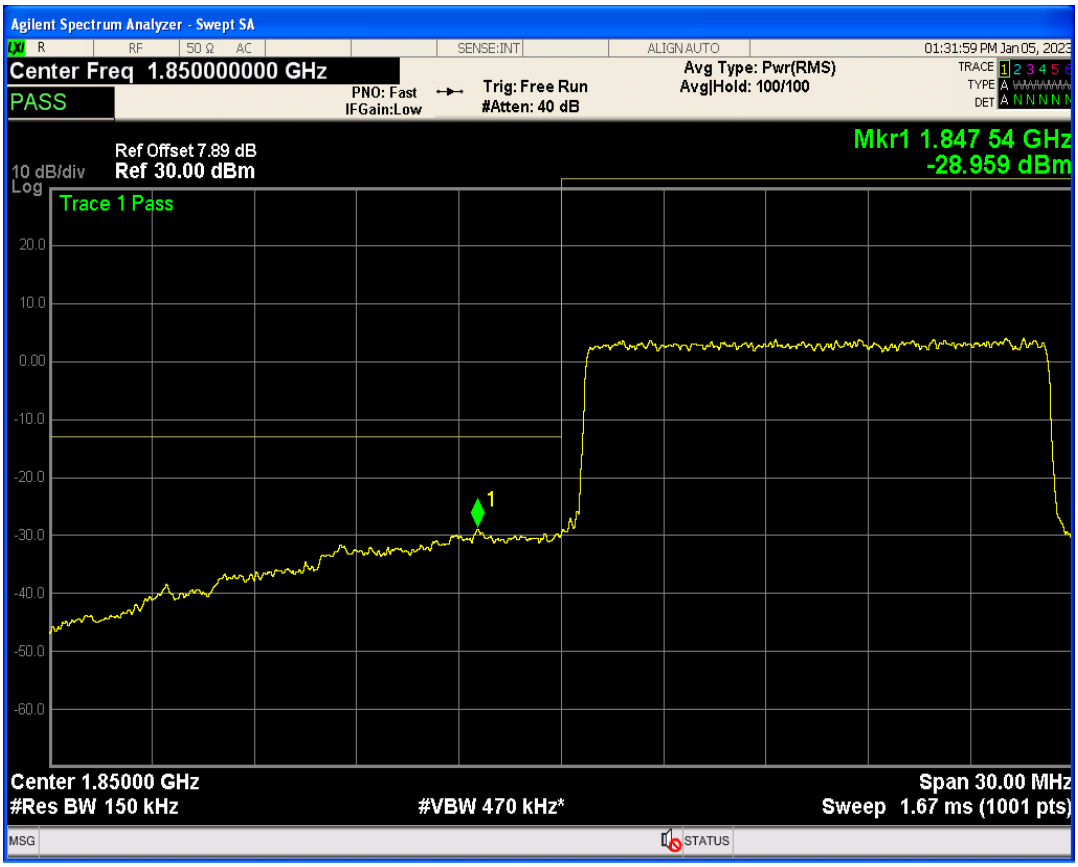

Band2 QPSK BW=15MHz Channel=19125 RB Size=1 Position=#0

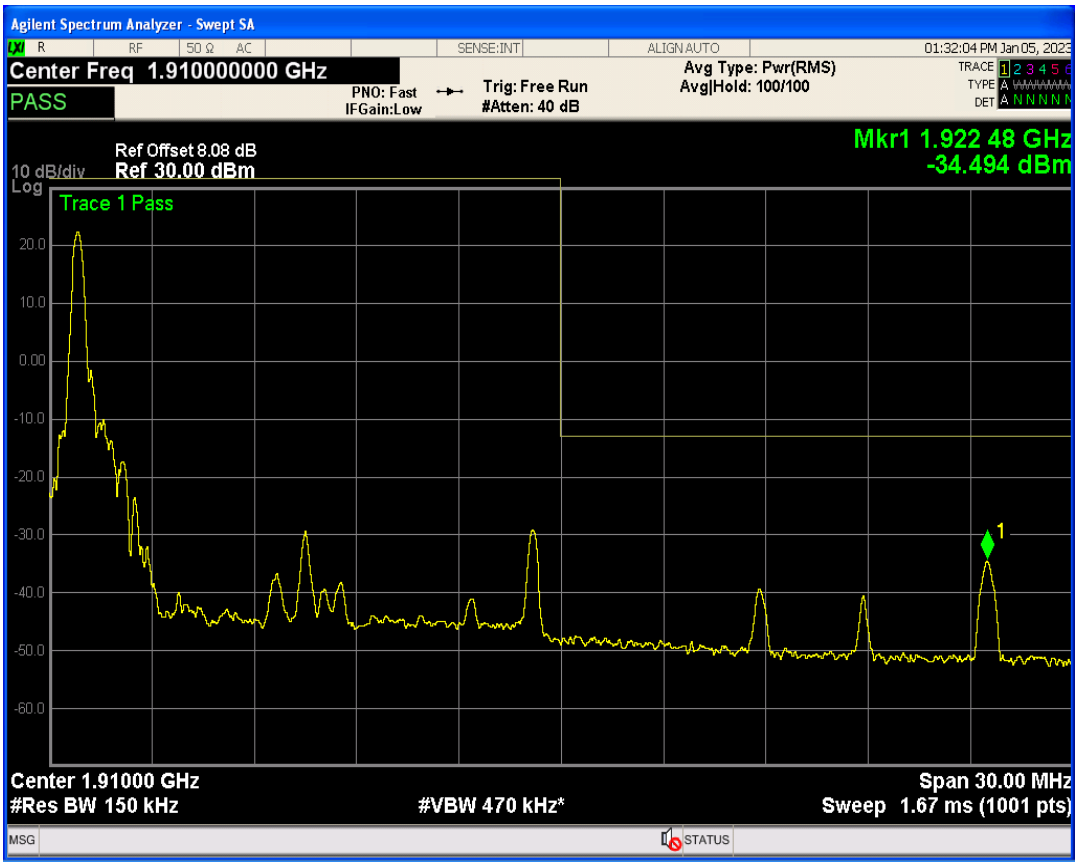

Band2 QPSK BW=15MHz Channel=19125 RB Size=1 Position=#Max

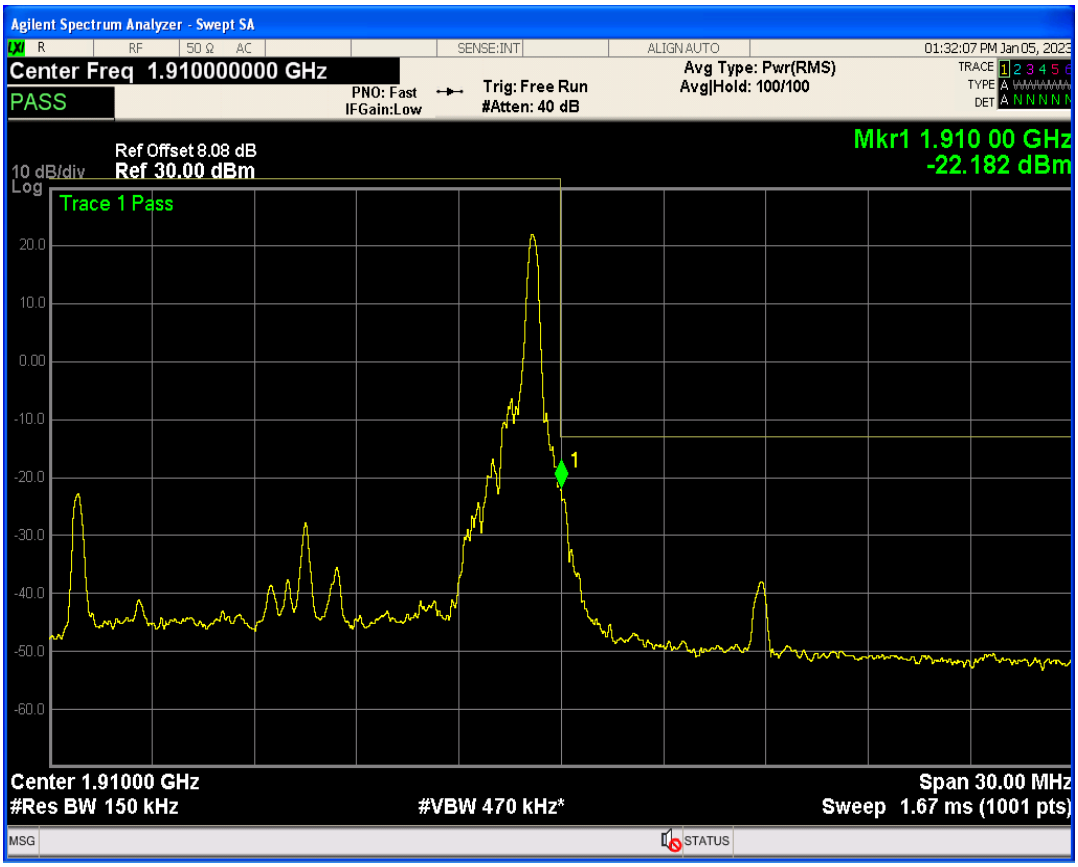

Band2 QPSK BW=15MHz Channel=19125 RB Size=75 Position=#0

Band2 QAM16 BW=15MHz Channel=19125 RB Size=1 Position=#Max

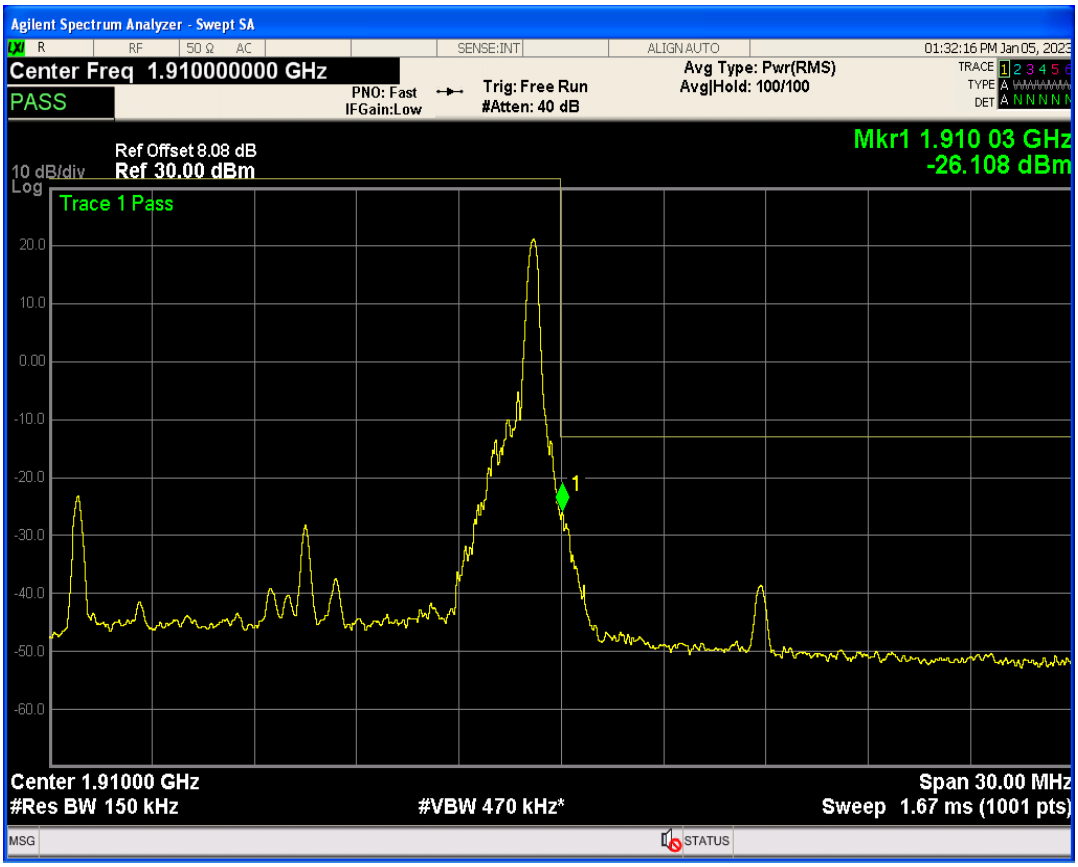

Band2 QAM16 BW=15MHz Channel=19125 RB Size=1 Position=#0

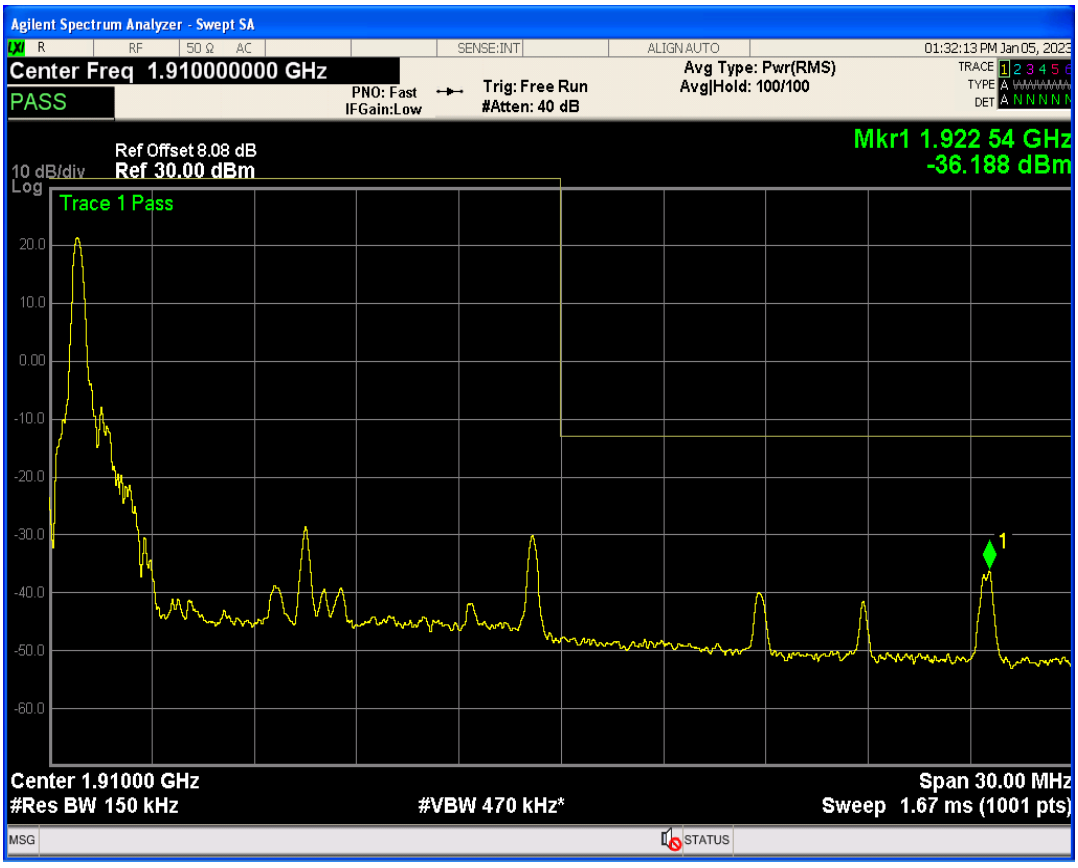

Band2 QAM16 BW=15MHz Channel=19125 RB Size=75 Position=#0

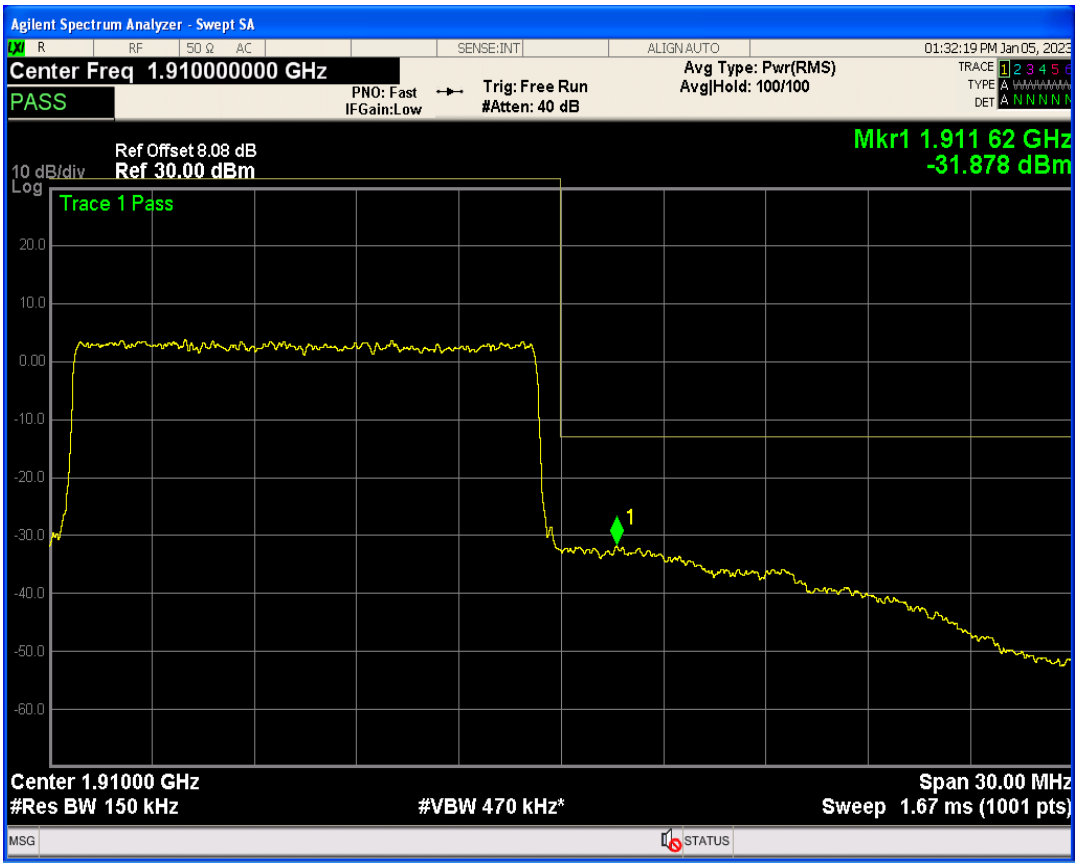

Band2 QPSK BW=20MHz Channel=18700 RB Size=1 Position=#0

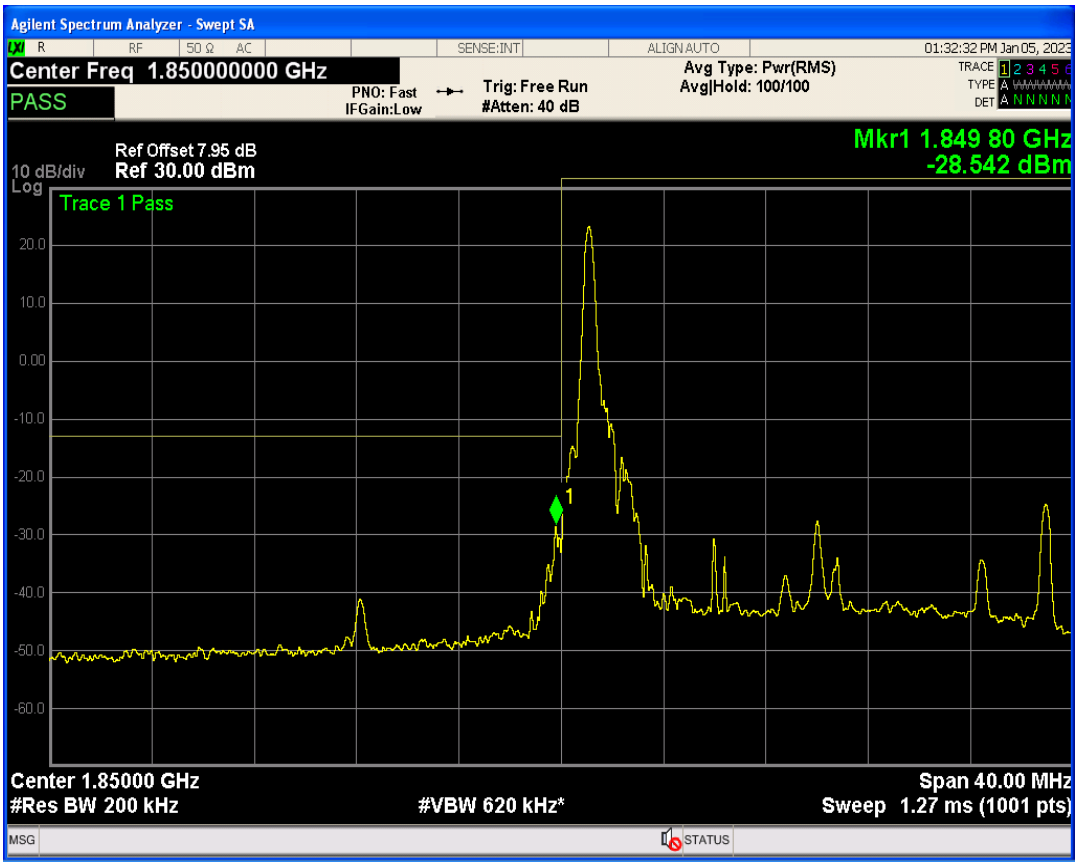

Band2 QPSK BW=20MHz Channel=18700 RB Size=100 Position=#0

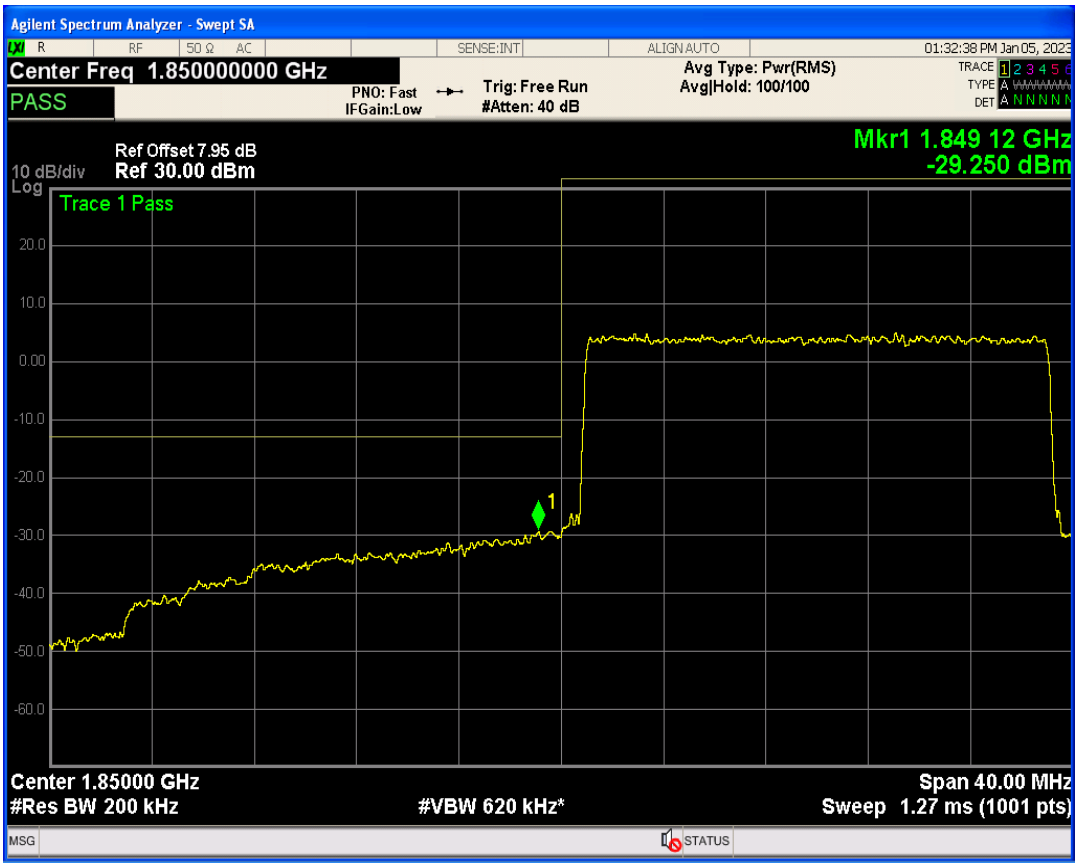

Band2 QPSK BW=20MHz Channel=18700 RB Size=1 Position=#Max

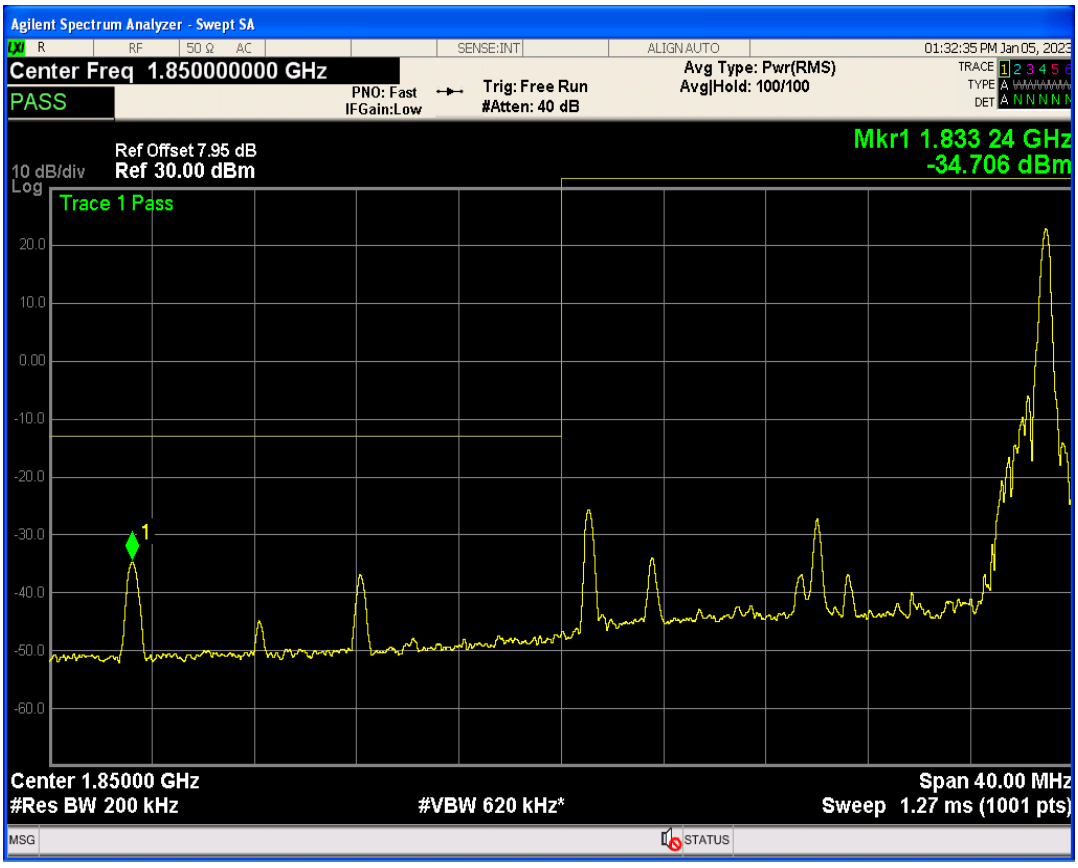

Band2 QAM16 BW=20MHz Channel=18700 RB Size=1 Position=#0

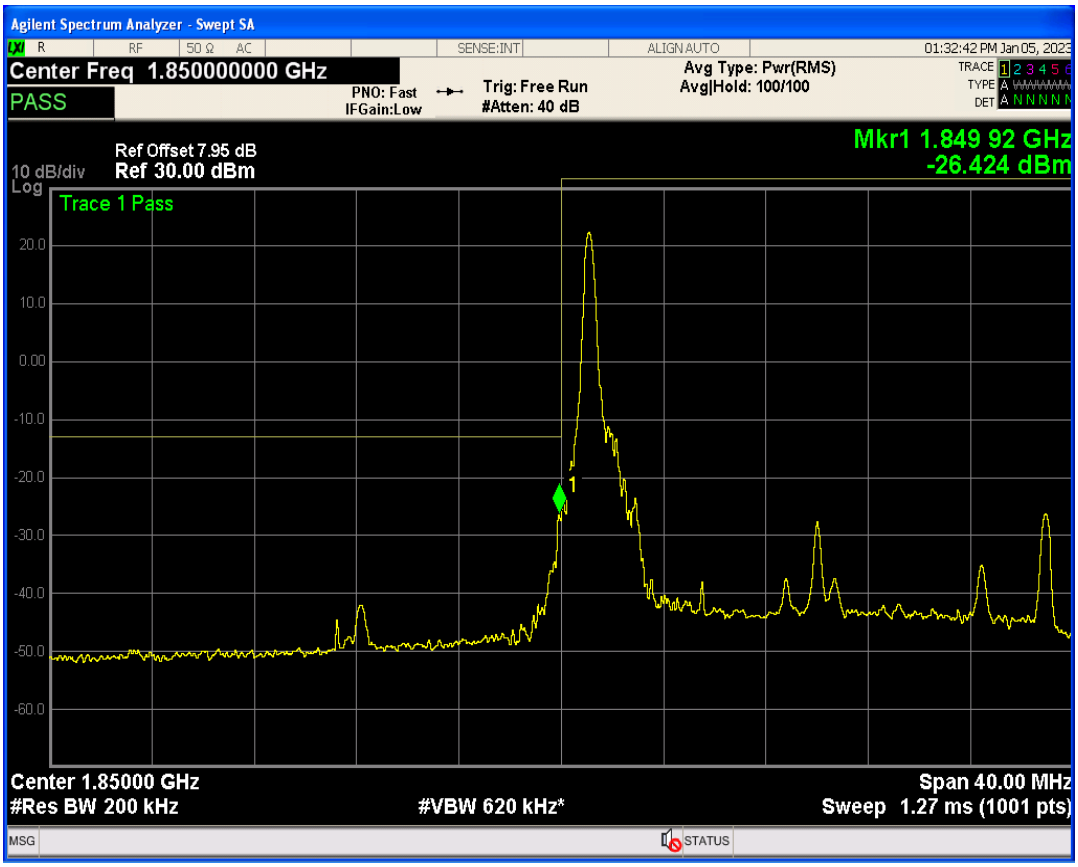

Band2 QAM16 BW=20MHz Channel=18700 RB Size=1 Position=#Max

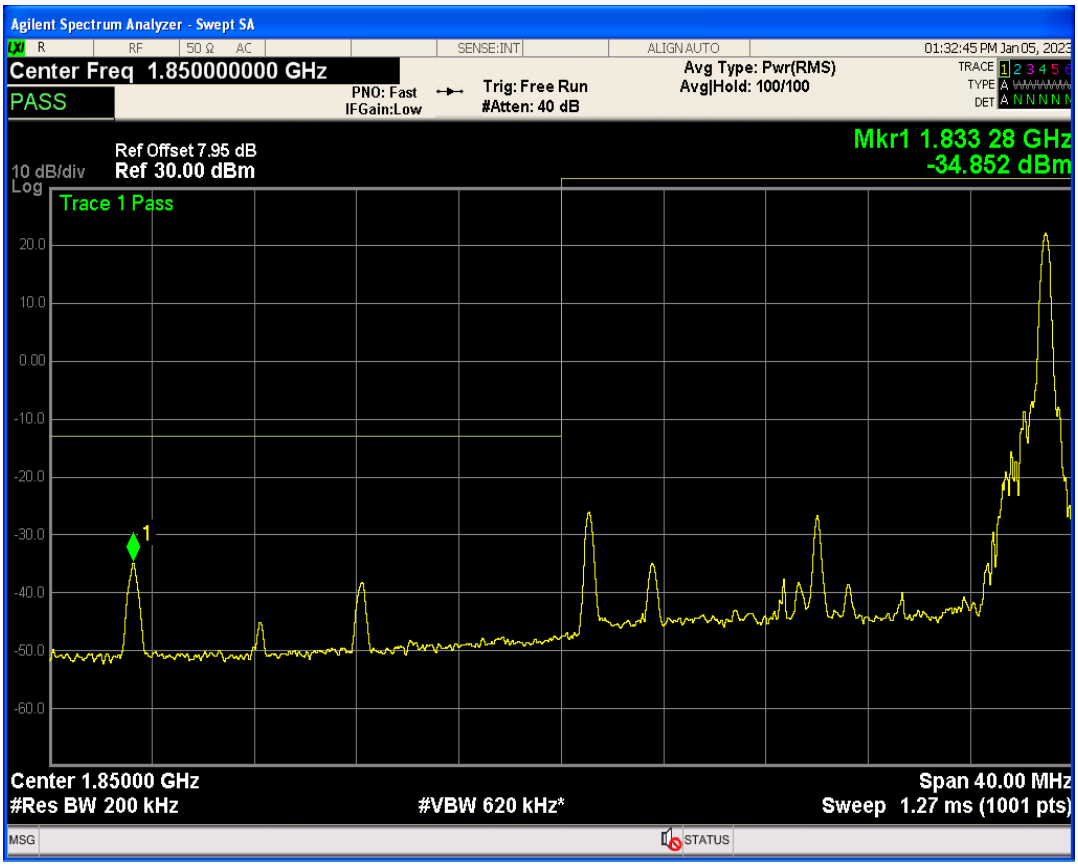

Band2 QAM16 BW=20MHz Channel=18700 RB Size=100 Position=#0

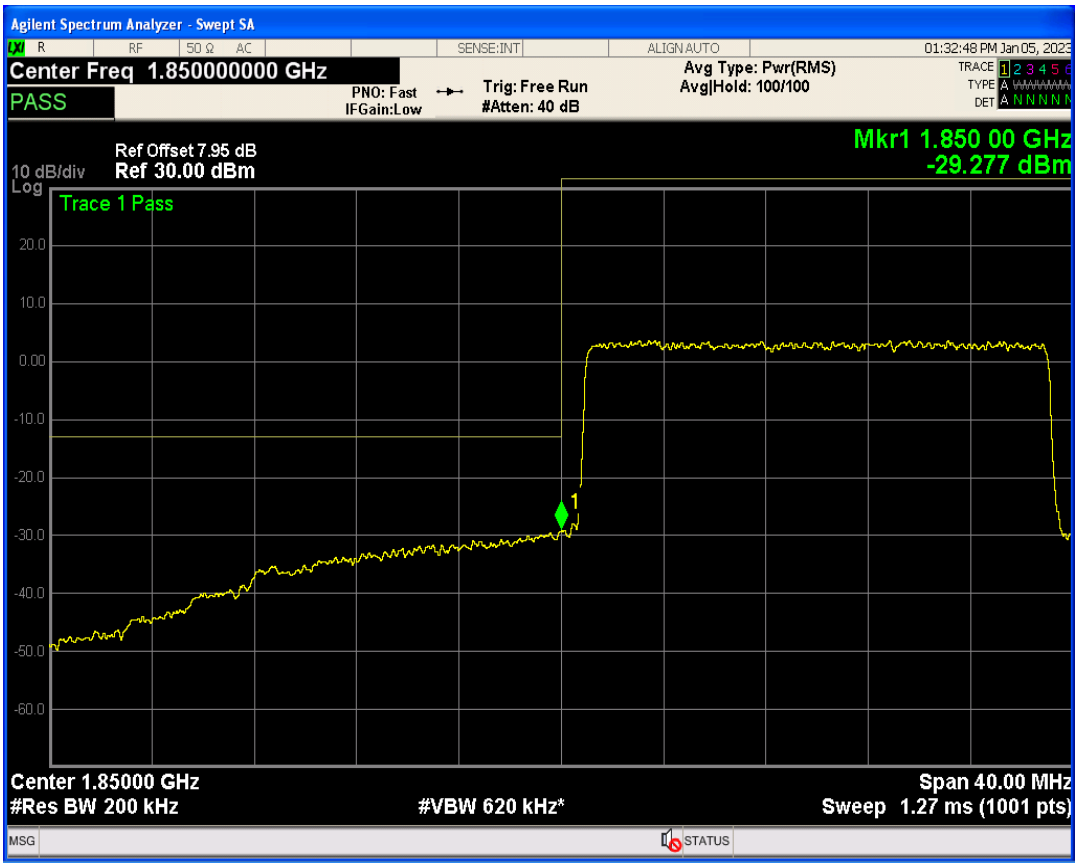

Band2 QPSK BW=20MHz Channel=19100 RB Size=1 Position=#0

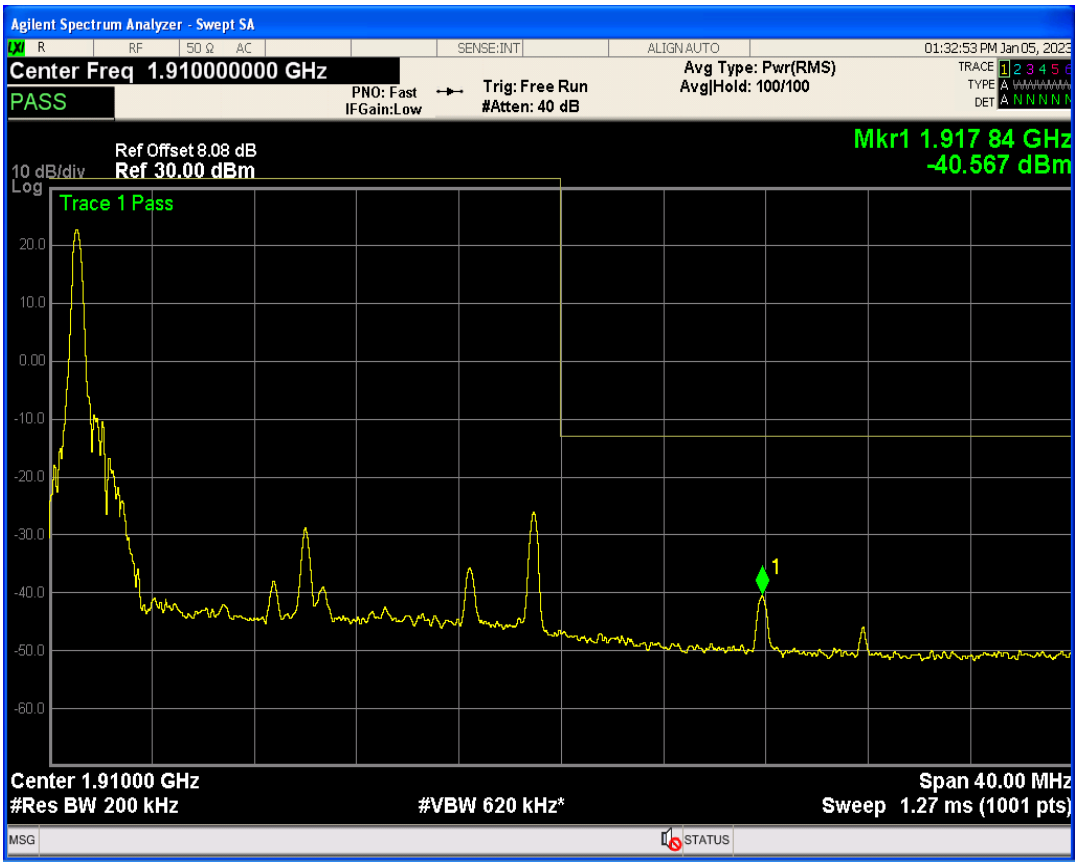

Band2 QPSK BW=20MHz Channel=19100 RB Size=1 Position=#Max

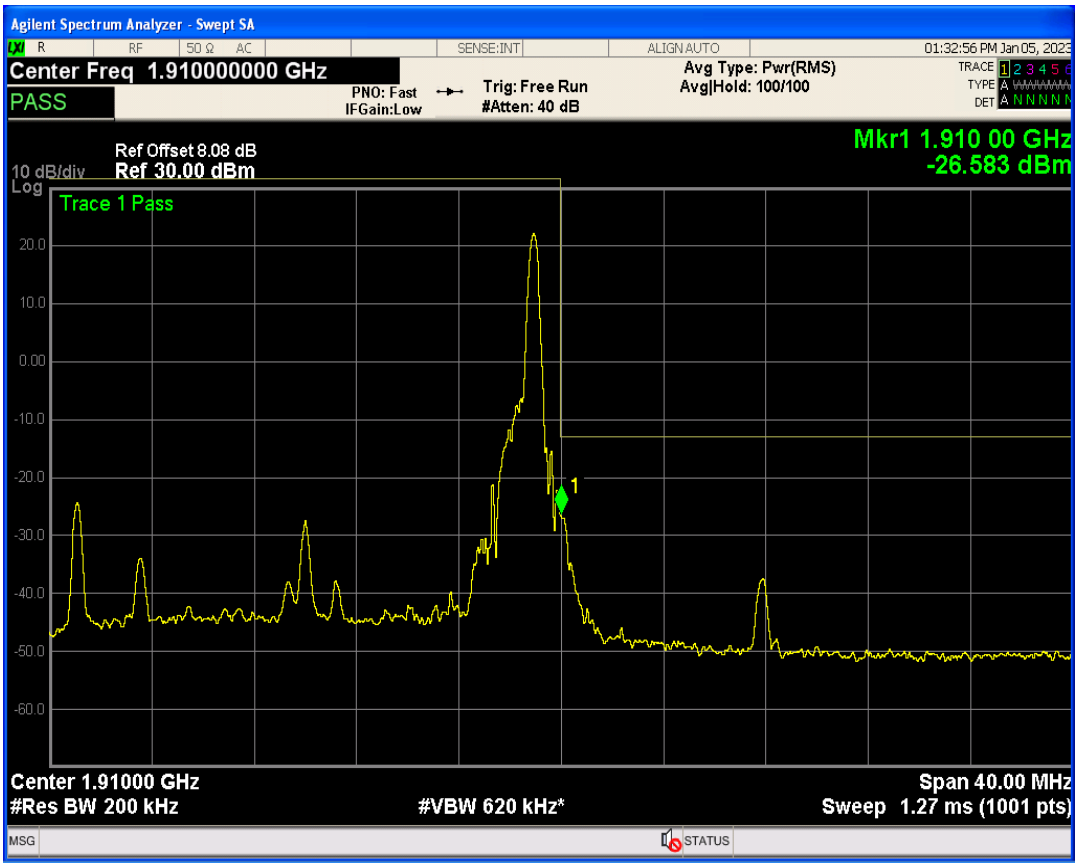

Band2 QPSK BW=20MHz Channel=19100 RB Size=100 Position=#0

Band2 QAM16 BW=20MHz Channel=19100 RB Size=1 Position=#0

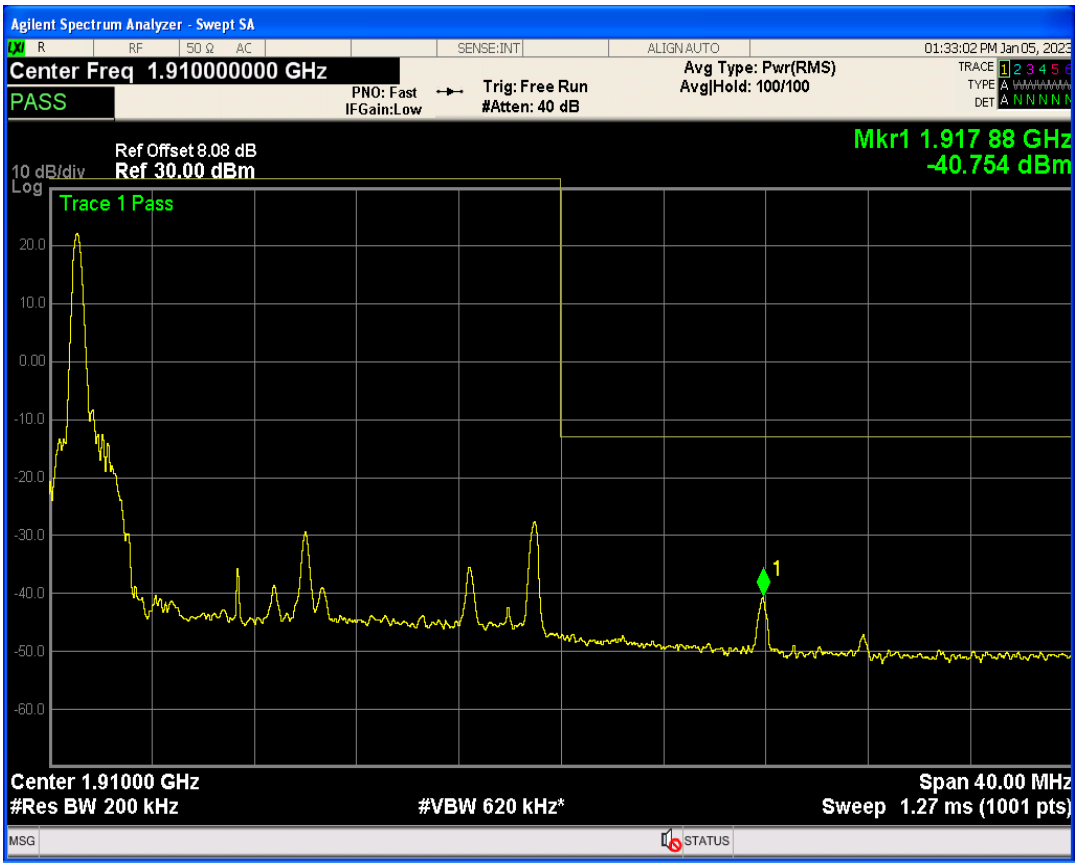

Band2 QAM16 BW=20MHz Channel=19100 RB Size=1 Position=#Max

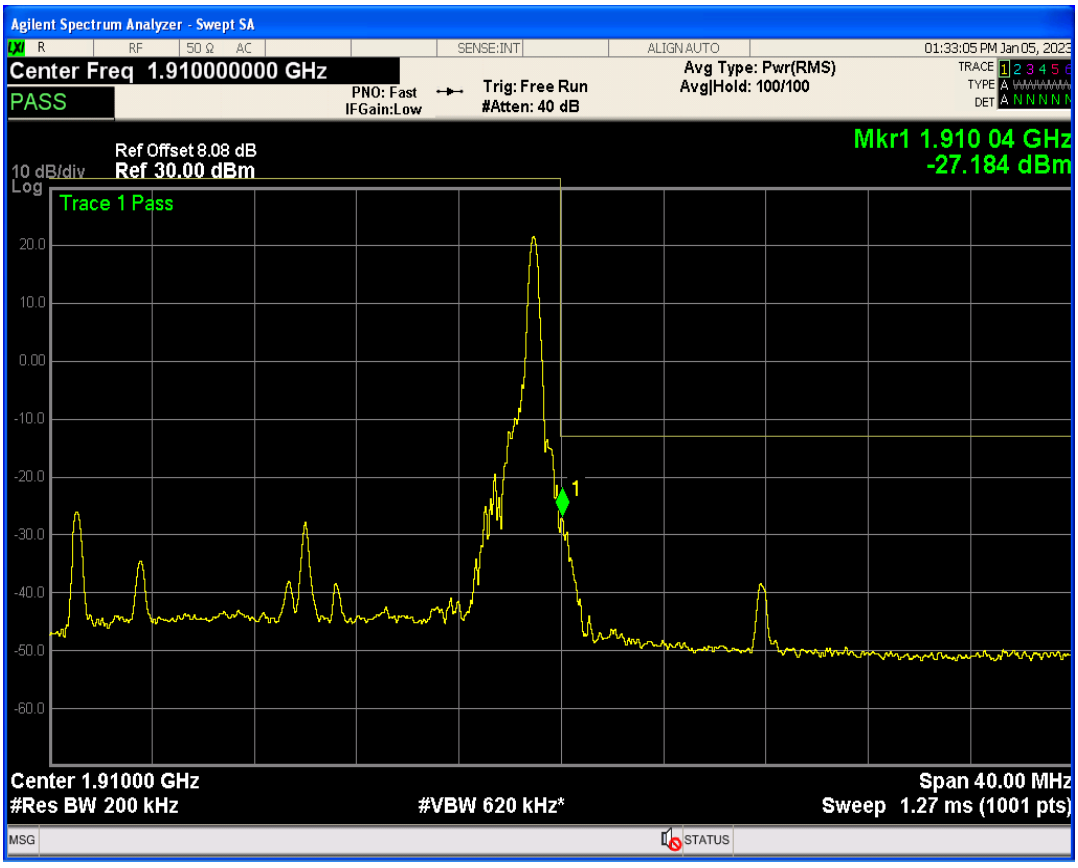

Band2 QAM16 BW=20MHz Channel=19100 RB Size=100 Position=#0

Band25 QAM16 BW=10MHz Channel=26090 RB Size=50 Position=#0

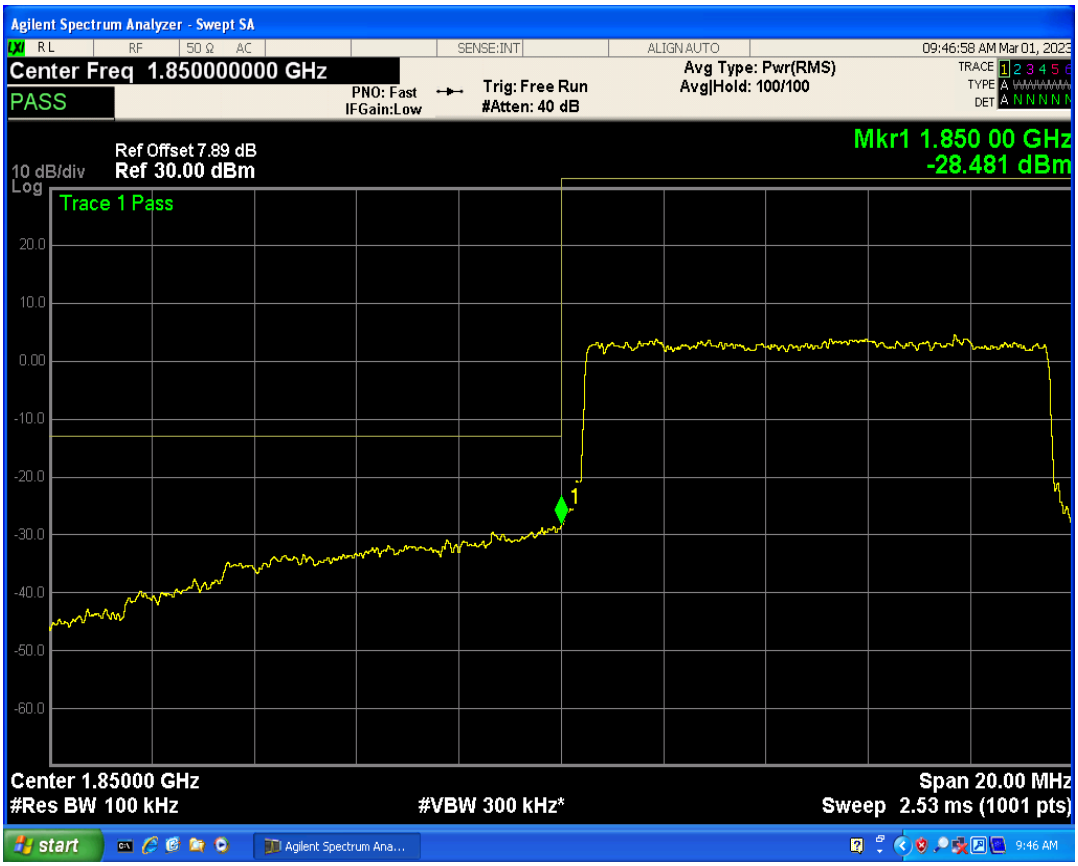

Band25 QAM16 BW=10MHz Channel=26090 RB Size=1 Position=#Max

Band25 QAM16 BW=10MHz Channel=26090 RB Size=1 Position=#0

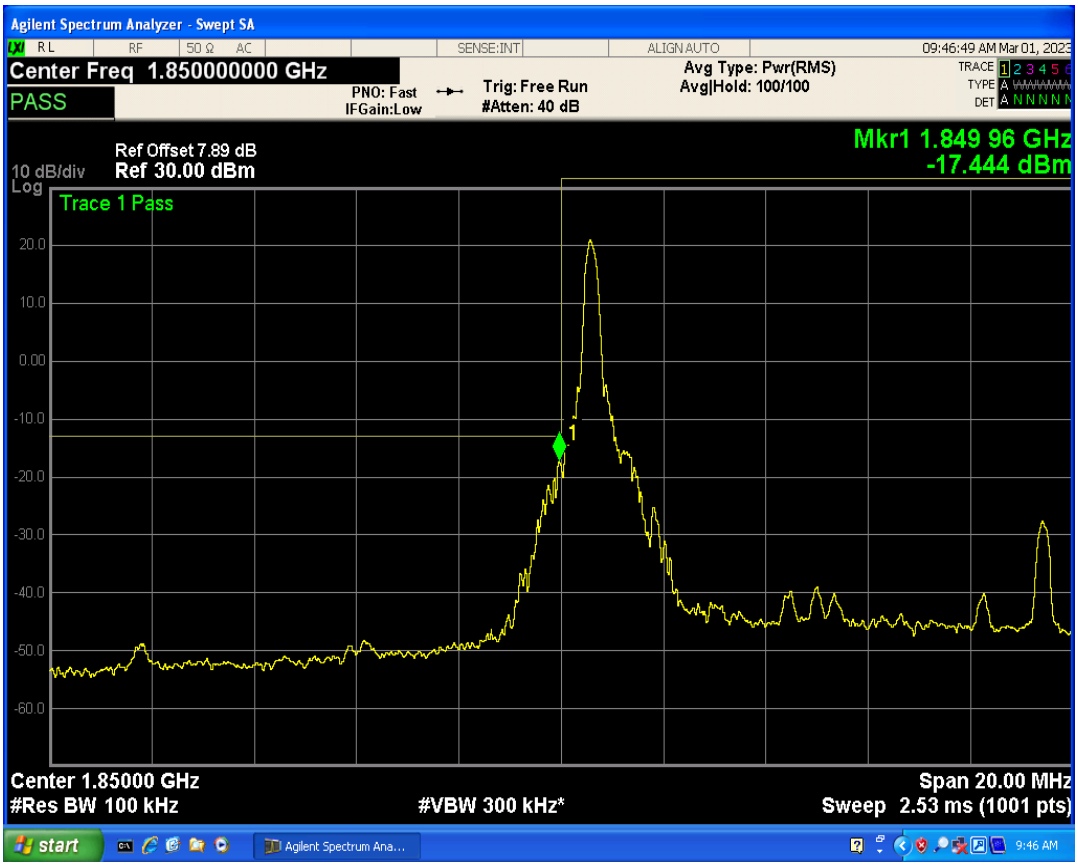

Band25 QAM16 BW=10MHz Channel=26640 RB Size=50 Position=#0

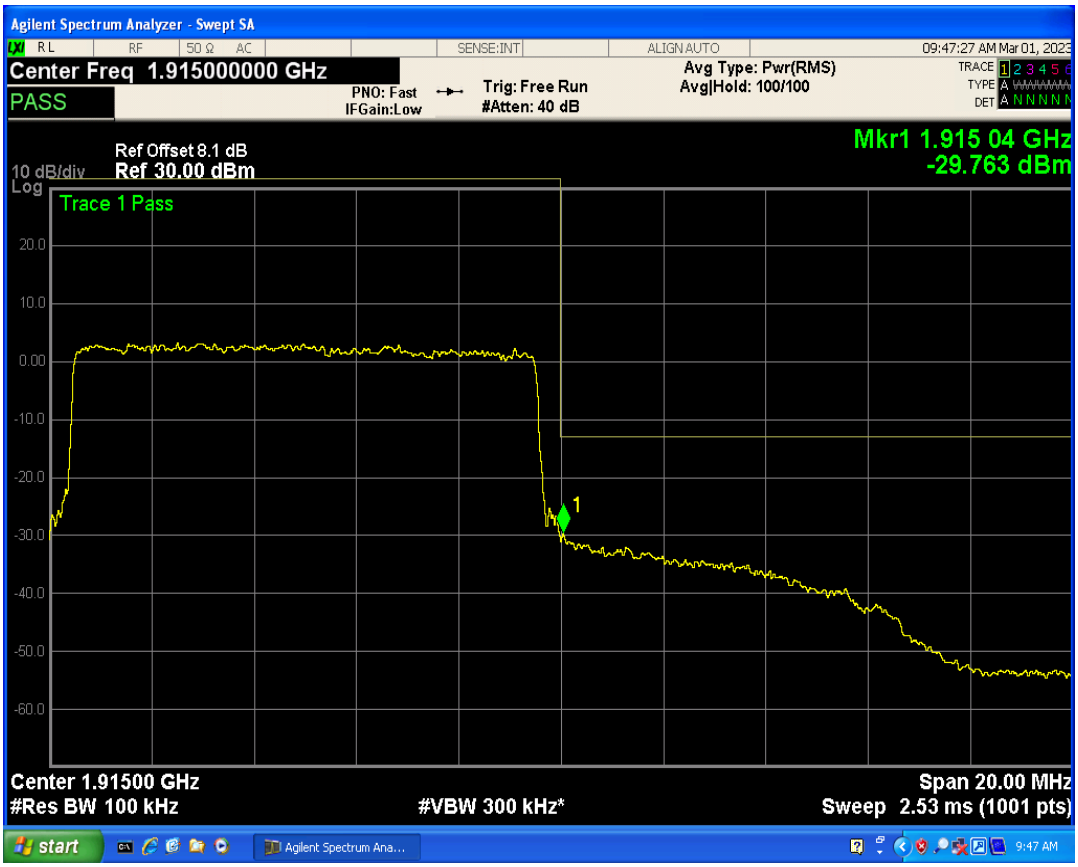

Band25 QAM16 BW=10MHz Channel=26640 RB Size=1 Position=#Max

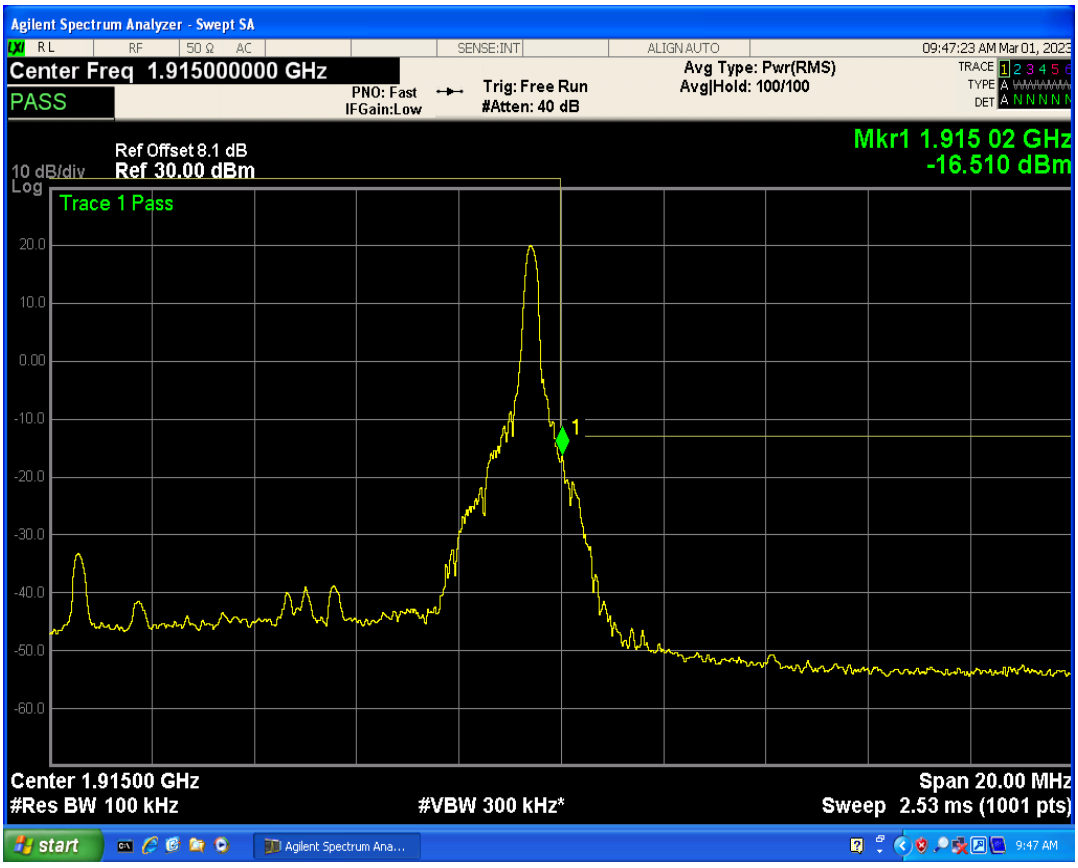

Band25 QAM16 BW=10MHz Channel=26640 RB Size=1 Position=#0

Band25 QAM16 BW=1.4MHz Channel=26047 RB Size=6 Position=#0

Band25 QAM16 BW=1.4MHz Channel=26047 RB Size=1 Position=#Max

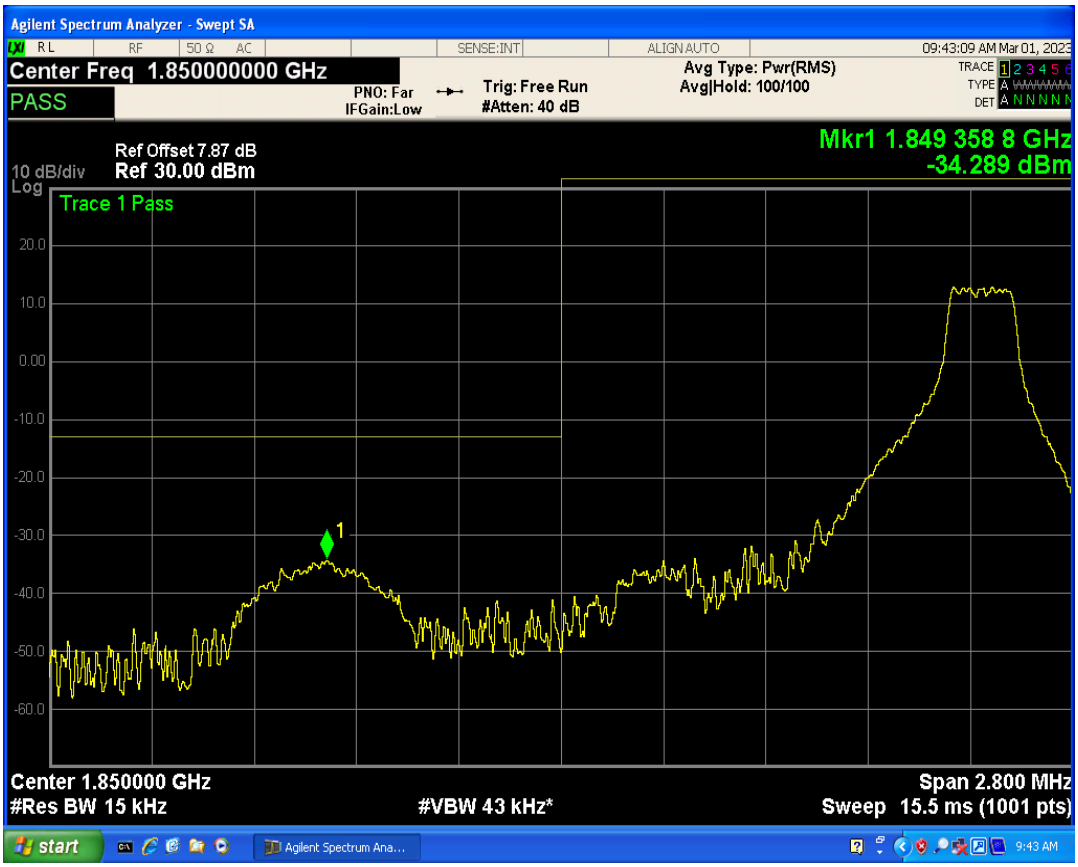

Band25 QAM16 BW=1.4MHz Channel=26047 RB Size=1 Position=#0

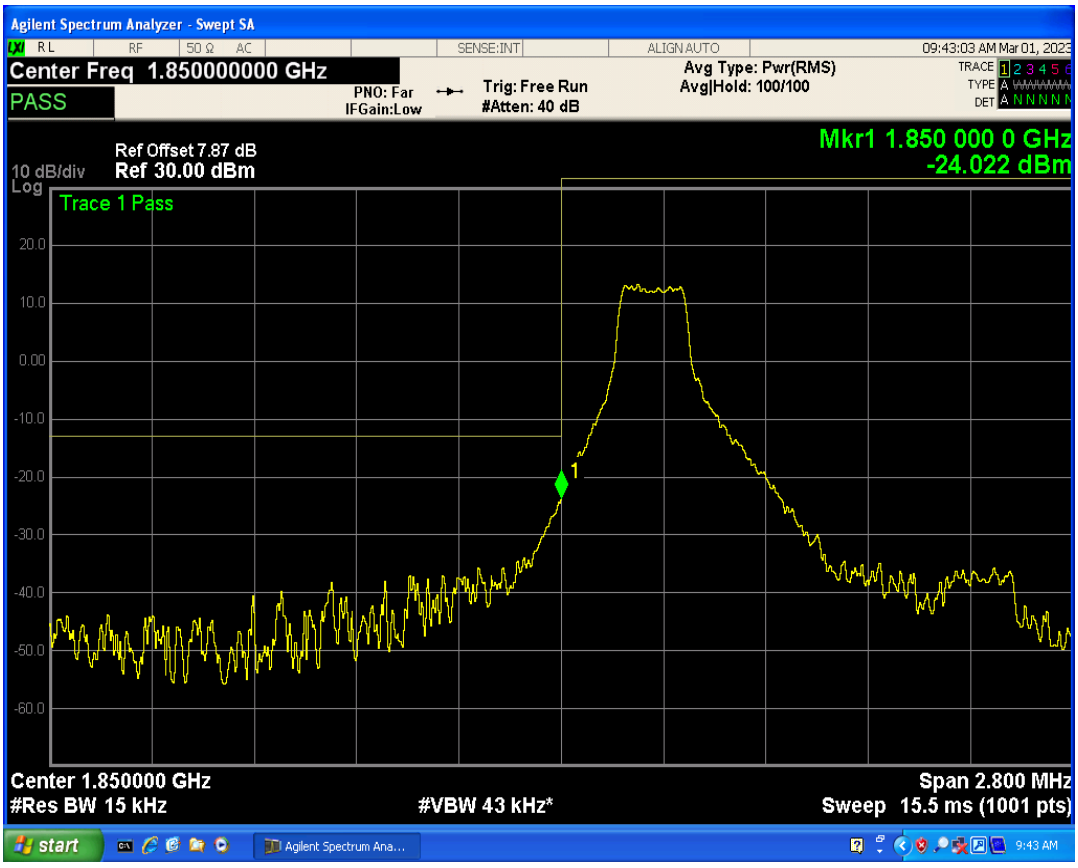

Band25 QAM16 BW=1.4MHz Channel=26683 RB Size=6 Position=#0

Band25 QAM16 BW=1.4MHz Channel=26683 RB Size=1 Position=#Max

Band25 QAM16 BW=1.4MHz Channel=26683 RB Size=1 Position=#0

Band25 QAM16 BW=20MHz Channel=26140 RB Size=100 Position=#0

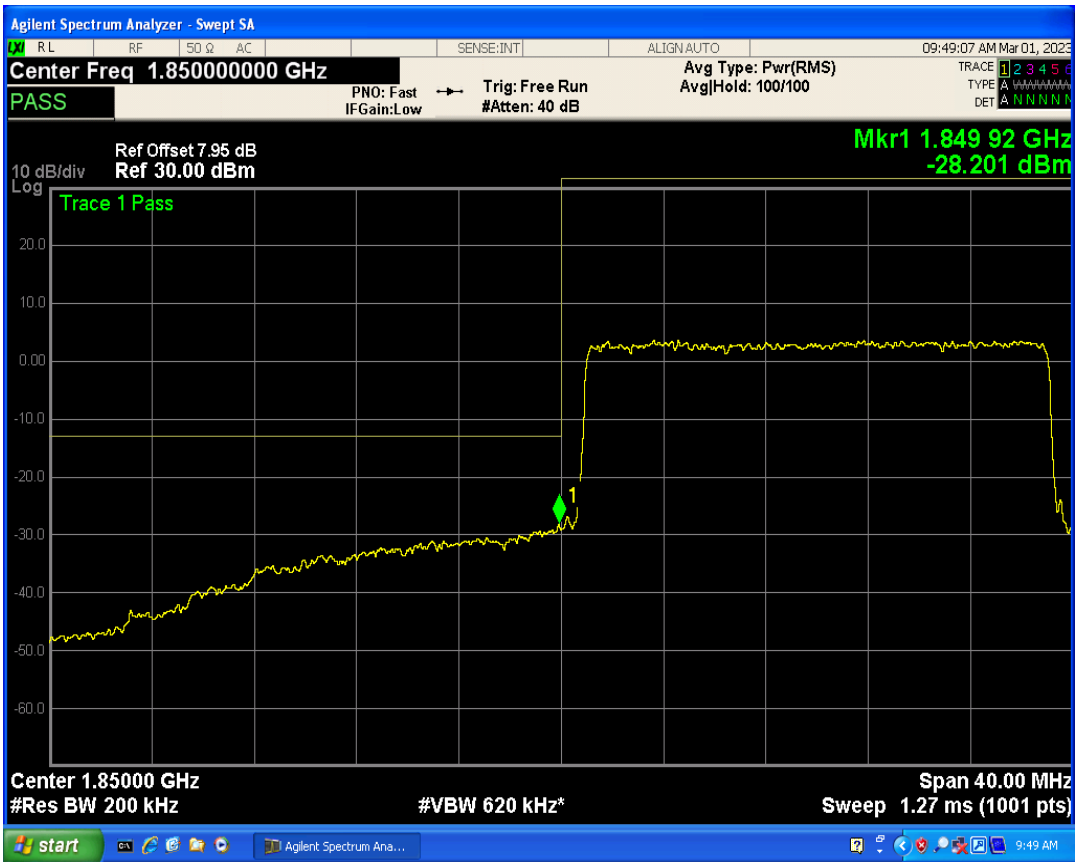

Band25 QAM16 BW=20MHz Channel=26140 RB Size=1 Position=#Max

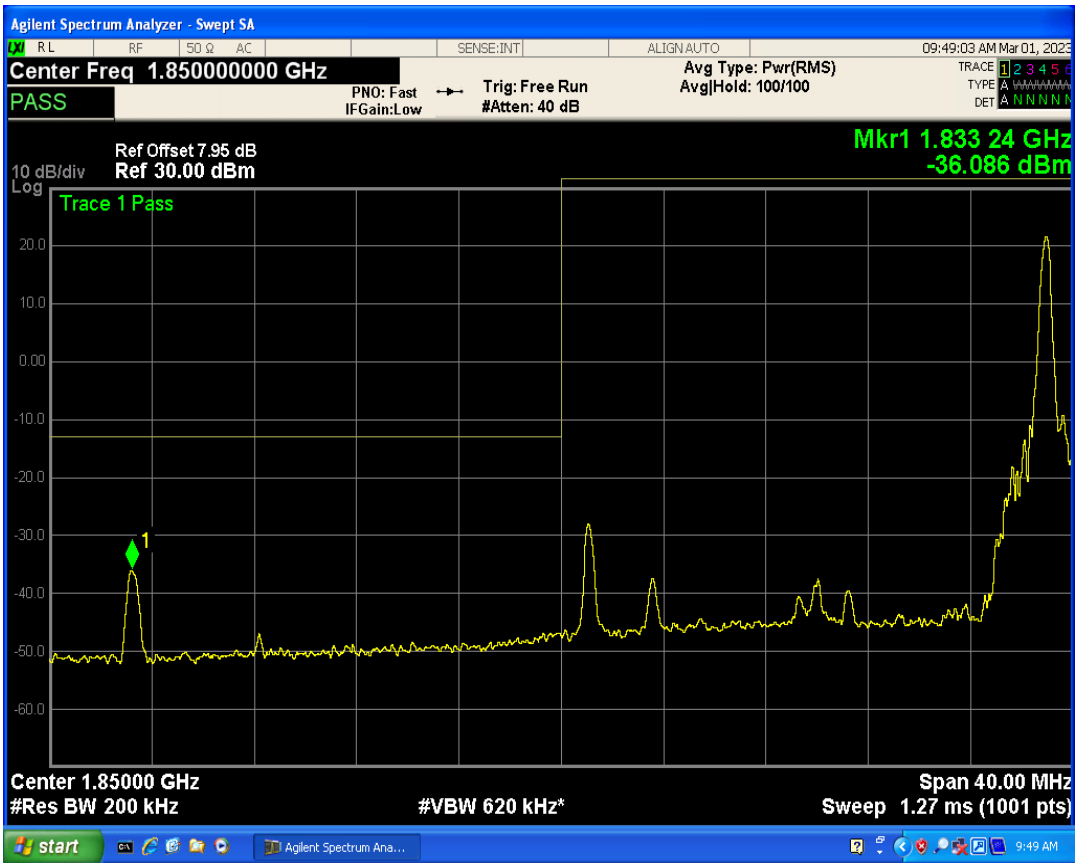

Band25 QAM16 BW=20MHz Channel=26140 RB Size=1 Position=#0

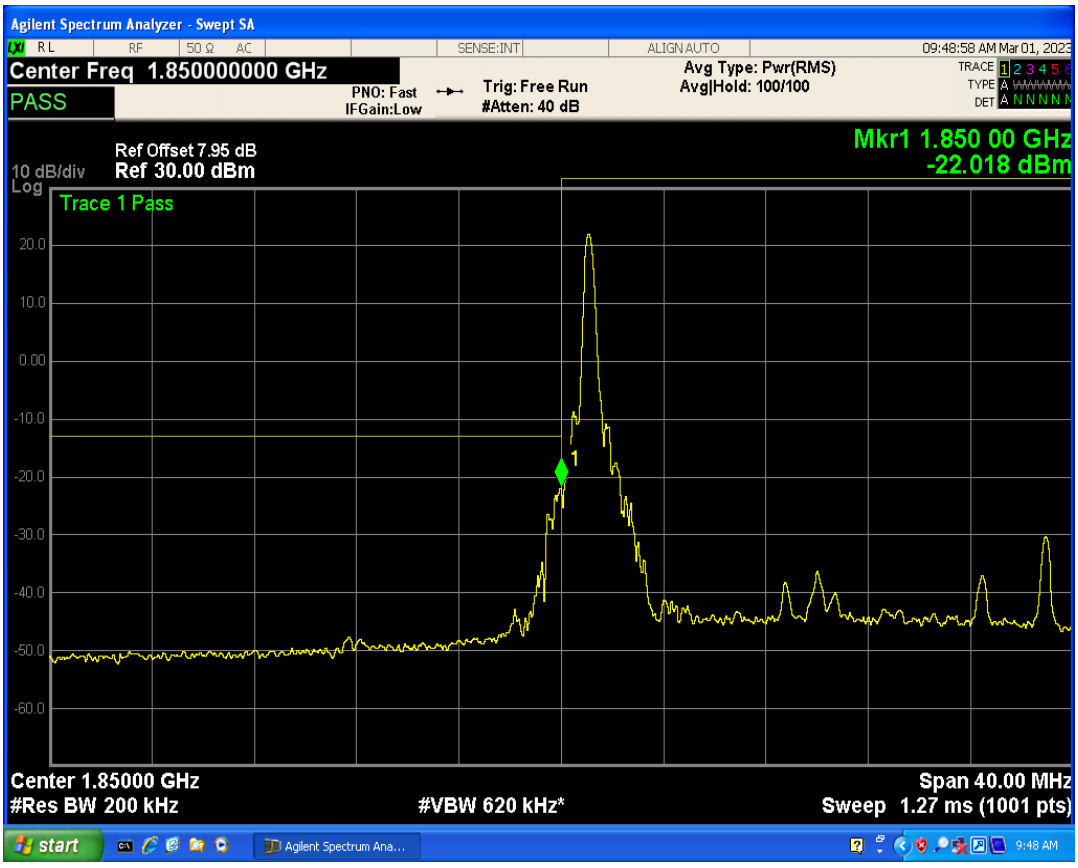

Band25 QAM16 BW=20MHz Channel=26590 RB Size=100 Position=#0

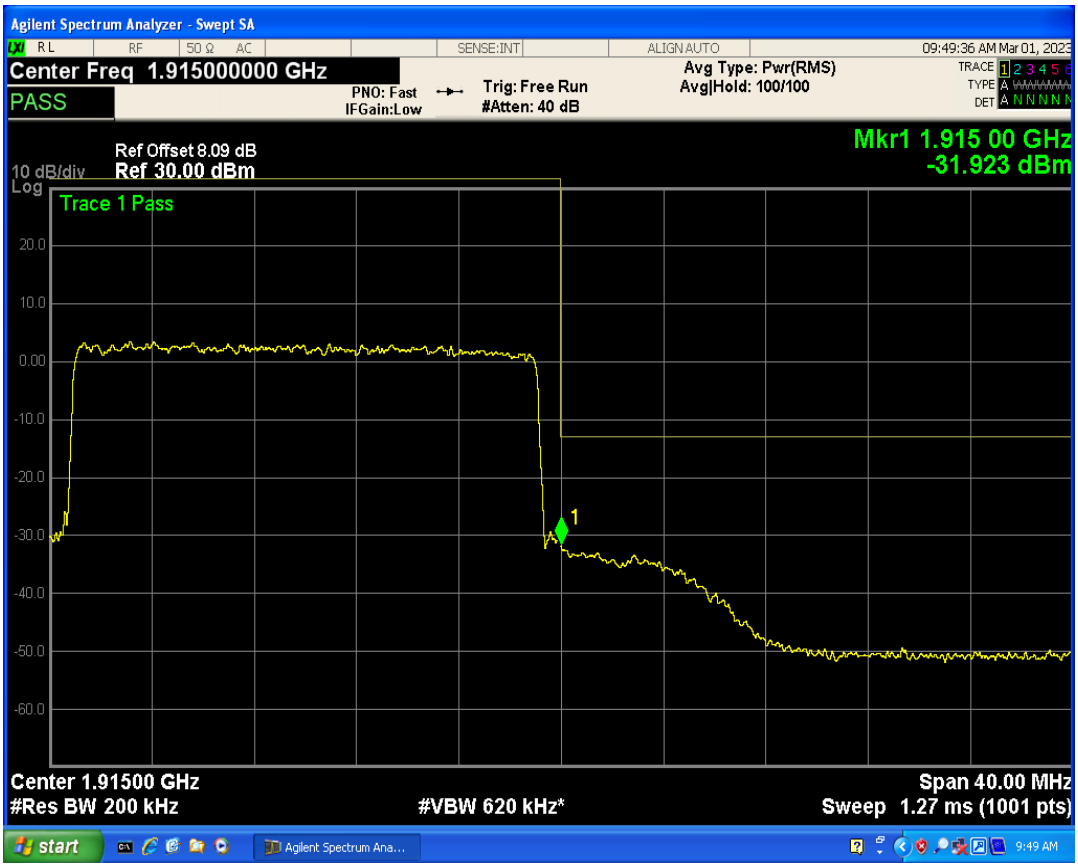

Band25 QAM16 BW=20MHz Channel=26590 RB Size=1 Position=#Max

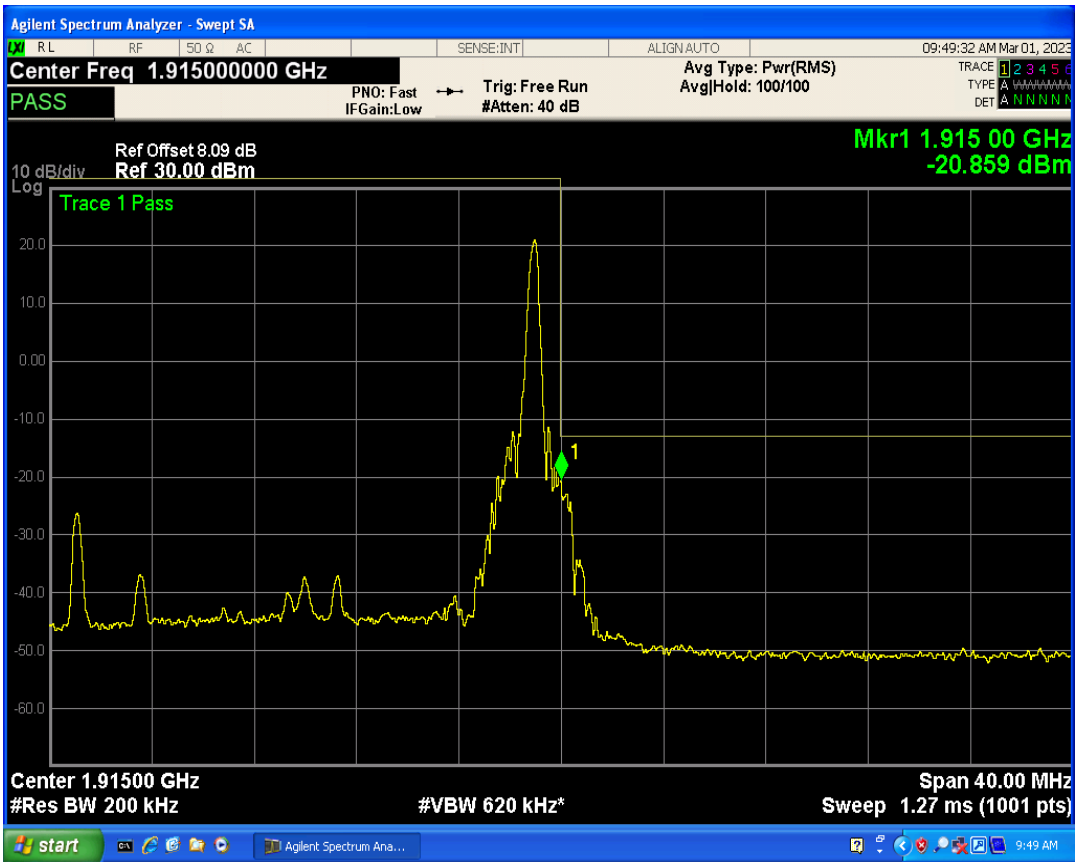

Band25 QAM16 BW=20MHz Channel=26590 RB Size=1 Position=#0

Band25 QAM16 BW=15MHz Channel=26115 RB Size=75 Position=#0

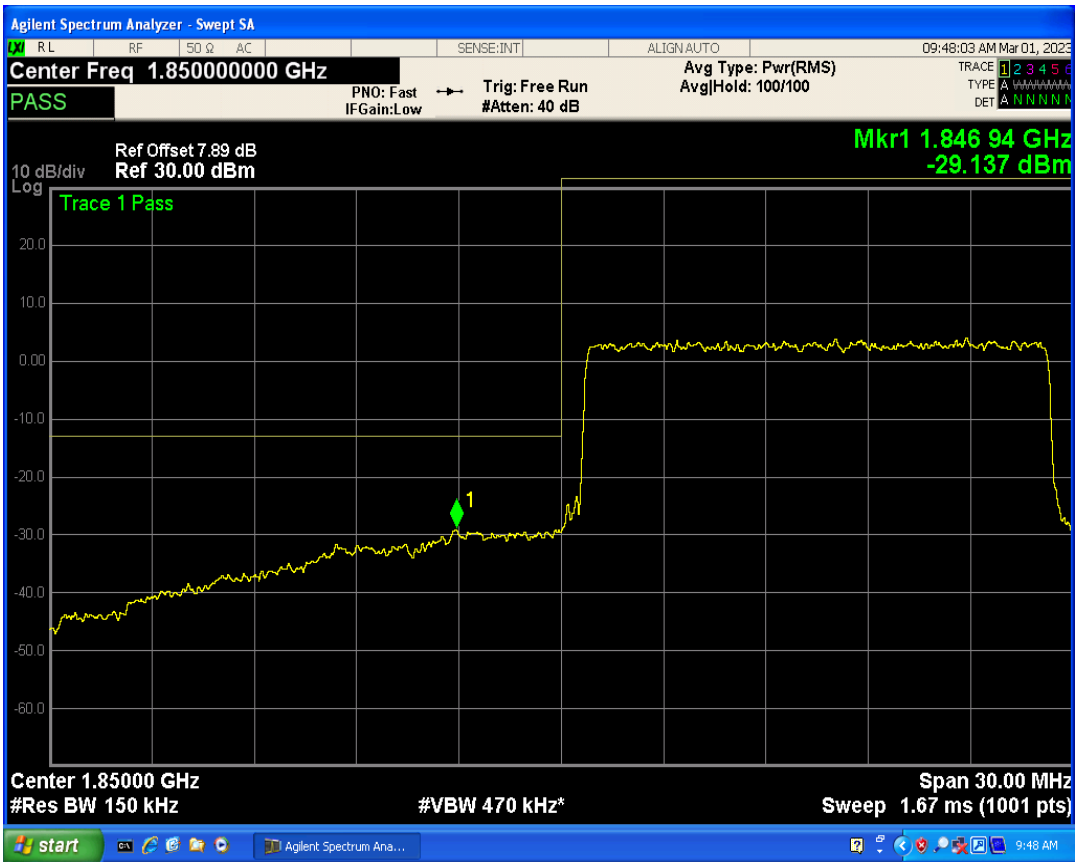

Band25 QAM16 BW=15MHz Channel=26115 RB Size=1 Position=#Max

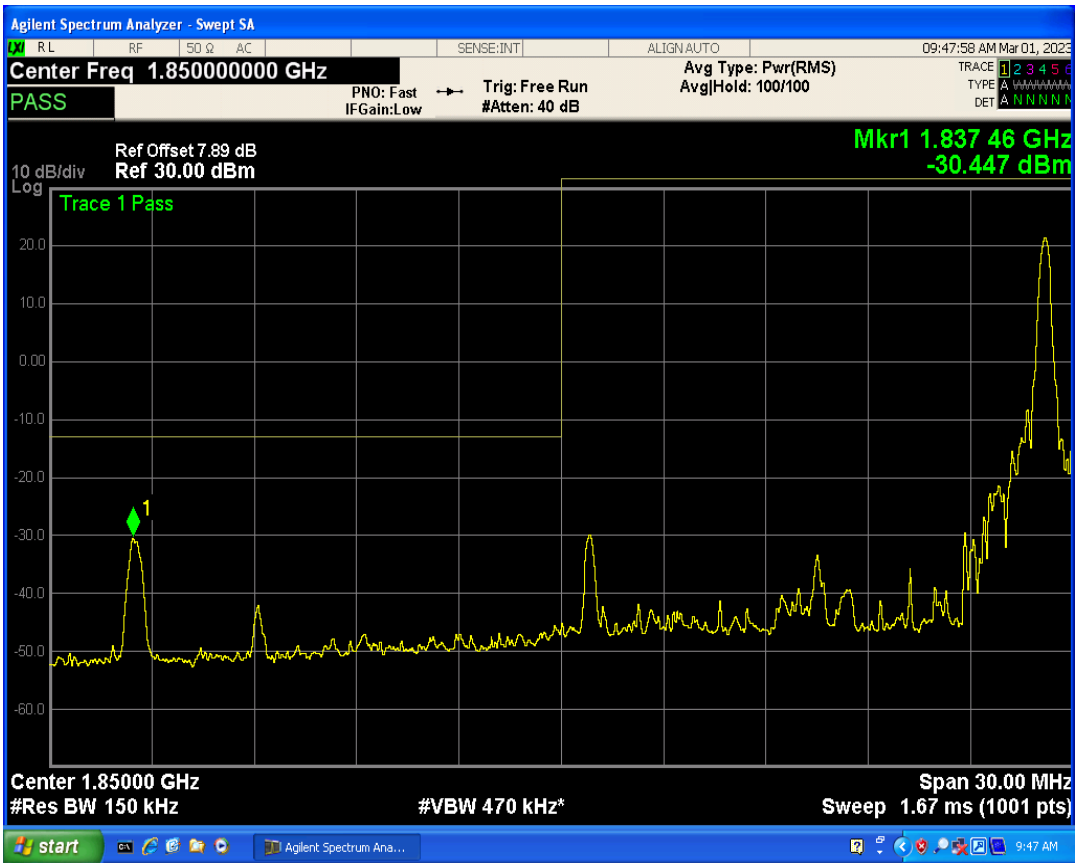

Band25 QAM16 BW=15MHz Channel=26115 RB Size=1 Position=#0

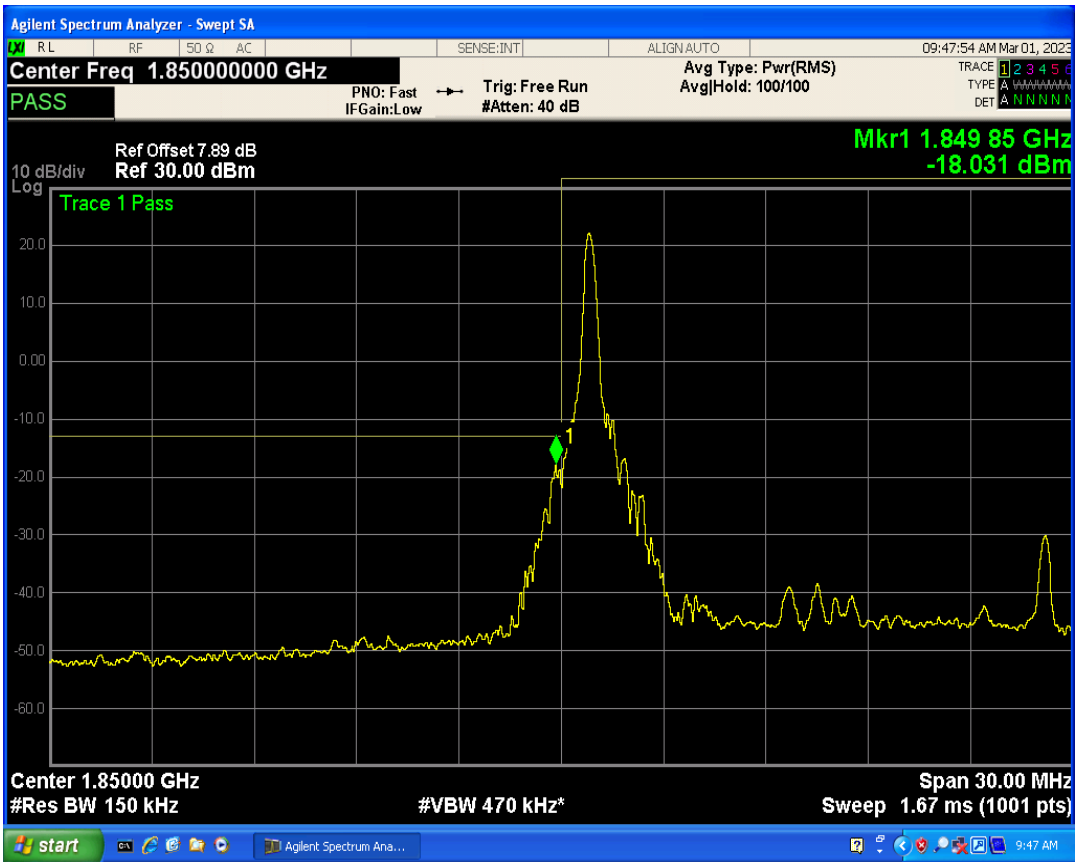

Band25 QAM16 BW=15MHz Channel=26615 RB Size=75 Position=#0

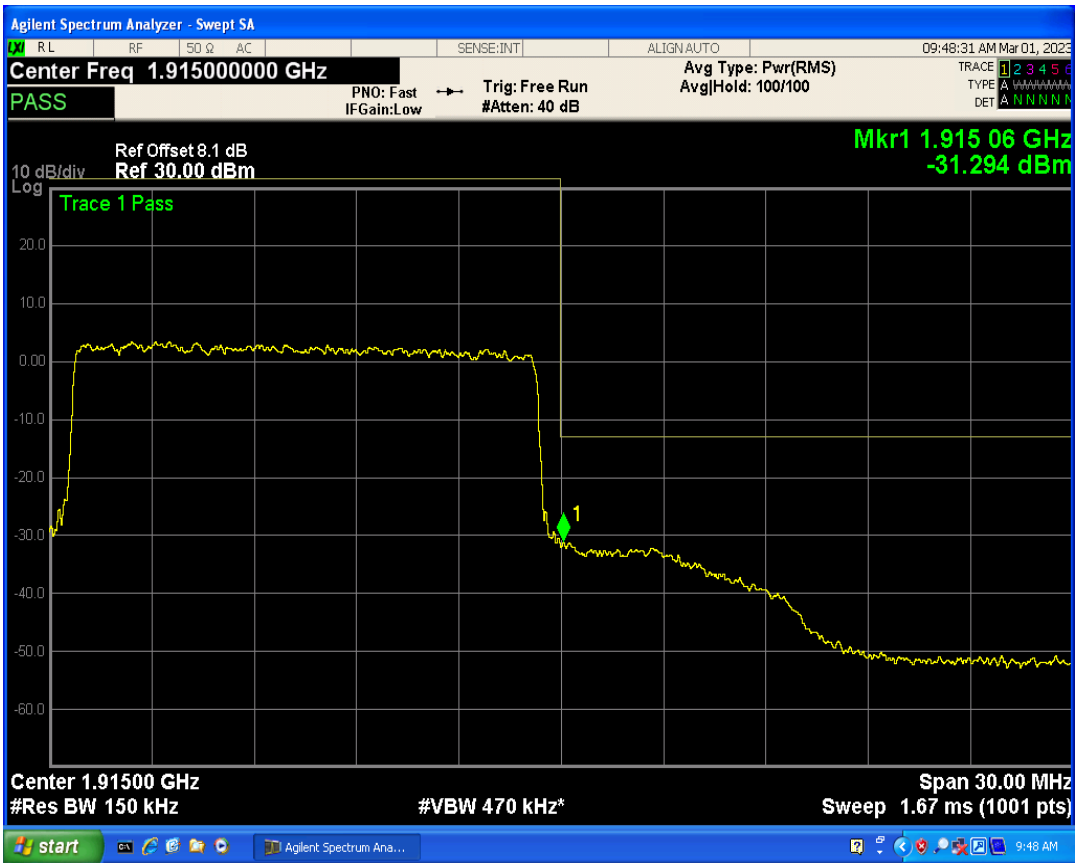

Band25 QAM16 BW=15MHz Channel=26615 RB Size=1 Position=#Max

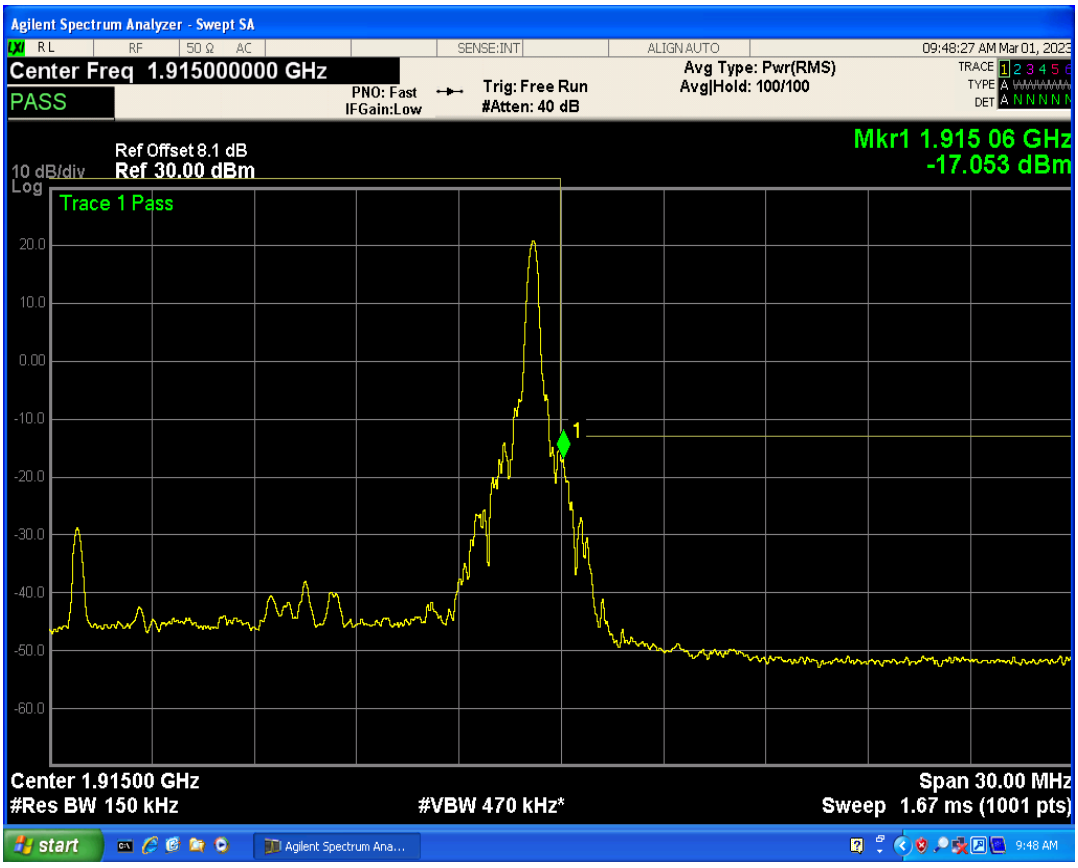

Band25 QAM16 BW=15MHz Channel=26615 RB Size=1 Position=#0

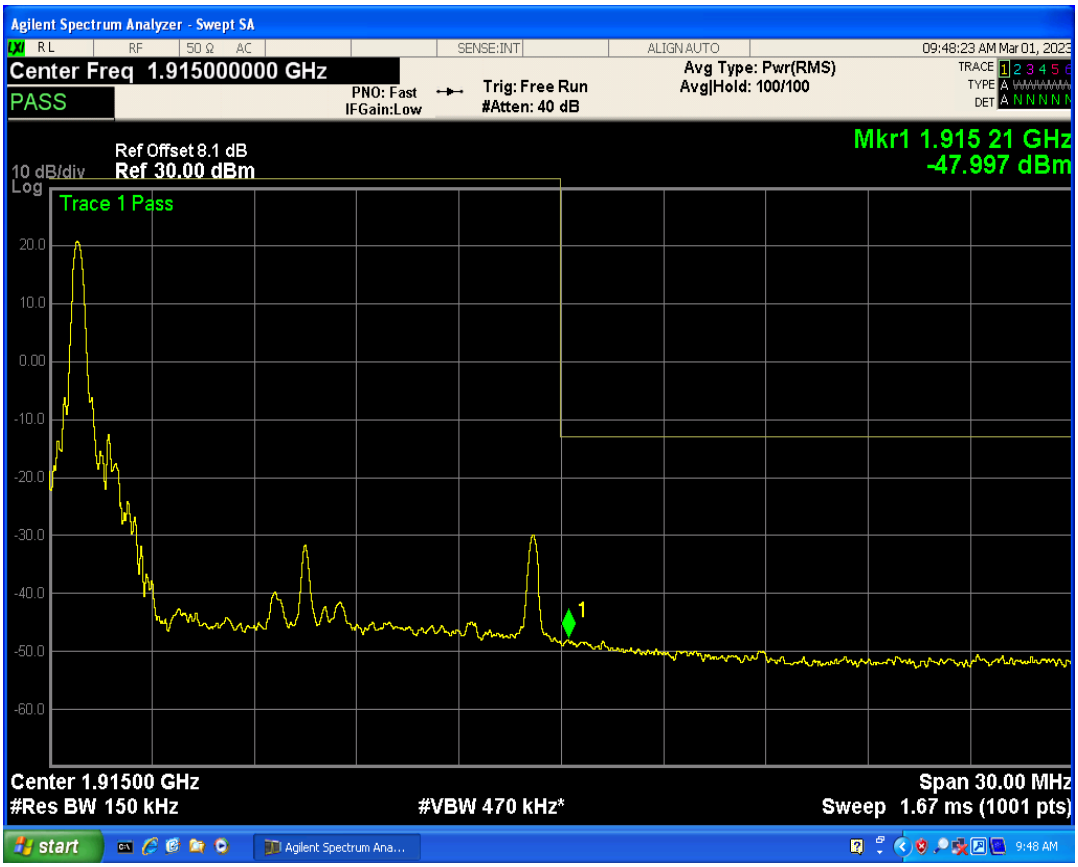

Band25 QAM16 BW=5MHz Channel=26065 RB Size=25 Position=#0

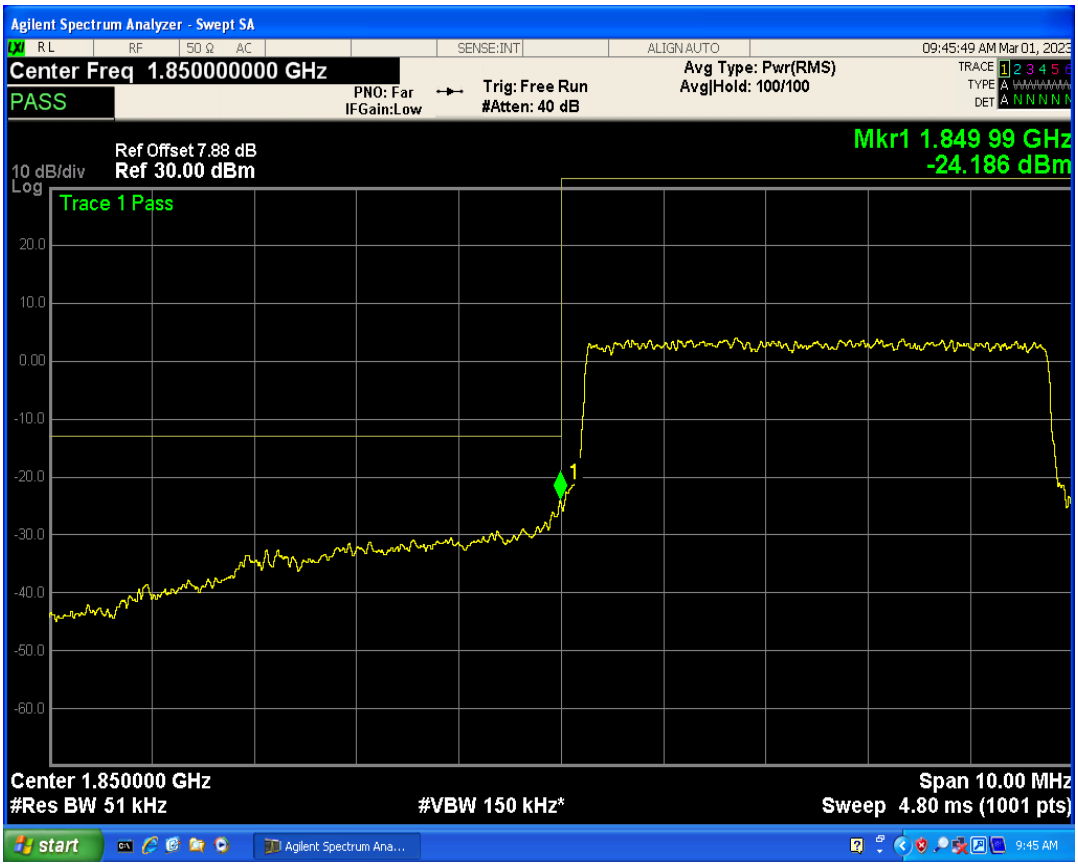

Band25 QAM16 BW=5MHz Channel=26065 RB Size=1 Position=#Max

Band25 QAM16 BW=5MHz Channel=26065 RB Size=1 Position=#0

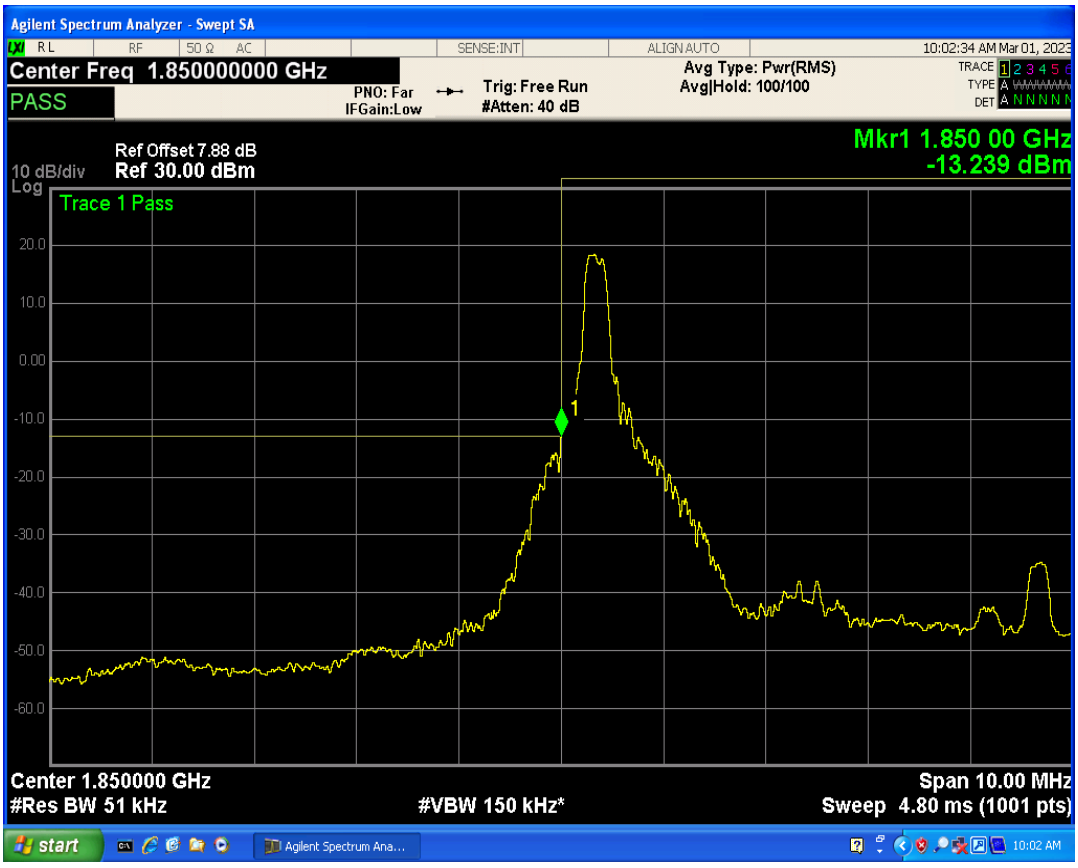

Band25 QAM16 BW=5MHz Channel=26665 RB Size=25 Position=#0