


Plot 21: DUT: 4G smart Phone; EUT Model: AGM_NOTE_N2

Test Date	2026-05-03
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 19 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	837.5
Relative permittivity (real part)	42.36
Conductivity (S/m)	0.91

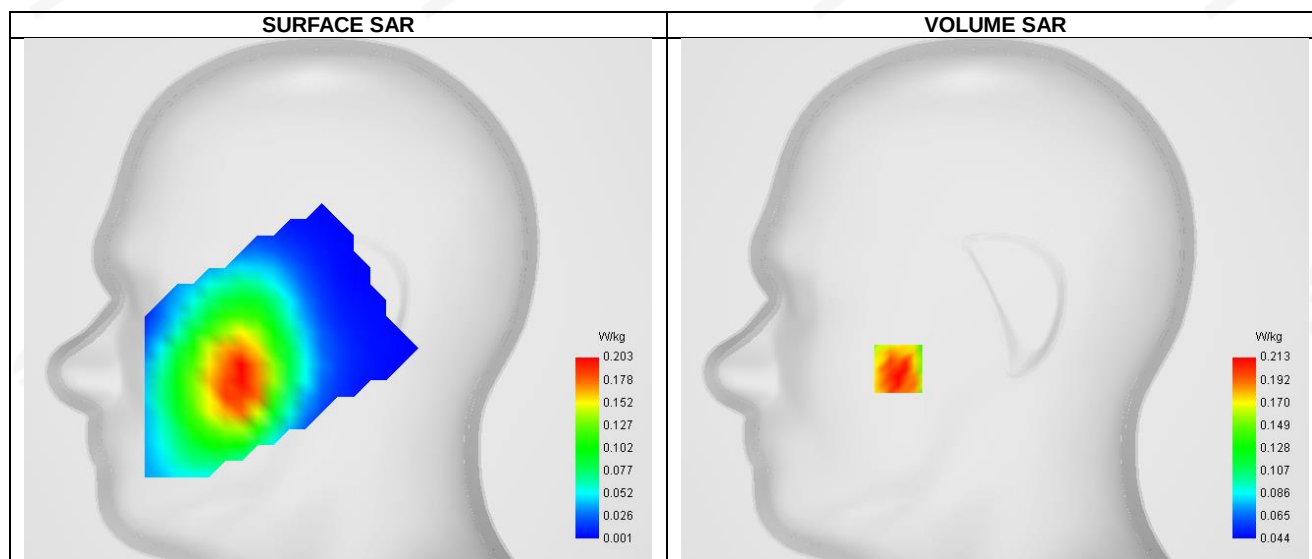


Maximum location: X=-48.00, Y=-34.00 ; SAR Peak: 0.31 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.124
SAR 1g (W/Kg)	0.195
Horizontal validation criteria: minimum distance (mm)	14.331028
Vertical validation criteria: SAR ratio M2/M1 (%)	61.831858

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.339	0.213	0.171	0.167	0.138	0.136	0.130	0.114	0.104	0.092	0.083	0.077

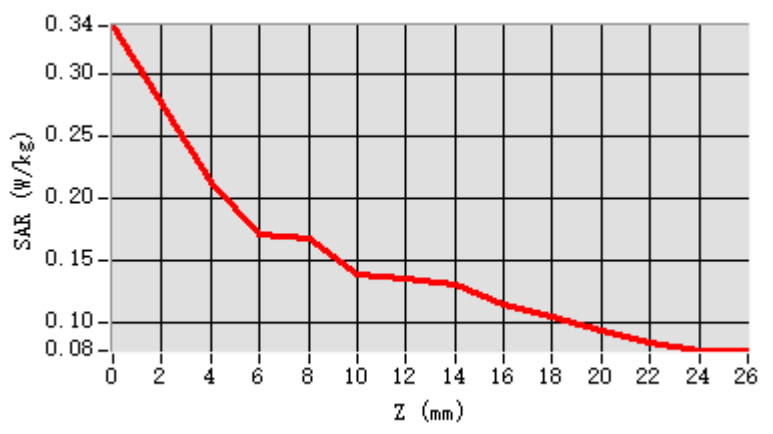


F. 3D Image

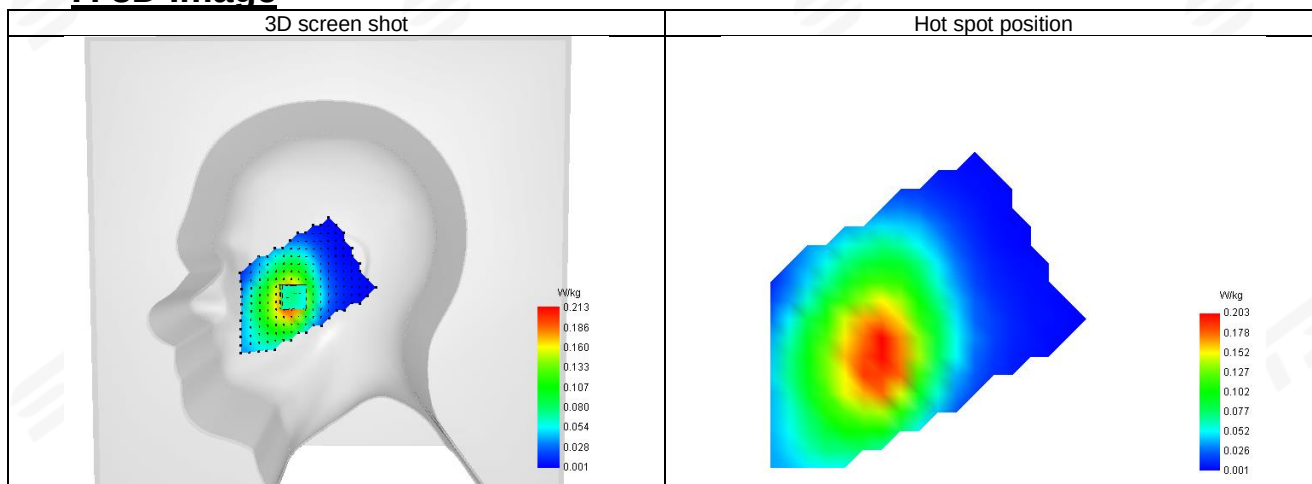



Plot 22: DUT: 4G smart Phone; EUT Model: AGM_NOTE_N2

Test Date	2026-05-03
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 19 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	837.5
Relative permittivity (real part)	42.36
Conductivity (S/m)	0.91

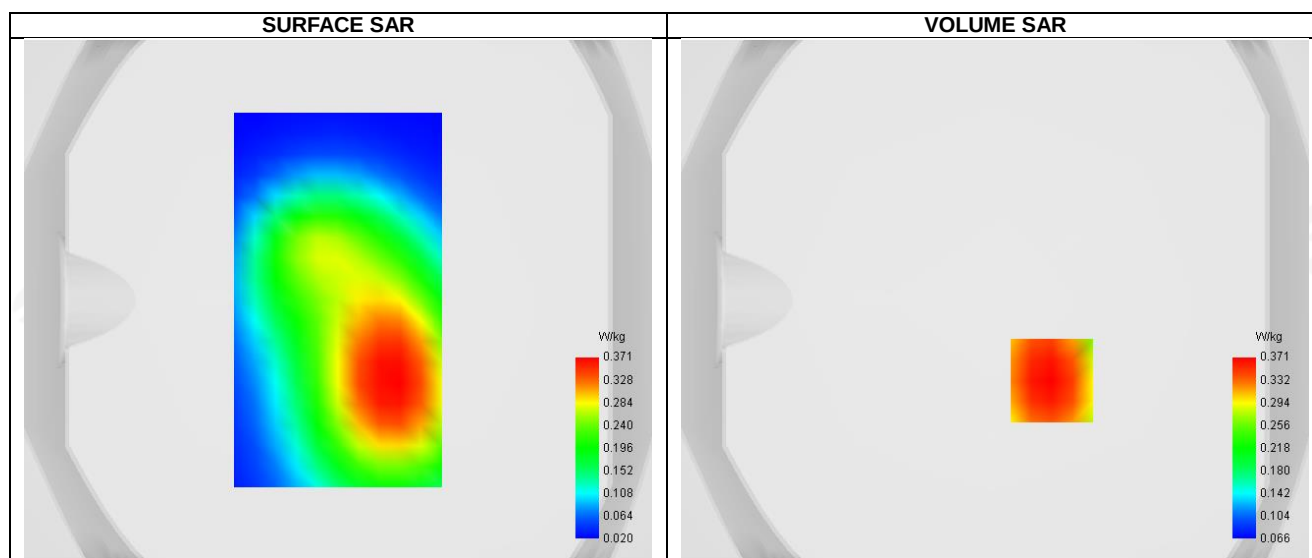


Maximum location: X=22.00, Y=-31.00 ; SAR Peak: 0.46 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.266
SAR 1g (W/Kg)	0.363
Horizontal validation criteria: minimum distance (mm)	13.859171
Vertical validation criteria: SAR ratio M2/M1 (%)	80.129589

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.463	0.371	0.286	0.222	0.172	0.127	0.097

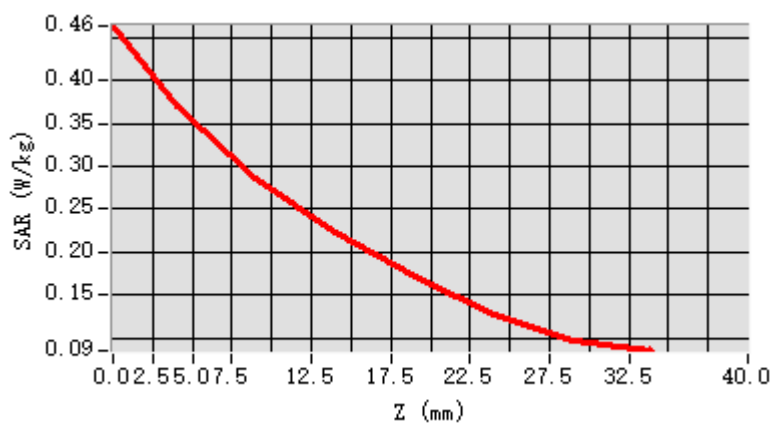


F. 3D Image

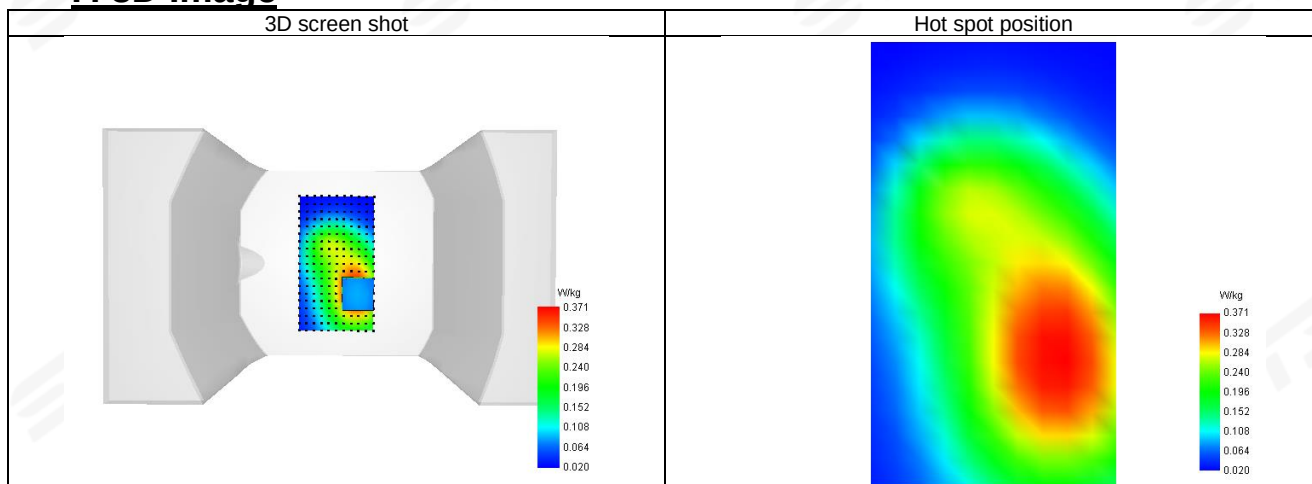

Plot 23: DUT: 4G smart Phone; EUT Model: AGM_NOTE_N2

Test Date	2026-05-03
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 26 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	841.5
Relative permittivity (real part)	41.39
Conductivity (S/m)	0.90

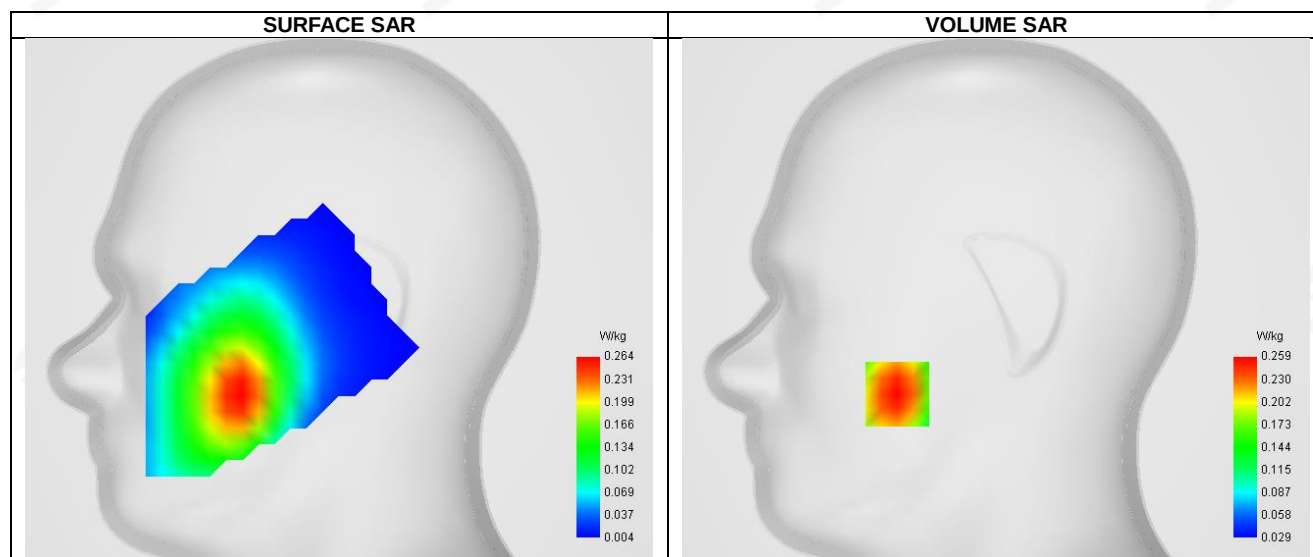


Maximum location: X=-49.00, Y=-47.00 ; SAR Peak: 0.33 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.180
SAR 1g (W/Kg)	0.252
Horizontal validation criteria: minimum distance (mm)	22.627417
Vertical validation criteria: SAR ratio M2/M1 (%)	76.915925

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.328	0.259	0.199	0.154	0.121	0.090	0.068

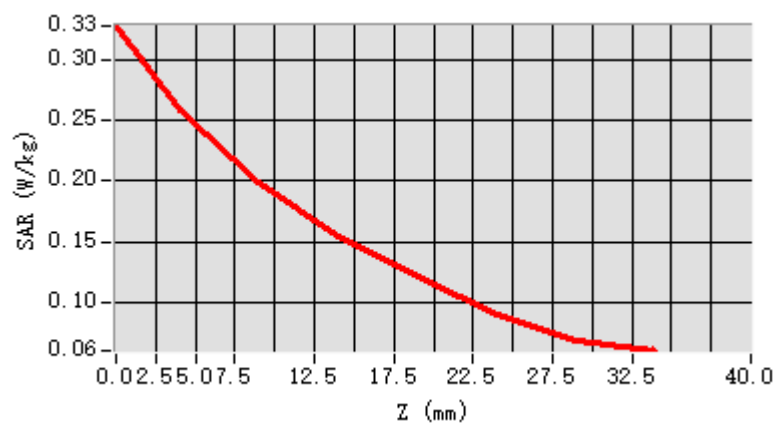


F. 3D Image

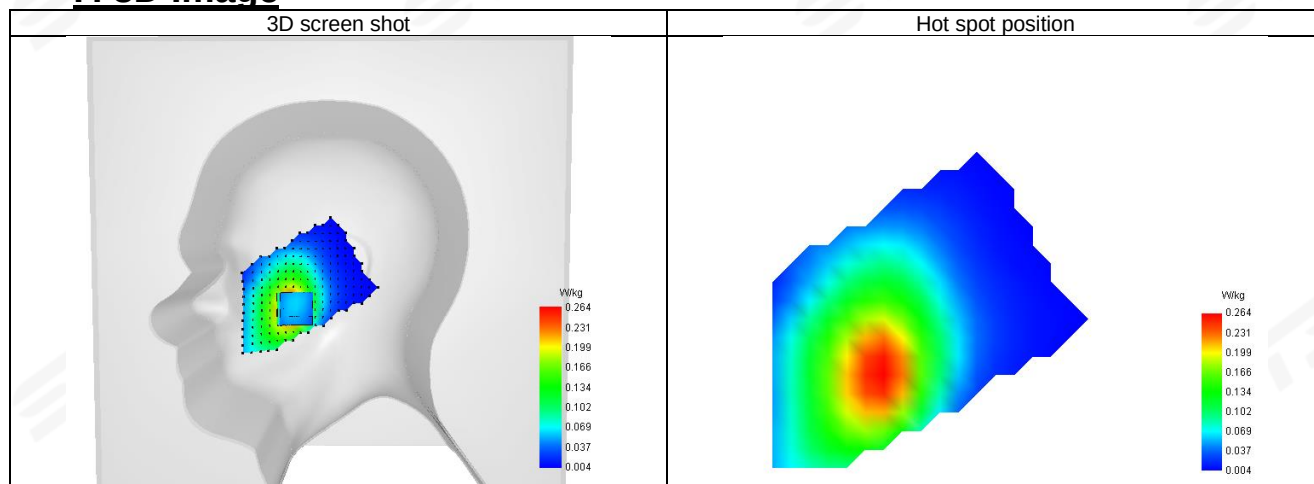



Plot 24: DUT: 4G smart Phone; EUT Model: AGM_NOTE_N2


Test Date	2026-05-03
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 26 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	841.5
Relative permittivity (real part)	41.39
Conductivity (S/m)	0.90

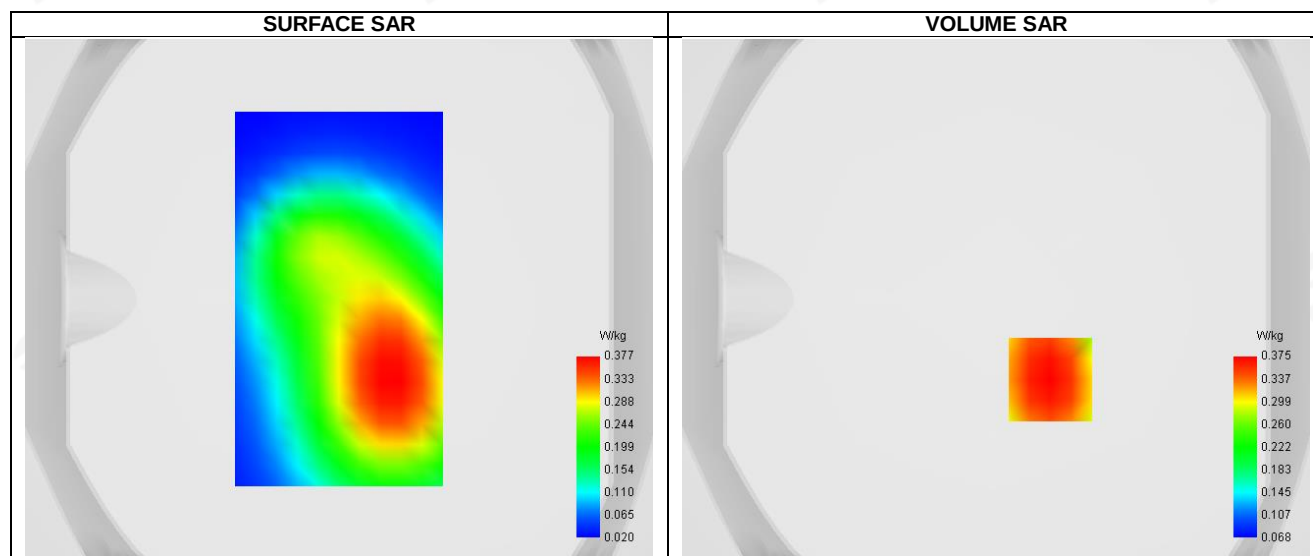**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.271
SAR 1g (W/Kg)	0.368
Horizontal validation criteria: minimum distance (mm)	18.664957
Vertical validation criteria: SAR ratio M2/M1 (%)	80.299785

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.467	0.375	0.293	0.227	0.177	0.131	0.099

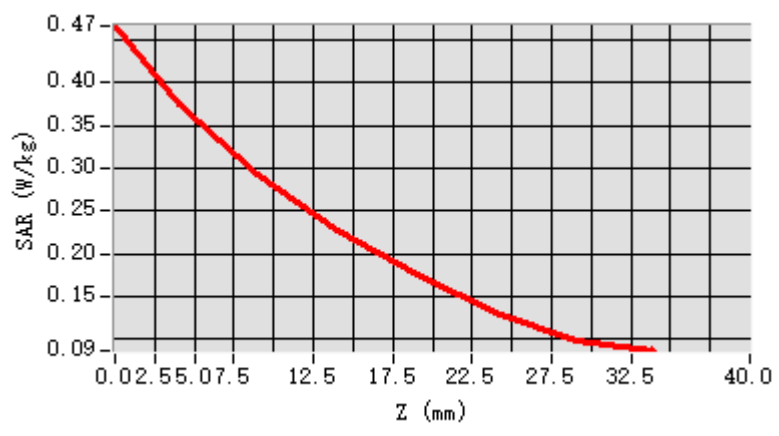


F. 3D Image

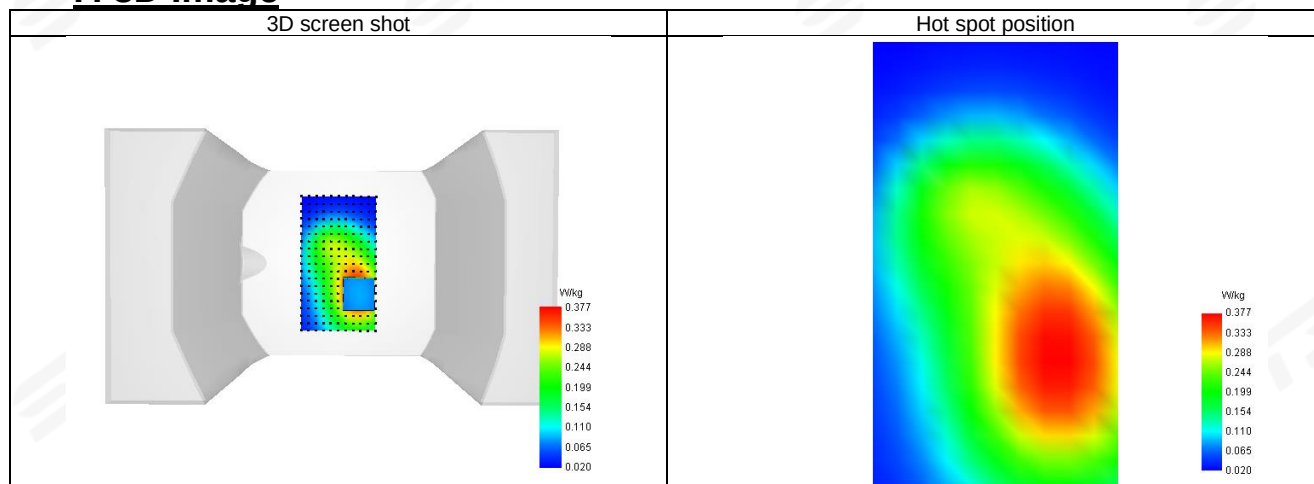

Plot 25: DUT: 4G smart Phone; EUT Model: AGM_NOTE_N2

Test Date	2026-05-06
ConvF	1.70
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 38 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2580
Relative permittivity (real part)	39.20
Conductivity (S/m)	1.95

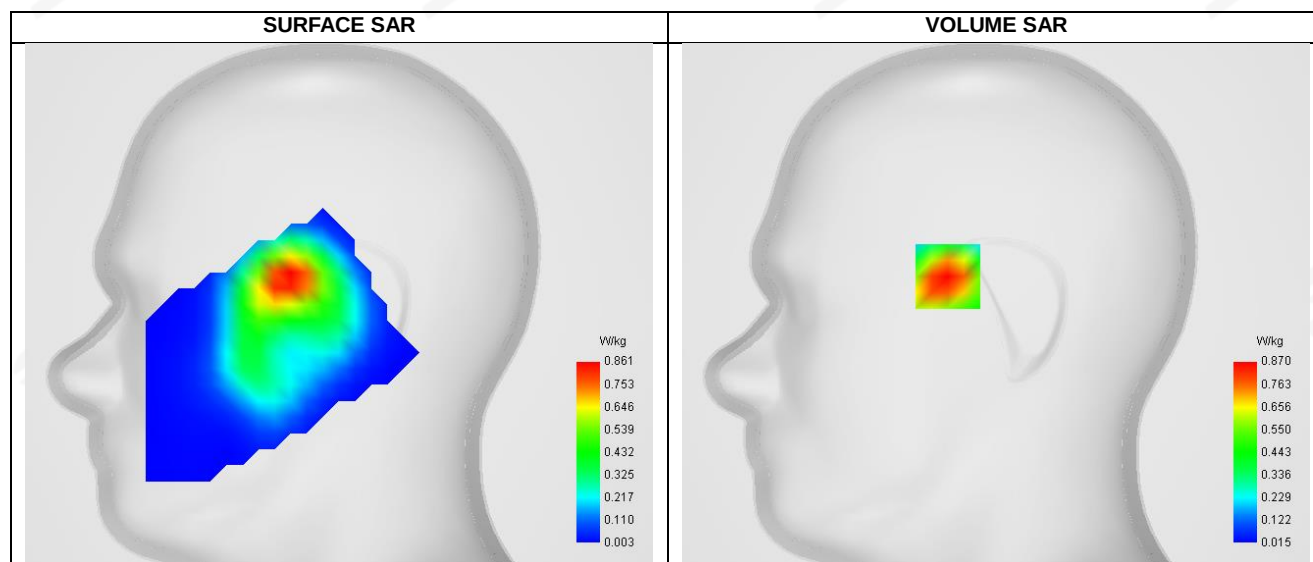


Maximum location: X=-24.00, Y=14.00 ; SAR Peak: 1.27 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.479
SAR 1g (W/Kg)	0.827
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	62.128330

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.259	0.870	0.541	0.329	0.206	0.127	0.079

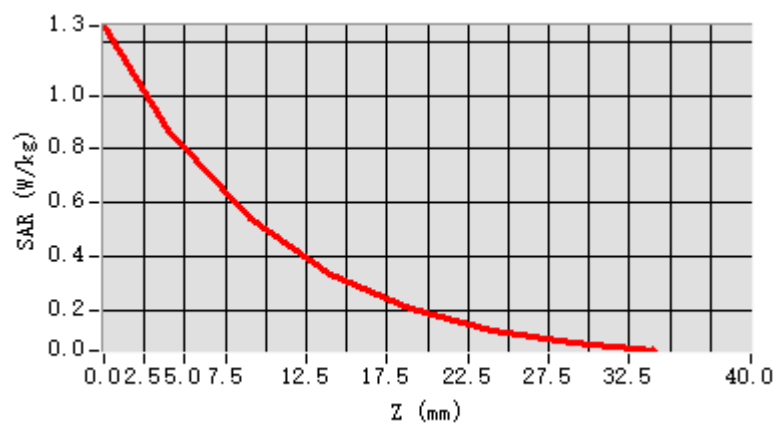


F. 3D Image

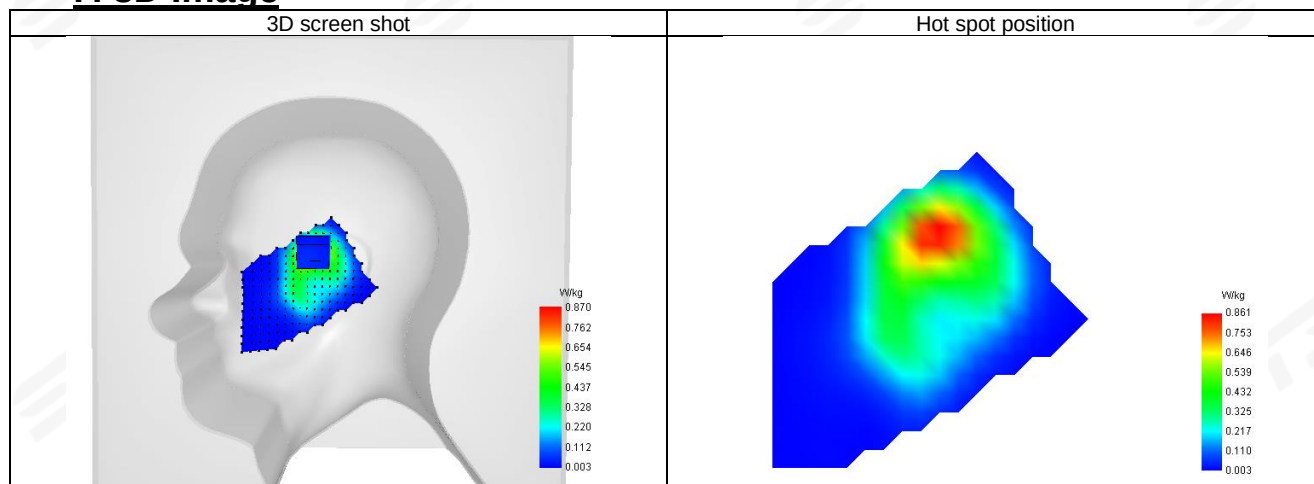

**Plot 26: DUT: 4G smart Phone; EUT Model: AGM_NOTE_N2**

Test Date	2026-05-06
ConvF	1.70
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 38 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2580
Relative permittivity (real part)	39.20
Conductivity (S/m)	1.95

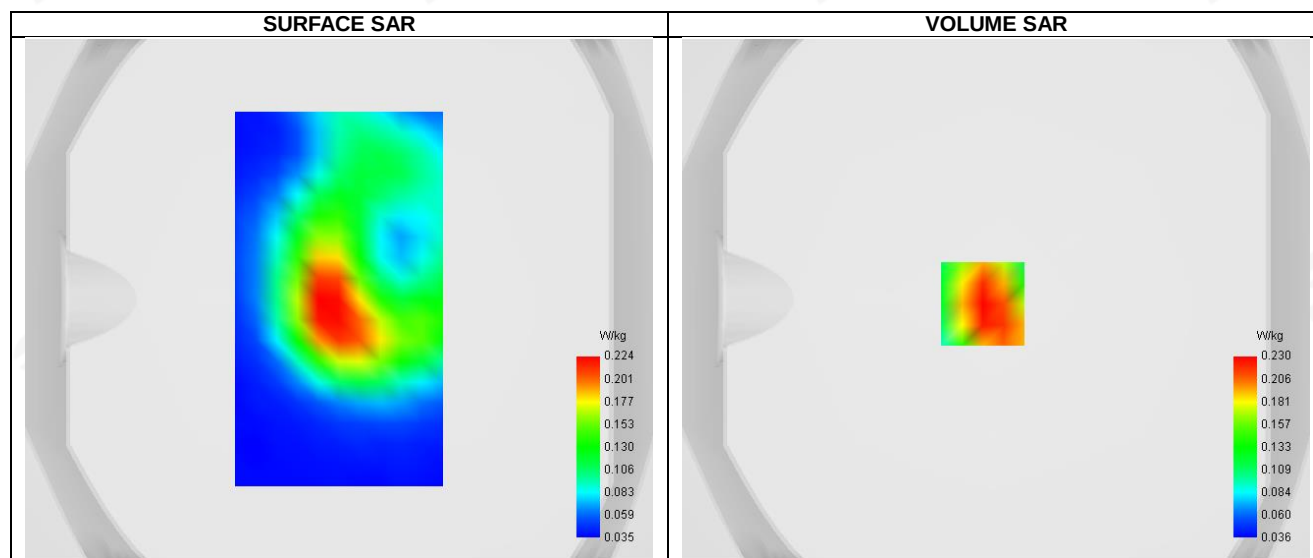


Maximum location: X=-5.00, Y=-2.00 ; SAR Peak: 0.39 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.137
SAR 1g (W/Kg)	0.233
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	59.320527

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.387	0.230	0.136	0.088	0.081	0.059	0.044

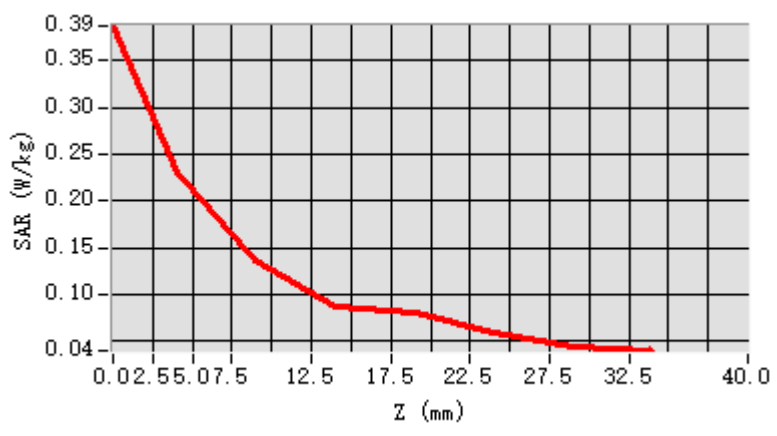


F. 3D Image

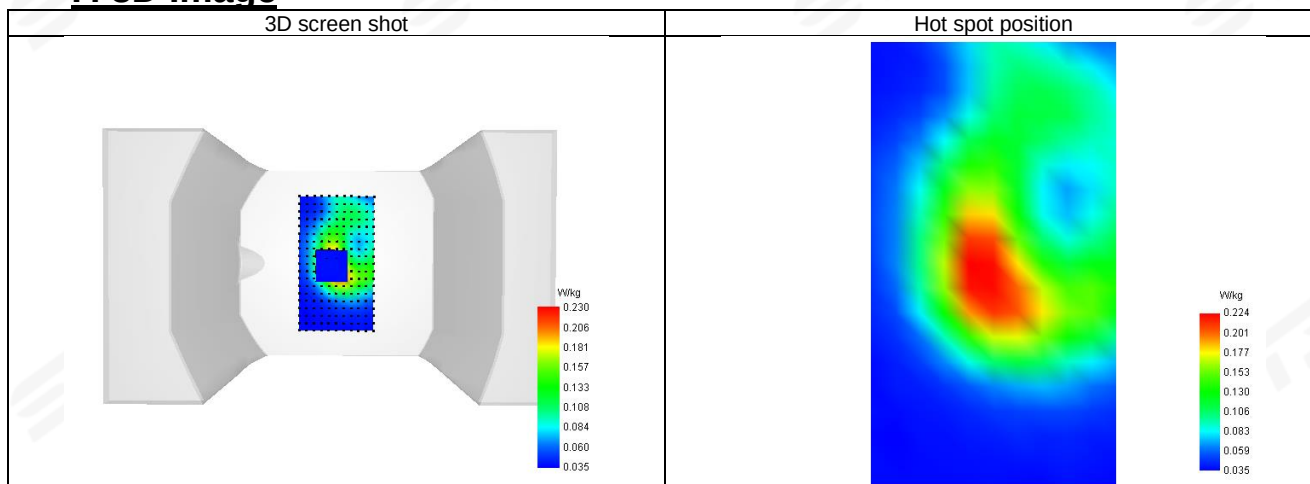

Plot 27: DUT: 4G smart Phone; EUT Model: AGM_NOTE_N2

Test Date	2026-05-06
ConvF	1.70
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 41 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2506
Relative permittivity (real part)	39.07
Conductivity (S/m)	1.86

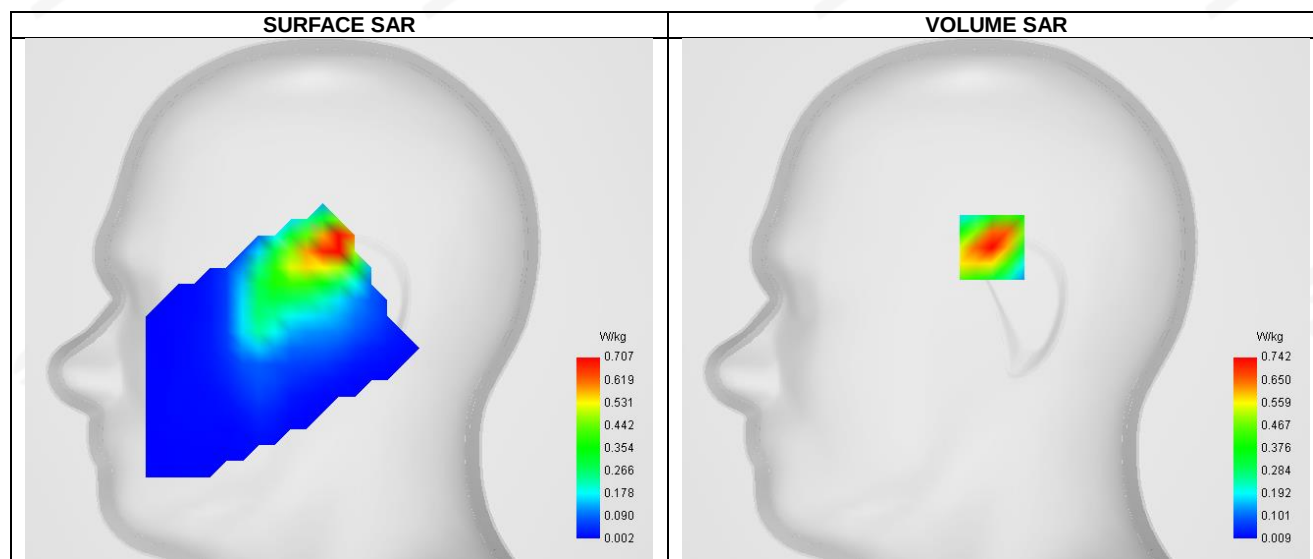


Maximum location: X=-2.00, Y=26.00 ; SAR Peak: 1.20 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.358
SAR 1g (W/Kg)	0.698
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	54.596275

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.170	0.742	0.405	0.220	0.120	0.065	0.036

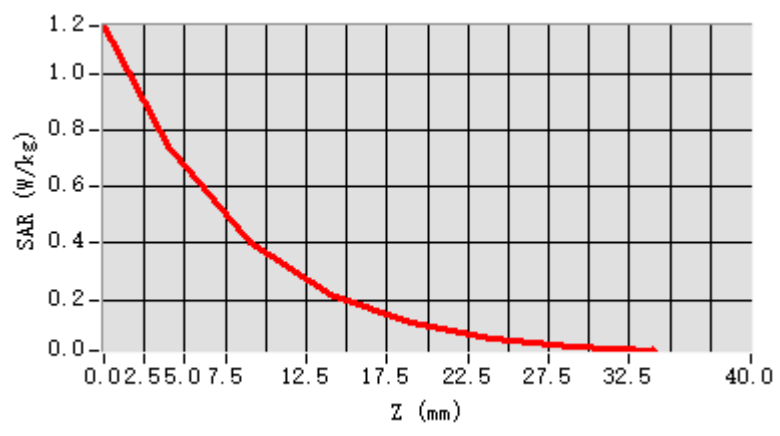


F. 3D Image

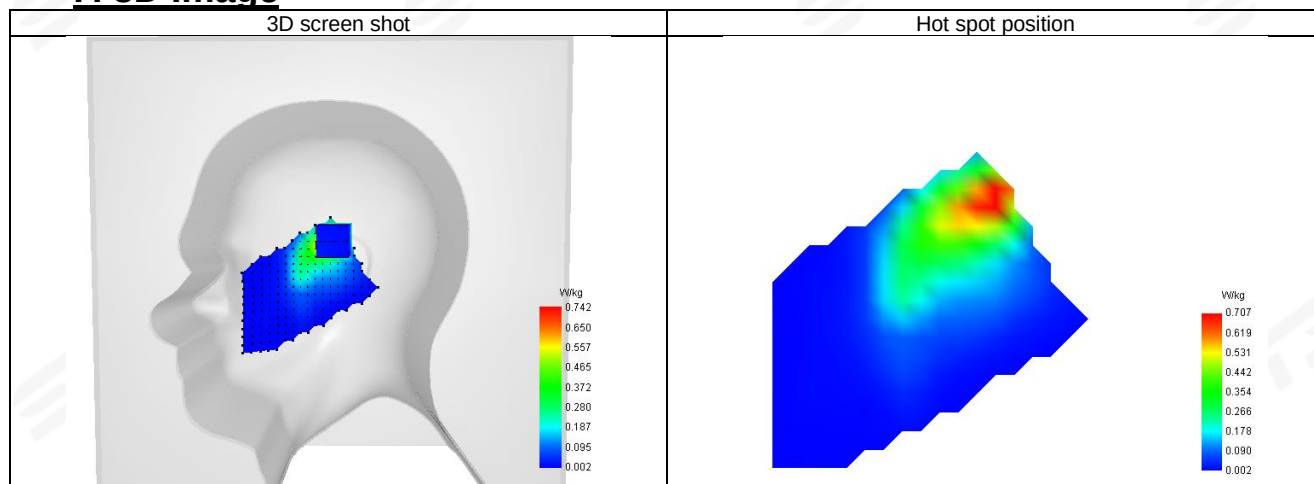

Plot 28: DUT: 4G smart Phone; EUT Model: AGM_NOTE_N2

Test Date	2026-05-06
ConvF	1.70
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 41 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2506
Relative permittivity (real part)	39.07
Conductivity (S/m)	1.86

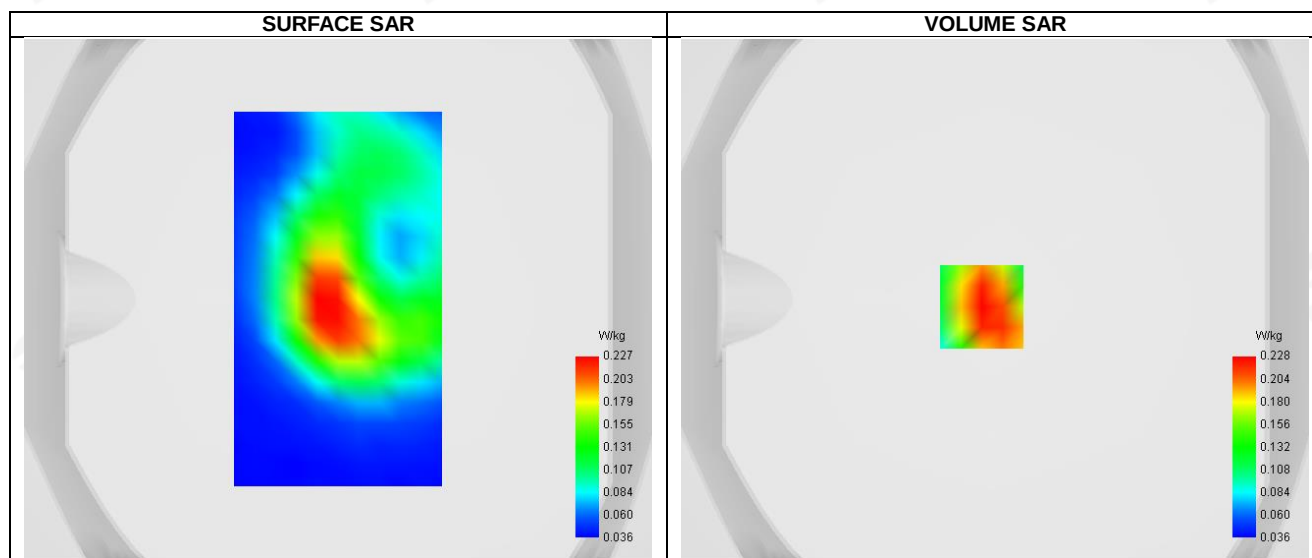


Maximum location: X=-5.00, Y=-3.00 ; SAR Peak: 0.37 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.140
SAR 1g (W/Kg)	0.230
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	59.397869

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.380	0.228	0.135	0.086	0.079	0.057	0.042

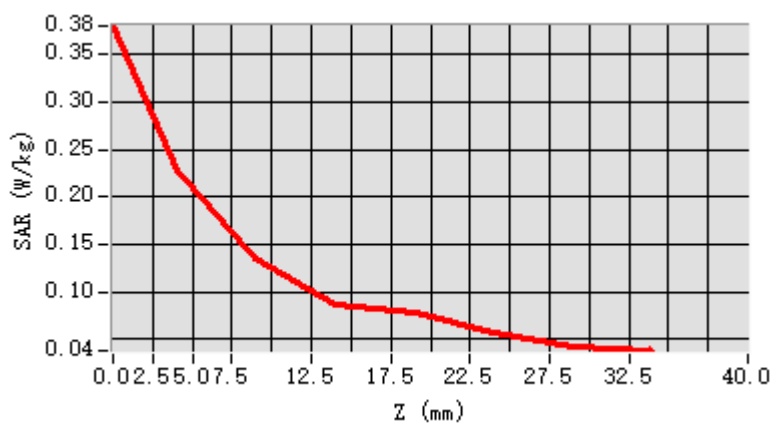


F. 3D Image

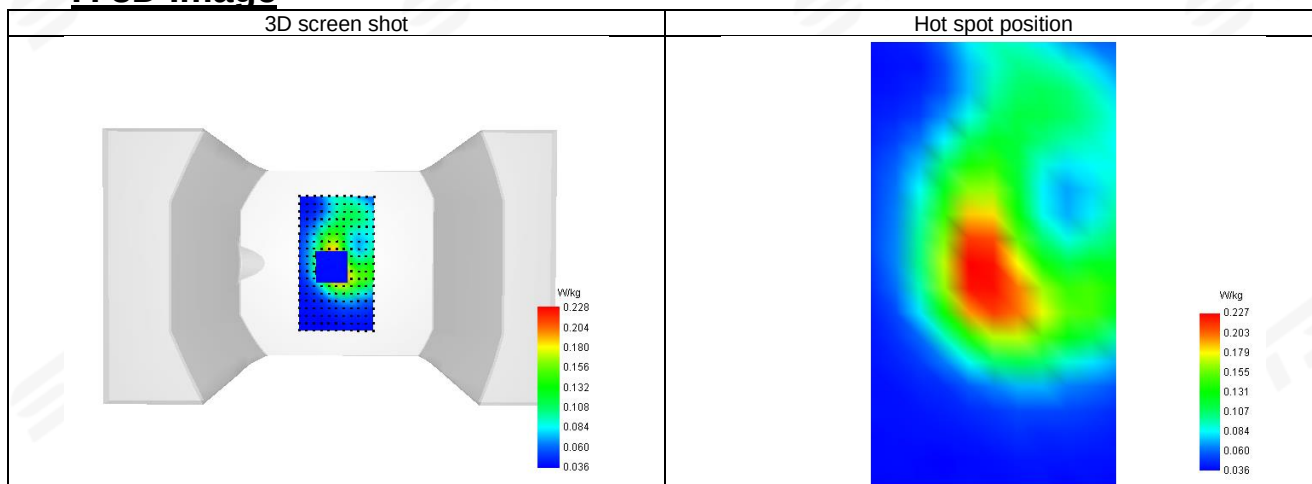

Plot 29: DUT: 4G smart Phone; EUT Model: AGM_NOTE_N2

Test Date	2026-05-04
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 66&4 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1745
Relative permittivity (real part)	39.67
Conductivity (S/m)	1.38

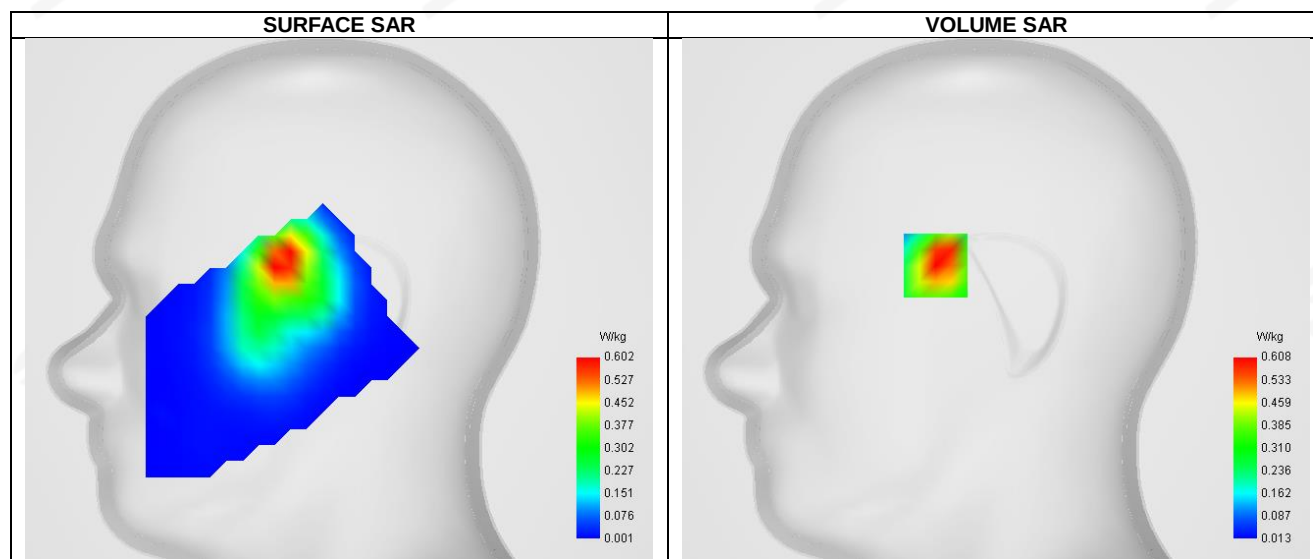


Maximum location: X=-30.00, Y=17.00 ; SAR Peak: 0.95 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.322
SAR 1g (W/Kg)	0.580
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	66.422211

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.816	0.608	0.404	0.238	0.150	0.094	0.058

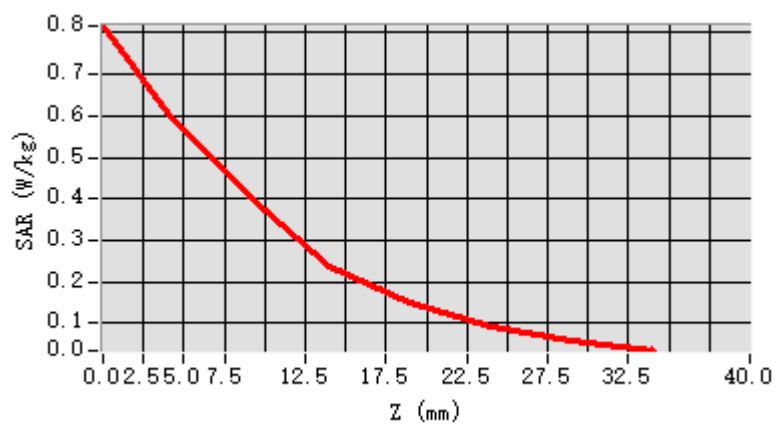


F. 3D Image

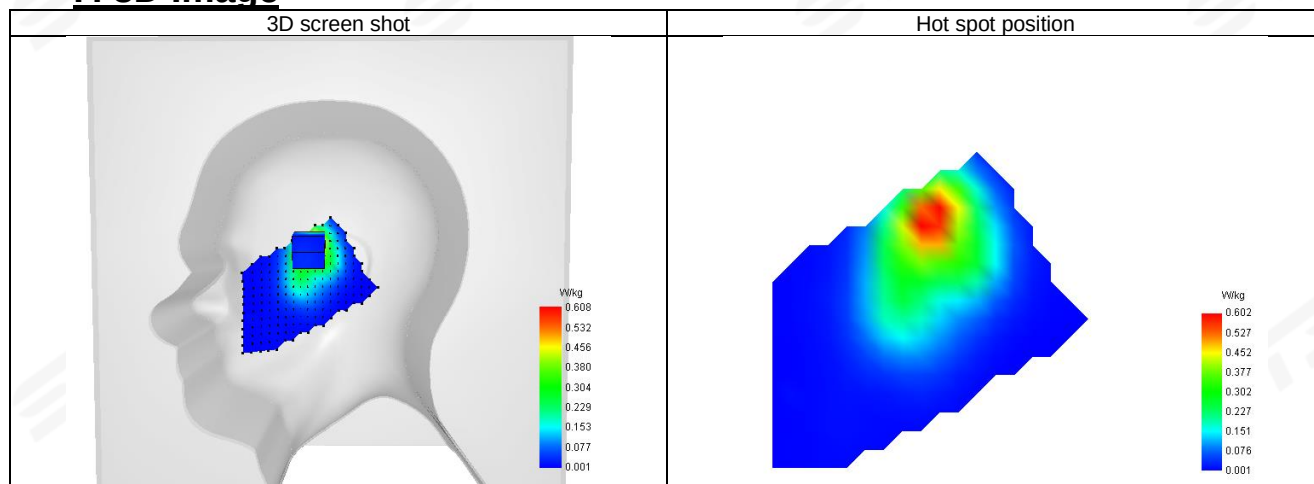

**Plot 30: DUT: 4G smart Phone; EUT Model: AGM_NOTE_N2**

Test Date	2026-05-04
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 66&4 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1745
Relative permittivity (real part)	39.67
Conductivity (S/m)	1.38

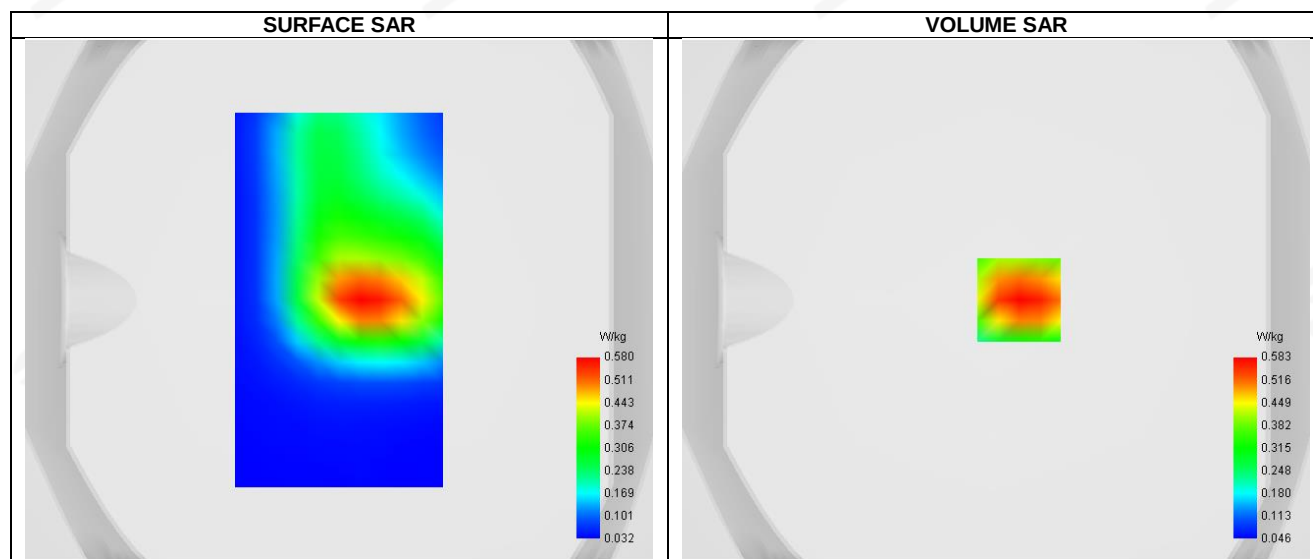


Maximum location: X=9.00, Y=0.00 ; SAR Peak: 0.82 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.357
SAR 1g (W/Kg)	0.560
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	67.140353

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.815	0.583	0.392	0.265	0.190	0.131	0.091

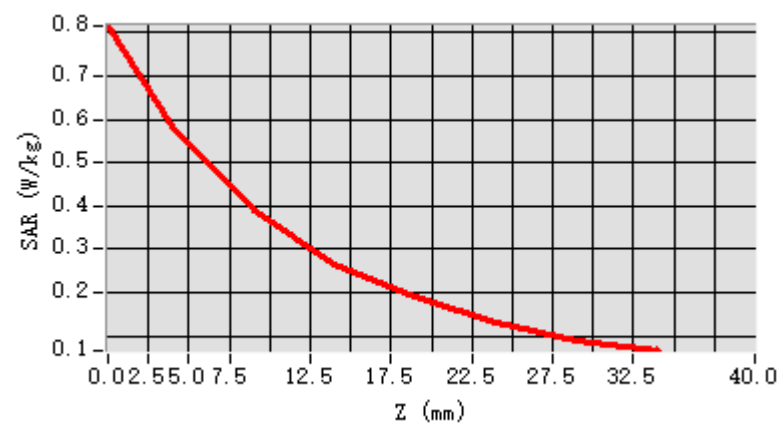


F. 3D Image

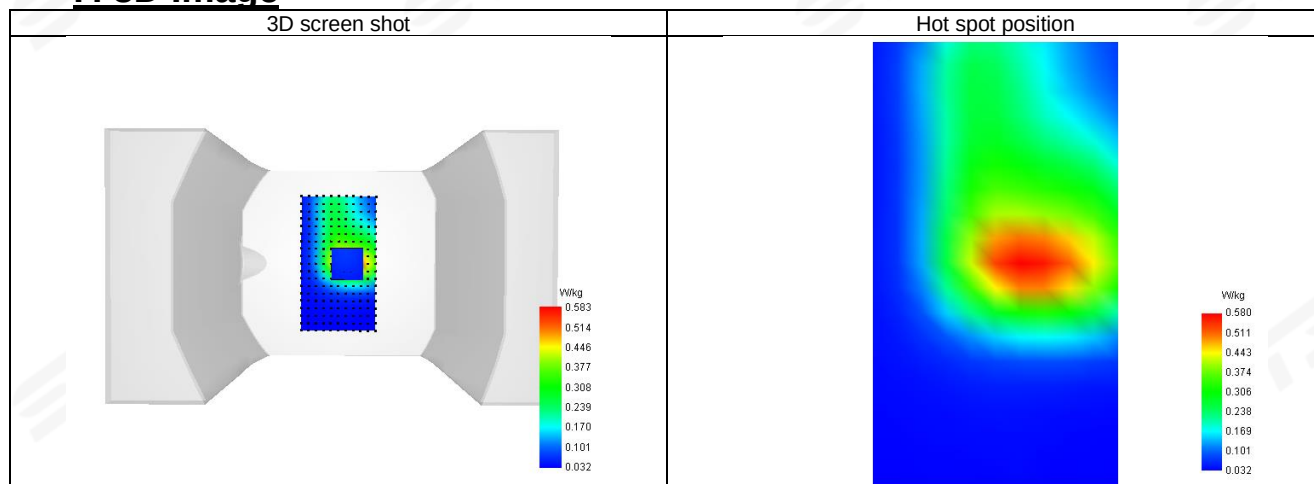

Plot 31: DUT: 4G smart Phone; EUT Model: AGM_NOTE_N2

Test Date	2026-05-05
	1.82
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	IEEE 802.11b ISM
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2437
Relative permittivity (real part)	39.73
Conductivity (S/m)	1.78

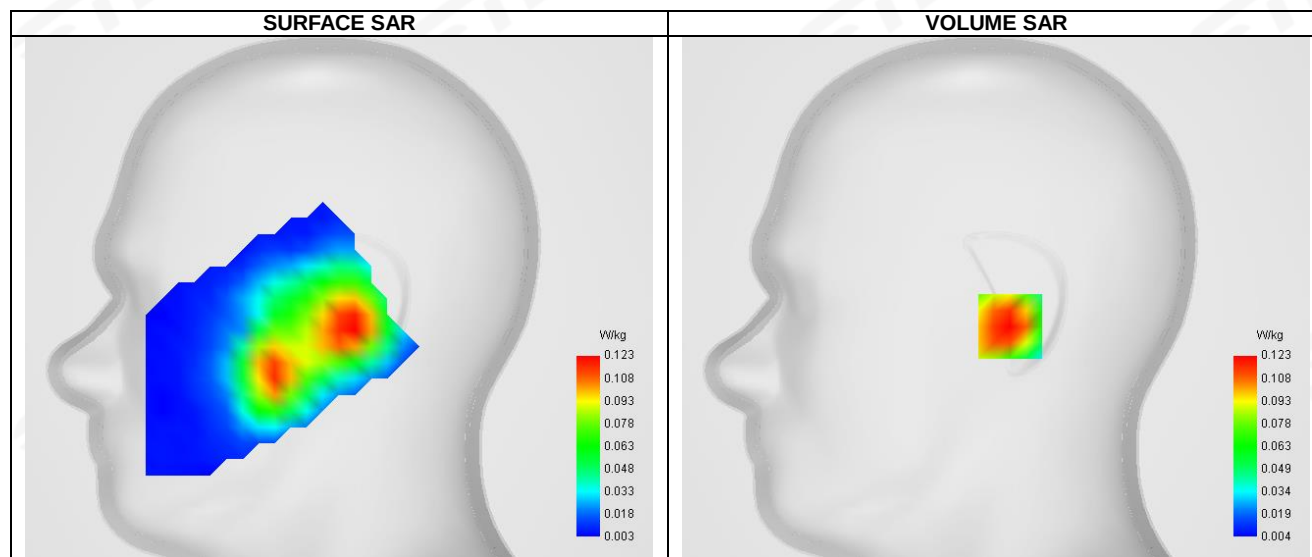


Maximum location: X=7.00, Y=-14.00 ; SAR Peak: 0.19 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.067
SAR 1g (W/Kg)	0.119
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	57.133562

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.194	0.123	0.070	0.039	0.026	0.016	0.010

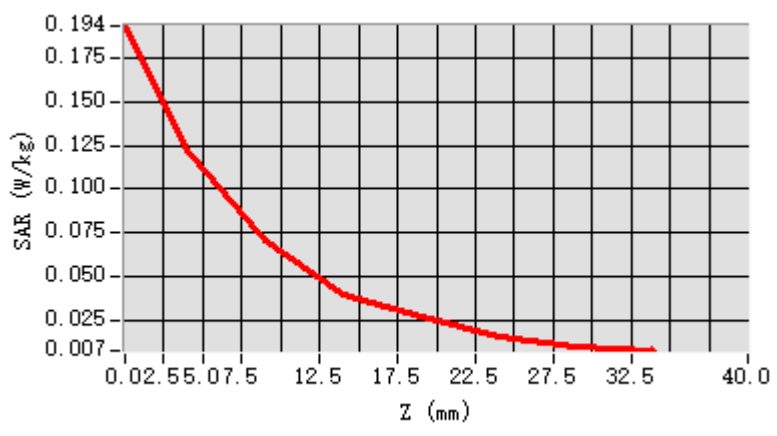


F. 3D Image

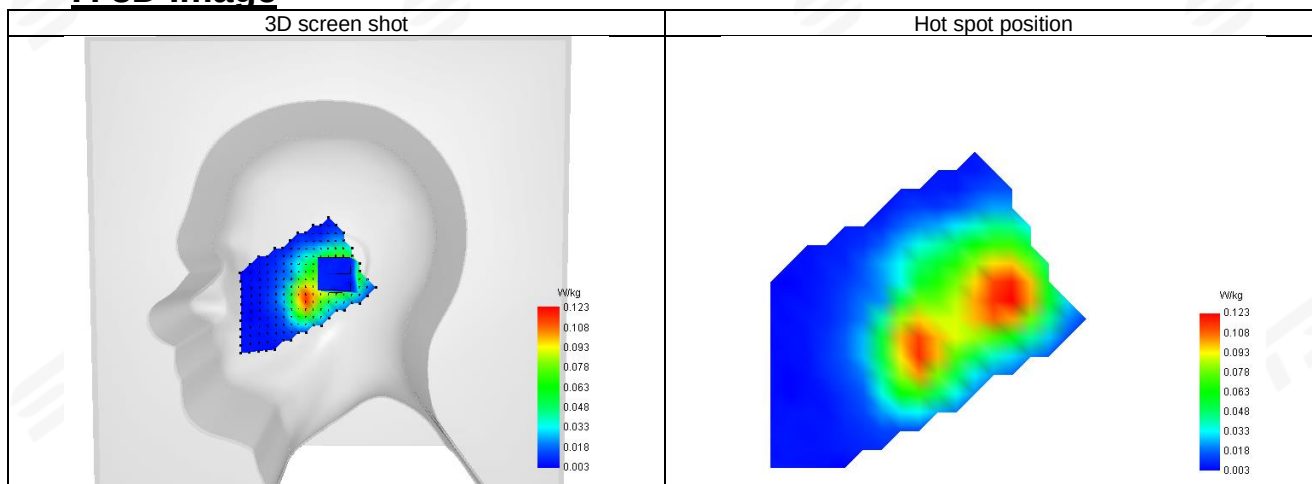



Plot 32: DUT: 4G smart Phone; EUT Model: AGM_NOTE_N2


Test Date	2026-05-05
ConvF	1.82
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2437
Relative permittivity (real part)	39.73
Conductivity (S/m)	1.78

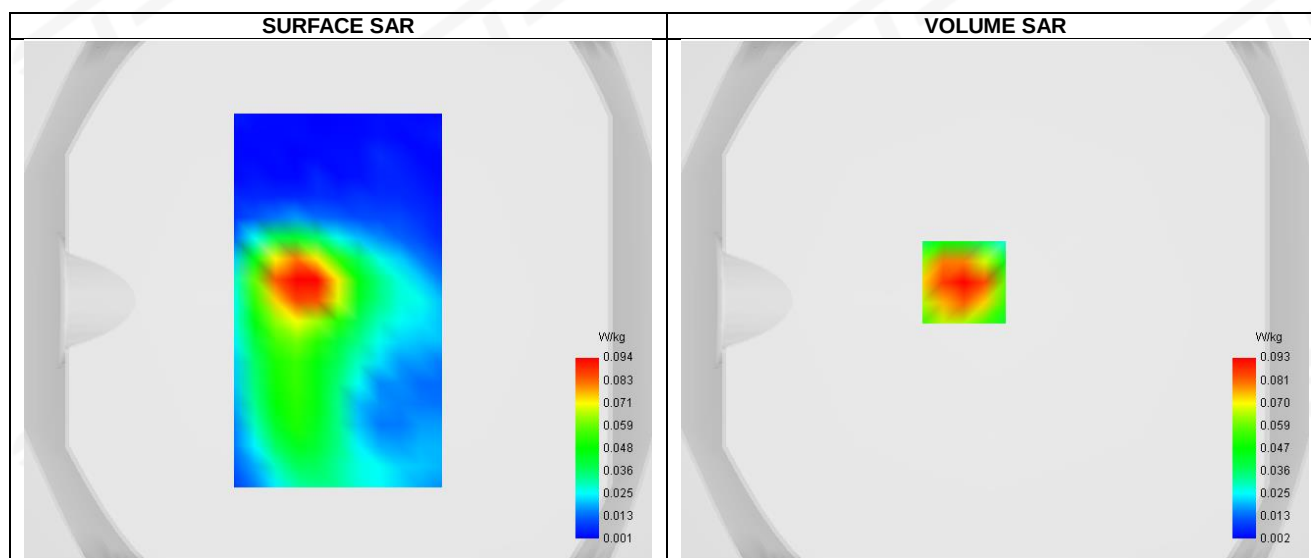**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.049
SAR 1g (W/Kg)	0.090
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	52.438243

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.153	0.093	0.049	0.030	0.017	0.010	0.006

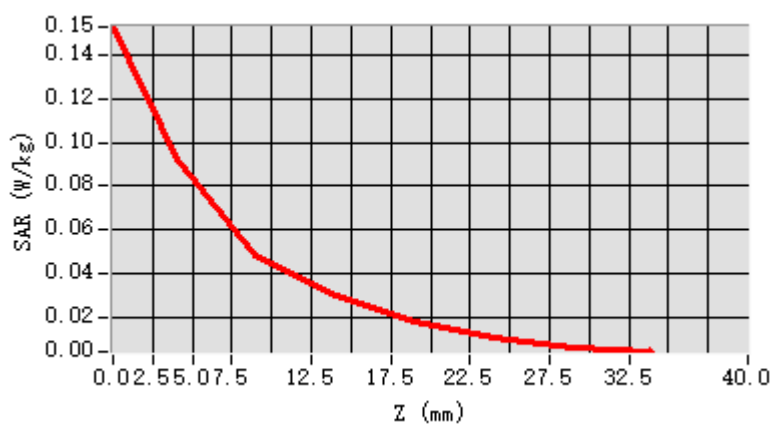

F. 3D Image

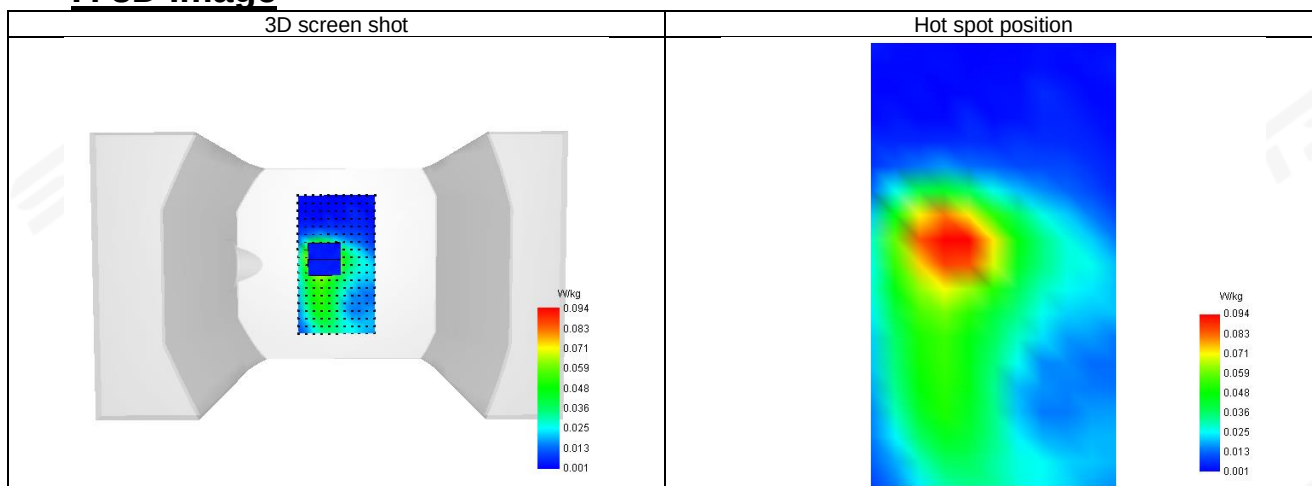



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※