


U382A LE RX(SUB) ANT SPEC

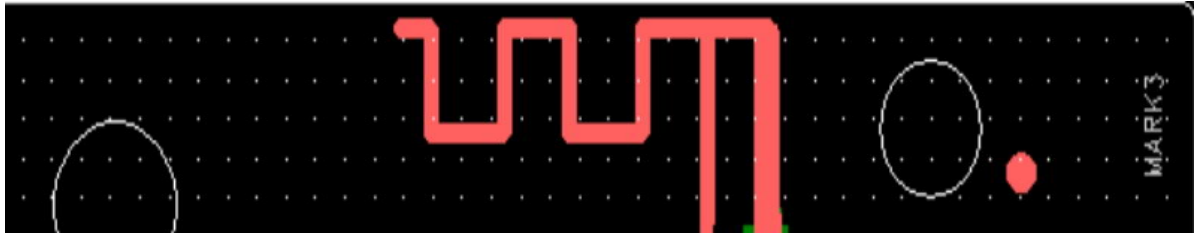

Type: PCB On Board ANT

Length: 13.2mm


Width: 5.8mm

Technology: FR4, Electrolytic copper

Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.

Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,
Shiyan Town, Baoan District, Shenzhen City, Guangdong, China

BT ANT SWR & Return Loss(2.4G)

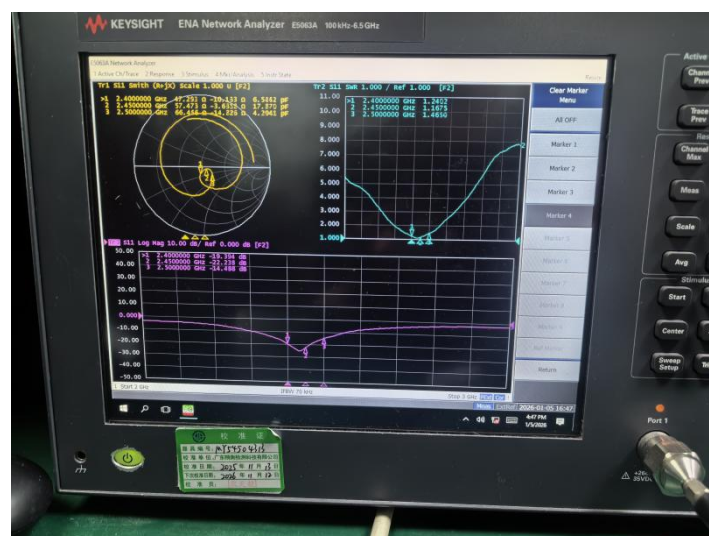

BT Efficiency & Gain

Frequency(MHz)	Efficiency(%)	Gain(dBi)
2400	40.31	1.82
2410	41.02	1.91
2420	41.54	2.13
2430	42.01	2.31
2440	43.24	2.42
2450	44.72	2.50
2460	44.56	2.38
2470	43.42	2.49
2480	42.76	2.38
2490	41.59	2.08
2500	40.78	1.97

