


U382A LE RX(SR&SL) ANT SPEC

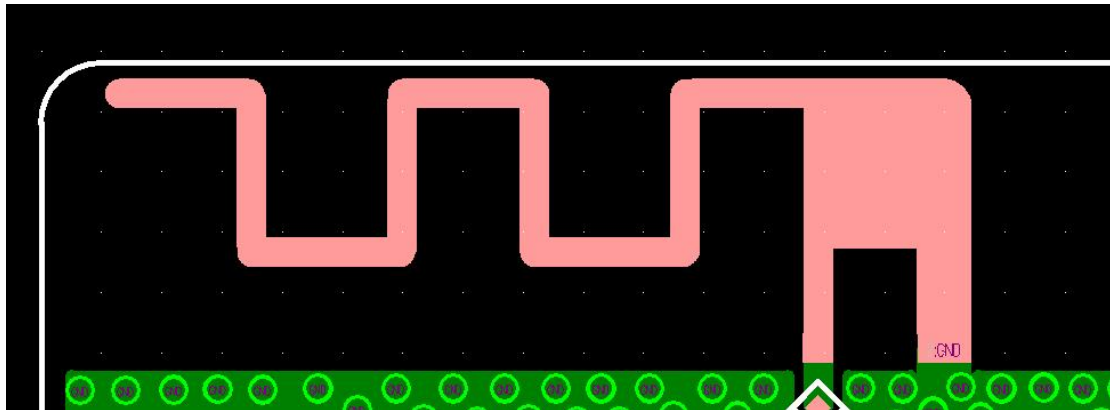

Type: PCB On Board ANT

Length: 14.4mm

Width: 5.0mm

Technology: FR4, Electrolytic copper

Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.

Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,
Shiyan Town, Baoan District, Shenzhen City, Guangdong, China

BT ANT SWR & Return Loss(2.4G)



BT Efficiency & Gain

Frequency(MHz)	Efficiency(%)	Gain(dBi)
2400	42.85	2.06
2410	42.96	2.15
2420	44.14	2.21
2430	45.21	2.28
2440	46.06	2.36
2450	46.86	2.41
2460	46.04	2.30
2470	45.40	2.25
2480	44.81	2.11
2490	43.98	2.09
2500	43.55	1.96

