


U382A Soundbar BLE TX ANT SPEC

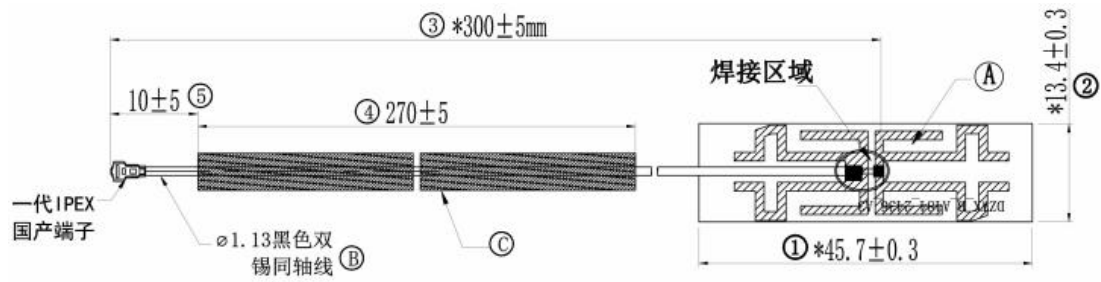

Type: FPC ANT


Length: 45.7mm Width: 13.4mm

Technology: PI, Electrolytic copper, and coaxial line

Manufacturer of Antenna: Shenzhen Daze Wireless Technology Co., Ltd


Address of antenna manufacturer: Room 306, Building 2, Fenda Technology Park Phase II, Baoyuan Community, Shiyan Street, Bao'an District, Shenzhen China.

BT ANT SWR & Return Loss(2.4G)

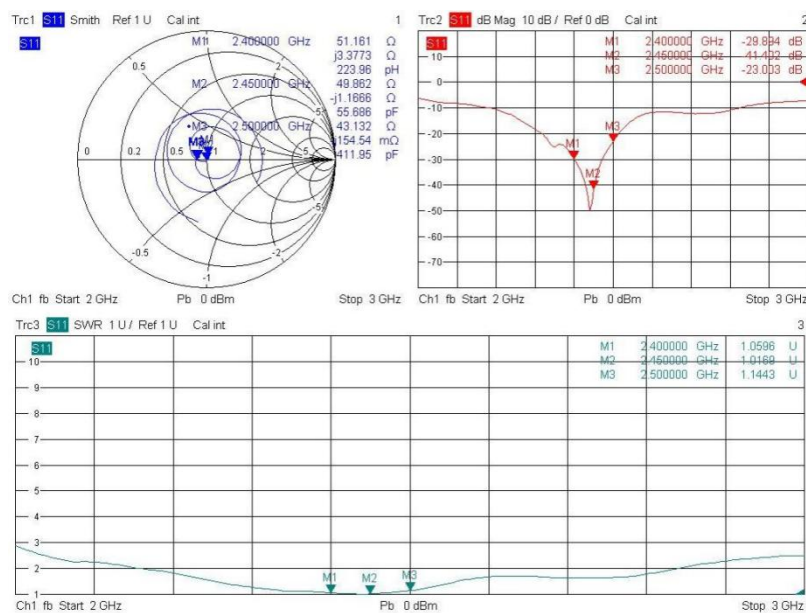


BT Efficiency & Gain

Frequency(MHz)	Efficiency(%)	Gain(dBi)
2400	54.00	3.18
2410	59.21	2.65
2420	57.85	2.09
2430	60.15	2.30
2440	59.44	2.62
2450	56.69	2.91
2460	59.02	3.57
2470	56.91	3.67
2480	54.00	3.66
2490	52.66	3.54
2500	54.88	3.82

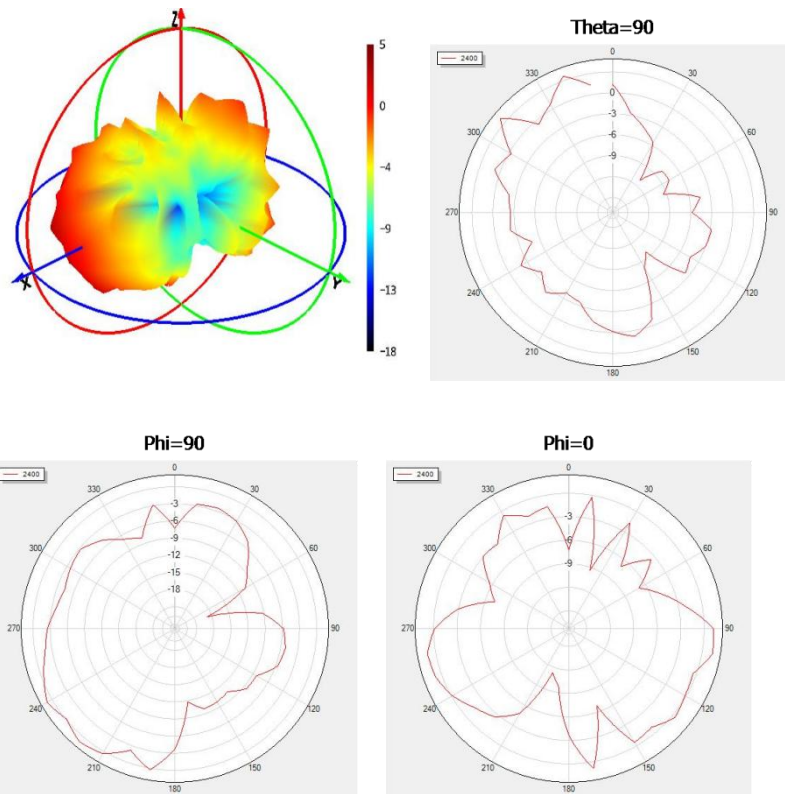

U382A Soundbar BT ANT SPEC

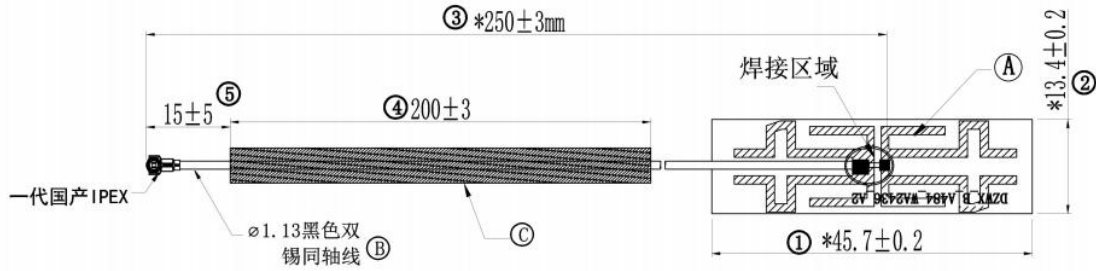

Type: FPC ANT


Length: 45.7mm Width: 13.4mm

Technology: PI, Electrolytic copper, and coaxial line

Manufacturer of Antenna: Shenzhen Daze Wireless Technology Co., Ltd

Address of antenna manufacturer: Room 306, Building 2, Fenda
Technology Park Phase II, Baoyuan Community, Shiyan Street, Bao'an District,
Shenzhen China.

BT ANT SWR & Return Loss(2.4G)

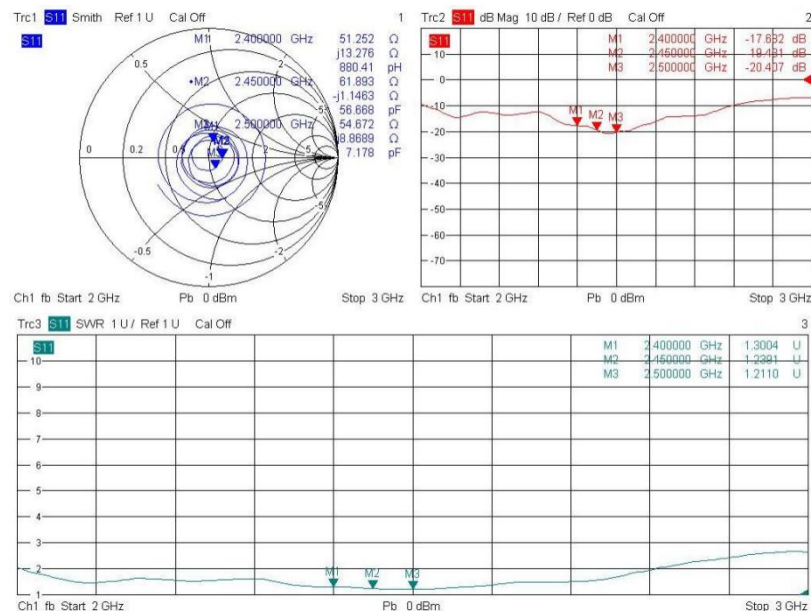

BT Efficiency & Gain

Frequency(MHz)	Efficiency(%)	Gain(dBi)
2400 MHz	43.79	1.62
2410 MHz	42.50	1.65
2420 MHz	41.29	1.73
2430 MHz	42.83	1.80
2440 MHz	43.59	1.83
2450 MHz	43.21	1.82
2460 MHz	46.17	1.79
2470 MHz	47.14	1.72
2480 MHz	46.05	1.68
2490 MHz	45.08	1.63
2500 MHz	48.12	1.56

