



ANNEX 1 TEST DATA

FCC ID: 2A9P6-S03

Applicant: Shenzhen Domyb Technology Co., Ltd

Address: 10F, Building No.1, Saitu Science Park, No.137, Bulan Road, Longgang Distric, Shenzhen, Guangdong Province, China

Manufacturer: Shenzhen Domyb Technology Co., Ltd

Address: 10F, Building No.1, Saitu Science Park, No.137, Bulan Road, Longgang Distric, Shenzhen, Guangdong Province, China

Product Name: Screen Projection Device

Trade Mark: N/A

Model Number: S03

Date of Receipt: Apr. 13, 2026

Test Date: Apr. 13, 2026 - May. 26, 2026

Date of Report: May. 26, 2026

Prepared By: Shenzhen DL Testing Technology Co., Ltd.


Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10-2020+Cor 1-2023


Test Result: Pass

**1. Duty Cycle**


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	b	2412	Ant1	97.3	0.12
NVNT	b	2437	Ant1	96.3	0.16
NVNT	b	2462	Ant1	96.11	0.17
NVNT	g	2412	Ant1	81.48	0.89
NVNT	g	2437	Ant1	79.28	1.01
NVNT	g	2462	Ant1	94.62	0.24
NVNT	n20	2412	Ant1	99.7	0.01
NVNT	n20	2437	Ant1	96.73	0.14
NVNT	n20	2462	Ant1	99.7	0.01
NVNT	n40	2422	Ant1	99.42	0.03
NVNT	n40	2437	Ant1	93.64	0.29
NVNT	n40	2452	Ant1	93.64	0.29

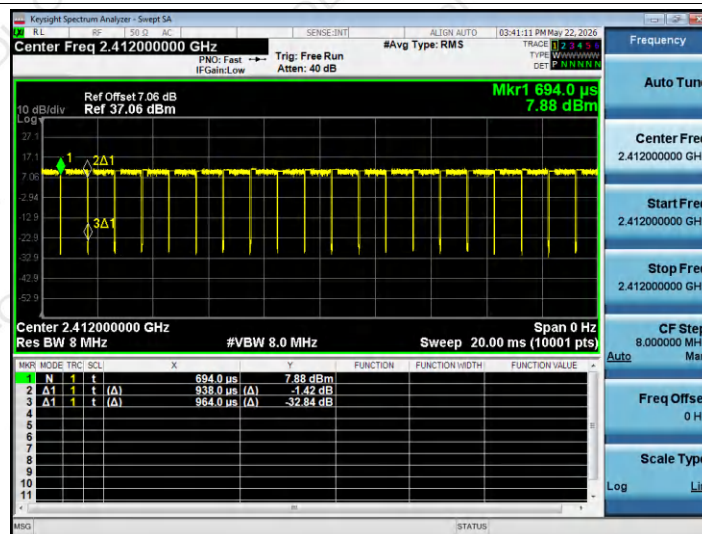


Duty Cycle NVNT b 2412MHz Ant1

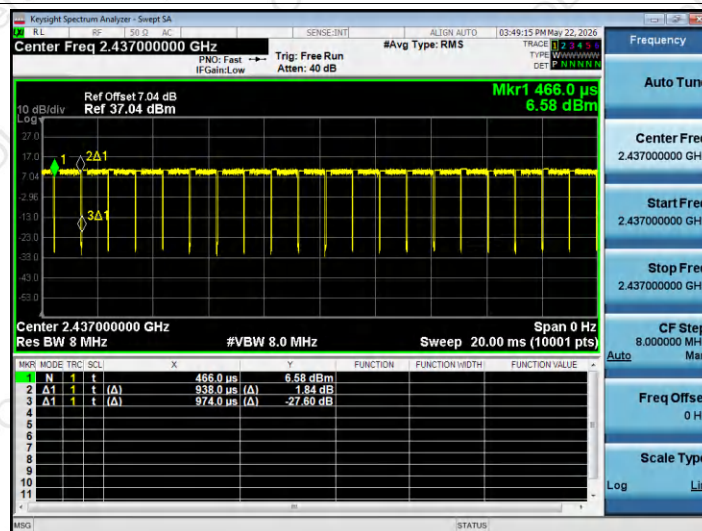


Duty Cycle NVNT b 2437MHz Ant1

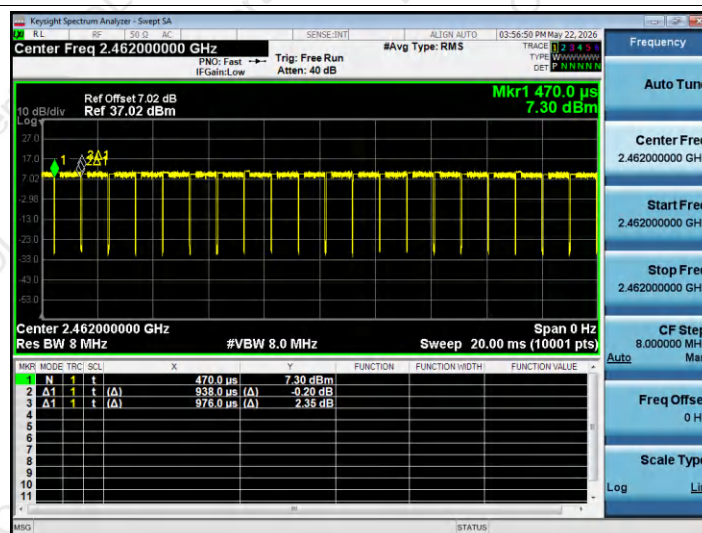


Duty Cycle NVNT b 2462MHz Ant1

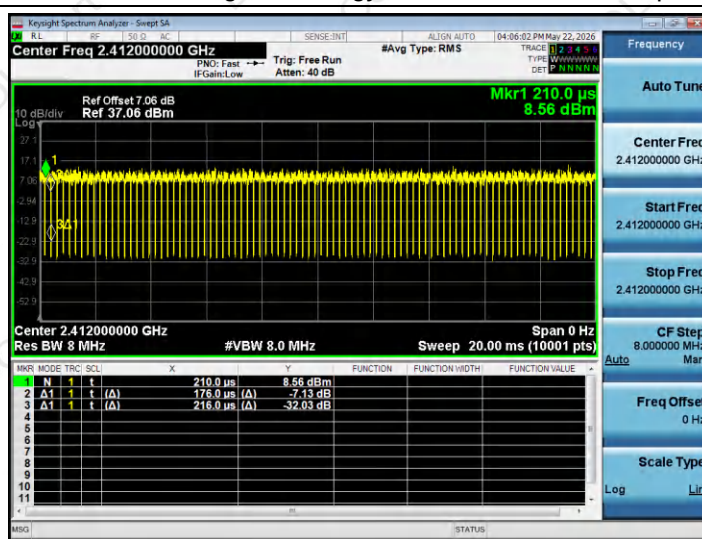


Duty Cycle NVNT g 2412MHz Ant1

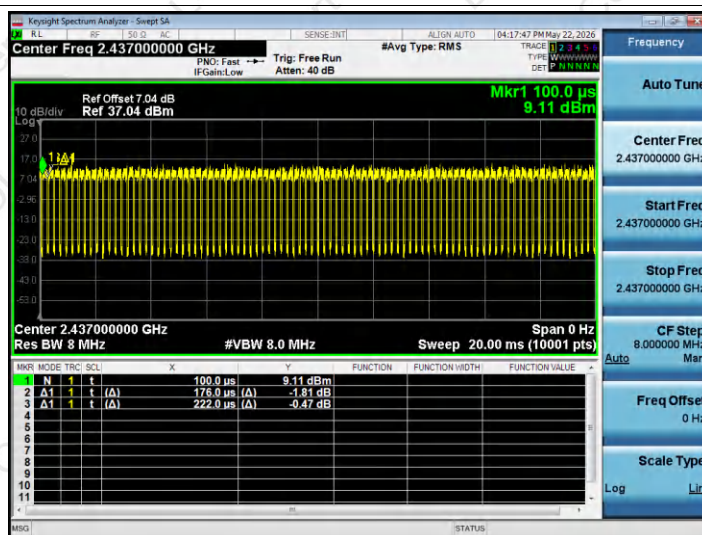


Duty Cycle NVNT g 2437MHz Ant1

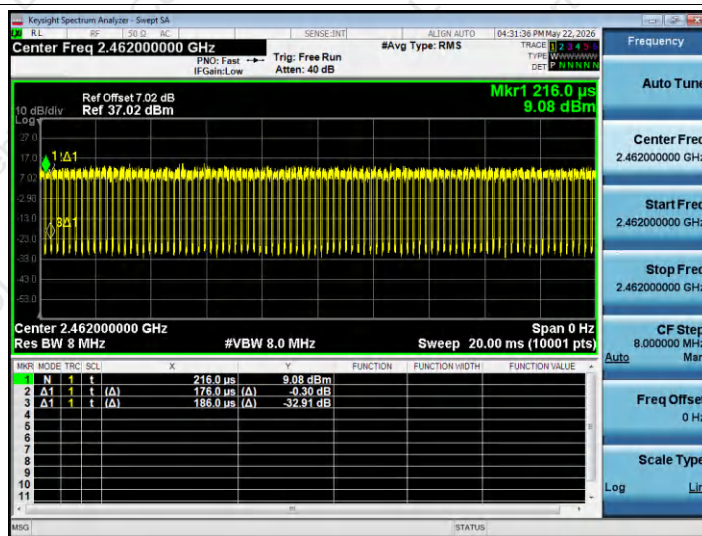


Duty Cycle NVNT g 2462MHz Ant1

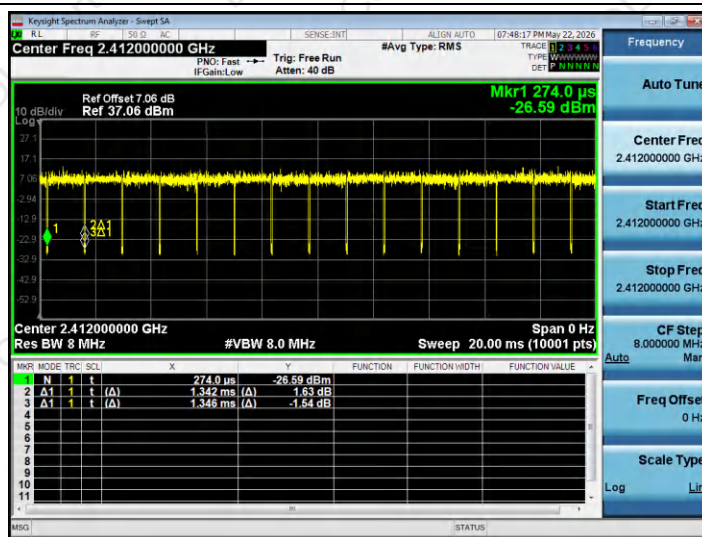


Duty Cycle NVNT n20 2412MHz Ant1

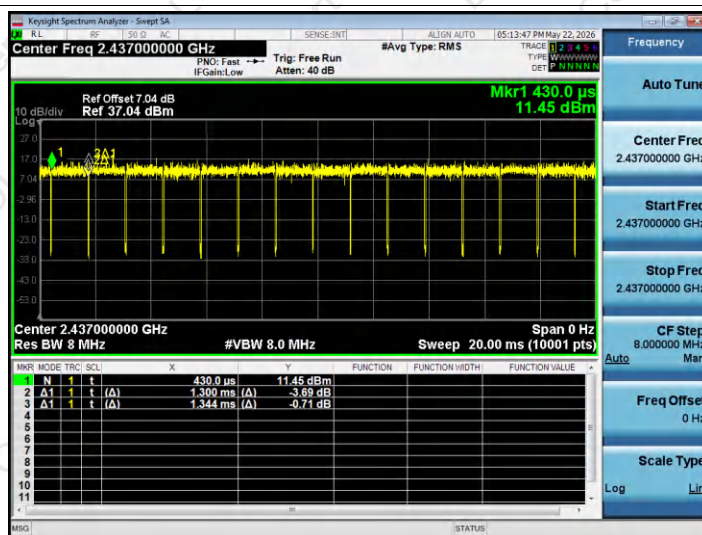


Duty Cycle NVNT n20 2437MHz Ant1

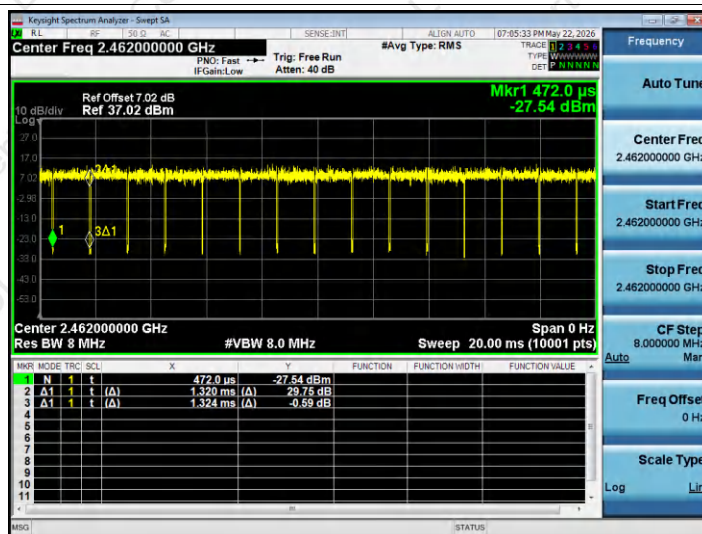


Duty Cycle NVNT n20 2462MHz Ant1

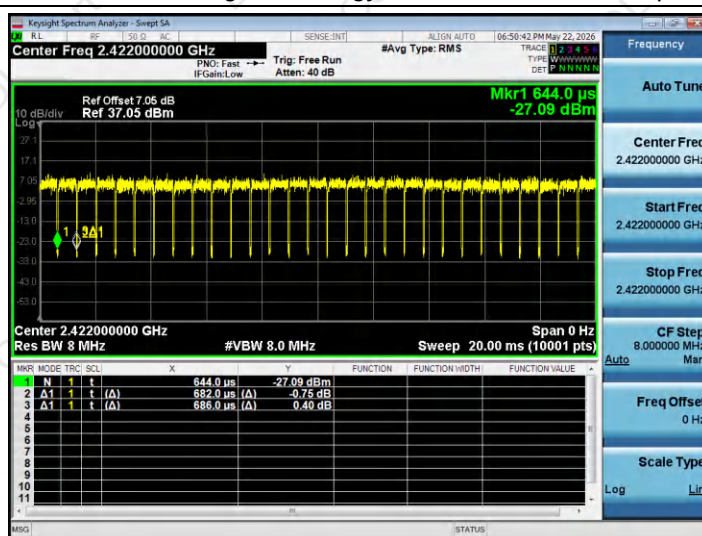

Duty Cycle NVNT n40 2422MHz Ant1

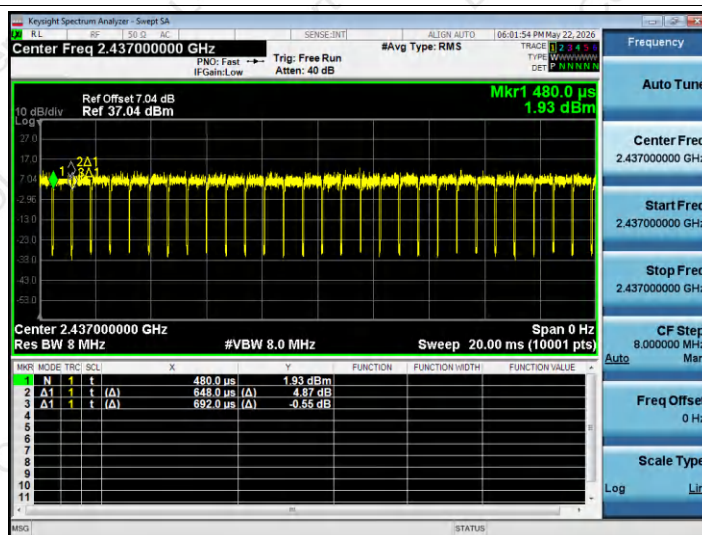


Duty Cycle NVNT n40 2437MHz Ant1

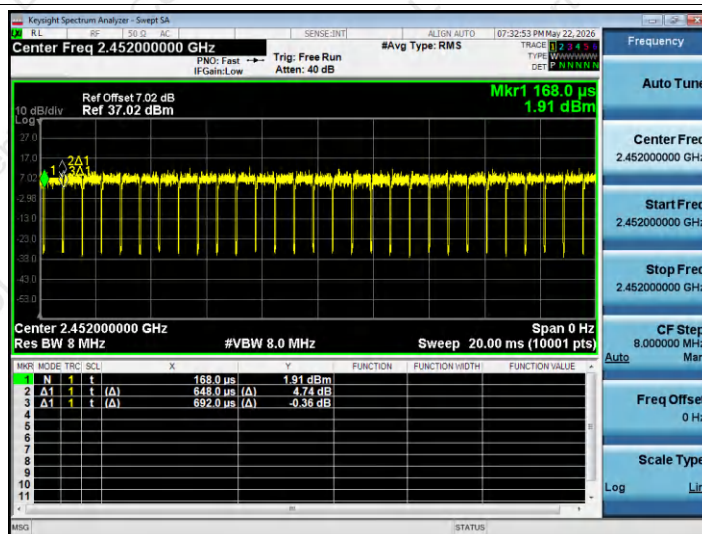


Duty Cycle NVNT n40 2452MHz Ant1

**2. Maximum Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	6.54	0.12	6.66	30	Pass
NVNT	b	2437	Ant1	6.4	0.16	6.56	30	Pass
NVNT	b	2462	Ant1	5.75	0.17	5.92	30	Pass
NVNT	g	2412	Ant1	5.92	0.89	6.81	30	Pass
NVNT	g	2437	Ant1	6.01	1.01	7.02	30	Pass
NVNT	g	2462	Ant1	5.72	0.24	5.96	30	Pass
NVNT	n20	2412	Ant1	5.23	0.01	5.24	30	Pass
NVNT	n20	2437	Ant1	8.68	0.14	8.82	30	Pass
NVNT	n20	2462	Ant1	6.34	0.01	6.35	30	Pass
NVNT	n40	2422	Ant1	6.46	0.03	6.49	30	Pass
NVNT	n40	2437	Ant1	6.37	0.29	6.66	30	Pass
NVNT	n40	2452	Ant1	6.15	0.29	6.44	30	Pass

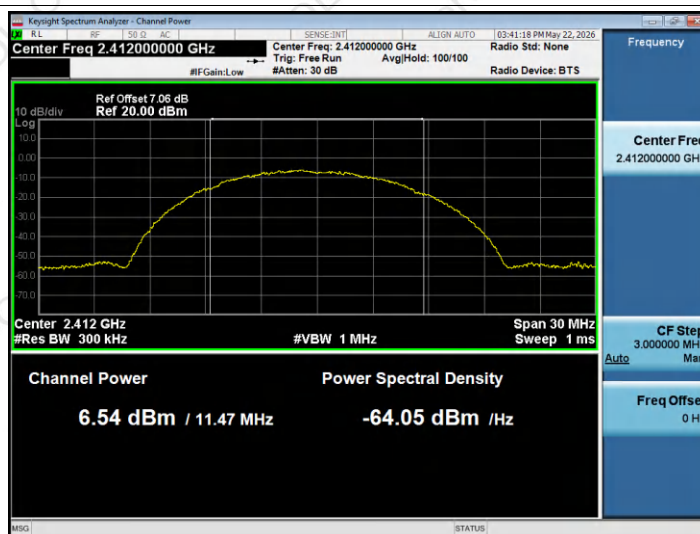


Average Power NVNT b 2412MHz Ant1

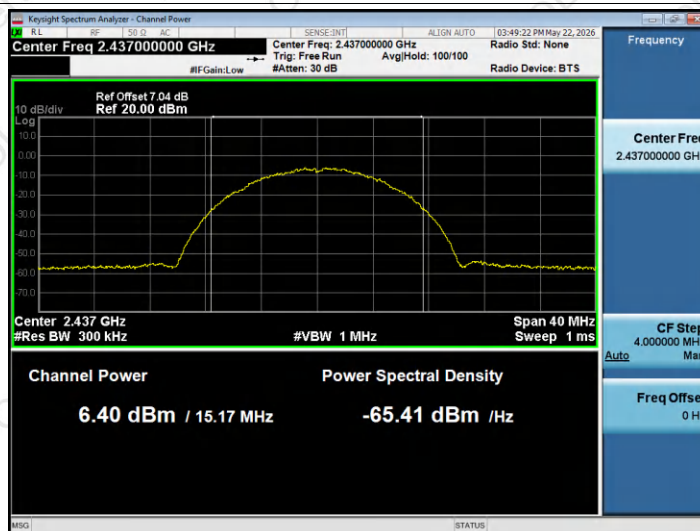


Average Power NVNT b 2437MHz Ant1

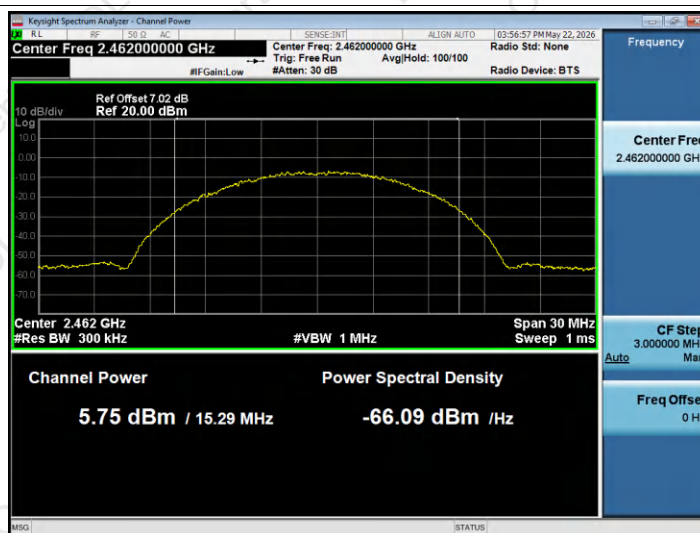


Average Power NVNT b 2462MHz Ant1

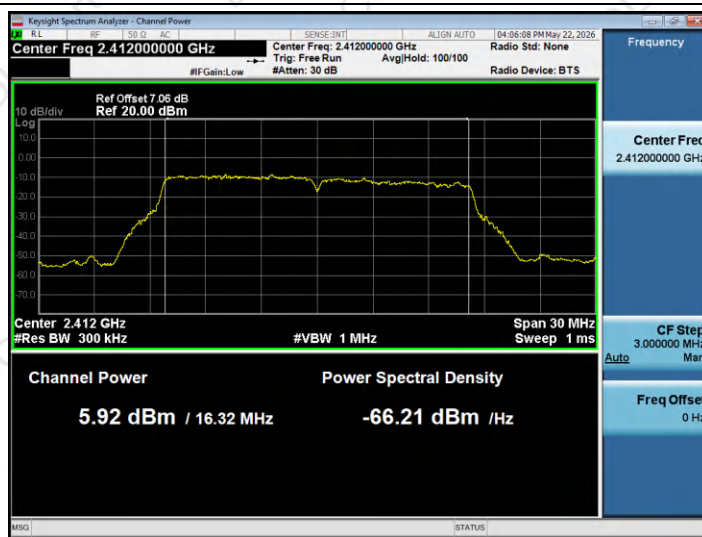


Average Power NVNT g 2412MHz Ant1

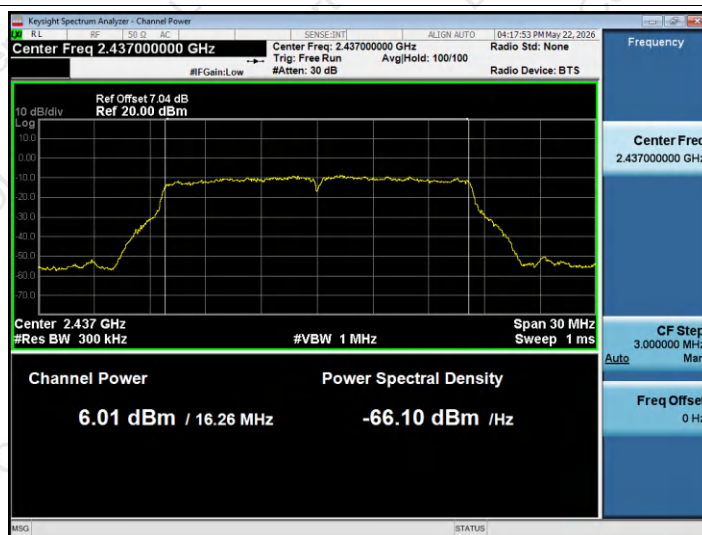


Average Power NVNT g 2437MHz Ant1

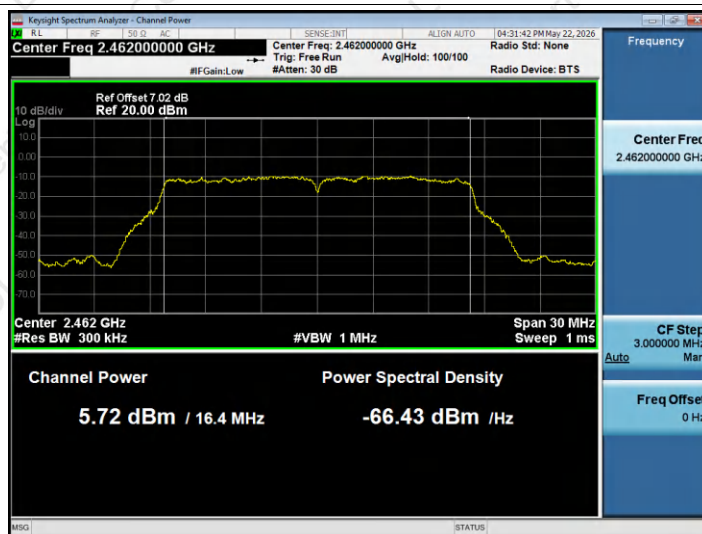


Average Power NVNT g 2462MHz Ant1

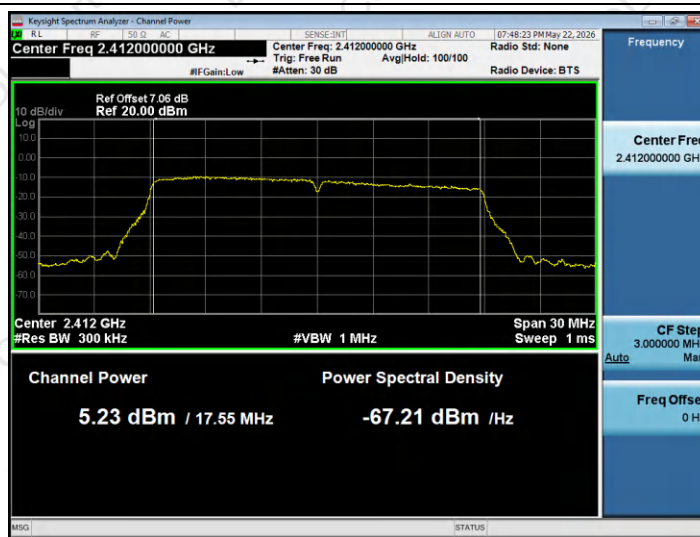


Average Power NVNT n20 2412MHz Ant1

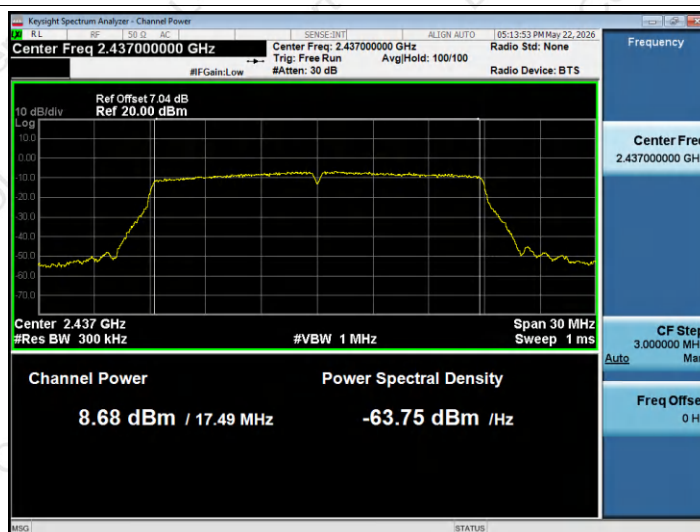


Average Power NVNT n20 2437MHz Ant1

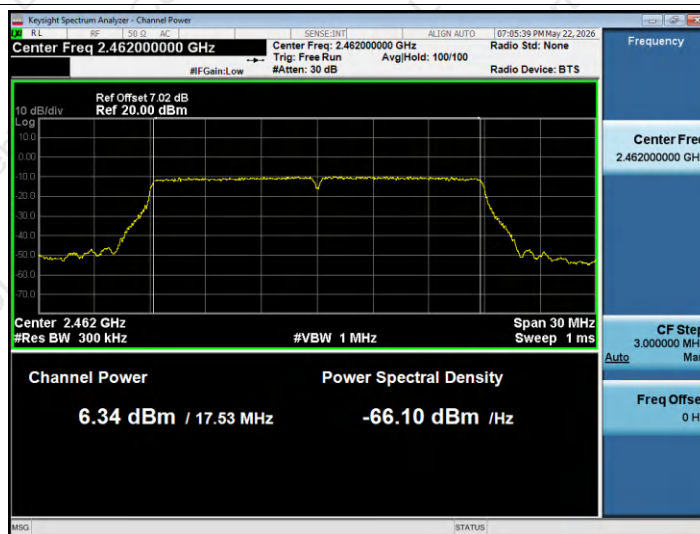


Average Power NVNT n20 2462MHz Ant1

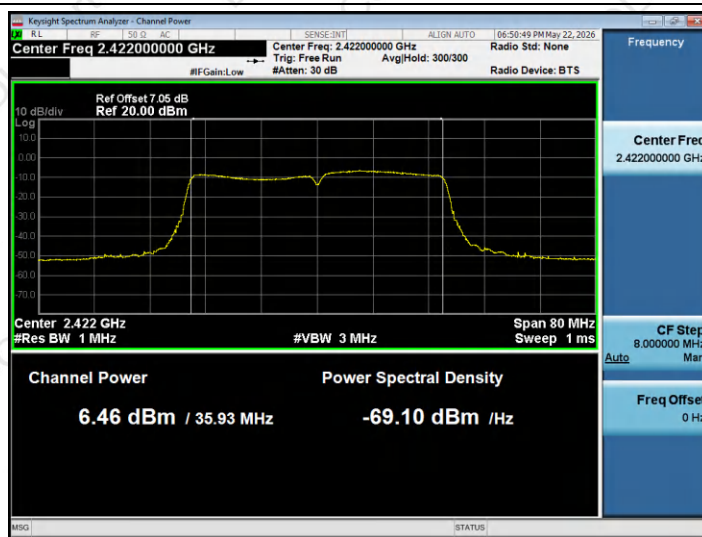

Average Power NVNT n40 2422MHz Ant1

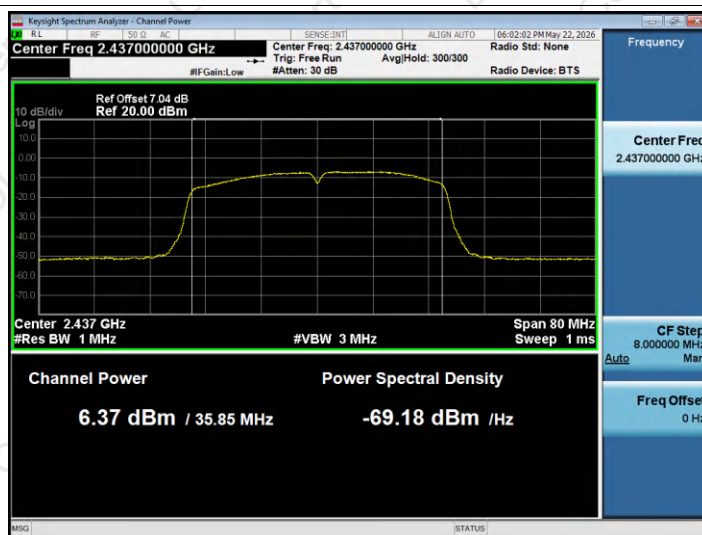

Average Power NVNT n40 2437MHz Ant1

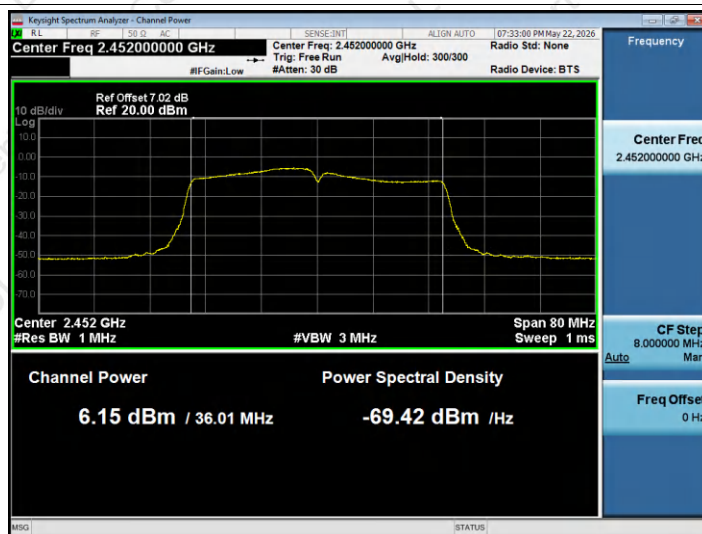


Average Power NVNT n40 2452MHz Ant1

**3. -6dB Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	8.484	0.5	Pass
NVNT	b	2437	Ant1	7.624	0.5	Pass
NVNT	b	2462	Ant1	8.65	0.5	Pass
NVNT	g	2412	Ant1	16.06	0.5	Pass
NVNT	g	2437	Ant1	16.23	0.5	Pass
NVNT	g	2462	Ant1	16.33	0.5	Pass
NVNT	n20	2412	Ant1	17.38	0.5	Pass
NVNT	n20	2437	Ant1	17.54	0.5	Pass
NVNT	n20	2462	Ant1	17.5	0.5	Pass
NVNT	n40	2422	Ant1	36.1	0.5	Pass
NVNT	n40	2437	Ant1	30.41	0.5	Pass
NVNT	n40	2452	Ant1	35.27	0.5	Pass




-6dB Bandwidth NVNT b 2412MHz Ant1

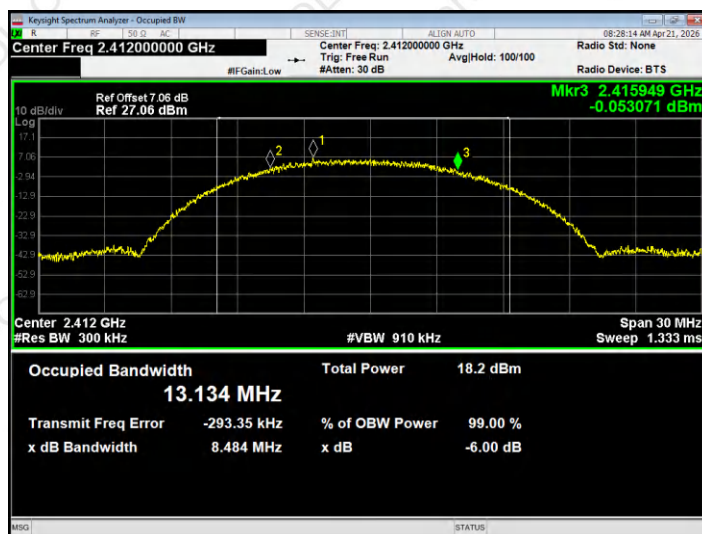

-6dB Bandwidth NVNT b 2437MHz Ant1

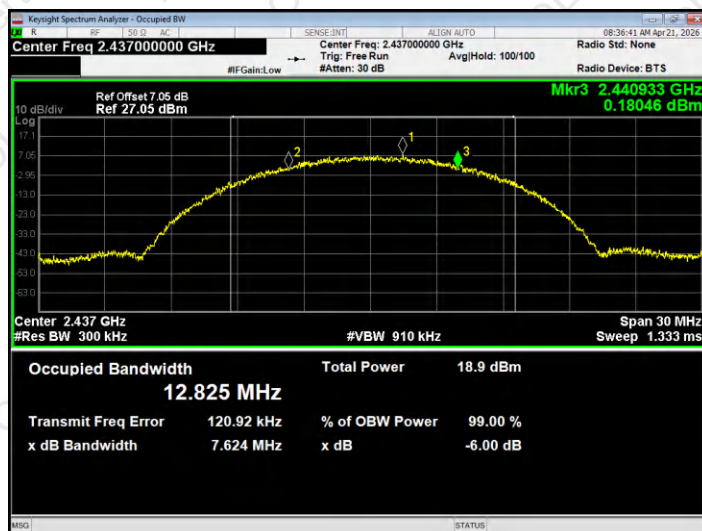


-6dB Bandwidth NVNT b 2462MHz Ant1

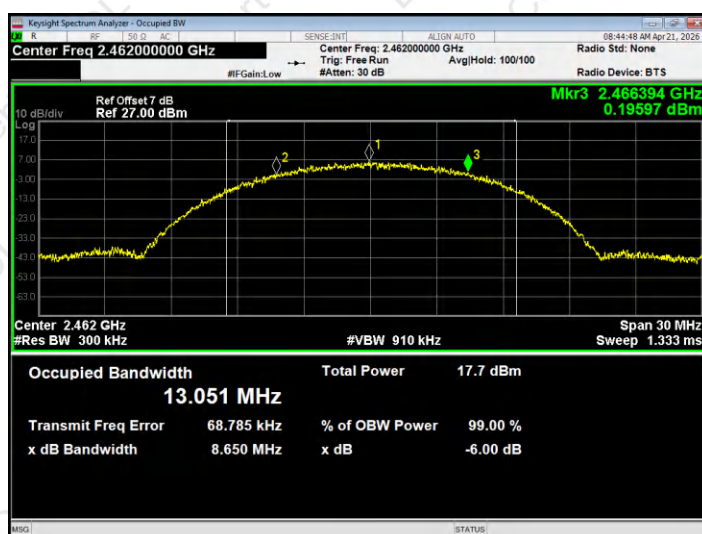





-6dB Bandwidth NVNT g 2412MHz Ant1

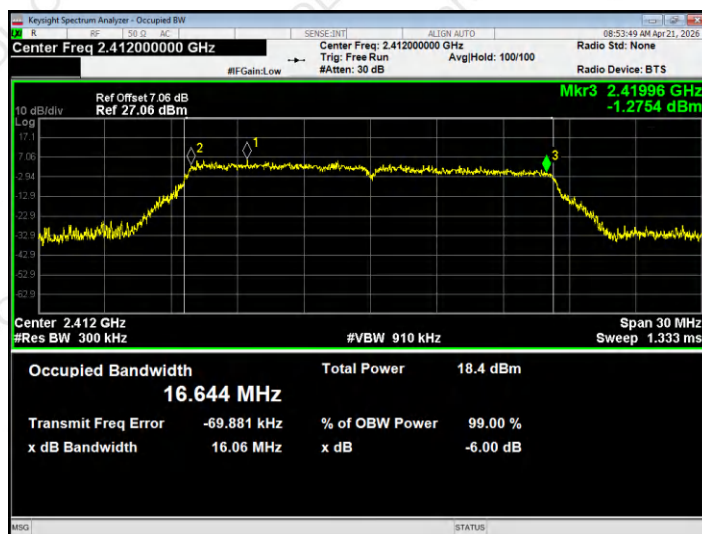

-6dB Bandwidth NVNT g 2437MHz Ant1

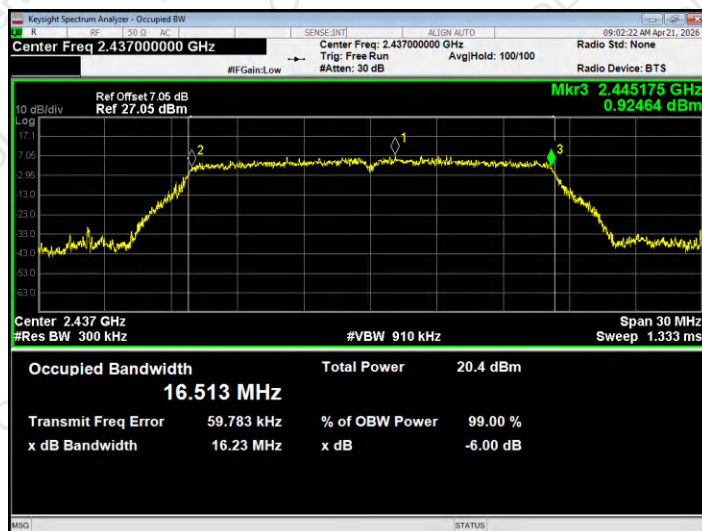


-6dB Bandwidth NVNT g 2462MHz Ant1

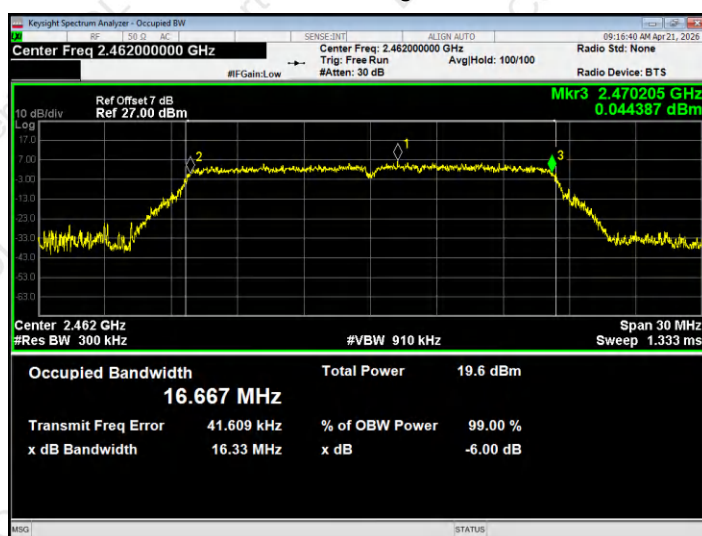





-6dB Bandwidth NVNT n20 2412MHz Ant1

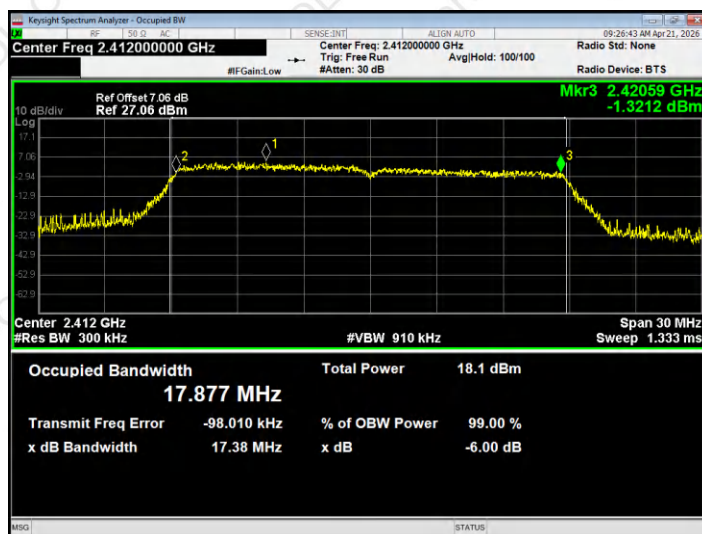

-6dB Bandwidth NVNT n20 2437MHz Ant1

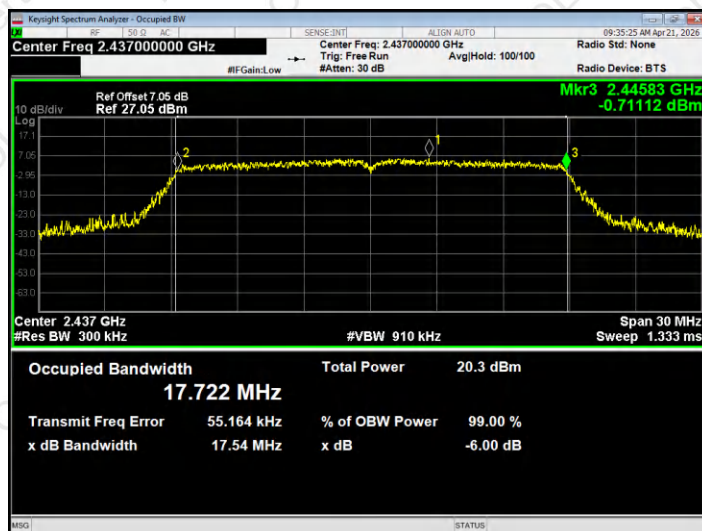


-6dB Bandwidth NVNT n20 2462MHz Ant1

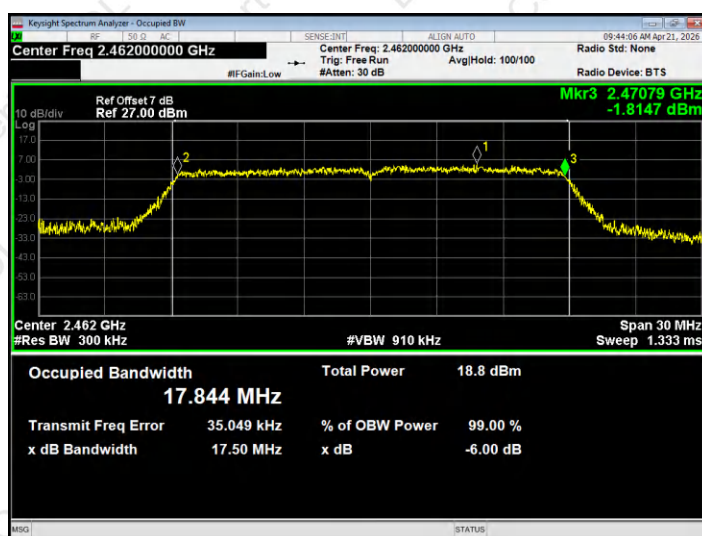





-6dB Bandwidth NVNT n40 2422MHz Ant1

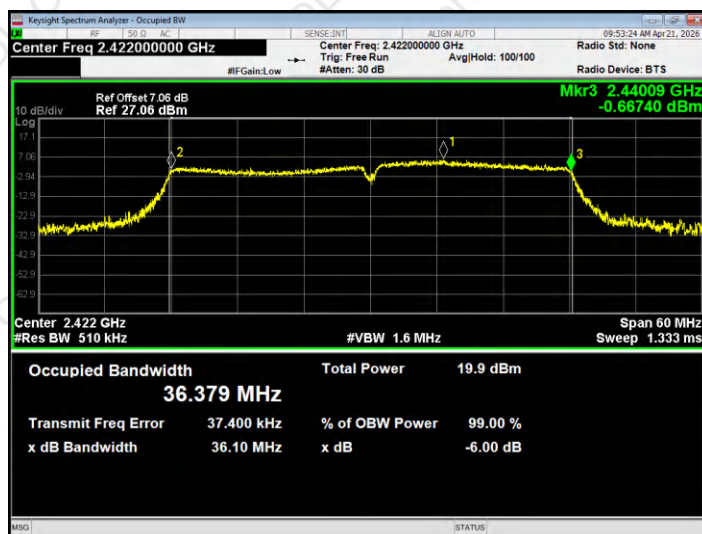

-6dB Bandwidth NVNT n40 2437MHz Ant1

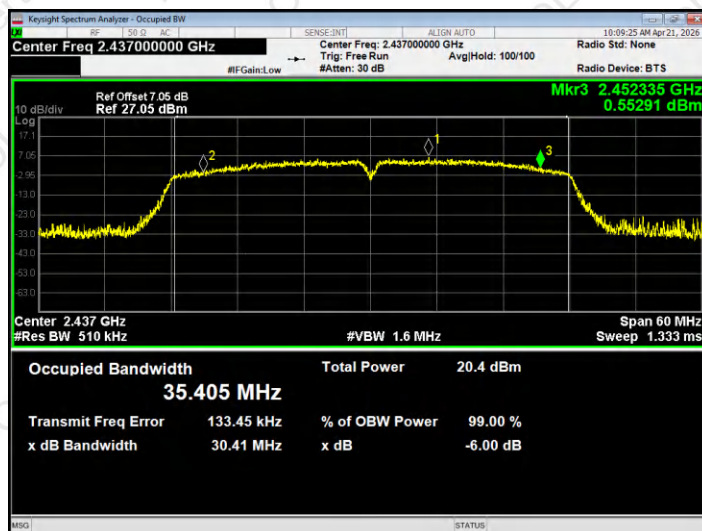

-6dB Bandwidth NVNT n40 2452MHz Ant1

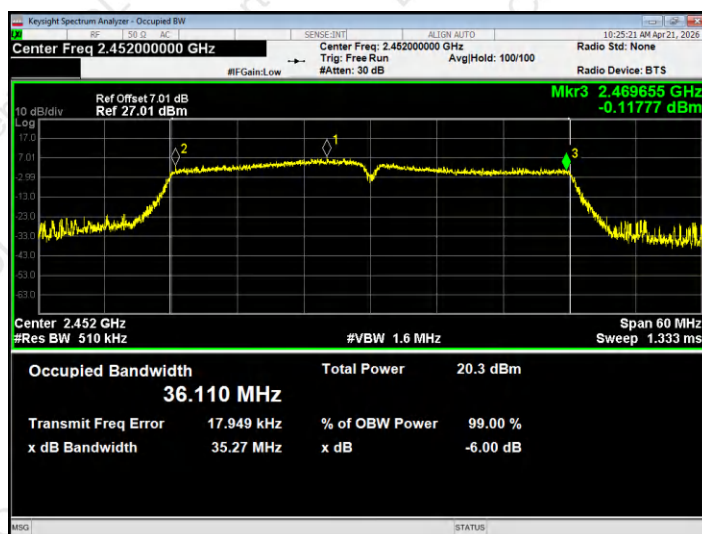


**4. Occupied Channel Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	13.185
NVNT	b	2437	Ant1	12.801
NVNT	b	2462	Ant1	13.052
NVNT	g	2412	Ant1	16.474
NVNT	g	2437	Ant1	16.428
NVNT	g	2462	Ant1	16.509
NVNT	n20	2412	Ant1	17.722
NVNT	n20	2437	Ant1	17.633
NVNT	n20	2462	Ant1	17.716
NVNT	n40	2422	Ant1	36.334
NVNT	n40	2437	Ant1	35.384
NVNT	n40	2452	Ant1	36.007




OBW NVNT b 2412MHz Ant1

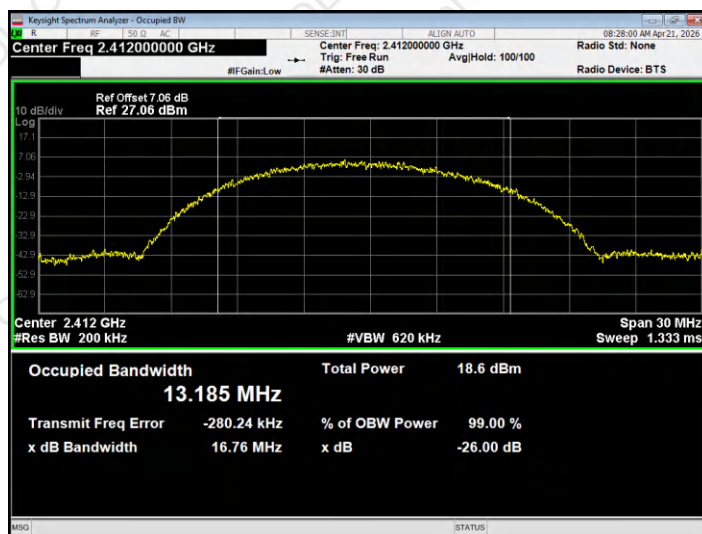

OBW NVNT b 2437MHz Ant1

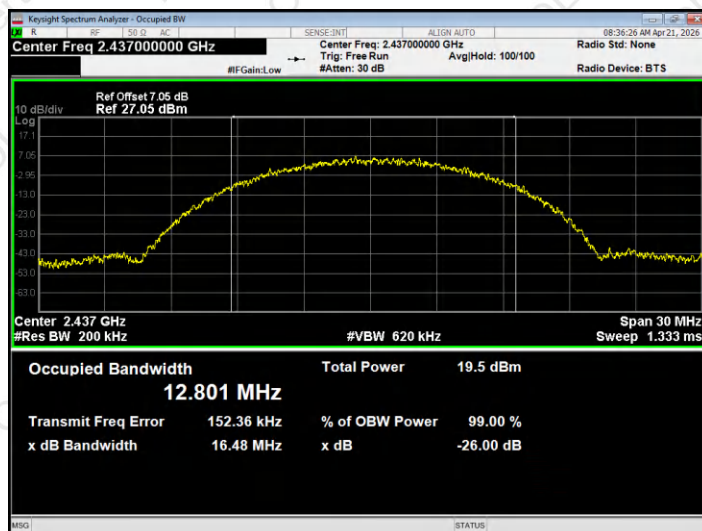


OBW NVNT b 2462MHz Ant1

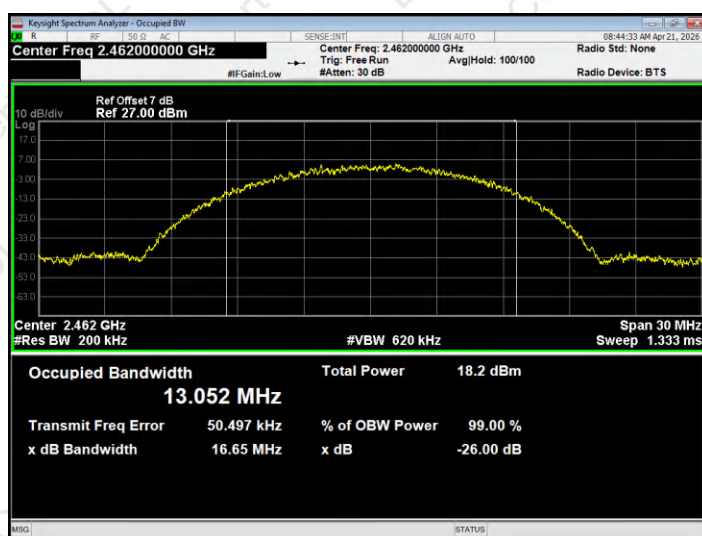





OBW NVNT g 2412MHz Ant1

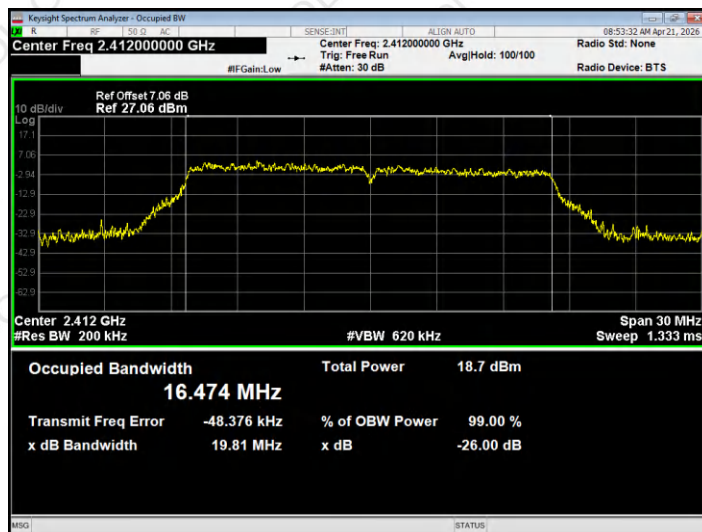

OBW NVNT g 2437MHz Ant1

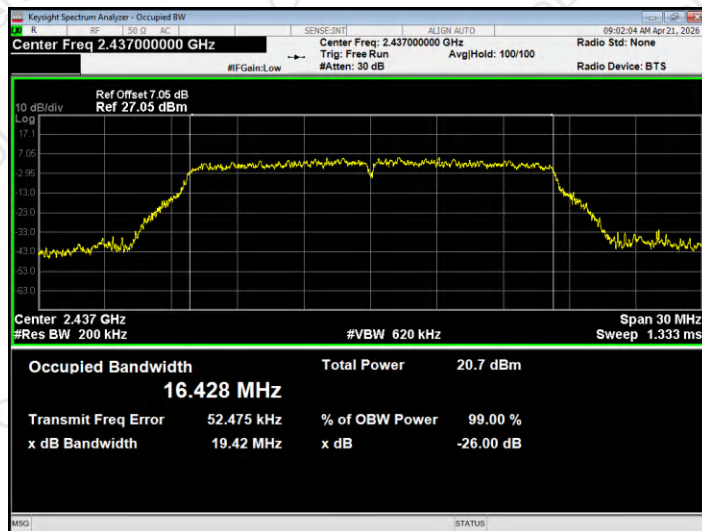


OBW NVNT g 2462MHz Ant1

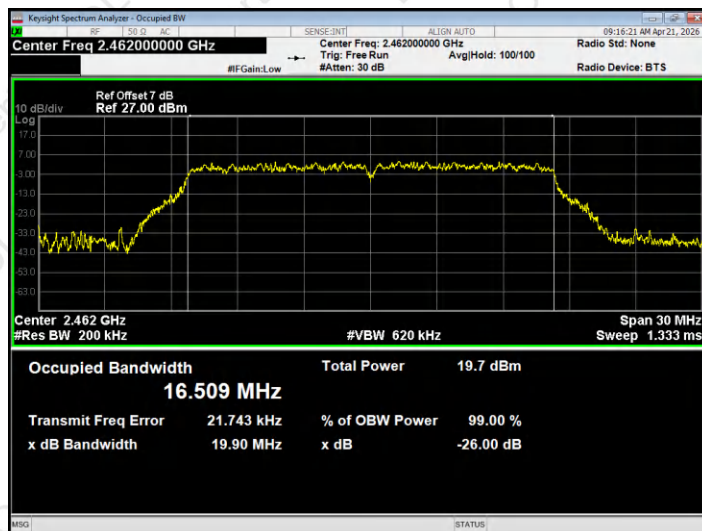





OBW NVNT n40 2422MHz Ant1

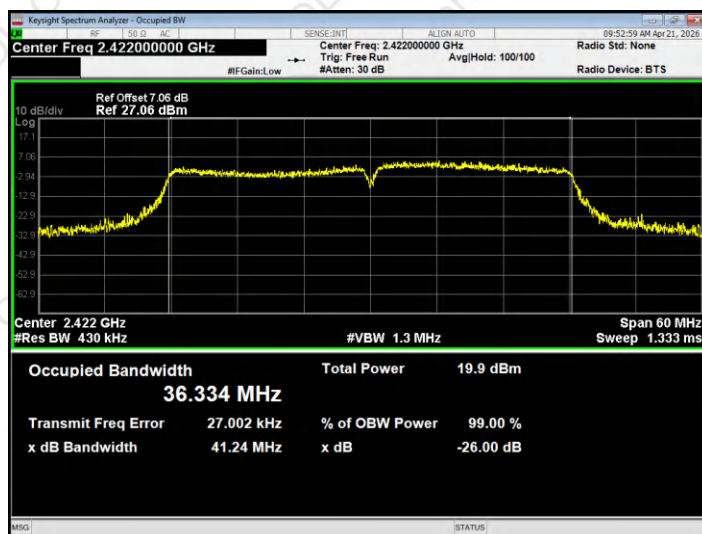

OBW NVNT n40 2437MHz Ant1

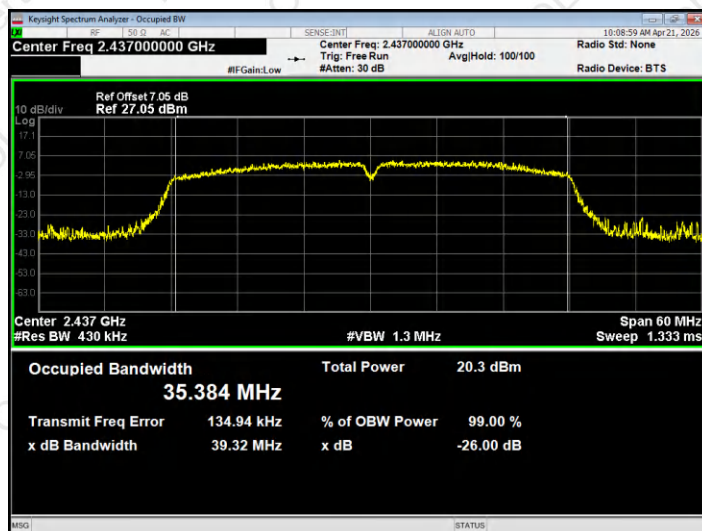


OBW NVNT n40 2452MHz Ant1

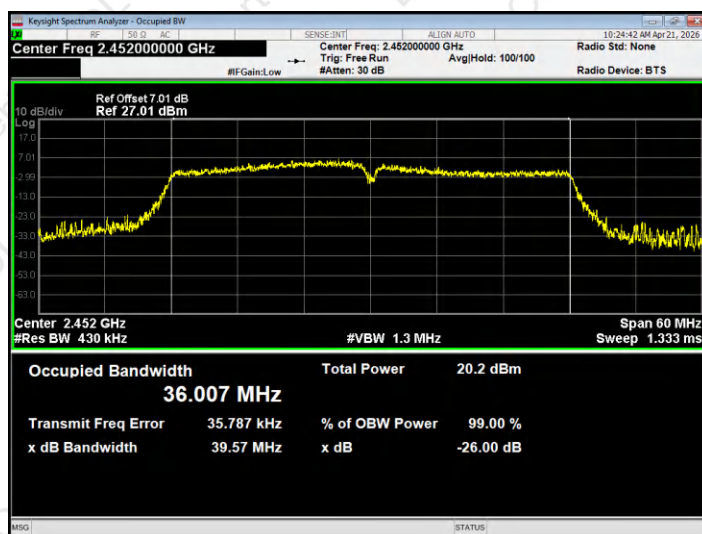


**5. Maximum Power Spectral Density Level**


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	-23.74	0.12	-23.62	8	Pass
NVNT	b	2437	Ant1	-22.88	0.16	-22.72	8	Pass
NVNT	b	2462	Ant1	-24.83	0.17	-24.66	8	Pass
NVNT	g	2412	Ant1	-23.52	0.89	-22.63	8	Pass
NVNT	g	2437	Ant1	-23.87	1.01	-22.86	8	Pass
NVNT	g	2462	Ant1	-24.31	0.24	-24.07	8	Pass
NVNT	n20	2412	Ant1	-27.58	0.01	-27.57	8	Pass
NVNT	n20	2437	Ant1	-24.98	0.14	-24.84	8	Pass
NVNT	n20	2462	Ant1	-27.87	0.01	-27.86	8	Pass
NVNT	n40	2422	Ant1	-27.2	0.03	-27.17	8	Pass
NVNT	n40	2437	Ant1	-28.1	0.29	-27.81	8	Pass
NVNT	n40	2452	Ant1	-26.33	0.29	-26.04	8	Pass

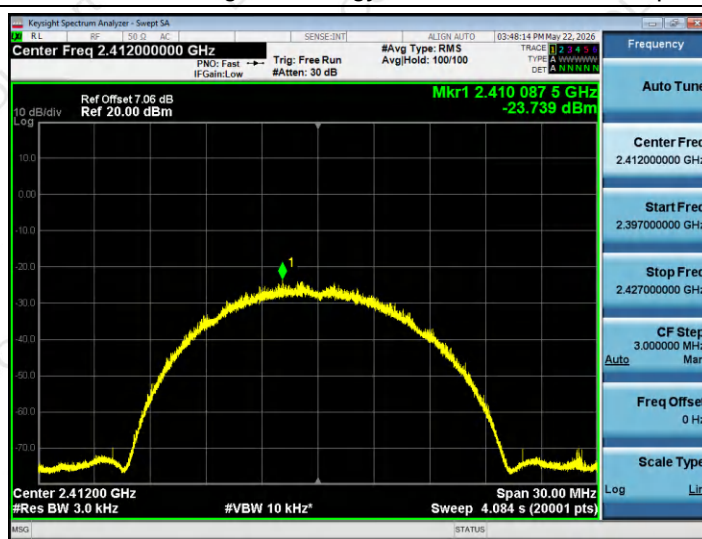


PSD NVNT b 2412MHz Ant1

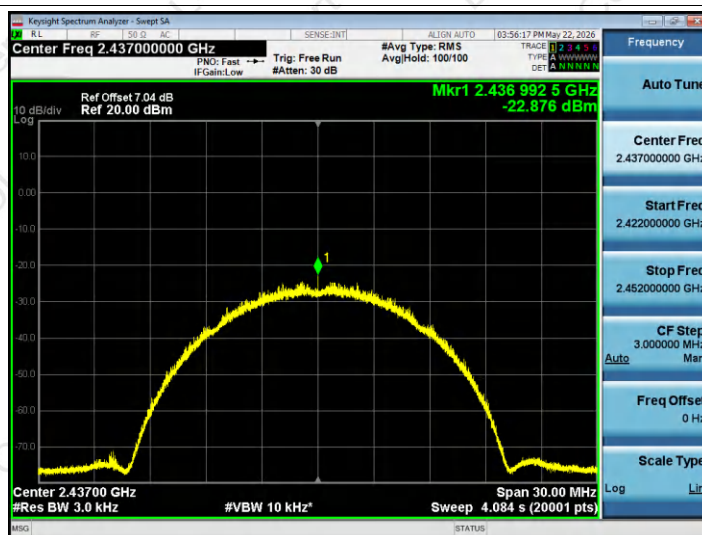


PSD NVNT b 2437MHz Ant1

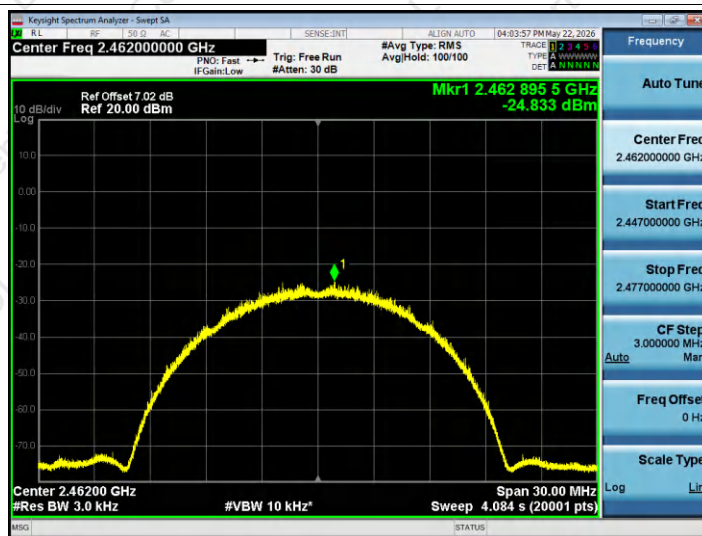


PSD NVNT b 2462MHz Ant1

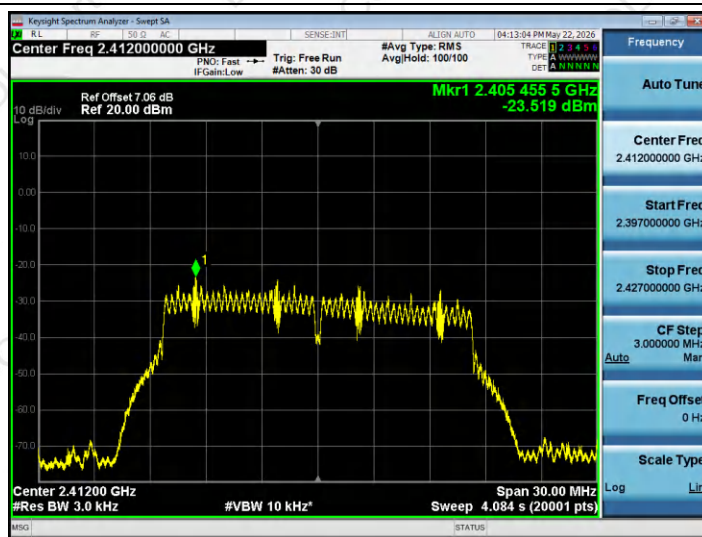


PSD NVNT g 2412MHz Ant1

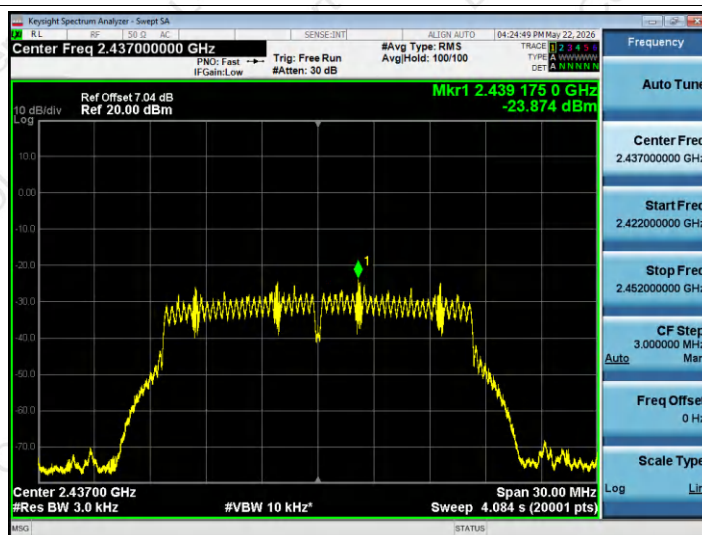


PSD NVNT g 2437MHz Ant1

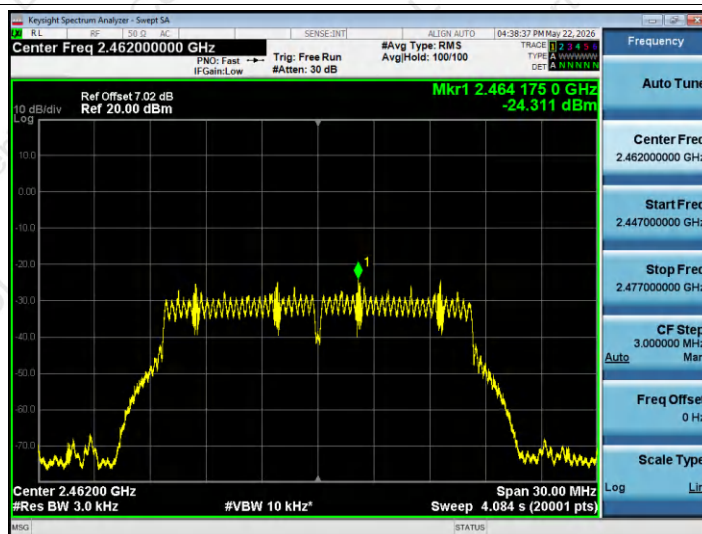


PSD NVNT g 2462MHz Ant1

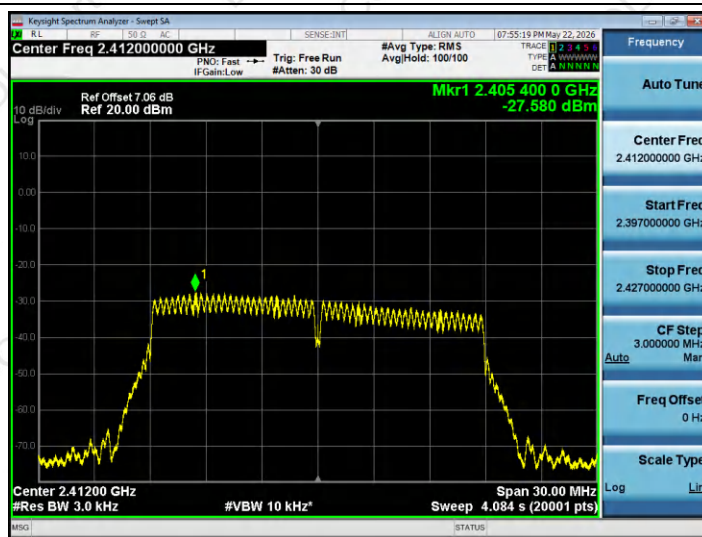


PSD NVNT n20 2412MHz Ant1

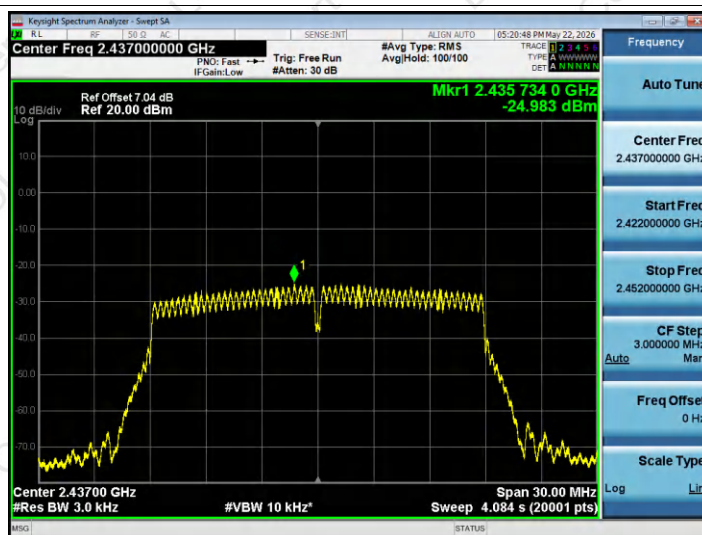


PSD NVNT n20 2437MHz Ant1

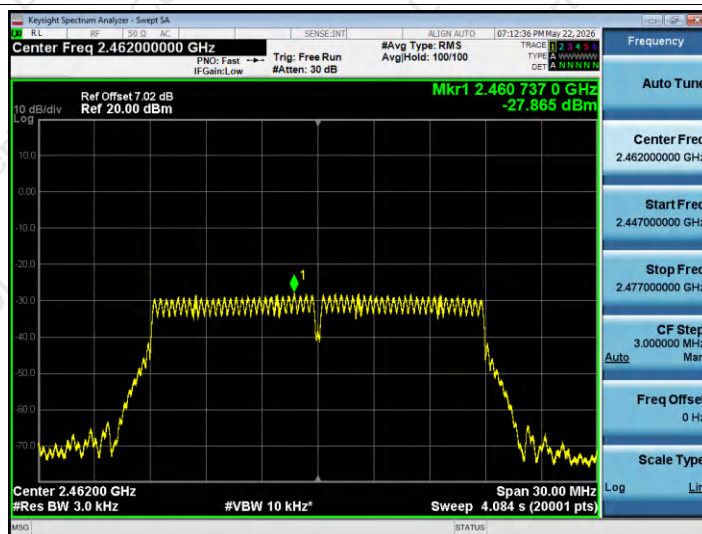


PSD NVNT n20 2462MHz Ant1

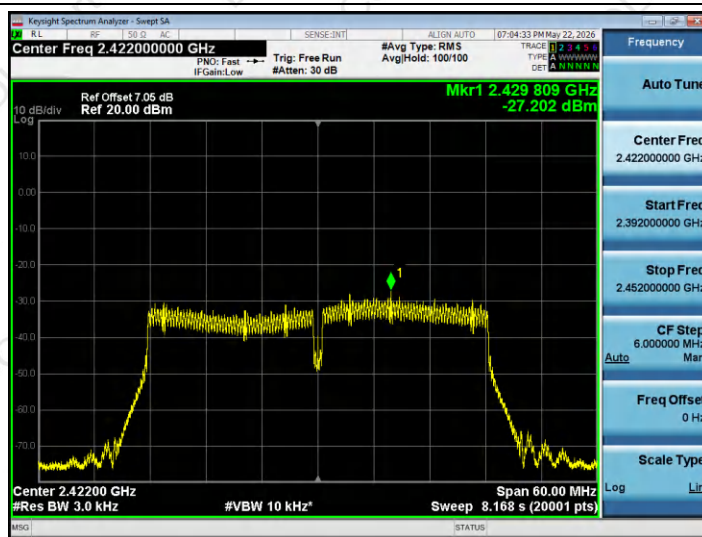

PSD NVNT n40 2422MHz Ant1

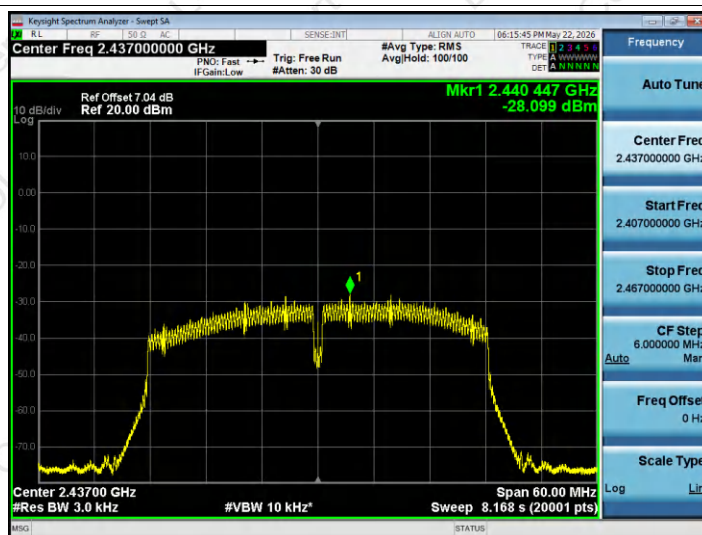

PSD NVNT n40 2437MHz Ant1

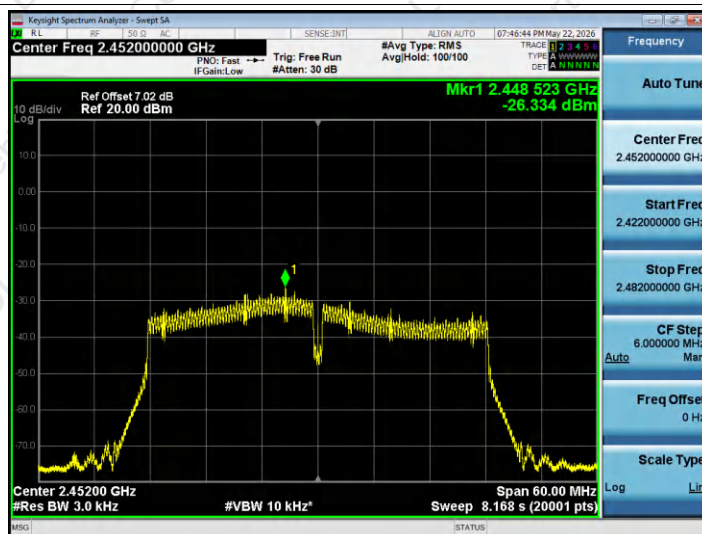


PSD NVNT n40 2452MHz Ant1

**6. Band Edge**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-45.48	-30	Pass
NVNT	b	2462	Ant1	-54.21	-30	Pass
NVNT	g	2412	Ant1	-33.4	-30	Pass
NVNT	g	2462	Ant1	-43.83	-30	Pass
NVNT	n20	2412	Ant1	-30.84	-30	Pass
NVNT	n20	2462	Ant1	-46.43	-30	Pass
NVNT	n40	2422	Ant1	-31.55	-30	Pass
NVNT	n40	2452	Ant1	-38.21	-30	Pass




Band Edge NVNT b 2412MHz Ant1 Ref

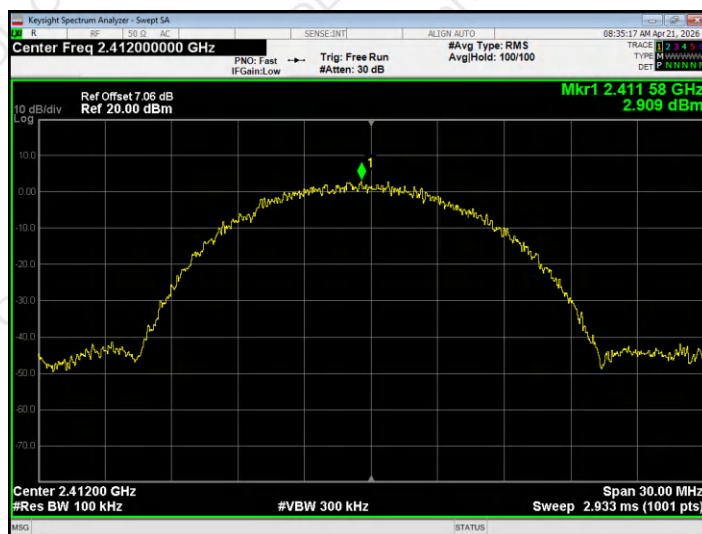

Band Edge NVNT b 2412MHz Ant1 Emission

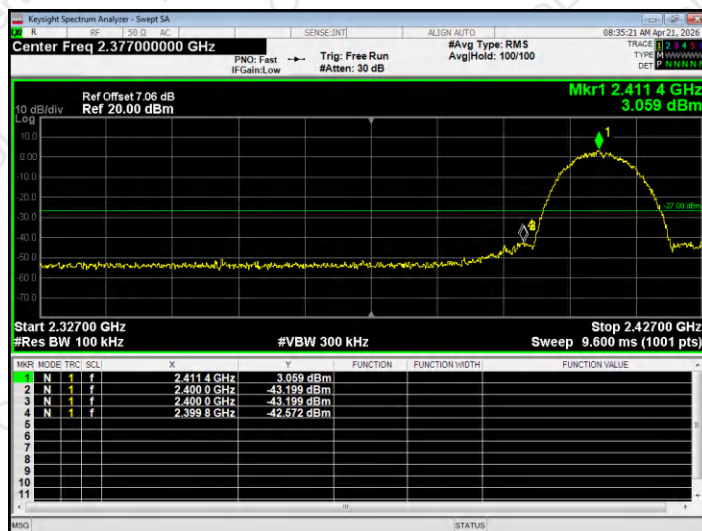


Band Edge NVNT b 2462MHz Ant1 Ref

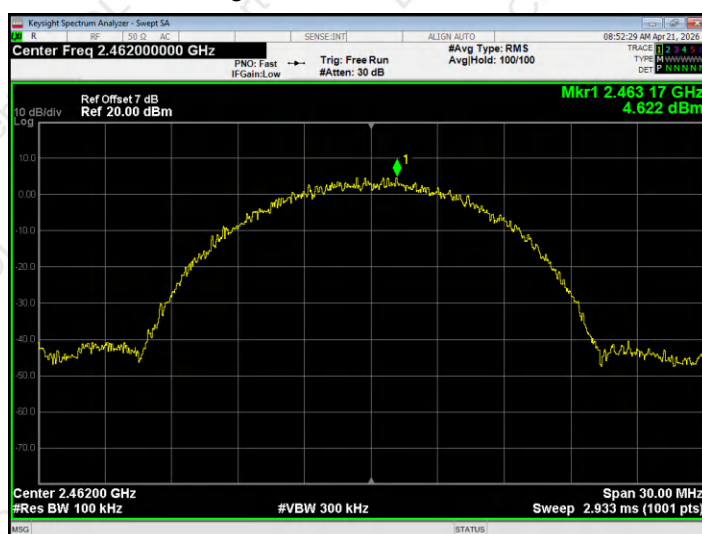





Band Edge NVNT b 2462MHz Ant1 Emission

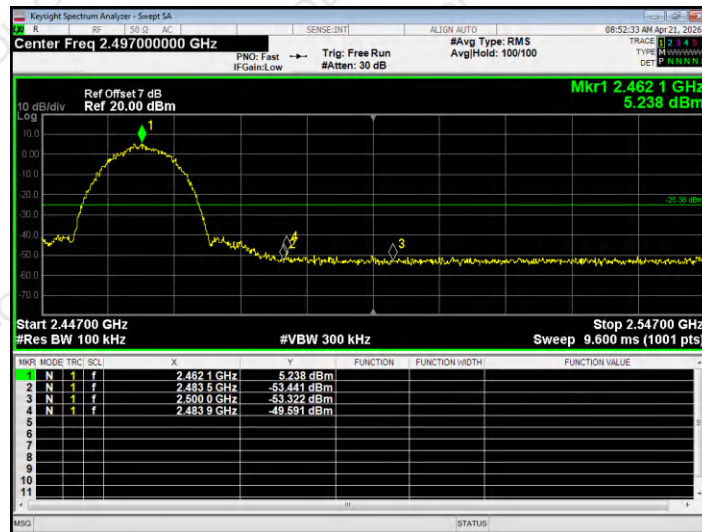

Band Edge NVNT g 2412MHz Ant1 Ref

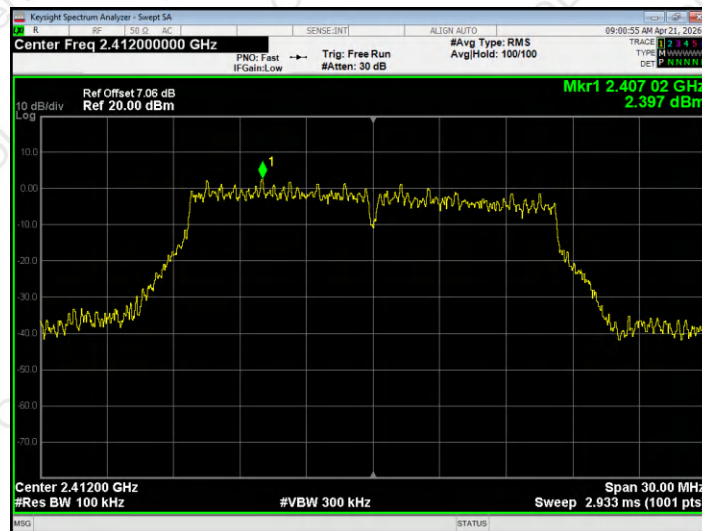


Band Edge NVNT g 2412MHz Ant1 Emission

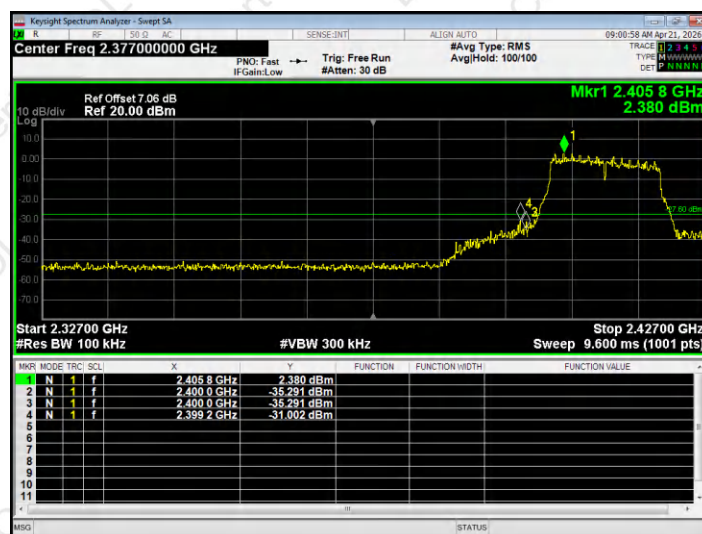





Band Edge NVNT g 2462MHz Ant1 Ref

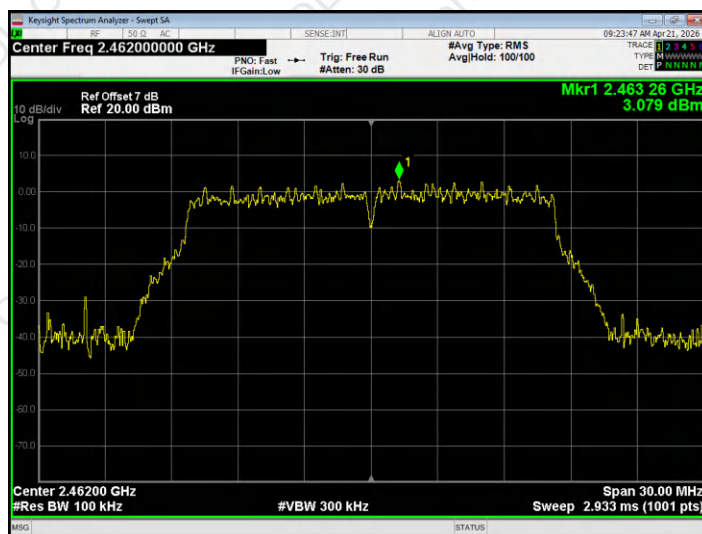

Band Edge NVNT g 2462MHz Ant1 Emission

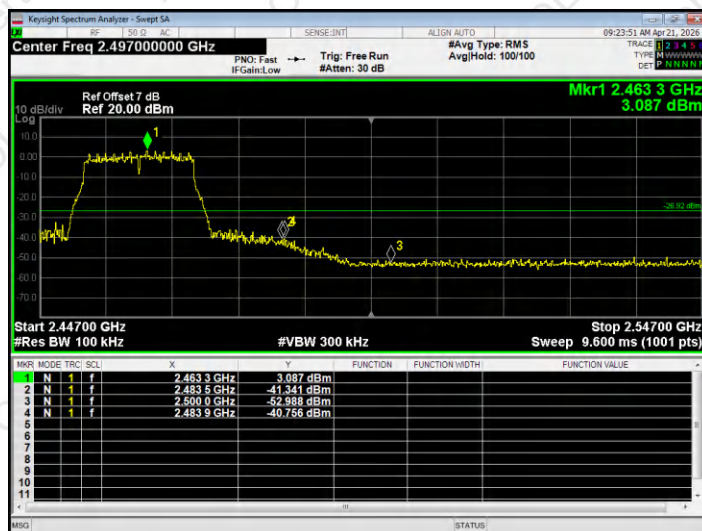


Band Edge NVNT n20 2412MHz Ant1 Ref

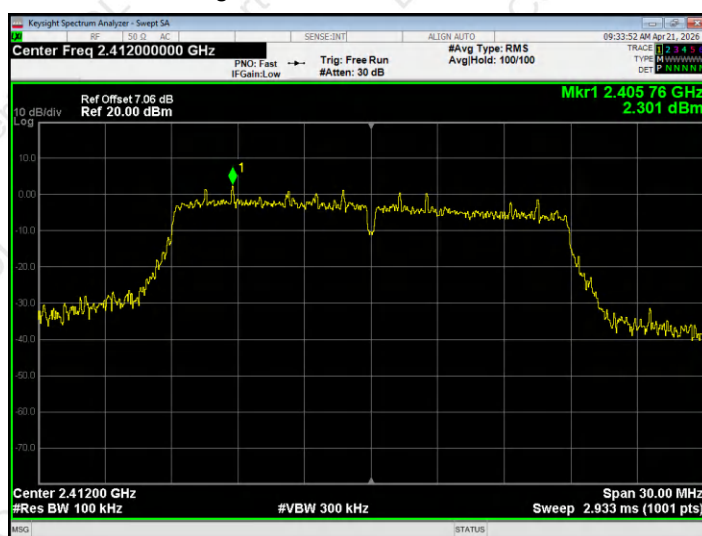




Band Edge NVNT n20 2412MHz Ant1 Emission

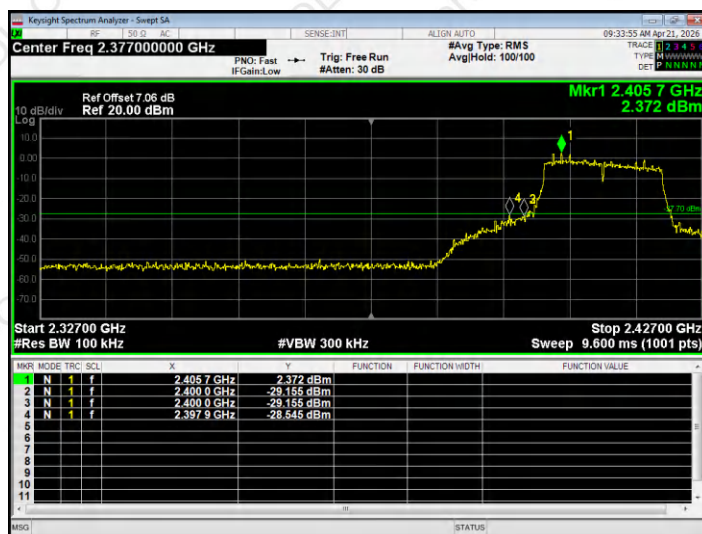

Band Edge NVNT n20 2462MHz Ant1 Ref

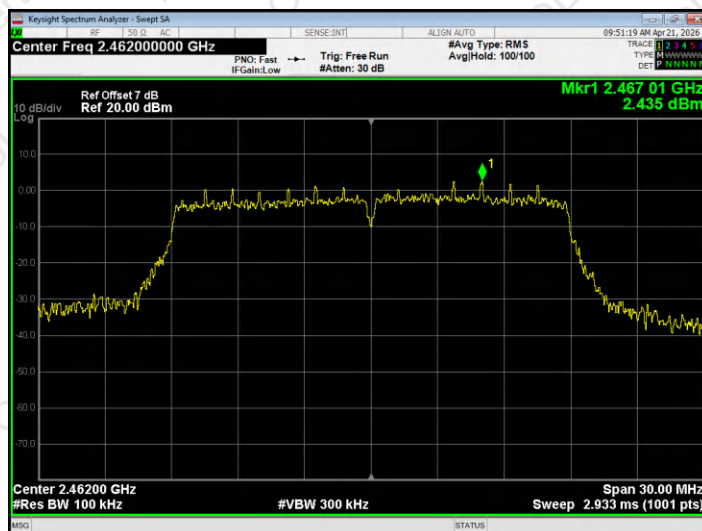


Band Edge NVNT n20 2462MHz Ant1 Emission







Band Edge NVNT n40 2422MHz Ant1 Ref

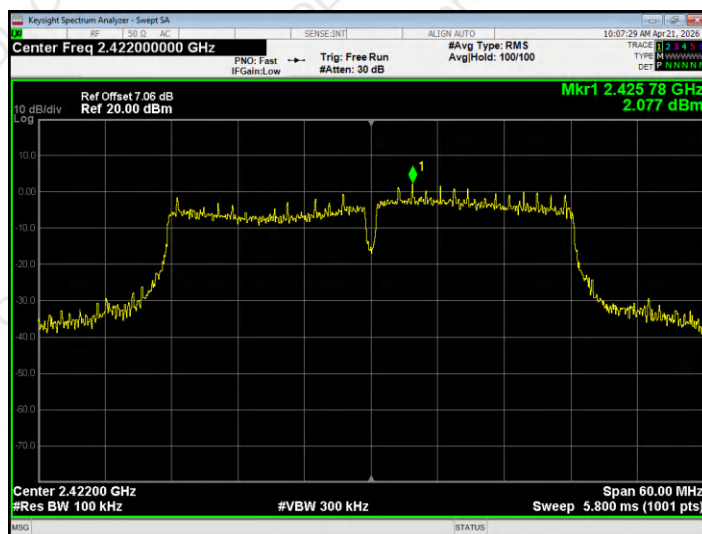

Band Edge NVNT n40 2422MHz Ant1 Emission

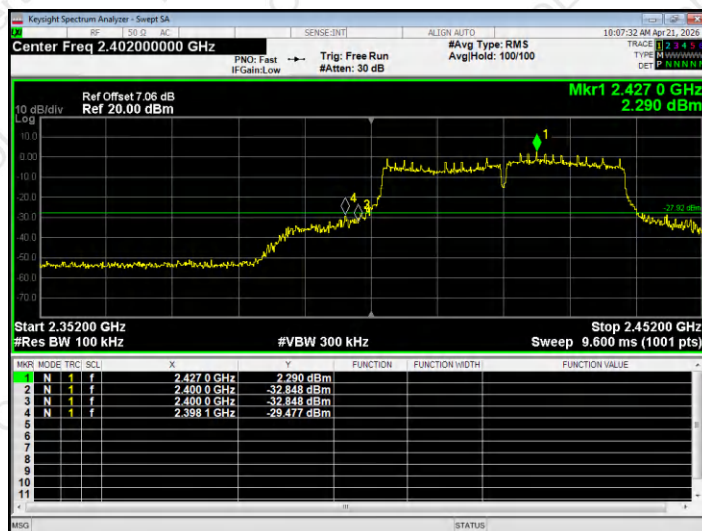


Band Edge NVNT n40 2452MHz Ant1 Ref

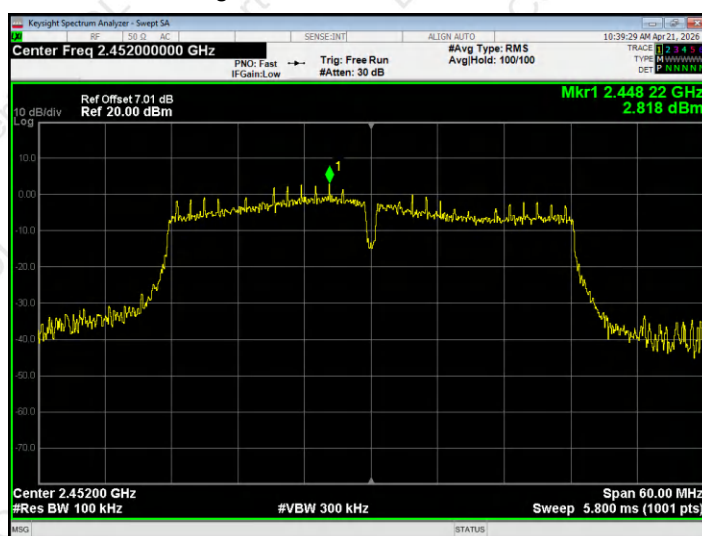



Band Edge NVNT n40 2452MHz Ant1 Emission

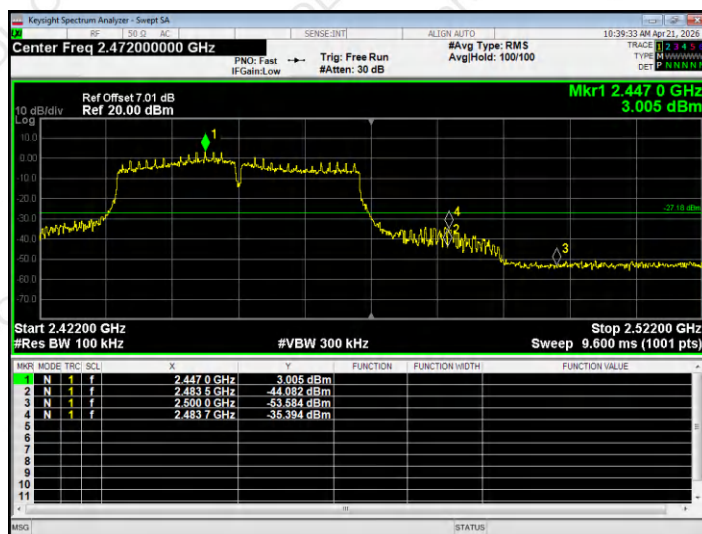


**7. Conducted RF Spurious Emission**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-39.24	-30	Pass
NVNT	b	2437	Ant1	-39.86	-30	Pass
NVNT	b	2462	Ant1	-39.21	-30	Pass
NVNT	g	2412	Ant1	-36.3	-30	Pass
NVNT	g	2437	Ant1	-38.46	-30	Pass
NVNT	g	2462	Ant1	-37.12	-30	Pass
NVNT	n20	2412	Ant1	-36.18	-30	Pass
NVNT	n20	2437	Ant1	-37.79	-30	Pass
NVNT	n20	2462	Ant1	-36.6	-30	Pass
NVNT	n40	2422	Ant1	-36.61	-30	Pass
NVNT	n40	2437	Ant1	-35.9	-30	Pass
NVNT	n40	2452	Ant1	-36.31	-30	Pass




Tx. Spurious NVNT b 2412MHz Ant1 Ref

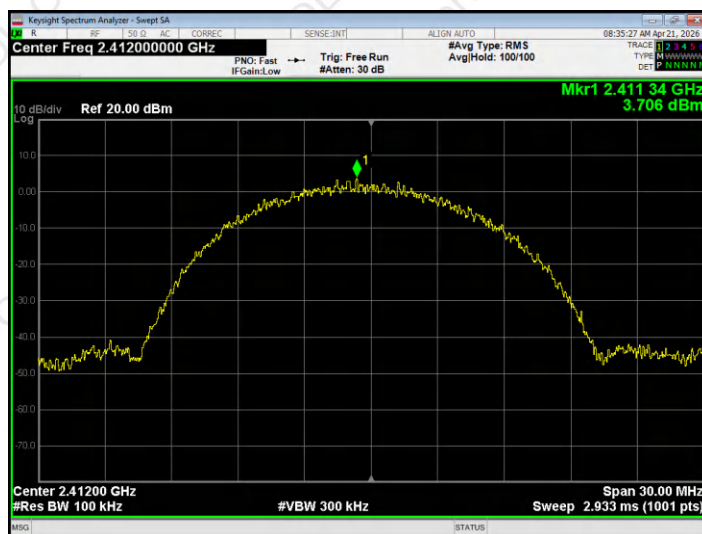

Tx. Spurious NVNT b 2412MHz Ant1 Emission

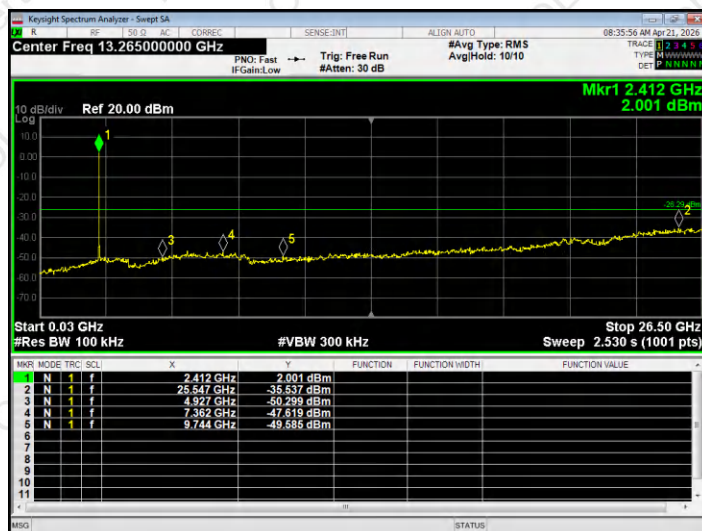


Tx. Spurious NVNT b 2437MHz Ant1 Ref

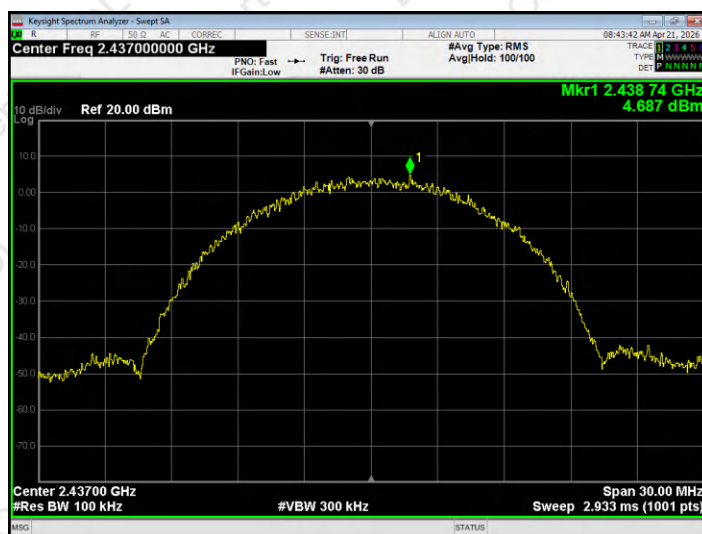





Tx. Spurious NVNT b 2437MHz Ant1 Emission

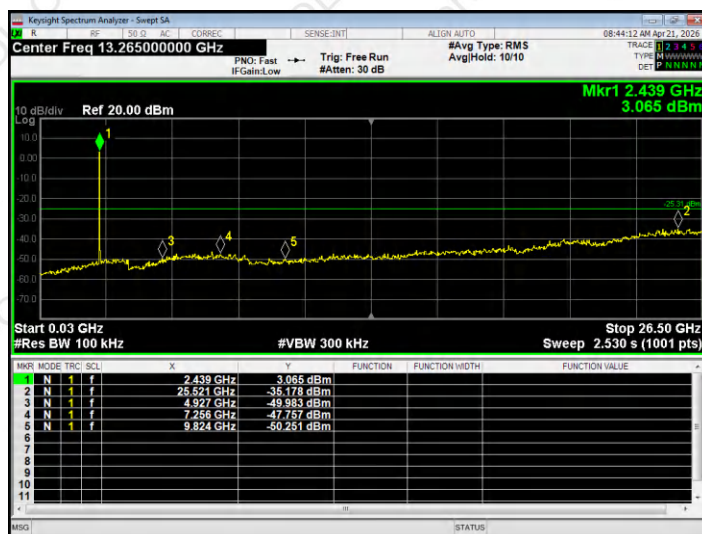

Tx. Spurious NVNT b 2462MHz Ant1 Ref

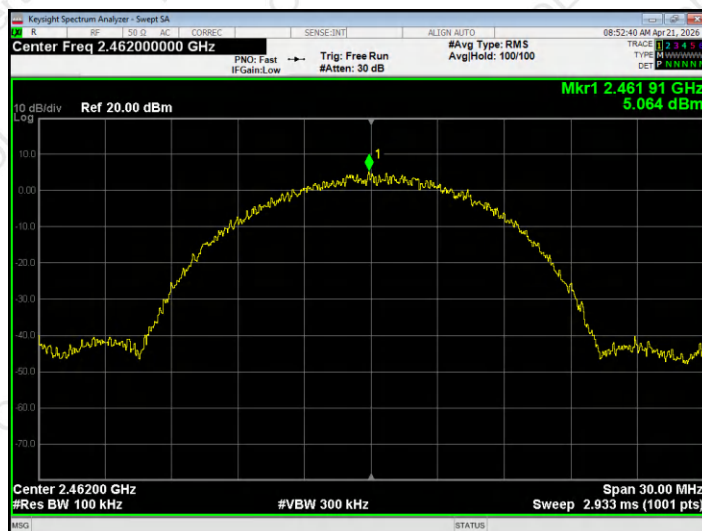


Tx. Spurious NVNT b 2462MHz Ant1 Emission

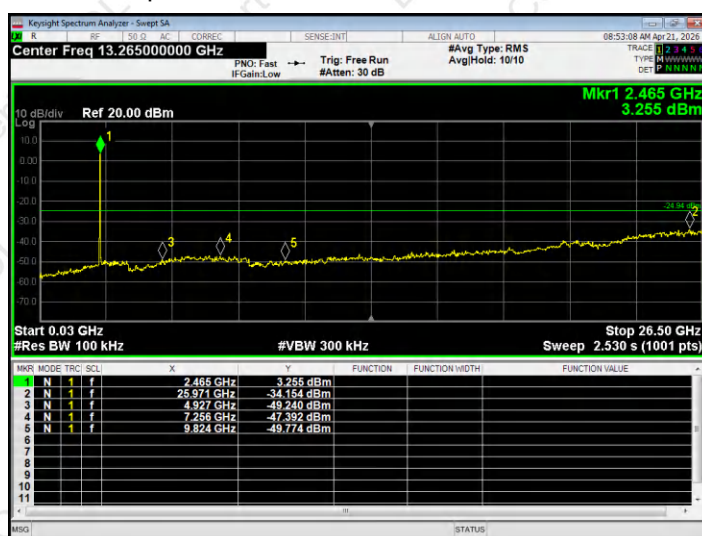





Tx. Spurious NVNT g 2412MHz Ant1 Ref

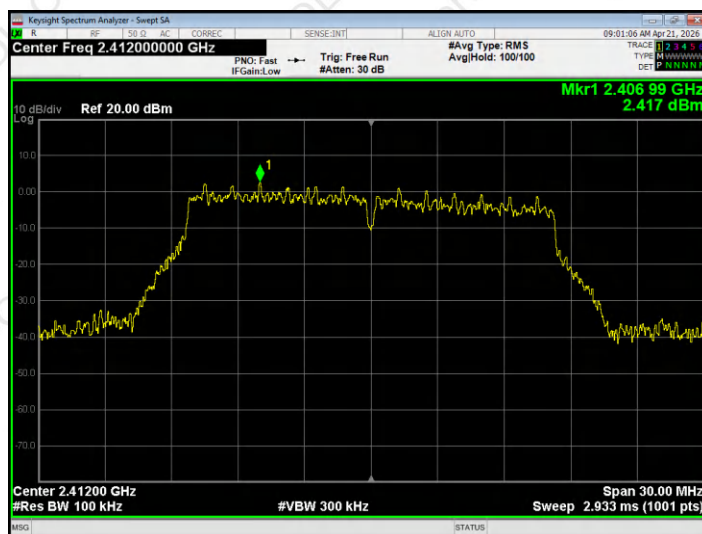

Tx. Spurious NVNT g 2412MHz Ant1 Emission

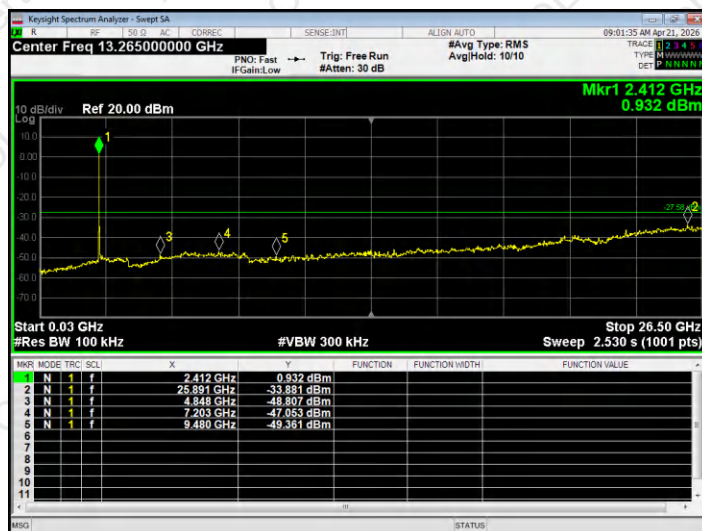


Tx. Spurious NVNT g 2437MHz Ant1 Ref

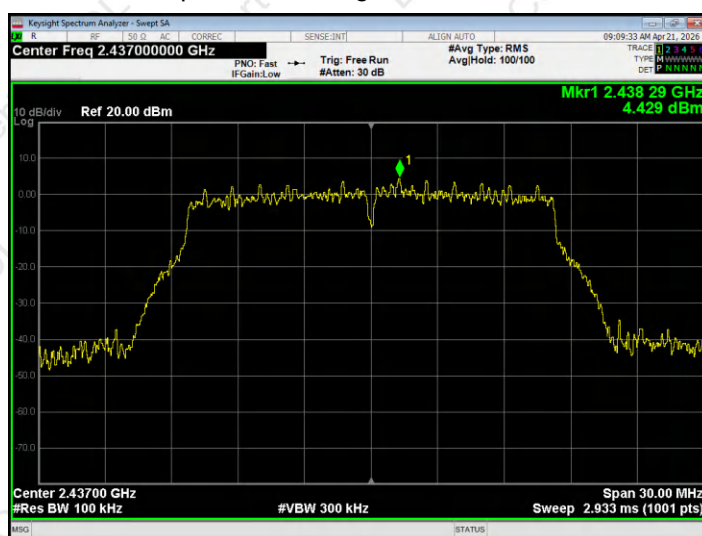





Tx. Spurious NVNT g 2437MHz Ant1 Emission

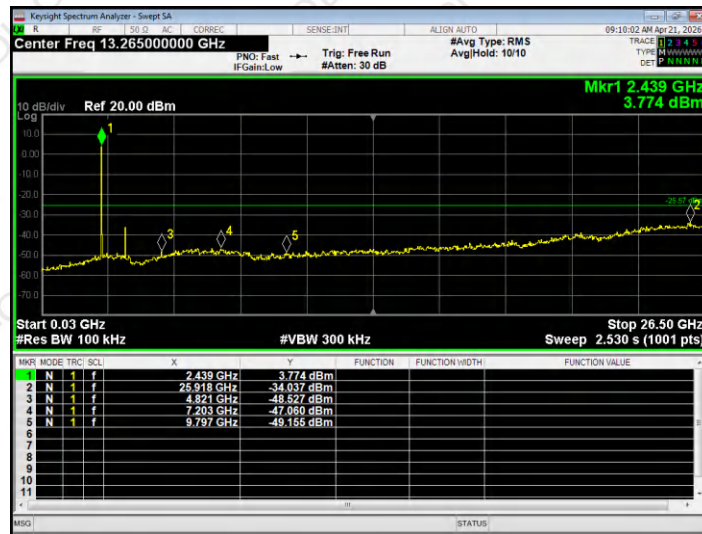

Tx. Spurious NVNT g 2462MHz Ant1 Ref

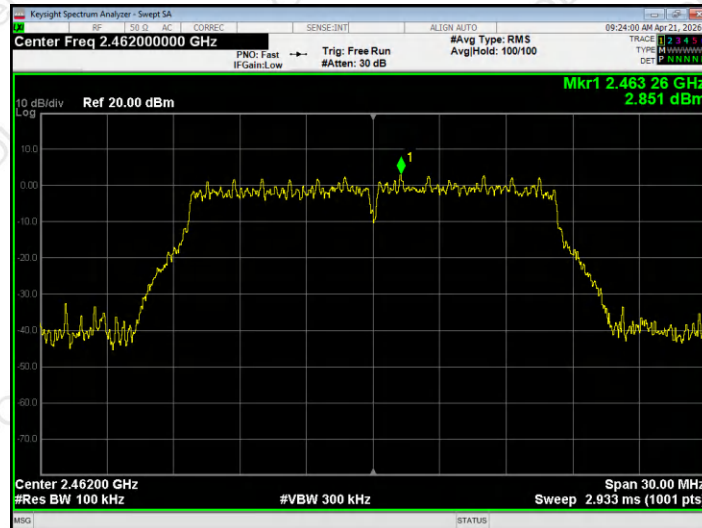


Tx. Spurious NVNT g 2462MHz Ant1 Emission

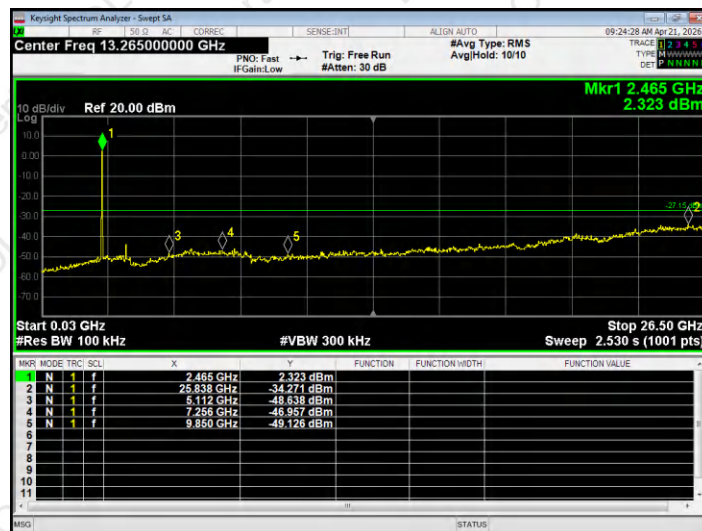





Tx. Spurious NVNT n20 2412MHz Ant1 Ref

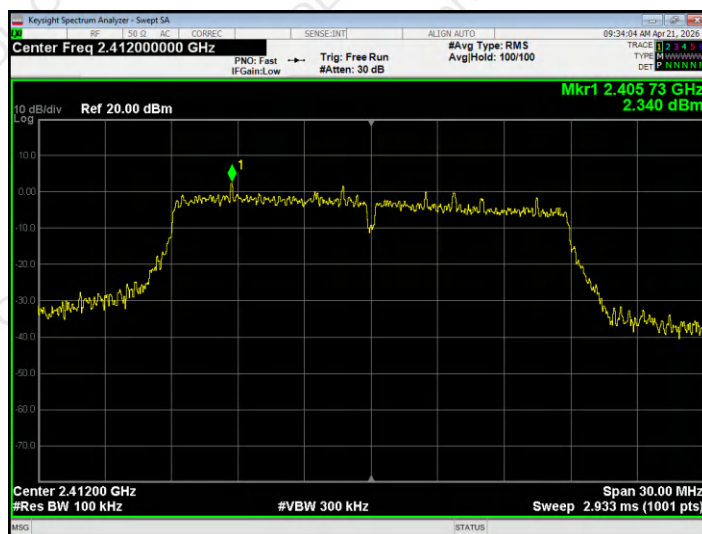

Tx. Spurious NVNT n20 2412MHz Ant1 Emission

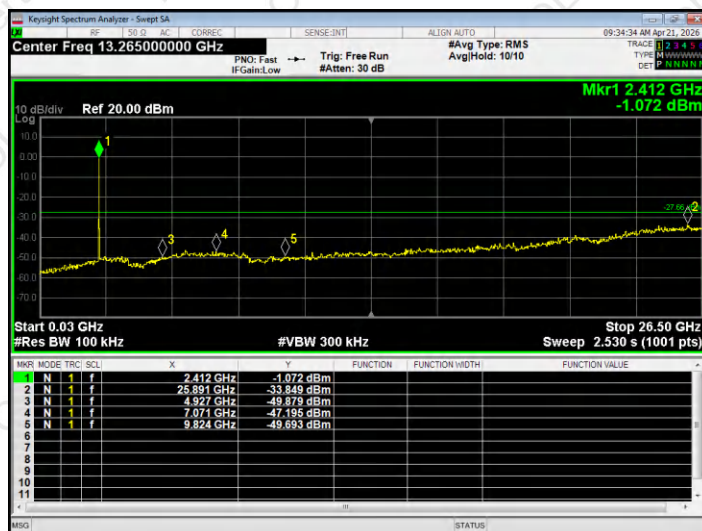


Tx. Spurious NVNT n20 2437MHz Ant1 Ref

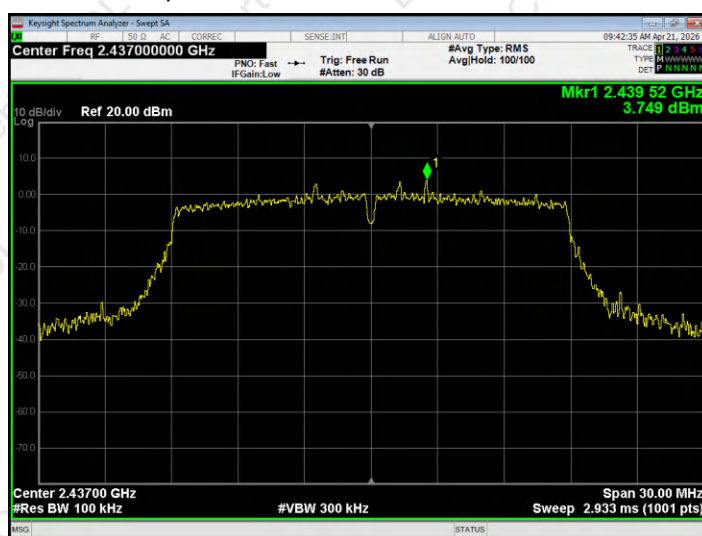




Tx. Spurious NVNT n20 2437MHz Ant1 Emission

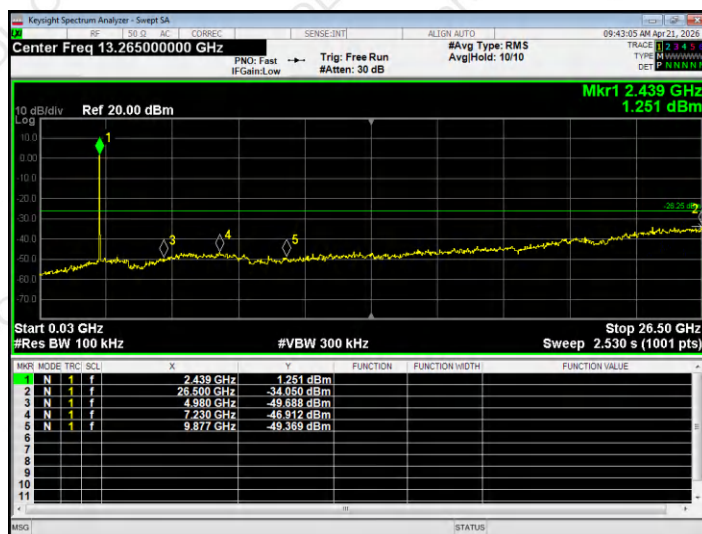

Tx. Spurious NVNT n20 2462MHz Ant1 Ref




Tx. Spurious NVNT n20 2462MHz Ant1 Emission

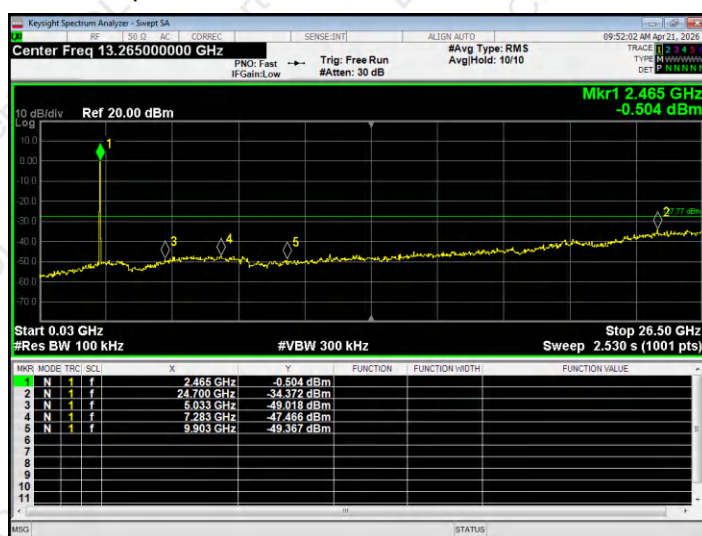





Tx. Spurious NVNT n40 2422MHz Ant1 Ref

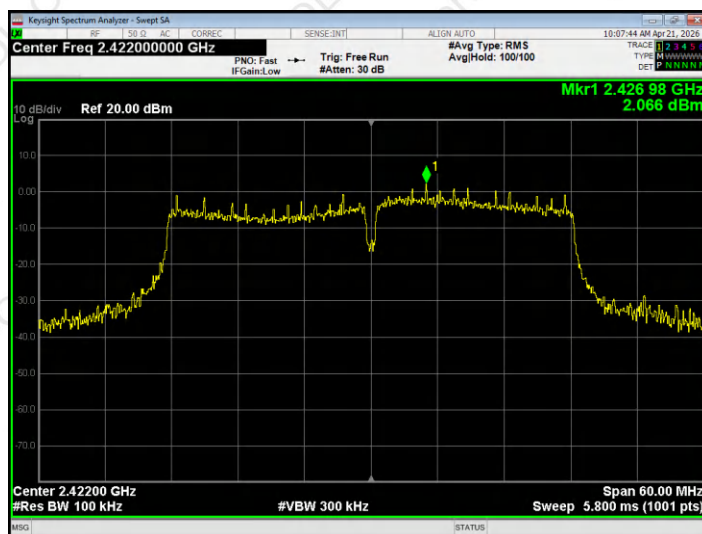

Tx. Spurious NVNT n40 2422MHz Ant1 Emission

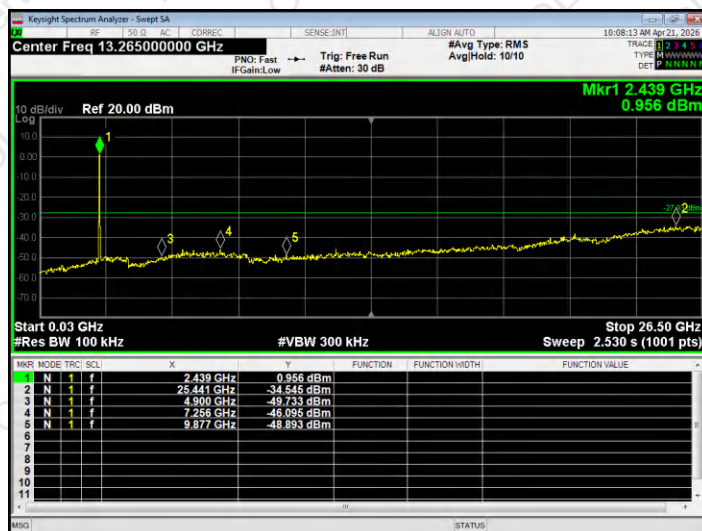


Tx. Spurious NVNT n40 2437MHz Ant1 Ref

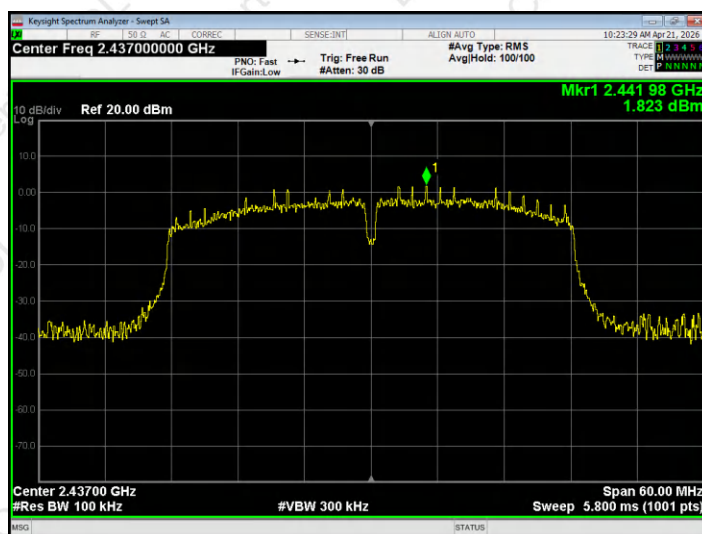




Tx. Spurious NVNT n40 2437MHz Ant1 Emission

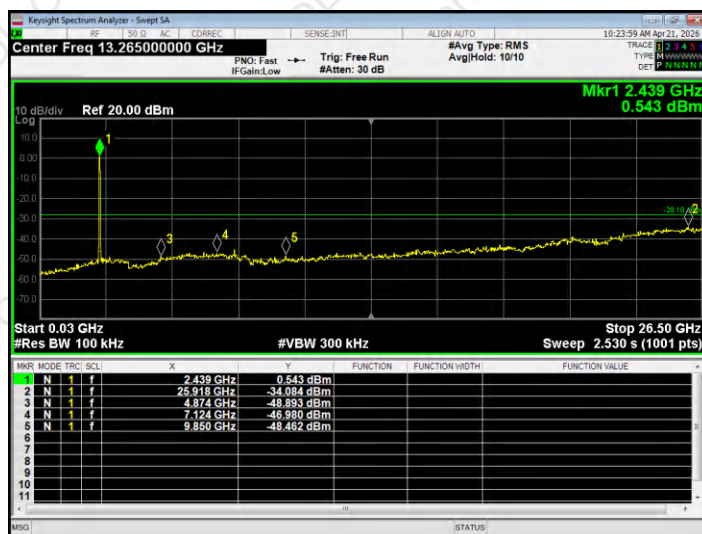

Tx. Spurious NVNT n40 2452MHz Ant1 Ref

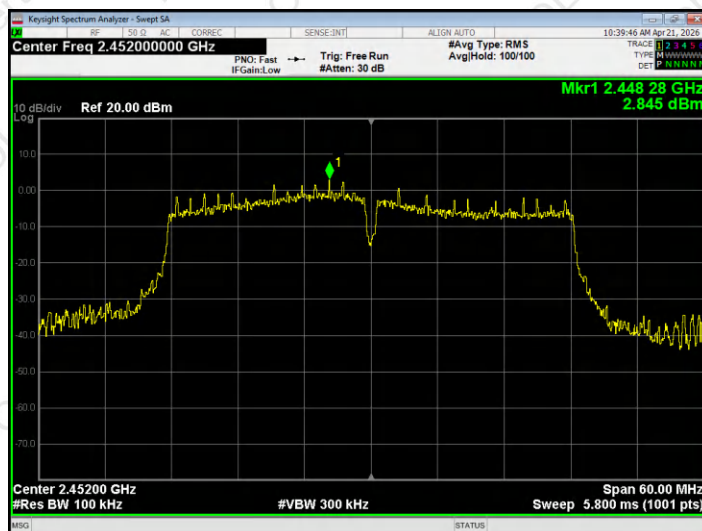

Tx. Spurious NVNT n40 2452MHz Ant1 Emission

