

ISED CABid: ES1909
Lab. Company Number: 4621A

Test Report No:
85372RRF.001

Test Report

USA FCC Part 22

CANADA RSS-132

(*) Identification of item tested	LTE Cat1-bis module
(*) Trademark	Sequans Communications
(*) Model and/or type reference	GC02S1-WW
Other identification of the product	FCC ID: 2AAGMGC02SW IC: 12732A-GC02SW
(*) Features	LTE Category CAT1_BIS HW version: Rev1 SW version: LR9.0.5.1-63892
Applicant	Sequans Communications 55 Boulevard Charles de Gaulle, 92700 Colombes, FRANCE
Test method requested, standard	USA FCC Part 22 (10-1-24 Edition). CANADA RSS-132 Issue 4, Jan. 2023. ANSI C63.26-2015. KDB 971168 D01 Power Meas License Digital Systems v03r01, April. 2018.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	José Manuel Gómez Galván EMC Consumer & RF Lab. Manager 
Date of issue	2026-03-10
Report template No	FDT08_27 (*) "Data provided by the client"

Firmado
digitalmente
por 53680346W
JOSE MANUEL
GOMEZ
(CA29507456)

Index

Competences and guarantees 3

General conditions 3

Uncertainty 3

Data provided by the client.....3

Usage of samples 4

Test sample description 5

Identification of the client.....5

Testing period and place.....6

Document history 6

Environmental conditions 6

Remarks and comments 7

Testing verdicts.....8

Summary 8

Appendix A: Test results for FCC 22 / RSS-132.....9

Competences and guarantees

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación) to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is an FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory, CABid: ES1909, Company Number: 4621A, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of: The Calliope 2 GC02S1 modules are based on Sequans's second-generation Calliope 2 silicon and delivers optimized 4G LTE Cat 1 connectivity for IoT, M2M and consumer devices such as wearables and hearables that require speeds higher than LTE-M.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results. The laboratory is not responsible for such information and it is not covered by accreditation.

Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	85370/002	LTE Cat1-bis module	GC02S1-WW	-	2025-12-11	Element Under Test
S/01	85370/011	LTE Cat1-bis module	GC02S1-WW	-	2026-01-09	Element Under Test
S/02	85370/002	LTE Cat1-bis module	GC02S1-WW	-	2025-12-11	Element Under Test
S/02	85370/005	SMA Cable	-	-	2025-12-11	Auxiliary Element
S/02	85370/010	LTE Cat1-bis module	GC02S1-WW	-	2026-01-09	Element Under Test
S/02	85370/012	SMA Cable	-	-	2026-01-09	Auxiliary Element

Notes referenced to samples during the project:

Id	Type
S/01	Radiated tests
S/02	Conducted tests

Test sample description

Ports..... :	Port name and description	Cable					
		Specified max length [m]	Attached during test	Shielded			
	USB	-	X	-			
	UART	-	X	-			
Supplementary information to the ports..... :	-						
Rated power supply :	Voltage and Frequency		Reference poles				
		AC:	L1	L2	L3	N	PE
		DC: 3.3 to 4.5 V					
Rated Power..... :	-						
Clock frequencies..... :	-						
Other parameters :	-						
Software version..... :							
Hardware version :							
Dimensions in cm (W x H x D) ... :	21 x 19.5 x 1.8 mm						
Mounting position :	X	Table top equipment					
		Wall/Ceiling mounted equipment					
		Floor standing equipment					
		Hand-held equipment					
		Other:					
Modules/parts..... :	Module/parts of test item		Type	Manufacturer			
	-		-	-			
Accessories (not part of the test item) :	Description		Type	Manufacturer			
	USB Cables		USB	-			
	Antennas		Antenna	-			
Documents as provided by the applicant :	Description		File name	Issue date			
	-		-	-			

Identification of the client

Sequans Communications
55 Boulevard Charles de Gaulle, 92700 Colombes. FRANCE

Testing period and place

Test Location	DEKRA TESTING AND CERTIFICATION S.A.U. C/ Severo Ochoa, 6 - Parque Tecnológico de Andalucía; 29590, Málaga, Spain
Date (start)	2025-12-16
Date (finish)	2026-01-29

Document history

Report number	Date	Description
85372RRF.001	2026-03-10	First release.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semi-anechoic chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Carmen Vázquez.

Used instrumentation:

Control No.	Equipment	Model	Manufacturer	Next Calibration
06791	SEMIANECHOIC ABSORBER LINED CHAMBER IV	FACT 3 200 STP	ETS LINDGREN	N/A
06792	SHIELDED ROOM	S101	ETS LINDGREN	N/A
06609	TEMPERATURE AND HUMIDITY PROBE	HWg-STE	HW GROUP	2026-04-21
06615	TEMPERATURE AND HUMIDITY PROBE	HWg-STE	HW GROUP	2026-04-24
06158	SIGNAL AND SPECTRUM ANALYZER 10 Hz - 40 GHz	FSV40	ROHDE AND SCHWARZ	2026-02-05
08849	WIDEBAND RADIO COMMUNICATION TESTER	CMW500	ROHDE AND SCHWARZ	2026-03-31
06043	POWER DIVIDER, DC-26 GHz	5333	TEKTRONIX	N/A
06165	EMI TEST RECEIVER 9 kHz-7 GHz	ESR	ROHDE AND SCHWARZ	2025-12-27
04578	HYBRID BILOG ANTENNA 30 MHz - 6 GHz	3142E	ETS LINDGREN	2026-06-01
07692	ATTENUATOR 3 dB, 2 W, DC, 18 GHz	TWTS2G	TECHNIWAVE	2026-02-03
08835	SIGNAL AND SPECTRUM ANALYZER 2 Hz - 50 GHz	FSW50	ROHDE AND SCHWARZ	2027-04-15
05705	PRE-AMPLIFIER G>40dB, 1-18 GHz	BLMA 0118-1M	BONN ELEKTRONIK	2026-07-23
04611	HORN ANTENNA 1-18 GHz	BBHA 9120 D	SCHWARZBECK MESS-ELEKTRONIK	2026-01-16
04716	SIGNAL AND SPECTRUM ANALYZER 2 Hz - 50 GHz	FSW50	ROHDE AND SCHWARZ	2026-08-02
10573	PRE-AMPLIFIER G>46dB 18-40 GHz	BLMA 1840-5G	BONN ELEKTRONIK	2026-03-07
04657	HORN ANTENNA 18-40 GHz	BBHA 9170	SCHWARZBECK MESS-ELEKTRONIK	2026-06-12
04848	SOFTWARE FOR EMC/RF TESTING	EMC32	ROHDE AND SCHWARZ	N/A

Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

Summary

LTE Cat 1bis Band 26 (Sub-band 824-849 MHz):

FCC PART 22 / RSS-132 PARAGRAPH			
Requirement – Test case	Verdict	Remark	Location
FCC 22.913 / RSS-132 5.4: RF Output Power	P	-	DEKRA TESTING AND CERTIFICATION S.A.U. C/ Severo Ochoa, 6 - Parque Tecnológico de Andalucía; 29590, Málaga, Spain
FCC 2.1047 / RSS-132 5.2: Modulation Characteristics	P	-	
FCC 22.355 / RSS-132 5.3: Frequency Stability	P	-	
FCC 2.1049: Occupied Bandwidth	P	-	
FCC 22.917 / RSS-132 5.5: Spurious Emissions at Antenna Terminals	P	-	
FCC 22.917 / RSS-132 5.5: Spurious Emissions at Antenna Terminals at Block Edges	P	-	
FCC 22.917 / RSS-132 5.5: Radiated Emissions	P	-	
<u>Supplementary information and remarks:</u>			
None.			

Appendix A: Test results for FCC 22 / RSS-132

INDEX

Competences and guarantees	3
TEST CONDITIONS	11
RF Output Power	12
Frequency Stability	19
Modulation Characteristics	23
Occupied Bandwidth.....	26
Spurious Emissions at Antenna Terminals	51
Spurious Emissions at Antenna Terminals at Block Edges	58
Radiated Emissions.....	62

TEST CONDITIONS

(*): Declared by the Applicant.

POWER SUPPLY (*):

Vnominal: 3.8 Vdc
Vminimum: 3.3 Vdc
Vmaximum: 4.5 Vdc

Type of Power Supply: USB.

ANTENNA (*):

BAND	GAIN (dBi)	ANTENNA TYPE
LTE 5	+2.4	TRIO mXTEND™ (NN03-310)

TEST FREQUENCIES:

LTE Cat 1bis Band 5. QPSK and 16QAM:

	Channel (Frequency MHz)			
	BW=1.4 MHz	BW=3 MHz	BW=5 MHz	BW=10 MHz
Low	20407 (824.70)	20415 (825.50)	20425 (826.50)	20450 (829.00)
Middle	20525 (836.50)	20525 (836.50)	20525 (836.50)	20525 (836.50)
High	20643 (848.30)	20635 (847.50)	20625 (846.50)	20600 (844.00)

NOTE: The 824-849 MHz band of the LTE Cat 1bis Band 5 is completely included in the LTE Cat 1bis Band 26, so the LTE Cat 1bis Band 26 channels were tested to give conformity to the assigned block.

LTE Cat 1bis Band 26 (Sub-band 824-849 MHz). QPSK and 16QAM:

	Channel (Frequency MHz)				
	BW=1.4 MHz	BW=3 MHz	BW=5 MHz	BW=10 MHz	BW=15 MHz
Low	26797 (824.70)	26805 (825.50)	26815 (826.50)	26840 (829.00)	26865 (831.50)
Middle	26915 (836.50)	26915 (836.50)	26915 (836.50)	26915 (836.50)	26915 (836.50)
High	27033 (848.30)	27025 (847.50)	27015 (846.50)	26990 (844.00)	26965 (841.50)

RF Output Power

Limits

* FCC §2.1046 and FCC §22.913. The Effective Radiated Power (E.R.P) of mobile transmitter and auxiliary test transmitter must not exceed 7 Watts (38.45 dBm E.R.P.).

* RSS-132 Issue 4. Clause 5.4. The transmitter output power shall be measured in terms of average power. The equivalent radiated power (e.r.p.) shall not exceed 7 watts for mobile equipment and 3 watts for portable equipment. The effective isotropic radiated power (e.i.r.p.) shall not exceed the limits specified in SRSP-503 for base station equipment.

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

Method

The conducted RF output power measurements were made at the RF output terminals of the EUT using the power meter of the Universal Radio Communication tester R&S CMW500, selecting maximum transmission power of the EUT and different modes of modulation.

The peak-to-average power ratio (PAPR) is measured using an attenuator, power splitter and spectrum analyser with a Complementary Cumulative Distribution Function implemented.


The maximum equivalent isotropically radiated power (e.i.r.p.) is calculated by adding the declared maximum antenna gain (dBi).

The maximum effective radiated power e.r.p. is calculated from the maximum equivalent isotropically radiated power (e.i.r.p.) by subtracting 2.15 dB:


$$\text{E.R.P.} = \text{E.I.R.P.} - 2.15 \text{ dB}$$

Test Setup

1. CONDUCTED AVERAGE POWER:

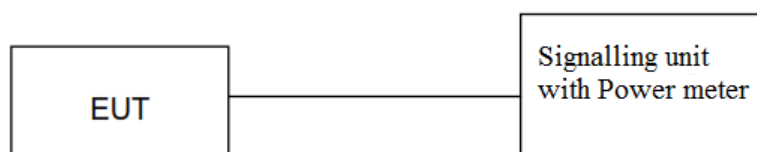

2. PEAK-TO-AVERAGE POWER RATIO (PAPR) and Conducted Average power:

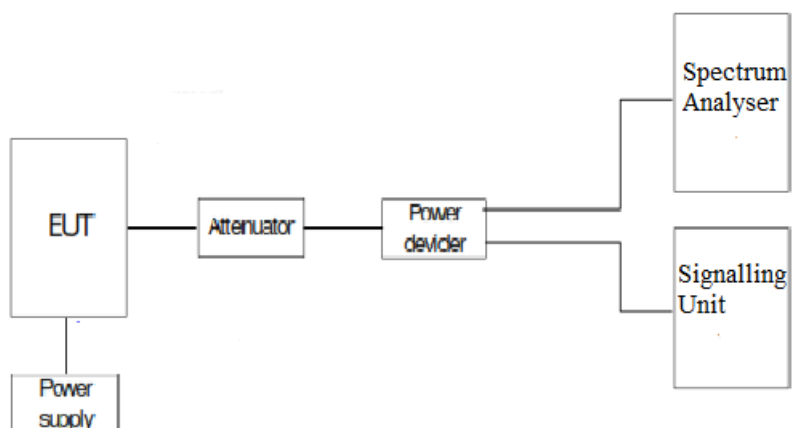

Results

1. CONDUCTED AVERAGE POWER:

LTE Cat 1bis 26 (Sub-band 824-849 MHz):

Preliminary measurements determined the worst case of RF Power is BW=10 MHz, Low Channel, QPSK, RB Size=1, RB Offset=24.

BANDWIDTH (MHz)	CHANNEL	FREQUENCY (MHz)	MODULATION	RB SIZE	RB OFFSET	AVERAGE POWER (dBm)	PAPR (dB)
10	Low 26840	829	QPSK	1	0	23.13	5.07
				1	24	23.72	4.67
				1	49	23.38	4.99
				25	0	22.48	5.77
				25	12	22.54	5.91
				25	24	22.5	5.77
				50	0	22.54	5.57
			16-QAM	1	0	22.44	6.84
				1	24	22.95	6.55
				1	49	22.69	6.43
				25	0	21.46	6.75
				25	12	21.57	6.72
				25	24	21.5	6.81
				50	0		
	Middle 26915	836.5	QPSK	1	0	23.27	5.36
				1	24	23.4	4.17
				1	49	23.24	4.72
				25	0	22.42	5.33
				25	12	22.34	5.36
				25	24	22.42	5.19
				50	0	22.13	5.36
			16-QAM	1	0	22.65	6.46
				1	24	22.8	5.54
				1	49	22.63	5.68
				25	0	21.43	6.12
				25	12	21.37	6.32
				25	24	21.41	6.26
				50	0		
	High 26990	844	QPSK	1	0	23.15	5.01
				1	24	23.35	5.04
				1	49	23.22	4.78
				25	0	22.37	5.36
				25	12	22.33	5.62
				25	24	22.31	5.36
				50	0	22.29	5.45
			16-QAM	1	0	22.48	5.71
				1	24	22.6	6.03
				1	49	22.49	5.54
				25	0	21.38	6.29
				25	12	21.34	6.61
				25	24	21.35	6.46
				50	0		

BW=10 MHz. QPSK:

MAX POWER	QPSK COND. POWER AVG (dBm)	ANTENNA GAIN (dBi)	RAD. POWER AVG EIRP (dBm)	RAD. POWER AVG ERP (dBm)
LOW	23.72	2	25.72	23.57
MIDDLE	23.4	2	25.4	23.25
HIGH	23.35	2	25.35	23.2
MAX:	23.72		25.72	23.57

BW=10 MHz. 16QAM:


MAX POWER	16QAM COND. POWER AVG (dBm)	ANTENNA GAIN (dBi)	RAD. POWER AVG EIRP (dBm)	RAD. POWER AVG ERP (dBm)
LOW	22.95	2	24.95	22.8
MIDDLE	22.8	2	24.8	22.65
HIGH	22.6	2	24.6	22.45
MAX:	22.95		24.95	22.8

2. PEAK-TO-AVERAGE POWER RATIO (PAPR)


LTE Cat 1bis 26 (Sub-band 824-849 MHz):

Preliminary measurements determined the worst-case of PAPR is BW=5 MHz, Low Channel, 16QAM, RB Size=12, RB Offset=0.


LOW CHANNEL:

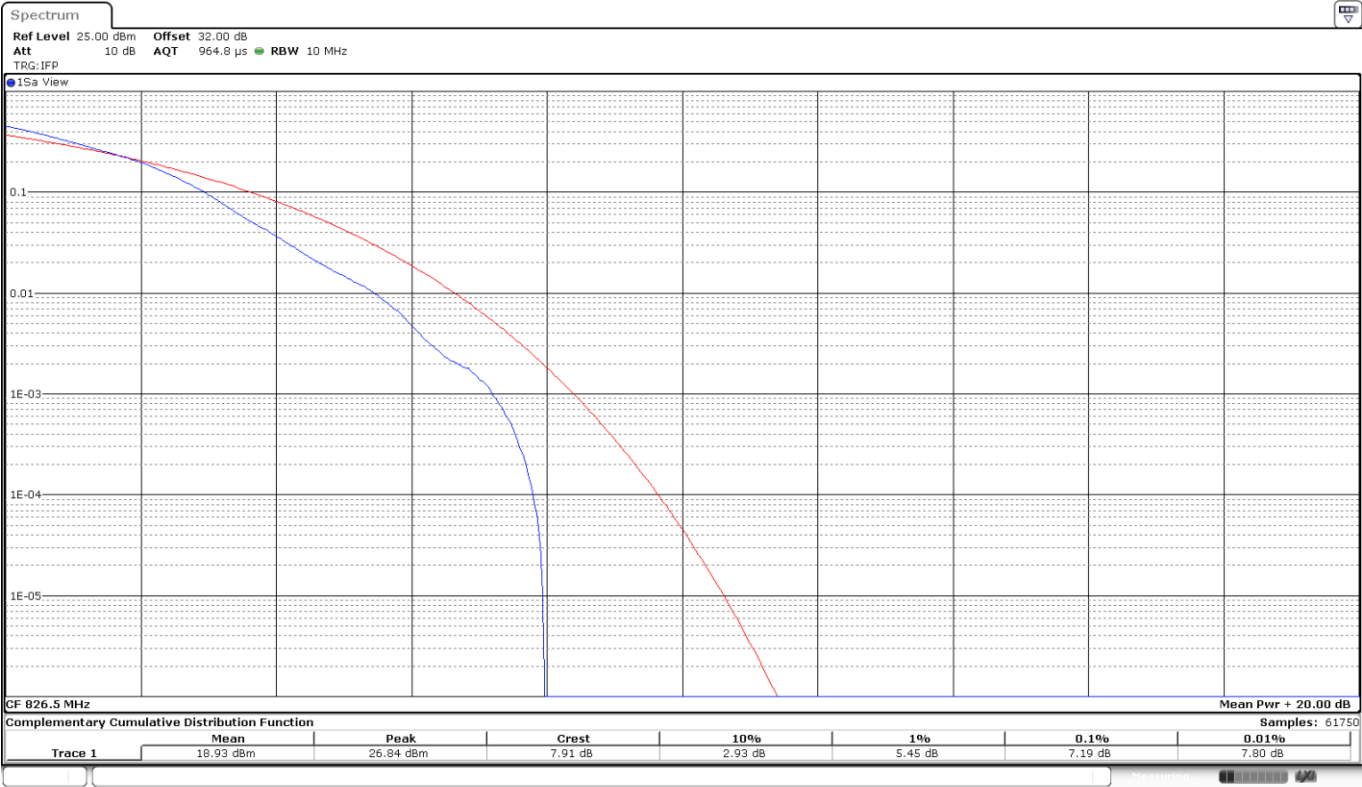

MIDDLE CHANNEL:

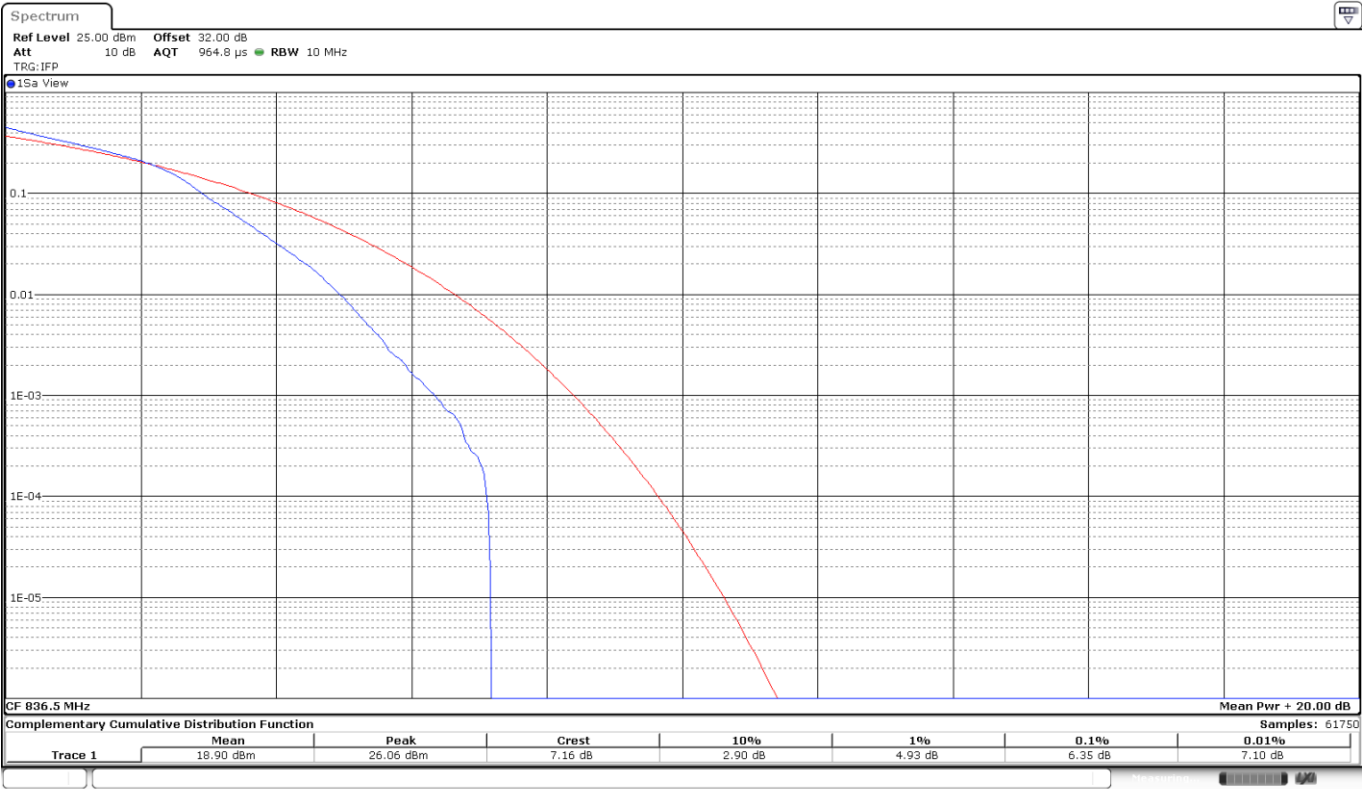

HIGH CHANNEL:

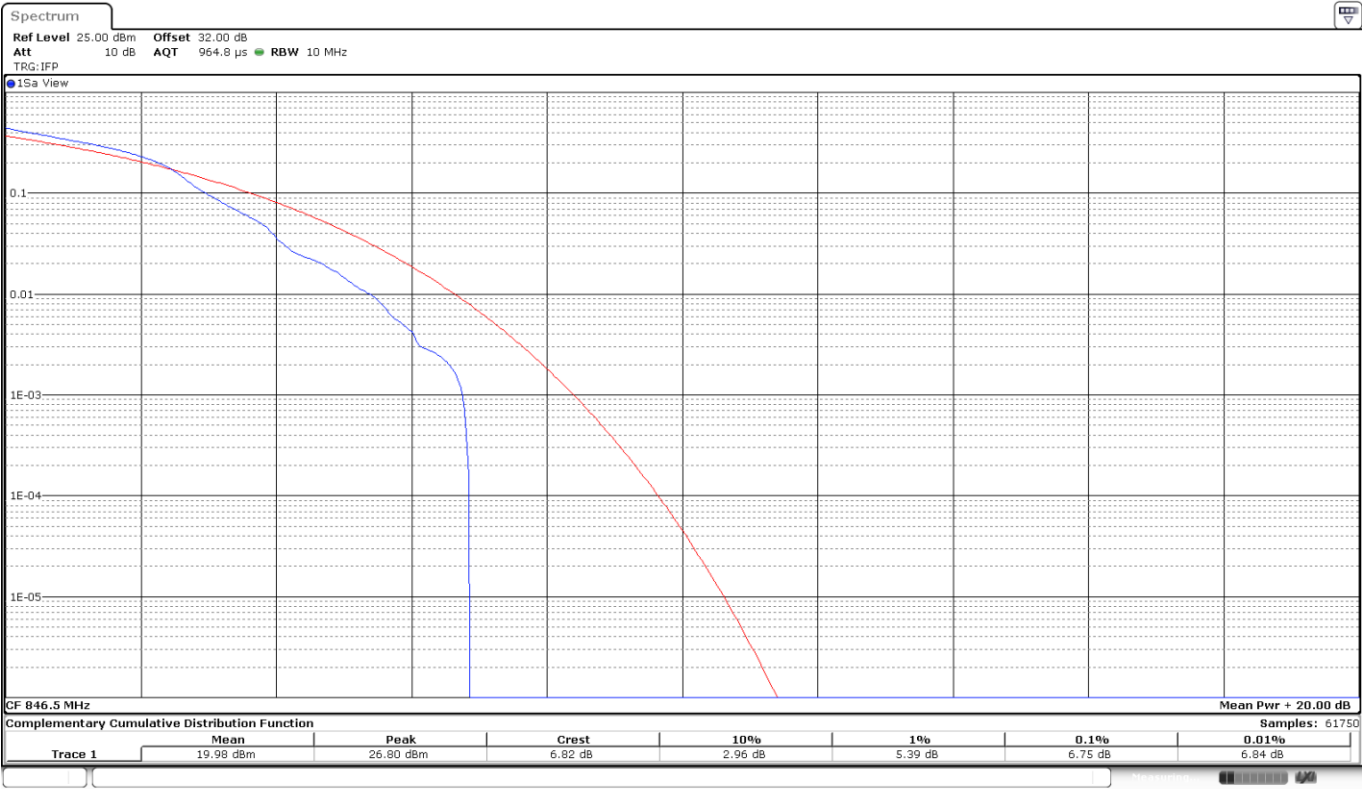

16QAM	Low	Middle	High
PAPR (dB)	7.19	6.35	6.75

Measurement uncertainty (dB) <±1.11

Verdict

Pass

Frequency Stability

Limits

- * FCC §2.1055 and §22.355. ± 2.5 ppm for mobile stations operating in the range 821 to 896 MHz.
- * RSS-132 Issue 4. Clause 5.3. The frequency stability shall be sufficient to ensure that the occupied bandwidth stays within each of the sub-bands when tested at the temperature and supply voltage variations specified in RSS-Gen.

Method

The frequency tolerance measurements over temperature variations were made over the temperature range of -30°C to $+50^{\circ}\text{C}$. The EUT was placed inside a climatic chamber and the temperature was raised hourly in 10°C steps from -30°C up to $+50^{\circ}\text{C}$.

The supply voltage was varied between 85% and 115% of nominal voltage.

Temperature and voltage range of testing has been extended to the maximum and minimum values declared by customer.

The EUT was set in "Radio Resource Control (RRC) mode" on the middle channel using the Universal Radio Communication tester R&S CMW500 and the maximum frequency error was measured using the built-in calibrated frequency meter.


The worst-case LTE mode for conducted power was used for the test.

In order to check that the frequency stability is sufficient such that the fundamental emissions stay within the authorized bands of operation, a reference point is established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the LOW and HIGH channels of operation are identified as fL and fH respectively. The worst-case frequency offset determined in the above methods is added or subtracted from the values of fL and fH to check that the resulting frequencies remain within the band.


The reference point measurements were made at the RF output terminals of the EUT using an attenuator, power splitter and spectrum analyser. The EUT was controlled via the Universal Radio Communication tester R&S CMW500 selecting maximum transmission power of the EUT and different modes of modulation.

Test Setup

Frequency tolerance:

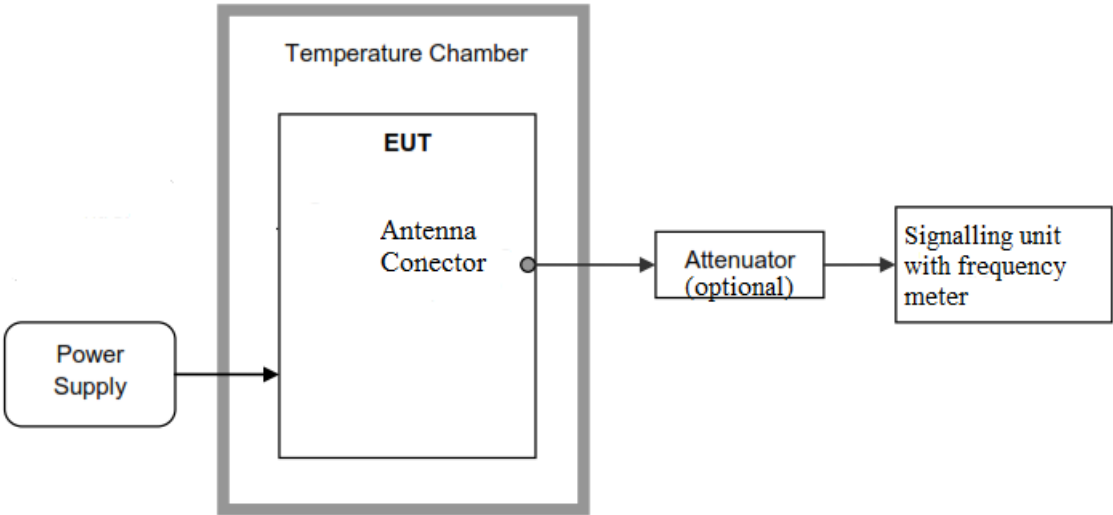

Reference points f_L and f_H :

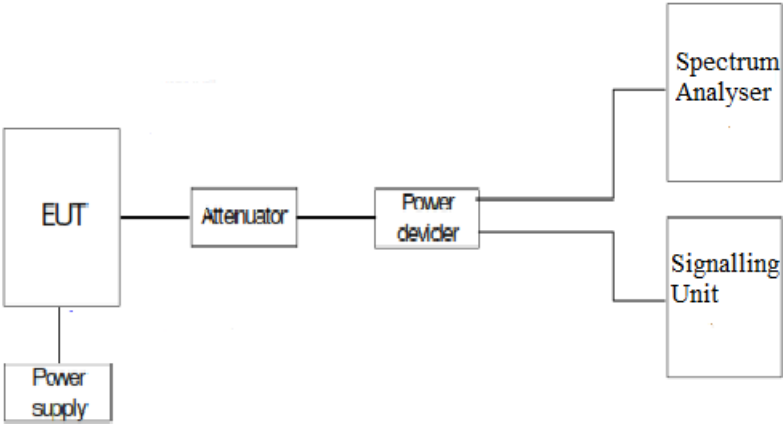

Results

LTE Cat 1bis 5:

The worst case modulation in terms of Frequency Stability is BW=5 MHz, QPSK, RB Size=1, RB Offset=0.

1. Frequency Tolerance:

- Frequency Stability over Temperature Variations:

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
+85 [#]	-2.57	-0.003072325
+80 [#]	3.4	0.004064555
+70 [#]	2.13	0.002546324
+60 [#]	4.66	0.005570831
+50	-2.54	-0.003036461
+40	1.35	0.001613867
+30	2.84	0.003395099
+20	-4.17	-0.004985057
+10	3.62	0.004327555
0	-2.95	-0.003526599
-10	4.48	0.005355649
-20	-3.21	-0.003837418
-30	5	0.005977286
-40 [#]	-2.67	-0.003191871

Tests conditions marked with “#” are out of the scope of ENAC accreditation

- Frequency Stability over Voltage Variations.

Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
Vmax	4.5	3.18	0.003801554
Vmin	3.3	-4.52	-0.005403467

2. Reference Frequency Points fL and fH:

The worst-case frequency offsets added or subtracted per band and bandwidth:

fL (MHz)	824.148845
fH (MHz)	848.841165

The reference frequency points fL and fH stay within the authorized blocks for the band above.

Measurement uncertainty (Hz) $\leq \pm 249.55$

Verdict

Pass

LTE Cat 1bis 26 (Sub-band 824-849 MHz):

The worst case modulation in terms of Frequency Stability is BW=5 MHz, QPSK, RB Size=1, RB Offset=0.

1. Frequency Tolerance:

- **Frequency Stability over Temperature Variations:**

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
+85	2.73	0.003263598
+80	-4.11	-0.004913329
+70	3.58	0.004279737
+60	-2.64	-0.003156007
+50	4.92	0.00588165
+40	-3.07	-0.003670054
+30	2.15	0.002570233
+20	-5.06	-0.006049014
+10	3.26	0.003897191
0	-4.48	-0.005355649
-10	2.89	0.003454871
-20	-2.33	-0.002785415
-30	4.01	0.004793784
-40	-3.75	-0.004482965

- **Frequency Stability over Voltage Variations.**

Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
Vmax	4.5	-2.47	-0.002952779
Vmin	3.3	4.36	0.005212194

2. Reference Frequency Points f_L and f_H:

The worst-case frequency offsets added or subtracted per band and bandwidth:

f _L (MHz)	824.148845
f _H (MHz)	848.843165

The reference frequency points f_L and f_H stay within the authorized blocks for the band above.

Measurement uncertainty (Hz) <± 249.55

Verdict

Pass

Modulation Characteristics

Limits


FCC §2.1047.

RSS-132. Clause 5.2: Equipment certified under this standard shall use digital modulation.

Method

For LTE the EUT operates with QPSK and 16QAM modes in which the information is digitized and coded into a bit stream. The RF transmission is multiplexed using *Orthogonal Frequency Division Multiplexing (OFDM)* using different possible arrangement of subcarriers (Resource Blocks RB).


Test Setup

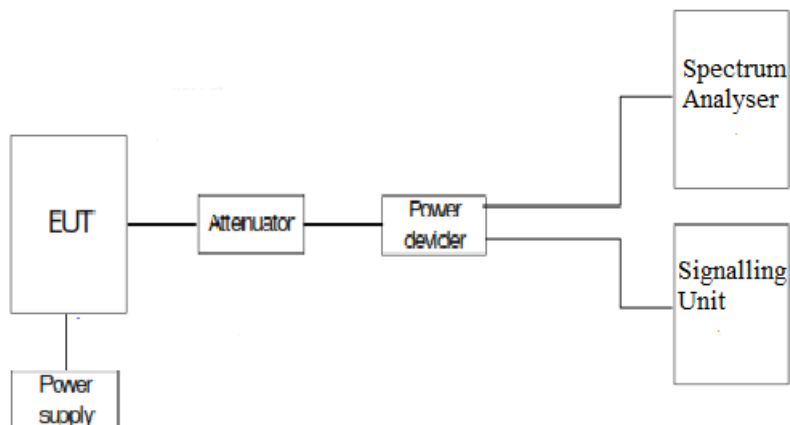

Results


The following plots show the modulation schemes in the EUT.

LTE Cat 1bis 26 (Sub-band 824-849 MHz): BW=5 MHz. QPSK. RB Size=1. RB Offset=12.

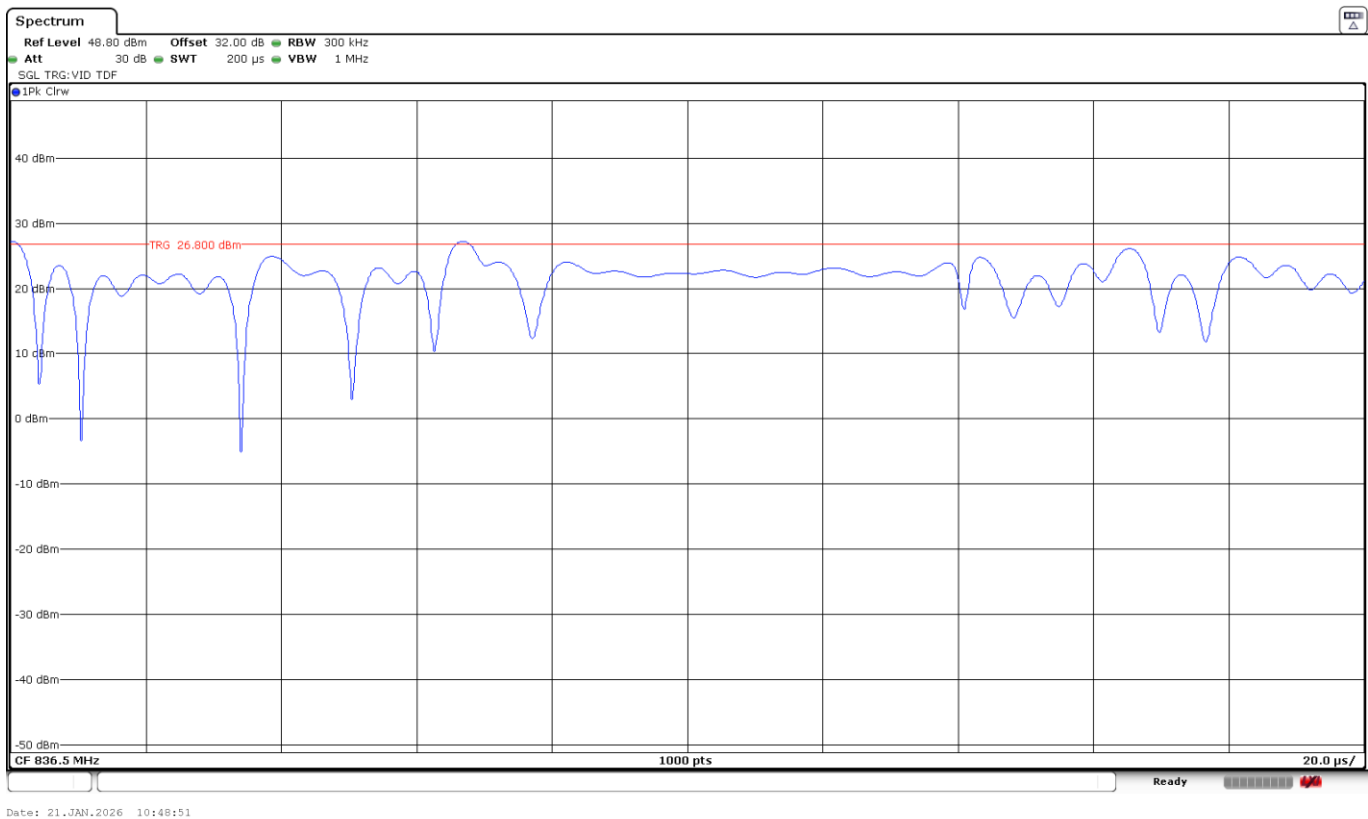

Date: 21.JAN.2026 10:48:51

LTE Cat 1bis 26 (Sub-band 824-849 MHz): BW=5 MHz. 16QAM. RB Size=1. RB Offset=12.

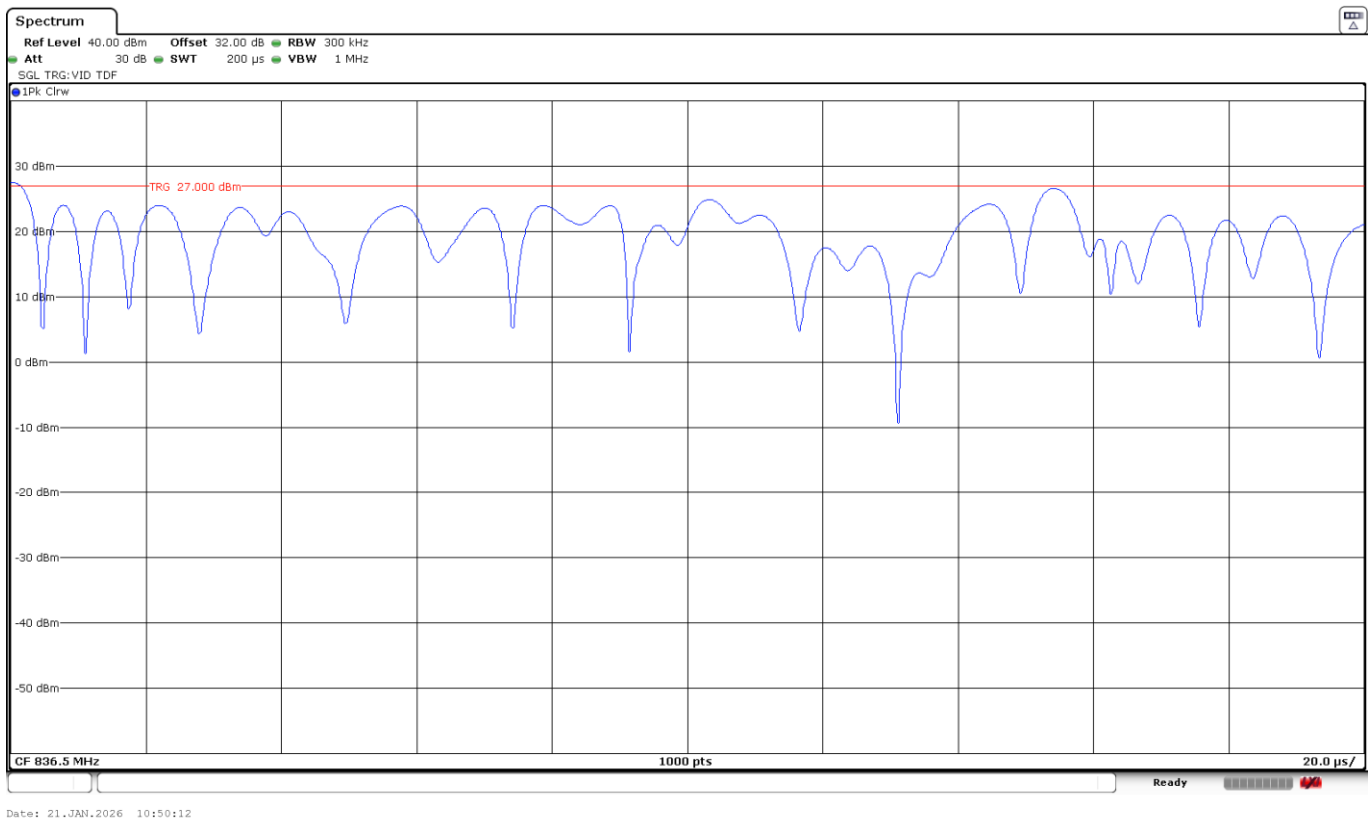

Occupied Bandwidth

Limits


FCC §2.1049. Measurements required: Occupied bandwidth.

RSS-Gen, Clause 6.7.

Method

The occupied bandwidth measurement was performed at the output terminals of the EUT using an attenuator, power splitter and spectrum analyser. The EUT was controlled via the Universal Radio Communication tester R&S CMW500 selecting maximum transmission power of the EUT and different modes of modulation. The 99% occupied bandwidth and the -26 dBc bandwidth were measured directly using the built-in bandwidth measuring option of spectrum analyser.

Test Setup

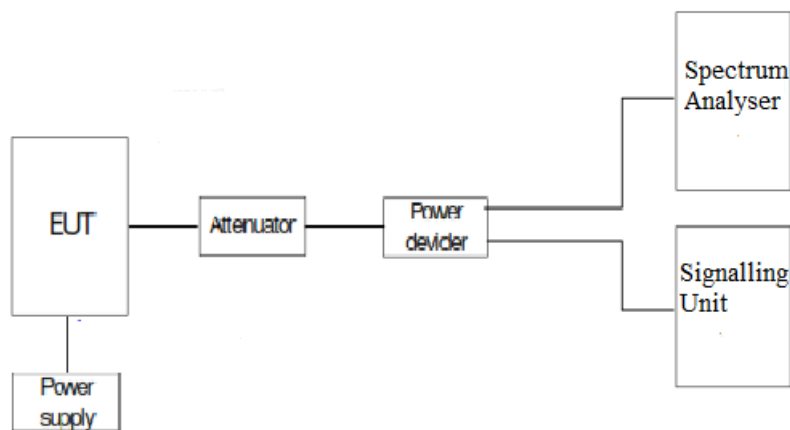

Results

The worst case of occupied bandwidth corresponds to all Resource Blocks (RB) offset 0 regardless either the Narrowband position or the nominal bandwidth selected.

LTE Cat 1bis 5:

LTE Cat 1bis 5. BW=5 MHz. QPSK. RB Size=6. RB Offset=0.


	Low Channel	Middle Channel	High Channel
99% Occupied Bandwidth (MHz)	4.49	4.46	4.46
-26 dBc Bandwidth (MHz)	5.26	5.10	5.18
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis 5. BW=5 MHz. 16QAM. RB Size=5. RB Offset=0.


	Low Channel	Middle Channel	High Channel
99% Occupied Bandwidth (MHz)	4.47	4.46	4.48
-26 dBc Bandwidth (MHz)	5.12	5.19	5.13
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis 5. BW=5 MHz. QPSK. RB Size 6. Offset 0.


LOW CHANNEL:

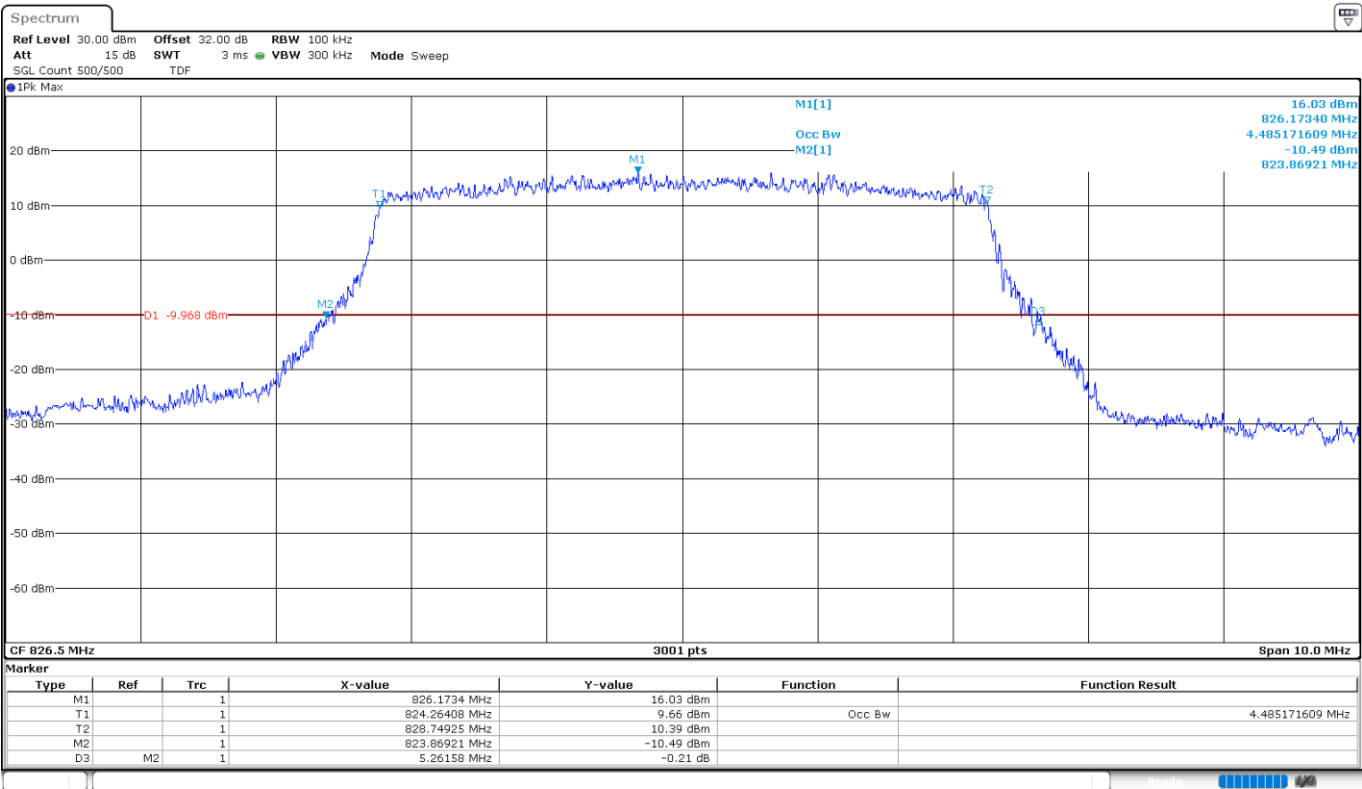

MIDDLE CHANNEL:

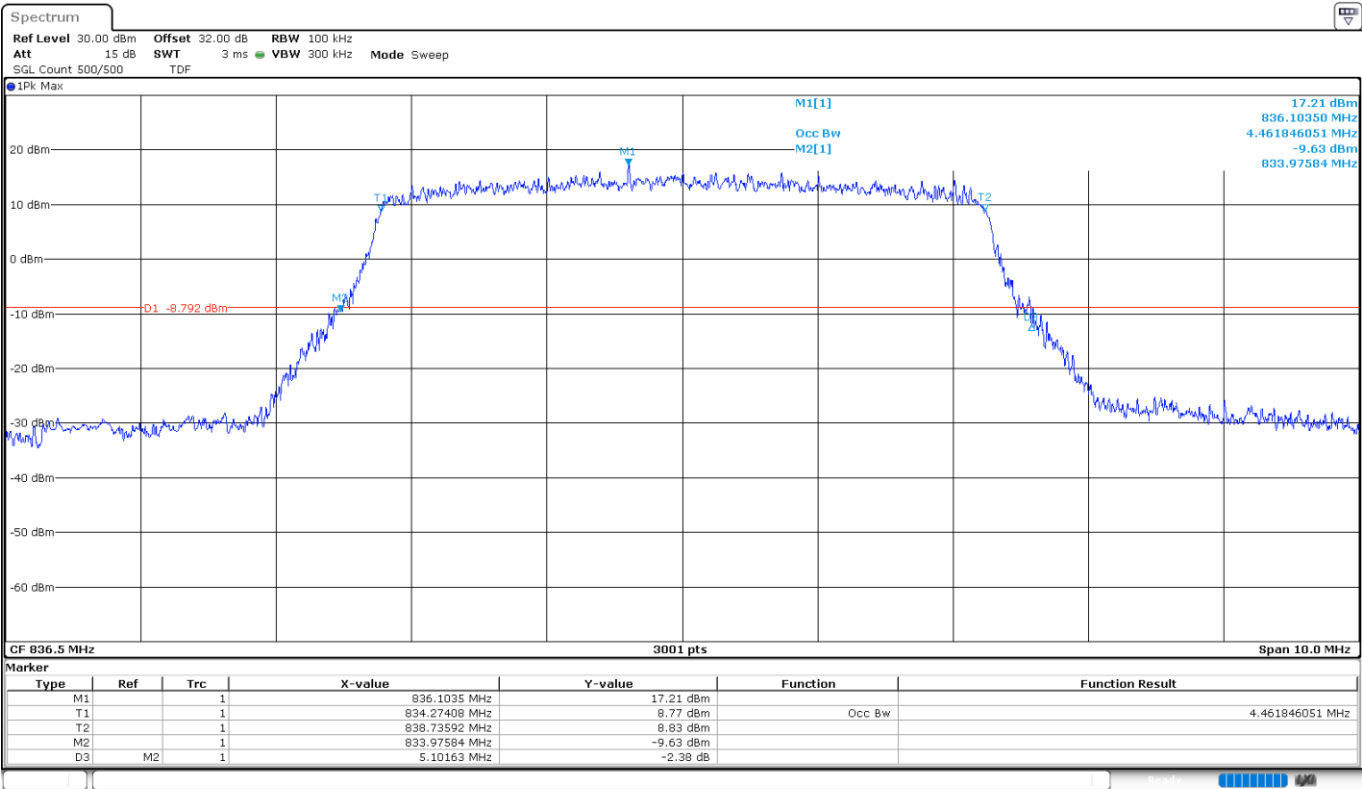


HIGH CHANNEL:

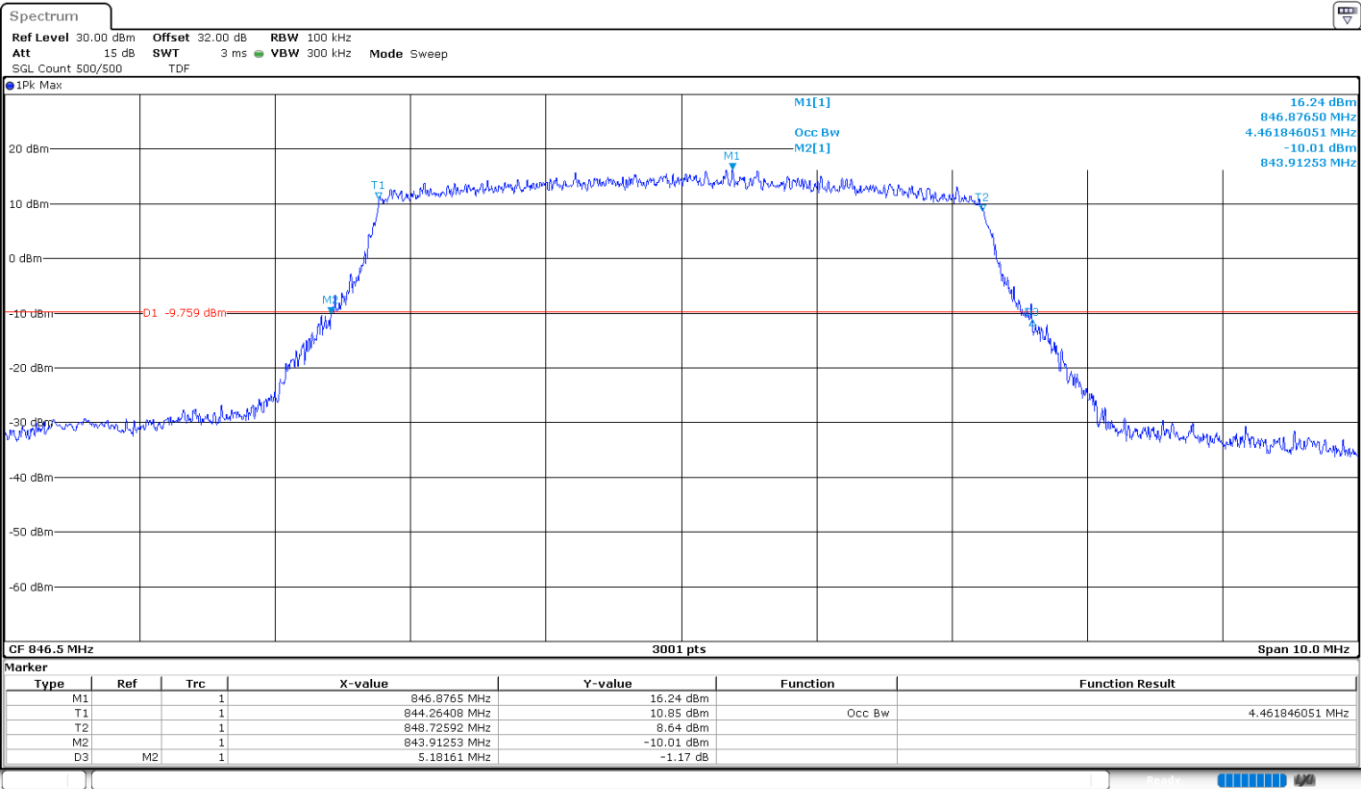


LTE Cat 1bis 5. BW=5 MHz. 16QAM. RB Size 5. Offset 0.


LOW CHANNEL:

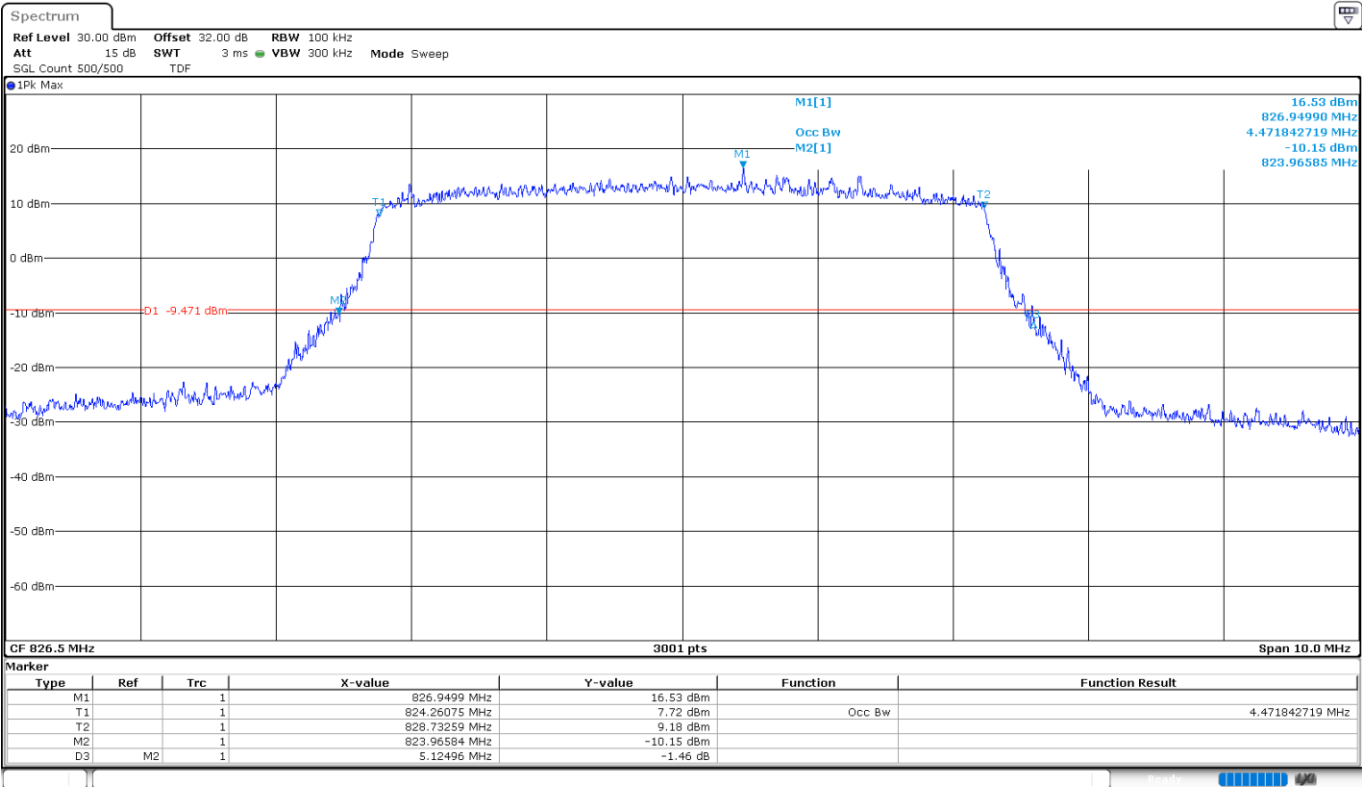

MIDDLE CHANNEL:

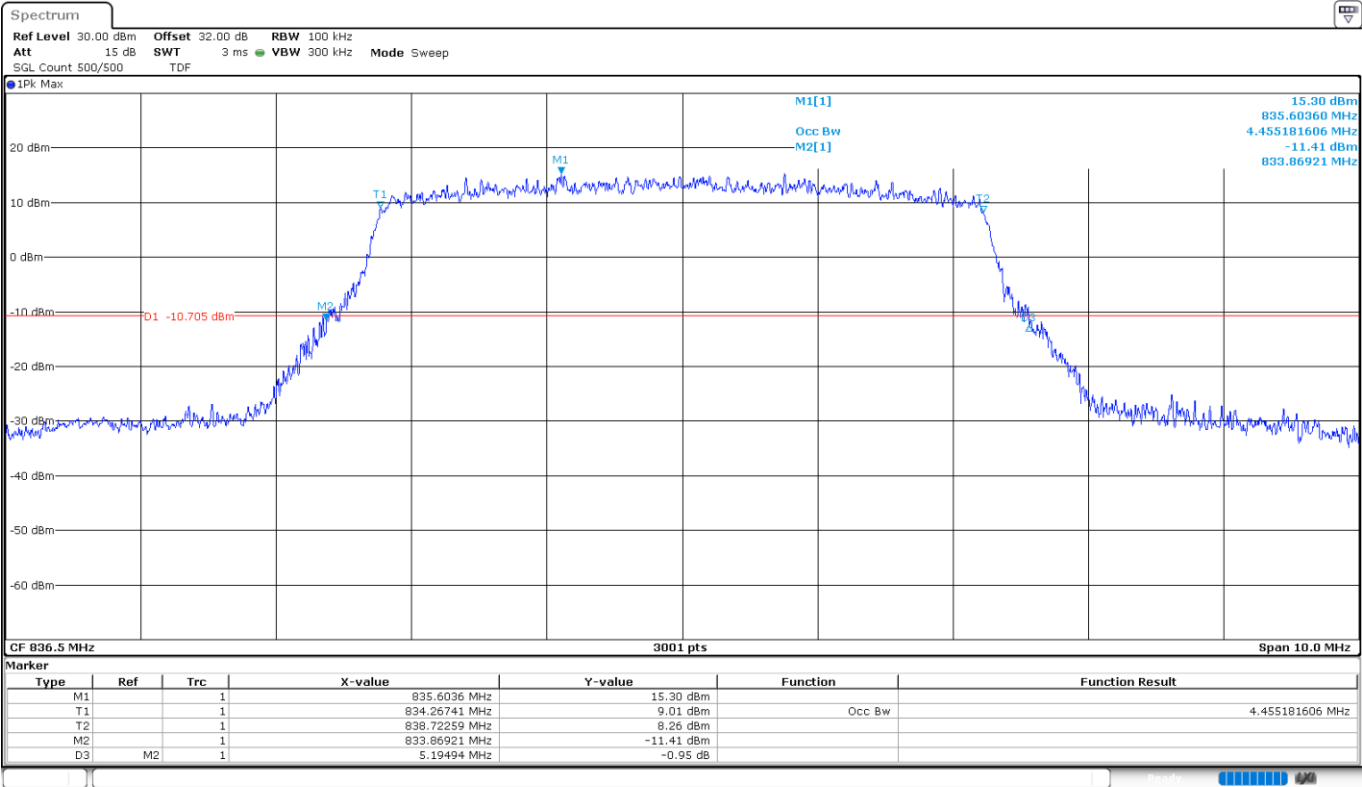

HIGH CHANNEL:

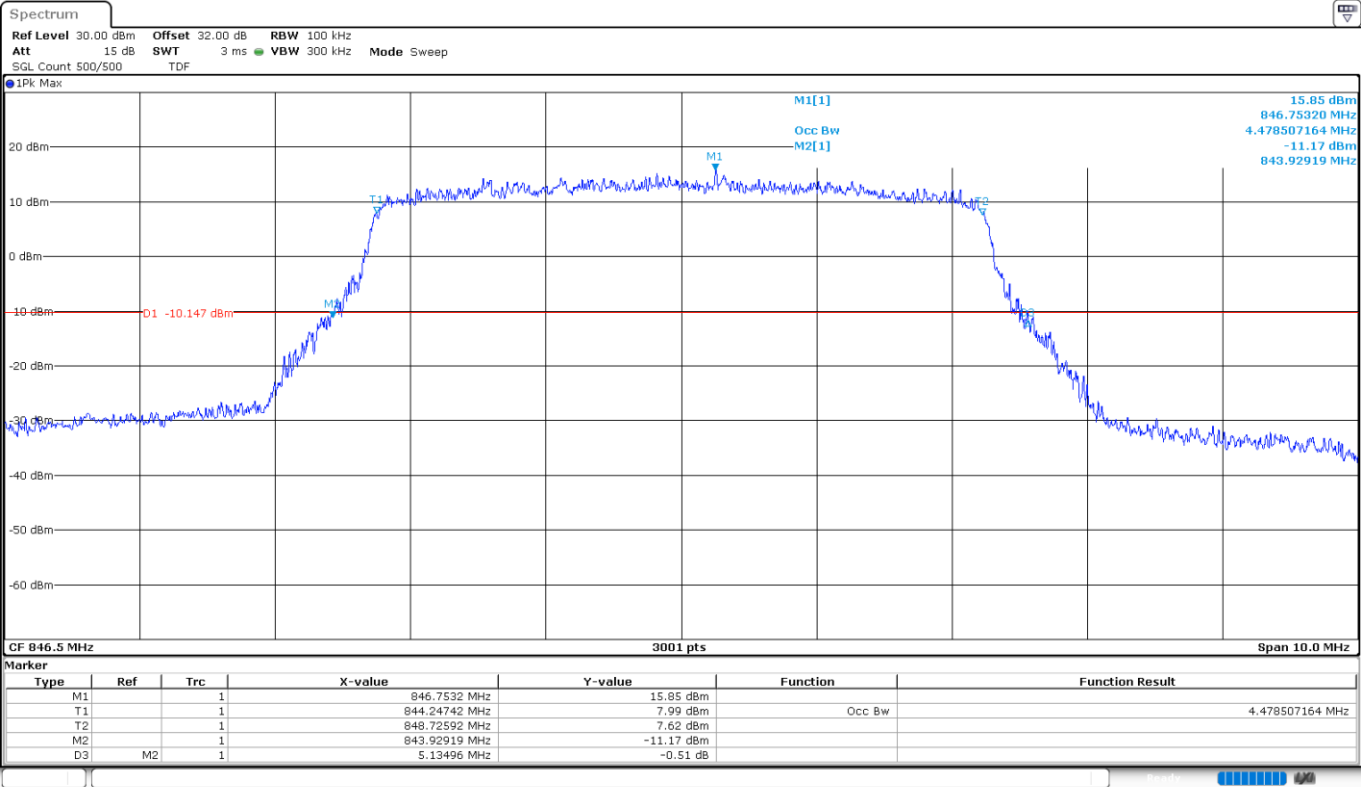

LTE Cat 1bis 5. BW=10 MHz. QPSK. RB Size=6. RB Offset=0.


	Low Channel	Middle Channel	High Channel
99% Occupied Bandwidth (MHz)	9.04	9.01	9.04
-26 dBc Bandwidth (MHz)	11.56	11.20	11.12
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis 5. BW=10 MHz. 16QAM. RB Size=5. RB Offset=0.


	Low Channel	Middle Channel	High Channel
99% Occupied Bandwidth (MHz)	4.59	4.62	4.68
-26 dBc Bandwidth (MHz)	6.86	6.80	6.96
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis 5. BW=10 MHz. QPSK. RB Size 6. Offset 0.


LOW CHANNEL:

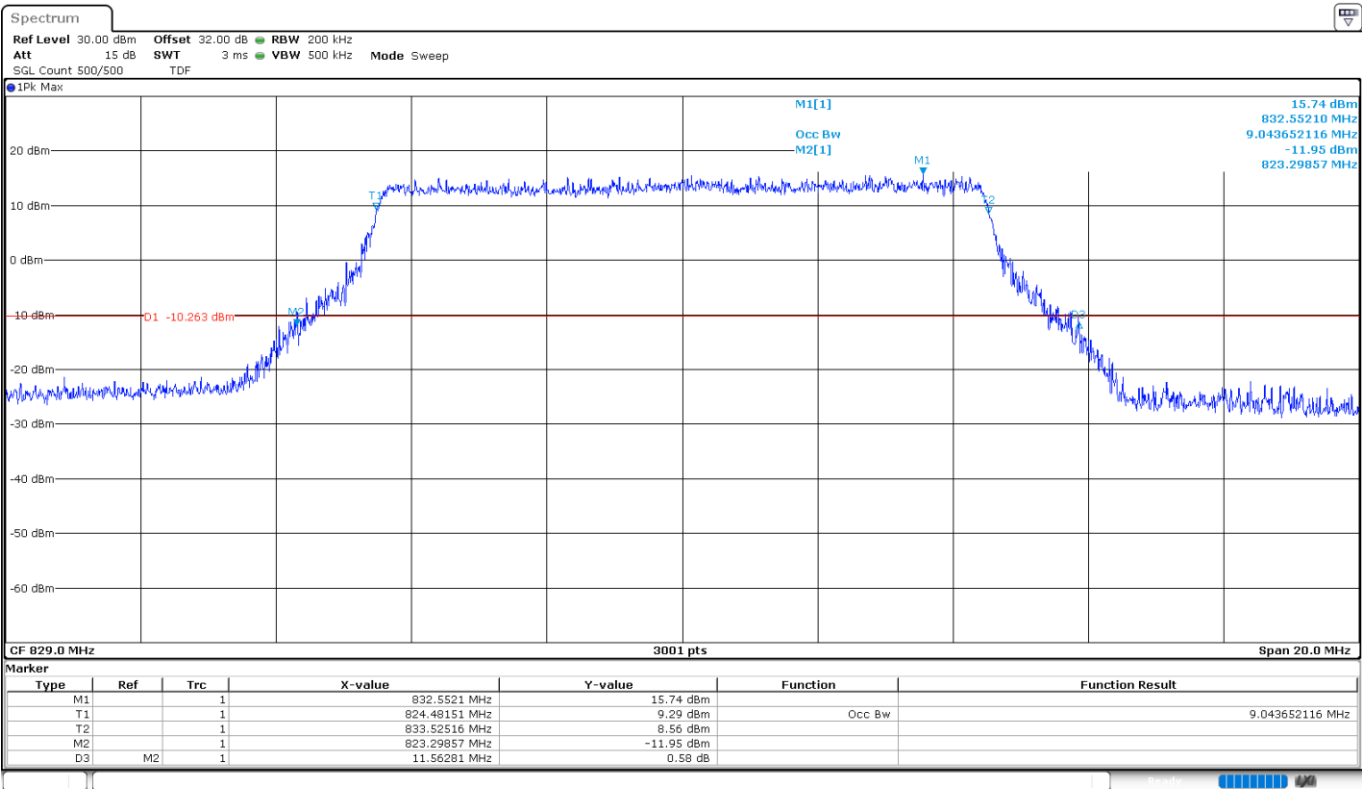

MIDDLE CHANNEL:

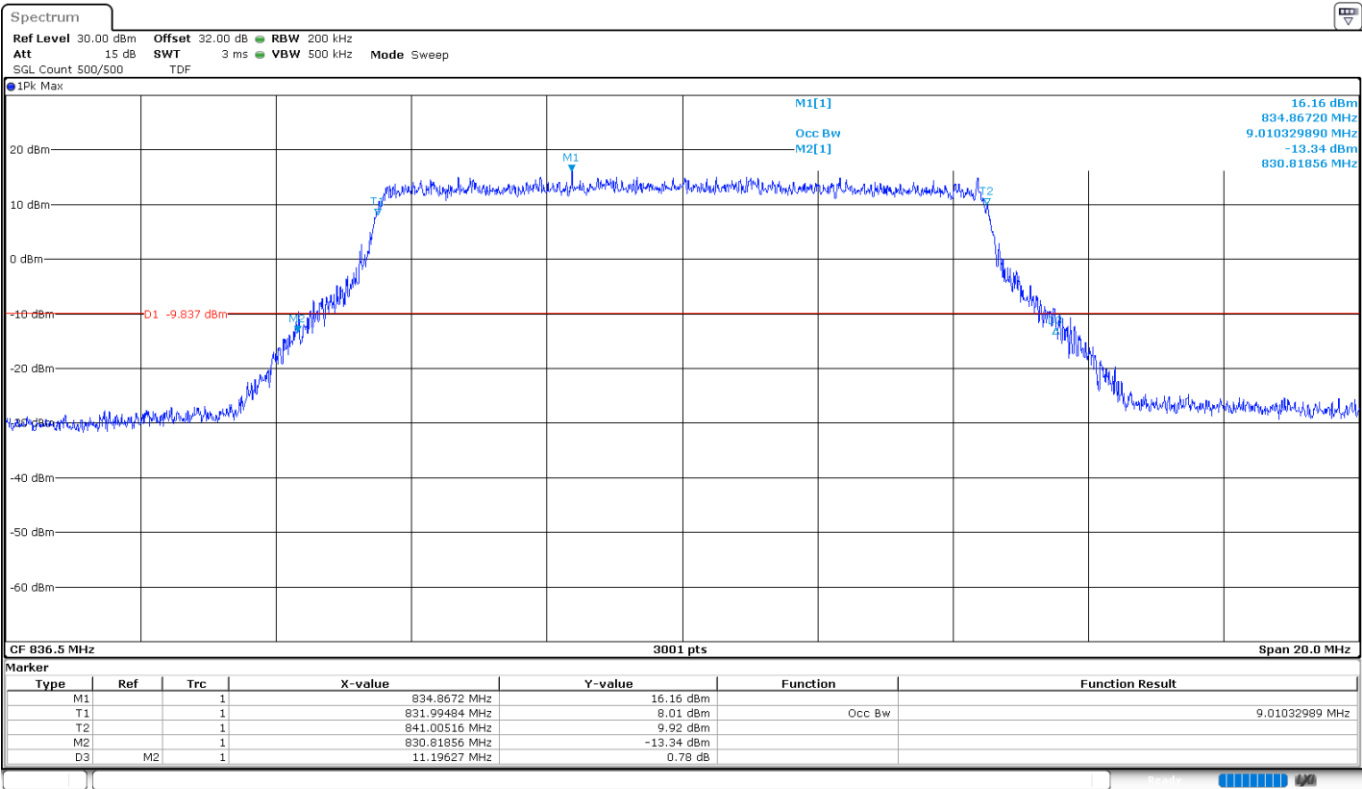


HIGH CHANNEL:

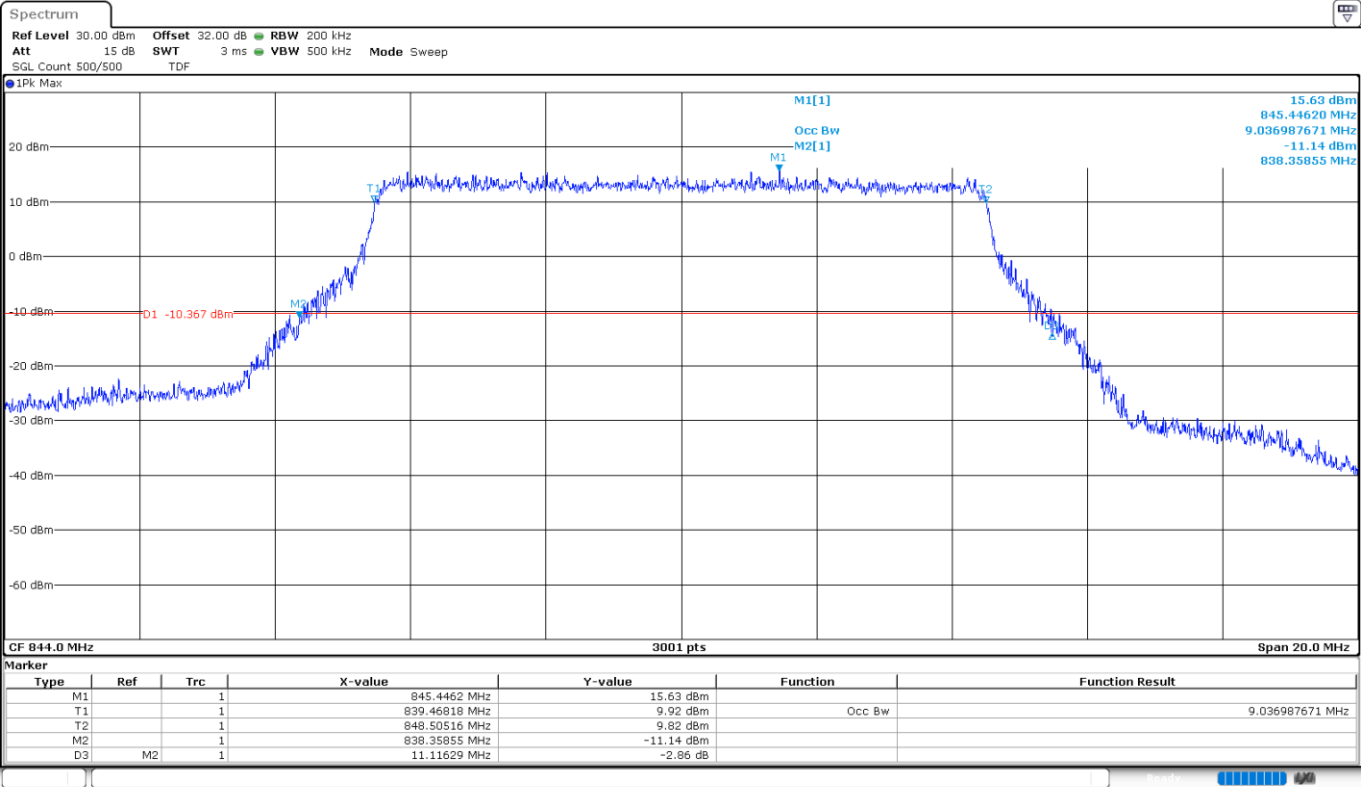


LTE Cat 1bis Band 10. BW=10 MHz. 16QAM. RB Size 5. Offset 0.


LOW CHANNEL:

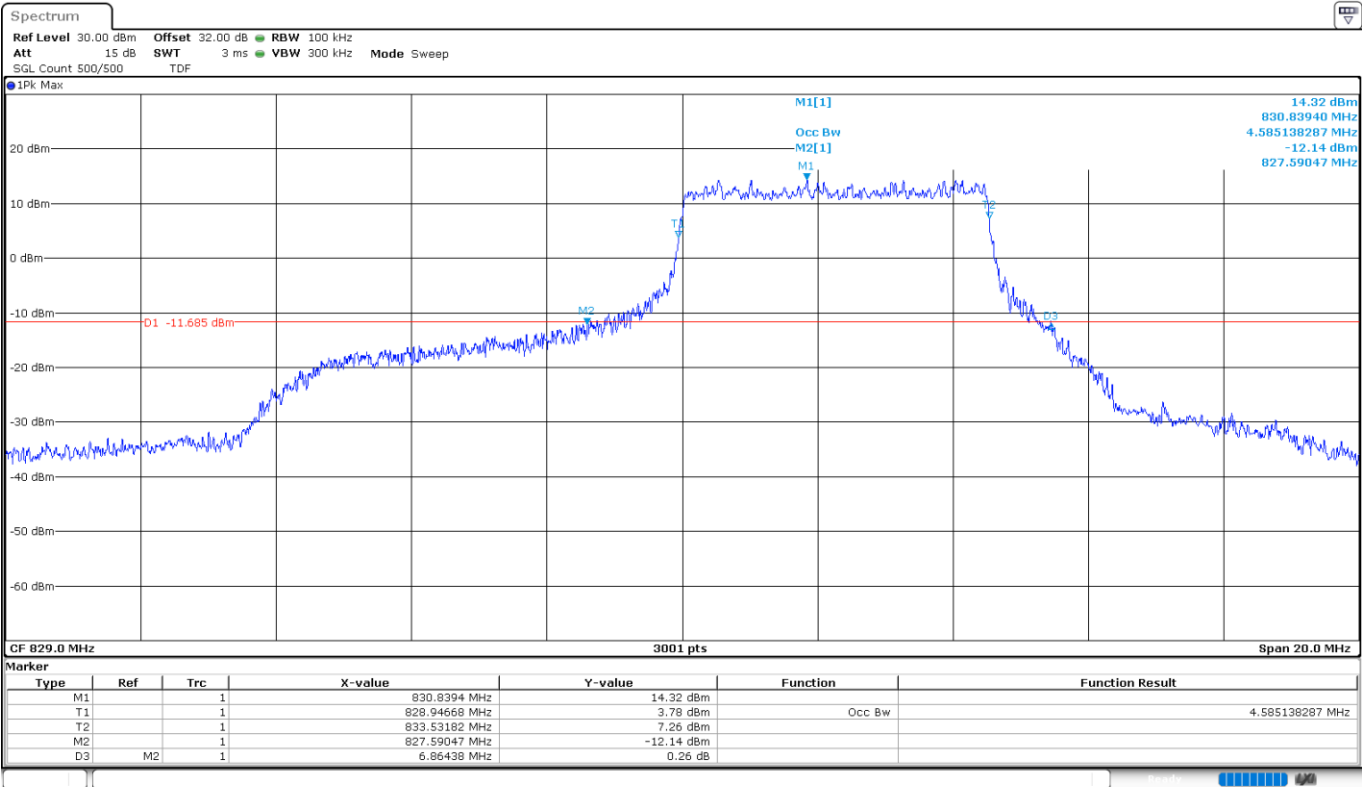

MIDDLE CHANNEL:

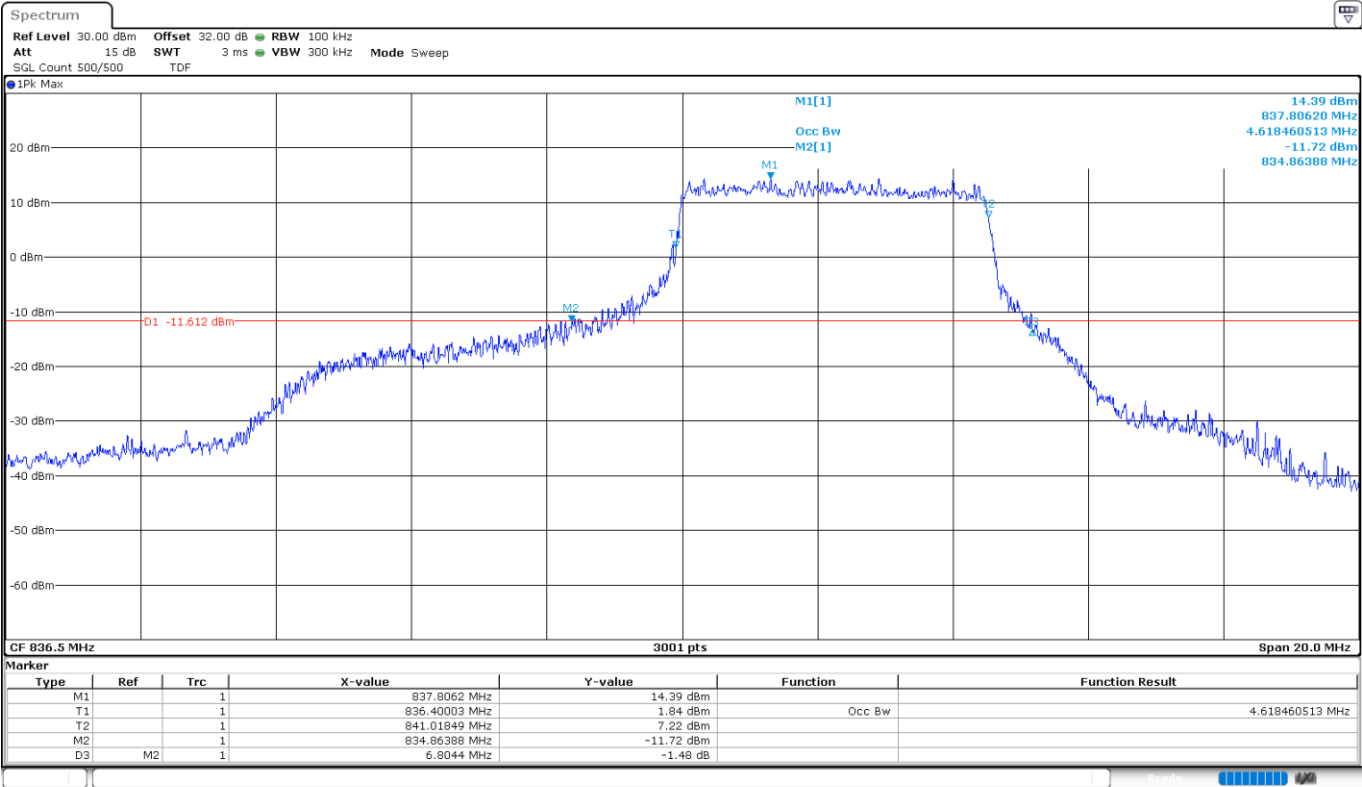

HIGH CHANNEL:

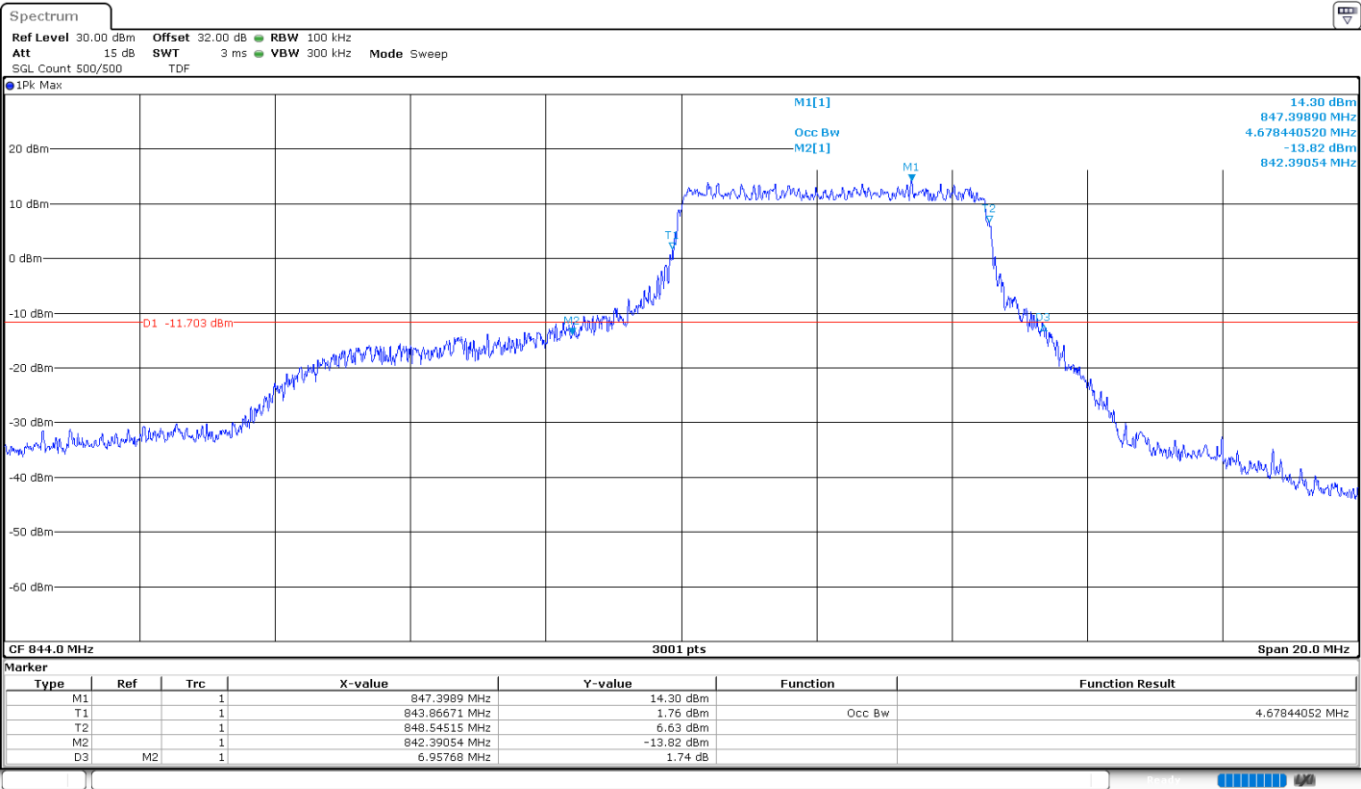

LTE Cat 1bis 26 (Sub-band 824-849 MHz):

LTE Cat 1bis 26 (Sub-band 824-849 MHz). BW=5 MHz. QPSK. RB Size=6. RB Offset=0.


	Low Channel	Middle Channel	High Channel
99% Occupied Bandwidth (MHz)	4.49	4.46	4.46
-26 dBc Bandwidth (MHz)	5.26	5.10	5.18
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis 26 (Sub-band 824-849 MHz). BW=5 MHz. 16QAM. RB Size=5. RB Offset=0.


	Low Channel	Middle Channel	High Channel
99% Occupied Bandwidth (MHz)	4.47	4.46	4.48
-26 dBc Bandwidth (MHz)	5.12	5.19	5.13
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis 26 (Sub-band 824-849 MHz). BW=5 MHz. QPSK. RB Size 6. Offset 0.


LOW CHANNEL:

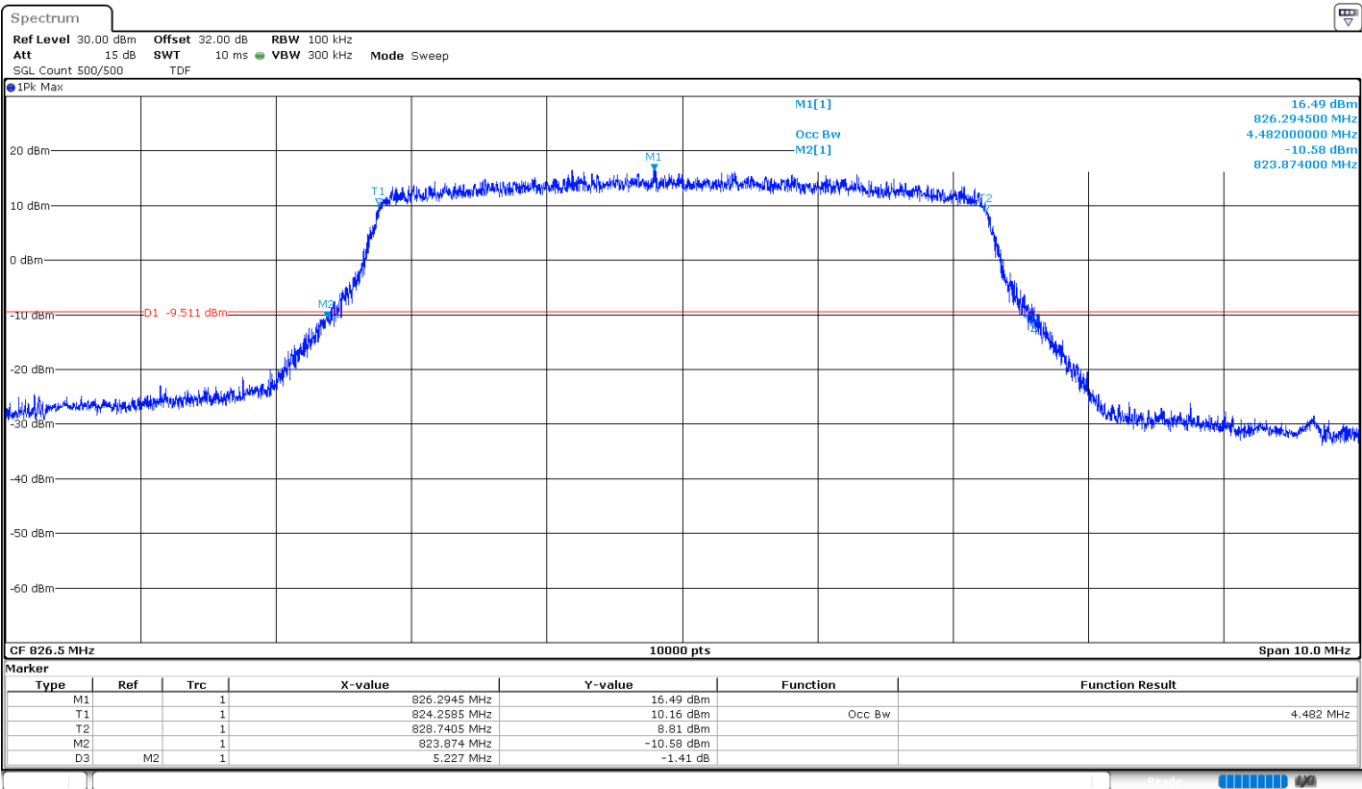

MIDDLE CHANNEL:

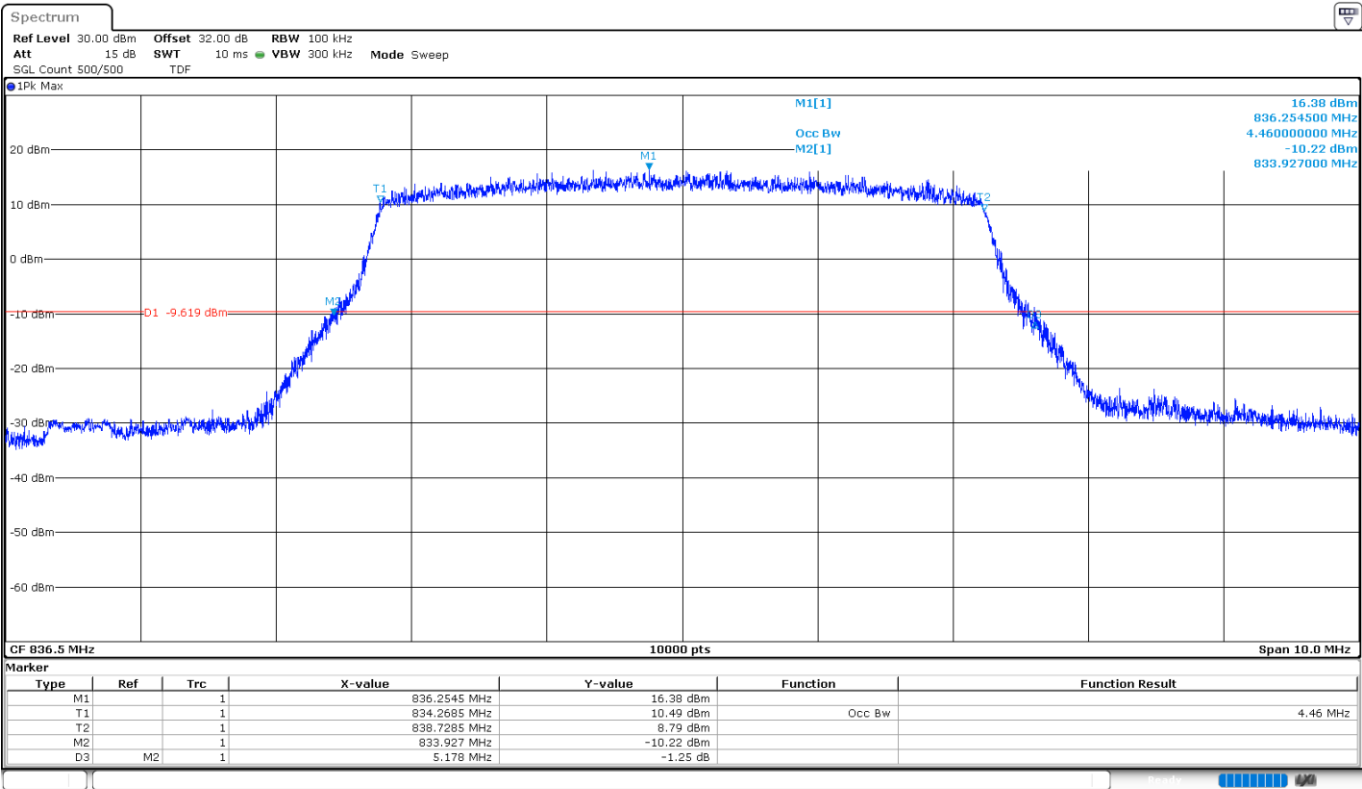


HIGH CHANNEL:

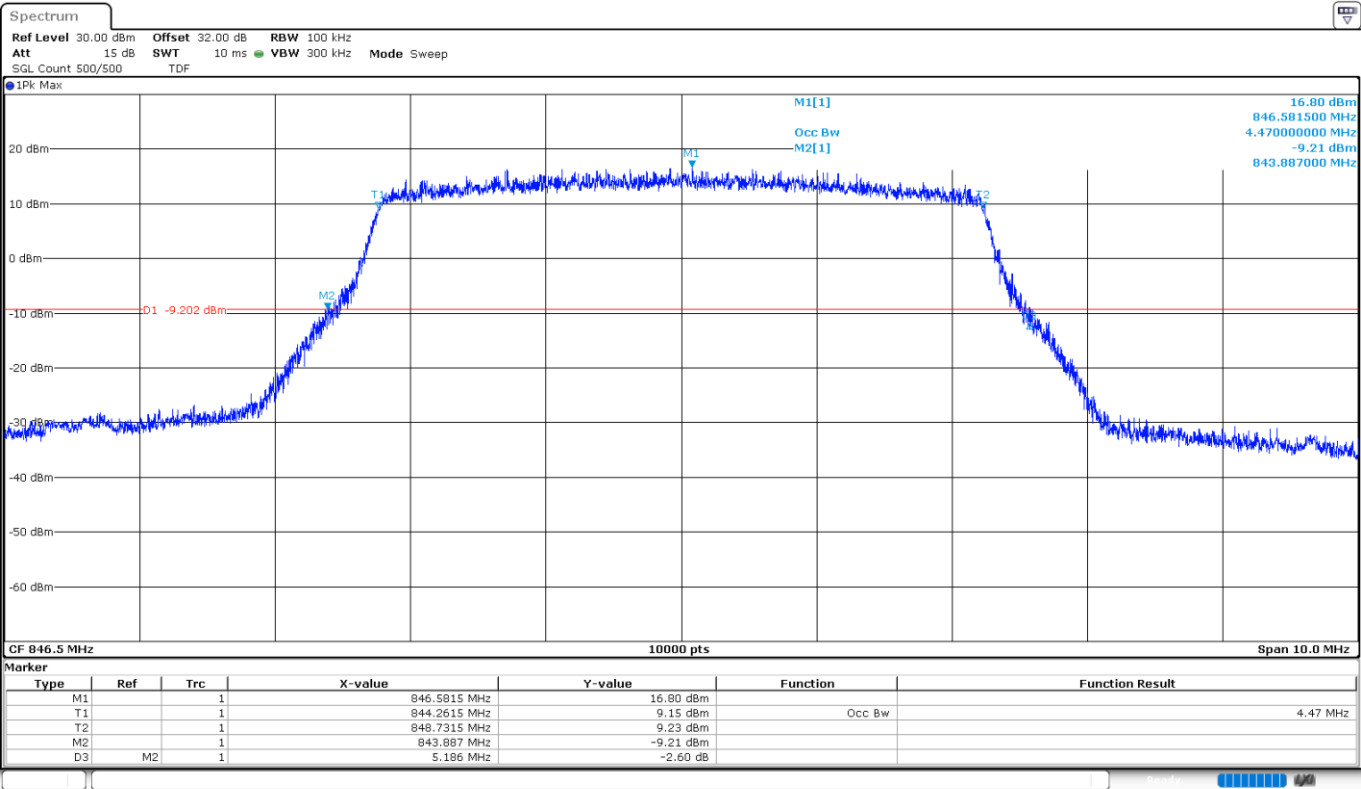


LTE Cat 1bis 26 (Sub-band 824-849 MHz). BW=5 MHz. 16QAM. RB Size 5. Offset 0.


LOW CHANNEL:

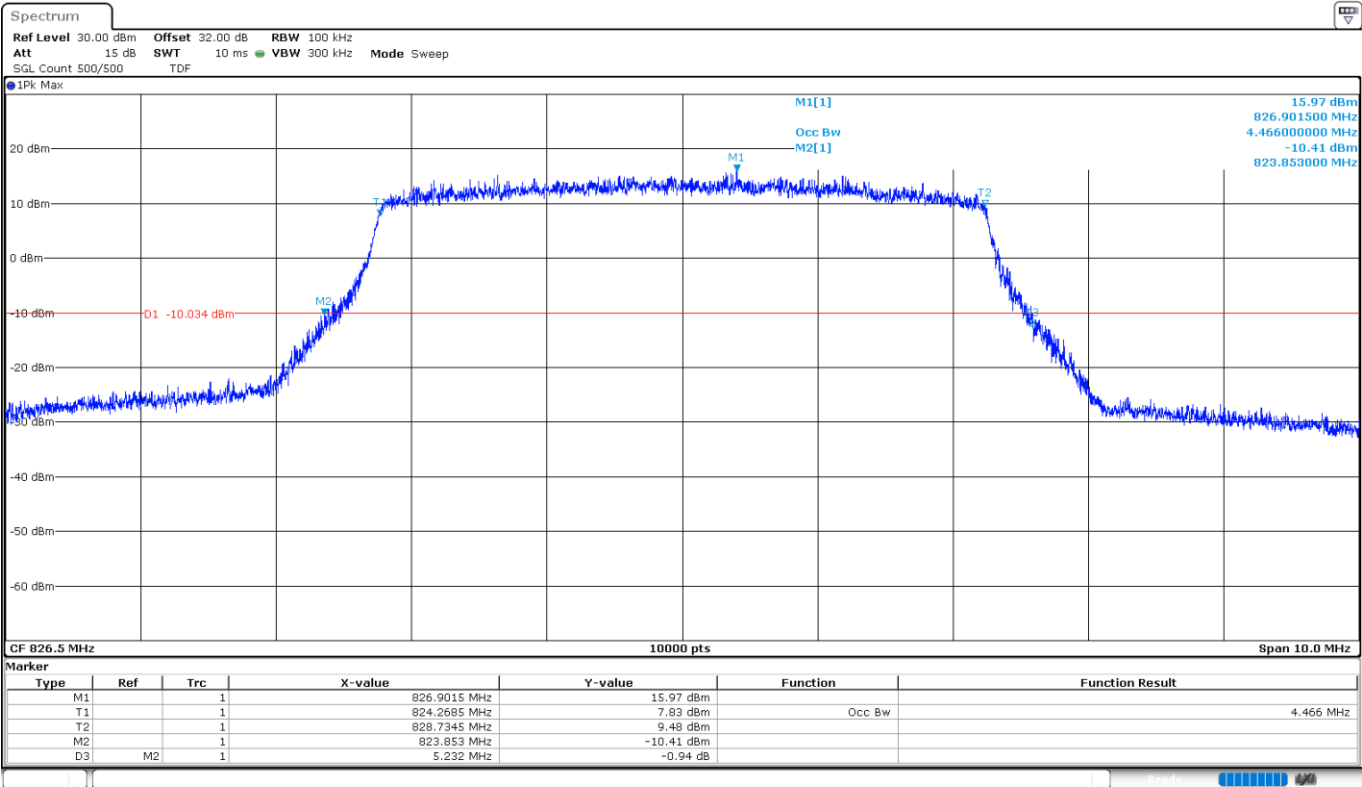

MIDDLE CHANNEL:

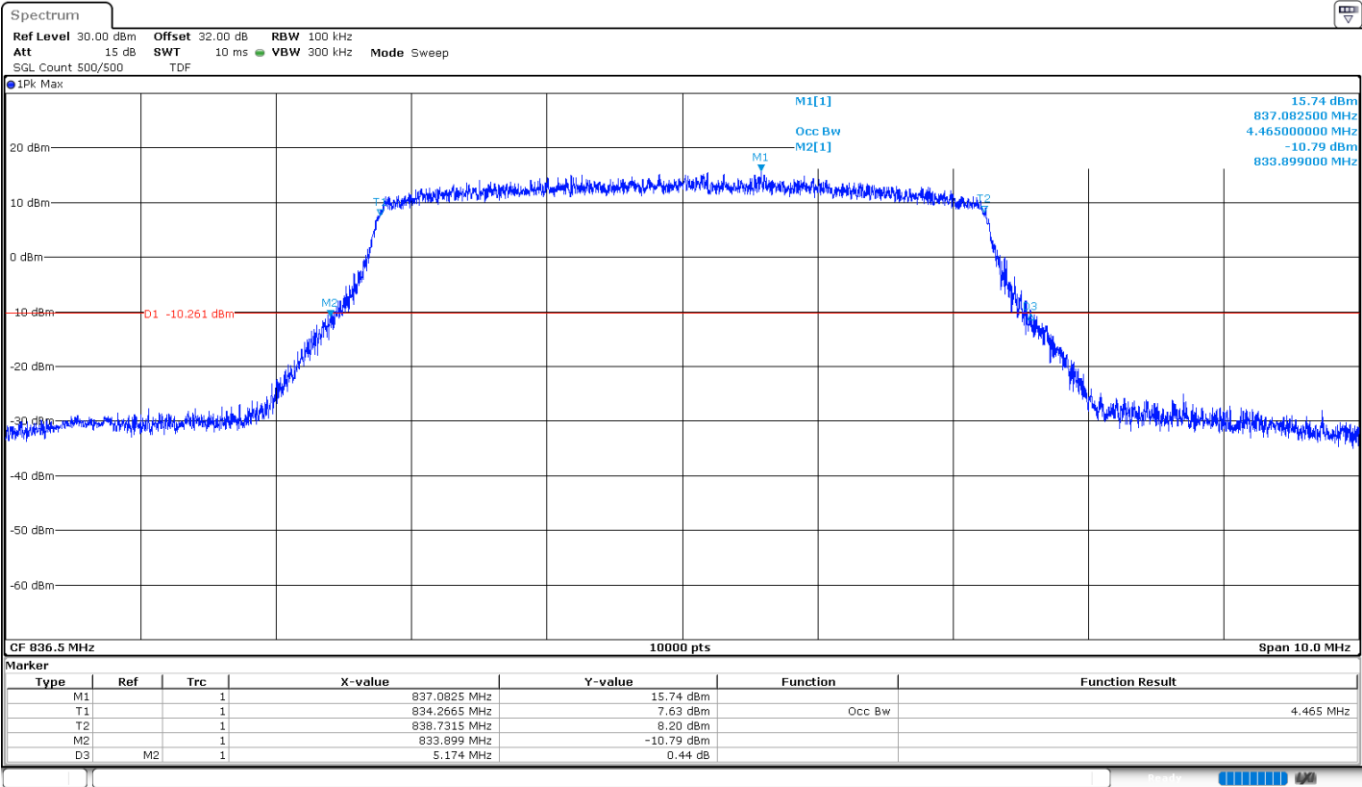

HIGH CHANNEL:

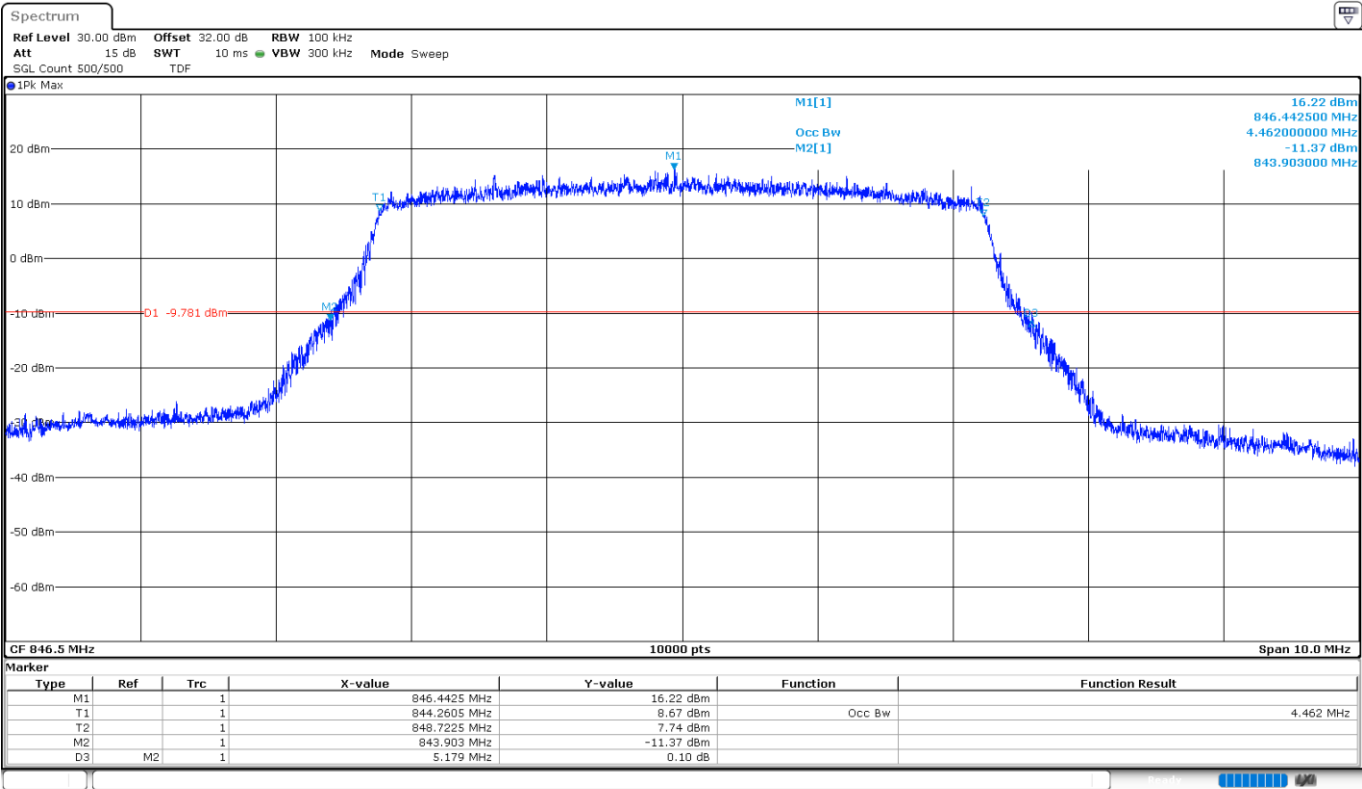

LTE Cat 1bis 26 (Sub-band 824-849 MHz). BW=10 MHz. QPSK. RB Size=6. RB Offset=0.


	Low Channel	Middle Channel	High Channel
99% Occupied Bandwidth (MHz)	9.04	9.01	9.04
-26 dBc Bandwidth (MHz)	11.56	11.20	11.12
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis 26 (Sub-band 824-849 MHz). BW=10 MHz. 16QAM. RB Size=5. RB Offset=0.


	Low Channel	Middle Channel	High Channel
99% Occupied Bandwidth (MHz)	4.59	4.62	4.68
-26 dBc Bandwidth (MHz)	6.86	6.80	6.96
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 10. BW=10 MHz. QPSK. RB Size 6. Offset 0.


LOW CHANNEL:

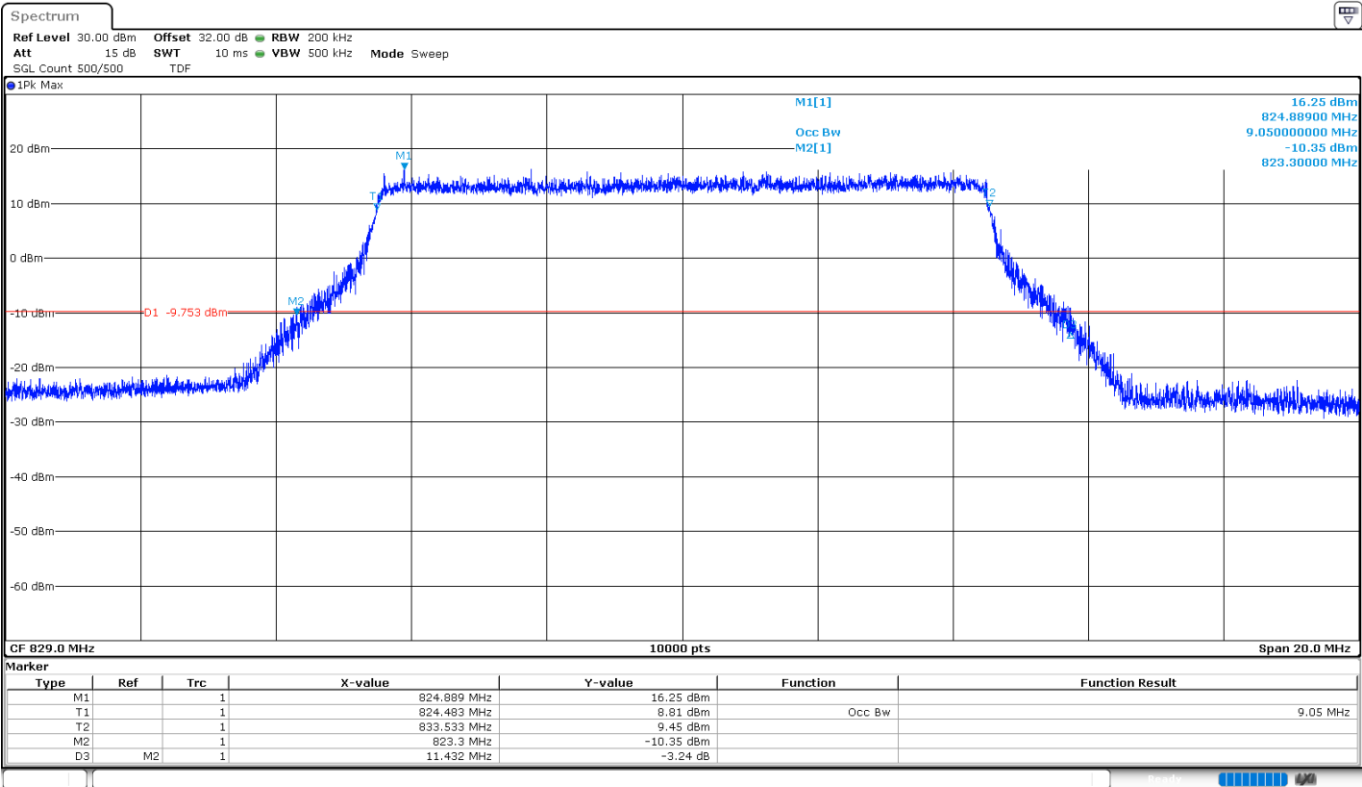

MIDDLE CHANNEL:

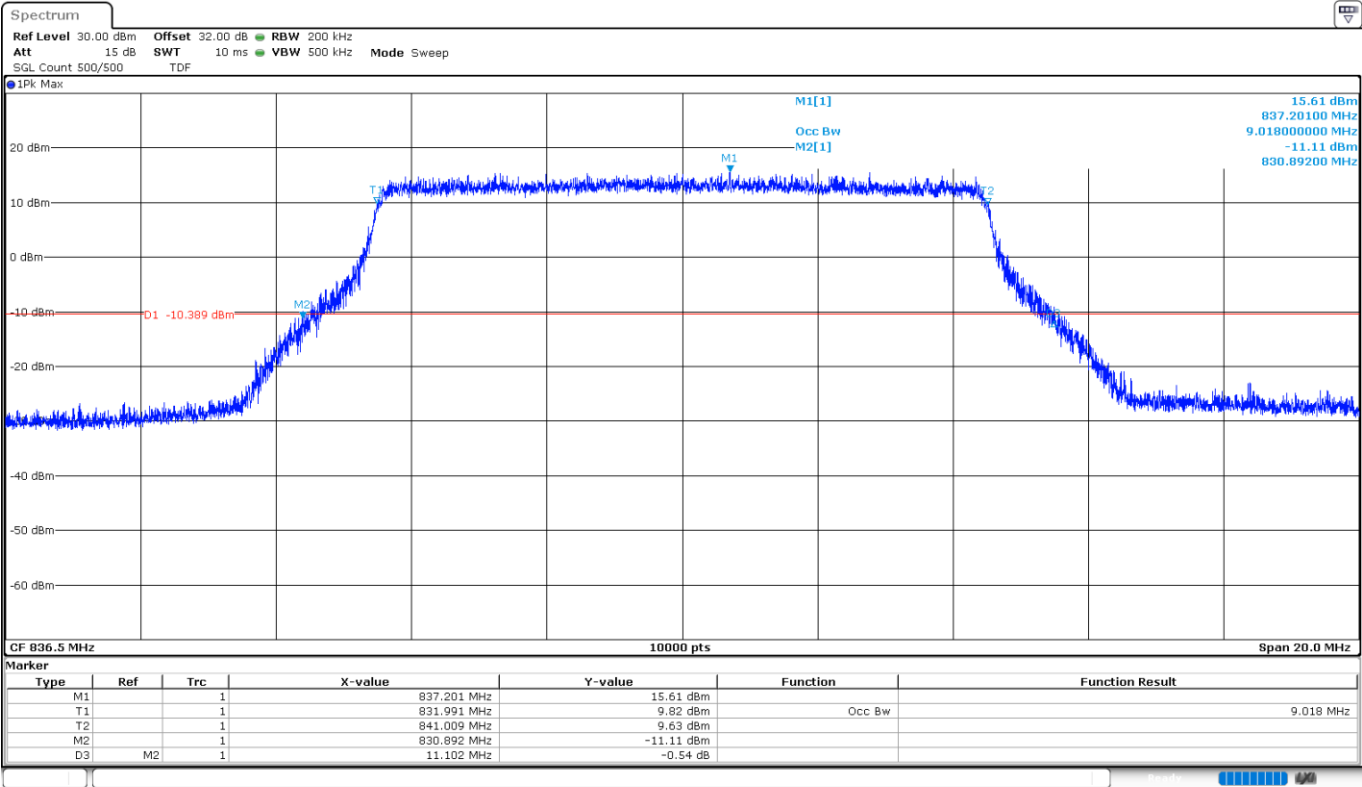


HIGH CHANNEL:

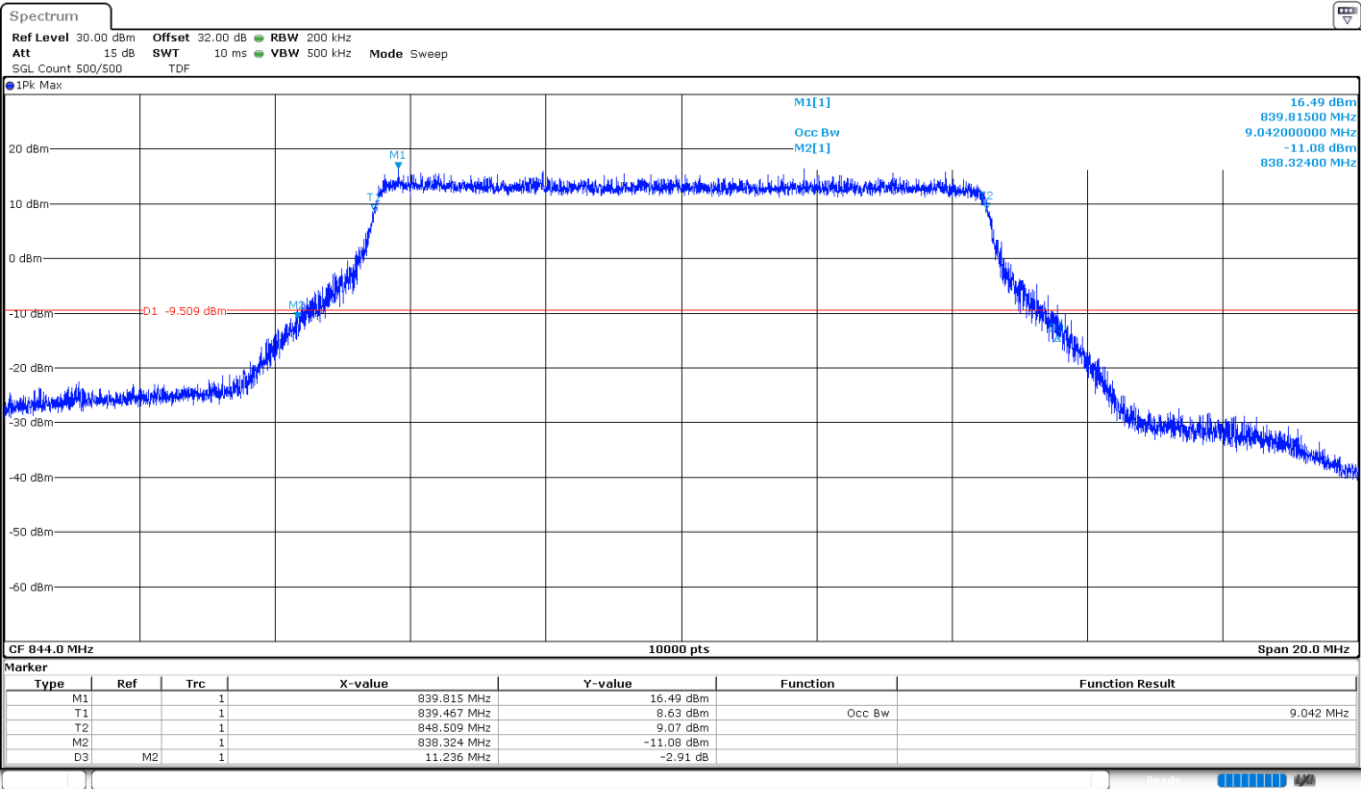


LTE Cat 1bis Band 10. BW=10 MHz. 16QAM. RB Size 5. Offset 0.


LOW CHANNEL:

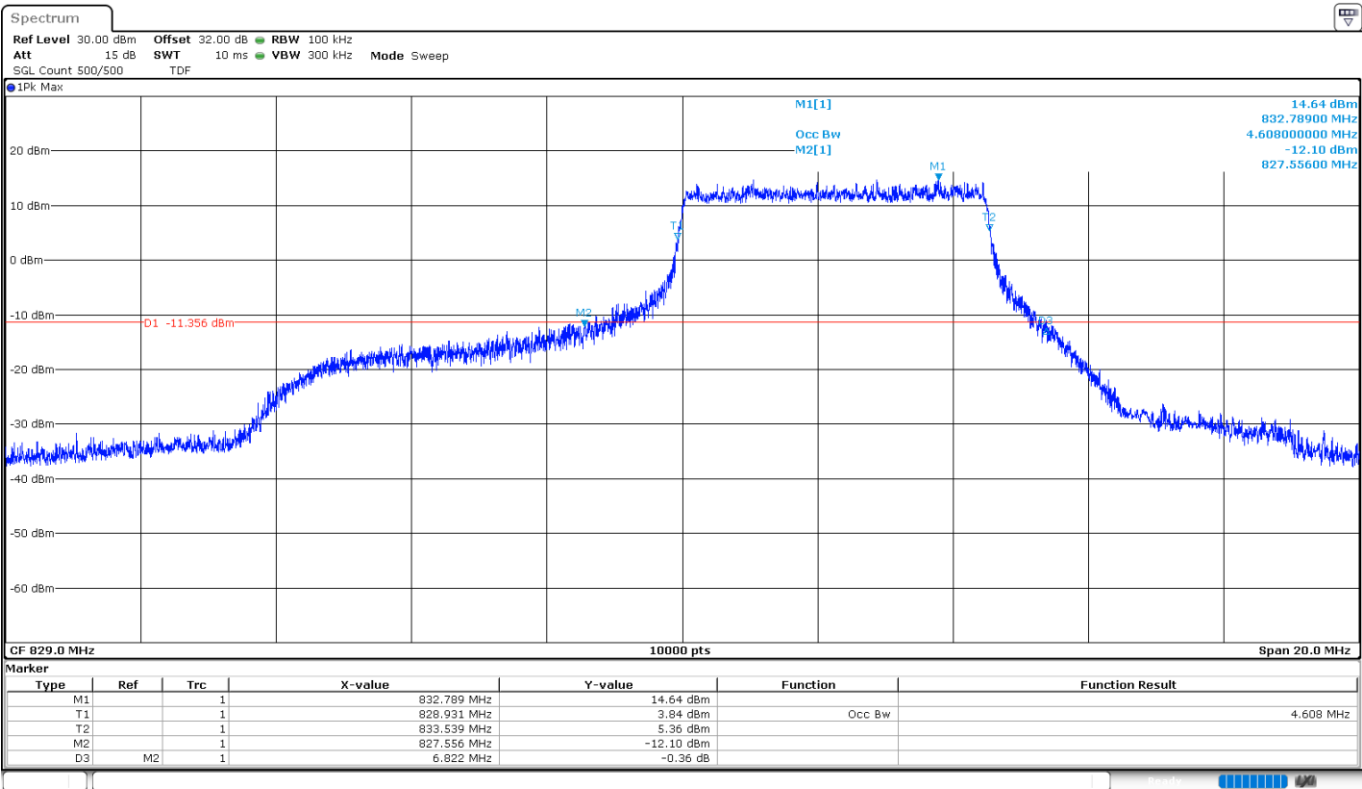

MIDDLE CHANNEL:

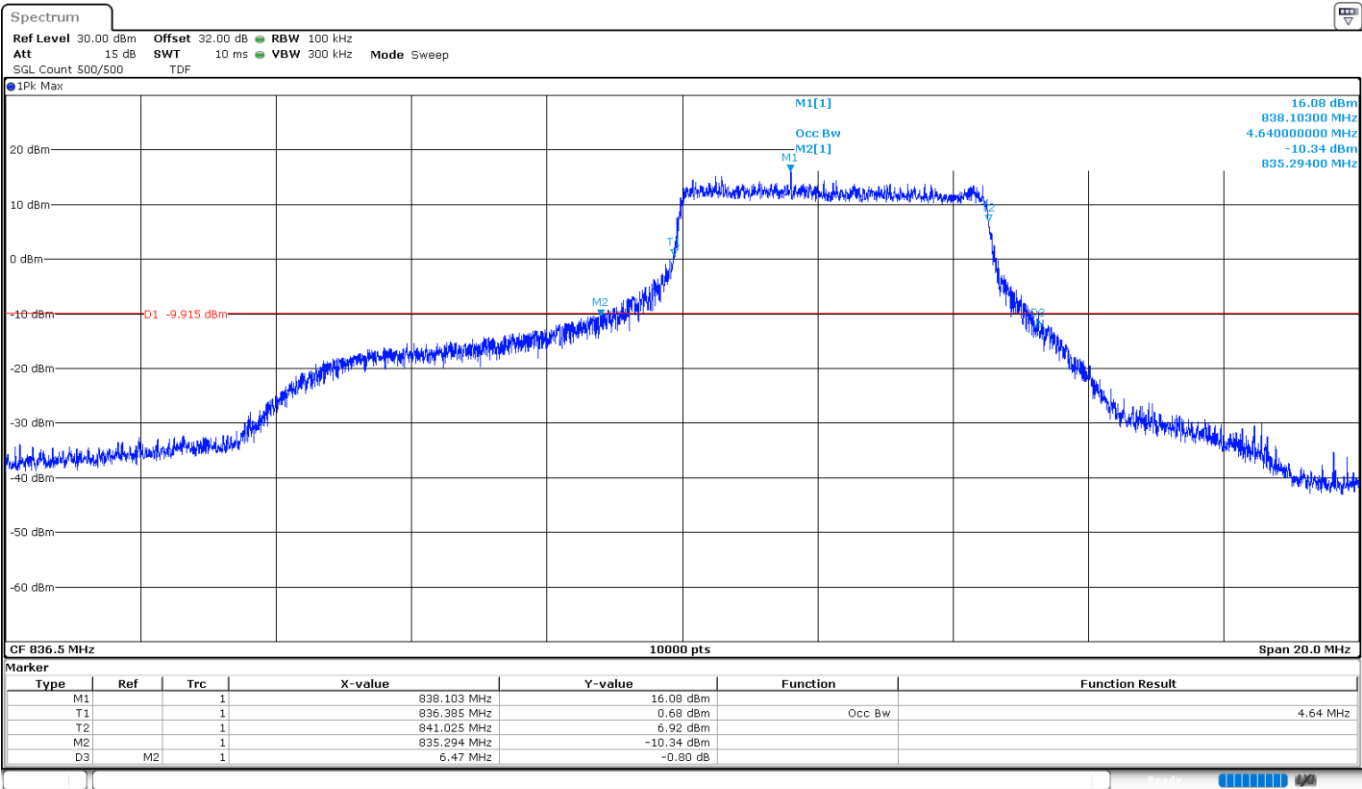

HIGH CHANNEL:

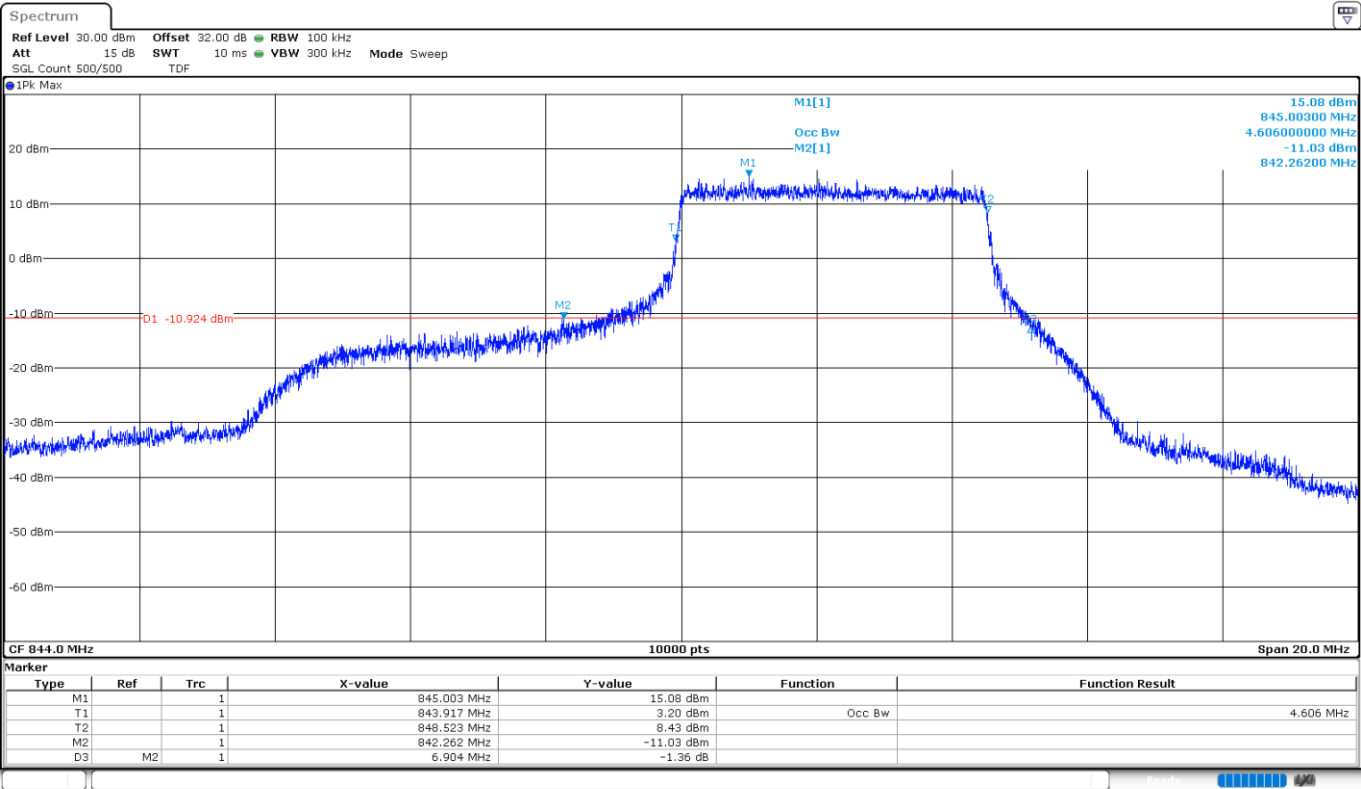

LTE Cat 1bis 26 (Sub-band 824-849 MHz). BW=15 MHz. QPSK. RB Size=6. RB Offset=0.


	Low Channel	Middle Channel	High Channel
99% Occupied Bandwidth (MHz)	13.458	13.425	13.458
-26 dBc Bandwidth (MHz)	15.291	15.162	15.420
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis 26 (Sub-band 824-849 MHz). BW=15 MHz. 16QAM. RB Size=5. RB Offset=0.


	Low Channel	Middle Channel	High Channel
99% Occupied Bandwidth (MHz)	4.614	4.617	4.626
-26 dBc Bandwidth (MHz)	6.585	6.684	6.327
Measurement uncertainty (kHz)	<±3.75		

LTE Cat 1bis Band 10. BW=15 MHz. QPSK. RB Size 6. Offset 0.


LOW CHANNEL:

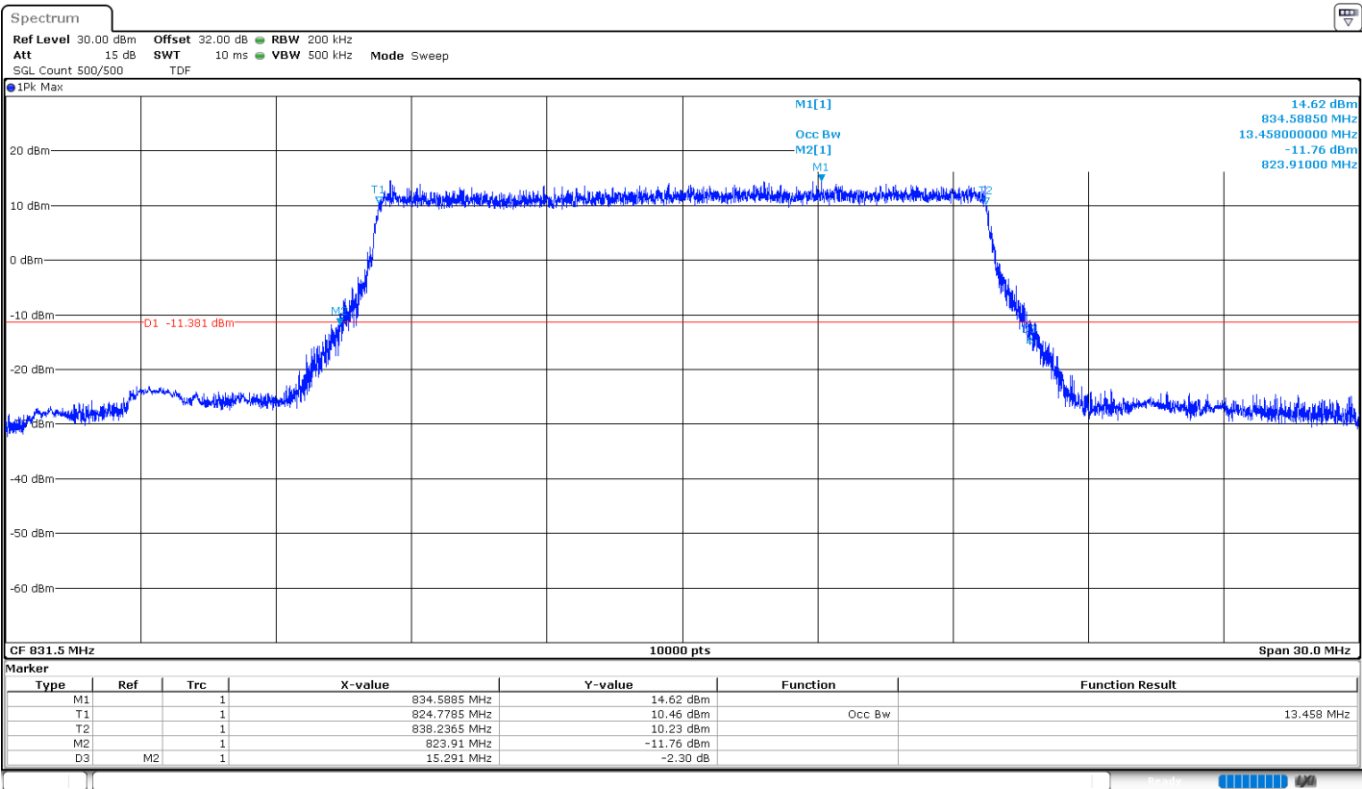

MIDDLE CHANNEL:

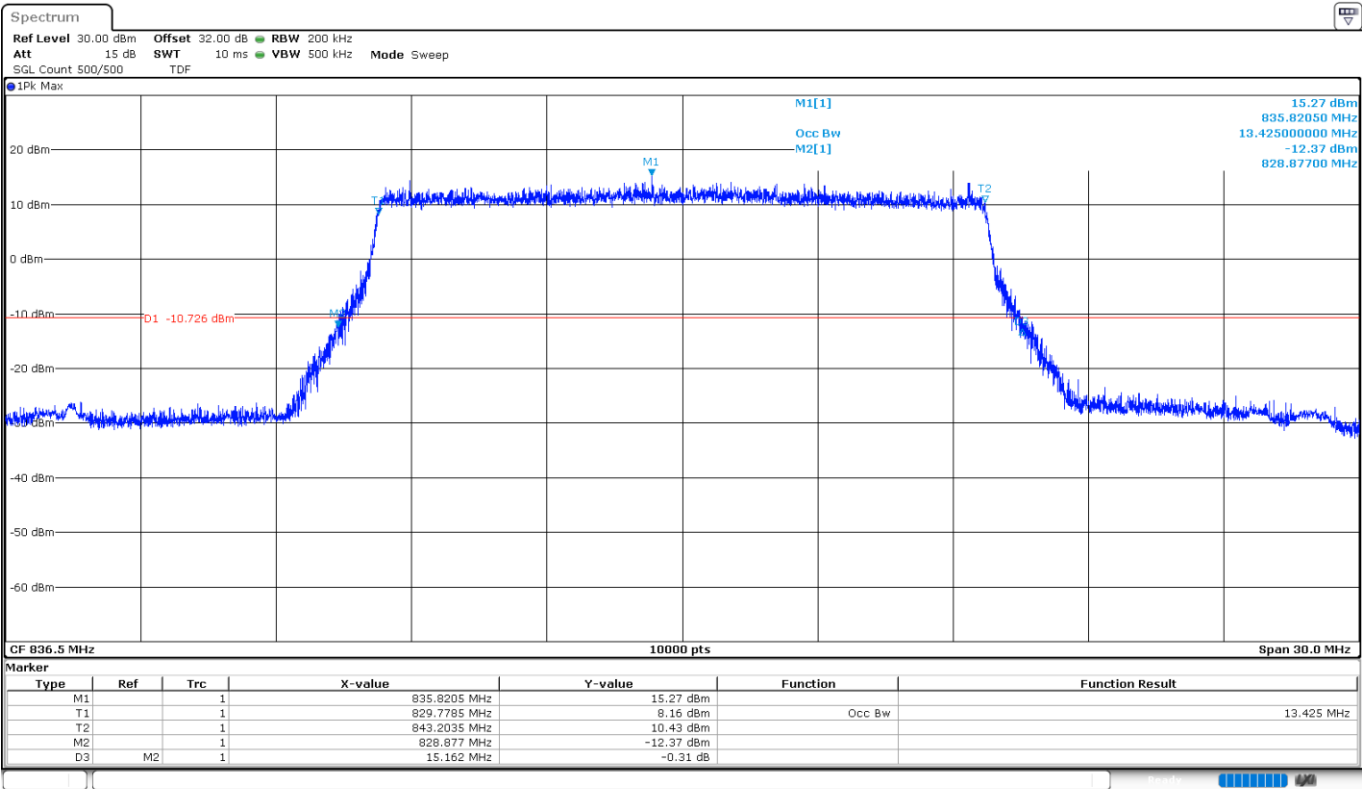


HIGH CHANNEL:

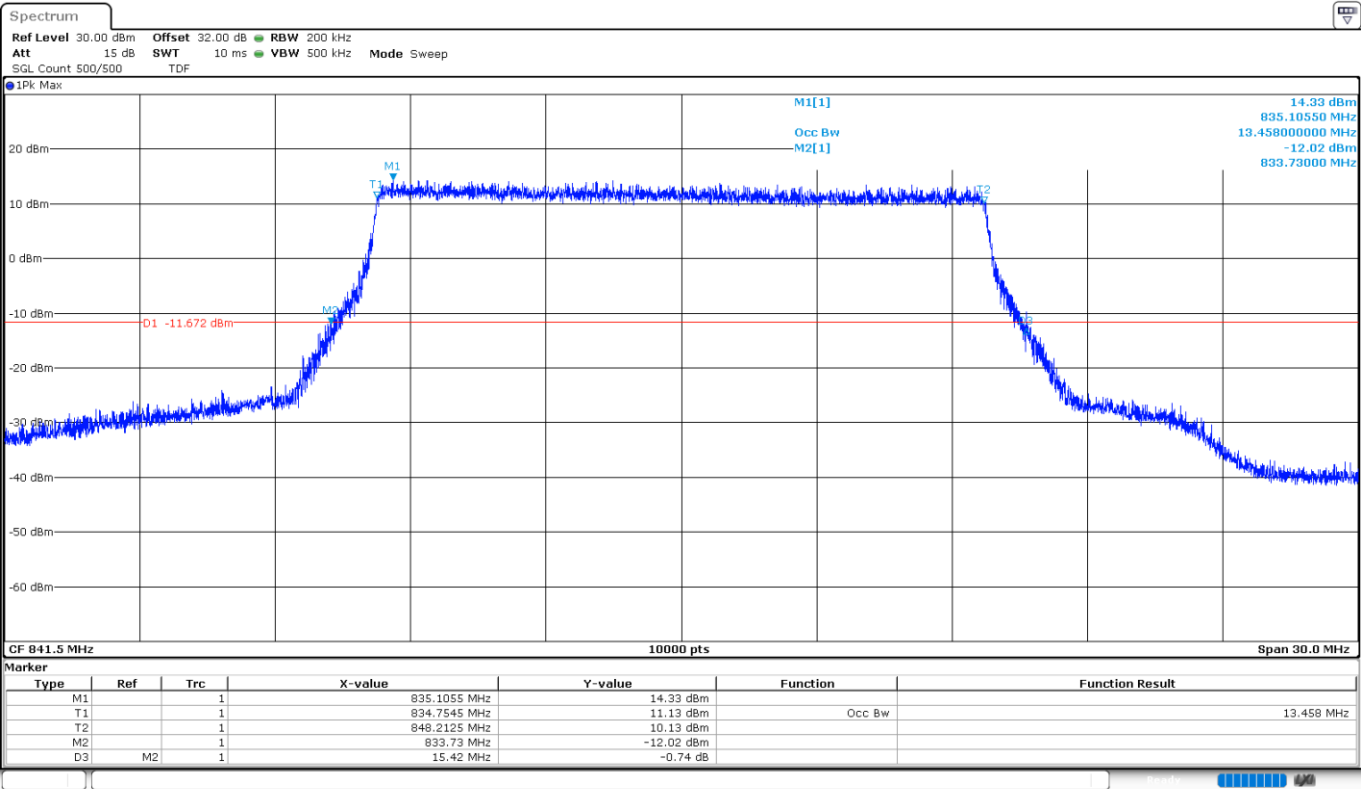


LTE Cat 1bis Band 10. BW=15 MHz. 16QAM. RB Size 5. Offset 0.


LOW CHANNEL:

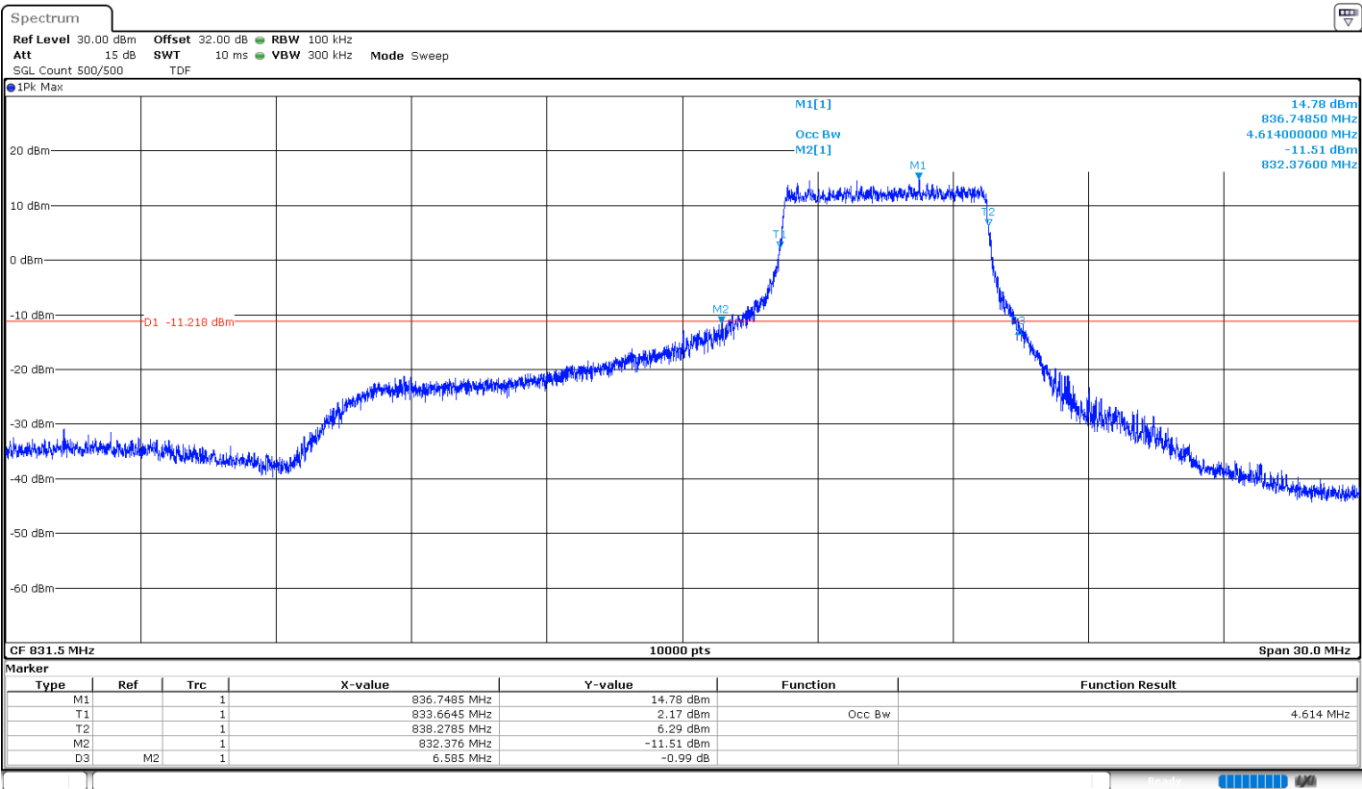

MIDDLE CHANNEL:

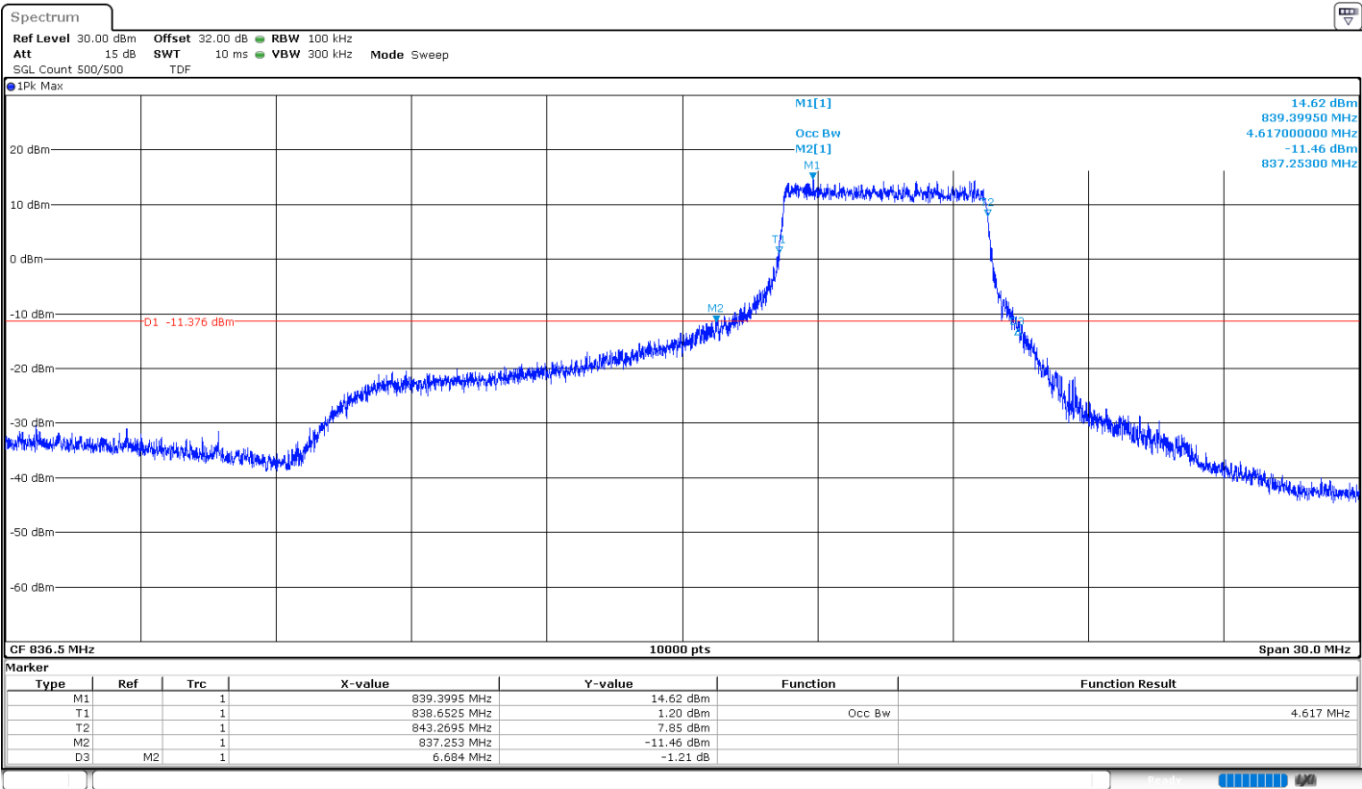

HIGH CHANNEL:

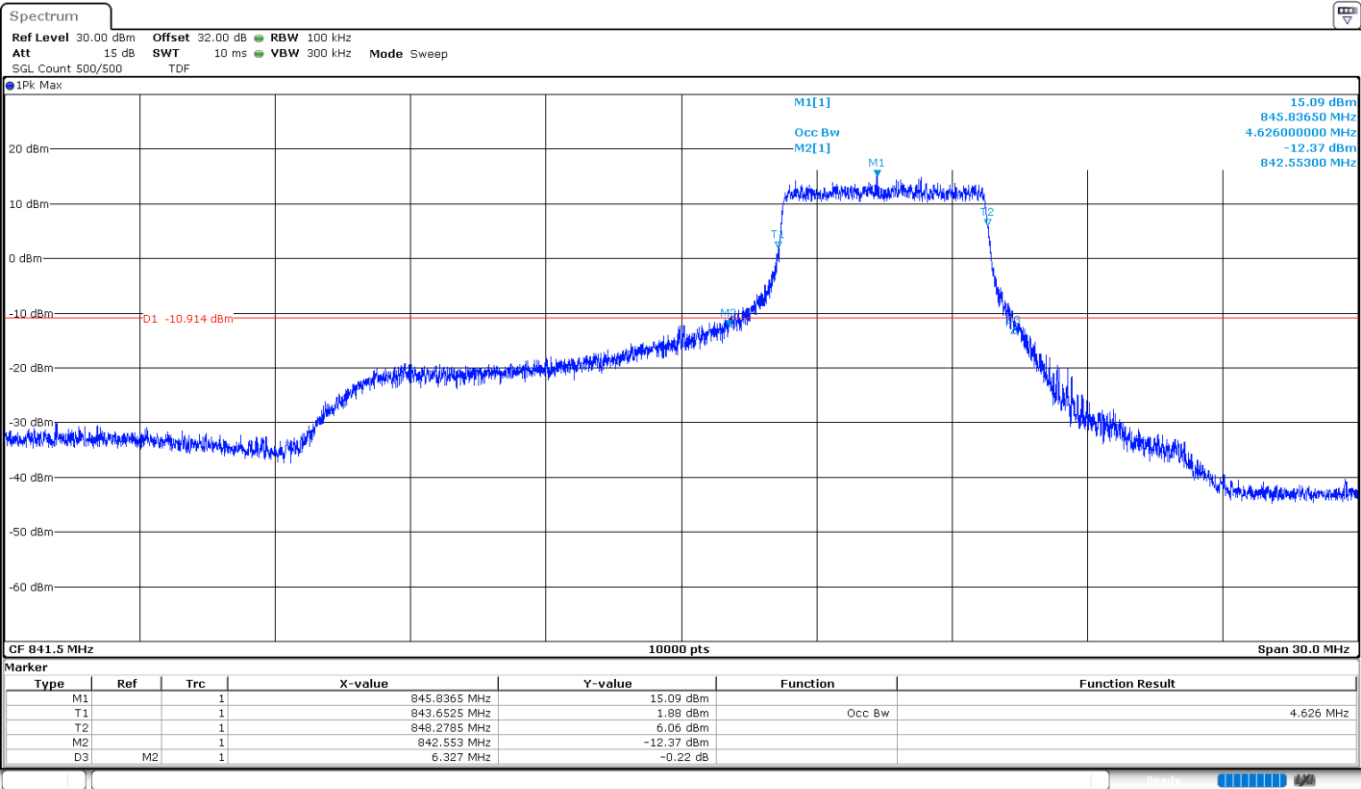

Spurious Emissions at Antenna Terminals

Limits

FCC §2.1051 and §22.917. RSS-132 Clause 5.5.

The power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater.
In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz.

At P_o transmitting power, the specified minimum attenuation becomes $43 + 10 \log (P_o)$, and the level in dBm relative to P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mW}) - 30] = -13 \text{ dBm}$$


Method

The EUT RF output connector was connected to a spectrum analyser and to the Universal Radio Communication tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50-Ohm attenuator and a power divider.

The reading of the spectrum analyser is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyser.

The configuration of Resource Blocks and modulation which is the worst case for conducted power was used.

Test Setup

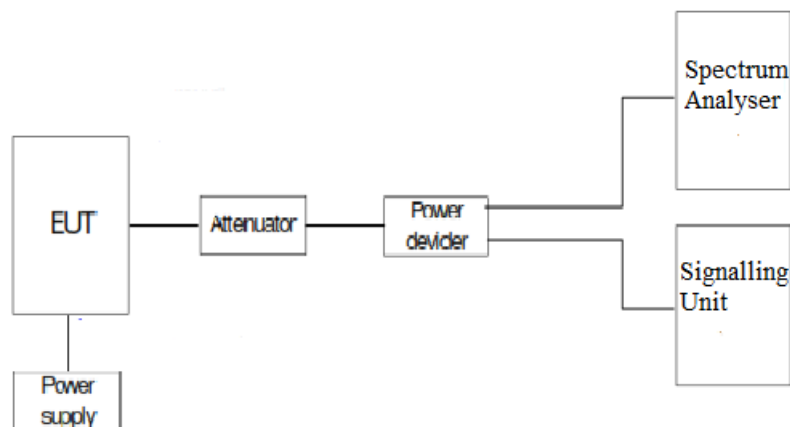

Results

LTE Cat 1bis 5:

A preliminary scan determined the worst-case:

BW=5 MHz, QPSK, RB Size=1, RB Offset=0.

The next results are for this worst-case configuration.

Frequency range 9 KHz - 10 GHz:

- LOW CHANNEL: No spurious frequencies at less than 20 dB below the limit.
- MIDDLE CHANNEL: No spurious frequencies at less than 20 dB below the limit.
- HIGH CHANNEL: No spurious frequencies at less than 20 dB below the limit.


Measurement uncertainty (dB): $<\pm 2.76$

Verdict: PASS

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [FSV 40]					
9 kHz - 150 kHz	14,1 Hz	PK+	300 Hz	Coupled	0 dB
150 kHz - 30 MHz	932,812 Hz	PK+	10 kHz	Coupled	0 dB
30 MHz - 1 GHz	30,312 kHz	PK+	100 kHz	Coupled	0 dB
1 GHz - 10 GHz	281,25 kHz	PK+	1 MHz	Coupled	0 dB

LTE Cat 1bis 5:


LOW CHANNEL:

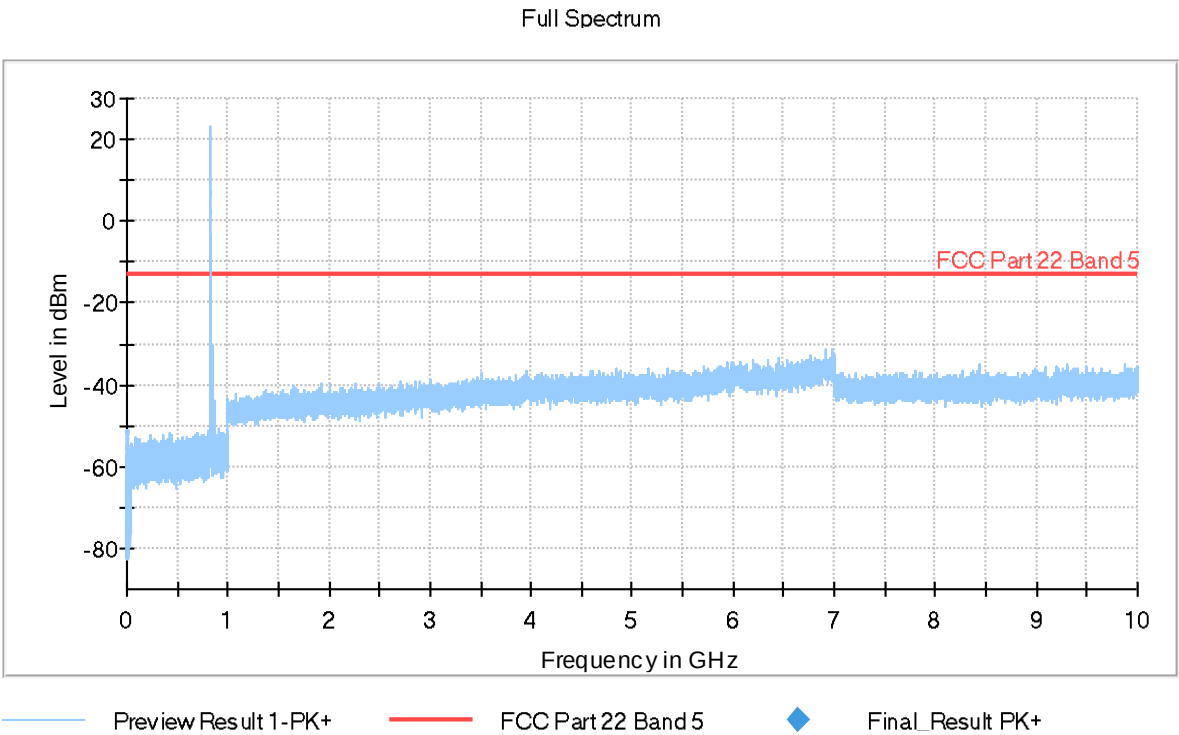

The peak above the limit is the carrier frequency.

MIDDLE CHANNEL:

Full Spectrum

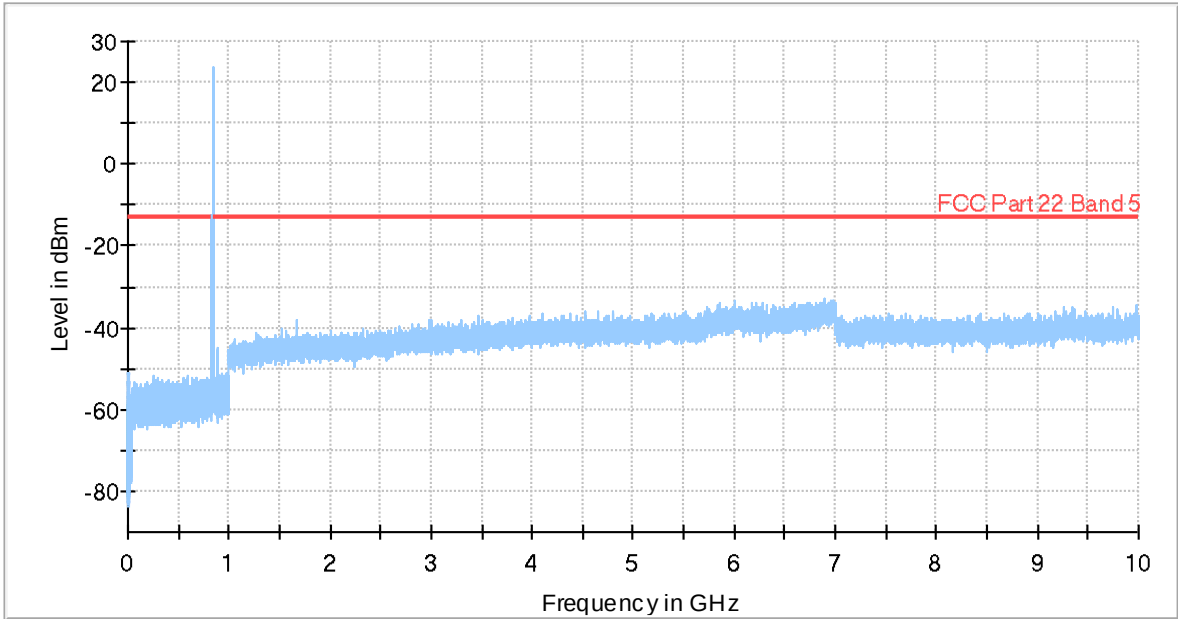


Preview Result 1-PK+ FCC Part 22 Band 5 Final_Result PK+

The peak above the limit is the carrier frequency.

HIGH CHANNEL:

Full Spectrum

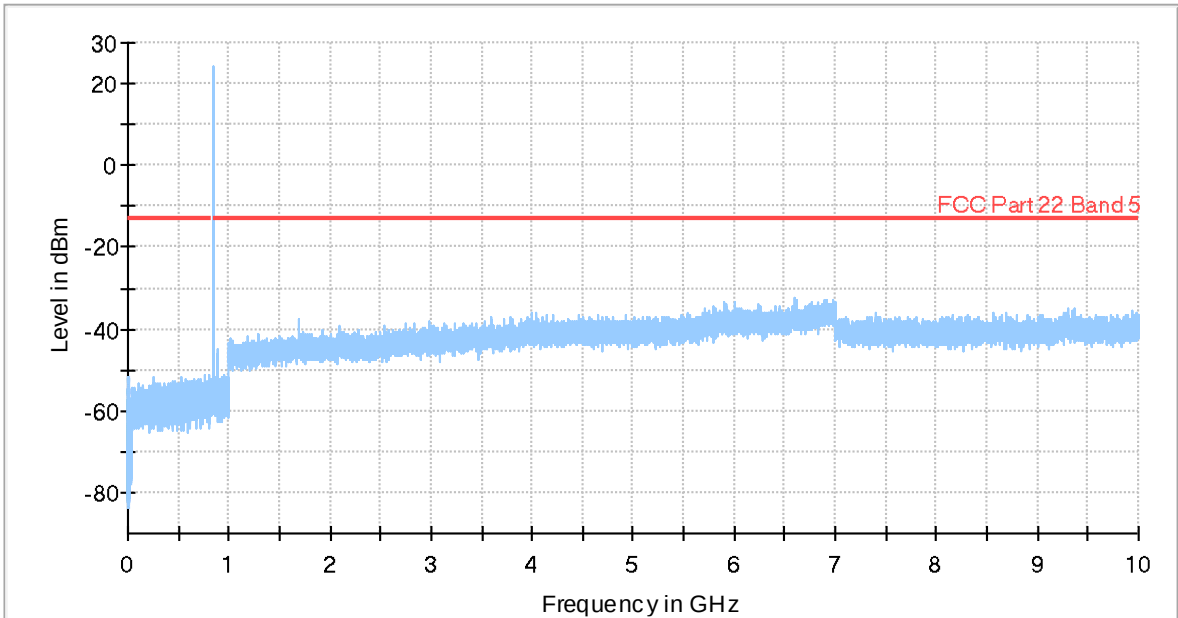

Preview Result 1-PK+ FCC Part 22 Band 5 Final_Result PK+

The peak above the limit is the carrier frequency.

LTE Cat 1bis 26 (Sub-band 824-849 MHz):

A preliminary scan determined the worst-case:

BW=5 MHz, QPSK, RB Size=1, RB Offset=0.

The next results are for this worst-case configuration.

Frequency range 9 KHz - 10 GHz:

- LOW CHANNEL: No spurious frequencies at less than 20 dB below the limit.
- MIDDLE CHANNEL: No spurious frequencies at less than 20 dB below the limit.
- HIGH CHANNEL: No spurious frequencies at less than 20 dB below the limit.


Measurement uncertainty (dB): $<\pm 2.76$

Verdict: PASS

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamplifier
Receiver: [FSV 40]					
9 kHz - 150 kHz	14,1 Hz	PK+	300 Hz	Coupled	0 dB
150 kHz - 30 MHz	932,812 Hz	PK+	10 kHz	Coupled	0 dB
30 MHz - 1 GHz	30,312 kHz	PK+	100 kHz	Coupled	0 dB
1 GHz - 10 GHz	281,25 kHz	PK+	1 MHz	Coupled	0 dB


LTE Cat 1bis 26 (Sub-band 824-849 MHz):

LOW CHANNEL:

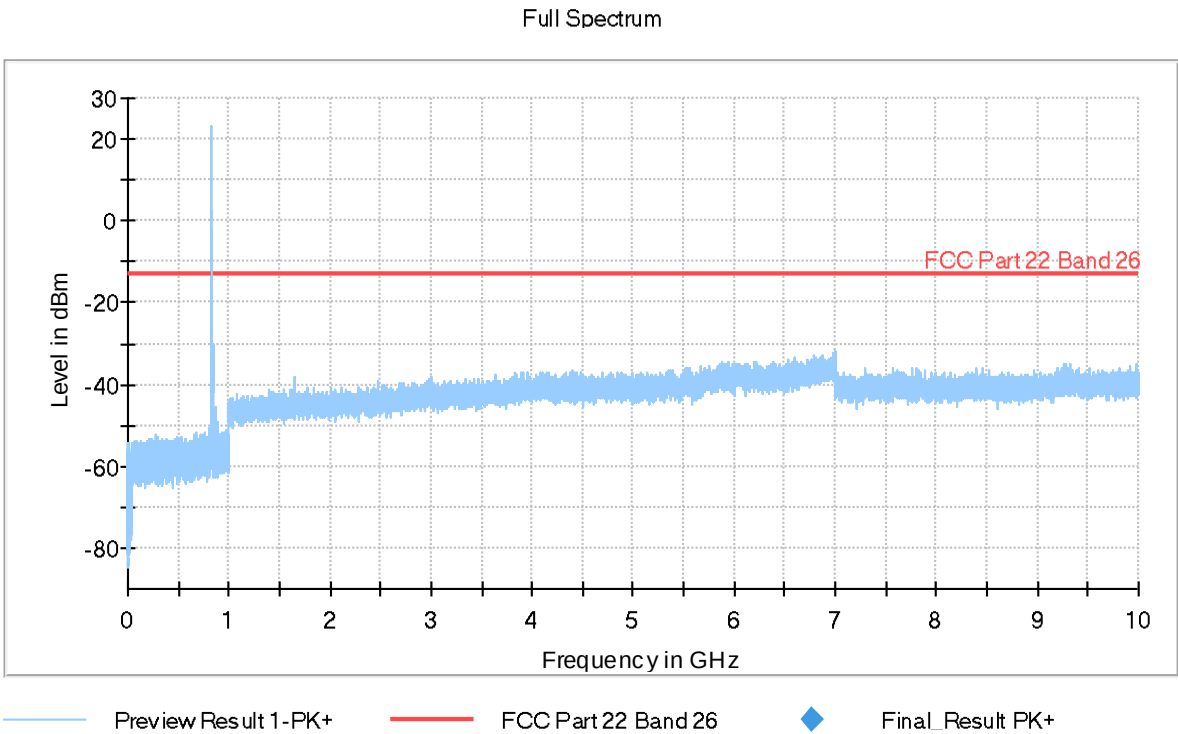


The peak above the limit is the carrier frequency.

MIDDLE CHANNEL:

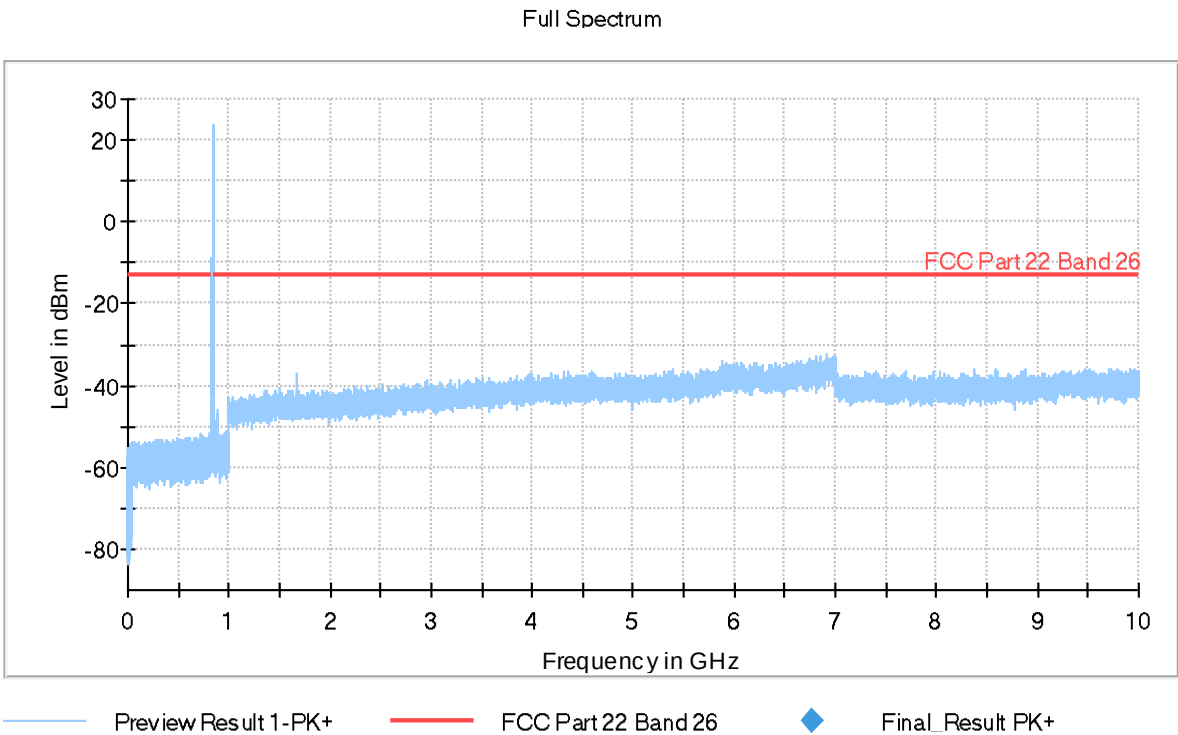

The peak above the limit is the carrier frequency.

HIGH CHANNEL:

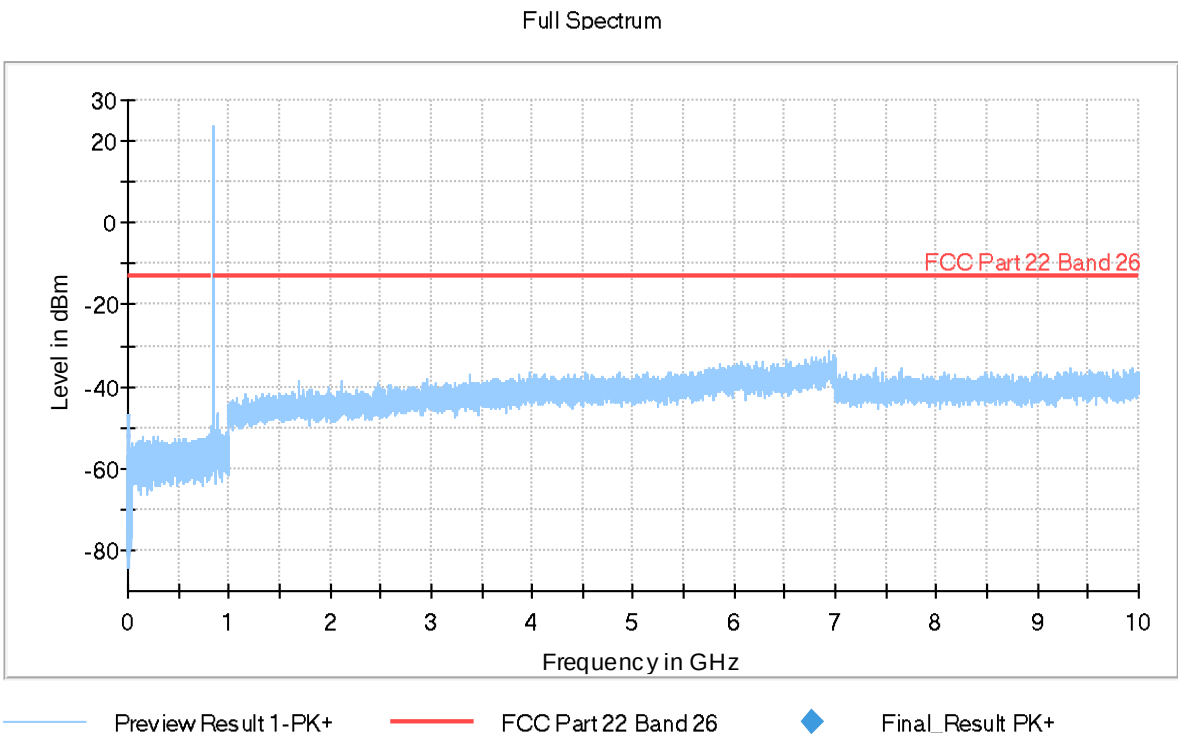

The peak above the limit is the carrier frequency.

Spurious Emissions at Antenna Terminals at Block Edges

Limits

FCC § 2.1051 and § 22.917:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

RSS-132. Clause 5.5:

Mobile and base station equipment shall comply with the limits below.

In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log 10 p$ (watts).

Method

The EUT RF output connector was connected to a spectrum analyzer and to the Universal Radio Communication tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50-Ohm attenuator and a power splitter.

The reading of the spectrum analyser is corrected with the path loss of the connection between the output terminal of the EUT and the input of the spectrum analyzer.

The configuration of modulation which is the worst case for conducted power was used.


As stated in FCC part 22.917 / RSS-132 Clause 5.5, in the 1 MHz bands immediately outside and adjacent to the frequency block or band a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

Measurement Limit:

At P_o transmitting power, the specified minimum attenuation $43 + 10 \log_{10} p$ (watts) becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = -13 \text{ dBm}$$

Test Setup

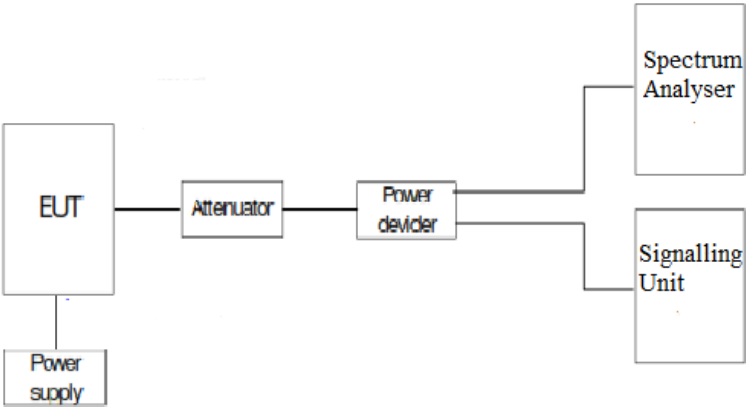

Results

LTE Cat 1bis 26 (Sub-band 824-849 MHz):

Preliminary measurements determined QPSK, BW=5 MHz, RB Size=1, RB Offset=0 as the worst-case modulation in terms of band edge results. The next results are for this worst-case configuration.

LTE Cat 1bis 26 (Sub-band 824-849 MHz). QPSK.	RB=1. Offset=0. BW=1.4 MHz	RB=1. Offset =0. BW = 3 MHz	RB=1. Offset =0. BW=5 MHz	RB=1. Offset =0. BW=10 MHz	RB=1. Offset =0. BW=15 MHz
Maximum measured level at <u>Low Block Edge</u> at antenna port (dBm)			-20.8	-24.23	-29.13

LTE Cat 1bis 26 (Sub-band 824-849 MHz). QPSK.	RB=All. Offset=0. BW=1.4 MHz	RB= All. Offset=0. BW = 3 MHz	RB= All. Offset=0. BW=5 MHz	RB= All. Offset=0. BW=10 MHz	RB= All. Offset=0. BW=15 MHz
Maximum measured level at <u>Low Block Edge</u> at antenna port (dBm)			-23.12	-23.01	-28.21

LTE Cat 1bis 26 (Sub-band 824-849 MHz). QPSK.	RB=1. Offset=Max. BW=1.4 MHz	RB=1. Offset =Max. BW = 3 MHz	RB=1. Offset =Max. BW=5 MHz	RB=1. Offset =Max. BW=10 MHz	RB=1. Offset =Max. BW=15 MHz
Maximum measured level at <u>High Block Edge</u> at antenna port (dBm)			-21.15	-24.98	-29.82

LTE Cat 1bis 26 (Sub-band 824-849 MHz). QPSK.	RB= All. Offset=0. BW=1.4 MHz	RB= All. Offset=0. BW = 3 MHz	RB= All. Offset=0. BW=5 MHz	RB= All. Offset=0. BW=10 MHz	RB= All. Offset=0. BW=15 MHz
Maximum measured level at <u>High Block Edge</u> at antenna port (dBm)			-25.48	-24.92	-28.15


Measurement uncertainty (dB): <±2.76

Verdict

Pass


LTE Cat 1bis 26 (Sub-band 824-849 MHz).

BW=5 MHz. QPSK. RB Size=1. RB Offset=0. Low Block Edge:

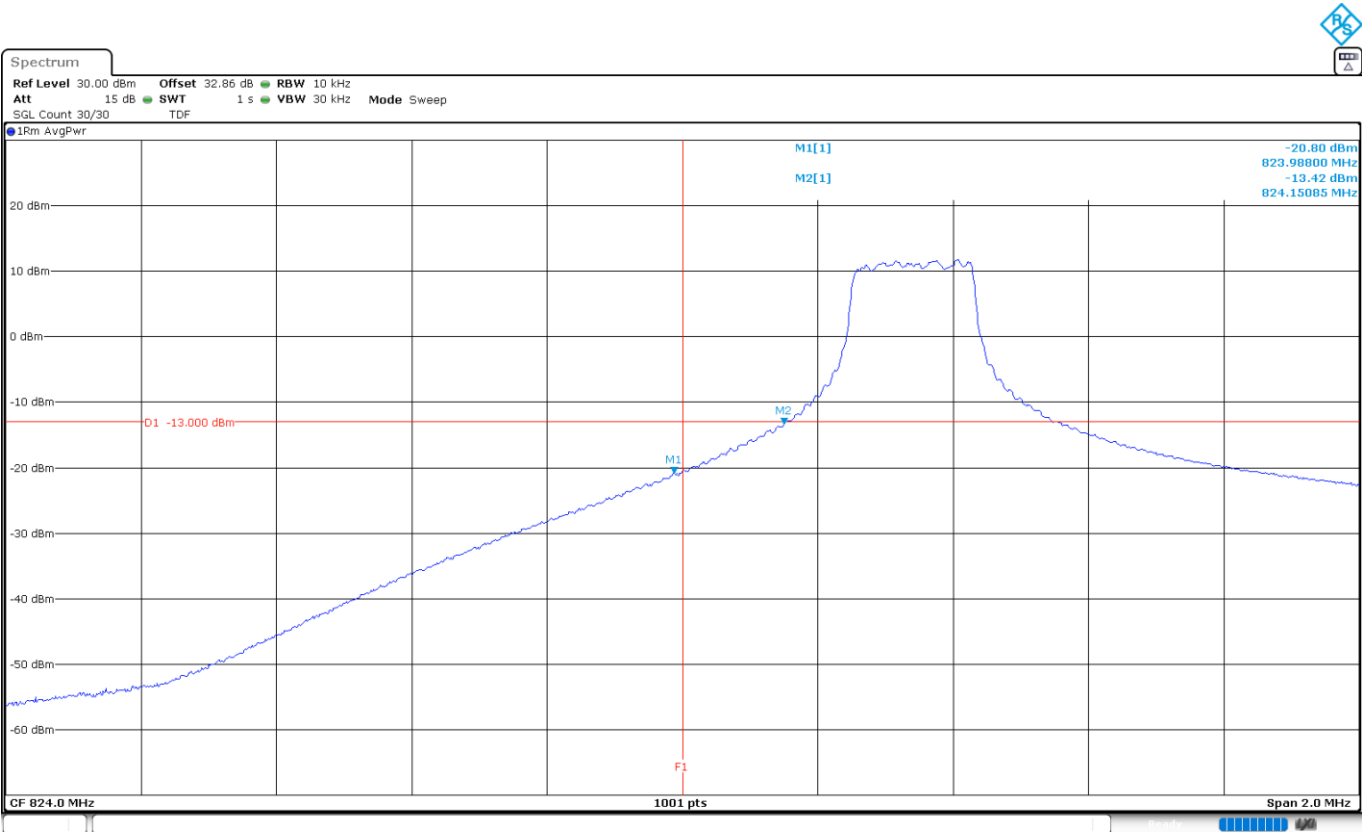


LTE Cat 1bis 26 (Sub-band 824-849 MHz).


BW=5 MHz. QPSK. RB Size=1. RB Offset=Max. High Block Edge:

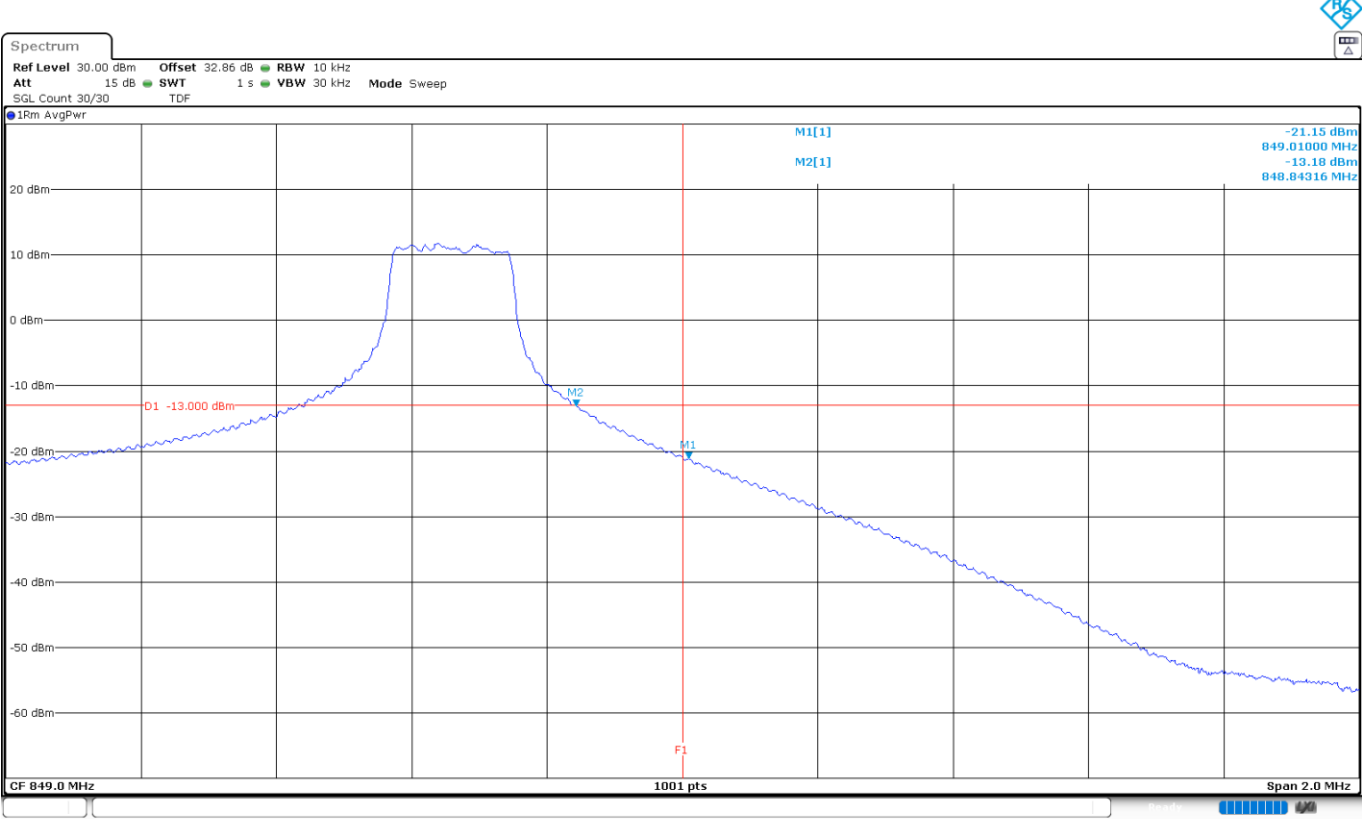

LTE Cat 1bis 26 (Sub-band 824-849 MHz). BW=5 MHz. QPSK. RB Size=All. RB Offset=0. Low Block Edge:

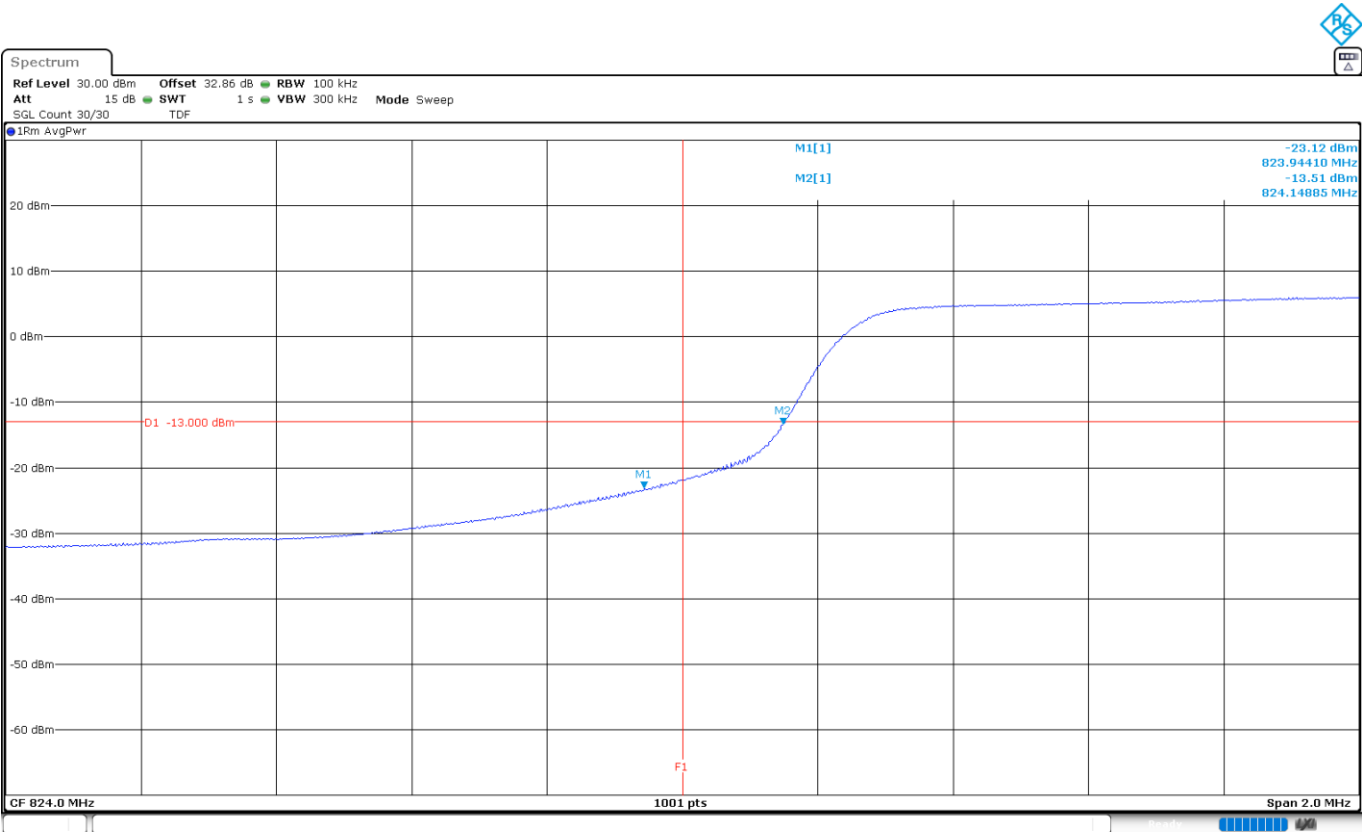

LTE Cat 1bis 26 (Sub-band 824-849 MHz). BW=5 MHz. QPSK. RB Size=All. RB Offset=0. High Block Edge:

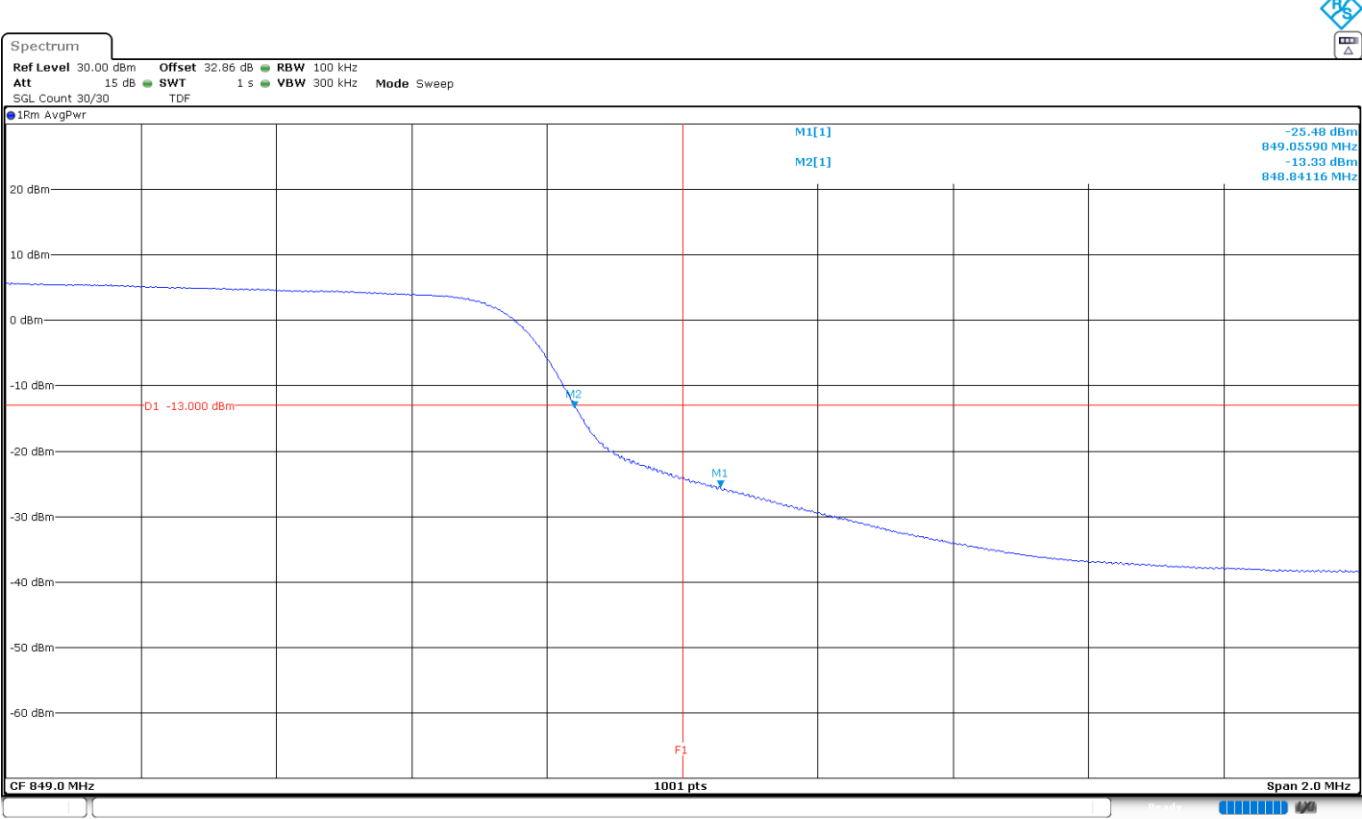

Radiated Emissions

Limits

- * FCC §2.1051 and §22.917: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- * RSS-132. 5.5: Mobile and base station equipment shall comply with the limits in (i) and (ii) below.
- i. In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} P$ (watts).
 - ii. After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} P$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

Method

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to at least the 10th harmonic of the HIGH frequency generated within the equipment.

The EUT was placed on a 1 meter high non-conductive stand at a 3 meter distance from the measuring antenna. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the height and polarization of the measuring antenna. The maximum meter reading was recorded.

Measurement Limit:

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB, P in watts.

At P_o transmitting power, the specified minimum attenuation becomes $43+10\log (P_o)$, and the level in dBm relative P_o becomes:


$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$

The maximum field strength (dB μ V/m) of each detected emission at less than 20 dB respect to the limit is converted to an equivalent EIRP level (dBm) according to ANSI C63.26 with the formula:


$EIRP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20 \log(D) - 104.8$; where D is the measurement distance (in the far field region) in m. $D = 3 \text{ m}$

Test Setup

Radiated measurements below 1 GHz:

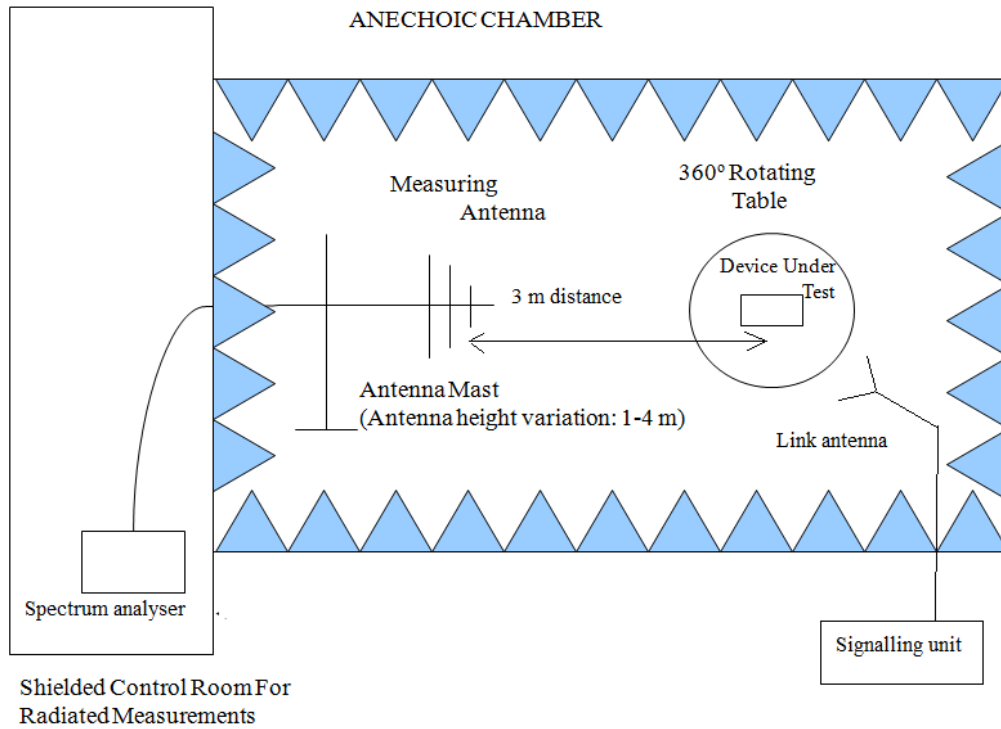

Radiated measurements above 1 GHz:

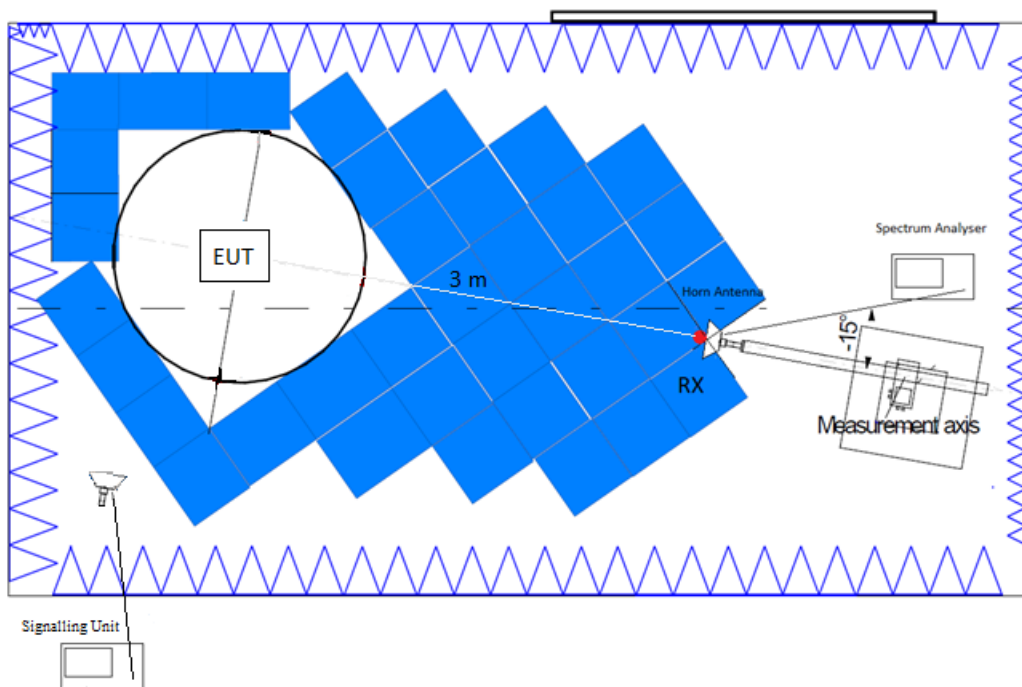

Results

LTE Cat 1bis 5 (Sub-band 824-849 MHz):

INTERNAL ANTENNA:

A preliminary scan determined the BW=5 MHz, QPSK, RB Size=1, RB Offset=0, as the worst case. The following results are for this worst-case configuration.

- LOW CHANNEL:

Frequency range 30 MHz - 1 GHz:

Spurious frequencies at less than 20 dB below the limit:

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Pol
820.004375	-20.59	-13.00	7.59	H
822.156563	-28.27	-13.00	15.27	H

Frequency range 1 - 8.5 GHz:

No spurious frequencies at less than 20 dB below the limit.

- MIDDLE CHANNEL:

Frequency range 30 MHz - 1 GHz:

No spurious frequencies at less than 20 dB below the limit.

Frequency range 1 - 8.5 GHz:

No spurious frequencies at less than 20 dB below the limit.

- HIGH CHANNEL:

Frequency range 30 MHz - 1 GHz:

No spurious frequencies at less than 20 dB below the limit.

Frequency range 1 - 8.5 GHz:

Spurious frequencies at less than 20 dB below the limit:

Frequency (MHz)	MaxPeak (dBm)	Limit (dBm)	Margin (dB)	Pol
2226.000000	-27.09	-13.00	14.09	H


Measurement uncertainty (dB): $\leq \pm 5.03$ for $f \geq 30$ MHz up to 1 GHz
 $\leq \pm 4.32$ for $f \geq 1$ GHz up to 8.5 GHz

Verdict: PASS

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
30 MHz - 1 GHz	30.312 kHz	PK+	100 kHz	Coupled	0 dB
1 GHz - 8.5 GHz	234.375 kHz	PK+	100 kHz	1 s	0 dB


FREQUENCY RANGE 30 MHz - 1 GHz:

- LOW CHANNEL:

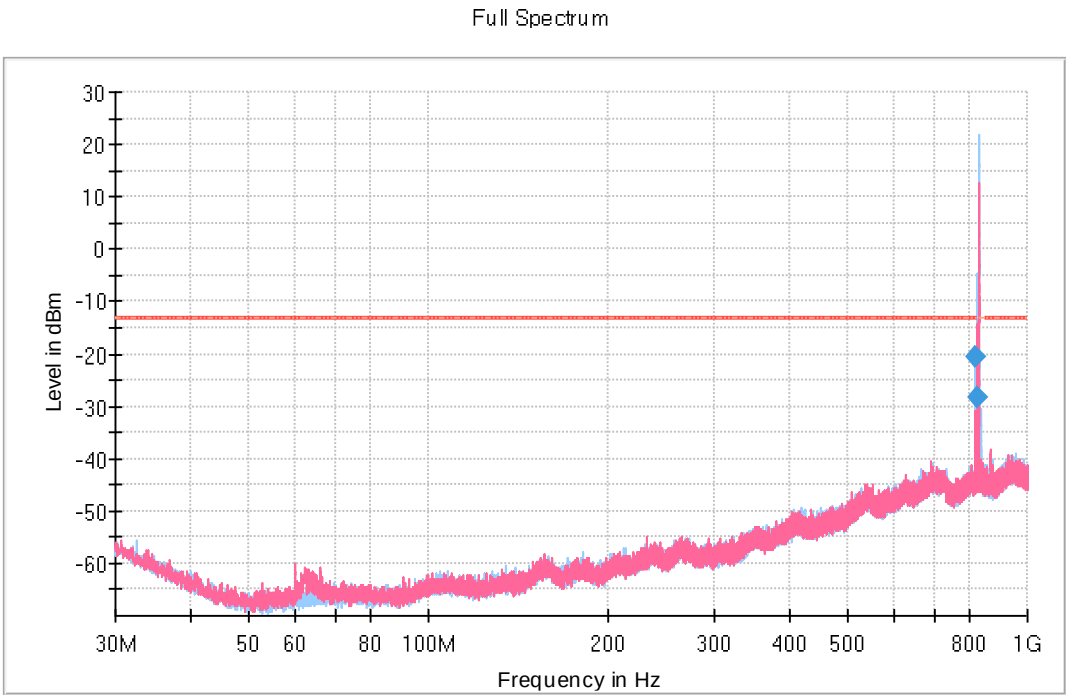

The peak above the limit is the carrier frequency.

- MIDDLE CHANNEL:

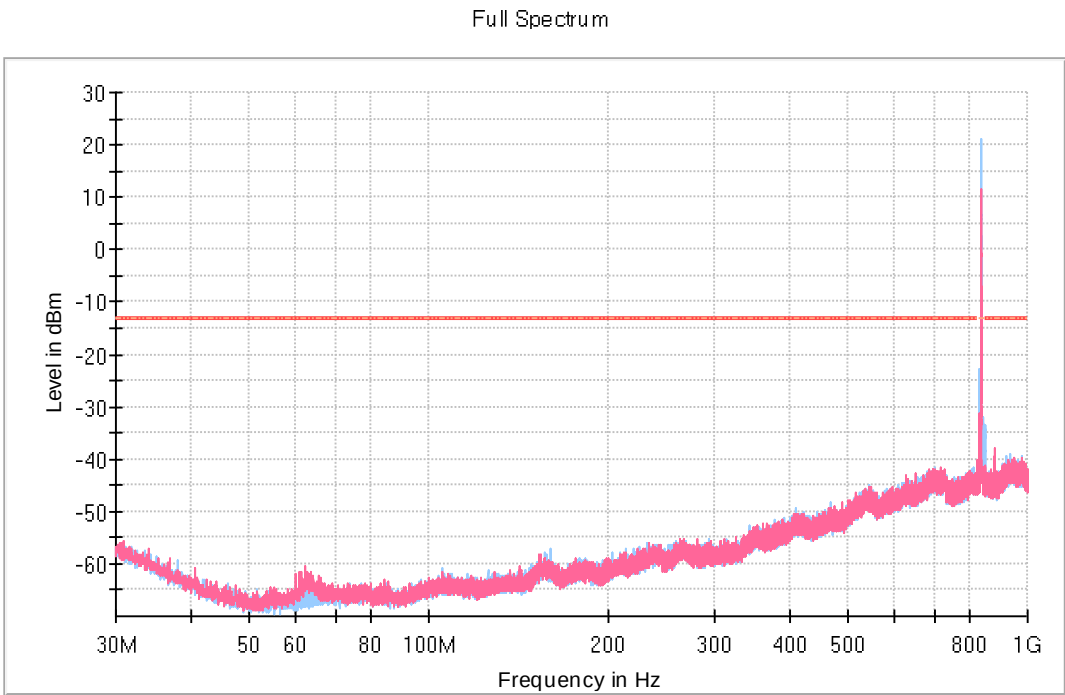

The peak above the limit is the carrier frequency.