



Appendix Test Data for BT(BDR/EDR) (Conducted Measurement)

Product Name: LED Speaker

Trade Mark: VIBE

Test Model: DG-LESPR-HOL25

FCC ID: 2AANZLESPR

Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Allen Lai
Supervised by:	Max Zhang
NOTE	N/A

Appendix A: 20dB Emission Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	20db EBW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
DH5	Ant1	2402	0.951	2401.514	2402.465	---	---
DH5	Ant1	2441	0.954	2440.505	2441.459	---	---
DH5	Ant1	2480	0.942	2479.508	2480.450	---	---
2DH5	Ant1	2402	1.326	2401.310	2402.636	---	---
2DH5	Ant1	2441	1.341	2440.298	2441.639	---	---
2DH5	Ant1	2480	1.326	2479.301	2480.627	---	---
3DH5	Ant1	2402	1.299	2401.334	2402.633	---	---
3DH5	Ant1	2441	1.317	2440.313	2441.630	---	---
3DH5	Ant1	2480	1.317	2479.316	2480.633	---	---

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs





DH5-Ant1-2480



2DH5-Ant1-2402





2DH5-Ant1-2441



2DH5-Ant1-2480





3DH5-Ant1-2402



3DH5-Ant1-2441







Appendix B: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
DH5	Ant1	2402	0.85172	2401.5464	2402.3982	---	---
DH5	Ant1	2441	0.85063	2440.5434	2441.3941	---	---
DH5	Ant1	2480	0.84917	2479.5423	2480.3915	---	---
2DH5	Ant1	2402	1.1854	2401.3818	2402.5672	---	---
2DH5	Ant1	2441	1.1930	2440.3715	2441.5645	---	---
2DH5	Ant1	2480	1.1873	2479.3719	2480.5592	---	---
3DH5	Ant1	2402	1.1873	2401.3790	2402.5663	---	---
3DH5	Ant1	2441	1.1940	2440.3744	2441.5684	---	---
3DH5	Ant1	2480	1.1947	2479.3749	2480.5696	---	---


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs



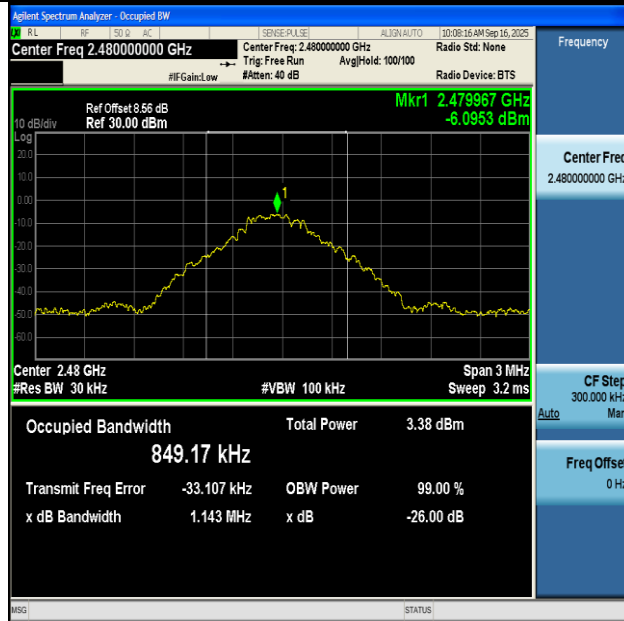

DH5-Ant1-2480




2DH5-Ant1-2402






2DH5-Ant1-2441

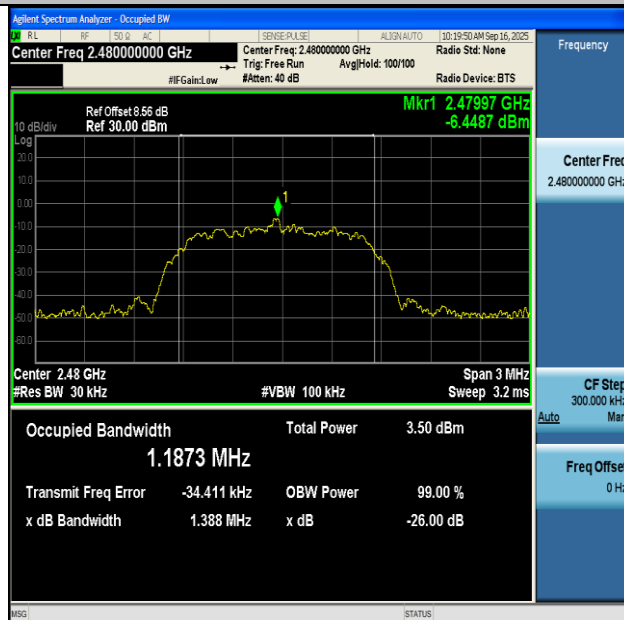


2DH5-Ant1-2480



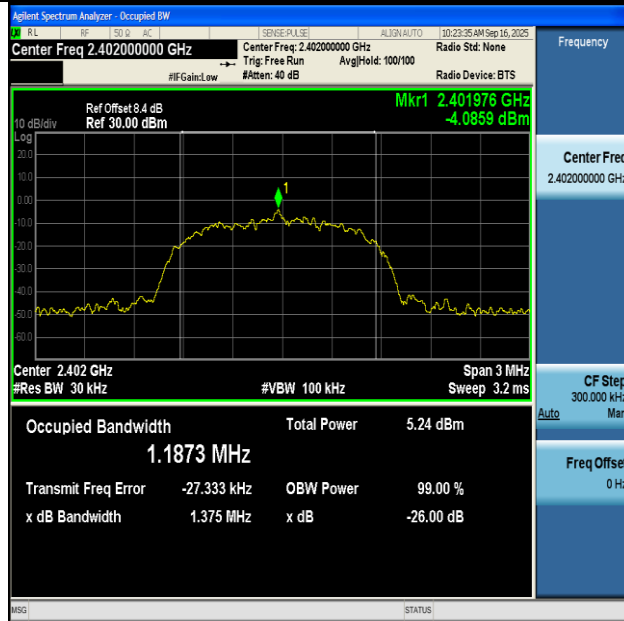


3DH5-Ant1-2402

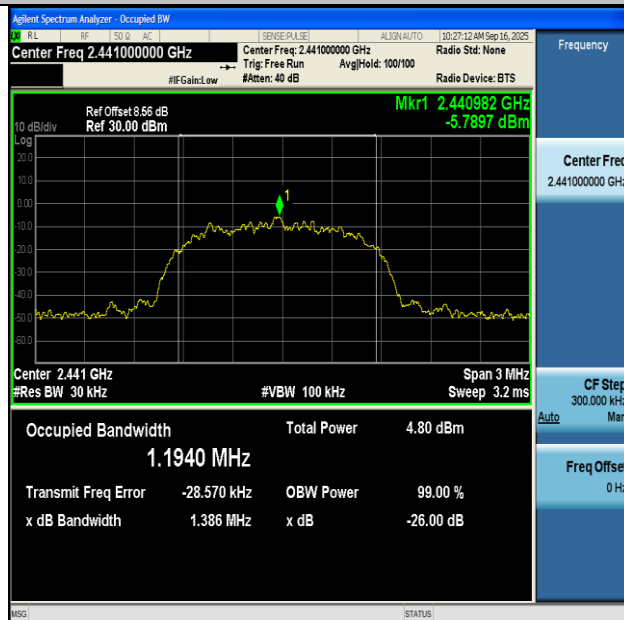

3DH5-Ant1-2441



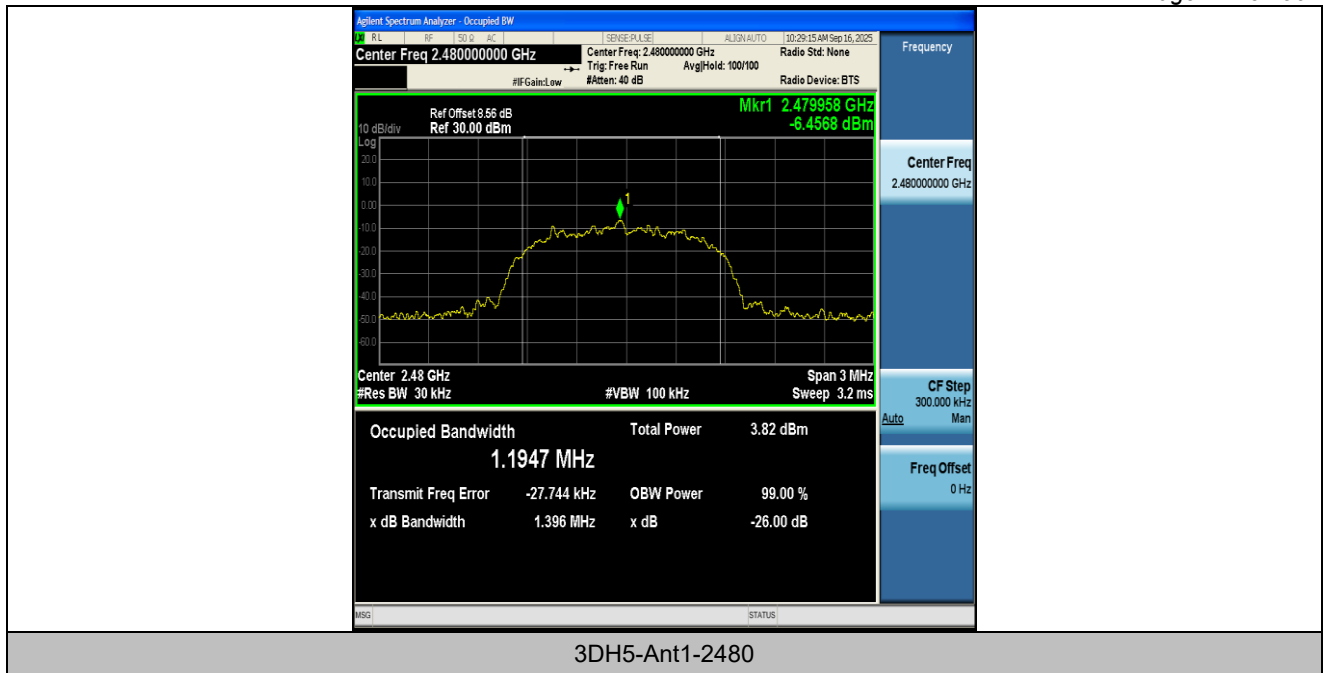



Appendix C: Maximum peak conducted output power

Test Result


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
DH5	Ant1	2402	-1.47	≤30	PASS
DH5	Ant1	2441	-1.91	≤30	PASS
DH5	Ant1	2480	-2.65	≤30	PASS
2DH5	Ant1	2402	0.53	≤20.97	PASS
2DH5	Ant1	2441	0.03	≤20.97	PASS
2DH5	Ant1	2480	-0.81	≤20.97	PASS
3DH5	Ant1	2402	0.99	≤20.97	PASS
3DH5	Ant1	2441	0.62	≤20.97	PASS
3DH5	Ant1	2480	-0.07	≤20.97	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

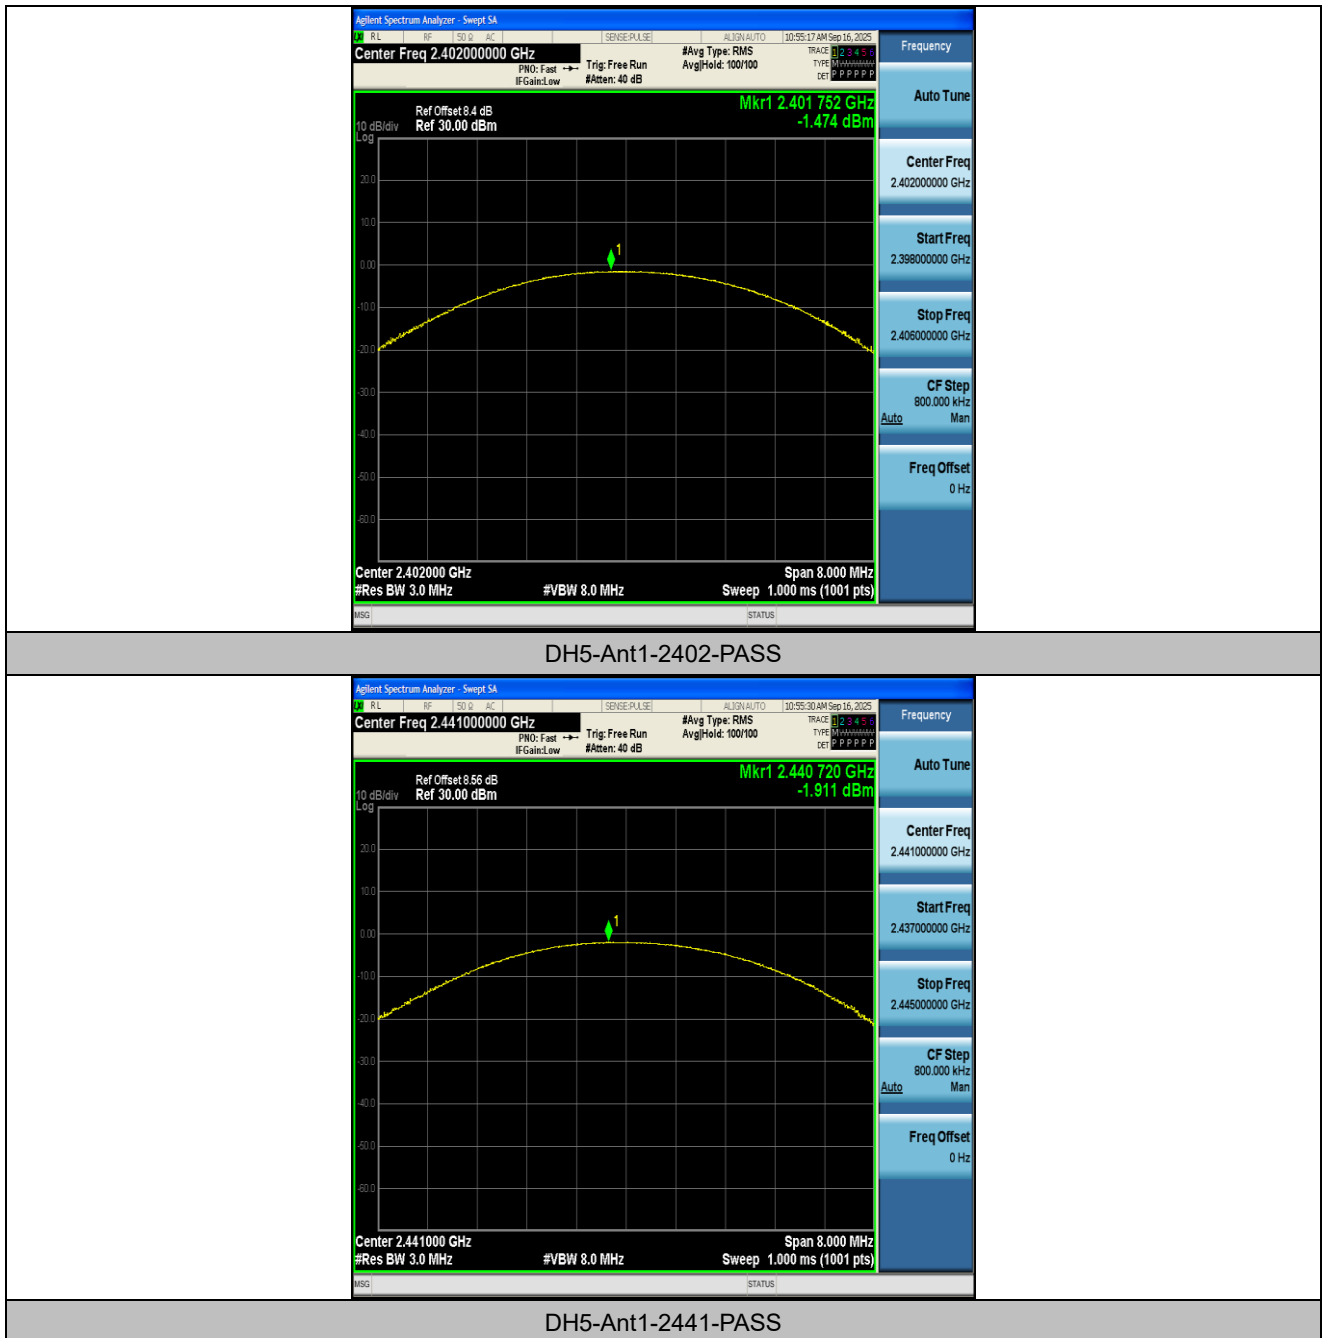

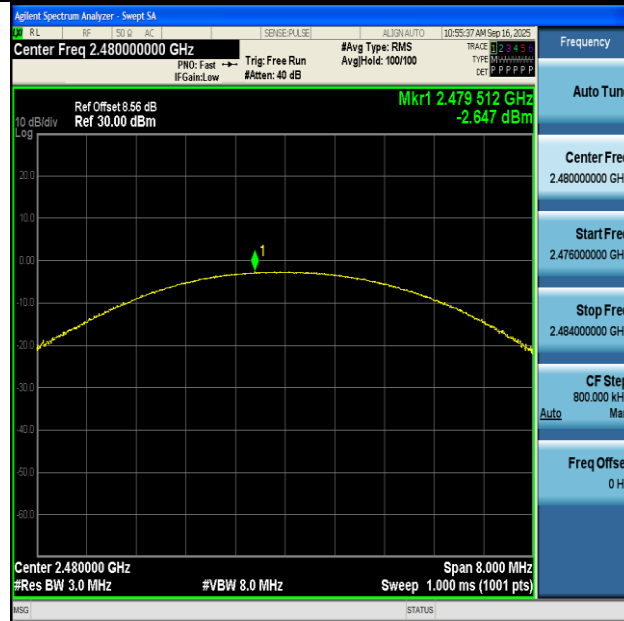


DH5-Ant1-2480-PASS

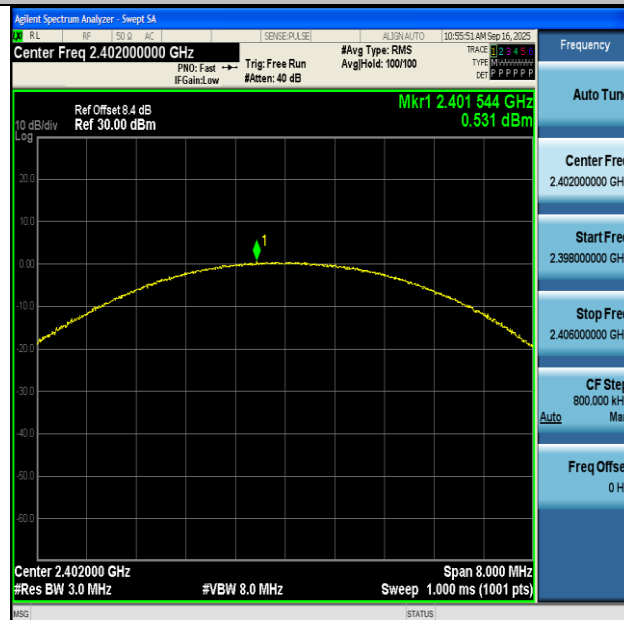

2DH5-Ant1-2402-PASS



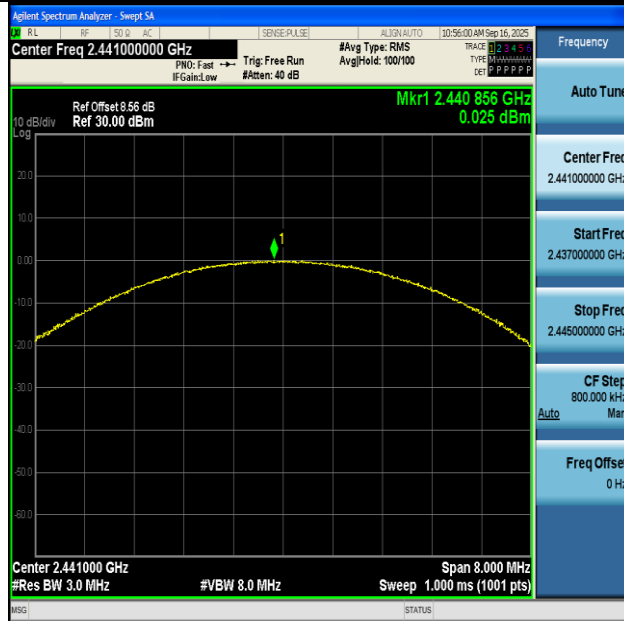


2DH5-Ant1-2441-PASS




2DH5-Ant1-2480-PASS



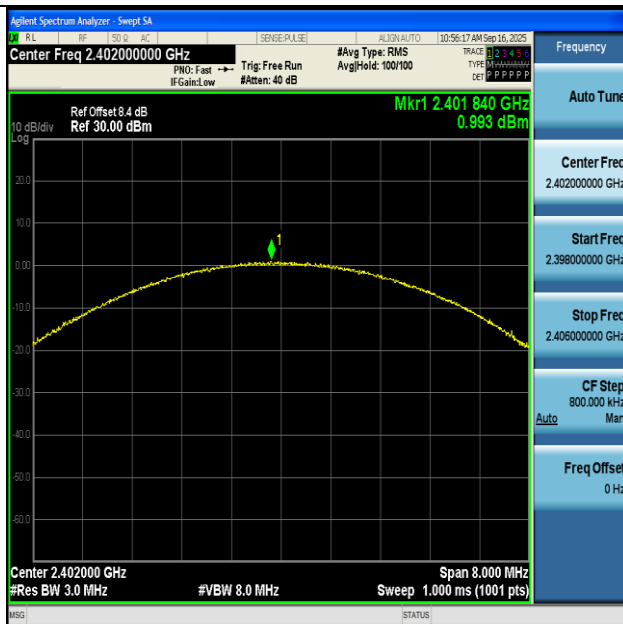


3DH5-Ant1-2402-PASS

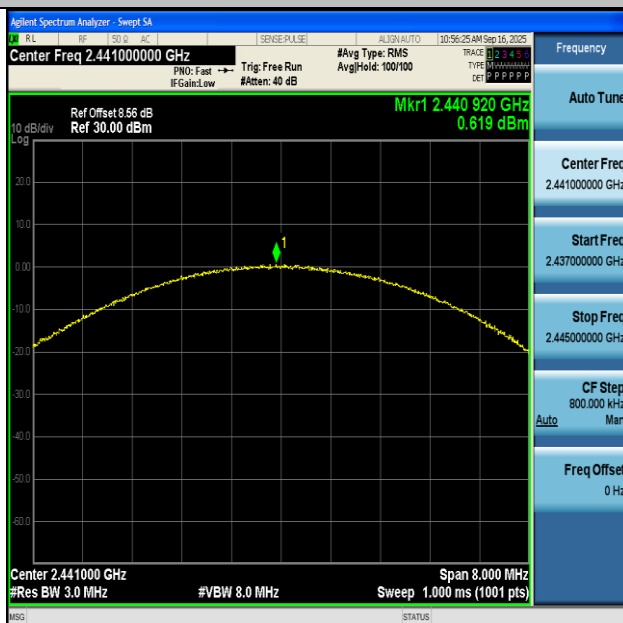

3DH5-Ant1-2441-PASS



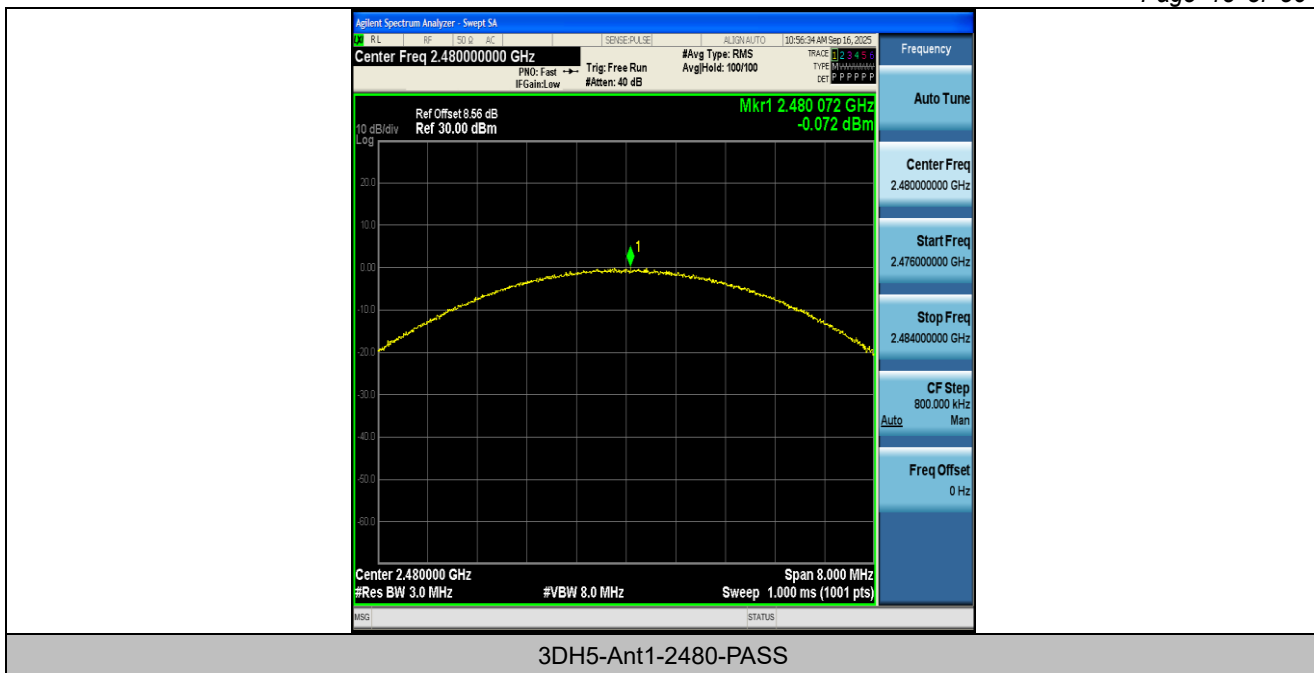



Appendix D: Carrier frequency separation

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	0.998	≥0.954	PASS
2DH5	Ant1	Hop	0.988	≥0.894	PASS
3DH5	Ant1	Hop	1.014	≥0.878	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs



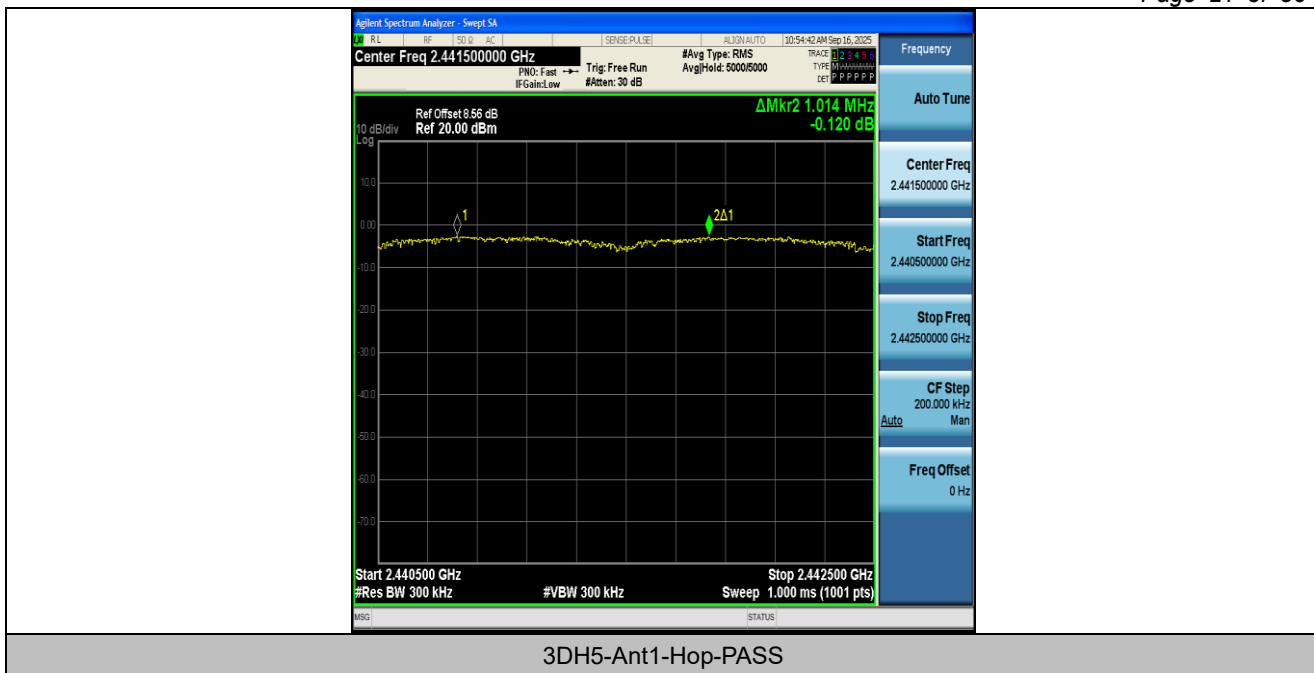



Appendix E: Time of occupancy

Test Result


Test Mode	Antenna	Frequency [MHz]	Burst Width [ms]	TotalHops [Num]	Result [s]	Limit [s]	Verdict
DH5	Ant1	Hop	2.915	90	0.262	≤0.4	PASS
2DH5	Ant1	Hop	2.920	120	0.35	≤0.4	PASS
3DH5	Ant1	Hop	2.922	120	0.351	≤0.4	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)







Test Graphs

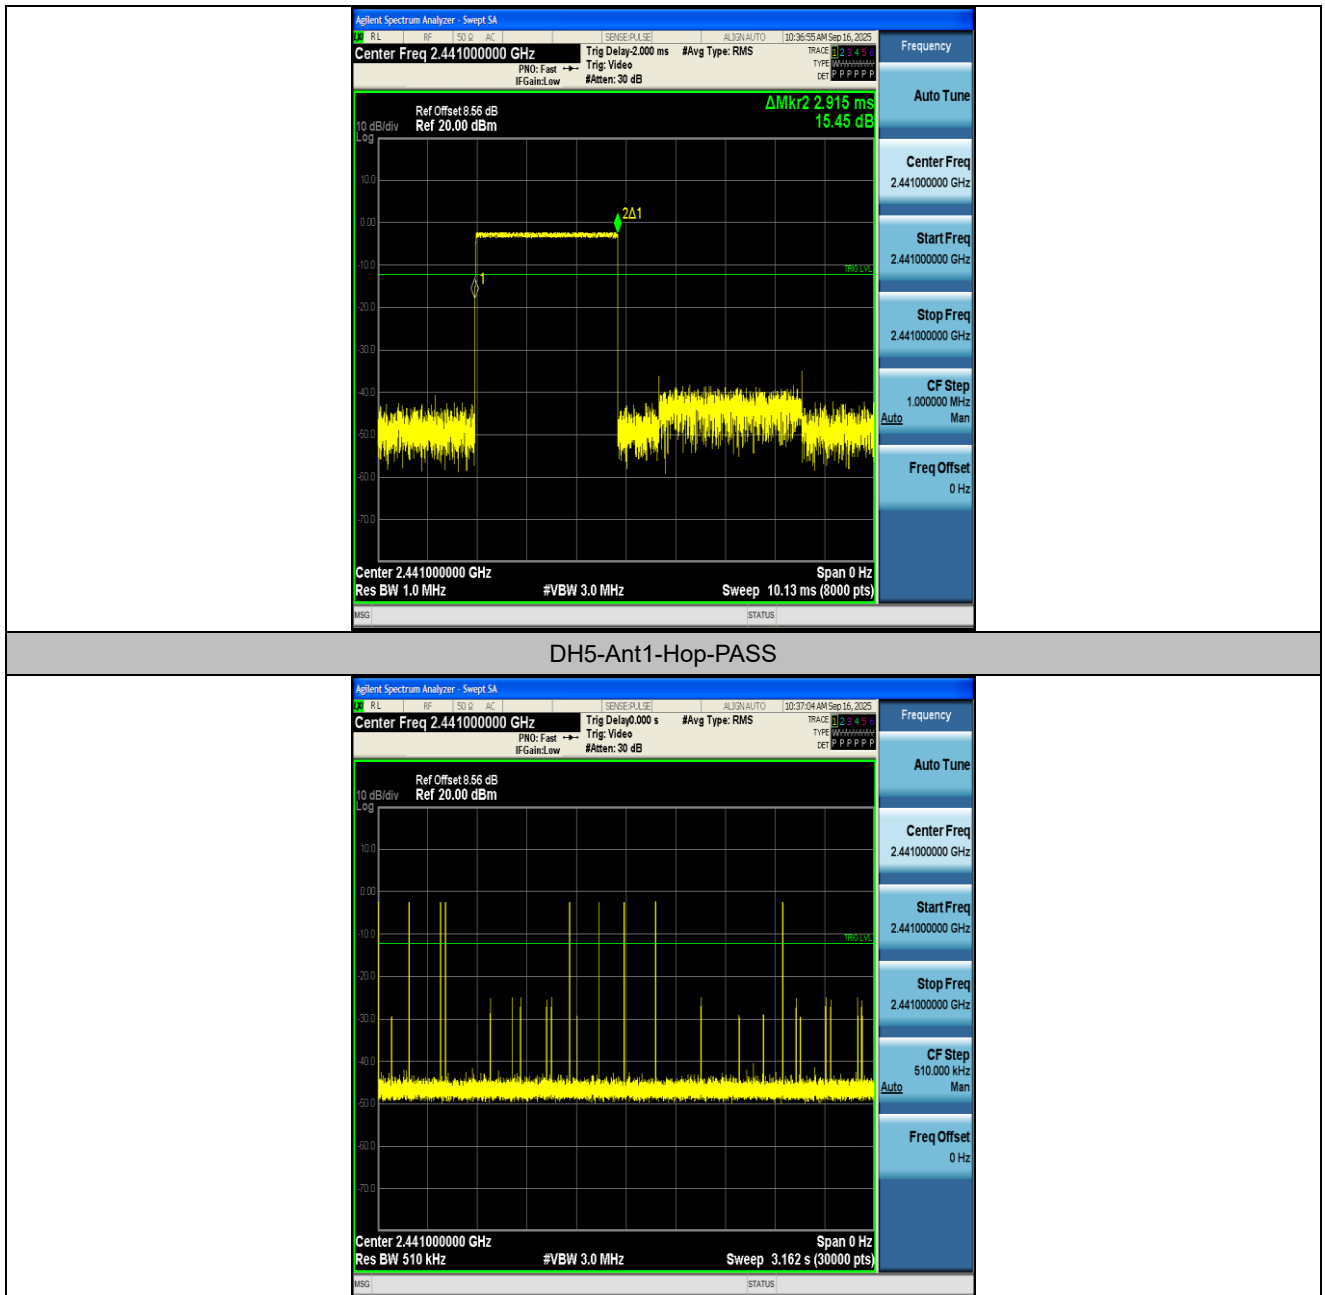

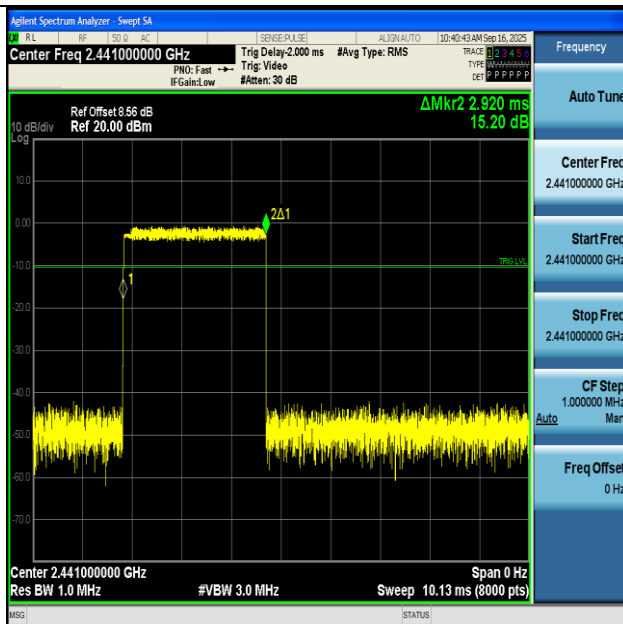


2DH5-Ant1-Hop-PASS

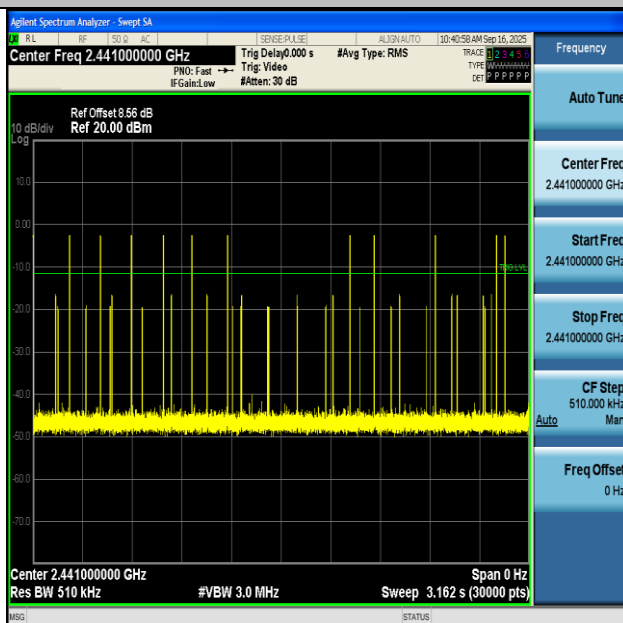

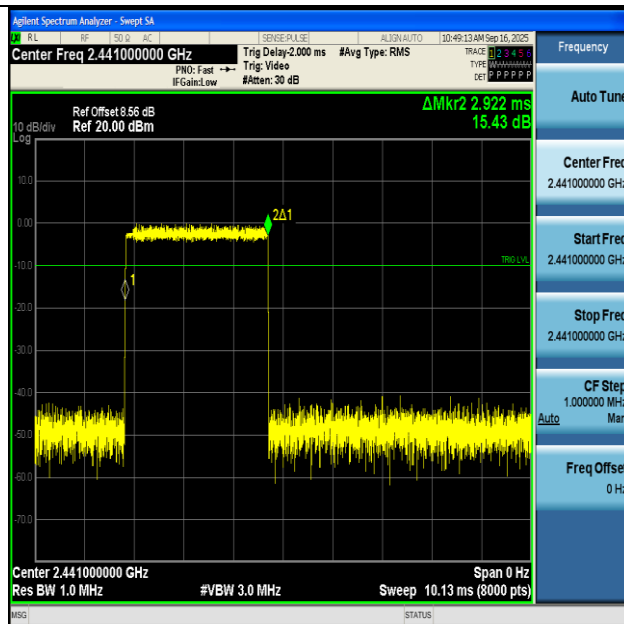

3DH5-Ant1-Hop-PASS

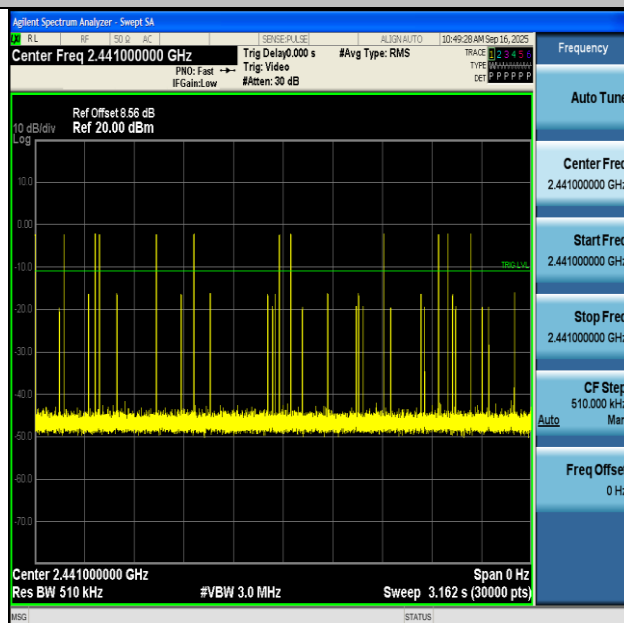



Appendix F: Number of hopping channels

Test Result


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs

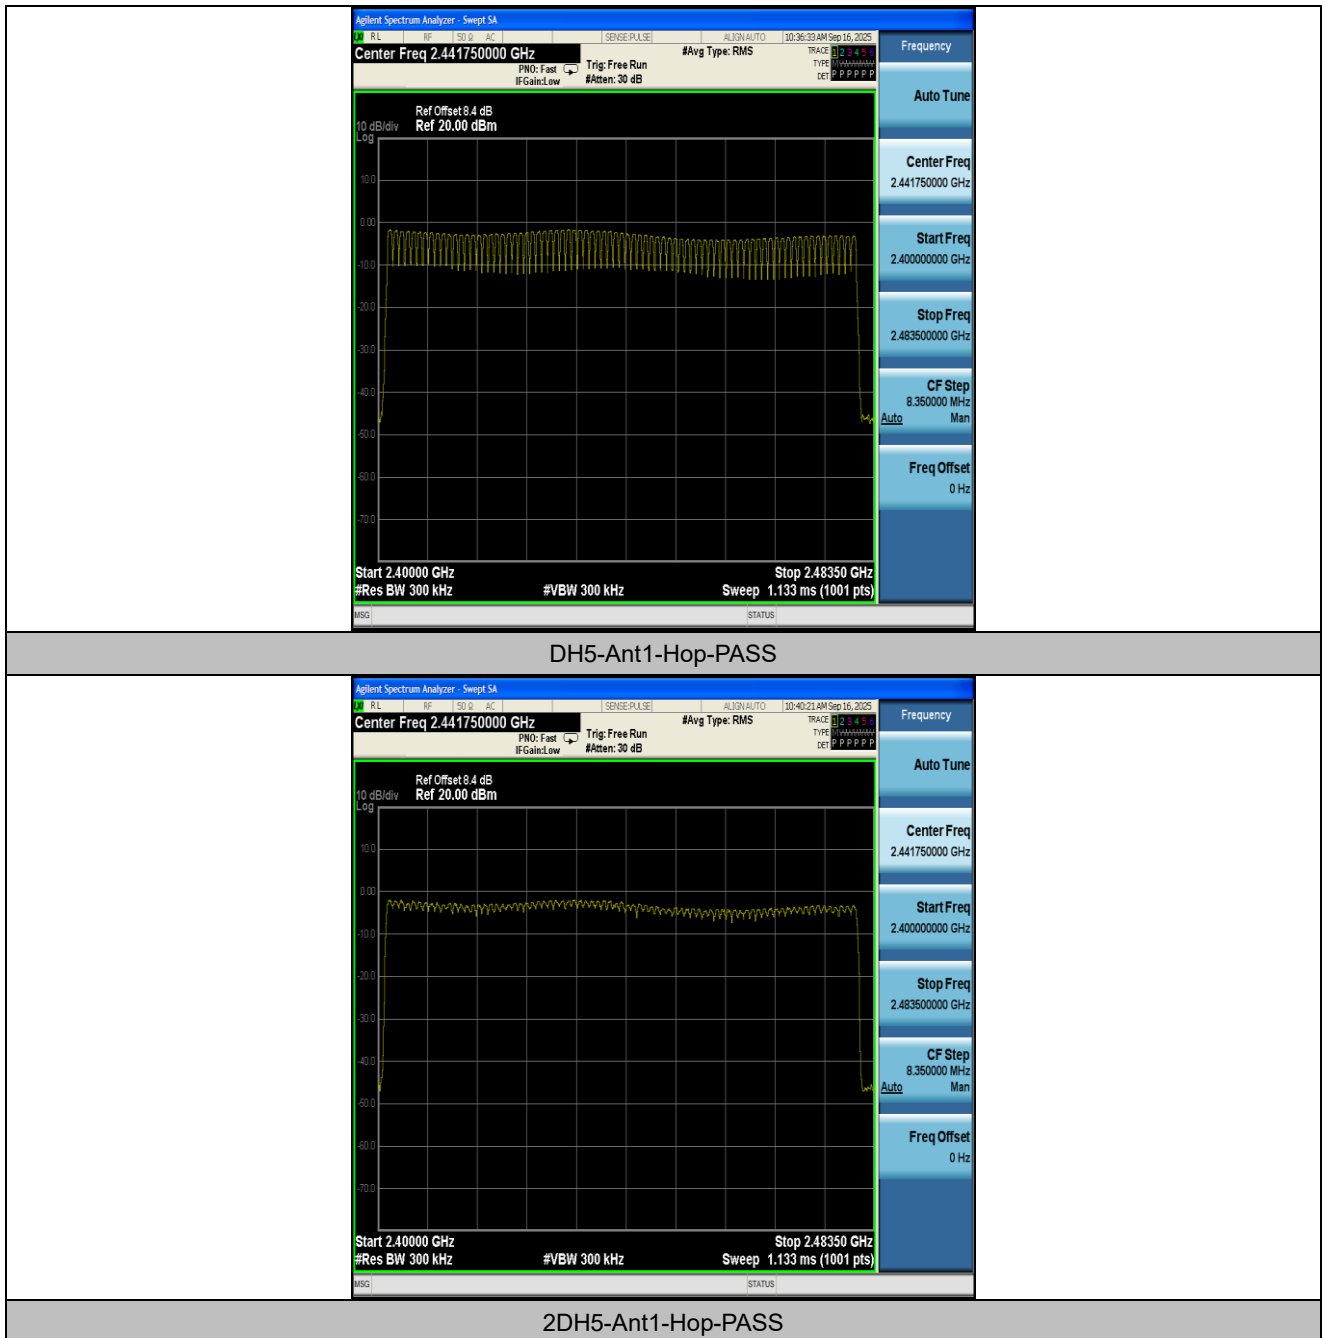

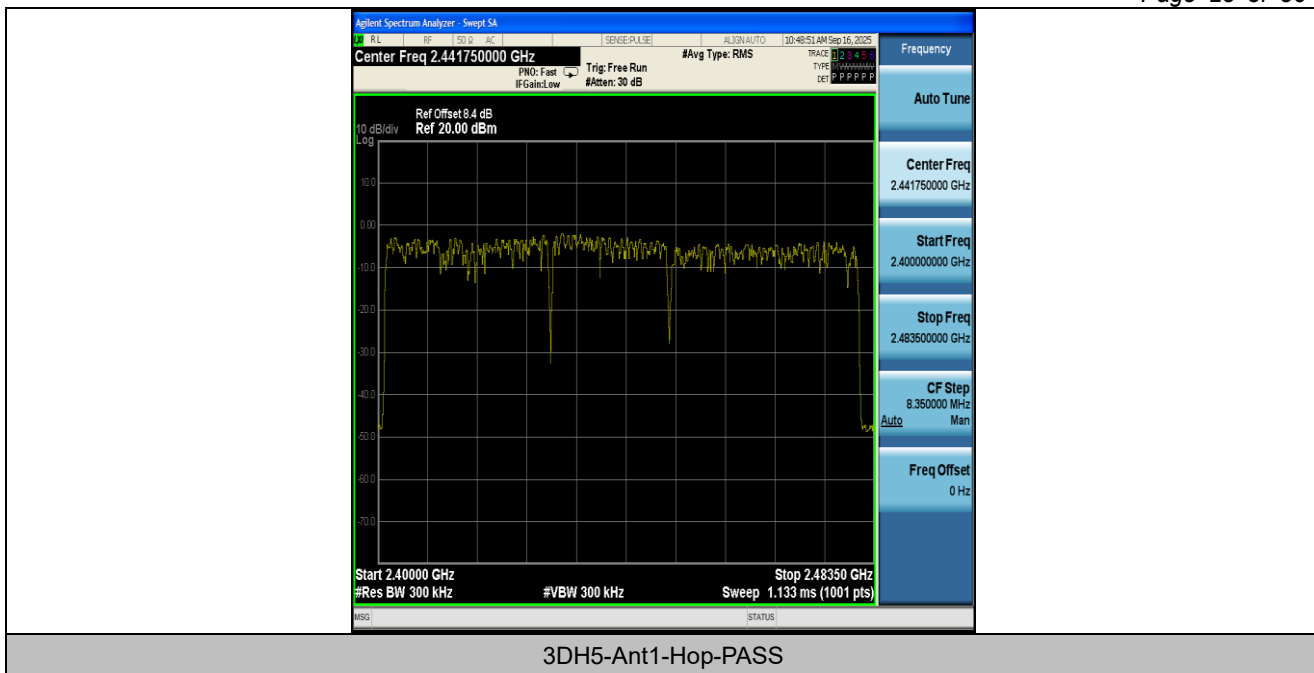



Appendix G: Band edge measurements

Test Result


Test Mode	Antenna	Ch.Name	Frequency [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-2.18	-49.45	≤-22.18	PASS
DH5	Ant1	High	2480	-3.52	-49.02	≤-23.52	PASS
DH5	Ant1	Low	Hop_2402	-3.03	-49.8	≤-23.03	PASS
DH5	Ant1	High	Hop_2480	-3.59	-49.45	≤-23.59	PASS
2DH5	Ant1	Low	2402	-2.37	-49.66	≤-22.37	PASS
2DH5	Ant1	High	2480	-4.04	-49.25	≤-24.04	PASS
2DH5	Ant1	Low	Hop_2402	-2.80	-49.96	≤-22.8	PASS
2DH5	Ant1	High	Hop_2480	-4.92	-49.1	≤-24.92	PASS
3DH5	Ant1	Low	2402	-2.57	-49.16	≤-22.57	PASS
3DH5	Ant1	High	2480	-3.56	-48.68	≤-23.56	PASS
3DH5	Ant1	Low	Hop_2402	-4.47	-49.43	≤-24.47	PASS
3DH5	Ant1	High	Hop_2480	-5.67	-48.47	≤-25.67	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

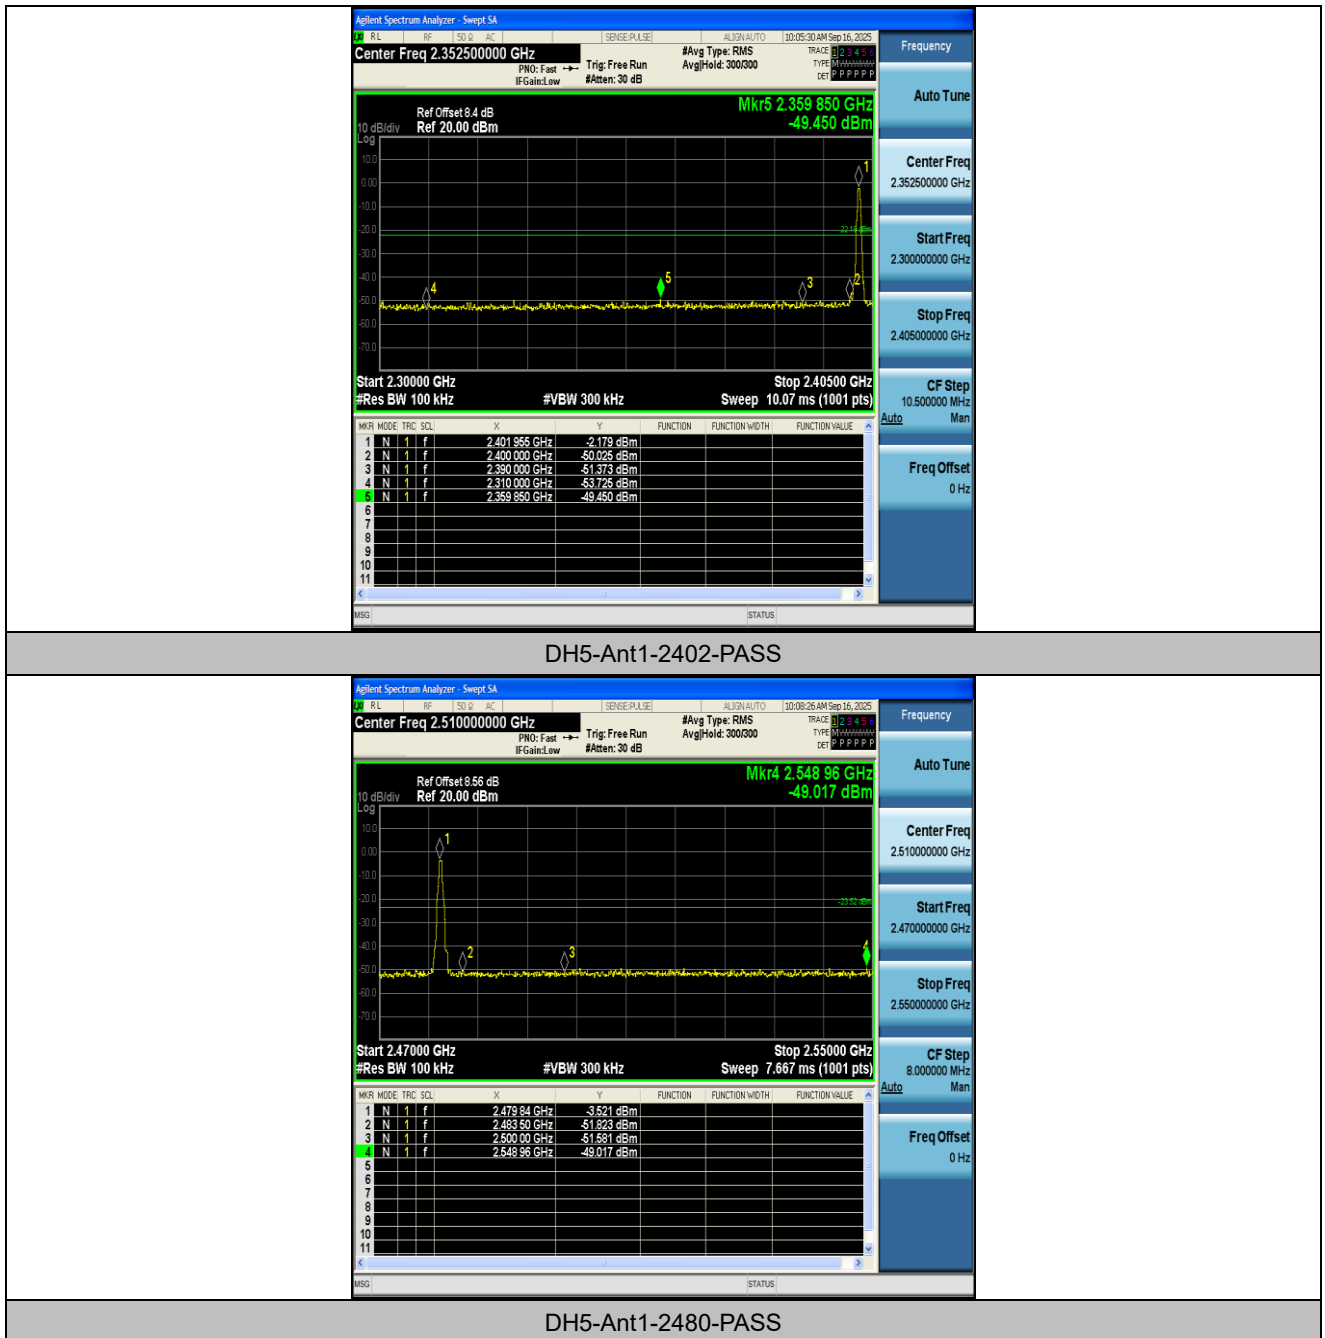

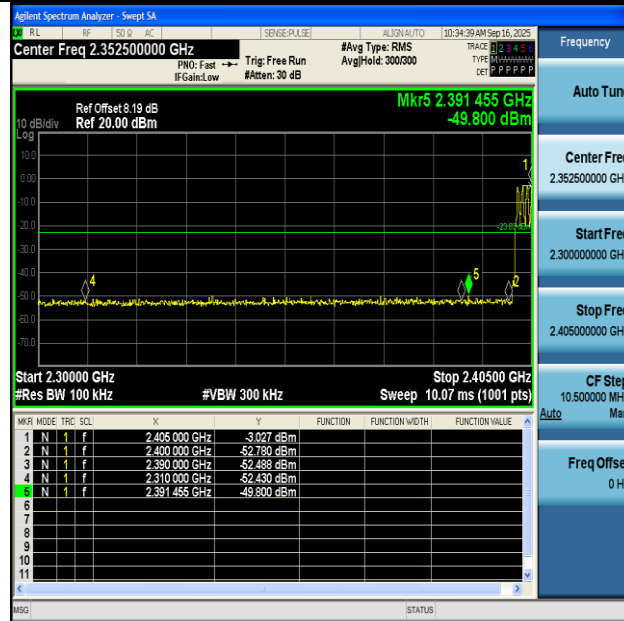


DH5-Ant1-Hop_2402-PASS

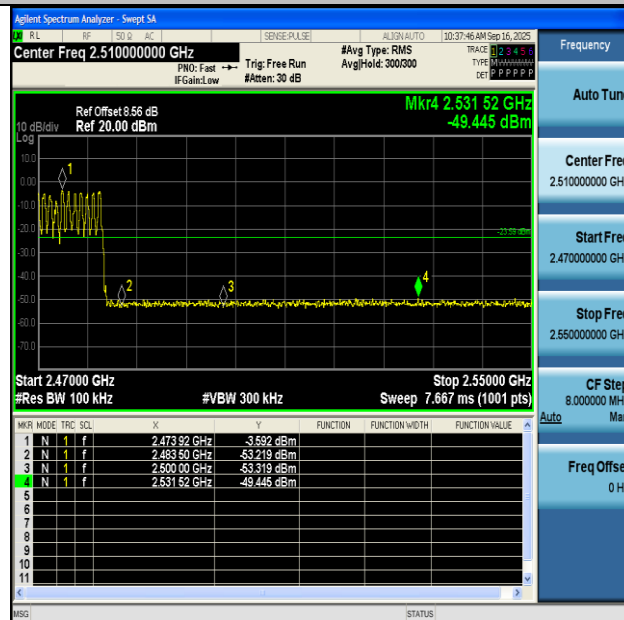


DH5-Ant1-Hop_2480-PASS



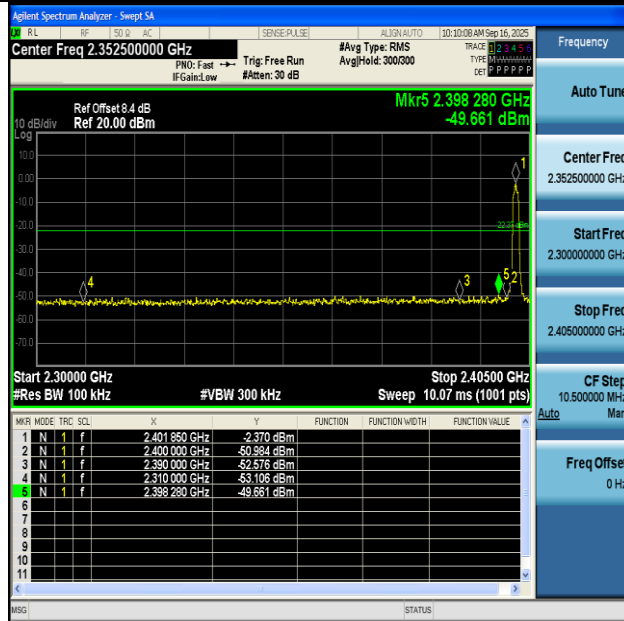


2DH5-Ant1-2402-PASS

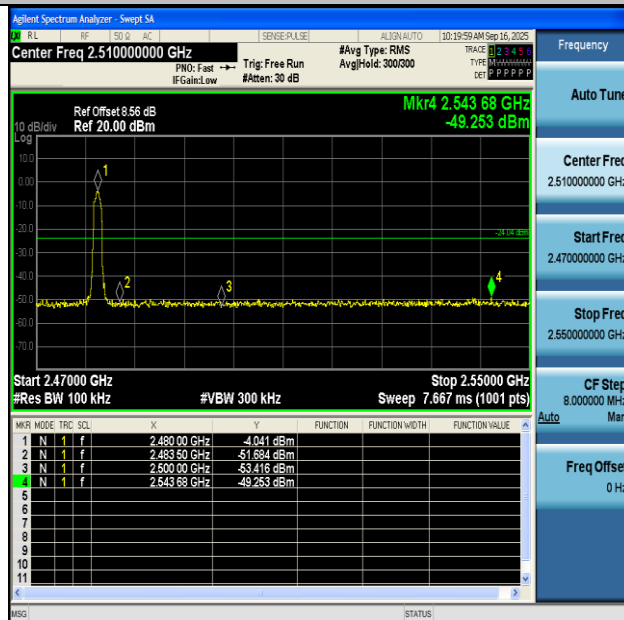


2DH5-Ant1-2480-PASS



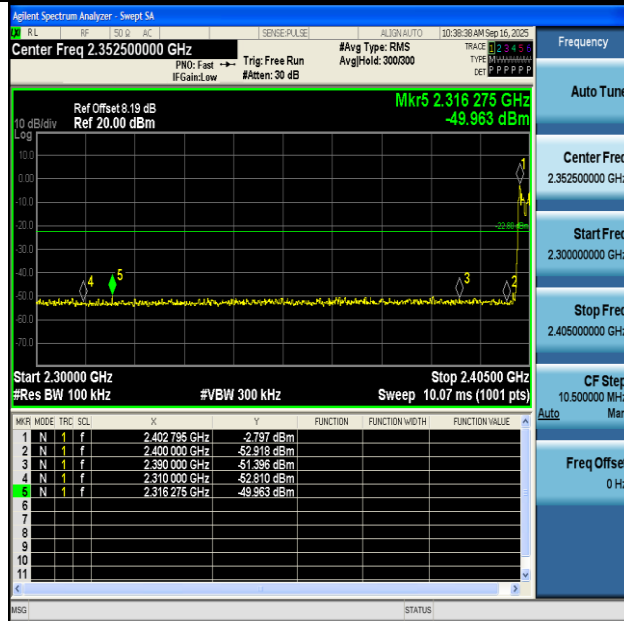


2DH5-Ant1-Hop_2402-PASS

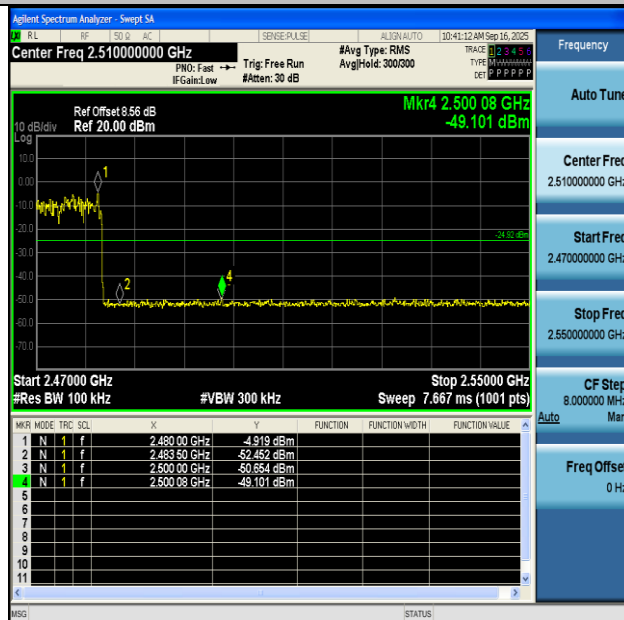


2DH5-Ant1-Hop_2480-PASS



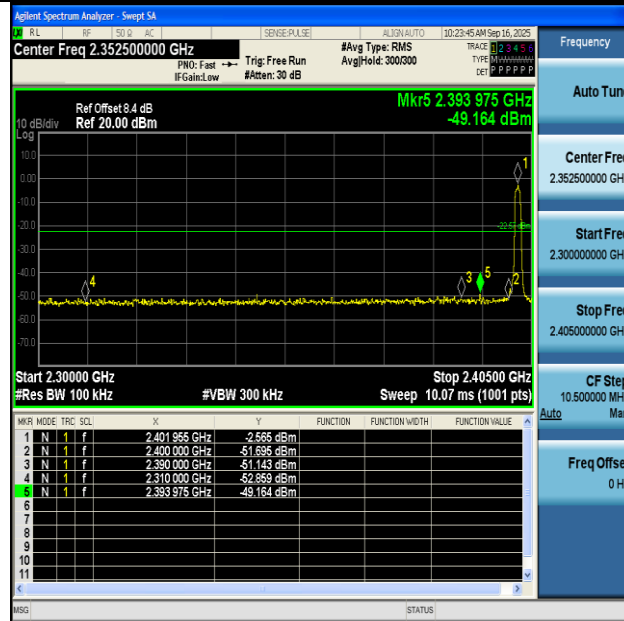


3DH5-Ant1-2402-PASS

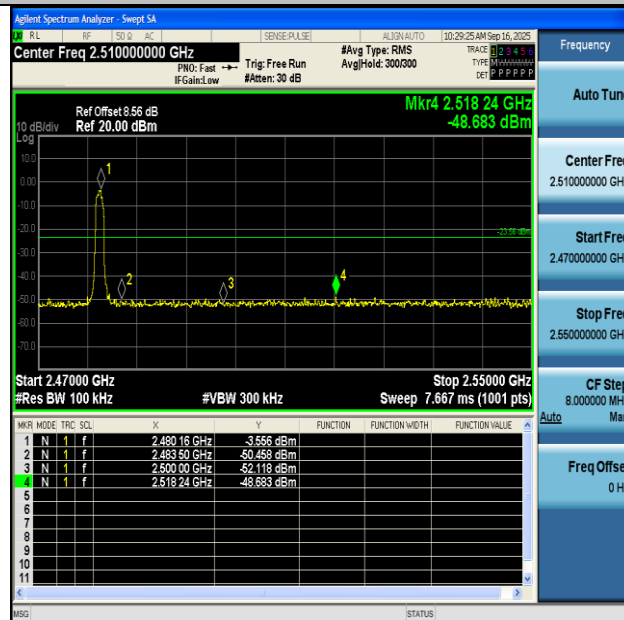


3DH5-Ant1-2480-PASS



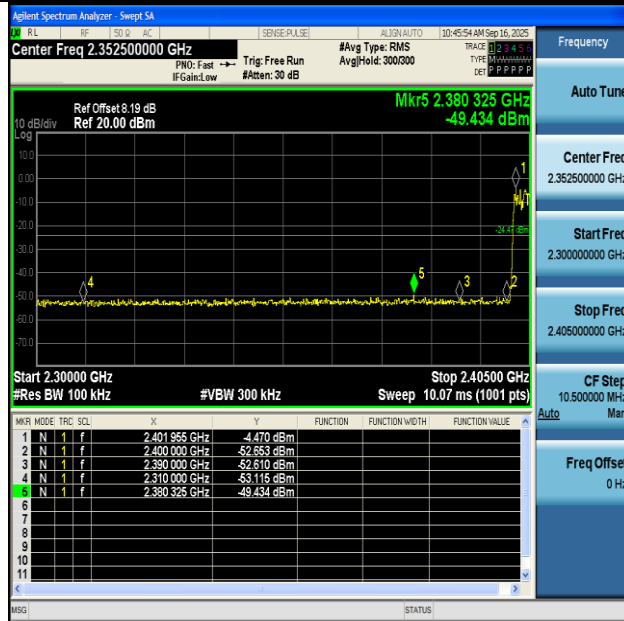

3DH5-Ant1-Hop_2402-PASS

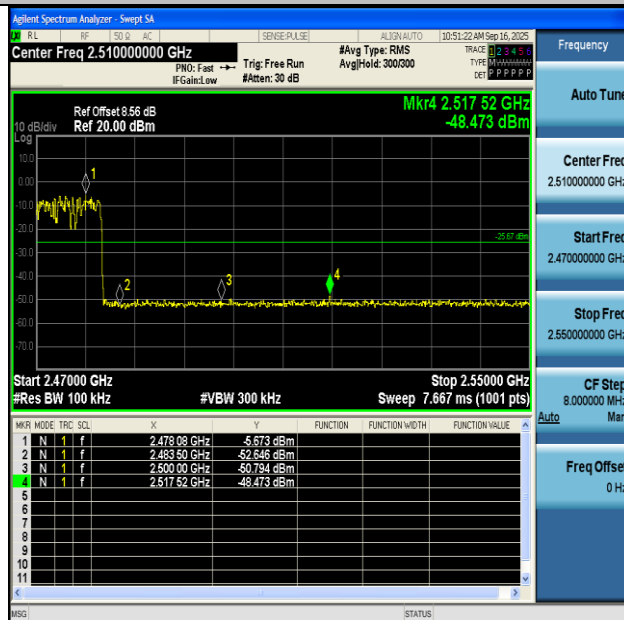

3DH5-Ant1-Hop_2480-PASS





Appendix H: Conducted Spurious Emission

Test Result


Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	-2.75	-2.75	---	PASS
DH5	Ant1	2402	30~1000	-2.75	-48.7	≤ -22.75	PASS
DH5	Ant1	2402	1000~26500	-2.75	-34.75	≤ -22.75	PASS
DH5	Ant1	2441	0~Reference	-2.93	-2.93	---	PASS
DH5	Ant1	2441	30~1000	-2.93	-53	≤ -22.93	PASS
DH5	Ant1	2441	1000~26500	-2.93	-39.4	≤ -22.93	PASS
DH5	Ant1	2480	0~Reference	-4.10	-4.10	---	PASS
DH5	Ant1	2480	30~1000	-4.10	-49.39	≤ -24.1	PASS
DH5	Ant1	2480	1000~26500	-4.10	-42.72	≤ -24.1	PASS
2DH5	Ant1	2402	0~Reference	-2.67	-2.67	---	PASS
2DH5	Ant1	2402	30~1000	-2.67	-54.3	≤ -22.67	PASS
2DH5	Ant1	2402	1000~26500	-2.67	-35.41	≤ -22.67	PASS
2DH5	Ant1	2441	0~Reference	-5.66	-5.66	---	PASS
2DH5	Ant1	2441	30~1000	-5.66	-49.16	≤ -25.66	PASS
2DH5	Ant1	2441	1000~26500	-5.66	-37.45	≤ -25.66	PASS
2DH5	Ant1	2480	0~Reference	-4.70	-4.70	---	PASS
2DH5	Ant1	2480	30~1000	-4.70	-51.03	≤ -24.7	PASS
2DH5	Ant1	2480	1000~26500	-4.70	-43.12	≤ -24.7	PASS
3DH5	Ant1	2402	0~Reference	-4.02	-4.02	---	PASS
3DH5	Ant1	2402	30~1000	-4.02	-54.35	≤ -24.02	PASS
3DH5	Ant1	2402	1000~26500	-4.02	-37.8	≤ -24.02	PASS
3DH5	Ant1	2441	0~Reference	-3.17	-3.17	---	PASS
3DH5	Ant1	2441	30~1000	-3.17	-48.85	≤ -23.17	PASS
3DH5	Ant1	2441	1000~26500	-3.17	-39.35	≤ -23.17	PASS
3DH5	Ant1	2480	0~Reference	-4.26	-4.26	---	PASS
3DH5	Ant1	2480	30~1000	-4.26	-56.02	≤ -24.26	PASS
3DH5	Ant1	2480	1000~26500	-4.26	-43	≤ -24.26	PASS


Note: offset(dB) in Reference test plots = cable loss(dB) + attenuator factor(dB); For spurious emissions plots from 30MHz to 26.5GHz, the cable loss and attenuator factors have been set in the 'Input Correction' of the Spectrum Analyzer during the test.






Test Graphs

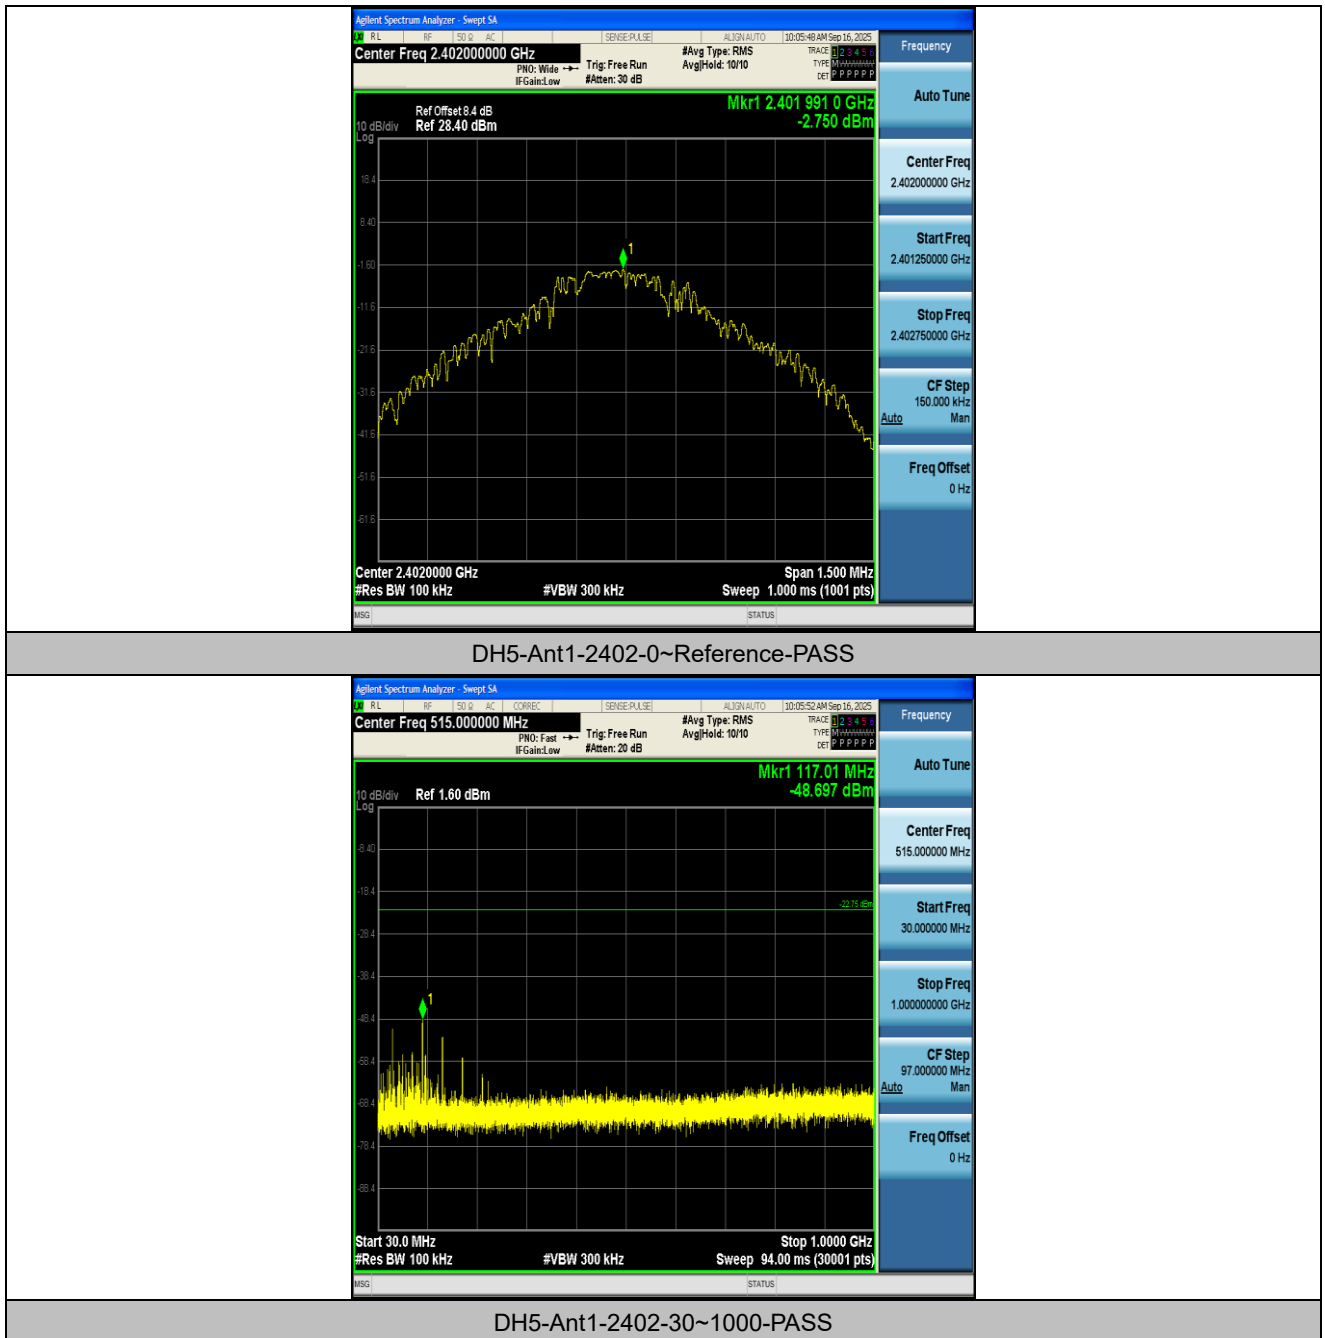

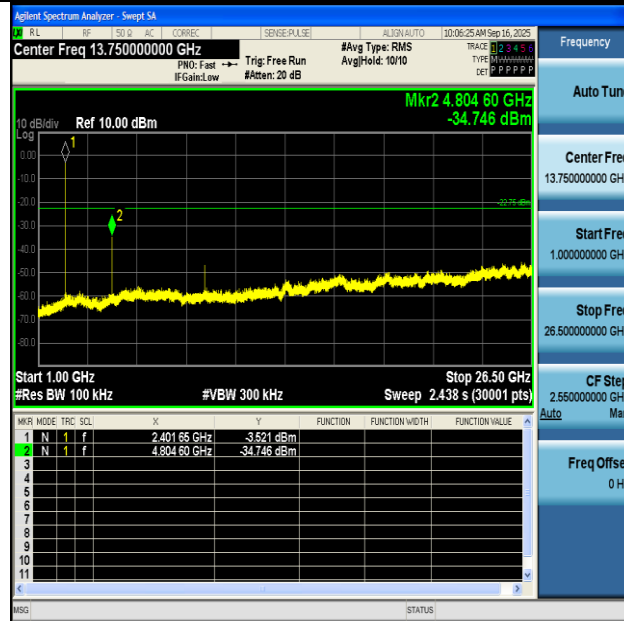


DH5-Ant1-2402-1000~26500-PASS

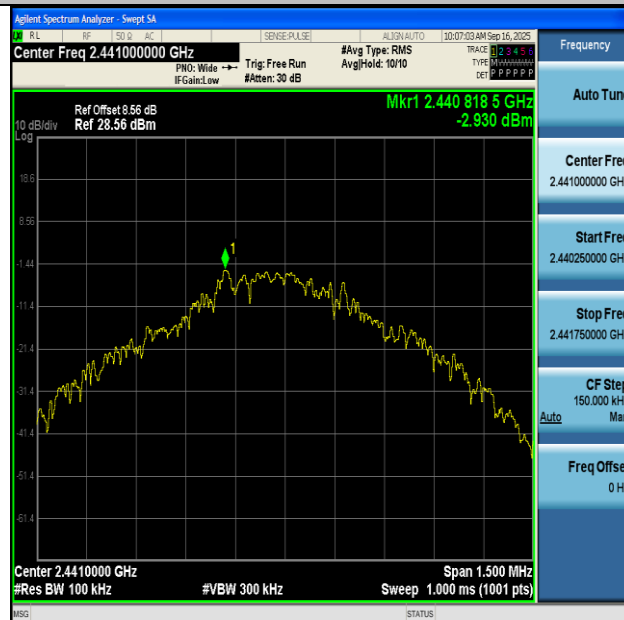


DH5-Ant1-2441-0~Reference-PASS



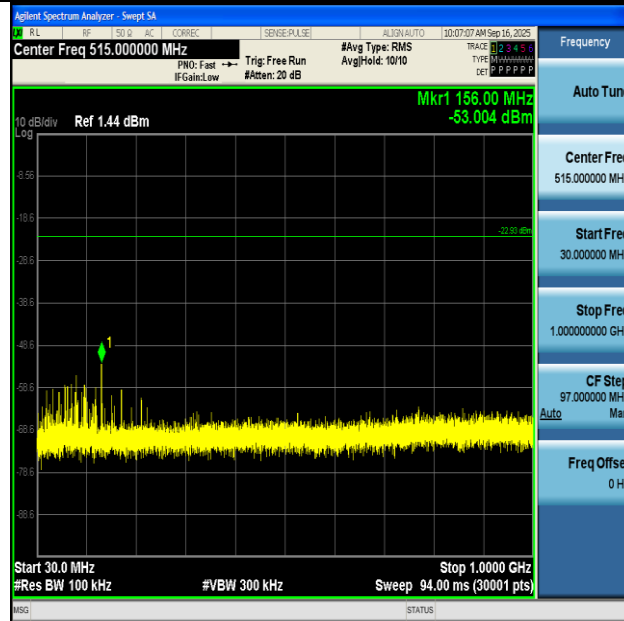


DH5-Ant1-2441-30~1000-PASS

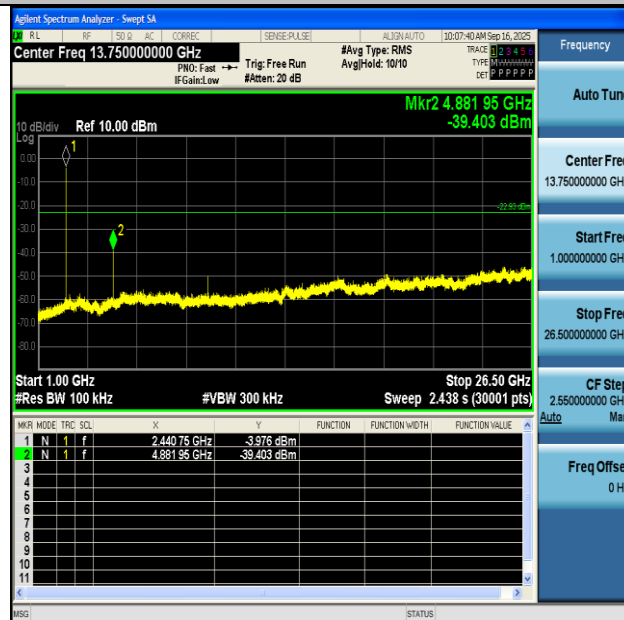


DH5-Ant1-2441-1000~26500-PASS



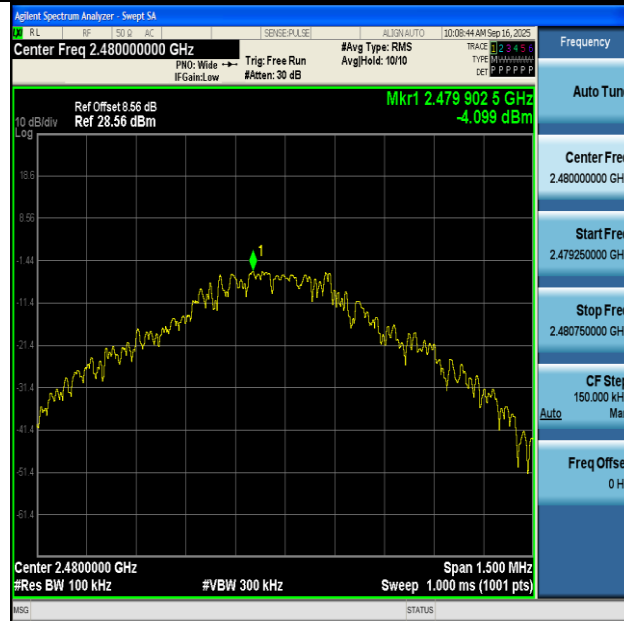


DH5-Ant1-2480-0~Reference-PASS

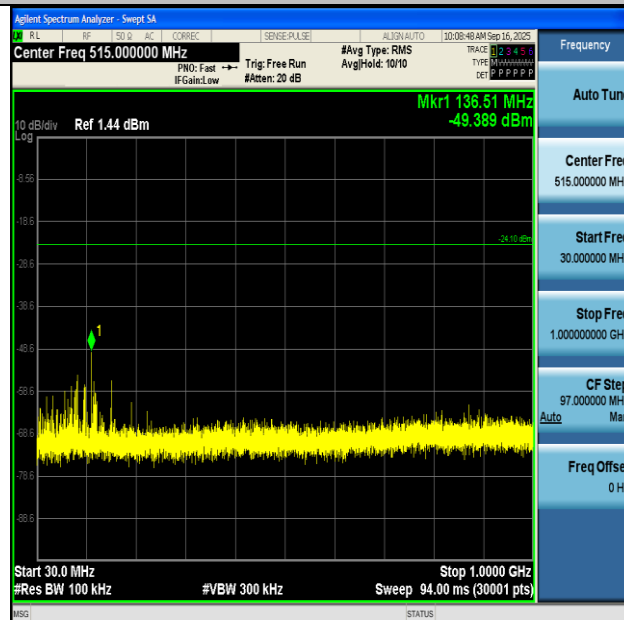


DH5-Ant1-2480-30~1000-PASS



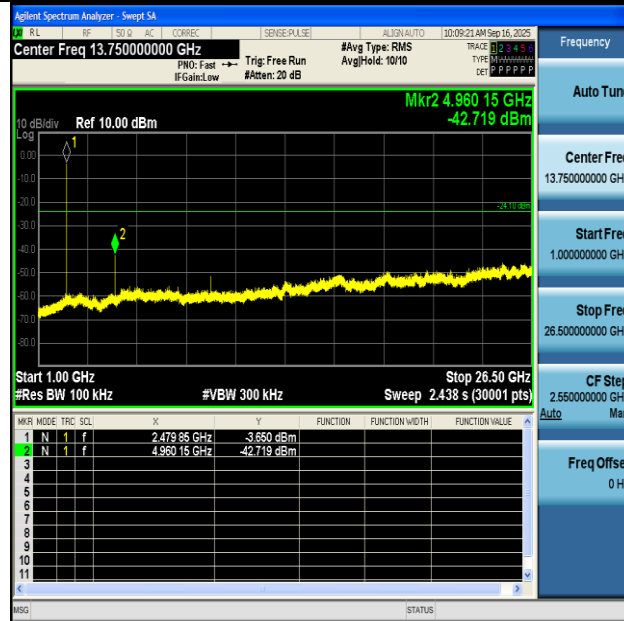


DH5-Ant1-2480-1000~26500-PASS

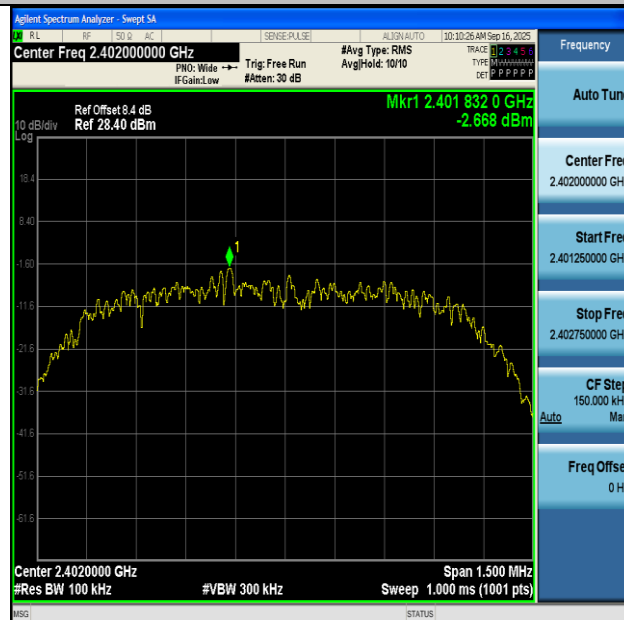


2DH5-Ant1-2402-0~Reference-PASS



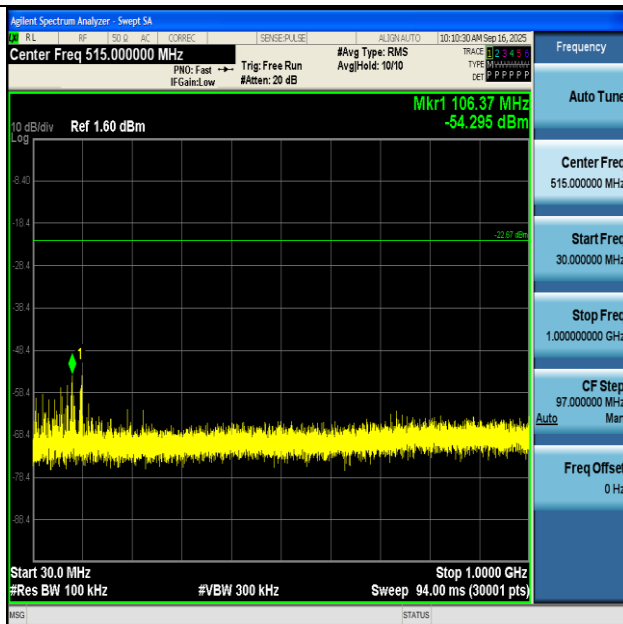

2DH5-Ant1-2402-30~1000-PASS

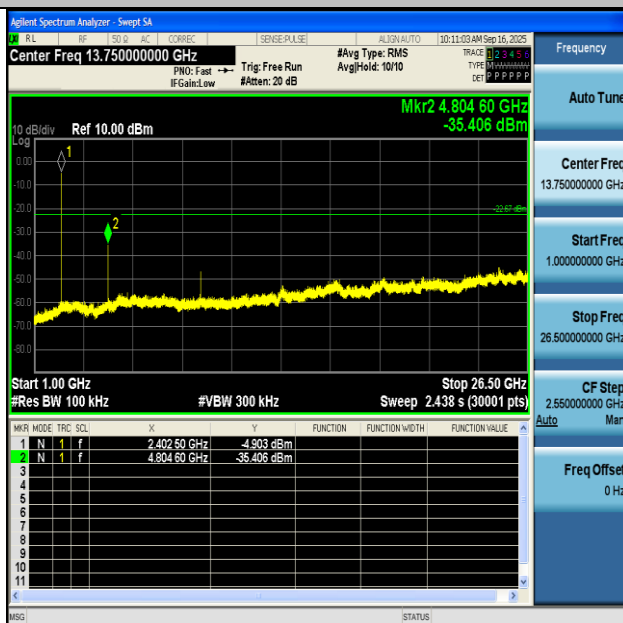


2DH5-Ant1-2402-1000~26500-PASS






2DH5-Ant1-2441-0~Reference-PASS

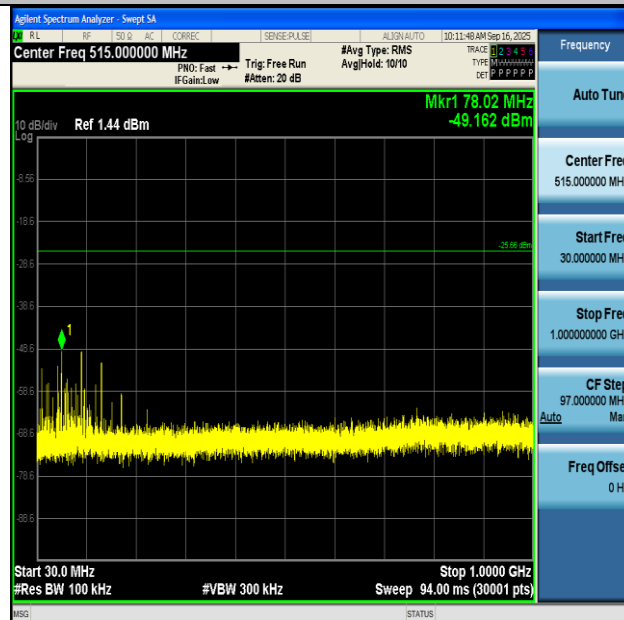

2DH5-Ant1-2441-30~1000-PASS



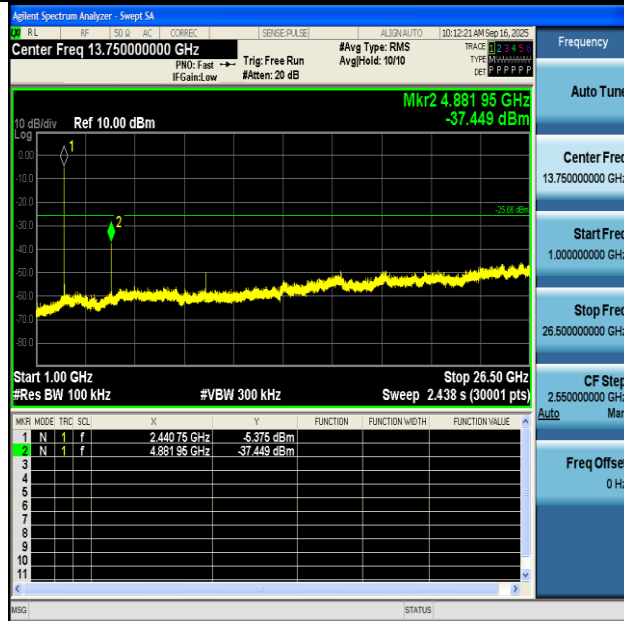


2DH5-Ant1-2441-1000~26500-PASS




2DH5-Ant1-2480-0~Reference-PASS



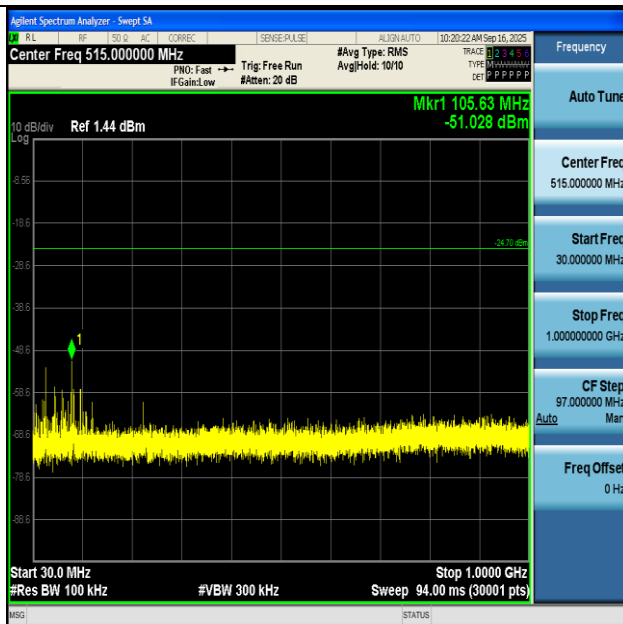

2DH5-Ant1-2480-30~1000-PASS

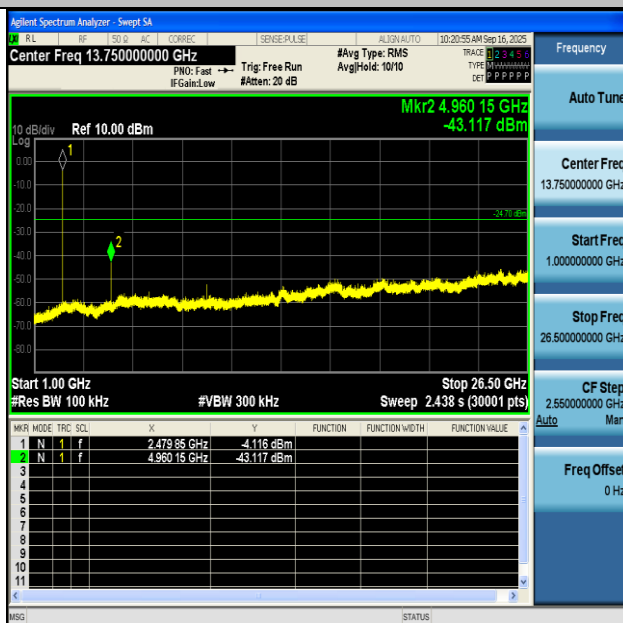


2DH5-Ant1-2480-1000~26500-PASS






3DH5-Ant1-2402-0~Reference-PASS

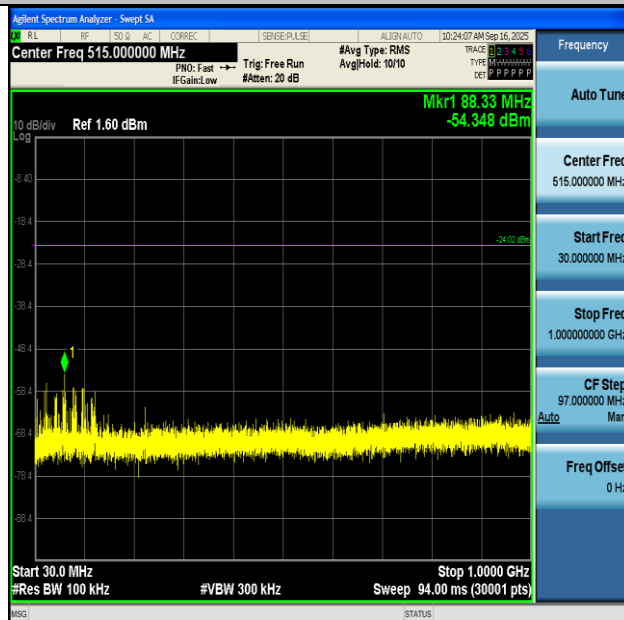


3DH5-Ant1-2402-30~1000-PASS



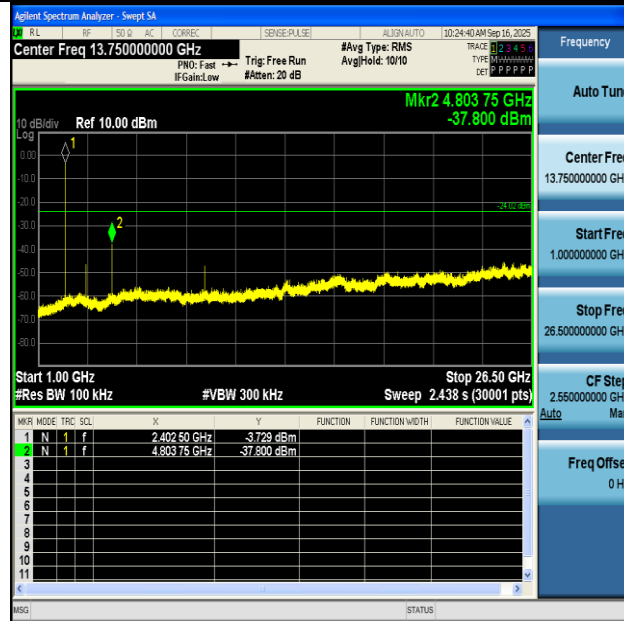


3DH5-Ant1-2402-1000~26500-PASS

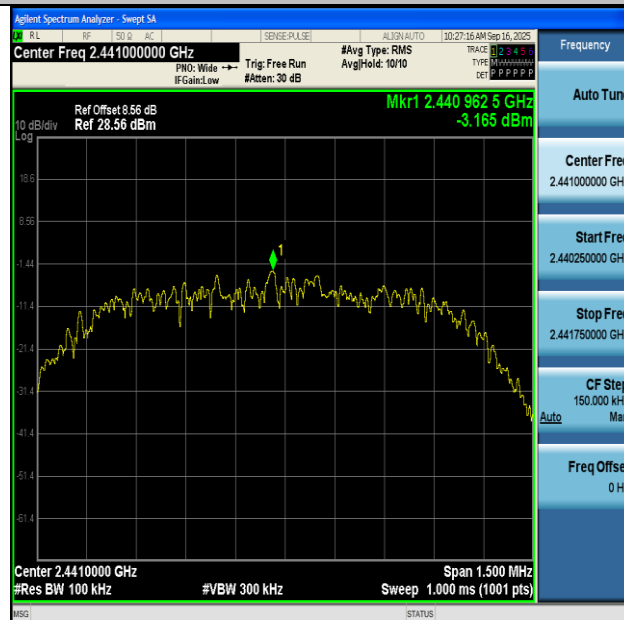


3DH5-Ant1-2441-0~Reference-PASS



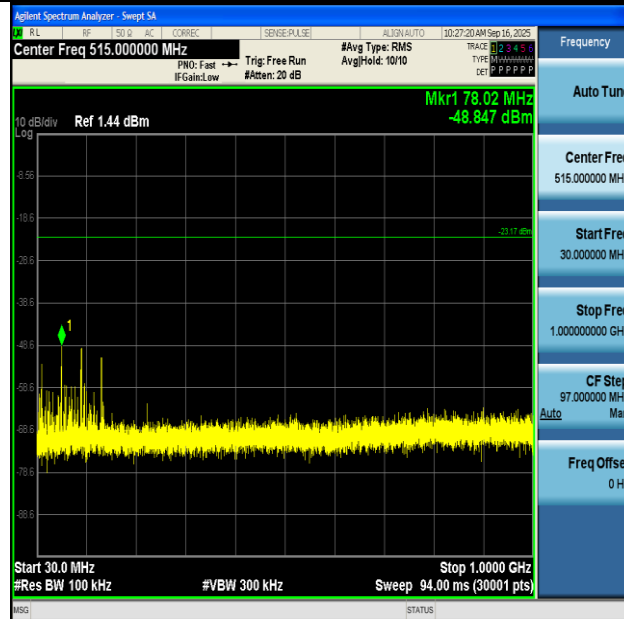

3DH5-Ant1-2441-30~1000-PASS

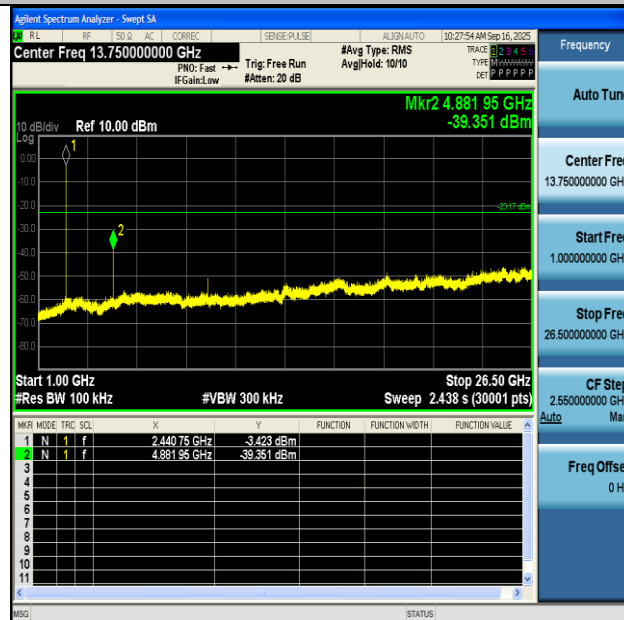


3DH5-Ant1-2441-1000~26500-PASS






3DH5-Ant1-2480-0~Reference-PASS

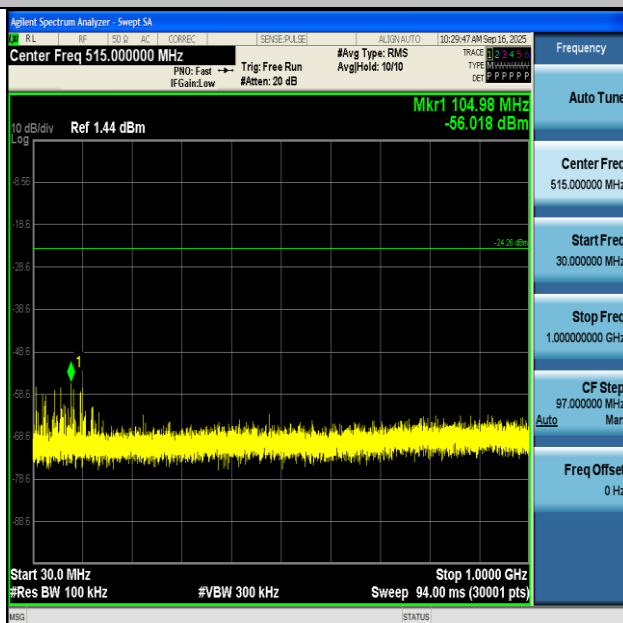

3DH5-Ant1-2480-30~1000-PASS



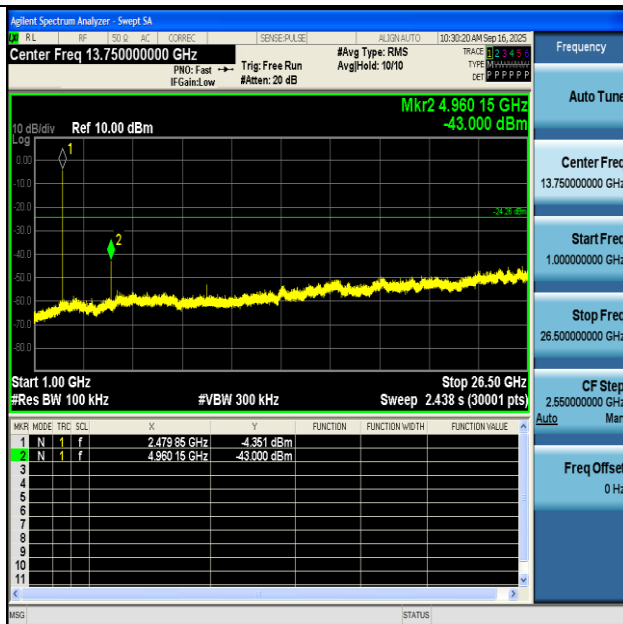

3DH5-Ant1-2480-1000~26500-PASS





Appendix I: Duty Cycle

Test Result


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
DH5	Ant1	2402	2.90	3.75	77.33	1.12
DH5	Ant1	2441	2.90	3.75	77.33	1.12
DH5	Ant1	2480	2.90	3.75	77.33	1.12
2DH5	Ant1	2402	2.90	3.75	77.33	1.12
2DH5	Ant1	2441	2.90	3.75	77.33	1.12
2DH5	Ant1	2480	2.91	3.75	77.60	1.10
3DH5	Ant1	2402	2.91	3.75	77.60	1.10
3DH5	Ant1	2441	2.90	3.75	77.33	1.12
3DH5	Ant1	2480	2.90	3.75	77.33	1.12


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

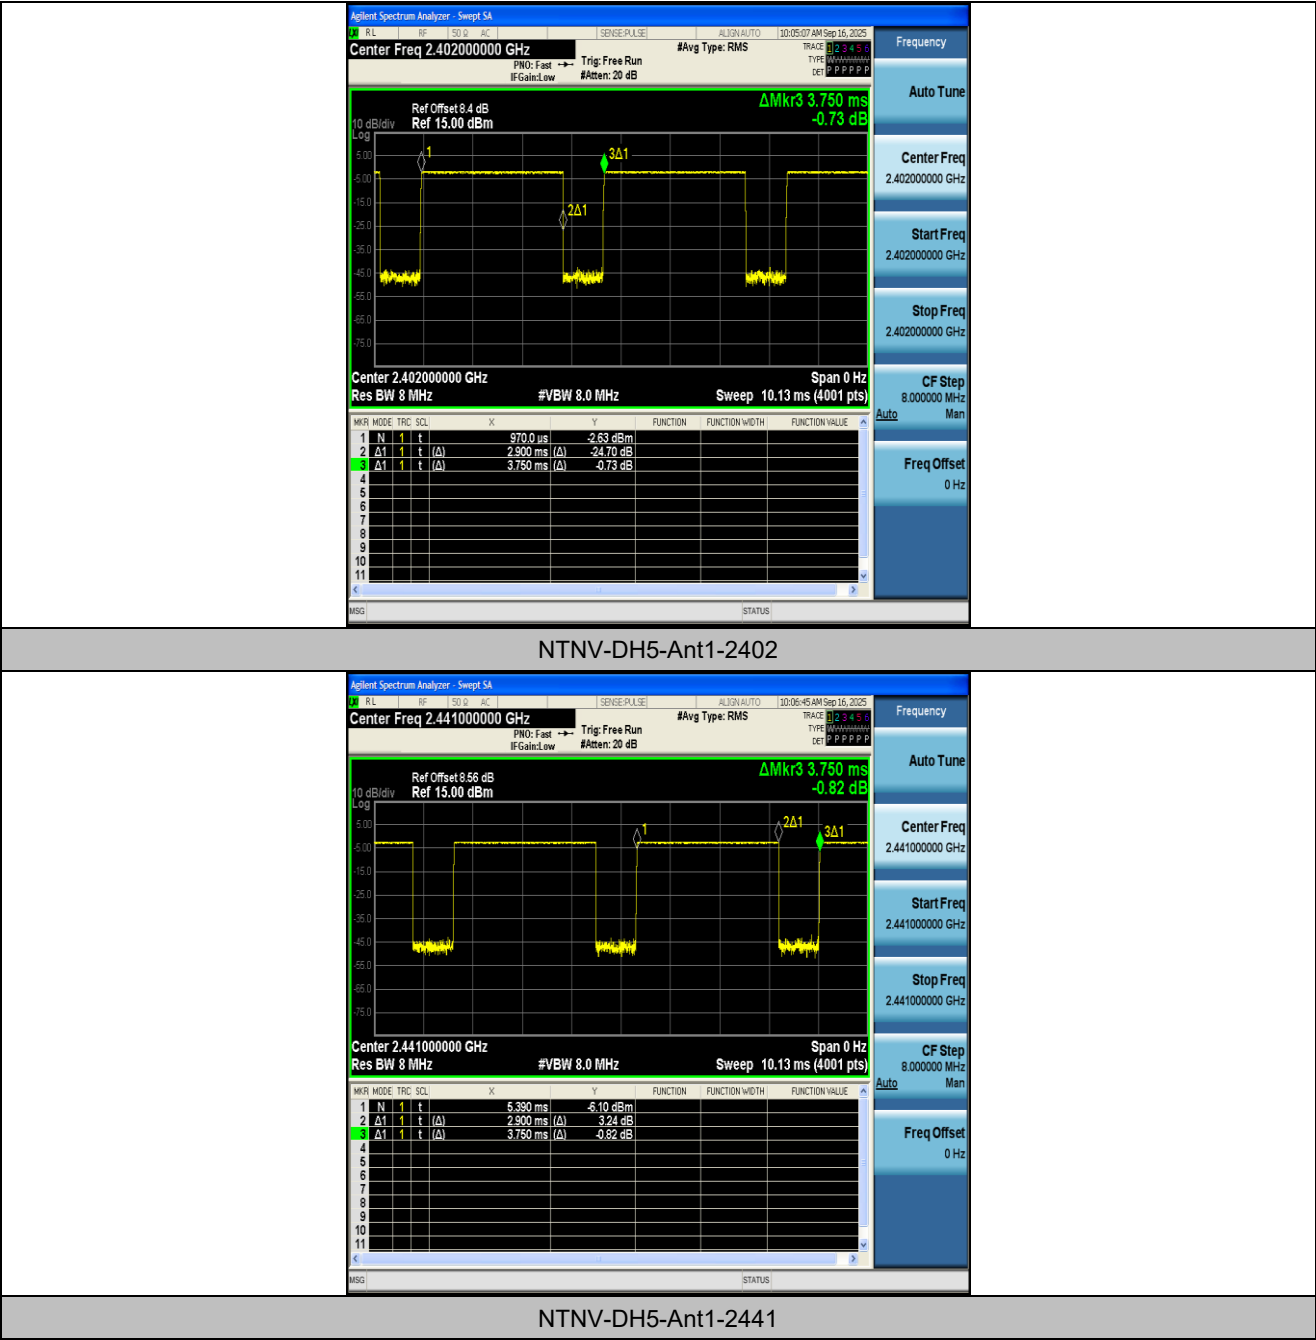

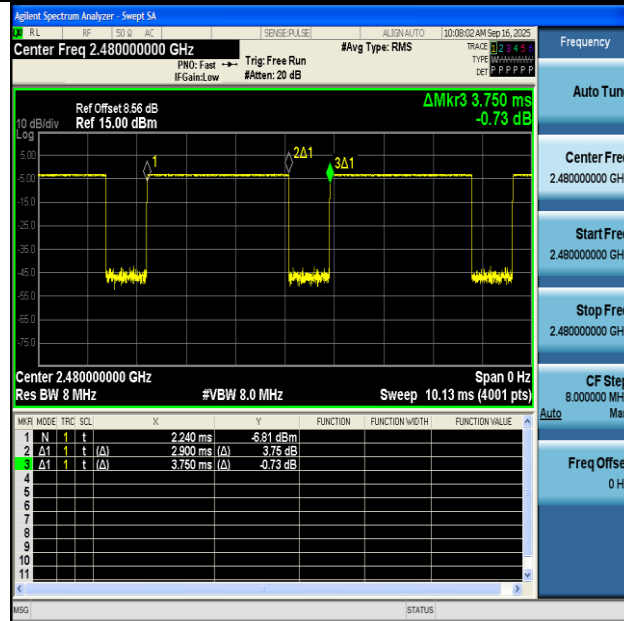


NTNV-DH5-Ant1-2480

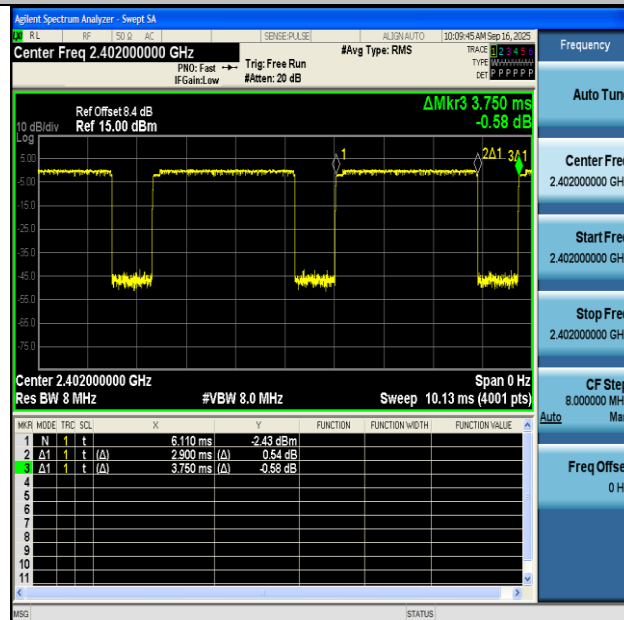


NTNV-2DH5-Ant1-2402



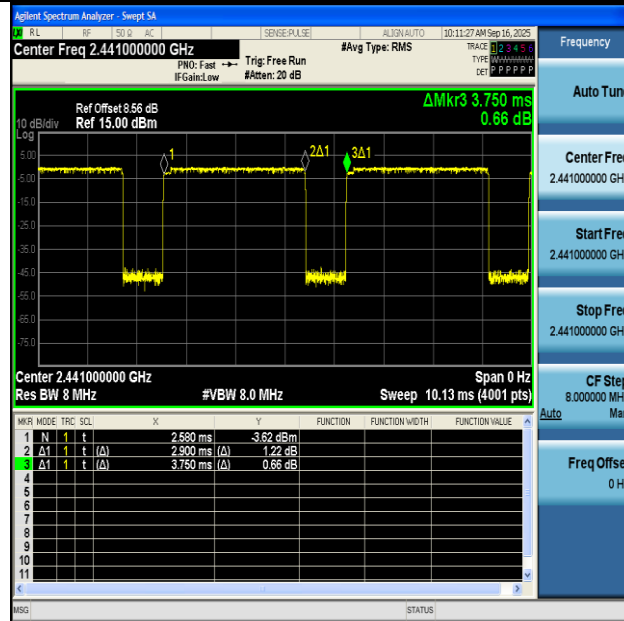


NTNV-2DH5-Ant1-2441

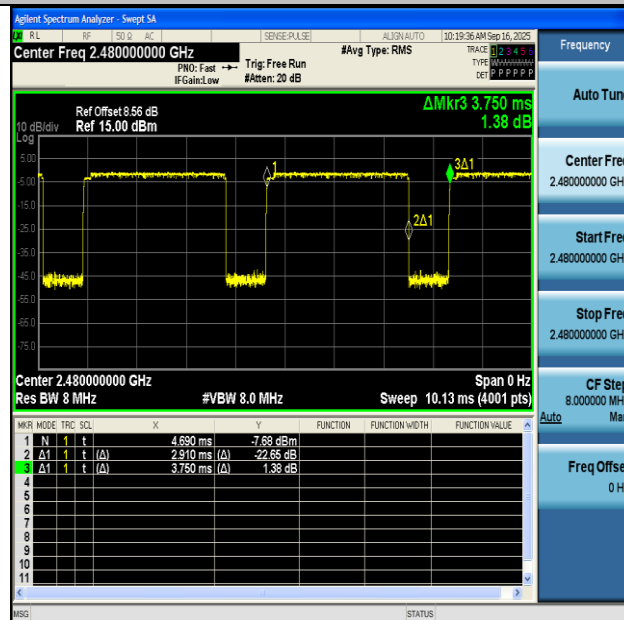


NTNV-2DH5-Ant1-2480



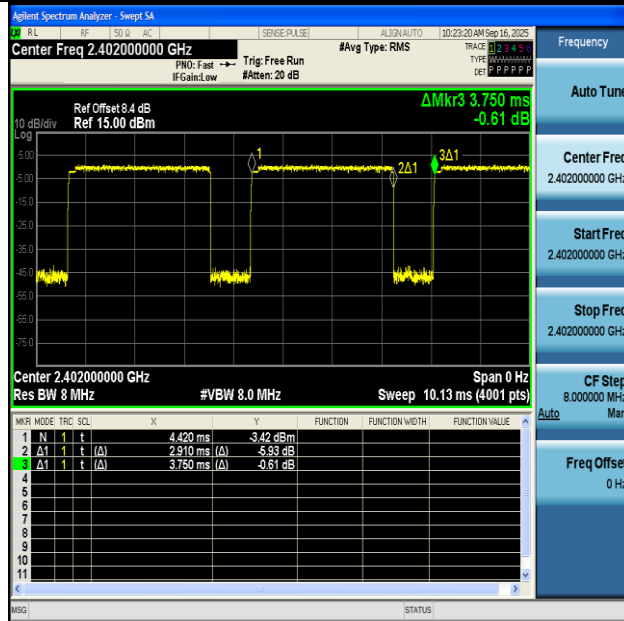


NTNV-3DH5-Ant1-2402

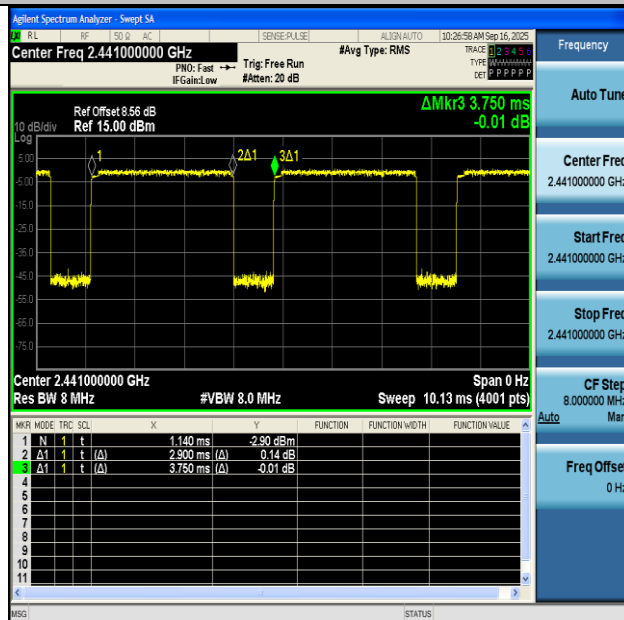

NTNV-3DH5-Ant1-2441



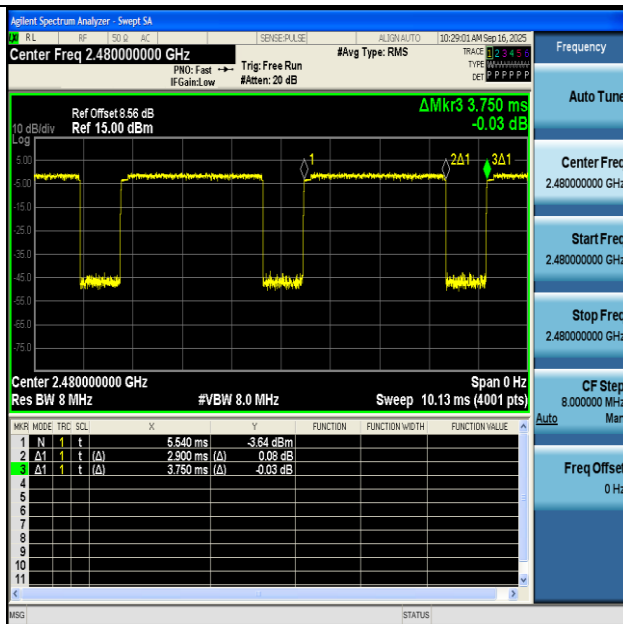

NTNV-3DH5-Ant1-2480

