



Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	98.96	0.05	0.08
NVNT	b	2437	Ant1	98.96	0.05	0.08
NVNT	b	2462	Ant1	98.96	0.05	0.08
NVNT	g	2412	Ant1	94.07	0.27	0.48
NVNT	g	2437	Ant1	94.07	0.27	0.48
NVNT	g	2462	Ant1	94.07	0.27	0.48
NVNT	n20	2412	Ant1	93.66	0.28	0.52
NVNT	n20	2437	Ant1	93.66	0.28	0.52
NVNT	n20	2462	Ant1	93.66	0.28	0.52

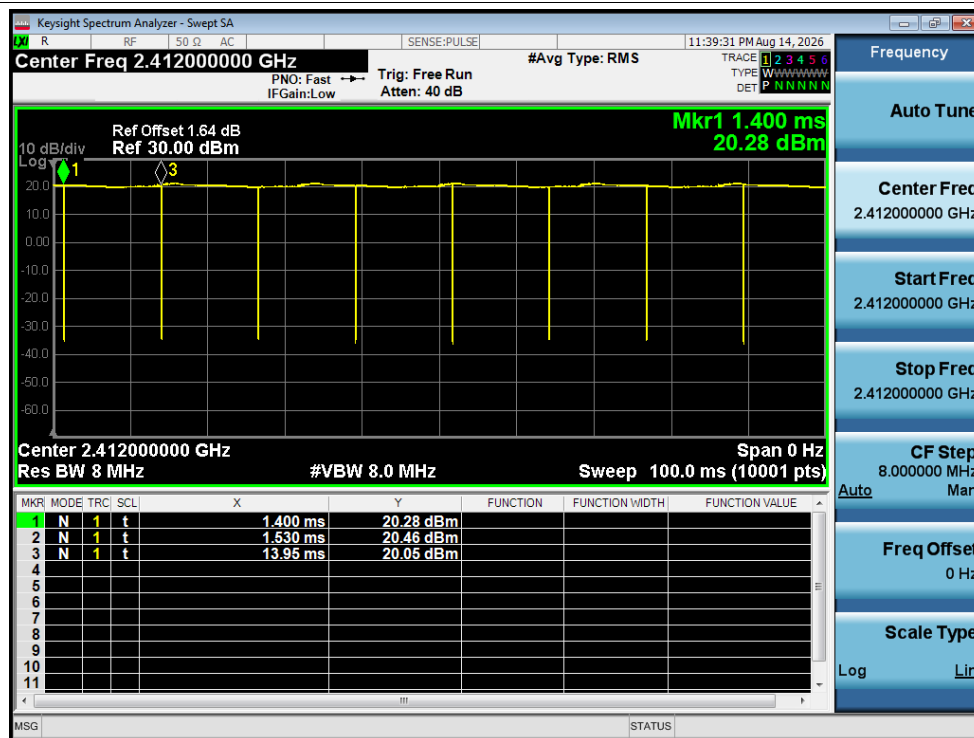


Duty Cycle NVNT b 2412MHz Ant1

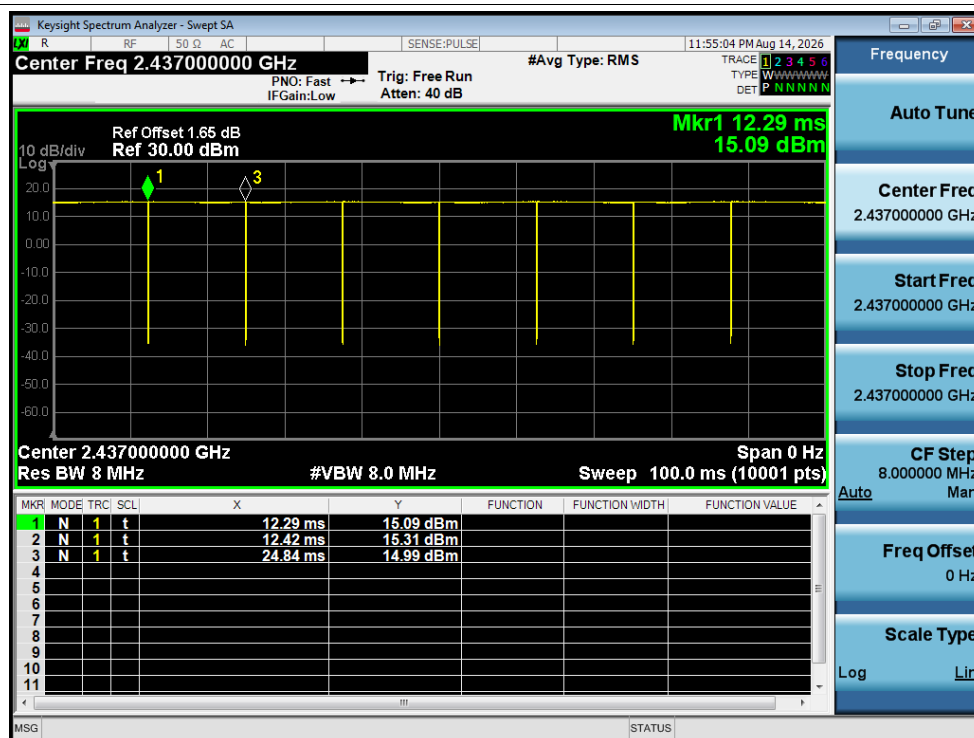


Duty Cycle NVNT b 2437MHz Ant1

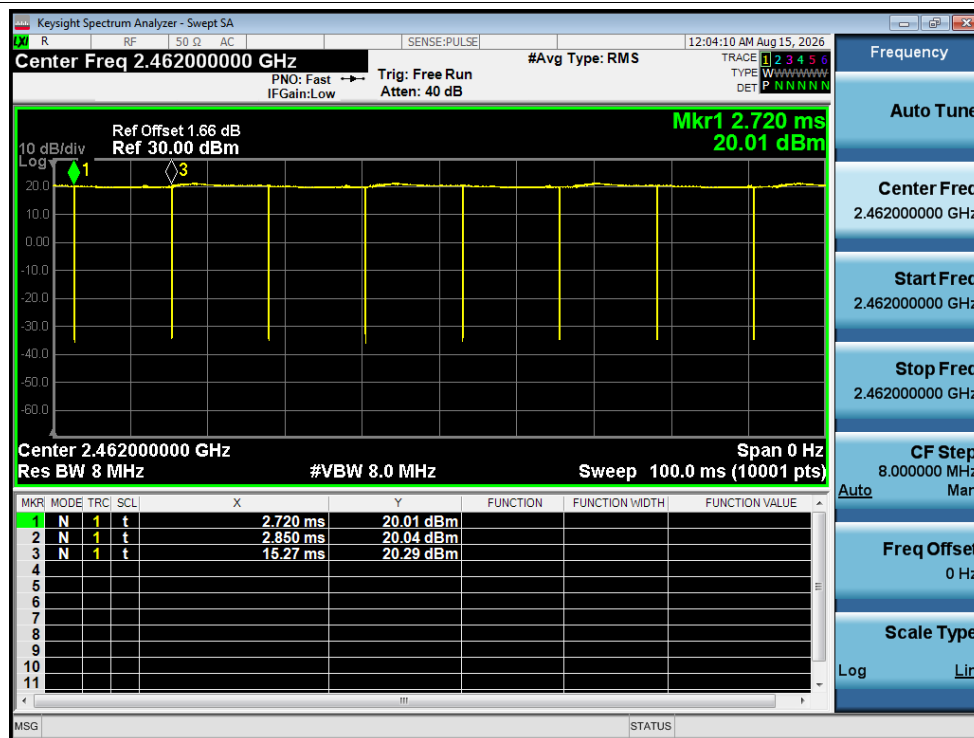


Duty Cycle NVNT b 2462MHz Ant1

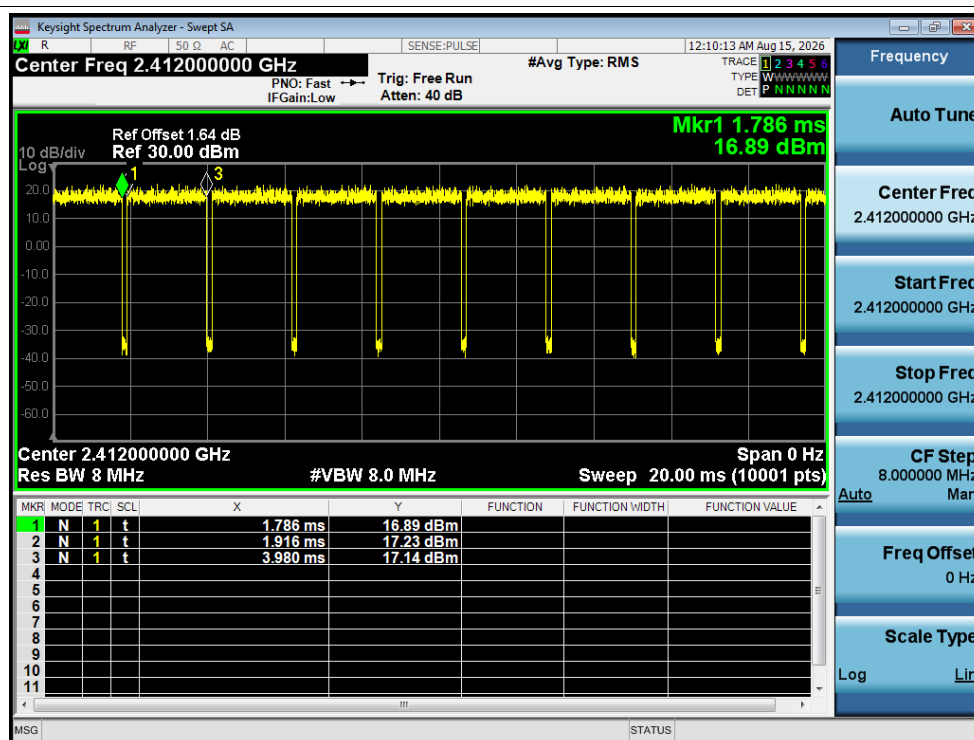


Duty Cycle NVNT g 2412MHz Ant1

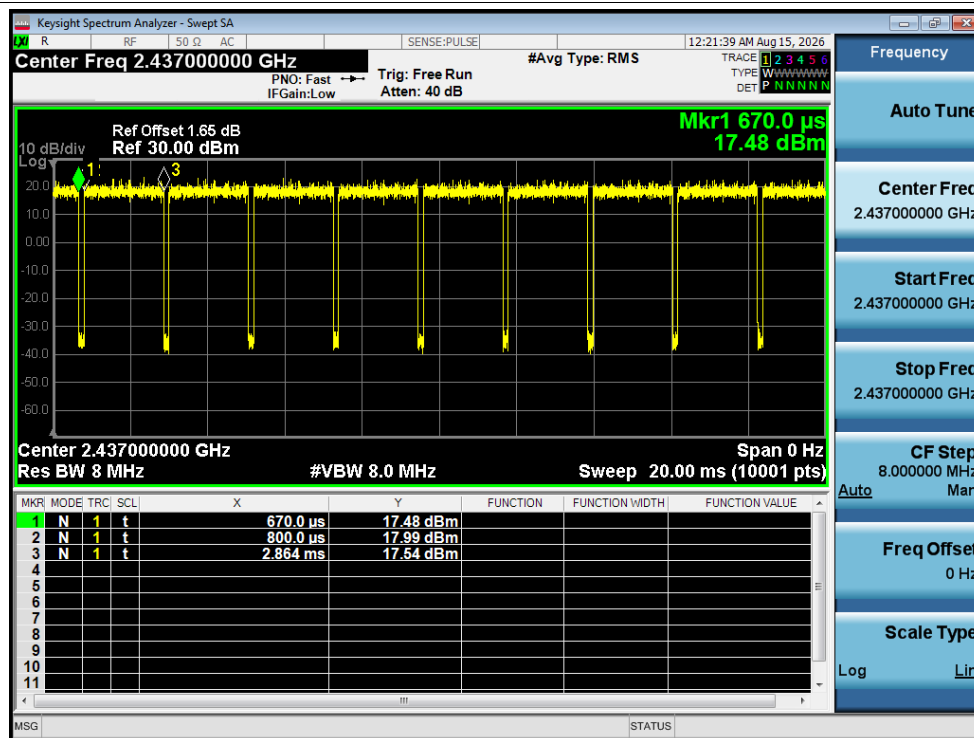


Duty Cycle NVNT g 2437MHz Ant1

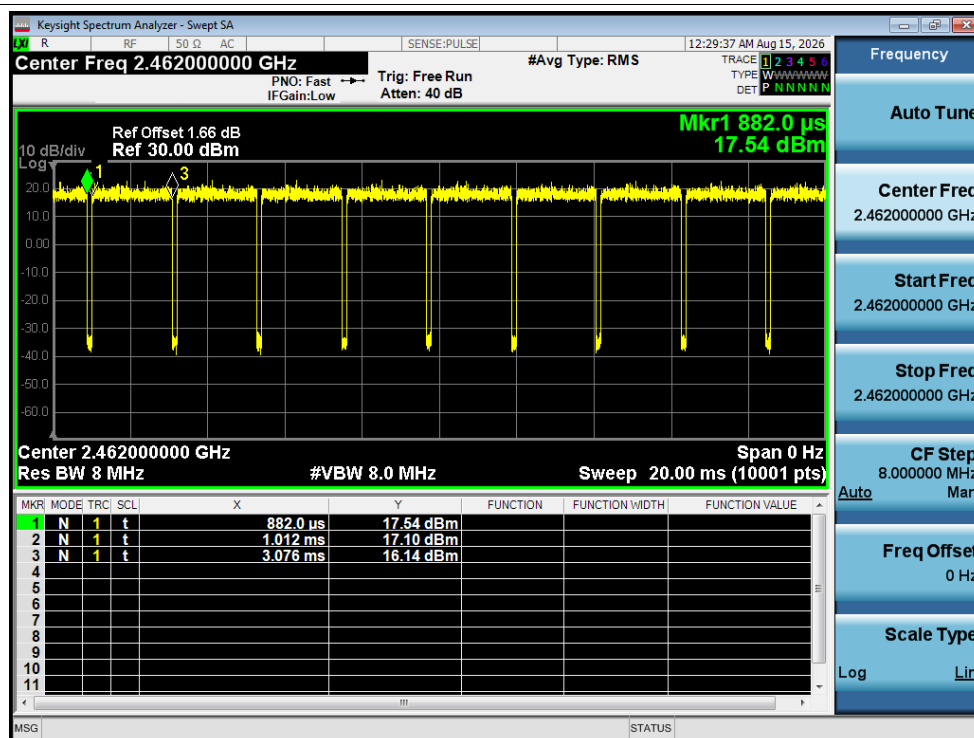


Duty Cycle NVNT g 2462MHz Ant1

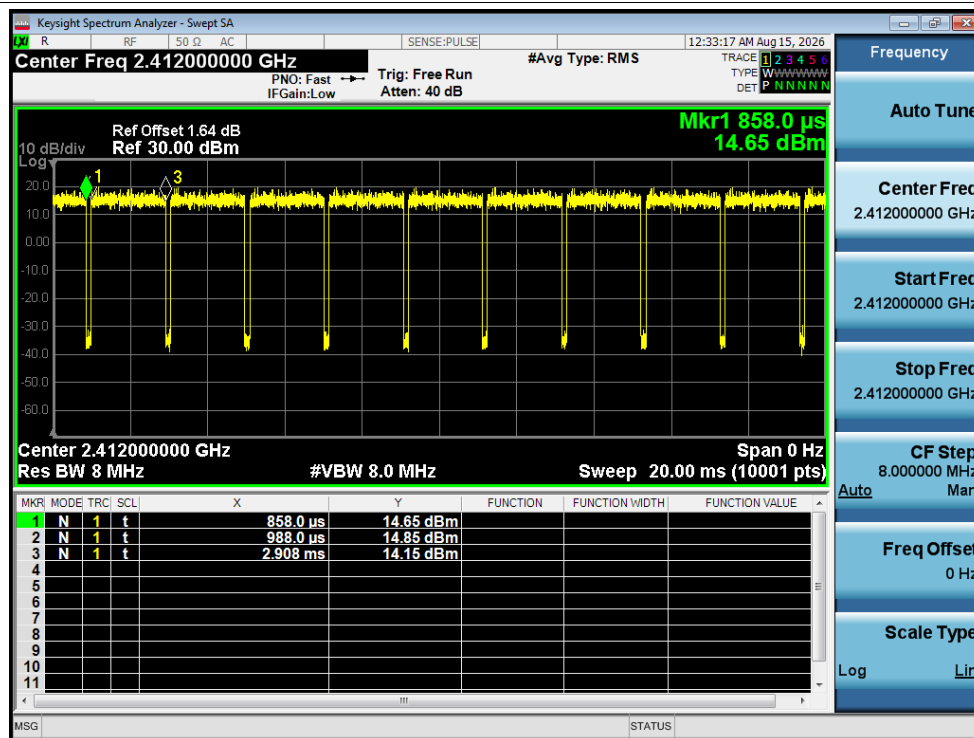

Duty Cycle NVNT n20 2412MHz Ant1

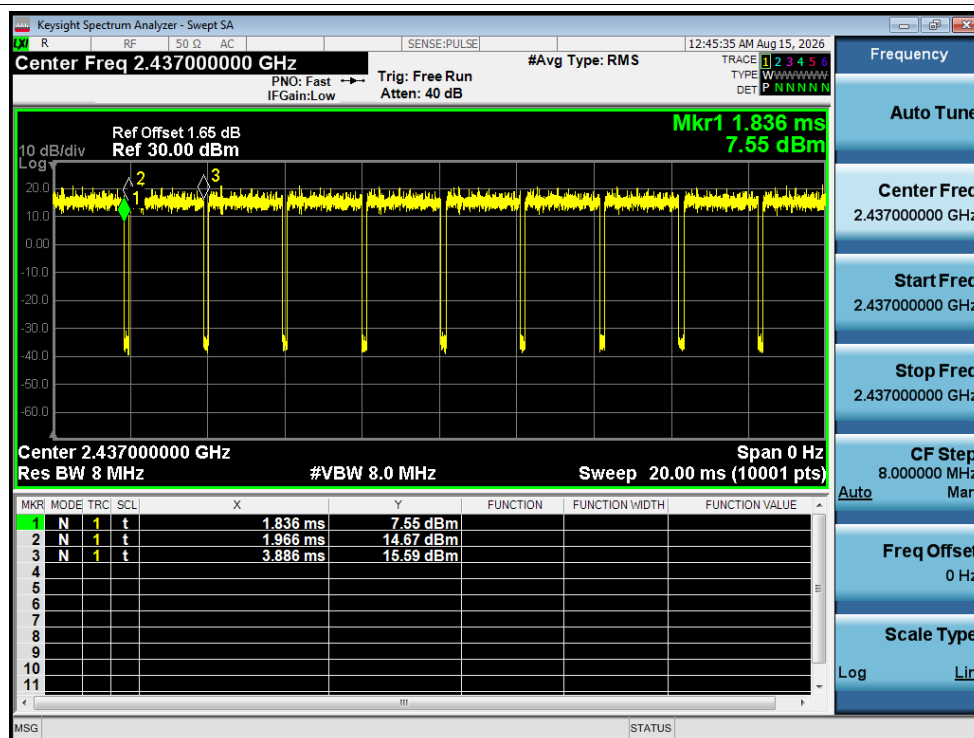

Duty Cycle NVNT n20 2437MHz Ant1

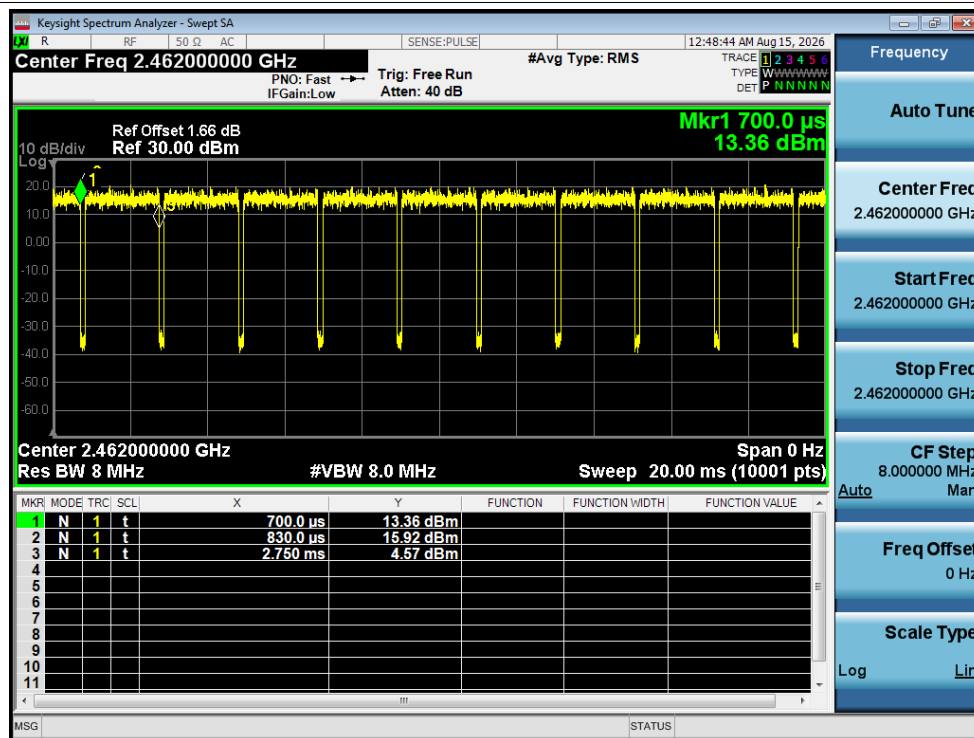


Duty Cycle NVNT n20 2462MHz Ant1

Maximum Average Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Conducted Power (W)	Limit Conducted(dBm)	Verdict
NVNT	b	2412	Ant1	16.7	0.04677	30	Pass
NVNT	b	2437	Ant1	16.94	0.04943	30	Pass
NVNT	b	2462	Ant1	16.71	0.04688	30	Pass
NVNT	g	2412	Ant1	15.53	0.03573	30	Pass
NVNT	g	2437	Ant1	15.84	0.03837	30	Pass
NVNT	g	2462	Ant1	15.56	0.03597	30	Pass
NVNT	n20	2412	Ant1	13.19	0.02084	30	Pass
NVNT	n20	2437	Ant1	13.53	0.02254	30	Pass
NVNT	n20	2462	Ant1	13.73	0.0236	30	Pass

-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	9.178	0.5	Pass
NVNT	b	2437	Ant1	9.178	0.5	Pass
NVNT	b	2462	Ant1	9.181	0.5	Pass
NVNT	g	2412	Ant1	16.45	0.5	Pass
NVNT	g	2437	Ant1	16.39	0.5	Pass
NVNT	g	2462	Ant1	16.41	0.5	Pass
NVNT	n20	2412	Ant1	17.62	0.5	Pass
NVNT	n20	2437	Ant1	17.61	0.5	Pass
NVNT	n20	2462	Ant1	17.65	0.5	Pass

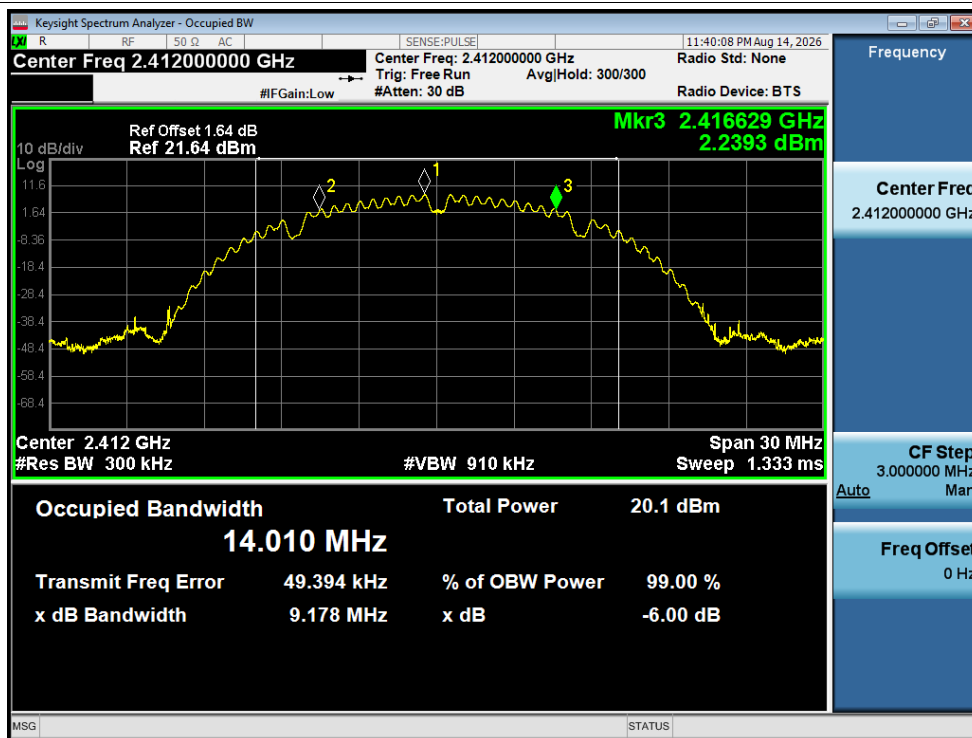


-6dB Bandwidth NVNT b 2412MHz Ant1

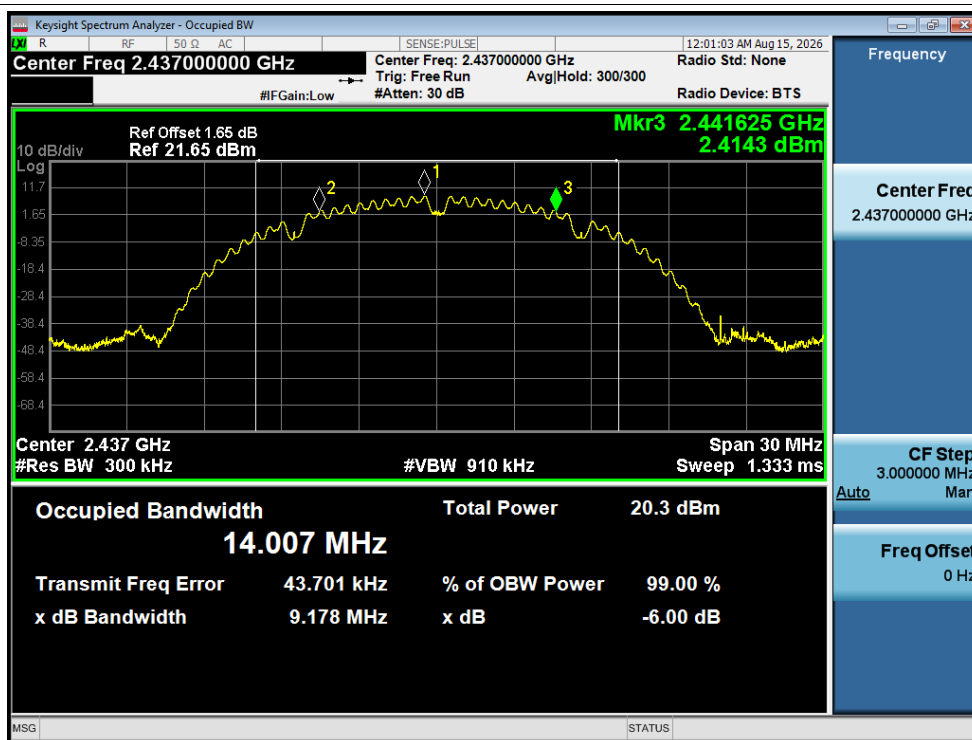


-6dB Bandwidth NVNT b 2437MHz Ant1

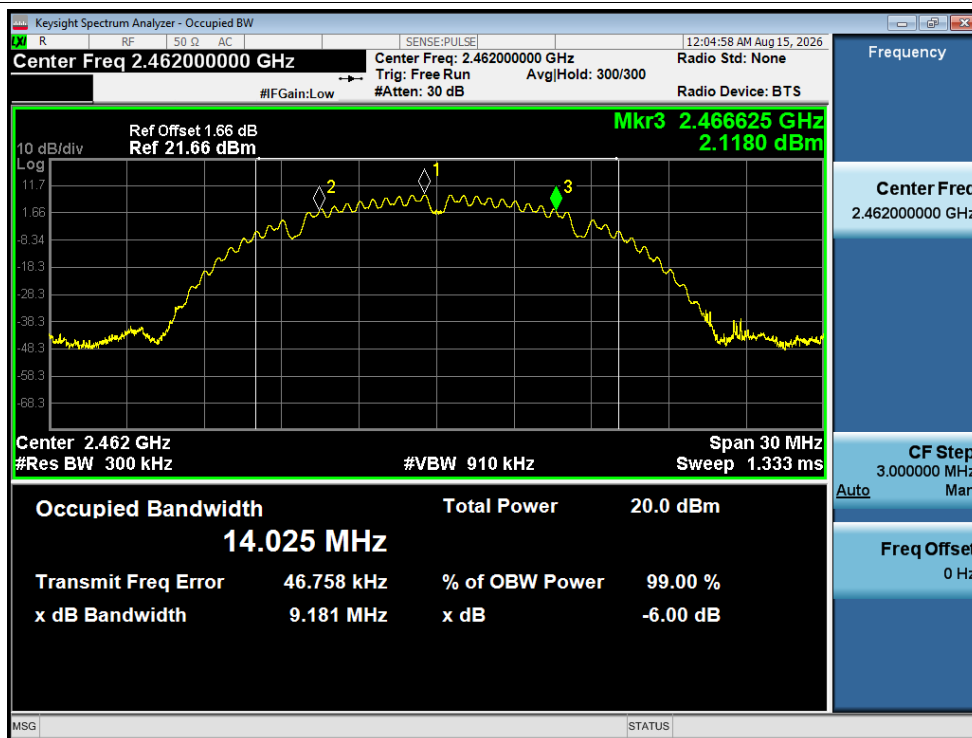


-6dB Bandwidth NVNT b 2462MHz Ant1

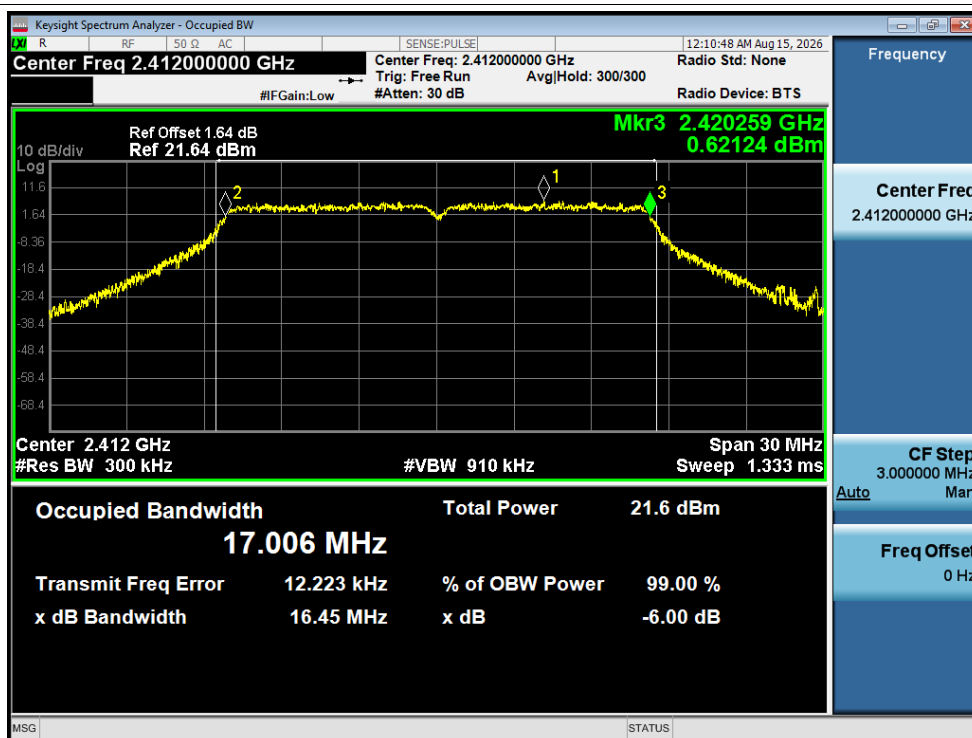


-6dB Bandwidth NVNT g 2412MHz Ant1

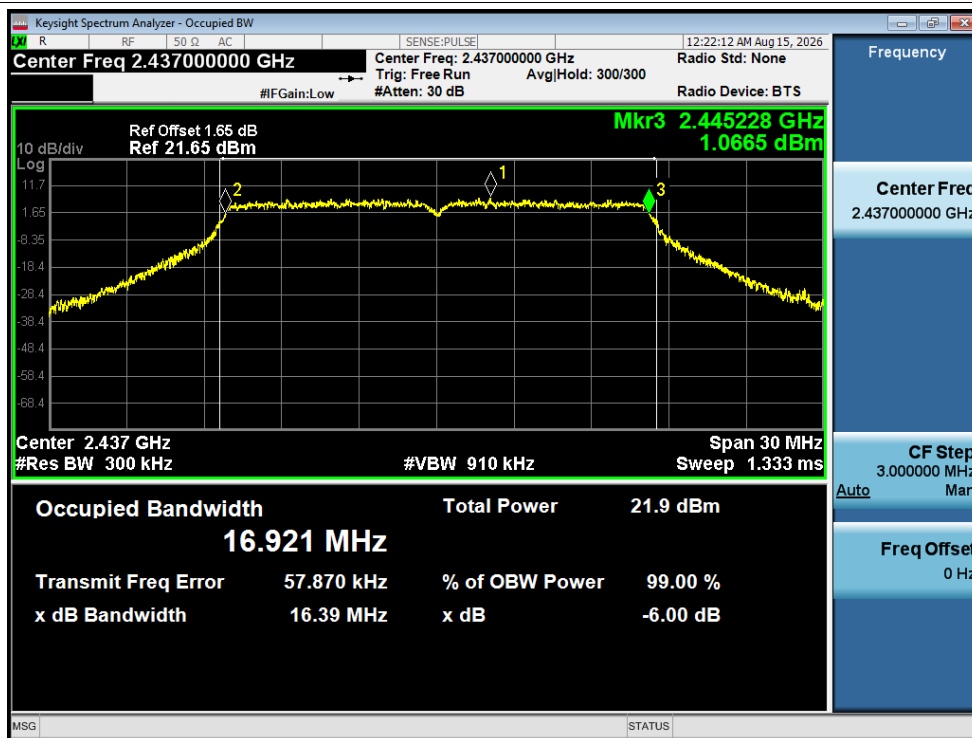


-6dB Bandwidth NVNT g 2437MHz Ant1

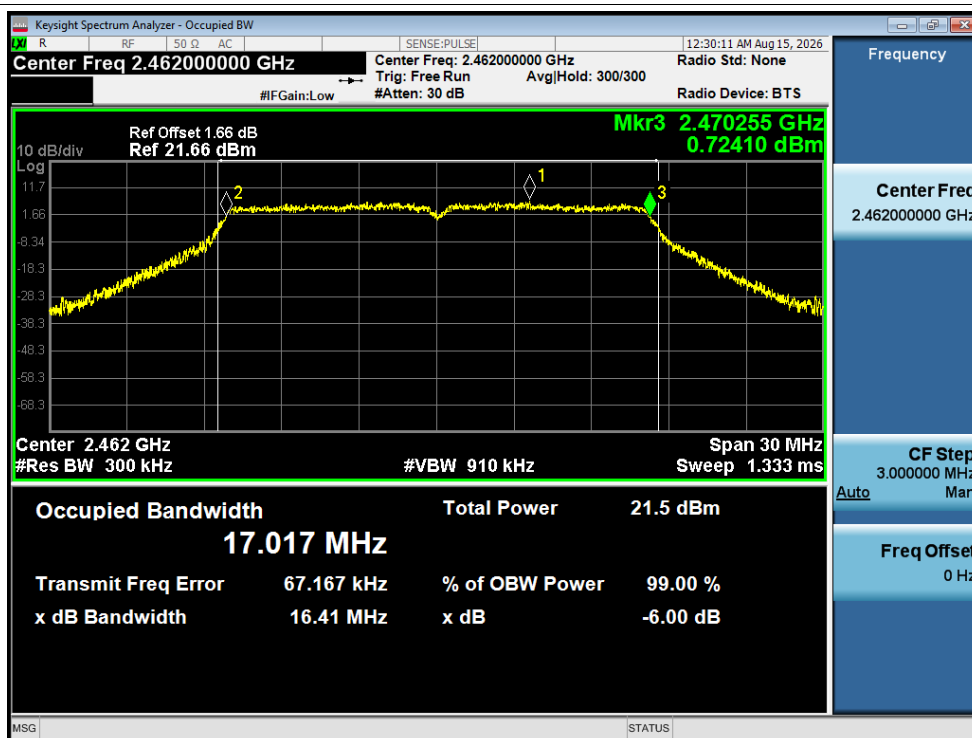


-6dB Bandwidth NVNT g 2462MHz Ant1

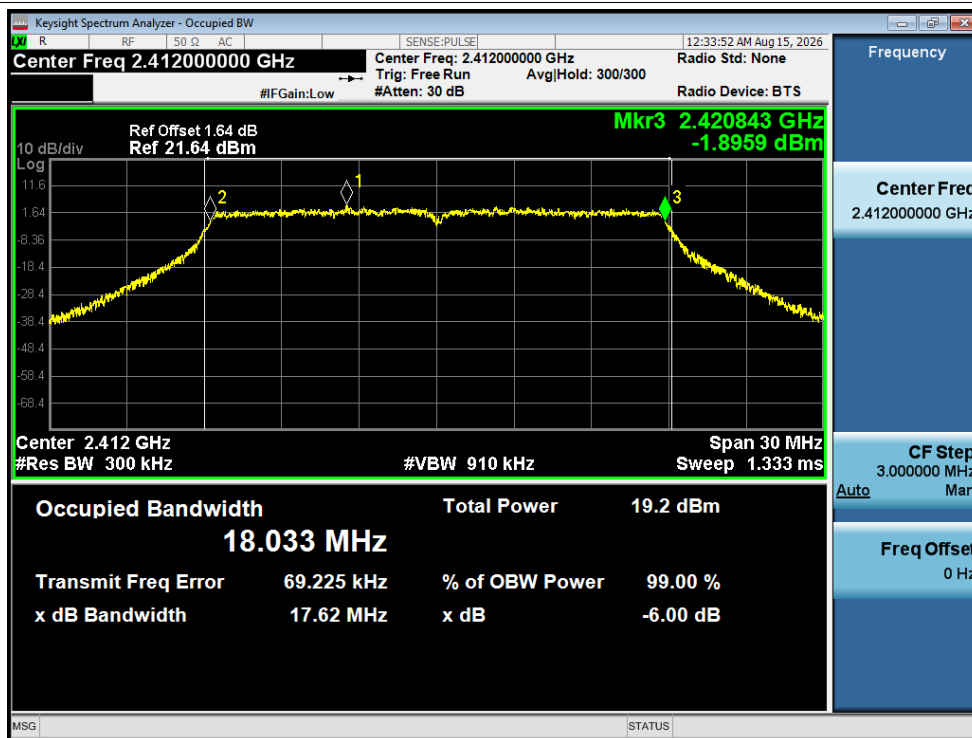

-6dB Bandwidth NVNT n20 2412MHz Ant1

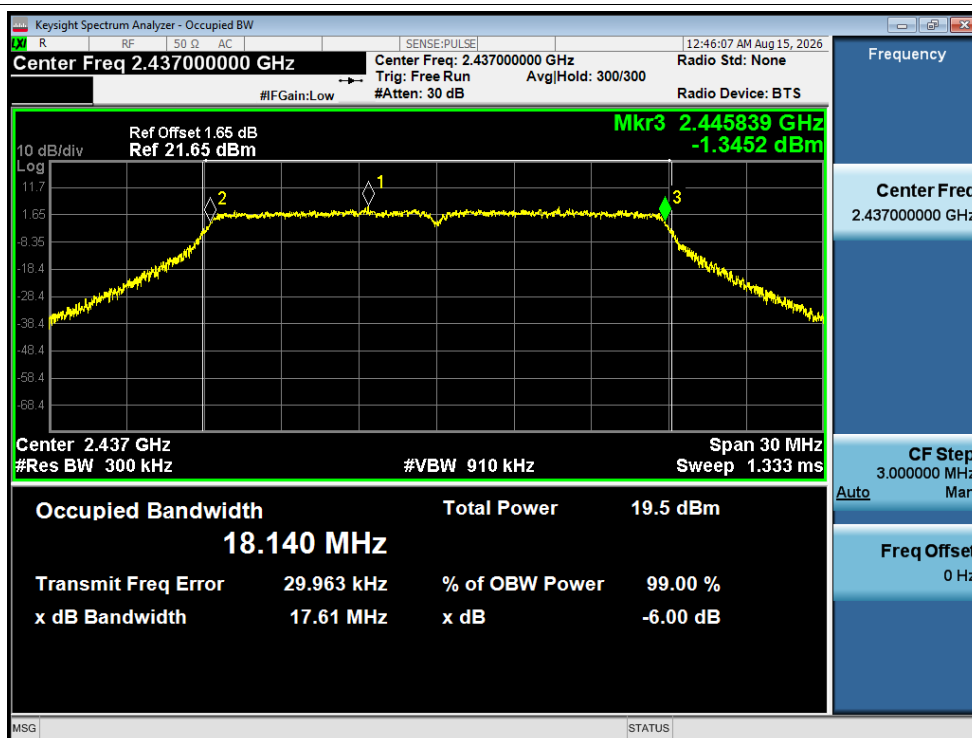


-6dB Bandwidth NVNT n20 2437MHz Ant1

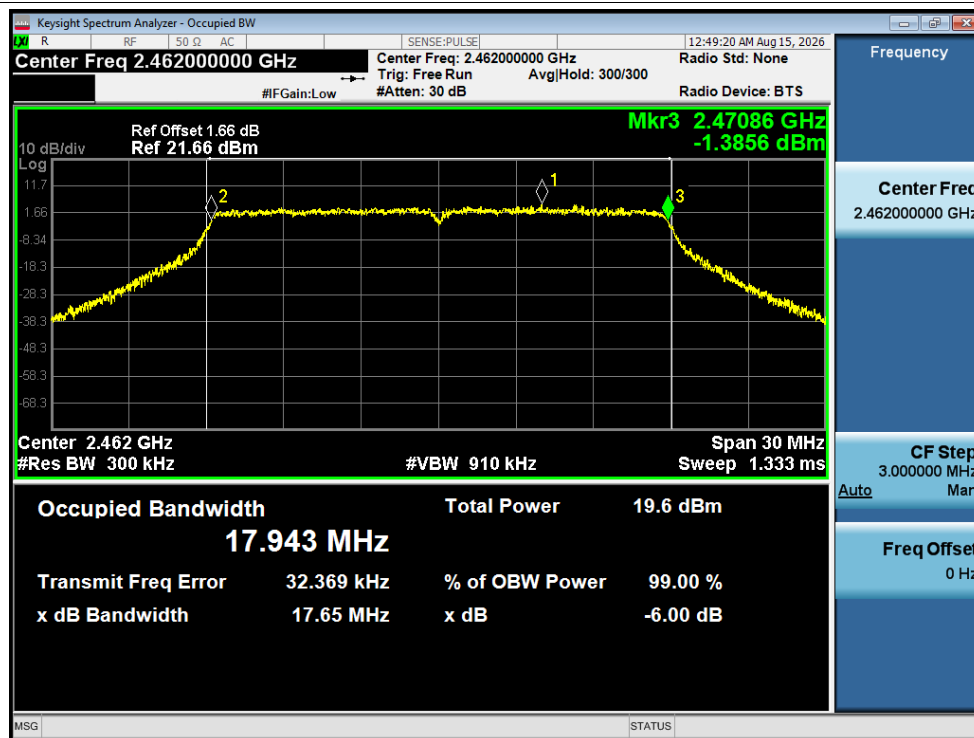

-6dB Bandwidth NVNT n20 2462MHz Ant1

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	14.007
NVNT	b	2437	Ant1	14.007
NVNT	b	2462	Ant1	14.024
NVNT	g	2412	Ant1	16.712
NVNT	g	2437	Ant1	16.662
NVNT	g	2462	Ant1	16.714
NVNT	n20	2412	Ant1	17.826
NVNT	n20	2437	Ant1	17.873
NVNT	n20	2462	Ant1	17.757

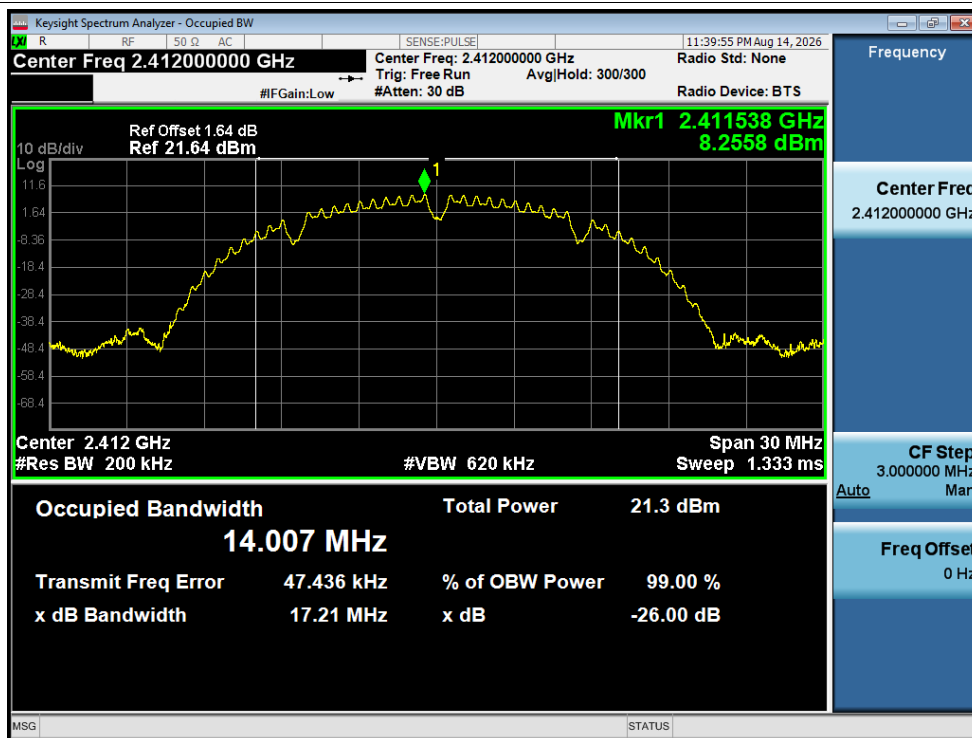


OBW NVNT b 2412MHz Ant1




OBW NVNT b 2437MHz Ant1

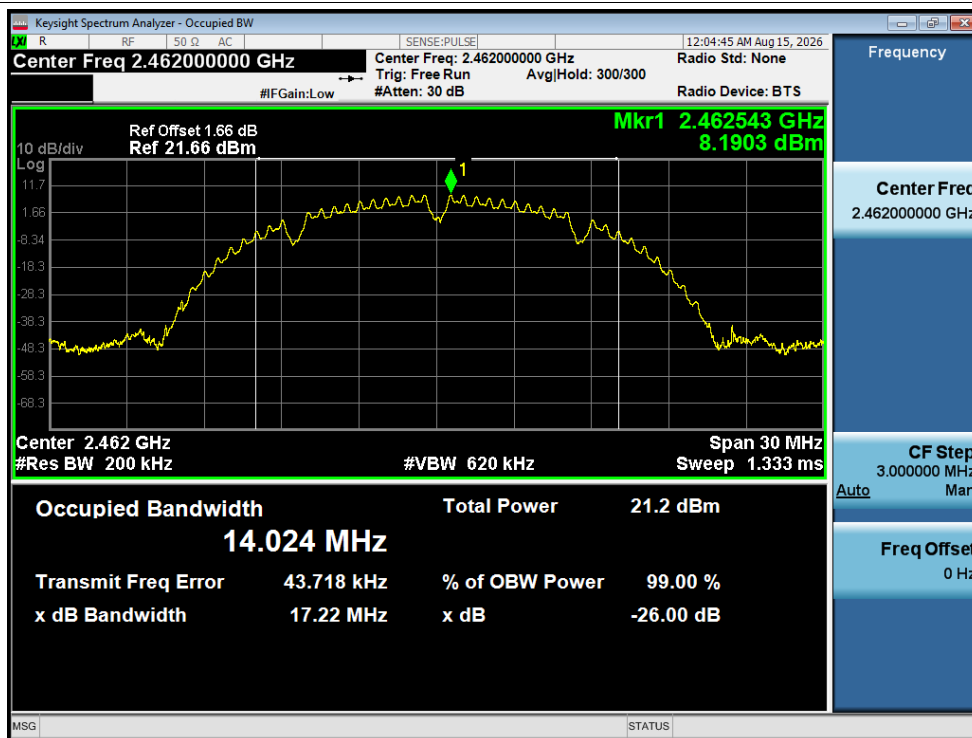


OBW NVNT b 2462MHz Ant1

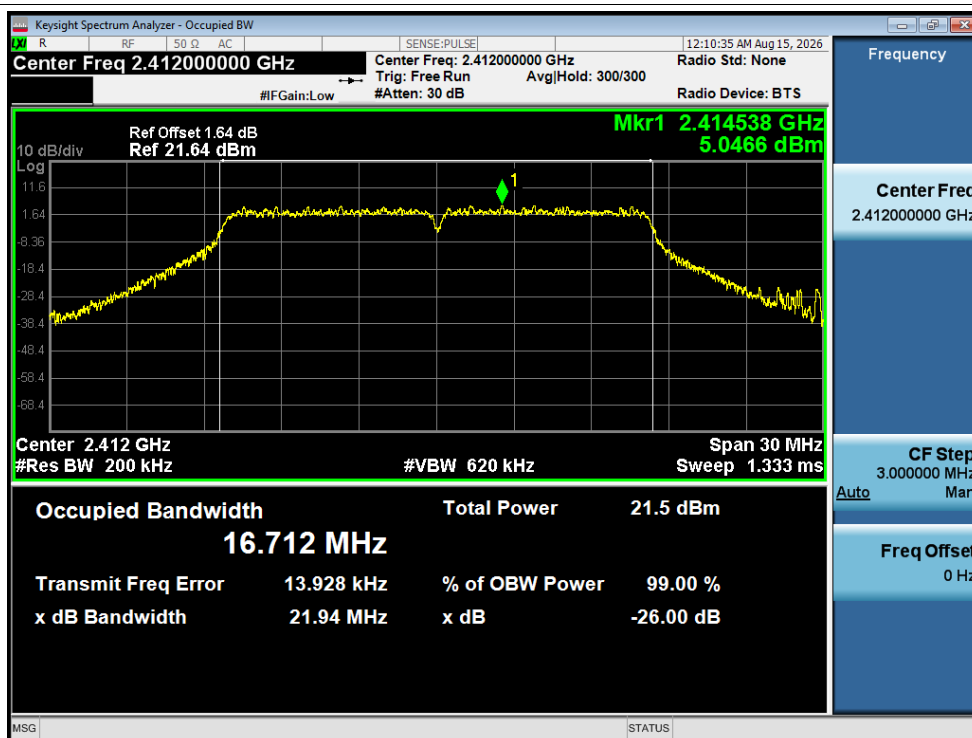


OBW NVNT g 2412MHz Ant1

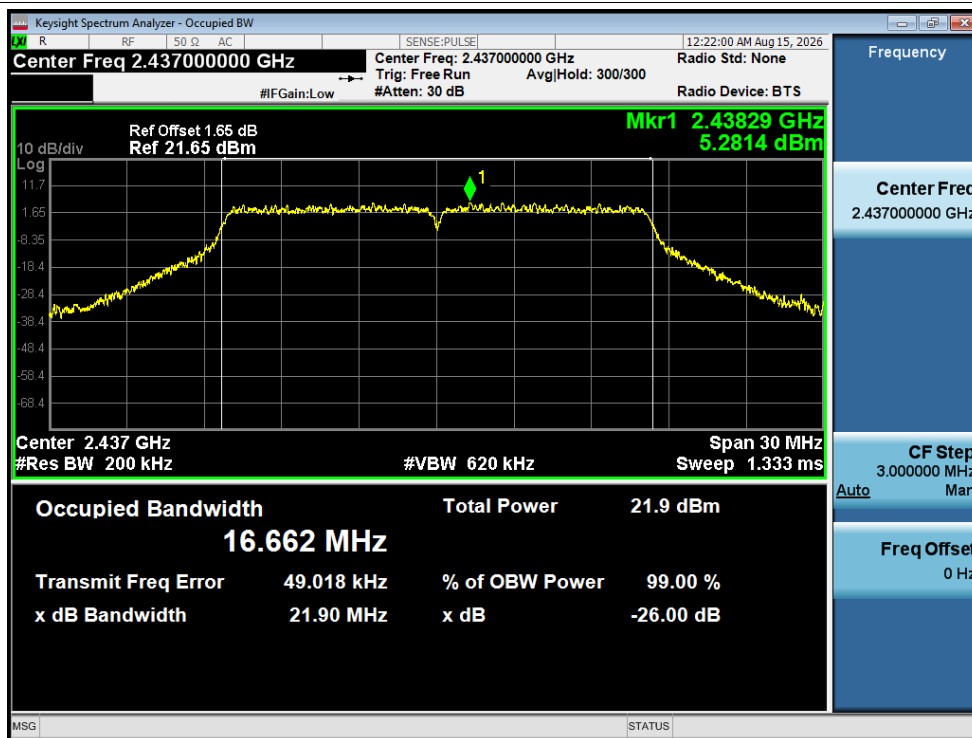


OBW NVNT g 2437MHz Ant1

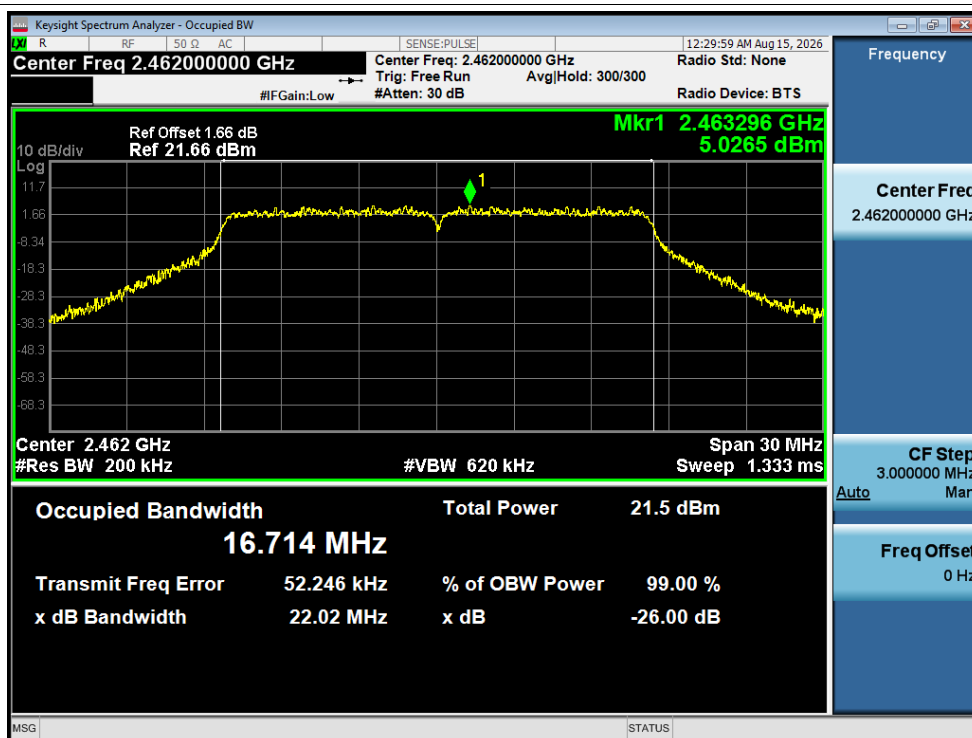


OBW NVNT g 2462MHz Ant1

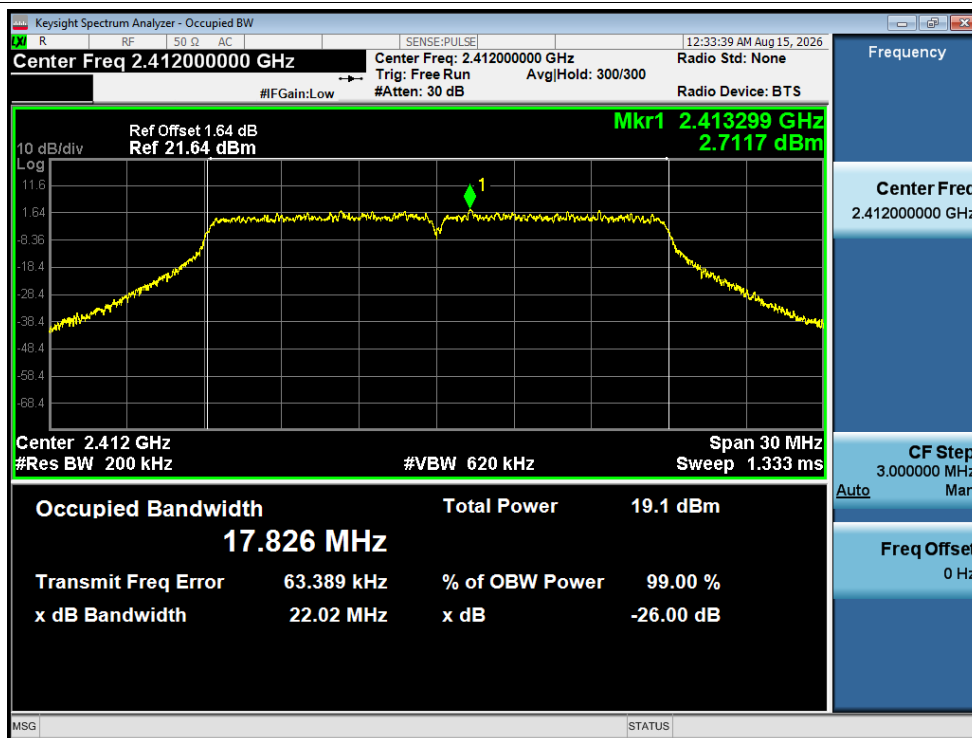

OBW NVNT n20 2412MHz Ant1

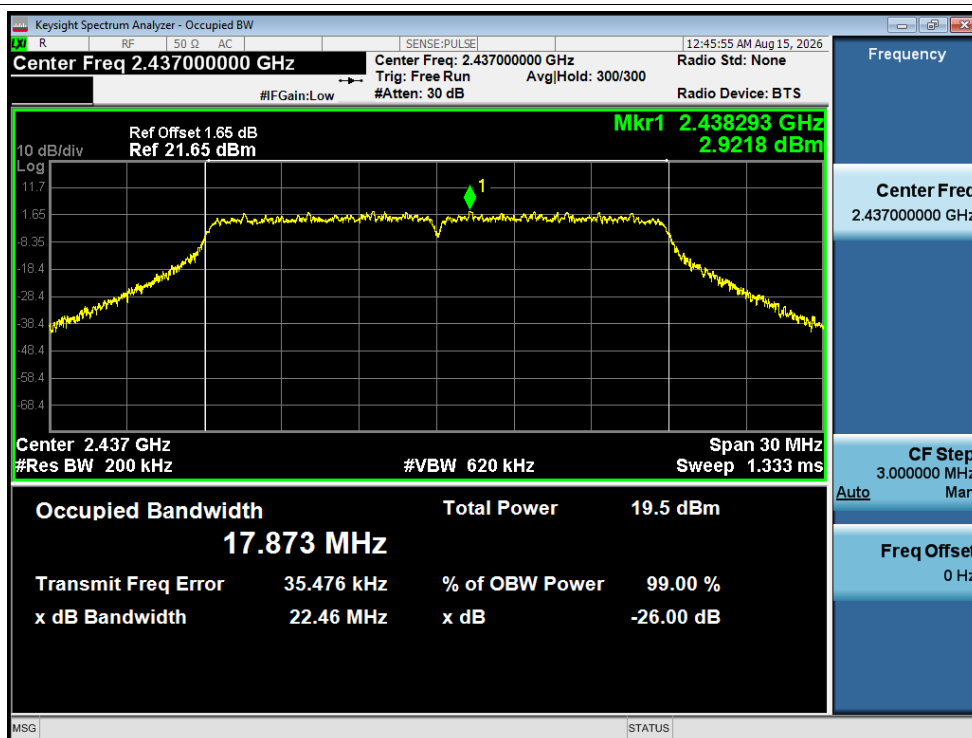


OBW NVNT n20 2437MHz Ant1

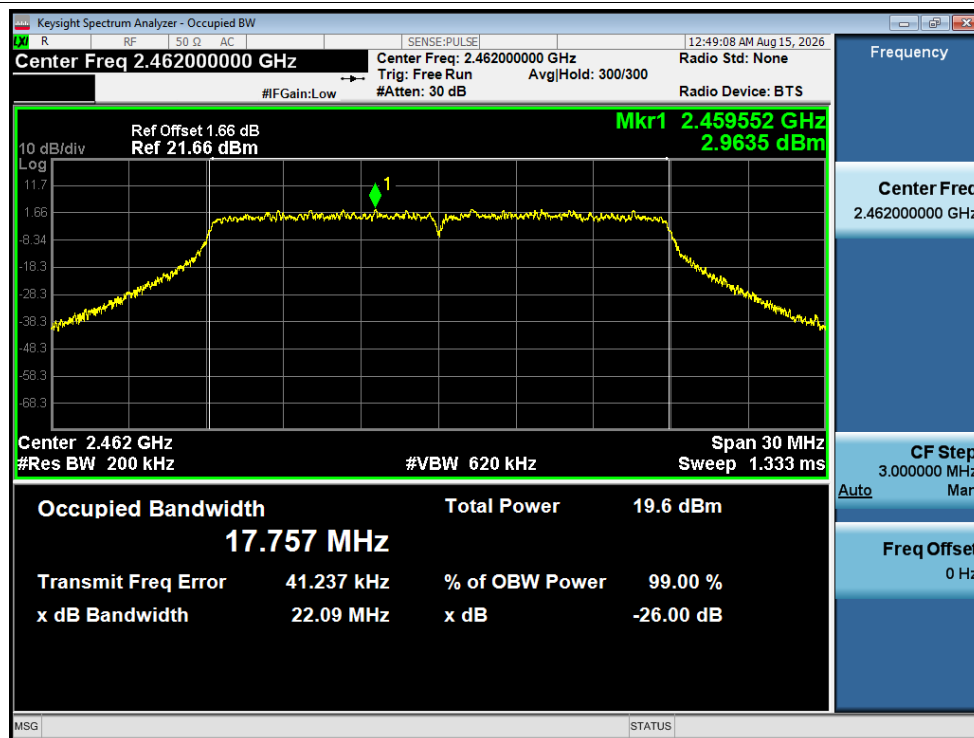


OBW NVNT n20 2462MHz Ant1

Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/30kHz)	Duty Factor (dB)	Total PSD (dBm/30kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-5.17	0.05	-5.12	8	Pass
NVNT	b	2437	Ant1	-5.15	0.05	-5.1	8	Pass
NVNT	b	2462	Ant1	-4.9	0.05	-4.85	8	Pass
NVNT	g	2412	Ant1	-9.15	0.27	-8.88	8	Pass
NVNT	g	2437	Ant1	-8.13	0.27	-7.86	8	Pass
NVNT	g	2462	Ant1	-8.66	0.27	-8.39	8	Pass
NVNT	n20	2412	Ant1	-11.57	0.28	-11.29	8	Pass
NVNT	n20	2437	Ant1	-10.85	0.28	-10.57	8	Pass
NVNT	n20	2462	Ant1	-11.04	0.28	-10.76	8	Pass

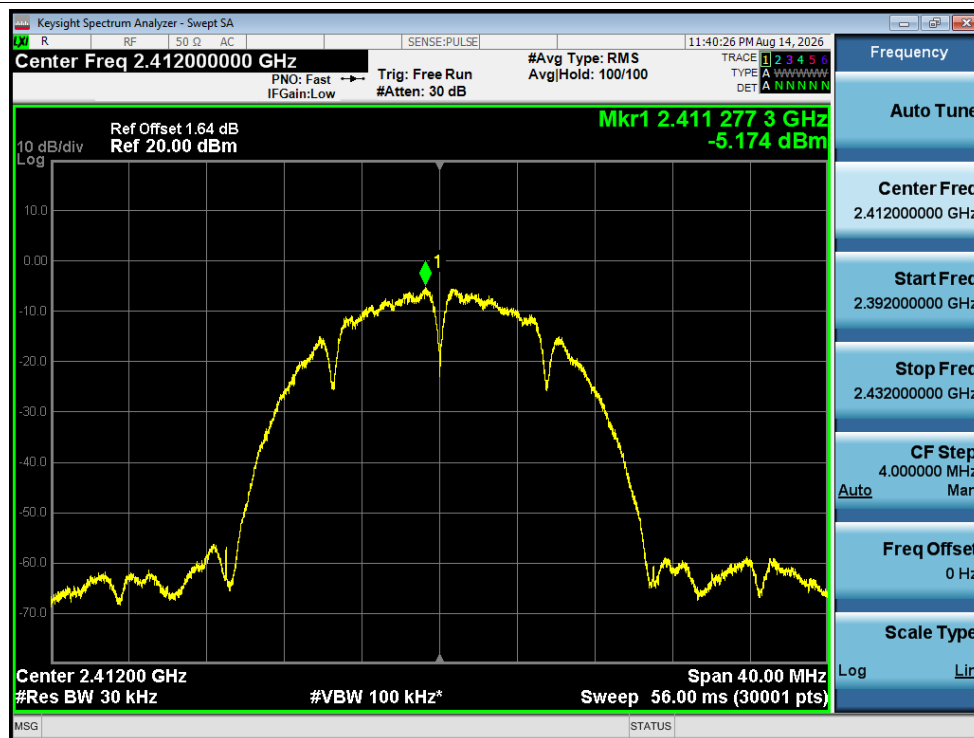


PSD NVNT b 2412MHz Ant1

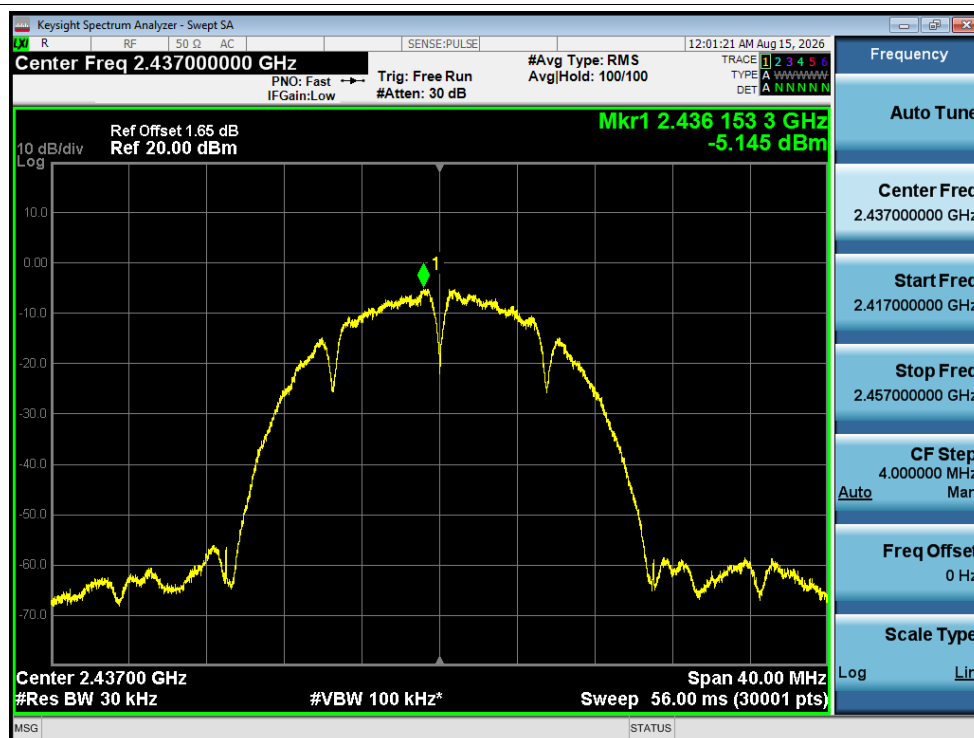


PSD NVNT b 2437MHz Ant1

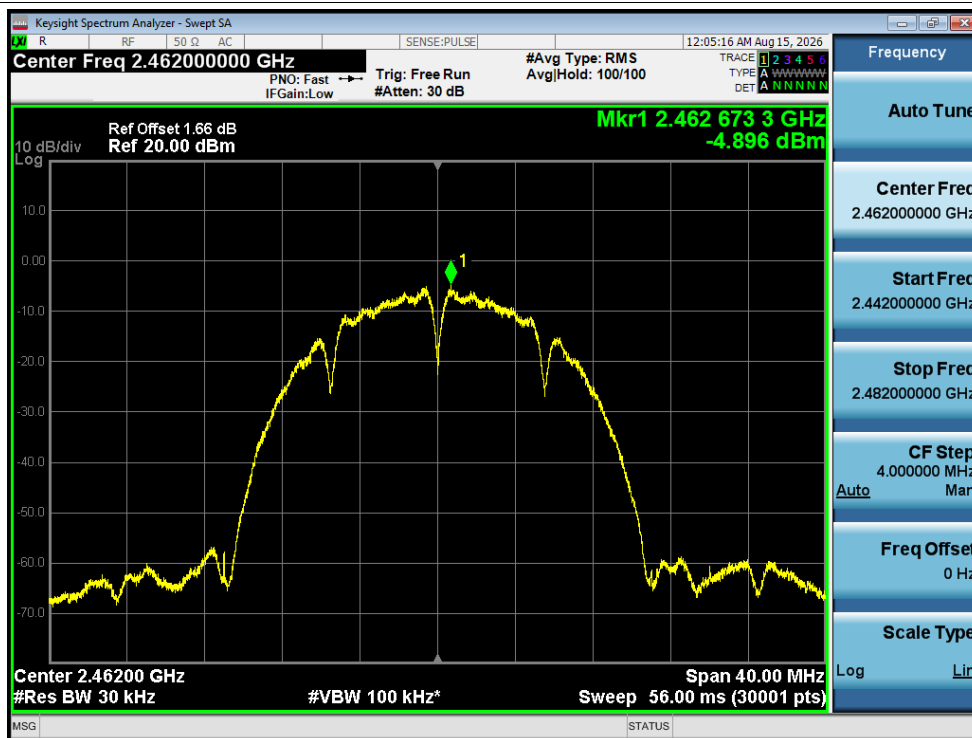


PSD NVNT b 2462MHz Ant1

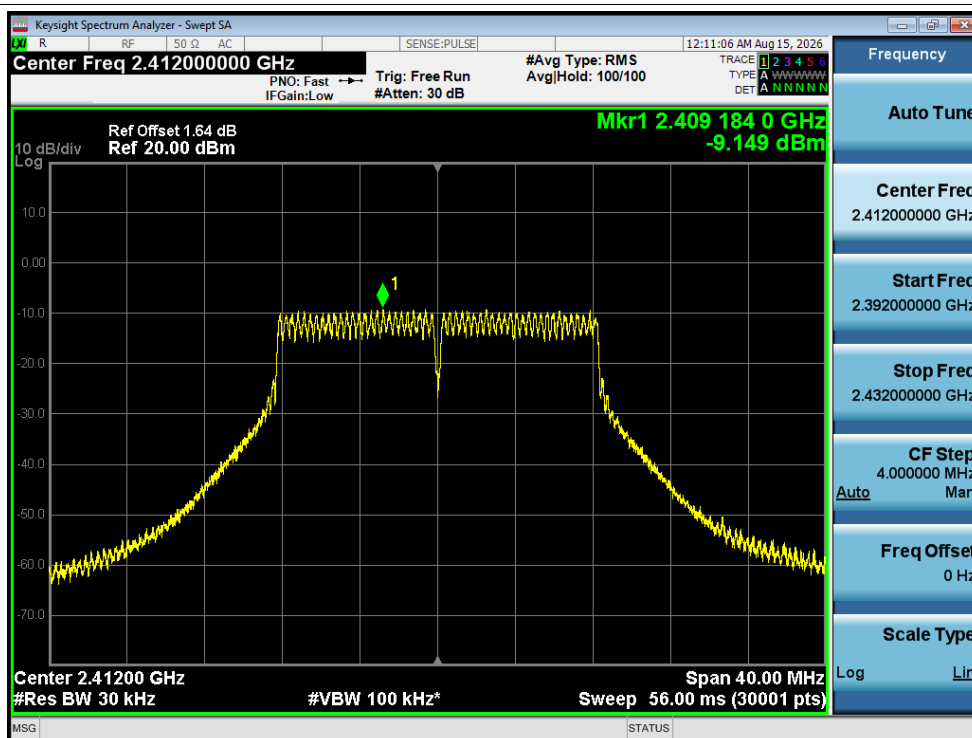


PSD NVNT g 2412MHz Ant1

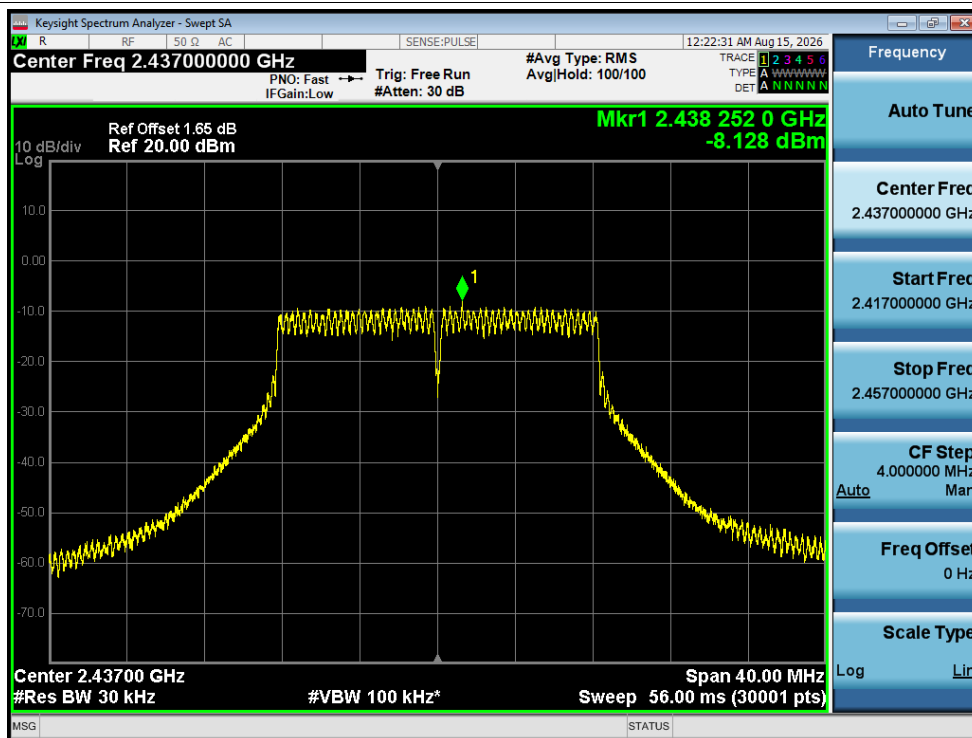


PSD NVNT g 2437MHz Ant1

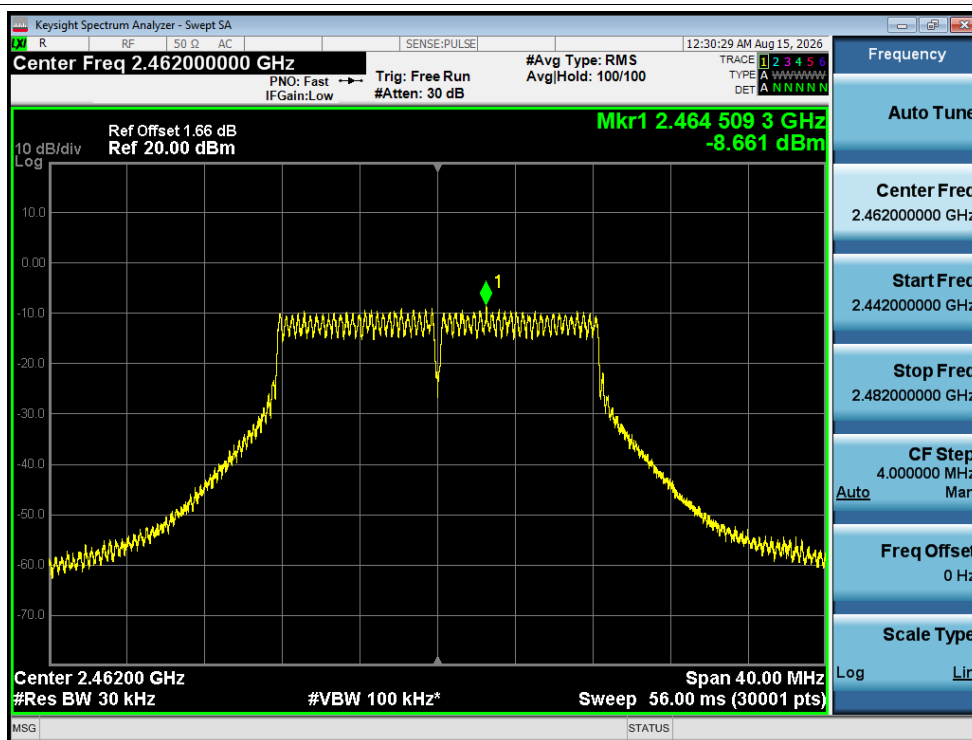


PSD NVNT g 2462MHz Ant1

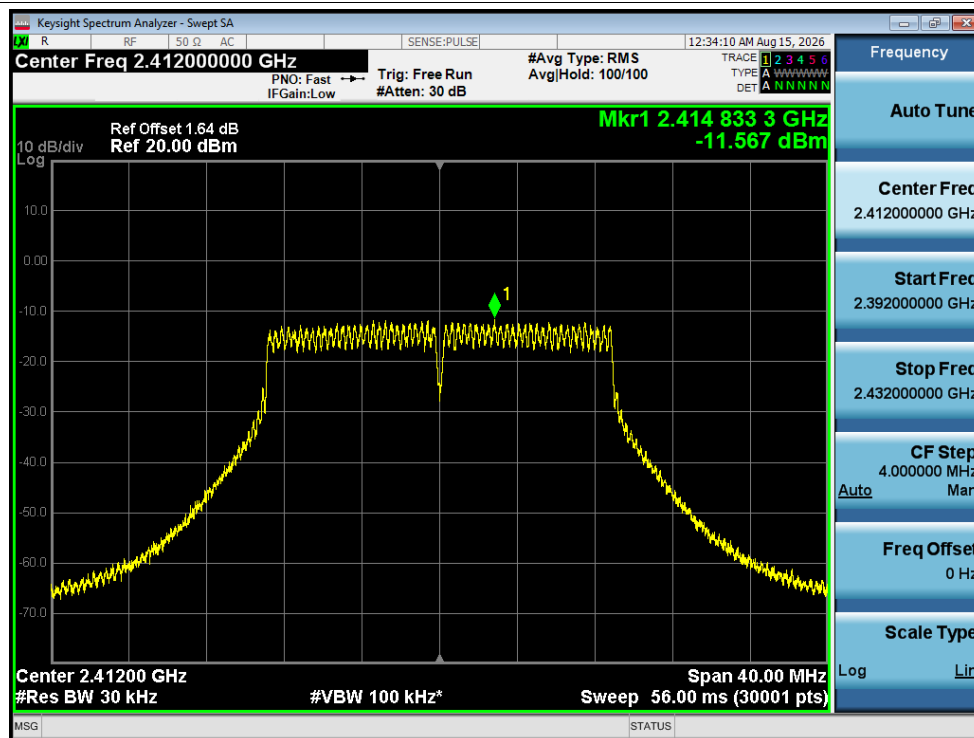

PSD NVNT n20 2412MHz Ant1

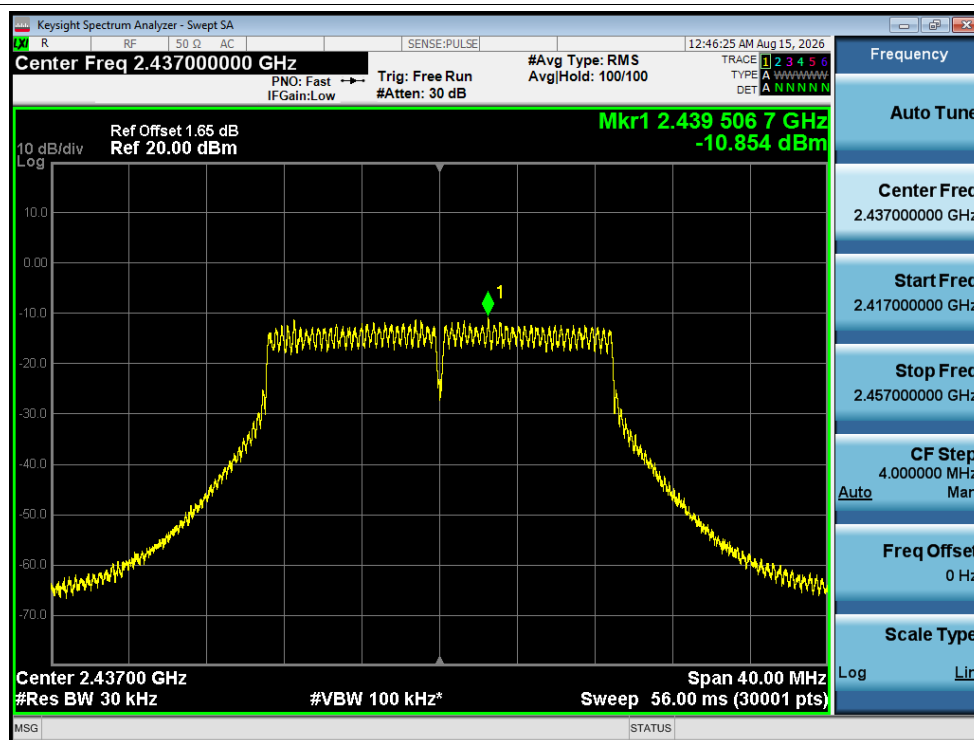

PSD NVNT n20 2437MHz Ant1

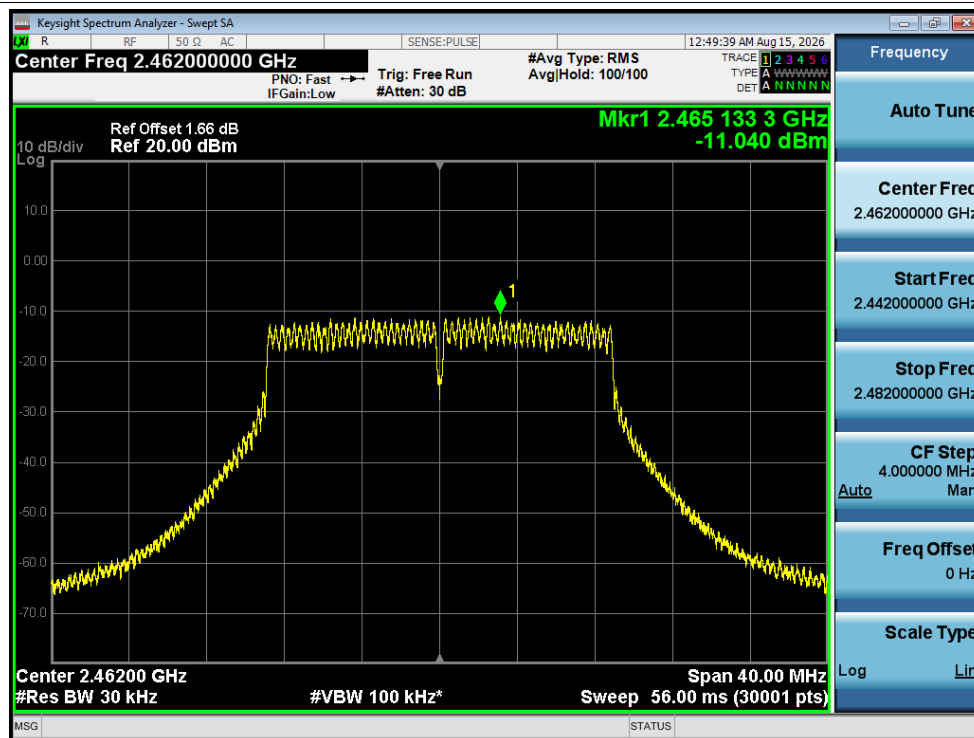


PSD NVNT n20 2462MHz Ant1

Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-51.02	-30	Pass
NVNT	b	2462	Ant1	-58.93	-30	Pass
NVNT	g	2412	Ant1	-34.95	-30	Pass
NVNT	g	2462	Ant1	-44.73	-30	Pass
NVNT	n20	2412	Ant1	-34.4	-30	Pass
NVNT	n20	2462	Ant1	-48.57	-30	Pass




Band Edge NVNT b 2412MHz Ant1 Ref

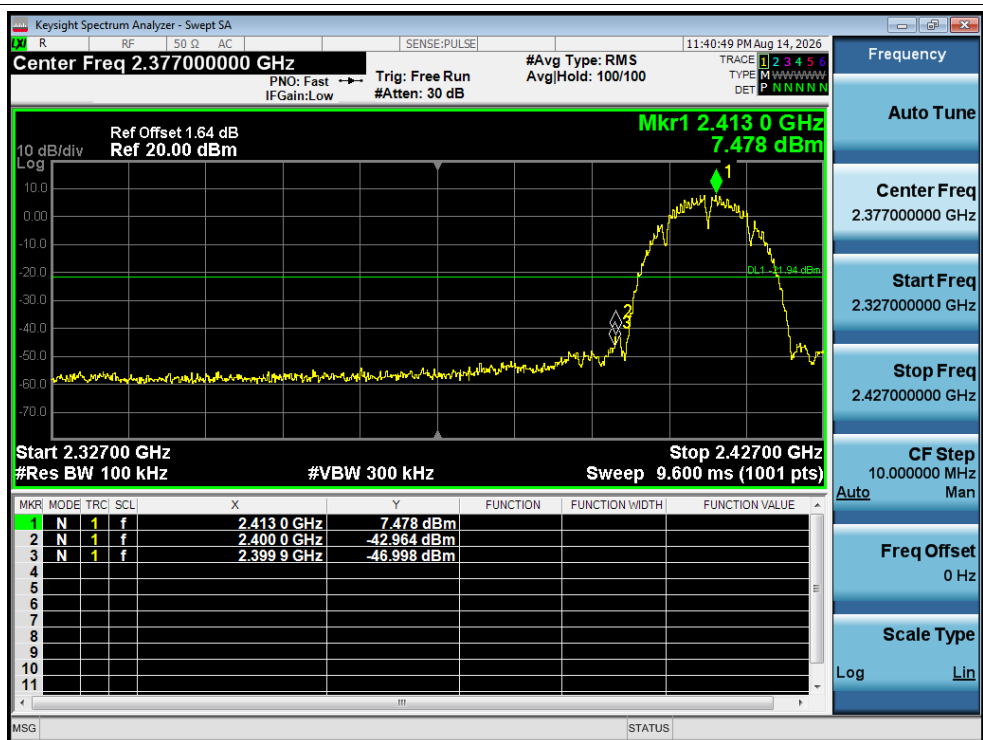


Band Edge NVNT b 2412MHz Ant1 Emission

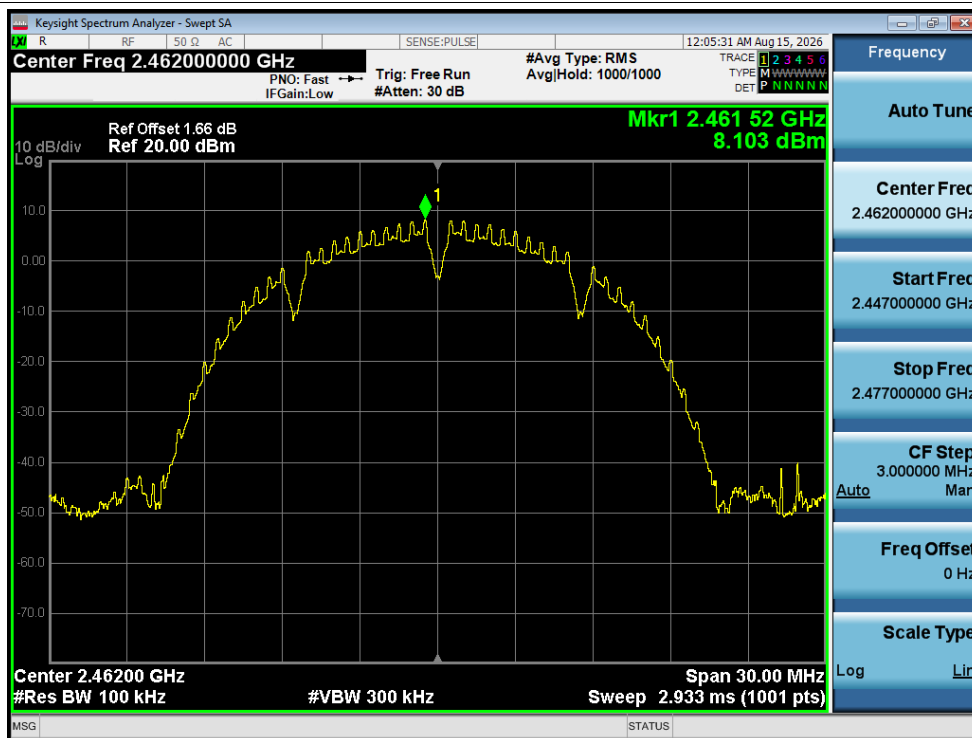


Band Edge NVNT b 2462MHz Ant1 Ref

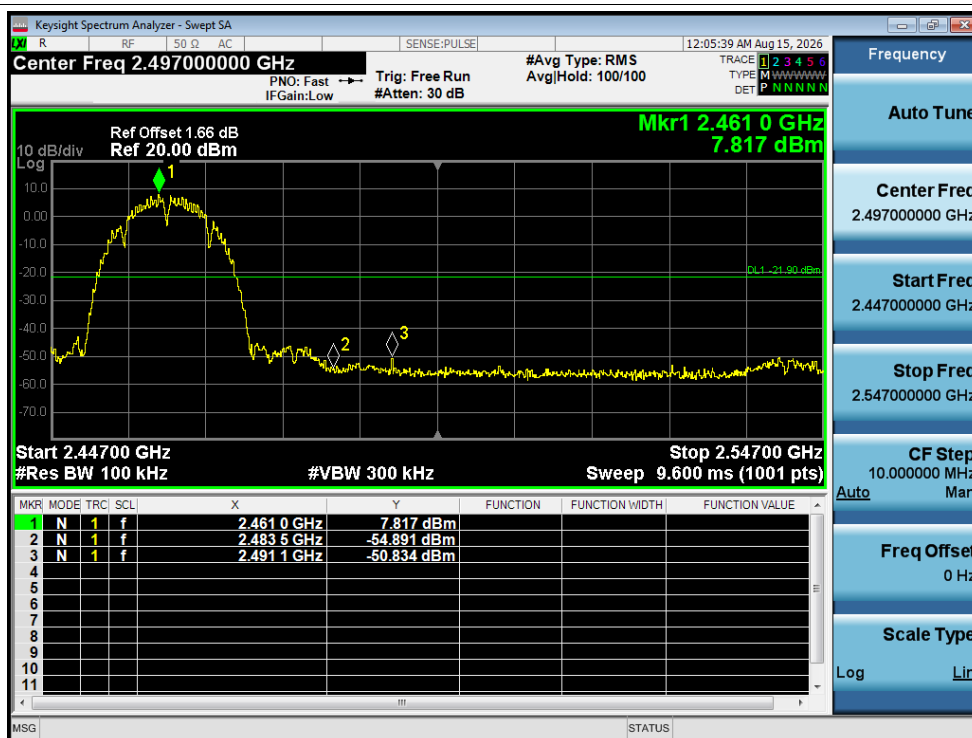


Band Edge NVNT b 2462MHz Ant1 Emission

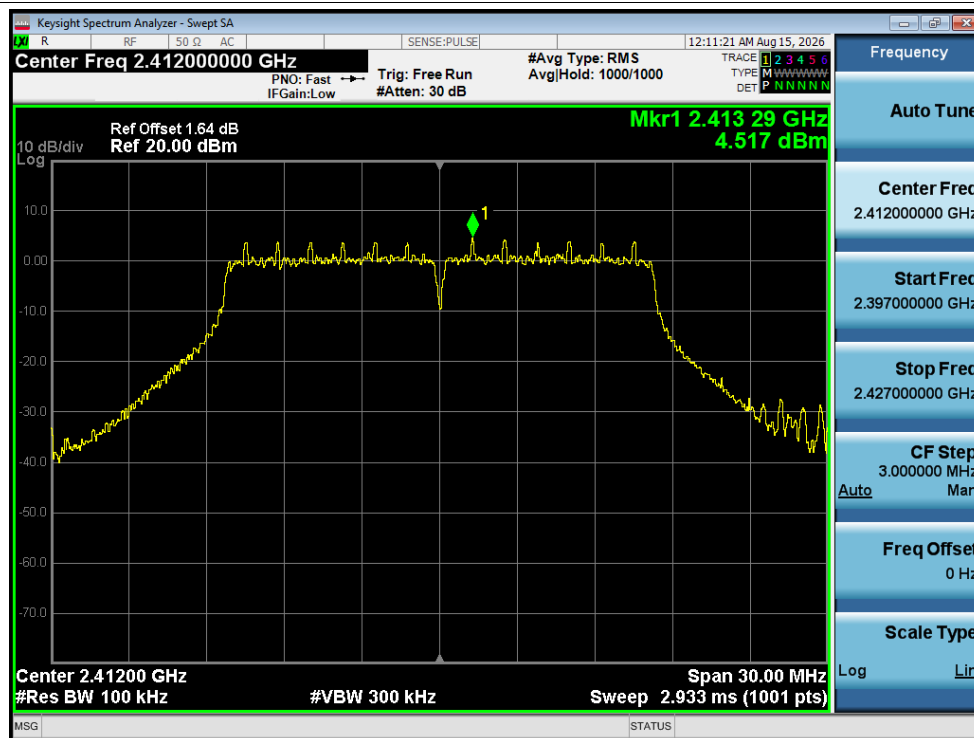


Band Edge NVNT g 2412MHz Ant1 Ref

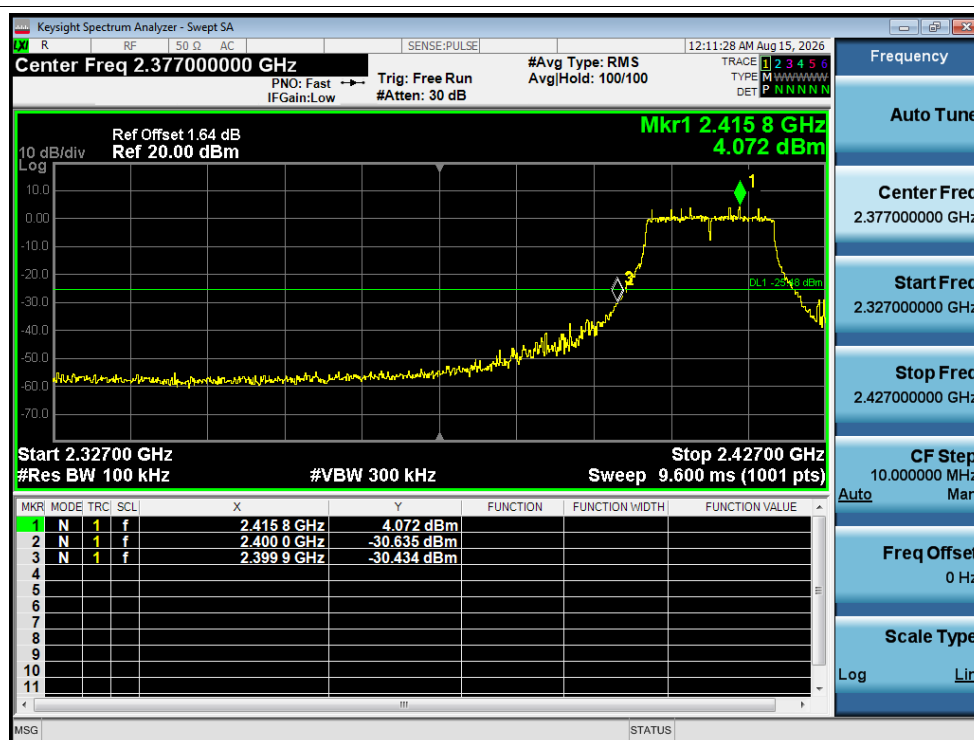

Band Edge NVNT g 2412MHz Ant1 Emission

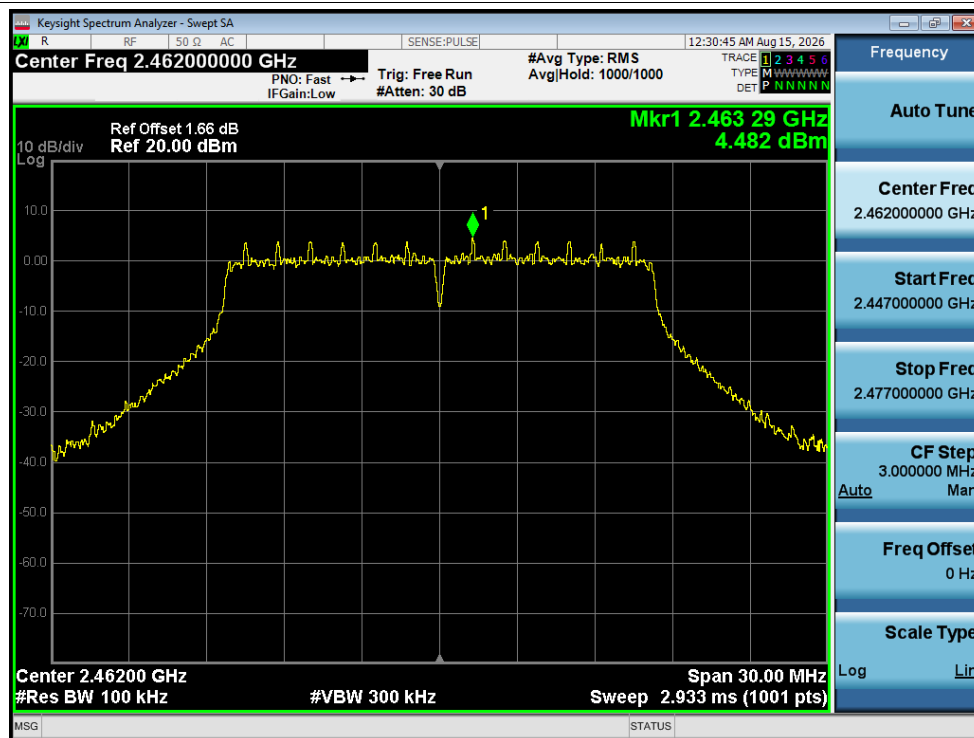


Band Edge NVNT g 2462MHz Ant1 Ref

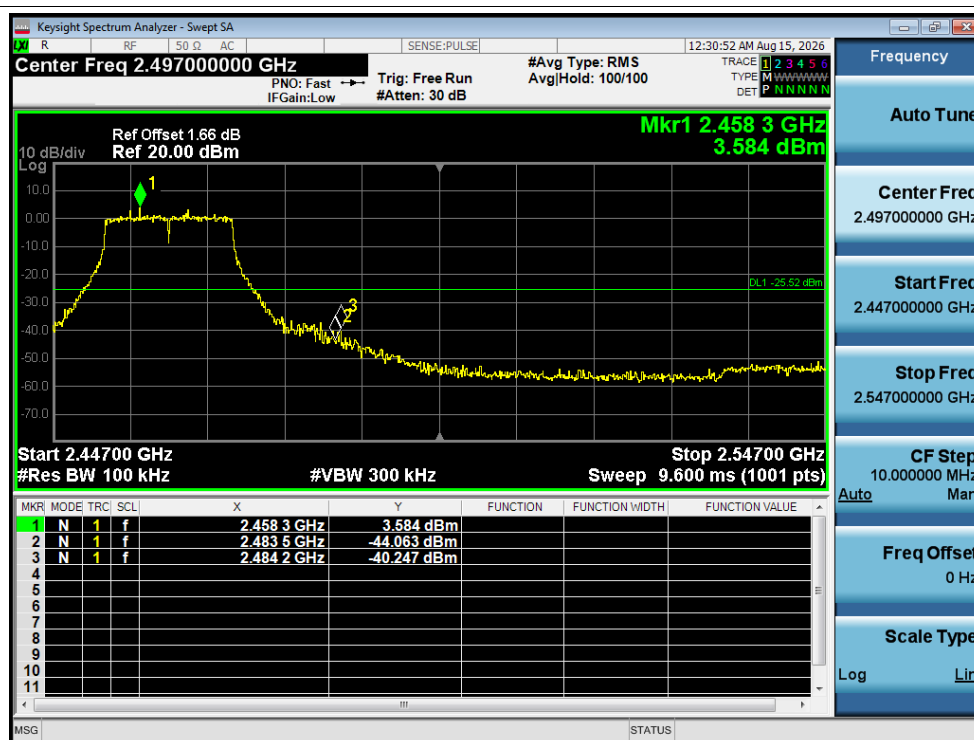


Band Edge NVNT g 2462MHz Ant1 Emission




Band Edge NVNT n20 2412MHz Ant1 Ref

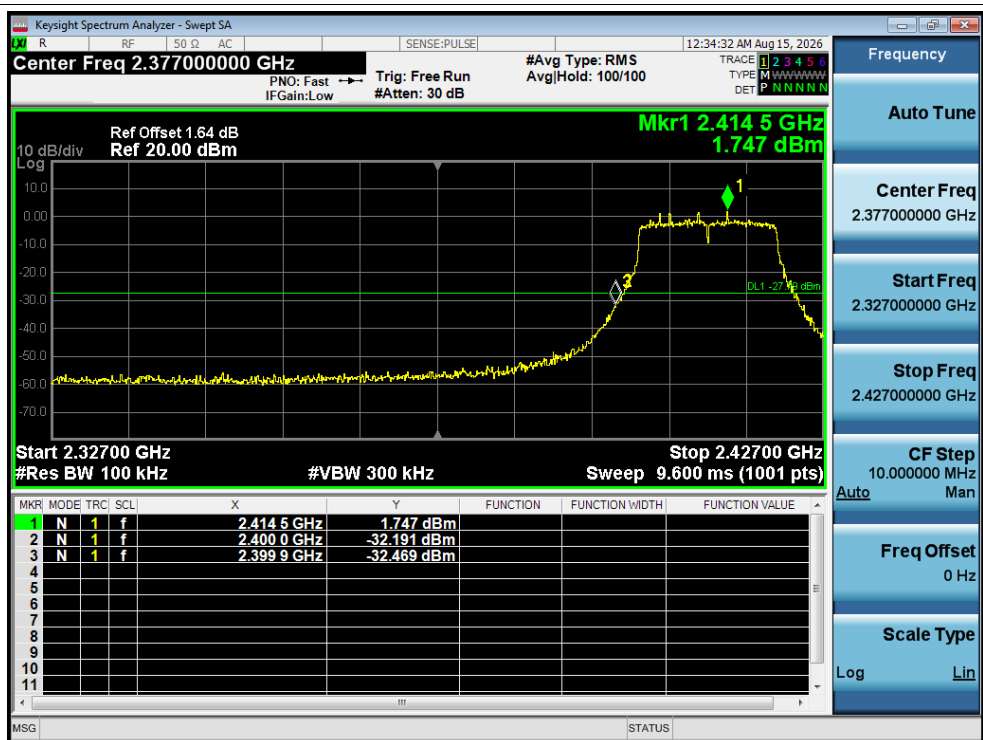

Band Edge NVNT n20 2412MHz Ant1 Emission

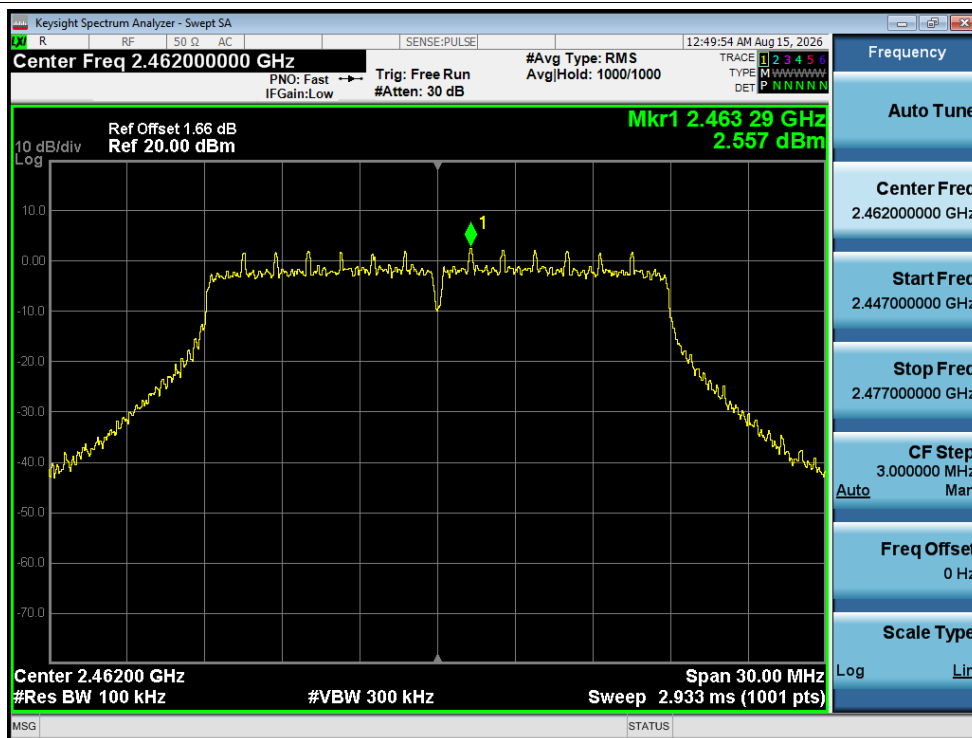

Band Edge NVNT n20 2462MHz Ant1 Ref

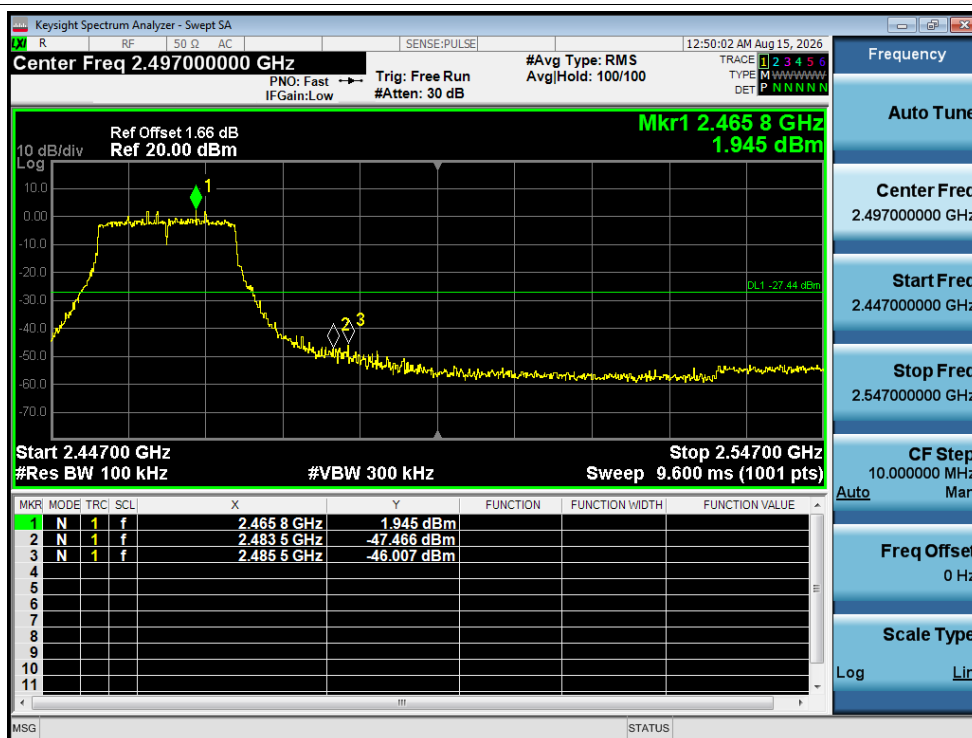


Band Edge NVNT n20 2462MHz Ant1 Emission

Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-47.35	-30	Pass
NVNT	b	2437	Ant1	-48.12	-30	Pass
NVNT	b	2462	Ant1	-48.32	-30	Pass
NVNT	g	2412	Ant1	-44.51	-30	Pass
NVNT	g	2437	Ant1	-44.15	-30	Pass
NVNT	g	2462	Ant1	-44.17	-30	Pass
NVNT	n20	2412	Ant1	-40.66	-30	Pass
NVNT	n20	2437	Ant1	-41.93	-30	Pass
NVNT	n20	2462	Ant1	-42.53	-30	Pass




Tx. Spurious NVNT b 2412MHz Ant1 Ref

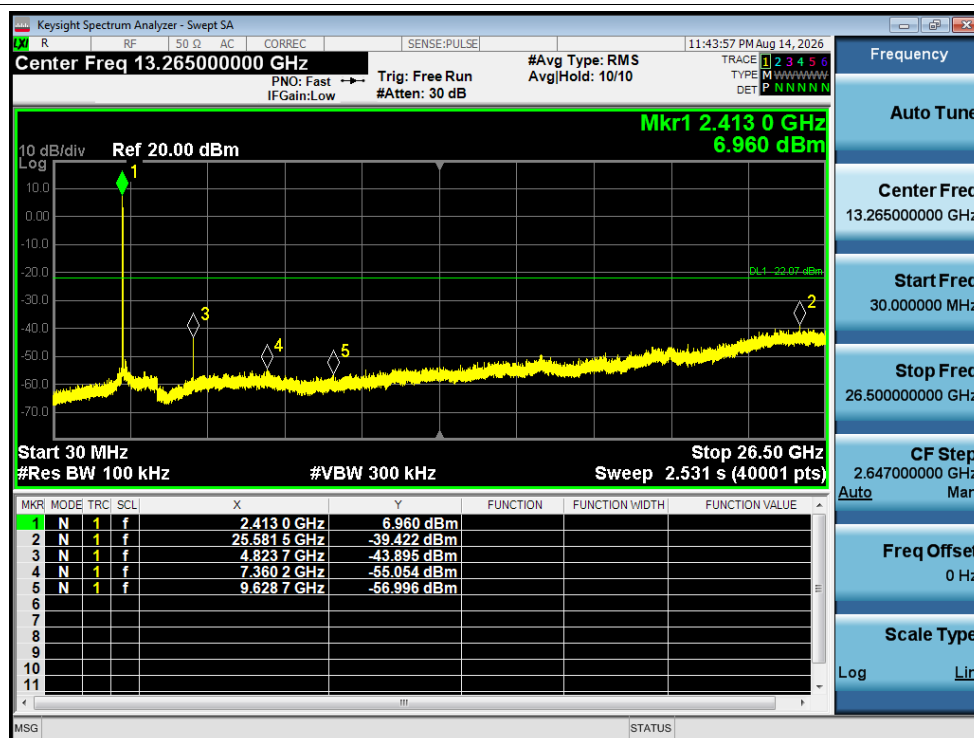

Tx. Spurious NVNT b 2412MHz Ant1 Emission




Tx. Spurious NVNT b 2437MHz Ant1 Ref

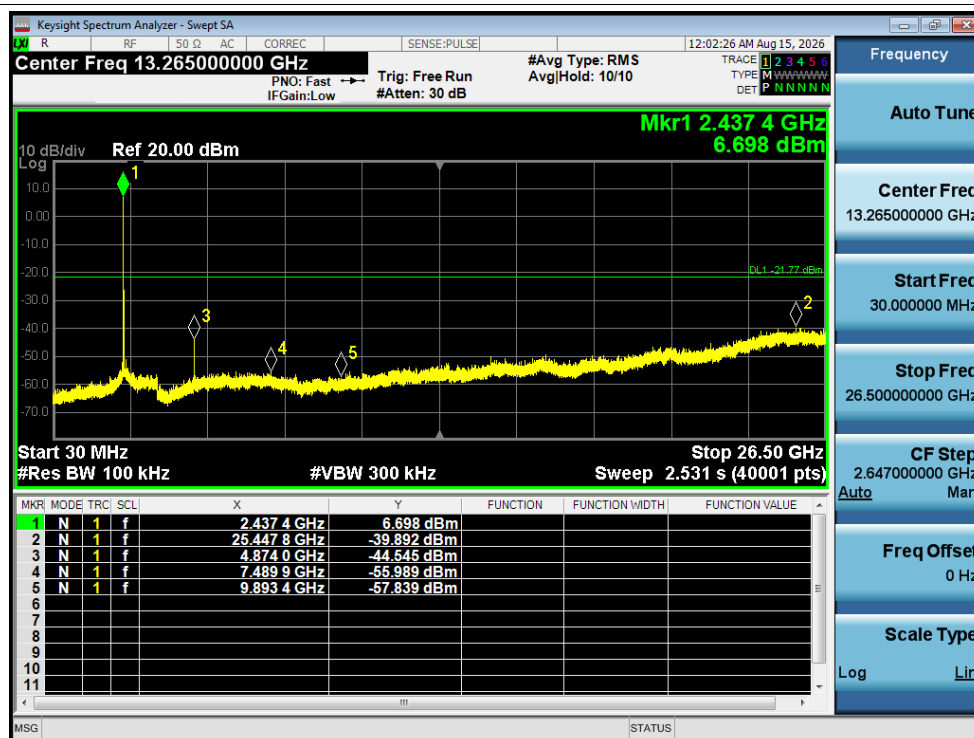


Tx. Spurious NVNT b 2437MHz Ant1 Emission




Tx. Spurious NVNT b 2462MHz Ant1 Ref

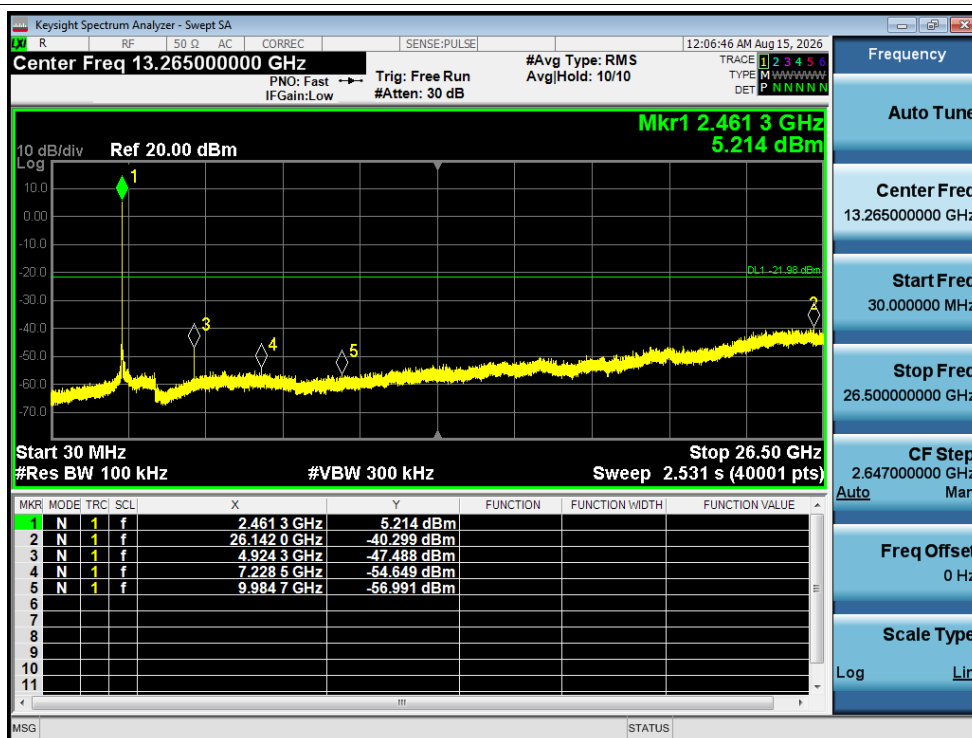


Tx. Spurious NVNT b 2462MHz Ant1 Emission

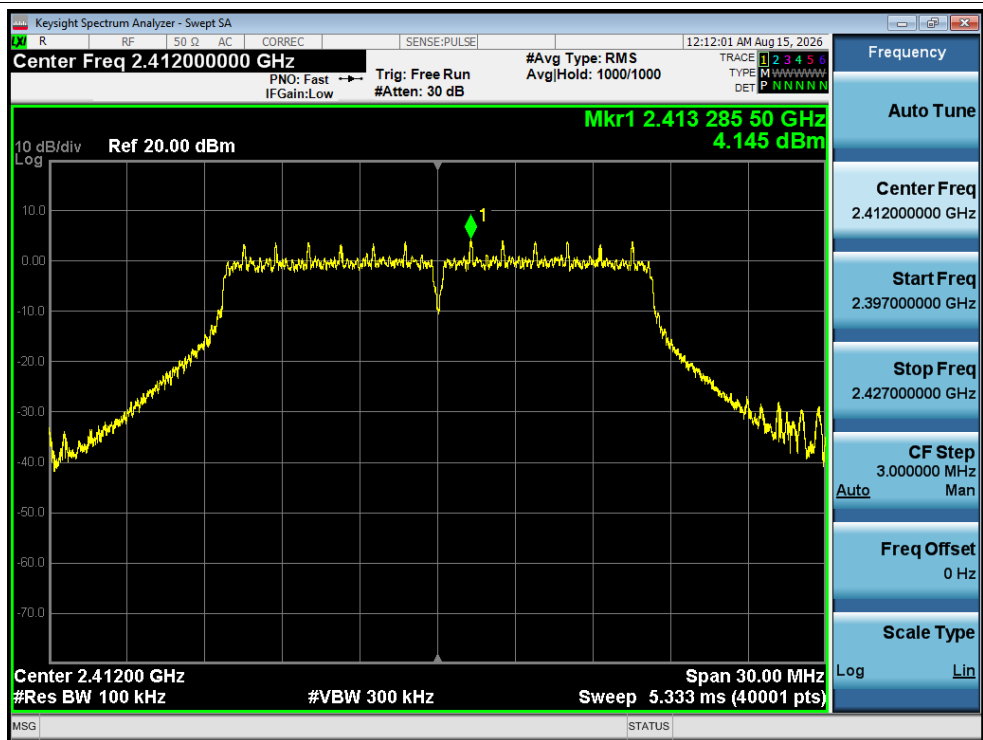


Tx. Spurious NVNT g 2412MHz Ant1 Ref

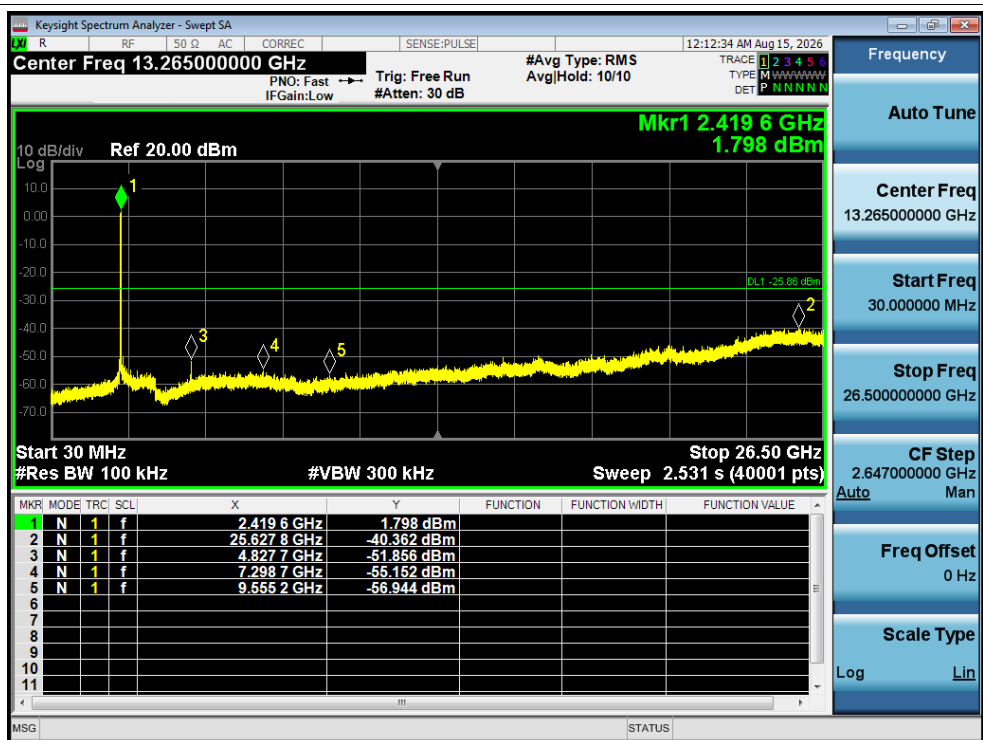


Tx. Spurious NVNT g 2412MHz Ant1 Emission

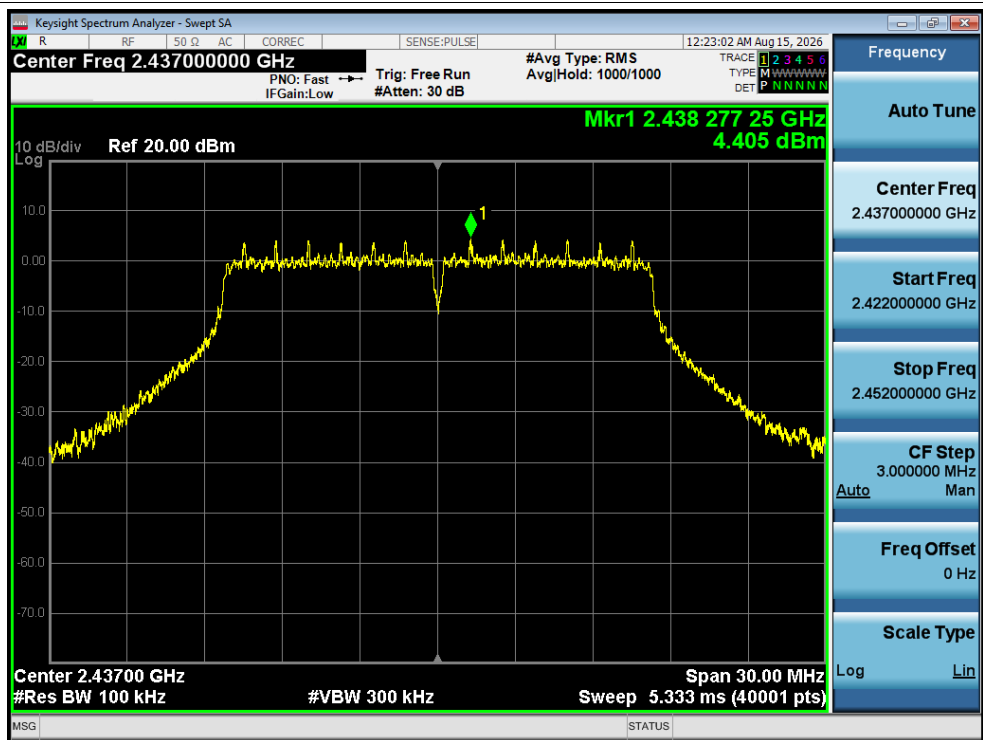


Tx. Spurious NVNT g 2437MHz Ant1 Ref

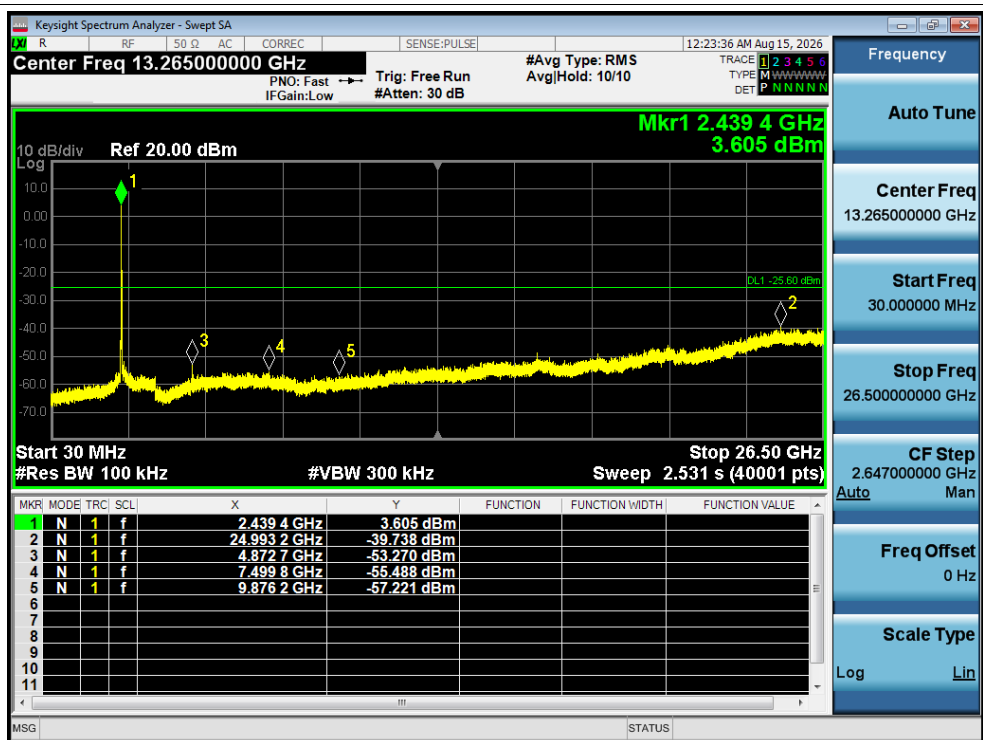


Tx. Spurious NVNT g 2437MHz Ant1 Emission

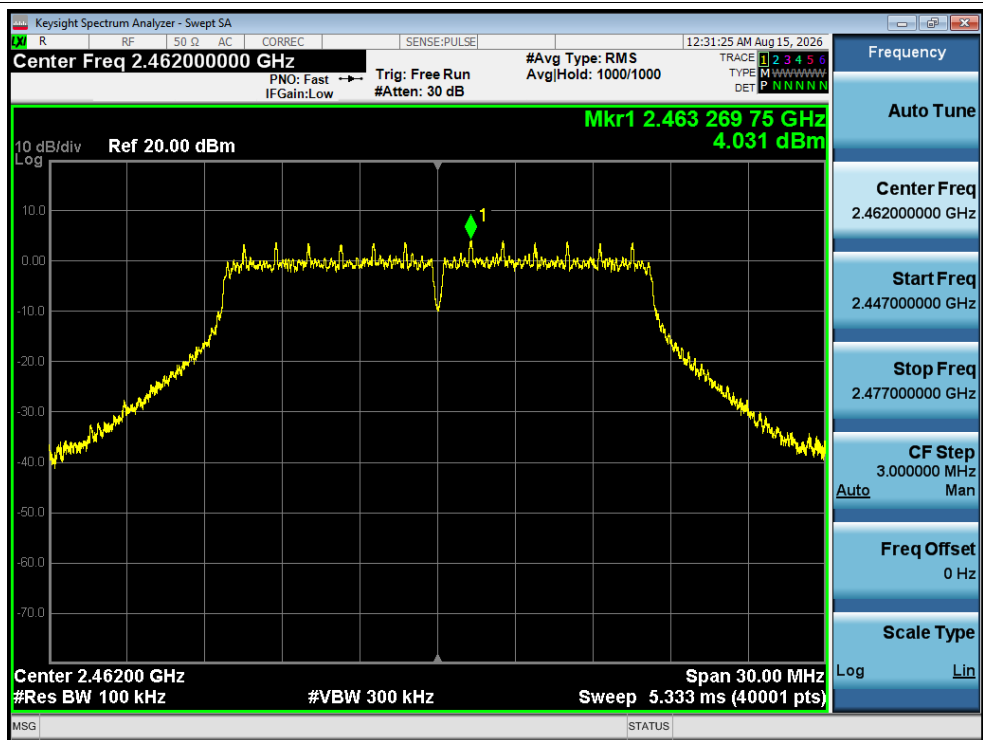


Tx. Spurious NVNT g 2462MHz Ant1 Ref

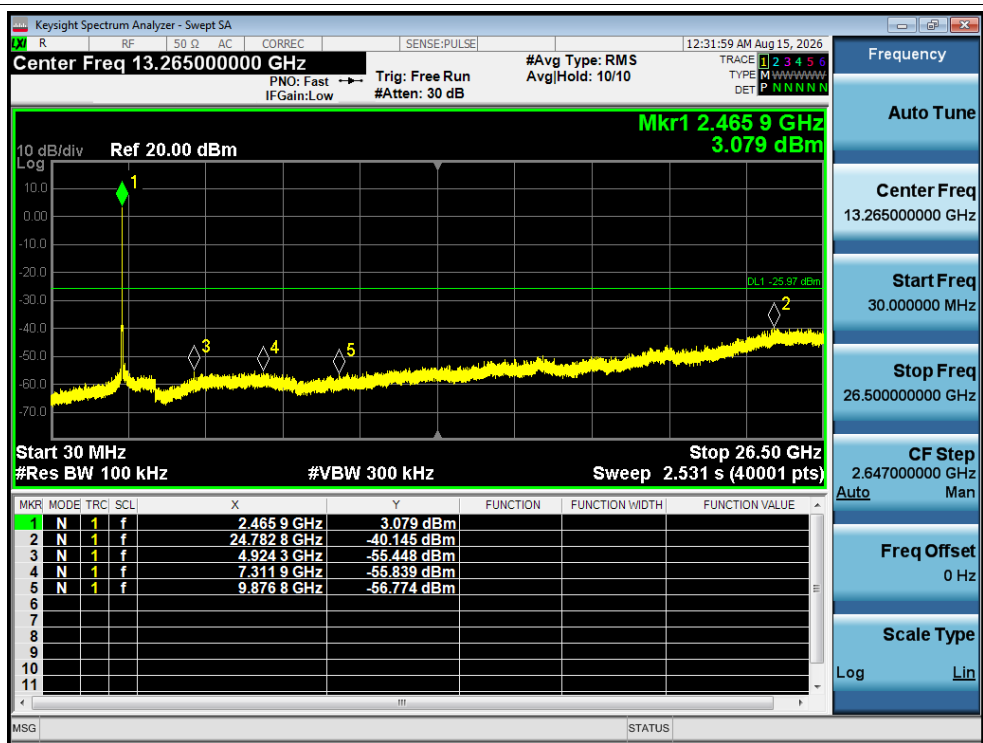

Tx. Spurious NVNT g 2462MHz Ant1 Emission

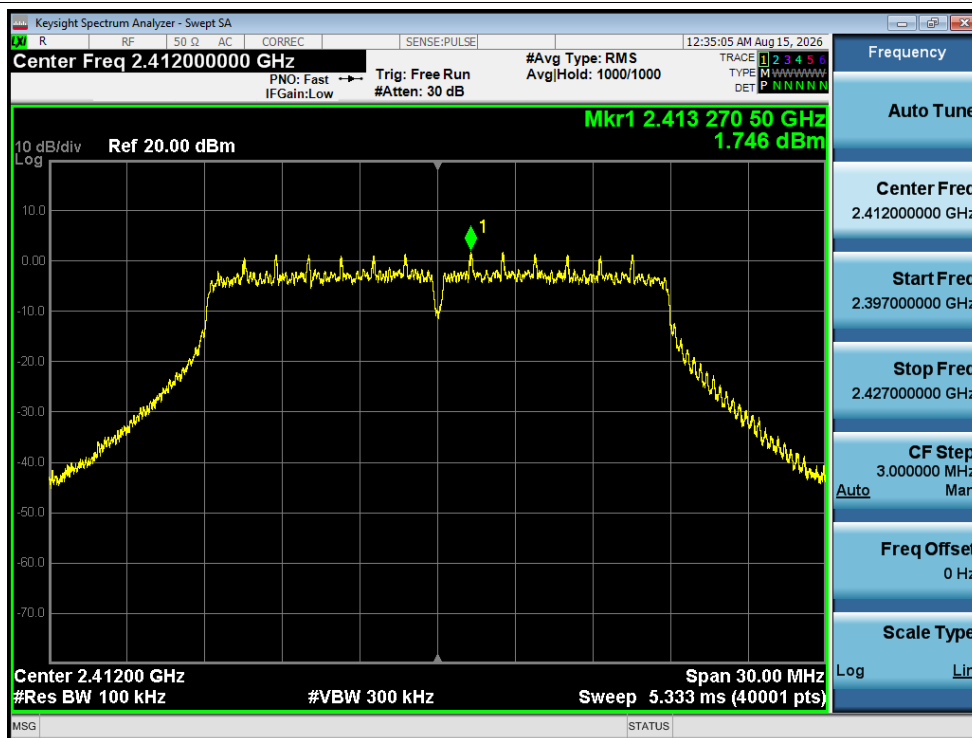


Tx. Spurious NVNT n20 2412MHz Ant1 Ref

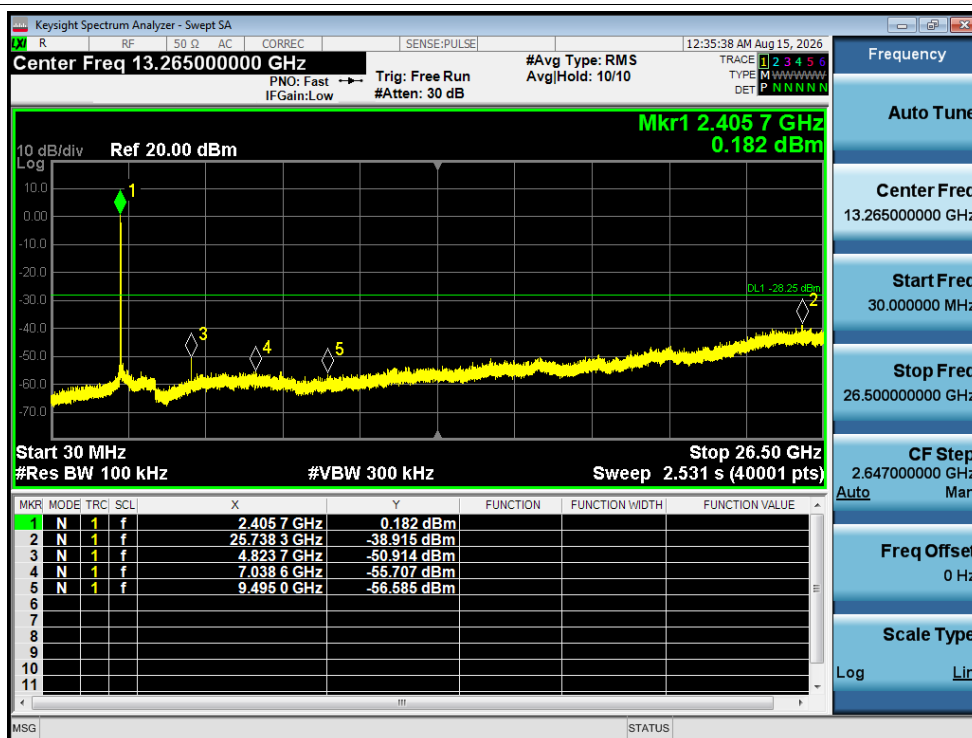


Tx. Spurious NVNT n20 2412MHz Ant1 Emission




Tx. Spurious NVNT n20 2437MHz Ant1 Ref

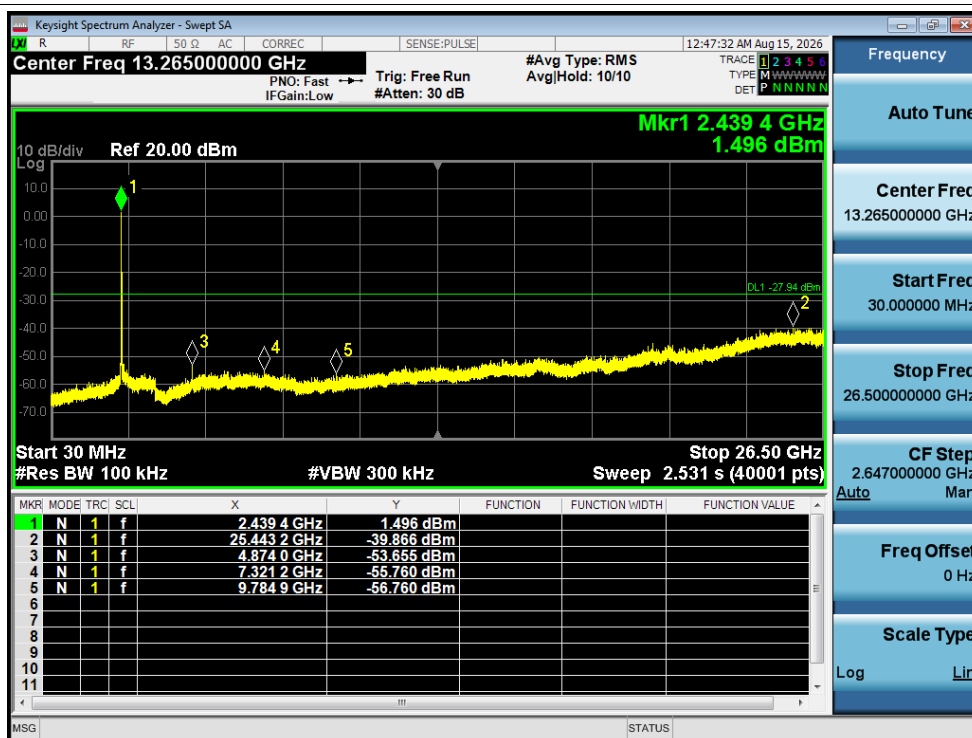

Tx. Spurious NVNT n20 2437MHz Ant1 Emission

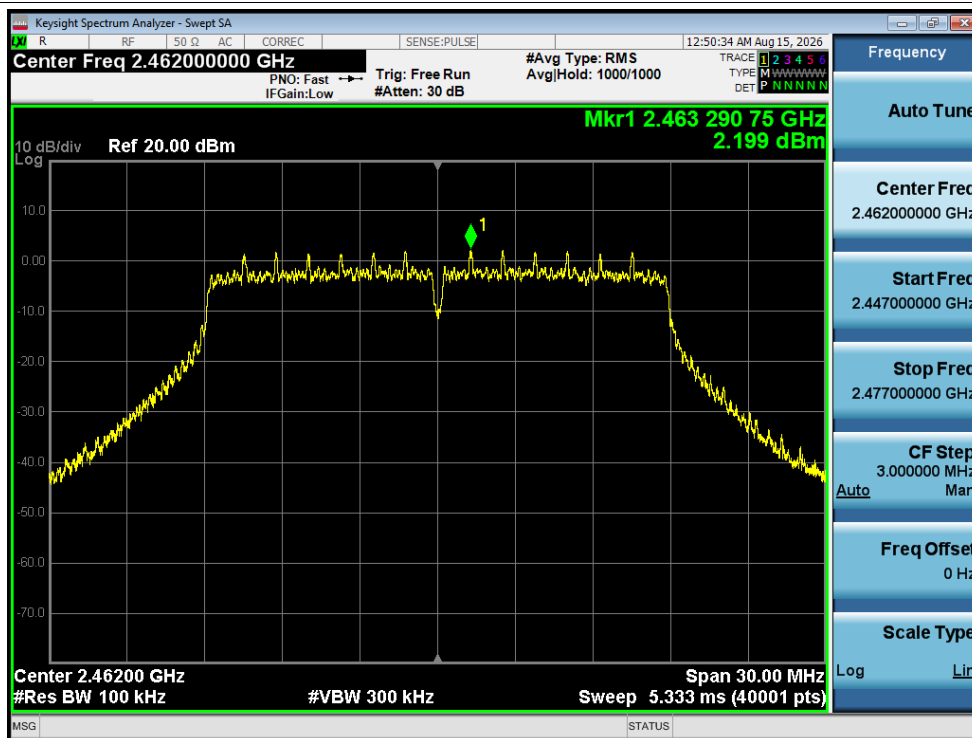

Tx. Spurious NVNT n20 2462MHz Ant1 Ref

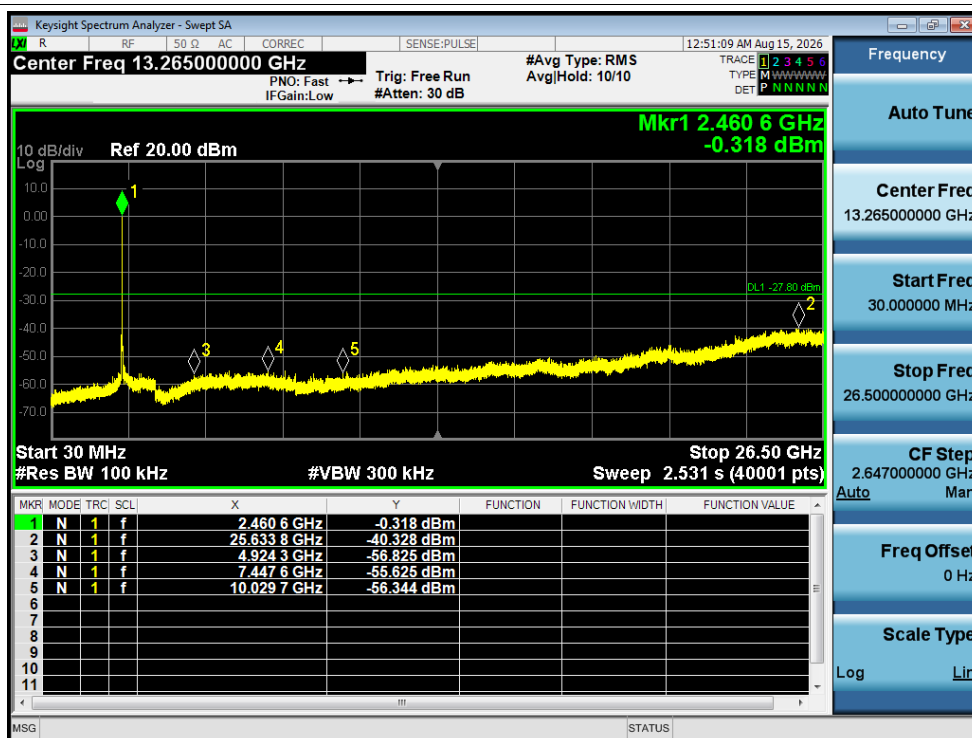

Tx. Spurious NVNT n20 2462MHz Ant1 Emission