

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
Report No.: RFBCKS-WTW-P25080470A
FCC ID: 2ABLK-GS4139E
Product: WiFi7 AP
Brand: GigaSpire
Model No.: 7u10t.2 GS4139E
Series Model: 7u10txg.2 GS4139XG
Received Date: 2025/11/28
Test Date: 2025/12/10 ~ 2025/12/22
Issued Date: 2026/3/16
Applicant: Calix Inc.
Address: 1 Santana West 3155 Olsen Drive, Suite 450, San Jose, California 95117, United States
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory
Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
FCC Registration /
Designation Number: 723255 / TW2022

Approved by: _____, **Date:** 2026/3/16
May Chen / Manager

This test report consists of 187 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Phoenix Huang / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/>, and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Supplementary Information	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Antenna Description of EUT	7
3.3 EUT Power Level.....	9
4 Test Instruments	10
4.1 U-NII Detection Bandwidth	10
4.2 Channel Availability Check Time	10
4.3 Channel Closing Transmission and Channel Move Time	10
4.4 Non-Occupancy Period	10
4.5 Statistical Performance Check	10
5 Limits of Test Items.....	11
5.1 Working Modes and Required Test Items	11
5.2 Test Limits and Radar Signal Parameters	12
6 Test Arrangements.....	15
6.1 Test Setup.....	15
6.2 Test Procedure	16
6.2.1 DFS Measurement System.....	16
6.2.2 Calibration of DFS Detection Threshold Level	19
6.2.3 DFS Detection Threshold	20
6.2.4 DFS Companion Device	25
7 Test Results of Test Item	26
7.1 U-NII Detection Bandwidth	26
7.2 Channel Availability Check Time	34
7.3 Channel Closing Transmission and Channel Move Time	36
7.4 Non-Occupancy Period	47
7.5 Statistical Performance Check	50
8 Declaration of Conformity by the Manufacturer	88
8.1 Transmit Power Control (TPC)	88
8.2 Statement of Manufacturer	88
9 Pictures of Test Arrangements	89
10 Information of the Testing Laboratories	90
11 Appendix.....	91
11.1 Radar Test Signal	91

Release Control Record

Issue No.	Description	Date Issued
RFBCKS-WTW-P25080470A	Original release.	2026/3/16

1 Certificate

Product: WiFi7 AP

Brand: GigaSpire

Test Model: 7u10t.2 GS4139E

Series Model: 7u10txg.2 GS4139XG

Sample Status: Engineering sample

Applicant: Calix Inc.

Test Date: 2025/12/10 ~ 2025/12/22

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement procedure: KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

The test items that the EUT need to perform in accordance with its interfaces, evaluated functions, are as follows:

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(h)	U-NII Detection Bandwidth	Pass	Applicable
15.407(h)	Channel Availability Check Time	Pass	Applicable
15.407(h)	Channel Closing Transmission and Channel Move Time	Pass	Applicable
15.407(h)	Non-Occupancy Period	Pass	Applicable
15.407(h)	Statistical Performance Check	Pass	Applicable
15.407(h)	Non-Associated Test	N/A	Not Applicable

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	WiFi7 AP
Brand	GigaSpire
Test Model	7u10t.2 GS4139E
Series Model	7u10txg.2 GS4139XG
DFS Firmware/software version	26.1.0
Operational Mode	Master (with TPC function) Repeater
Operating Frequency Band	5.25 GHz ~ 5.35 GHz 5.47 GHz ~ 5.725 GHz
Communication Mode	IP based
Channel Puncturing Function	Support Channel Puncturing

Note:

1. All models are listed as below.

Brand	Model	Difference
GigaSpire	7u10t.2 GS4139E	GigaSpire 7u10t.2, GS4139E, Triband 2+4+4 Wi-Fi 7 RG/Mesh, 10GE WAN, 10GE + 2.5GE + 2 GE LAN, 1 POTS, USB, AM PA
	7u10txg.2 GS4139XG	GigaSpire 7u10txg.2, GS4139XG, Triband 2+4+4 Wi-Fi 7 RG/Mesh, XGS WAN, 10GE + 2.5GE + 2 GE LAN, 1 POTS, USB, AM PA

2. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna NO.	RF Chain NO.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type
2G_1	0	WNC	48XPAB0R	2.66	2.4~2.4835	Dipole	ipex(MHF)
2G_2	1	WNC	48XPAB0S	1.54	2.4~2.4835	Dipole	ipex(MHF)
5G_3	0	WNC	48XPAB09	4.03	5.15~5.25	Dipole	ipex(MHF)
				2.36	5.25~5.35		
				2.72	5.47~5.725		
				2.28	5.725~5.85		
5G_4	1	WNC	48XPAB09	3.33	5.15~5.25	Dipole	ipex(MHF)
				3.5	5.25~5.35		
				4.09	5.47~5.725		
				4.09	5.725~5.85		
5G_5	2	WNC	48XPAB09	4.27	5.15~5.25	Dipole	ipex(MHF)
				4.18	5.25~5.35		
				4.03	5.47~5.725		
				3.35	5.725~5.85		
5G_6	3	WNC	48XPAB09	3.18	5.15~5.25	Dipole	ipex(MHF)
				2.69	5.25~5.35		
				4.46	5.47~5.725		
				4.1	5.725~5.85		
6G_7	0	WNC	48XPAB0T	3.56	5.925~6.425	Dipole	ipex(MHF)
				2.74	6.425~6.525		
				3.47	6.525~6.875		
				3.47	6.875~7.125		
6G_8	1	WNC	48XPAB0U	2.99	5.925~6.425	Dipole	ipex(MHF)
				3.44	6.425~6.525		
				3.76	6.525~6.875		
				4.9	6.875~7.125		
6G_9	2	WNC	48XPAB0V	4.68	5.925~6.425	Dipole	ipex(MHF)
				4.71	6.425~6.525		
				4.86	6.525~6.875		
				4.66	6.875~7.125		
6G_10	3	WNC	48XPAB0W	3.77	5.925~6.425	Dipole	ipex(MHF)
				4.33	6.425~6.525		
				4.33	6.525~6.875		
				4.79	6.875~7.125		

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The directional antenna gain, please refer to the following table:

Frequency Range (GHz)	Directional Antenna Gain (dBi)
2.4 ~ 2.4835	3.69
5.15 ~ 5.25	7
5.25 ~ 5.35	6.17
5.47 ~ 5.725	6.52
5.725 ~ 5.85	6.52

3. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ac (VHT160)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX
802.11ax (HE160)	4TX	4RX
802.11be (EHT20)	4TX	4RX
802.11be (EHT40)	4TX	4RX
802.11be (EHT80)	4TX	4RX
802.11be (EHT160)	4TX	4RX
802.11be (EHT240)	4TX	4RX

3.3 EUT Power Level

Highest Power Level						
Signal Mode	Frequency Band (MHz)	Conducted Power		Gain (dBi)	EIRP	
		(mW)	(dBm)		(mW)	(dBm)
CDD	5250-5350	236.682	23.74	4.18	619.677	27.92
	5470-5725	245.774	23.91	4.46	686.335	28.37
Beamforming	5250-5350	233.659	23.69	6.17	967.348	29.86
	5470-5725	221.132	23.45	6.52	992.32	29.97

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 U-NII Detection Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXG Vector Signal Generator Keysight	N5182B	MY53052700	2025/7/19	2026/7/18
Programmable Step Attenuator Agilent	8496H-002	MY42143989	2025/10/22	2026/10/21
Signal & Spectrum Analyzer R&S	FSV3044	101506	2025/6/12	2026/6/11
Software BV	BVDFS_Auto- ISM_Workbench_V2A2	N/A	N/A	N/A

Notes:

1. The test was performed in DFS-2 room.
2. Tested Date: 2025/12/10 ~ 2025/12/22

4.2 Channel Availability Check Time

Refer to section 4.1 to get the tested date and information of the instruments.

4.3 Channel Closing Transmission and Channel Move Time

Refer to section 4.1 to get the tested date and information of the instruments.

4.4 Non-Occupancy Period

Refer to section 4.1 to get the tested date and information of the instruments.

4.5 Statistical Performance Check

Refer to section 4.1 to get the tested date and information of the instruments.

5 Limits of Test Items

5.1 Working Modes and Required Test Items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

Table 1: Applicability of DFS Requirements Prior To Use a Channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	✓ note	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Note: Per KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02 section (b)(5/6), If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear. An analyzer plot that contains a single 30-minute sweep on the original channel.

Table 2: Applicability of DFS Requirements during Normal Operation.

Requirement	Operational Mode	
	Master or Client with radar detection	Client without radar detection
DFS Detection Threshold	✓	Not required
Channel Closing Transmission Time	✓	✓
Channel Move Time	✓	✓
U-NII Detection Bandwidth	✓	Not required

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

5.2 Test Limits and Radar Signal Parameters

Detection Threshold Values

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Parameters of DFS Test Waveforms

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a ----- Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\lceil \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\rceil$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 6: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses Per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30
Three subsets of trials will be performed with a minimum of ten trials per subset. The subset of trials differ in where the Long Pulse Type 5 Signal is tuned in frequency. a) the Channel center frequency b) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth c) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth It include 10 trails for every subset, the formula as below, For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT Channel. For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 2. The center frequency of the signal generator for each trial is calculated by: $FL + (0.4 * \text{Chirp Width [in MHz]})$ For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 3. The center frequency of the signal generator for each trial is calculated by: $FH - (0.4 * \text{Chirp Width [in MHz]})$							

Table 7: Frequency Hopping Radar Test Waveform


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

6 Test Arrangements

6.1 Test Setup

Conducted measurement

Master Mode

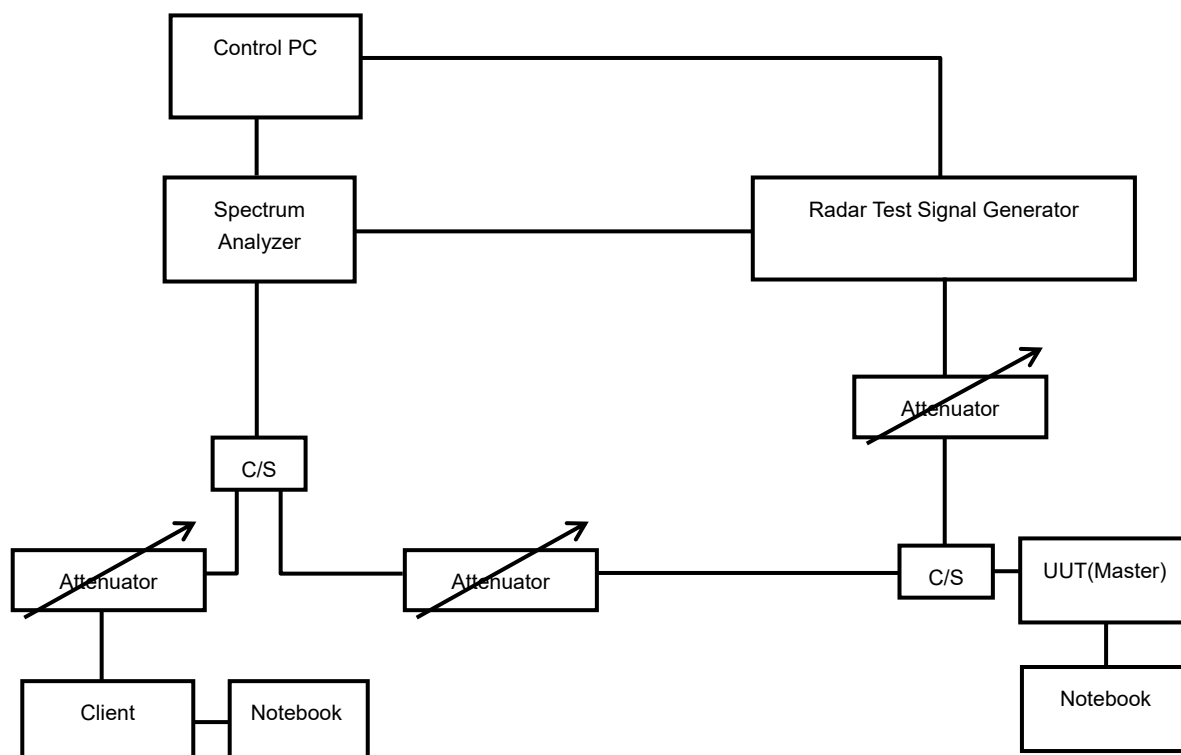


The UUT is a U-NII Device operating in Master mode. The radar test signals are injected into the Master Device.

6.2 Test Procedure

6.2.1 DFS Measurement System

A complete DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating system and (2) the Traffic Monitoring system. The control PC is necessary for generating the Radar waveforms in Table 5, 6 and 7. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

Conducted Setup Configuration of DFS Measurement System

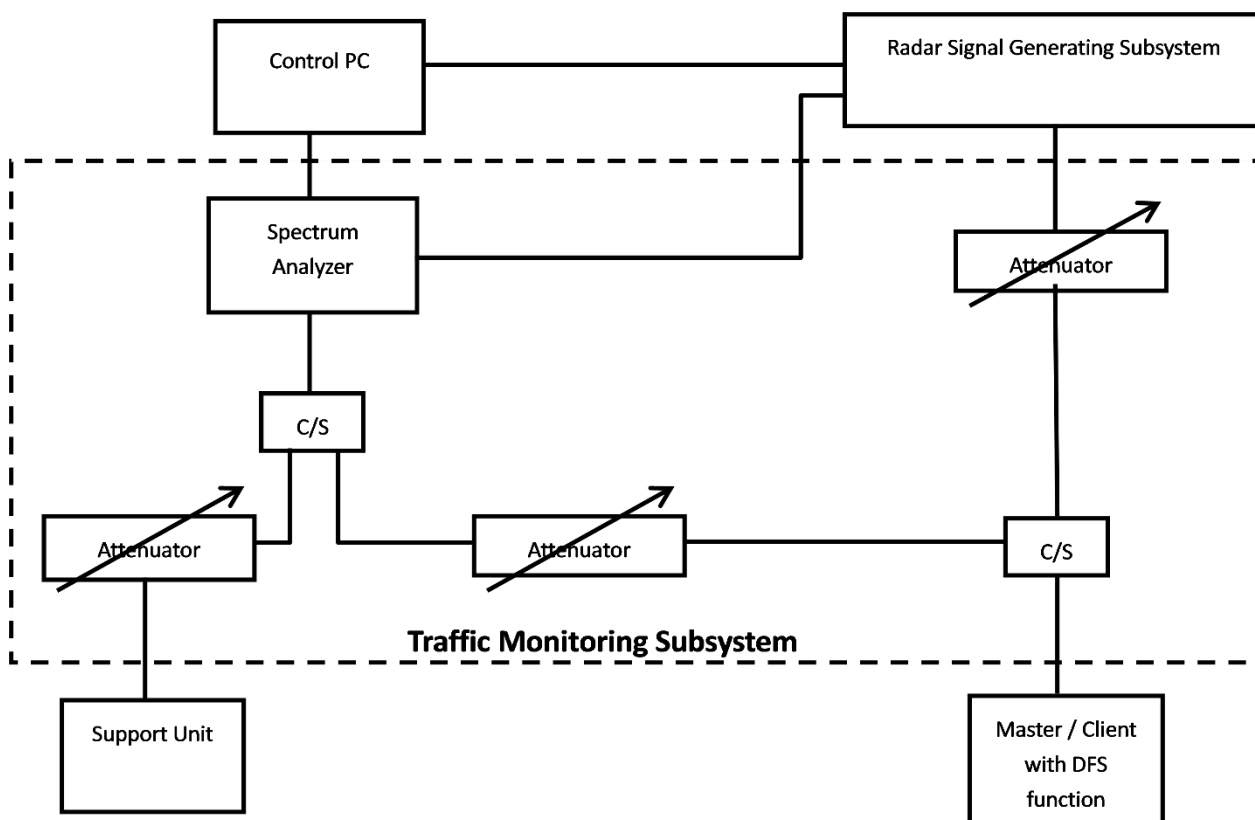


Channel Loading

System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:

Applicable	Requirements apply
	a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
	b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
√	c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.
	d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.


Plots of Channel Loading

Duty Cycle

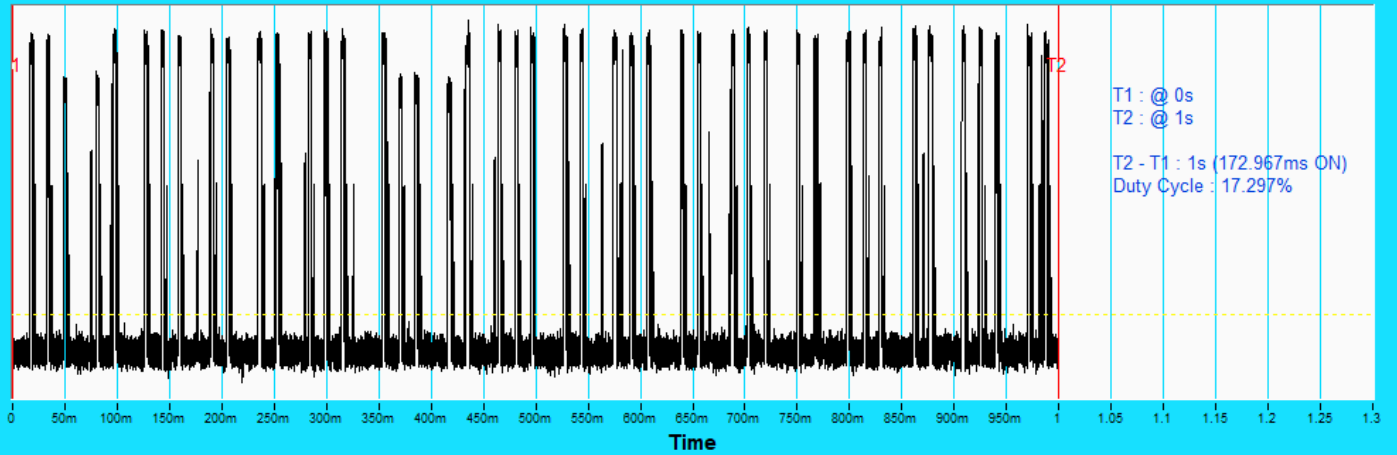


802.11be (EHT20)

Duty Cycle

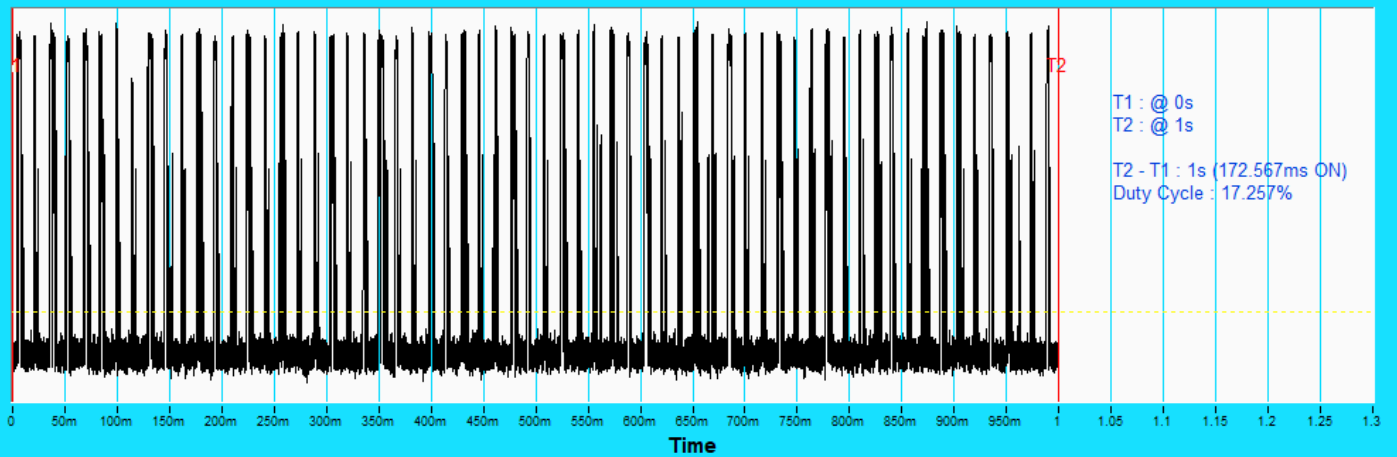

802.11be (EHT40)


Duty Cycle

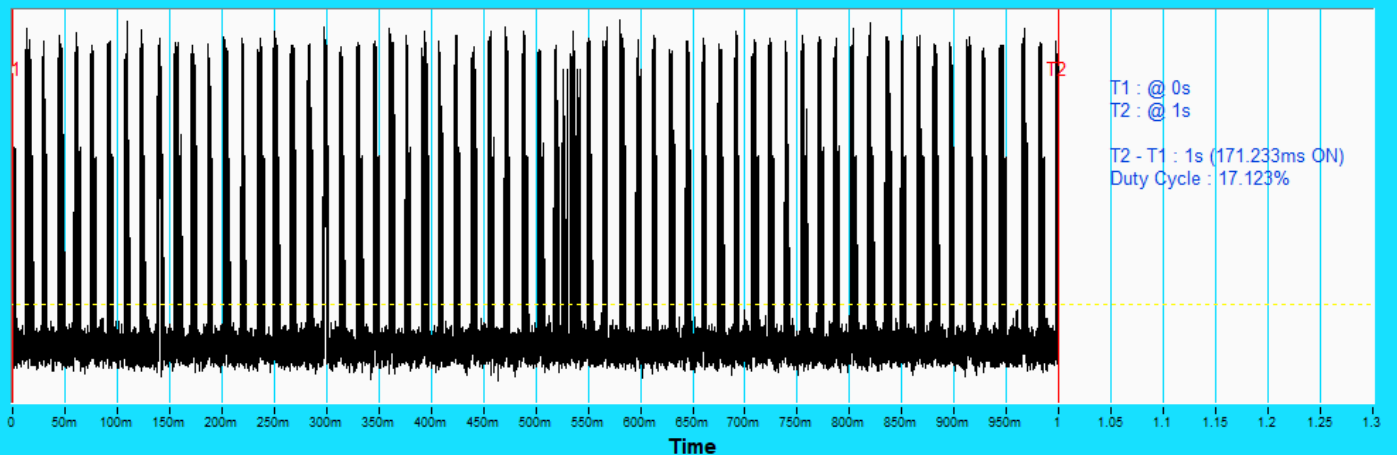

802.11be (EHT80)


Plots of Channel Loading

DutyCycle

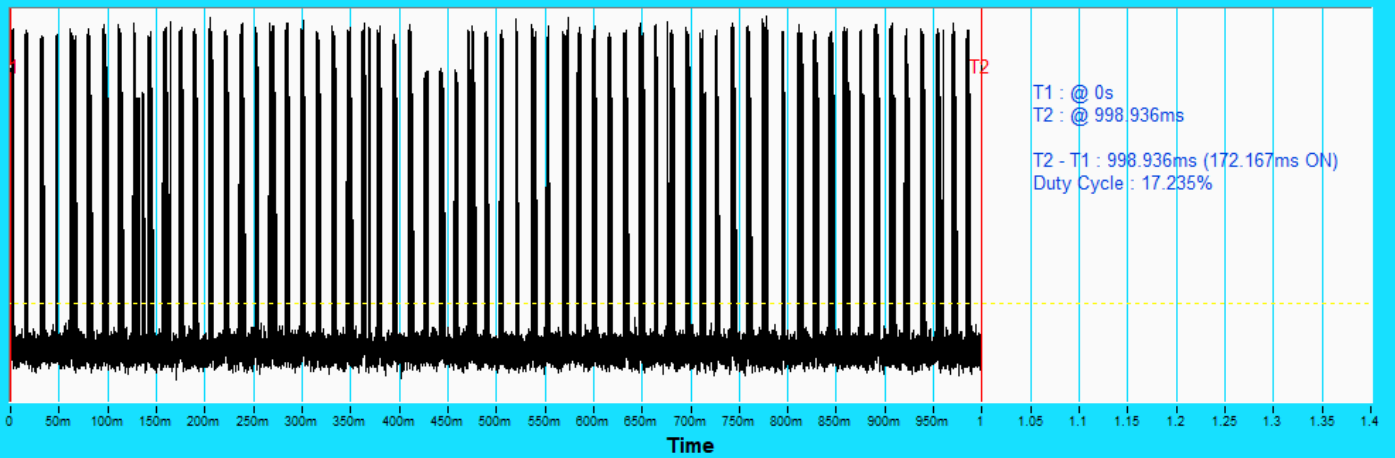

802.11be (EHT160)

Duty Cycle

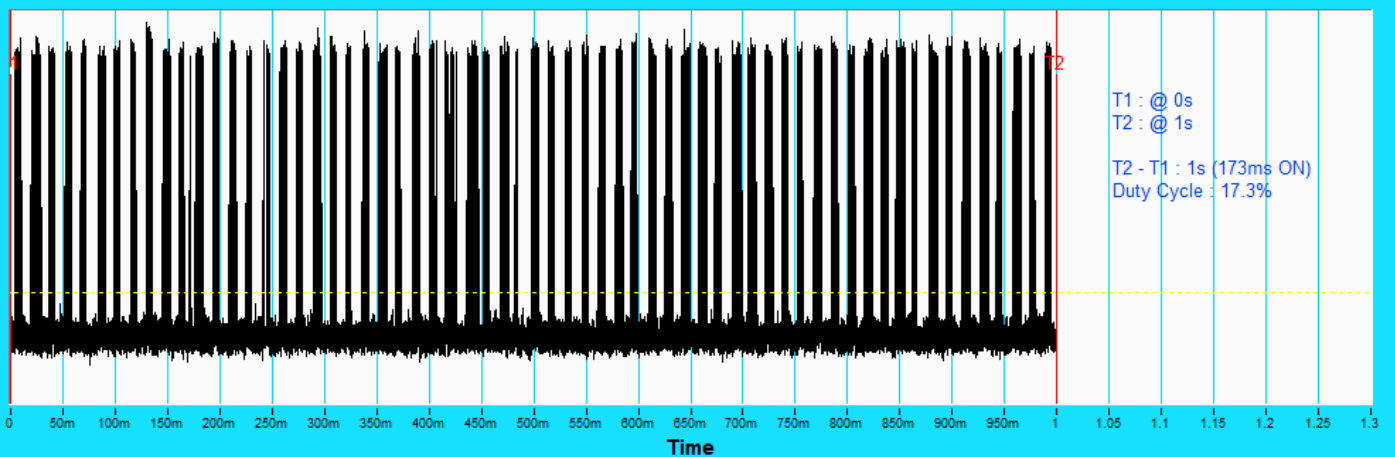


802.11be (EHT240)

6.2.2 Calibration of DFS Detection Threshold Level

The measured channel is chosen from the operating channels of the UUT within the DFS band and using the all bandwidth mode available for the link. The radar signal was the same as transmitted channels, and injected into the antenna of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time.

Conducted Setup Configuration of Calibration of DFS Detection Threshold Level

The calibrated conducted detection threshold level is set to -64 dBm. The tested level is lower than required level hence it provides margin to the limit.

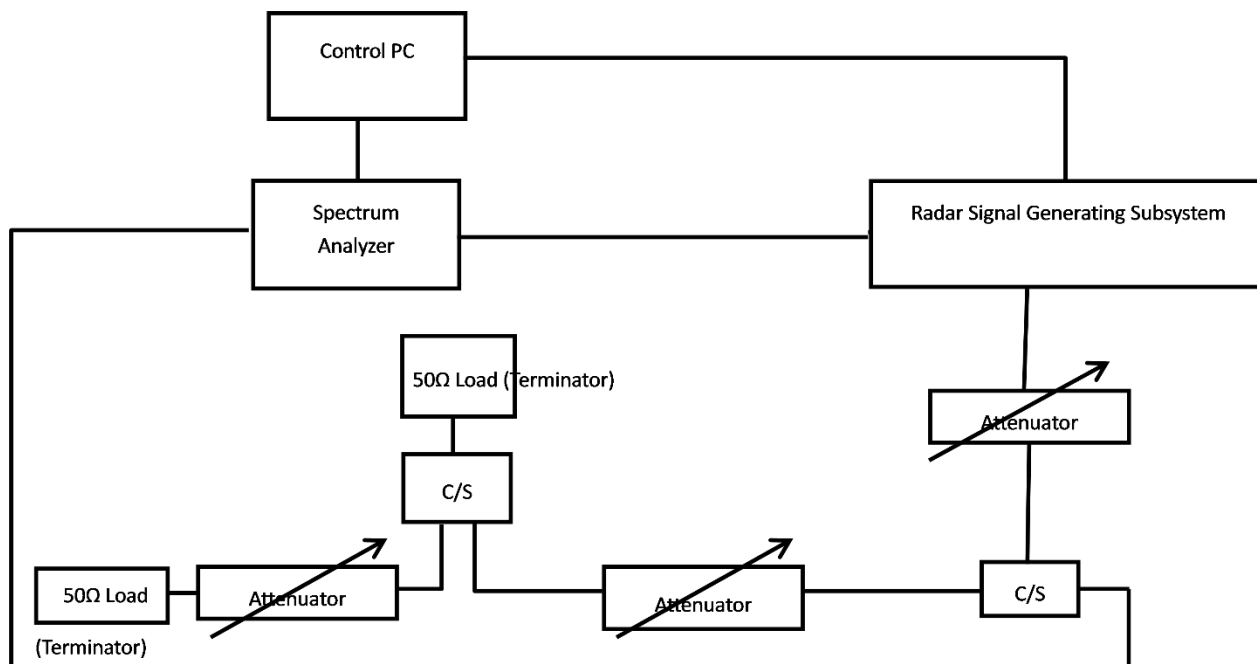

6.2.3 DFS Detection Threshold


Test Mode: Device Operating in Master Mode


The radar test waveforms are injected into the Master.


The antenna net gain is 2.36 dBi.


DFS Detection Threshold = $-64 \text{ dBm} + 2.36 \text{ dBi} + 1 \text{ dB} = -60.64 \text{ dBm}$


The calibrated conducted detection threshold level is lower than -60.64 dBm .

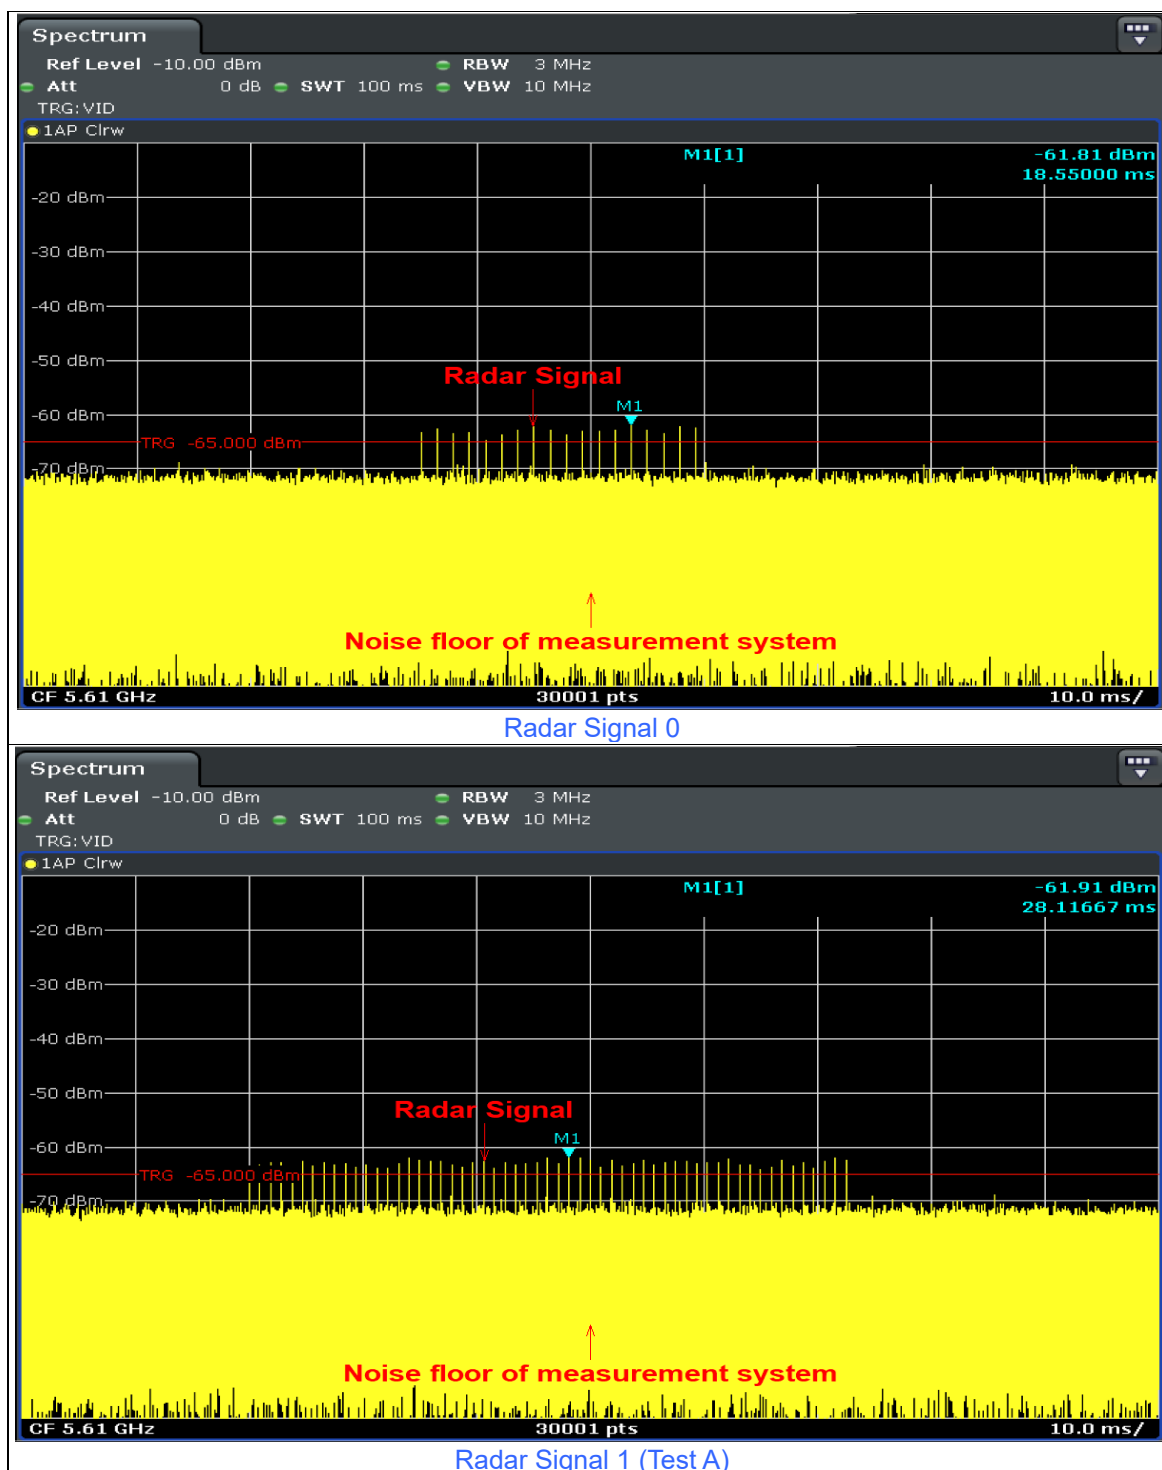

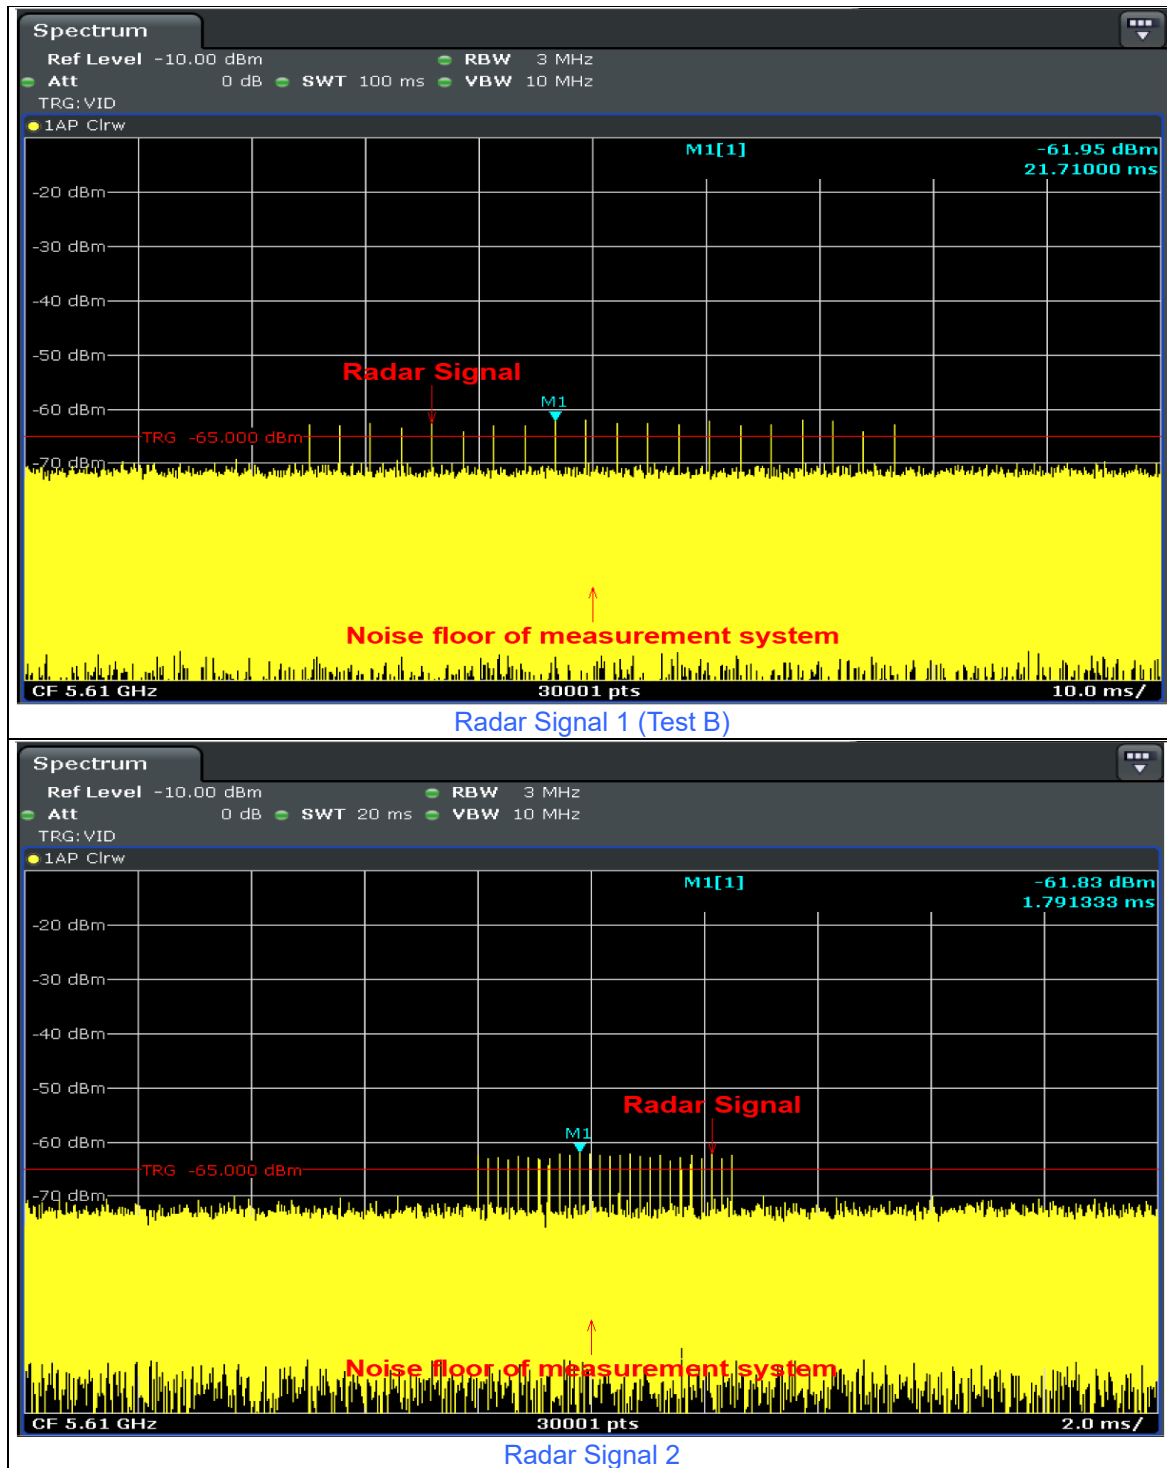

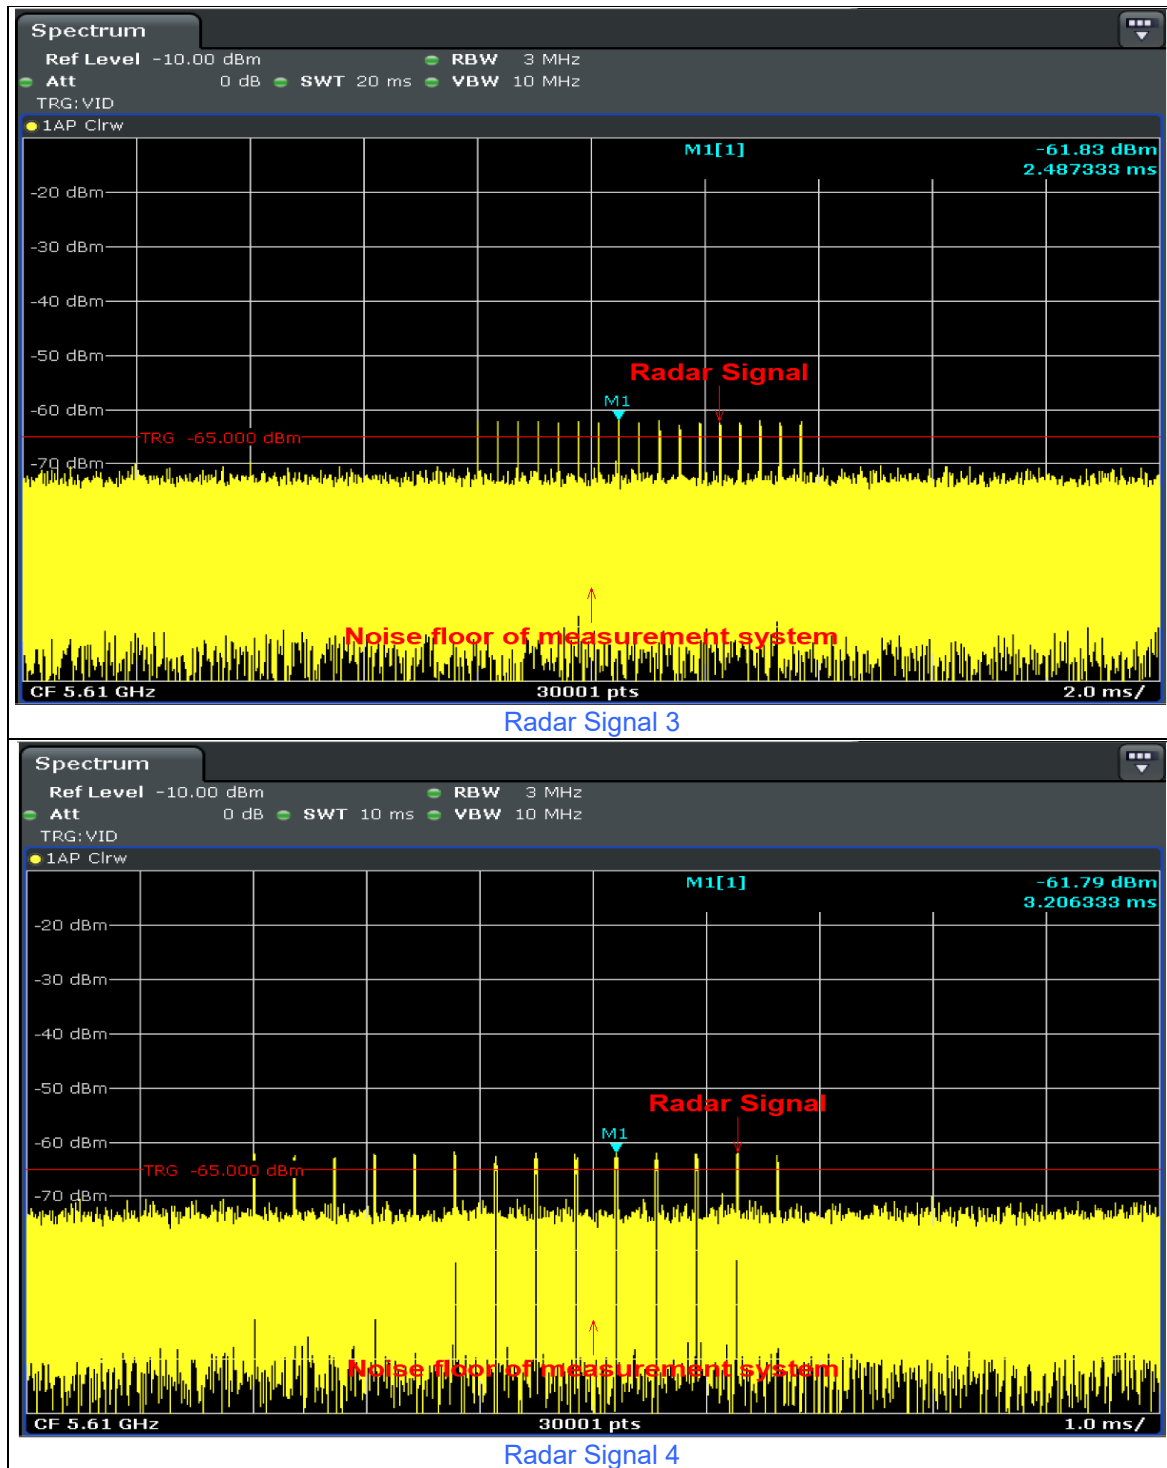

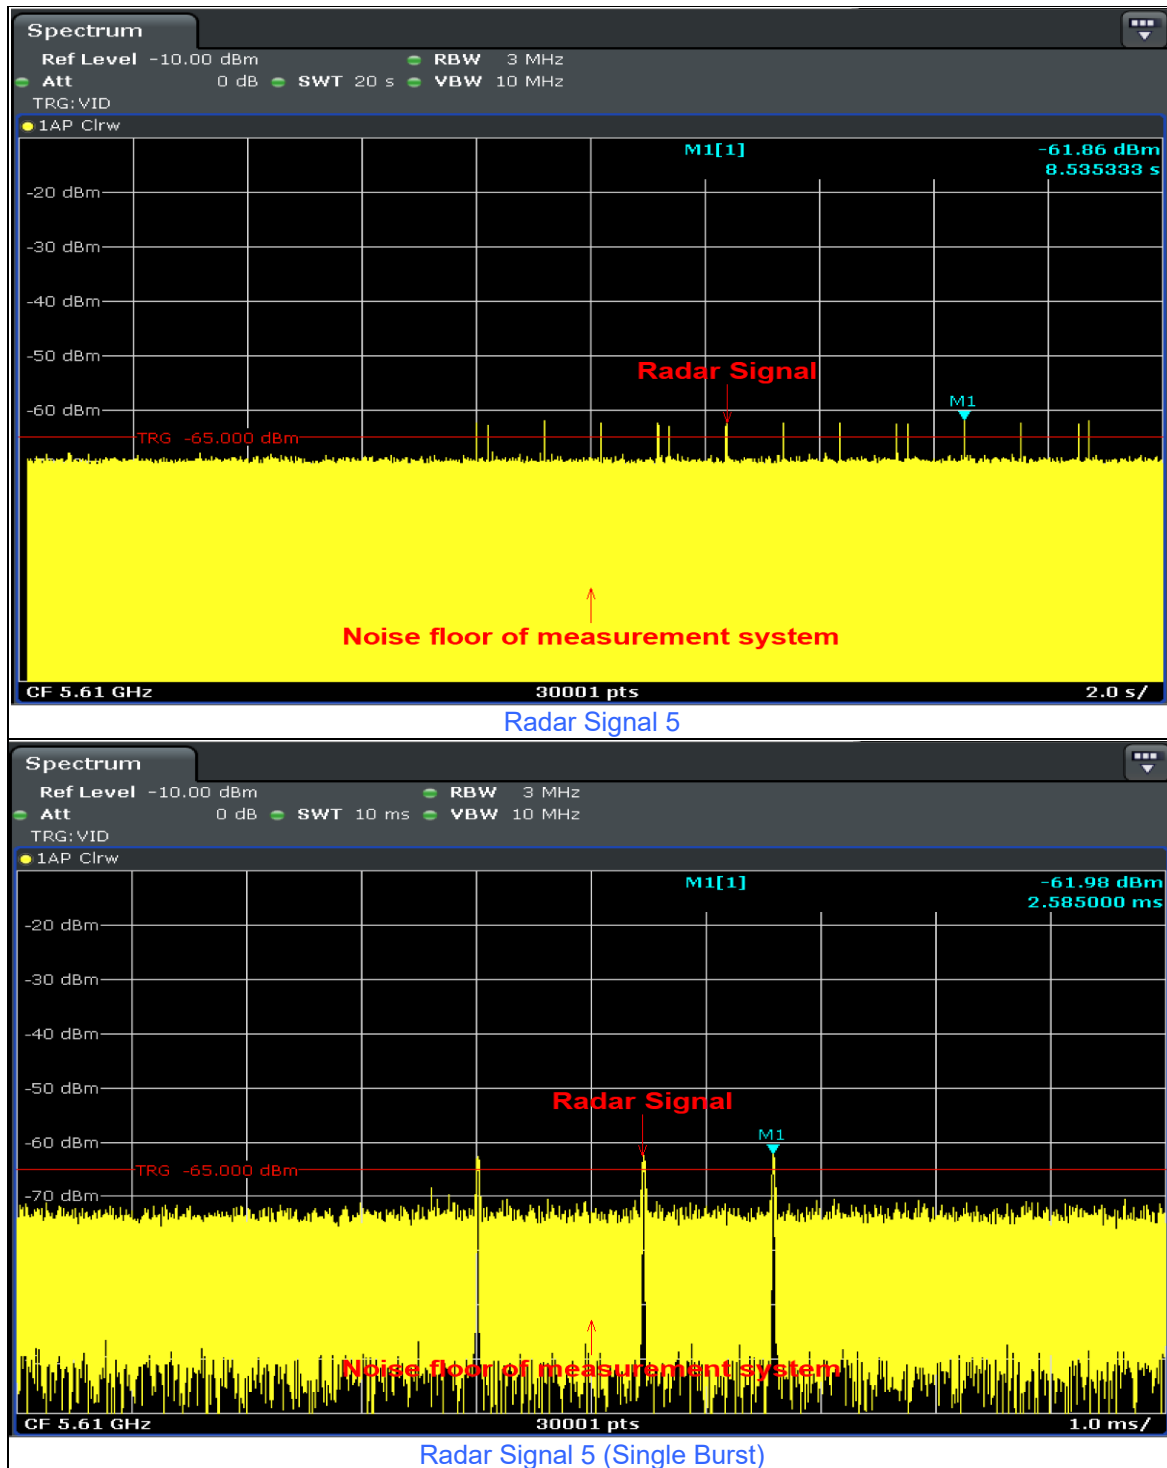

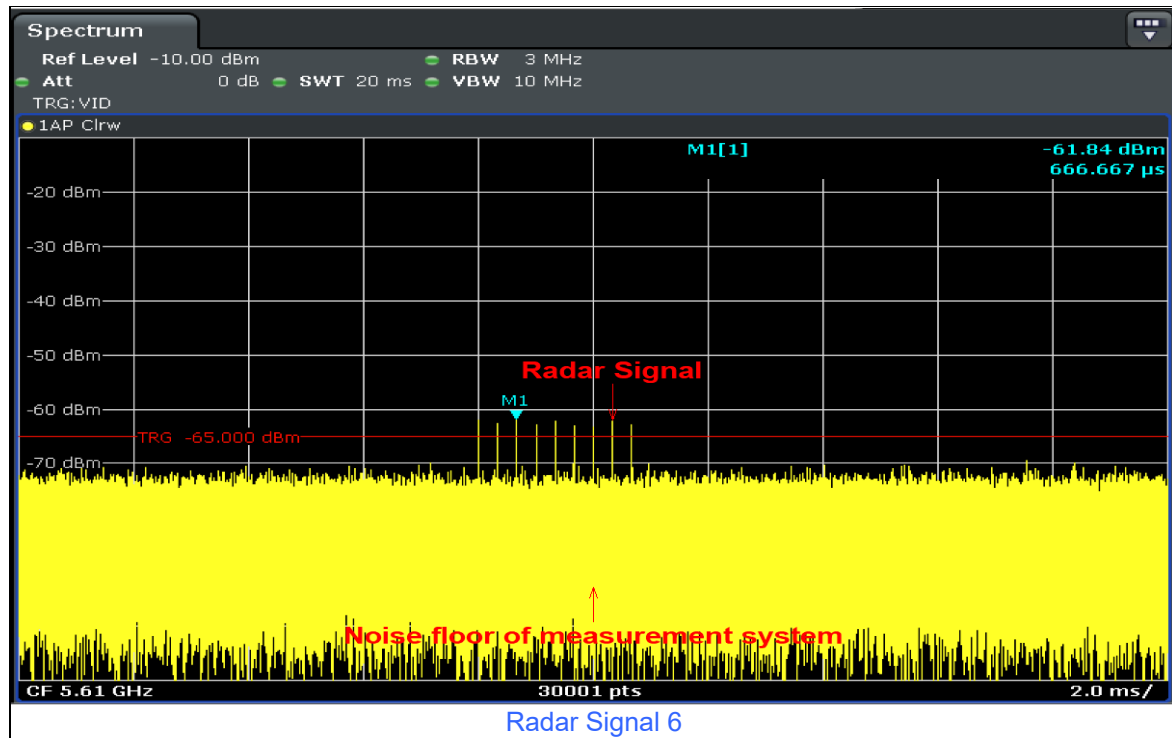

6.2.4 DFS Companion Device

Companion Device Information				
Product	Brand	Model No.	FCC ID	Software/Firmware Version
WiFi7 AP	GigaSpire	7u10t.2 GS4139E	2ABLK-GS4139E	OpenWrt SNAPSHOT r0-7075587 / LuCI Master 0


7 Test Results of Test Item

7.1 U-NII Detection Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------

802.11be (EHT20)

Detection Bandwidth Test													
Radar Type 0 EUT Frequency: 5500 MHz Detection bandwidth limit (100% of EUT 99% Power bandwidth): 19.08 MHz Detection bandwidth (5510 MHz (FH) – 5490 MHz (FL)): 20 MHz													
Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Percentage of Successful Detection	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

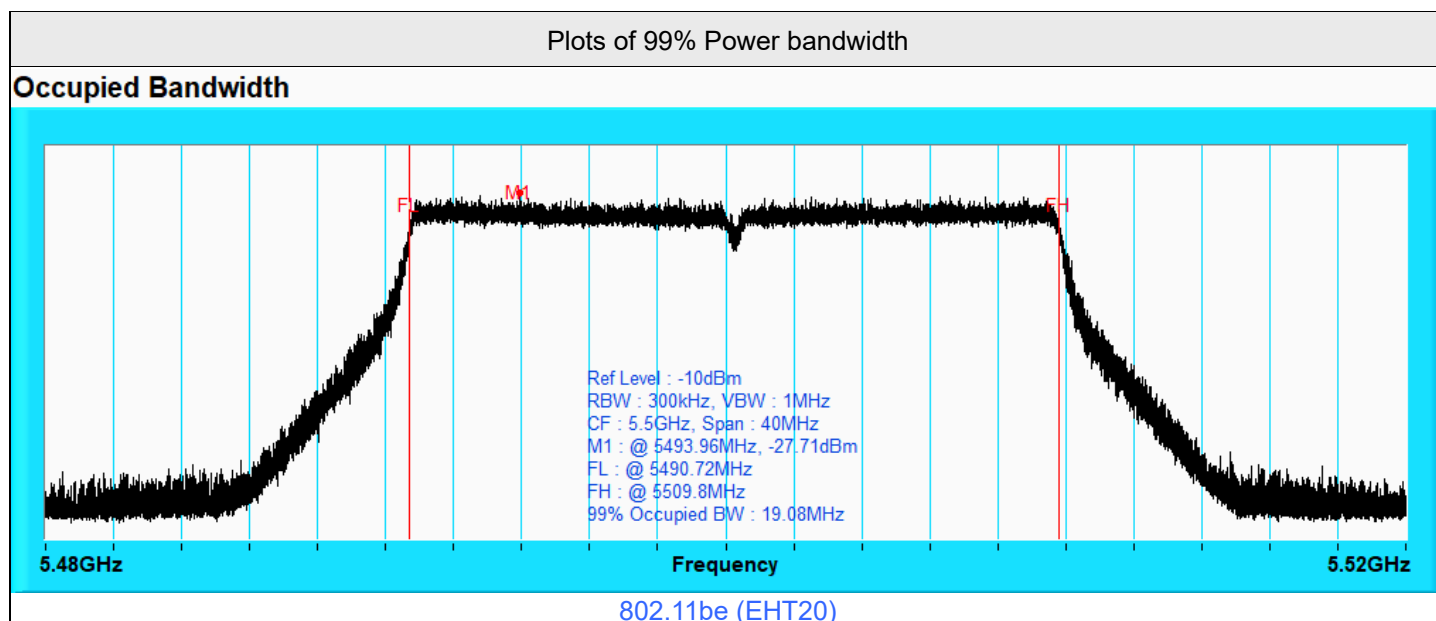

802.11be (EHT40)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5510 MHz


Detection bandwidth limit (100% of EUT 99% Power bandwidth): 38.29 MHz

Detection bandwidth (5530 MHz (FH) – 5490 MHz (FL)): 40 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5490 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

Occupied Bandwidth

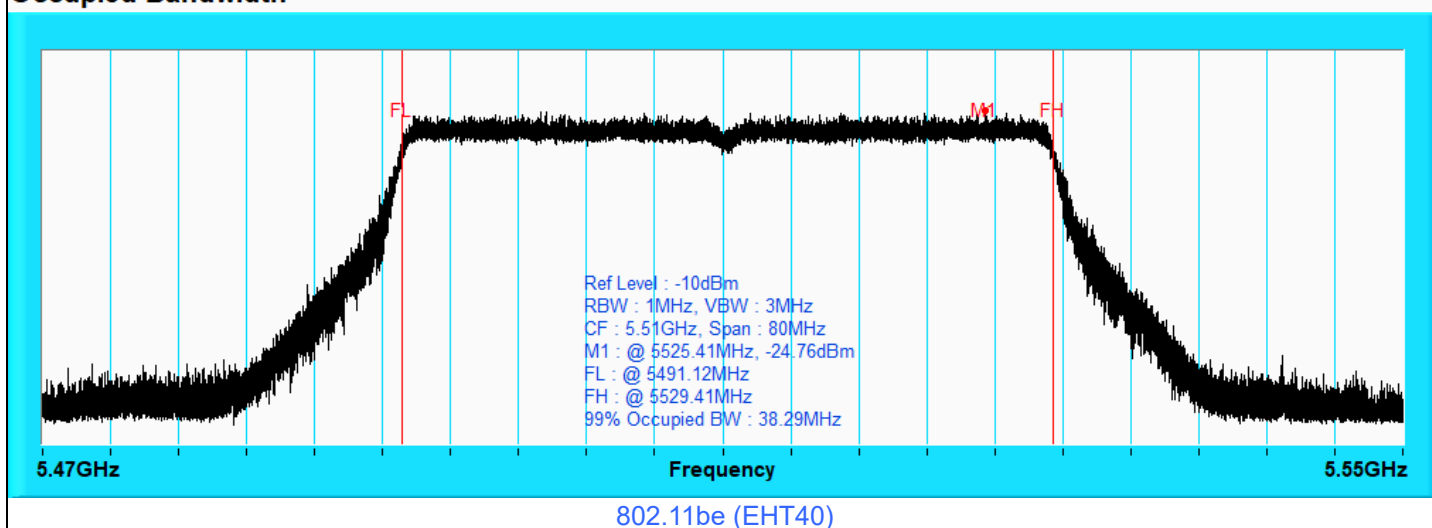

802.11be (EHT80)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5530 MHz


Detection bandwidth limit (100% of EUT 99% Power bandwidth): 77.66 MHz

Detection bandwidth (5569 MHz (FH) – 5491 MHz (FL)): 78 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5491 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5569 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

Occupied Bandwidth

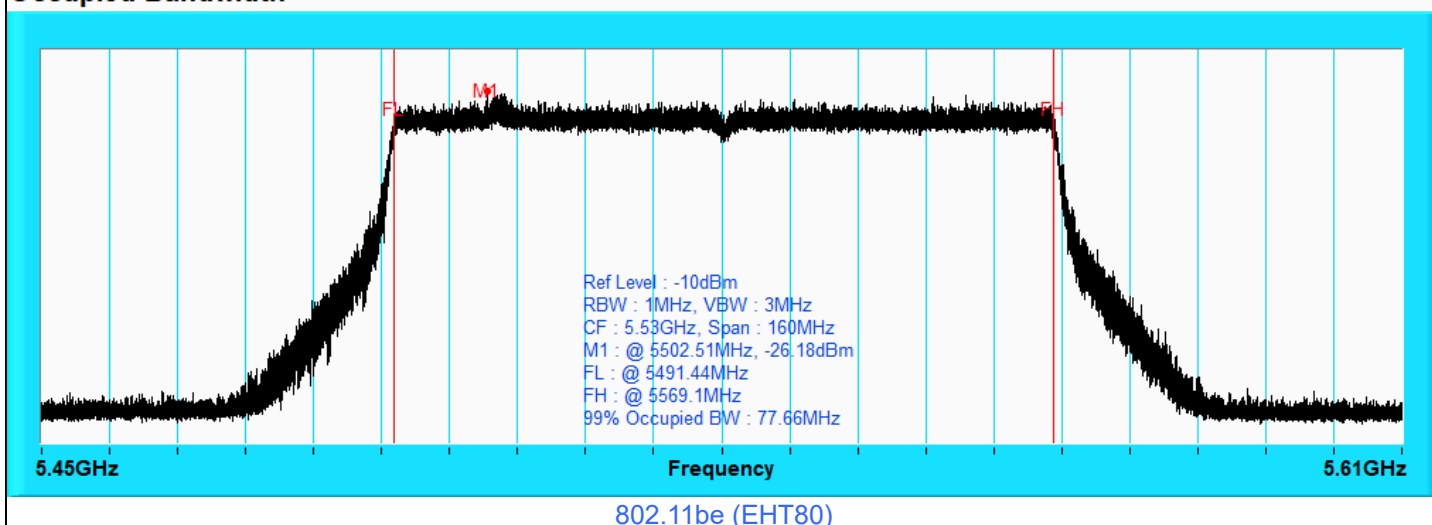

802.11be (EHT160) CH50

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5250 MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 156.82 MHz


Detection bandwidth (5329 MHz (FH) – 5250 MHz (FL)): 79 MHz

(160 MHz channel (5250 MHz) straddle between 5150 ~ 5250 MHz and 5250 ~ 5350 MHz, the DFS ability is necessary in 5250 ~ 5350 MHz, therefore DFS detection bandwidth start from 5250 MHz for 802.11be (EHT160) mode.)

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5250 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5255	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5260	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5265	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5270	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5275	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5280	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5285	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5290	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5295	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5300	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5305	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5310	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5315	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5320	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5325	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5329 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

Occupied Bandwidth

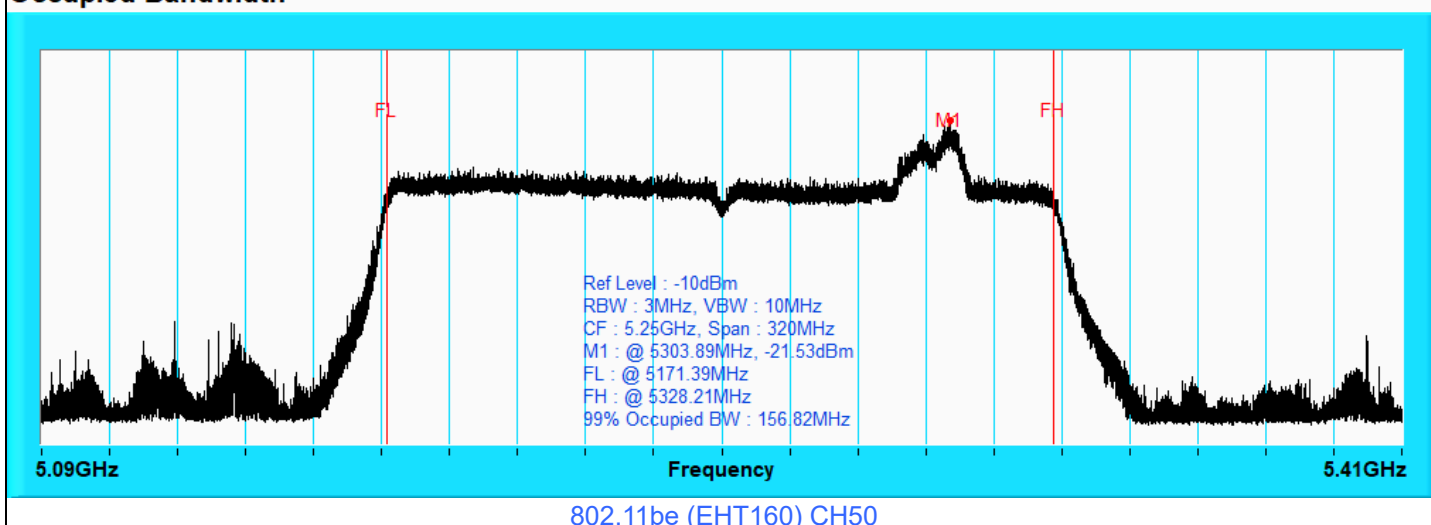

802.11be (EHT160) CH114

Detection Bandwidth Test

Radar Type 0


EUT Frequency: 5570 MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 156.96 MHz

Detection bandwidth (5649 MHz (FH) – 5491 MHz (FL)): 158 MHz

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5491 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5514	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5649 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

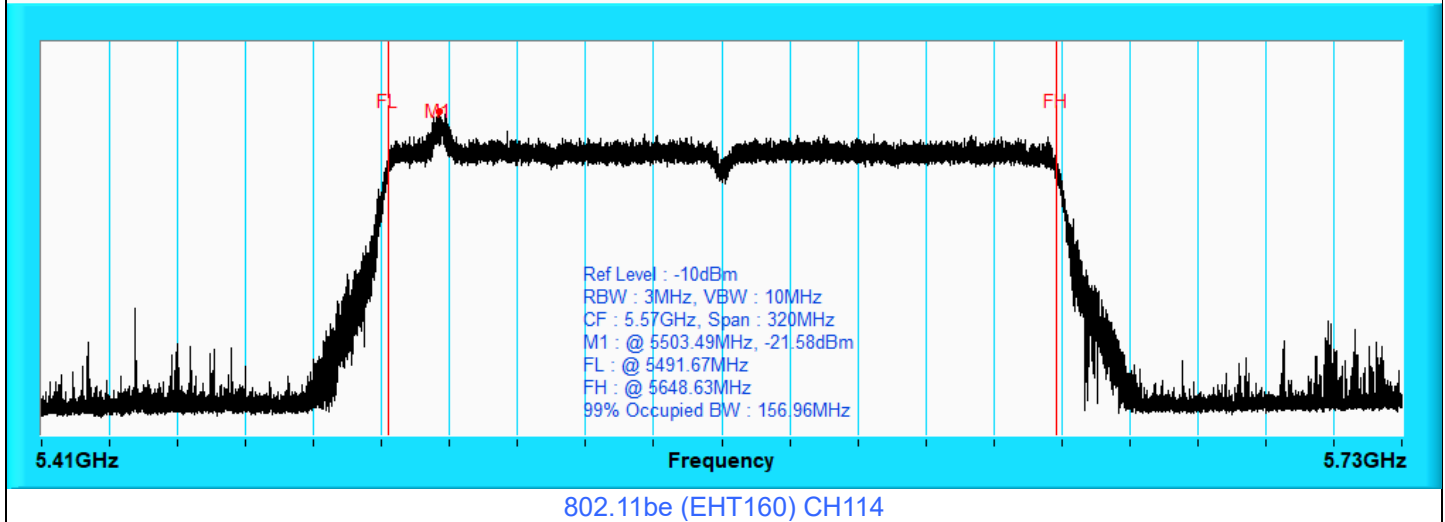Occupied Bandwidth

802.11be (EHT240)

Detection Bandwidth Test

Radar Type 0

EUT Frequency: 5610 MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 236.02 MHz

Detection bandwidth (5725 MHz (FH) – 5491 MHz (FL)): 234 MHz


(240 MHz channel (5610 MHz) straddle between 5470 ~ 5725 MHz and 5725 ~ 5850 MHz, the DFS ability is necessary in 5470 ~ 5725 MHz, therefore DFS detection bandwidth end of 5725 MHz for 802.11be (EHT240) mode.)

Radar Frequency (MHz)	Trial Number / Detection										Detection Probability	Minimum Detection Limit	Test Result
	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10			
5491 (FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5535	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5540	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5545	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5550	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5555	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5560	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5565	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5570	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5575	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5580	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5585	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5590	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5595	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5600	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5605	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5610	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	90%	90%	Pass
5615	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5620	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5625	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5630	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5635	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5640	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5645	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	90%	90%	Pass
5650	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5655	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

5660	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5665	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5670	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5675	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5680	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5685	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5690	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5695	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5700	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5705	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5710	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5715	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5720	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass
5725 (FH)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100%	90%	Pass

Plots of 99% Power bandwidth

Occupied Bandwidth

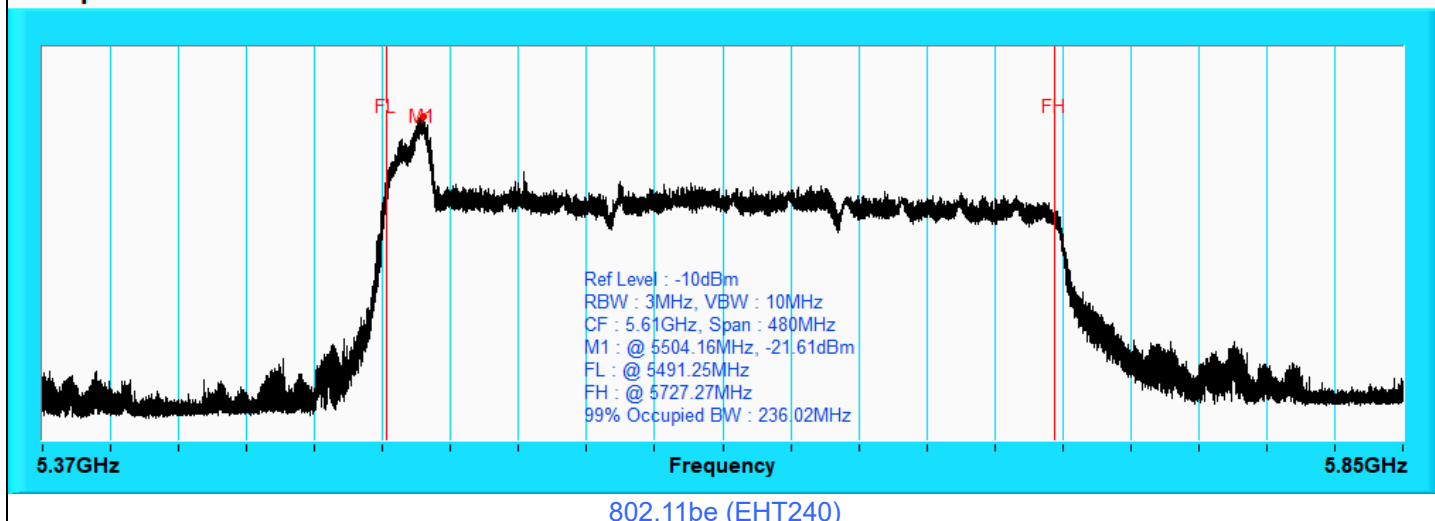


7.2 Channel Availability Check Time

Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------


If the EUT successfully detected the radar burst, it should be observed as the EUT has no transmissions occurred until the EUT starts transmitting on another channel.

Timing of Radar Signal	Observation	
	EUT	Spectrum Analyzer
Within 0 to 6 seconds	Detected	No transmissions
Within 54 to 60 seconds	Detected	No transmissions

Note: Worst case channel for final "Channel Availability Check" test.

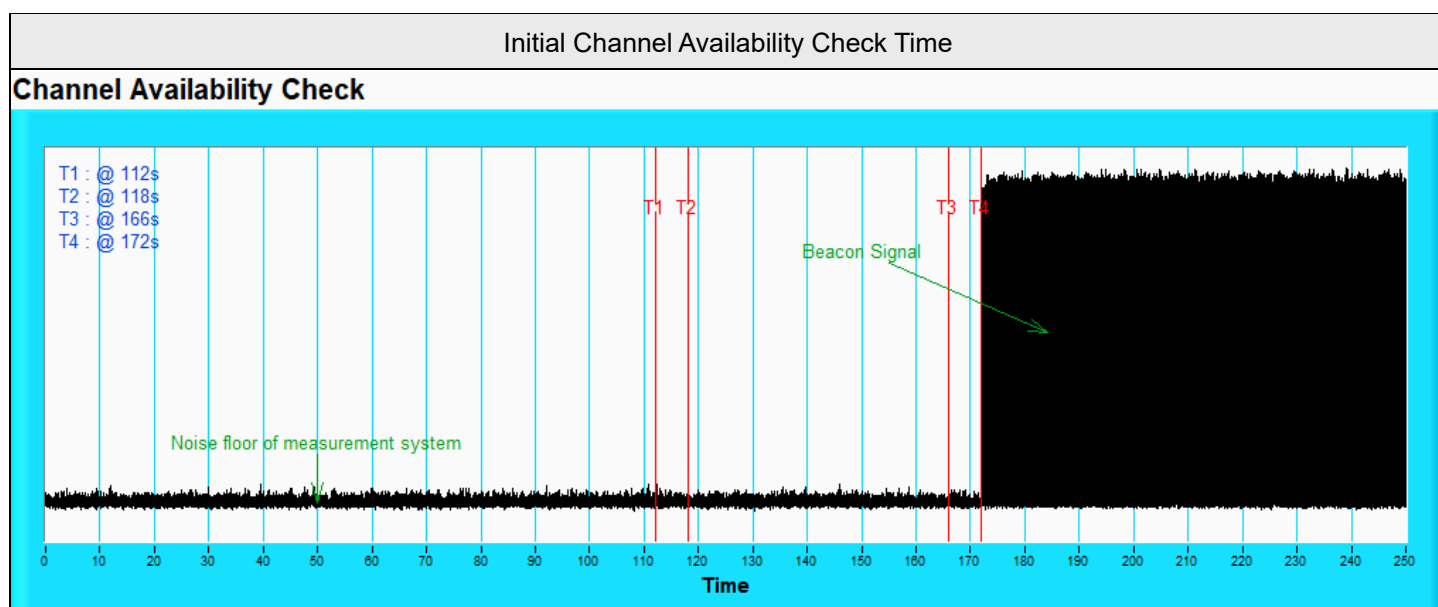


Note: T1 denotes the end of power-up time period is 112th second. T4 denotes the end of Channel Availability Check time is 172th second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

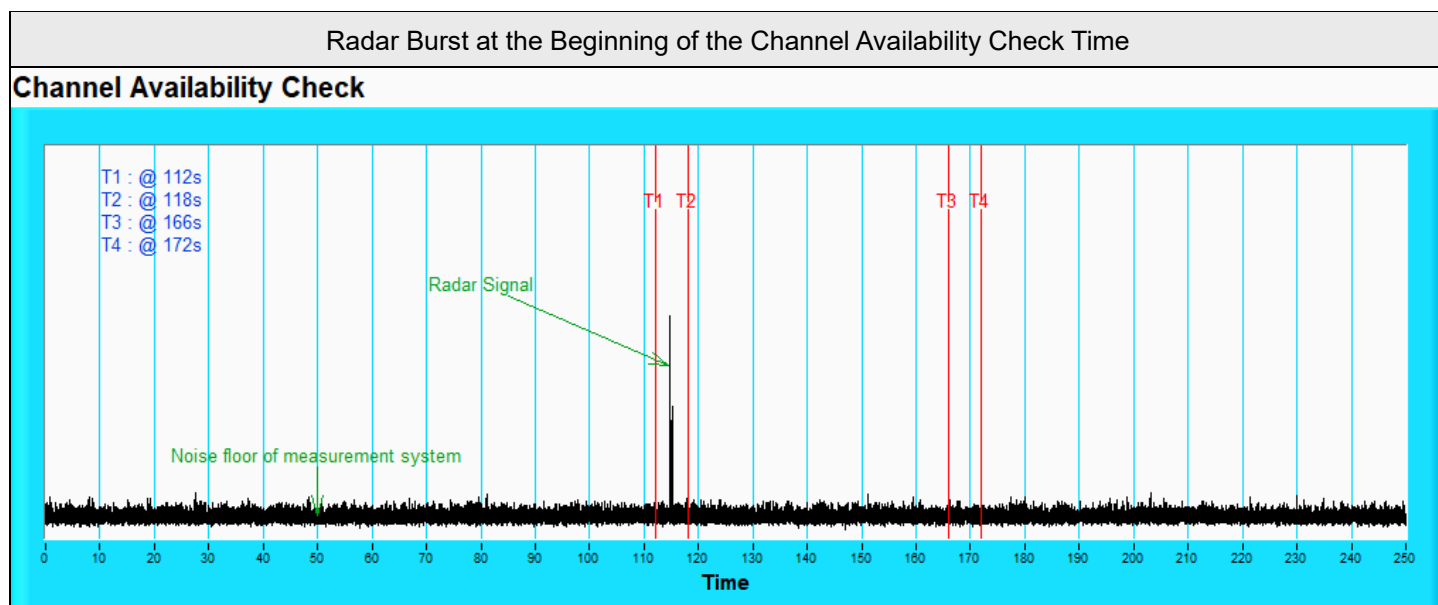

Note: T1 denotes the end of power-up time period is 112th second. T2 denotes 118th second and the radar burst was commenced within a 6 second window starting from the end of power-up sequence. T4 denotes the 172th second.

Radar Burst at the End of the Channel Availability Check Time


Channel Availability Check

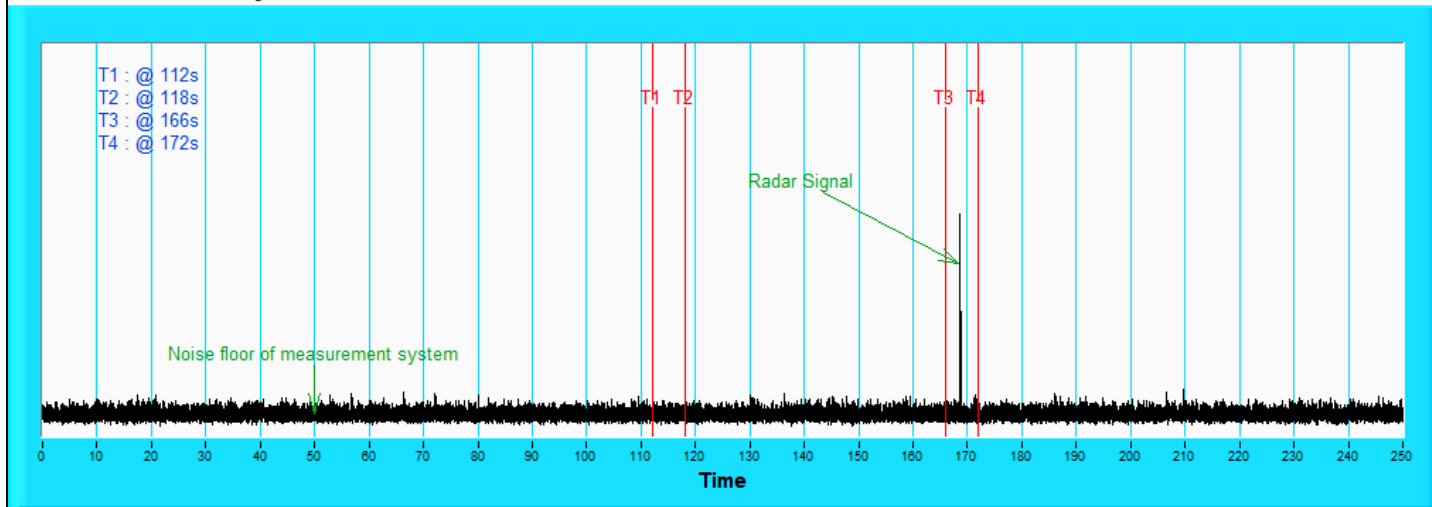


Note: T1 denotes the end of power-up time period is 112th second. T3 denotes 166th second and the radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence. T4 denotes the 172th second.

7.3 Channel Closing Transmission and Channel Move Time

Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------

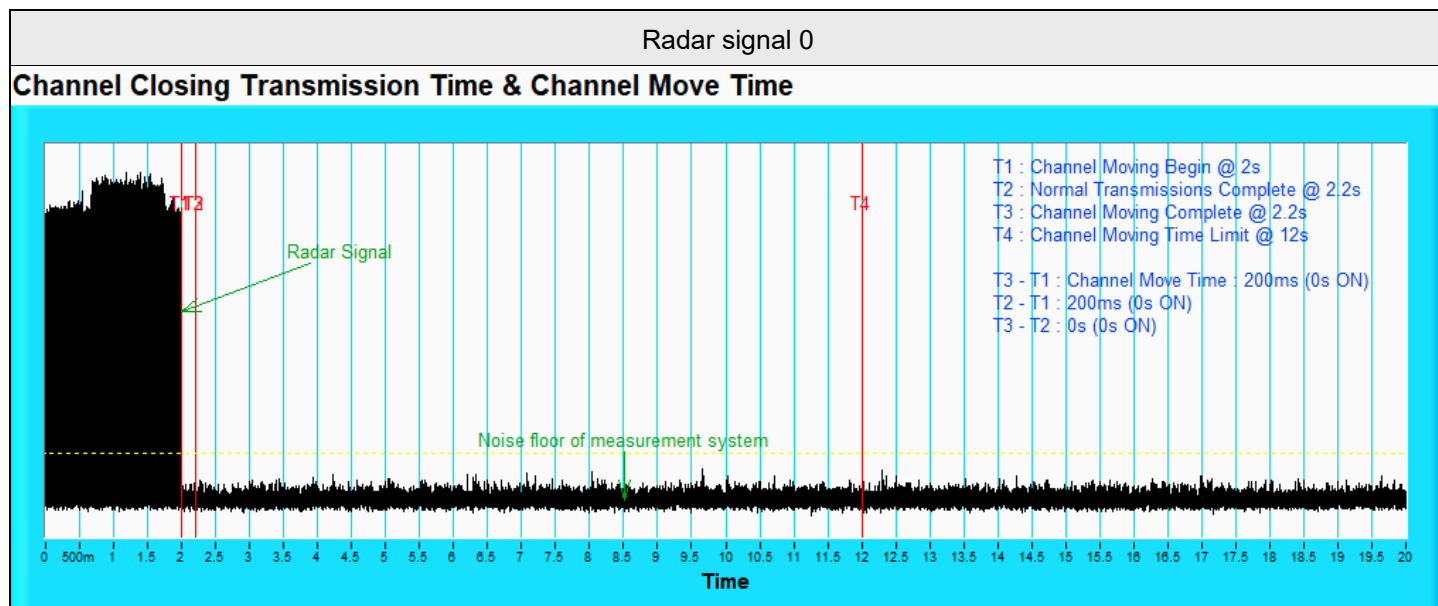


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

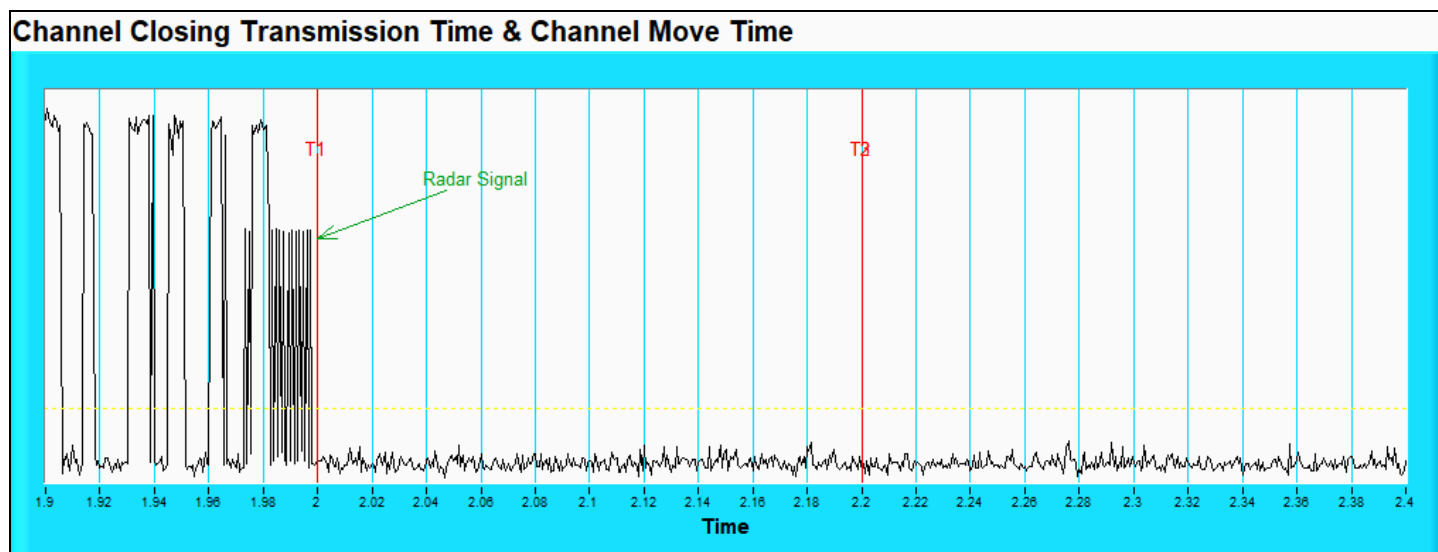

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 1

Channel Closing Transmission Time & Channel Move Time

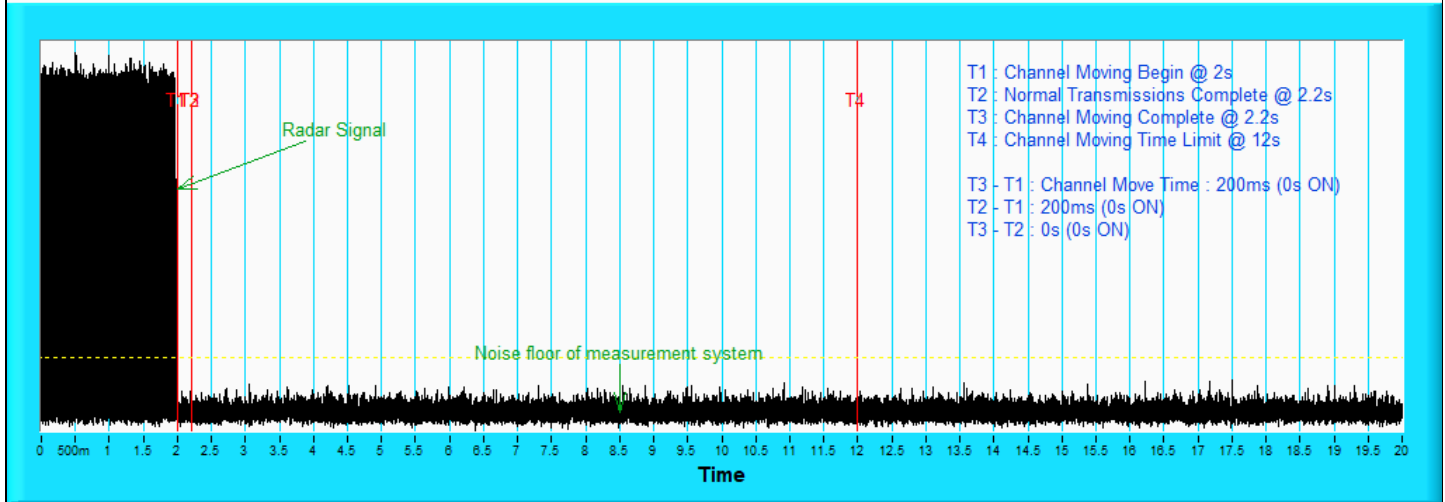

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

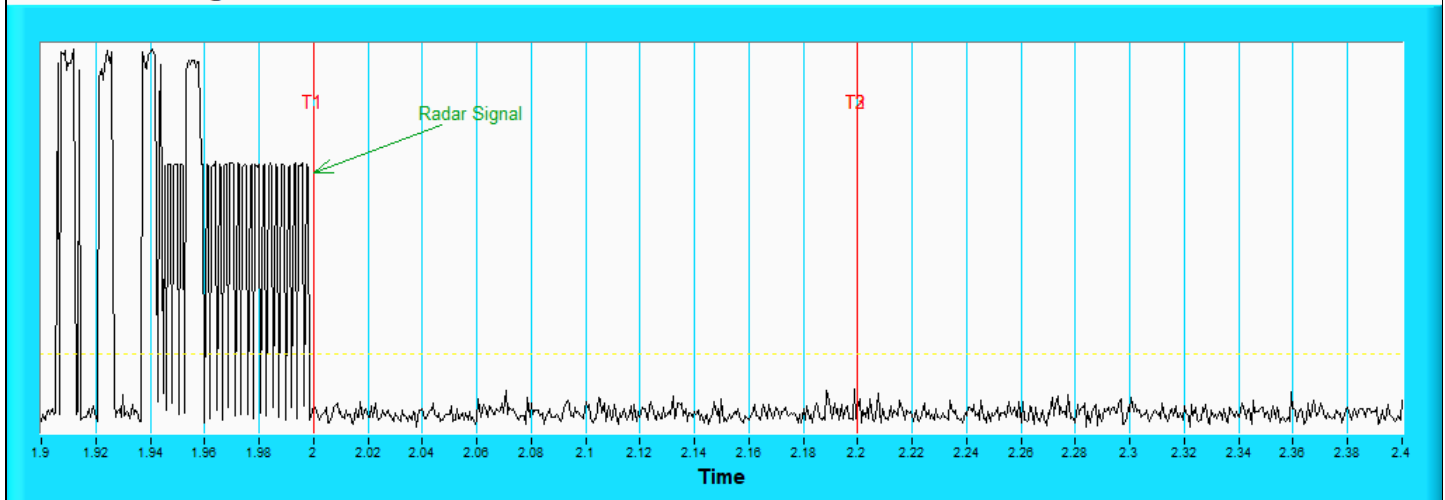

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 2

Channel Closing Transmission Time & Channel Move Time

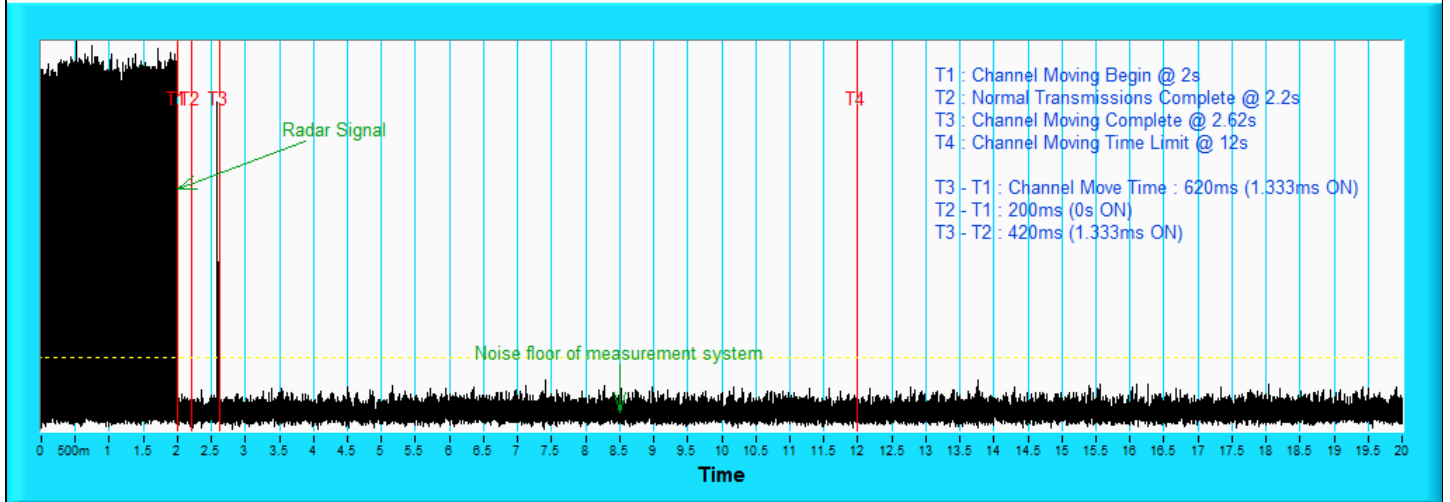

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

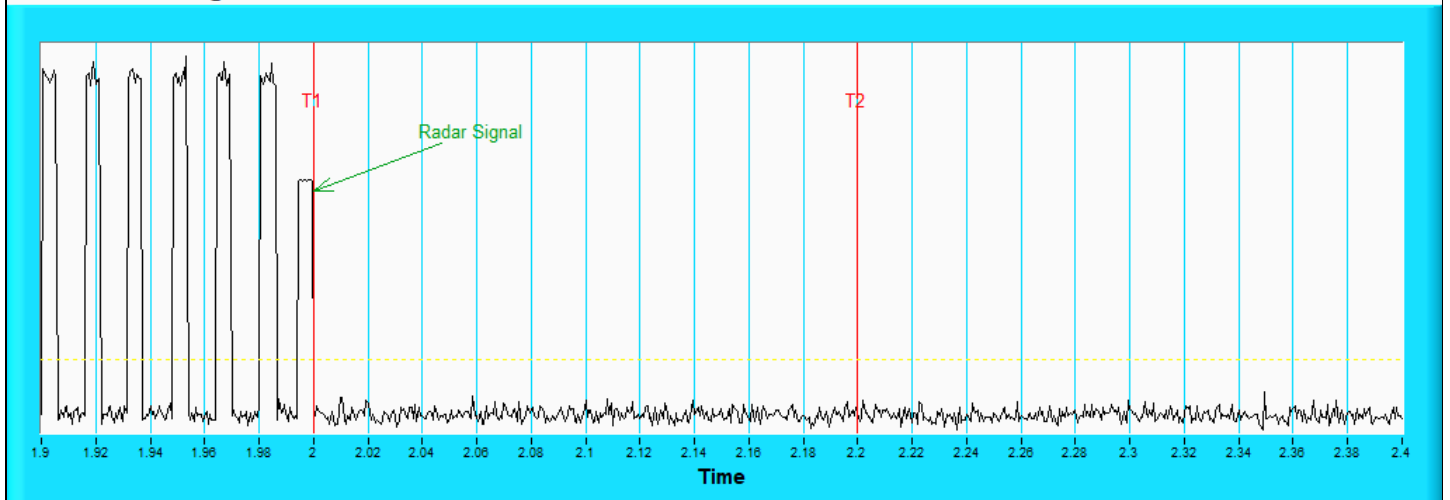

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 3

Channel Closing Transmission Time & Channel Move Time

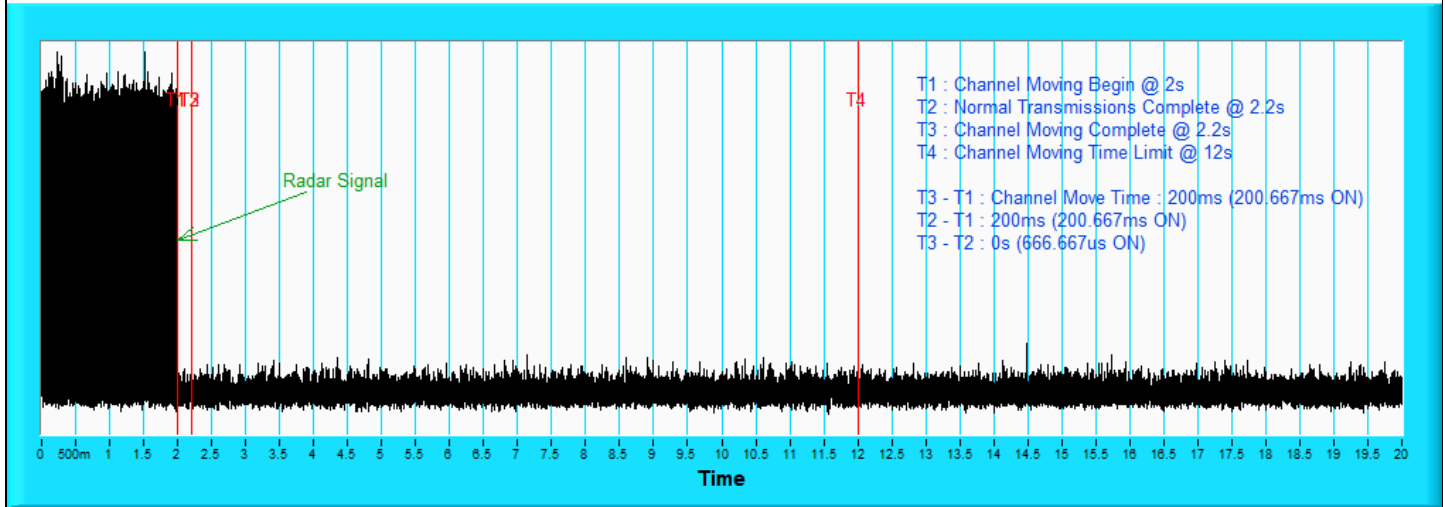

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

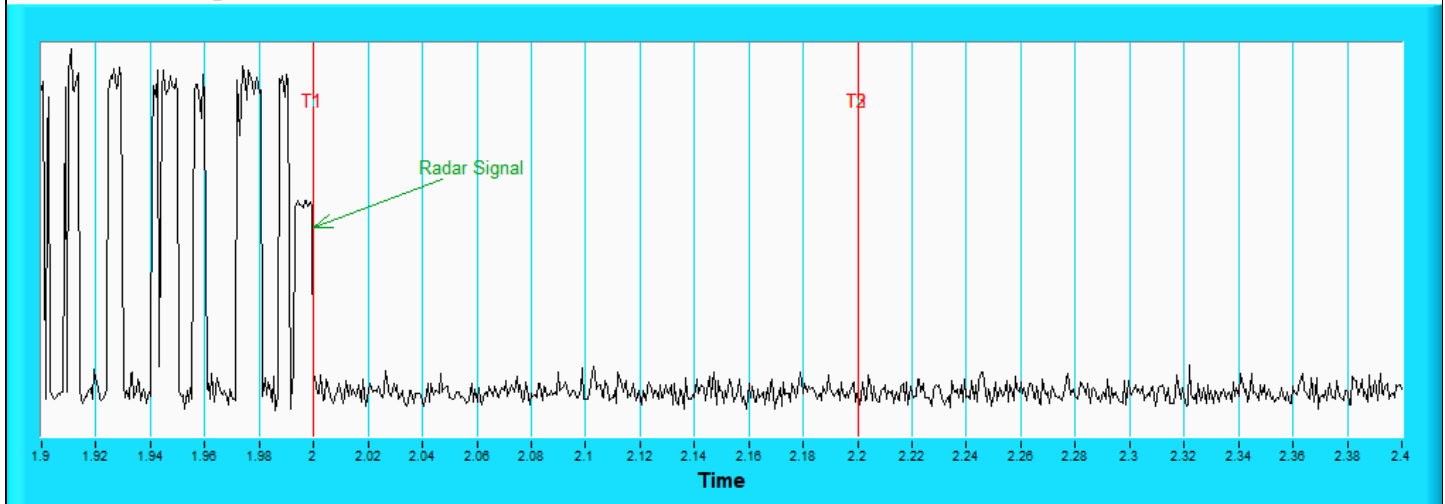

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 4

Channel Closing Transmission Time & Channel Move Time

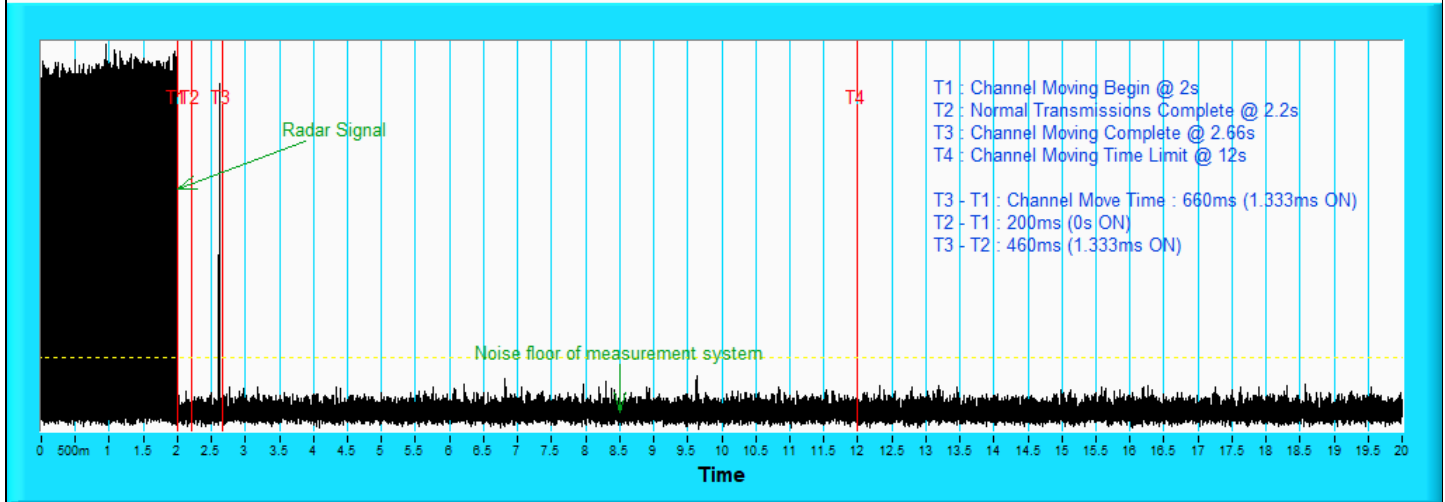

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

Channel Closing Transmission Time & Channel Move Time

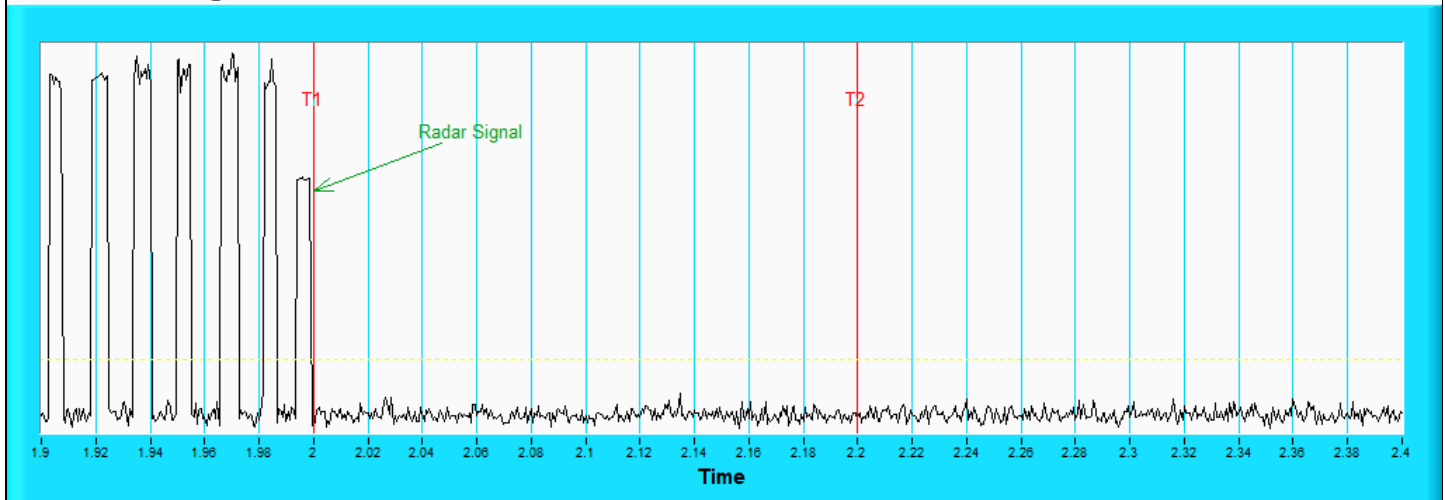


Note: Zoom in of the first 500 ms after radar signal applied.

Puncturing20


Radar signal 0

Channel Closing Transmission Time & Channel Move Time

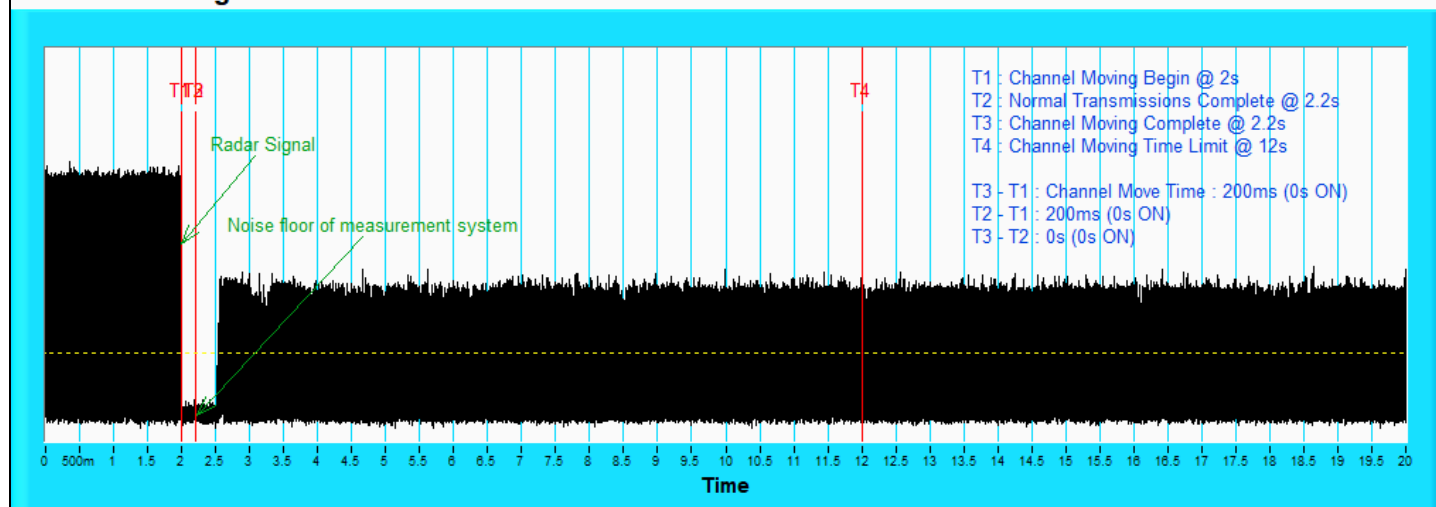

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

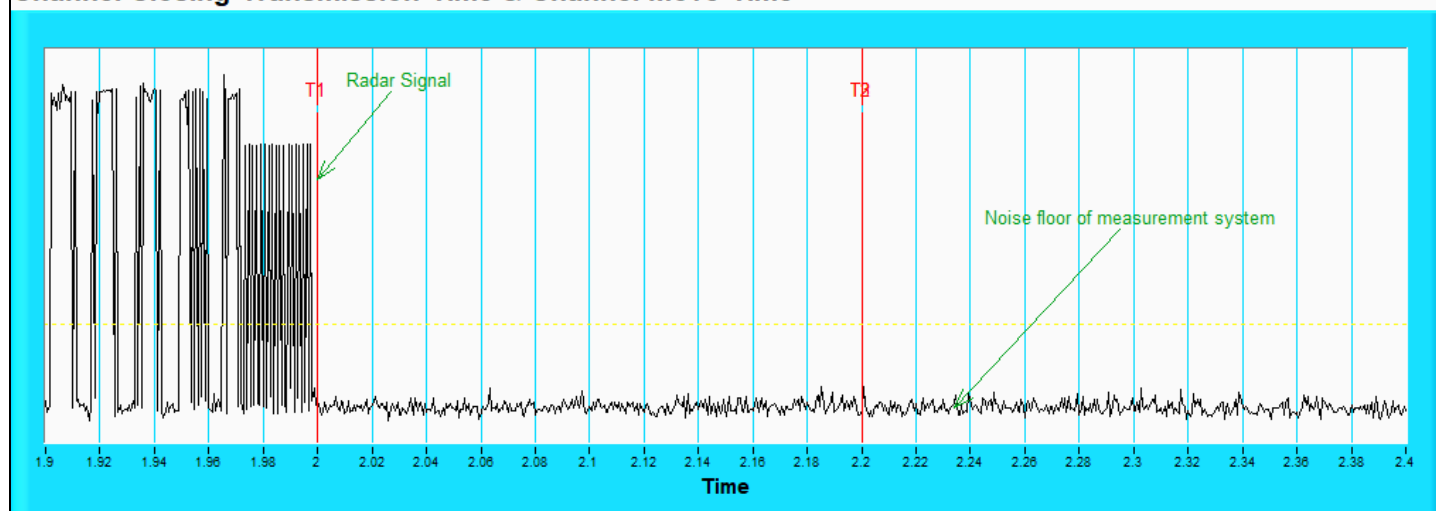

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 1

Channel Closing Transmission Time & Channel Move Time

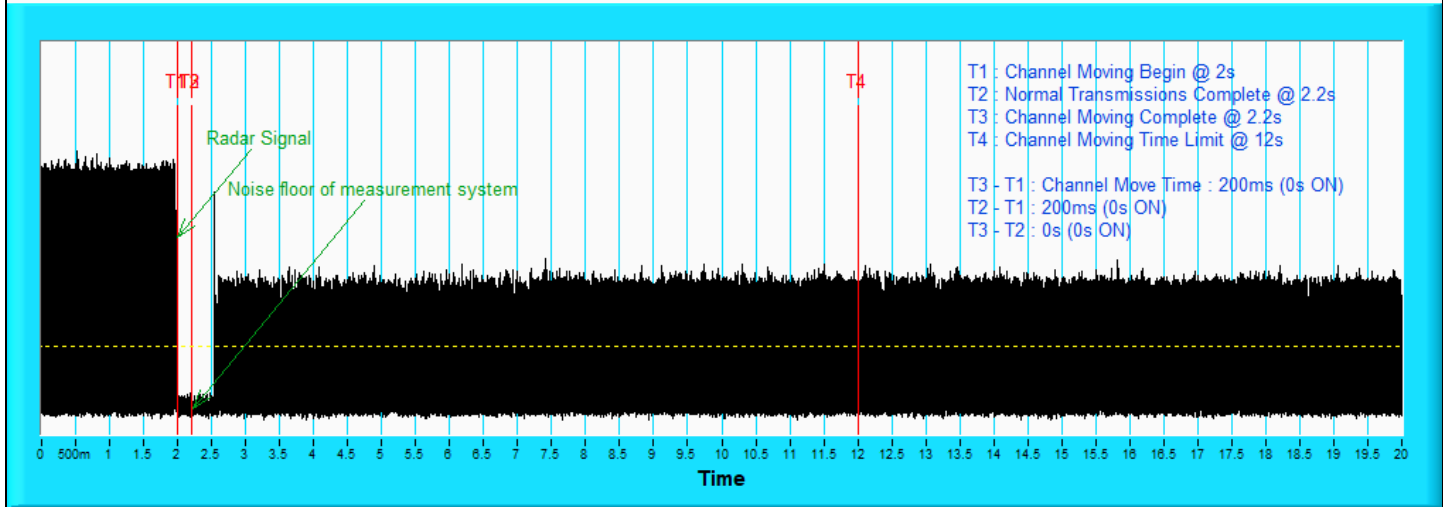

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

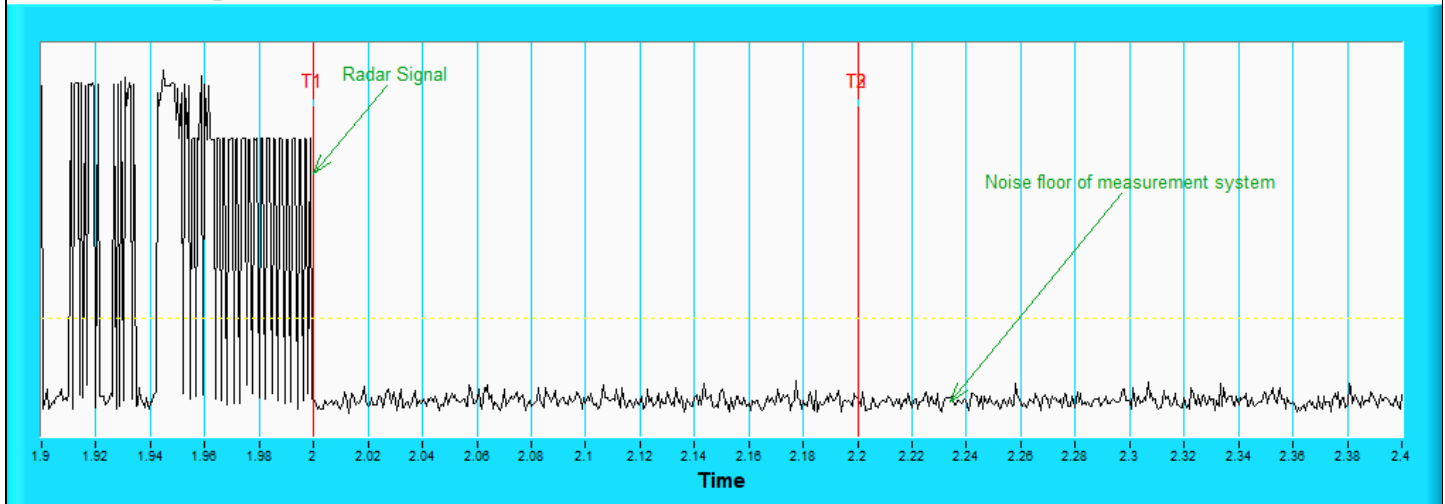

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 2

Channel Closing Transmission Time & Channel Move Time

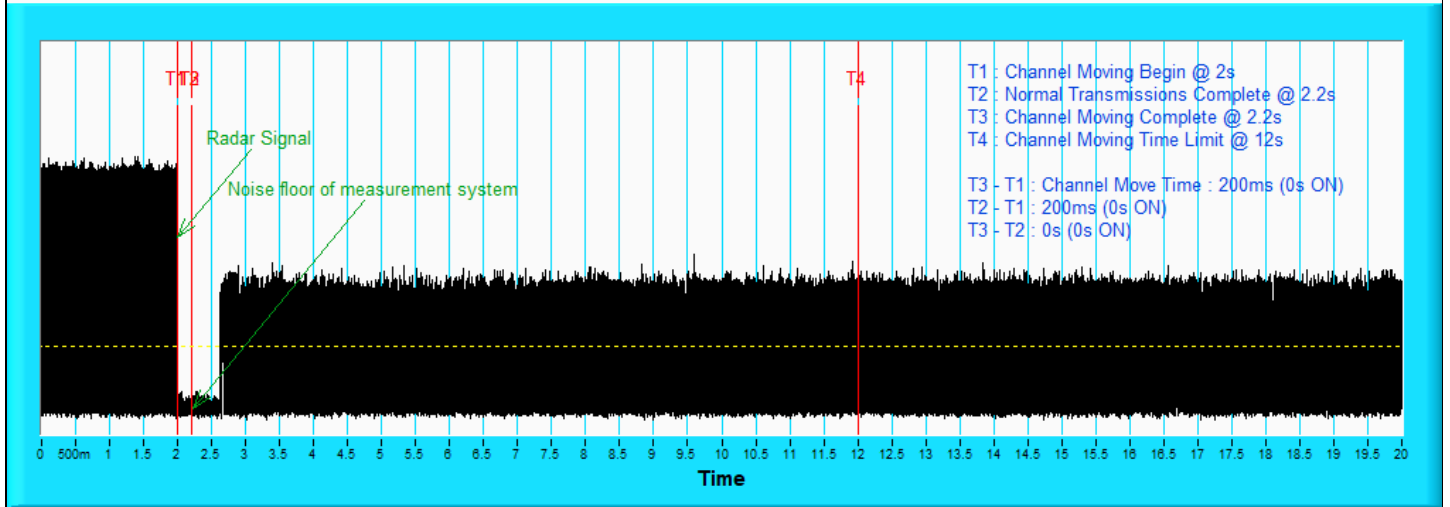

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

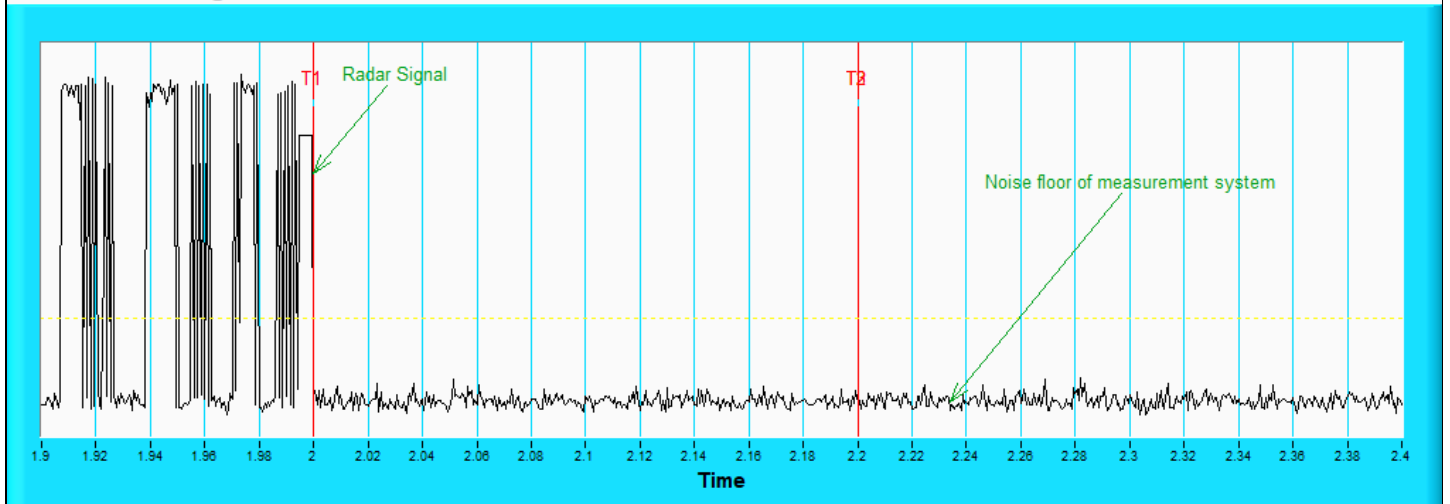

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 3

Channel Closing Transmission Time & Channel Move Time

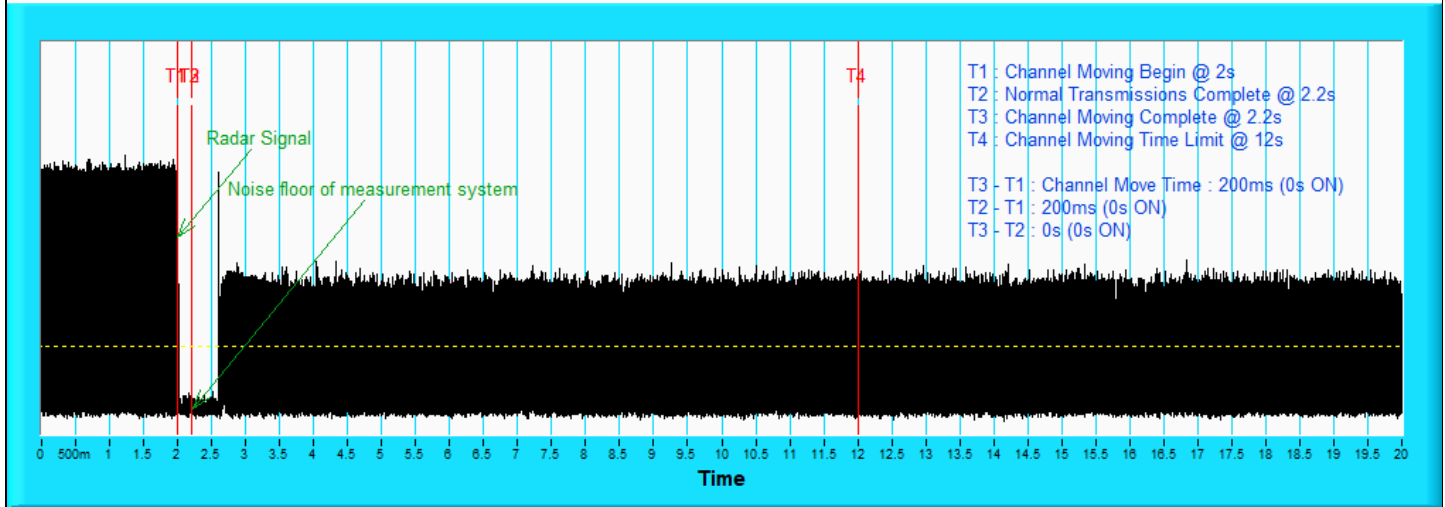

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.


Channel Closing Transmission Time & Channel Move Time

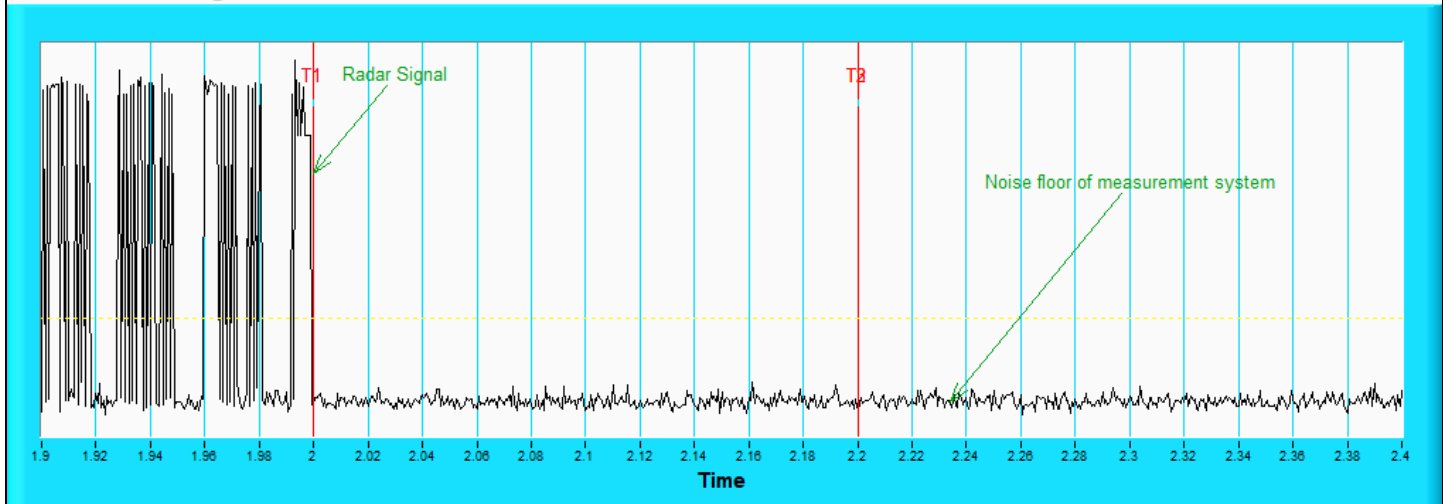

Note: Zoom in of the first 500 ms after radar signal applied.


Radar signal 4

Channel Closing Transmission Time & Channel Move Time

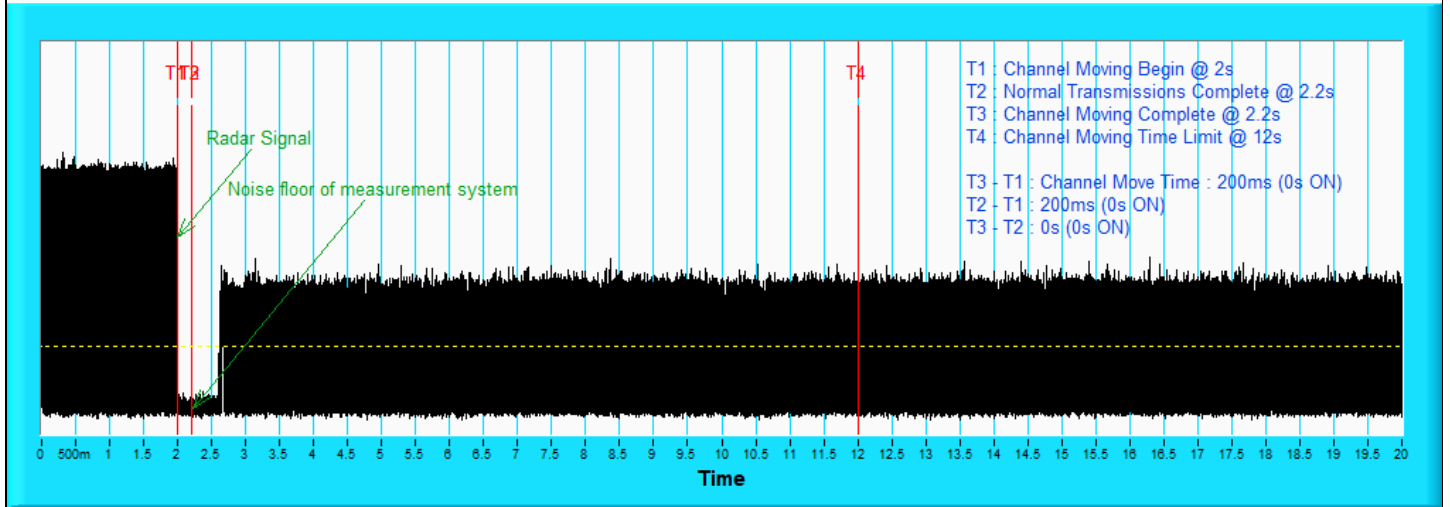


Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200 ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

Channel Closing Transmission Time & Channel Move Time

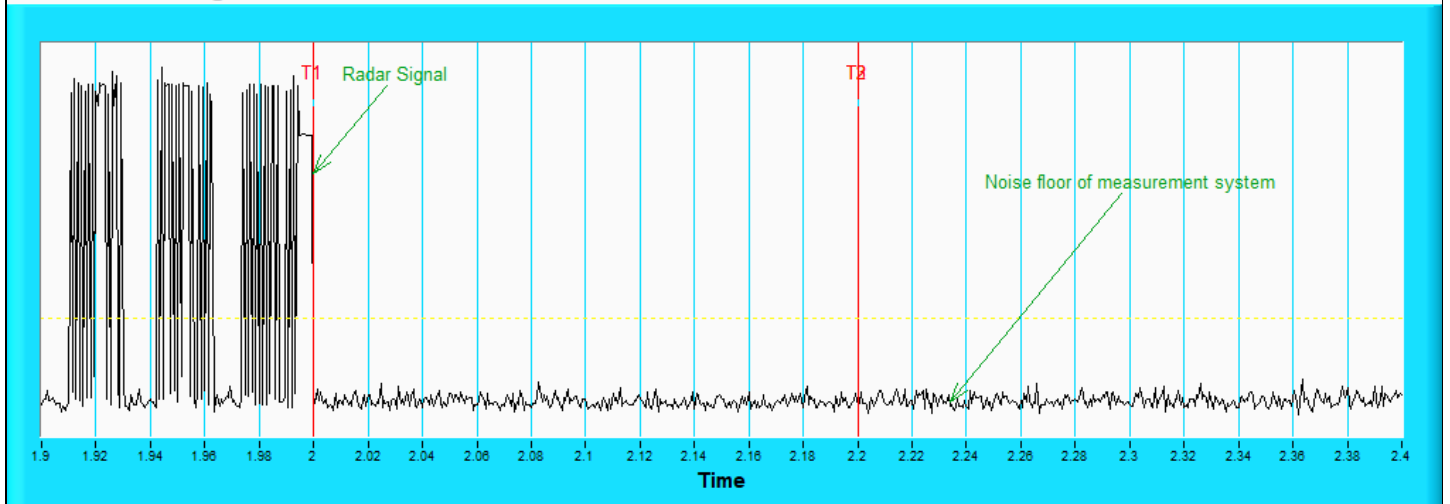

Note: Zoom in of the first 500 ms after radar signal applied.

Test results demonstrating an associated to Radar interference, the channel will produce a puncturing result.

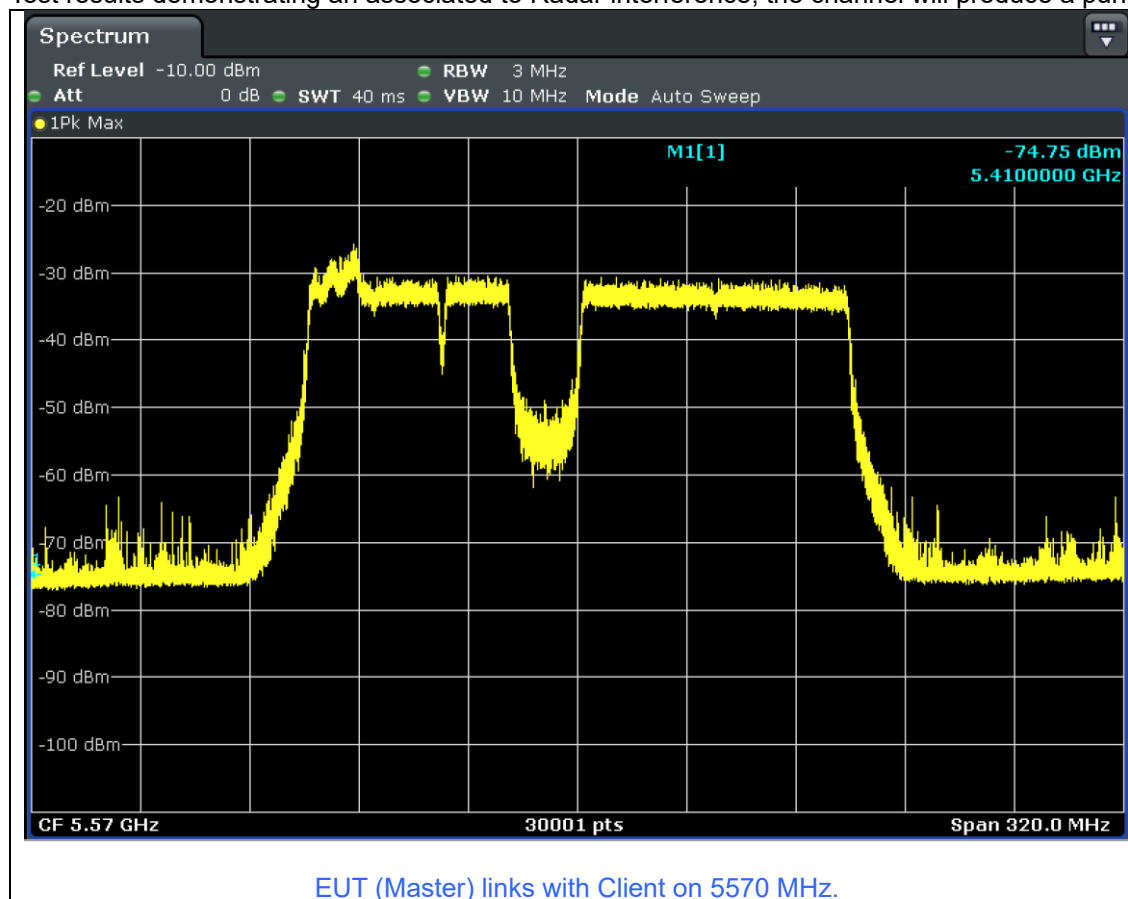


7.4 Non-Occupancy Period


Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------

For Associated Test


1) Test results demonstrating an associated client link is established with the master on a test frequency.

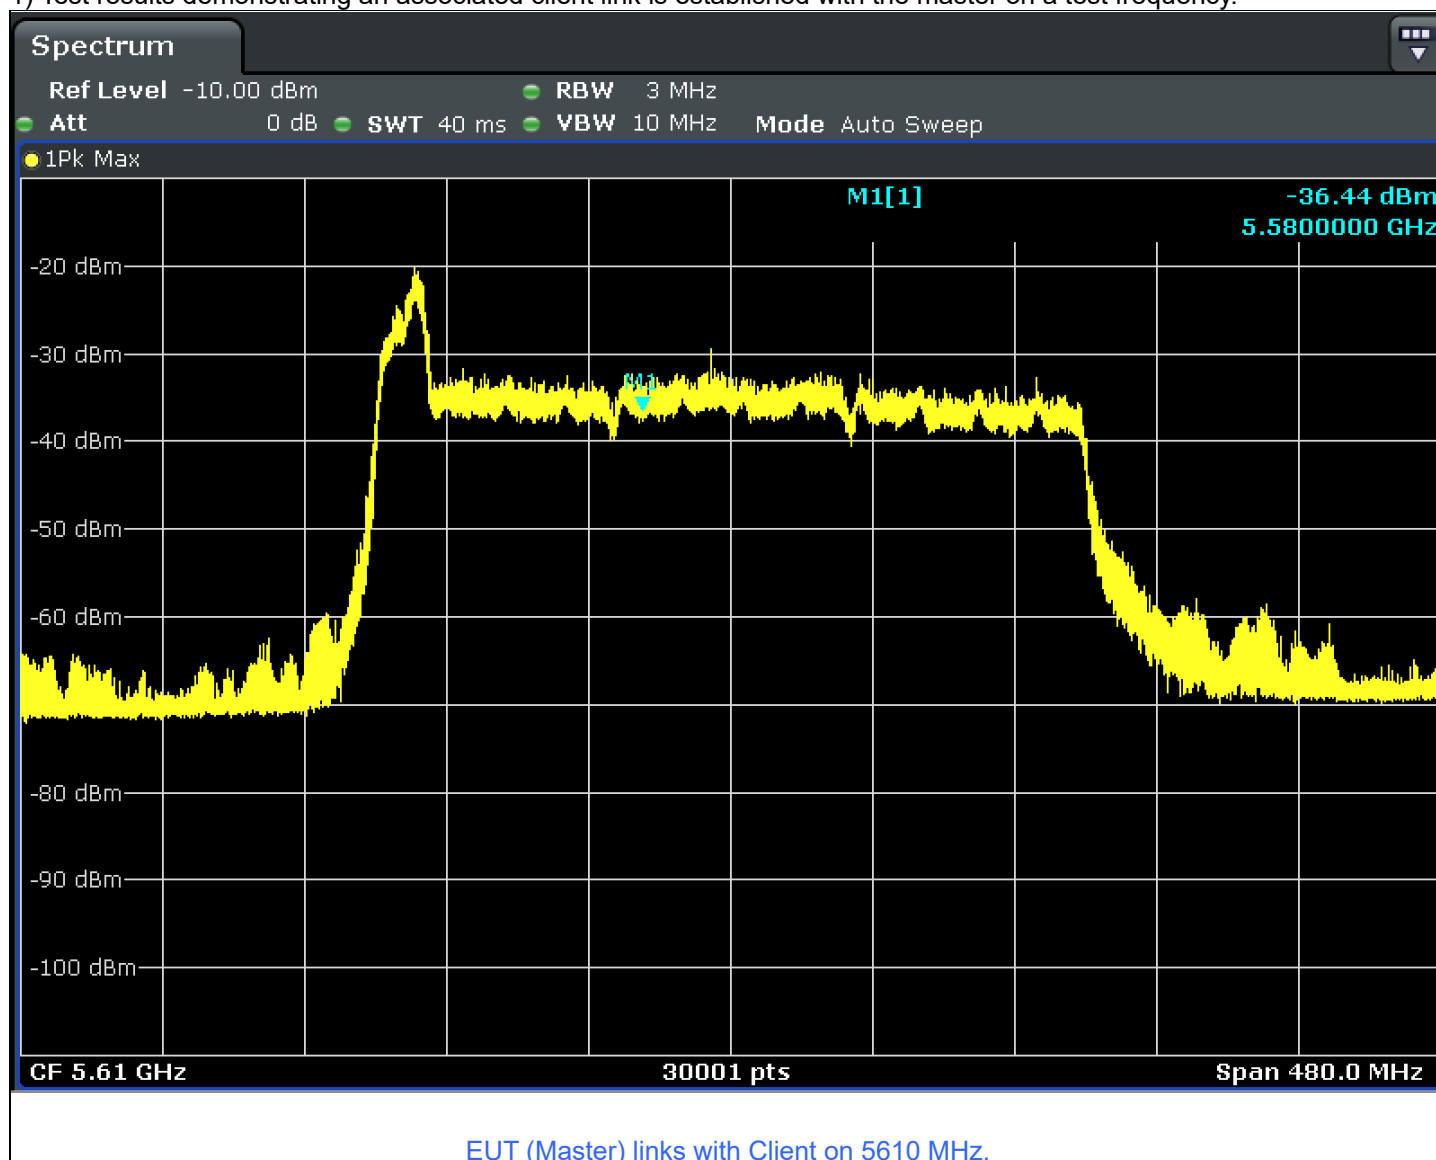


2) The Master and DFS-certified client device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.

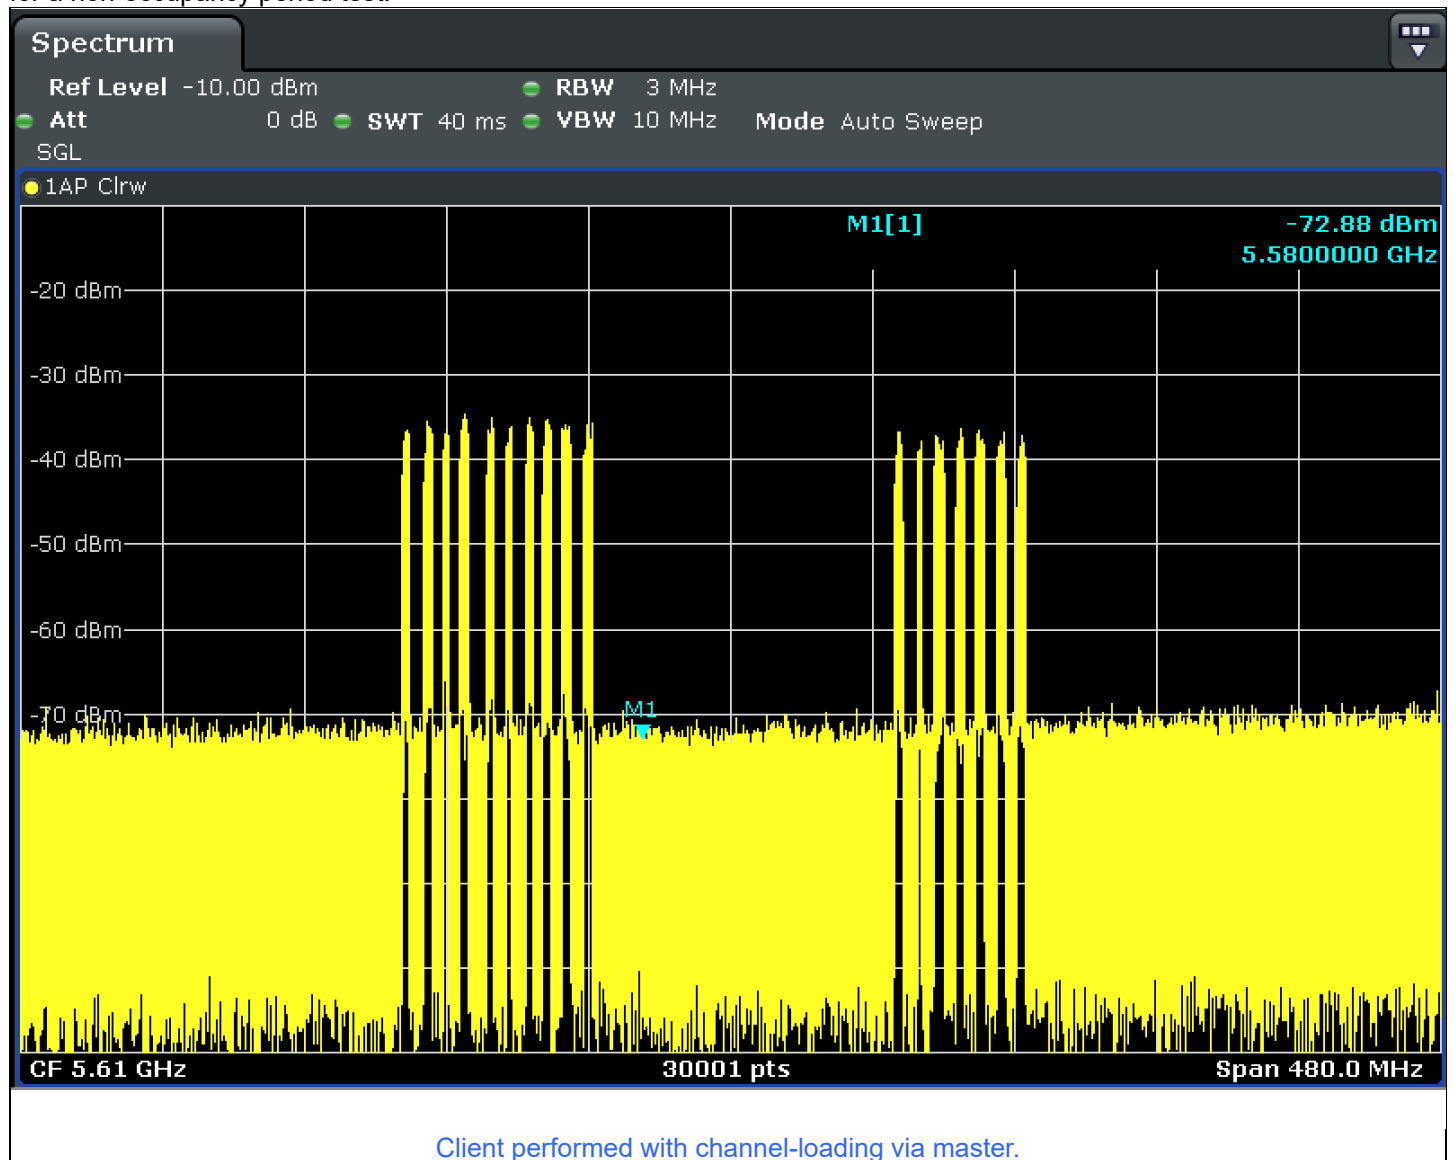

3). The device transmits one type of radar as specified in the DFS Order.

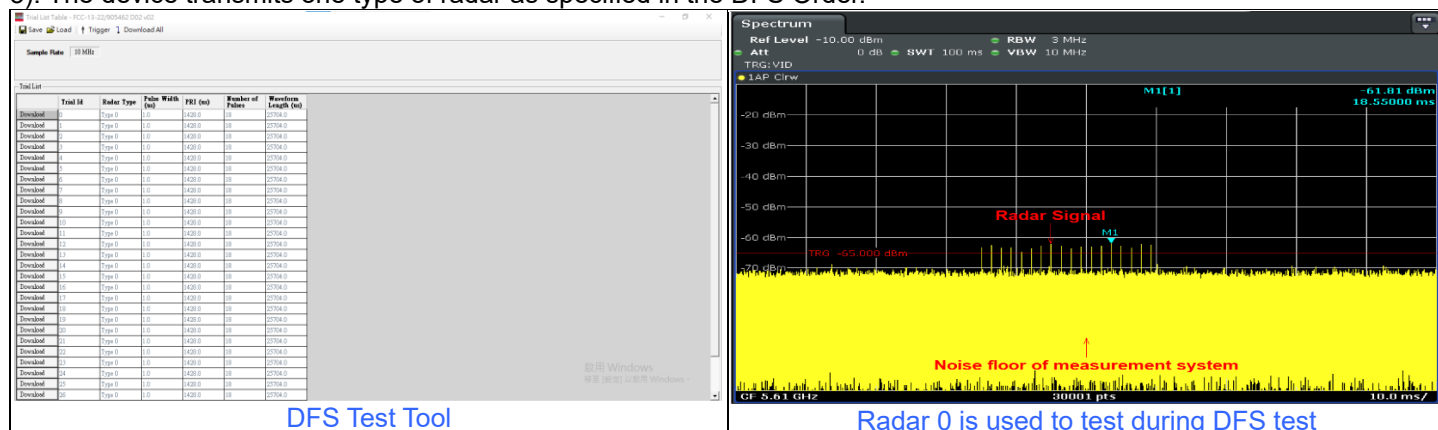

- 4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;
 Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;
 5) An analyzer plot that contains a single 30-minute sweep on the original test frequency.

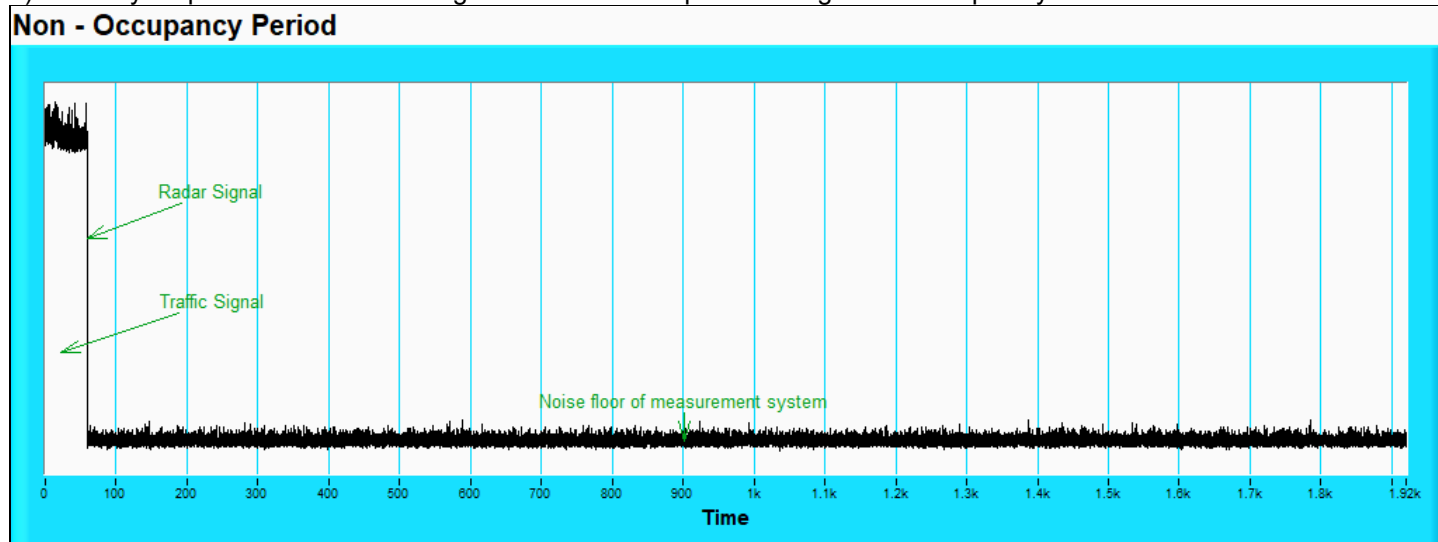

7.5 Statistical Performance Check

Environmental Conditions:	25°C, 60% RH	Tested By:	Jyunchun Lin
---------------------------	--------------	------------	--------------

Master

Radar Type	Number of Trials (Times)	Percentage of Successful Detection						Minimum Percentage of Successful Detection	Test Result
		802.11be (EHT20)	802.11be (EHT40)	802.11be (EHT80)	802.11be (EHT160) CH50	802.11be (EHT160) CH114	802.11be (EHT240) CH122		
1	30	93.3%	96.7%	100.0%	80.0%	93.3%	100.0%	60%	Pass
2	30	80.0%	83.3%	93.3%	83.3%	93.3%	90.0%	60%	Pass
3	30	80.0%	83.3%	80.0%	90.0%	90.0%	86.7%	60%	Pass
4	30	83.3%	80.0%	80.0%	90.0%	83.3%	90.0%	60%	Pass
Aggregate (Radar Types 1 - 4)		84.2%	85.8%	88.3%	85.8%	90.0%	91.7%	80%	Pass
5	30	100.0%	96.7%	93.3%	80.0%	93.3%	93.3%	80%	Pass
6	30	93.3%	90.0%	86.7%	93.3%	96.7%	96.7%	70%	Pass

802.11be (EHT20) 5500 MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5490	5	1672.2	89	598	No
2	5497	23	326.2	18	3066	Yes
3	5501	15	1253.1	67	798	Yes
4	5509	17	1193.3	63	838	Yes
5	5496	9	1474.9	78	678	Yes
6	5494	7	1567.4	83	638	Yes
7	5495	4	1730.1	92	578	Yes
8	5493	16	1222.5	65	818	Yes
9	5500	8	1519.8	81	658	Yes
10	5499	22	1066.1	57	938	Yes
11	5503	6	1618.1	86	618	Yes
12	5491	18	1165.5	62	858	Yes
13	5508	14	1285.3	68	778	Yes
14	5502	10	1432.7	76	698	Yes
15	5498	2	1858.7	99	538	Yes
16	5505	-	416.1	22	2403	Yes
17	5506	-	492.9	27	2029	Yes
18	5507	-	368.2	20	2716	Yes
19	5504	-	386.2	21	2589	Yes
20	5510	-	394.5	21	2535	No
21	5492	-	360.1	20	2777	Yes
22	5498	-	494.1	27	2024	Yes
23	5508	-	897.7	48	1114	Yes
24	5493	-	962.5	51	1039	Yes
25	5509	-	380.2	21	2630	Yes
26	5506	-	452.7	24	2209	Yes
27	5497	-	391.8	21	2552	Yes
28	5501	-	1083.4	58	923	Yes
29	5494	-	329.7	18	3033	Yes
30	5496	-	502	27	1992	Yes
						Detection Rate: 93.3%

802.11be (EHT20) 5500 MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5496	24	2	224	No
2	5508	29	4.5	219	Yes
3	5503	26	3.2	167	Yes
4	5507	27	3.7	216	Yes
5	5494	23	1.1	179	Yes
6	5500	26	3.1	181	No
7	5506	27	3.7	188	Yes
8	5495	26	2.9	155	Yes
9	5491	29	4.8	214	Yes
10	5493	23	1.5	195	Yes
11	5490	29	4.9	201	No
12	5510	24	1.8	197	No
13	5497	23	1.5	158	Yes
14	5492	29	4.9	222	Yes
15	5504	28	4.2	185	Yes
16	5501	23	1	173	Yes
17	5509	29	4.8	190	Yes
18	5505	29	4.5	200	Yes
19	5502	25	2.3	165	Yes
20	5498	27	3.4	177	Yes
21	5499	23	1	183	Yes
22	5504	28	4	156	Yes
23	5508	23	1.1	213	Yes
24	5494	25	2.7	229	No
25	5500	23	1.2	206	No
26	5502	29	4.9	203	Yes
27	5501	26	3.3	163	Yes
28	5506	26	3.2	182	Yes
29	5495	24	1.7	166	Yes
30	5497	25	2.6	210	Yes
					Detection Rate: 80%

802.11be (EHT20) 5500 MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5491	16	7	239	No
2	5492	18	9.5	335	Yes
3	5509	17	8.2	411	Yes
4	5499	18	8.7	224	Yes
5	5504	16	6.1	428	Yes
6	5498	17	8.1	332	No
7	5490	17	8.7	491	Yes
8	5503	17	7.9	348	Yes
9	5500	18	9.8	206	No
10	5495	16	6.5	204	No
11	5494	18	9.9	438	Yes
12	5501	16	6.8	484	Yes
13	5505	16	6.5	344	Yes
14	5506	18	9.9	465	No
15	5508	18	9.2	444	Yes
16	5496	16	6	357	Yes
17	5502	18	9.8	423	Yes
18	5507	18	9.5	225	Yes
19	5510	16	7.3	217	Yes
20	5493	17	8.4	242	No
21	5497	16	6	483	Yes
22	5499	18	9	470	Yes
23	5501	16	6.1	308	Yes
24	5500	17	7.7	498	Yes
25	5491	16	6.2	477	Yes
26	5503	18	9.9	375	Yes
27	5502	17	8.3	285	Yes
28	5507	17	8.2	433	Yes
29	5504	16	6.7	490	Yes
30	5509	17	7.6	202	Yes
					Detection Rate: 80%

802.11be (EHT20) 5500 MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5496	14	16	355	Yes
2	5498	12	11.3	487	No
3	5492	13	13.5	344	Yes
4	5502	16	19.4	288	Yes
5	5507	15	17.5	230	Yes
6	5494	14	15.3	432	No
7	5500	14	15.9	207	Yes
8	5510	13	14.3	443	Yes
9	5490	14	15.8	439	Yes
10	5497	12	11.5	223	No
11	5503	15	17.4	208	Yes
12	5501	16	19	463	Yes
13	5491	14	16	441	Yes
14	5505	13	13.8	323	Yes
15	5508	16	18.9	297	Yes
16	5504	14	15.5	412	Yes
17	5506	16	19.9	324	Yes
18	5495	13	14.1	271	Yes
19	5499	14	15.2	349	Yes
20	5509	13	13.8	409	Yes
21	5493	15	17.1	373	Yes
22	5509	13	13.8	254	Yes
23	5505	16	19.8	274	Yes
24	5499	14	15.3	278	Yes
25	5508	13	14.5	317	Yes
26	5498	12	11.3	260	No
27	5494	15	17.3	211	No
28	5504	16	19.2	272	Yes
29	5506	13	14.2	264	Yes
30	5510	15	18.2	284	Yes
					Detection Rate: 83.3%

802.11be (EHT20) 5500 MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5500	LP_SIGNAL_01	Yes
2	18	5500	LP_SIGNAL_02	Yes
3	13	5500	LP_SIGNAL_03	Yes
4	15	5500	LP_SIGNAL_04	Yes
5	5	5500	LP_SIGNAL_05	Yes
6	13	5500	LP_SIGNAL_06	Yes
7	15	5500	LP_SIGNAL_07	Yes
8	12	5500	LP_SIGNAL_08	Yes
9	20	5500	LP_SIGNAL_09	Yes
10	6	5500	LP_SIGNAL_10	Yes
11	20	5498	LP_SIGNAL_11	Yes
12	8	5493.2	LP_SIGNAL_12	Yes
13	7	5492.8	LP_SIGNAL_13	Yes
14	20	5498	LP_SIGNAL_14	Yes
15	17	5496.8	LP_SIGNAL_15	Yes
16	5	5492	LP_SIGNAL_16	Yes
17	20	5498	LP_SIGNAL_17	Yes
18	19	5497.6	LP_SIGNAL_18	Yes
19	10	5494	LP_SIGNAL_19	Yes
20	14	5495.6	LP_SIGNAL_20	Yes
21	5	5508	LP_SIGNAL_21	Yes
22	16	5503.6	LP_SIGNAL_22	Yes
23	5	5508	LP_SIGNAL_23	Yes
24	11	5505.6	LP_SIGNAL_24	Yes
25	5	5508	LP_SIGNAL_25	Yes
26	20	5502	LP_SIGNAL_26	Yes
27	14	5504.4	LP_SIGNAL_27	Yes
28	13	5504.8	LP_SIGNAL_28	Yes
29	7	5507.2	LP_SIGNAL_29	Yes
30	11	5505.6	LP_SIGNAL_30	Yes
				Detection Rate: 100%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT20) 5500 MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	No
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	No
				Detection Rate: 93.3%

802.11be (EHT40) 5510 MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5513	5	1672.2	89	598	Yes
2	5529	23	326.2	18	3066	Yes
3	5493	15	1253.1	67	798	Yes
4	5511	17	1193.3	63	838	Yes
5	5494	9	1474.9	78	678	Yes
6	5519	7	1567.4	83	638	Yes
7	5524	4	1730.1	92	578	Yes
8	5530	16	1222.5	65	818	Yes
9	5508	8	1519.8	81	658	Yes
10	5510	22	1066.1	57	938	No
11	5500	6	1618.1	86	618	Yes
12	5491	18	1165.5	62	858	Yes
13	5518	14	1285.3	68	778	Yes
14	5498	10	1432.7	76	698	Yes
15	5495	2	1858.7	99	538	Yes
16	5503	-	416.1	22	2403	Yes
17	5506	-	492.9	27	2029	Yes
18	5497	-	368.2	20	2716	Yes
19	5527	-	386.2	21	2589	Yes
20	5504	-	394.5	21	2535	Yes
21	5507	-	360.1	20	2777	Yes
22	5490	-	494.1	27	2024	Yes
23	5520	-	897.7	48	1114	Yes
24	5499	-	962.5	51	1039	Yes
25	5528	-	380.2	21	2630	Yes
26	5526	-	452.7	24	2209	Yes
27	5516	-	391.8	21	2552	Yes
28	5517	-	1083.4	58	923	Yes
29	5509	-	329.7	18	3033	Yes
30	5514	-	502	27	1992	Yes
						Detection Rate: 96.7%

802.11be (EHT40) 5510 MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	24	2	224	Yes
2	5499	29	4.5	219	Yes
3	5505	26	3.2	167	Yes
4	5520	27	3.7	216	Yes
5	5523	23	1.1	179	Yes
6	5510	26	3.1	181	Yes
7	5494	27	3.7	188	Yes
8	5516	26	2.9	155	No
9	5495	29	4.8	214	Yes
10	5515	23	1.5	195	Yes
11	5498	29	4.9	201	No
12	5514	24	1.8	197	Yes
13	5502	23	1.5	158	Yes
14	5503	29	4.9	222	No
15	5508	28	4.2	185	Yes
16	5506	23	1	173	Yes
17	5525	29	4.8	190	Yes
18	5497	29	4.5	200	Yes
19	5492	25	2.3	165	Yes
20	5526	27	3.4	177	Yes
21	5519	23	1	183	Yes
22	5511	28	4	156	No
23	5501	23	1.1	213	Yes
24	5528	25	2.7	229	Yes
25	5491	23	1.2	206	No
26	5530	29	4.9	203	Yes
27	5500	26	3.3	163	Yes
28	5496	26	3.2	182	Yes
29	5517	24	1.7	166	Yes
30	5522	25	2.6	210	Yes
					Detection Rate: 83.3%

802.11be (EHT40) 5510 MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5490	16	7	239	No
2	5510	18	9.5	335	Yes
3	5499	17	8.2	411	No
4	5498	18	8.7	224	Yes
5	5502	16	6.1	428	Yes
6	5508	17	8.1	332	Yes
7	5519	17	8.7	491	Yes
8	5529	17	7.9	348	Yes
9	5509	18	9.8	206	Yes
10	5494	16	6.5	204	No
11	5500	18	9.9	438	No
12	5525	16	6.8	484	Yes
13	5504	16	6.5	344	Yes
14	5515	18	9.9	465	Yes
15	5491	18	9.2	444	Yes
16	5503	16	6	357	Yes
17	5506	18	9.8	423	Yes
18	5507	18	9.5	225	No
19	5501	16	7.3	217	Yes
20	5520	17	8.4	242	Yes
21	5527	16	6	483	Yes
22	5513	18	9	470	Yes
23	5518	16	6.1	308	Yes
24	5514	17	7.7	498	Yes
25	5505	16	6.2	477	Yes
26	5512	18	9.9	375	Yes
27	5522	17	8.3	285	Yes
28	5517	17	8.2	433	Yes
29	5492	16	6.7	490	Yes
30	5516	17	7.6	202	Yes
					Detection Rate: 83.3%

802.11be (EHT40) 5510 MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5525	14	16	355	Yes
2	5505	12	11.3	487	No
3	5492	13	13.5	344	Yes
4	5506	16	19.4	288	Yes
5	5528	15	17.5	230	No
6	5494	14	15.3	432	Yes
7	5499	14	15.9	207	Yes
8	5509	13	14.3	443	Yes
9	5495	14	15.8	439	Yes
10	5512	12	11.5	223	Yes
11	5526	15	17.4	208	Yes
12	5529	16	19	463	No
13	5502	14	16	441	Yes
14	5503	13	13.8	323	Yes
15	5520	16	18.9	297	Yes
16	5491	14	15.5	412	Yes
17	5501	16	19.9	324	Yes
18	5515	13	14.1	271	Yes
19	5508	14	15.2	349	Yes
20	5524	13	13.8	409	Yes
21	5500	15	17.1	373	Yes
22	5522	13	13.8	254	Yes
23	5523	16	19.8	274	No
24	5530	14	15.3	278	Yes
25	5518	13	14.5	317	No
26	5497	12	11.3	260	No
27	5510	15	17.3	211	Yes
28	5527	16	19.2	272	Yes
29	5490	13	14.2	264	Yes
30	5519	15	18.2	284	Yes
					Detection Rate: 80%

802.11be (EHT40) 5510 MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5510	LP_SIGNAL_01	Yes
2	18	5510	LP_SIGNAL_02	Yes
3	13	5510	LP_SIGNAL_03	Yes
4	15	5510	LP_SIGNAL_04	Yes
5	5	5510	LP_SIGNAL_05	Yes
6	13	5510	LP_SIGNAL_06	Yes
7	15	5510	LP_SIGNAL_07	Yes
8	12	5510	LP_SIGNAL_08	Yes
9	20	5510	LP_SIGNAL_09	Yes
10	6	5510	LP_SIGNAL_10	Yes
11	20	5498	LP_SIGNAL_11	Yes
12	8	5493.2	LP_SIGNAL_12	Yes
13	7	5492.8	LP_SIGNAL_13	Yes
14	20	5498	LP_SIGNAL_14	Yes
15	17	5496.8	LP_SIGNAL_15	Yes
16	5	5492	LP_SIGNAL_16	Yes
17	20	5498	LP_SIGNAL_17	Yes
18	19	5497.6	LP_SIGNAL_18	Yes
19	10	5494	LP_SIGNAL_19	Yes
20	14	5495.6	LP_SIGNAL_20	No
21	5	5528	LP_SIGNAL_21	Yes
22	16	5523.6	LP_SIGNAL_22	Yes
23	5	5528	LP_SIGNAL_23	Yes
24	11	5525.6	LP_SIGNAL_24	Yes
25	5	5528	LP_SIGNAL_25	Yes
26	20	5522	LP_SIGNAL_26	Yes
27	14	5524.4	LP_SIGNAL_27	Yes
28	13	5524.8	LP_SIGNAL_28	Yes
29	7	5527.2	LP_SIGNAL_29	Yes
30	11	5525.6	LP_SIGNAL_30	Yes
				Detection Rate: 96.7%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT40) 5510 MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	No
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	No
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	No
				Detection Rate: 90%

802.11be (EHT80) 5530 MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5547	5	1672.2	89	598	Yes
2	5527	23	326.2	18	3066	Yes
3	5541	15	1253.1	67	798	Yes
4	5521	17	1193.3	63	838	Yes
5	5525	9	1474.9	78	678	Yes
6	5561	7	1567.4	83	638	Yes
7	5514	4	1730.1	92	578	Yes
8	5498	16	1222.5	65	818	Yes
9	5538	8	1519.8	81	658	Yes
10	5522	22	1066.1	57	938	Yes
11	5530	6	1618.1	86	618	Yes
12	5506	18	1165.5	62	858	Yes
13	5552	14	1285.3	68	778	Yes
14	5504	10	1432.7	76	698	Yes
15	5505	2	1858.7	99	538	Yes
16	5562	-	416.1	22	2403	Yes
17	5529	-	492.9	27	2029	Yes
18	5543	-	368.2	20	2716	Yes
19	5492	-	386.2	21	2589	Yes
20	5501	-	394.5	21	2535	Yes
21	5497	-	360.1	20	2777	Yes
22	5550	-	494.1	27	2024	Yes
23	5536	-	897.7	48	1114	Yes
24	5565	-	962.5	51	1039	Yes
25	5515	-	380.2	21	2630	Yes
26	5557	-	452.7	24	2209	Yes
27	5502	-	391.8	21	2552	Yes
28	5518	-	1083.4	58	923	Yes
29	5540	-	329.7	18	3033	Yes
30	5516	-	502	27	1992	Yes
						Detection Rate: 100%

802.11be (EHT80) 5530 MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5491	24	2	224	No
2	5534	29	4.5	219	Yes
3	5542	26	3.2	167	Yes
4	5567	27	3.7	216	Yes
5	5511	23	1.1	179	Yes
6	5557	26	3.1	181	No
7	5559	27	3.7	188	Yes
8	5533	26	2.9	155	Yes
9	5507	29	4.8	214	Yes
10	5554	23	1.5	195	Yes
11	5504	29	4.9	201	Yes
12	5502	24	1.8	197	Yes
13	5495	23	1.5	158	Yes
14	5514	29	4.9	222	Yes
15	5547	28	4.2	185	Yes
16	5563	23	1	173	Yes
17	5569	29	4.8	190	Yes
18	5508	29	4.5	200	Yes
19	5537	25	2.3	165	Yes
20	5510	27	3.4	177	Yes
21	5561	23	1	183	Yes
22	5506	28	4	156	Yes
23	5493	23	1.1	213	Yes
24	5546	25	2.7	229	Yes
25	5496	23	1.2	206	Yes
26	5540	29	4.9	203	Yes
27	5517	26	3.3	163	Yes
28	5564	26	3.2	182	Yes
29	5519	24	1.7	166	Yes
30	5532	25	2.6	210	Yes
					Detection Rate: 93.3%

802.11be (EHT80) 5530 MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5510	16	7	239	Yes
2	5547	18	9.5	335	Yes
3	5518	17	8.2	411	Yes
4	5507	18	8.7	224	Yes
5	5512	16	6.1	428	No
6	5563	17	8.1	332	Yes
7	5493	17	8.7	491	No
8	5520	17	7.9	348	Yes
9	5497	18	9.8	206	Yes
10	5500	16	6.5	204	Yes
11	5525	18	9.9	438	Yes
12	5567	16	6.8	484	Yes
13	5517	16	6.5	344	No
14	5543	18	9.9	465	Yes
15	5515	18	9.2	444	Yes
16	5535	16	6	357	Yes
17	5559	18	9.8	423	Yes
18	5568	18	9.5	225	No
19	5534	16	7.3	217	Yes
20	5542	17	8.4	242	Yes
21	5504	16	6	483	Yes
22	5544	18	9	470	Yes
23	5536	16	6.1	308	Yes
24	5541	17	7.7	498	Yes
25	5553	16	6.2	477	Yes
26	5551	18	9.9	375	No
27	5564	17	8.3	285	No
28	5531	17	8.2	433	Yes
29	5491	16	6.7	490	Yes
30	5539	17	7.6	202	Yes
					Detection Rate: 80%

802.11be (EHT80) 5530 MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5523	14	16	355	Yes
2	5559	12	11.3	487	Yes
3	5502	13	13.5	344	No
4	5522	16	19.4	288	Yes
5	5551	15	17.5	230	Yes
6	5554	14	15.3	432	Yes
7	5557	14	15.9	207	Yes
8	5520	13	14.3	443	No
9	5526	14	15.8	439	Yes
10	5525	12	11.5	223	No
11	5569	15	17.4	208	No
12	5542	16	19	463	Yes
13	5538	14	16	441	Yes
14	5534	13	13.8	323	Yes
15	5539	16	18.9	297	Yes
16	5563	14	15.5	412	No
17	5507	16	19.9	324	Yes
18	5497	13	14.1	271	Yes
19	5509	14	15.2	349	Yes
20	5567	13	13.8	409	Yes
21	5508	15	17.1	373	Yes
22	5511	13	13.8	254	Yes
23	5566	16	19.8	274	Yes
24	5552	14	15.3	278	Yes
25	5537	13	14.5	317	Yes
26	5531	12	11.3	260	Yes
27	5517	15	17.3	211	Yes
28	5536	16	19.2	272	Yes
29	5494	13	14.2	264	No
30	5498	15	18.2	284	Yes
					Detection Rate: 80%

802.11be (EHT80) 5530 MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5530	LP_SIGNAL_01	Yes
2	18	5530	LP_SIGNAL_02	Yes
3	13	5530	LP_SIGNAL_03	Yes
4	15	5530	LP_SIGNAL_04	Yes
5	5	5530	LP_SIGNAL_05	Yes
6	13	5530	LP_SIGNAL_06	Yes
7	15	5530	LP_SIGNAL_07	Yes
8	12	5530	LP_SIGNAL_08	Yes
9	20	5530	LP_SIGNAL_09	Yes
10	6	5530	LP_SIGNAL_10	Yes
11	20	5499	LP_SIGNAL_11	Yes
12	8	5494.2	LP_SIGNAL_12	Yes
13	7	5493.8	LP_SIGNAL_13	Yes
14	20	5499	LP_SIGNAL_14	Yes
15	17	5497.8	LP_SIGNAL_15	Yes
16	5	5493	LP_SIGNAL_16	Yes
17	20	5499	LP_SIGNAL_17	Yes
18	19	5498.6	LP_SIGNAL_18	No
19	10	5495	LP_SIGNAL_19	Yes
20	14	5496.6	LP_SIGNAL_20	Yes
21	5	5567	LP_SIGNAL_21	Yes
22	16	5562.6	LP_SIGNAL_22	No
23	5	5567	LP_SIGNAL_23	Yes
24	11	5564.6	LP_SIGNAL_24	Yes
25	5	5567	LP_SIGNAL_25	Yes
26	20	5561	LP_SIGNAL_26	Yes
27	14	5563.4	LP_SIGNAL_27	Yes
28	13	5563.8	LP_SIGNAL_28	Yes
29	7	5566.2	LP_SIGNAL_29	Yes
30	11	5564.6	LP_SIGNAL_30	Yes
				Detection Rate: 93.3%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT80) 5530 MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	No
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	No
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	No
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	No
				Detection Rate: 86.7%

802.11be (EHT160) 5250 MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5317	5	1672.2	89	598	Yes
2	5251	23	326.2	18	3066	Yes
3	5255	15	1253.1	67	798	Yes
4	5319	17	1193.3	63	838	Yes
5	5254	9	1474.9	78	678	No
6	5300	7	1567.4	83	638	No
7	5326	4	1730.1	92	578	Yes
8	5292	16	1222.5	65	818	Yes
9	5276	8	1519.8	81	658	No
10	5314	22	1066.1	57	938	No
11	5259	6	1618.1	86	618	Yes
12	5312	18	1165.5	62	858	Yes
13	5322	14	1285.3	68	778	Yes
14	5263	10	1432.7	76	698	Yes
15	5318	2	1858.7	99	538	Yes
16	5307	-	416.1	22	2403	Yes
17	5284	-	492.9	27	2029	Yes
18	5267	-	368.2	20	2716	Yes
19	5262	-	386.2	21	2589	Yes
20	5302	-	394.5	21	2535	Yes
21	5327	-	360.1	20	2777	Yes
22	5256	-	494.1	27	2024	No
23	5291	-	897.7	48	1114	Yes
24	5298	-	962.5	51	1039	Yes
25	5274	-	380.2	21	2630	Yes
26	5290	-	452.7	24	2209	Yes
27	5288	-	391.8	21	2552	Yes
28	5297	-	1083.4	58	923	Yes
29	5306	-	329.7	18	3033	Yes
30	5321	-	502	27	1992	No
						Detection Rate: 80%

802.11be (EHT160) 5250 MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5253	24	2	224	Yes
2	5318	29	4.5	219	Yes
3	5313	26	3.2	167	Yes
4	5291	27	3.7	216	Yes
5	5252	23	1.1	179	No
6	5260	26	3.1	181	Yes
7	5257	27	3.7	188	Yes
8	5323	26	2.9	155	Yes
9	5281	29	4.8	214	Yes
10	5320	23	1.5	195	Yes
11	5286	29	4.9	201	Yes
12	5258	24	1.8	197	No
13	5262	23	1.5	158	Yes
14	5303	29	4.9	222	Yes
15	5302	28	4.2	185	Yes
16	5267	23	1	173	Yes
17	5307	29	4.8	190	Yes
18	5289	29	4.5	200	Yes
19	5256	25	2.3	165	Yes
20	5254	27	3.4	177	Yes
21	5255	23	1	183	No
22	5326	28	4	156	Yes
23	5265	23	1.1	213	Yes
24	5273	25	2.7	229	Yes
25	5277	23	1.2	206	Yes
26	5275	29	4.9	203	Yes
27	5274	26	3.3	163	No
28	5300	26	3.2	182	No
29	5299	24	1.7	166	Yes
30	5282	25	2.6	210	Yes
					Detection Rate: 83.3%

802.11be (EHT160) 5250 MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5259	16	7	239	No
2	5251	18	9.5	335	Yes
3	5301	17	8.2	411	Yes
4	5278	18	8.7	224	Yes
5	5256	16	6.1	428	Yes
6	5258	17	8.1	332	Yes
7	5307	17	8.7	491	Yes
8	5257	17	7.9	348	Yes
9	5270	18	9.8	206	Yes
10	5317	16	6.5	204	Yes
11	5264	18	9.9	438	Yes
12	5266	16	6.8	484	Yes
13	5323	16	6.5	344	Yes
14	5263	18	9.9	465	Yes
15	5316	18	9.2	444	Yes
16	5275	16	6	357	Yes
17	5271	18	9.8	423	Yes
18	5267	18	9.5	225	Yes
19	5308	16	7.3	217	Yes
20	5310	17	8.4	242	Yes
21	5291	16	6	483	No
22	5311	18	9	470	Yes
23	5328	16	6.1	308	No
24	5300	17	7.7	498	Yes
25	5306	16	6.2	477	Yes
26	5290	18	9.9	375	Yes
27	5282	17	8.3	285	Yes
28	5319	17	8.2	433	Yes
29	5325	16	6.7	490	Yes
30	5262	17	7.6	202	Yes
					Detection Rate: 90%

802.11be (EHT160) 5250 MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5306	14	16	355	Yes
2	5270	12	11.3	487	Yes
3	5272	13	13.5	344	Yes
4	5284	16	19.4	288	Yes
5	5260	15	17.5	230	Yes
6	5301	14	15.3	432	Yes
7	5277	14	15.9	207	Yes
8	5311	13	14.3	443	Yes
9	5326	14	15.8	439	Yes
10	5264	12	11.5	223	Yes
11	5266	15	17.4	208	Yes
12	5290	16	19	463	Yes
13	5315	14	16	441	No
14	5322	13	13.8	323	Yes
15	5299	16	18.9	297	No
16	5323	14	15.5	412	No
17	5273	16	19.9	324	Yes
18	5325	13	14.1	271	Yes
19	5292	14	15.2	349	Yes
20	5300	13	13.8	409	Yes
21	5318	15	17.1	373	Yes
22	5287	13	13.8	254	Yes
23	5317	16	19.8	274	Yes
24	5255	14	15.3	278	Yes
25	5295	13	14.5	317	Yes
26	5319	12	11.3	260	Yes
27	5253	15	17.3	211	Yes
28	5254	16	19.2	272	Yes
29	5259	13	14.2	264	Yes
30	5271	15	18.2	284	Yes
					Detection Rate: 90%

802.11be (EHT160) 5250 MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5290	LP_SIGNAL_01	Yes
2	18	5290	LP_SIGNAL_02	Yes
3	13	5290	LP_SIGNAL_03	Yes
4	15	5290	LP_SIGNAL_04	Yes
5	5	5290	LP_SIGNAL_05	Yes
6	13	5290	LP_SIGNAL_06	Yes
7	15	5290	LP_SIGNAL_07	No
8	12	5290	LP_SIGNAL_08	Yes
9	20	5290	LP_SIGNAL_09	No
10	6	5290	LP_SIGNAL_10	Yes
11	20	5258	LP_SIGNAL_11	Yes
12	8	5253.2	LP_SIGNAL_12	No
13	7	5252.8	LP_SIGNAL_13	Yes
14	20	5258	LP_SIGNAL_14	Yes
15	17	5256.8	LP_SIGNAL_15	No
16	5	5252	LP_SIGNAL_16	Yes
17	20	5258	LP_SIGNAL_17	Yes
18	19	5257.6	LP_SIGNAL_18	Yes
19	10	5254	LP_SIGNAL_19	Yes
20	14	5255.6	LP_SIGNAL_20	Yes
21	5	5327	LP_SIGNAL_21	Yes
22	16	5322.6	LP_SIGNAL_22	No
23	5	5327	LP_SIGNAL_23	Yes
24	11	5324.6	LP_SIGNAL_24	Yes
25	5	5327	LP_SIGNAL_25	Yes
26	20	5321	LP_SIGNAL_26	Yes
27	14	5323.4	LP_SIGNAL_27	Yes
28	13	5323.8	LP_SIGNAL_28	Yes
29	7	5326.2	LP_SIGNAL_29	No
30	11	5324.6	LP_SIGNAL_30	Yes
				Detection Rate: 80%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5250 MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	No
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	No
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 93.3%

802.11be (EHT160) 5570 MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5625	5	1672.2	89	598	Yes
2	5584	23	326.2	18	3066	Yes
3	5542	15	1253.1	67	798	Yes
4	5505	17	1193.3	63	838	Yes
5	5522	9	1474.9	78	678	Yes
6	5535	7	1567.4	83	638	Yes
7	5577	4	1730.1	92	578	Yes
8	5523	16	1222.5	65	818	Yes
9	5563	8	1519.8	81	658	Yes
10	5511	22	1066.1	57	938	Yes
11	5580	6	1618.1	86	618	No
12	5544	18	1165.5	62	858	Yes
13	5571	14	1285.3	68	778	Yes
14	5550	10	1432.7	76	698	Yes
15	5607	2	1858.7	99	538	Yes
16	5506	-	416.1	22	2403	Yes
17	5507	-	492.9	27	2029	Yes
18	5493	-	368.2	20	2716	Yes
19	5548	-	386.2	21	2589	Yes
20	5630	-	394.5	21	2535	Yes
21	5494	-	360.1	20	2777	Yes
22	5512	-	494.1	27	2024	Yes
23	5602	-	897.7	48	1114	Yes
24	5589	-	962.5	51	1039	No
25	5515	-	380.2	21	2630	Yes
26	5573	-	452.7	24	2209	Yes
27	5491	-	391.8	21	2552	Yes
28	5599	-	1083.4	58	923	Yes
29	5517	-	329.7	18	3033	Yes
30	5639	-	502	27	1992	Yes
						Detection Rate: 93.3%

802.11be (EHT160) 5570 MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5604	24	2	224	Yes
2	5493	29	4.5	219	Yes
3	5546	26	3.2	167	Yes
4	5494	27	3.7	216	Yes
5	5573	23	1.1	179	Yes
6	5529	26	3.1	181	Yes
7	5497	27	3.7	188	Yes
8	5503	26	2.9	155	Yes
9	5530	29	4.8	214	Yes
10	5526	23	1.5	195	Yes
11	5645	29	4.9	201	Yes
12	5639	24	1.8	197	Yes
13	5627	23	1.5	158	Yes
14	5540	29	4.9	222	Yes
15	5608	28	4.2	185	Yes
16	5506	23	1	173	Yes
17	5507	29	4.8	190	Yes
18	5600	29	4.5	200	Yes
19	5518	25	2.3	165	Yes
20	5562	27	3.4	177	Yes
21	5541	23	1	183	Yes
22	5510	28	4	156	Yes
23	5512	23	1.1	213	Yes
24	5514	25	2.7	229	No
25	5564	23	1.2	206	Yes
26	5582	29	4.9	203	Yes
27	5553	26	3.3	163	Yes
28	5532	26	3.2	182	Yes
29	5519	24	1.7	166	No
30	5578	25	2.6	210	Yes
					Detection Rate: 93.3%

802.11be (EHT160) 5570 MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5491	16	7	239	Yes
2	5576	18	9.5	335	Yes
3	5507	17	8.2	411	Yes
4	5608	18	8.7	224	Yes
5	5538	16	6.1	428	No
6	5545	17	8.1	332	Yes
7	5497	17	8.7	491	Yes
8	5510	17	7.9	348	Yes
9	5499	18	9.8	206	Yes
10	5563	16	6.5	204	Yes
11	5586	18	9.9	438	Yes
12	5616	16	6.8	484	Yes
13	5513	16	6.5	344	Yes
14	5623	18	9.9	465	No
15	5581	18	9.2	444	Yes
16	5498	16	6	357	Yes
17	5573	18	9.8	423	Yes
18	5508	18	9.5	225	Yes
19	5509	16	7.3	217	Yes
20	5552	17	8.4	242	Yes
21	5511	16	6	483	Yes
22	5523	18	9	470	No
23	5496	16	6.1	308	Yes
24	5514	17	7.7	498	Yes
25	5636	16	6.2	477	Yes
26	5640	18	9.9	375	Yes
27	5574	17	8.3	285	Yes
28	5598	17	8.2	433	Yes
29	5519	16	6.7	490	Yes
30	5617	17	7.6	202	Yes
					Detection Rate: 90%

802.11be (EHT160) 5570 MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5529	14	16	355	Yes
2	5495	12	11.3	487	Yes
3	5576	13	13.5	344	Yes
4	5643	16	19.4	288	Yes
5	5557	15	17.5	230	No
6	5496	14	15.3	432	Yes
7	5572	14	15.9	207	Yes
8	5514	13	14.3	443	Yes
9	5591	14	15.8	439	Yes
10	5494	12	11.5	223	No
11	5542	15	17.4	208	Yes
12	5502	16	19	463	Yes
13	5505	14	16	441	Yes
14	5626	13	13.8	323	Yes
15	5584	16	18.9	297	Yes
16	5617	14	15.5	412	Yes
17	5519	16	19.9	324	Yes
18	5545	13	14.1	271	Yes
19	5566	14	15.2	349	Yes
20	5526	13	13.8	409	Yes
21	5570	15	17.1	373	No
22	5518	13	13.8	254	Yes
23	5637	16	19.8	274	Yes
24	5508	14	15.3	278	Yes
25	5638	13	14.5	317	No
26	5516	12	11.3	260	Yes
27	5601	15	17.3	211	Yes
28	5492	16	19.2	272	Yes
29	5577	13	14.2	264	No
30	5580	15	18.2	284	Yes
					Detection Rate: 83.3%

802.11be (EHT160) 5570 MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5570	LP_SIGNAL_01	Yes
2	18	5570	LP_SIGNAL_02	Yes
3	13	5570	LP_SIGNAL_03	Yes
4	15	5570	LP_SIGNAL_04	Yes
5	5	5570	LP_SIGNAL_05	No
6	13	5570	LP_SIGNAL_06	Yes
7	15	5570	LP_SIGNAL_07	Yes
8	12	5570	LP_SIGNAL_08	Yes
9	20	5570	LP_SIGNAL_09	Yes
10	6	5570	LP_SIGNAL_10	Yes
11	20	5499	LP_SIGNAL_11	Yes
12	8	5494.2	LP_SIGNAL_12	Yes
13	7	5493.8	LP_SIGNAL_13	Yes
14	20	5499	LP_SIGNAL_14	Yes
15	17	5497.8	LP_SIGNAL_15	Yes
16	5	5493	LP_SIGNAL_16	Yes
17	20	5499	LP_SIGNAL_17	Yes
18	19	5498.6	LP_SIGNAL_18	Yes
19	10	5495	LP_SIGNAL_19	Yes
20	14	5496.6	LP_SIGNAL_20	No
21	5	5647	LP_SIGNAL_21	Yes
22	16	5642.6	LP_SIGNAL_22	Yes
23	5	5647	LP_SIGNAL_23	Yes
24	11	5644.6	LP_SIGNAL_24	Yes
25	5	5647	LP_SIGNAL_25	Yes
26	20	5641	LP_SIGNAL_26	Yes
27	14	5643.4	LP_SIGNAL_27	Yes
28	13	5643.8	LP_SIGNAL_28	Yes
29	7	5646.2	LP_SIGNAL_29	Yes
30	11	5644.6	LP_SIGNAL_30	Yes
				Detection Rate: 93.3%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT160) 5570 MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	No
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 96.7%

802.11be (EHT240) 5610 MHz

Type 1 Radar Statistical Performances						
Trial Id	Radar Frequency (MHz)	PRF No. (1 to 23)	PRF(pps)	Number of Pulses	PRI (us)	Detection
1	5601	5	1672.2	89	598	Yes
2	5625	23	326.2	18	3066	Yes
3	5506	15	1253.1	67	798	Yes
4	5494	17	1193.3	63	838	Yes
5	5695	9	1474.9	78	678	Yes
6	5562	7	1567.4	83	638	Yes
7	5565	4	1730.1	92	578	Yes
8	5498	16	1222.5	65	818	Yes
9	5646	8	1519.8	81	658	Yes
10	5505	22	1066.1	57	938	Yes
11	5611	6	1618.1	86	618	Yes
12	5502	18	1165.5	62	858	Yes
13	5497	14	1285.3	68	778	Yes
14	5499	10	1432.7	76	698	Yes
15	5544	2	1858.7	99	538	Yes
16	5631	-	416.1	22	2403	Yes
17	5676	-	492.9	27	2029	Yes
18	5660	-	368.2	20	2716	Yes
19	5604	-	386.2	21	2589	Yes
20	5510	-	394.5	21	2535	Yes
21	5600	-	360.1	20	2777	Yes
22	5584	-	494.1	27	2024	Yes
23	5557	-	897.7	48	1114	Yes
24	5514	-	962.5	51	1039	Yes
25	5547	-	380.2	21	2630	Yes
26	5673	-	452.7	24	2209	Yes
27	5687	-	391.8	21	2552	Yes
28	5572	-	1083.4	58	923	Yes
29	5533	-	329.7	18	3033	Yes
30	5630	-	502	27	1992	Yes
						Detection Rate: 100%

802.11be (EHT240) 5610 MHz

Type 2 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5629	24	2	224	Yes
2	5653	29	4.5	219	Yes
3	5723	26	3.2	167	Yes
4	5589	27	3.7	216	Yes
5	5595	23	1.1	179	No
6	5500	26	3.1	181	Yes
7	5497	27	3.7	188	Yes
8	5707	26	2.9	155	Yes
9	5630	29	4.8	214	Yes
10	5580	23	1.5	195	Yes
11	5549	29	4.9	201	Yes
12	5698	24	1.8	197	Yes
13	5542	23	1.5	158	Yes
14	5548	29	4.9	222	No
15	5505	28	4.2	185	Yes
16	5666	23	1	173	Yes
17	5642	29	4.8	190	Yes
18	5508	29	4.5	200	Yes
19	5564	25	2.3	165	No
20	5509	27	3.4	177	Yes
21	5570	23	1	183	Yes
22	5656	28	4	156	Yes
23	5569	23	1.1	213	Yes
24	5558	25	2.7	229	Yes
25	5715	23	1.2	206	Yes
26	5526	29	4.9	203	Yes
27	5543	26	3.3	163	Yes
28	5647	26	3.2	182	Yes
29	5571	24	1.7	166	Yes
30	5541	25	2.6	210	Yes
					Detection Rate: 90%

802.11be (EHT240) 5610 MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5522	16	7	239	Yes
2	5573	18	9.5	335	Yes
3	5602	17	8.2	411	Yes
4	5542	18	8.7	224	Yes
5	5714	16	6.1	428	Yes
6	5496	17	8.1	332	Yes
7	5625	17	8.7	491	Yes
8	5557	17	7.9	348	Yes
9	5708	18	9.8	206	Yes
10	5647	16	6.5	204	Yes
11	5501	18	9.9	438	No
12	5693	16	6.8	484	Yes
13	5505	16	6.5	344	Yes
14	5641	18	9.9	465	Yes
15	5596	18	9.2	444	Yes
16	5517	16	6	357	Yes
17	5576	18	9.8	423	Yes
18	5562	18	9.5	225	Yes
19	5545	16	7.3	217	Yes
20	5594	17	8.4	242	Yes
21	5531	16	6	483	Yes
22	5510	18	9	470	No
23	5628	16	6.1	308	Yes
24	5495	17	7.7	498	No
25	5703	16	6.2	477	Yes
26	5516	18	9.9	375	No
27	5676	17	8.3	285	Yes
28	5544	17	8.2	433	Yes
29	5519	16	6.7	490	Yes
30	5664	17	7.6	202	Yes
					Detection Rate: 86.7%

802.11be (EHT240) 5610 MHz

Type 4 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5528	14	16	355	Yes
2	5702	12	11.3	487	Yes
3	5555	13	13.5	344	Yes
4	5536	16	19.4	288	Yes
5	5715	15	17.5	230	Yes
6	5496	14	15.3	432	Yes
7	5689	14	15.9	207	Yes
8	5500	13	14.3	443	Yes
9	5491	14	15.8	439	Yes
10	5537	12	11.5	223	Yes
11	5672	15	17.4	208	Yes
12	5568	16	19	463	Yes
13	5509	14	16	441	Yes
14	5709	13	13.8	323	No
15	5626	16	18.9	297	No
16	5516	14	15.5	412	Yes
17	5633	16	19.9	324	Yes
18	5508	13	14.1	271	Yes
19	5579	14	15.2	349	Yes
20	5680	13	13.8	409	Yes
21	5523	15	17.1	373	Yes
22	5499	13	13.8	254	Yes
23	5701	16	19.8	274	Yes
24	5603	14	15.3	278	Yes
25	5515	13	14.5	317	No
26	5581	12	11.3	260	Yes
27	5517	15	17.3	211	Yes
28	5609	16	19.2	272	Yes
29	5637	13	14.2	264	Yes
30	5641	15	18.2	284	Yes
					Detection Rate: 90%

802.11be (EHT240) 5610 MHz

Type 5 Radar Statistical Performances				
No.	Chirp Width (MHz)	Radar Frequency (MHz)	LP_SIGNAL_NO.	Detection
1	9	5610	LP_SIGNAL_01	Yes
2	18	5610	LP_SIGNAL_02	Yes
3	13	5610	LP_SIGNAL_03	Yes
4	15	5610	LP_SIGNAL_04	Yes
5	5	5610	LP_SIGNAL_05	Yes
6	13	5610	LP_SIGNAL_06	Yes
7	15	5610	LP_SIGNAL_07	Yes
8	12	5610	LP_SIGNAL_08	Yes
9	20	5610	LP_SIGNAL_09	Yes
10	6	5610	LP_SIGNAL_10	No
11	20	5499	LP_SIGNAL_11	Yes
12	8	5494.2	LP_SIGNAL_12	Yes
13	7	5493.8	LP_SIGNAL_13	Yes
14	20	5499	LP_SIGNAL_14	Yes
15	17	5497.8	LP_SIGNAL_15	Yes
16	5	5493	LP_SIGNAL_16	Yes
17	20	5499	LP_SIGNAL_17	Yes
18	19	5498.6	LP_SIGNAL_18	Yes
19	10	5495	LP_SIGNAL_19	Yes
20	14	5496.6	LP_SIGNAL_20	Yes
21	5	5723	LP_SIGNAL_21	Yes
22	16	5718.6	LP_SIGNAL_22	Yes
23	5	5723	LP_SIGNAL_23	Yes
24	11	5720.6	LP_SIGNAL_24	No
25	5	5723	LP_SIGNAL_25	Yes
26	20	5717	LP_SIGNAL_26	Yes
27	14	5719.4	LP_SIGNAL_27	Yes
28	13	5719.8	LP_SIGNAL_28	Yes
29	7	5722.2	LP_SIGNAL_29	Yes
30	11	5720.6	LP_SIGNAL_30	Yes
				Detection Rate: 93.3%

Note: The Long Pulse Radar pattern shown in Appendix.

802.11be (EHT240) 5610 MHz

Type 6 Radar Statistical Performances				
Trial Id	Pulses per HOP	Pulse Width (us)	PRI (us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	No
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes
				Detection Rate: 96.7%

Repeater

Radar Type	Number of Trials (Times)	Percentage of Successful Detection	Minimum Percentage of Successful Detection	Test Result
		802.11be (EHT80)		
3	30	73.3%	60%	Pass

802.11be (EHT80) 5530 MHz

Type 3 Radar Statistical Performances					
Trial Id	Radar Frequency (MHz)	Number of Pulses	Pulse Width (us)	PRI (us)	Detection
1	5510	16	7	239	Yes
2	5547	18	9.5	335	Yes
3	5518	17	8.2	411	Yes
4	5507	18	8.7	224	Yes
5	5512	16	6.1	428	Yes
6	5563	17	8.1	332	Yes
7	5493	17	8.7	491	Yes
8	5520	17	7.9	348	No
9	5497	18	9.8	206	No
10	5500	16	6.5	204	Yes
11	5525	18	9.9	438	Yes
12	5567	16	6.8	484	Yes
13	5517	16	6.5	344	No
14	5543	18	9.9	465	No
15	5515	18	9.2	444	Yes
16	5535	16	6	357	Yes
17	5559	18	9.8	423	Yes
18	5568	18	9.5	225	Yes
19	5534	16	7.3	217	No
20	5542	17	8.4	242	Yes
21	5504	16	6	483	No
22	5544	18	9	470	Yes
23	5536	16	6.1	308	Yes
24	5541	17	7.7	498	No
25	5553	16	6.2	477	Yes
26	5551	18	9.9	375	Yes
27	5564	17	8.3	285	No
28	5531	17	8.2	433	Yes
29	5491	16	6.7	490	Yes
30	5539	17	7.6	202	Yes
Detection Rate: 73.3%					

8 Declaration of Conformity by the Manufacturer

8.1 Transmit Power Control (TPC)

U-NII devices operating in DFS Bands (5.25 to 5.35 GHz and 5.47 to 5.725 GHz) shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

The maximum EIRP of this device is 990.24 mW, and it has TPC functionality.

The UUT can adjust a transmitter's output power according to the device's Transmit Power Control (TPC) triggering mechanism. The TPC is controlled by the operation mode declared by the manufacturer.

8.2 Statement of Manufacturer

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

9 Pictures of Test Arrangements

Please refer to the attached file (DFS Test Setup Photo)

10 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

11 Appendix

11.1 Radar Test Signal

The Long Pulse Radar Pattern

802.11be (EHT20) 5500 MHz

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_01						
Number of Bursts in Trial: 11						
Chirp Center Frequency: 5500MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_02
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 16
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_05
Number of Bursts in Trial: 8
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_06
Number of Bursts in Trial: 14
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 16
Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5500MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5493.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_13
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5492.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_14
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 18
Chirp Center Frequency: 5496.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 8
Chirp Center Frequency: 5492MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5497.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_20
Number of Bursts in Trial: 15
Chirp Center Frequency: 5495.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_21
Number of Bursts in Trial: 8
Chirp Center Frequency: 5508MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 17
Chirp Center Frequency: 5503.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 8
Chirp Center Frequency: 5508MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5505.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5508MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5502MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5504.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5504.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 10
Chirp Center Frequency: 5507.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 13
Chirp Center Frequency: 5505.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT40) 5510 MHz

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_01						
Number of Bursts in Trial: 11						
Chirp Center Frequency: 5510MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_02						
Number of Bursts in Trial: 19						
Chirp Center Frequency: 5510MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5510MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5493.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 9
Chirp Center Frequency: 5492.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 20
Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_15
 Number of Bursts in Trial: 18
 Chirp Center Frequency: 5496.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_16
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5492MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_17
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5498MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5497.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5494MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5495.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5528MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5523.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5528MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5525.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5528MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5522MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5524.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5524.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5527.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5525.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT80) 5530 MHz

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_01						
Number of Bursts in Trial: 11						
Chirp Center Frequency: 5530MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_02						
Number of Bursts in Trial: 19						
Chirp Center Frequency: 5530MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5530MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5494.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 9
Chirp Center Frequency: 5493.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 20
Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 18
Chirp Center Frequency: 5497.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 8
Chirp Center Frequency: 5493MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5498.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5495MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5496.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5567MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_22
Number of Bursts in Trial: 17
Chirp Center Frequency: 5562.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_23
Number of Bursts in Trial: 8
Chirp Center Frequency: 5567MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_24
Number of Bursts in Trial: 13
Chirp Center Frequency: 5564.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_25
Number of Bursts in Trial: 8
Chirp Center Frequency: 5567MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5561MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5563.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5563.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5566.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5564.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT160) 5250 MHz

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_01						
Number of Bursts in Trial: 11						
Chirp Center Frequency: 5290MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_02						
Number of Bursts in Trial: 19						
Chirp Center Frequency: 5290MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 20
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 9
Chirp Center Frequency: 5290MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5253.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 9
Chirp Center Frequency: 5252.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 20
Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 18
Chirp Center Frequency: 5256.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 8
Chirp Center Frequency: 5252MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5258MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5257.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5254MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5255.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5327MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5322.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5327MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5324.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5327MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5321MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5323.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5323.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_29
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5326.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_30
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5324.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT160) 5570 MHz

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_01						
Number of Bursts in Trial: 11						
Chirp Center Frequency: 5570MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_02						
Number of Bursts in Trial: 19						
Chirp Center Frequency: 5570MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_03
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_04
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_07
Number of Bursts in Trial: 16
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_08
Number of Bursts in Trial: 14
Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_09
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_10
 Number of Bursts in Trial: 9
 Chirp Center Frequency: 5570MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5494.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 9
Chirp Center Frequency: 5493.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 20
Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 18
Chirp Center Frequency: 5497.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 8
Chirp Center Frequency: 5493MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_17
Number of Bursts in Trial: 20
Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5498.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5495MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5496.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5647MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5642.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5647MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5644.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5647MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5641MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5643.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5643.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 10
Chirp Center Frequency: 5646.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 13
Chirp Center Frequency: 5644.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

802.11be (EHT240) 5610 MHz

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_01						
Number of Bursts in Trial: 11						
Chirp Center Frequency: 5610MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	63.2	1251	-	-
2	3	9	93	1099	1203	1528
3	2	9	77.2	1842	1132	-
4	3	9	84.1	1139	1584	1206
5	1	9	52	1514	-	-
6	2	9	76.6	1696	1078	-
7	2	9	83	1188	1467	-
8	2	9	74.1	1282	1923	-
9	3	9	97.4	1521	1847	1791
10	1	9	56.1	1558	-	-
11	3	9	98.7	1315	1204	1306

Long Pulse Radar Test Signal						
Test Signal Name: LP_SIGNAL_02						
Number of Bursts in Trial: 19						
Chirp Center Frequency: 5610MHz						
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	60.2	1801	-	-
2	1	18	56.5	1403	-	-
3	3	18	97.8	1719	1959	1990
4	3	18	89.1	1916	1920	1723
5	1	18	50.9	1175	-	-
6	3	18	97.6	1053	1186	1250
7	3	18	93.8	1138	1234	1548
8	1	18	66.3	1699	-	-
9	2	18	80.4	1405	1177	-
10	1	18	50.2	1575	-	-
11	3	18	86.8	1319	1339	1393
12	1	18	52.4	1085	-	-
13	2	18	70.8	1861	1355	-
14	1	18	52.6	1999	-	-
15	3	18	98.2	1742	1522	1609
16	2	18	78.4	1300	1573	-
17	2	18	77.9	1899	1729	-
18	1	18	58.8	1692	-	-
19	2	18	70.5	1668	1182	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_03
Number of Bursts in Trial: 15
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	52.3	1596	-	-
2	3	13	88.8	1292	1975	1156
3	3	13	97.5	1388	1281	1285
4	2	13	79.5	1036	1287	-
5	1	13	51.1	1299	-	-
6	3	13	90.2	1345	1623	1163
7	3	13	95.6	1280	1240	1715
8	3	13	86.9	1010	1887	1098
9	2	13	72.7	1066	1561	-
10	2	13	79.2	1174	1983	-
11	3	13	96.5	1655	1446	1932
12	2	13	69.2	1241	1507	-
13	3	13	92.6	1858	1284	1006
14	3	13	99.5	1811	1981	1346
15	2	13	78	1183	1258	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_04
Number of Bursts in Trial: 16
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	96.5	1057	1829	1321
2	2	15	75.1	1700	1650	-
3	3	15	91.7	1152	1273	1367
4	2	15	74.6	1912	1014	-
5	2	15	69.7	1935	1783	-
6	1	15	59.9	1084	-	-
7	2	15	76.8	1733	1675	-
8	1	15	53.1	1245	-	-
9	2	15	68.9	1756	1195	-
10	1	15	50	1142	-	-
11	2	15	76.4	1608	1048	-
12	3	15	90.6	1782	1443	1061
13	1	15	56.3	1870	-	-
14	2	15	81.4	1354	1395	-
15	1	15	53.9	1480	-	-
16	3	15	98.2	1896	1785	1005

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_05
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	55	1081	-	-
2	1	5	65.3	1524	-	-
3	2	5	76.9	1929	1493	-
4	1	5	53.8	1476	-	-
5	1	5	59.9	1333	-	-
6	1	5	62.8	1749	-	-
7	2	5	77.1	1119	1565	-
8	3	5	96.7	1331	1746	1176

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_06
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	99	1503	1924	1407
2	1	13	55.4	1682	-	-
3	1	13	60.7	1063	-	-
4	2	13	71.1	1917	1474	-
5	3	13	87.1	1344	1541	1257
6	3	13	83.9	1589	1537	1598
7	2	13	81.1	1880	1889	-
8	3	13	94.3	1269	1231	1930
9	1	13	52.9	1955	-	-
10	3	13	92.8	1815	1856	1199
11	1	13	56.1	1914	-	-
12	2	13	73	1253	1448	-
13	3	13	86.8	1276	1043	1972
14	1	13	53.3	1289	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_07
 Number of Bursts in Trial: 16
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	15	89.2	1520	1813	1948
2	1	15	60.5	1326	-	-
3	2	15	75.6	1427	1795	-
4	3	15	85.7	1356	1944	1166
5	2	15	78.5	1050	1838	-
6	2	15	79.5	1205	1219	-
7	2	15	74.7	1404	1931	-
8	3	15	99.6	1515	1248	1803
9	3	15	89.2	1109	1167	1107
10	1	15	55.4	1442	-	-
11	2	15	68.7	1429	1894	-
12	2	15	81	1684	1374	-
13	3	15	91.5	1252	1992	1029
14	1	15	53.8	1591	-	-
15	1	15	65.7	1525	-	-
16	3	15	95.7	1892	1128	1239

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_08
 Number of Bursts in Trial: 14
 Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	68.1	1789	1765	-
2	3	12	83.7	1271	1288	1233
3	3	12	98.1	1421	1034	1044
4	3	12	95.1	1114	1657	1027
5	2	12	75.7	1263	1090	-
6	1	12	64.2	1901	-	-
7	3	12	99.3	1327	1320	1606
8	1	12	55.6	1074	-	-
9	1	12	66	1527	-	-
10	3	12	85	1621	1464	1482
11	2	12	68.9	1970	1883	-
12	2	12	82.1	1351	1469	-
13	3	12	87.7	1841	1640	1009
14	1	12	63.5	1599	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_09
Number of Bursts in Trial: 20
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.3	1881	1127	-
2	2	20	81	1274	1648	-
3	1	20	61.4	1077	-	-
4	1	20	51.7	1570	-	-
5	2	20	76.2	1478	1019	-
6	1	20	66.3	1501	-	-
7	2	20	78.2	1626	1818	-
8	2	20	74.3	1123	1201	-
9	3	20	84.3	1165	1144	1809
10	3	20	97.6	1335	1753	1453
11	2	20	71.9	1153	1939	-
12	3	20	99.4	1900	1069	1389
13	1	20	66.2	1516	-	-
14	1	20	55.2	1502	-	-
15	1	20	52.4	1745	-	-
16	1	20	56	1193	-	-
17	3	20	92.5	1585	1534	1304
18	2	20	77.3	1747	1730	-
19	2	20	78.6	1015	1202	-
20	1	20	57.2	1382	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_10
Number of Bursts in Trial: 9
Chirp Center Frequency: 5610MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	74.7	1508	1788	-
2	2	6	72.4	1718	1439	-
3	2	6	74.9	1097	1455	-
4	3	6	91.8	1602	1799	1376
5	2	6	77.7	1823	1748	-
6	2	6	74.9	1922	1672	-
7	1	6	61.3	1903	-	-
8	2	6	69.9	1089	1772	-
9	2	6	69.6	1008	1134	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_11
 Number of Bursts in Trial: 20
 Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	20	93.6	1370	1793	1594
2	1	20	60.5	1093	-	-
3	3	20	92.6	1607	1991	1504
4	1	20	61.9	1773	-	-
5	2	20	75.7	1659	1151	-
6	2	20	80.1	1353	1419	-
7	3	20	87.8	1001	1291	1396
8	2	20	69.6	1651	1819	-
9	3	20	89.7	1764	1338	1254
10	2	20	77.7	1634	1641	-
11	3	20	99.4	1064	1432	1627
12	2	20	67.4	1418	1874	-
13	3	20	93.9	1178	1519	1909
14	3	20	99.5	1362	1192	1977
15	1	20	50.4	1771	-	-
16	2	20	73.1	1848	1550	-
17	2	20	76.3	1888	1787	-
18	3	20	98.1	1740	1721	1638
19	3	20	94	1832	1593	1461
20	1	20	53.2	1218	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_12
 Number of Bursts in Trial: 10
 Chirp Center Frequency: 5494.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	8	59.9	1968	-	-
2	3	8	92.6	1072	1399	1032
3	3	8	91.7	1988	1458	1428
4	1	8	53.5	1686	-	-
5	2	8	80.4	1490	1347	-
6	3	8	88.9	1459	1698	1083
7	1	8	52.9	1485	-	-
8	1	8	56	1039	-	-
9	2	8	69.7	1549	1755	-
10	2	8	74	1279	1140	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_13
Number of Bursts in Trial: 9
Chirp Center Frequency: 5493.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	51.3	1489	-	-
2	1	7	54.9	1149	-	-
3	1	7	58.3	1605	-	-
4	1	7	54.6	1316	-	-
5	3	7	90.8	1154	1226	1247
6	3	7	87	1578	1643	1375
7	2	7	79.3	1677	1041	-
8	3	7	87.4	1631	1586	1323
9	3	7	90.6	1361	1466	1411

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_14
Number of Bursts in Trial: 20
Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	75.2	1744	1145	-
2	1	20	64.6	1971	-	-
3	3	20	86.5	1532	1301	1031
4	1	20	52.7	1028	-	-
5	3	20	99.7	1040	1486	1451
6	2	20	79.2	1488	1702	-
7	3	20	89.9	1553	1984	1492
8	2	20	80.8	1869	1511	-
9	2	20	73	1437	1030	-
10	2	20	74.5	1208	1734	-
11	2	20	68.6	1400	1013	-
12	1	20	51.3	1816	-	-
13	2	20	76.8	1087	1674	-
14	2	20	67.4	1845	1665	-
15	1	20	66.6	1844	-	-
16	1	20	59.7	1135	-	-
17	1	20	51	1088	-	-
18	2	20	68.9	1661	1024	-
19	3	20	89.1	1497	1915	1170
20	2	20	81.6	1921	1877	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_15
Number of Bursts in Trial: 18
Chirp Center Frequency: 5497.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	17	86.8	1854	1969	1825
2	2	17	77.1	1895	1473	-
3	2	17	81.8	1905	1615	-
4	3	17	99.9	1401	1025	1979
5	1	17	65.7	1652	-	-
6	2	17	76.3	1572	1408	-
7	3	17	94.5	1543	1430	1465
8	1	17	59.1	1802	-	-
9	3	17	89.3	1710	1212	1950
10	1	17	58.6	1897	-	-
11	1	17	63.5	1735	-	-
12	3	17	93.9	1129	1168	1383
13	3	17	89	1775	1689	1708
14	1	17	57.5	1047	-	-
15	2	17	68.7	1853	1904	-
16	3	17	88.7	1539	1761	1120
17	2	17	73.4	1259	1445	-
18	3	17	89.8	1058	1484	1189

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_16
Number of Bursts in Trial: 8
Chirp Center Frequency: 5493MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	92.1	1774	1390	1720
2	2	5	74.3	1852	1910	-
3	3	5	90.5	1094	1663	1191
4	1	5	58	1704	-	-
5	2	5	79.9	1592	1409	-
6	2	5	81.5	1566	1051	-
7	1	5	51.1	1691	-	-
8	2	5	72.7	1833	1583	-

Long Pulse Radar Test Signal

Test Signal Name: LP_SIGNAL_17

Number of Bursts in Trial: 20

Chirp Center Frequency: 5499MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	74.5	1544	1805	-
2	3	20	87.5	1460	1664	1807
3	3	20	91.7	1886	1249	1849
4	3	20	94.9	1884	1717	1431
5	3	20	89.7	1000	1283	1213
6	2	20	68.1	1601	1349	-
7	3	20	90.3	1666	1369	1328
8	1	20	55.8	1878	-	-
9	1	20	53.7	1512	-	-
10	3	20	98.1	1161	1875	1580
11	2	20	82.9	1555	1111	-
12	3	20	86.6	1311	1637	1307
13	3	20	87.1	1857	1963	1947
14	2	20	73.3	1122	1873	-
15	3	20	84.8	1998	1743	1941
16	2	20	80.7	1831	1557	-
17	3	20	91.6	1420	1738	1470
18	1	20	64.3	1225	-	-
19	1	20	60.9	1309	-	-
20	2	20	74.8	1197	1617	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_18
 Number of Bursts in Trial: 19
 Chirp Center Frequency: 5498.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	19	62.4	1636	-	-
2	2	19	69.3	1002	1054	-
3	3	19	98.7	1360	1974	1441
4	2	19	78	1851	1244	-
5	3	19	86.3	1918	1310	1406
6	1	19	61.2	1426	-	-
7	2	19	76.8	1386	1997	-
8	1	19	64.8	1436	-	-
9	3	19	91.1	1928	1938	1576
10	2	19	78.8	1007	1817	-
11	3	19	97.3	1447	1117	1313
12	1	19	50.2	1982	-	-
13	3	19	98.8	1101	1517	1976
14	3	19	93	1255	1112	1468
15	1	19	51.7	1936	-	-
16	1	19	56.9	1554	-	-
17	2	19	67.5	1456	1925	-
18	3	19	94.4	1866	1758	1978
19	2	19	69	1371	1732	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_19
 Number of Bursts in Trial: 12
 Chirp Center Frequency: 5495MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	10	95.4	1483	1113	1568
2	1	10	53.6	1713	-	-
3	2	10	83.2	1200	1387	-
4	1	10	53.8	1148	-	-
5	2	10	70.6	1270	1146	-
6	1	10	55.7	1373	-	-
7	3	10	86.9	1864	1037	1217
8	1	10	52.7	1125	-	-
9	2	10	68.8	1612	1810	-
10	3	10	89.6	2000	1415	1141
11	1	10	59.7	1973	-	-
12	1	10	66.4	1422	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_20
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5496.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	65.6	1479	-	-
2	2	14	70.6	1075	1317	-
3	2	14	76.3	1949	1961	-
4	1	14	60.2	1653	-	-
5	1	14	55.2	1359	-	-
6	3	14	88.8	1110	1158	1076
7	1	14	63.6	1046	-	-
8	1	14	58.5	1229	-	-
9	2	14	78.5	1391	1590	-
10	3	14	91.3	1126	1108	1872
11	2	14	75.5	1697	1893	-
12	1	14	64.7	1221	-	-
13	2	14	74.9	1444	1911	-
14	1	14	50.8	1506	-	-
15	2	14	82.6	1582	1185	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_21
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5723MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	87.9	1834	1951	1104
2	3	5	94.1	1762	1716	1410
3	2	5	71.5	1294	1750	-
4	2	5	77.8	1706	1337	-
5	1	5	63.2	1784	-	-
6	3	5	97.2	1552	1564	1216
7	3	5	95.4	1402	1336	1017
8	1	5	65.6	1068	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_22
 Number of Bursts in Trial: 17
 Chirp Center Frequency: 5718.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	16	71.2	1358	1100	-
2	2	16	79.3	1224	1475	-
3	1	16	65.5	1681	-	-
4	2	16	78.1	1827	1322	-
5	2	16	72.2	1164	1821	-
6	3	16	99.5	1115	1752	1800
7	1	16	58.5	1806	-	-
8	1	16	58	1065	-	-
9	2	16	75.2	1846	1246	-
10	2	16	81.3	1171	1956	-
11	1	16	62.3	1646	-	-
12	2	16	81.6	1342	1628	-
13	2	16	79.7	1020	1937	-
14	2	16	72.4	1797	1669	-
15	2	16	82.8	1341	1116	-
16	3	16	96.6	1049	1890	1533
17	2	16	68.1	1481	1070	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_23
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5723MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	5	53.8	1709	-	-
2	3	5	85.9	1768	1645	1563
3	3	5	90.5	1676	1055	1597
4	1	5	54.1	1425	-	-
5	2	5	78.2	1348	1952	-
6	2	5	68.4	1169	1760	-
7	2	5	78.9	1776	1620	-
8	2	5	69.8	1662	1381	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_24
 Number of Bursts in Trial: 13
 Chirp Center Frequency: 5720.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	73.2	1690	1966	-
2	3	11	99.1	1707	1220	1763
3	1	11	58.6	1647	-	-
4	3	11	97.3	1926	1499	1529
5	1	11	61.7	1434	-	-
6	3	11	96.6	1727	1600	1804
7	2	11	69.2	1042	1023	-
8	2	11	70.3	1898	1701	-
9	1	11	54.9	1256	-	-
10	1	11	55.1	1986	-	-
11	2	11	81	1736	1477	-
12	3	11	89.8	1372	1724	1571
13	1	11	60.7	1958	-	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_25
 Number of Bursts in Trial: 8
 Chirp Center Frequency: 5723MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	5	91.4	1673	1060	1196
2	1	5	59.1	1639	-	-
3	2	5	70	1303	1822	-
4	2	5	83.2	1778	1215	-
5	1	5	50.2	1433	-	-
6	3	5	83.4	1695	1106	1885
7	1	5	62.5	1946	-	-
8	2	5	69.3	1622	1731	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_26
Number of Bursts in Trial: 20
Chirp Center Frequency: 5717MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	20	52.9	1509	-	-
2	1	20	65.4	1714	-	-
3	1	20	61.3	1907	-	-
4	2	20	75	1136	1618	-
5	1	20	59.7	1919	-	-
6	1	20	59.4	1942	-	-
7	1	20	61.3	1850	-	-
8	1	20	54.8	1859	-	-
9	1	20	61.4	1624	-	-
10	3	20	93.1	1162	1649	1368
11	1	20	60.8	1312	-	-
12	3	20	86.6	1180	1828	1397
13	1	20	58.2	1860	-	-
14	3	20	99.1	1394	1275	1722
15	1	20	50.4	1423	-	-
16	3	20	99.9	1227	1343	1867
17	1	20	60.8	1879	-	-
18	1	20	63.5	1003	-	-
19	3	20	84.8	1613	1703	1685
20	3	20	93.2	1222	1194	1567

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_27
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5719.4MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	14	61.3	1190	-	-
2	2	14	74.7	1633	1062	-
3	2	14	67.3	1022	1147	-
4	1	14	51.7	1352	-	-
5	1	14	56.7	1413	-	-
6	1	14	57.3	1642	-	-
7	1	14	62.4	1658	-	-
8	2	14	76.7	1902	1121	-
9	2	14	70.5	1546	1513	-
10	2	14	70.9	1644	1505	-
11	2	14	77.9	1518	1004	-
12	3	14	85.1	1155	2000	1330
13	1	14	66.3	1876	-	-
14	1	14	50.5	1018	-	-
15	2	14	70.2	1814	1035	-

Long Pulse Radar Test Signal
 Test Signal Name: LP_SIGNAL_28
 Number of Bursts in Trial: 15
 Chirp Center Frequency: 5719.8MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	13	83.6	1207	1133	1542
2	3	13	97.4	1540	1026	1906
3	2	13	72.2	1688	1933	-
4	1	13	52	1610	-	-
5	3	13	87.1	1863	1210	1236
6	1	13	57.9	1272	-	-
7	1	13	65.4	1577	-	-
8	3	13	93.6	1214	1412	1835
9	1	13	62.1	1463	-	-
10	2	13	70.1	1705	1989	-
11	1	13	53.1	1262	-	-
12	1	13	52.5	1318	-	-
13	3	13	92.4	1340	1364	1780
14	1	13	58.6	1293	-	-
15	2	13	70.2	1332	1993	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_29
Number of Bursts in Trial: 10
Chirp Center Frequency: 5722.2MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	7	72.4	1495	1679	-
2	3	7	86.8	1296	1683	1836
3	3	7	98.7	1667	1767	1305
4	2	7	69.4	1855	1611	-
5	1	7	57.9	1157	-	-
6	2	7	78.2	1927	1759	-
7	3	7	98.1	1105	1995	1547
8	1	7	59.5	1726	-	-
9	2	7	68.3	1741	1325	-
10	1	7	52.3	1500	-	-

Long Pulse Radar Test Signal
Test Signal Name: LP_SIGNAL_30
Number of Bursts in Trial: 13
Chirp Center Frequency: 5720.6MHz

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width (us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	97	1181	1440	1980
2	3	11	84.6	1562	1184	1779
3	3	11	84.4	1452	1350	1868
4	3	11	90.5	1678	1228	1223
5	1	11	65.1	1943	-	-
6	2	11	75.8	1130	1498	-
7	2	11	70.2	1994	1712	-
8	1	11	57.7	1960	-	-
9	2	11	78.8	1953	1379	-
10	2	11	66.8	1131	1366	-
11	1	11	52.5	1560	-	-
12	3	11	88.7	1278	1957	1934
13	1	11	61.4	1016	-	-

--- END ---