

料 号 705-C01000-01

项 目 C01 中英文 折页说明书

成品尺寸 65*95 mm

公 差 $\pm 0.5\text{mm}$

材 质 105g 哑粉纸 单色印刷

工 艺 折页（先弹簧折，后对折）

颜色要求

其 他

设计师 邱光宇 包装结构 文案 邹舒婷 伍青蕾

项目 产品 结构工程 ID 王震

重要: PDF 文件仅供预览，实际印刷请使用 AI 转曲文档
或 Cdr 转曲文档)



刀模线




标示线

标示线刀模线

请勿印刷!

印刷要求:

色相正确、印迹牢固、套印准确、各色套印不露杂色，
套印误差 $\leq 1\text{mm}$ ，模切走位 $\leq \pm 1\text{mm}$

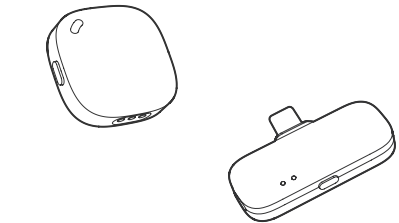

C01

无线麦克风

Wireless Microphone

使用手册

Instruction Manual

前言

感谢您购买神牛无线麦克风 C01。
使用本产品之前，请仔细阅读说明书，以便正确使用。

主要特点

- 200 米无线传输距离；
- 一键降噪清晰收音；
- 单发射器 9H 续航，搭配充电盒最长可达 27H 续航（一拖二状态）；
- 手机边充电边直播；
- 48kHz/24bit 高品质音质；
- 麦克风仅 7g，无感佩戴。

警告

- ⚠ 麦克风是精密设备，请勿使其掉落或受到撞击，以避免发生故障。
- ⚠ 请勿私自拆卸、改装或尝试维修本产品。
- ⚠ 产品如出现故障须由本公司或授权的维修人员进行检查维修。

- ⚠ 请勿让儿童接触本产品，以避免发生意外。
- ⚠ 请勿在易燃易爆环境中使用。
- ⚠ 如果电池更换不当会有爆炸危险，只能用同样类型或等效类型的电池来更换，仅维修人员可更换，非一般人员更换。
- ⚠ 消费者若使用电源适配器充电，则应购买配套使用获得 CCC 认证并满足标准要求的电源适配器。


物品清单

型号	物品清单
C01 Kit1	发射器 ×1、接收器 ×1、发射器磁吸充电线 ×1、磁铁 ×1、说明书 ×1、卡通贴纸 ×1
C01 Kit2	发射器 ×2、接收器 ×1、充电盒 ×1、USB-C 充电线 ×1、磁铁 ×2、说明书 ×1、卡通贴纸 ×1


麦克风佩戴




连接手机

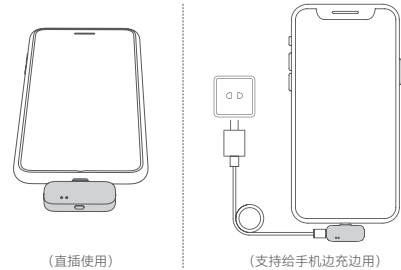

发射器按键操作 / 指示灯说明

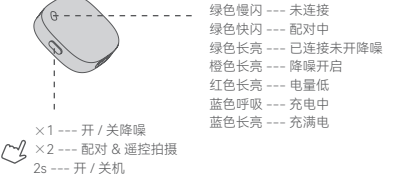

接收器按键操作 / 指示灯说明

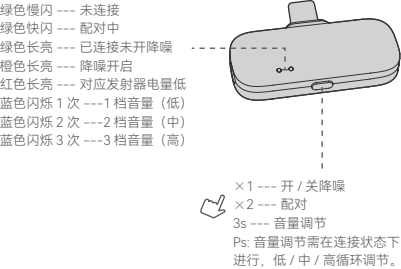

充电盒电量指示灯含义

- 0-25% 电量
- 25%-50% 电量
- 50%-75% 电量
- 75%-100% 电量

规格参数

名称	发射器	接收器	充电盒
型号	C01 TX	C01 RX	C01 Charging Case
传输类型	2.4GHz 数字跳频系统		
拾音模式	全向型		
频率范围	20Hz~20KHz		
最大 SPL	115dB SLP	/	/
信噪比	> 65dB		
最大无线距离	200 米 (视距)		
输入参数	5V ≍ 90mA	20V ≍ 3A (Max.)	5V ≍ 600mA
输出参数	/	20V ≍ 3A (Max.)	5V ≍ 0.2A(*2) 总输出: 5V ≍ 0.4A
锂电池参数	3.87V, 97mAh, 0.376Wh		3.7V, 600mAh, 2.22Wh
续航时间	约 9h	/	可为两台发射器充电 2 次
充电时间	约 1.5h		约 1.5h
工作环境温度	-10~50℃		
充电温度	0℃~45℃	/	0℃~45℃
尺寸	24.5mm ×24.8mm ×12.5mm	40.0mm ×26.3mm ×9.0mm	88.0mm ×31.0mm ×35.5mm
净重	约 7g	约 5g	约 49g

规格参数如有变更，恕不另行通知。

Foreword

Thank you for purchasing!
Please read this manual carefully before using to make sure the correct operation and exert the optimum function.

Main Features

- Max. 200m stable wireless transmission.
- Clear and stable recording with noise cancellation function.
- Transmitter provides 9h of battery life, extended to 27h with charging case (paired with 2 receivers).
- Receiver supports using while charging.
- 48kHz/24bit high quality sound.
- Transmitter weighs merely 7g.

Warning

- ⚠ This product is high-precision instrument, please avoid falling, collision or pounding.
- ⚠ Do not disassemble, modify, or attempt to repair this product without permission.
- ⚠ Should repairs become necessary, this product must be sent to our Company or an authorized maintenance center.
- ⚠ Keep out of reach of children.
- ⚠ Do not use in flammable and explosive environments.
- ⚠ Danger of explosion if the battery is not replaced properly, danger of fire or explosion if replaced with the wrong type of battery pack, replace only with battery of the same type or equivalent. Replace by service personnel only, not general personnel.


What's Inside

Model	Item List
C01 Kit1	Transmitter×1, Receiver×1, Magnetic Charging Cable×1, Magnet×1, Instruction Manual×1, Cartoon Stickers × 1
C01 Kit2	Transmitter×2, Receiver×1, Charging Case×1, USB-C Charging Cable×1, Magnet×2, Instruction Manual×1, Cartoon Stickers × 1

Transmitter Installation




Receiver Installation

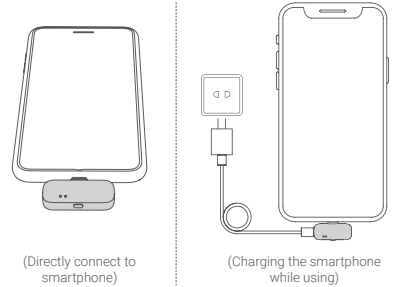


Buttons and Indicators Instructions for Transmitter

Flash green slowly — Unpaired
Flash green quickly — Pairing
Constant on green — Paired with noise cancellation off
Constant on orange — Noise cancellation on
Constant on red — Low battery level
Breathe blue — Charging
Constant on blue — Fully Charged



Buttons and Indicators Instructions for Receiver

Flash green slowly — Unpaired
Flash green quickly — Pairing
Constant on green — Paired with noise cancellation off
Constant on orange — Noise cancellation on
Constant on red — Low battery level in corresponding transmitter
Flash blue once — Level 1 volume (low)
Flash blue twice — Level 2 volume (medium)
Flash blue three times — Level 3 volume (high)

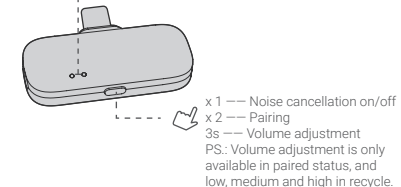

Indicators Instructions for Charging Case

- 0-25% battery
- 25%-50% battery
- 50%-75% battery
- 75%-100% battery

Technical Data

Product Name	Transmitter	Receiver	Charging Case
Model	C01 TX	C01 RX	C01 Charging Case
Transmission Type	2.4GHz Frequency Hopping System		
Pickup Pattern	Omnidirectional	/	/
Frequency Range	20Hz~20KHz		
Max. SPL	115dB SLP		
SNR	> 65dB		
Max. Wireless Distance	200m (sight distance)		
Input Parameters	5V ≈ 90mA	20V ≈ 3A (Max.)	5V ≈ 600mA
Output Parameters	/	20V ≈ 3A (Max.)	5V ≈ 0.2A(*2) Total Output: 5V ≈ 0.4A
Lithium Battery Parameters	3.87V, 97mAh, 0.376Wh	/	3.7V, 600mAh, 2.22Wh
Battery Life	Approx. 9h		Charge 2 devices for about twice
Charging Time	Approx. 1.5h		Approx. 1.5h
Working Environment Temperature	-10~50℃		
Charging Environment Temperature	0℃ ~45℃	/	0℃ ~45℃
Dimension≈	0.97" *0.98" *0.49"	1.57" *1.04" *0.35"	3.46" *1.22" *1.4"
Net Weight≈	7g	5g	49g

Specifications and data may subject to changes without notice.

Marking Information

Model: C01 TX R-R-gdx-096 214-250627	Li-ion Battery: 3.87V, 97mAh, 0.376Wh Input: 5V ≍ 90mA CAN ICES 003(B)/NMB-003(B) IC: 20034-155 FCC ID: 2ABYN155	UK CE
Model: C01 RX R-R-gdx-096 214-250626	Output: 20V ≍ 3A (Max.) CAN ICES 003(B)/NMB-003(B) IC: 20034-154 FCC ID: 2ABYN154	UK CE

Warning

Operating frequency: 2402MHz ~ 2480MHz
C01 TX Maximum EIRP Power: 2.90dBm
C01 RX Maximum EIRP Power: 7.48dBm

Declaration of Conformity

GODOX Photo Equipment Co.,Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states.
For more information of DoC, Please click this web link: <https://www.godox.com/eu-declaration-of-conformity>
The device complies with RF specifications when the device used at 0mm from your body

IC Warning

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:
(1) This device may not cause interference, and
(2) This device must accept any interference, including interference that may cause undesired operation of the device.
Cet appareil est conforme aux normes RSS exemptées de licence d'Innovation, Sciences et Développement économique Canada. L'exploitation est soumise aux deux conditions suivantes:
(1) Cet appareil ne peut pas causer d'interférences, et
(2) Cet appareil doit accepter toute interférence, y compris celles qui pourraient entraîner un fonctionnement accidentel de l'appareil.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
Tout changement ou modification non expressément approuvé par la partie responsable de la réglementation de l'OCDE peut faire perdre à l'utilisateur le droit d'utiliser l'appareil.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

Remarque: cet appareil a été testé pour répondre aux limites des appareils numériques de classe B conformément à la partie 15 des règles de la Federal Communications Commission

des États - Unis. Ces limites sont conçues pour fournir une protection raisonnable contre les interférences nuisibles dans les installations résidentielles. L'appareil génère de l'énergie RF utilisée et rayonne, ce qui peut causer des interférences nocives pour les communications radio s'il n'est pas installé et utilisé conformément aux instructions. Cependant, aucun Garantie contre les interférences dans une installation spécifique. Si l'appareil cause des interférences nuisibles à la réception de la radio ou de la télévision, qui peuvent être déterminées en éteignant et en allumant l'appareil, l'utilisateur est encouragé à tenter de corriger les interférences par une ou plusieurs des mesures suivantes:
- redirection ou repositionnement de l'antenne de réception.
- augmenter l'espacement entre l'appareil et le récepteur.
- Connecter l'appareil à une prise sur un circuit différent de celui auquel le récepteur est connecté.
- consultez votre revendeur ou un technicien radio / tv expérimenté pour obtenir de l'aide.
RF warning for Portable device:
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.
Avertissement RF pour les appareils portables:
L'appareil a été évalué pour répondre aux exigences générales d'exposition aux radiofréquences.Équipement Peut être utilisé sans restriction dans des conditions d'exposition portables.

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.
Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

产品保修

尊敬的用户， 本保修卡是申请保修服务的重要凭证，请您配合销售商填写并妥善保管， 谢谢！

产品信息	型号	产品条码
用户信息	姓名	联系电话
	通讯地址	
销售商信息	名称	
	联系电话	
	通讯地址	
	销售日期	
备注		

注：此表应由销售商盖章确认。

产品信息

本文件适用于相关《产品保修信息》（见后面说明）所列产品，其他非属此范围的产品或部件(如促销品、赠品及其他出厂后附加的部件等）不在此保修承诺内。

保修期

产品及部件的相应保修期按相关的《产品保修信息》执行。保修期自产品首次购买日起算，购买日以购买产品时保修卡登记日期为准。

如何获得保修服务

要保修服务， 您可直接与产品销售商或授权服务机构联系，也可拨打神牛产品售后服务电话， 与我们联系， 由我们的服务人员为您安排服务。申请保修时， 您应提供有效的保修卡作为保修凭证， 方可获得保修。如您不能提供有效的保修卡， 则在我们可确认产品或部件属于保修范围的情况下， 也可以为您提供保修， 但这不作为我们的义务。

不适用保修的情况

如产品存在下列情况， 本文件项下的保证和服务将不适用
①**产品或部件超过相应保修期**；②**错误或不适当使用、维护或保管导致的故障或损坏**，如： 不当搬运、 非按产品合理预期用途使用； 不当插拔外接设备； 跌落或外力挤压； 接触或暴露于不当温度、溶剂、酸碱、水浸或潮湿环境；
③**由非神牛授权机构或人员安装、修理、更改、添加或拆卸造成的故障或损坏**；
④**产品或部件原有识别信息被修改变更或删除**；
⑤**无有效保修卡**；
⑥**使用非法授权、非标准或非公开发行的软件造成的故障或损坏**；
⑦**因不可抗力或意外事件造成的故障或损坏**；
⑧**其他非因产品本身质量问题导致的故障或损坏**。遇上述情况， 您应向相关责任方寻求解决， 神牛对此不承担任何责任。因非在保修期或保修范围内的部件、附件或软件导致产品不能正常使用的， 不是保修范围内的故障。产品使用过程中正常的褪色， 磨损和消耗， 不是保修范围内的故障。

产品保修和服务支持信息

产品的保修期和服务类型按以下《产品保修信息》执行：

产品类型	选件名称	保修期（月）	保修服务类型
部件	主机	12	客户送修
	电池	3	
	充电器等 带电性能的部件	12	
其他	如电源线、同步线、电池盒、防风棉、防风毛罩、锁紧装置、手提绳、扎带、魔术贴、领夹、便携袋、包装等	无	无保修

神牛产品售后服务电话 0755-29609320-8062

有害物质标识

弃置本产品时，请不要将其与一般生活垃圾放在一起，应将其交给政府指定的回收中心有利于环保。

电子电气产品有害物质申明					
部件名称	铅 (Pb)	镉 (Cd)	汞 (Hg)	六价铬 (Cr6+)	多溴联苯 (PBB)
外壳	○	○	○	○	○
金属充电触点	×	○	○	○	○
电路板组件*	○	○	○	○	○
电池组	○	○	○	○	○
其他配件	○	○	○	○	○
本表格依据 SJ/T11364 的规定编制。 *：电路板组件包括印刷电路板及其构成的零部件，如电阻、电容、集成电路、连接器等。 ○：表示该有毒物质在该部件所有均质材料中的含量在 GB/T 26572 规定的限量要求以内。 ×：表示该有毒物质至少在在该部件的某一均质材料中含量超出 GB/T26572 规定的限量要求。 上表中打 × 的部件，由于技术原因目前无法实现替代，今后随着技术进步，将实现替代或改进。					
 在本说明书所述的正常使用条件下，本仪器的环保使用期限为 10 年，在环保使用期限内可以放心使用，超过环保使用期限之后则应该进入回收循环系统。					

Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

Product Information	Model	Product Code Number
Customer Information	Name	Contact Number
	Address	
Seller Information	Name	
	Contact Number	
	Address	
	Date of Sale	
Note		

Note: This form shall be sealed by the seller.

Applicable Products

The document applies to the products listed on the Product Maintenance information (see below for further information). Other products or accessories (e.g. promotional items, giveaways and additional accessories attached, etc.) are not included in this warranty scope.

Warranty Period

The warranty period of products and accessories is implemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day (purchase date) when the product is bought for the first time, and the purchase date is considered as the date registered on the warranty card when buying the product.

How to Get the Maintenance Service

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

Inapplicable Cases

The guarantee and service offered by this document are not applicable in the following cases: ①. **The product or accessory has expired its warranty period**; ②. **Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment,**

falling off or squeezing by external force, contacting or exposing to the improper temperature, solvent, acid, base, flooding and damp environments, etc; ③. **Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alternation, addition and detachment**; ④. **The original identifying information of product or accessory is modified, alternated, or removed**; ⑤. **No valid warranty card**; ⑥. **Breakage or damage caused by using illegally authorized, nonstandard or non-public released software**; ⑦. **Breakage or damage caused by force majeure or accident**; ⑧. **Breakage or damage that could not be attributed to the product itself**. Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal discoloration, abrasion and consumption are not the breakage within the maintenance scope.

Maintenance and Service Support Information

The warranty period and service types of products are implemented according to the following Product Maintenance Information:

Product Type	Name	Maintenance Period(month)	Warranty Service Type
Parts	Product Main Body	12	Customer sends the product to designated site
	Battery	3	
	Charger, Electrical Parts etc.	12	
Other Items	Power Cable, Sync Cable, Battery Case, Windscreen Foam, Wind Cap, Locking Device, Lanyard, Tie, Velcro Tape, Clip, Bag, Package etc.	No	Without warranty

Godox After-sale Service Call 0755-29609320-8062

合格证
QC PASS



Godox Audio Wechat
Official Account
神牛影音微信公众号



Overseas Official
Accounts & Updates
海外社媒平台及资讯

深圳市神牛摄影器材有限公司

地址：深圳市宝安区福海街道塘尾社区福川工业园厂房 2 栋
电话：0755-29609320(8062) 传真：0755-25723423
邮箱：godox@godox.com

GODOX Photo Equipment Co., Ltd.
Add: Building 2, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China Tel: +86-755-29609320(8062)
Fax: +86-755-25723423 E-mail: godox@godox.com

www.godox.com
Made in China | 705-C01000-01

