

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.9 ± 6 %	5.10 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.18 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.0 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.7 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	33.8 ± 6 %	5.15 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.19 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.31 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.8 W/kg ± 19.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	47.6 Ω - 6.2 j Ω
Return Loss	- 23.3 dB

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	46.9 Ω - 4.8 j Ω
Return Loss	- 24.5 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	46.2 Ω - 3.3 j Ω
Return Loss	- 25.6 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	49.1 Ω - 4.2 j Ω
Return Loss	- 27.3 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	53.9 Ω + 0.4 j Ω
Return Loss	- 28.4 dB

Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	51.8 Ω - 0.8 j Ω
Return Loss	- 34.3 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	50.9 Ω - 2.7 j Ω
Return Loss	- 31.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.201 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 22.06.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1060

Communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5250 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.54$ S/m; $\epsilon_r = 34.7$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.64$ S/m; $\epsilon_r = 34.6$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.85$ S/m; $\epsilon_r = 34.3$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.95$ S/m; $\epsilon_r = 34.1$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.1$ S/m; $\epsilon_r = 33.9$; $\rho = 1000$ kg/m³,

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.15$ S/m; $\epsilon_r = 33.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.8, 5.8, 5.8) @ 5200 MHz, ConvF(5.5, 5.5, 5.5) @ 5250 MHz, ConvF(5.49, 5.49, 5.49) @ 5300 MHz, ConvF(5.25, 5.25, 5.25) @ 5500 MHz, ConvF(5.1, 5.1, 5.1) @ 5600 MHz, ConvF(5.08, 5.08, 5.08) @ 5750 MHz, ConvF(5.01, 5.01, 5.01) @ 5800 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 78.84 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 28.2 W/kg

SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.29 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.1%

Maximum value of SAR (measured) = 18.5 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 80.04 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.29 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 70.3%

Maximum value of SAR (measured) = 18.2 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 80.15 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 28.9 W/kg
SAR(1 g) = 8.25 W/kg; SAR(10 g) = 2.35 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 69.1%
Maximum value of SAR (measured) = 19.1 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 80.07 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 33.6 W/kg
SAR(1 g) = 8.80 W/kg; SAR(10 g) = 2.47 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 66.4%
Maximum value of SAR (measured) = 20.9 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 80.82 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 30.8 W/kg
SAR(1 g) = 8.45 W/kg; SAR(10 g) = 2.40 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 67.5%
Maximum value of SAR (measured) = 19.9 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 78.22 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 31.8 W/kg
SAR(1 g) = 8.18 W/kg; SAR(10 g) = 2.30 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 65.8%
Maximum value of SAR (measured) = 19.5 W/kg


Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 77.53 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 31.9 W/kg
SAR(1 g) = 8.19 W/kg; SAR(10 g) = 2.31 W/kg
Smallest distance from peaks to all points 3 dB below = 7.4 mm
Ratio of SAR at M2 to SAR at M1 = 65.4%
Maximum value of SAR (measured) = 19.2 W/kg

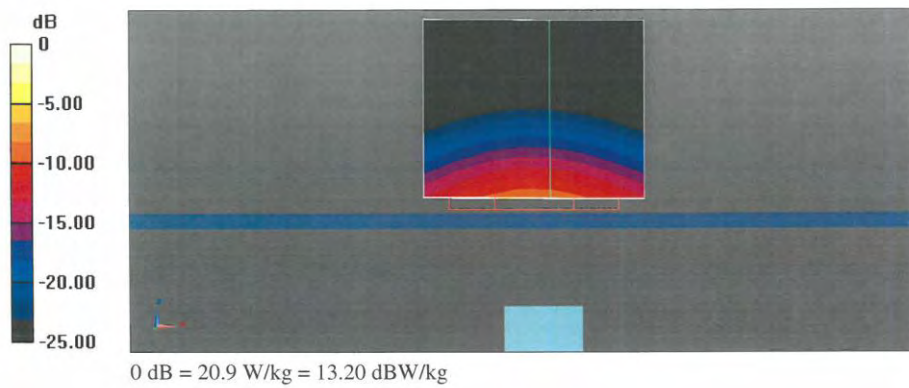

Impedance Measurement Plot for Head TSL (5200, 5500, 5800 MHz)


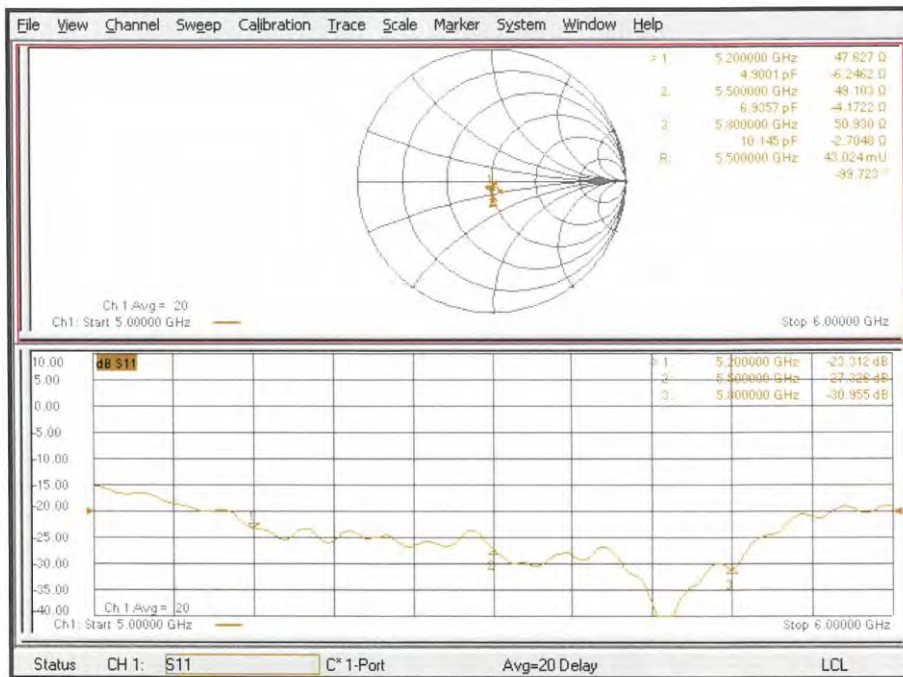


Impedance Measurement Plot for Head TSL (5250, 5300, 5600, 5750 MHz)

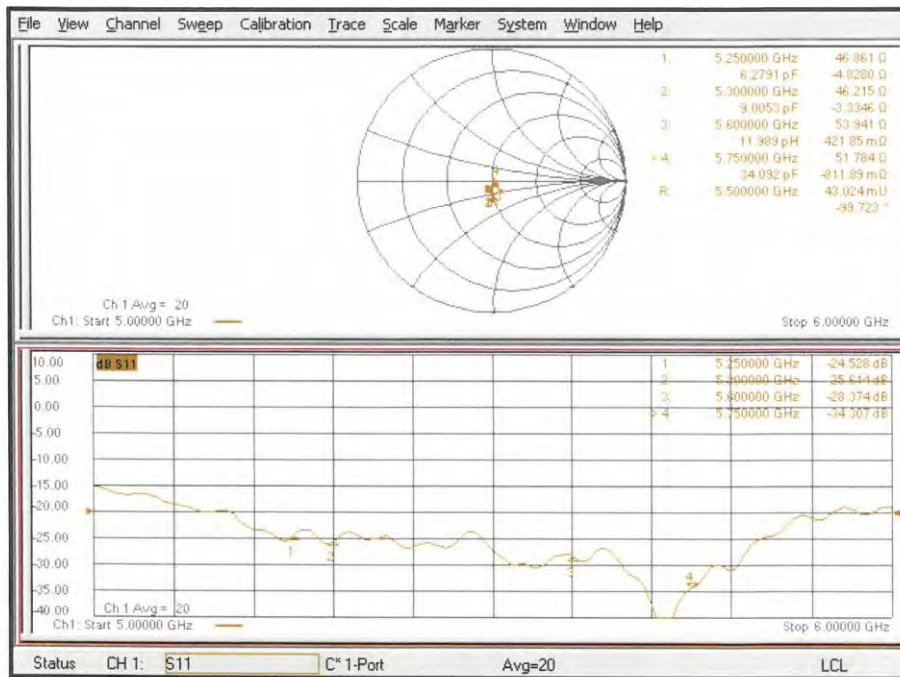

ANNEX I Sensor Triggering Data Summary

The DUT has the proximity sensors to reduce the output power. The position of the sensor and antenna are as shown in the graphic.

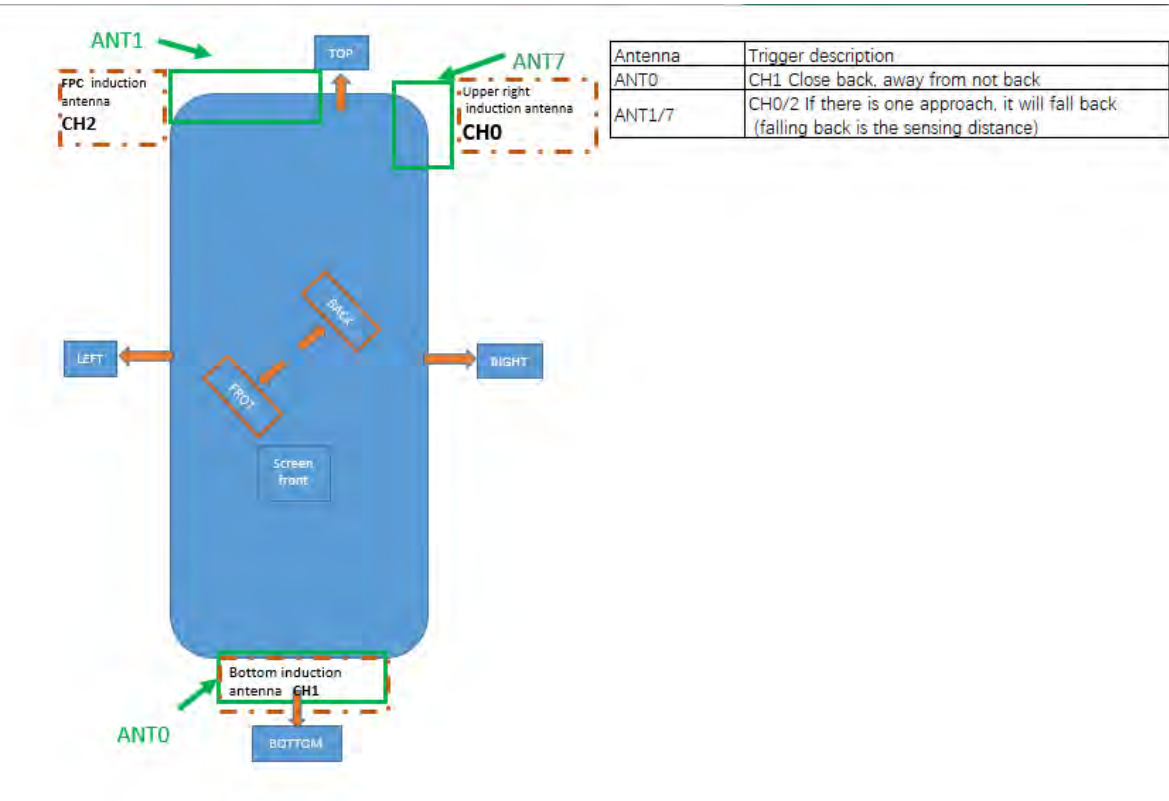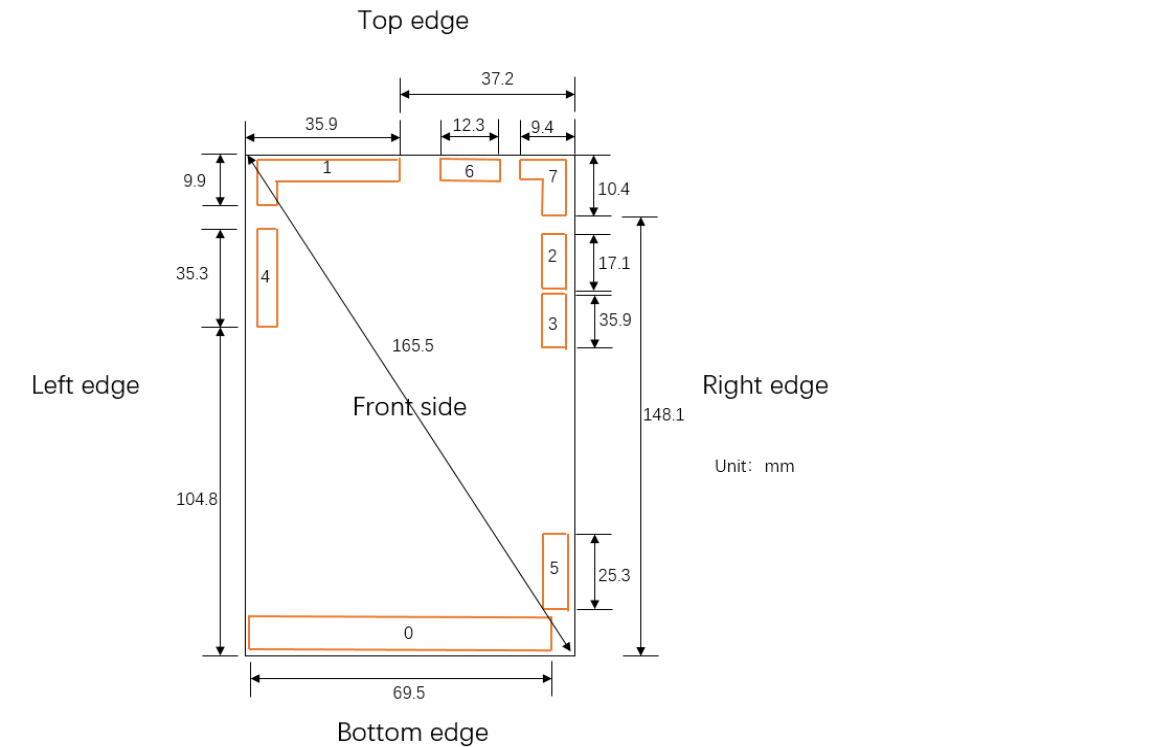


Antenna number	Sensing surface	Trigger distance N
ANT1	Front	5mm
	Back	14mm
	Top	11mm
	bottom	\
	right	\
	left	5mm

Antenna number	Sensing surface	Trigger distance N
ANT0	Front	8mm
	Back	13mm
	Top	\
	bottom	11mm
	right	\
	left	5mm

Antenna number	Sensing surface	Trigger distance N
ANT7	Front	5mm
	Back	10mm
	Top	9mm
	bottom	\
	right	13mm
	left	\

Rear, Front, Bottom, Left, Right and Top of the DUT was placed directly below the flat phantom. The DUT was moved toward the phantom in accordance with the steps outlined in KDB 616217 to determine the trigger distance for enabling power reduction. The DUT was moved away from the phantom to determine the trigger distance for resuming full power.

The DUT featured a visual indicator on its display that showed the status of the proximity sensor (Triggered or not triggered). This was used to determine the status of the sensor during the proximity sensor assessment as monitoring the output power directly was not practical without affecting the measurement. It was confirmed separately that the output power according to locking the proximity sensor status.

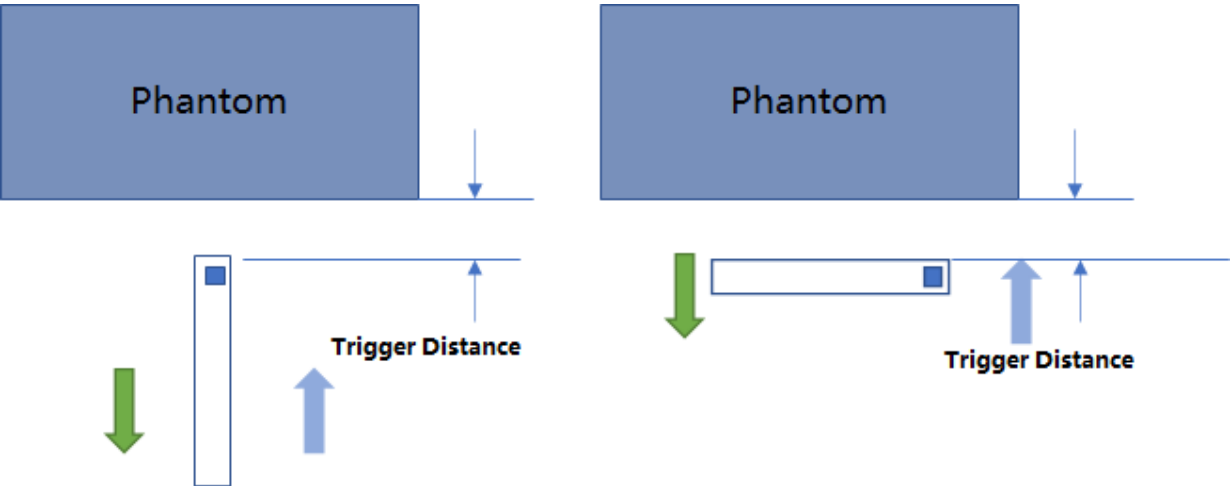

Blue arrow : Direction of DUT travel for determination of power reduction triggering point.

Green arrow: Direction of DUT travel for determination of normal power triggering point

When the visual indicator display is “Channel_1 NEAR”, indicates that the status of the proximity sensor ANT0 is triggered, when the visual indicator display is “Channel_2 NEAR”, indicates that the status of the proximity sensor ANT1 is triggered, when the visual indicator display is “Channel_0 NEAR”, indicates that the status of the proximity sensor ANT7 is triggered (see the figure below),



Fig1.sensor is triggered

When the visual indicator display is “Channel_0, Channel_1 and Channel_2 FAR ”, indicates that the status of the proximity sensor ANT0 and sensor ANT1 is not triggered

|

Sar Sensor 测试		
Channel_0		
Distance	FAR	
Diff	0	
Offset	2401	
Channel_1		
Distance	FAR	
Diff	2	
Offset	4824	
Channel_2		
Distance	FAR	
Diff	0	
Offset	2504	

Fig2. sensor ANT0 and sensor ANT1 is not triggered

ANT 1

Front Edge

Moving device toward the phantom:

sensor triggered (YES or NO)											
Distance [mm]	10	9	8	7	6	5	4	3	2	1	0
ANT1	NO	NO	NO	NO	NO	YES	YES	YES	YES	YES	YES

Moving device away from the phantom:

sensor triggered (YES or NO)											
Distance [mm]	0	1	2	3	4	5	6	7	8	9	10
ANT1	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO	NO

Rear Edge

Moving device toward the phantom:

sensor triggered (YES or NO)											
Distance [mm]	19	18	17	16	15	14	13	12	11	10	9
ANT1	NO	NO	NO	NO	NO	YES	YES	YES	YES	YES	YES

Moving device away from the phantom:

sensor triggered (YES or NO)											
Distance [mm]	9	10	11	12	13	14	15	16	17	18	19
ANT1	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO	NO

Top Edge

Moving device toward the phantom:

sensor triggered (YES or NO)											
Distance [mm]	18	17	16	15	14	13	12	11	10	9	8
ANT1	NO	NO	NO	NO	NO	YES	YES	YES	YES	YES	YES

Moving device away from the phantom:

sensor triggered (YES or NO)											
Distance [mm]	8	9	10	11	12	13	14	15	16	17	18
ANT1	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO	NO

Left Edge

Moving device toward the phantom:

sensor triggered (YES or NO)											
Distance [mm]	10	9	8	7	6	5	4	3	2	1	0
ANT1	NO	NO	NO	NO	NO	YES	YES	YES	YES	YES	YES

Moving device away from the phantom:

sensor triggered (YES or NO)											
Distance [mm]	0	1	2	3	4	5	6	7	8	9	10
ANT1	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO	NO

ANT 0

Front Edge

Moving device toward the phantom:

sensor triggered (YES or NO)											
Distance [mm]	14	13	12	11	10	9	8	7	6	5	4
ANT0	NO	NO	NO	NO	NO	YES	YES	YES	YES	YES	YES

Moving device away from the phantom:

sensor triggered (YES or NO)											
Distance [mm]	4	5	6	7	8	9	10	11	12	13	14
ANT0	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO	NO

Rear Edge

Moving device toward the phantom:

sensor triggered (YES or NO)											
Distance [mm]	19	18	17	16	15	14	13	12	11	10	9
ANT0	NO	NO	NO	NO	NO	YES	YES	YES	YES	YES	YES

Moving device away from the phantom:

sensor triggered (YES or NO)											
Distance [mm]	9	10	11	12	13	14	15	16	17	18	19
ANT0	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO	NO

Bottom Edge

Moving device toward the phantom:

sensor triggered (YES or NO)											
Distance [mm]	18	17	16	15	14	13	12	11	10	9	8
ANT0	NO	NO	NO	NO	NO	YES	YES	YES	YES	YES	YES

Moving device away from the phantom:

sensor triggered (YES or NO)											
Distance [mm]	8	9	10	11	12	13	14	15	16	17	18
ANT0	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO	NO

Left Edge

Moving device toward the phantom:

sensor triggered (YES or NO)											
Distance [mm]	10	9	8	7	6	5	4	3	2	1	0
ANT0	NO	NO	NO	NO	NO	YES	YES	YES	YES	YES	YES

Moving device away from the phantom:

sensor triggered (YES or NO)											
Distance [mm]	0	1	2	3	4	5	6	7	8	9	10
ANT0	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO	NO

ANT 7

Front Edge

Moving device toward the phantom:

sensor triggered (YES or NO)											
Distance [mm]	10	9	8	7	6	5	4	3	2	1	0
ANT1	NO	NO	NO	NO	NO	YES	YES	YES	YES	YES	YES

Moving device away from the phantom:

sensor triggered (YES or NO)											
Distance [mm]	0	1	2	3	4	5	6	7	8	9	10
ANT1	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO	NO

Rear Edge

Moving device toward the phantom:

sensor triggered (YES or NO)											
Distance [mm]	15	14	13	12	11	10	9	8	7	6	5
ANT1	NO	NO	NO	NO	NO	YES	YES	YES	YES	YES	YES

Moving device away from the phantom:

sensor triggered (YES or NO)											
Distance [mm]	5	6	7	8	9	10	11	12	13	14	15
ANT1	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO	NO

Top Edge

Moving device toward the phantom:

sensor triggered (YES or NO)											
Distance [mm]	14	13	12	11	10	9	8	7	6	5	4
ANT1	NO	NO	NO	NO	NO	YES	YES	YES	YES	YES	YES

Moving device away from the phantom:

sensor triggered (YES or NO)											
Distance [mm]	4	5	6	7	8	9	10	11	12	13	14
ANT1	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO	NO

Right Edge

Moving device toward the phantom:


sensor triggered (YES or NO)											
Distance [mm]	18	17	16	15	14	13	12	11	10	9	8
ANT1	NO	NO	NO	NO	NO	YES	YES	YES	YES	YES	YES

Moving device away from the phantom:


sensor triggered (YES or NO)											
Distance [mm]	8	9	10	11	12	13	14	15	16	17	18
ANT1	YES	YES	YES	YES	YES	YES	NO	NO	NO	NO	NO

Per FCC KDB Publication 616217 D04v01r02, the influence of table tilt angles to proximity sensor triggering is determined by positioning each edge that contains a transmitting antenna, perpendicular to the flat phantom, at the smallest sensor triggering test distance by rotating the device around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ or more from the vertical position at 0° .


ANT0

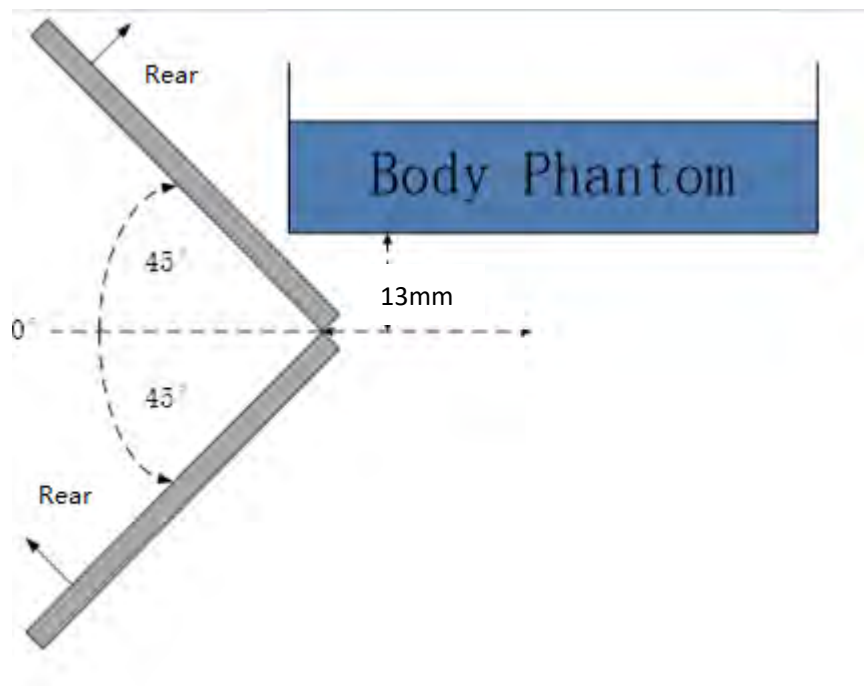


The Rear evaluation

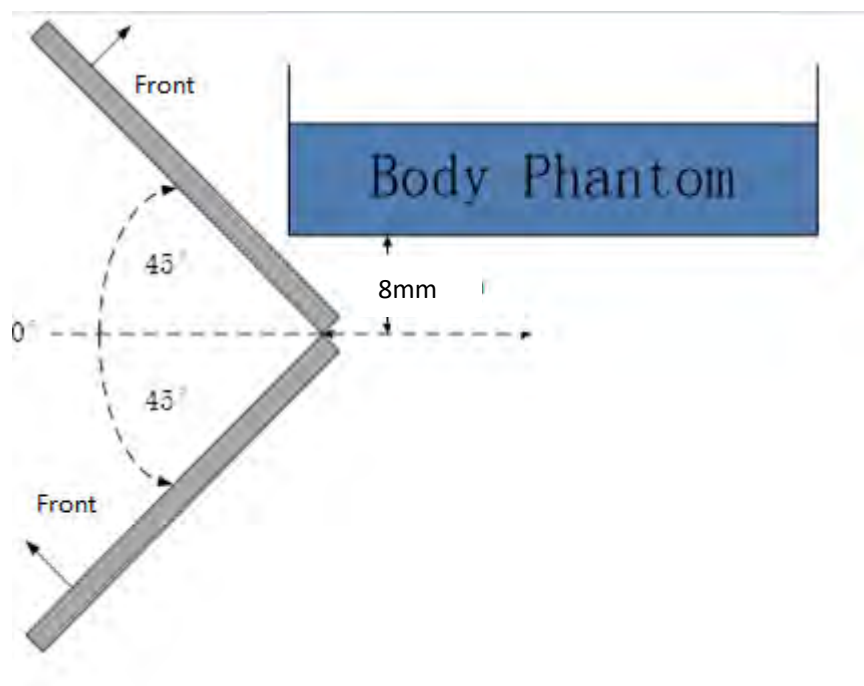

The Front edge evaluation

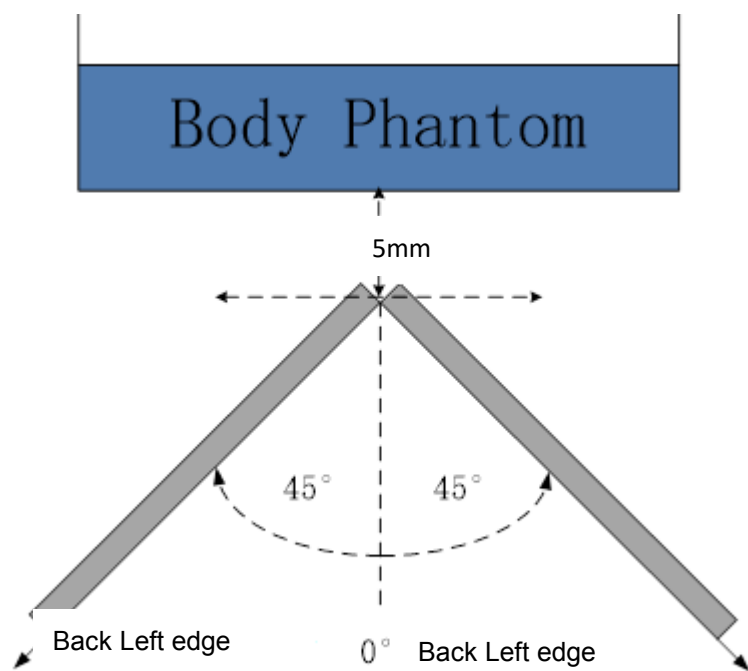


The Left edge evaluation

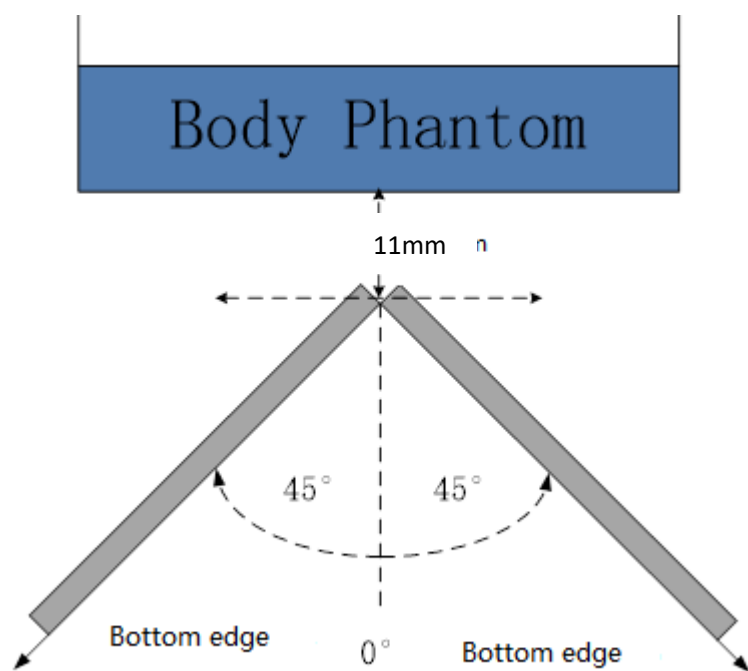


The Bottom edge evaluation


ANT1

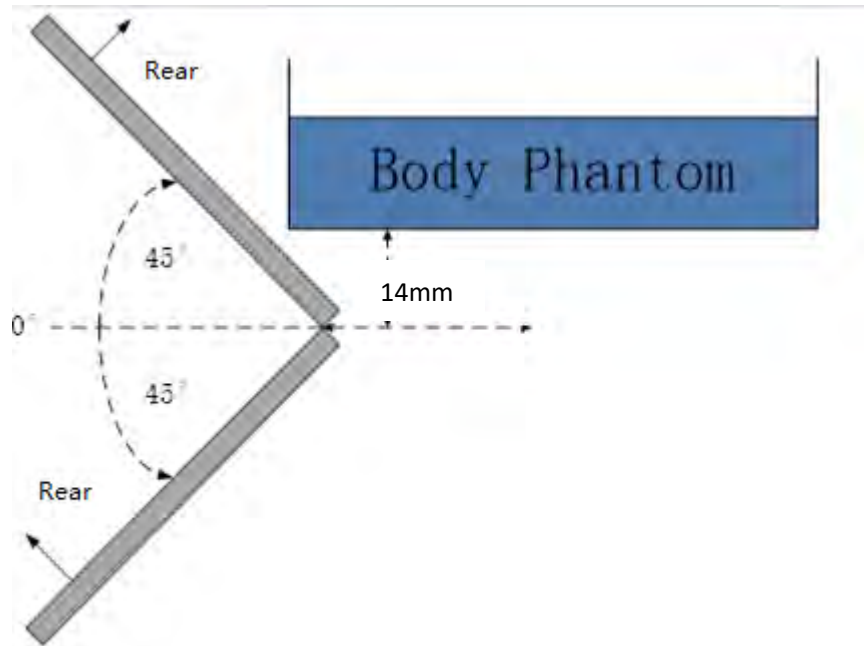


The Rear evaluation

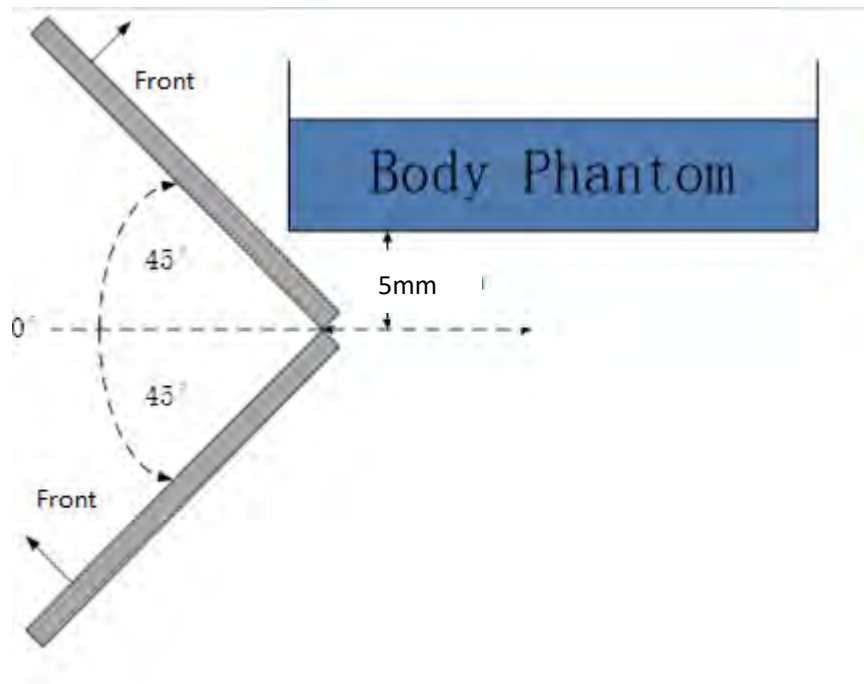

The Front edge evaluation

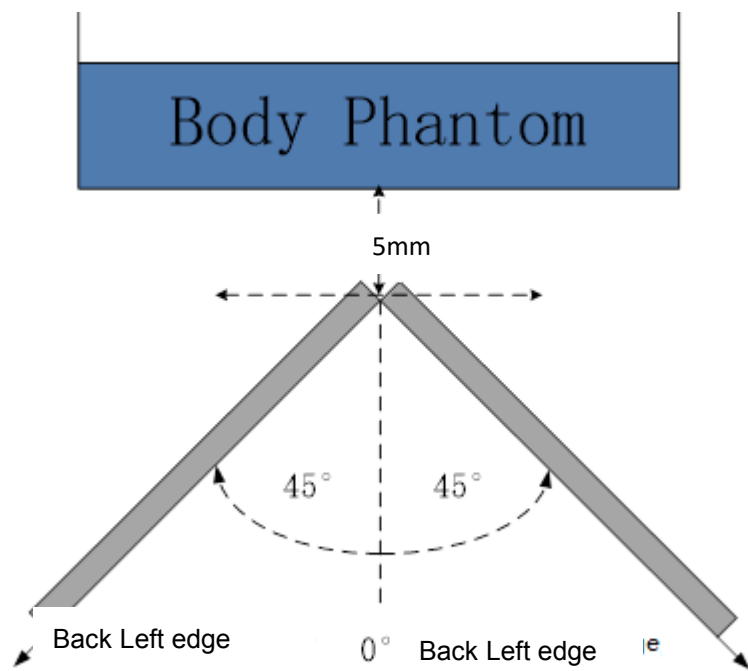


The Left edge evaluation

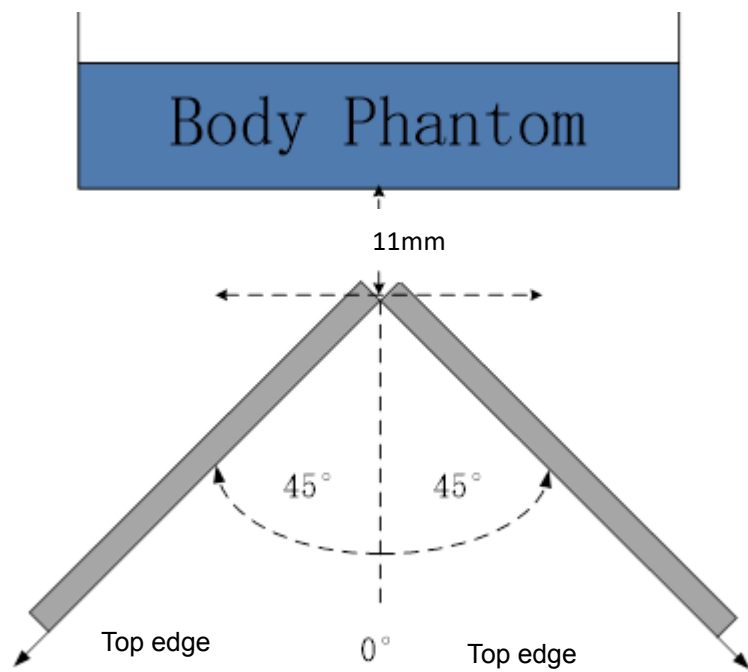


The Top edge evaluation


ANT7

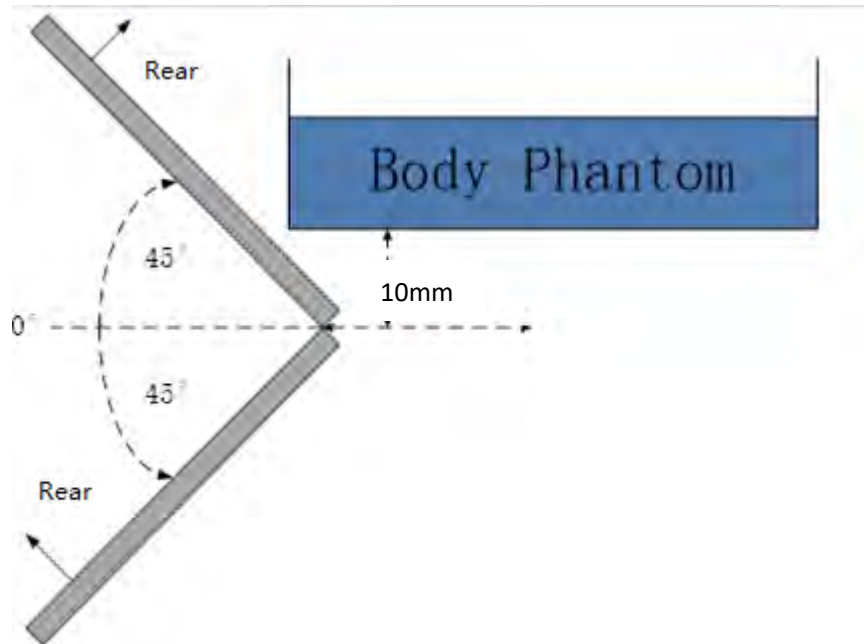


The Rear evaluation

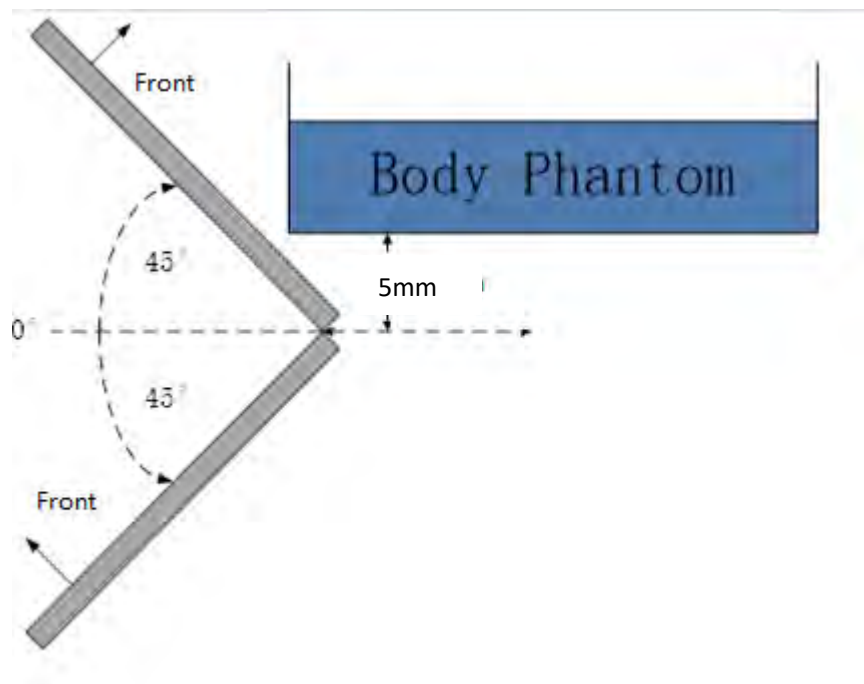

The Front edge evaluation

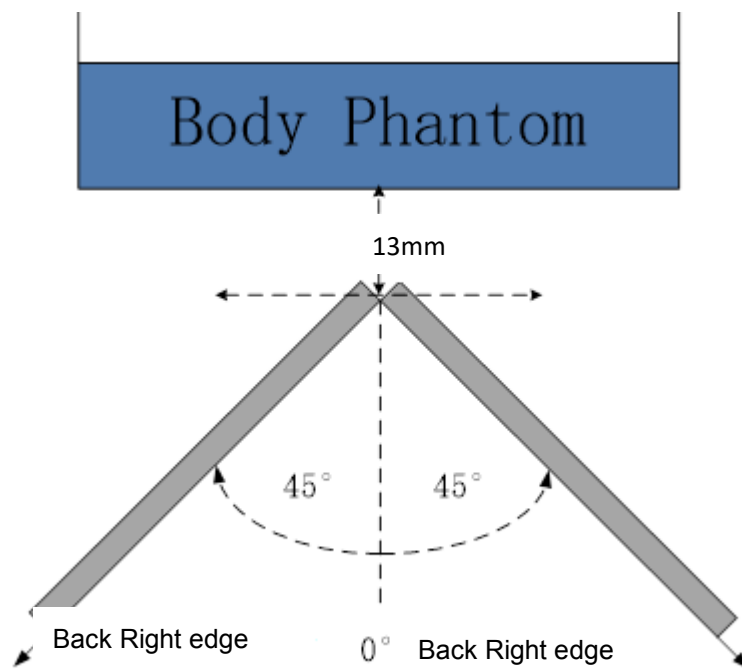


The Right edge evaluation

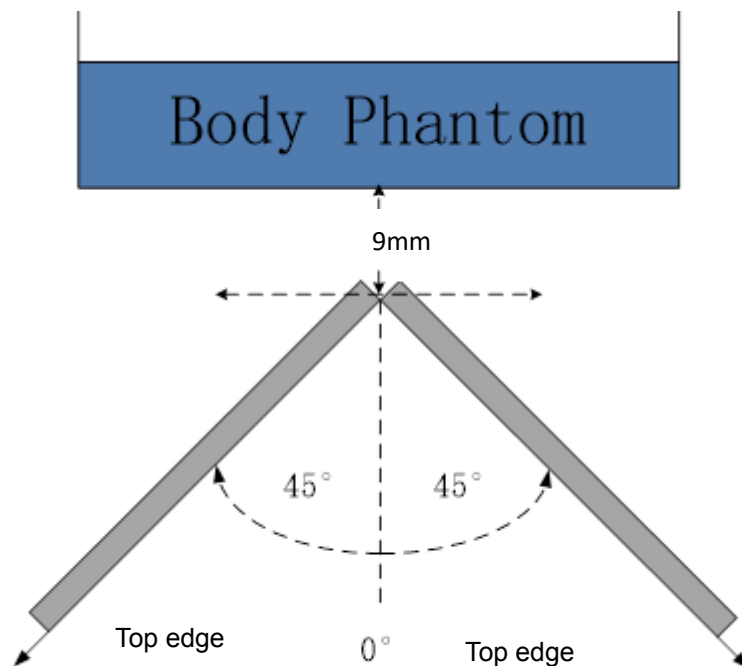

The Top edge evaluation

Based on the above evaluation, we come to the conclusion that the sensor triggering is not released and normal maximum output power is not restored within the $\pm 45^\circ$ range at the smallest sensor triggering test distance declared by manufacturer.

ANNEX J Accreditation Certificate

United States Department of Commerce National Institute of Standards and Technology NVLAP[®] 	
Certificate of Accreditation to ISO/IEC 17025:2017	
NVLAP LAB CODE: 600118-0	
Telecommunication Technology Labs, CAICT Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
Electromagnetic Compatibility & Telecommunications	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).</i>	
2021-09-29 through 2022-09-30 <i>Effective Dates</i>	  For the National Voluntary Laboratory Accreditation Program