FCC RF Test Report

APPLICANT	:	OnePlus Technology (Shenzhen) Co.,Ltd.
EQUIPMENT	:	Mobile Phone
BRAND NAME	:	ONEPLUS
MODEL NAME	:	CPH2419, CPH2417
FCC ID	:	2ABZ2-AA497
STANDARD	:	47 CFR Part 2, 27 Subpart O
CLASSIFICATION	:	PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S)	:	Jun. 02, 2022 ~ Jun. 17, 2022

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia

ACCREDITED
Cert #5145.01

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY **3**

SUMMARY OF TEST RESULT **4**

1 GENERAL DESCRIPTION **5**

1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 6
1.5 Modification of EUT 6
1.6 Maximum EIRP and Emission Designator 7
1.7 Testing Location 7
1.8 Test Software 8
1.9 Applicable Standards 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST **9**

2.1 Test Mode 9
2.2 Connection Diagram of Test System 10
2.3 Support Unit used in test configuration and system 10
2.4 Measurement Results Explanation Example 10
2.5 Frequency List of Low/Middle/High Channels 11

3 CONDUCTED TEST ITEMS **12**

3.1 Measuring Instruments 12
3.2 Test Setup 12
3.3 Test Result of Conducted Test 12
3.4 Conducted Output Power and EIRP 13
3.5 Peak-to-Average Ratio 14
3.6 Occupied Bandwidth 15
3.7 Conducted Band Edge 16
3.8 Conducted Spurious Emission 17
3.9 Frequency Stability 18

4 RADIATED TEST ITEMS **19**

4.1 Measuring Instruments 19
4.2 Test Setup 19
4.3 Test Result of Radiated Test 20
4.4 Radiated Spurious Emission 21

5 LIST OF MEASURING EQUIPMENT **22**

6 UNCERTAINTY OF EVALUATION **23**

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. TEST SETUP PHOTOGRAPHS

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG251121J	Rev. 01	Initial issue of report	Jul. 08, 2022

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77)	EIRP < 1Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n77)	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §27.53(l)(2)	Conducted Spurious Emission (5G NR n77)	< 43+10log10(P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(l)(2)	Radiated Spurious Emission (5G NR n77)	< $43+10\log_{10}$(P[Watts])	PASS	Under limit 28.15 dB at 11106.00 MHz

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

OnePlus Technology (Shenzhen) Co.,Ltd.
18C02, 18C03, 18C04, 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, China.

1.2 Manufacturer

OnePlus Technology (Shenzhen) Co.,Ltd.
18C02, 18C03, 18C04, 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, China.

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	ONEPLUS
Model Name	CPH2419, CPH2417
FCC ID	2ABZ2-AA497
IMEI Code	Conducted: 861677060020347 Radiation: 861677060027938
HW Version	2AA495-0
SW Version	CPH2419_11_A.03
EUT Stage	Production Unit

Remark: The different model name is for different market purpose.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz
SCS	30kHz
Bandwidth	n77(30kHz): 20 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
,Maximum Output Power	**Ant. 5:** 5G NR n77: 25.81 dBm **Ant. 10:** 5G NR n77: 24.66 dBm
Antenna Gain	**Ant. 5:** 5G NR n77: -2.0 dBi **Ant. 10:** 5G NR n77: -3.0 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP of Antenna 5 is shown in the report.
2. 5G NR n77 support SA and NSA mode. The whole testing has assessed NSA mode for n77 by referring to the higher conducted power for conducted test items.
3. 5G NR n77 supports HPUE mode.
4. The EN-DC mode combination could be referred to the SAR report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP and Emission Designator

5G NR n77 NSA (EN DC_5A-n77A)		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	**Frequency Range (MHz)**	**Maximum EIRP(W)**	**Emission Designator (99%OBW)**	**Maximum EIRP(W)**	**Emission Designator (99%OBW)**
20	3710.01 ~ 3969.99	0.2344	18M2G7D	0.1936	18M2W7D
30	3715.02 ~ 3964.98	0.2350	27M8G7D	0.1972	27M9W7D
40	3720.00 ~ 3960.00	0.2388	37M7G7D	0.2028	38M0W7D
50	3725.01 ~ 3954.99	0.2259	47M5G7D	0.1905	47M6W7D
60	3730.02 ~ 3949.98	0.2234	58M0G7D	0.1905	57M8W7D
70	3735.00 ~ 3945.00	0.2213	67M4G7D	0.1875	67M5W7D
80	3740.01 ~ 3939.99	0.2203	77M5G7D	0.1871	77M5W7D
90	3745.02 ~ 3934.98	0.2208	87M4G7D	0.1807	87M6W7D
100	3750.00 ~ 3930.00	0.2404	97M5G7D	0.1888	97M6W7D

1.7 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 27
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane

Test Items	5G NR	Bandwidth (MHz)									Modulation					RB #		Test Channel		
		20	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n77	v									v	v				v	v	v	v	v
26dB and 99% Bandwidth	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v		v	
Conducted Band Edge	n77	v				v				v	v	v				v	v	v		v
Conducted Spurious Emission	n77	v				v				v	v	v				v		v	v	v
Frequency Stability	n77	v										v					v		v	
E.R.P / E.I.R.P	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n77	Worst Case																v	v	v
Note	1. The mark "**v** " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Normal Voltage: 7.78Vdc, Extreme Voltage: 6.0Vdc ~8.96Vdc																			

2.2 Connection Diagram of Test System

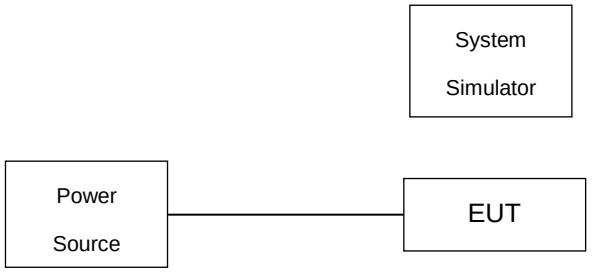

This example is connection diagram of EUT test configurations.

. For detail, please refer to test mode configuration and setup photographs for each test item.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.6 dB.

Example :

Offset(dB) = RF cable loss(dB).

= 8.6 (dB)

2.5 Frequency List of Low/Middle/High Channels

5G n77 (30kHz) Channel and Frequency List				
BW [MHz]	**Channel/Frequency(MHz)**	**Lowest**	**Middle**	**Highest**
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3964.98
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

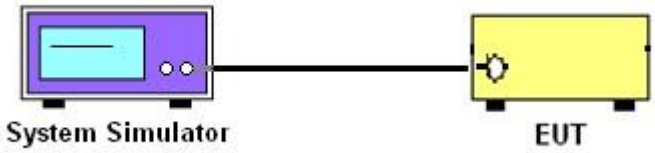

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

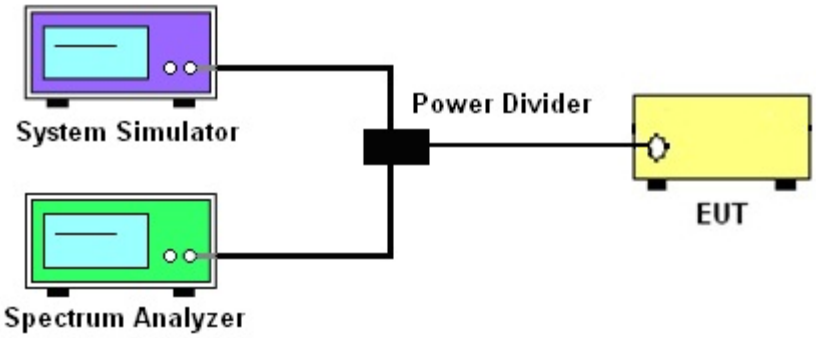

3.2.3 Frequency Stability

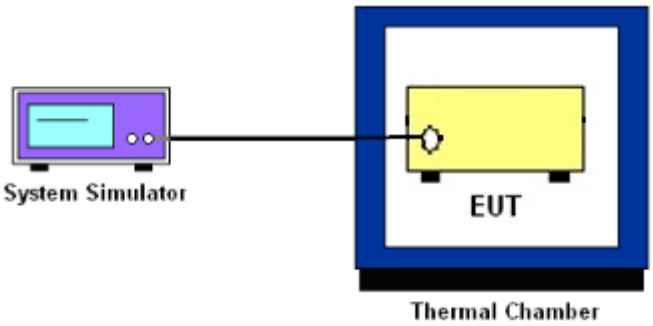

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77.

According to KDB 412172 D01 Power Approach,

EIRP = $P_T + G_T – L_C$, ERP = EIRP -2.15, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
   (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “–X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed −13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

   Example:

   The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

   = P(W)- [43 + 10log(P)] (dB)

   = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB) = -13dBm.
9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
    = P(W)- [43 + 10log(P)] (dB)
    = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
    = -13dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments

See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test below 30MHz

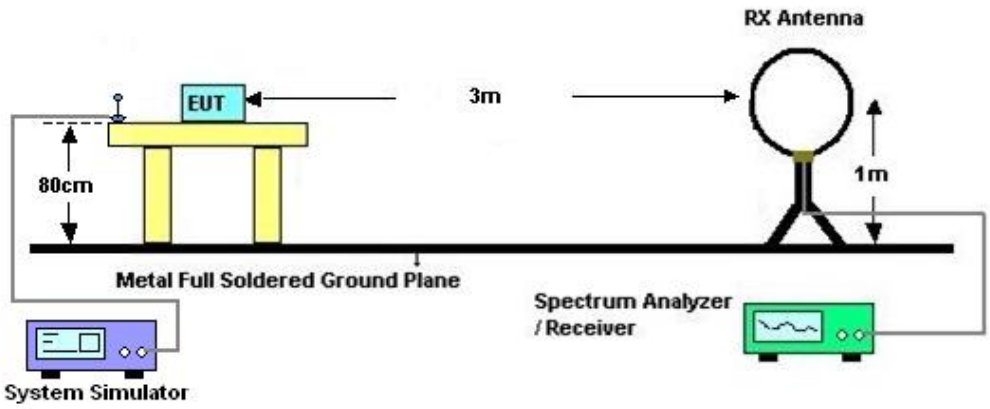

4.2.2 For radiated test from 30MHz to 1GHz

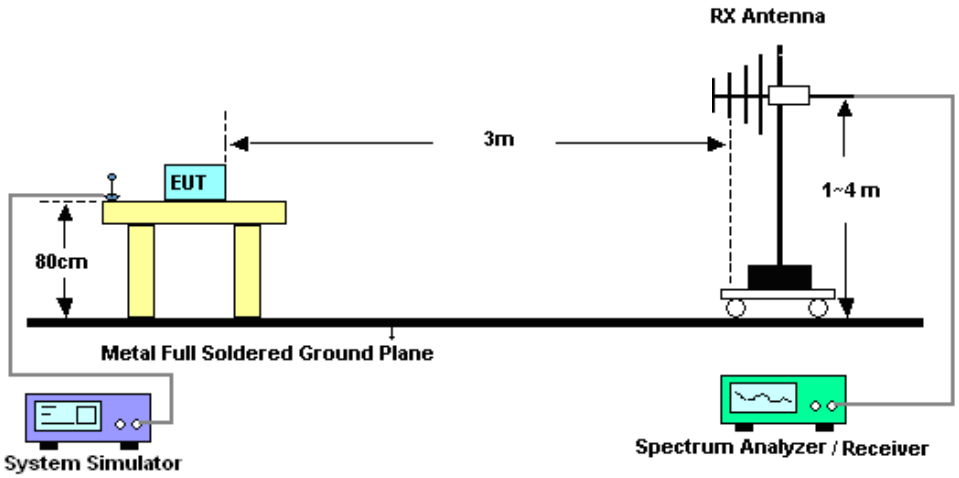

4.2.3 For radiated test above 1GHz

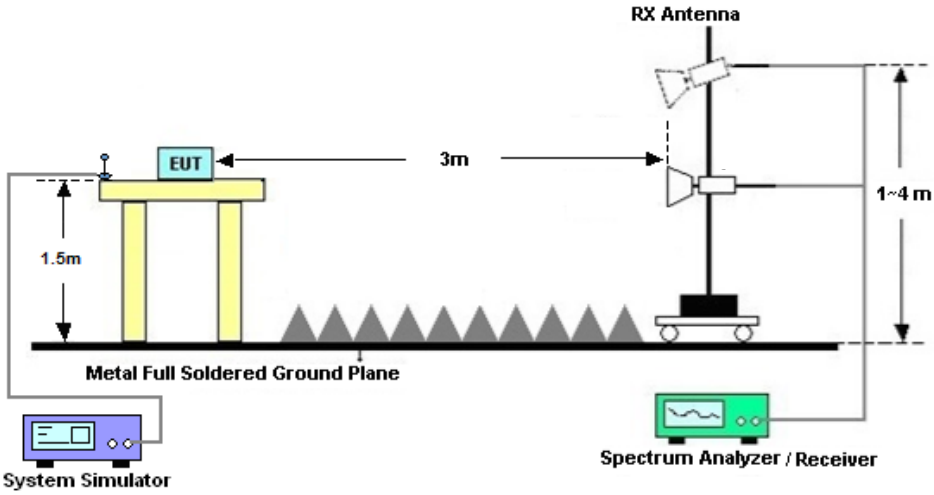

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
11. ERP (dBm) = EIRP - 2.15
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
    The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
    = P(W)- [43 + 10log(P)] (dB)
    = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
    = -13dBm.

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Jun. 02, 2022	Apr. 06, 2023	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V，3A	Oct. 25, 2021	Jun. 02, 2022	Oct. 24, 2022	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2021	Jun. 02, 2022	Dec. 24, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 14, 2021	Jun. 02, 2022	Jul. 13, 2022	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2021	Jun. 17, 2022	Dec. 26, 2022	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 14, 2021	Jun. 17, 2022	Jul. 13, 2022	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Jun. 17, 2022	Jun. 21, 2022	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Sep. 28, 2021	Jun. 17, 2022	Sep. 27, 2022	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 18, 2021	Jun. 17, 2022	Jul. 17, 2022	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 10, 2022	Jun. 17, 2022	Apr. 09, 2023	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Jun. 17, 2022	Apr. 05, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 22, 2021	Jun. 17, 2022	Oct. 21, 2022	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 22, 2021	Jun. 17, 2022	Oct. 21, 2022	Radiation (03CH01-SZ
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 13, 2021	Jun. 17, 2022	Jul. 12, 2022	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Jun. 17, 2022	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 17, 2022	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 17, 2022	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.48dB

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.53dB

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.02dB

---------- THE END ----------

Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Guo	**Temperature :**	22~23℃
		Relative Humidity :	40~42%

Software Version: 22.05.231801

FR1 N77

LTE Band: 5, LTE BW: 10M, LTE ARFCN: Mid

Transmitter Conducted Output Power And EIRP, (GT-LC)=-2.0dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@1	25.61	23.61	0.2296
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@1	24.83	22.83	0.1919
77	30	20	656000	3840	DFT-s-OFDM QPSK	1@1	25.7	23.7	0.2344
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.86	22.86	0.1932
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@1	25.62	23.62	0.2301
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	1@1	24.87	22.87	0.1936
77	30	30	647668	3715.02	DFT-s-OFDM QPSK	1@1	25.71	23.71	0.2350
77	30	30	647668	3715.02	DFT-s-OFDM 16 QAM	1@1	24.95	22.95	0.1972
77	30	30	656000	3840	DFT-s-OFDM QPSK	1@1	25.7	23.7	0.2344
77	30	30	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.89	22.89	0.1945
77	30	30	664332	3964.98	DFT-s-OFDM QPSK	1@1	25.66	23.66	0.2323
77	30	30	664332	3964.98	DFT-s-OFDM 16 QAM	1@1	24.87	22.87	0.1936
77	30	40	648000	3720	DFT-s-OFDM QPSK	1@1	25.62	23.62	0.2301
77	30	40	648000	3720	DFT-s-OFDM 16 QAM	1@1	25.07	23.07	0.2028
77	30	40	656000	3840	DFT-s-OFDM QPSK	1@1	25.78	23.78	0.2388
77	30	40	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.04	23.04	0.2014
77	30	40	664000	3960	DFT-s-OFDM QPSK	1@1	25.7	23.7	0.2344
77	30	40	664000	3960	DFT-s-OFDM 16 QAM	1@1	24.97	22.97	0.1982

77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@1	25.49	23.49	0.2234
77	30	50	648334	3725.01	DFT-s-OFDM 16 QAM	1@1	24.72	22.72	0.1871
77	30	50	656000	3840	DFT-s-OFDM QPSK	1@1	25.54	23.54	0.2259
77	30	50	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.8	22.8	0.1905
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@1	25.4	23.4	0.2188
77	30	50	663666	3954.99	DFT-s-OFDM 16 QAM	1@1	24.68	22.68	0.1854
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@1	25.48	23.48	0.2228
77	30	60	648668	3730.02	DFT-s-OFDM 16 QAM	1@1	24.7	22.7	0.1862
77	30	60	656000	3840	DFT-s-OFDM QPSK	1@1	25.49	23.49	0.2234
77	30	60	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.8	22.8	0.1905
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@1	25.23	23.23	0.2104
77	30	60	663332	3949.98	DFT-s-OFDM 16 QAM	1@1	24.53	22.53	0.1791
77	30	70	649000	3735	DFT-s-OFDM QPSK	1@1	25.45	23.45	0.2213
77	30	70	649000	3735	DFT-s-OFDM 16 QAM	1@1	24.67	22.67	0.1849
77	30	70	656000	3840	DFT-s-OFDM QPSK	1@1	25.43	23.43	0.2203
77	30	70	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.73	22.73	0.1875
77	30	70	663000	3945	DFT-s-OFDM QPSK	1@1	25.25	23.25	0.2113
77	30	70	663000	3945	DFT-s-OFDM 16 QAM	1@1	24.48	22.48	0.1770
77	30	80	649334	3740.01	DFT-s-OFDM QPSK	1@1	25.42	23.42	0.2198
77	30	80	649334	3740.01	DFT-s-OFDM 16 QAM	1@1	24.64	22.64	0.1837
77	30	80	656000	3840	DFT-s-OFDM QPSK	1@1	25.43	23.43	0.2203
77	30	80	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.72	22.72	0.1871
77	30	80	662666	3939.99	DFT-s-OFDM QPSK	1@1	25.22	23.22	0.2099
77	30	80	662666	3939.99	DFT-s-OFDM 16 QAM	1@1	24.33	22.33	0.1710

77	30	90	649668	3745.02	DFT-s-OFDM QPSK	1@1	25.37	23.37	0.2173
77	30	90	649668	3745.02	DFT-s-OFDM 16 QAM	1@1	24.49	22.49	0.1774
77	30	90	656000	3840	DFT-s-OFDM QPSK	1@1	25.44	23.44	0.2208
77	30	90	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.57	22.57	0.1807
77	30	90	662332	3934.98	DFT-s-OFDM QPSK	1@1	25.11	23.11	0.2046
77	30	90	662332	3934.98	DFT-s-OFDM 16 QAM	1@1	24.25	22.25	0.1679
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	135@67	25.52	23.52	0.2249
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@1	25.37	23.37	0.2173
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@271	25.48	23.48	0.2228
77	30	100	650000	3750	DFT-s-OFDM QPSK	135@67	25.81	23.81	0.2404
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@1	25.36	23.36	0.2168
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@271	25.5	23.5	0.2239
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	135@67	24.58	22.58	0.1811
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@1	24.61	22.61	0.1824
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@271	24.76	22.76	0.1888
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	135@67	23.06	21.06	0.1276
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@1	23.1	21.1	0.1288
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@271	23.27	21.27	0.1340
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	135@67	21.02	19.02	0.0798
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@1	20.75	18.75	0.0750
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@271	20.93	18.93	0.0782
77	30	100	650000	3750	CP-OFDM QPSK	137@68	24.03	22.03	0.1596
77	30	100	650000	3750	CP-OFDM QPSK	1@1	23.97	21.97	0.1574
77	30	100	650000	3750	CP-OFDM QPSK	1@271	24.09	22.09	0.1618

77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	135@67	25.38	23.38	0.2178
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.34	23.34	0.2158
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@271	25.28	23.28	0.2128
77	30	100	656000	3840	DFT-s-OFDM QPSK	135@67	25.41	23.41	0.2193
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@1	25.36	23.36	0.2168
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@271	25.33	23.33	0.2153
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	135@67	24.51	22.51	0.1782
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.57	22.57	0.1807
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@271	24.56	22.56	0.1803
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	135@67	22.96	20.96	0.1247
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@1	23.17	21.17	0.1309
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@271	23.08	21.08	0.1282
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	135@67	21	19	0.0794
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@1	20.83	18.83	0.0764
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@271	20.73	18.73	0.0746
77	30	100	656000	3840	CP-OFDM QPSK	137@68	23.97	21.97	0.1574
77	30	100	656000	3840	CP-OFDM QPSK	1@1	24.07	22.07	0.1611
77	30	100	656000	3840	CP-OFDM QPSK	1@271	23.96	21.96	0.1570
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	135@67	25.22	23.22	0.2099
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@1	25.12	23.12	0.2051
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@271	25.27	23.27	0.2123
77	30	100	662000	3930	DFT-s-OFDM QPSK	135@67	25.25	23.25	0.2113
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@1	25.15	23.15	0.2065
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@271	25.28	23.28	0.2128

77	30	100	662000	3930	DFT-s-OFDM 16 QAM	135@67	24.34	22.34	0.1714
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@1	24.42	22.42	0.1746
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@271	24.51	22.51	0.1782
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	135@67	22.86	20.86	0.1219
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@1	22.88	20.88	0.1225
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@271	23.09	21.09	0.1285
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	135@67	20.81	18.81	0.0760
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@1	20.55	18.55	0.0716
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@271	20.73	18.73	0.0746
77	30	100	662000	3930	CP-OFDM QPSK	137@68	23.85	21.85	0.1531
77	30	100	662000	3930	CP-OFDM QPSK	1@1	23.8	21.8	0.1514
77	30	100	662000	3930	CP-OFDM QPSK	1@271	23.92	21.92	0.1556

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00371	**PASS**	NV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00404	**PASS**	LV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00361	**PASS**	HV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00068	**PASS**	-30℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00274	**PASS**	-20℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00693	**PASS**	-10℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00451	**PASS**	0℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00523	**PASS**	10℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00636	**PASS**	20℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00472	**PASS**	30℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00658	**PASS**	40℃
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00319	**PASS**	50℃

Peak to Average Radio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	647334	3710.01	DFT-s-OFDM PI/2 BPSK	50@0	7.2	13	**PASS**
77	30	20	647334	3710.01	DFT-s-OFDM PI/2 BPSK	1@0	7.42	13	**PASS**
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	50@0	8.28	13	**PASS**
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	9.49	13	**PASS**
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	50@0	7.0	13	**PASS**
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	1@0	8.62	13	**PASS**
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	8.2	13	**PASS**
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	9.1	13	**PASS**
77	30	20	664666	3969.99	DFT-s-OFDM PI/2 BPSK	50@0	7.03	13	**PASS**
77	30	20	664666	3969.99	DFT-s-OFDM PI/2 BPSK	1@0	7.7	13	**PASS**
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	50@0	8.16	13	**PASS**
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	9.93	13	**PASS**

B5_N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

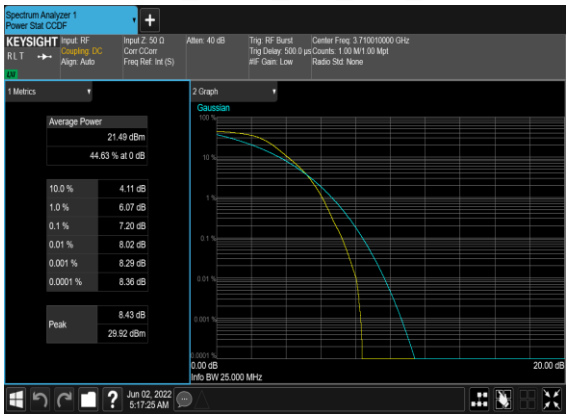

B5_N77(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

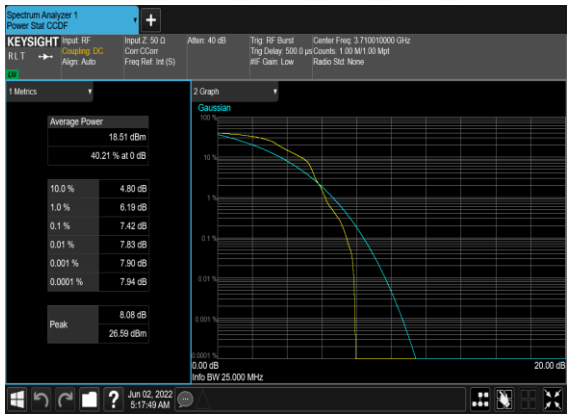

B5_N77(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

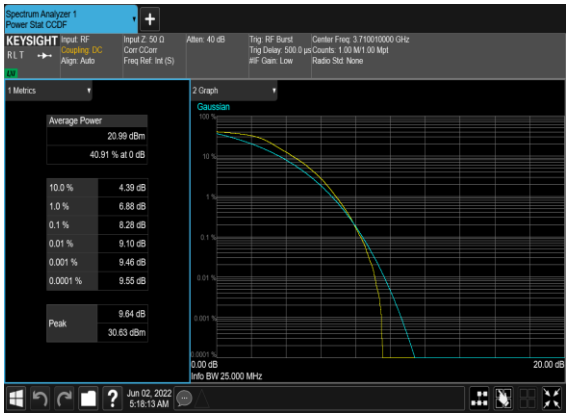

B5_N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

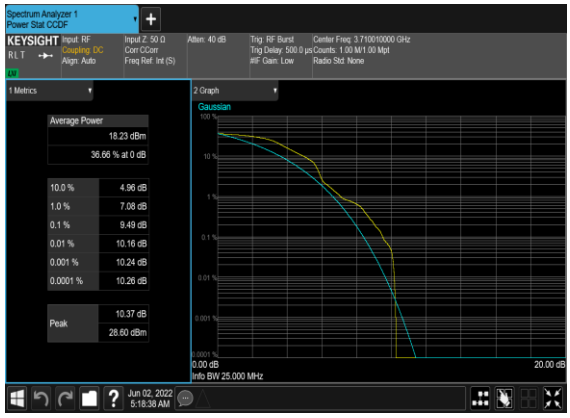

B5_N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

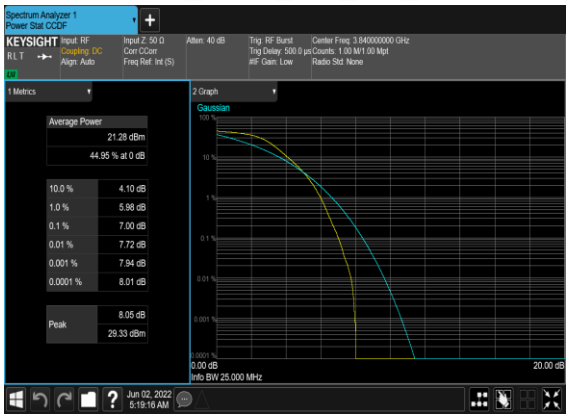

B5_N77(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

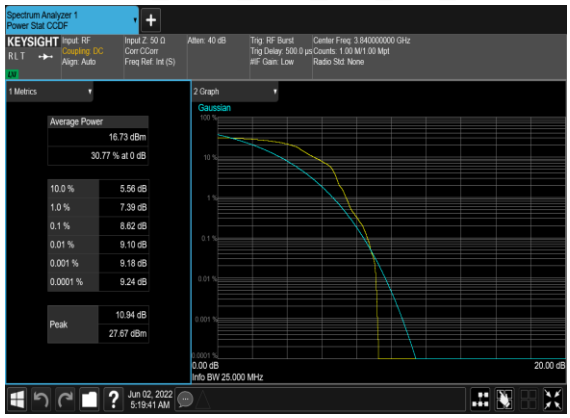

B5_N77(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

B5_N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

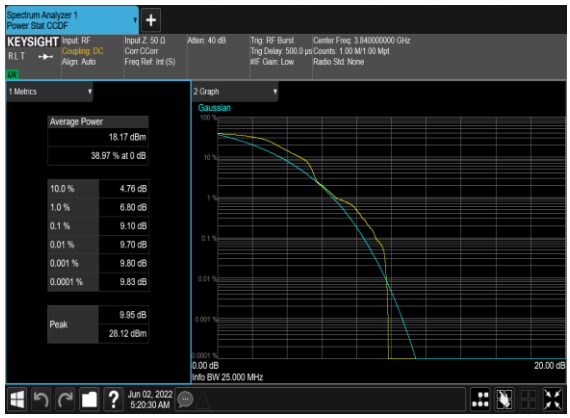

B5_N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

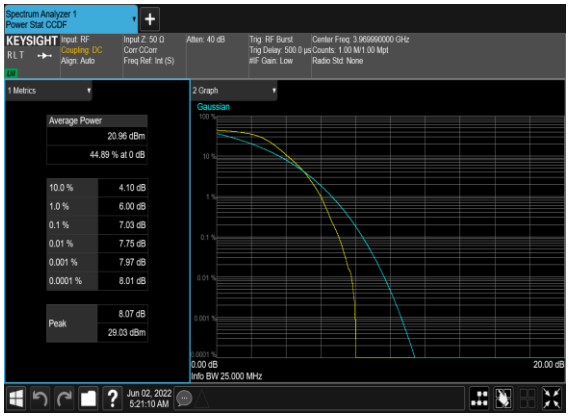

B5_N77(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

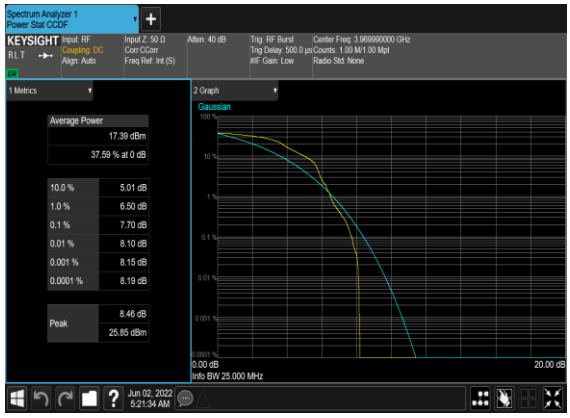

B5_N77(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

B5_N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

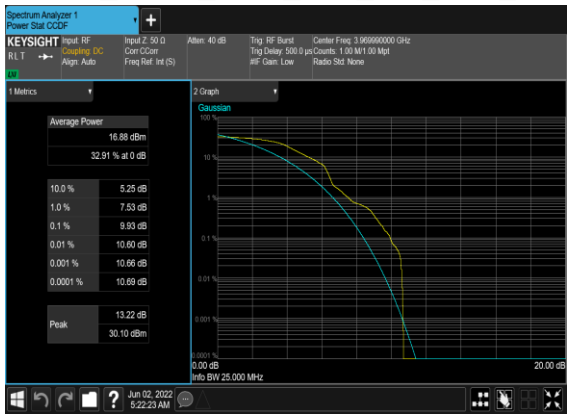

Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	50@0	17.763	19.03
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	17.786	19.21
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	18.226	19.8
77	30	20	656000	3840.0	CP-OFDM 16 QAM	51@0	18.189	19.38
77	30	20	656000	3840.0	CP-OFDM 64 QAM	51@0	18.189	19.69
77	30	20	656000	3840.0	CP-OFDM 256 QAM	51@0	18.22	19.52
77	30	30	656000	3840.0	DFT-s-OFDM PI/2 BPSK	75@0	26.777	28.36
77	30	30	656000	3840.0	DFT-s-OFDM QPSK	75@0	26.779	28.4
77	30	30	656000	3840.0	CP-OFDM QPSK	78@0	27.84	29.37
77	30	30	656000	3840.0	CP-OFDM 16 QAM	78@0	27.911	29.54
77	30	30	656000	3840.0	CP-OFDM 64 QAM	78@0	27.827	29.57
77	30	30	656000	3840.0	CP-OFDM 256 QAM	78@0	27.838	29.48
77	30	40	656000	3840.0	DFT-s-OFDM PI/2 BPSK	100@0	35.73	37.9
77	30	40	656000	3840.0	DFT-s-OFDM QPSK	100@0	35.73	37.68
77	30	40	656000	3840.0	CP-OFDM QPSK	106@0	37.744	39.7
77	30	40	656000	3840.0	CP-OFDM 16 QAM	106@0	37.732	39.5
77	30	40	656000	3840.0	CP-OFDM 64 QAM	106@0	37.888	39.73
77	30	40	656000	3840.0	CP-OFDM 256 QAM	106@0	37.953	39.89
77	30	50	656000	3840.0	DFT-s-OFDM PI/2 BPSK	128@0	45.735	47.72
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	128@0	45.803	47.77
77	30	50	656000	3840.0	CP-OFDM QPSK	133@0	47.519	49.35
77	30	50	656000	3840.0	CP-OFDM 16 QAM	133@0	47.594	49.49
77	30	50	656000	3840.0	CP-OFDM 64 QAM	133@0	47.405	49.12
77	30	50	656000	3840.0	CP-OFDM 256 QAM	133@0	47.529	49.27

77	30	60	656000	3840.0	DFT-s-OFDM PI/2 BPSK	162@0	57.839	59.86
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	162@0	57.965	60.42
77	30	60	656000	3840.0	CP-OFDM QPSK	162@0	57.765	60.02
77	30	60	656000	3840.0	CP-OFDM 16 QAM	162@0	57.795	60.17
77	30	60	656000	3840.0	CP-OFDM 64 QAM	162@0	57.769	59.95
77	30	60	656000	3840.0	CP-OFDM 256 QAM	162@0	57.705	59.71
77	30	70	656000	3840.0	DFT-s-OFDM PI/2 BPSK	180@0	64.327	66.81
77	30	70	656000	3840.0	DFT-s-OFDM QPSK	180@0	64.317	66.53
77	30	70	656000	3840.0	CP-OFDM QPSK	189@0	67.442	70.05
77	30	70	656000	3840.0	CP-OFDM 16 QAM	189@0	67.488	69.91
77	30	70	656000	3840.0	CP-OFDM 64 QAM	189@0	67.468	69.9
77	30	70	656000	3840.0	CP-OFDM 256 QAM	189@0	67.452	70.06
77	30	80	656000	3840.0	DFT-s-OFDM PI/2 BPSK	216@0	77.128	79.86
77	30	80	656000	3840.0	DFT-s-OFDM QPSK	216@0	77.225	79.82
77	30	80	656000	3840.0	CP-OFDM QPSK	217@0	77.501	80.47
77	30	80	656000	3840.0	CP-OFDM 16 QAM	217@0	77.446	80.18
77	30	80	656000	3840.0	CP-OFDM 64 QAM	217@0	77.546	80.23
77	30	80	656000	3840.0	CP-OFDM 256 QAM	217@0	77.378	80.15
77	30	90	656000	3840.0	DFT-s-OFDM PI/2 BPSK	240@0	85.684	88.65
77	30	90	656000	3840.0	DFT-s-OFDM QPSK	240@0	85.817	88.64
77	30	90	656000	3840.0	CP-OFDM QPSK	245@0	87.37	90.26
77	30	90	656000	3840.0	CP-OFDM 16 QAM	245@0	87.486	90.37
77	30	90	656000	3840.0	CP-OFDM 64 QAM	245@0	87.56	90.57
77	30	90	656000	3840.0	CP-OFDM 256 QAM	245@0	87.564	90.44
77	30	100	656000	3840.0	DFT-s-OFDM PI/2 BPSK	270@0	96.484	99.67
77	30	100	656000	3840.0	DFT-s-OFDM	270@0	96.493	99.52

					QPSK			
77	30	100	656000	3840.0	CP-OFDM QPSK	273@0	97.464	100.7
77	30	100	656000	3840.0	CP-OFDM 16 QAM	273@0	97.414	100.5
77	30	100	656000	3840.0	CP-OFDM 64 QAM	273@0	97.563	100.6
77	30	100	656000	3840.0	CP-OFDM 256 QAM	273@0	97.323	100.5

B5_N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

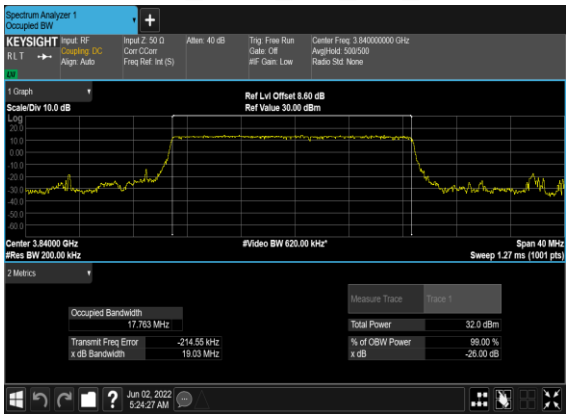

B5_N77(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

B5_N77(20M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

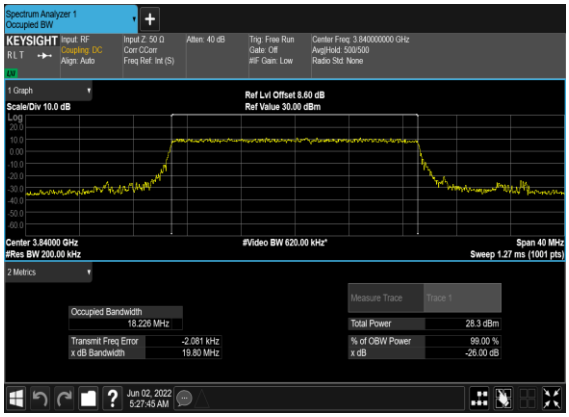

B5_N77(20M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

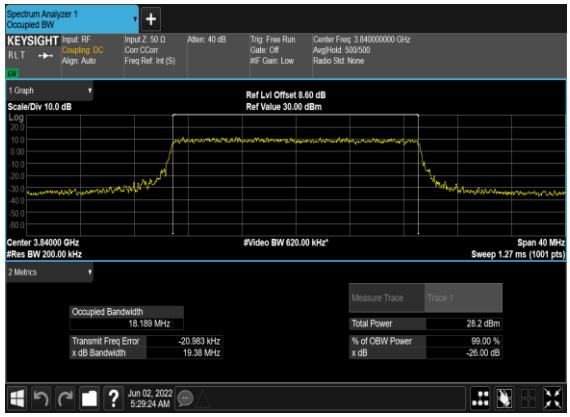

B5_N77(20M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

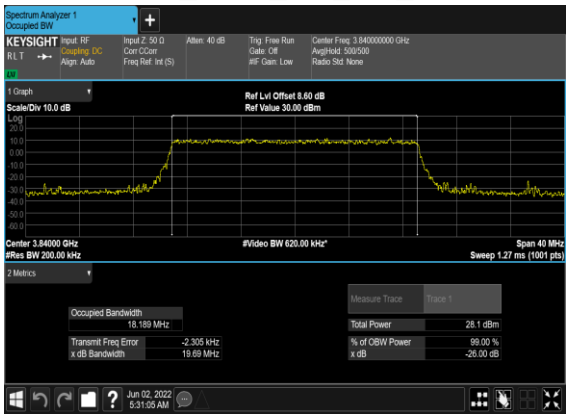

B5_N77(20M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

B5_N77(30M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

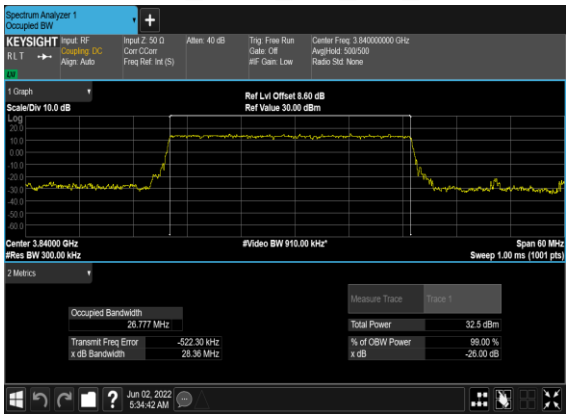

B5_N77(30M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

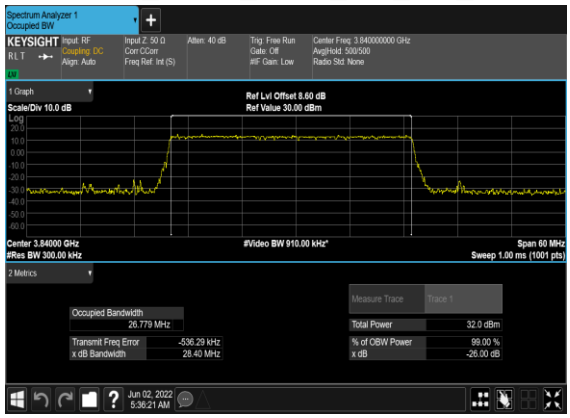

B5_N77(30M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

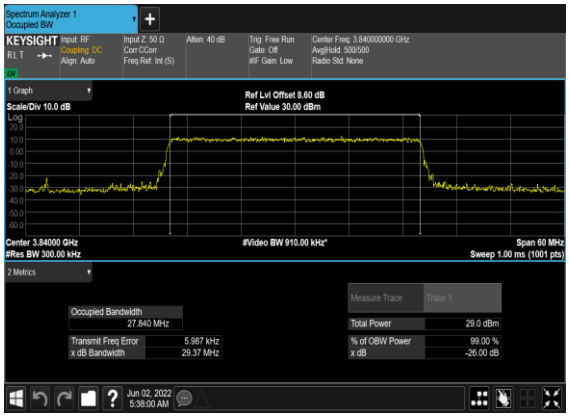

B5_N77(30M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

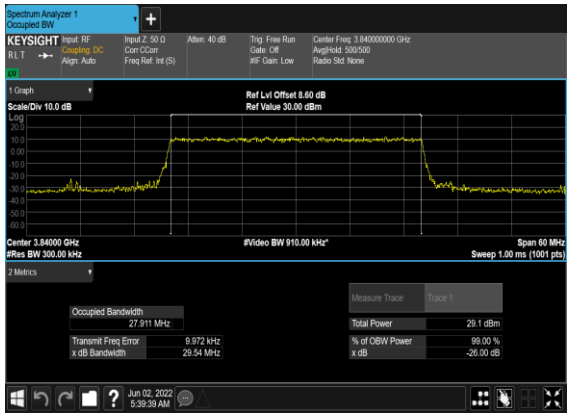

B5_N77(30M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

B5_N77(30M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

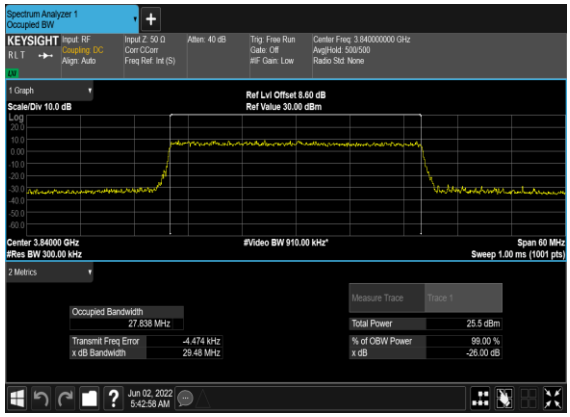

B5_N77(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

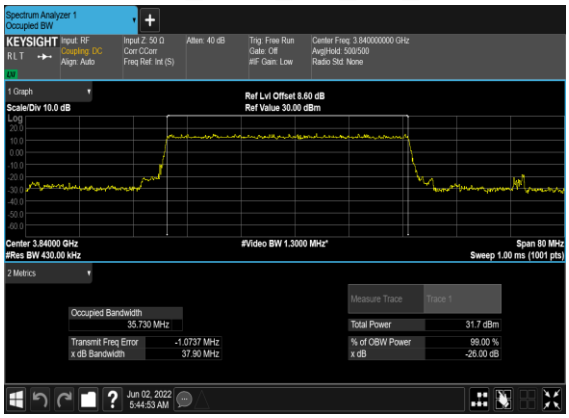

B5_N77(40M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

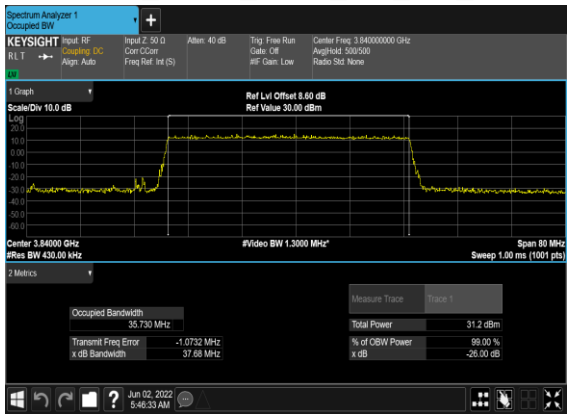

B5_N77(40M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

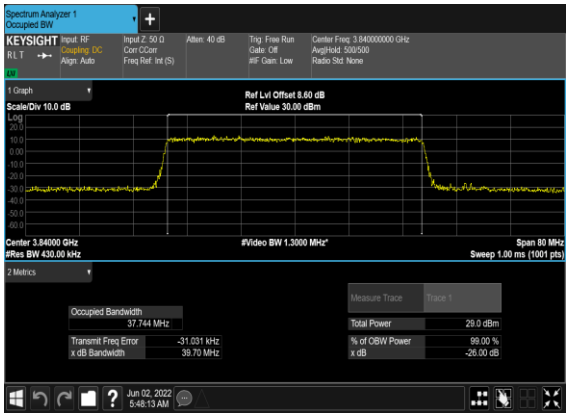

B5_N77(40M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

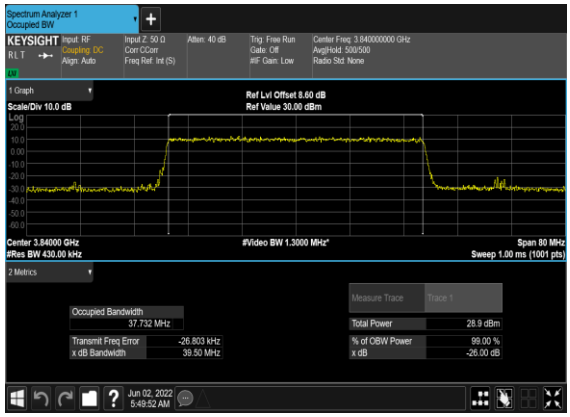

B5_N77(40M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

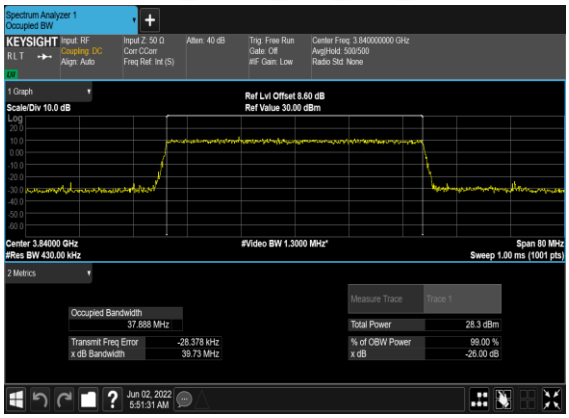

B5_N77(40M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

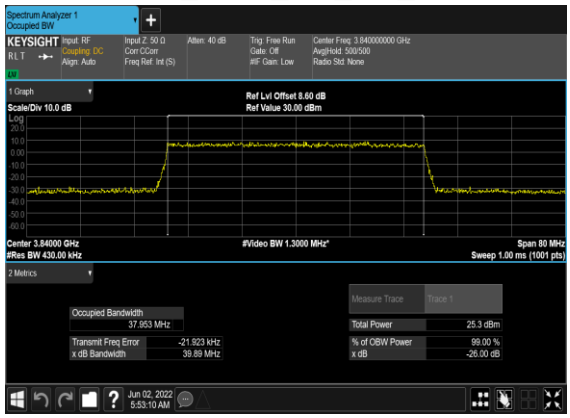

B5_N77(50M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

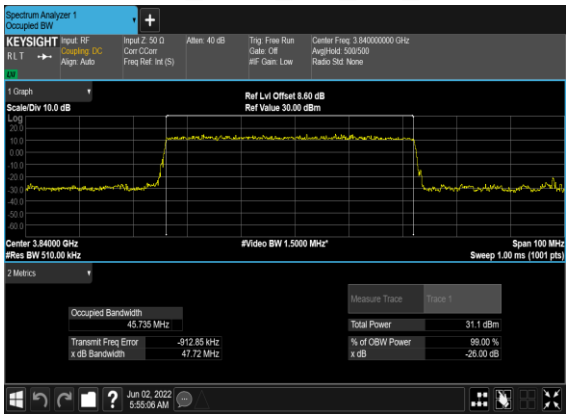

B5_N77(50M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

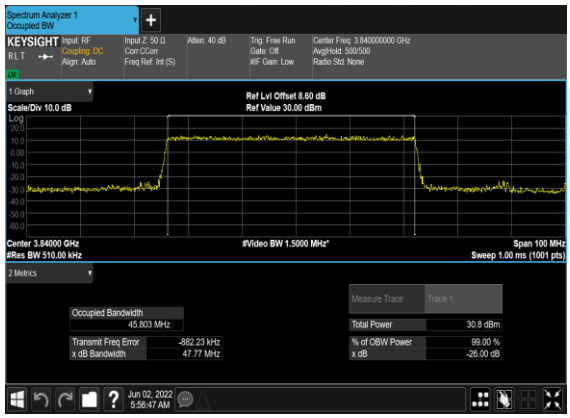

B5_N77(50M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

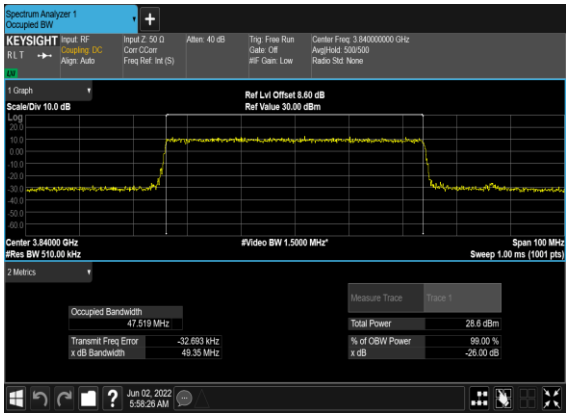

B5_N77(50M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

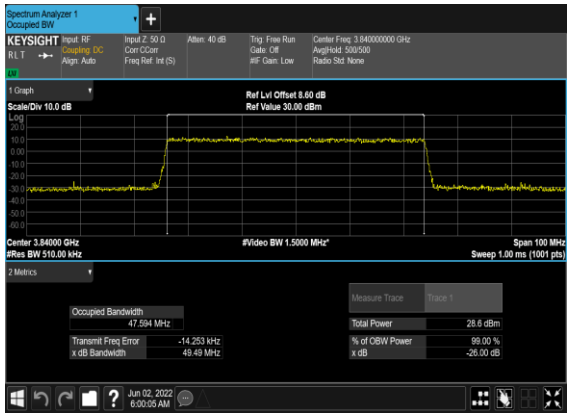

B5_N77(50M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

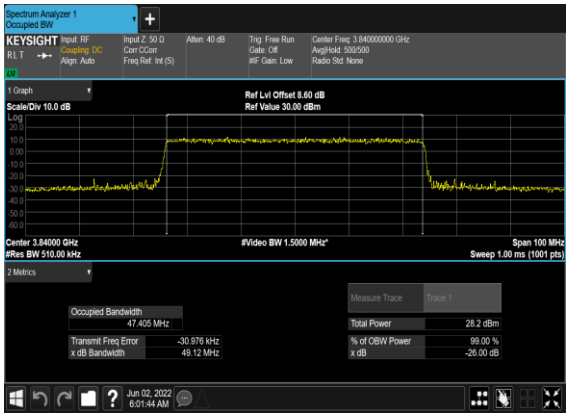

B5_N77(50M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

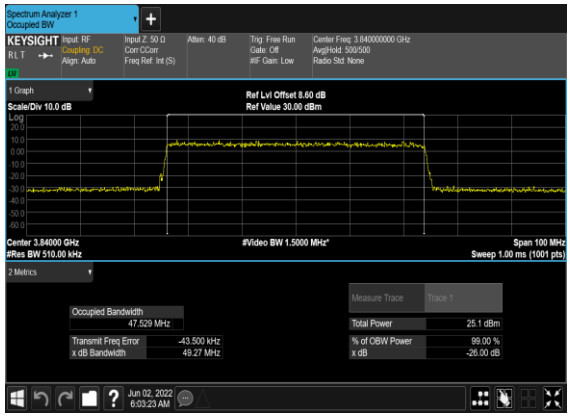

B5_N77(60M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

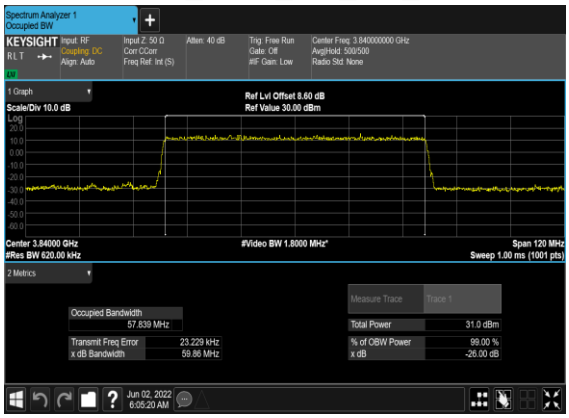

B5_N77(60M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

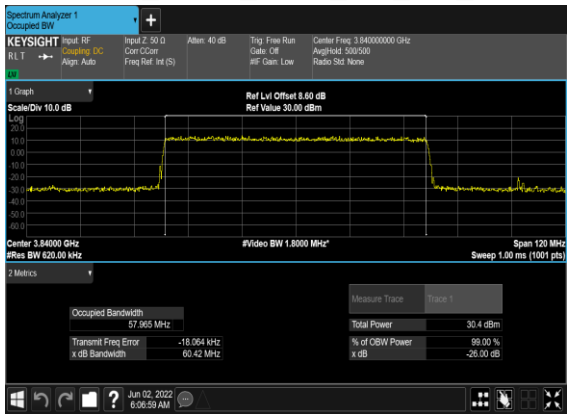

B5_N77(60M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

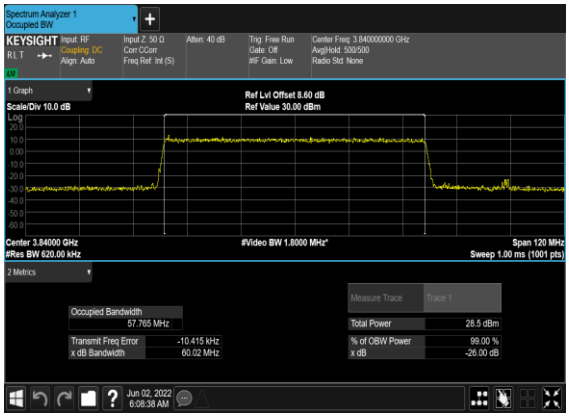

B5_N77(60M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

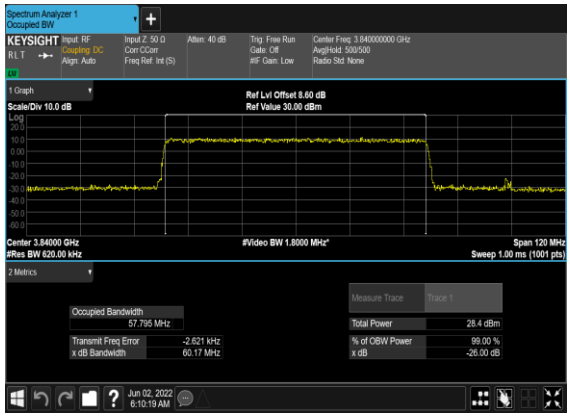

B5_N77(60M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

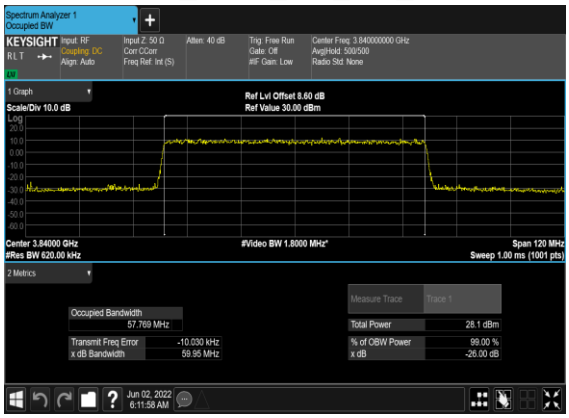

B5_N77(60M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

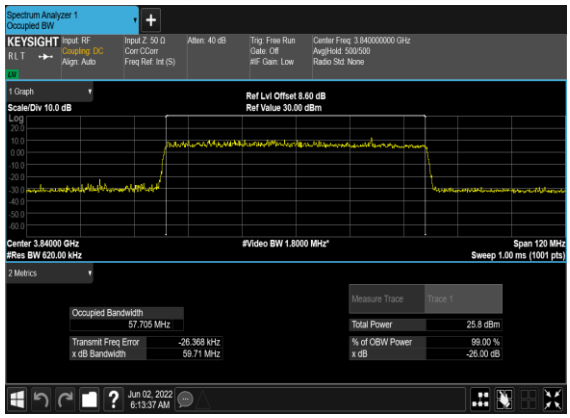

B5_N77(70M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

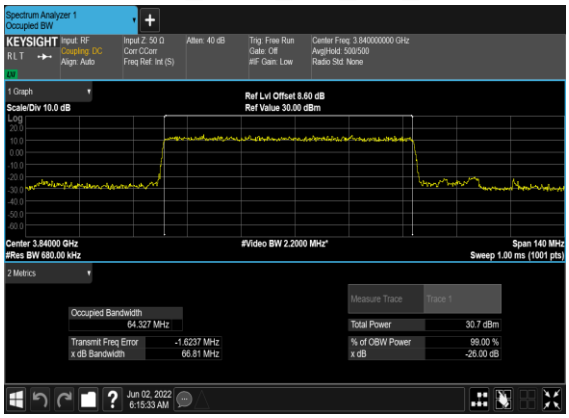

B5_N77(70M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

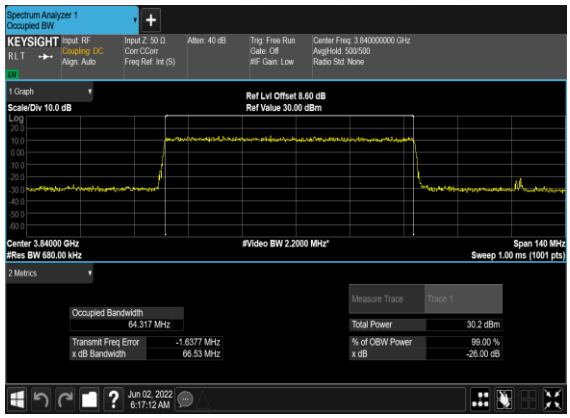

B5_N77(70M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

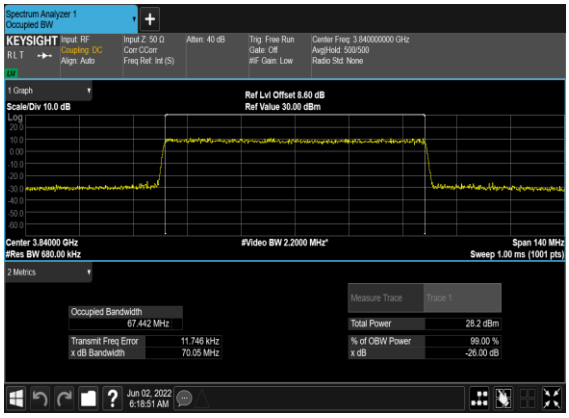

B5_N77(70M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

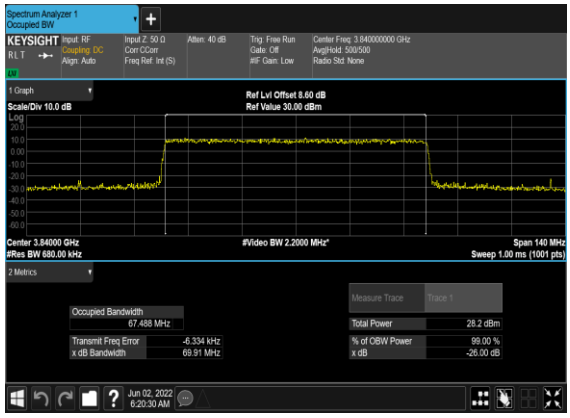

B5_N77(70M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

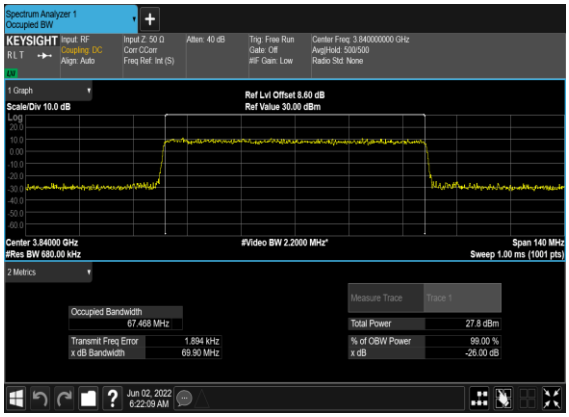

B5_N77(70M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

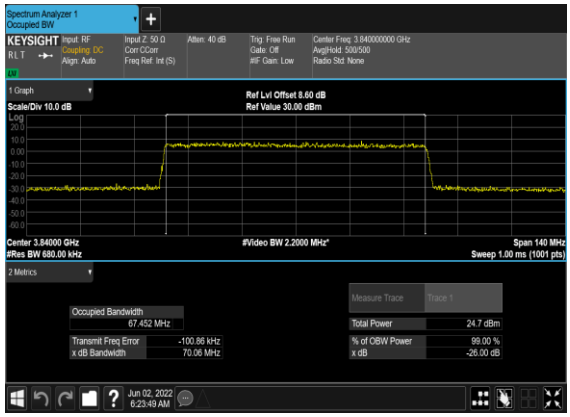

B5_N77(80M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

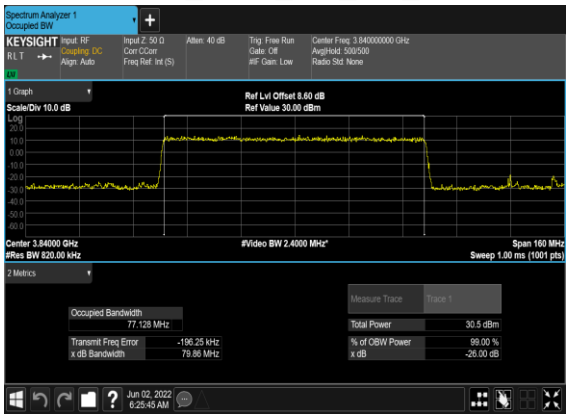

B5_N77(80M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

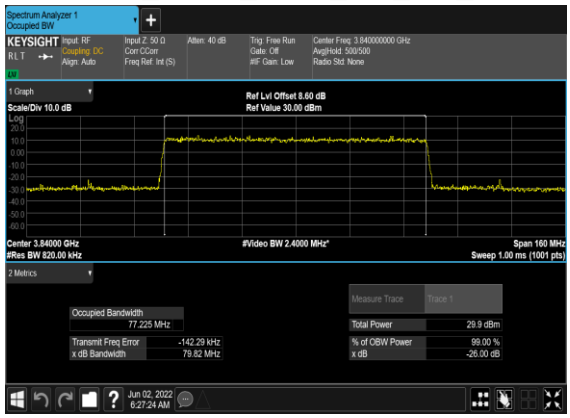

B5_N77(80M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

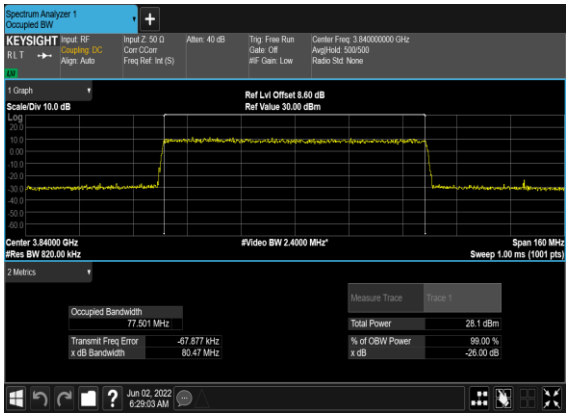

B5_N77(80M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

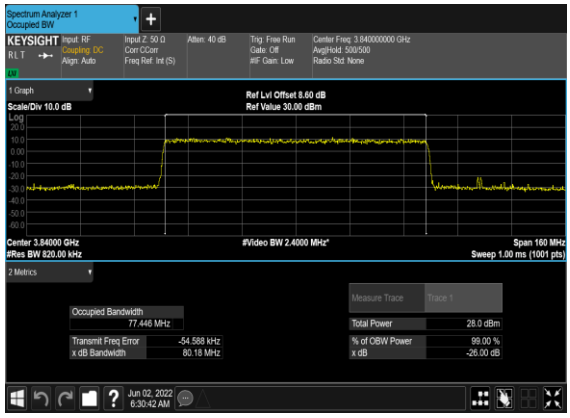

B5_N77(80M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

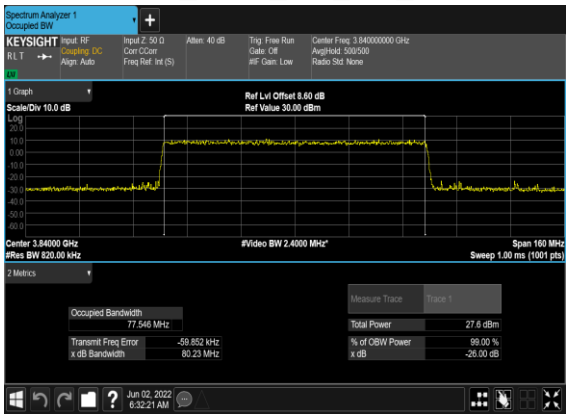

B5_N77(80M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

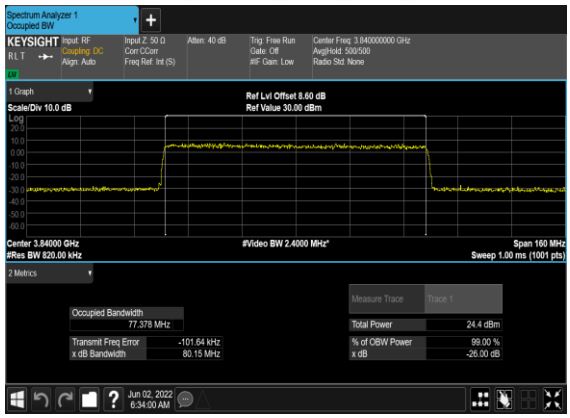

B5_N77(90M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

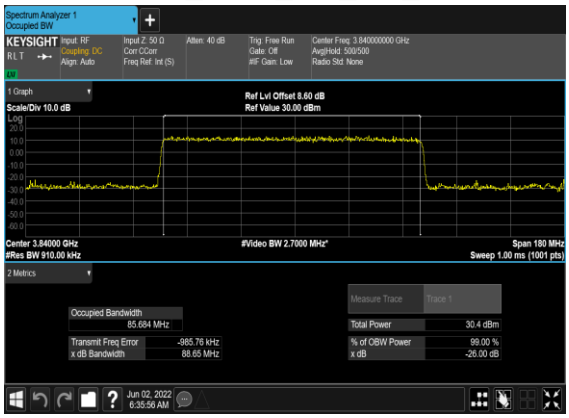

B5_N77(90M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

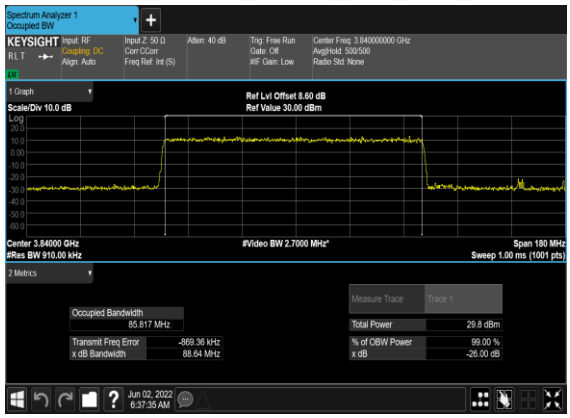

B5_N77(90M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

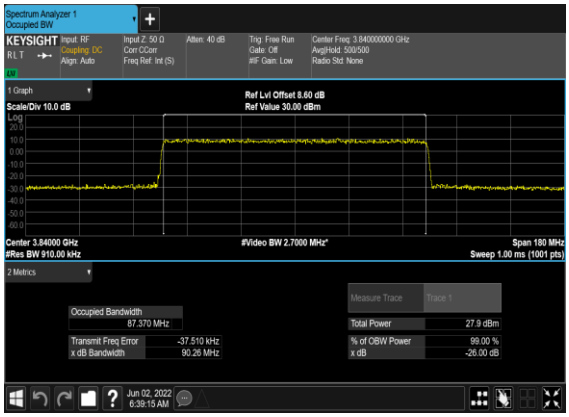

B5_N77(90M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

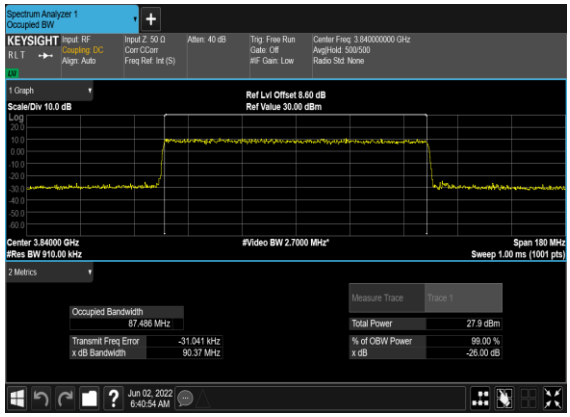

B5_N77(90M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

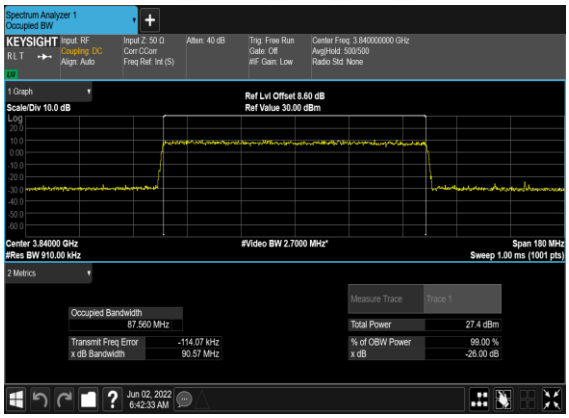

B5_N77(90M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

B5_N77(100M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

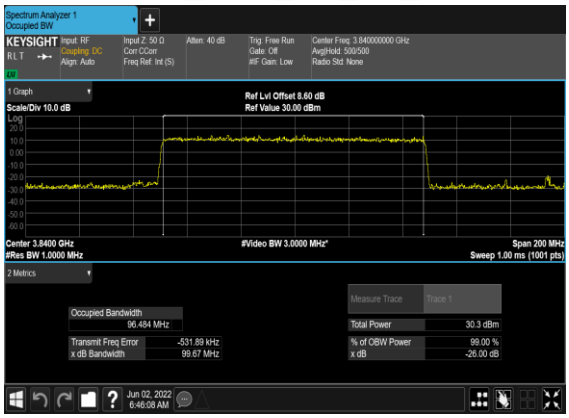

B5_N77(100M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

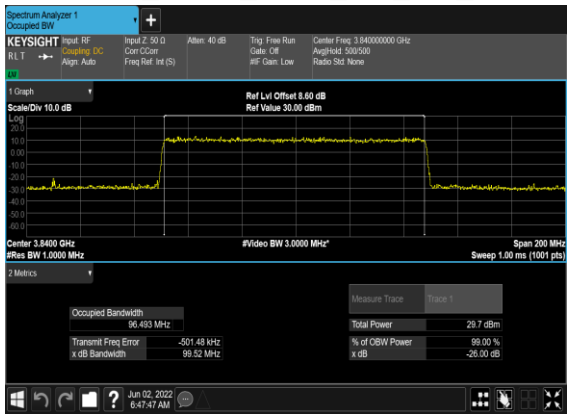

B5_N77(100M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

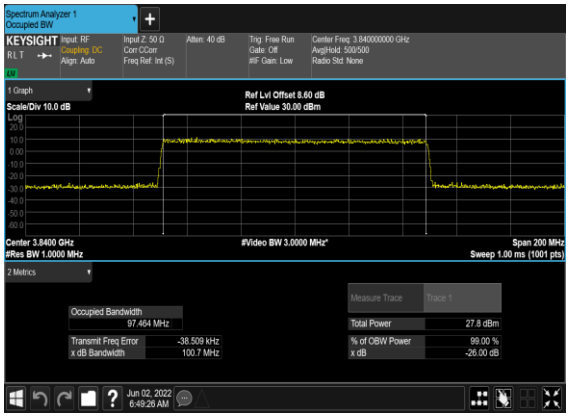

B5_N77(100M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

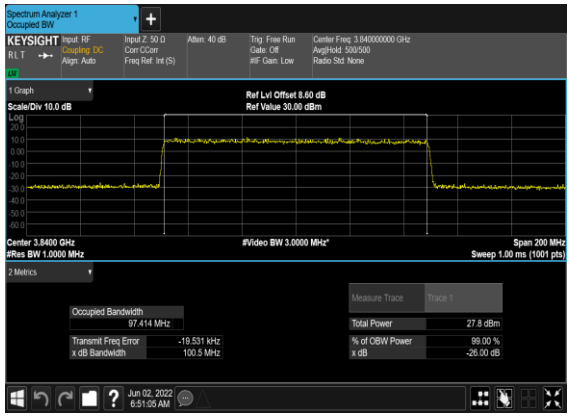

B5_N77(100M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

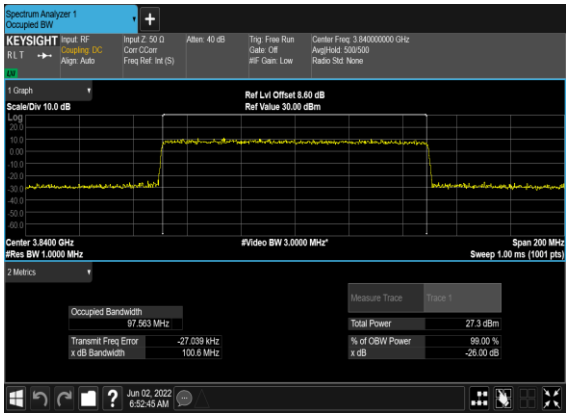

B5_N77(100M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

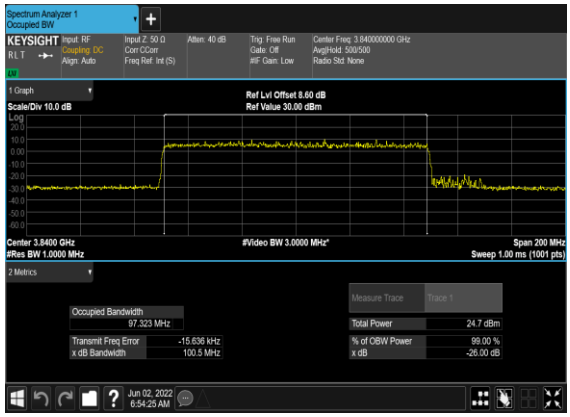

Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	**---**
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	**---**
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	**---**
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	**---**
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	1@0	see graph	**---**
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@0	see graph	**---**

77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	60	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
77	30	60	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	60	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	1@0	see graph	**---**
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@0	see graph	**---**
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	**---**

77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**

B5_N77(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

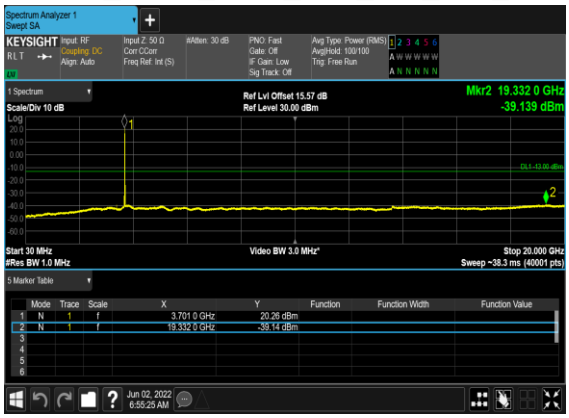

B5_N77(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

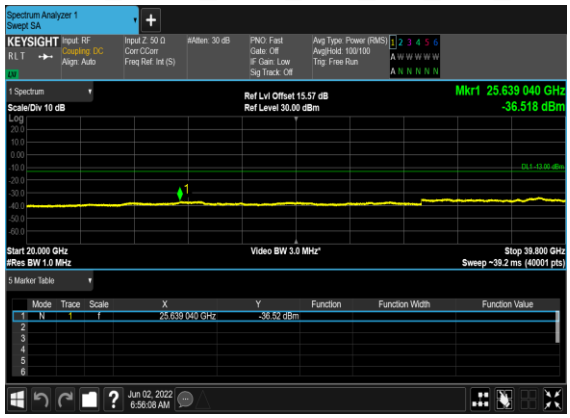

B5_N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

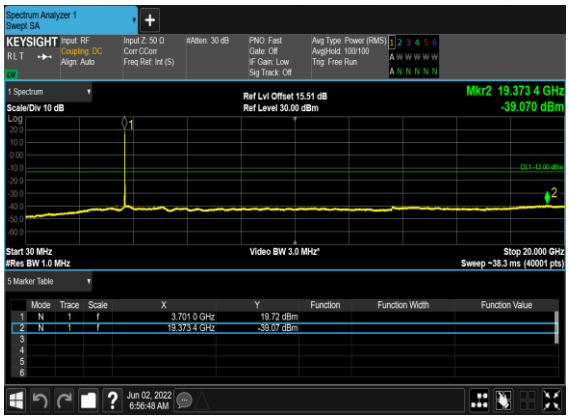

B5_N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

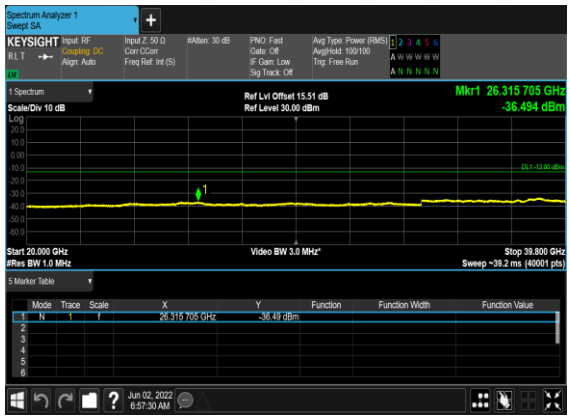

B5_N77(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

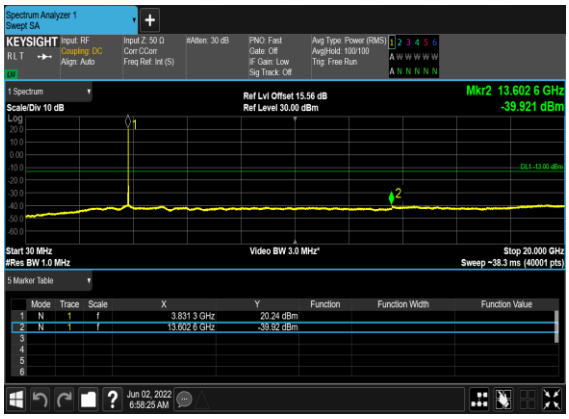

B5_N77(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

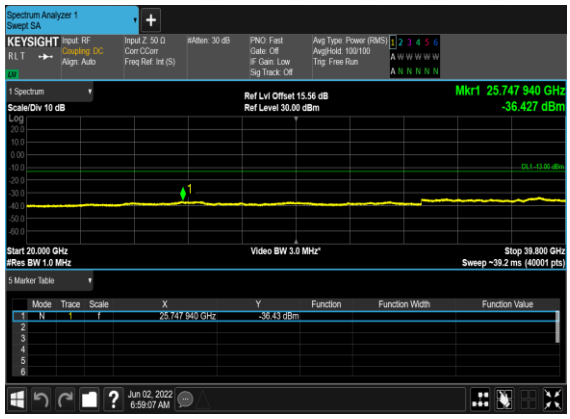

B5_N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

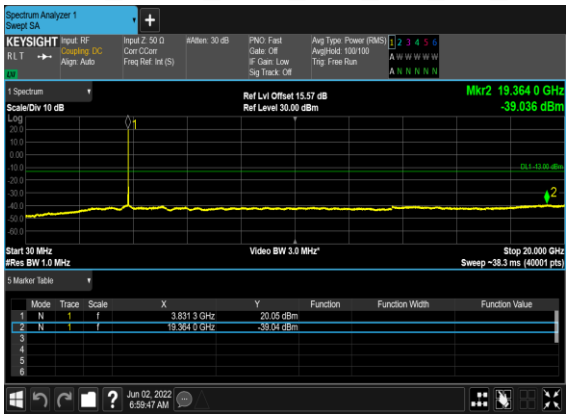

B5_N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

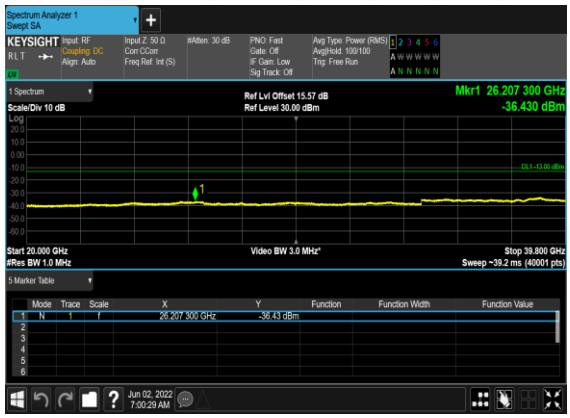

B5_N77(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

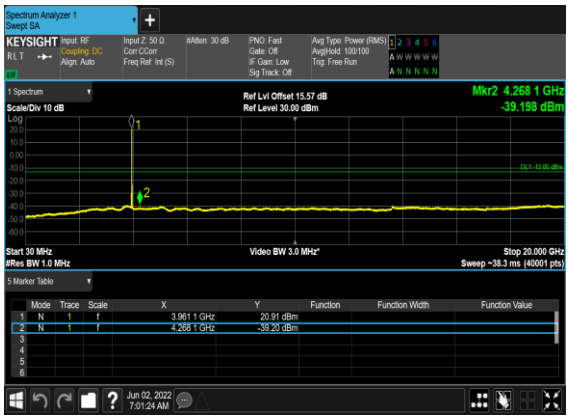

B5_N77(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

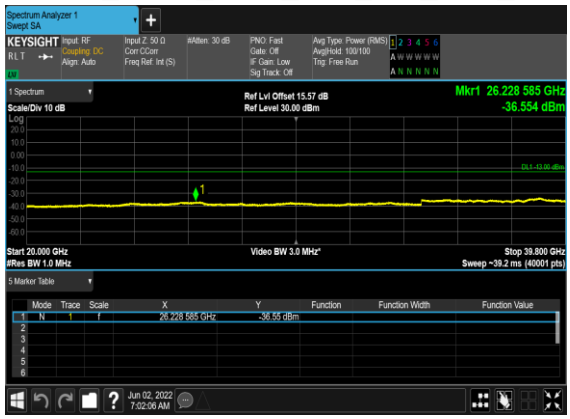

B5_N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

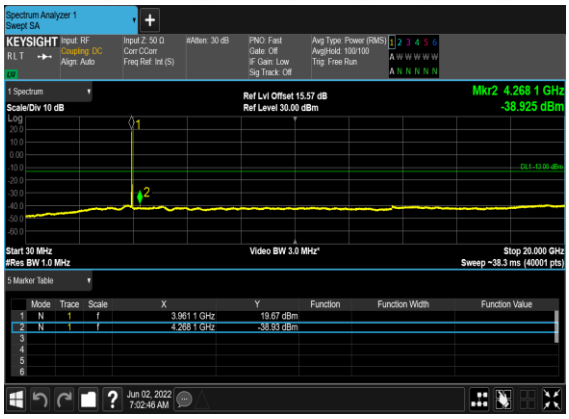

B5_N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

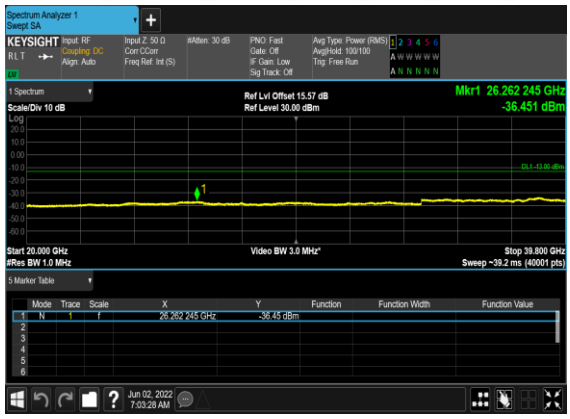

B5_N77(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

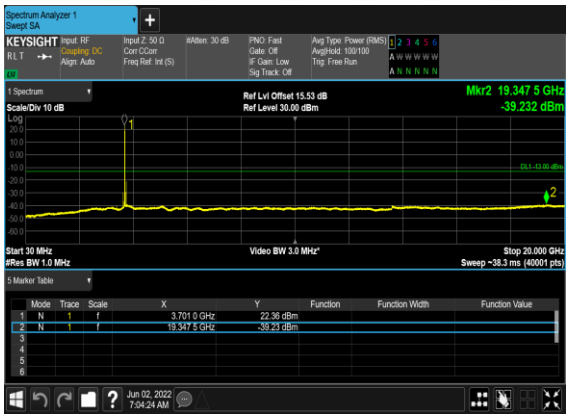

B5_N77(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

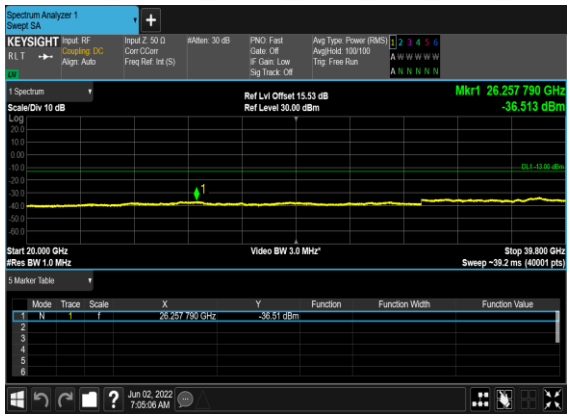

B5_N77(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

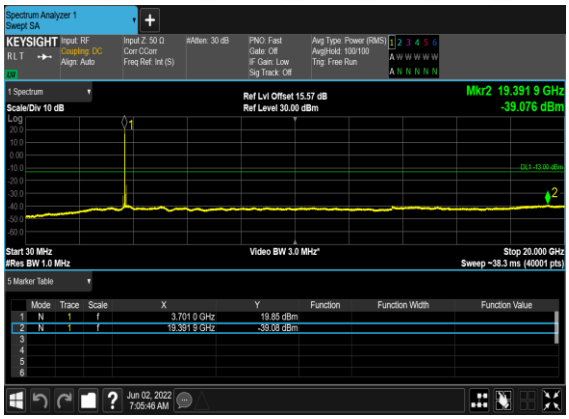

B5_N77(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

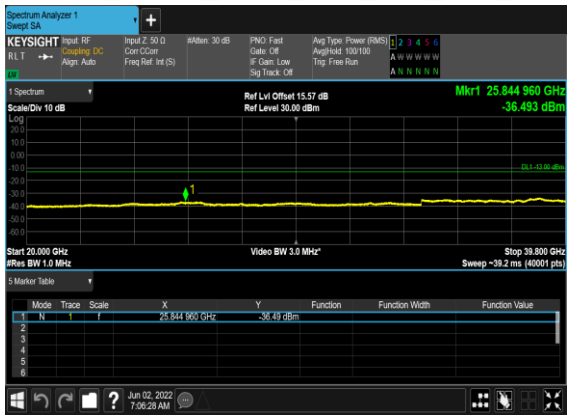

B5_N77(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

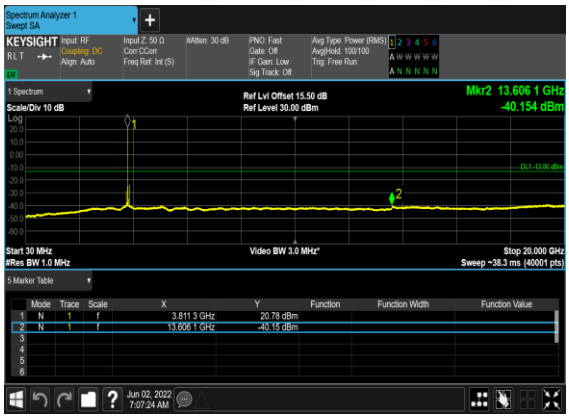

B5_N77(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

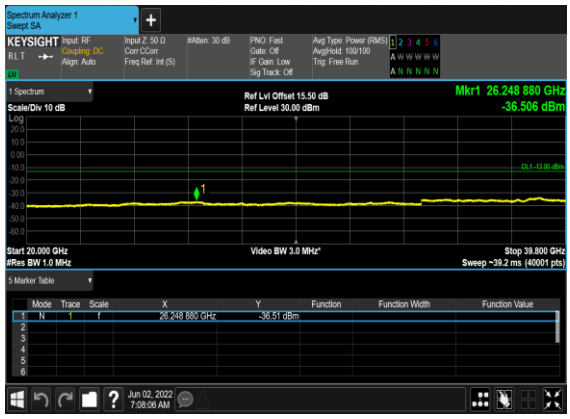

B5_N77(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

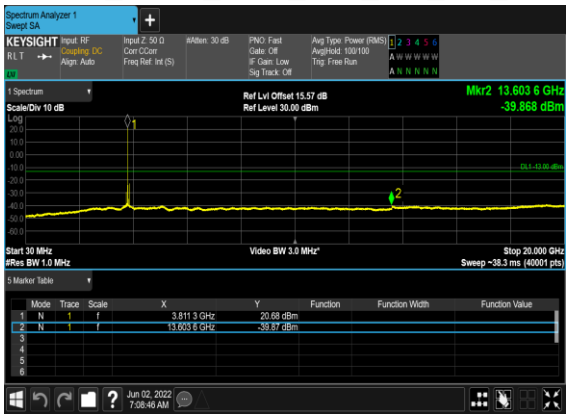

B5_N77(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

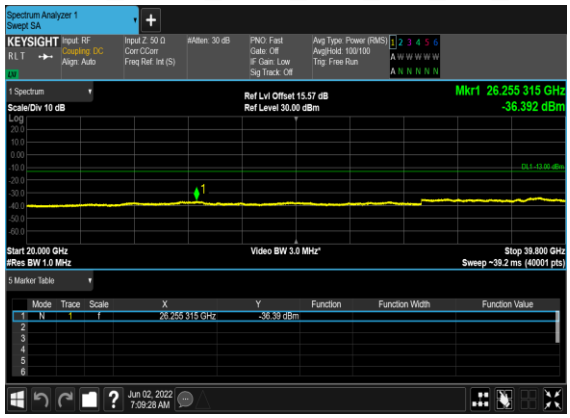

B5_N77(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

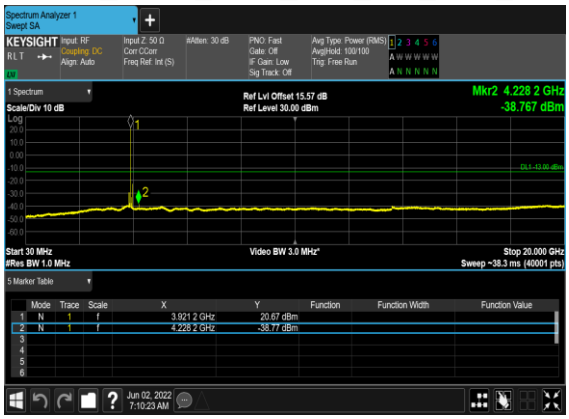

B5_N77(60M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

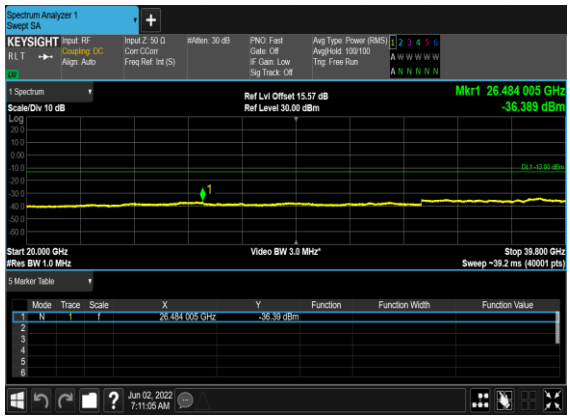

B5_N77(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

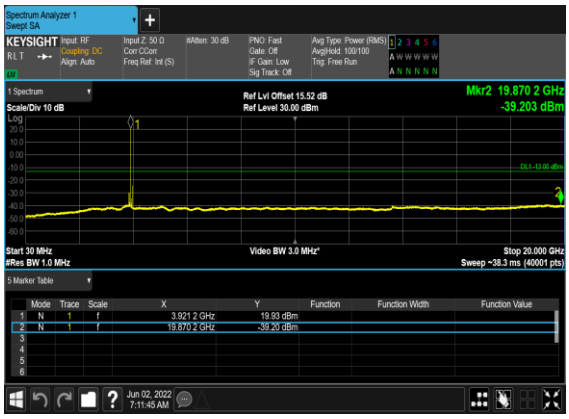

B5_N77(60M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

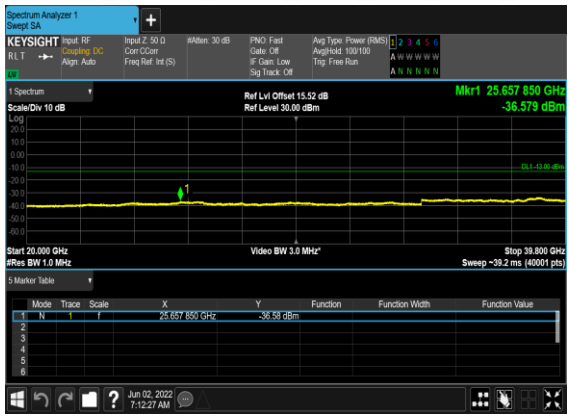

B5_N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

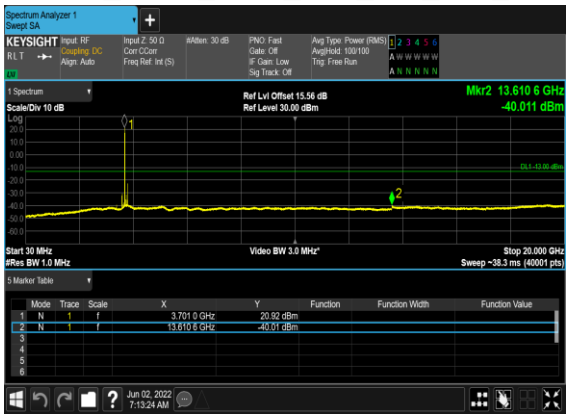

B5_N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

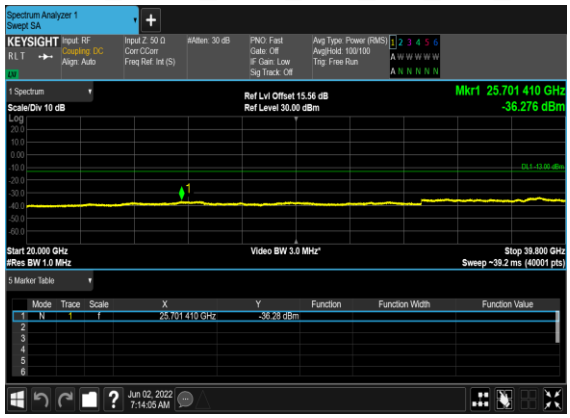

B5_N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

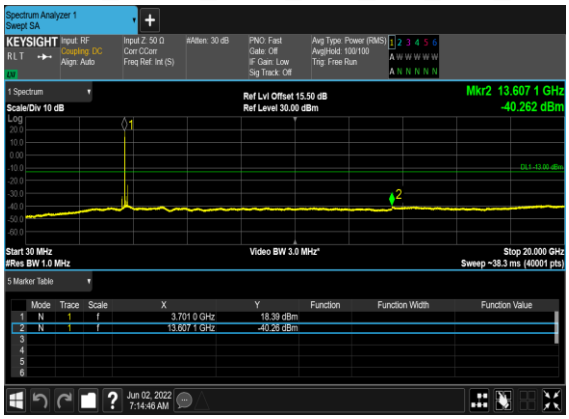

B5_N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

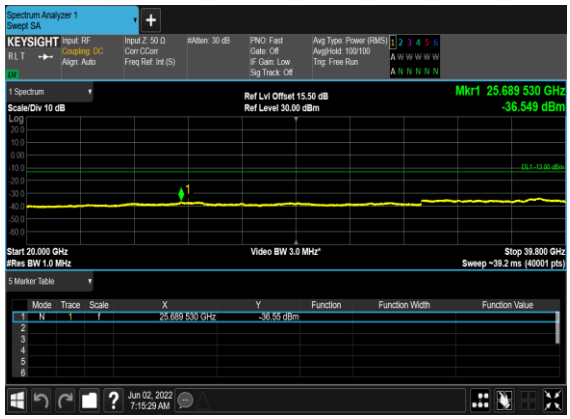

B5_N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

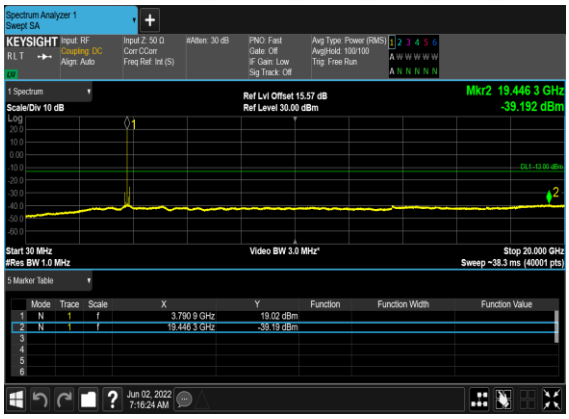
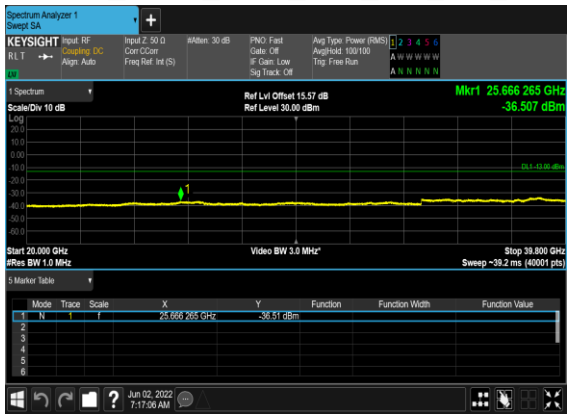
B5_N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH