



FCC RF Test Report

APPLICANT : OnePlus Technology (Shenzhen) Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : ONEPLUS, 
MODEL NAME : CPH2749
FCC ID : 2ABZ2-OP24865
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : 15E 6 GHZ Very Low Power Device(6VL)
TEST DATE(S) : Aug. 02, 2025 ~ Aug. 15, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



Table of Contents

1	General Description	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test	5
1.4	Product Specification of Equipment Under Test	6
1.5	Modification of EUT	9
1.6	Testing Location	9
1.7	Test Software	9
1.8	Applicable Standards	9
2	Test Configuration of Equipment Under Test	10
2.1	Carrier Frequency and Channel	10
2.2	Test Mode	13
2.3	Connection Diagram of Test System	15
2.4	Support Unit used in test configuration and system	16
2.5	EUT Operation Test Setup	16
2.6	Measurement Results Explanation Example	16
3	Test Result	17
3.1	26dB & 99% Occupied Bandwidth Measurement	17
3.2	Maximum conducted Output Power and Fundamental Maximum EIRP Measurement	18
3.3	Fundamental Power Spectral Density Measurement	19
3.4	In-Band Emissions (Channel Mask)	21
3.5	Unwanted Emissions Measurement	23
3.6	AC Conducted Emission Measurement	27
3.7	Antenna Requirements	29
4	List of Measuring Equipment	30
5	Measurement Uncertainty	31
	Appendix A. Conducted Test Results	
	Appendix B. AC Conducted Emission Test Result	
	Appendix C. Radiated Spurious Emission	
	Appendix D. Duty Cycle Plots	
	Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR561202I	01	Initial issue of report	Sep. 01, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(11)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)(9)	Maximum Conducted Output Power	Reporting only	-
3.2	15.407(a)(9)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(9)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(7)	In-Band Emissions (Channel Mask)	Pass	-
-	15.407(d)(6)	Contention Based Protocol	Pass	1
3.5	15.407(b)	Unwanted Emissions	Pass	Under limit 1.02 dB at 2483.510 MHz
3.6	15.207	AC Conducted Emission	Pass	Under limit 12.75 dB at 0.170 MHz
3.7	15.203 15.407(a)	Antenna Requirement	Pass	-

Remark 1: The device support VLP and Dual Client, the Very Low Power client and low power client share the same RF Path, the Contention Based Protocol have been demonstrated compliance in the Indoor low power test report which is issued separately (Report No. FR561202G).

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

OnePlus Technology (Shenzhen) Co., Ltd.

18C02, 18C03, 18C04, and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, P.R. China.

1.2 Manufacturer

OnePlus Technology (Shenzhen) Co., Ltd.

18C02, 18C03, 18C04, and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen, Guangdong, P.R. China.

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	ONEPLUS, 
Model Name	CPH2749
FCC ID	2ABZ2-OP24865
IMEI	Conducted: 867621080021194/867621080021186 Conduction: 867621080024719/867621080024701 Radiation: 867621080022598/867621080022580
HW Version	11
SW Version	OxygenOS 16.0
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	U-NII-5: 5925 MHz ~ 6425 MHz U-NII-6: 6425 MHz ~ 6525 MHz U-NII-7: 6525 MHz ~ 6875 MHz U-NII-8: 6875 MHz ~ 7125 MHz
Maximum EIRP	<MIMO Ant.15+10> <5925 MHz ~ 7125 MHz > 802.11a : -2.43 dBm / 0.0006 W 802.11ax HE20 : -2.54 dBm / 0.0006 W 802.11ax HE40 : 1.63 dBm / 0.0015 W 802.11ax HE80 : 1.18 dBm / 0.0013 W 802.11ax HE160 : 3.29 dBm / 0.0021 W 802.11be EHT20: -2.46 dBm / 0.0006 W 802.11be EHT40: 1.70 dBm / 0.0015 W 802.11be EHT80: 1.26 dBm / 0.0013 W 802.11be EHT160: 3.36 dBm / 0.0022 W 802.11be EHT320: 6.32 dBm / 0.0043 W
99% Occupied Bandwidth	802.11a : 17.518 MHz 802.11be EHT20 : 19.374 MHz 802.11be EHT40 : 38.644 MHz 802.11be EHT80 : 78.072 MHz 802.11be EHT160 : 159.920 MHz 802.11be EHT320 : 319.970 MHz
Antenna Type / Gain	<5925 MHz ~ 6425 MHz > <Ant. 15> : IFA Antenna with gain -1.20 dBi <Ant. 10> : IFA Antenna with gain -2.10 dBi <6425 MHz ~ 6525 MHz > <Ant. 15> : IFA Antenna with gain -1.40 dBi <Ant. 10> : IFA Antenna with gain -3.90 dBi <6525 MHz ~ 6875 MHz > <Ant. 15> : IFA Antenna with gain -2.10 dBi <Ant. 10> : IFA Antenna with gain -4.60 dBi <6875 MHz ~ 7125 MHz > <Ant. 15> : IFA Antenna with gain -4.70 dBi <Ant. 10> : IFA Antenna with gain -7.00 dBi
Type of Modulation	802.11a: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) 802.11be : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM)

Remark:

1. WIFI MIMO support CDD by manufacturer declared.
2. For WLAN SISO/MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.
3. For 802.11ax/be 20/40/80/160MHz mode, the whole testing has assessed only 802.11be EHT20/EHT40/EHT80/EHT160MHz by referring to the higher output power.

4. 802.11ax/be support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD/Channel Mask in appendix A, all the other test case were performed with full RU with its maximum power/PSD.
5. The device does not support UNII-5 CH 2 & UNII-8 CH 233 by manufacturer declared.
6. 802.11be support small size RU, Large size RU and Puncturing modes as below, which is less than full RU conducted power, therefore have assessed only Power Density/RSE.

<Small size RU 52+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	26	52	1	38	1
20MHz	52	26	39	7	3

<Small size RU 106+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	106	26	53	4	1
20MHz	26	106	4	54	2

<Large size RU 484+242 tone> & <80M BW Puncturing 20MHz>:

Bandwidth	Tones		Index		For test modes configure
80MHz	242	484	62	66	1
80MHz	242	484	61	66	2
80MHz	484	242	65	64	3
80MHz	484	242	65	63	4

<Large size RU 996+484 tone> & <160M BW Puncturing 40MHz>:

Bandwidth	Tones		Index		For test modes configure
160MHz	484-Left	996-Right	66-Left	67-Right	1
160MHz	484-Left	996-Right	65-Left	67-Right	2
160MHz	996-Left	484-Right	67-Left	66-Right	3
160MHz	996-Left	484-Right	67-Left	65-Right	4


<160M BW Puncturing 20MHz>:

Bandwidth	Tones			Index			For test modes configure
160MHz	242-Left	484-Left	996-Right	62-Left	66-Left	67-Right	1
160MHz	242-Left	484-Left	996-Right	61-Left	66-Left	67-Right	2
160MHz	484-Left	242-Left	996-Right	65-Left	64-Left	67-Right	3
160MHz	484-Left	242-Left	996-Right	65-Left	63-Left	67-Right	4
160MHz	996-Left	242-Right	484-Right	67-Left	62-Right	66-Right	5
160MHz	996-Left	242-Right	484-Right	67-Left	61-Right	66-Right	6
160MHz	996-Left	484-Right	242-Right	67-Left	65-Right	64-Right	7
160MHz	996-Left	484-Right	242-Right	67-Left	65-Right	63-Right	8


<Large size RU 3*996 tone> & <320M BW Puncturing 80MHz>:

Bandwidth	Tones	Index	For test modes configure
320MHz			1
			2
			3
			4

<Large size RU 3*996+484 tone> & <320M BW Puncturing 40MHz>:

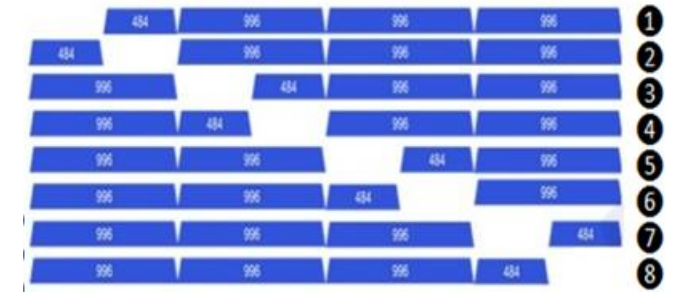Bandwidth	Tones	Index	For test modes configure
320MHz			1
			2
			3
			4
			5
			6
			7
			8

<Large size RU 2*996+484 tone> & <320M BW Puncturing 80+40MHz>:

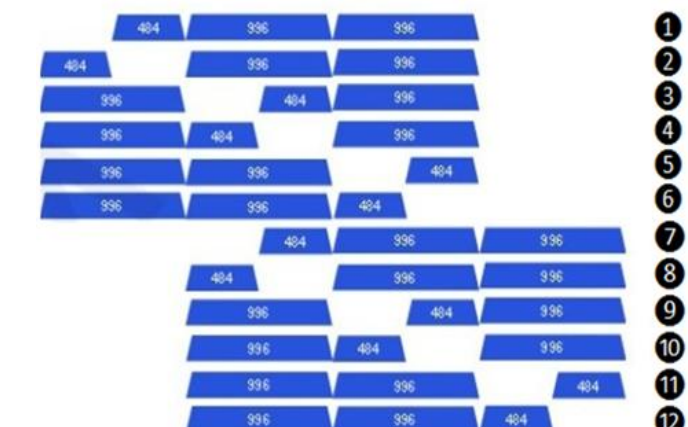Bandwidth	Tones	Index	For test modes configure
320MHz			1
			2
			3
			4
			5
			6
			7
			8
			9
			10
			11
			12

Only the worse cases are shown in this report.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ DFS01-SZ CO02-SZ 03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2020

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

<U-NII-5, 6, 7, 8>

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			
BW 160M	Channel	15							
	Freq. (MHz)	6025							

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							
BW 320M	Channel	31				63			
	Freq. (MHz)	6105				6265			



BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							
BW 320M	Channel	95							
	Freq. (MHz)	6425							

BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							
BW 320M	Channel	127							
	Freq. (MHz)	6585							



BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							
BW 320M	Channel	159							
	Freq. (MHz)	6745							

BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							
BW 320M	Channel	191							
	Freq. (MHz)	6905							

BW 20M	Channel	225				229			
	Freq. (MHz)	7075				7095			
BW 40M	Channel	227							
	Freq. (MHz)	7085							

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0
802.11be EHT320	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle+ BT Link+ WLAN Link(6G)+ USB Cable(Charging From Adapter 1) + Battery 1
Remark: For Radiated Test Cases, the tests were performed with Adapter and USB Cable.	

Ch. #		UNII-5	UNII-6	UNII-7	UNII-8
		20M BW	20M BW	20M BW	20M BW
L	Low	001	097	117	189
M	Middle	045	105	149	209
H	High	093	113	181	229
Straddle		-	-	-	185

Ch. #		UNII-5	UNII-6	UNII-7	UNII-8
		40M BW	40M BW	40M BW	40M BW
L	Low	003	099	123	195
M	Middle	043	-	147	203
H	High	091	107	179	227
Straddle		-	115	-	187

Ch. #		UNII-5	UNII-6	UNII-7	UNII-8
		80M BW	80M BW	80M BW	80M BW
L	Low	007	103	135	199
M	Middle	039		151	-
H	High	087		167	215
Straddle		-	119	183	-


Ch. #		UNII-5	UNII-6	UNII-7	UNII-8
		160M BW	160M BW	160M BW	160M BW
L	Low	015	-	143	207
M	Middle	047			
H	High	079			
Straddle		-	111	175	-

Ch. #		UNII-5	UNII-6	UNII-7	UNII-8
		320M BW	320M BW	320M BW	320M BW
L	Low	-	-	-	-
M	Middle	031			
H	High	063			
Straddle		95	127	159	191


Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

For Conduction emission

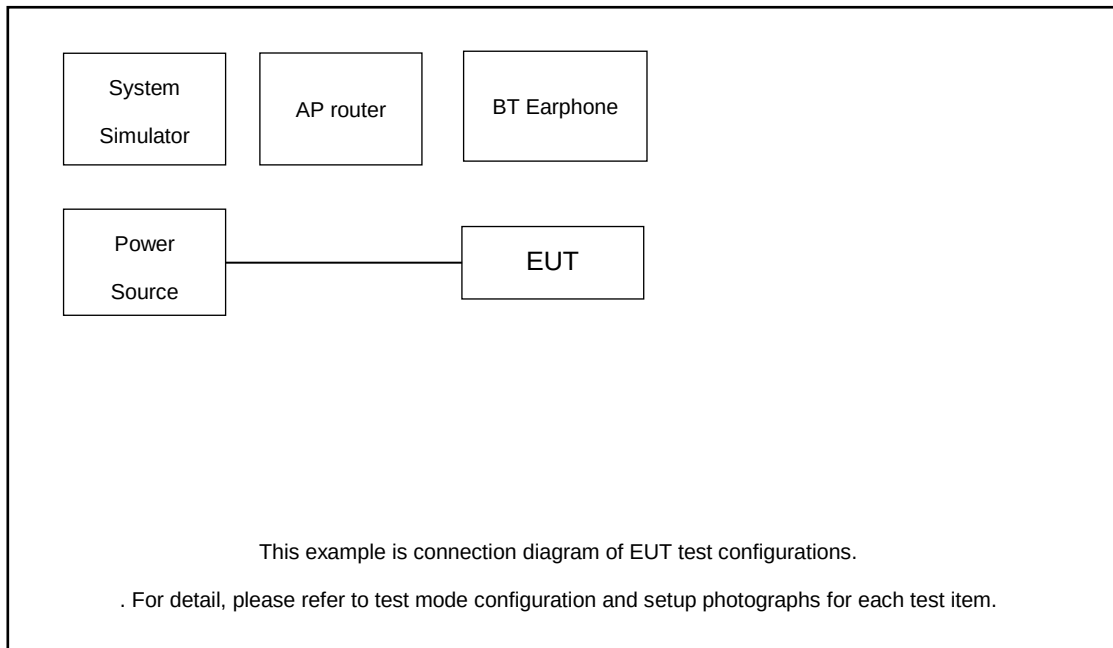

For Radiated emission

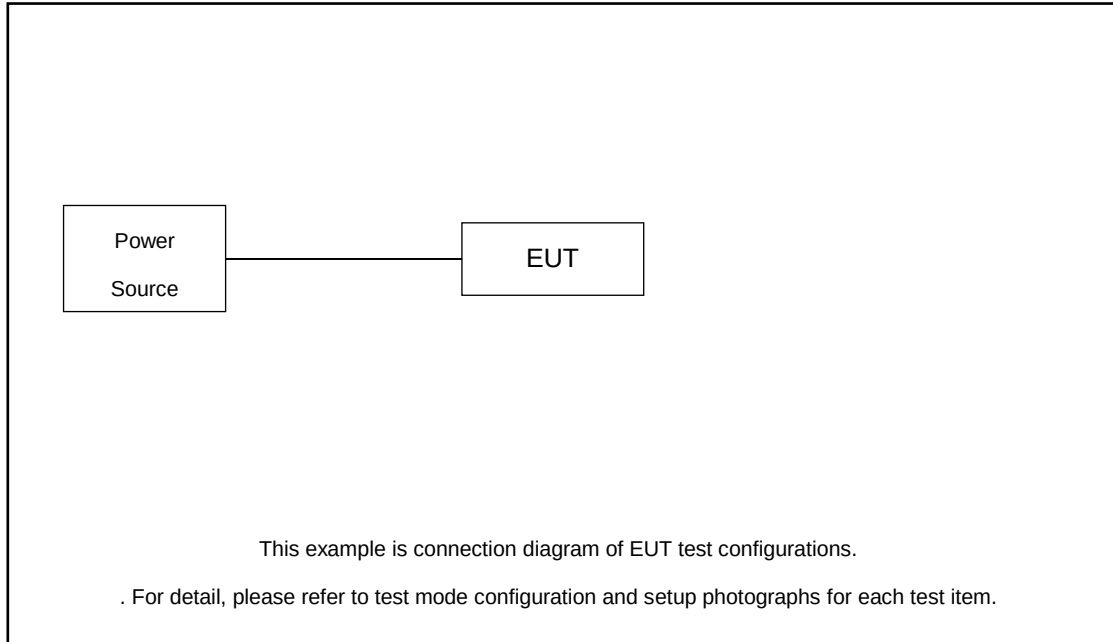

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	WLAN AP	NETHEAR	RAXE500	PY320300508	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT TX Tool) was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.86 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.86 + 10 = 15.86 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 CFR 15.407 (a)(11)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

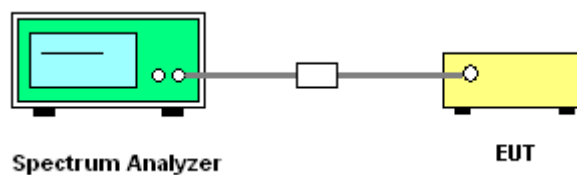

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(9) For very low power devices operating in the 5.925-7125 GHz bands, the maximum e.i.r.p must not exceed 14 dBm.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

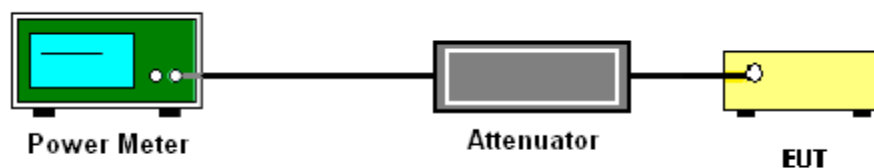

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.

3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(9) For very low power devices operating in the 5.925-7125 GHz bands, the maximum power spectral density must not exceed -5 dBm e.i.r.p in any 1-megahertz band.

(d)(10) Very low power devices operating in the 5.925-7125 GHz bands shall employ a transmit power control (TPC) mechanism. A very low power device is required to have the capability to operate at least 6 dB below the maximum EIRP power spectral density (PSD) value of -5 dBm/MHz.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, attenuator loss and duty factor. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is the bin-by-bin summation to obtain the combined

spectrum. For the device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

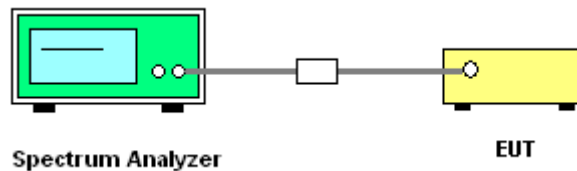

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

The EIRP PSD test results are more than 6 dB below the maximum EIRP PSD value of -5 dBm/MHz, thus satisfying the TPC requirements.

3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<FCC 14-30 CFR 15.407>

(b)(7) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures


The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.

- c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

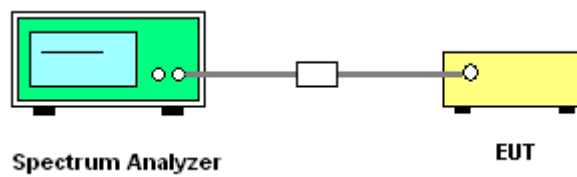

3.4.5 Test Result

Please refer to Appendix A.

3.5 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.5.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.2
- 7 (Peak)	88.2

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.5.2 Measuring Instruments


See list of measuring equipment of this test report.

3.5.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.5.4 Test Setup


For radiated emissions below 30MHz

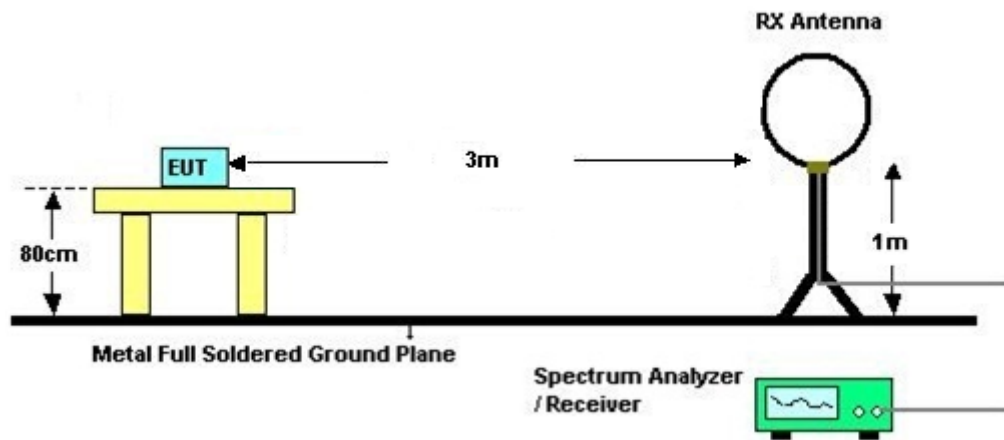

For radiated emissions from 30MHz to 1GHz

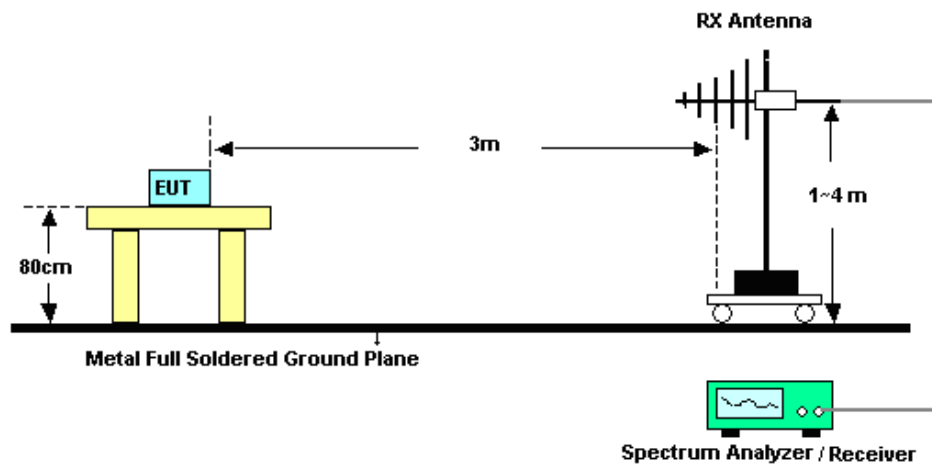

For radiated emissions above 1GHz

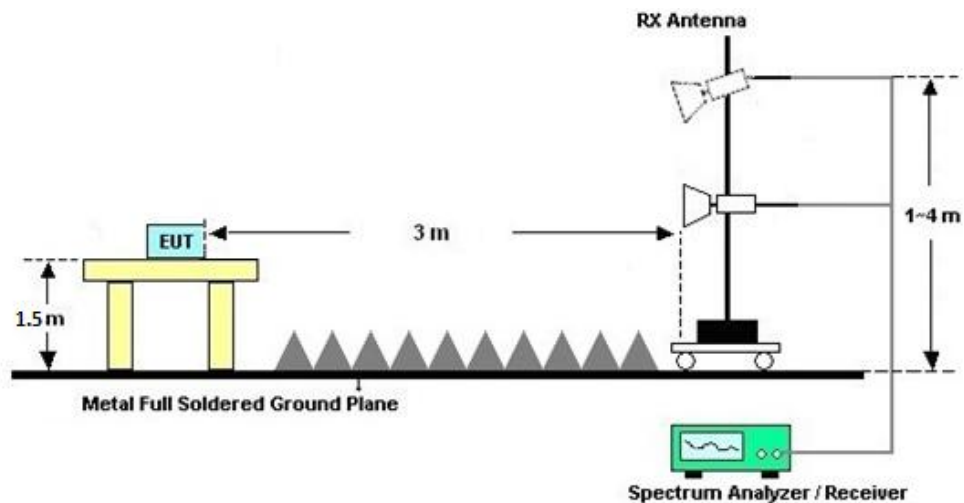



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

The emission level above 18GHz is checked that the emission level is noise floor only, so it is not reflected in the report.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

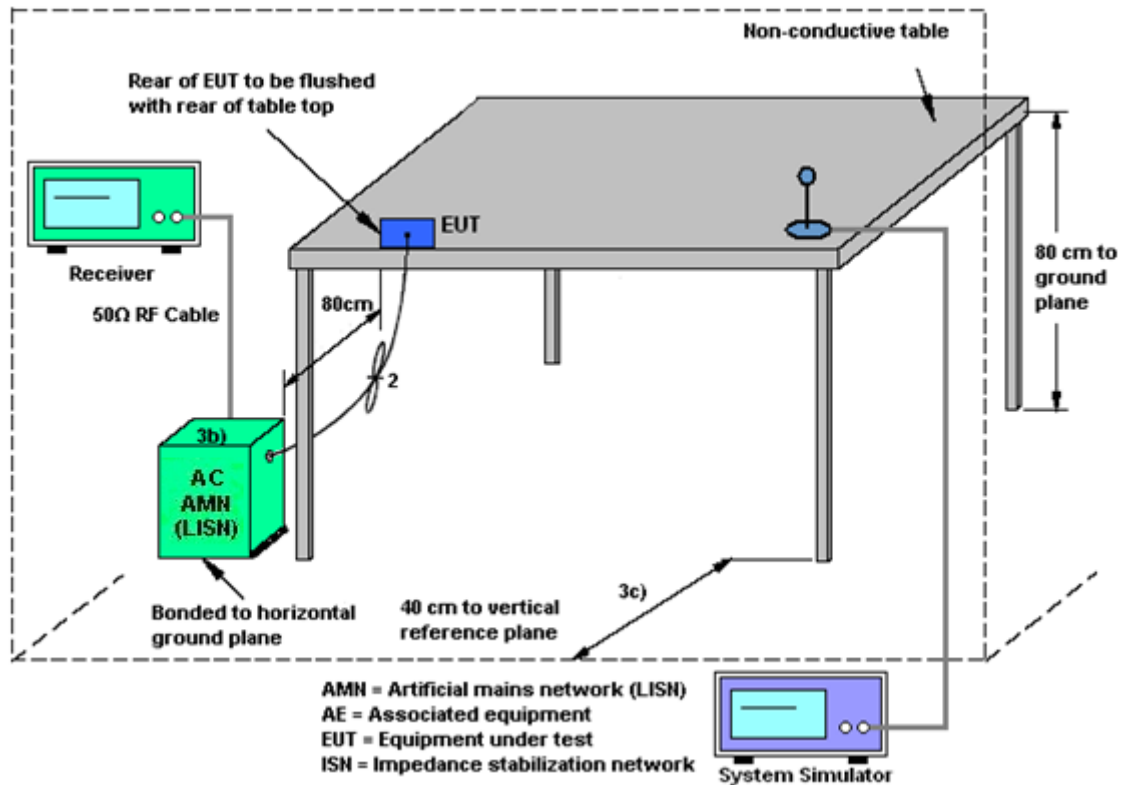

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

Directional gain = $G_{ANT\ MAX}(Ant.1\ Gain, Ant.2\ Gain, \dots) + \text{Array Gain}$, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

For PSD, the directional gain calculation is following,

Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_n/20})^2 / N_{ANT}]$ dBi, as following table for PSD.

N_{ANT} = number of transmit antennas

N_{SS} = number of spatial streams. (The worst case directional gain will occur when $N_{SS} = 1$)

<CDD Modes>				
			DG for Power (dBi)	DG for PSD (dBi)
	Ant. 15 (dBi)	Ant. 10 (dBi)		
U-NII-5	-1.20	-2.10	-1.20	1.37
U-NII-6	-1.40	-3.90	-1.40	0.45
U-NII-7	-2.10	-4.60	-2.10	-0.25
U-NII-8	-4.70	-7.00	-4.70	-2.76



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Aug. 02, 2025~ Aug. 06, 2025	Apr. 01, 2026	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	Aug. 02, 2025~ Aug. 06, 2025	Dec. 24, 2025	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct. 14, 2024	Aug. 02, 2025~ Aug. 06, 2025	Oct. 13, 2025	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H201408180 3	-40~+150°C	Jul. 02, 2025	Aug. 02, 2025~ Aug. 06, 2025	Jul. 01, 2026	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 25, 2024	Aug. 15, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Aug. 15, 2025	Jul. 02, 2026	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Aug. 15, 2025	Dec. 27, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Aug. 15, 2025	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2025	Aug. 15, 2025	Jul. 03, 2026	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 03, 2025	Aug. 15, 2025	Apr. 02, 2027	Radiation (03CH01-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2024	Aug. 15, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101 800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Aug. 15, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 14, 2024	Aug. 15, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 03, 2025	Aug. 15, 2025	Jul. 02, 2026	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	6160100019 85	N/A	Oct. 14, 2024	Aug. 15, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Aug. 15, 2025	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Aug. 15, 2025	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 02, 2025	Aug. 06, 2025	Jul. 01, 2026	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2025	Aug. 06, 2025	Jul. 02, 2026	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	6160100024 70	100Vac~250Vac	Dec. 25, 2024	Aug. 06, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz
Conducted Generated signal Levels	±0.62 dB
Conducted Time	0.38%

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Chen ZhiQiang	Temperature:	21~25	°C
Test Date:	2025/08/02~2025/08/06	Relative Humidity:	51~54	%

TEST RESULTS DATA
EIRP Power Table

Band V MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant15	Ant10	Ant15	Ant10	SUM	Ant15	Ant10	SUM		
11a	6Mbps	2	1	5955	Full	0.04	0.04	-10.06	-9.15	-6.57	-1.20		-7.77	14.00	Pass
11a	6Mbps	2	45	6175	Full	0.04	0.04	-9.08	-9.85	-6.44	-1.20		-7.64	14.00	Pass
11a	6Mbps	2	93	6415	Full	0.04	0.04	-9.05	-9.40	-6.21	-1.20		-7.41	14.00	Pass
AX20	MCS0	2	1	5955	Full	0.02	0.02	-10.31	-9.19	-6.71	-1.20		-7.91	14.00	Pass
AX20	MCS0	2	1	5955	26/0	0.02	0.02	-15.38	-14.58	-11.96	-1.20		-13.16	14.00	Pass
AX20	MCS0	2	1	5955	52/37	0.02	0.02	-12.62	-11.76	-9.16	-1.20		-10.36	14.00	Pass
AX20	MCS0	2	1	5955	106/53	0.02	0.02	-9.56	-8.70	-6.10	-1.20		-7.30	14.00	Pass
AX20	MCS0	2	45	6175	Full	0.02	0.02	-9.29	-9.86	-6.56	-1.20		-7.76	14.00	Pass
AX20	MCS0	2	93	6415	Full	0.02	0.02	-9.33	-9.22	-6.27	-1.20		-7.47	14.00	Pass
AX40	MCS0	2	3	5965	Full	0.02	0.02	-10.56	-9.44	-6.96	-1.20		-8.16	14.00	Pass
AX40	MCS0	2	43	6165	Full	0.02	0.02	-9.58	-10.13	-6.84	-1.20		-8.04	14.00	Pass
AX40	MCS0	2	91	6405	Full	0.02	0.02	-9.51	-9.31	-6.40	-1.20		-7.60	14.00	Pass
AX80	MCS0	2	7	5985	Full	0.02	0.02	-4.58	-3.41	-0.95	-1.20		-2.15	14.00	Pass
AX80	MCS0	2	39	6145	Full	0.02	0.02	-3.24	-3.23	-0.23	-1.20		-1.43	14.00	Pass
AX80	MCS0	2	87	6385	Full	0.02	0.02	-3.33	-3.18	-0.25	-1.20		-1.45	14.00	Pass
AX160	MCS0	2	15	6025	Full	0.02	0.02	-1.39	-0.58	2.04	-1.20		0.84	14.00	Pass
AX160	MCS0	2	47	6185	Full	0.02	0.02	-0.90	-1.42	1.85	-1.20		0.65	14.00	Pass
AX160	MCS0	2	79	6345	Full	0.02	0.02	-0.67	-0.83	2.26	-1.20		1.06	14.00	Pass

Power Setting	
Ant15	Ant10
	-11.5
	-11.5
	-11.5
	-11
	-16
	-13
	-10
	-11
	-11
	-11
	-11
	-6
	-5
	-6
	-3.5
	-3.5
	-3

TEST RESULTS DATA
EIRP Power Table

Band V MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant15	Ant10	Ant15	Ant10	SUM	Ant15	Ant10	SUM			Ant15	Ant10
BE20	MCS0	2	1	5955	Full	0.02	0.02	-10.23	-9.11	-6.63	-1.20		-7.83	14.00	Pass	-11	
BE20	MCS0	2	1	5955	26/0	0.02	0.02	-15.30	-14.47	-11.86	-1.20		-13.06	14.00	Pass	-16	
BE20	MCS0	2	1	5955	52/37	0.02	0.02	-12.54	-11.65	-9.07	-1.20		-10.27	14.00	Pass	-13	
BE20	MCS0	2	1	5955	106/53	0.02	0.02	-9.48	-8.59	-6.01	-1.20		-7.21	14.00	Pass	-10	
BE20	MCS0	2	45	6175	Full	0.02	0.02	-9.21	-9.78	-6.48	-1.20		-7.68	14.00	Pass	-11	
BE20	MCS0	2	93	6415	Full	0.02	0.02	-9.25	-9.14	-6.19	-1.20		-7.39	14.00	Pass	-11	
BE40	MCS0	2	3	5965	Full	0.02	0.02	-10.49	-9.37	-6.89	-1.20		-8.09	14.00	Pass	-11	
BE40	MCS0	2	43	6165	Full	0.02	0.02	-9.51	-10.06	-6.77	-1.20		-7.97	14.00	Pass	-11	
BE40	MCS0	2	91	6405	Full	0.02	0.02	-9.44	-9.24	-6.33	-1.20		-7.53	14.00	Pass	-11	
BE80	MCS0	2	7	5985	Full	0.02	0.01	-4.50	-3.34	-0.87	-1.20		-2.07	14.00	Pass	-6	
BE80	MCS0	2	39	6145	Full	0.02	0.01	-3.16	-3.16	-0.15	-1.20		-1.35	14.00	Pass	-5	
BE80	MCS0	2	87	6385	Full	0.02	0.01	-3.25	-3.11	-0.17	-1.20		-1.37	14.00	Pass	-6	
BE160	MCS0	2	15	6025	Full	0.01	0.02	-1.33	-0.51	2.11	-1.20		0.91	14.00	Pass	-3.5	
BE160	MCS0	2	47	6185	Full	0.01	0.02	-0.84	-1.35	1.92	-1.20		0.72	14.00	Pass	-3.5	
BE160	MCS0	2	79	6345	Full	0.01	0.02	-0.61	-0.76	2.32	-1.20		1.12	14.00	Pass	-3	
BE320	MCS0	2	31	6105	Full	0.02	0.02	3.98	4.28	7.14	-1.20		5.94	14.00	Pass	3	
BE320	MCS0	2	63	6265	Full	0.02	0.02	4.09	4.64	7.38	-1.20		6.18	14.00	Pass	2	

Band V straddle channel MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant15	Ant10	Ant15	Ant10	SUM	Ant15	Ant10	SUM			Ant15	Ant10
BE320	MCS0	2	95	6425	Full	0.02	0.02	3.95	4.89	7.45	-1.20		6.25	14.00	Pass	2	

TEST RESULTS DATA
EIRP Power Table

Band VI MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant15	Ant10	Ant15	Ant10	SUM	Ant15	Ant10	SUM		
11a	6Mbps	2	97	6435	Full	0.04	0.04	-9.04	-9.15	-6.08	-1.40		-7.48	14.00	Pass
11a	6Mbps	2	105	6475	Full	0.04	0.04	-9.06	-10.25	-6.60	-1.40		-8.00	14.00	Pass
11a	6Mbps	2	113	6515	Full	0.04	0.04	-9.34	-10.18	-6.73	-1.40		-8.13	14.00	Pass
AX20	MCS0	2	97	6435	Full	0.02	0.02	-9.37	-9.25	-6.30	-1.40		-7.70	14.00	Pass
AX20	MCS0	2	97	6435	26/0	0.02	0.02	-13.34	-13.18	-10.25	-1.40		-11.65	14.00	Pass
AX20	MCS0	2	97	6435	52/37	0.02	0.02	-10.37	-10.21	-7.28	-1.40		-8.68	14.00	Pass
AX20	MCS0	2	97	6435	106/53	0.02	0.02	-7.14	-7.27	-4.20	-1.40		-5.60	14.00	Pass
AX20	MCS0	2	105	6475	Full	0.02	0.02	-9.25	-10.07	-6.63	-1.40		-8.03	14.00	Pass
AX20	MCS0	2	113	6515	Full	0.02	0.02	-9.11	-9.46	-6.28	-1.40		-7.68	14.00	Pass
AX40	MCS0	2	99	6445	Full	0.02	0.02	-9.67	-9.57	-6.61	-1.40		-8.01	14.00	Pass
AX40	MCS0	2	107	6485	Full	0.02	0.02	-9.26	-9.82	-6.52	-1.40		-7.92	14.00	Pass
AX80	MCS0	2	103	6465	Full	0.02	0.02	-3.34	-3.11	-0.22	-1.40		-1.62	14.00	Pass

Power Setting	
Ant15	Ant10
-11.5	
-12	
-12	
-11	
-15	
-12	
-9	
-11.5	
-11	
-11	
-11	
-5.5	

Band VI straddle channel MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant15	Ant10	Ant15	Ant10	SUM	Ant15	Ant10	SUM		
AX40	MCS0	2	115	6525	Full	0.02	0.02	-9.65	-9.84	-6.74	-1.40	-8.14		14.00	Pass
AX80	MCS0	2	119	6545	Full	0.02	0.02	-0.27	-0.59	2.58	-1.40	1.18		14.00	Pass
AX160	MCS0	2	111	6505	Full	0.02	0.02	-0.65	-1.08	2.15	-1.40	0.75		14.00	Pass

Power Setting	
Ant15	Ant10
-11	
-2.5	
-3.5	

EIRP Power Table

Power Setting	
Ant15	Ant10
-11	
-15	
-12	
-9	
-11.5	
-11	
-11	
-11	
-5.5	

Power Setting	
Ant15	Ant10
-11	
-2.5	
-3.5	
3	

TEST RESULTS DATA
EIRP Power Table

Band VII MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant15	Ant10	Ant15	Ant10	SUM	Ant15	Ant10	SUM				
11a	6Mbps	2	117	6535	Full	0.04	0.04	-6.02	-6.78	-3.37	-2.10		-5.47	14.00	Pass	Ant15	Ant10
11a	6Mbps	2	149	6695	Full	0.04	0.04	-6.07	-6.93	-3.47	-2.10		-5.57	14.00	Pass		-8.5
11a	6Mbps	2	181	6855	Full	0.04	0.04	-6.38	-6.69	-3.52	-2.10		-5.62	14.00	Pass		-8.5
AX20	MCS0	2	117	6535	Full	0.02	0.02	-6.22	-6.59	-3.39	-2.10		-5.49	14.00	Pass		-8
AX20	MCS0	2	117	6535	26/0	0.02	0.02	-13.20	-14.20	-10.66	-2.10		-12.76	14.00	Pass		-15
AX20	MCS0	2	117	6535	52/37	0.02	0.02	-10.17	-11.33	-7.70	-2.10		-9.80	14.00	Pass		-12
AX20	MCS0	2	117	6535	106/53	0.02	0.02	-7.15	-8.23	-4.65	-2.10		-6.75	14.00	Pass		-9
AX20	MCS0	2	149	6695	Full	0.02	0.02	-6.30	-6.72	-3.50	-2.10		-5.60	14.00	Pass		-8
AX20	MCS0	2	181	6855	Full	0.02	0.02	-6.62	-6.60	-3.60	-2.10		-5.70	14.00	Pass		-8
AX40	MCS0	2	123	6565	Full	0.02	0.02	-6.29	-6.54	-3.41	-2.10		-5.51	14.00	Pass		-7.5
AX40	MCS0	2	147	6685	Full	0.02	0.02	-6.24	-6.34	-3.28	-2.10		-5.38	14.00	Pass		-7.5
AX40	MCS0	2	179	6845	Full	0.02	0.02	-6.56	-6.46	-3.50	-2.10		-5.60	14.00	Pass		-7.5
AX80	MCS0	2	135	6625	Full	0.02	0.02	-0.43	-0.61	2.49	-2.10		0.39	14.00	Pass		-2.5
AX80	MCS0	2	151	6705	Full	0.02	0.02	-0.47	-0.25	2.65	-2.10	0.55		14.00	Pass		-2.5
AX80	MCS0	2	167	6785	Full	0.02	0.02	-0.53	-0.31	2.59	-2.10	0.49		14.00	Pass		-2.5
AX160	MCS0	2	143	6665	Full	0.02	0.02	1.97	2.38	5.19	-2.10		3.09	14.00	Pass		0

Band VII straddle channel MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant15	Ant10	Ant15	Ant10	SUM	Ant15	Ant10	SUM			Ant15	Ant10
11a	6Mbps	2	185	6875	Full	0.04	0.04	-3.29	-3.39	-0.33	-2.10	-2.43	14.00	Pass		-5.5	
AX20	MCS0	2	185	6875	Full	0.02	0.02	-3.55	-3.34	-0.44	-2.10	-2.54	14.00	Pass		-5	
AX40	MCS0	2	187	6885	Full	0.02	0.02	0.50	0.94	3.73	-2.10	1.63	14.00	Pass		-0.5	
AX80	MCS0	2	183	6865	Full	0.02	0.02	-0.59	-0.37	2.53	-2.10	0.43	14.00	Pass		-2.5	
AX160	MCS0	2	175	6825	Full	0.02	0.02	1.78	2.17	4.99	-2.10	2.89	14.00	Pass		-0.5	

TEST RESULTS DATA
EIRP Power Table

Band VII MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant15	Ant10	Ant15	Ant10	SUM	Ant15	Ant10	SUM				
BE20	MCS0	2	117	6535	Full	0.02	0.02	-6.14	-6.51	-3.31	-2.10		-5.41	14.00	Pass	Ant15	Ant10
BE20	MCS0	2	117	6535	26/0	0.02	0.02	-13.12	-14.09	-10.57	-2.10		-12.67	14.00	Pass	-8	-15
BE20	MCS0	2	117	6535	52/37	0.02	0.02	-10.09	-11.22	-7.61	-2.10		-9.71	14.00	Pass	-12	-12
BE20	MCS0	2	117	6535	106/53	0.02	0.02	-7.07	-8.12	-4.56	-2.10		-6.66	14.00	Pass	-9	-9
BE20	MCS0	2	149	6695	Full	0.02	0.02	-6.22	-6.64	-3.42	-2.10		-5.52	14.00	Pass	-8	-8
BE20	MCS0	2	181	6855	Full	0.02	0.02	-6.54	-6.52	-3.52	-2.10		-5.62	14.00	Pass	-7.5	-7.5
BE40	MCS0	2	123	6565	Full	0.02	0.02	-6.22	-6.47	-3.34	-2.10		-5.44	14.00	Pass	-7.5	-7.5
BE40	MCS0	2	147	6685	Full	0.02	0.02	-6.17	-6.27	-3.21	-2.10		-5.31	14.00	Pass	-7.5	-7.5
BE40	MCS0	2	179	6845	Full	0.02	0.02	-6.49	-6.39	-3.43	-2.10		-5.53	14.00	Pass	-2.5	-2.5
BE80	MCS0	2	135	6625	Full	0.02	0.01	-0.35	-0.54	2.56	-2.10		0.46	14.00	Pass	-2.5	-2.5
BE80	MCS0	2	151	6705	Full	0.02	0.01	-0.39	-0.18	2.72	-2.10		0.62	14.00	Pass	-2.5	-2.5
BE80	MCS0	2	167	6785	Full	0.02	0.01	-0.45	-0.24	2.66	-2.10		0.56	14.00	Pass	0	0
BE160	MCS0	2	143	6665	Full	0.01	0.02	2.03	2.45	5.25	-2.10		3.15	14.00	Pass		

Band VII straddle channel MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant15	Ant10	Ant15	Ant10	SUM	Ant15	Ant10	SUM				
BE20	MCS0	2	185	6875	Full	0.02	0.02	-3.47	-3.26	-0.36	-2.10		-2.46	14.00	Pass	Ant15	Ant10
BE40	MCS0	2	187	6885	Full	0.02	0.02	0.57	1.01	3.80	-2.10		1.70	14.00	Pass		-5
BE80	MCS0	2	183	6865	Full	0.02	0.01	-0.51	-0.30	2.60	-2.10		0.50	14.00	Pass		-0.5
BE160	MCS0	2	175	6825	Full	0.01	0.02	1.84	2.24	5.05	-2.10		2.95	14.00	Pass		-2.5
BE320	MCS0	2	159	6745	Full	0.02	0.02	4.32	4.76	7.55	-2.10		5.45	14.00	Pass		-0.5
BE320	MCS0	2	191	6905	Full	0.02	0.02	4.20	4.98	7.61	-2.10		5.51	14.00	Pass		3
																	2.5

TEST RESULTS DATA
EIRP Power Table

Band VIII MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant15	Ant10	Ant15	Ant10	SUM	Ant15	Ant10	SUM		
11a	6Mbps	2	189	6895	Full	0.04	0.04	-3.04	-3.25	-0.13	-4.70		-4.83	14.00	Pass
11a	6Mbps	2	209	6995	Full	0.04	0.04	-3.08	-3.67	-0.35	-4.70		-5.05	14.00	Pass
11a	6Mbps	2	229	7095	Full	0.04	0.04	-3.07	-3.01	-0.03	-4.70		-4.73	14.00	Pass
AX20	MCS0	2	189	6895	Full	0.02	0.02	-3.45	-3.22	-0.33	-4.70		-5.03	14.00	Pass
AX20	MCS0	2	209	6995	Full	0.02	0.02	-3.33	-3.94	-0.62	-4.70		-5.32	14.00	Pass
AX20	MCS0	2	229	7095	Full	0.02	0.02	-3.79	-3.40	-0.58	-4.70		-5.28	14.00	Pass
AX20	MCS0	2	229	7095	26/8	0.02	0.02	-13.62	-13.84	-10.72	-4.70		-15.42	14.00	Pass
AX20	MCS0	2	229	7095	52/40	0.02	0.02	-10.65	-10.99	-7.81	-4.70		-12.51	14.00	Pass
AX20	MCS0	2	229	7095	106/54	0.02	0.02	-7.59	-7.97	-4.77	-4.70		-9.47	14.00	Pass
AX40	MCS0	2	195	6925	Full	0.02	0.02	0.78	0.33	3.57	-4.70		-1.13	14.00	Pass
AX40	MCS0	2	203	6965	Full	0.02	0.02	0.83	0.32	3.59	-4.70		-1.11	14.00	Pass
AX40	MCS0	2	227	7085	Full	0.02	0.02	0.40	0.48	3.45	-4.70		-1.25	14.00	Pass
AX80	MCS0	2	199	6945	Full	0.02	0.02	2.22	1.79	5.02	-4.70		0.32	14.00	Pass
AX80	MCS0	2	215	7025	Full	0.02	0.02	1.88	1.44	4.67	-4.70		-0.03	14.00	Pass
AX160	MCS0	2	207	6985	Full	0.02	0.02	4.93	5.04	7.99	-4.70		3.29	14.00	Pass

Power Setting	
Ant15	Ant10
	-5.5
	-5.5
	-5
	-5
	-5
	-5
	-15
	-12
	-9
	-0.5
	-0.5
	-0.5
	1
	1
	3.5

TEST RESULTS DATA
EIRP Power Table

Band VIII MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant15	Ant10	Ant15	Ant10	SUM	Ant15	Ant10	SUM		
BE20	MCS0	2	189	6895	Full	0.02	0.02	-3.37	-3.14	-0.25	-4.70		-4.95	14.00	Pass
BE20	MCS0	2	209	6995	Full	0.02	0.02	-3.25	-3.86	-0.54	-4.70		-5.24	14.00	Pass
BE20	MCS0	2	229	7095	Full	0.02	0.02	-3.59	-3.32	-0.45	-4.70		-5.15	14.00	Pass
BE20	MCS0	2	229	7095	26/8	0.02	0.02	-13.54	-13.73	-10.63	-4.70		-15.33	14.00	Pass
BE20	MCS0	2	229	7095	52/40	0.02	0.02	-10.57	-10.88	-7.72	-4.70		-12.42	14.00	Pass
BE20	MCS0	2	229	7095	106/54	0.02	0.02	-7.51	-7.86	-4.68	-4.70		-9.38	14.00	Pass
BE40	MCS0	2	195	6925	Full	0.02	0.02	0.85	0.40	3.64	-4.70		-1.06	14.00	Pass
BE40	MCS0	2	203	6965	Full	0.02	0.02	0.90	0.39	3.66	-4.70		-1.04	14.00	Pass
BE40	MCS0	2	227	7085	Full	0.02	0.02	0.47	0.55	3.52	-4.70		-1.18	14.00	Pass
BE80	MCS0	2	199	6945	Full	0.02	0.01	2.30	1.86	5.09	-4.70		0.39	14.00	Pass
BE80	MCS0	2	215	7025	Full	0.02	0.01	1.96	1.51	4.75	-4.70		0.05	14.00	Pass
BE160	MCS0	2	207	6985	Full	0.01	0.02	4.99	5.11	8.06	-4.70		3.36	14.00	Pass

Power Setting	
Ant15	Ant10
	-5
	-5
	-5
	-15
	-12
	-9
	-0.5
	-0.5
	-0.5
	1
	1
	3.5



Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A-CDD	Ant15	5955	21.99	5944.05	5966.04	≤320	PASS
	Ant10	5955	21.66	5944.09	5965.75	≤320	PASS
	Ant15	6175	21.99	6164.08	6186.07	≤320	PASS
	Ant10	6175	22.01	6164.07	6186.08	≤320	PASS
	Ant15	6415	21.83	6403.91	6425.74	≤320	PASS
	Ant10	6415	21.60	6404.11	6425.71	≤320	PASS
	Ant15	6435	22.24	6423.51	6445.75	≤320	PASS
	Ant10	6435	21.94	6424.08	6446.02	≤320	PASS
	Ant15	6475	22.02	6464.09	6486.11	≤320	PASS
	Ant10	6475	21.91	6464.00	6485.91	≤320	PASS
	Ant15	6515	21.76	6503.98	6525.74	≤320	PASS
	Ant10	6515	21.92	6504.17	6526.09	≤320	PASS
	Ant15	6535	21.68	6524.02	6545.70	≤320	PASS
	Ant10	6535	21.52	6524.13	6545.65	≤320	PASS
	Ant15	6695	22.06	6684.04	6706.10	≤320	PASS
	Ant10	6695	21.50	6684.15	6705.65	≤320	PASS
	Ant15	6855	21.81	6843.99	6865.80	≤320	PASS
	Ant10	6855	21.27	6844.33	6865.60	≤320	PASS
	Ant15	6875	22.61	6863.58	6886.19	≤320	PASS
	Ant10	6875	21.36	6864.33	6885.69	≤320	PASS
	Ant15	6895	22.09	6883.99	6906.08	≤320	PASS
	Ant10	6895	21.60	6884.08	6905.68	≤320	PASS
	Ant15	6995	20.65	6984.28	7004.93	≤320	PASS
	Ant10	6995	21.14	6984.06	7005.20	≤320	PASS
	Ant15	7095	20.62	7084.92	7105.54	≤320	PASS
	Ant10	7095	21.37	7084.29	7105.66	≤320	PASS
11BE20MIMO	Ant15	5955	21.62	5944.19	5965.81	≤320	PASS
	Ant10	5955	22.68	5943.61	5966.29	≤320	PASS
	Ant15	6175	22.05	6163.67	6185.72	≤320	PASS
	Ant10	6175	21.43	6164.22	6185.65	≤320	PASS
	Ant15	6415	21.99	6403.74	6425.73	≤320	PASS
	Ant10	6415	22.15	6404.15	6426.30	≤320	PASS



	Ant15	6435	21.84	6423.89	6445.73	≤320	PASS
	Ant10	6435	22.81	6423.33	6446.14	≤320	PASS
	Ant15	6475	22.79	6463.49	6486.28	≤320	PASS
	Ant10	6475	23.00	6463.57	6486.57	≤320	PASS
	Ant15	6515	22.00	6503.87	6525.87	≤320	PASS
	Ant10	6515	22.34	6503.97	6526.31	≤320	PASS
	Ant15	6535	22.02	6524.09	6546.11	≤320	PASS
	Ant10	6535	21.58	6524.25	6545.83	≤320	PASS
	Ant15	6695	22.44	6683.77	6706.21	≤320	PASS
	Ant10	6695	23.15	6683.30	6706.45	≤320	PASS
	Ant15	6855	21.91	6844.03	6865.94	≤320	PASS
	Ant10	6855	21.65	6844.02	6865.67	≤320	PASS
	Ant15	6875	21.88	6863.92	6885.80	≤320	PASS
	Ant10	6875	22.46	6863.90	6886.36	≤320	PASS
	Ant15	6895	21.67	6884.16	6905.83	≤320	PASS
	Ant10	6895	22.21	6884.13	6906.34	≤320	PASS
	Ant15	6995	21.62	6983.60	7005.22	≤320	PASS
	Ant10	6995	21.21	6984.32	7005.53	≤320	PASS
	Ant15	7095	21.49	7084.21	7105.70	≤320	PASS
	Ant10	7095	21.20	7084.40	7105.60	≤320	PASS
11BE40MIMO	Ant15	5965	43.44	5942.94	5986.38	≤320	PASS
	Ant10	5965	41.46	5944.36	5985.82	≤320	PASS
	Ant15	6165	41.86	6143.72	6185.58	≤320	PASS
	Ant10	6165	41.86	6144.14	6186.00	≤320	PASS
	Ant15	6405	43.10	6382.66	6425.76	≤320	PASS
	Ant10	6405	42.70	6383.72	6426.42	≤320	PASS
	Ant15	6445	43.38	6422.76	6466.14	≤320	PASS
	Ant10	6445	43.24	6423.44	6466.68	≤320	PASS
	Ant15	6485	42.66	6463.94	6506.60	≤320	PASS
	Ant10	6485	42.38	6463.52	6505.90	≤320	PASS
	Ant15	6525	42.92	6503.38	6546.30	≤320	PASS
	Ant10	6525	42.84	6503.48	6546.32	≤320	PASS
	Ant15	6565	43.90	6542.88	6586.78	≤320	PASS
	Ant10	6565	42.34	6543.76	6586.10	≤320	PASS
	Ant15	6685	41.92	6664.14	6706.06	≤320	PASS
	Ant10	6685	41.74	6664.16	6705.90	≤320	PASS
	Ant15	6845	42.16	6824.20	6866.36	≤320	PASS
	Ant10	6845	42.32	6823.64	6865.96	≤320	PASS



	Ant15	6885	43.18	6863.52	6906.70	≤320	PASS
	Ant10	6885	42.68	6863.98	6906.66	≤320	PASS
	Ant15	6925	43.88	6902.96	6946.84	≤320	PASS
	Ant10	6925	42.84	6903.82	6946.66	≤320	PASS
	Ant15	6965	43.74	6942.82	6986.56	≤320	PASS
	Ant10	6965	43.18	6943.46	6986.64	≤320	PASS
	Ant15	7085	44.14	7062.84	7106.98	≤320	PASS
	Ant10	7085	43.98	7063.12	7107.10	≤320	PASS
11BE80MIMO	Ant15	5985	84.84	5941.32	6026.16	≤320	PASS
	Ant10	5985	82.60	5943.96	6026.56	≤320	PASS
	Ant15	6145	82.60	6103.24	6185.84	≤320	PASS
	Ant10	6145	85.92	6101.24	6187.16	≤320	PASS
	Ant15	6385	85.36	6341.08	6426.44	≤320	PASS
	Ant10	6385	82.20	6343.80	6426.00	≤320	PASS
	Ant15	6465	82.48	6424.24	6506.72	≤320	PASS
	Ant10	6465	86.44	6421.76	6508.20	≤320	PASS
	Ant15	6545	85.60	6502.40	6588.00	≤320	PASS
	Ant10	6545	85.52	6501.76	6587.28	≤320	PASS
	Ant15	6625	83.84	6582.76	6666.60	≤320	PASS
	Ant10	6625	84.68	6583.24	6667.92	≤320	PASS
	Ant15	6705	83.72	6662.48	6746.20	≤320	PASS
	Ant10	6705	82.60	6663.24	6745.84	≤320	PASS
	Ant15	6785	82.88	6743.44	6826.32	≤320	PASS
	Ant10	6785	84.28	6742.24	6826.52	≤320	PASS
	Ant15	6865	86.40	6822.12	6908.52	≤320	PASS
	Ant10	6865	86.88	6821.24	6908.12	≤320	PASS
	Ant15	6945	85.20	6902.20	6987.40	≤320	PASS
	Ant10	6945	86.12	6902.64	6988.76	≤320	PASS
11BE160MIMO	Ant15	7025	86.08	6981.64	7067.72	≤320	PASS
	Ant10	7025	86.76	6980.88	7067.64	≤320	PASS
	Ant15	6025	177.12	5936.44	6113.56	≤320	PASS
	Ant10	6025	176.40	5937.16	6113.56	≤320	PASS
	Ant15	6185	178.96	6094.76	6273.72	≤320	PASS
	Ant10	6185	175.84	6096.12	6271.96	≤320	PASS
	Ant15	6345	176.80	6256.68	6433.48	≤320	PASS
	Ant10	6345	175.84	6256.36	6432.20	≤320	PASS
	Ant15	6505	178.00	6415.96	6593.96	≤320	PASS
	Ant10	6505	176.96	6415.96	6592.92	≤320	PASS




	Ant15	6665	176.32	6576.36	6752.68	≤320	PASS
	Ant10	6665	175.20	6577.56	6752.76	≤320	PASS
	Ant15	6825	174.24	6737.64	6911.88	≤320	PASS
	Ant10	6825	172.48	6739.08	6911.56	≤320	PASS
	Ant15	6985	177.04	6895.40	7072.44	≤320	PASS
	Ant10	6985	172.88	6897.88	7070.76	≤320	PASS
11BE320MIMO	Ant15	6105	346.24	5930.92	6277.16	---	---
	Ant10	6105	345.12	5932.20	6277.32	---	---
	Ant15	6265	345.60	6090.60	6436.20	---	---
	Ant10	6265	344.96	6092.04	6437.00	---	---
	Ant15	6425	347.20	6249.96	6597.16	---	---
	Ant10	6425	347.04	6250.76	6597.80	---	---
	Ant15	6585	349.12	6409.00	6758.12	---	---
	Ant10	6585	348.80	6411.40	6760.20	---	---
	Ant15	6745	350.88	6570.28	6921.16	---	---
	Ant10	6745	346.08	6572.52	6918.60	---	---
	Ant15	6905	352.64	6728.04	7080.68	---	---
	Ant10	6905	347.20	6733.32	7080.52	---	---


Note1: For channels with a nominal bandwidth of 320MHz, compliance is demonstrated by way of the 99%BW.


Note2: For channels with a nominal bandwidth less than 320MHz(e.g 20,40,80,160MHz), compliance is demonstrated by way of the 26dB EBW.





Test Graphs

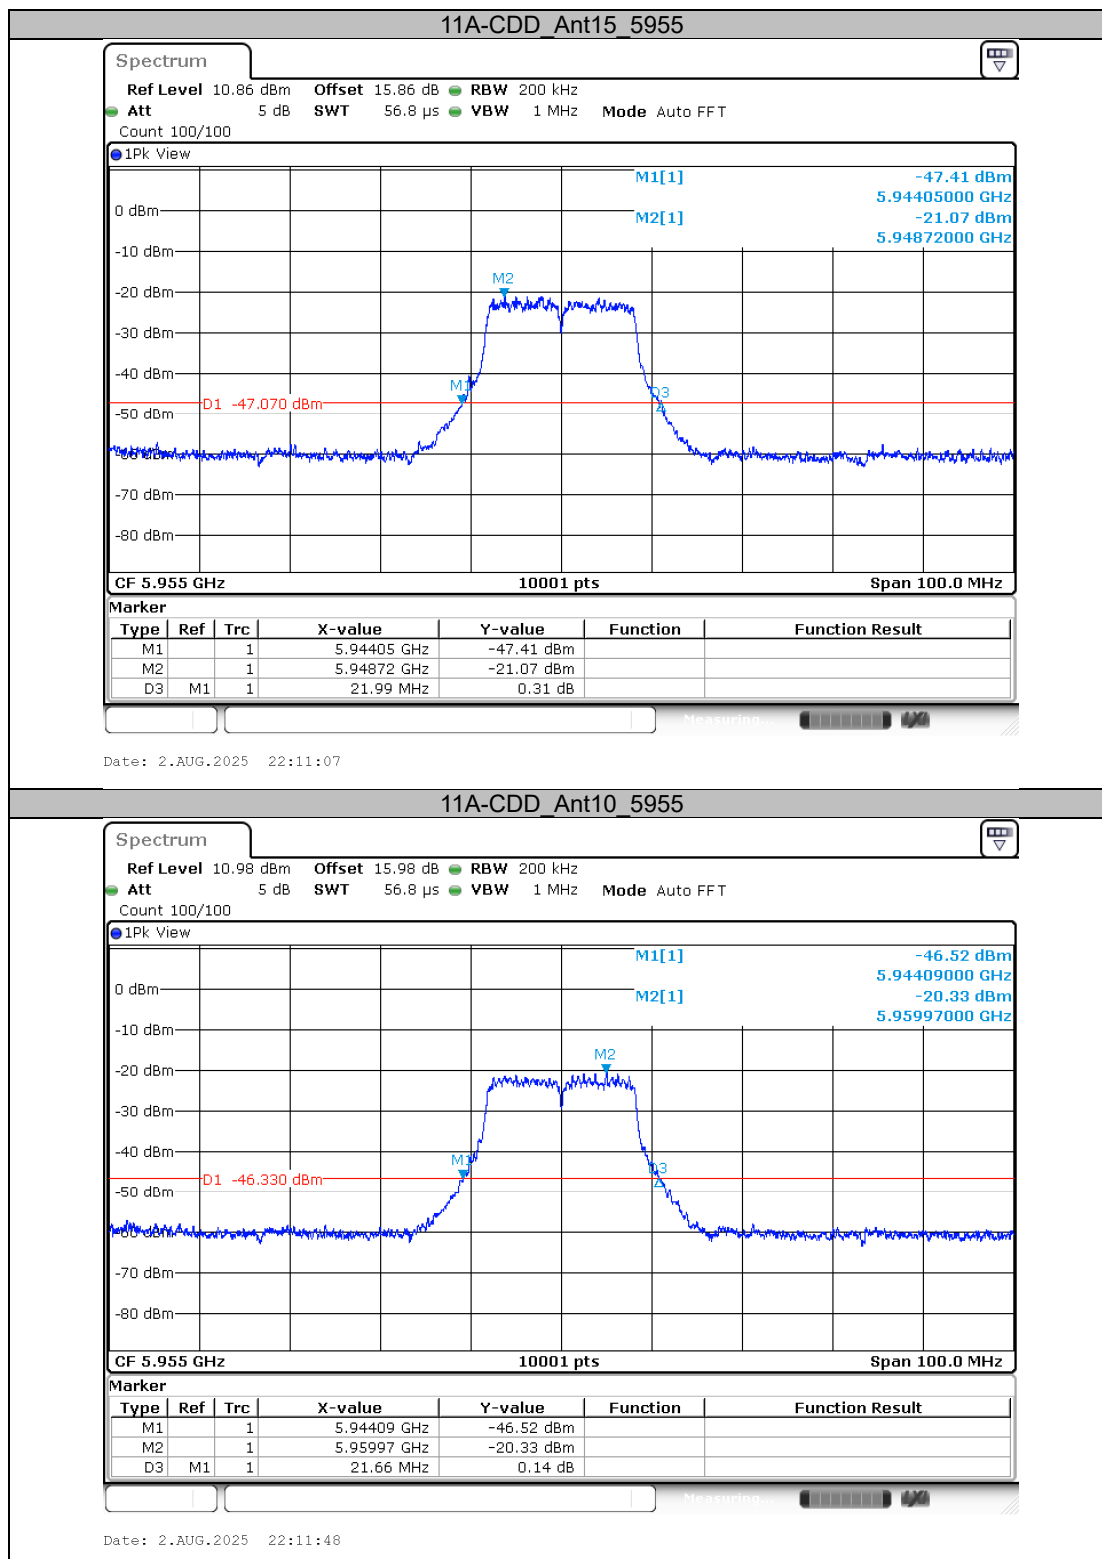


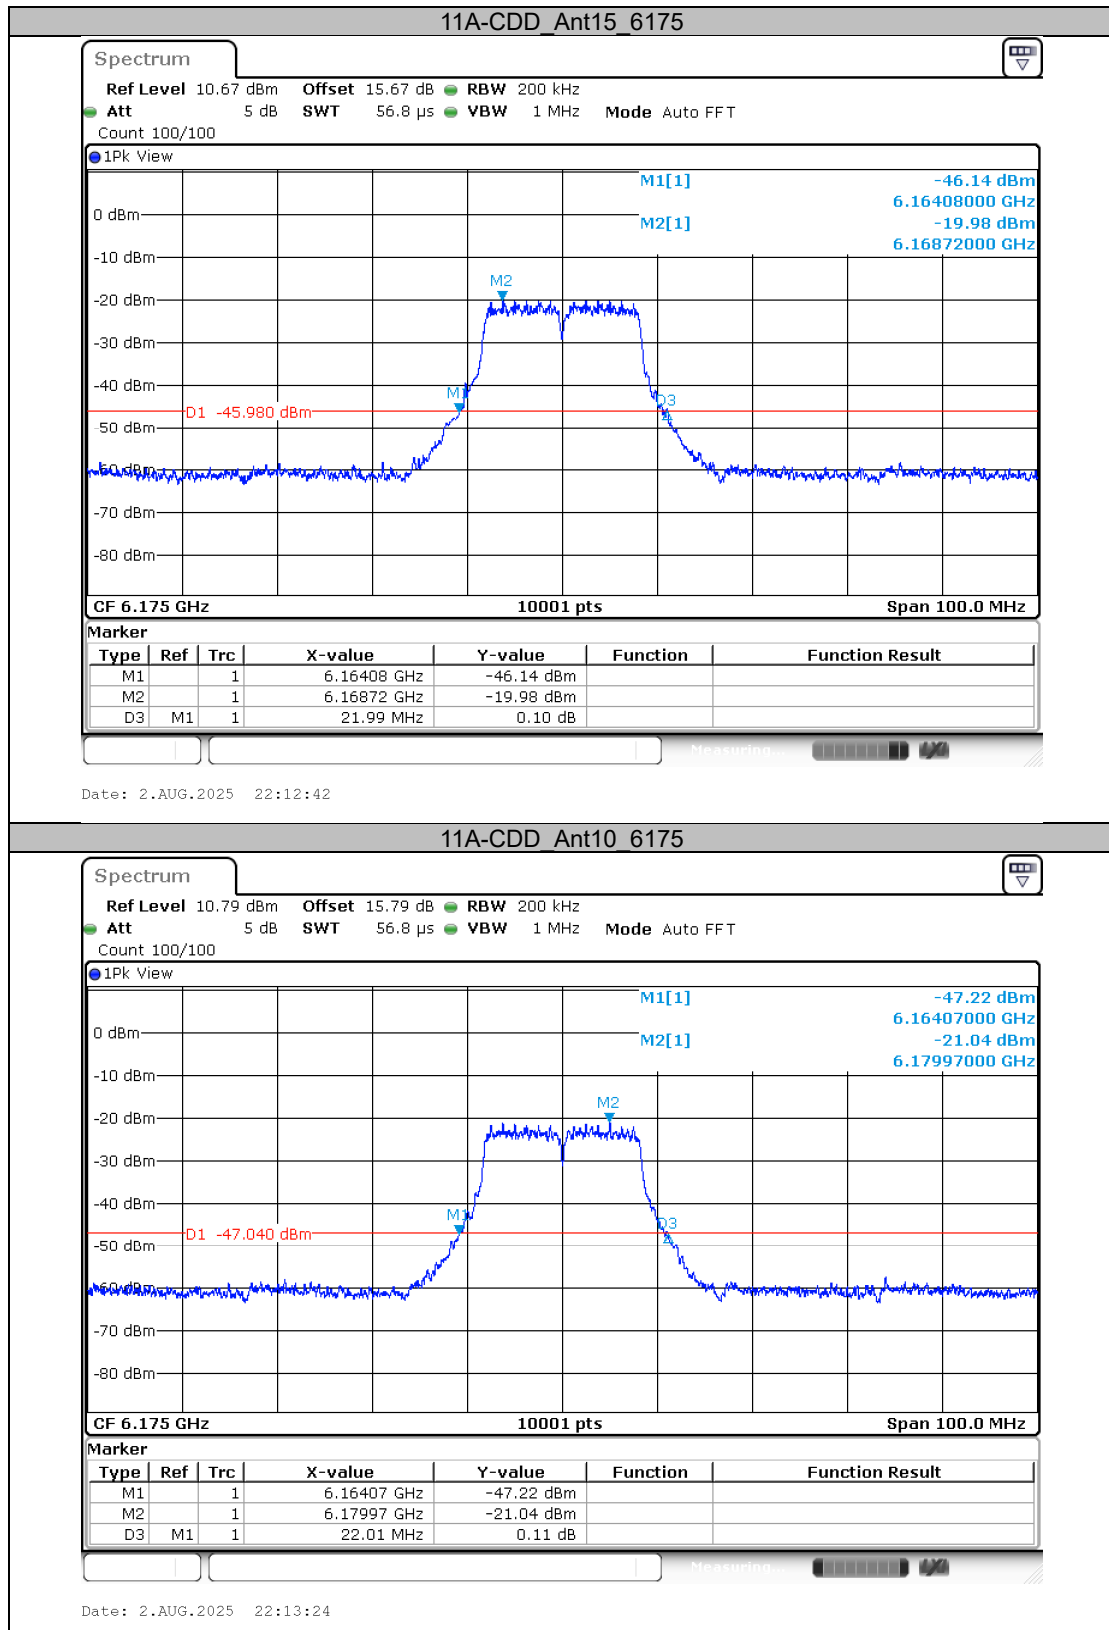


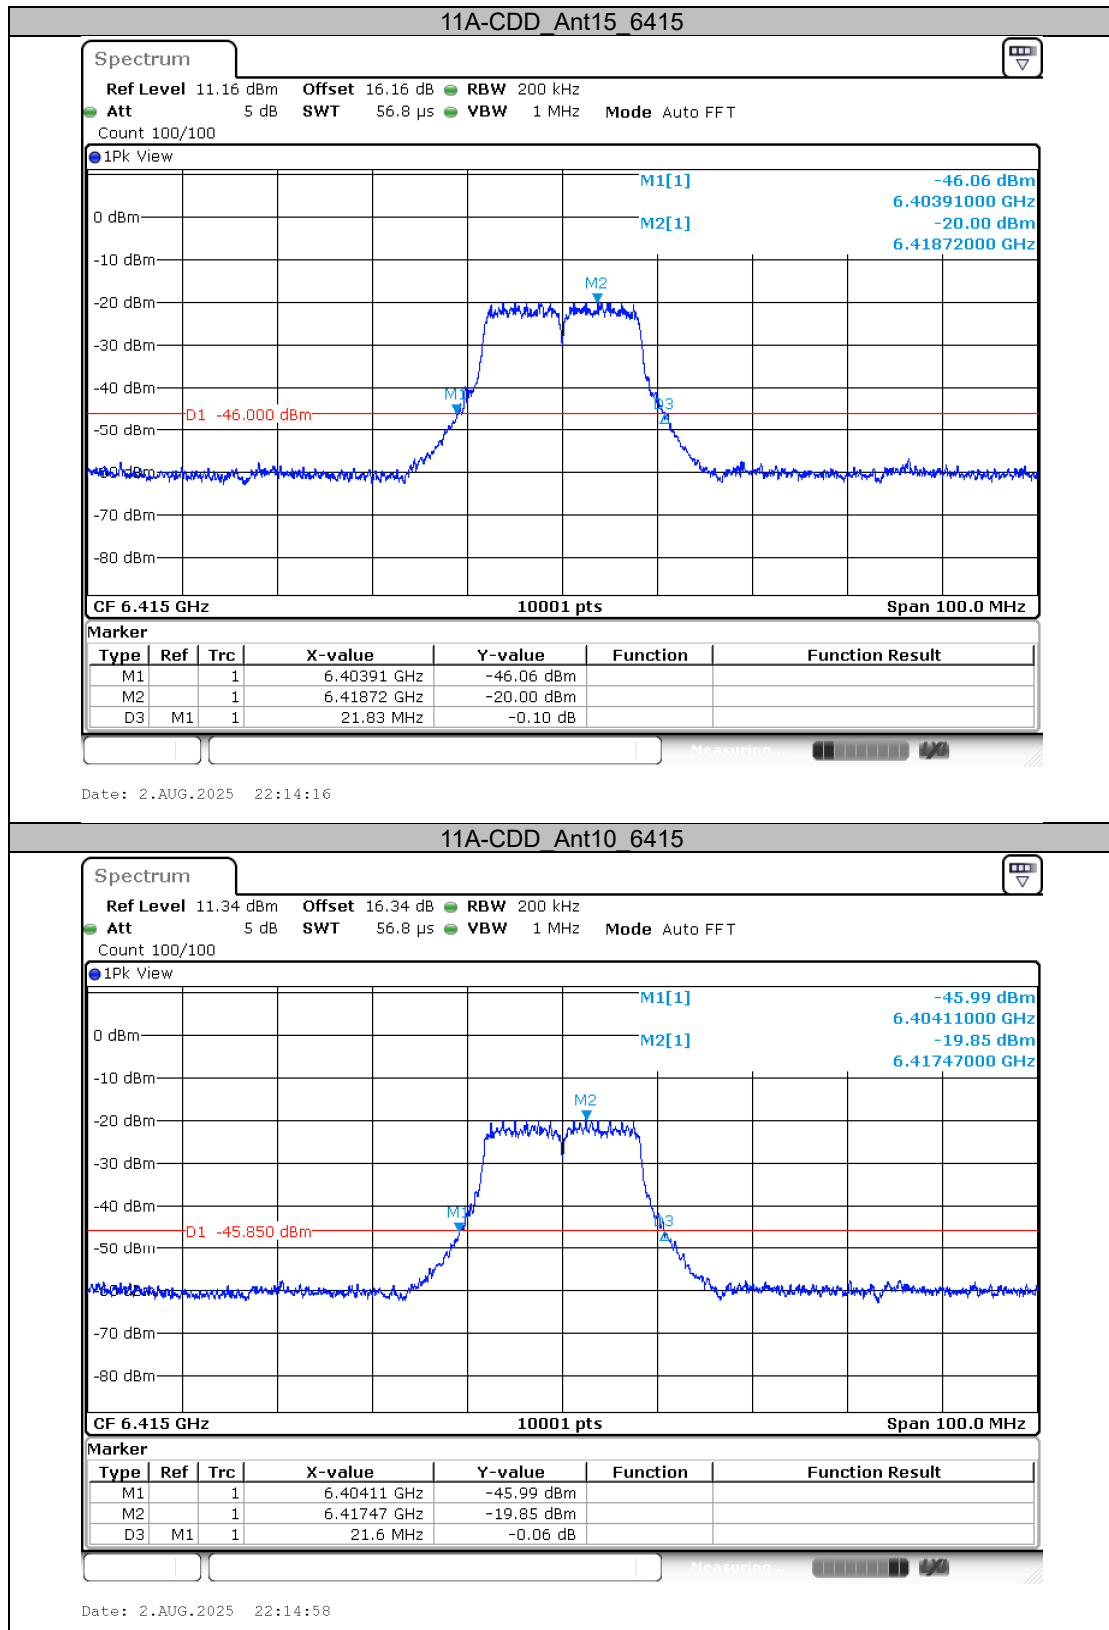


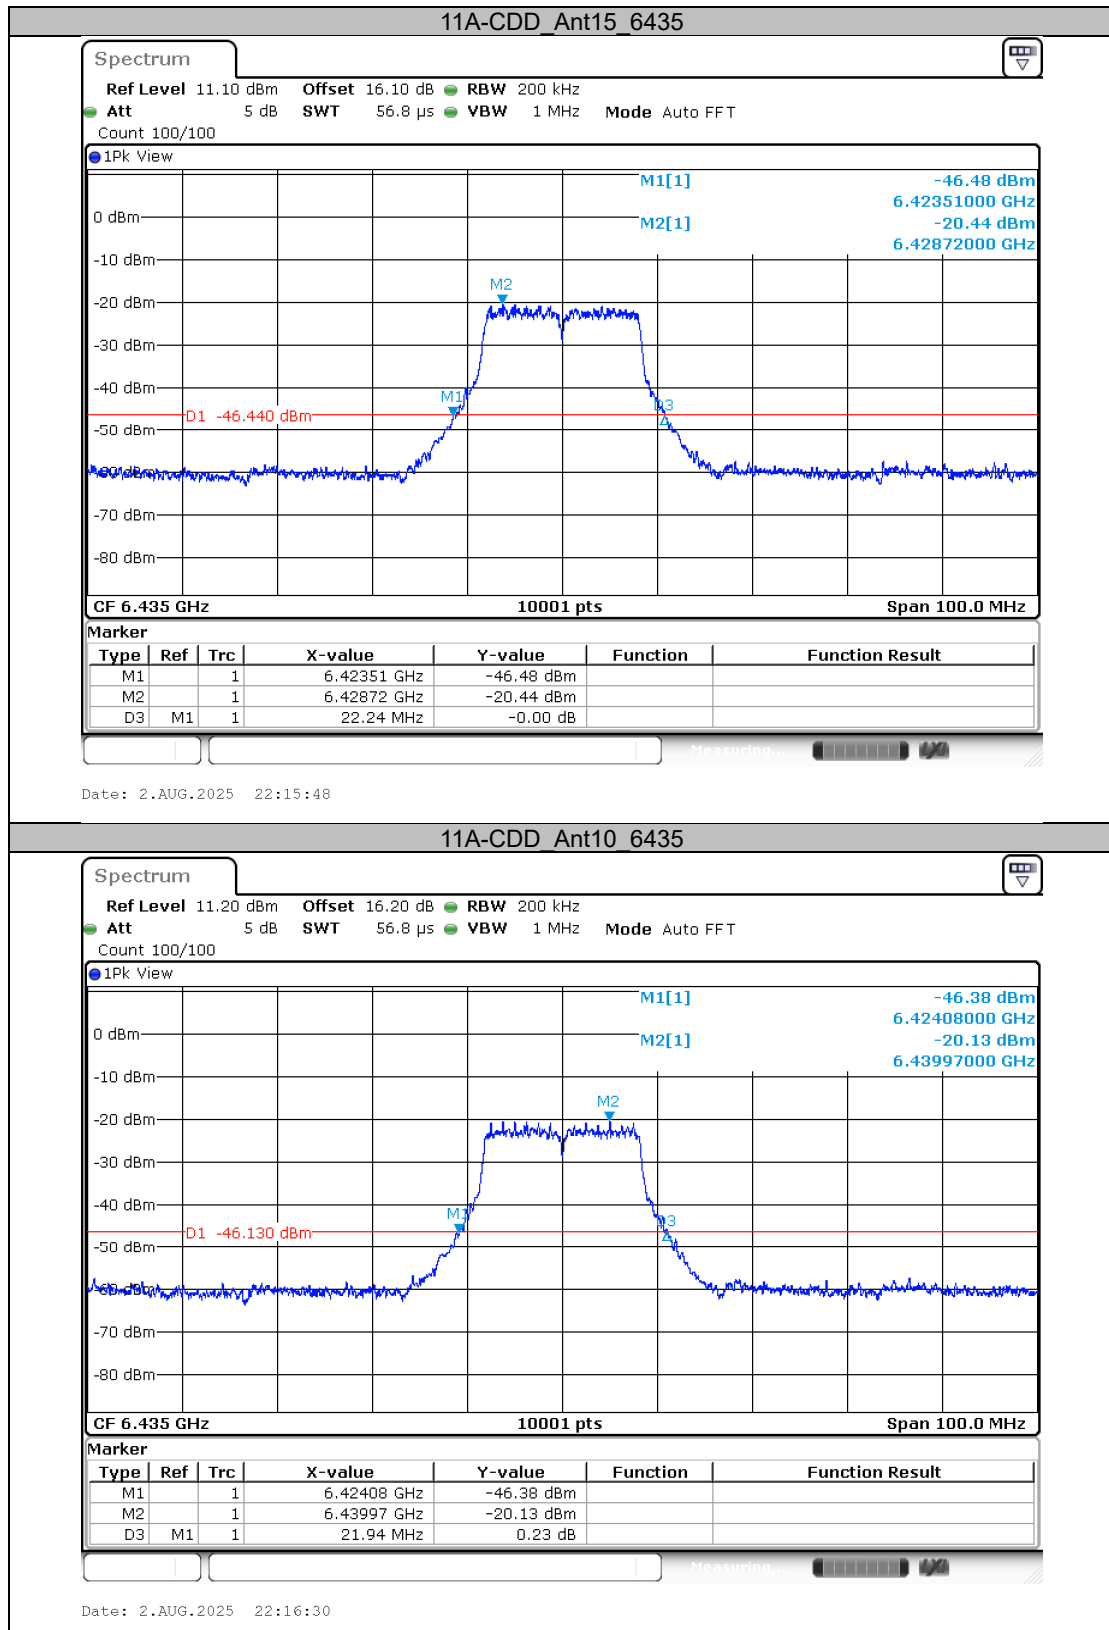


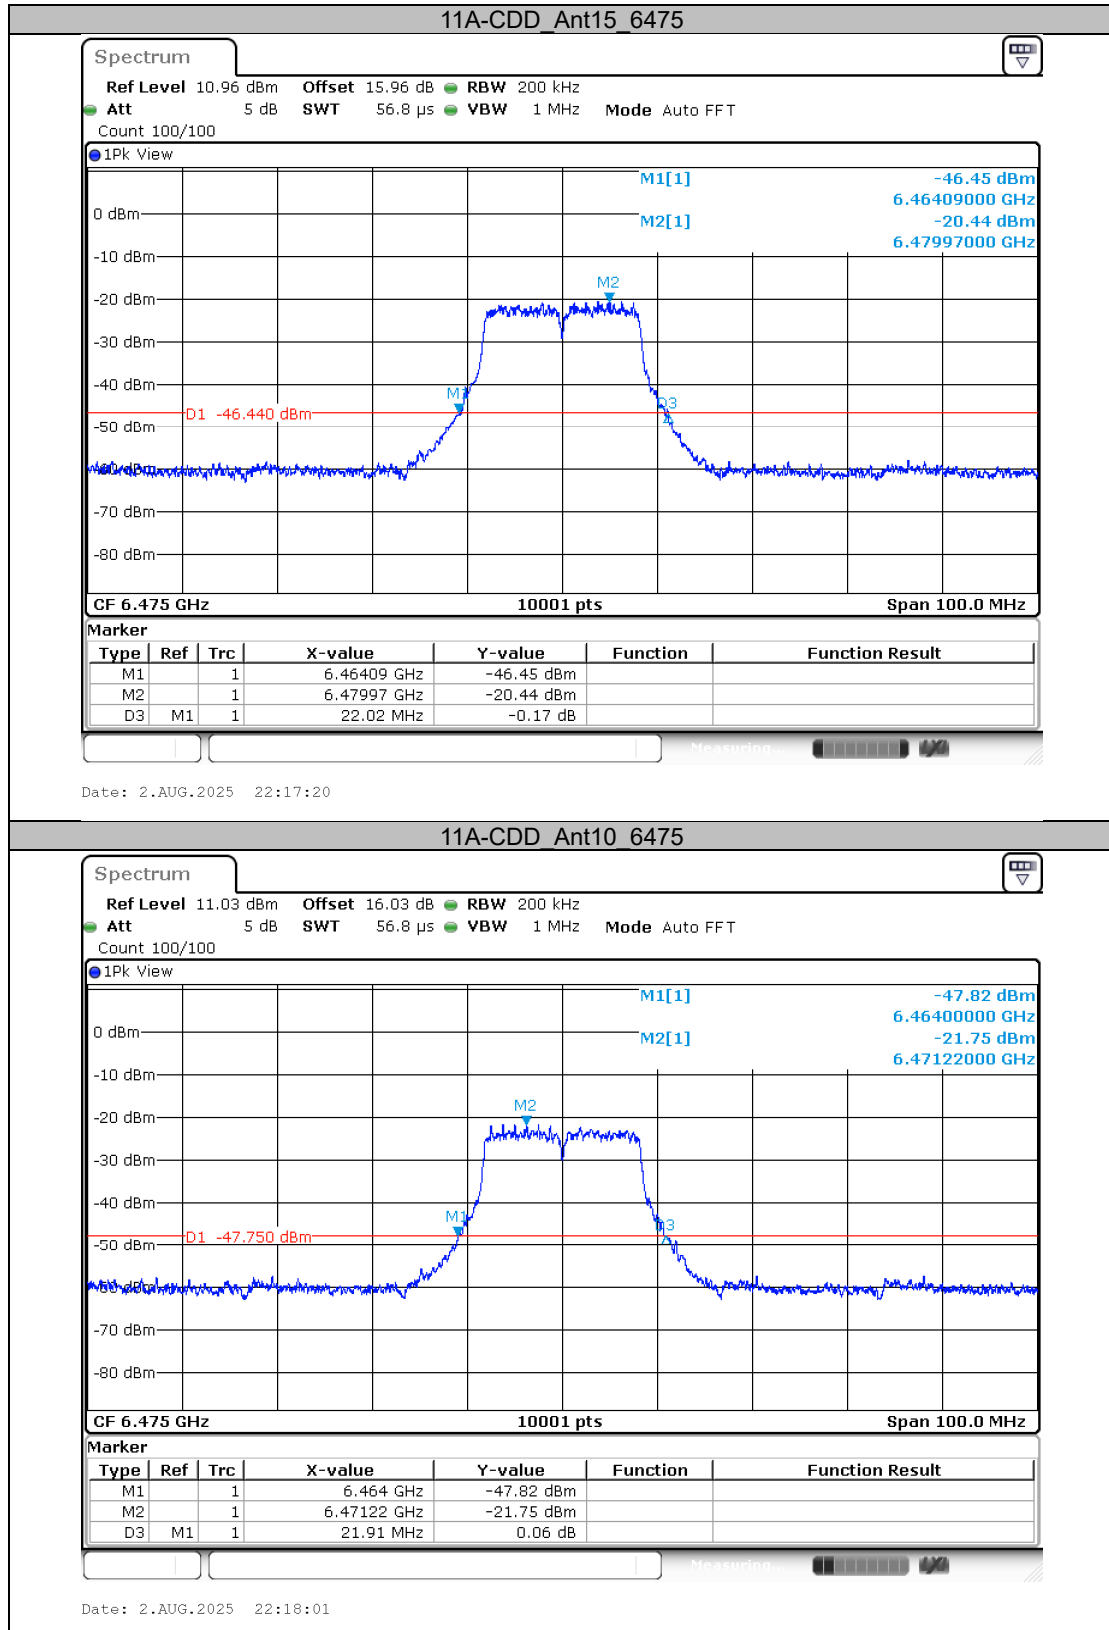


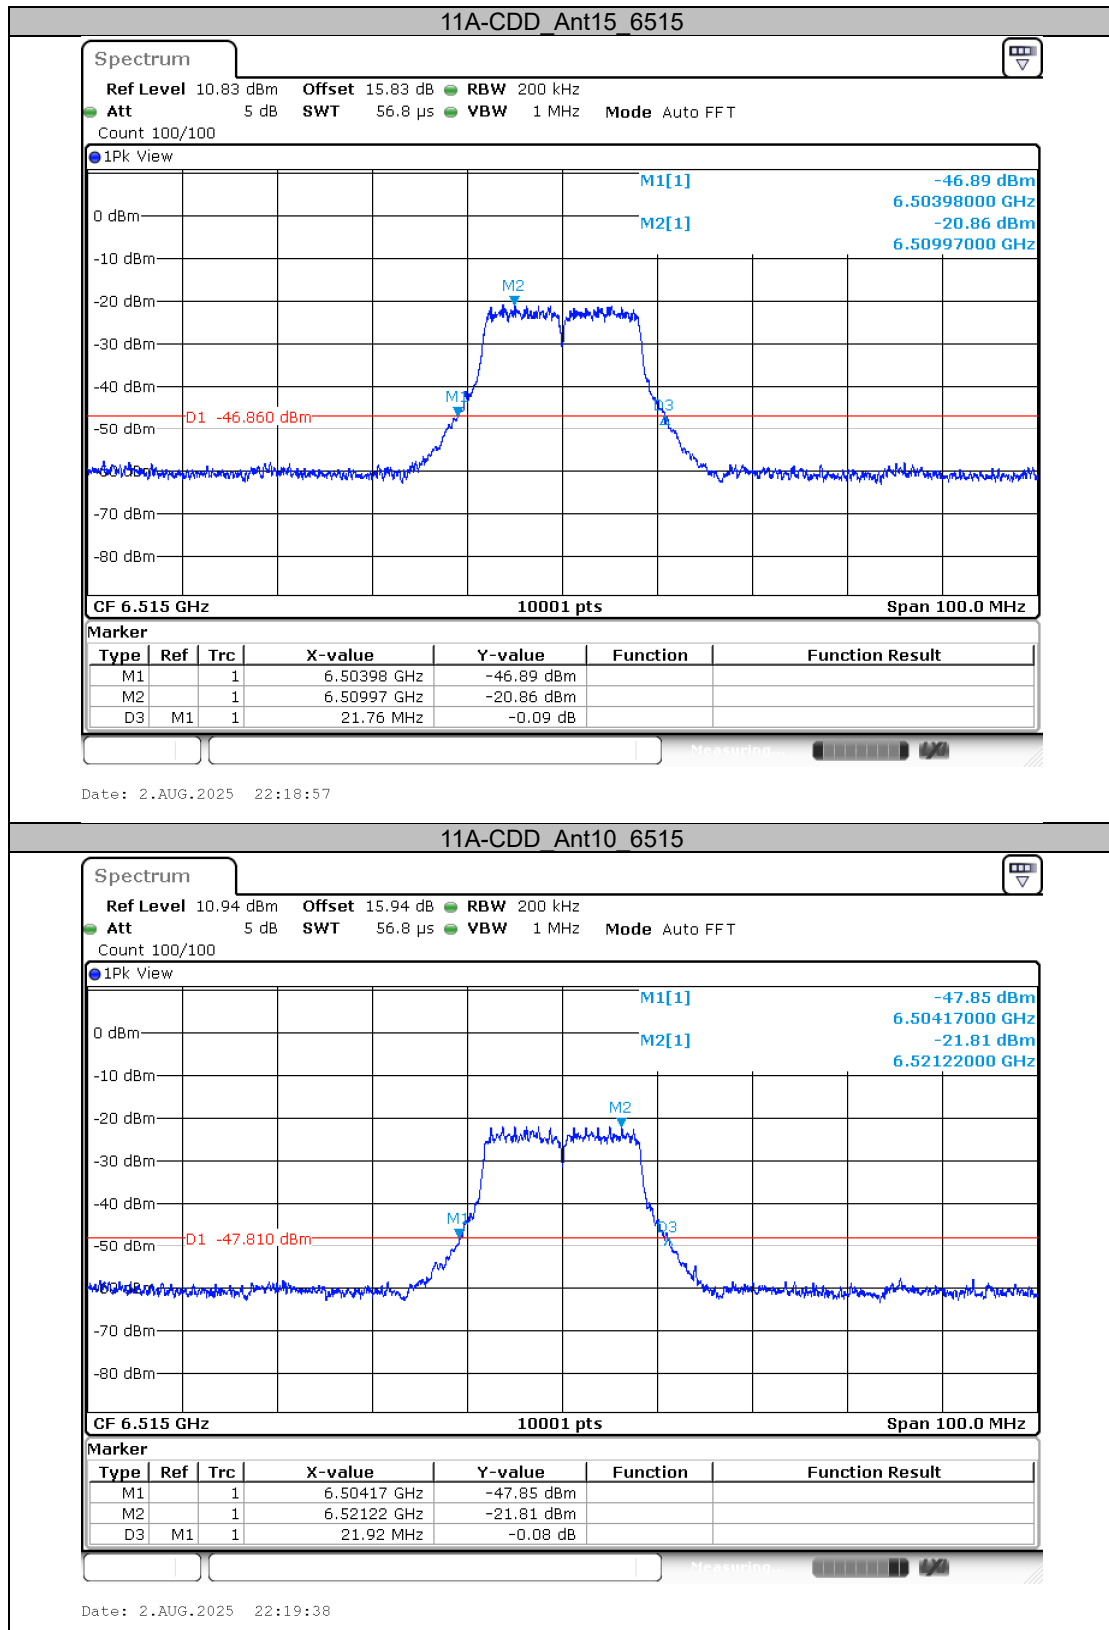


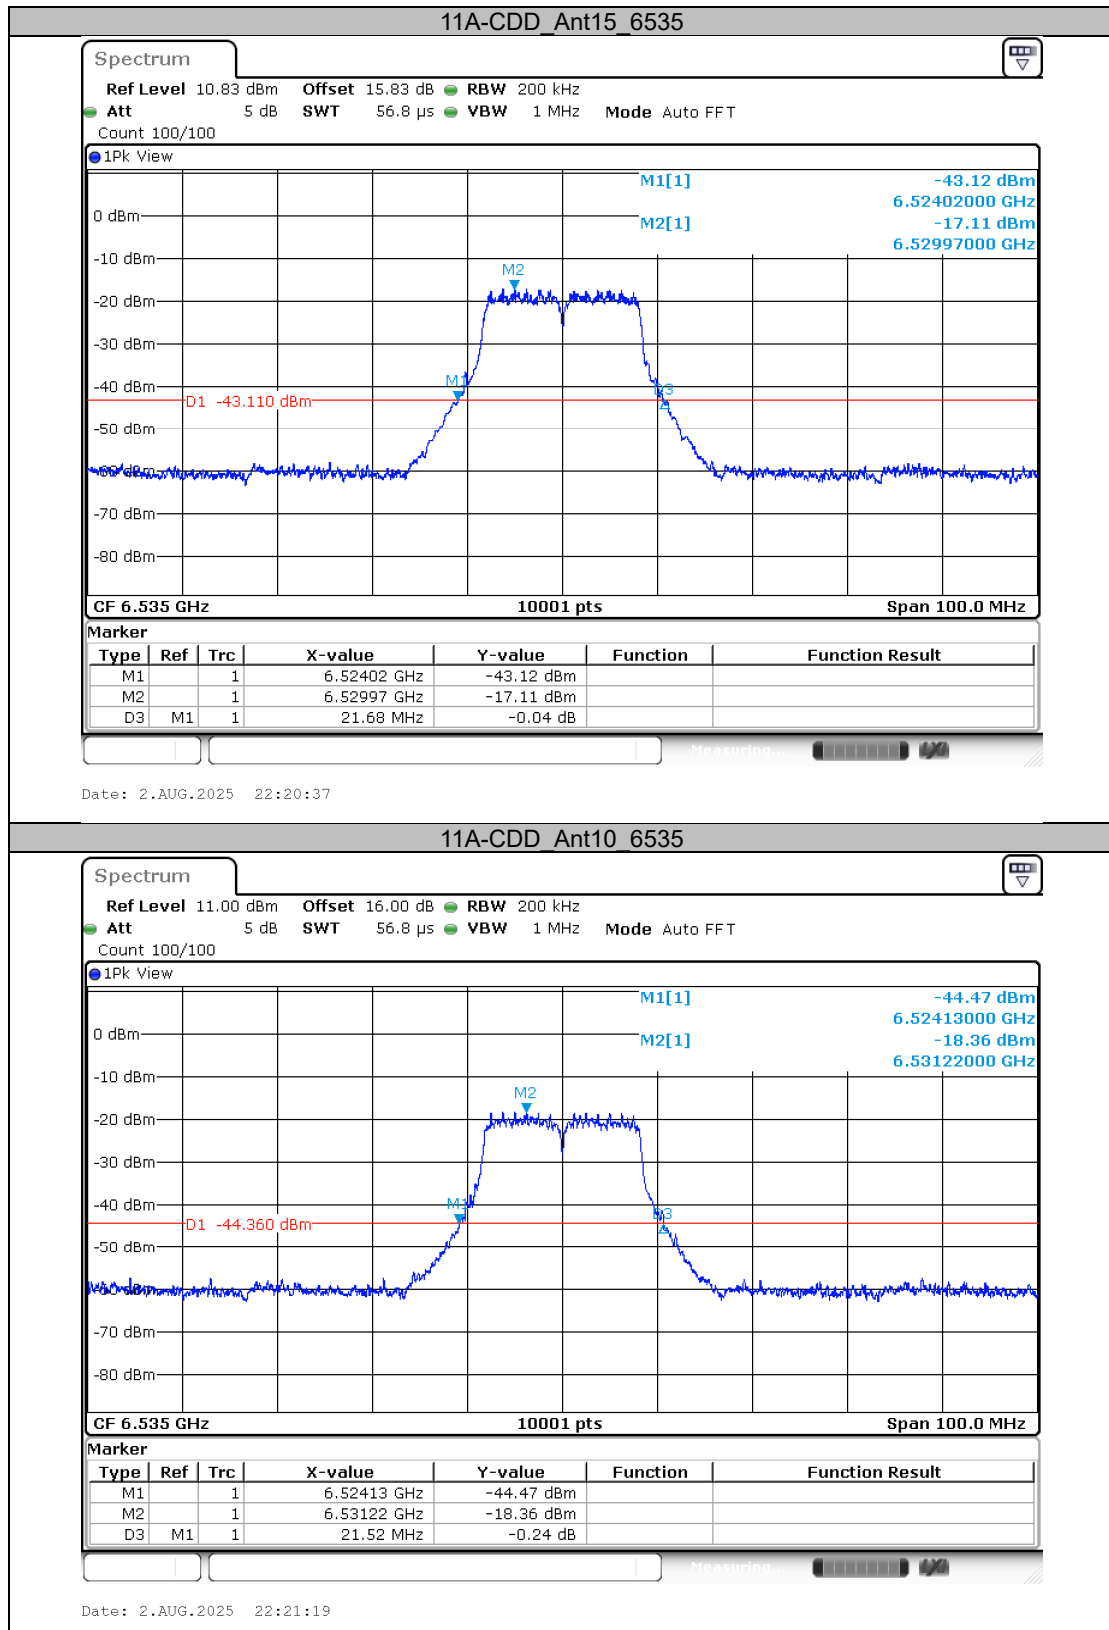


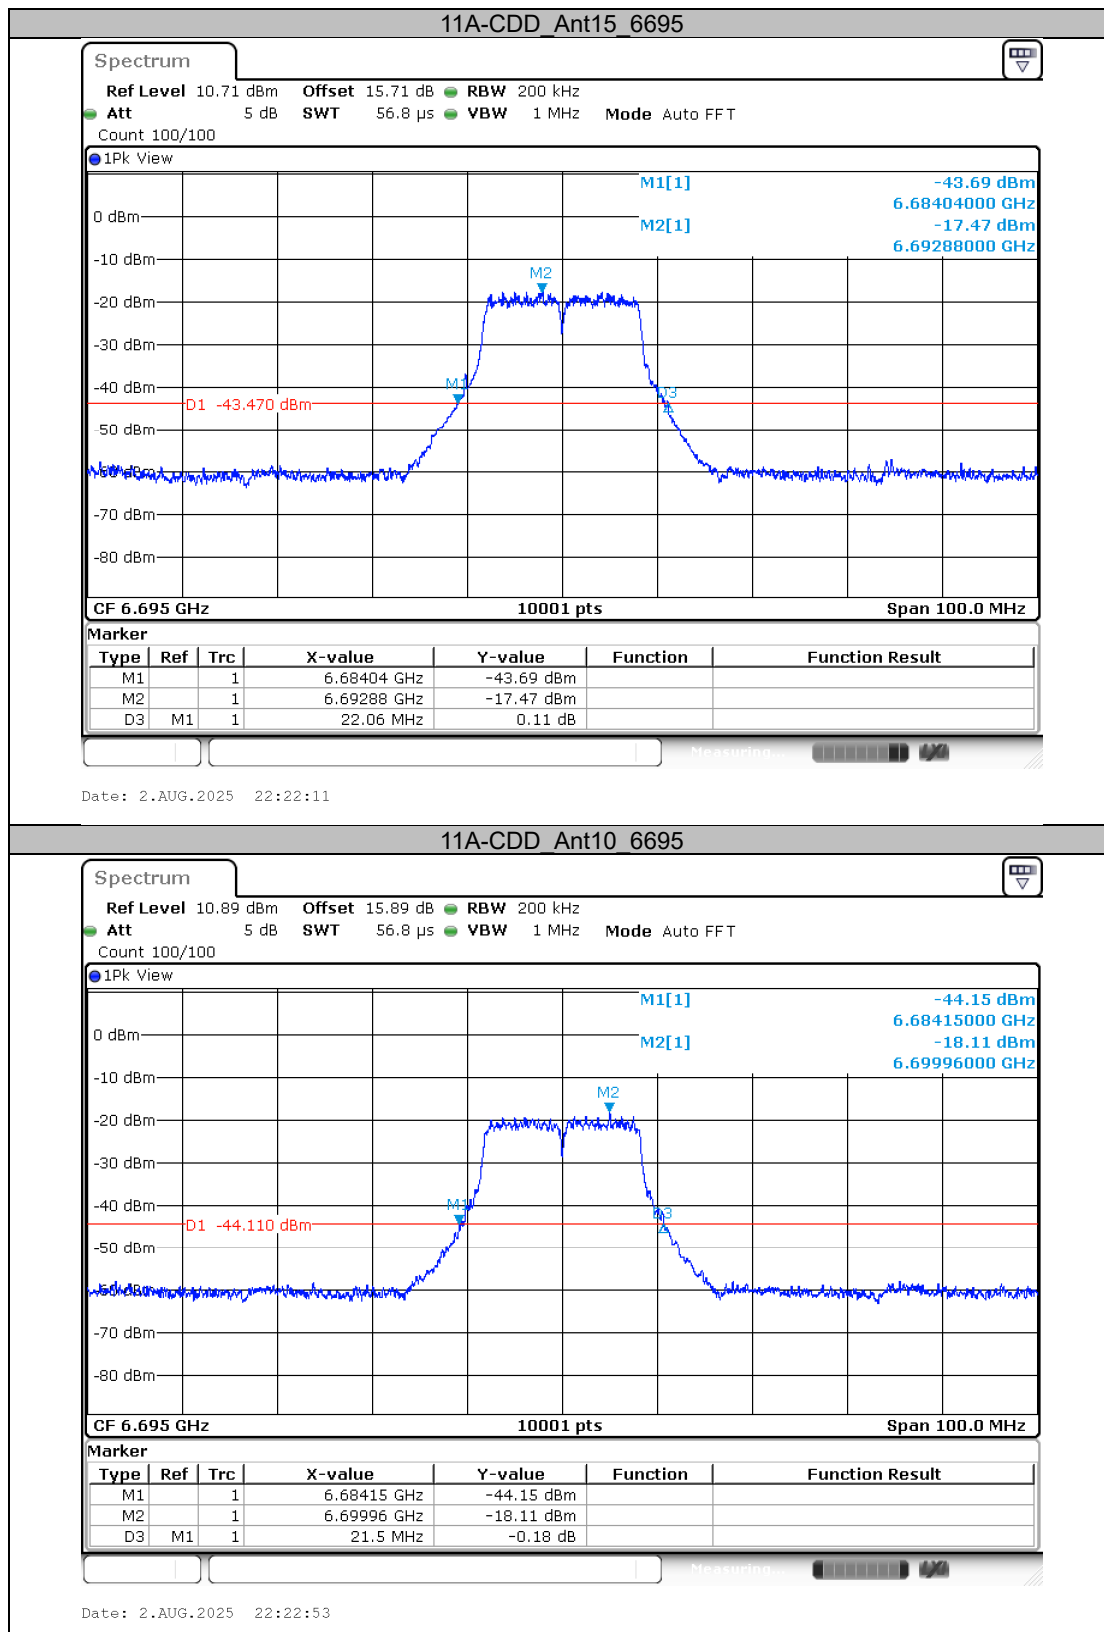


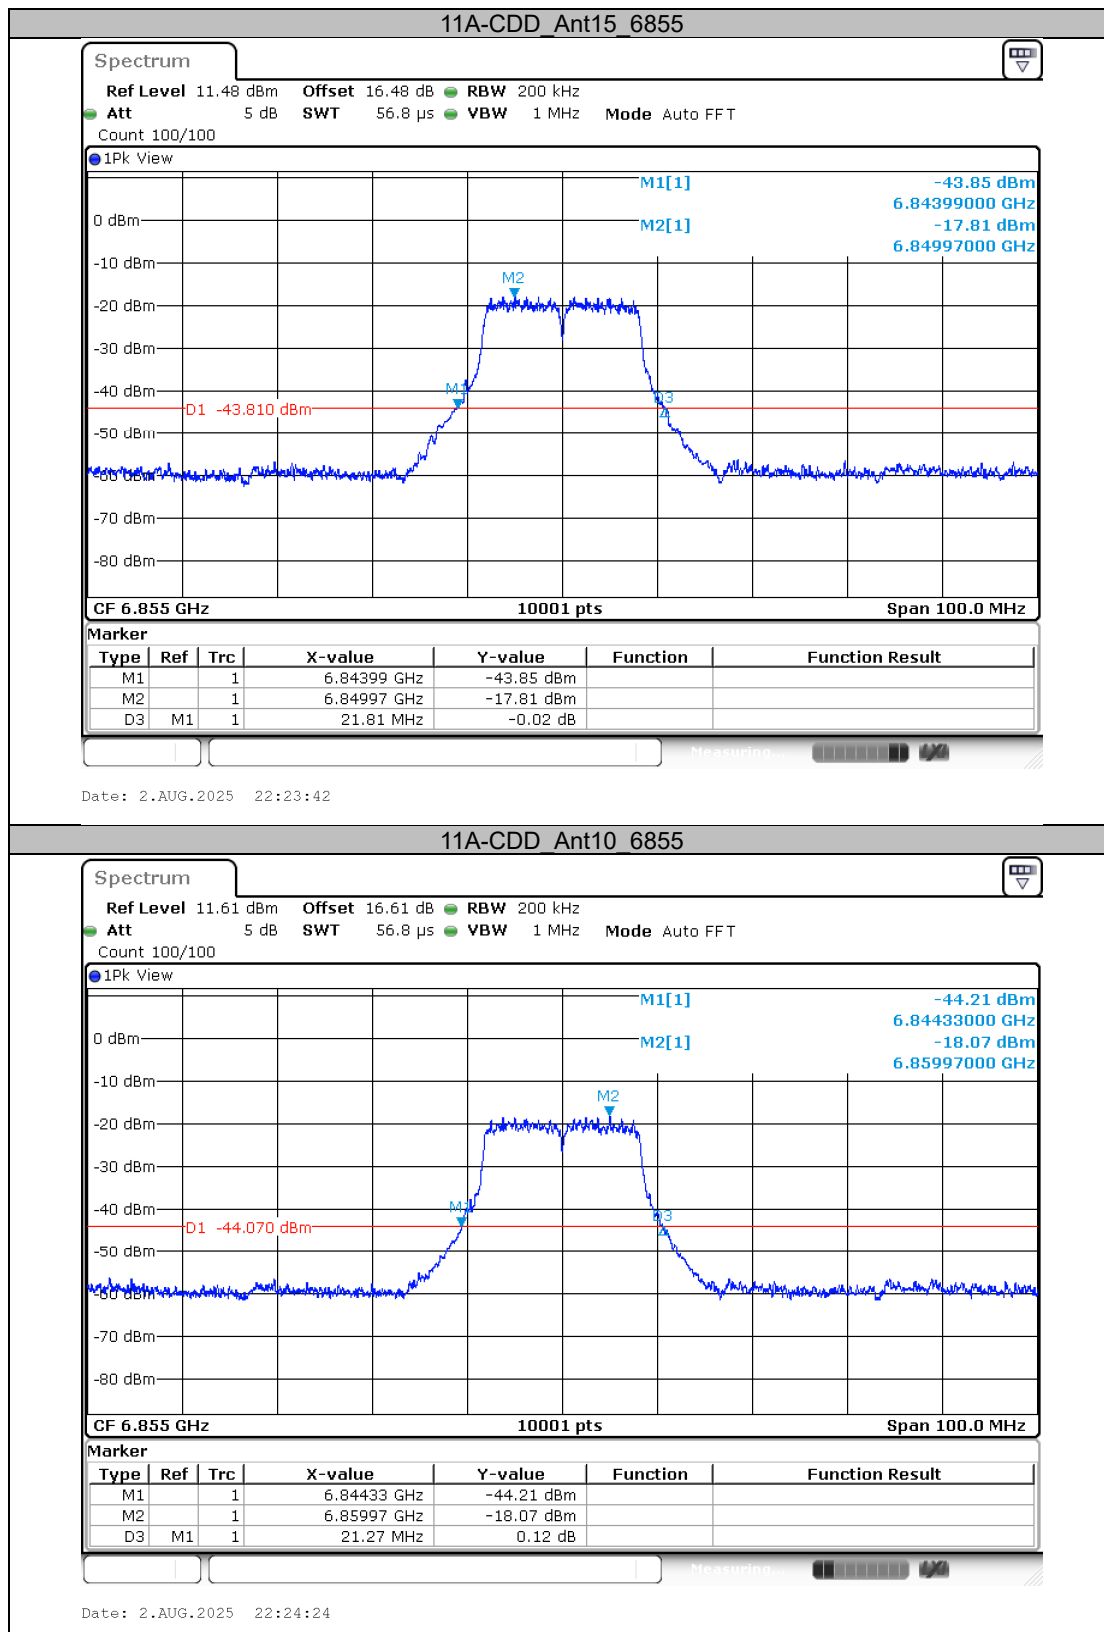


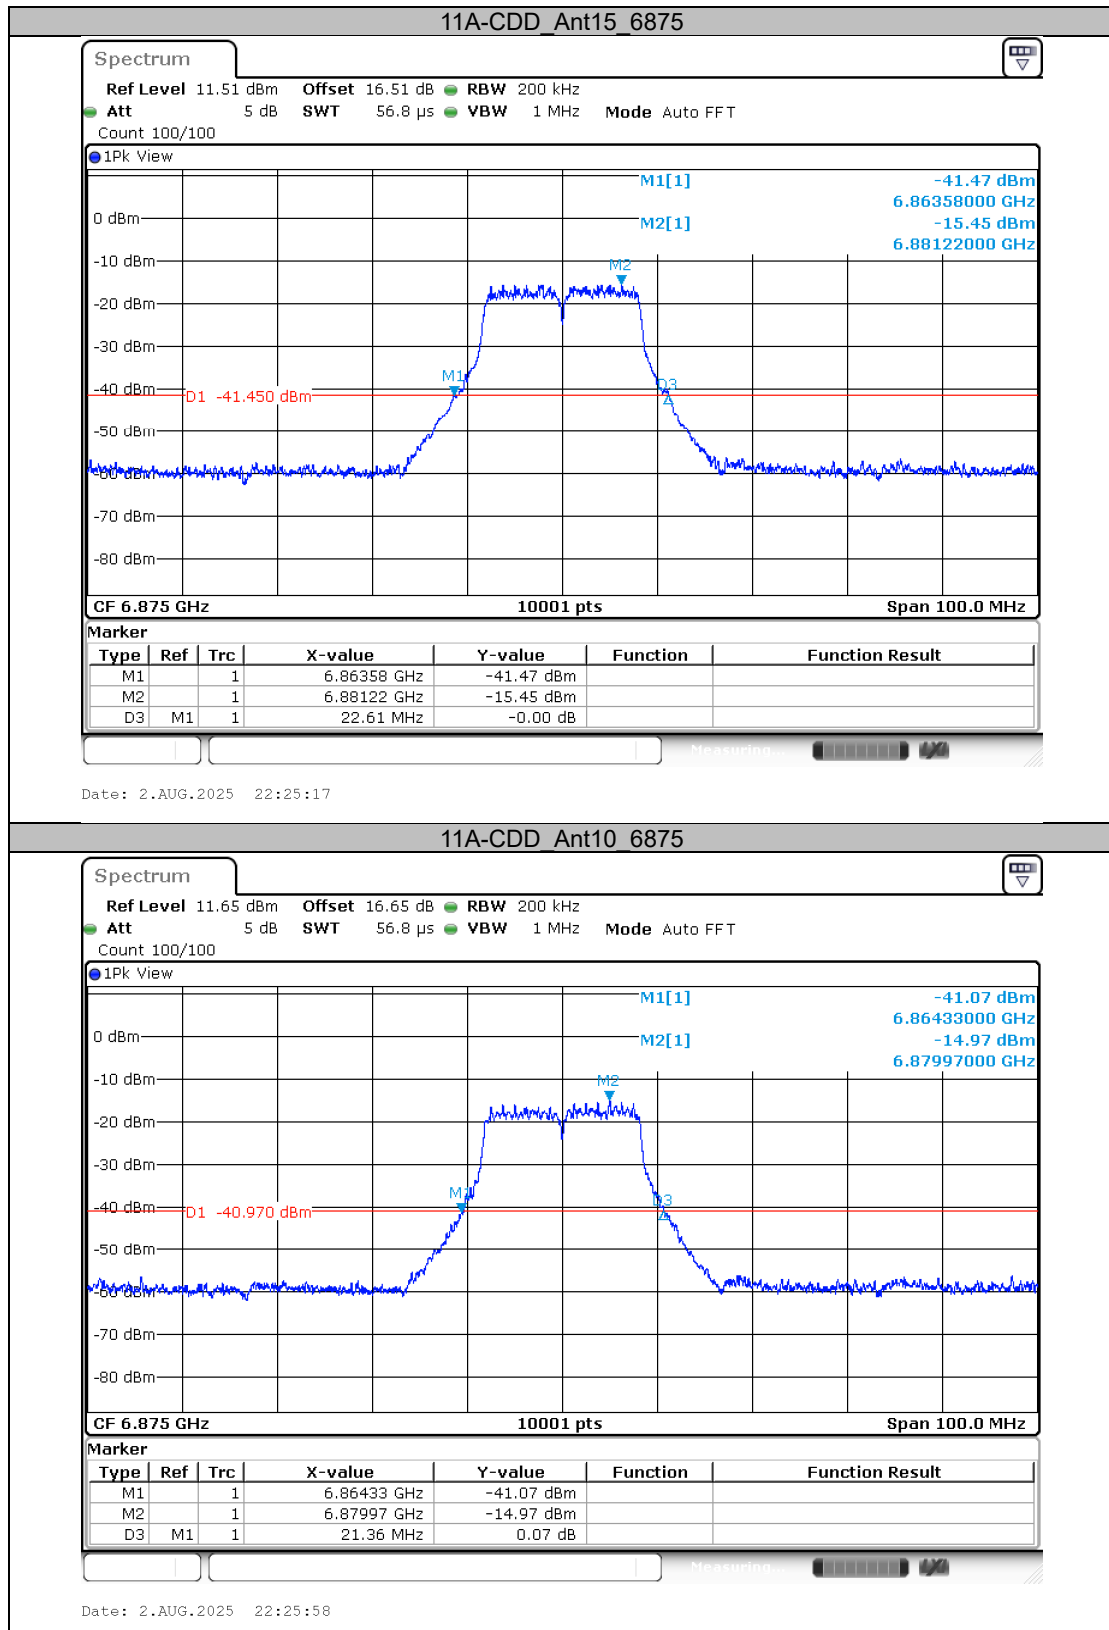


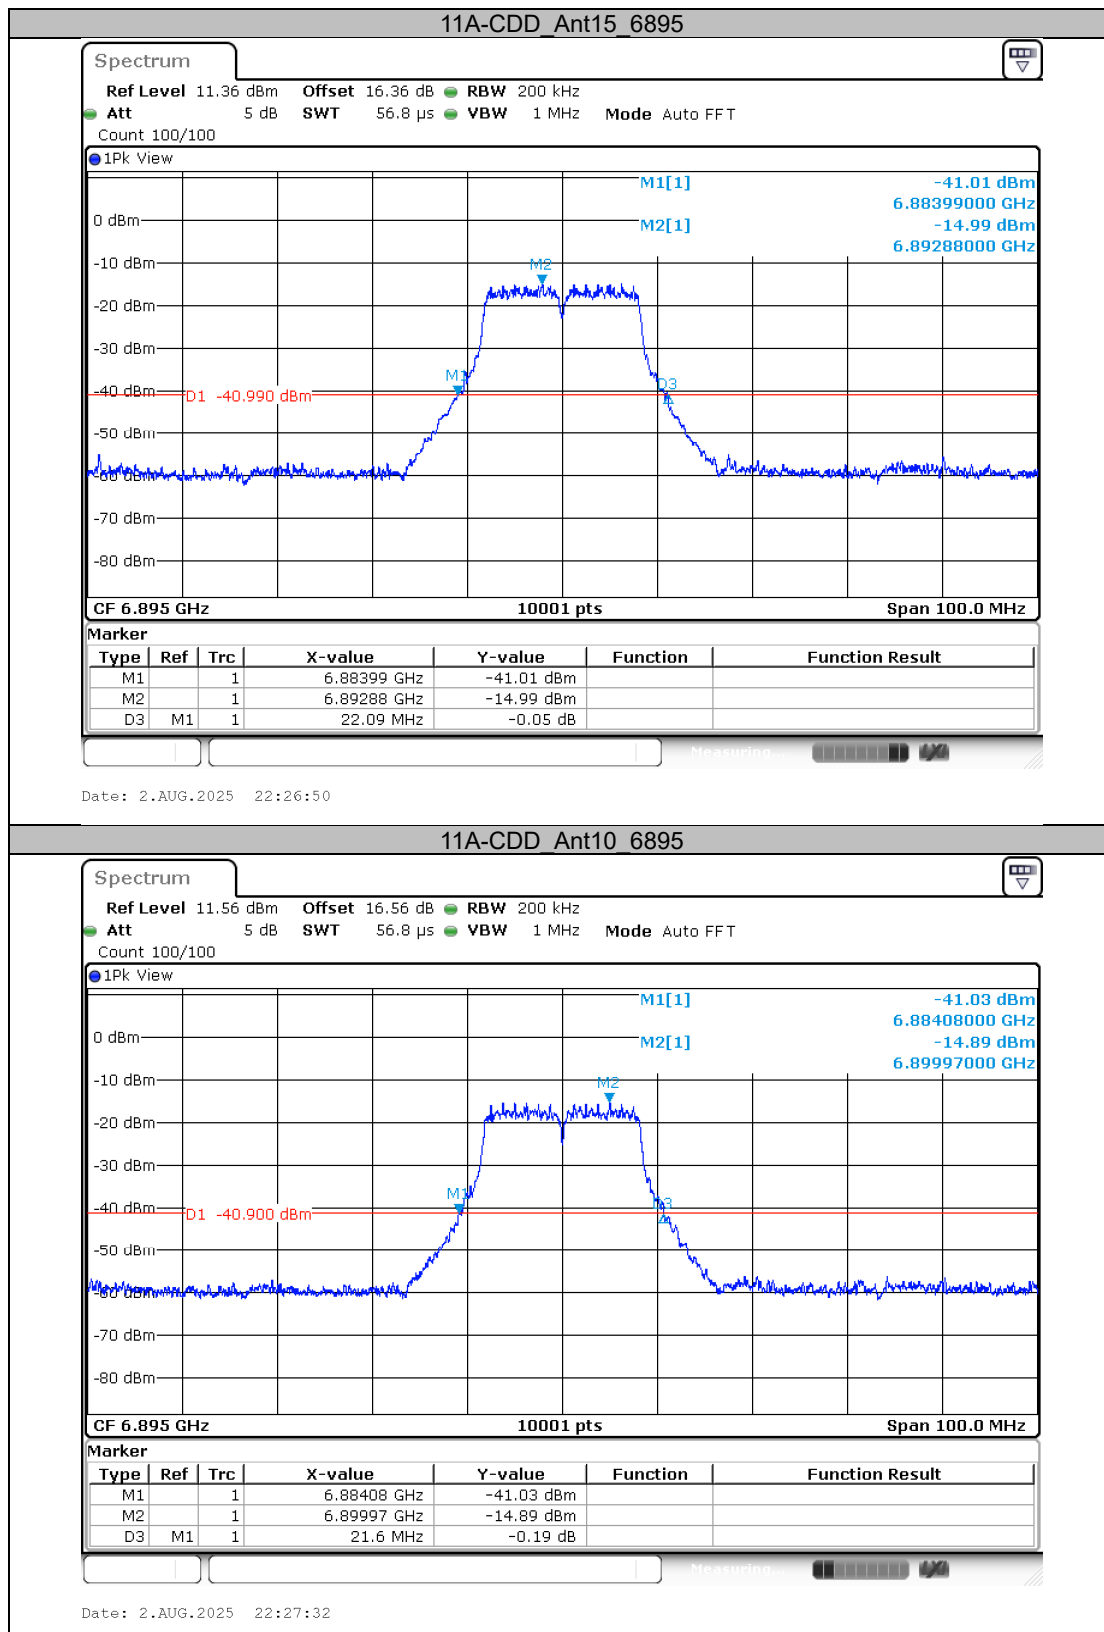


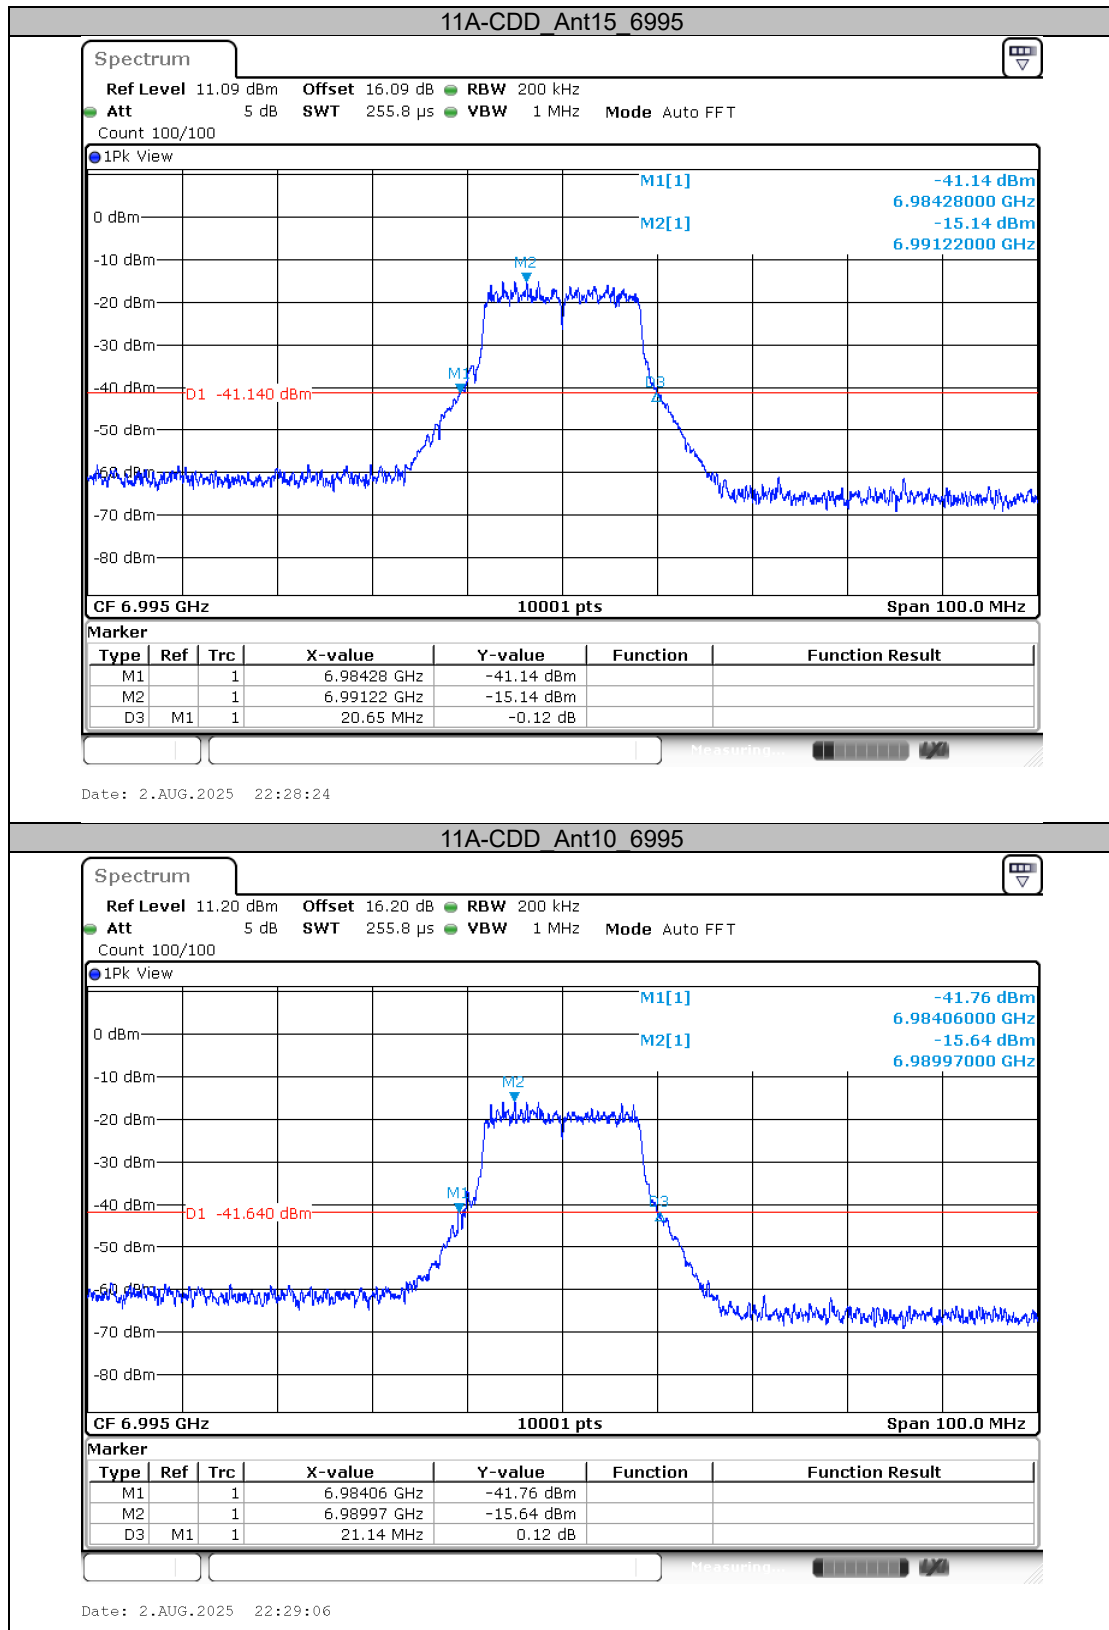


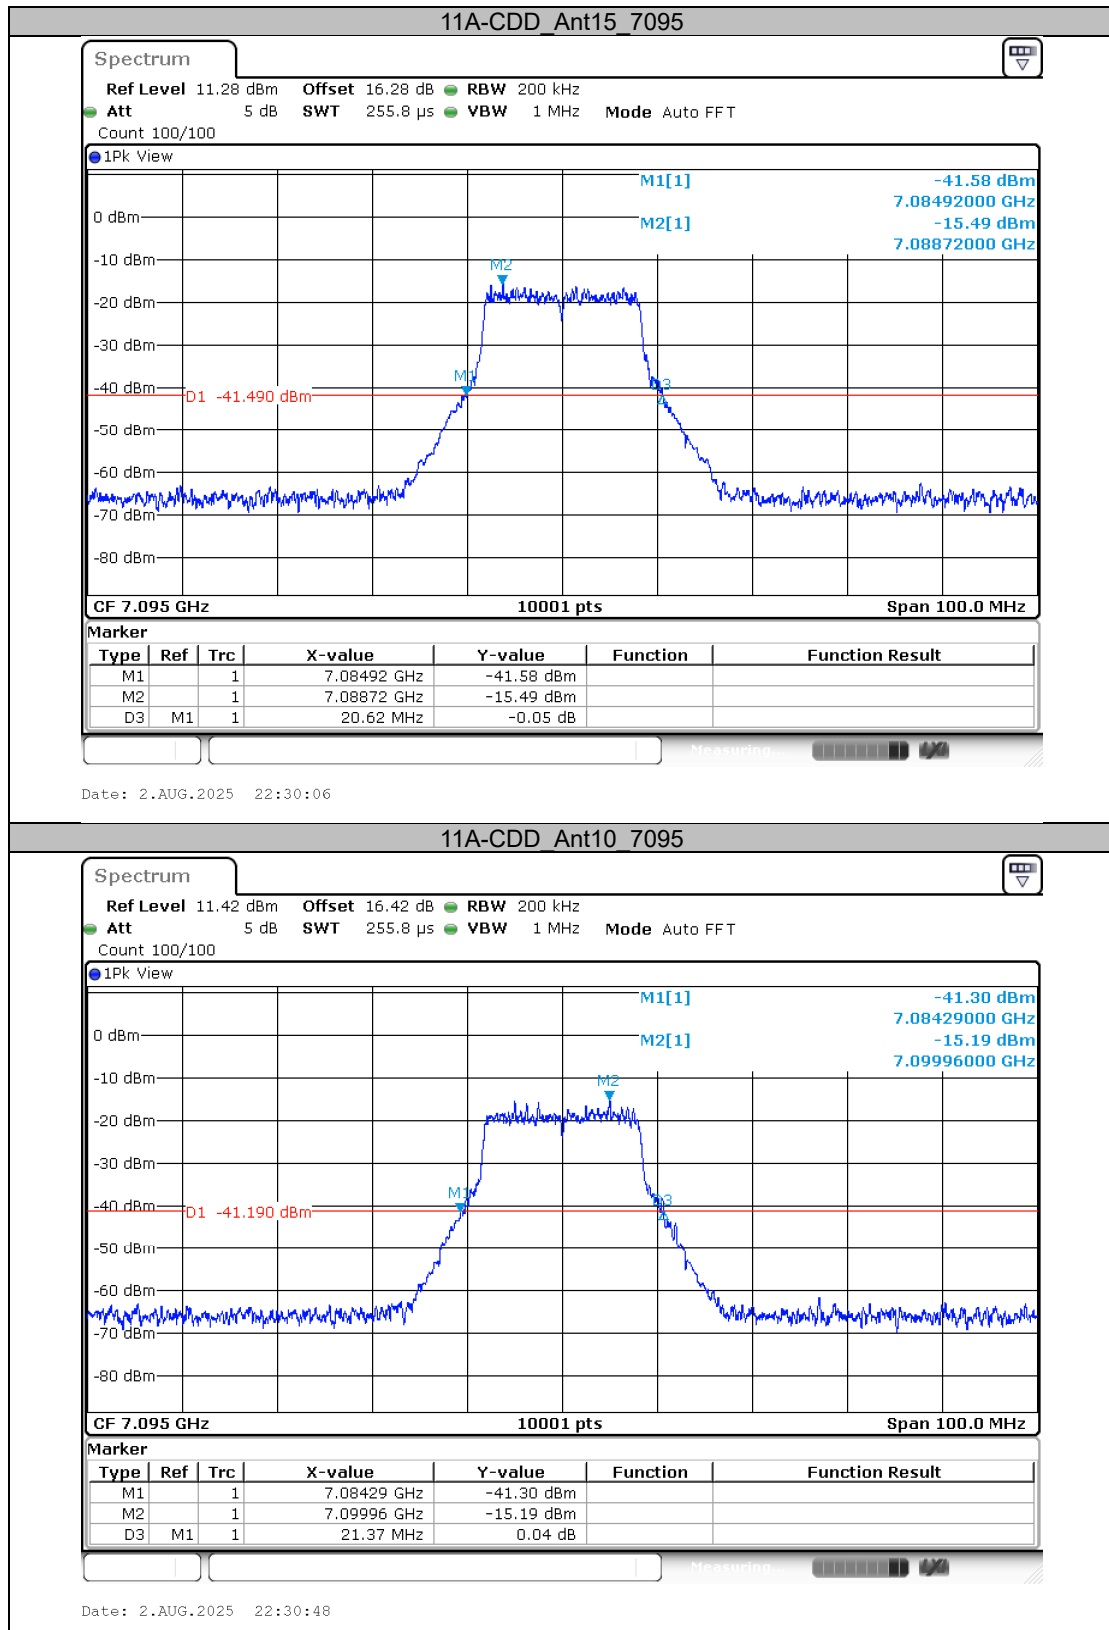


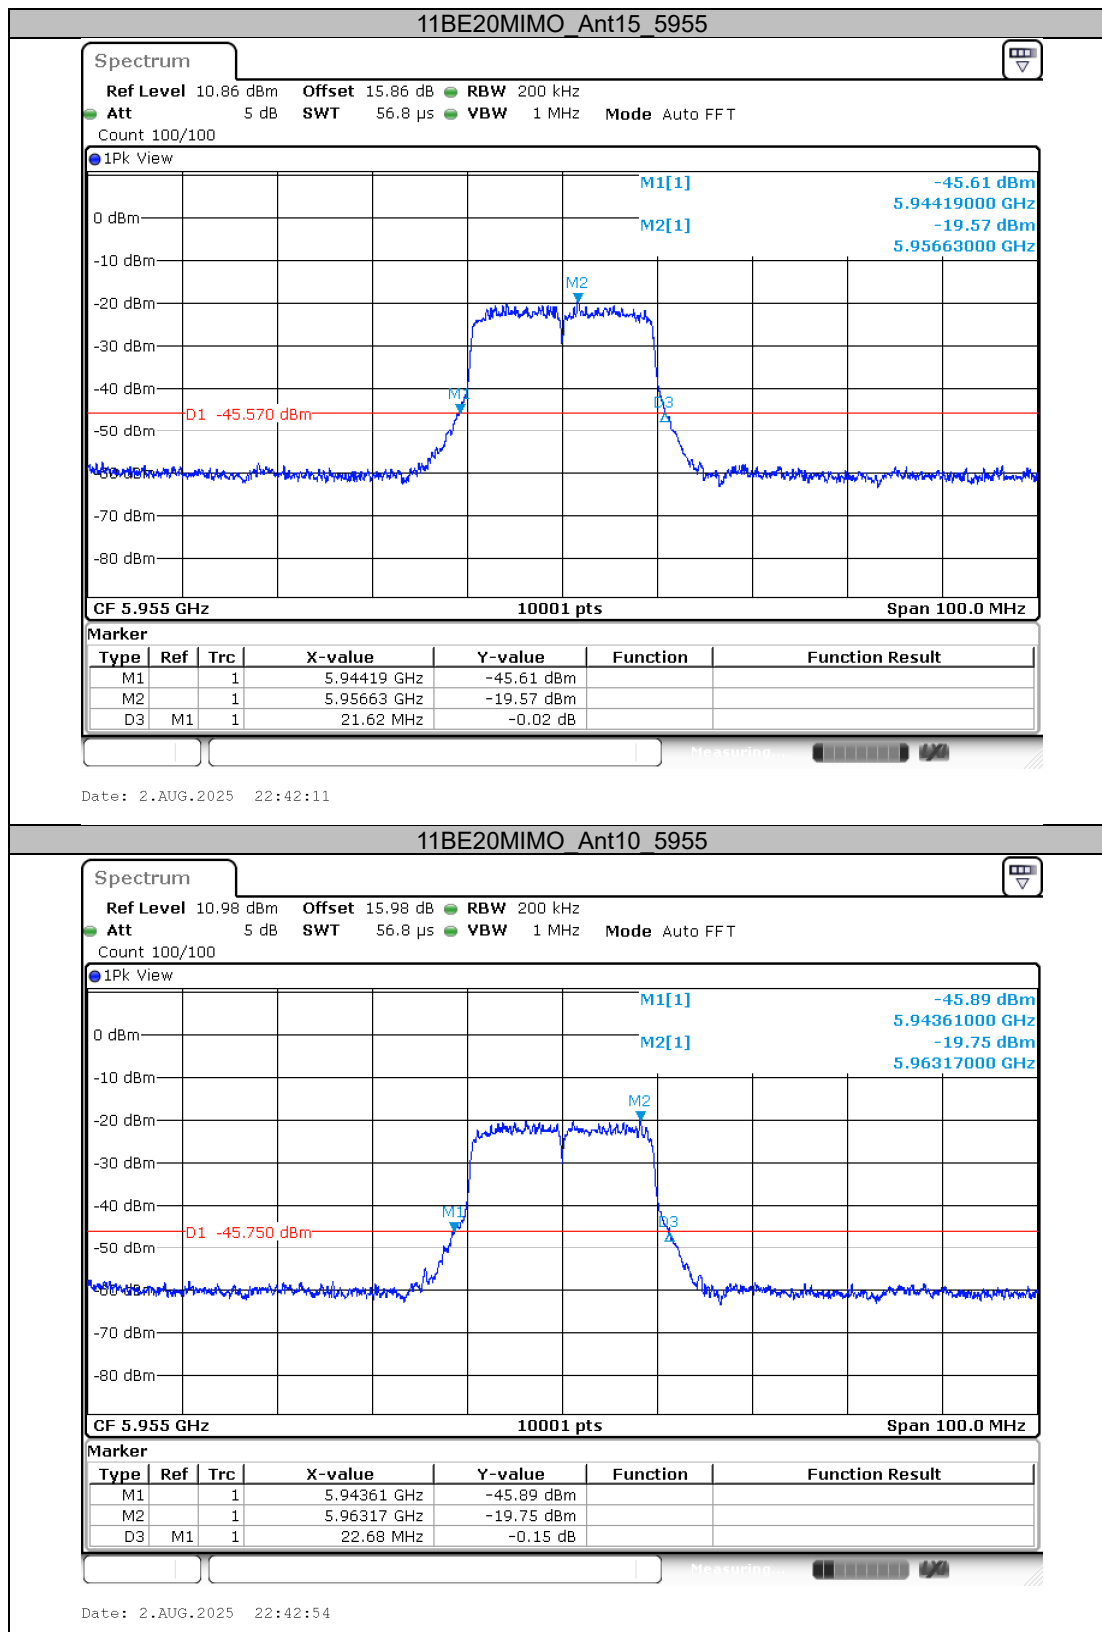


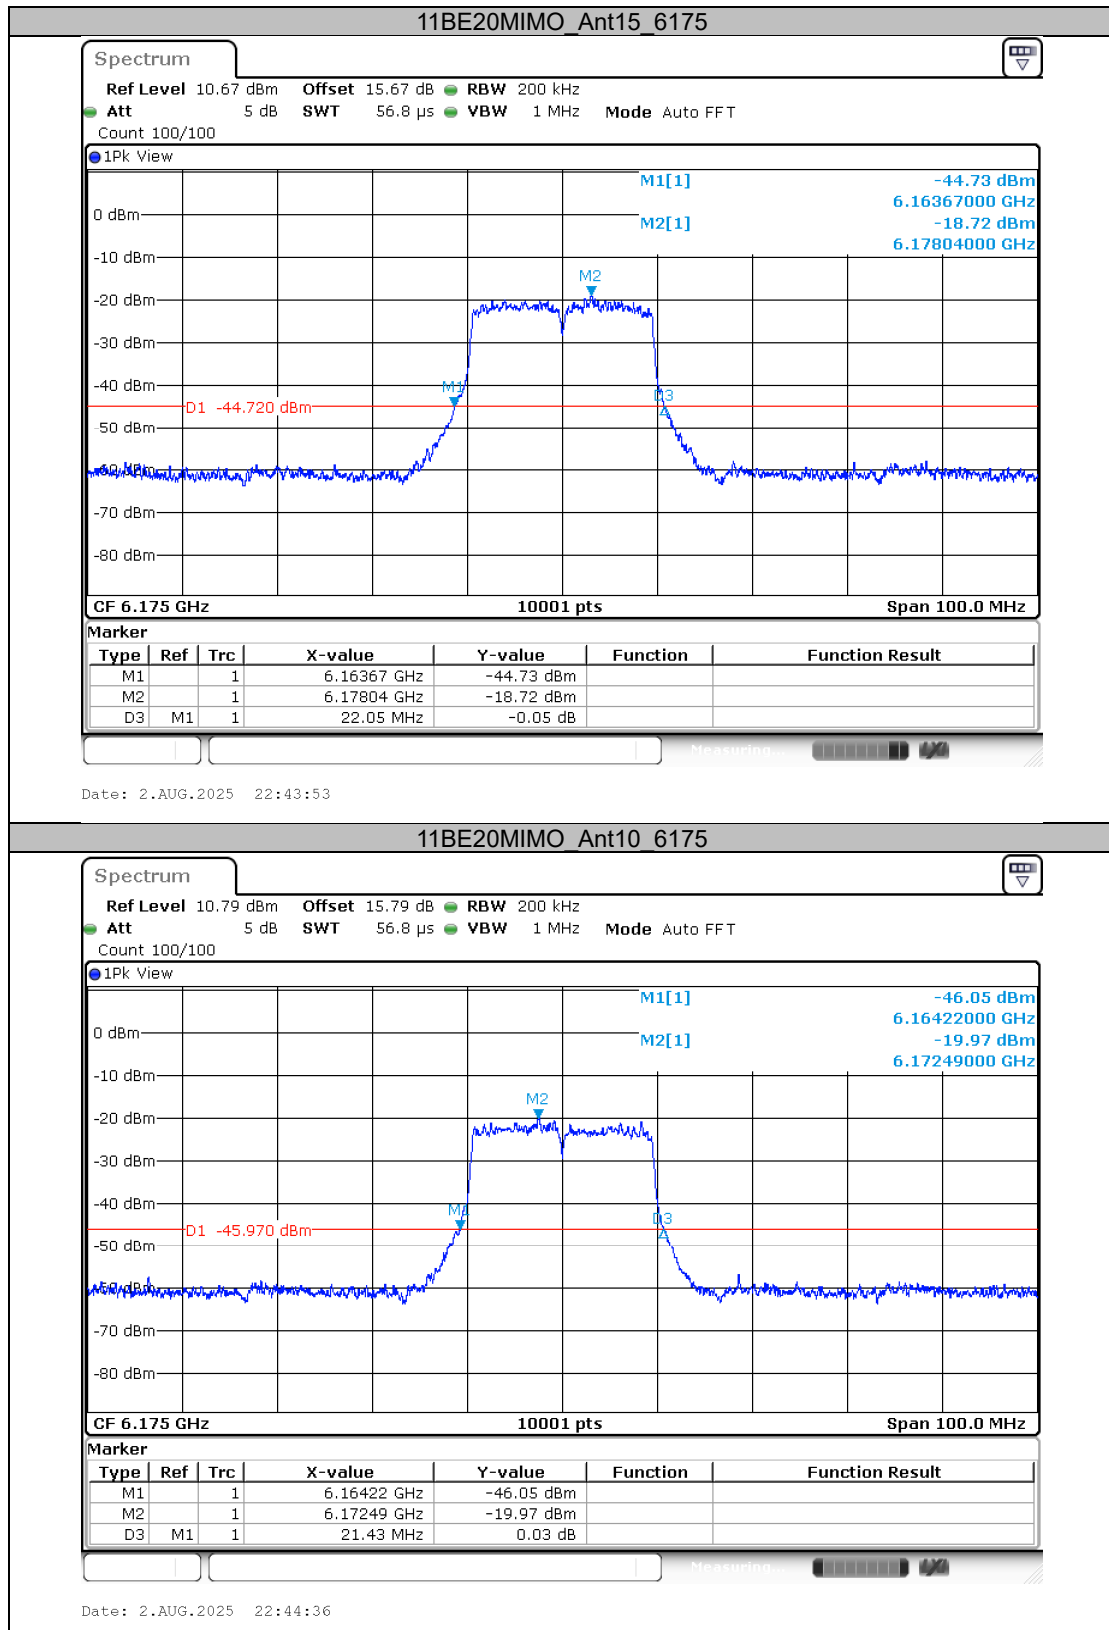


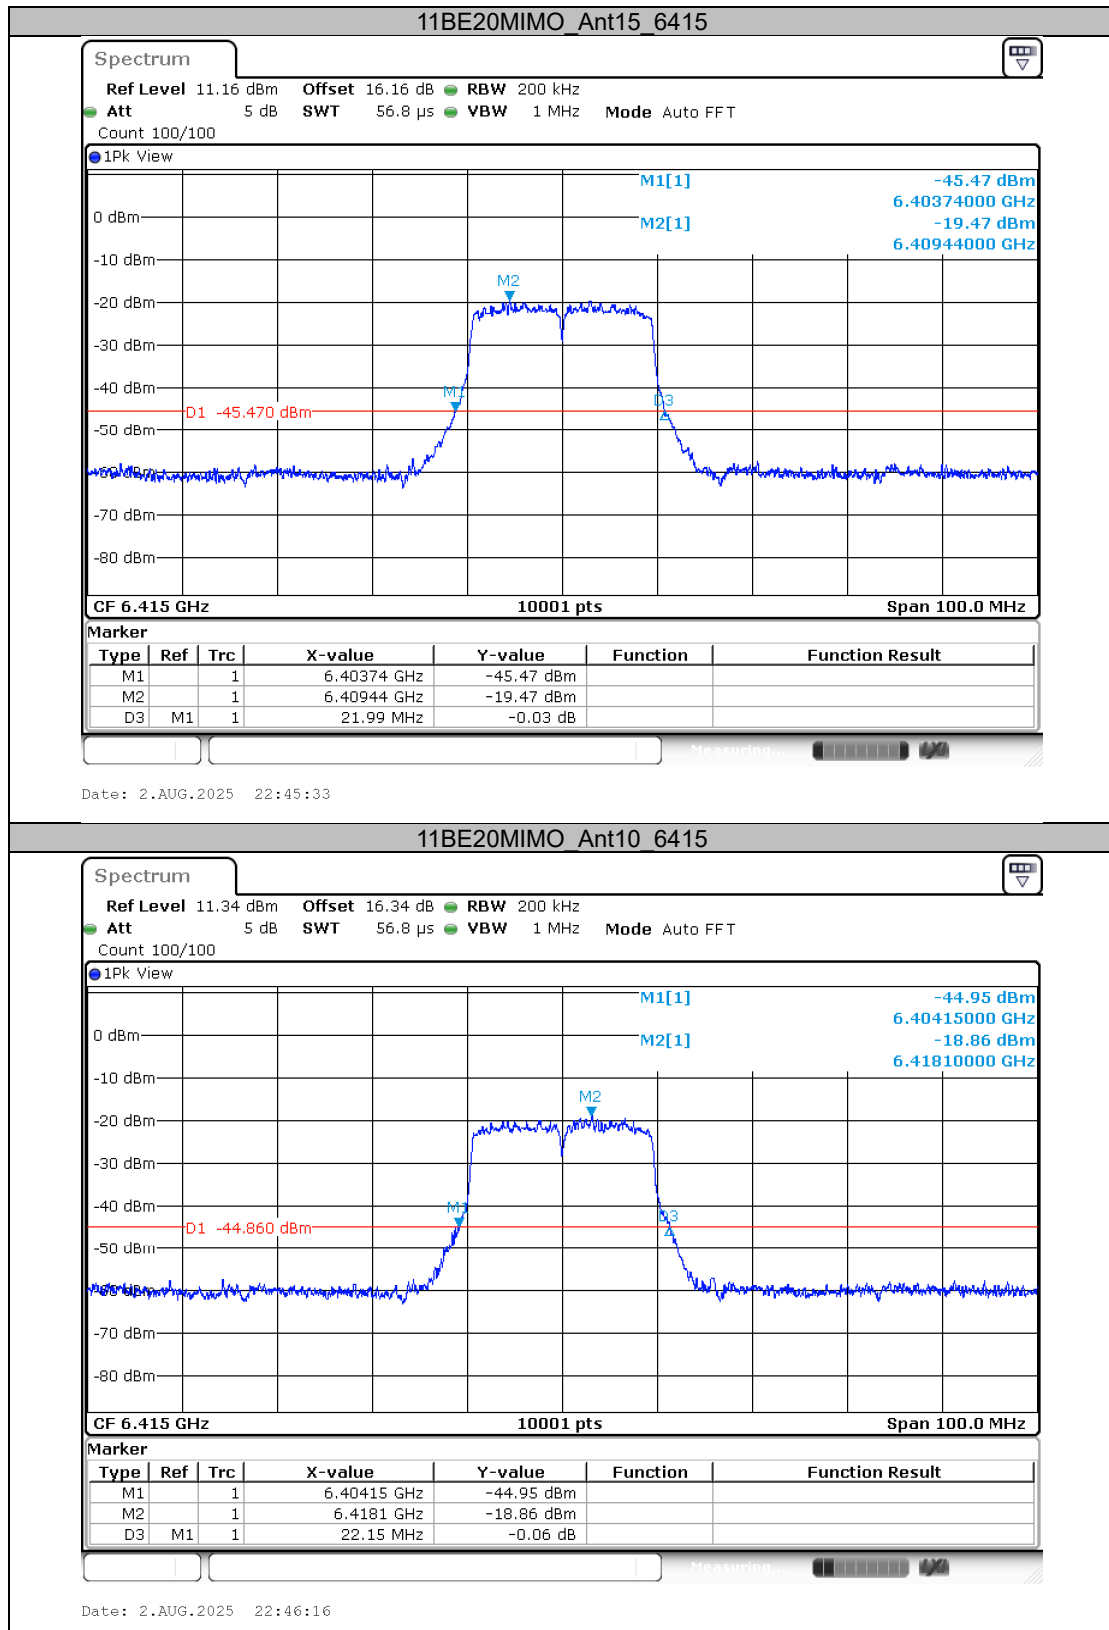


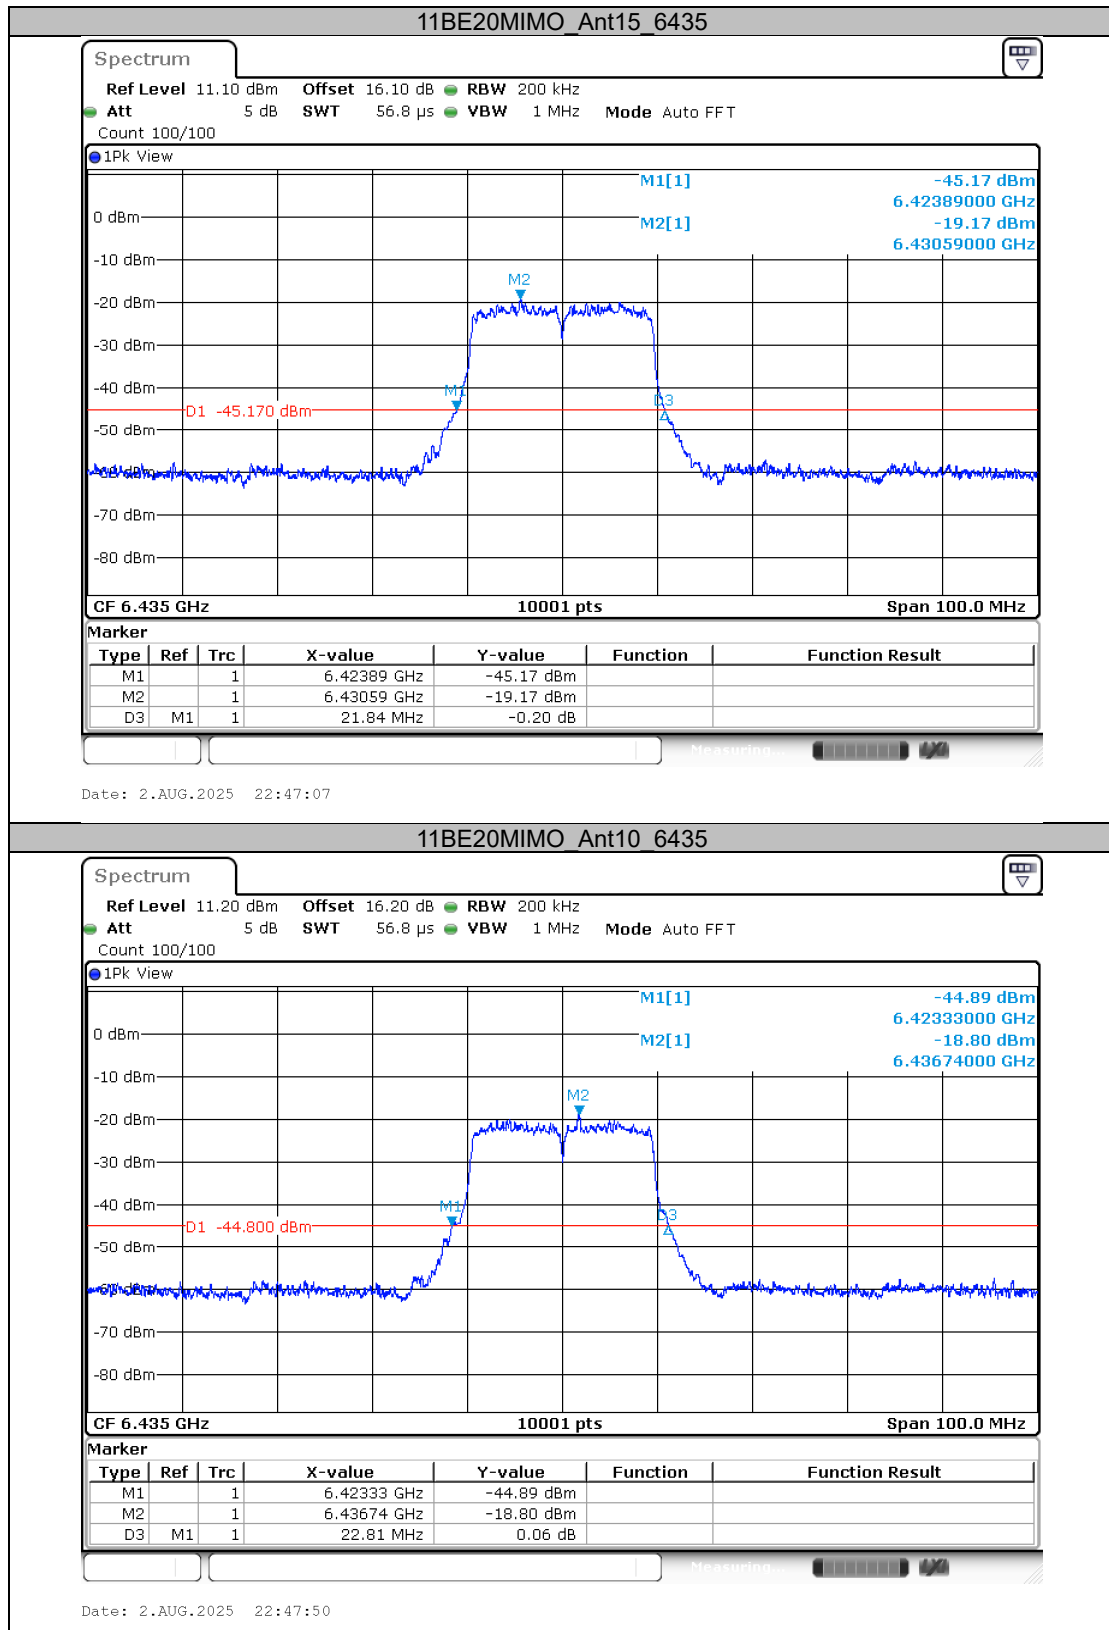


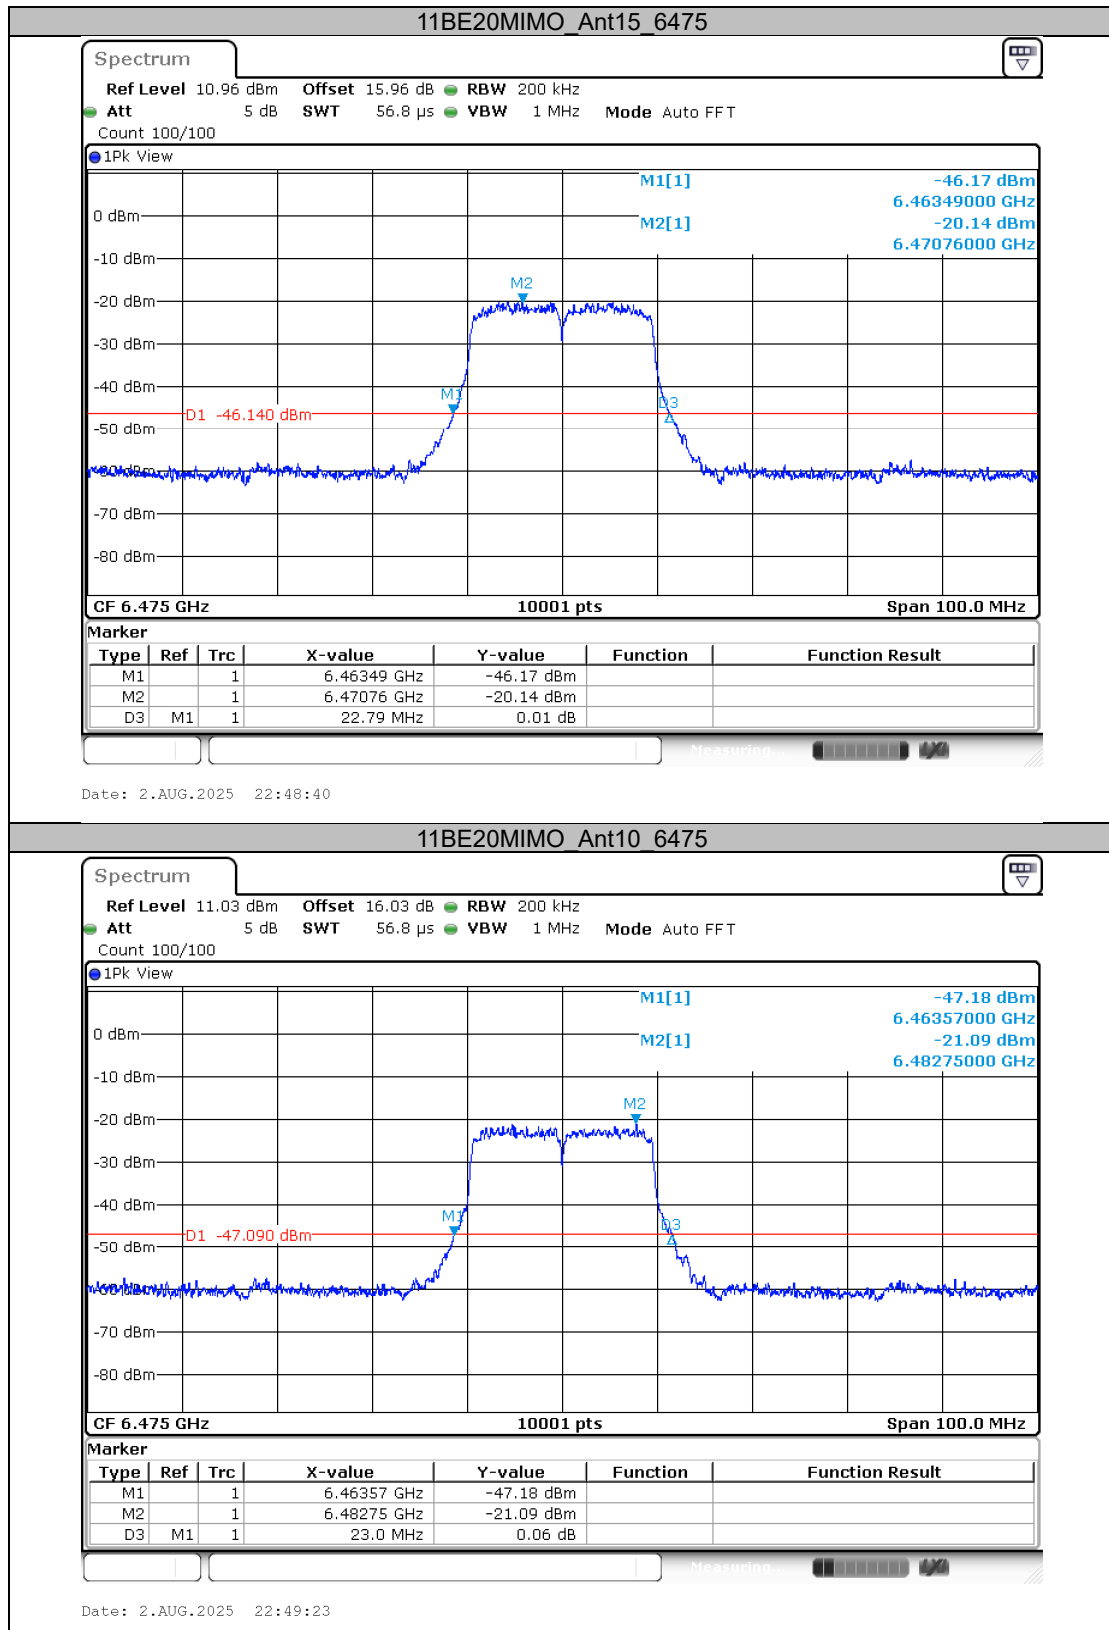


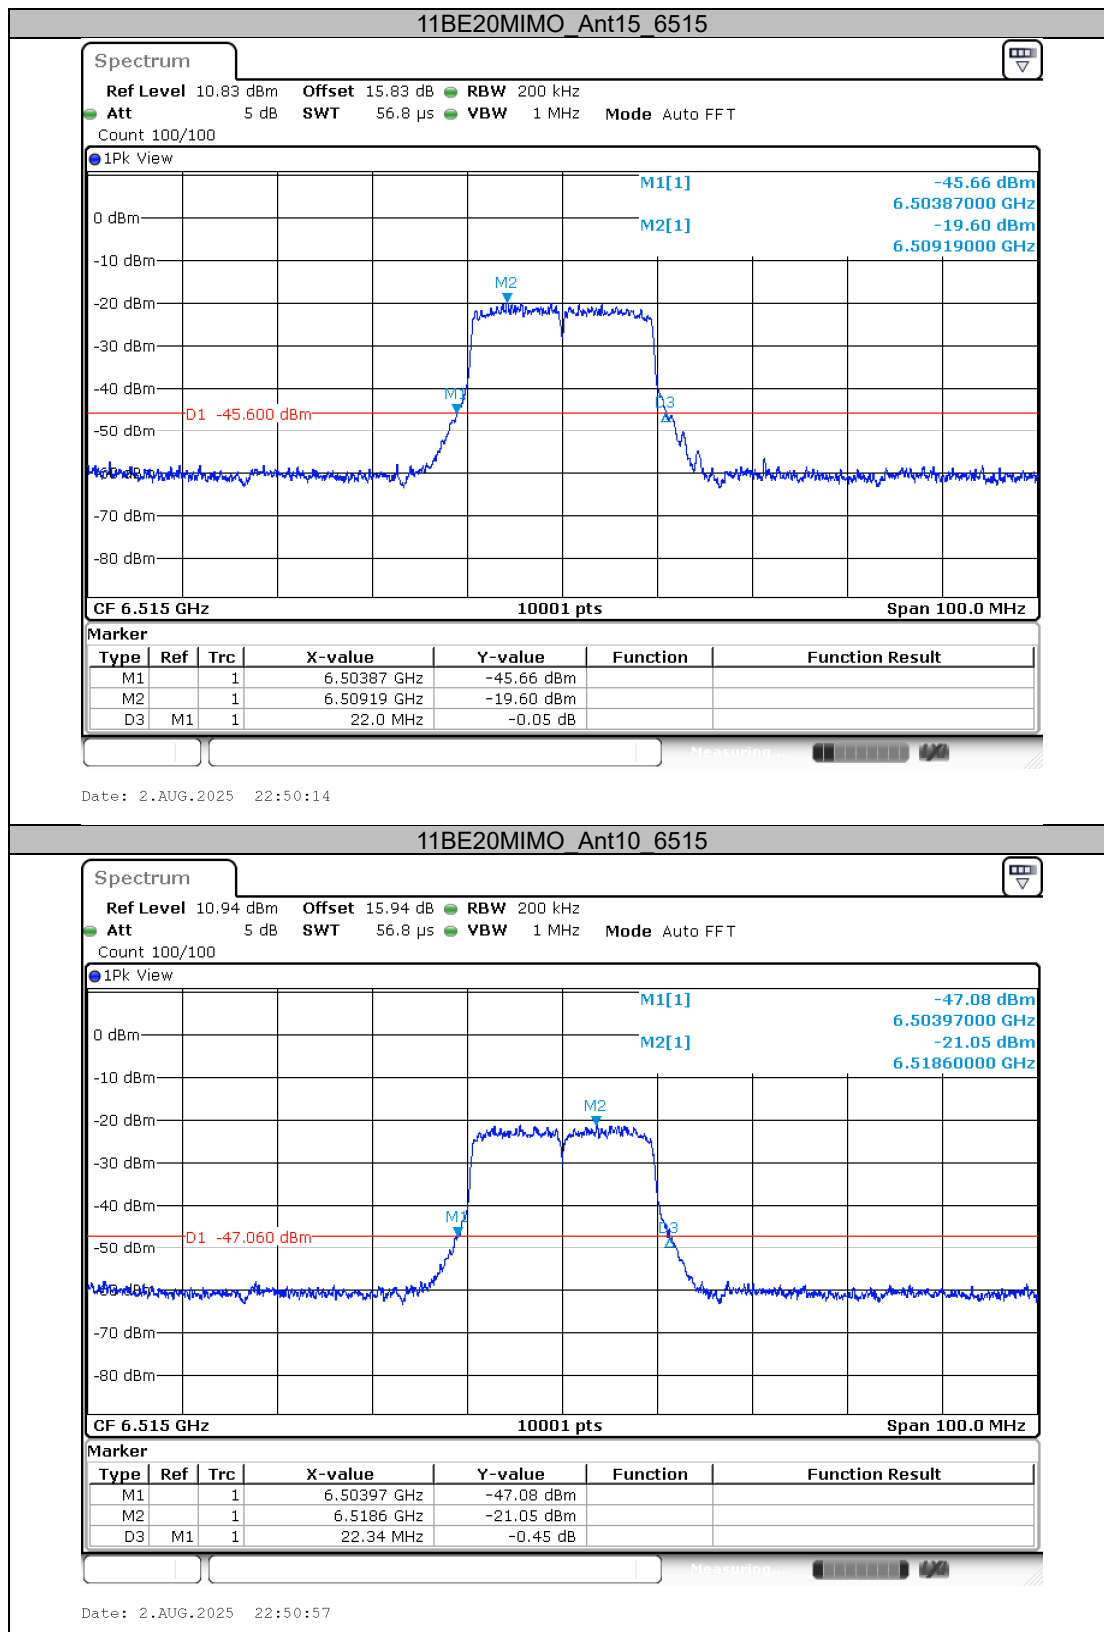


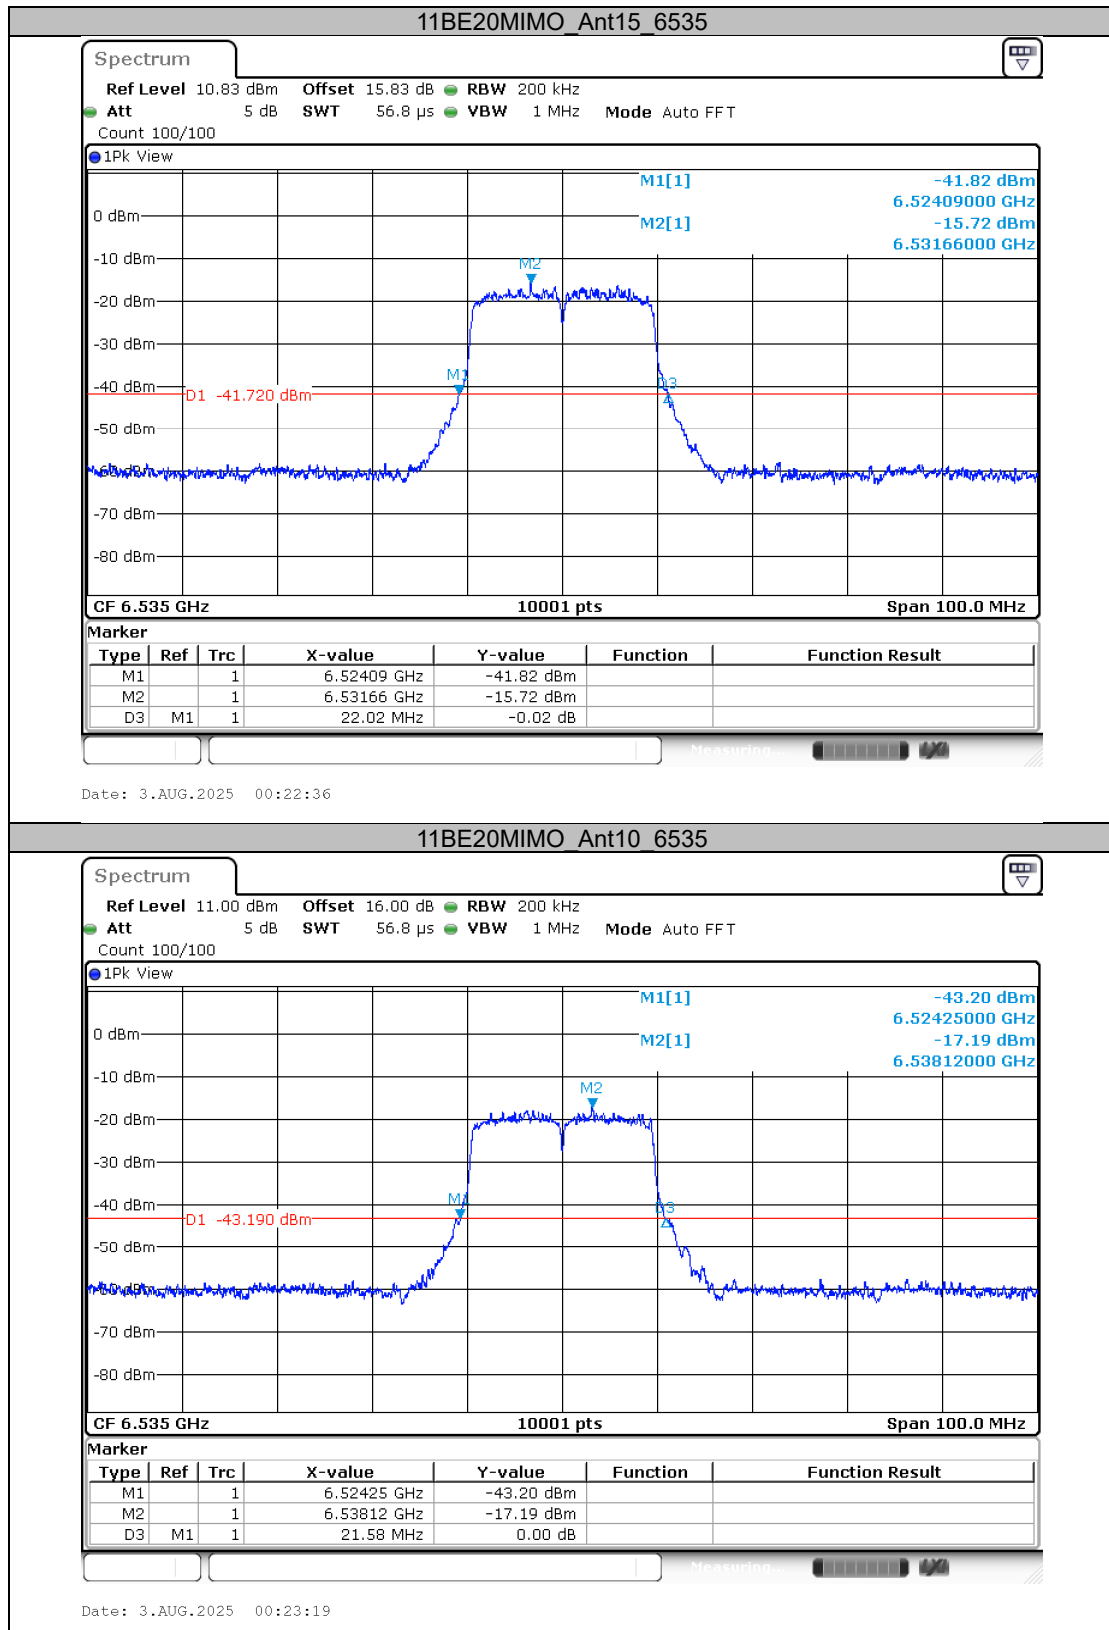


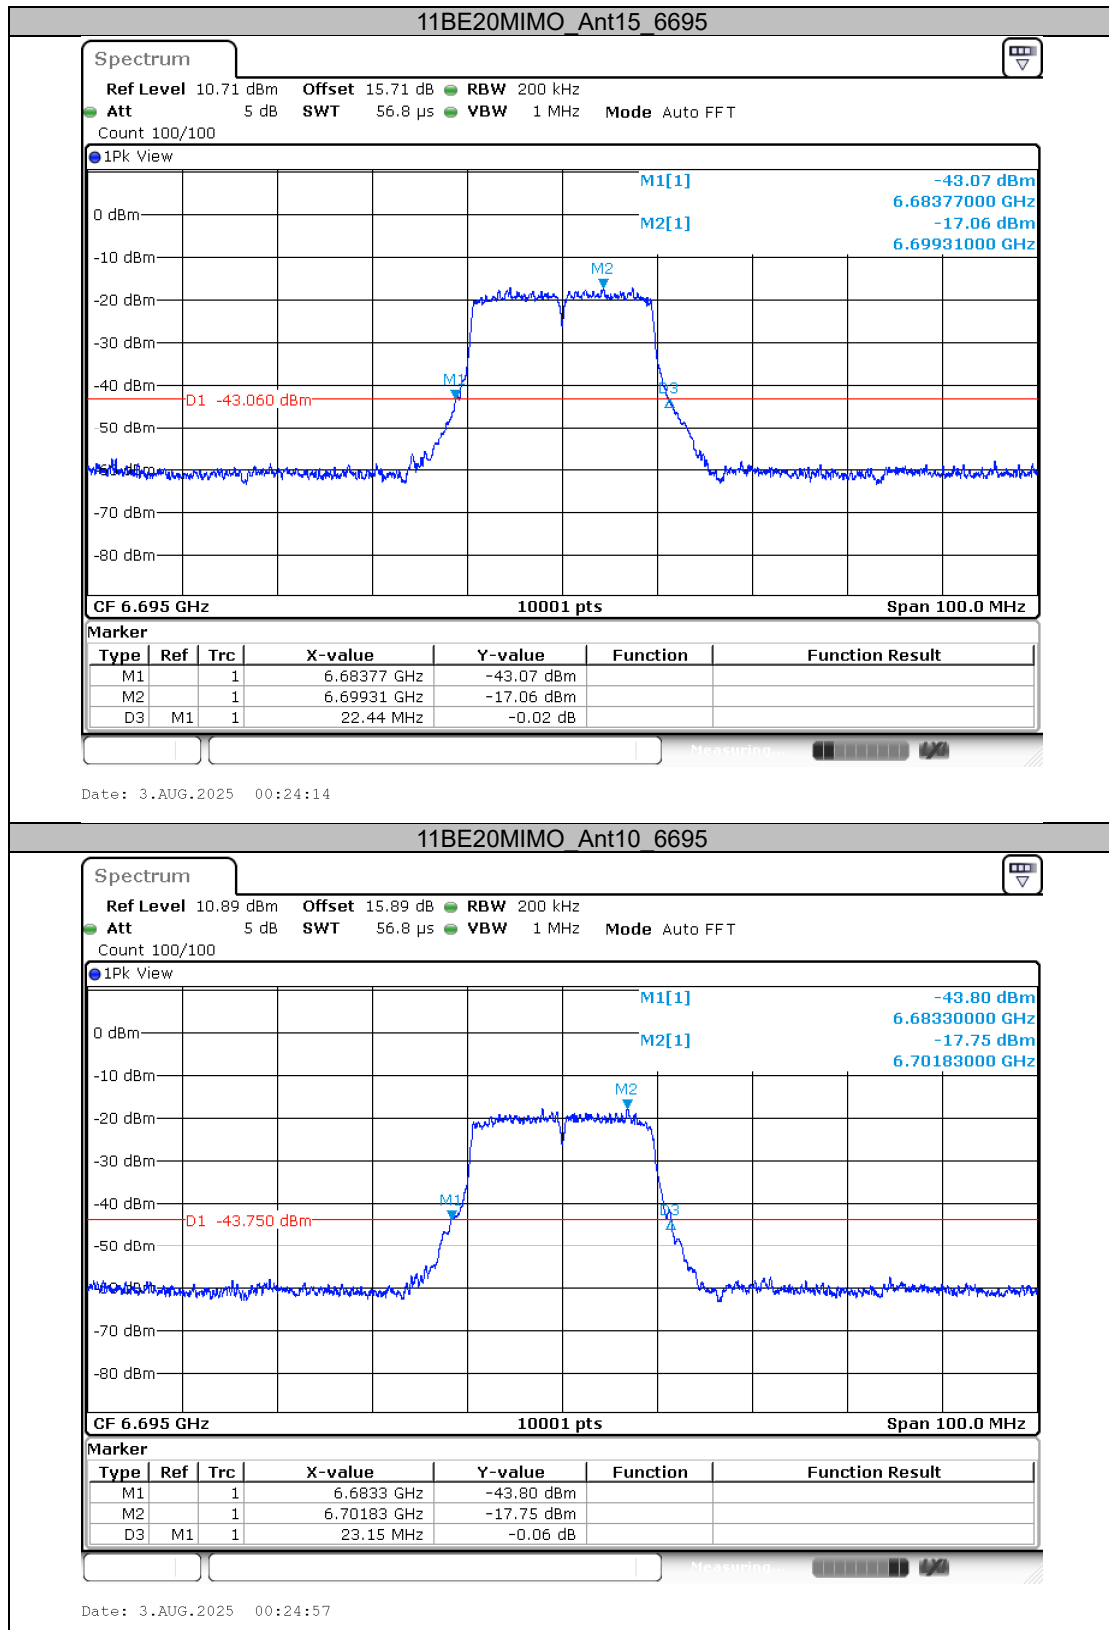


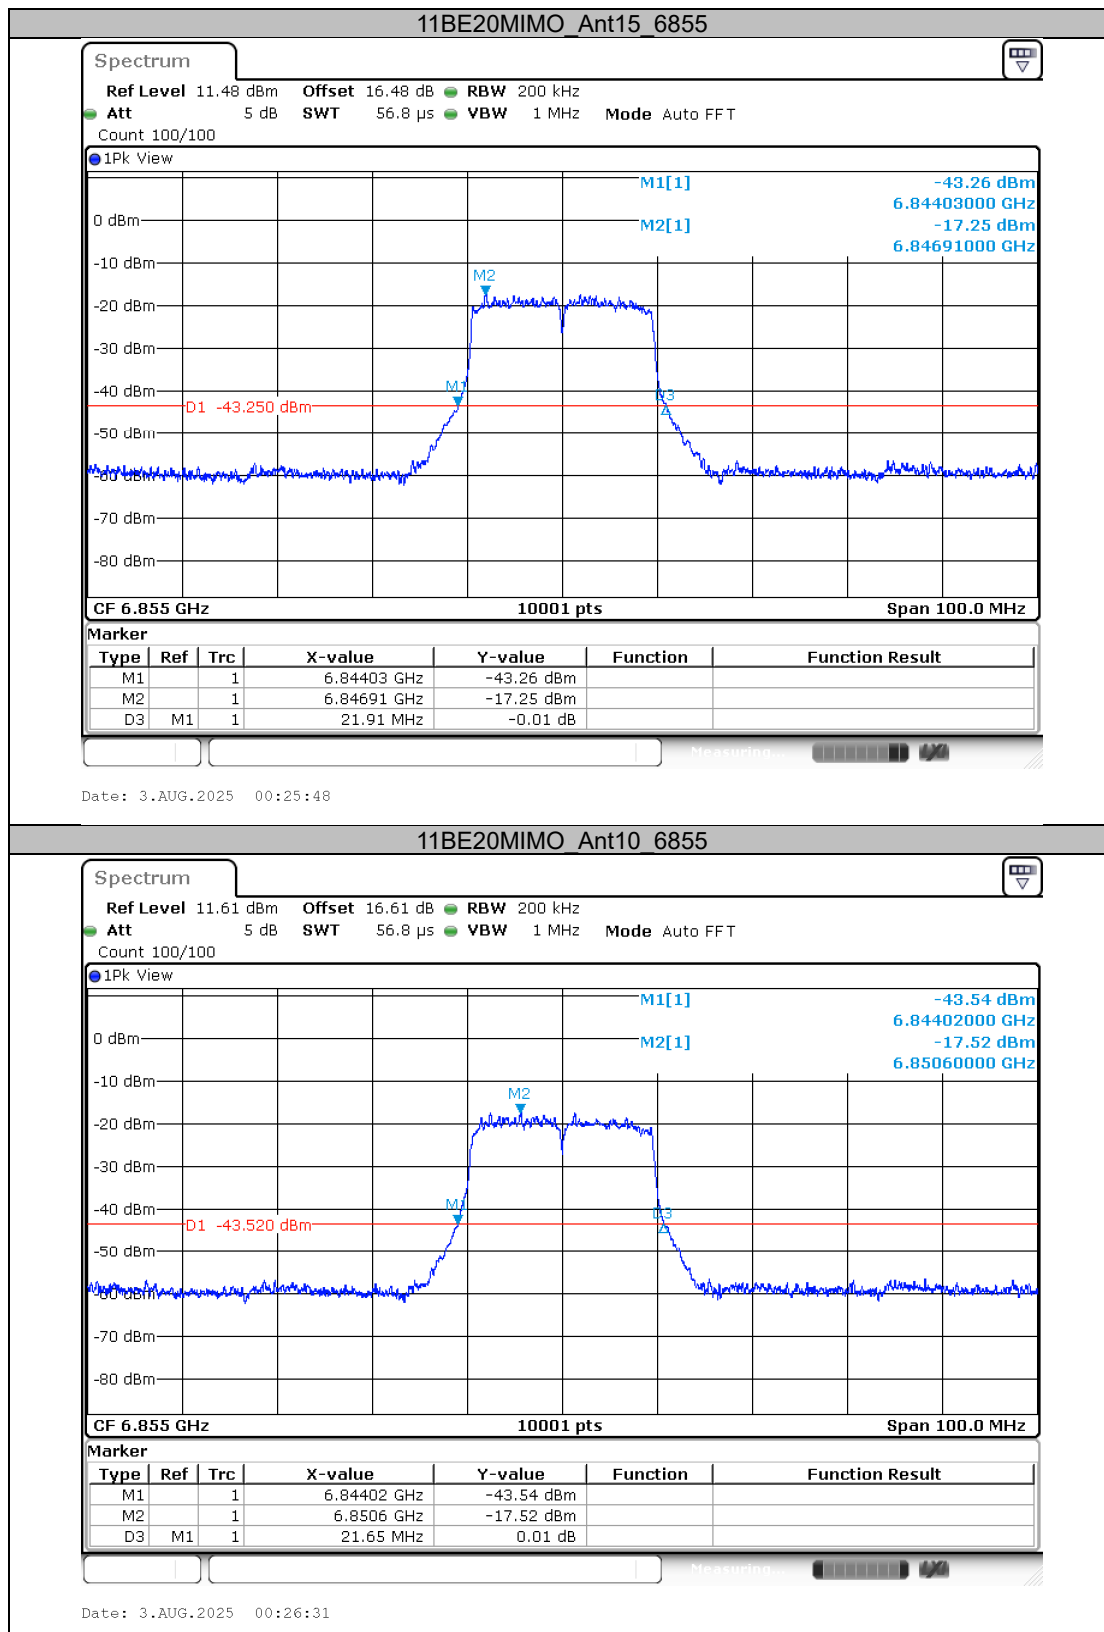


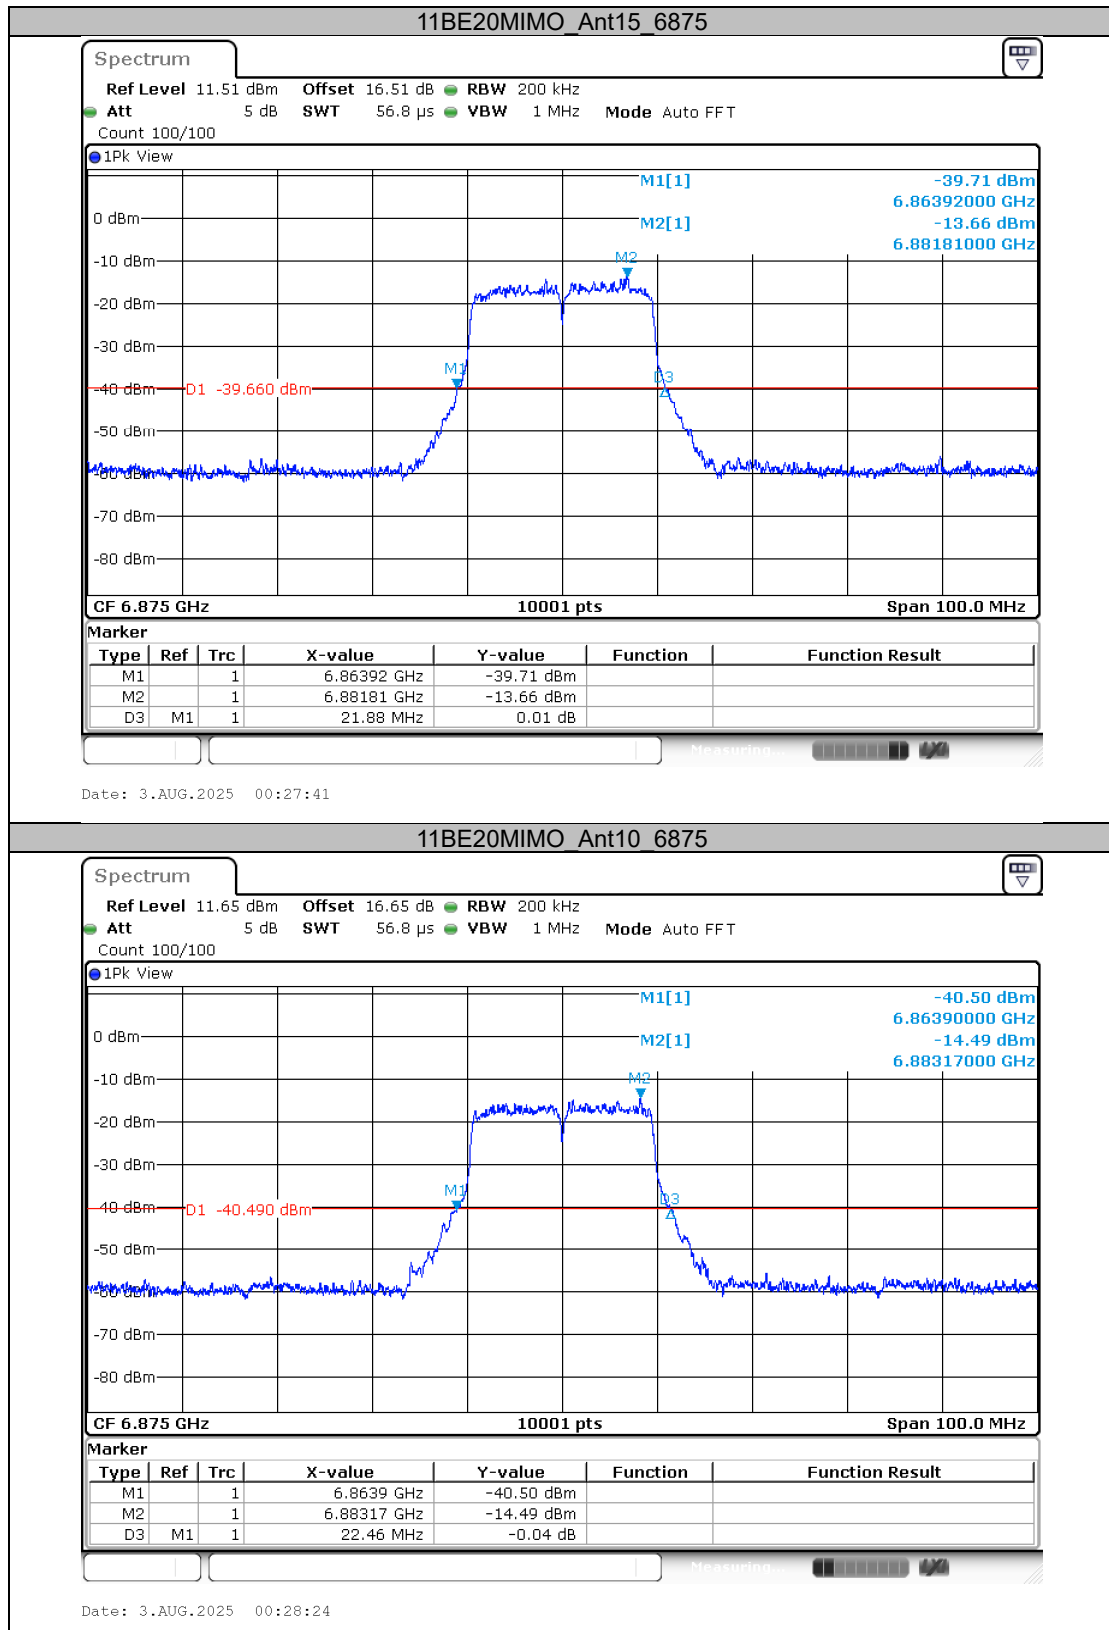


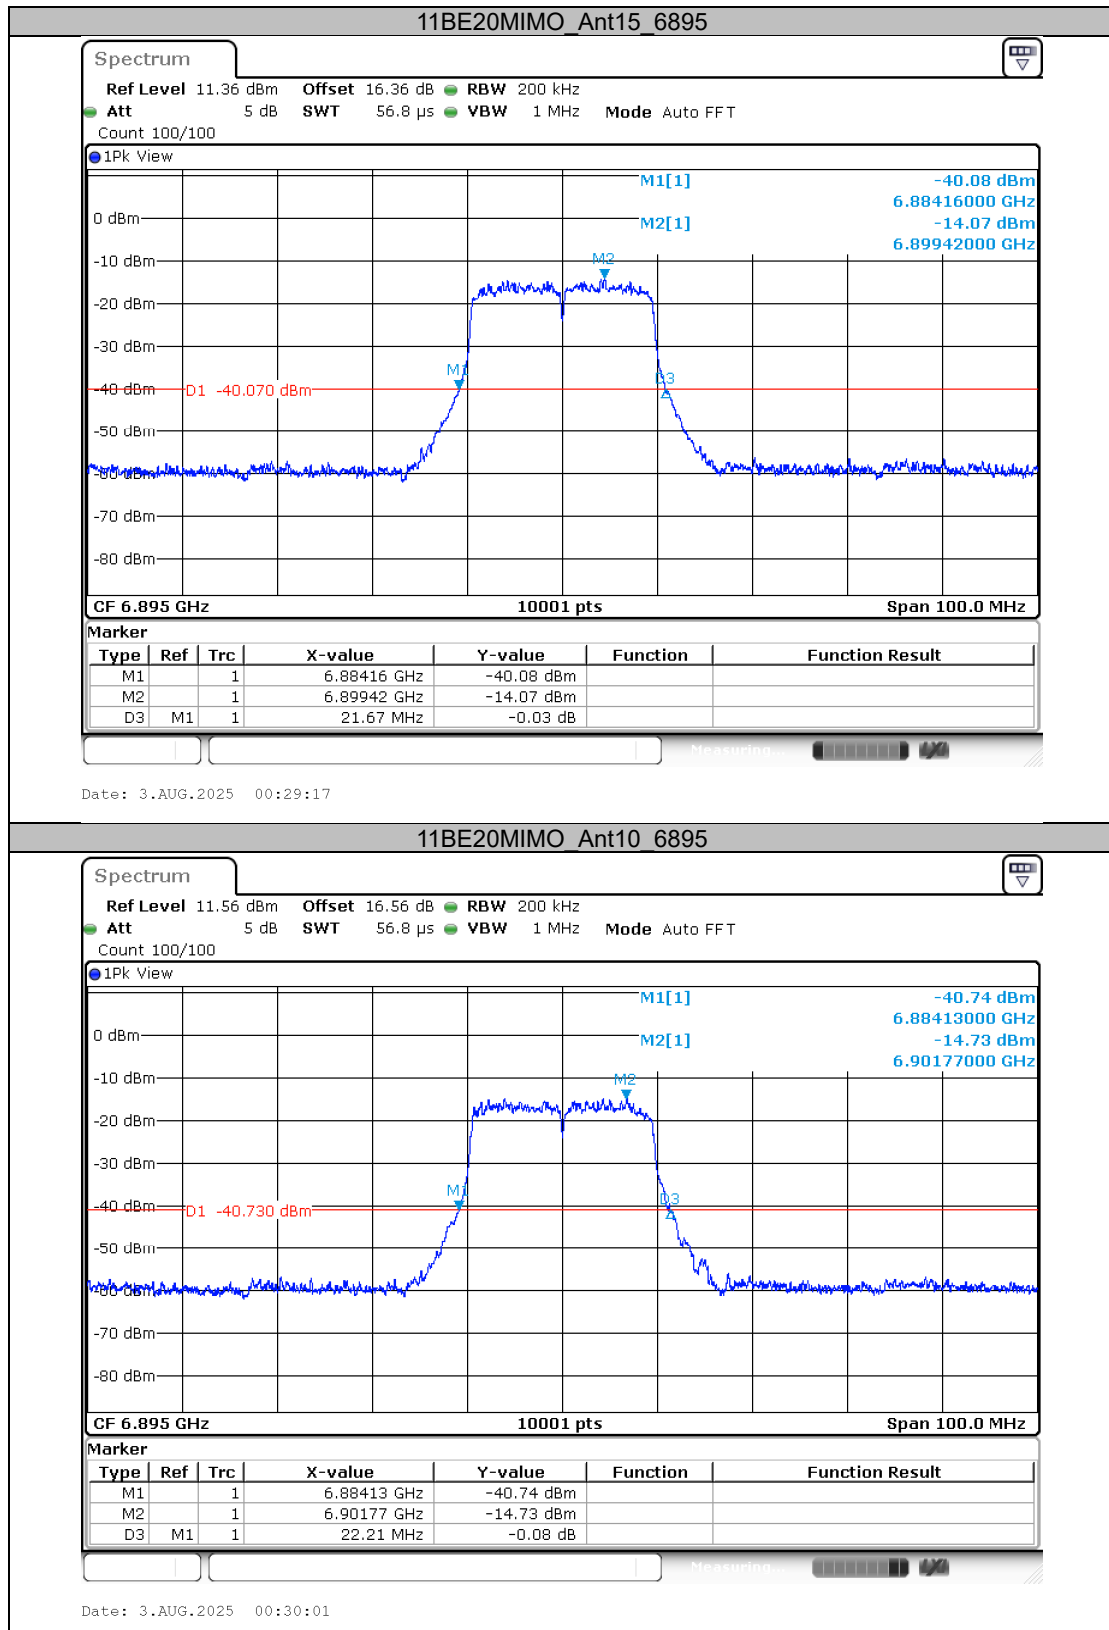


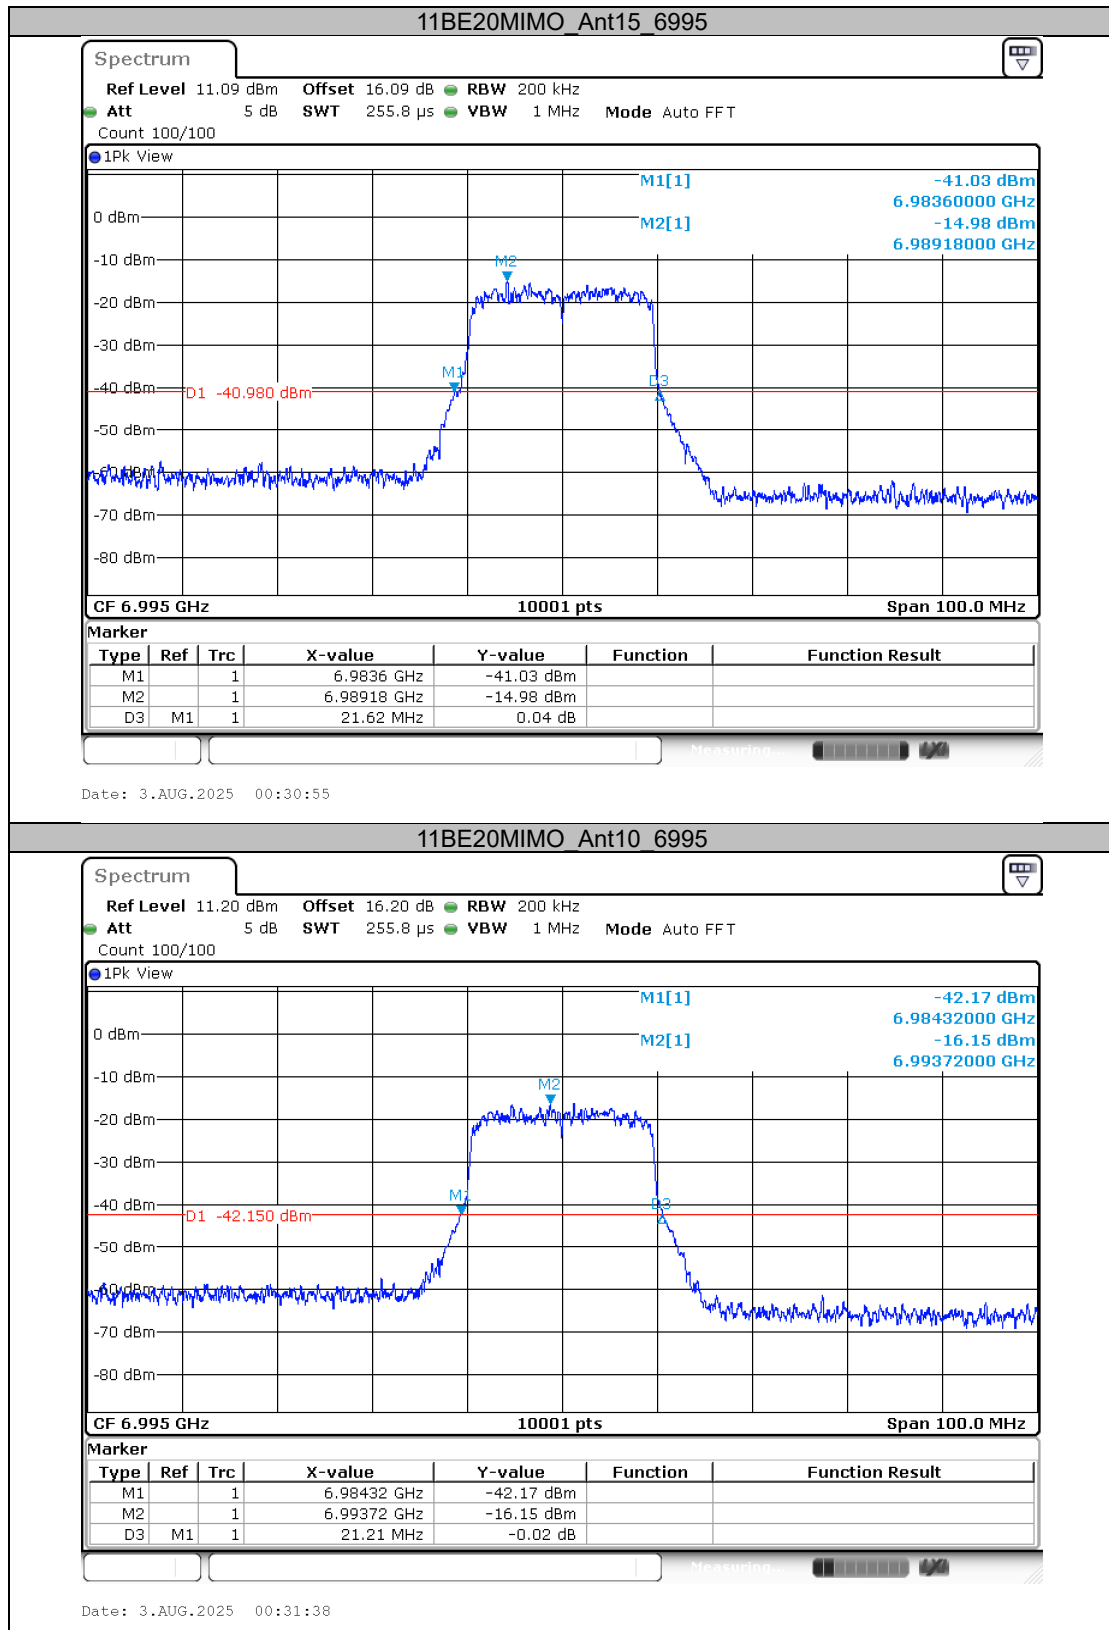


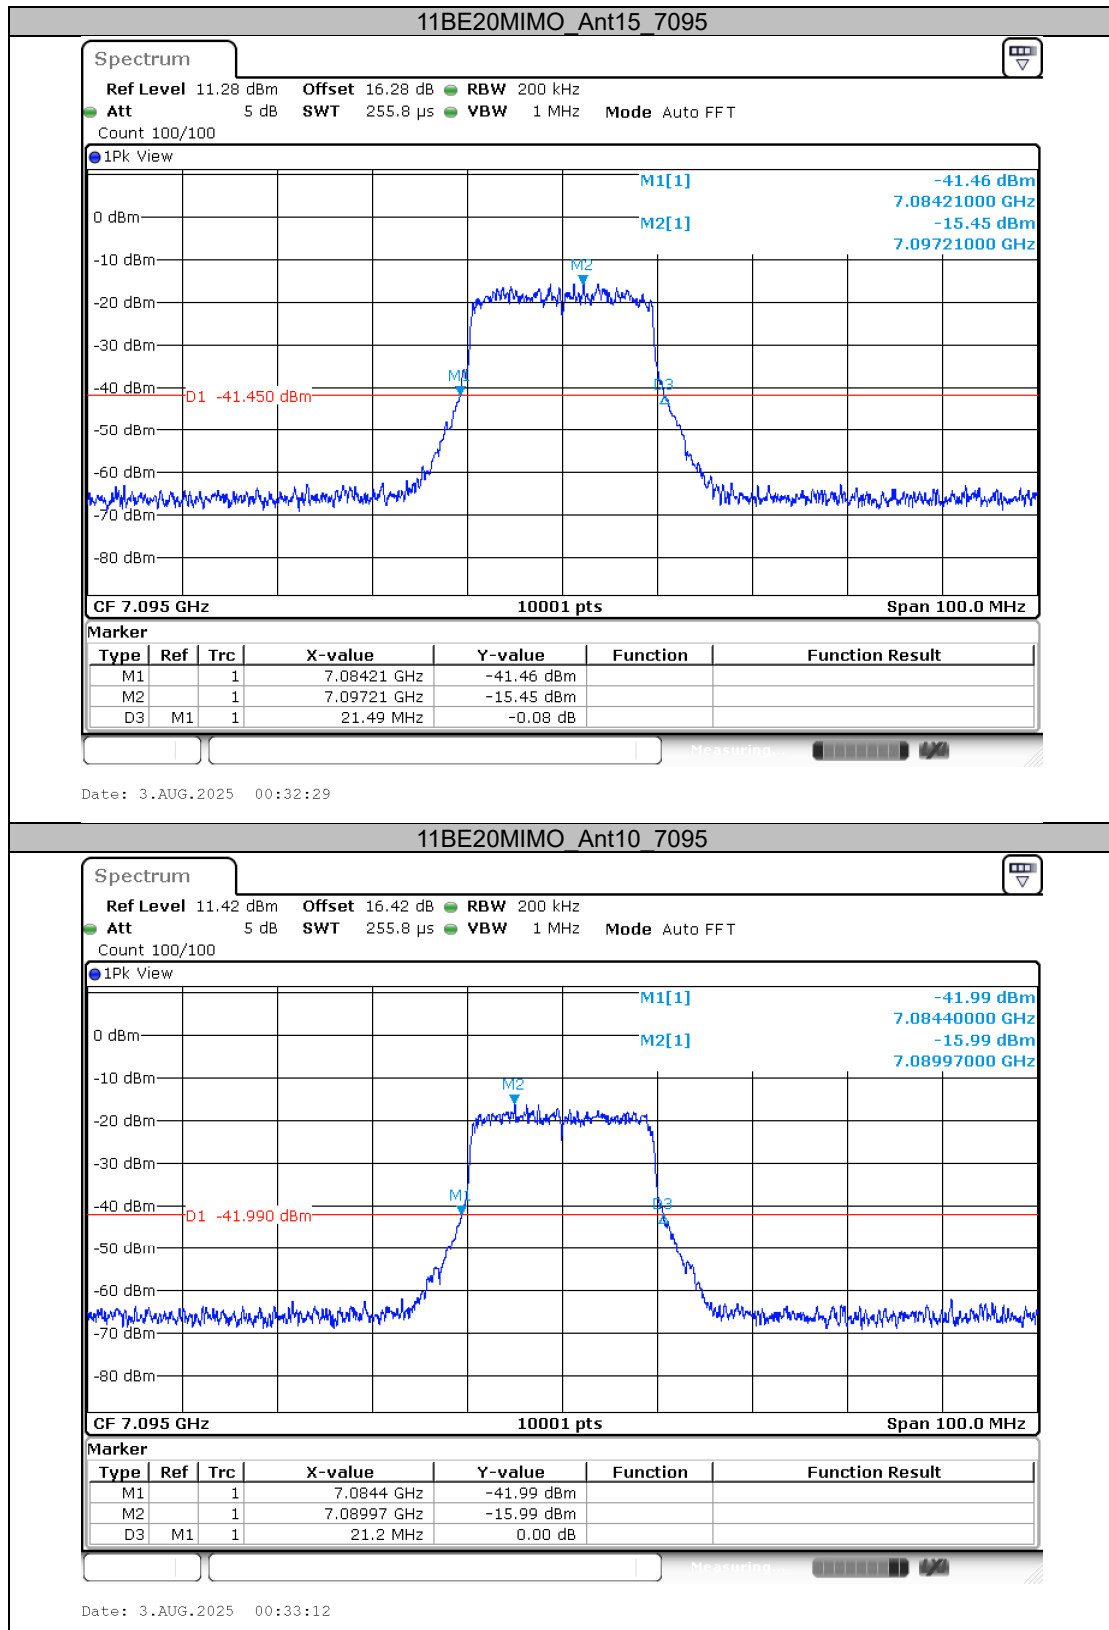


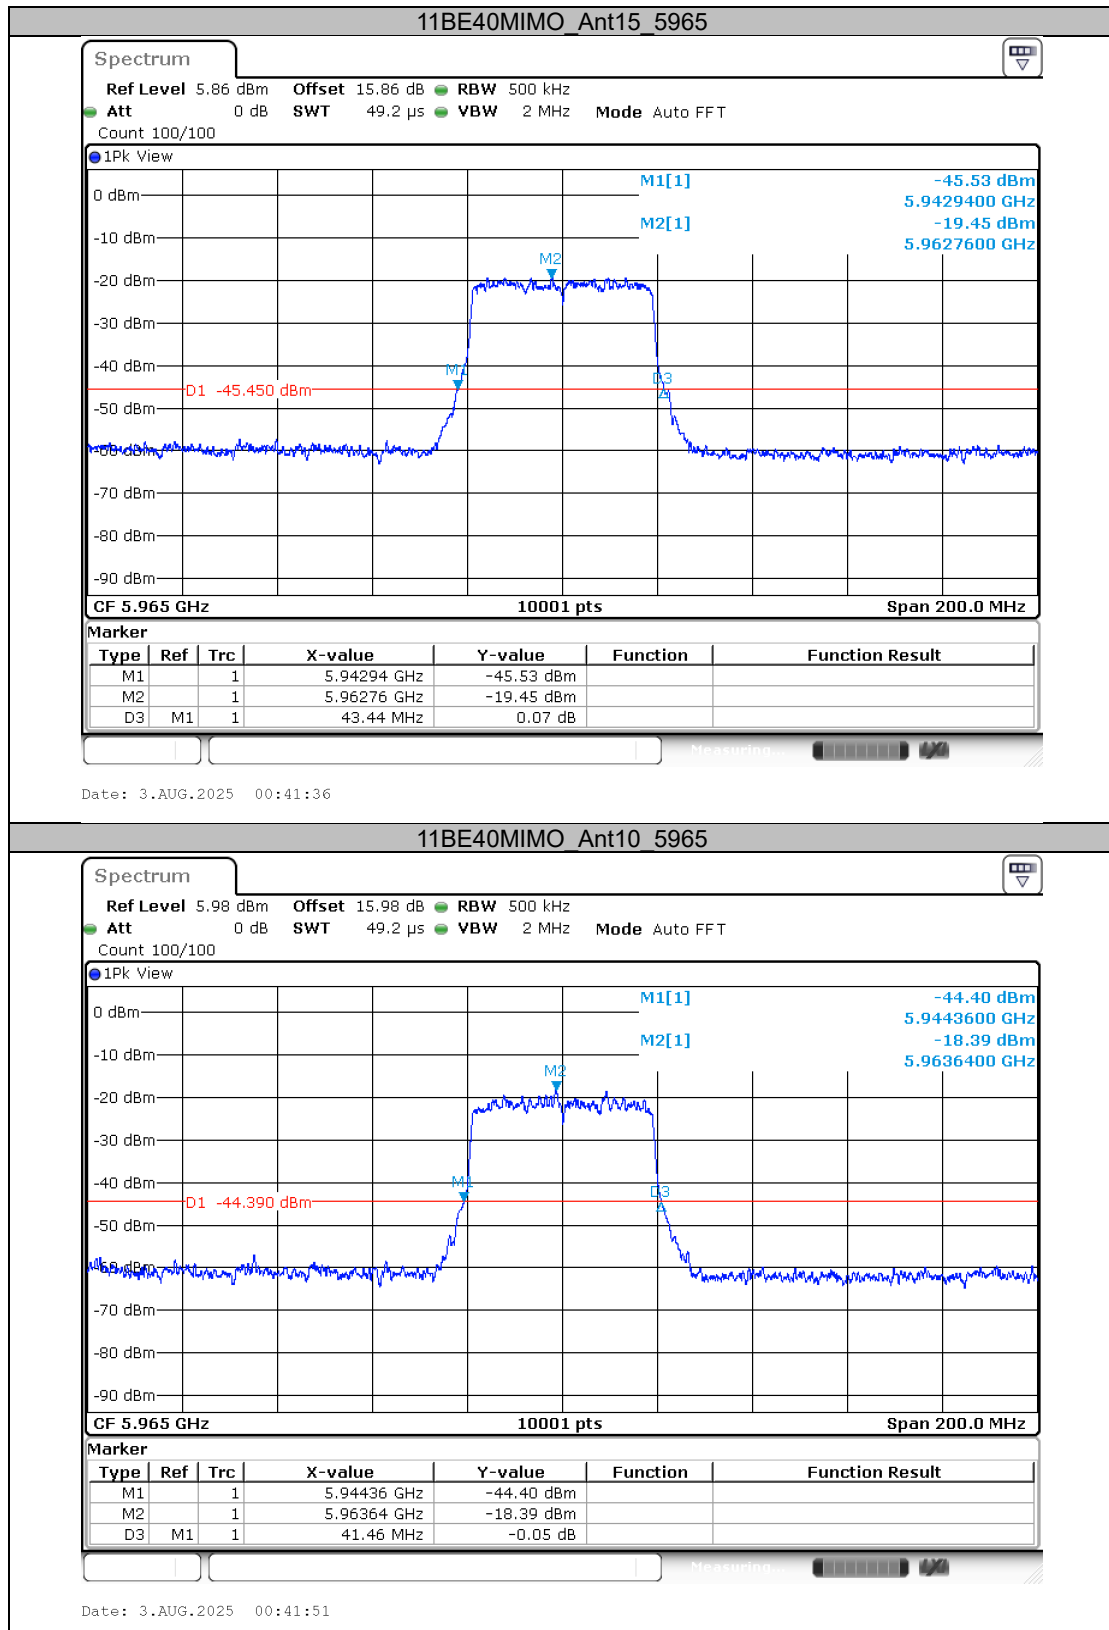


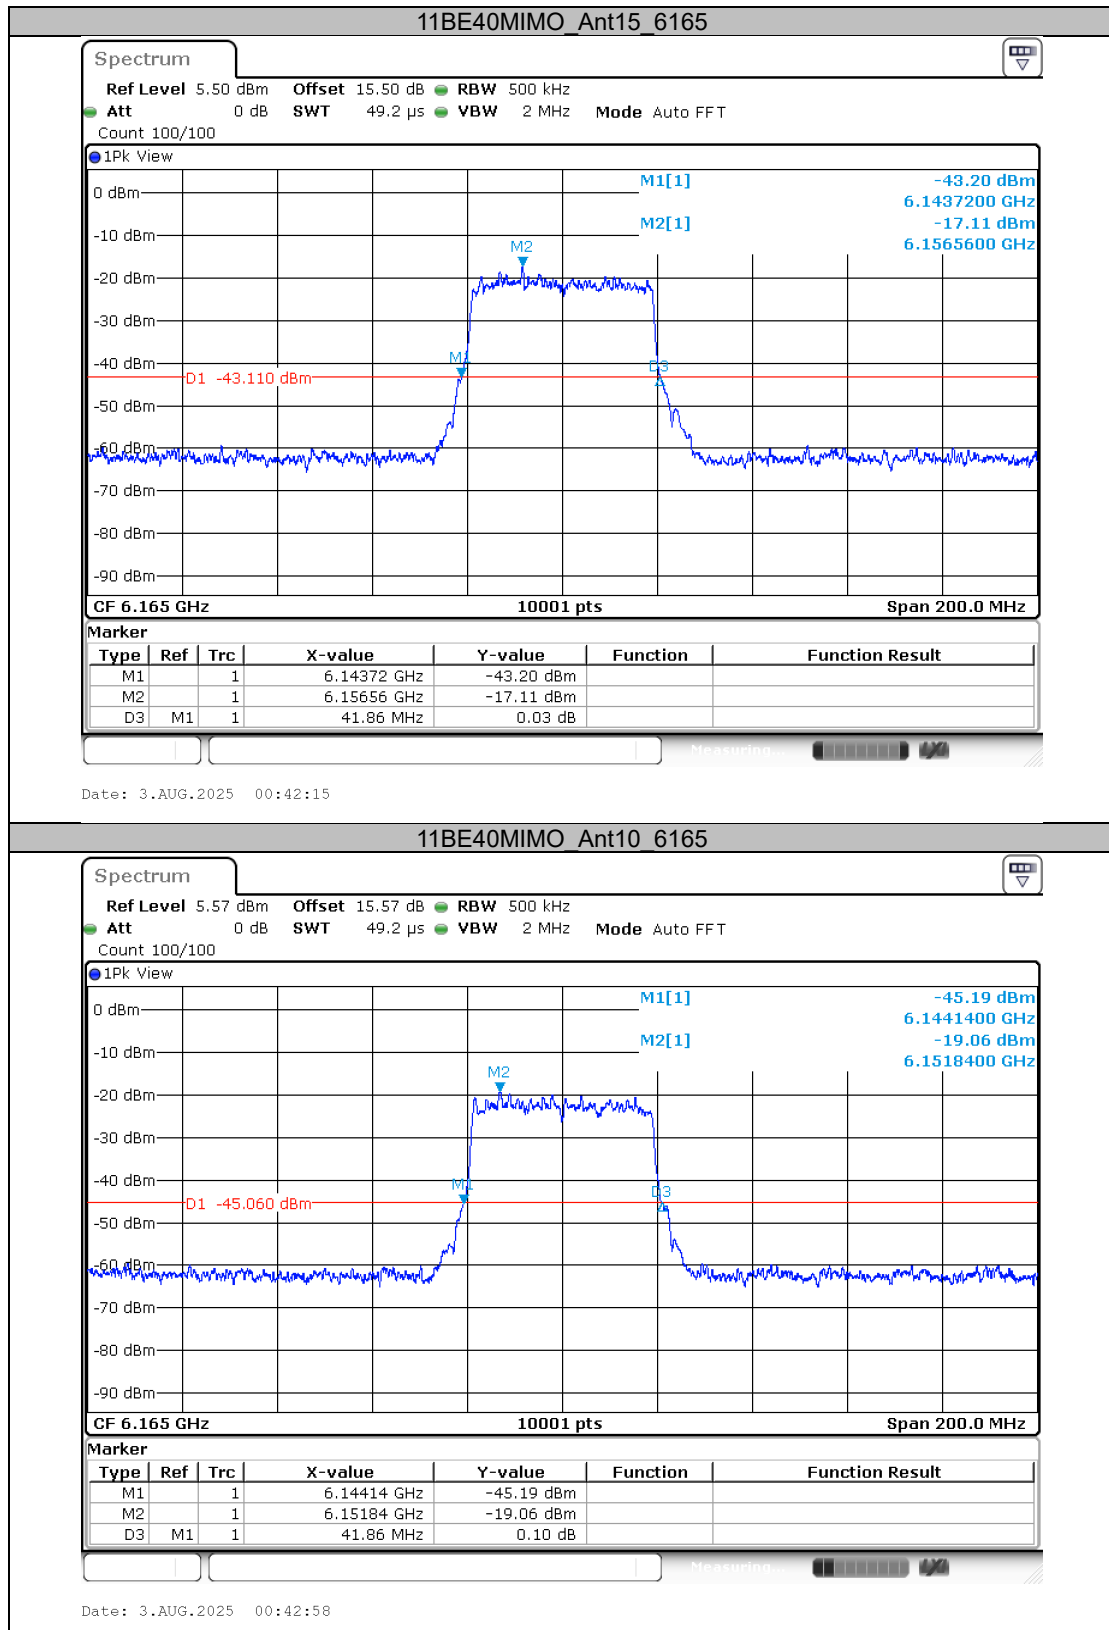


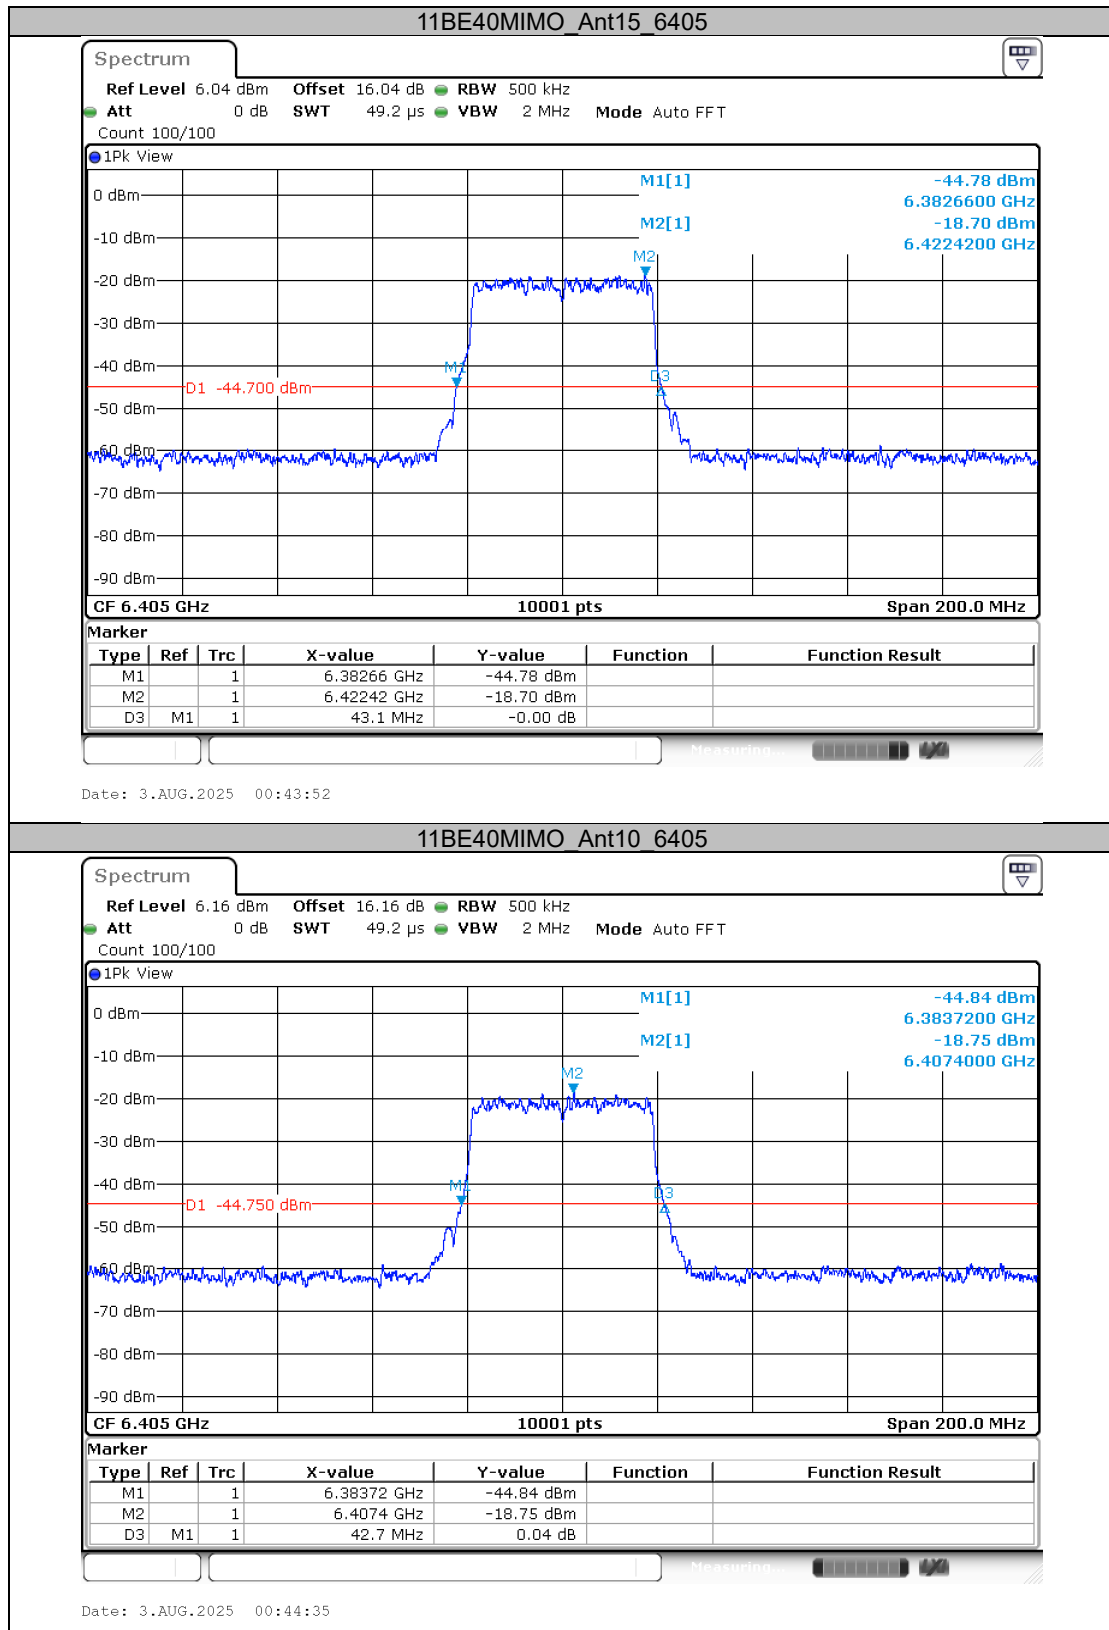


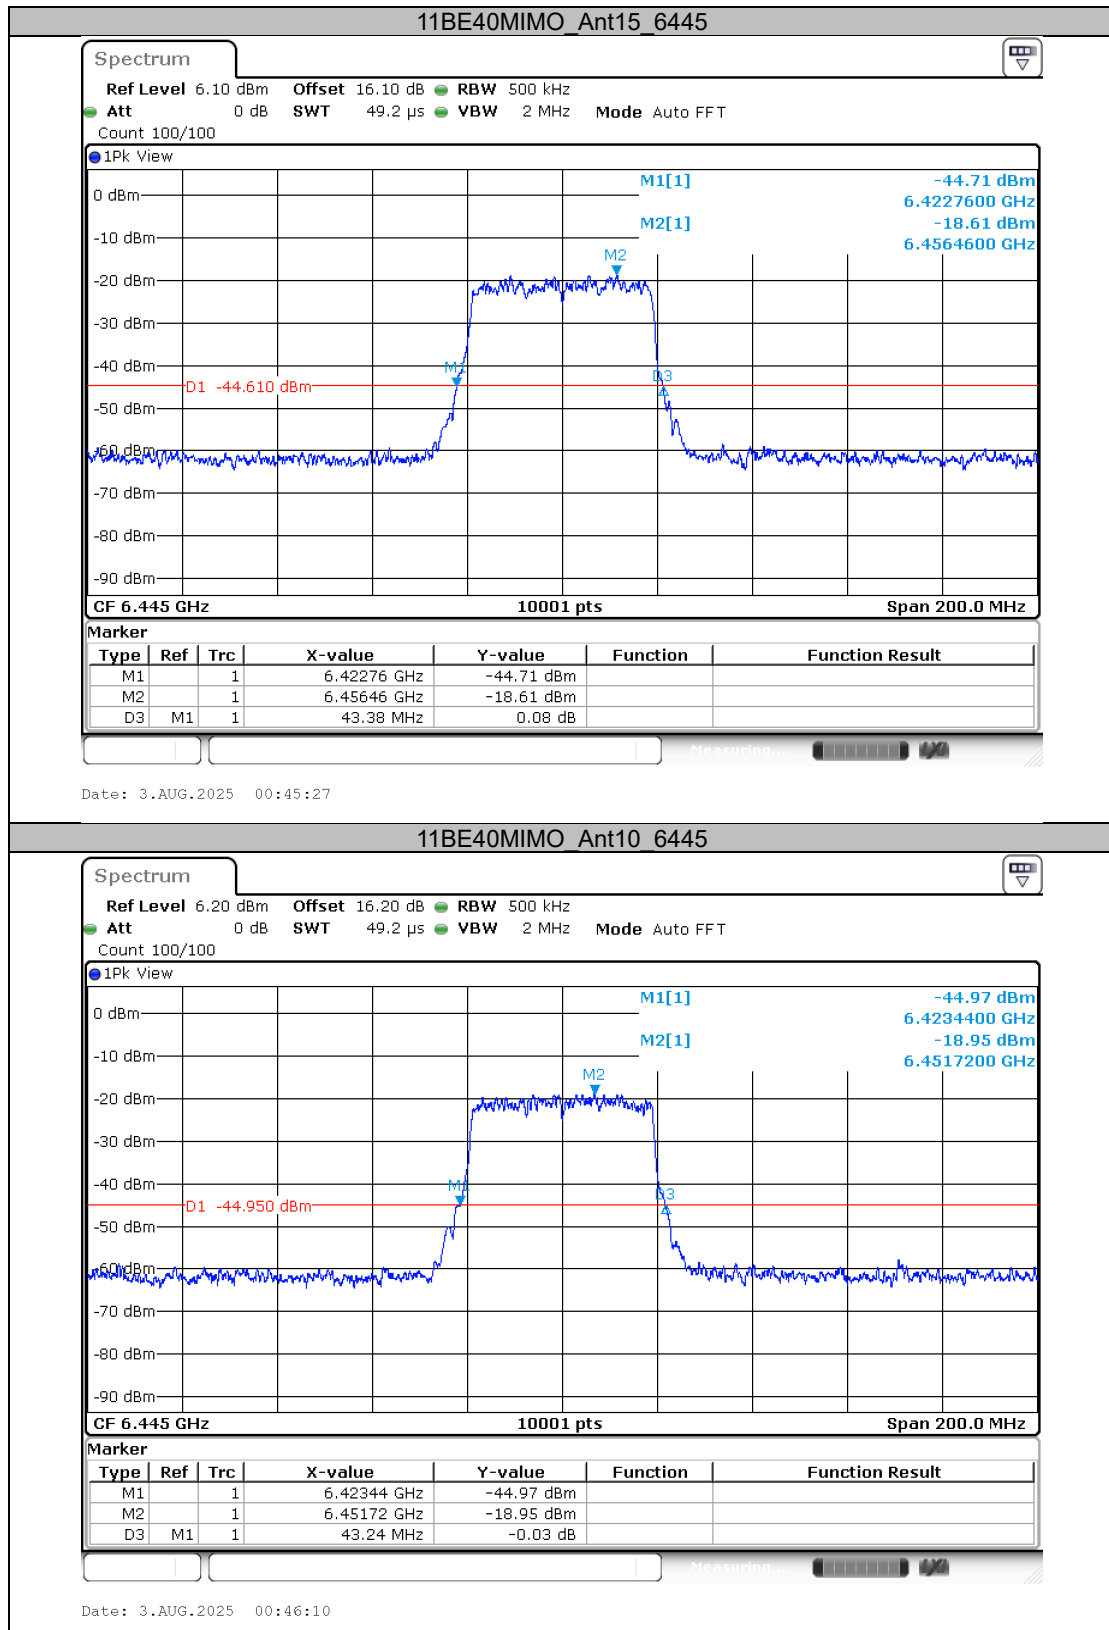


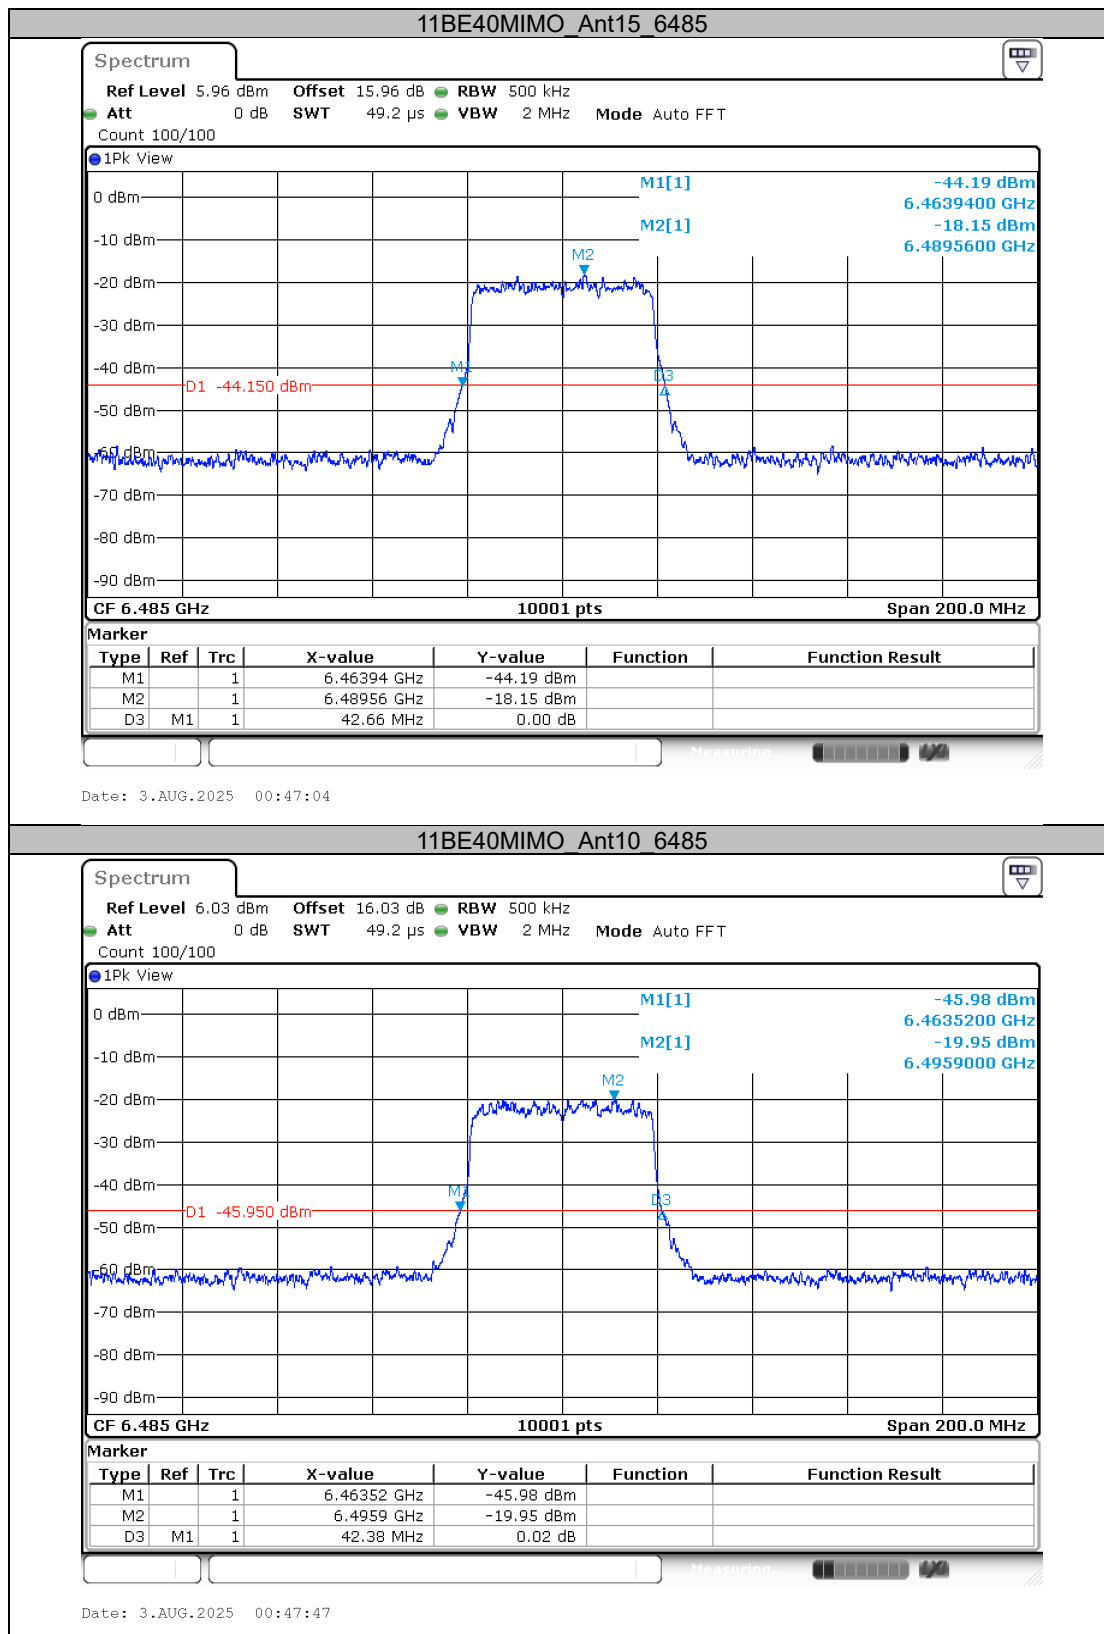


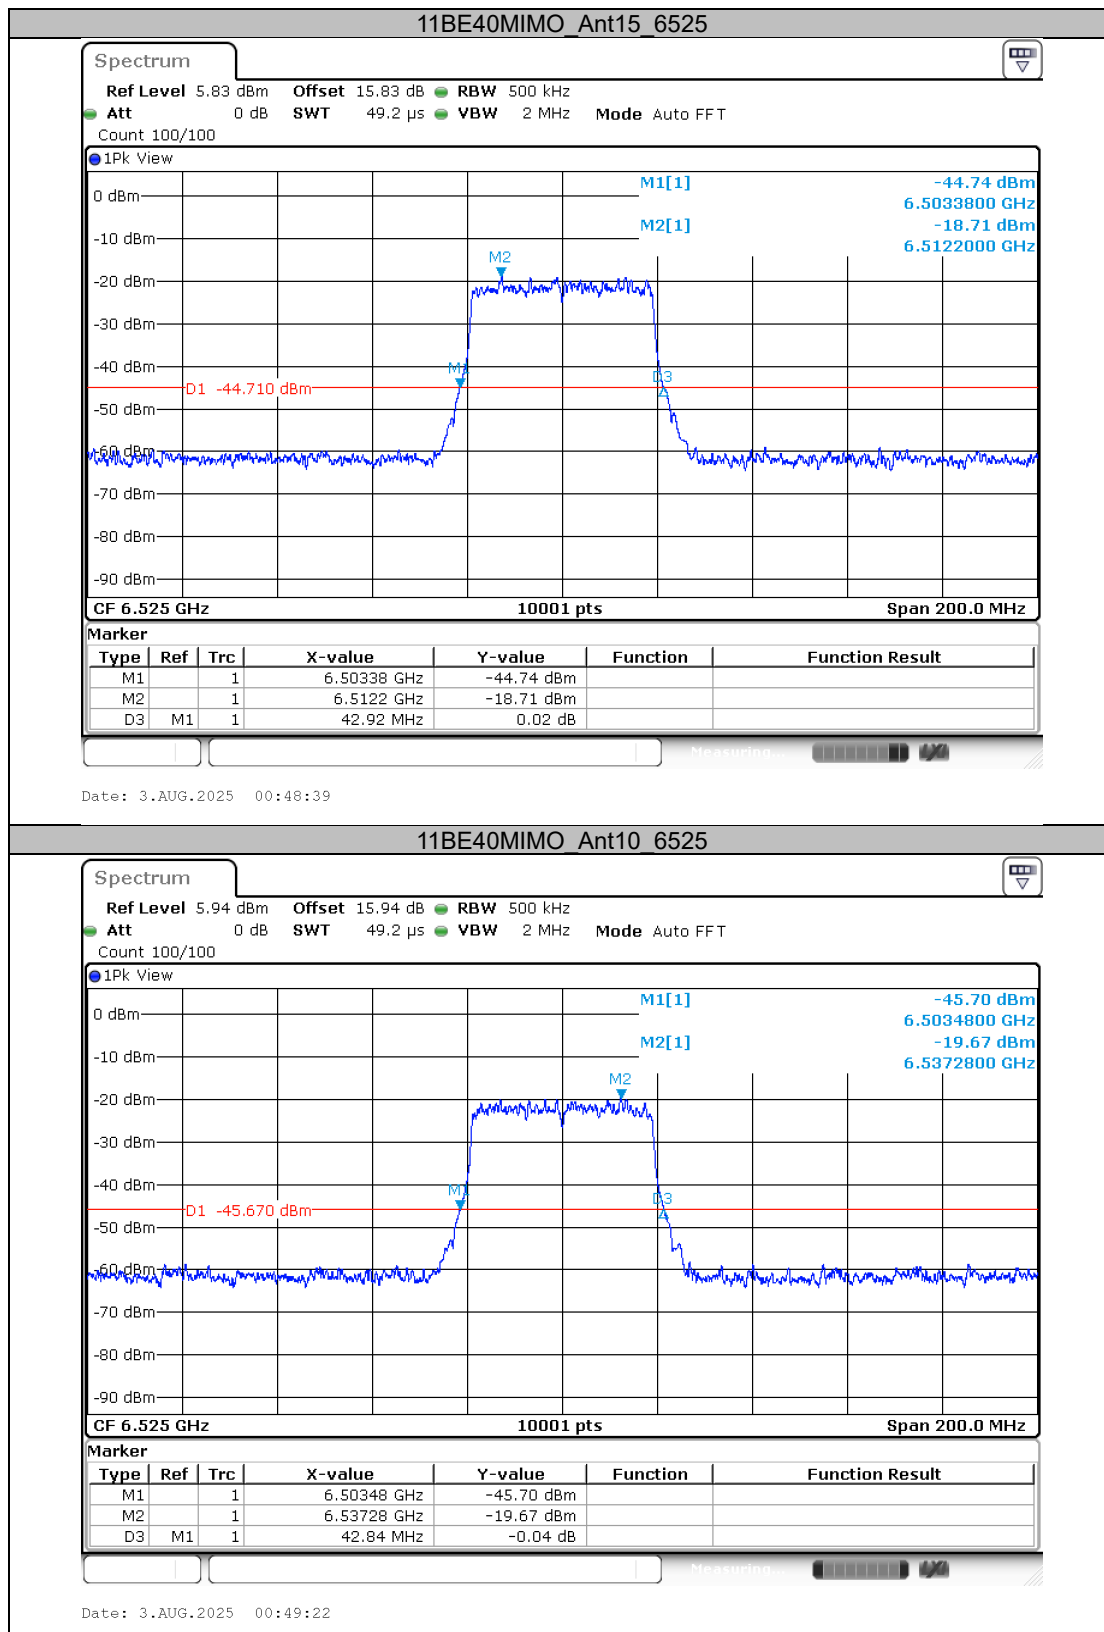


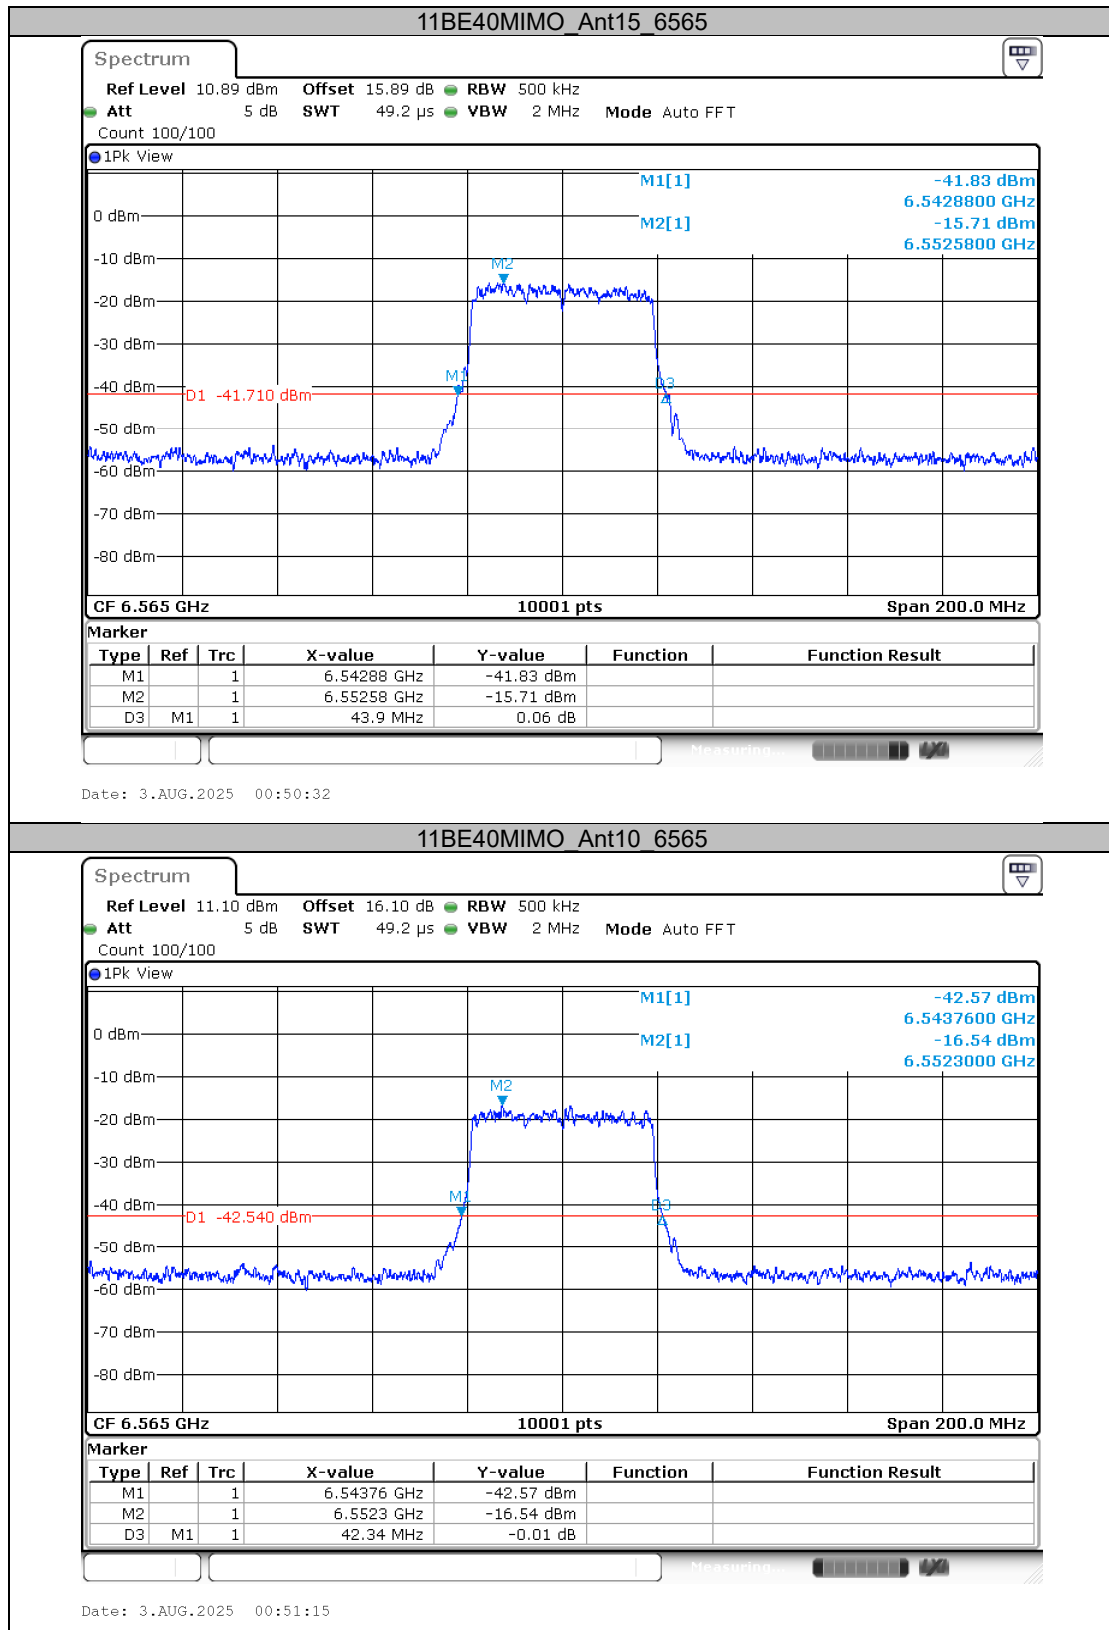


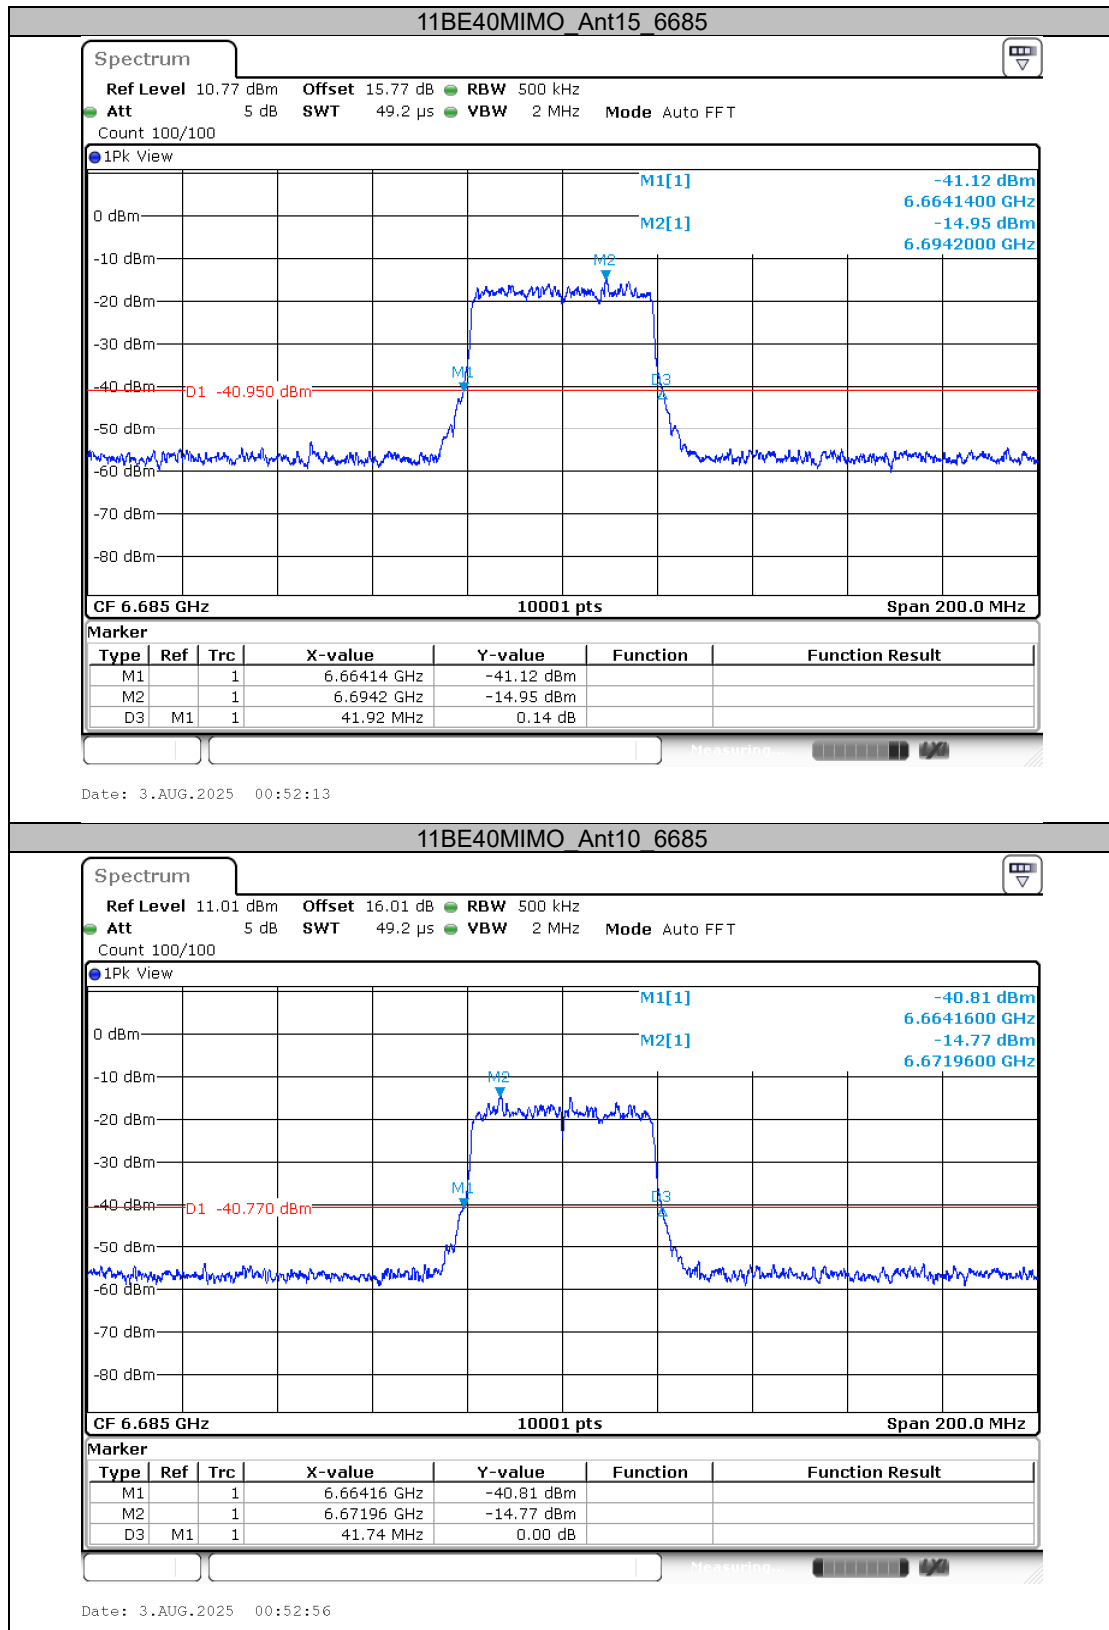


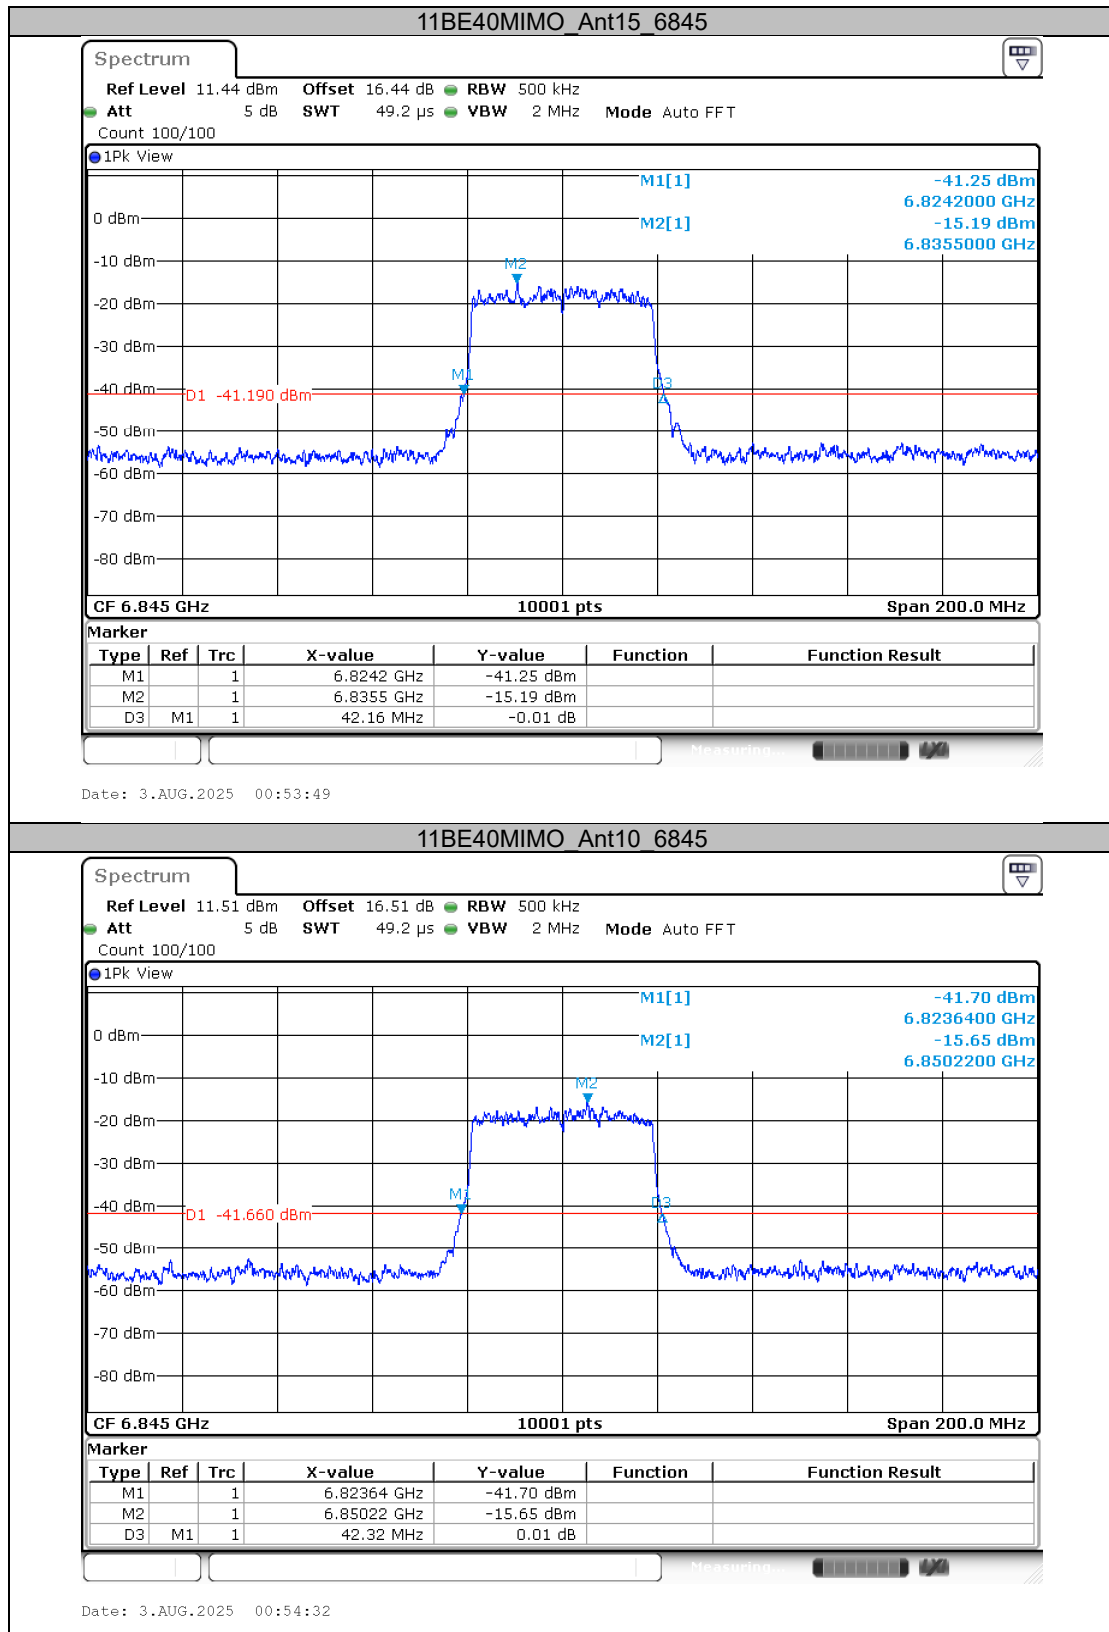


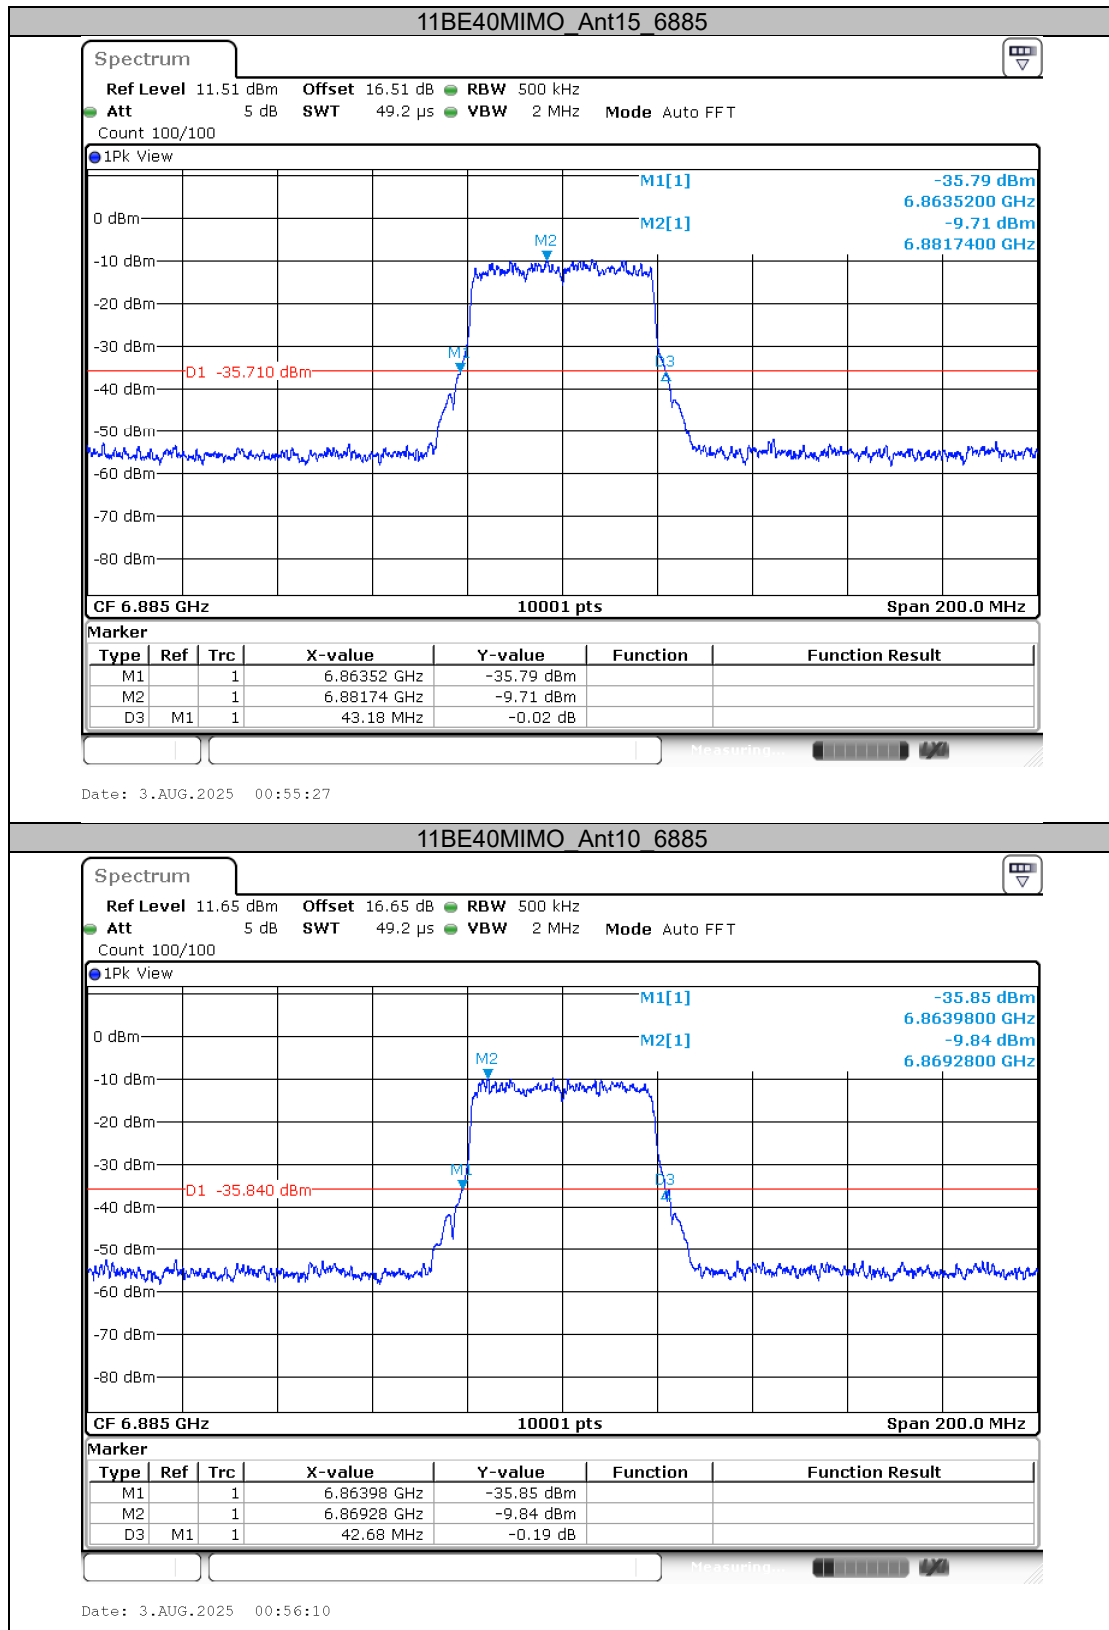


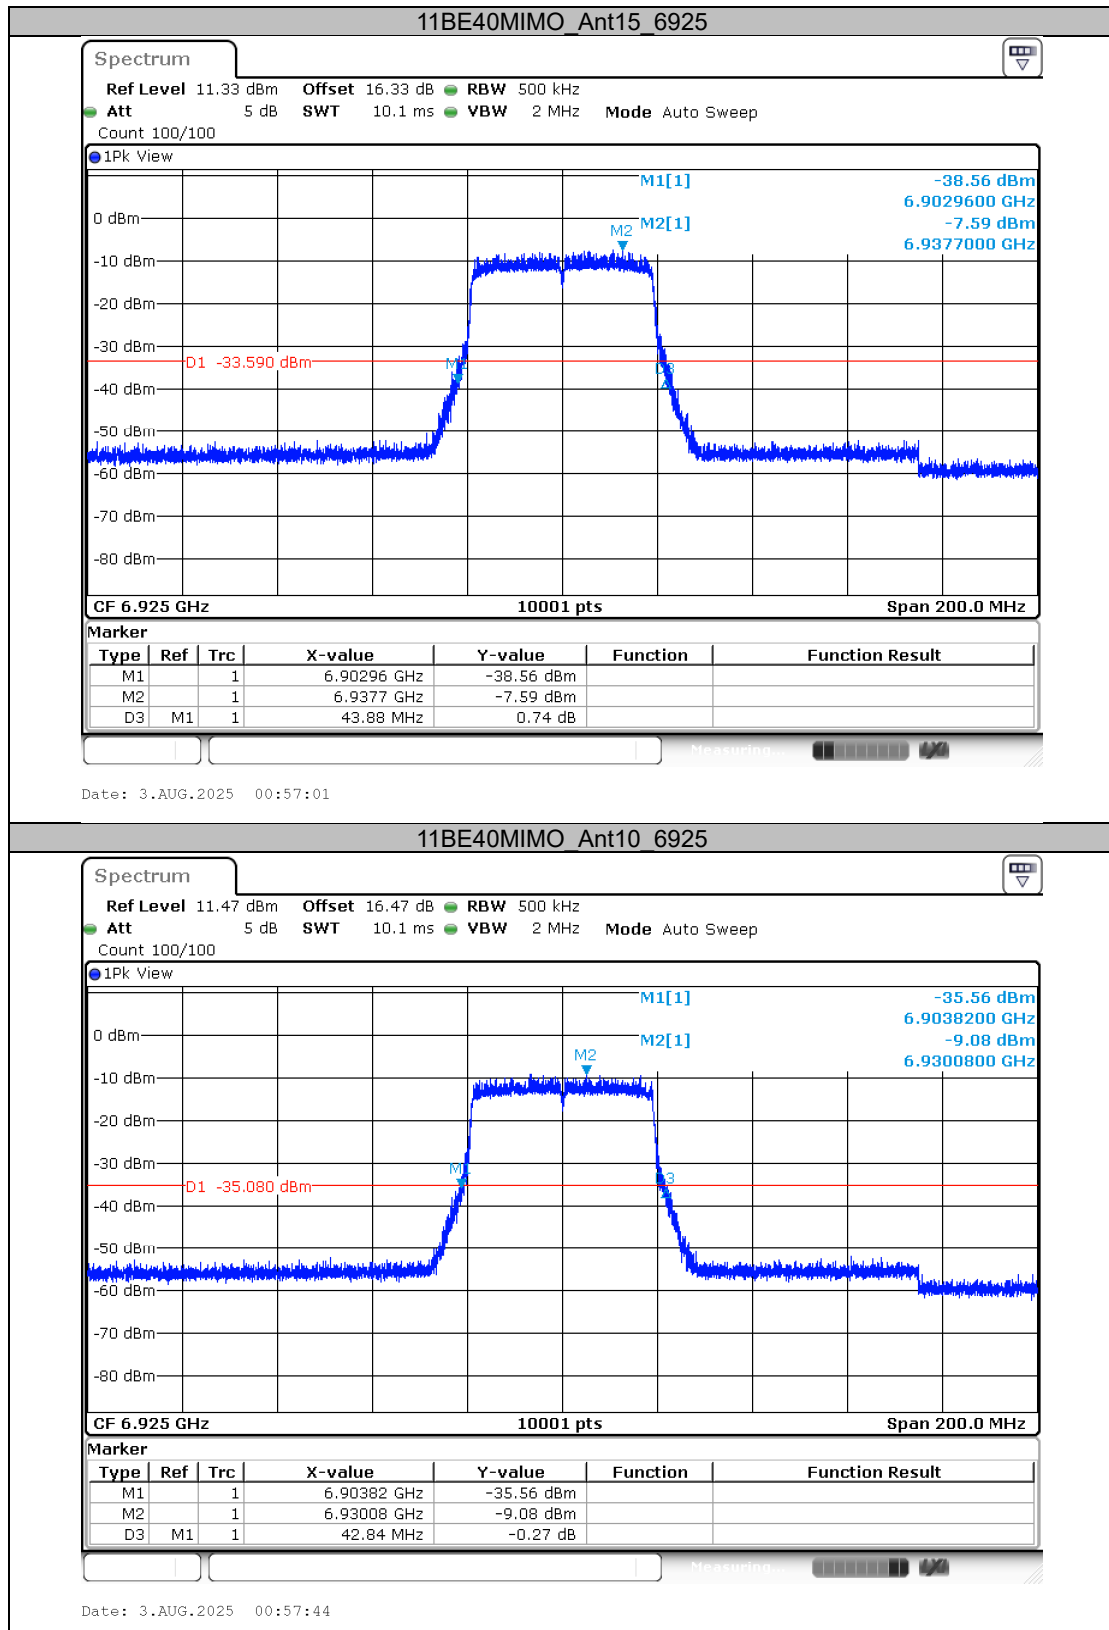


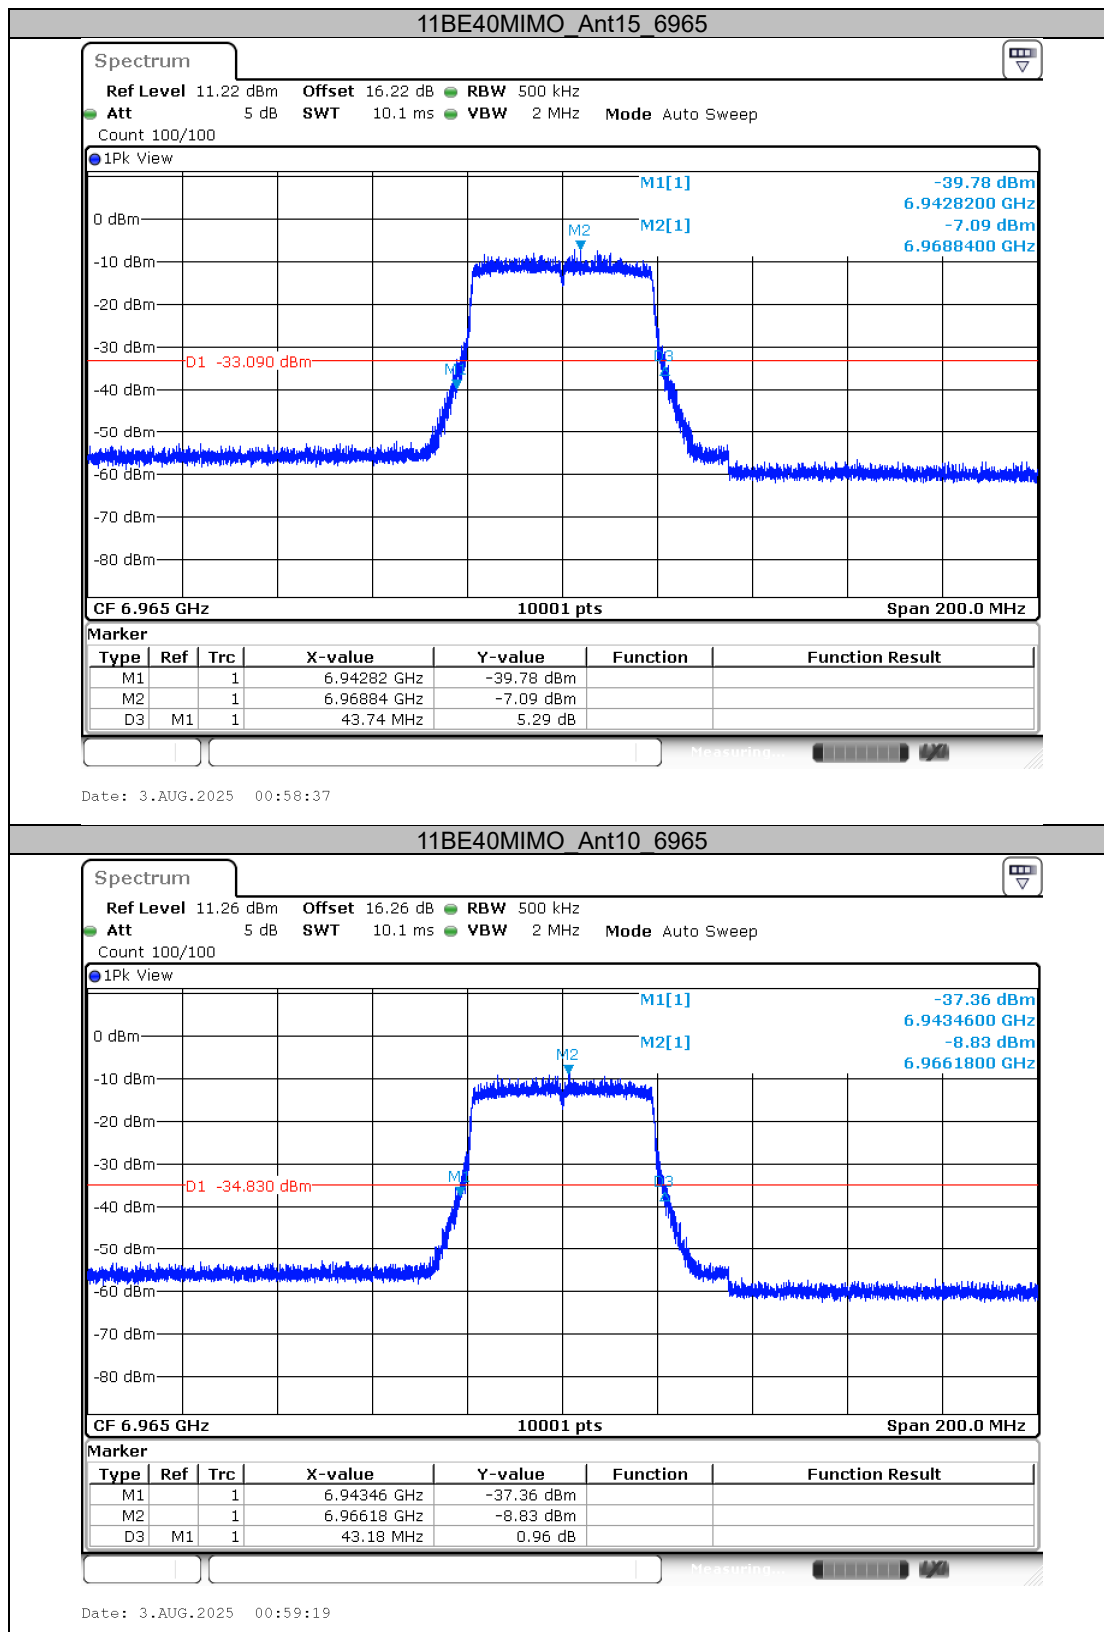


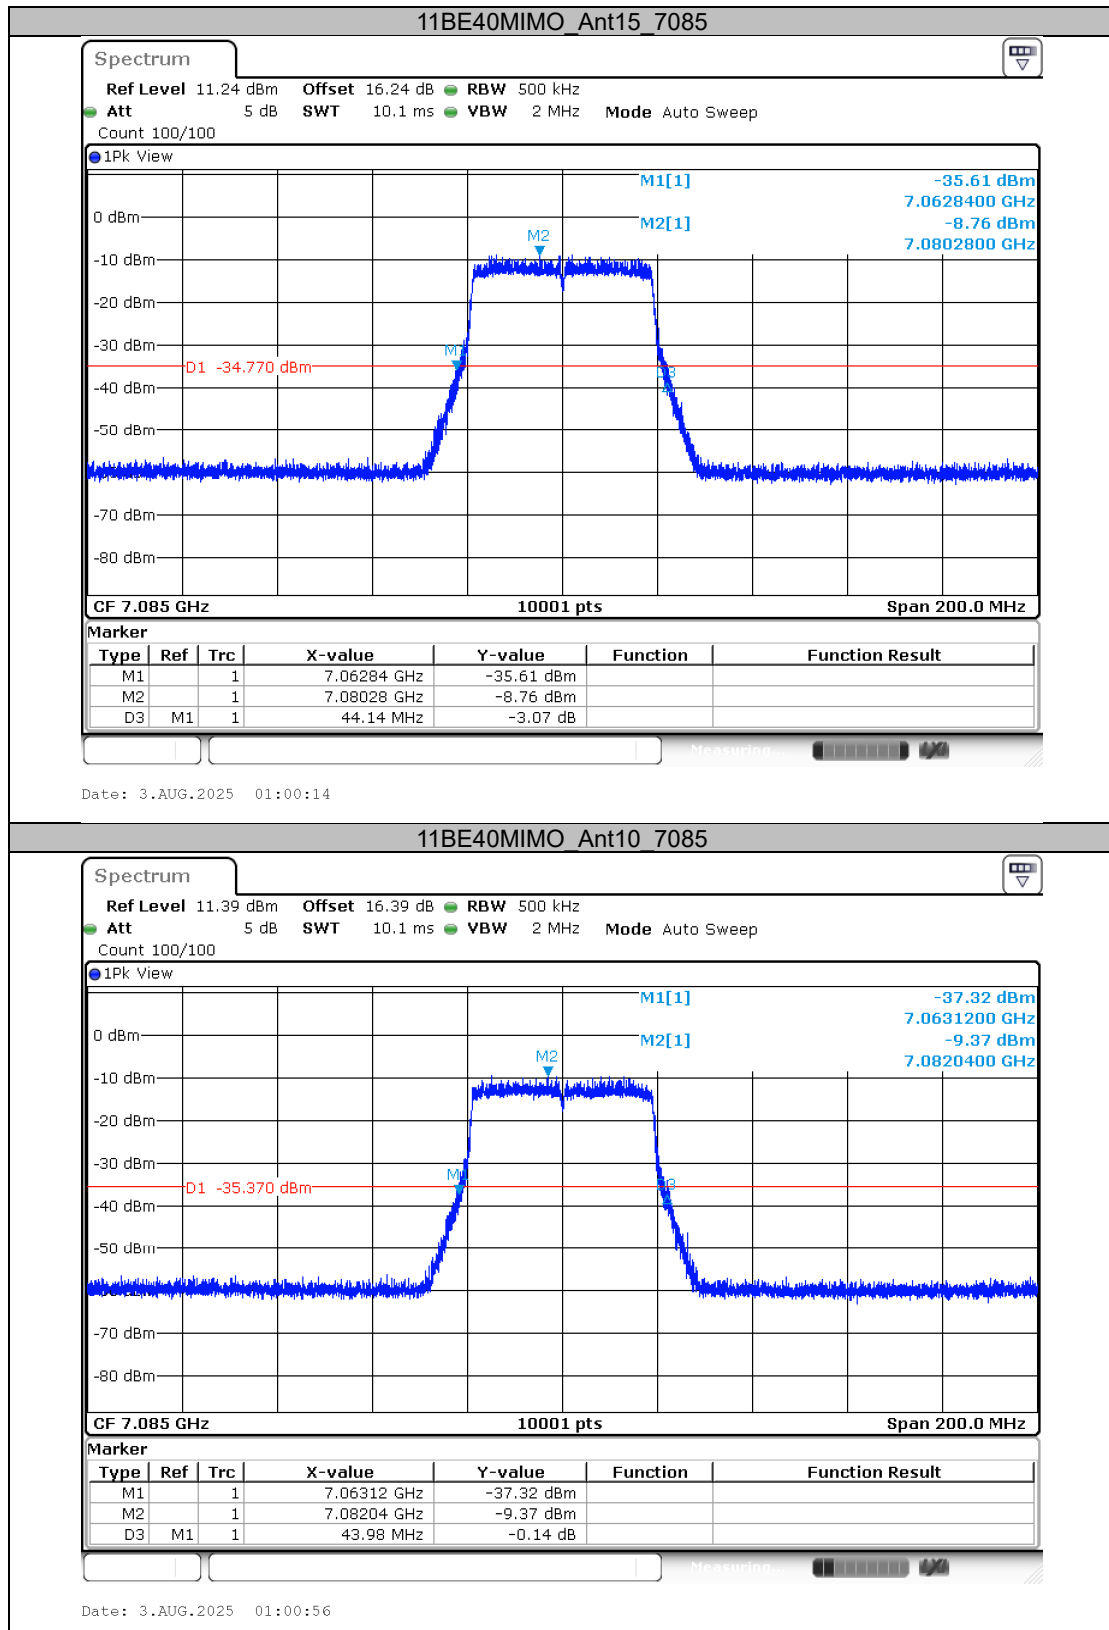


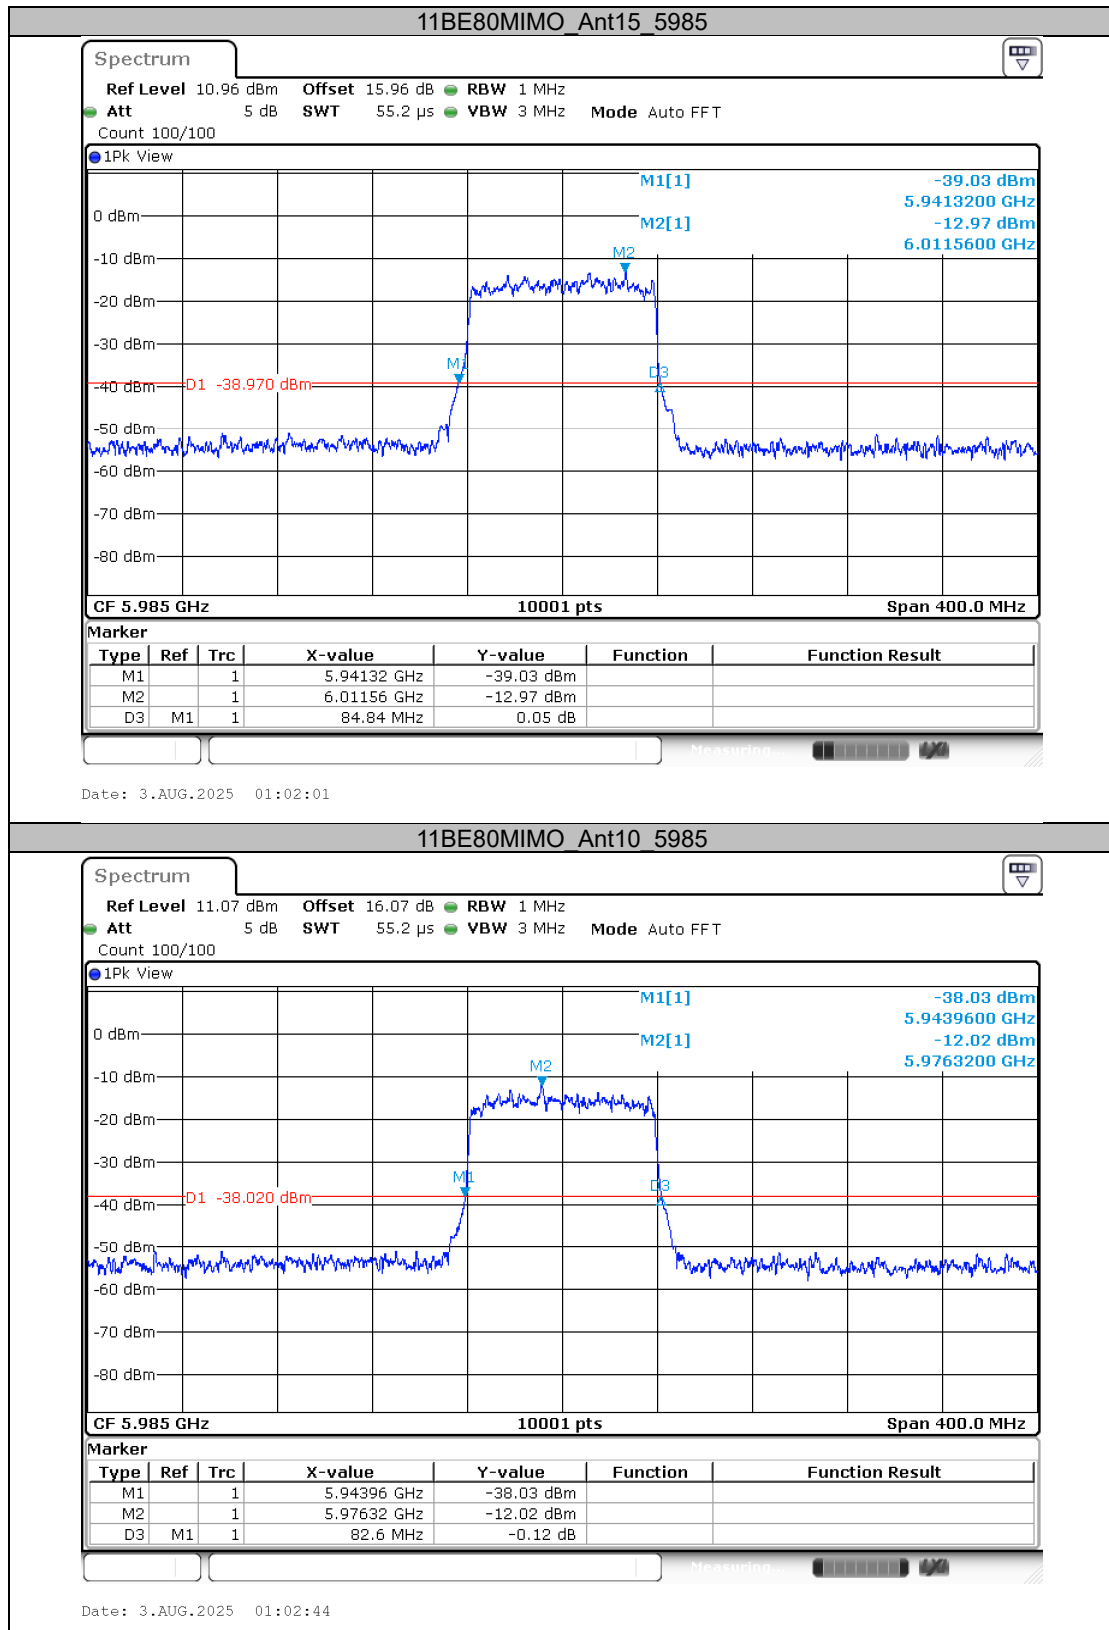


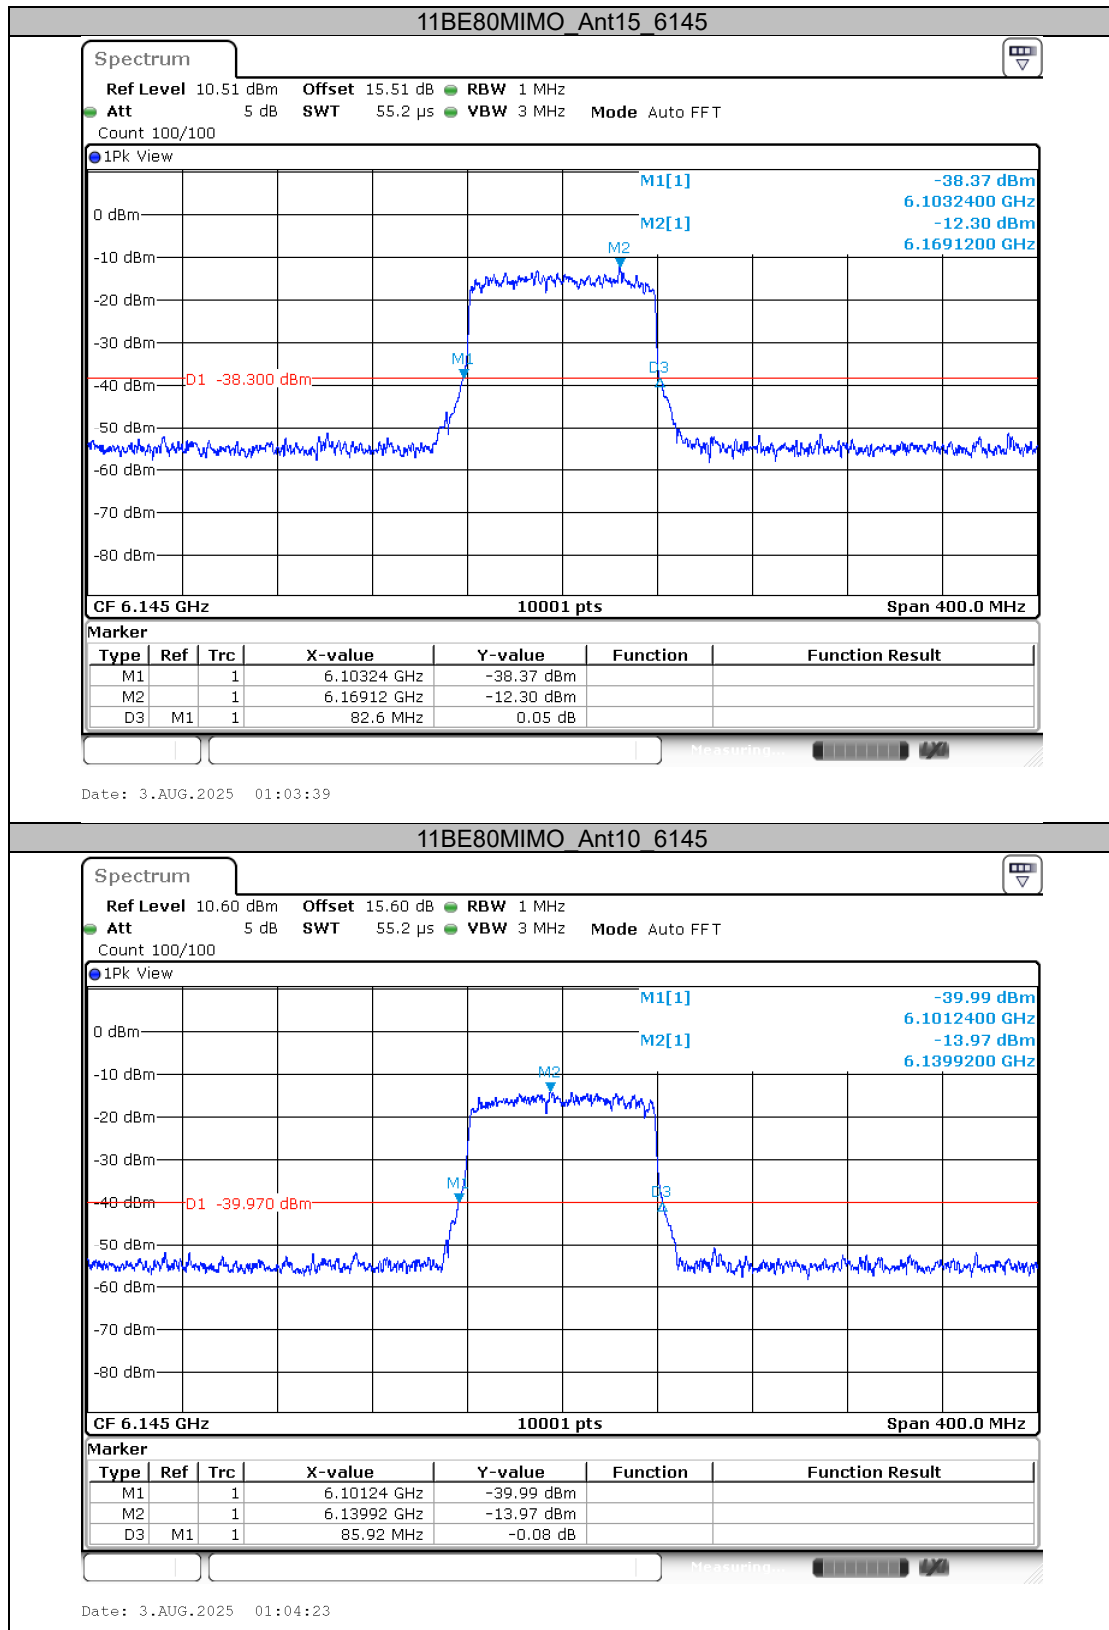


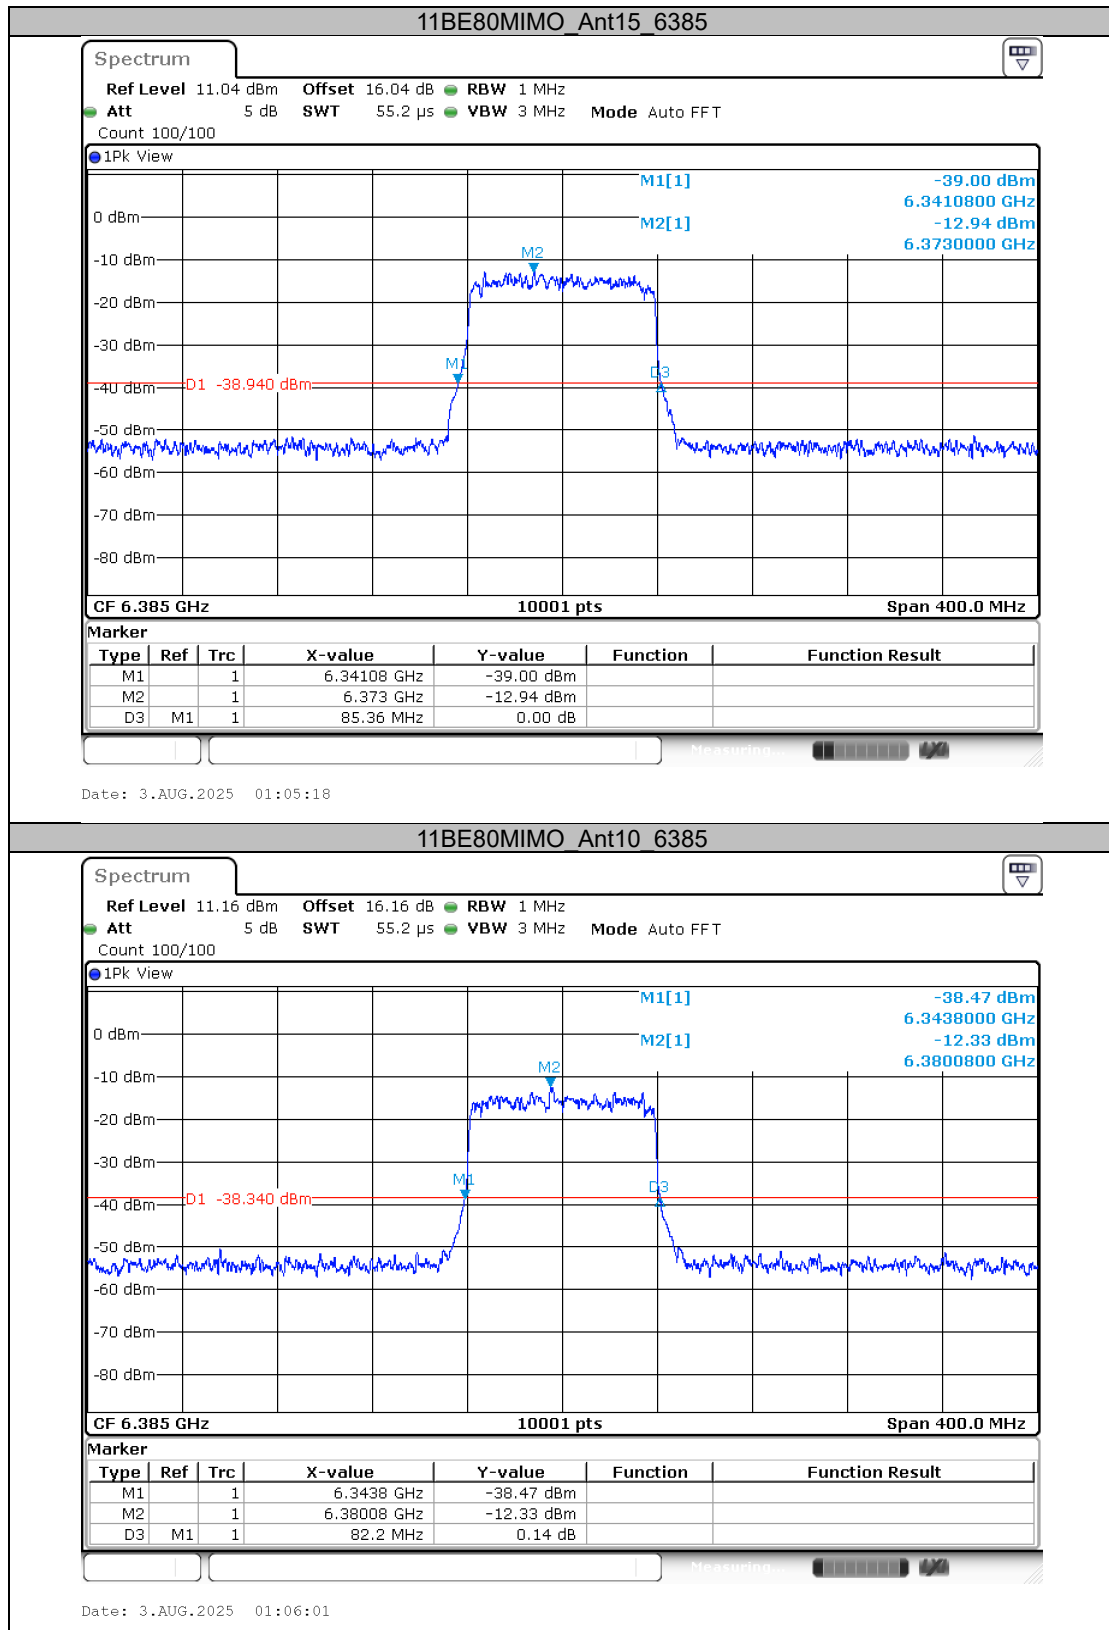


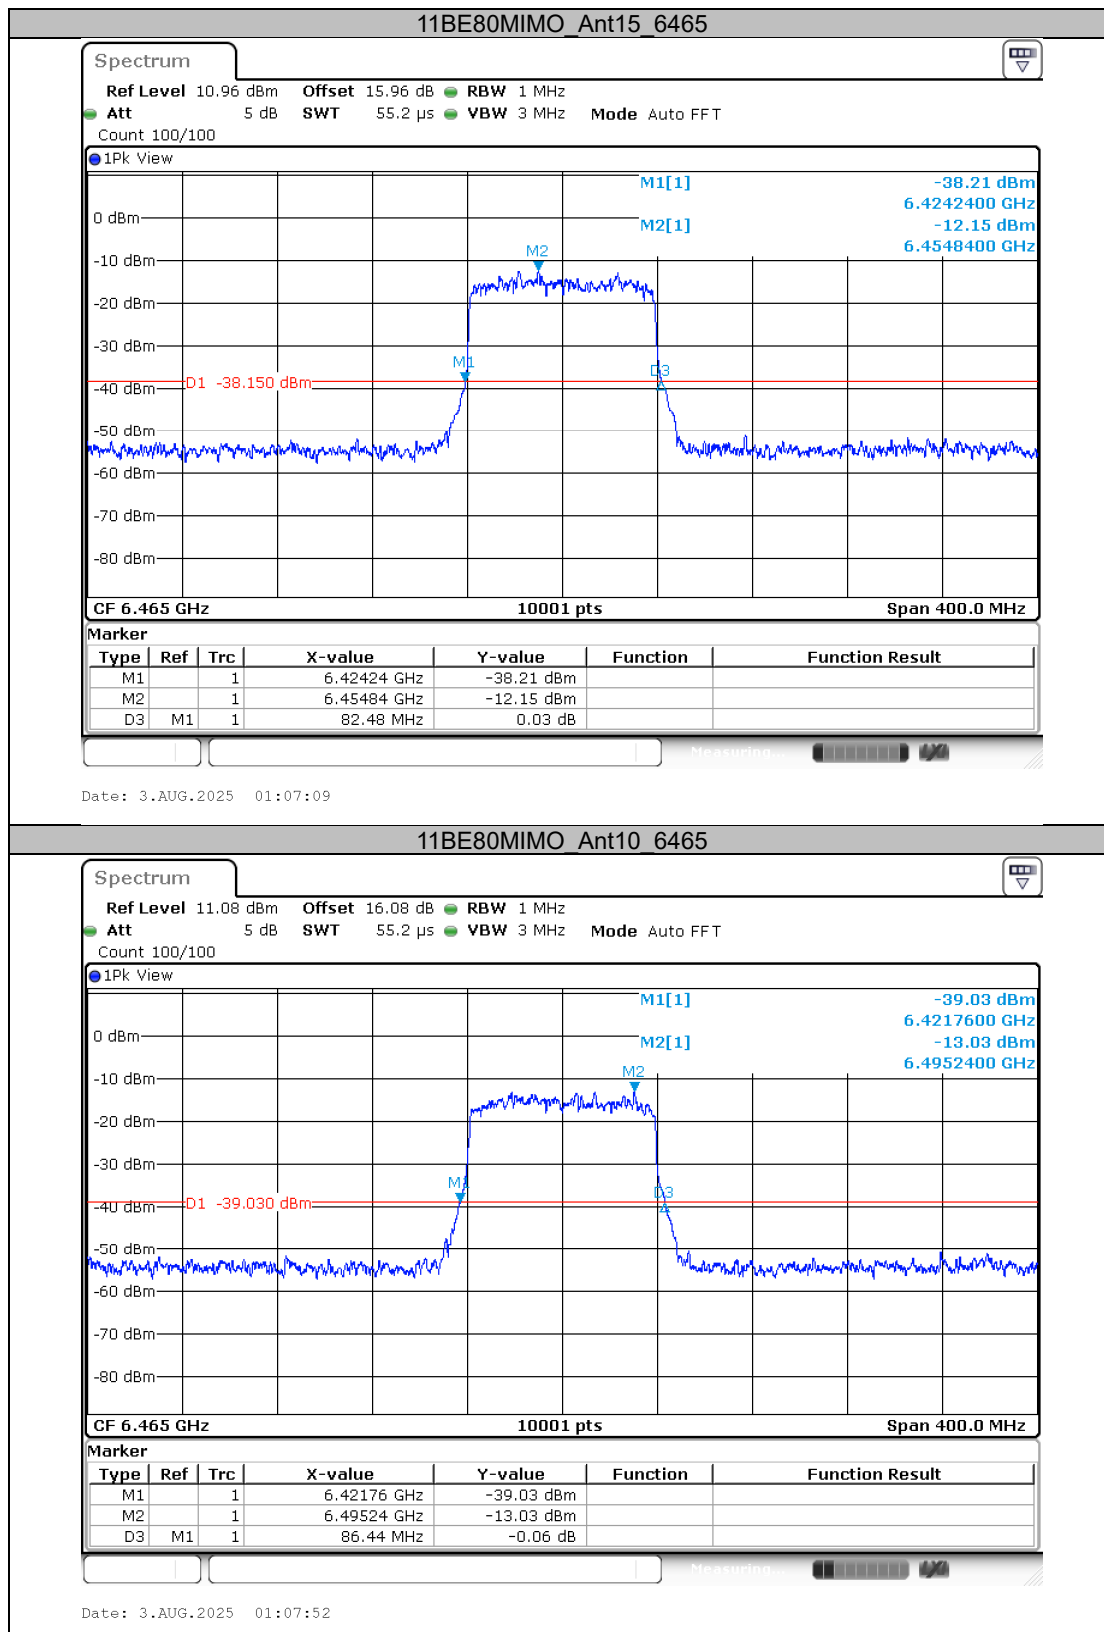


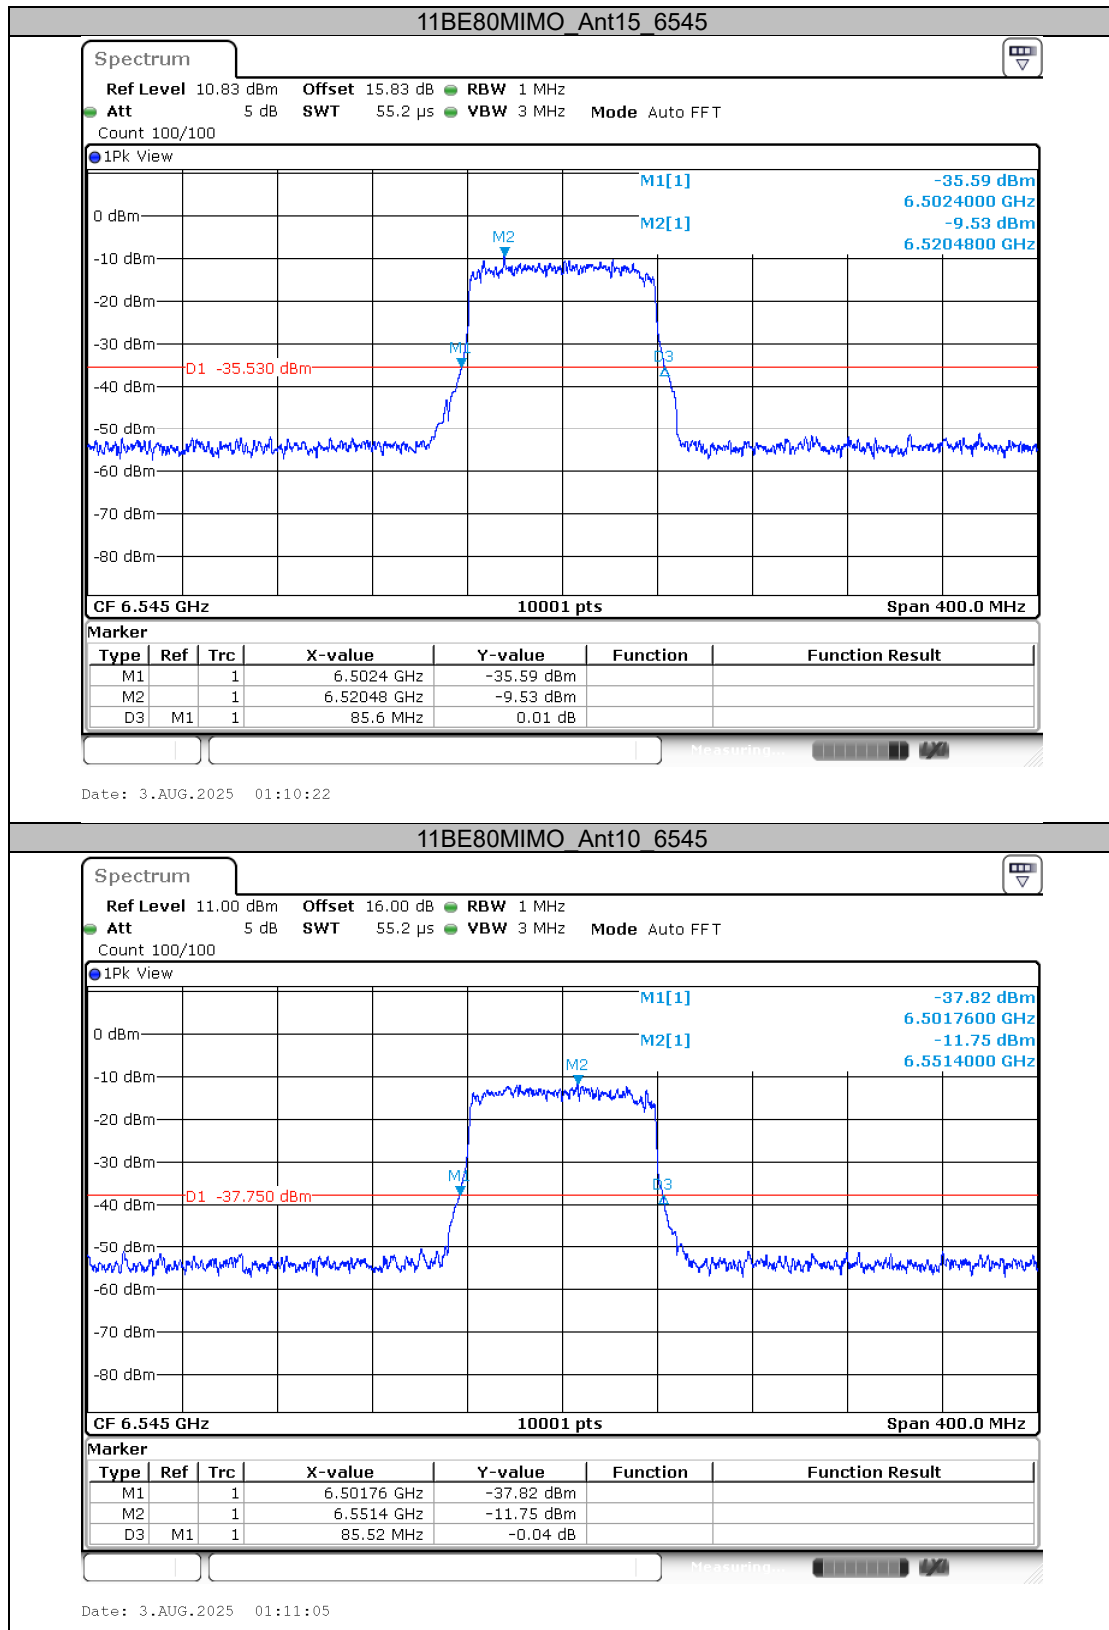


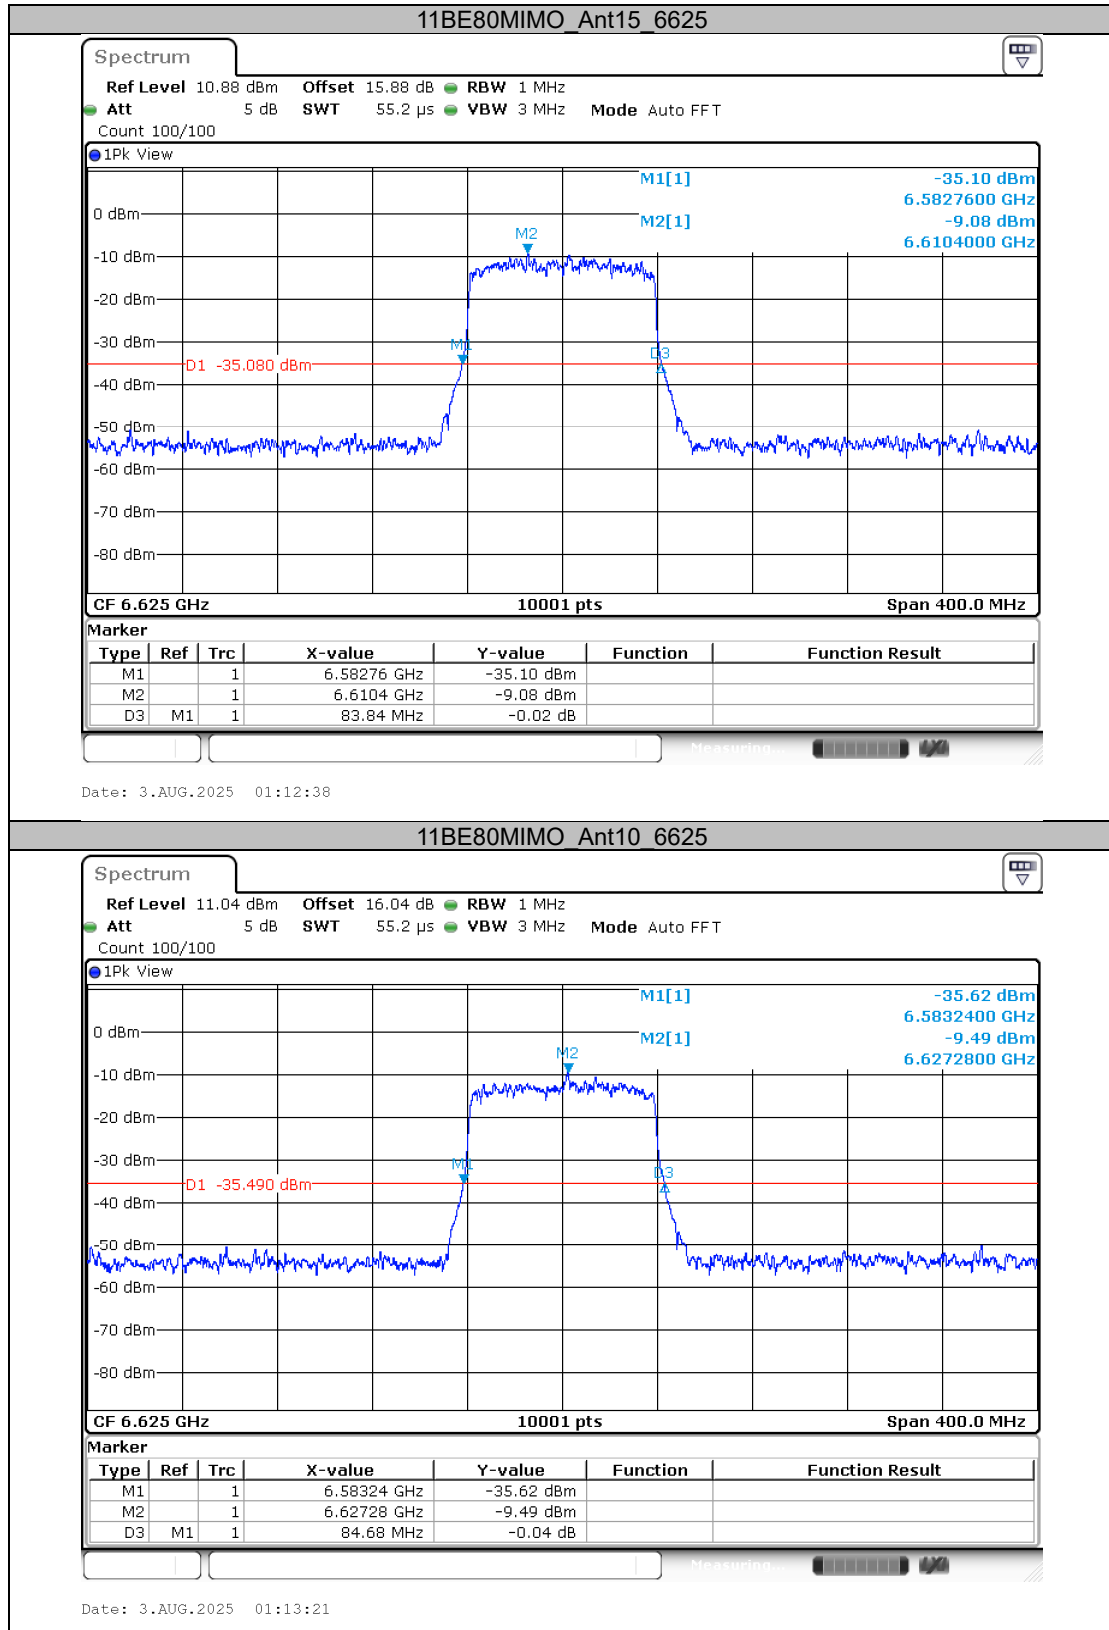


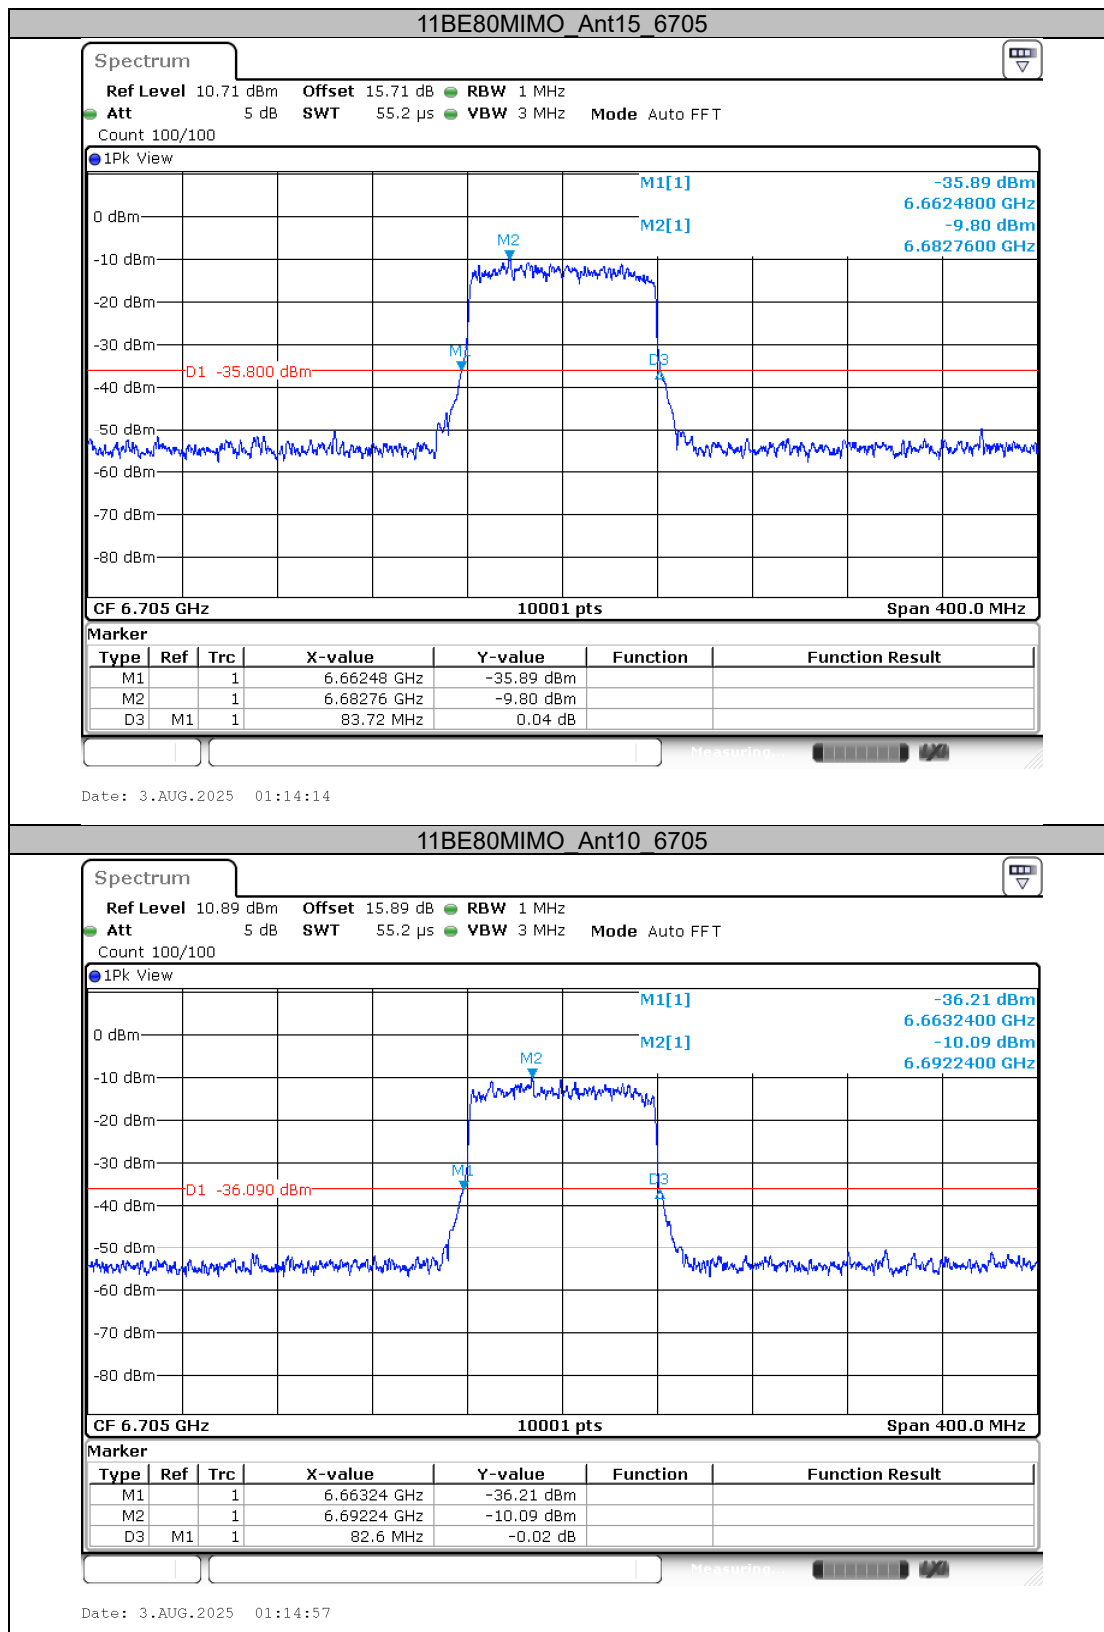


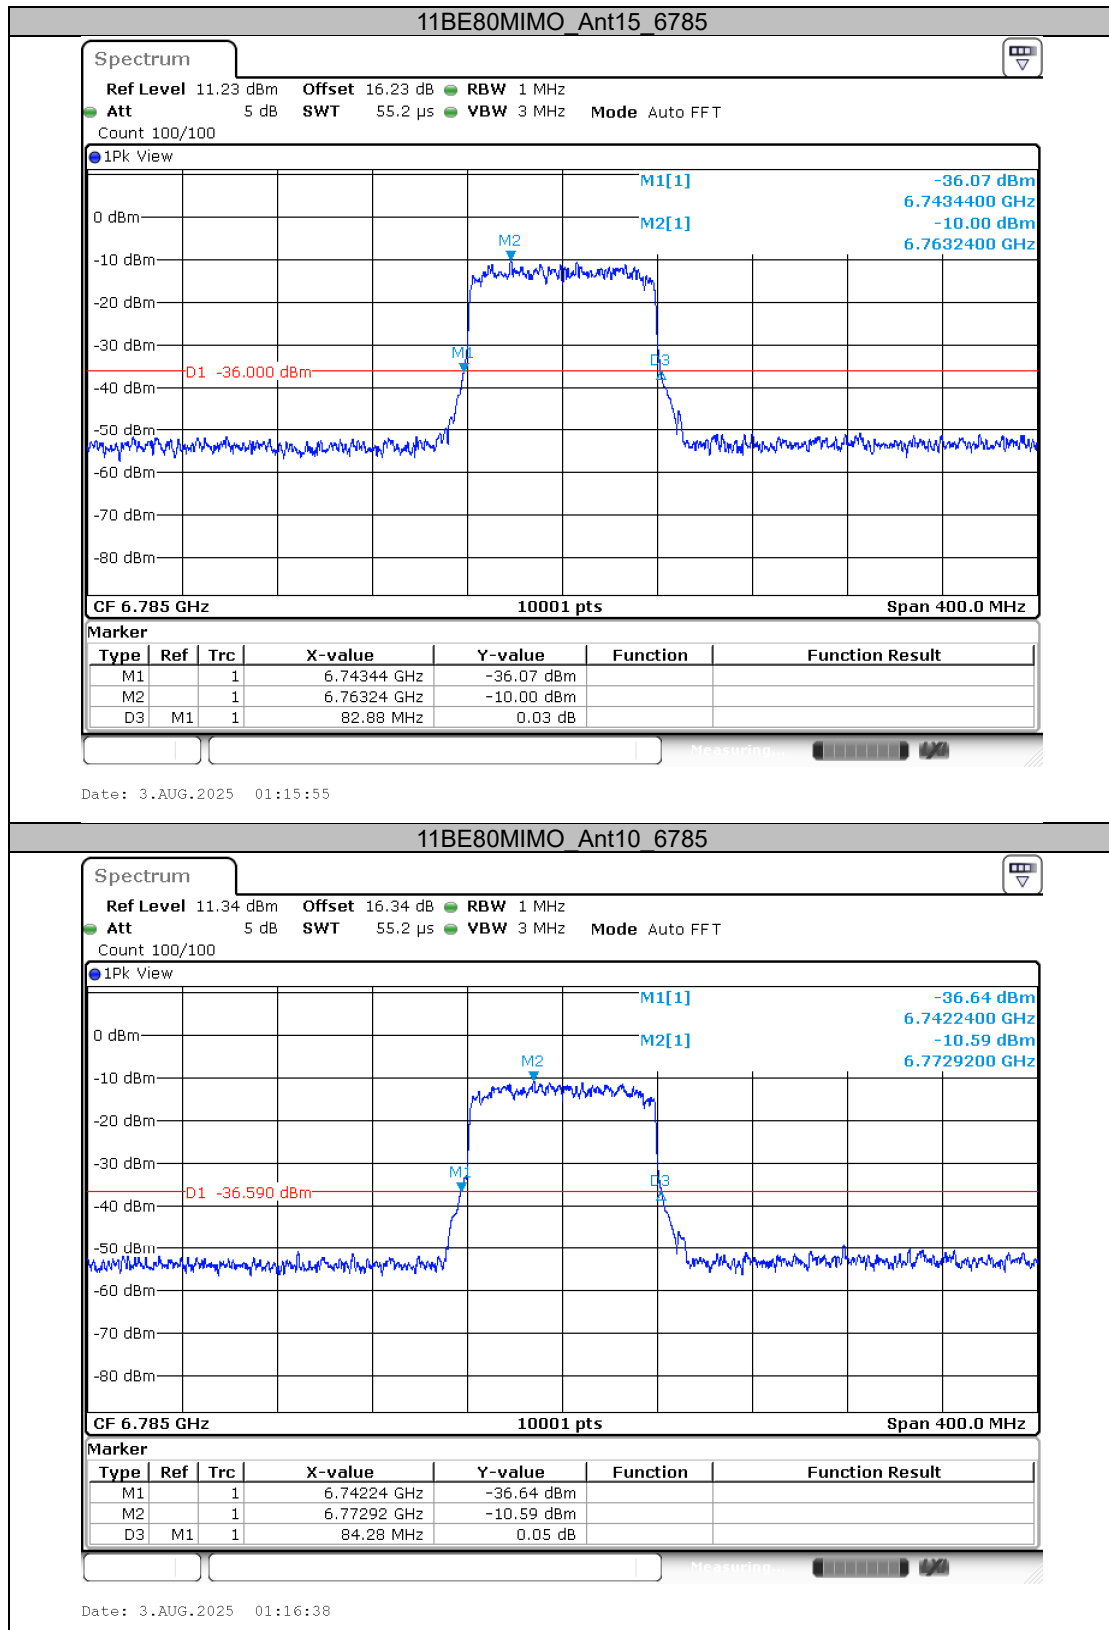


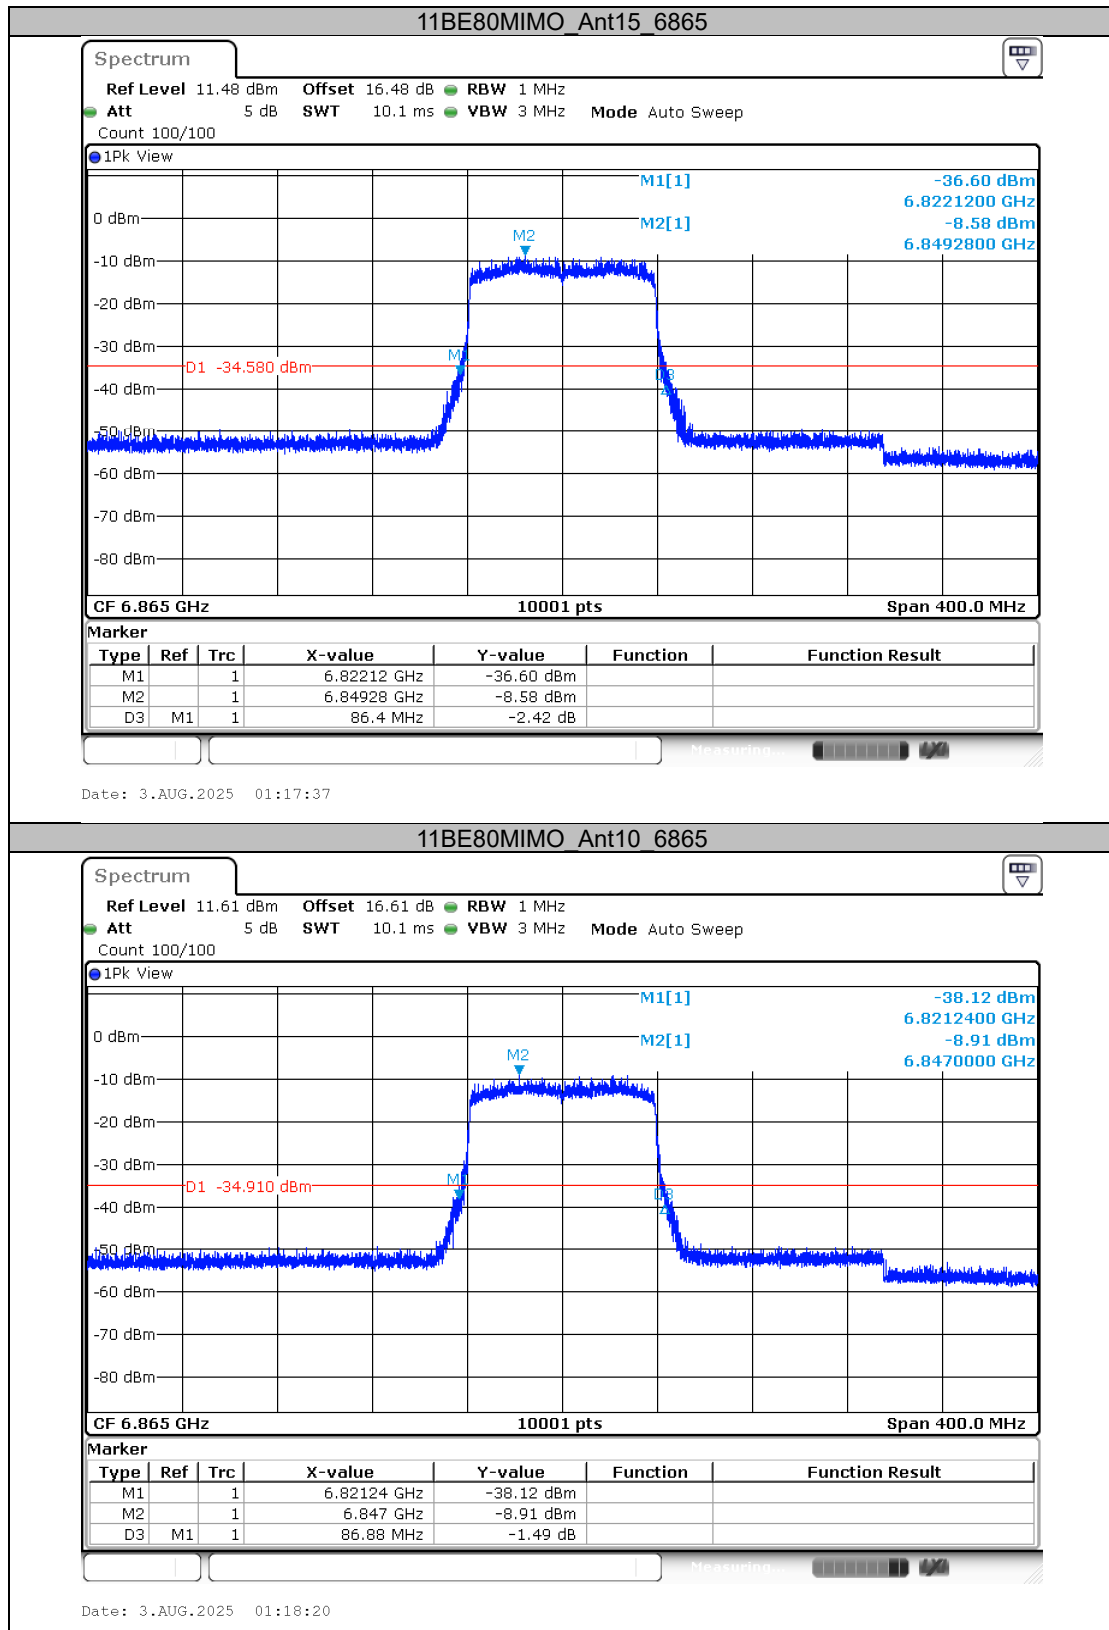


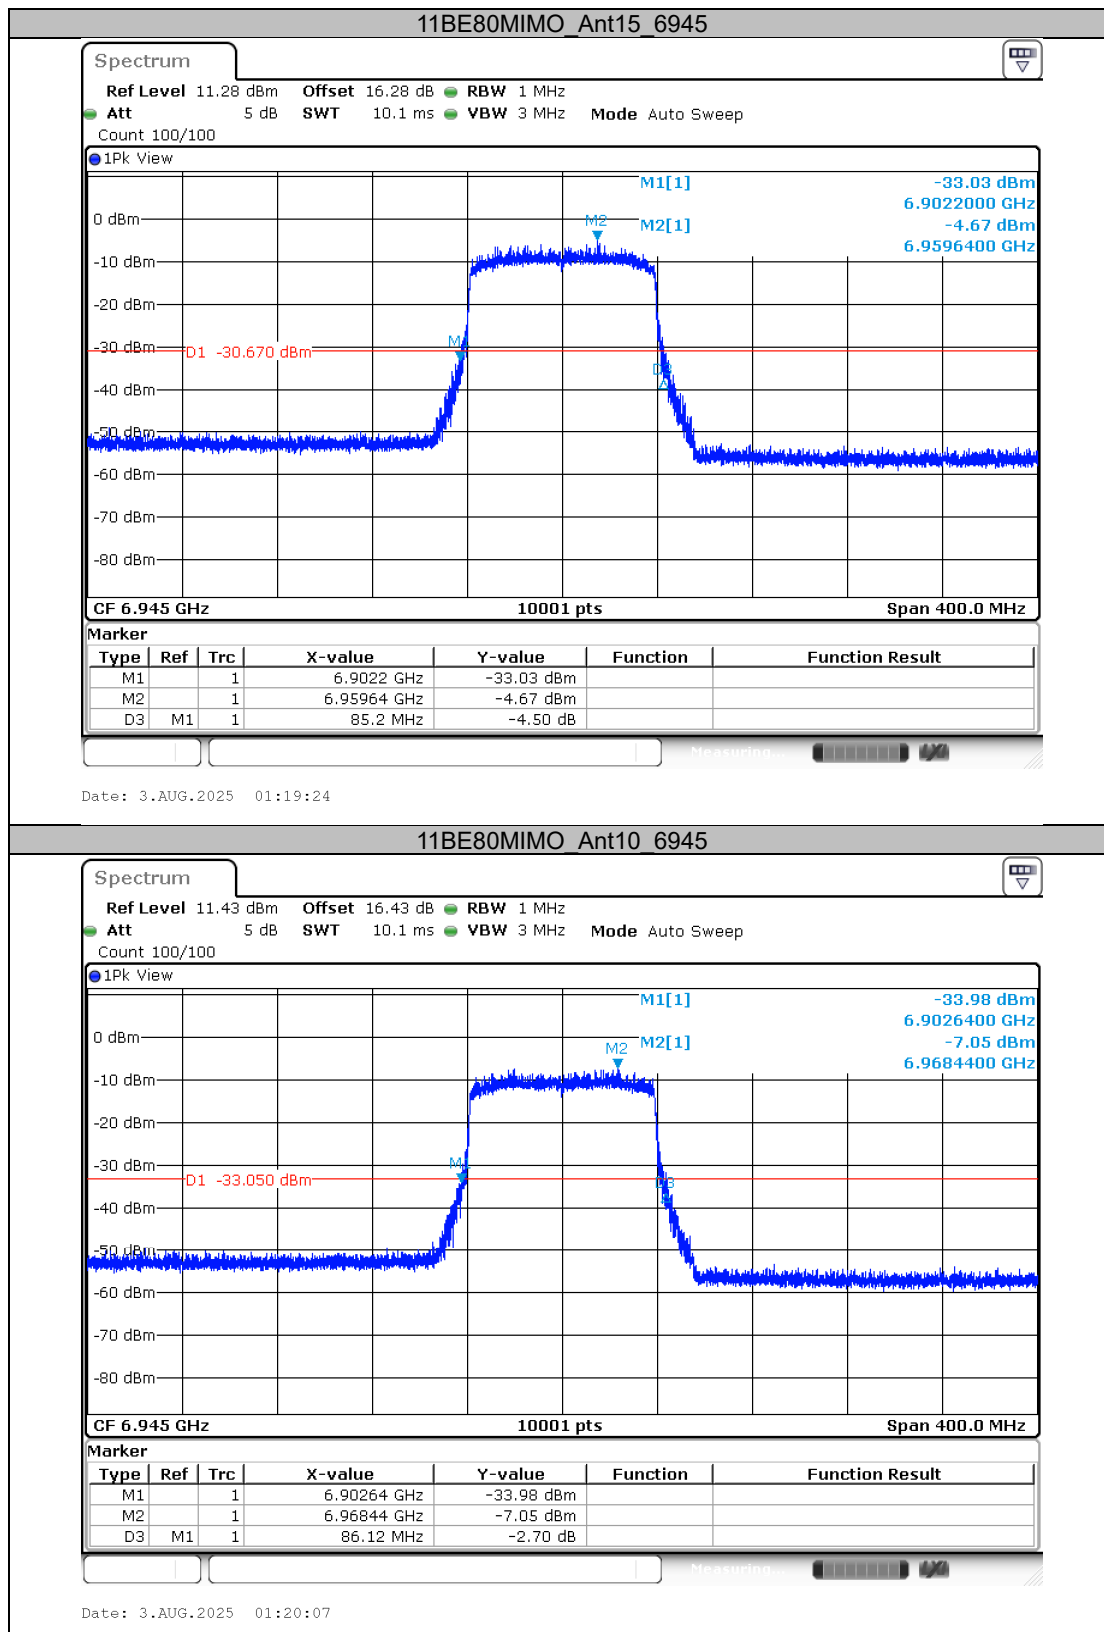


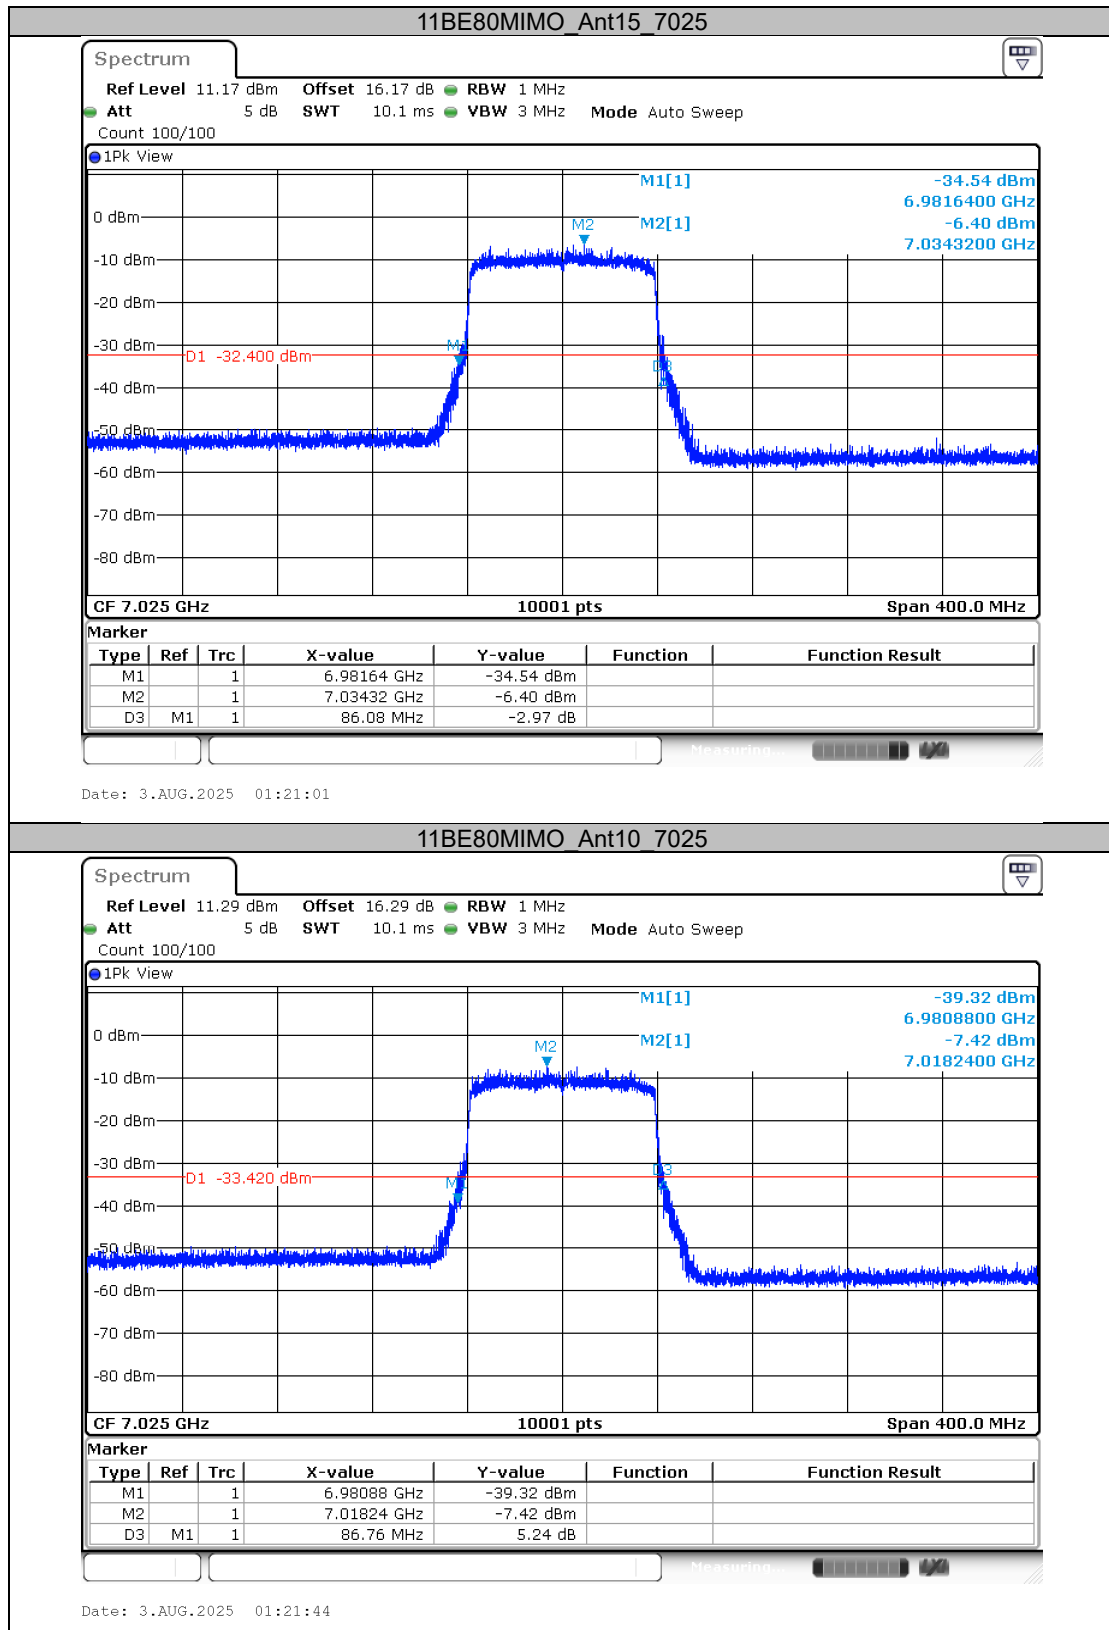


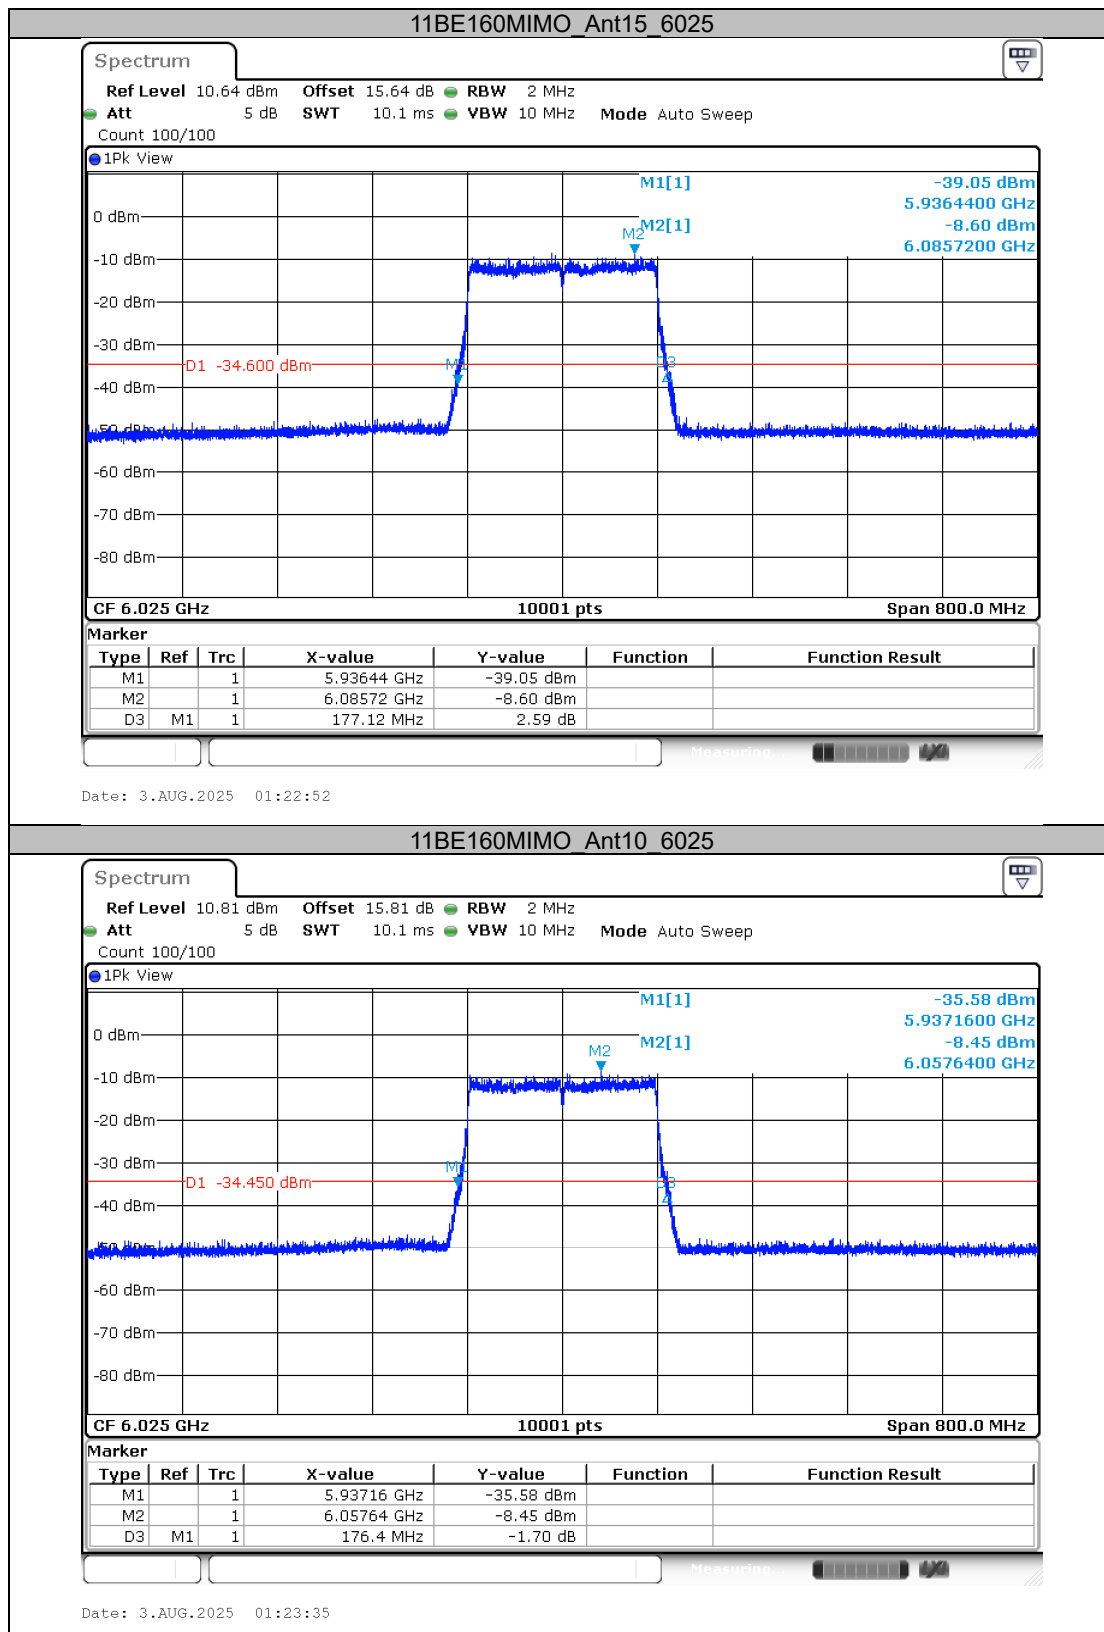


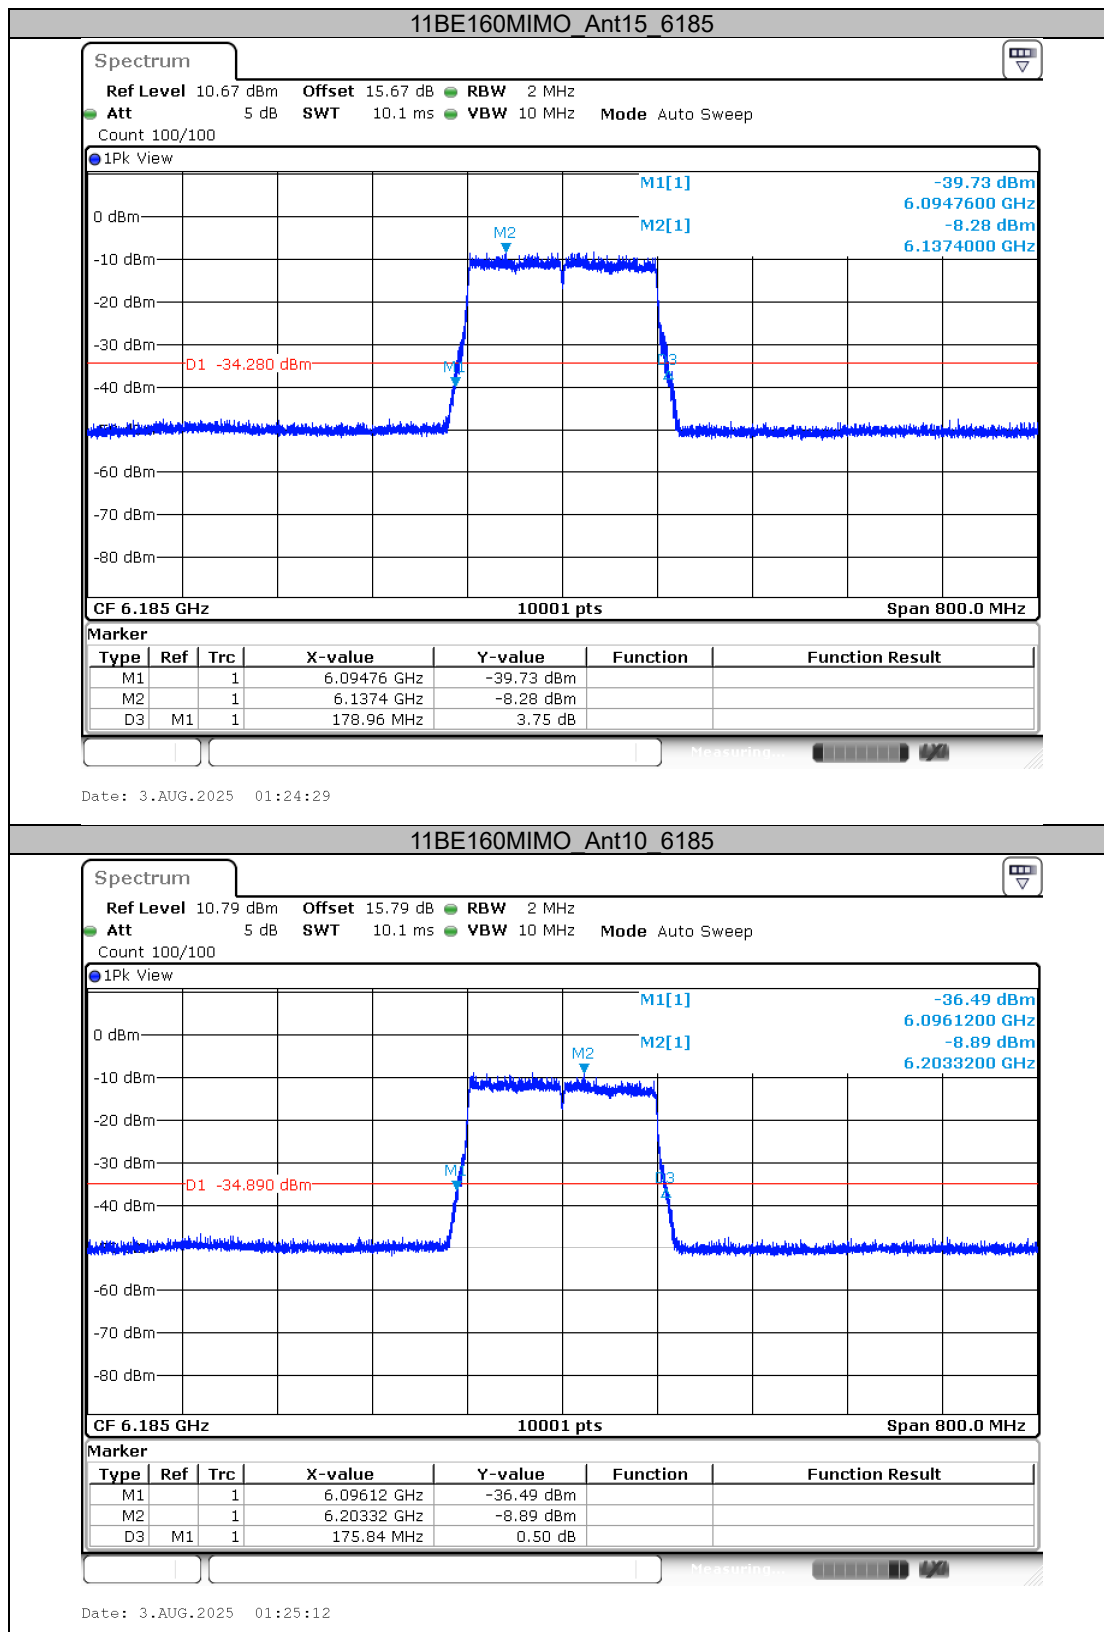


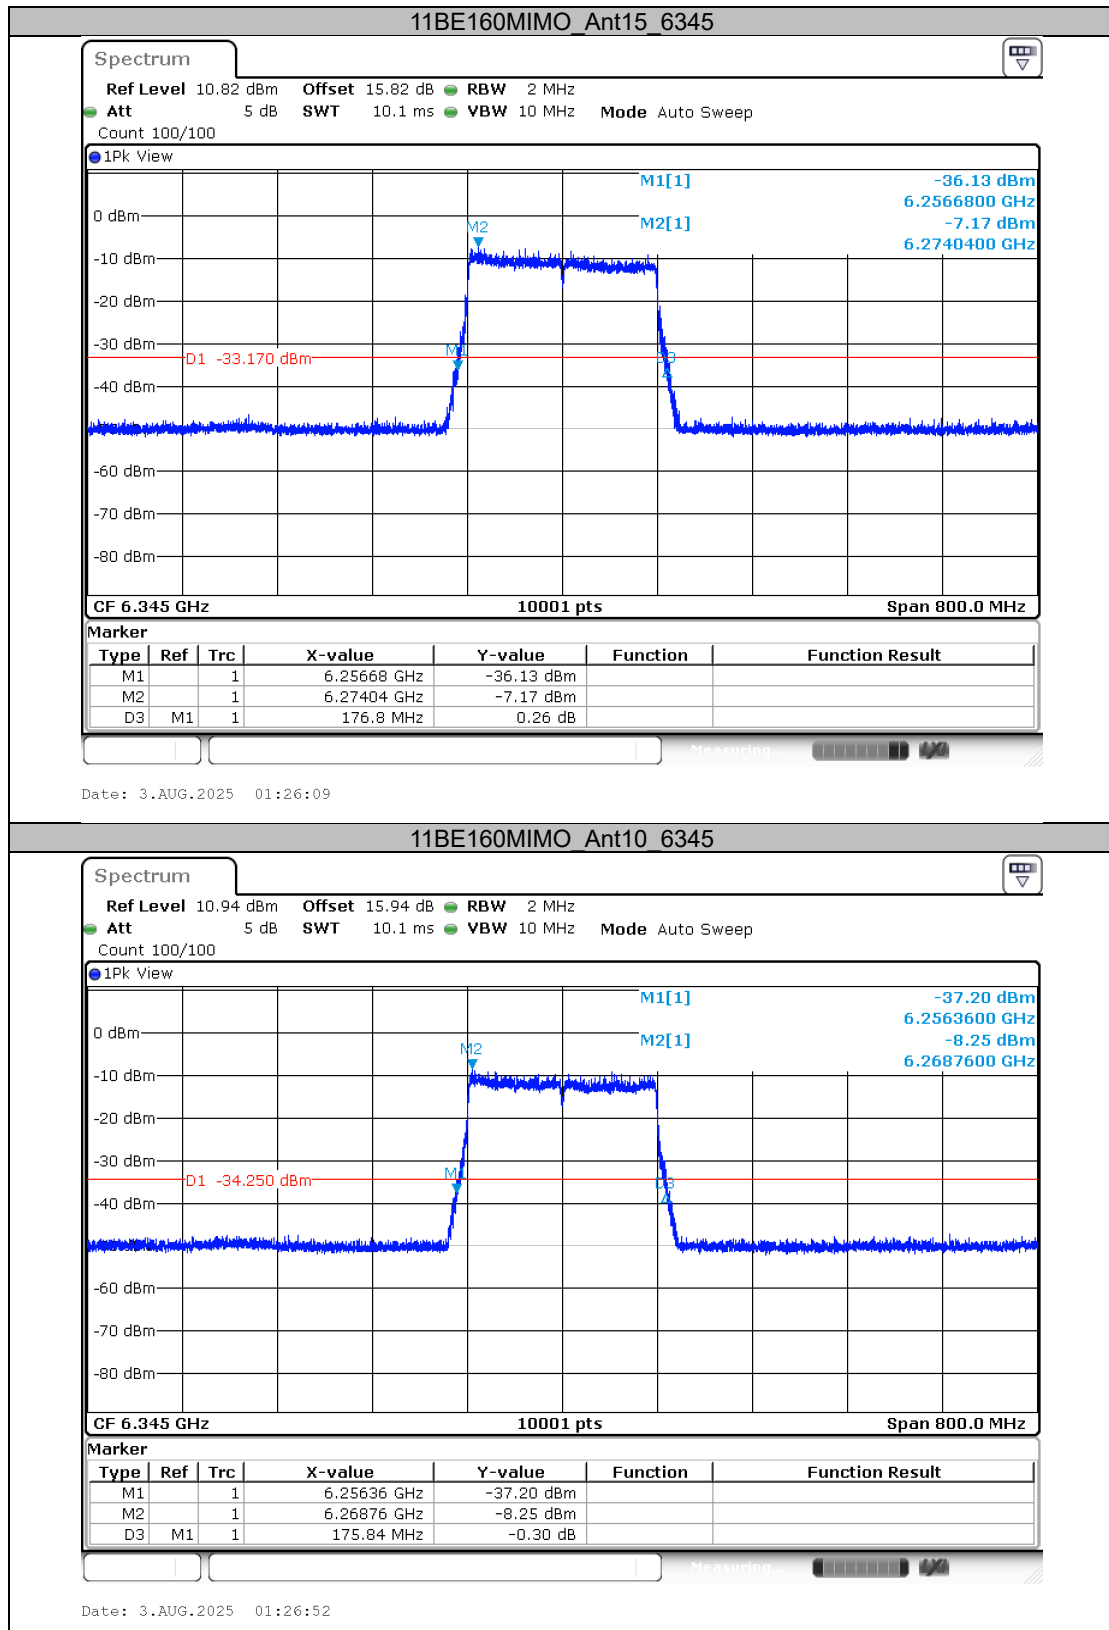


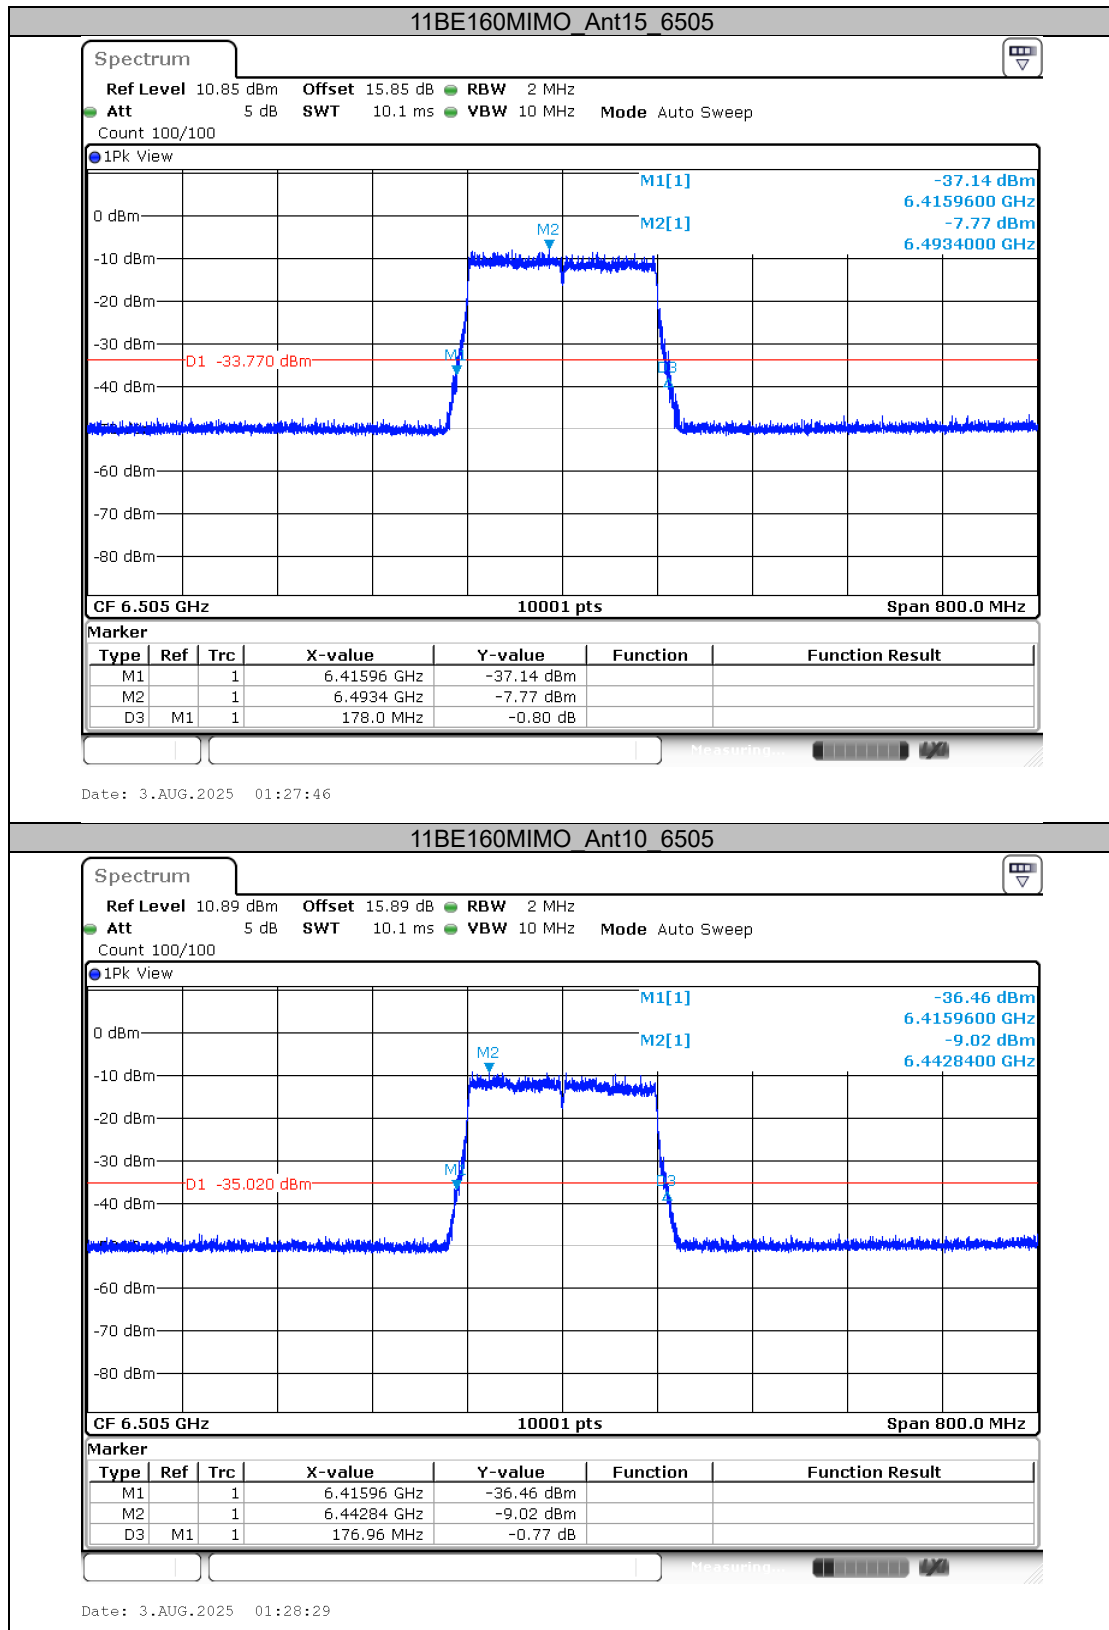


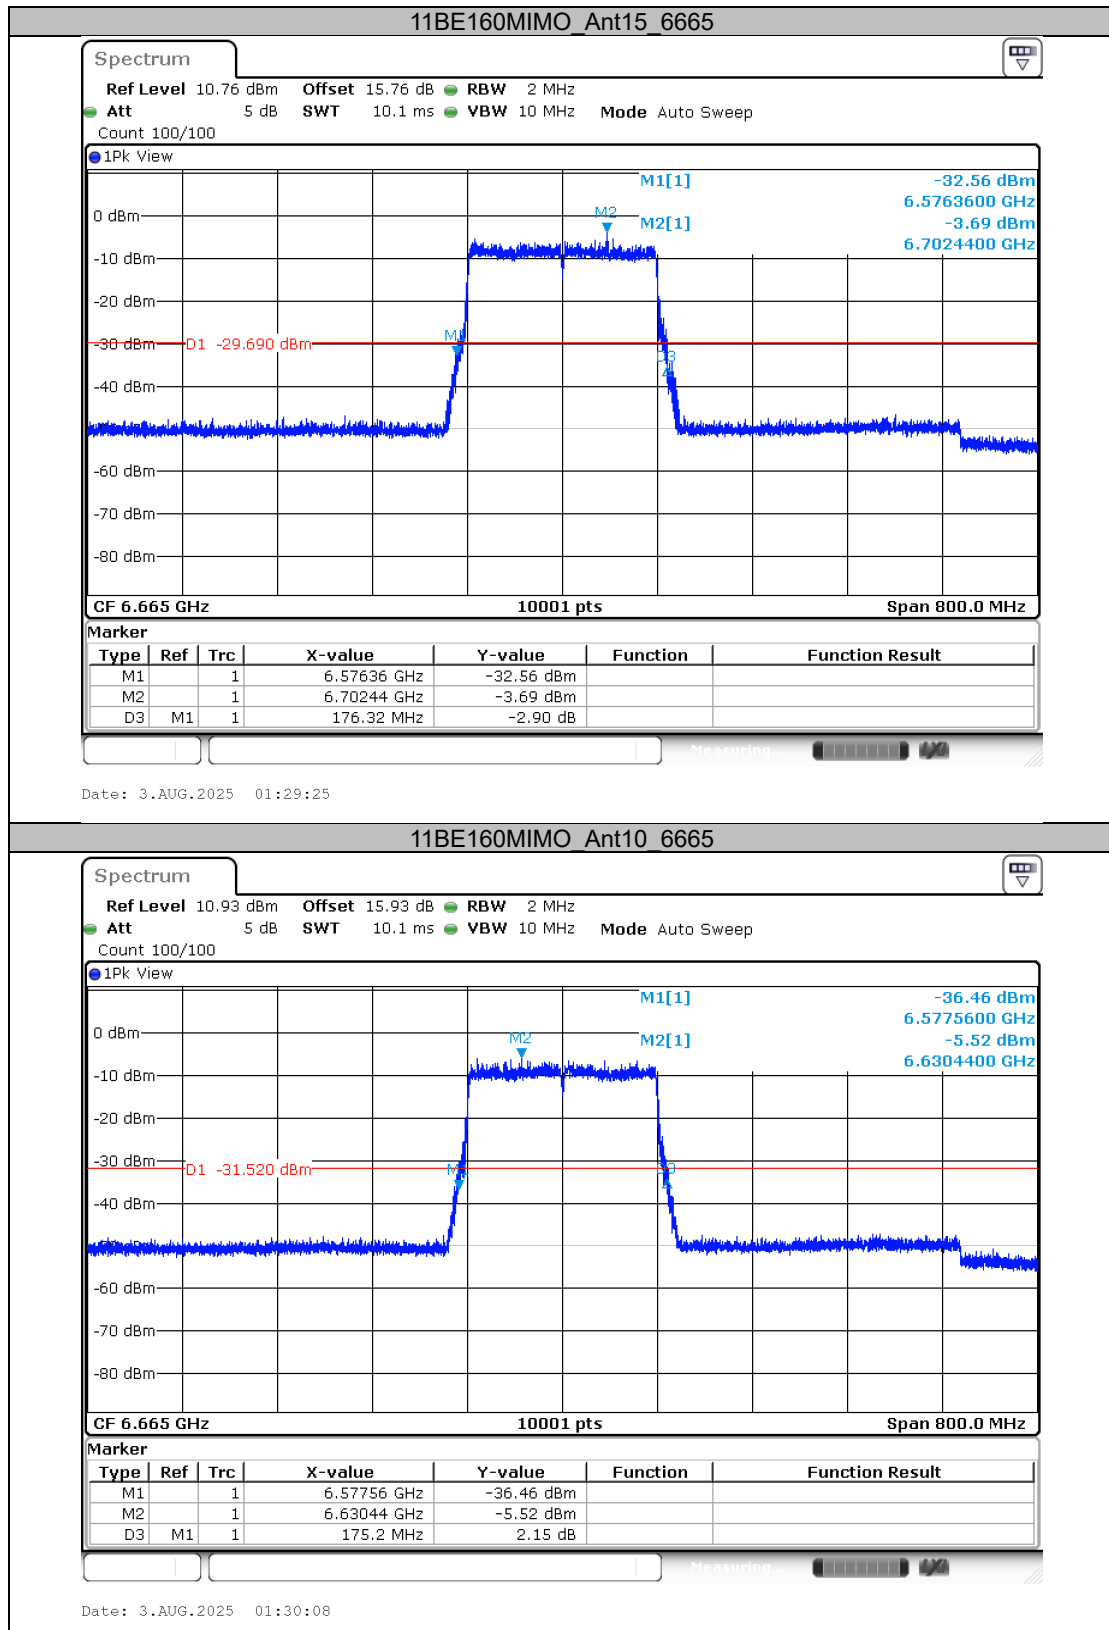


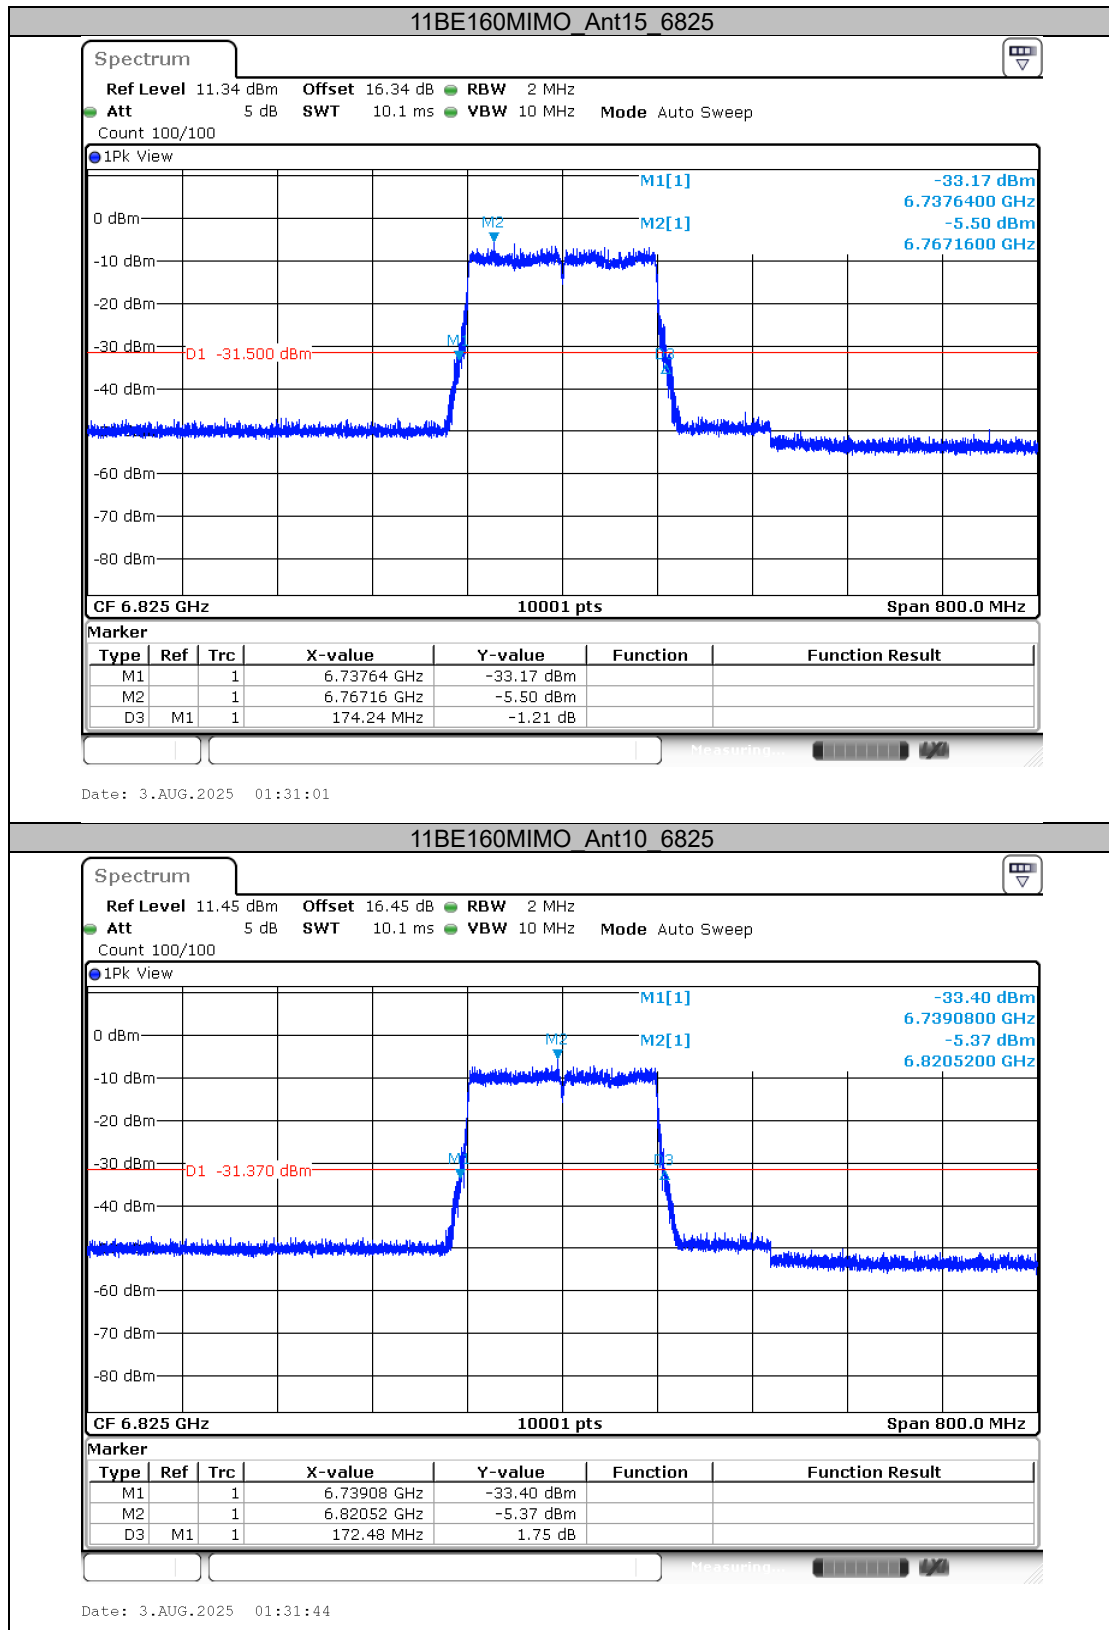


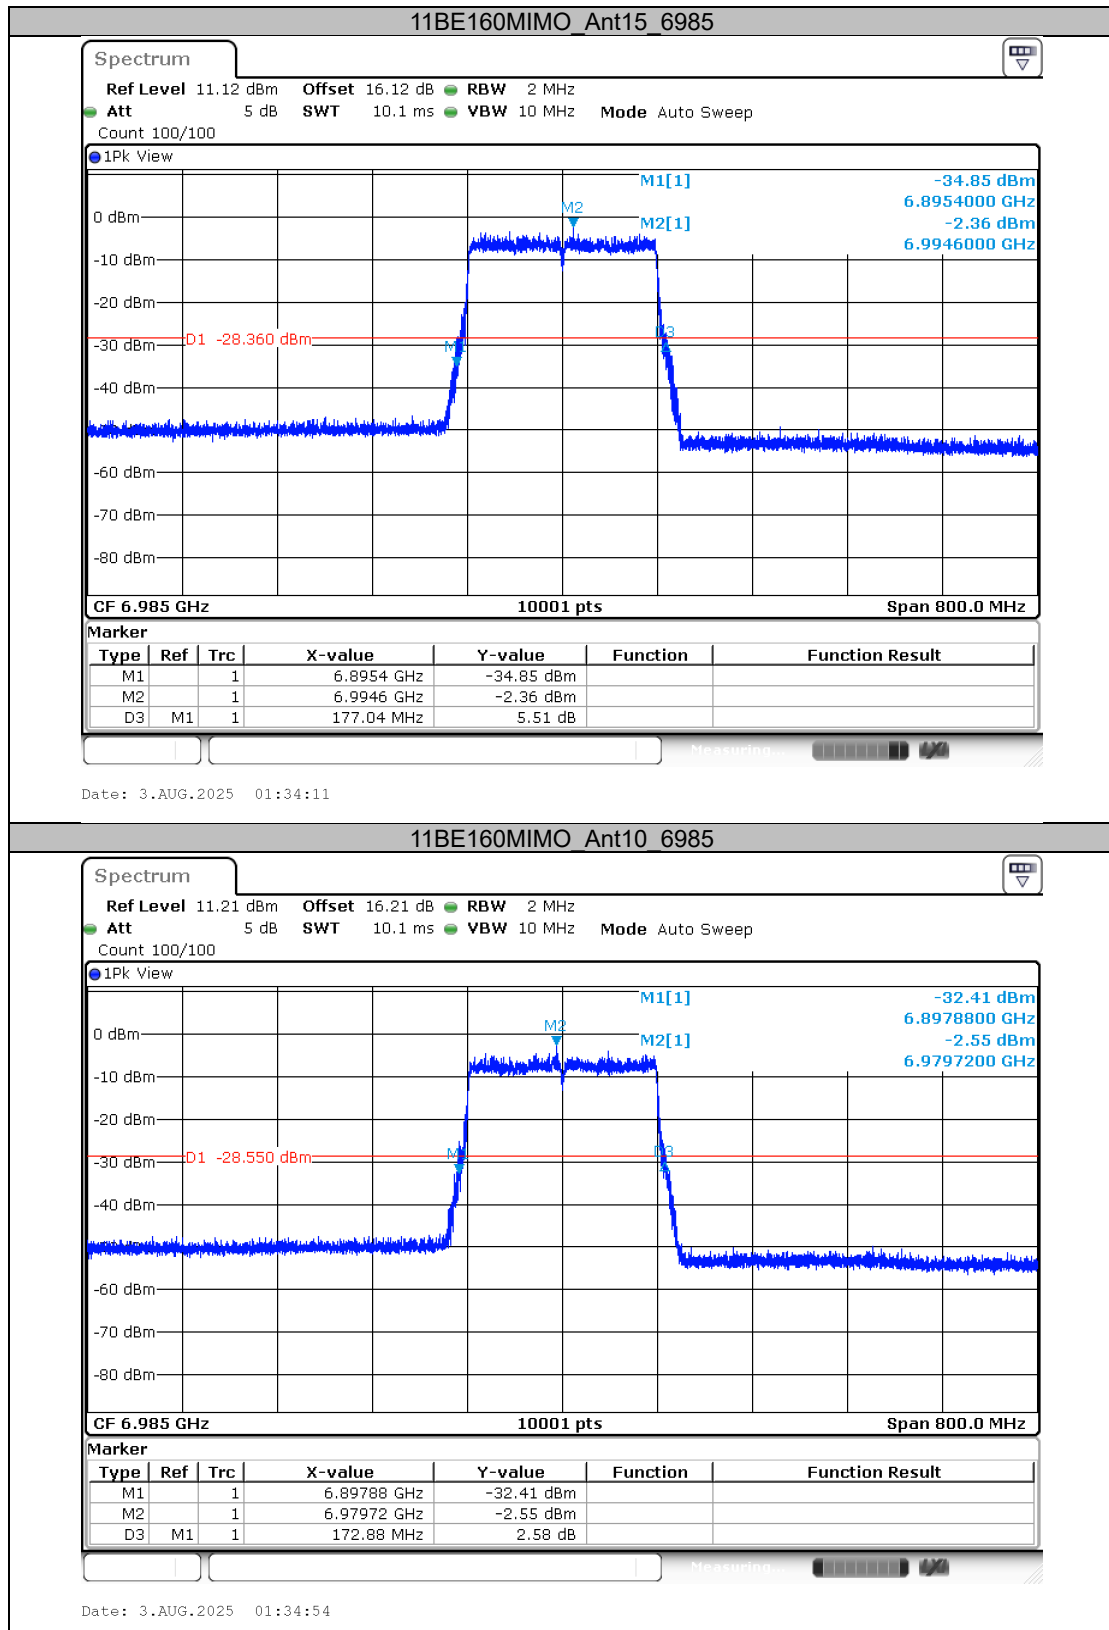


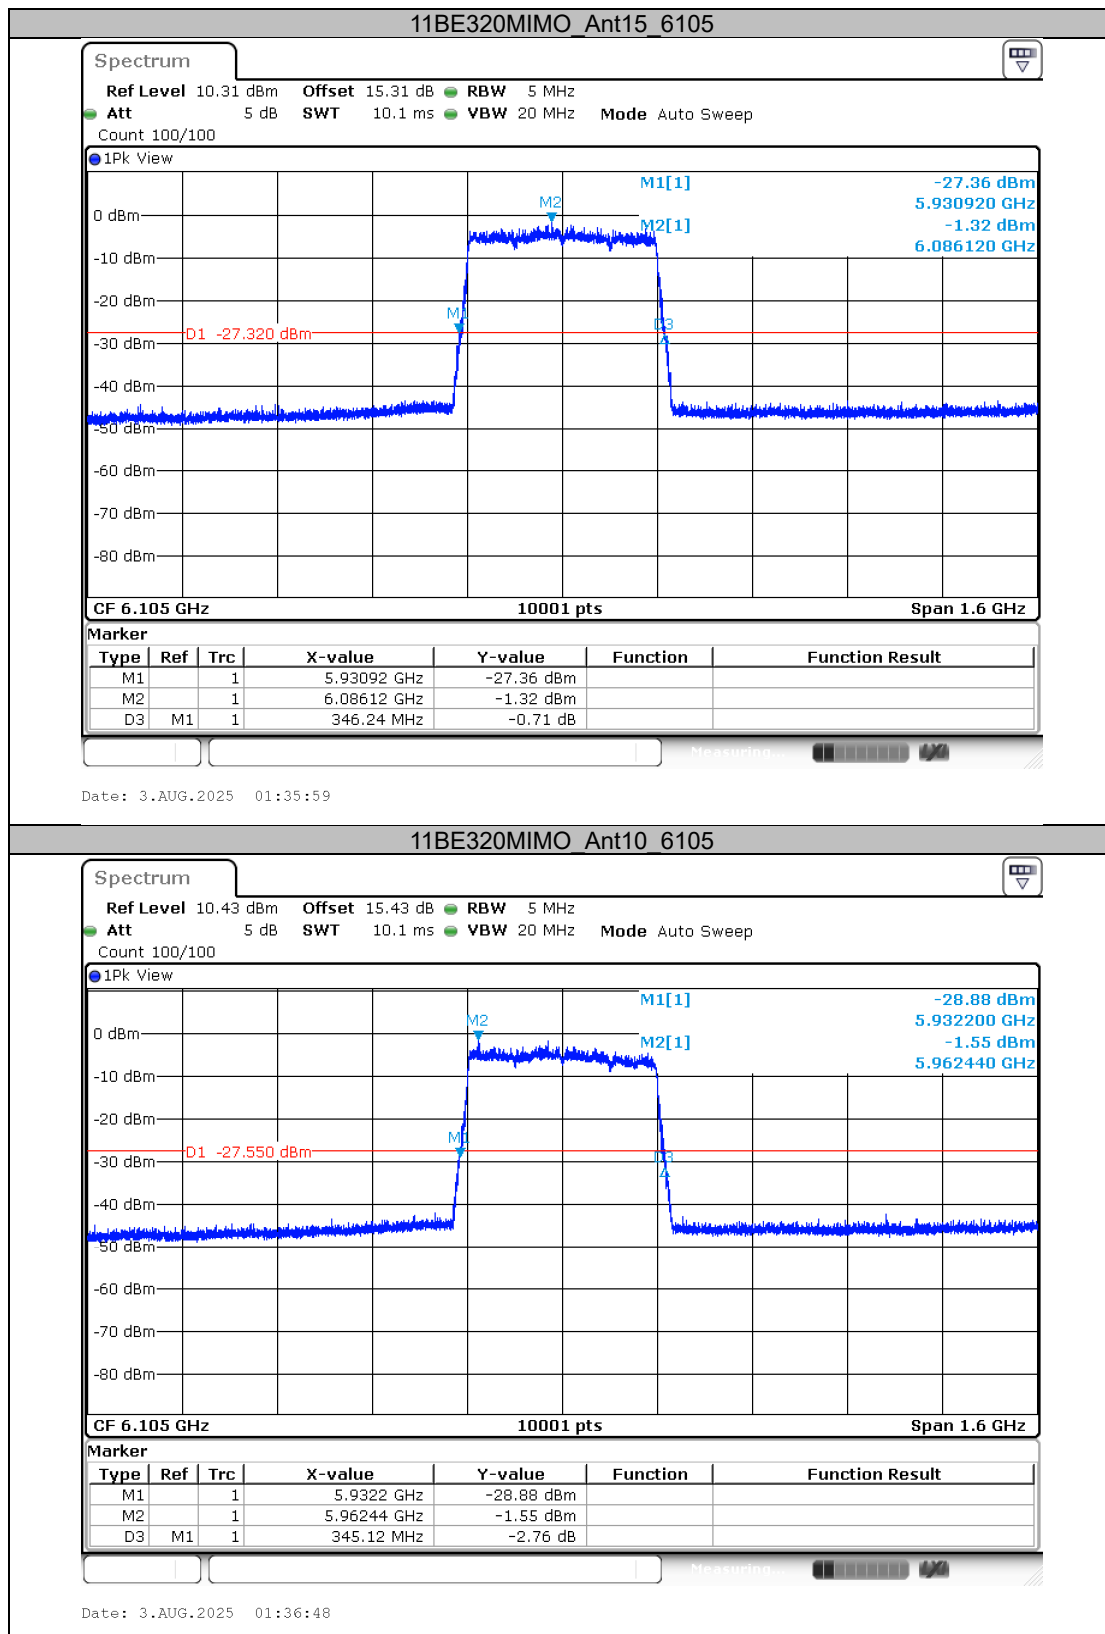


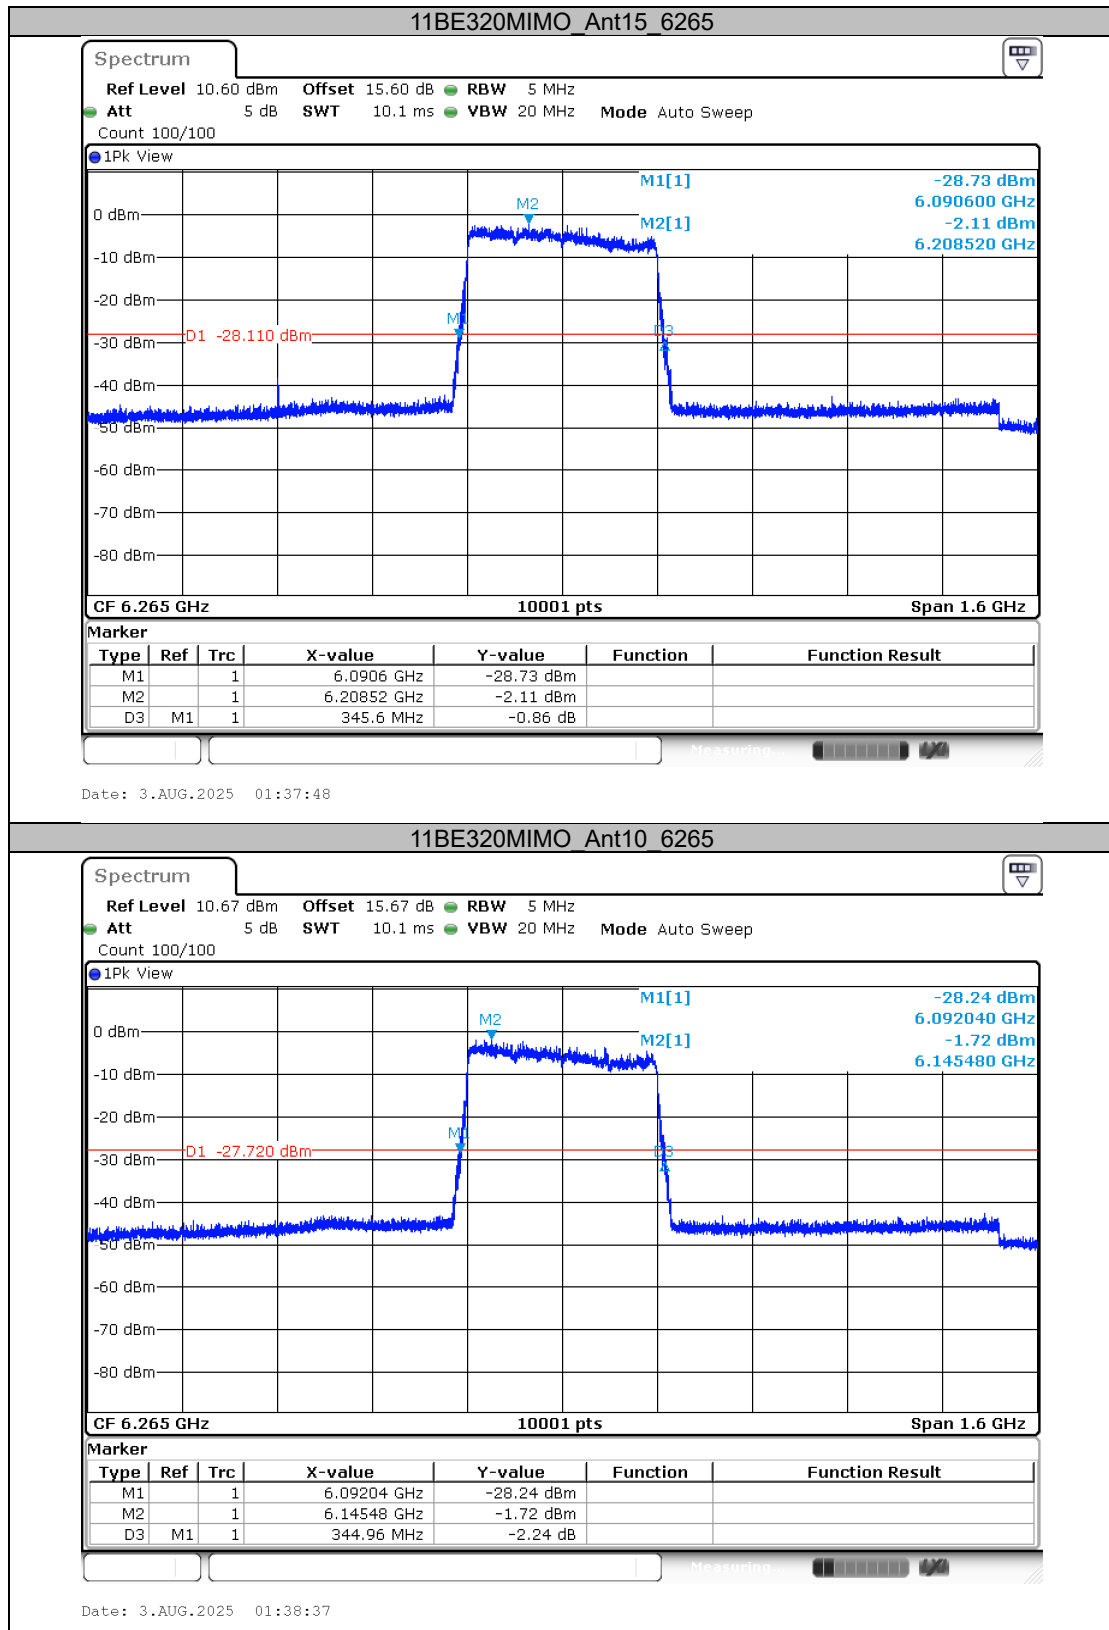

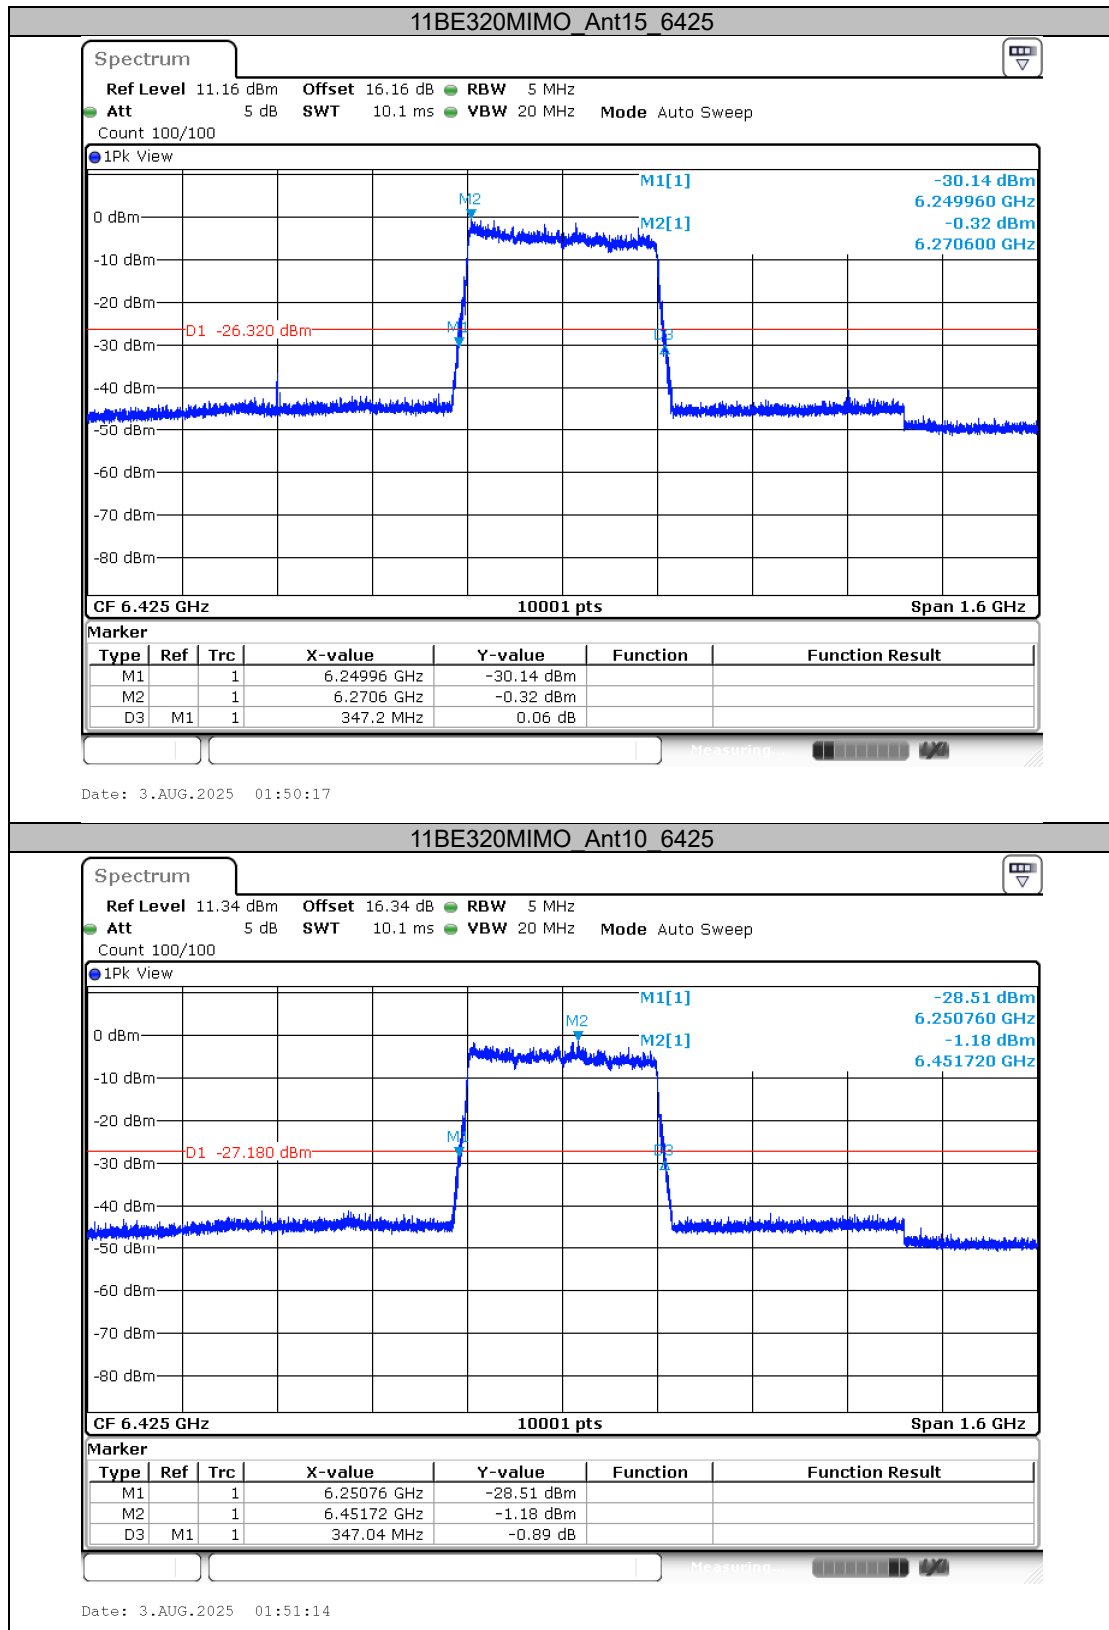

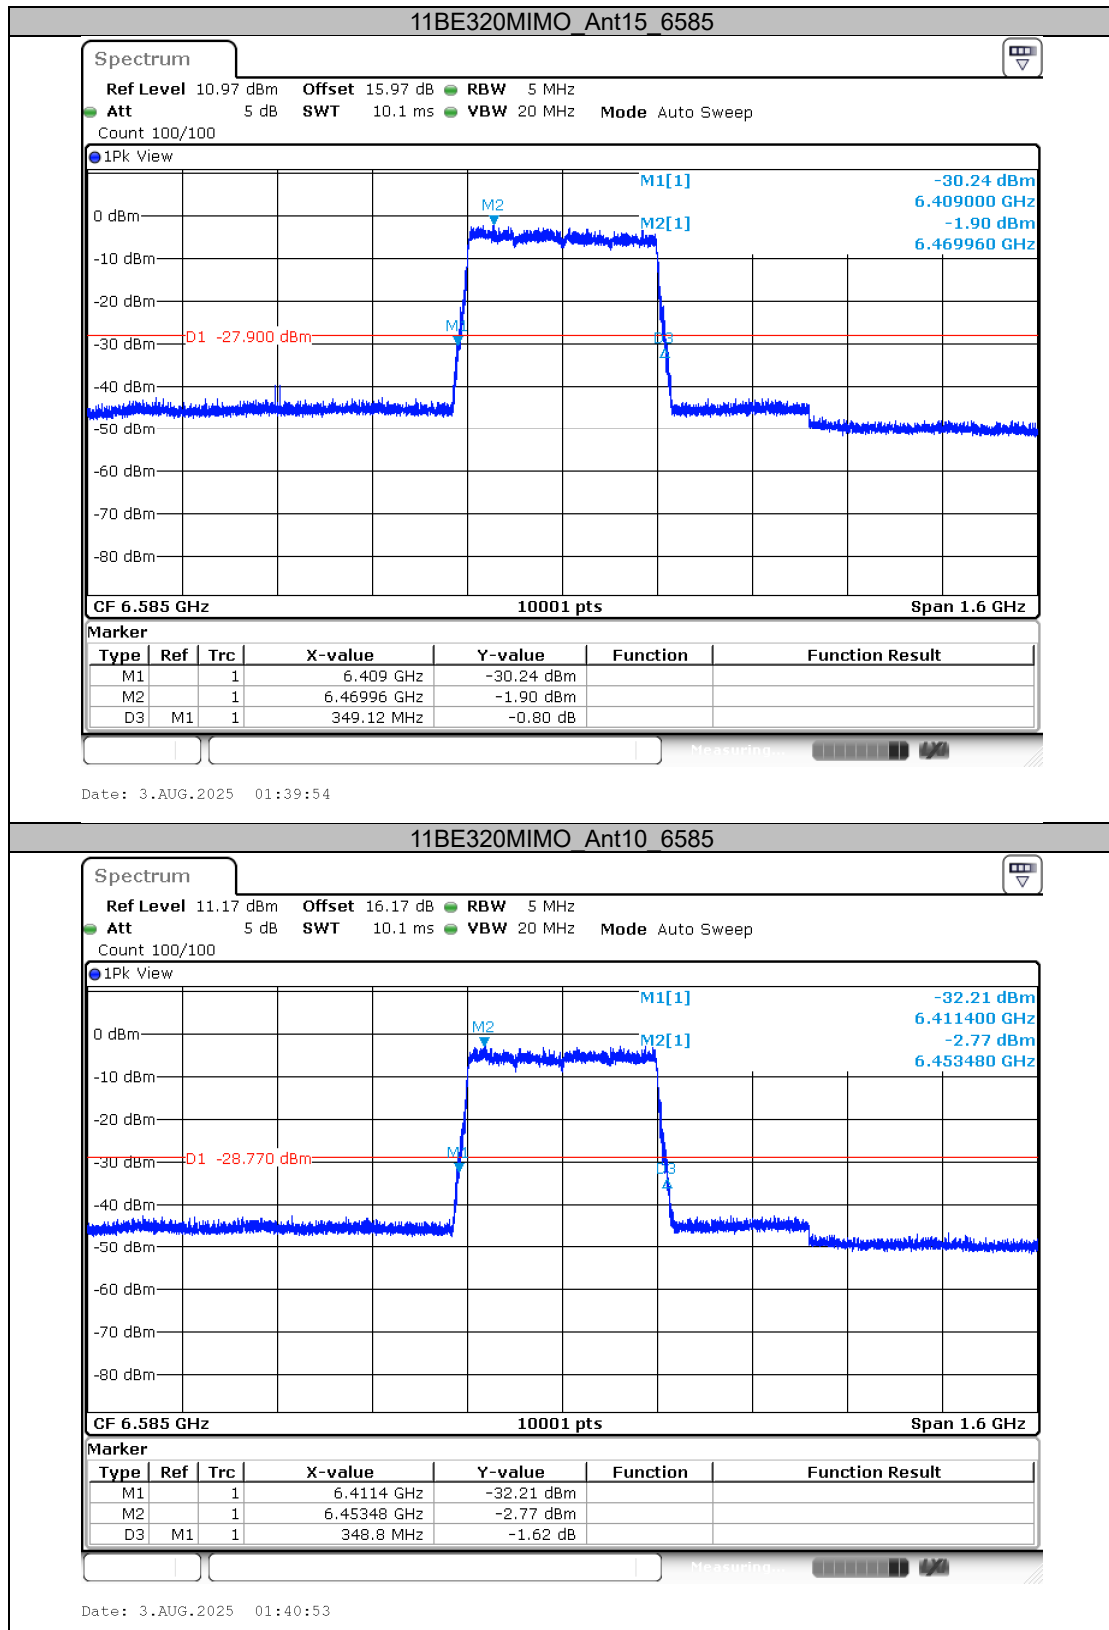

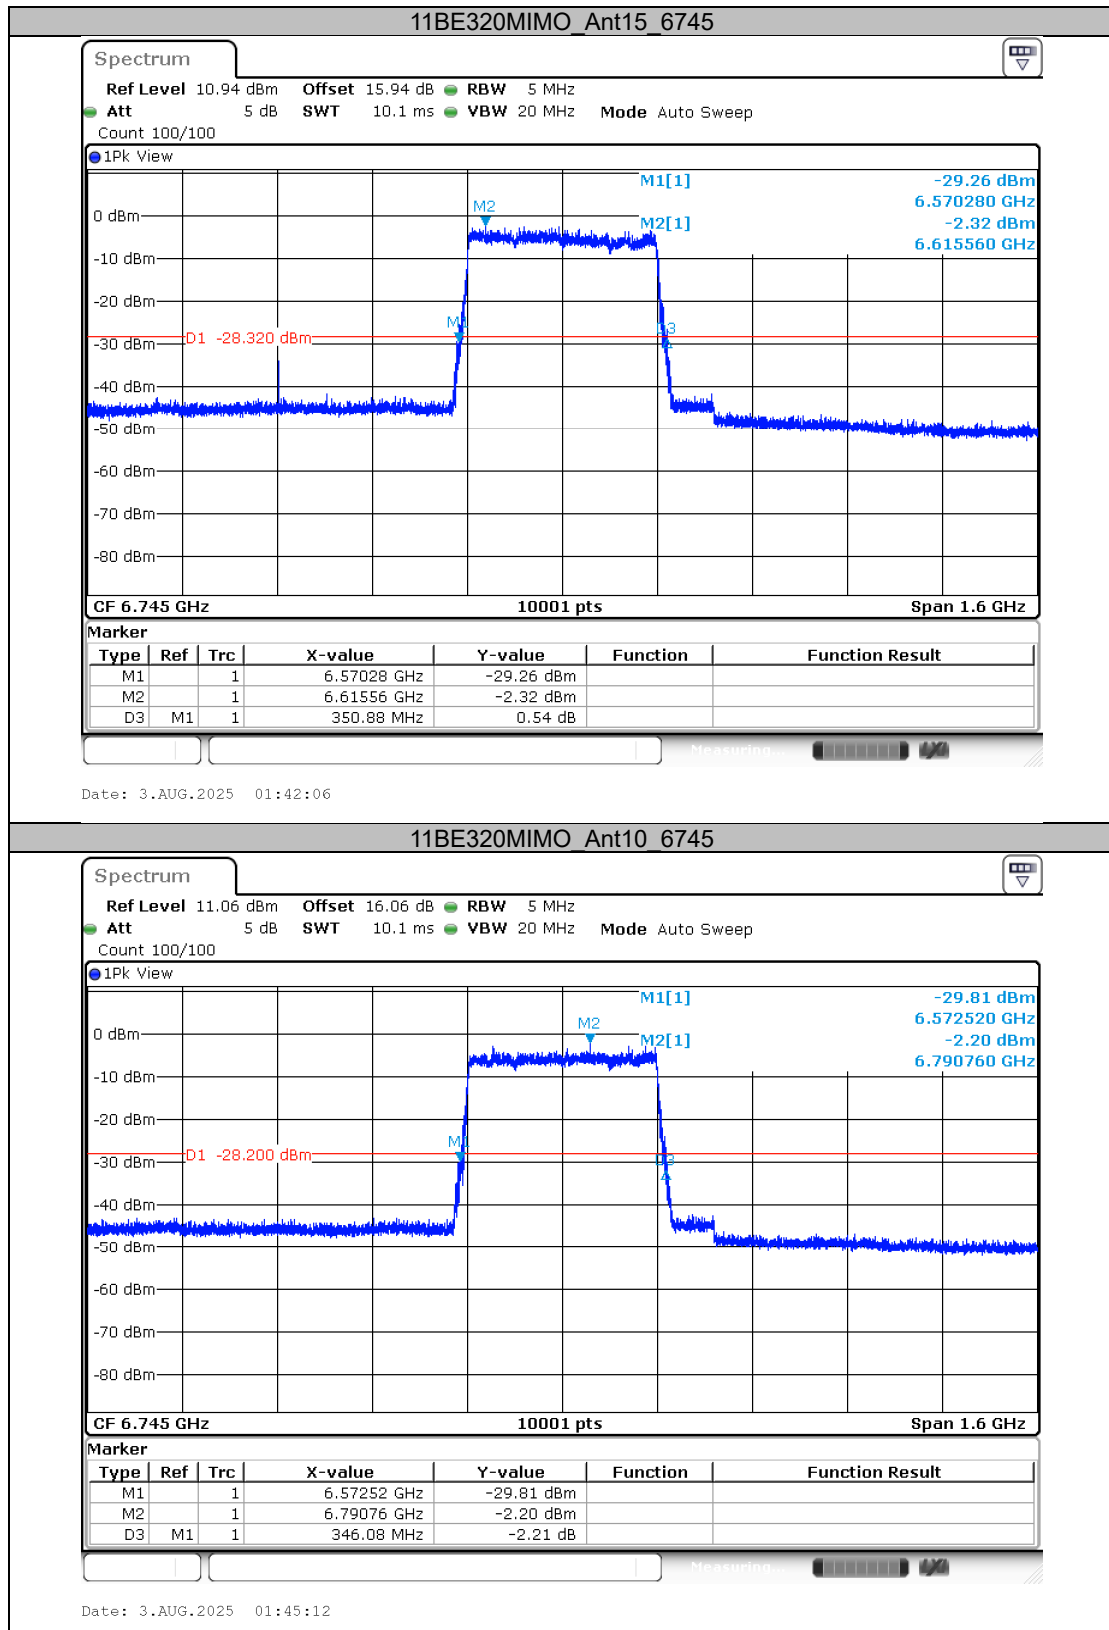

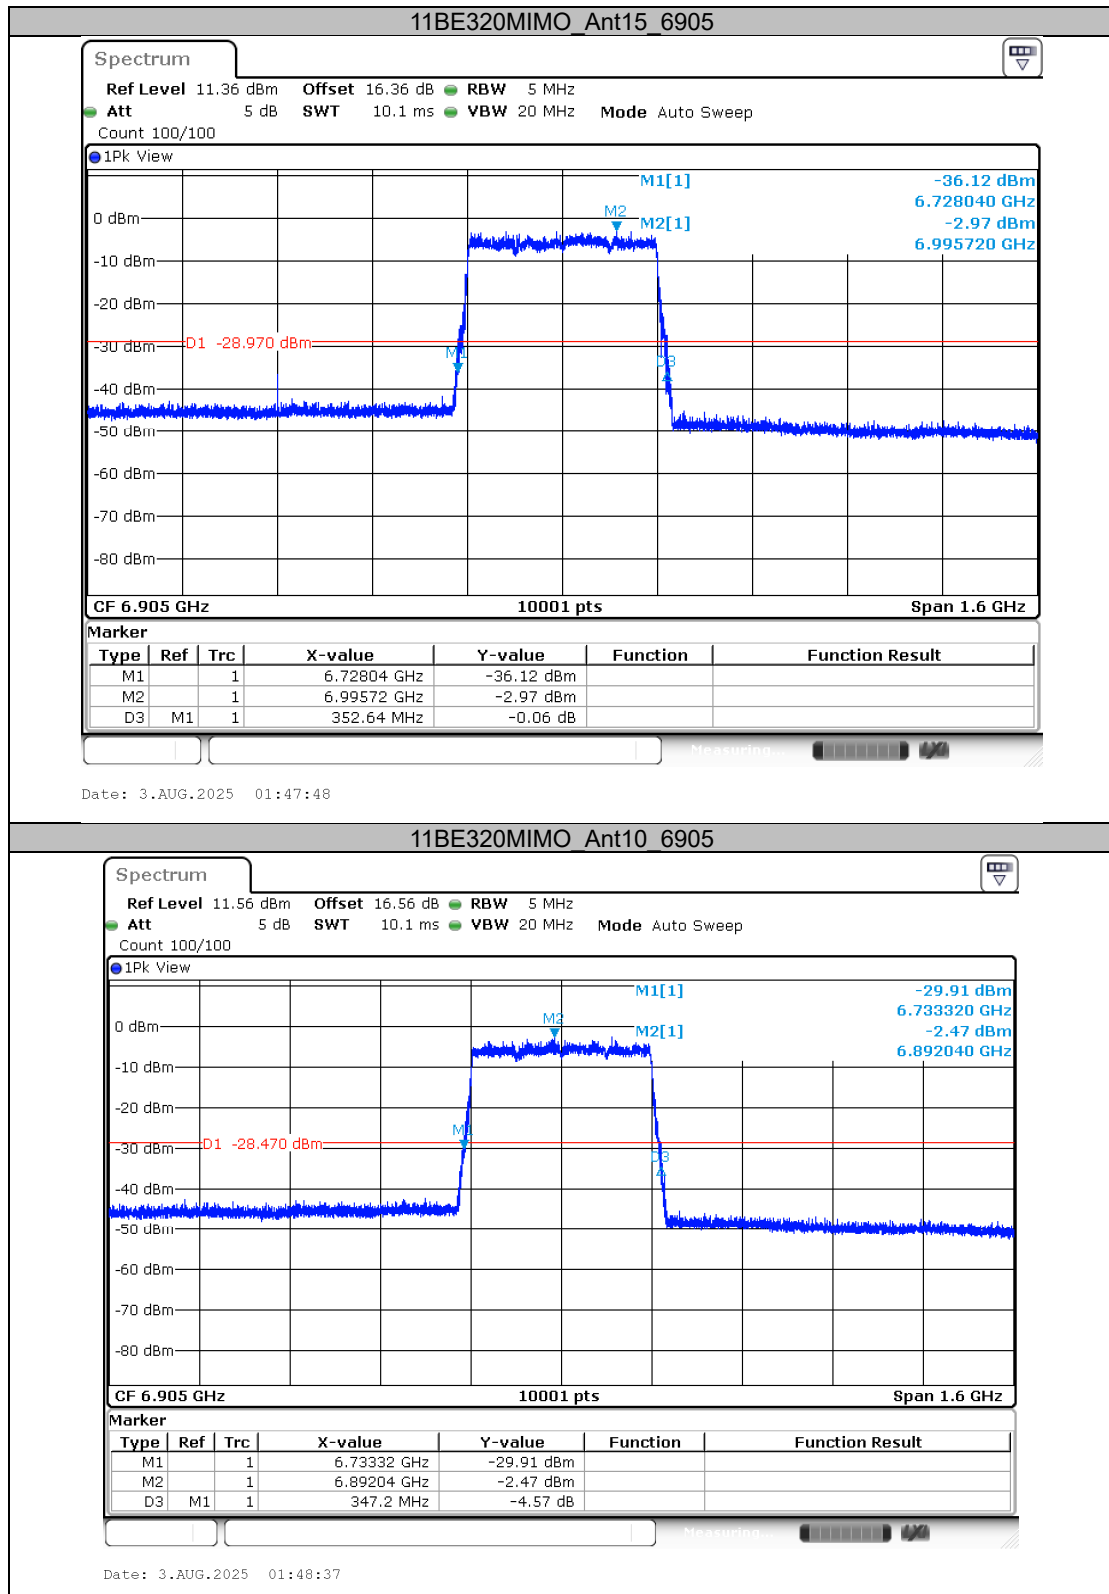



Occupied channel bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A-CDD	Ant15	5955	17.482	5946.1049	5963.5871	---	---
	Ant10	5955	17.066	5946.4609	5963.5271	---	---
	Ant15	6175	17.434	6166.0929	6183.5271	---	---
	Ant10	6175	17.246	6166.3409	6183.5871	---	---
	Ant15	6415	17.258	6406.2929	6423.5511	---	---
	Ant10	6415	17.182	6406.3049	6423.4872	---	---
	Ant15	6435	17.438	6426.1809	6443.6191	---	---
	Ant10	6435	17.026	6426.4369	6443.4632	---	---
	Ant15	6475	17.482	6466.0449	6483.5271	---	---
	Ant10	6475	17.318	6466.2049	6483.5231	---	---
	Ant15	6515	17.518	6506.0009	6523.5191	---	---
	Ant10	6515	17.134	6506.3849	6523.5191	---	---
	Ant15	6535	17.402	6526.1449	6543.5471	---	---
	Ant10	6535	17.014	6526.3969	6543.4112	---	---
	Ant15	6695	17.370	6686.1369	6703.5071	---	---
	Ant10	6695	17.142	6686.3529	6703.4952	---	---
	Ant15	6855	17.426	6846.0849	6863.5111	---	---
	Ant10	6855	17.114	6846.4169	6863.5311	---	---
	Ant15	6875	17.306	6866.2249	6883.5311	---	---
	Ant10	6875	17.042	6866.4369	6883.4792	---	---
	Ant15	6895	17.426	6886.1369	6903.5631	---	---
	Ant10	6895	17.186	6886.3089	6903.4952	---	---
	Ant15	6995	17.294	6986.2089	7003.5031	---	---
	Ant10	6995	17.078	6986.4209	7003.4992	---	---
11BE20MIMO	Ant15	7095	17.394	7086.1209	7103.5151	---	---
	Ant10	7095	17.102	7086.3929	7103.4952	---	---
	Ant15	5955	19.094	5945.4610	5964.5550	---	---
	Ant10	5955	19.166	5945.4330	5964.5990	---	---
	Ant15	6175	19.054	6165.4290	6184.4831	---	---
	Ant10	6175	19.270	6165.3770	6184.6470	---	---
	Ant15	6415	19.134	6405.3890	6424.5230	---	---
	Ant10	6415	19.210	6405.3970	6424.6070	---	---
	Ant15	6435	19.374	6425.3530	6444.7270	---	---



	Ant10	6435	19.210	6425.4250	6444.6350	---	---
	Ant15	6475	19.166	6465.4170	6484.5830	---	---
	Ant10	6475	19.146	6465.4050	6484.5510	---	---
	Ant15	6515	19.230	6505.3810	6524.6110	---	---
	Ant10	6515	19.074	6505.4370	6524.5110	---	---
	Ant15	6535	19.114	6525.4170	6544.5310	---	---
	Ant10	6535	19.130	6525.4010	6544.5310	---	---
	Ant15	6695	19.110	6685.3970	6704.5070	---	---
	Ant10	6695	19.102	6685.3970	6704.4991	---	---
	Ant15	6855	19.222	6845.3210	6864.5430	---	---
	Ant10	6855	19.066	6845.4370	6864.5030	---	---
	Ant15	6875	19.198	6865.3930	6884.5910	---	---
	Ant10	6875	19.130	6865.4090	6884.5390	---	---
	Ant15	6895	19.186	6885.3890	6904.5750	---	---
	Ant10	6895	19.110	6885.4290	6904.5390	---	---
	Ant15	6995	19.126	6985.4050	7004.5310	---	---
	Ant10	6995	19.126	6985.3970	7004.5230	---	---
	Ant15	7095	19.182	7085.3690	7104.5510	---	---
	Ant10	7095	19.166	7085.3730	7104.5390	---	---
11BE40MIMO	Ant15	5965	38.188	5945.8739	5984.0621	---	---
	Ant10	5965	38.364	5945.8339	5984.1981	---	---
	Ant15	6165	38.068	6146.0259	6184.0941	---	---
	Ant10	6165	38.620	6145.8259	6184.4461	---	---
	Ant15	6405	38.220	6385.7779	6423.9981	---	---
	Ant10	6405	38.332	6385.7619	6424.0941	---	---
	Ant15	6445	38.212	6425.9139	6464.1261	---	---
	Ant10	6445	38.396	6425.5219	6463.9181	---	---
	Ant15	6485	38.364	6465.7059	6504.0701	---	---
	Ant10	6485	38.388	6465.7139	6504.1021	---	---
	Ant15	6525	38.316	6505.7619	6544.0781	---	---
	Ant10	6525	38.324	6505.7699	6544.0941	---	---
	Ant15	6565	38.204	6545.8419	6584.0461	---	---
	Ant10	6565	38.644	6545.7059	6584.3501	---	---
	Ant15	6685	38.300	6665.8419	6704.1421	---	---
	Ant10	6685	38.396	6665.5779	6703.9741	---	---
	Ant15	6845	38.252	6825.8099	6864.0621	---	---
	Ant10	6845	38.236	6825.8099	6864.0461	---	---
	Ant15	6885	38.116	6865.9619	6904.0781	---	---



	Ant10	6885	38.140	6865.9139	6904.0541	---	---
	Ant15	6925	38.084	6905.9219	6944.0061	---	---
	Ant10	6925	38.220	6905.8259	6944.0461	---	---
	Ant15	6965	38.100	6945.8979	6983.9981	---	---
	Ant10	6965	38.132	6945.9219	6984.0541	---	---
	Ant15	7085	38.212	7065.8259	7104.0381	---	---
	Ant10	7085	38.212	7065.8499	7104.0621	---	---
11BE80MIMO	Ant15	5985	77.144	5946.4279	6023.5721	---	---
	Ant10	5985	77.640	5946.2679	6023.9081	---	---
	Ant15	6145	77.592	6106.1399	6183.7321	---	---
	Ant10	6145	77.528	6106.1399	6183.6681	---	---
	Ant15	6385	77.672	6345.9479	6423.6201	---	---
	Ant10	6385	77.528	6346.0919	6423.6201	---	---
	Ant15	6465	78.072	6425.9799	6504.0521	---	---
	Ant10	6465	77.624	6426.3159	6503.9401	---	---
	Ant15	6545	77.672	6506.1079	6583.7801	---	---
	Ant10	6545	77.880	6505.8519	6583.7321	---	---
	Ant15	6625	77.880	6586.0919	6663.9721	---	---
	Ant10	6625	77.560	6586.1559	6663.7161	---	---
	Ant15	6705	77.448	6666.1399	6743.5881	---	---
	Ant10	6705	77.816	6666.2519	6744.0681	---	---
	Ant15	6785	77.704	6746.1559	6823.8601	---	---
	Ant10	6785	77.640	6746.1239	6823.7641	---	---
	Ant15	6865	78.040	6826.0919	6904.1321	---	---
	Ant10	6865	77.640	6826.0759	6903.7161	---	---
	Ant15	6945	77.560	6906.0759	6983.6361	---	---
	Ant10	6945	77.832	6906.0439	6983.8761	---	---
	Ant15	7025	77.224	6986.2359	7063.4602	---	---
	Ant10	7025	77.656	6985.9159	7063.5721	---	---
11BE160MIMO	Ant15	6025	159.92	5945.2000	6105.1200	---	---
	Ant10	6025	159.63	5945.2640	6104.8960	---	---
	Ant15	6185	159.63	6104.9440	6264.5760	---	---
	Ant10	6185	159.38	6104.8160	6264.1921	---	---
	Ant15	6345	159.76	6264.6560	6424.4161	---	---
	Ant10	6345	159.82	6264.7840	6424.6080	---	---
	Ant15	6505	159.54	6425.0080	6584.5440	---	---
	Ant10	6505	159.47	6424.9760	6584.4481	---	---
	Ant15	6665	159.66	6585.0080	6744.6720	---	---



	Ant10	6665	159.34	6585.4560	6744.8000	---	---
	Ant15	6825	159.86	6745.0080	6904.8640	---	---
	Ant10	6825	159.70	6745.2000	6904.8960	---	---
	Ant15	6985	159.09	6905.4240	7064.5120	---	---
	Ant10	6985	159.15	6905.4880	7064.6400	---	---
11BE320MIMO	Ant15	6105	319.26	5945.0160	6264.2801	≤320	PASS
	Ant10	6105	318.75	5944.6320	6263.3842	≤320	PASS
	Ant15	6265	319.52	6103.8641	6423.3842	≤320	PASS
	Ant10	6265	319.90	6103.7361	6423.6401	≤320	PASS
	Ant15	6425	319.97	6263.7361	6583.7041	≤320	PASS
	Ant10	6425	319.97	6264.1201	6584.0881	≤320	PASS
	Ant15	6585	319.84	6424.5680	6744.4081	≤320	PASS
	Ant10	6585	319.90	6425.0800	6744.9840	≤320	PASS
	Ant15	6745	319.97	6584.7600	6904.7280	≤320	PASS
	Ant10	6745	319.58	6585.5919	6905.1760	≤320	PASS
	Ant15	6905	319.71	6744.7600	7064.4721	≤320	PASS
	Ant10	6905	319.39	6745.4000	7064.7920	≤320	PASS

Note1: For channels with a nominal bandwidth of 320MHz, compliance is demonstrated by way of the 99%BW.

Note2: For channels with a nominal bandwidth less than 320MHz(e.g 20,40,80,160MHz), compliance is demonstrated by way of the 26dB EBW.



Test Graphs

