

TEST REPORT

of the accredited test laboratory

TÜV Nr.: 2023-IN-AT-TICL-E-EX-0-000179-FG-002**Applicant:** PDi Digital GmbH
Kalsdorfer Strasse 6
A – 8072 Fernitz-Mellach**Tested Product:** sepioo sensoric system**Product Name:** sepioo S1**Model:** RMG3-RCOM-C**FCC-ID:** 2A3HY-RMG3-RCOM-C**IC-ID:** 27854-RMG3RCOMC**Manufacturer:** PDi Digital GmbH
Kalsdorfer Strasse 6
A – 8072 Fernitz-Mellach**Output power / field strength:** 5,50 mV/m average @ 3m distance / 1,62mW EIRP
power supply: 3V DC external battery**Frequency range:** 2404,053 - 2479,285 MHz / 2401-2481 MHz
Channel separation: 0,35 MHz 1 / 2 MHz**Standard:** FCC: 47 CFR Part 15 (eCFR 07.09.2023)
RSS-102 Issue 5, March 2015 + Amd. 1 02.02.2021
RSS-247 Issue 3, August 2023
RSS-210 Issue 10, December 2019Testing Laboratory,
Inspection Body,
Certification Body,
Calibration Laboratory,
Verifizierungsstelle**Notified Body 0408**
IC 2932K-1**Non-executive**
Board of Directors:
KR DI Johann
Marihart**Management:**
DI Dr. Stefan Haas
Mag. Christoph
Wenninger**Registered Office:**
Deutschstrasse 10
1230 Vienna/Austria**Branch Offices:**
www.tuv.at/standorte**Company Register**
Court / - Number:
Vienna / FN 288476 f**Bank Details:**
IBAN
AT131200052949001066
BIC BKAUATWWVAT ATU63240488
DVR 3002476

TÜV AUSTRIA GMBH

Test laboratory for EMC

Ing. Andreas Malek

examined by / Testing
Laboratory
TÜV AUSTRIA GMBH

15.09.2023

Ing. Michael Emminger

approved by / Testing
Laboratory
TÜV AUSTRIA GMBH

A publication of this test report is only permitted literally.

Copying or reproduction of partial sections needs a written permission of TÜV AUSTRIA GMBH.

The results of this test report only refer to the provided equipment.

Contents

	Designation	PAGE
1.	Applicant	3
2.	Description of EUT	4
3.	Standards / Final result	5
4.	Test results	
	List of measurements according to 47 CFR 15 and RSS-210 (SES-Imagotag Protocol)	
4.1	Test object data	6
4.2	Number of channels and channel spacing	7
4.3	Duty Cycle for averaging	8
4.4	Field strength at 2400 – 2483,5 MHz	9-11
4.5	Emissions outside 2400 – 2483,5 MHz (15.209)	12-16
4.6	RF Exposure	17-19
	List of measurements according to 47 CFR 15 and RSS-247 (BLE/Quuppa Protocol)	
4.7	Test object data	20
4.8	Number of channels and channel spacing	21
4.9	6 dB Bandwidth	22 – 24
4.10	99% dB Bandwidth	25 – 27
4.11	Maximum Peak RF Power Output	28
4.12	Power Spectral Density	29 – 31
4.13	Emissions outside the used frequency band	32 – 40
4.14	Emissions in restricted bands	41 – 45
4.15	RF Exposure	46 – 49
Appendix	Designation	PAGES
1	Test equipment used	5
2	Photodocumentation	9

1. Applicant

Company: PDi Digital GmbH

Department: Product & Project Manager

Address: A – 8072 Fernitz-Mellach; Kalsdorfer Strasse 6

Contact person: Mr. Klaus Niederl

EUT received on: 07.09.2023

Tests were performed on: 07. and 15.09.2023

2. Description of EUT

EUT:	sepioo sensoric system
Product Name:	sepioo S1
Model:	RMG3-RCOM-C
Serial Number:	Prototype
Manufacturer:	PDi Digital GmbH A – 8072 Fernitz-Mellach; Kalsdorfer Strasse 6
Description:	PDi Digital GmbH provided the following configuration for the measurements: Prototype with special test-firmware for continuous transmission
Operating mode:	The measurements were carried out at the following running states: test-firmware running, transmitting continuously
Technical data EUT:	Rated voltage: 3VDC Rated current: <1A Rated frequency: DC Mains voltage during the tests: 3VDC external battery
Climatic conditions in the emc laboratory:	Relative humidity: 50% Temperature: 23°C

3. Standards / Final result

Name	Title	Deviation	Result
Title 47 CFR Part 15 eCFR 07.09.2023	RADIO FREQUENCY DEVICES	none	OK
RSS-210 Issue 10, December 2019	Licence-Exempt Radio Apparatus: Category I Equipment	none	OK
RSS-247 Issue 3, February 2023	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	none	OK
RSS-102 Issue 5, March 2015 + Amd. 1 02.02.2021	Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)	none	OK
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	none	OK
Result: Opinions and interpretation of testing laboratory OK: EUT passed NOK: EUT failed			

4.1 TEST OBJECT DATA (SES-Imagotag Protocol)

General EUT Description

This transceiver module is working in a network consisting of a controller station, so called Accesspoint, and various other devices. This module is not intended for use as an Accesspoint. This device incorporates different communication protocols. The first part of this test report is for the proprietary SES-Imagotag Protocol, the second parts includes measurements for BLE/Quuppa protocol.

2.1033 (c) Technical description

2.1033 (4) Type of emission: Minimum shift keying – declared channel bandwidth 250 kHz –
'virtual' channel spacing about 0,35 MHz. Only 11 channels from the channel plan are used, therefore the channel spacing in reality is much higher and varies from 2,45 MHz minimum up to 17,15 MHz.

2.1033 (5) Frequency range: 2404,053 – 2479,285 MHz (channel center frequencies of channel 0 up to ch. 10)

2.1033 (6) Power range and Controls: The maximum field strength measured is 5,50 mV/m average @ 3m distance. There is no power control or regulation.

2.1033 (7) Maximum output power rating: 5,50 mV/m average @ 3m distance.

2.1033 (8) DC Voltage and Current: 3 VDC (internal battery)
maximum current consumption: 28 mA during continuous transmission

RSS-135 This standard does not apply to:

- 1.1.(a) a receiver that scans radio frequencies for the purpose of enabling its associated transmitter to avoid transmitting in an occupied frequency but which does not have the capability of decoding the message (e.g. converting it to audio voice) contained in the radio signal

Worst case Spurious Emissions: 26,52 dBµV/m Average at 4,9585 GHz.

Tests were performed: September 7th and 15th 2023.

4.2 Number of channels and channel spacing

§ 2.1033

Channel plan:

ESL-CH	RF-CH	f_{G2} [GHz] (26.000000 MHz) (6049109)
CH0	12	2.404053
CH1	29	2.410002
CH2	63	2.421899
CH3	71	2.424698
CH4	120	2.441844
CH5	141	2.449192
CH6	177	2.461789
CH7	199	2.469487
CH8	213	2.474386
CH9	220	2.476835
CH10	227	2.479285


Tests were performed on ESL channels 0, 4 and 10.

Test Equipment used: N/A

4.3 Duty Cycle measurements for averaging

§ 15.249 (e)

Mode: data transmission (worst case in 100ms)

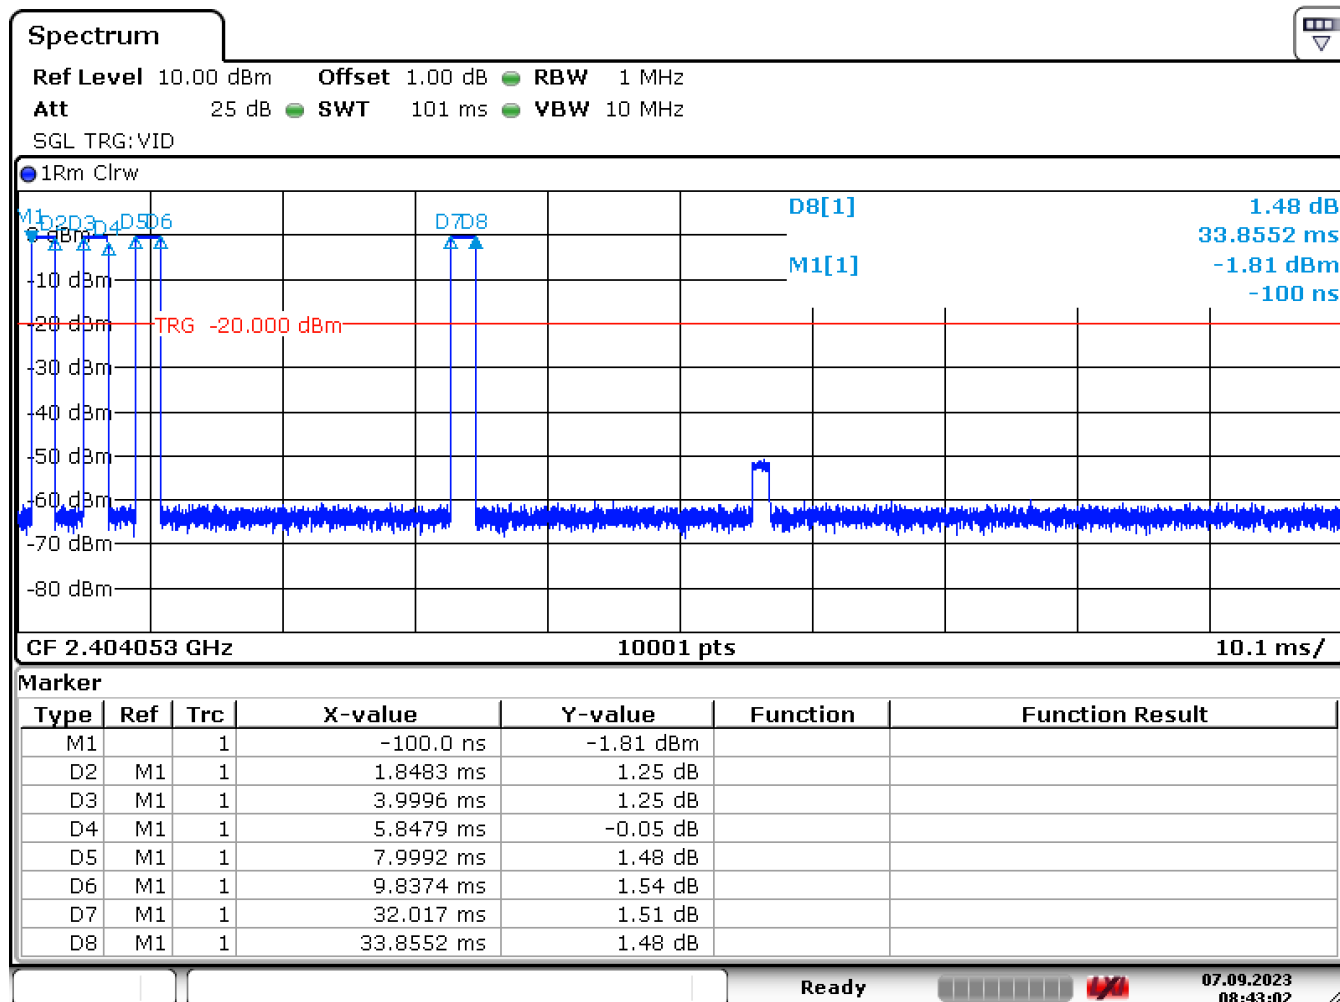

Date: 7.SEP.2023 08:43:02

Worst Case: 4 transmissions in a 100ms time frame, each 1,85ms in length, giving a duty cycle of 7,40 % or an average factor of -22,6 dB.

LIMIT SUBCLAUSE 15.249(e)

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Test Equipment used: EMV-205

4.4 Field strength of emissions at 2400 – 2483,5 MHz

§ 15.249 (a) (c)

Operating on CH 0 (2404,053MHz)

The maximum peak value measured was 96,3 dBµV/m = 65,31 mV/m at 3m distance.

With the averaging factor calculated on page 8 of this test report of -22,6 dB the maximum average value is then 73,7 dBµV/m = 4,84 mV/m at 3m distance.

LIMIT SUBCLAUSE 15.249(a) (c)

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

(c) Field strength limits are specified at a distance of 3 meters.

Test Equipment used: NT-100; NT-110/1; NT-111/1; NT-112/1; NT-131/1; NT-139; NT-207/1; NT-216

Field strength of emissions at 2400 – 2483,5 MHz

§ 15.249 (a) (c)

Operating on CH 4 (2441,844 MHz)

The maximum peak value measured was 96,8 dBµV/m = 69,18 mV/m at 3m distance.

With the averaging factor calculated on page 8 of this test report of -22,6 dB the maximum average value is then 74,2 dBµV/m = 5,13 mV/m at 3m distance.

LIMIT SUBCLAUSE 15.249(a) (c)

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

(c) Field strength limits are specified at a distance of 3 meters.

Test Equipment used: NT-100; NT-110/1; NT-111/1; NT-112/1; NT-131/1; NT-139; NT-207/1; NT-216

Field strength of emissions at 2400 – 2483,5 MHz

§ 15.249 (a) (c)

Operating on CH 10 (2479,285 MHz)

The maximum peak value measured was 97,4 dBµV/m = 74,13 mV/m at 3m distance.

With the averaging factor calculated on page 8 of this test report of -22,6 dB the maximum average value is then 74,8 dBµV/m = 5,50 mV/m at 3m distance.

LIMIT SUBCLAUSE 15.249(a) (c)

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500


(c) Field strength limits are specified at a distance of 3 meters.

Test Equipment used: NT-100; NT-110/1; NT-111/1; NT-112/1; NT-131/1; NT-139; NT-207/1; NT-216

4.5 Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 0 (2404,053 MHz) – average values above 1 GHz are shown in magenta – green = peak

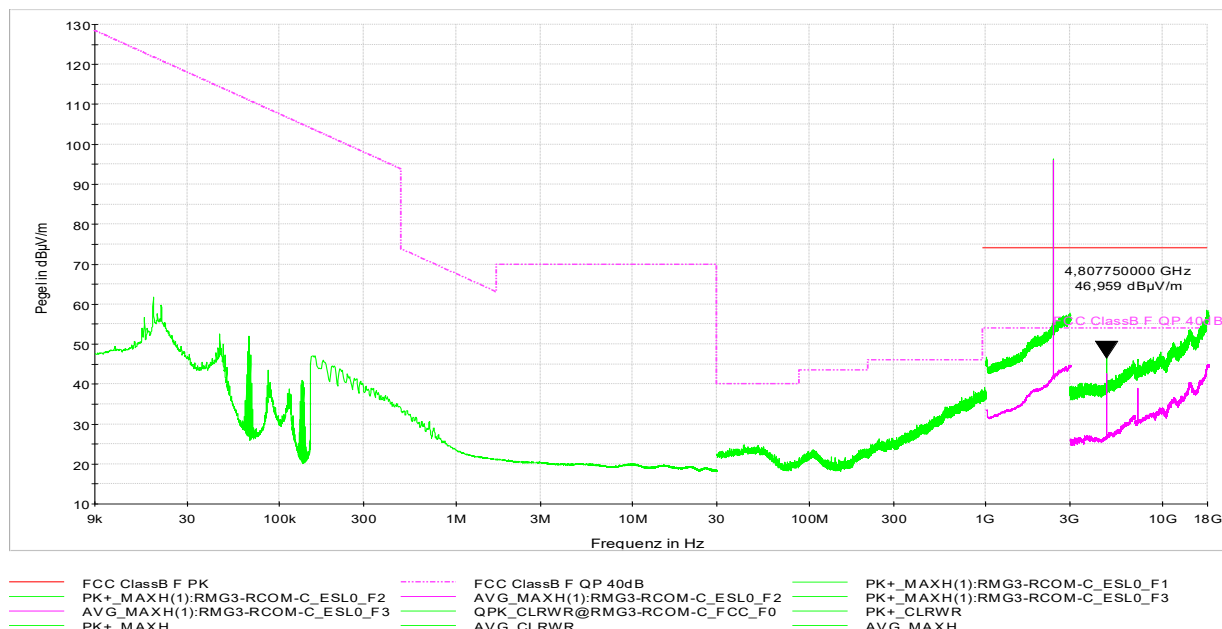

Worst case Emission: 46,96 dBµV/m Peak at 4807,75 MHz which is below the AVG Limit.

LIMIT

SUBCLAUSE 15.249(d) (e) (15.209)

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3


Test Equipment used: EMV-114; NT-100; NT-110/1; NT-111/1; NT-112/1; NT-122/1; NT-126; NT-131/1; NT-139; NT-207/1; NT-216; NT-337/1; NT-472

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 0 (2404,053 MHz) – band edge requirement – average values are in magenta – green = peak

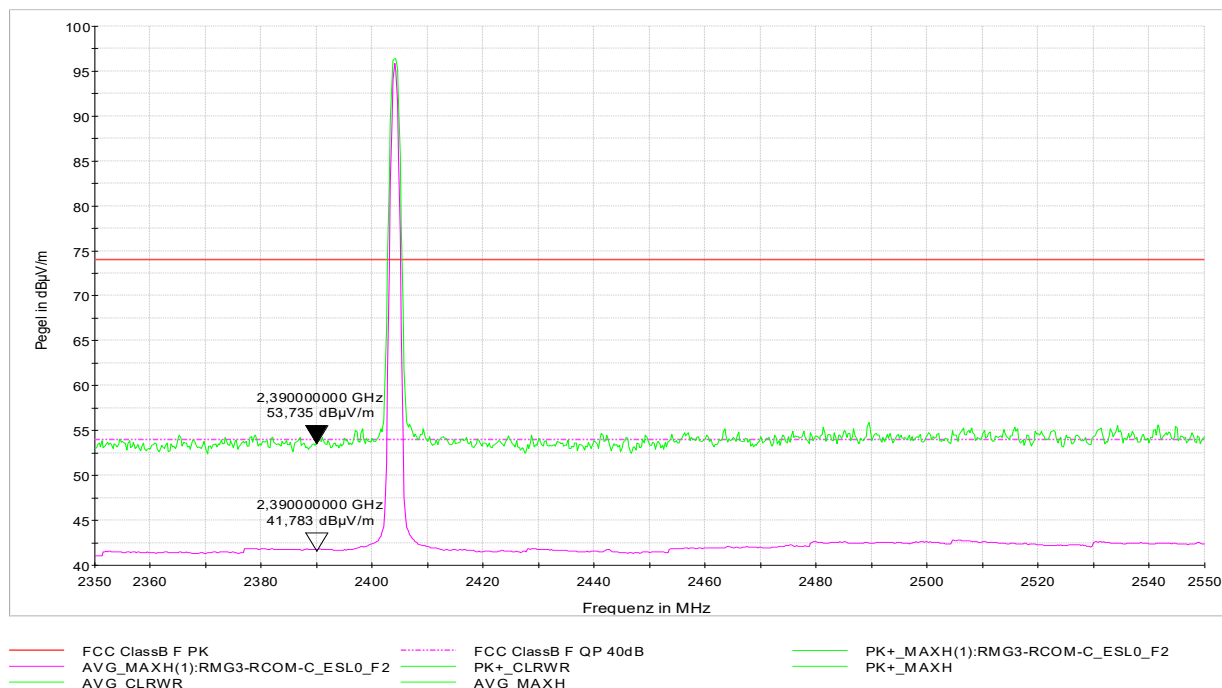

Nearest Band Edge: 2390 MHz

LIMIT SUBCLAUSE 15.249(d) (e) (15.209)

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3


Test Equipment used:

NT-100; NT-110/1; NT-111/1; NT-112/1; NT-131/1; NT-139; NT-207/1; NT-216

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 4 (2441,844 MHz) – average values above 1 GHz are shown in magenta – green = peak

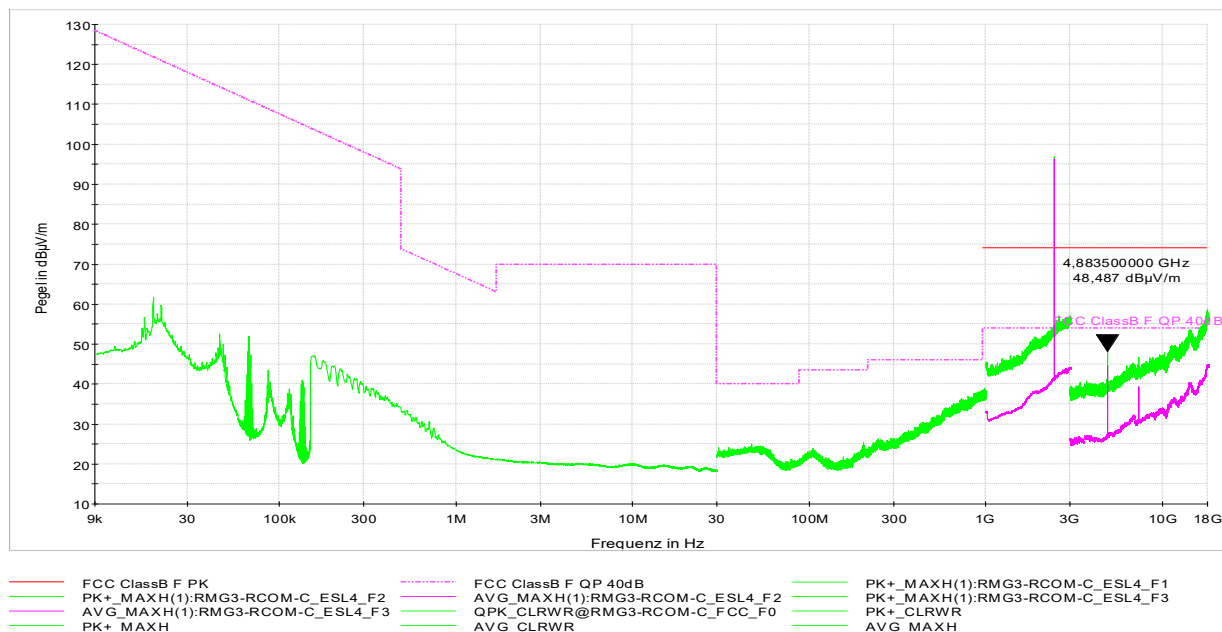

Worst case Emission: 48,49 dBµV/m Peak at 4883,5 MHz which is below the AVG Limit.

LIMIT

SUBCLAUSE 15.249(d) (e) (15.209)

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3


Test Equipment used: EMV-114; NT-100; NT-110/1; NT-111/1; NT-112/1; NT-122/1; NT-126; NT-131/1; NT-139; NT-207/1; NT-216; NT-337/1; NT-472

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 10 (2479,285 MHz) – average values above 1 GHz are shown in magenta – green = peak

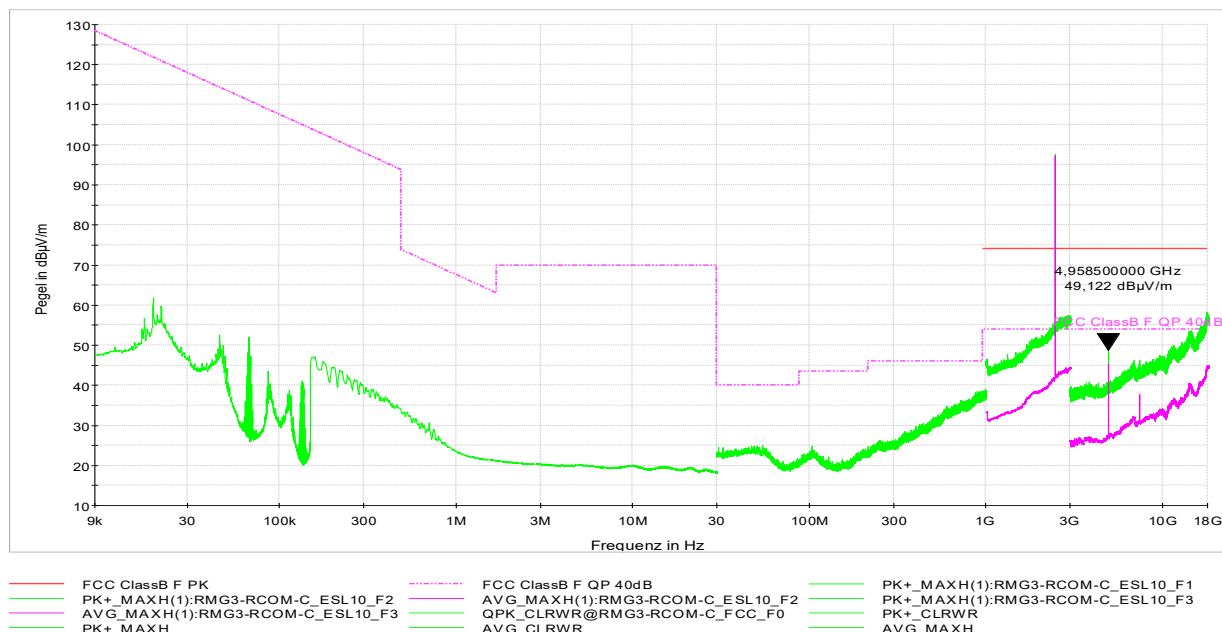

Worst case Emission: 49,12 dBµV/m Peak at 4958,5 MHz which is below the AVG Limit.

LIMIT SUBCLAUSE 15.249(d) (e) (15.209)

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3


Test Equipment used: EMV-114; NT-100; NT-110/1; NT-111/1; NT-112/1; NT-122/1; NT-126; NT-131/1; NT-139; NT-207/1; NT-216; NT-337/1; NT-472

Remark: Although the measurements were made up to the 10th harmonic (25 GHz) the frequency range above 18 GHz is not automatized, so no graphs are available. Nevertheless no emissions above noise level were found in the frequency range above 18 GHz.

Emissions outside 2400 – 2483,5 MHz

§ 15.249 (d) (e)

Channel 10 (2479,285 MHz) – band edge requirement – average values are in magenta – green = peak

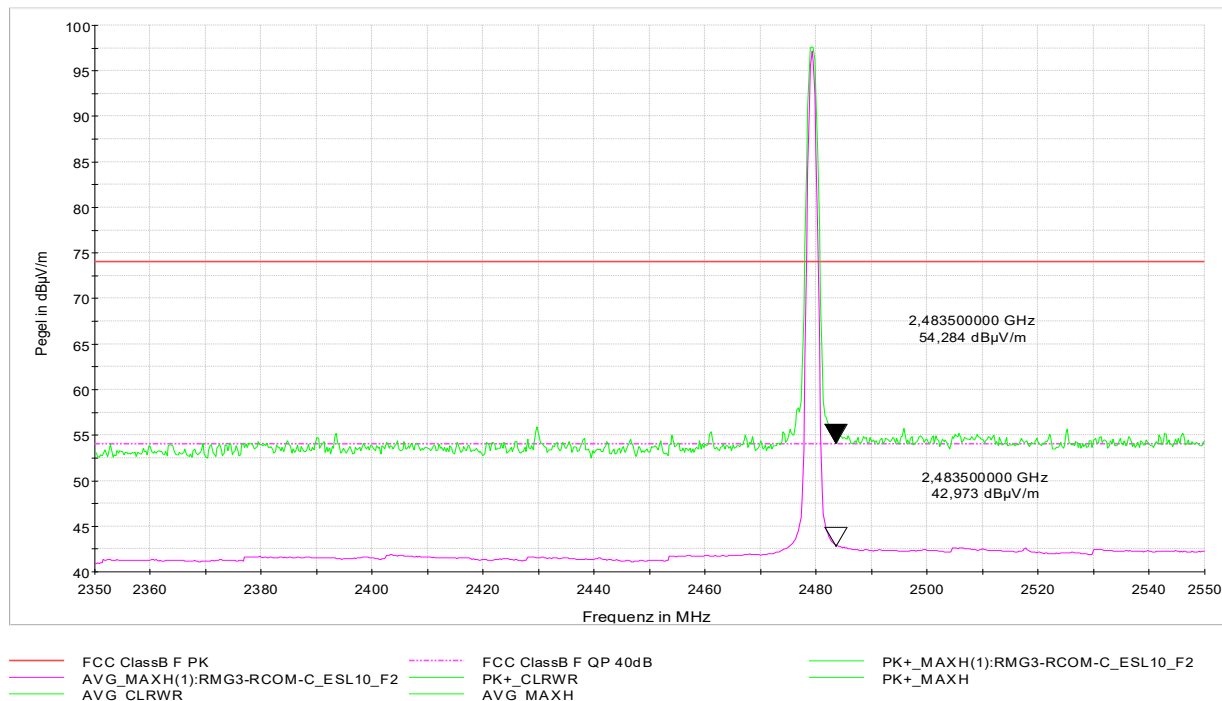

Nearest Band Edge: 2483,5 MHz

LIMIT

SUBCLAUSE 15.249(d) (e) (15.209)

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Test Equipment used:

NT-100; NT-110/1; NT-111/1; NT-112/1; NT-131/1; NT-139; NT-207/1; NT-216

4.6 RF Exposure

§ 1.1307(b)(3)(i)(A)

Title 47 §1.1307(b)(3)(i):

(3) Determination of exemption. (i) For single RF sources (i.e., any single fixed RF source, mobile device, or portable device, as defined in paragraph (b)(2) of this section): A single RF source is exempt if:

(A) The available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption may not be used in conjunction with other exemption criteria other than those in paragraph (b)(3)(ii)(A) of this section. Medical implant devices may only use this exemption and that in paragraph (b)(3)(ii)(A);

max. Tx power [mW] (from conducted and ERP measurement)	Duty cycle [%] (see 4.3)	max. time-averaged power [mW]	§1.1307(b)(3)(i)(A) limit [mW]
1,11	7,4	0,082	1

The maximum time-averaged power is less than 1 mW.

The device is an *exempt RF device* as per Title 47 §1.1307(b)(3)(i)(A).

ERP measurement:		Effective radiated power (mW)		
Test condition		CH 0 (2404,053MHz)	CH 4 (2441,844MHz)	CH 10 (2479,285MHz)
T _{nom} 23 °C	V _{nom} (3)V	0,79	0,88	1,01

EIRP measurement:		Effective isotropically radiated power (mW)		
Test condition		CH 0 (2404,053MHz)	CH 4 (2441,844MHz)	CH 10 (2479,285MHz)
T _{nom} 23 °C	V _{nom} (3)V	1,29	1,45	1,66

Conducted measurement		conducted power (mW)		
Test condition		CH 0 (2404,053MHz)	CH 4 (2441,844MHz)	CH 10 (2479,285MHz)
T _{nom} 23 °C	V _{nom} (3)V	1,11	1,07	1,10

Maximum Gain derived from EIRP and conducted measurement:		Maximum Gain (dBi)		
Test condition		CH 0 (2404,053MHz)	CH 4 (2441,844MHz)	CH 10 (2479,285MHz)
T _{nom} 23 °C	V _{nom} (3)V	0,66	1,32	1,8

RF Exposure

RSS-102, Issue 5

2.5.1 Exemption Limits for Routine Evaluation – SAR Evaluation

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1.

Table 1: SAR evaluation – Exemption limits for routine evaluation based on frequency and separation distance

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

Output power level shall be the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power. For controlled use devices where the 8 W/kg for 1 gram of tissue applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 5. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 2.5. If the operating frequency of the device is between two frequencies located in Table 1, linear interpolation shall be applied for the applicable separation distance. For test separation distance less than 5 mm, the exemption limits for a separation distance of 5 mm can be applied to determine if a routine evaluation is required.

For medical implants devices, the exemption limit for routine evaluation is set at 1 mW. The output power of a medical implants device is defined as the higher of the conducted or e.i.r.p to determine whether the device is exempt from the SAR evaluation.

RSS-102 2.5.1 Exemption calculation

Frequency (MHz)	cond. P (mW)	max. EIRP (mW)	Duty Cycle (1)	Avg. cond. P (mW)	Avg. EIRP (mW)	separation distance (mm)	Limit (mW)	
2404.053	1,11	1,29	0,074	0,082	0,095	5	4,25	OK
2441.844	1,07	1,45	0,074	0,079	0,107	5	4,04	OK
2479.285	1,10	1,66	0,074	0,081	0,123	5	3,94	OK

*) Calculations are done for a minimum separation distance of ≤ 5 mm. It is conservative, as customers are not expected to directly touch the modules. Exemption calculations are OK even with such a small separation distance and without considering limb worn exposure.

The time-averaged output power is below the exemption limit for routine evaluation.

4.7. TEST OBJECT DATA (BLE/Quuppa Protocol)

General EUT Description

2.1033 (c) Technical description

2.1033 (4) Type of emission: 1M03F1D – Channel spacing 2 MHz plus 2 additional ‘Quuppa’ channels at 2401 and 2481 MHz

2.1033 (5) Frequency range: 2402 to 2480 MHz (channel center frequencies) plus 2 additional ‘Quuppa’ channels at 2401 and 2481 MHz

2.1033 (6) Power range and Controls: The maximum peak output power is 1,62 mW eirp and there is no power regulation.

2.1033 (7) Maximum output power rating: 1,62 mW eirp.

2.1033 (8) DC Voltage and Current: 3 VDC (internal battery)
maximum current consumption: 28 mA during continuous transmission

RSS-135 This standard does not apply to:

- 1.1.(a) a receiver that scans radio frequencies for the purpose of enabling its associated transmitter to avoid transmitting in an occupied frequency but which does not have the capability of decoding the message (e.g. converting it to audio voice) contained in the radio signal

Worst case Spurious Emissions: 44,66 dBµV/m Average at 4962 MHz.

Tests were performed: September 7th and 15th 2023.

4.8. Number of channels and channel spacing

§ 2.1033

Conducted Measurement

Rated output power: 1,62 mW

There are 40 Channels used, starting at 2402 till 2480 MHz each separated by 2 MHz channel spacing.

Two additional channels are used with the same modulation but for positioning purposes. These channels use 2401 MHz and 2481 MHz as center frequencies.


Test Equipment used: N/A

4.9. 6 dB Bandwidth

§ 15.247(a)(2)
5.2.a)

Conducted Measurement

Rated output power: 1,62 mW 2401 MHz center frequency

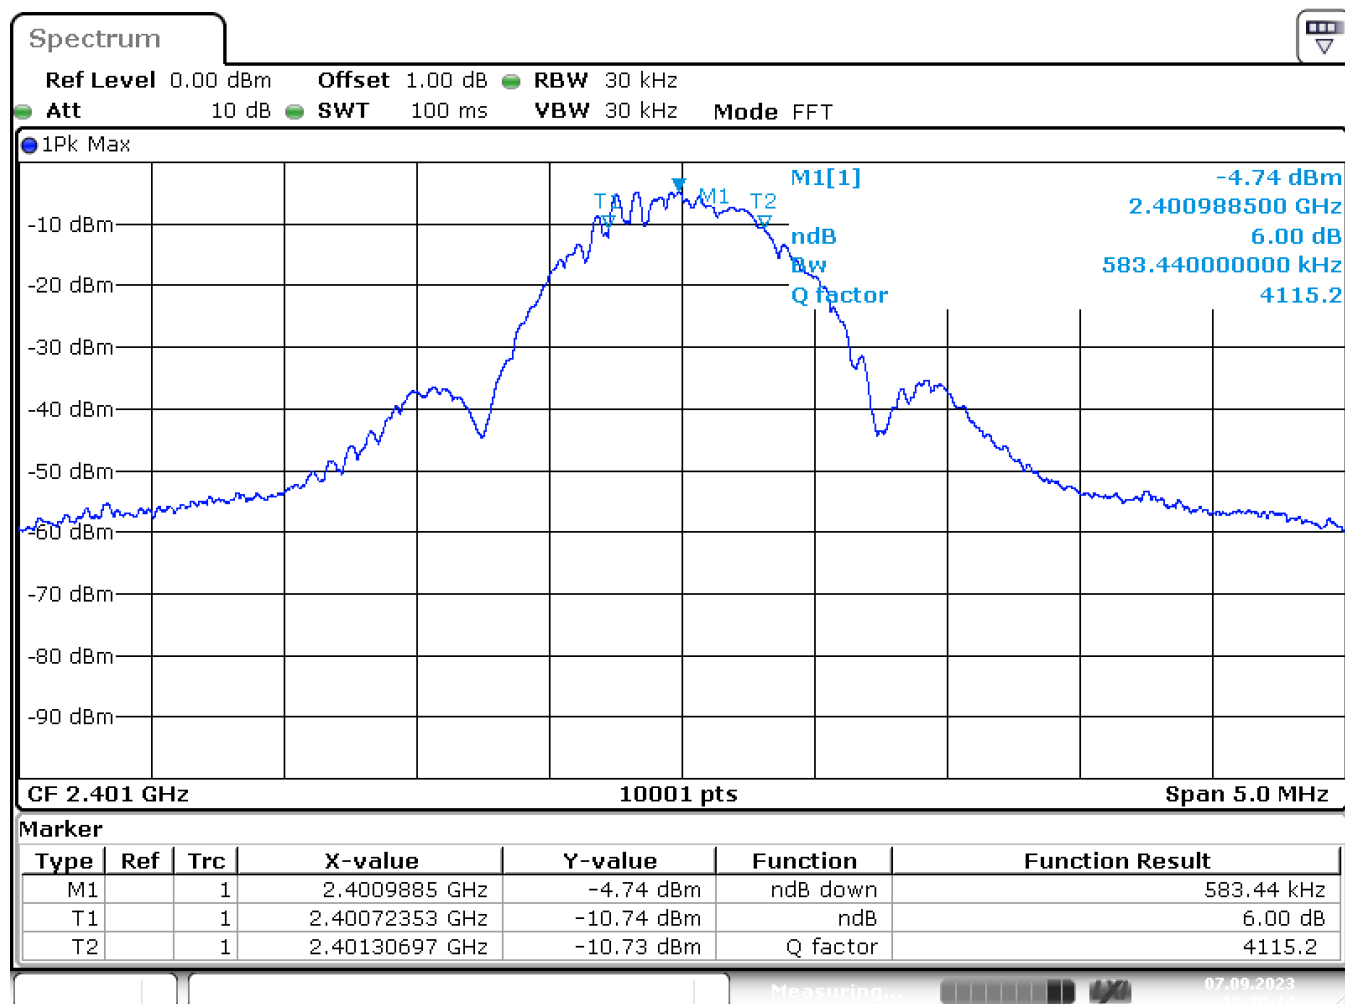

Date: 7.SEP.2023 12:30:14

6dB Bandwidth: 583,4 kHz

LIMIT SUBCLAUSE 15.247(e) – 5.2.a)

Under normal test conditons	6 dB Bandwidth at least 500 kHz
-----------------------------	---------------------------------


Test Equipment used: EMV-205;

6 dB Bandwidth

§ 15.247(a)(2)
5.2.a)

Conducted Measurement

Rated output power: 1,62 mW 2440 MHz center frequency

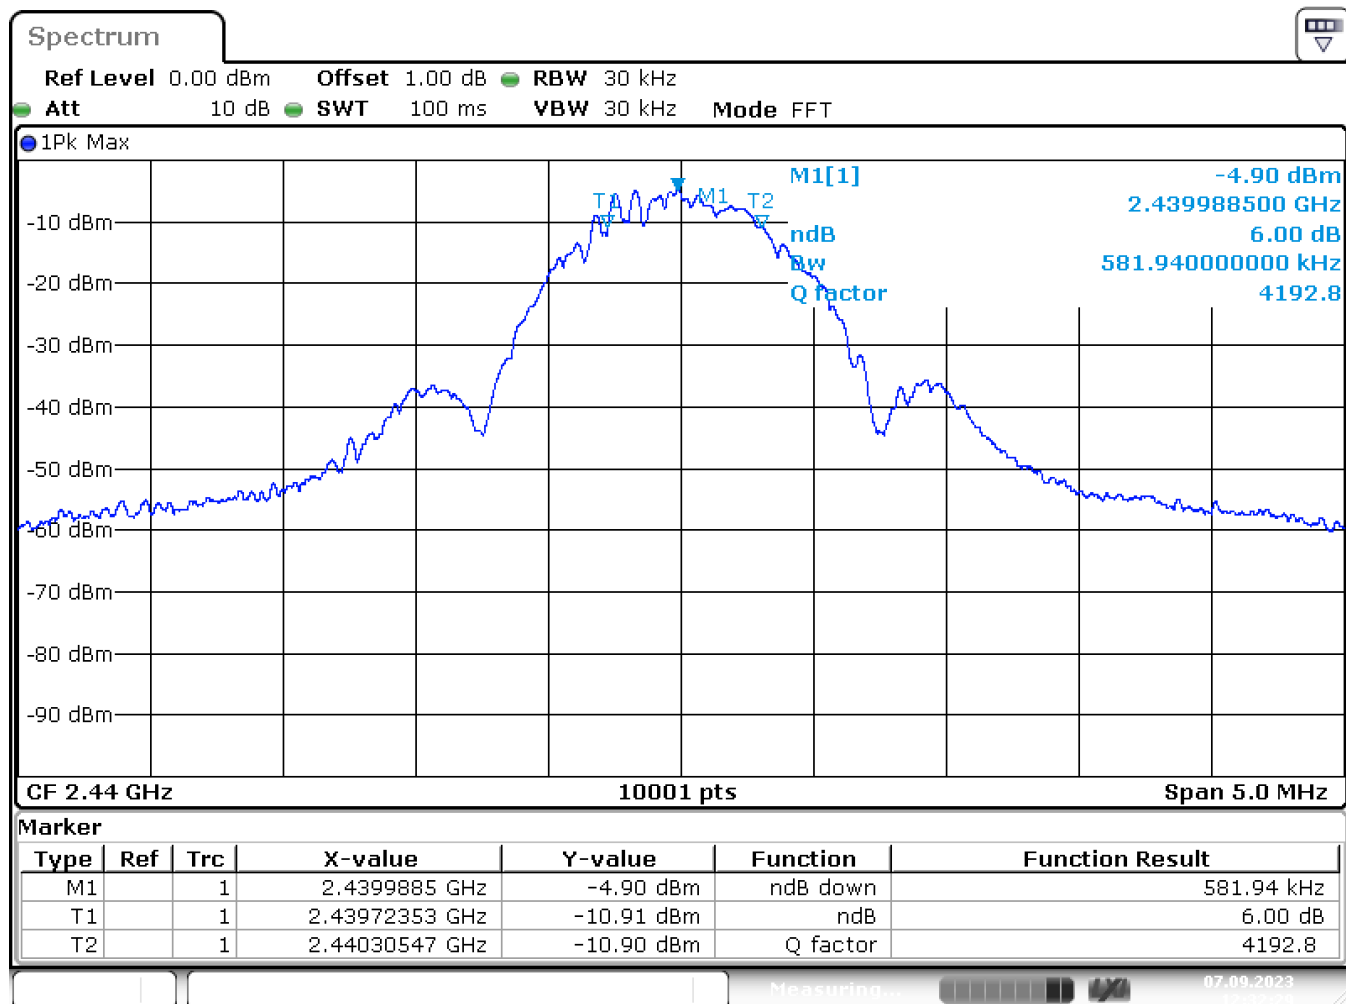

Date: 7.SEP.2023 12:32:29

6dB Bandwidth: 581,9 kHz

LIMIT SUBCLAUSE 15.247(e) – 5.2.a)

Under normal test conditons	6 dB Bandwidth at least 500 kHz
-----------------------------	---------------------------------


Test Equipment used: EMV-205;

6 dB Bandwidth

§ 15.247(a)(2)
5.2.a)

Conducted Measurement

Rated output power: 1,62 mW 2481 MHz center frequency

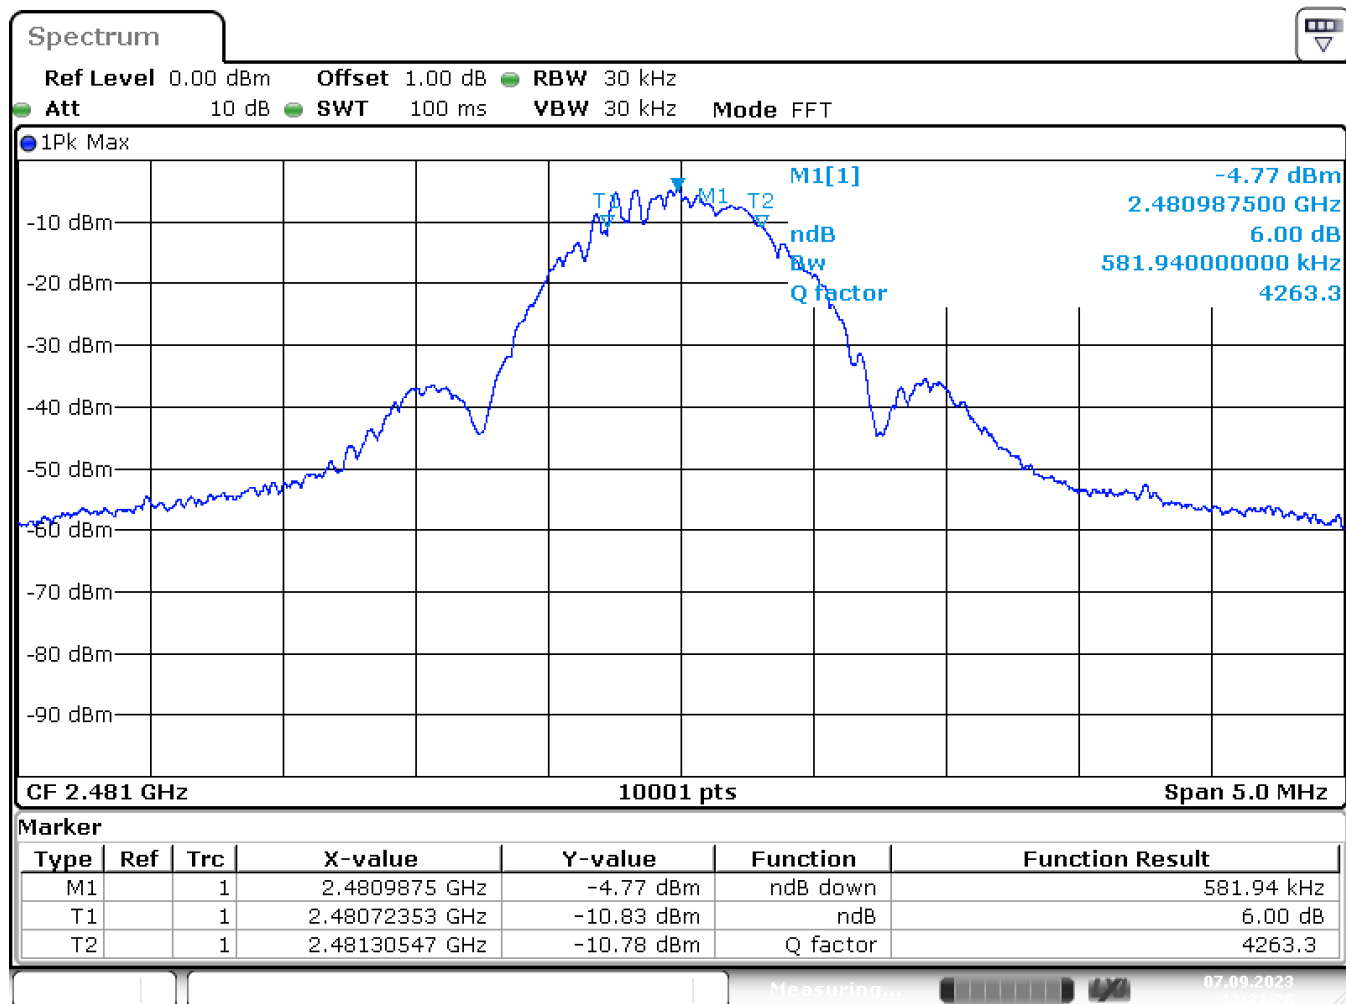

Date: 7.SEP.2023 12:31:26

6dB Bandwidth: 581,9 kHz

LIMIT SUBCLAUSE 15.247(e) – 5.2.a)

Under normal test conditons	6 dB Bandwidth at least 500 kHz
-----------------------------	---------------------------------


Test Equipment used: EMV-205;

4.10. 99% Bandwidth

RSS 247

Conducted Measurement

Rated output power: 1,62 mW 2401 MHz center frequency

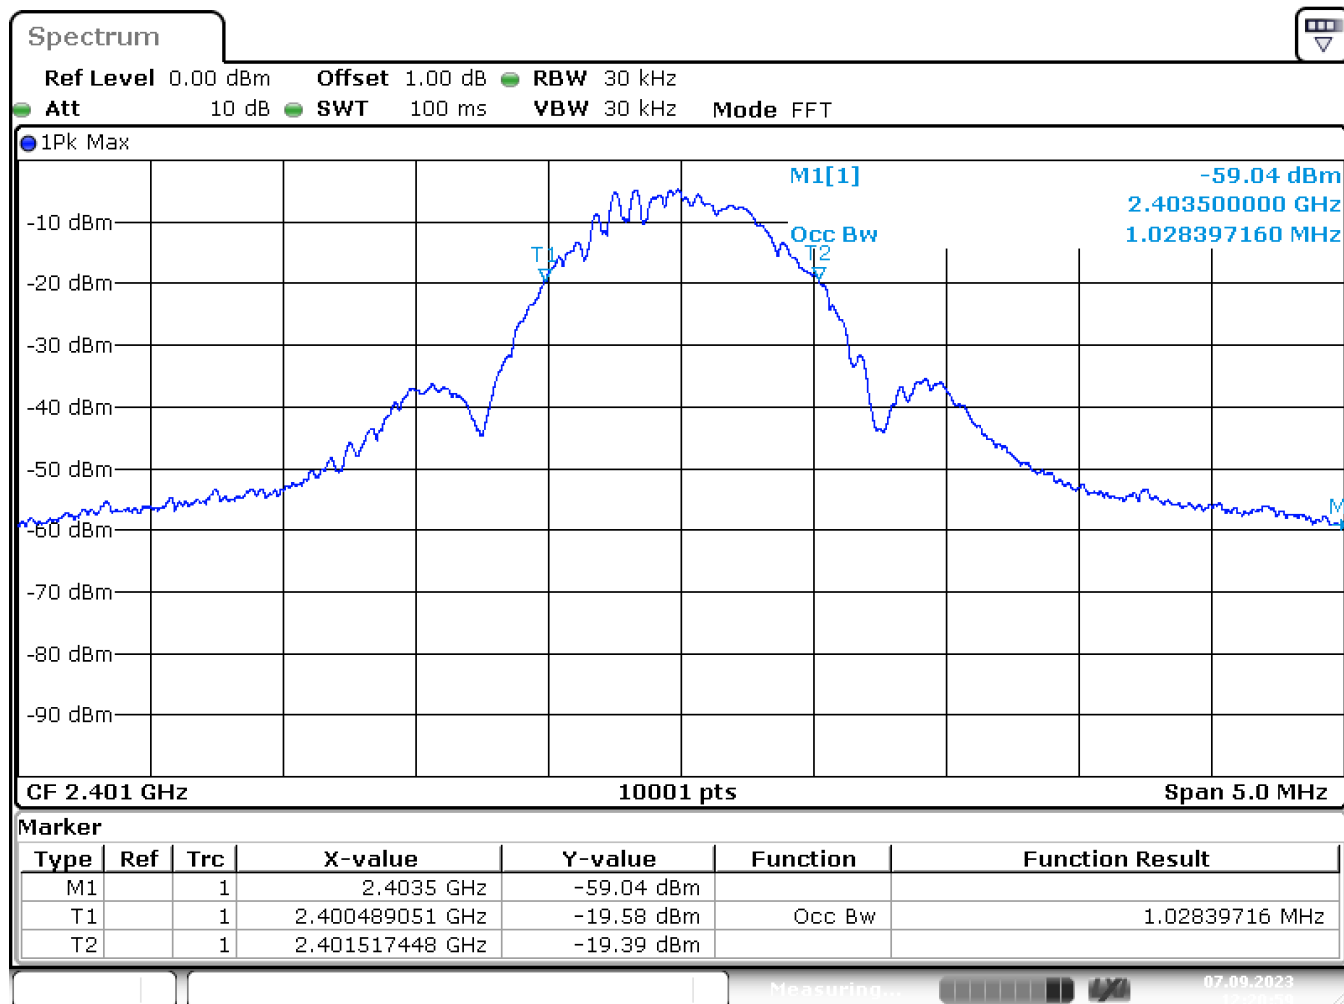

Date: 7.SEP.2023 12:21:00

99% Bandwidth: 1028 kHz

LIMIT RSS 247

None; for IC reporting purposes only


Test Equipment used: EMV-205;

99% Bandwidth

RSS 247

Conducted Measurement

Rated output power: 1,62 mW 2440 MHz center frequency

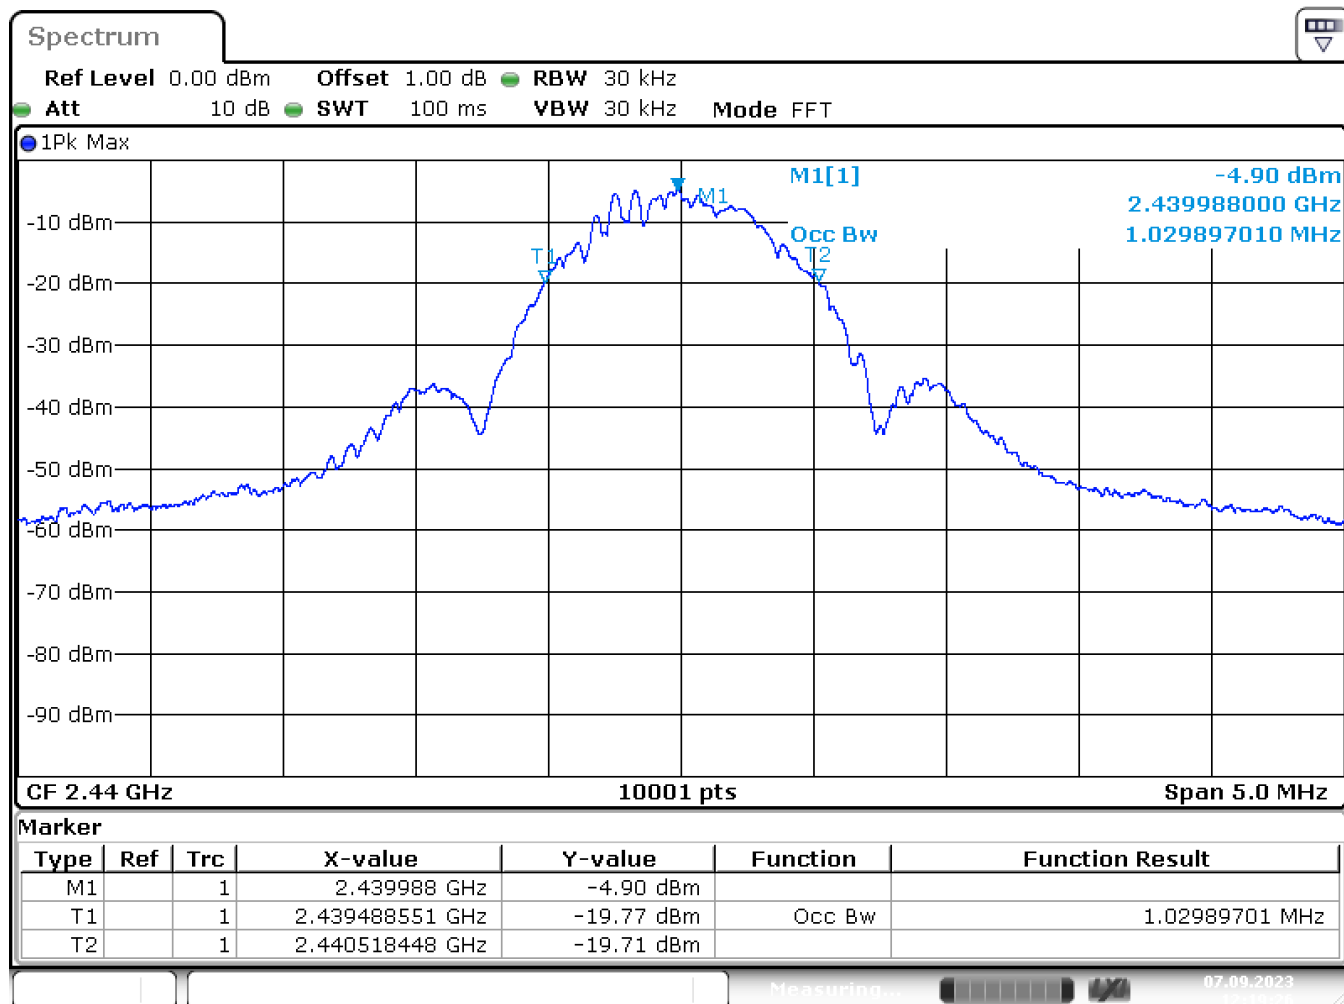

Date: 7.SEP.2023 12:19:26

99% Bandwidth: 1030 kHz

LIMIT **RSS 247**

None; for IC reporting purposes only


Test Equipment used:EMV-205;

99% Bandwidth

RSS 247

Conducted Measurement

Rated output power: 1,62 mW 2481 MHz center frequency

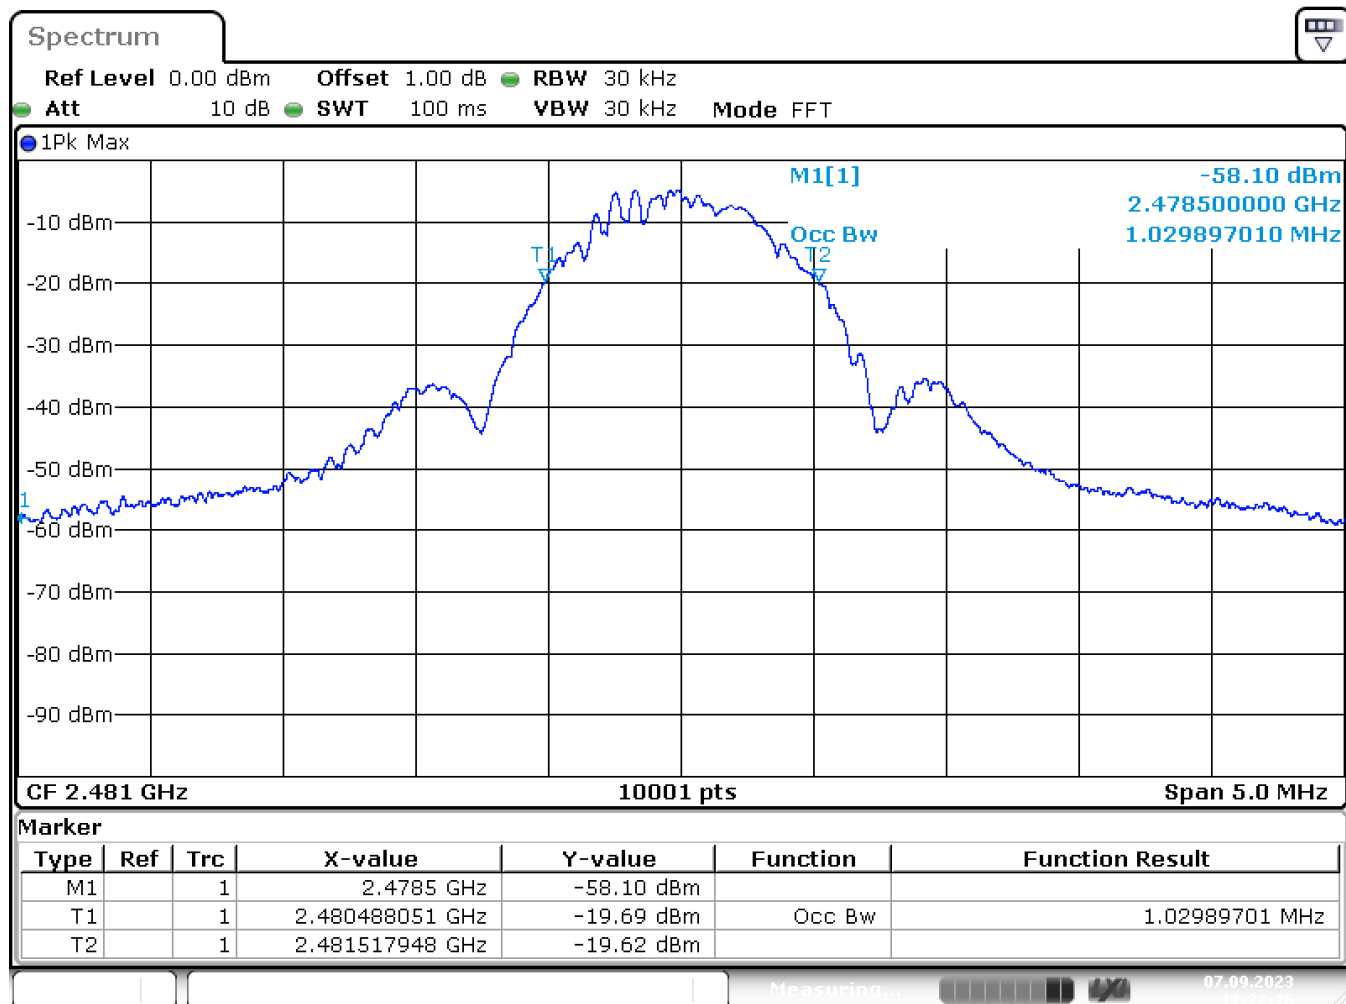

Date: 7.SEP.2023 12:22:16

99% Bandwidth: 1030 kHz

LIMIT RSS 247

None; for IC reporting purposes only

Test Equipment used: EMV-205;

4.11. Maximum Peak RF Power Output

§ 15.247(b)(3)
5.4.4

Conducted Measurement

Rated output power: 1,62 mW

Test conditions		Transmitter power (mW)		
		2401 MHz	2440 MHz	2481 MHz
T _{nom} (23) °C	V _{nom} (3) V	1,09	1,04	1,07
Measurement uncertainty		± 0,75 dB		

Radiated Measurement

Rated output power: 1,62 mW

Test conditions		Transmitter power (mW) EIRP		
		2401 MHz	2440 MHz	2481 MHz
T _{nom} (23) °C	V _{nom} (3) V	1,35	1,51	1,62
Measurement uncertainty		± 2 dB		

Maximum Gain derived from EIRP and
conducted measurement:

Test condition		Maximum Gain (dBi)		
		2401 MHz	2440 MHz	2481 MHz
T _{nom} 23 °C	V _{nom} (3)V	0,93	1,61	1,82

LIMIT

SUBCLAUSE 15.247(b)(3) – 5.4.4

Under normal test conditons	1W conducted (4W eirp)
-----------------------------	------------------------


Test Equipment used: NT-100; NT-110/1; NT-111/1; NT-139; NT-207/1; EMV-205

4.12. Power spectral density (radiated)

§ 15.247(e)
5.2.2

Conducted Measurement

Rated output power: 1,62 mW 2401 MHz center frequency

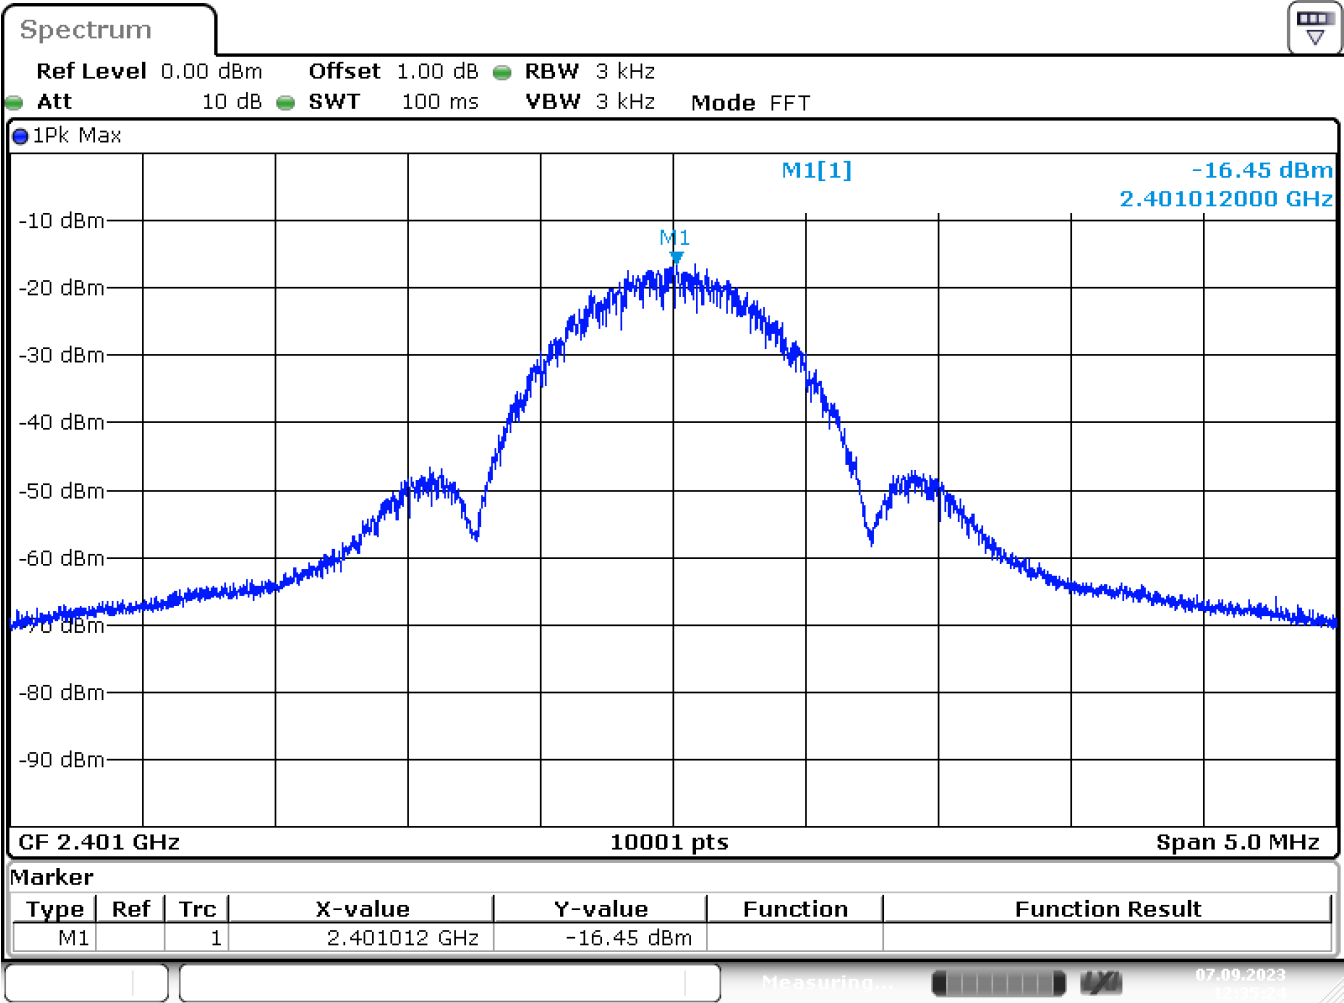

Date: 7.SEP.2023 12:35:24

Power Spectral density: -16,45 dBm @ 2401,01 MHz

LIMIT SUBCLAUSE 15.247(e) – 5.2 b)

Under normal test conditons	+8dBm in any 3 kHz band
-----------------------------	-------------------------


Test Equipment used: NT-100; NT-110/1; NT-111/1; NT-139; NT-207/1;

Power spectral density (radiated)

§ 15.247(e)
5.2 b)

Conducted Measurement

Rated output power: 1,62 mW 2440 MHz center frequency

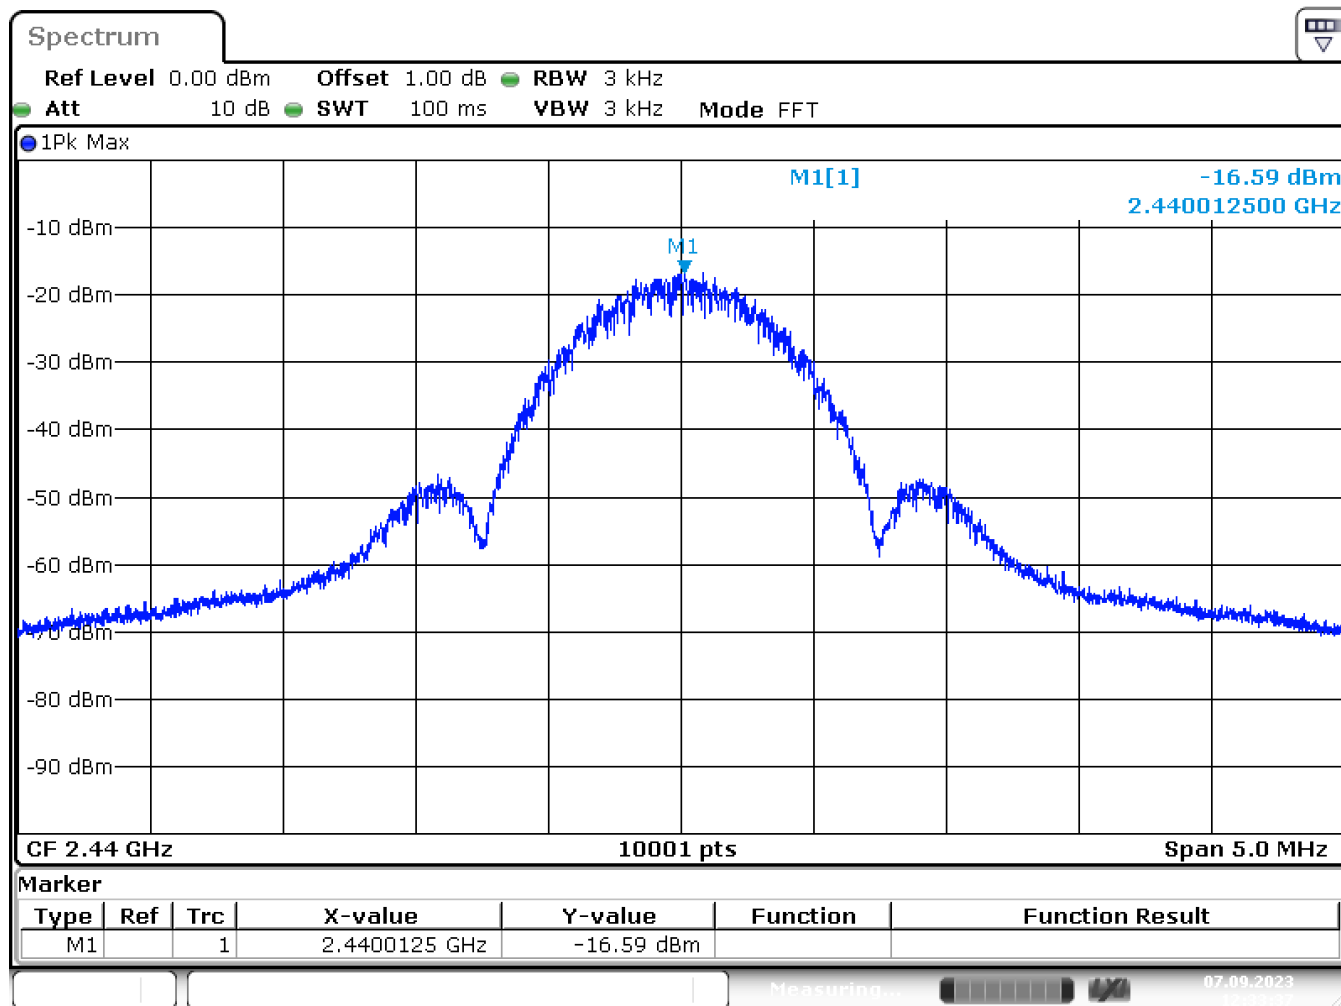

Date: 7.SEP.2023 12:33:37

Power Spectral density: -16,59 dBm @ 2440,01 MHz

LIMIT SUBCLAUSE 15.247(e) – 5.2 b)

Under normal test conditons	+8dBm in any 3 kHz band
-----------------------------	-------------------------


Test Equipment used: NT-100; NT-110/1; NT-111/1; NT-139; NT-207/1;

Power spectral density (radiated)

§ 15.247(e)
5.2 b)

Conducted Measurement

Rated output power: 1,62 mW 2481 MHz center frequency

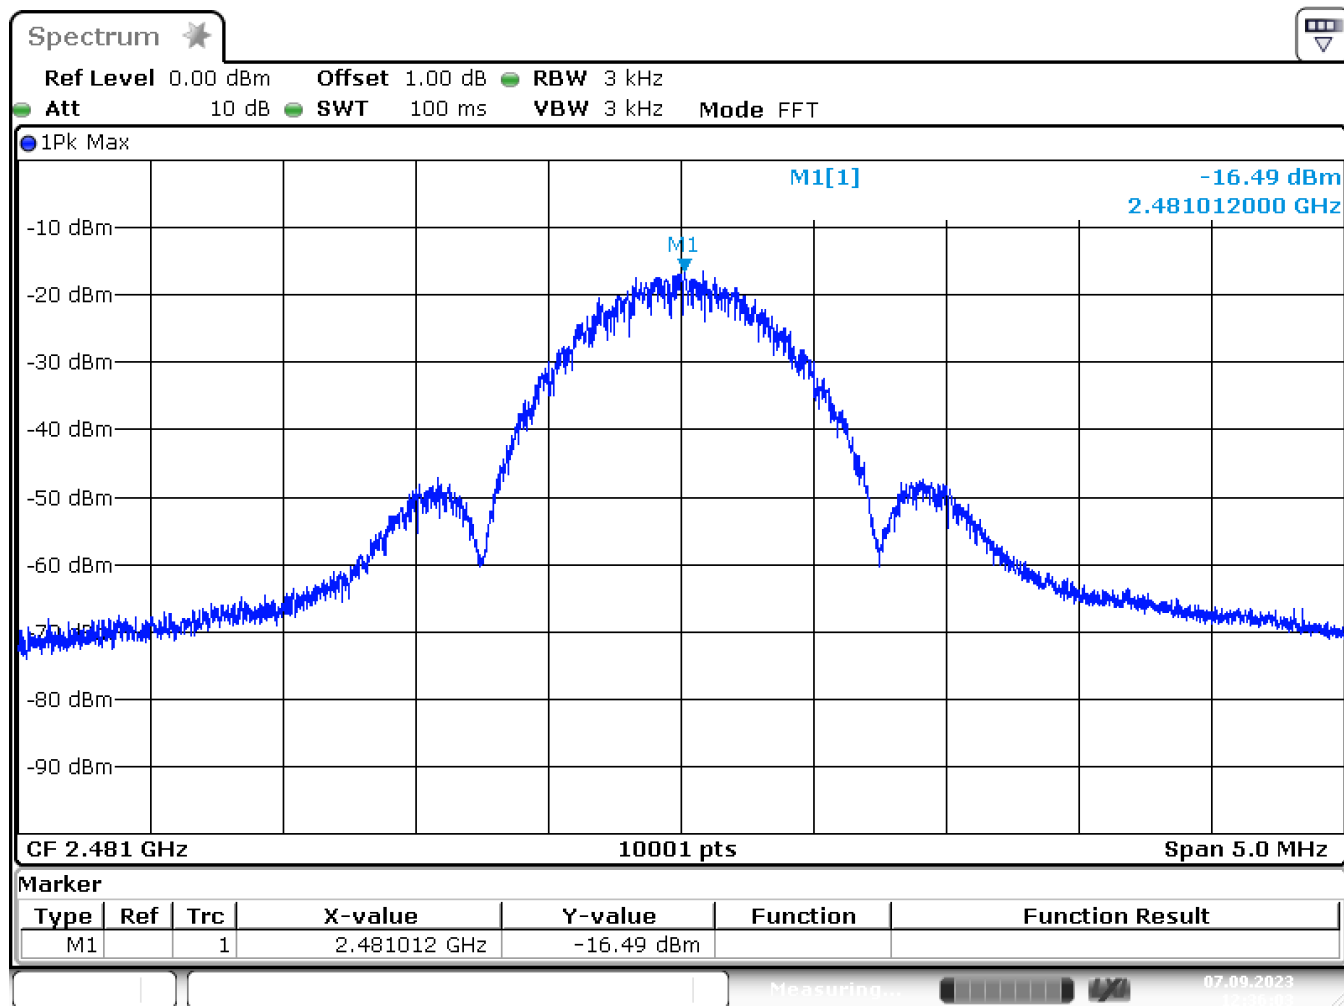

Date: 7.SEP.2023 12:36:03

Power Spectral density: -16,49 dBm @ 2481,01 MHz

LIMIT SUBCLAUSE 15.247(e) – 5.2 b)

Under normal test conditons	+8dBm in any 3 kHz band
-----------------------------	-------------------------


Test Equipment used: NT-100; NT-110/1; NT-111/1; NT-139; NT-207/1;

4.13. Emissions outside the used frequency band Unwanted Emissions

§ 15.247(d)
5.5

Conducted measurement

Setup: 2401 MHz

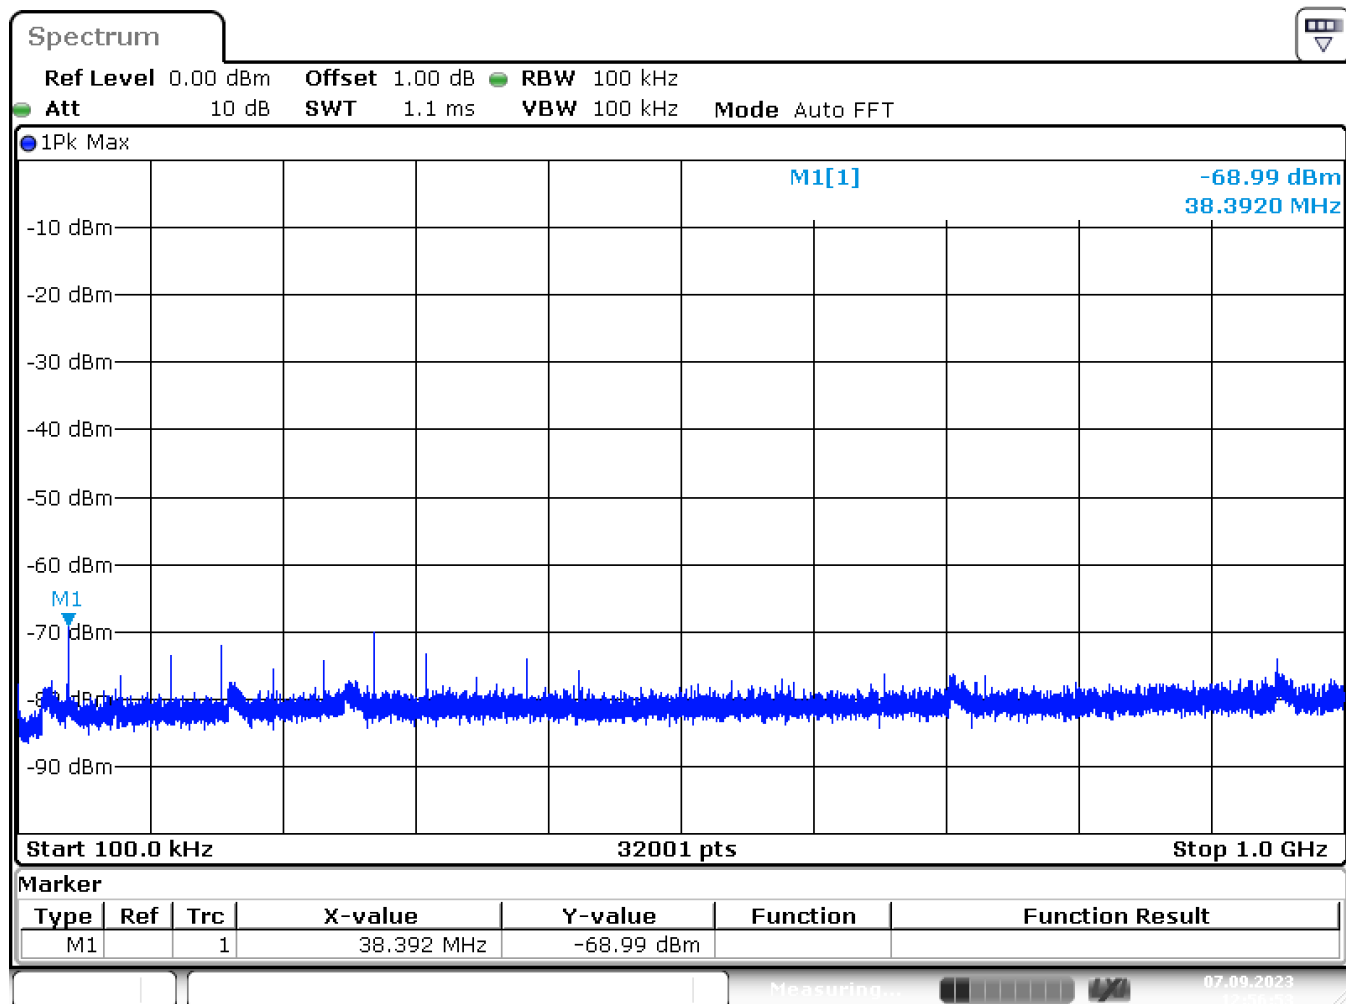

Date: 7.SEP.2023 12:56:53

LIMIT SUBCLAUSE 15.247(d) – 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


Test Equipment used: EMV-205

Emissions outside the used frequency band Unwanted Emissions

§ 15.247(d)
5.5

Conducted measurement

Setup: 2401 MHz

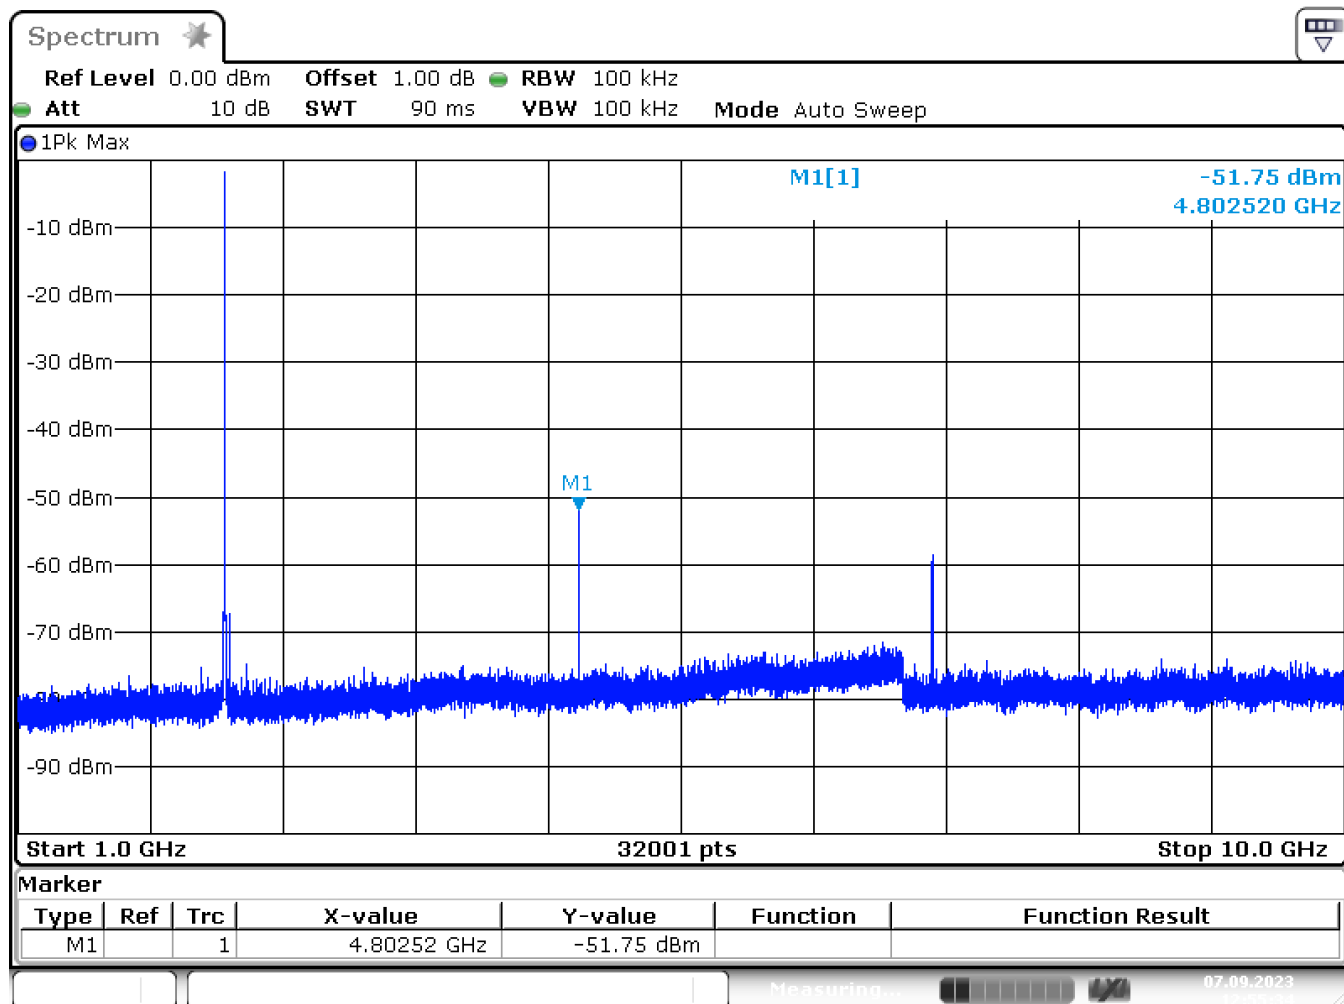

Date: 7.SEP.2023 12:55:34

Worst case emission @ 4802,52 MHz: -51,75 dBm

LIMIT SUBCLAUSE 15.247(d) – 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


Test Equipment used: EMV-205

Emissions outside the used frequency band Unwanted Emissions

§ 15.247(d)
5.5

Conducted measurement

Setup: 2401 MHz

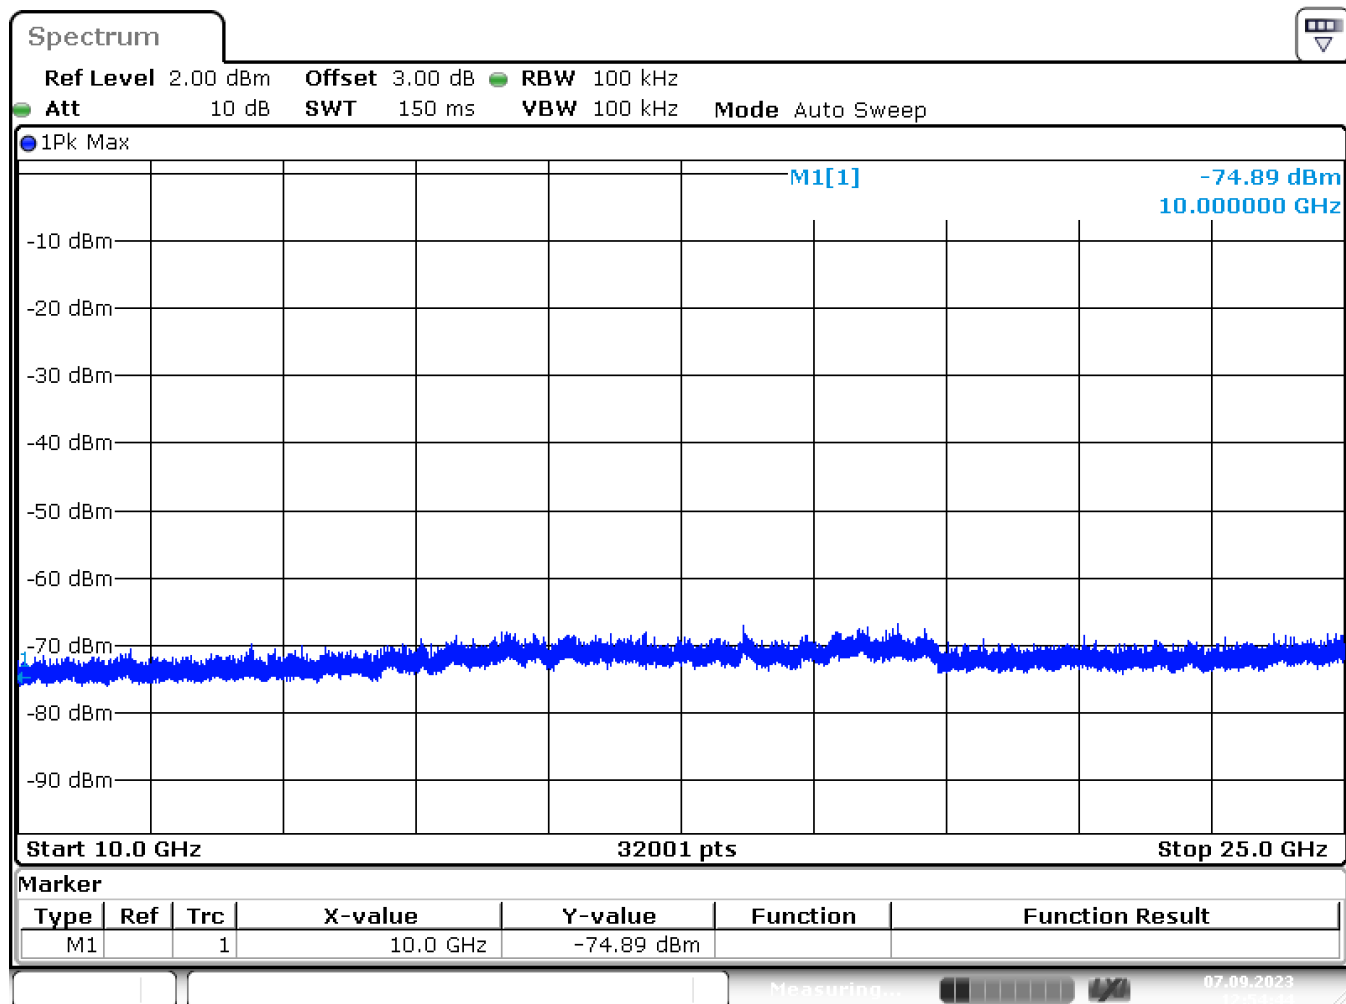

Date: 7.SEP.2023 12:54:44

LIMIT SUBCLAUSE 15.247(d) – 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


Test Equipment used: EMV-205

Emissions outside the used frequency band Unwanted Emissions

§ 15.247(d)
5.5

Conducted measurement

Setup: 2440 MHz

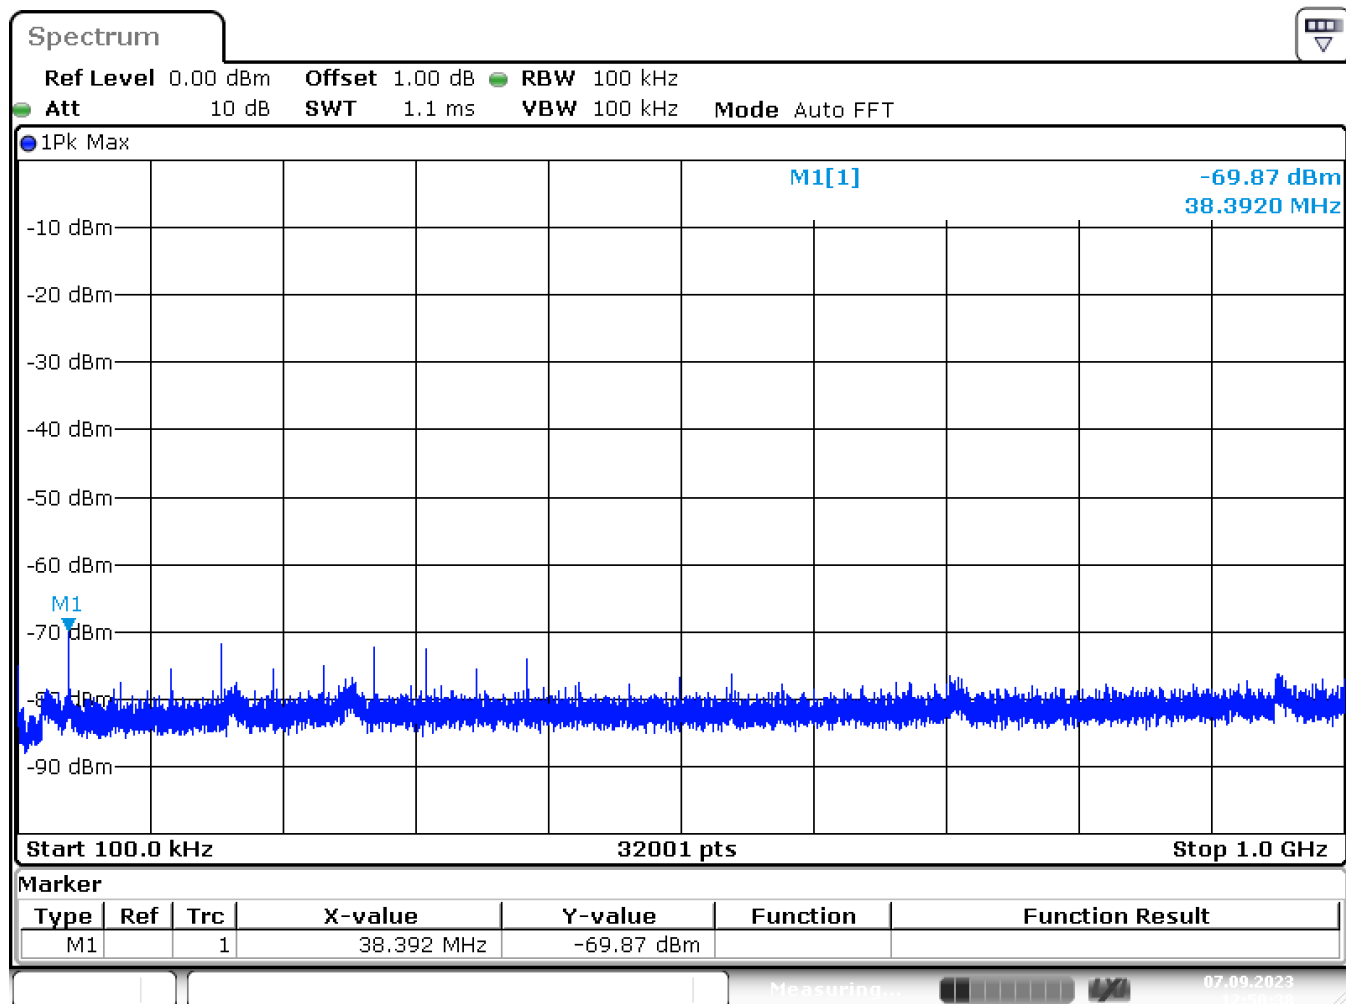

Date: 7.SEP.2023 12:50:38

LIMIT SUBCLAUSE 15.247(d) – 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


Test Equipment used: EMV-205

Emissions outside the used frequency band Unwanted Emissions

§ 15.247(d)
5.5

Conducted measurement

Setup: 2440 MHz

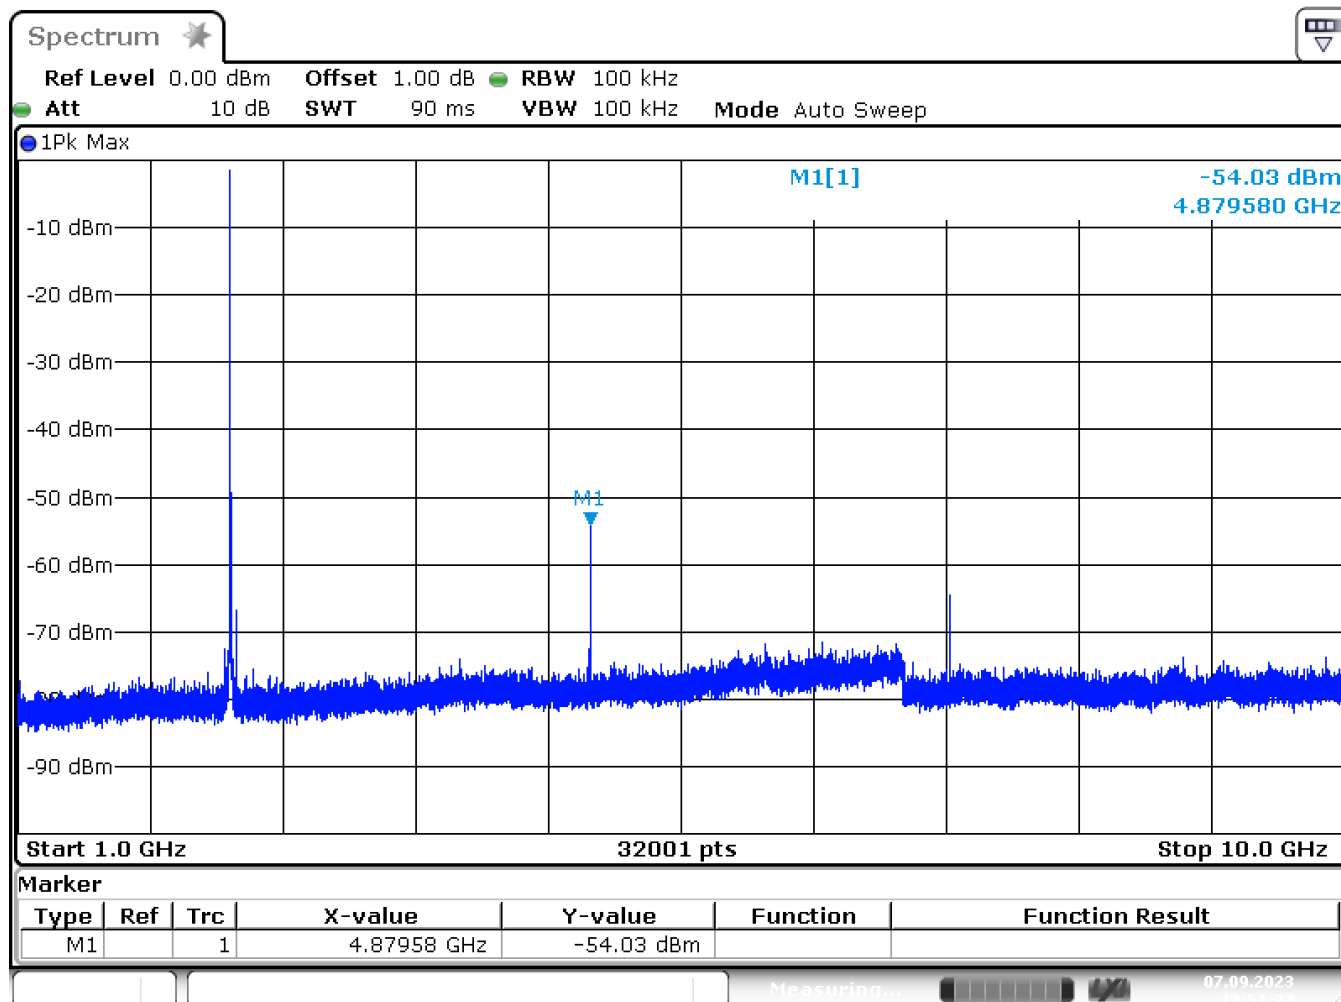

Date: 7.SEP.2023 12:51:23

Worst case emission @ 4879,58 MHz: -54,03 dBm

LIMIT SUBCLAUSE 15.247(d) – 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


Test Equipment used: EMV-205

Emissions outside the used frequency band
Unwanted Emissions

§ 15.247(d)
5.5

Conducted measurement

Setup: 2440 MHz

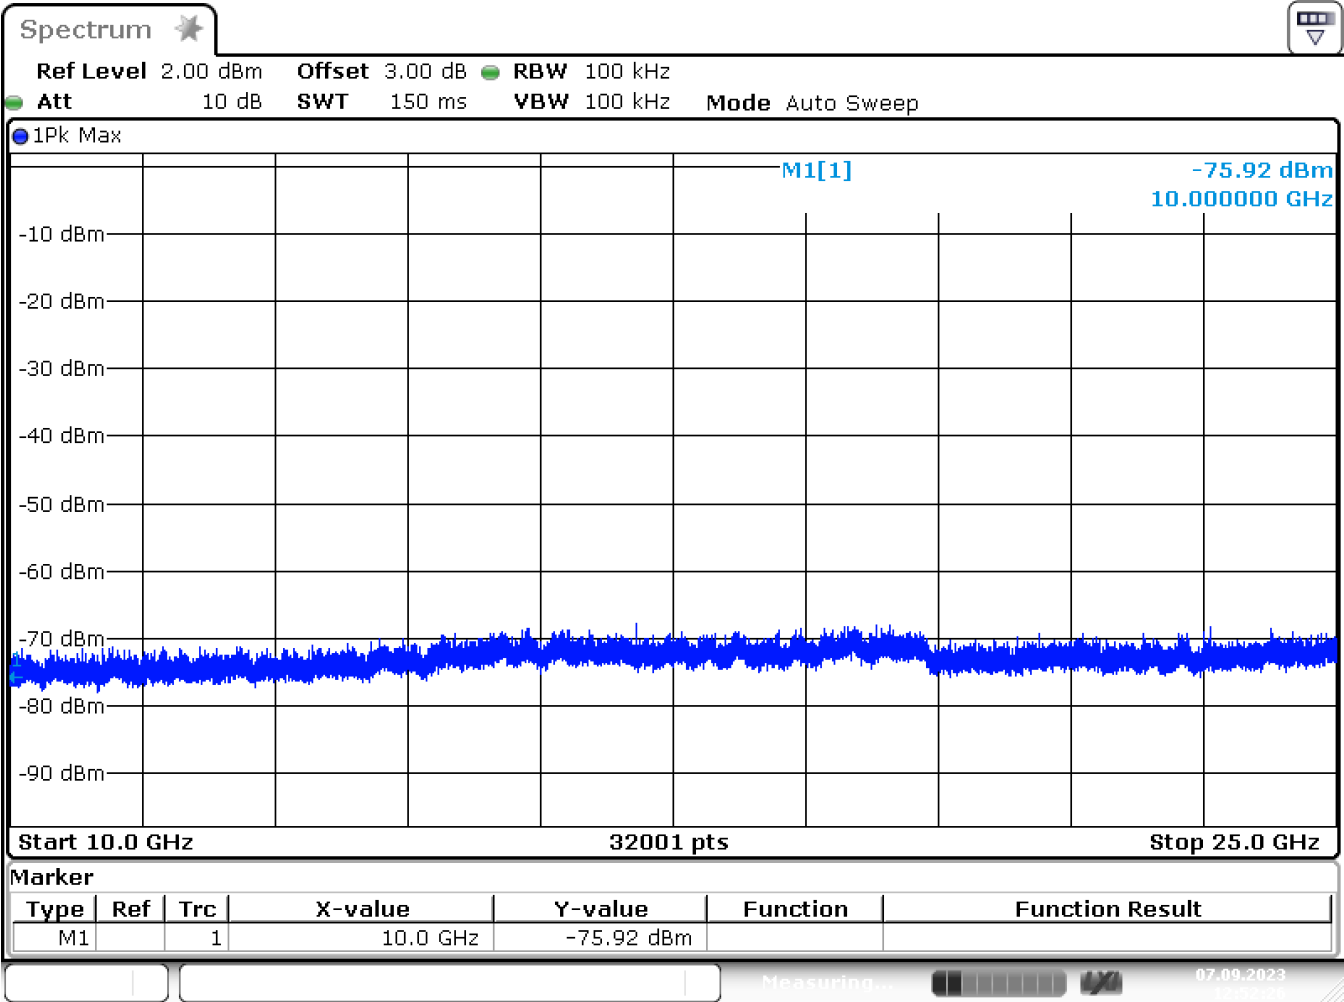

Date: 7.SEP.2023 12:52:27

LIMIT SUBCLAUSE 15.247(d) – 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


Test Equipment used: EMV-205

Emissions outside the used frequency band Unwanted Emissions

§ 15.247(d)
5.5

Conducted measurement

Setup: 2481 MHz

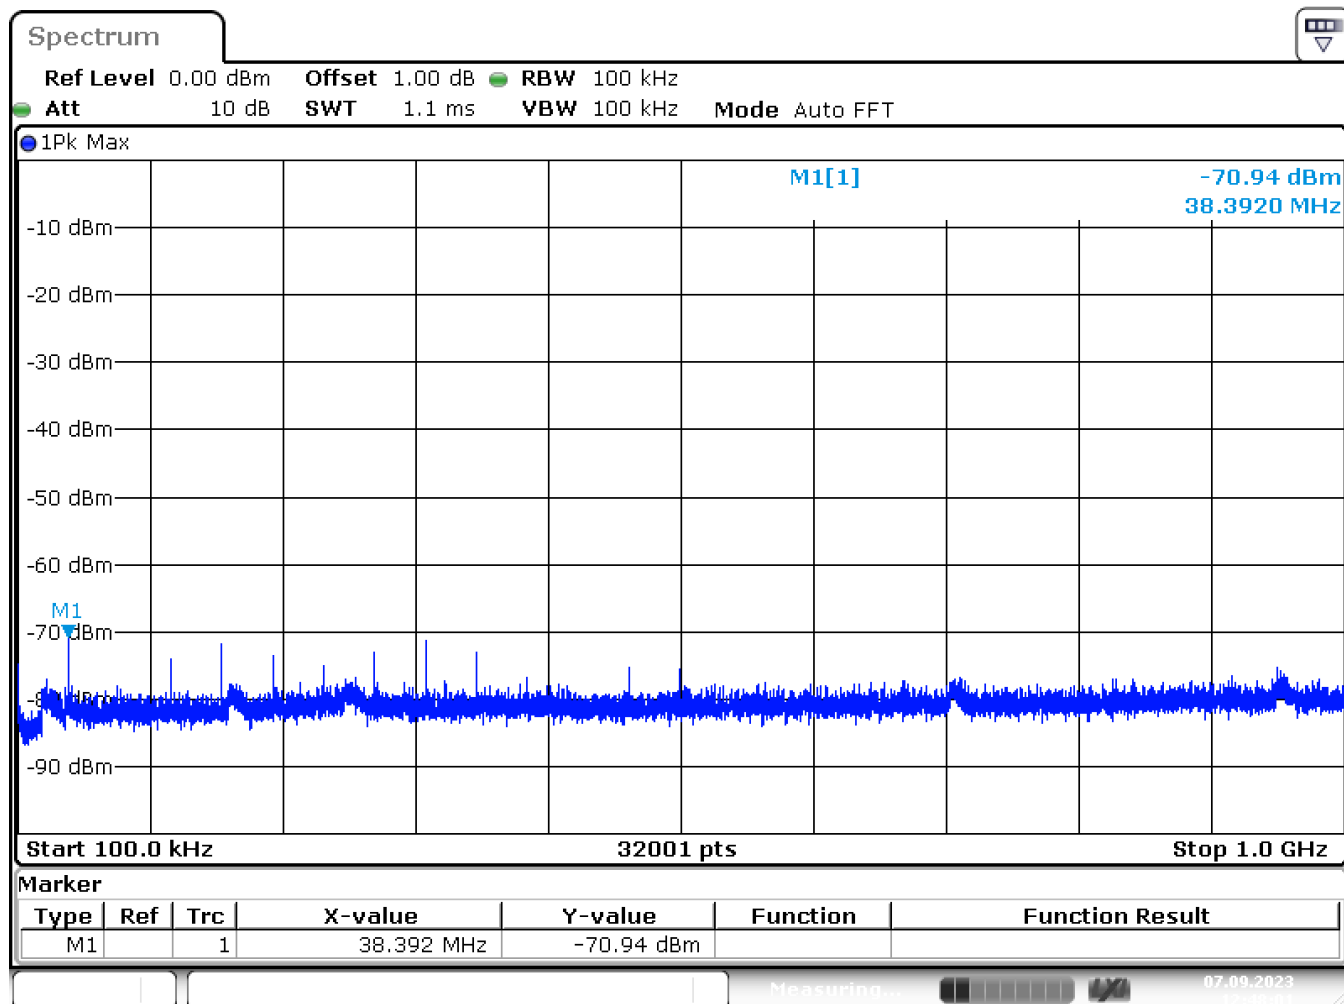

Date: 7.SEP.2023 12:48:01

LIMIT SUBCLAUSE 15.247(d) – 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


Test Equipment used: EMV-205

Emissions outside the used frequency band Unwanted Emissions

§ 15.247(d)
5.5

Conducted measurement

Setup: 2481 MHz

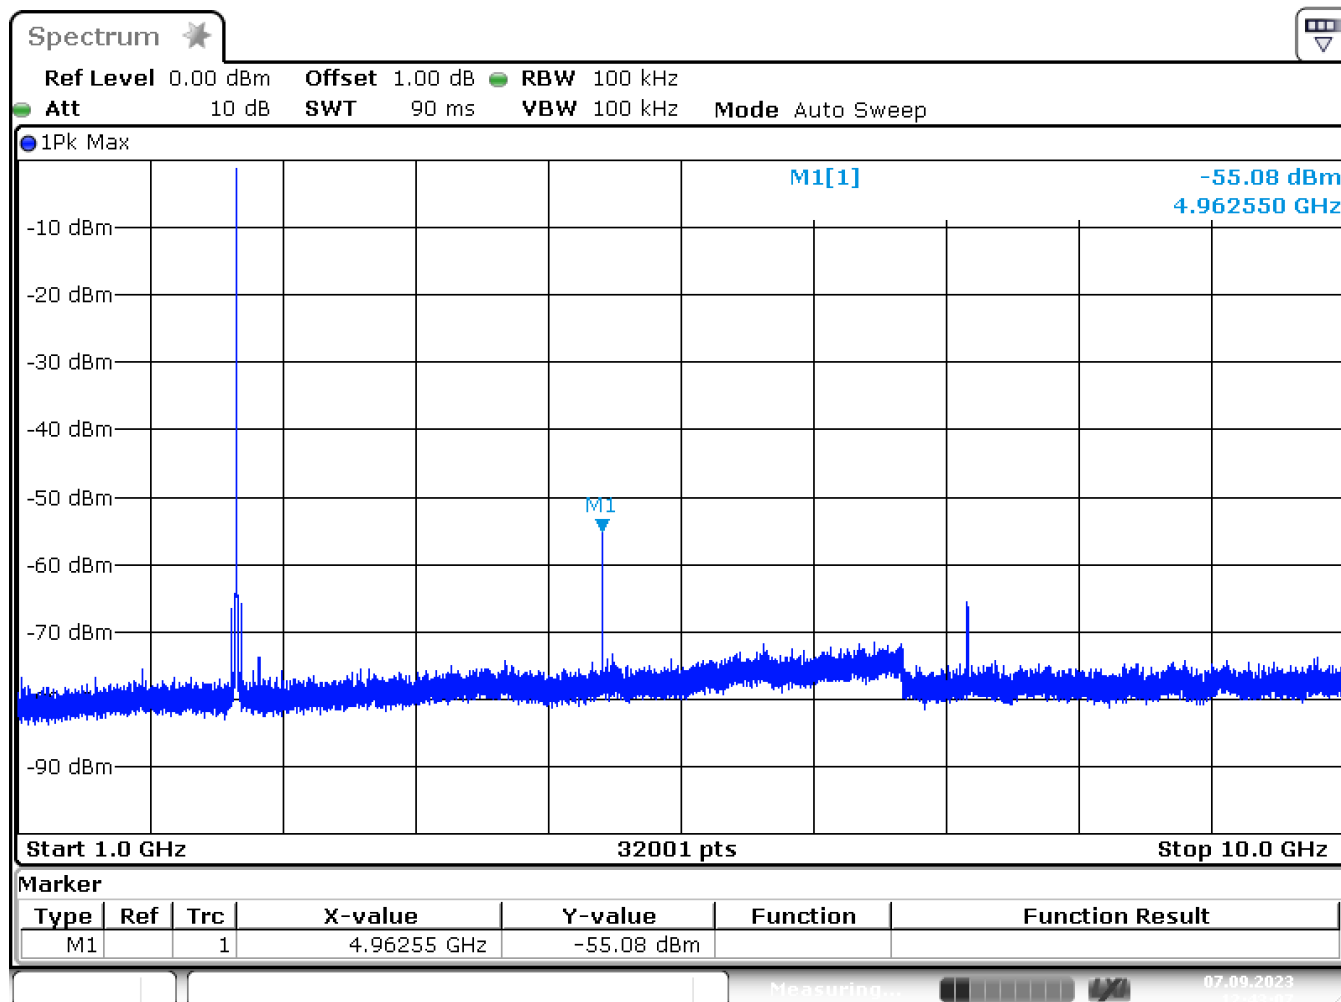

Date: 7.SEP.2023 12:43:07

Worst case emission @ 4962,55 MHz: -55,08 dBm

LIMIT SUBCLAUSE 15.247(d) – 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


Test Equipment used: EMV-205

Emissions outside the used frequency band Unwanted Emissions

§ 15.247(d)
5.5

Conducted measurement

Setup: 2481 MHz

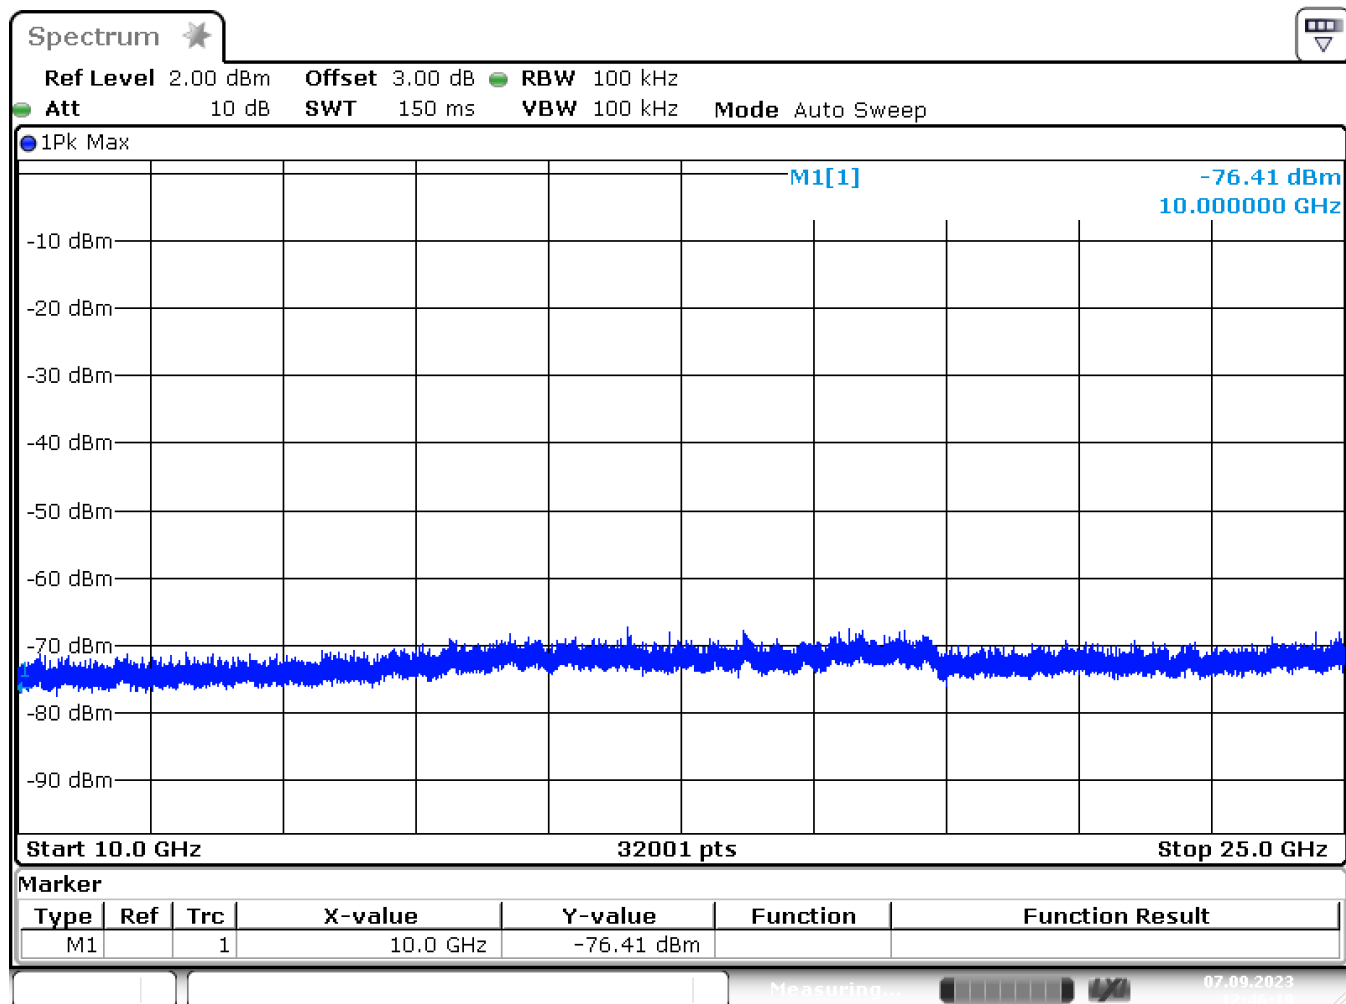

Date: 7.SEP.2023 12:46:20

LIMIT SUBCLAUSE 15.247(d) – 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


Test Equipment used: EMV-205

4.14. Emissions in restricted bands Emissions falling within restricted frequency bands

§ 15.209(a) RSS-Gen

Measurement with Peak-Detector (green line) and Average detector (magenta line):

Setup: 2401 MHz

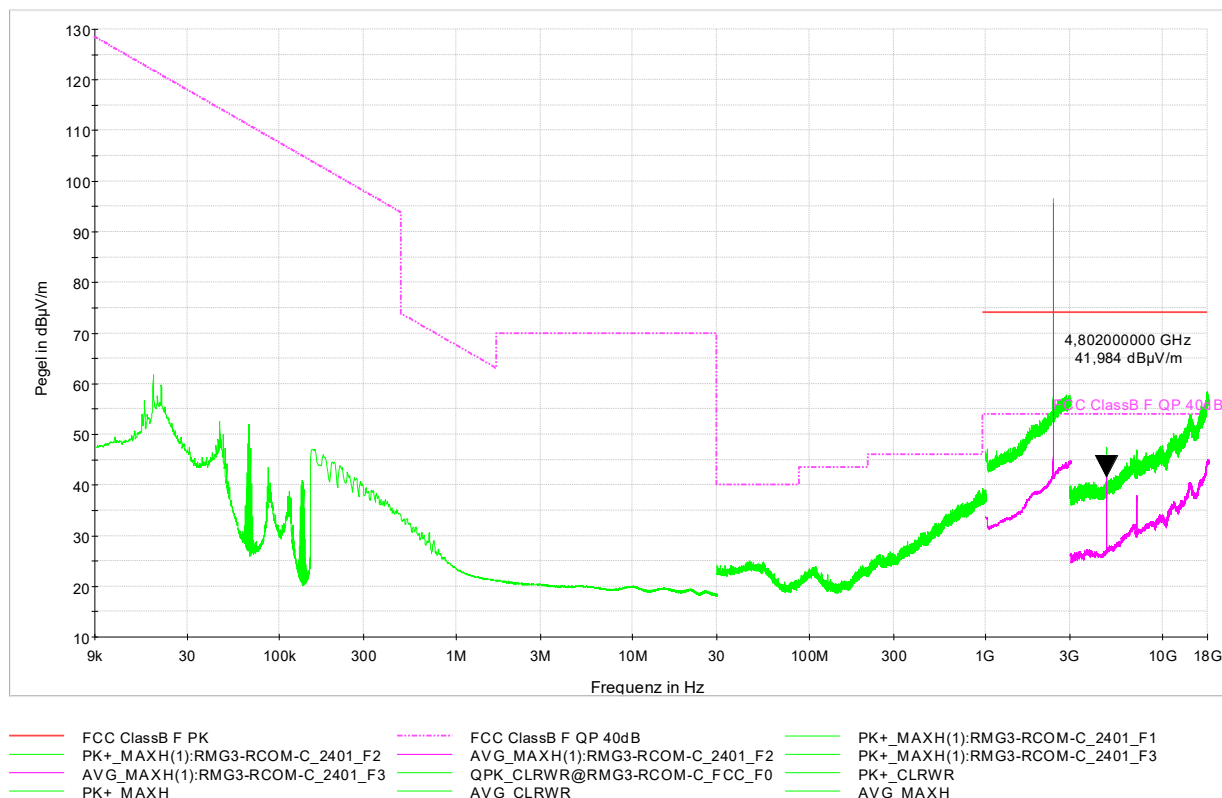

Worst case emission: Average @ 4802 MHz: 41,98 dBµV/m

Remark: Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

LIMIT

SUBCLAUSE 15.209(a) – RSS-Gen

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110/1; NT-111/1; NT-132; NT-207/1;

Emissions in restricted bands
Emissions falling within restricted frequency bands

§ 15.209(a)
RSS-Gen

Measurement with Peak-Detector (green line) and Average detector (magenta line): Band Edge requirement

Setup: 2401 MHz

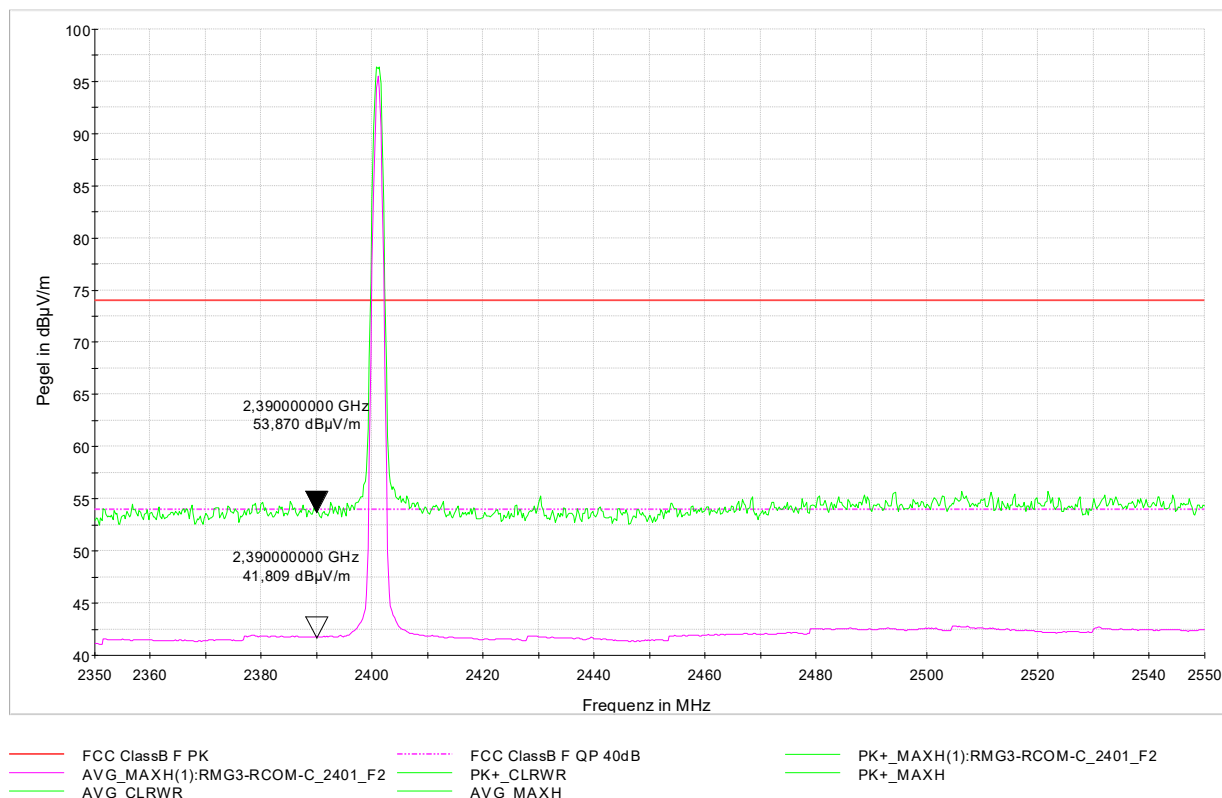

LIMIT

SUBCLAUSE 15.209(a) – RSS-Gen

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Band edges of the nearest restricted bands: 2390 MHz and 2483,5 MHz.

Test Equipment used: NT-100; NT-110/1; NT-111/1; NT-131/1; NT-139; NT-207/1;

§ 15.209(a)
RSS-Gen

Measurement with Peak-Detector (green line) and Average detector (magenta line):

Setup: 2440 MHz

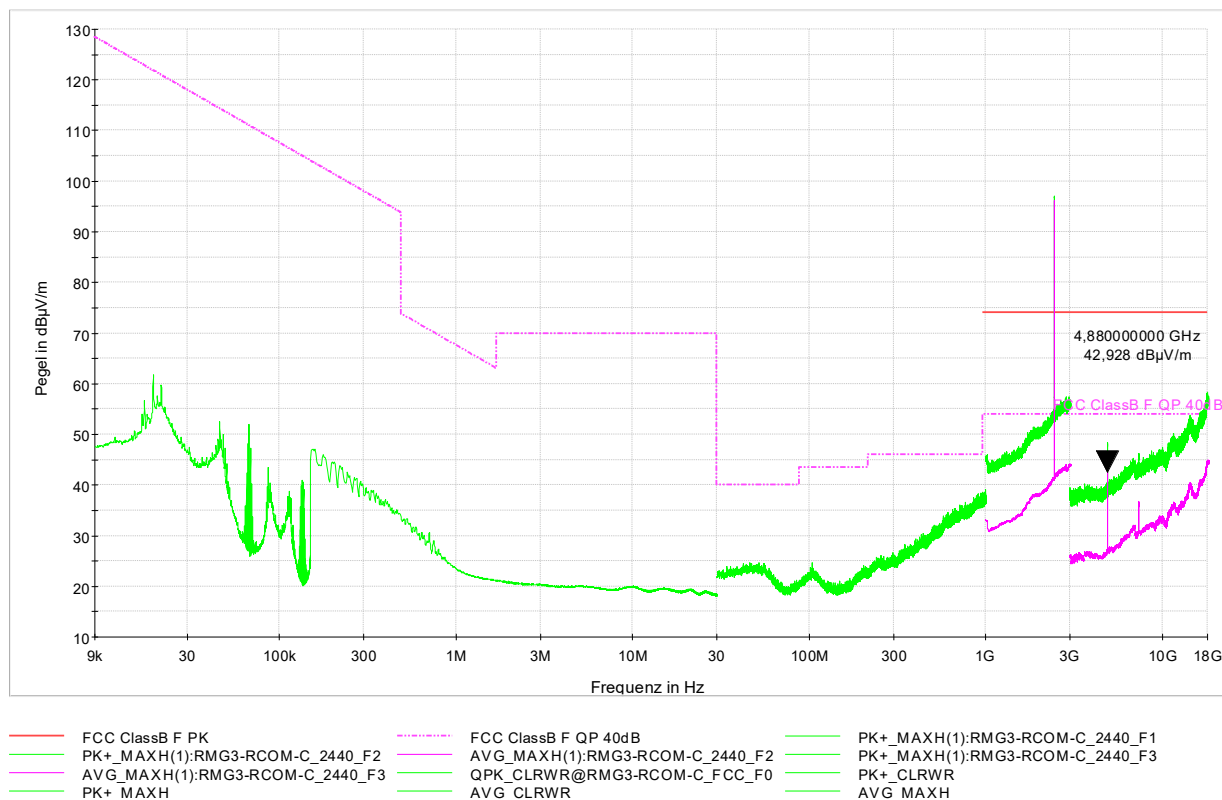

Worst case emission: Average @ 4880 MHz: 42.93 dBμV/m

Remark: Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

LIMIT **SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110/1; NT-111/1; NT-132; NT-207/1;

Emissions in restricted bands
Emissions falling within restricted frequency bands

§ 15.209(a)
RSS-Gen

Measurement with Peak-Detector (green line) and Average detector (magenta line):

Setup: 2481 MHz

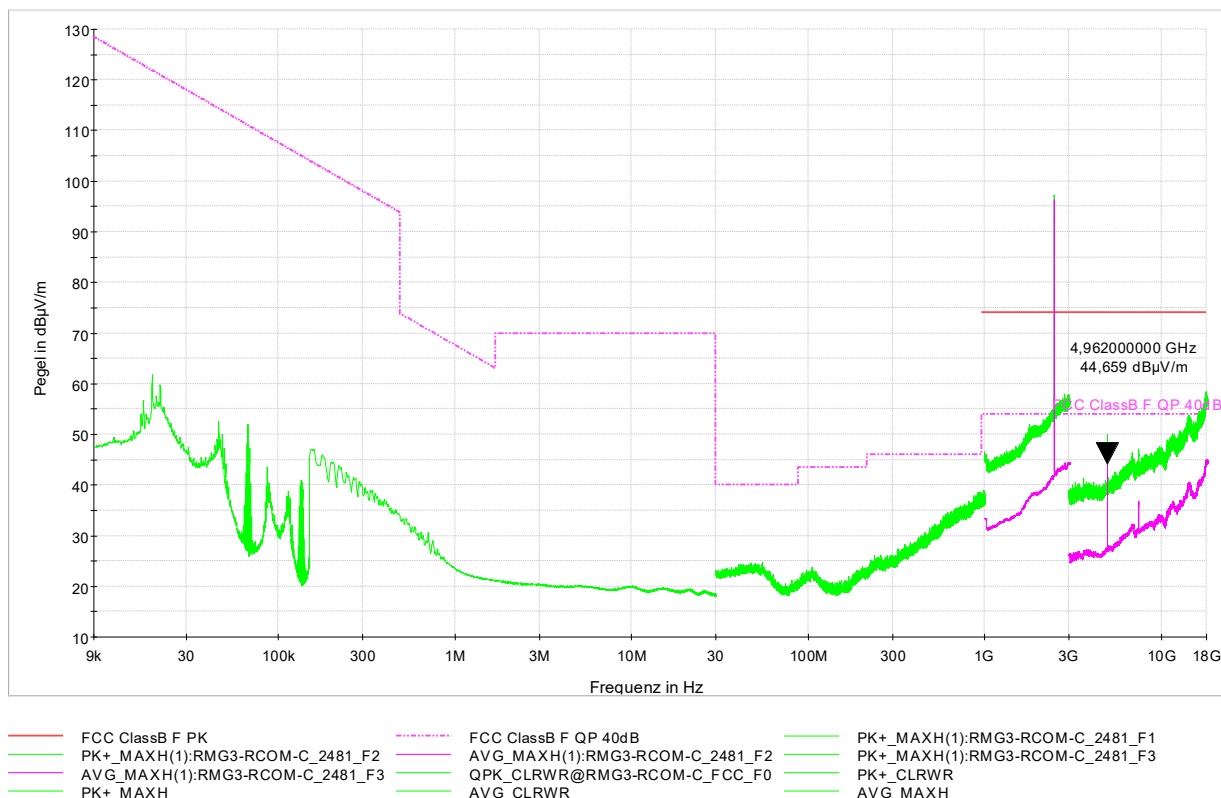

Worst case emission: Average @ 4962 MHz: 44,66 dBµV/m

Remark: Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

LIMIT **SUBCLAUSE 15.209(a) – RSS-Gen**

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


Test Equipment used: NT-100; NT-110/1; NT-111/1; NT-132; NT-207/1;

Emissions in restricted bands
Emissions falling within restricted frequency bands

§ 15.209(a)
RSS-Gen

Measurement with Peak-Detector (green line) and Average detector (magenta line): Band Edge requirement

Setup: 2481 MHz

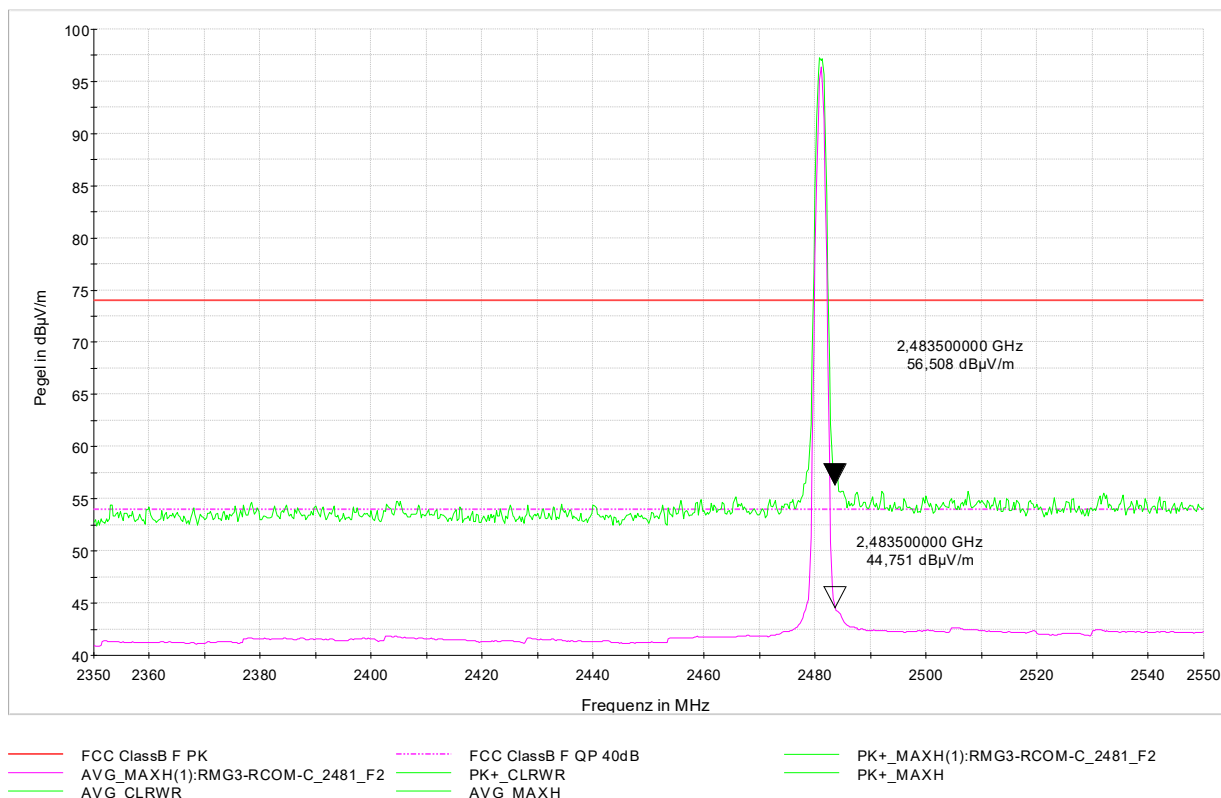

LIMIT

SUBCLAUSE 15.209(a) – RSS-Gen

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Band edges of the nearest restricted bands: 2390 MHz and 2483,5 MHz.

Test Equipment used: NT-100; NT-110/1; NT-111/1; NT-131/1; NT-139; NT-207/1;

4.15 RF Exposure

KDB 447498 D04
§1.1307(b)(3)(i)(B)

according to KDB 447498 D04 Interim General RF Exposure Guidance v01 "RF EXPOSURE PROCEDURES AND EQUIPMENT AUTHORIZATION POLICIES FOR MOBILE AND PORTABLE DEVICES".

The device has only one antenna and simultaneous transmission does not apply.
The evaluation followed the flowchart in Figure A.1.

Title 47 §1.1307(b)(3)(i)(B):

(3) Determination of exemption. (i) For single RF sources (i.e., any single fixed RF source, mobile device, or portable device, as defined in paragraph (b)(2) of this section): A single RF source is exempt if:

(B) Or the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

Maximum conducted power and EIRP values are taken from Section 4.5.

Calculations are done for a minimum separation distance of 1 cm. This distance is derived from the device casing. It is conservative, as customers are not expected to touch or lean on electronic shelf labels for extended periods of time.

Production variance was declared by the manufacturer, see operational description.

f [MHz]	cond. P [mW]	duty cycle [1]	production variance [1]	max. time-averaged power [mW]	EIRP [mW]	ERP [mW]	ERP incl. prod. var. [mW]
2401	1,09	1	1,58	1,72	1,35	0,82	1,30
2440	1,04	1	1,58	1,65	1,51	0,92	1,46
2481	1,07	1	1,58	1,69	1,62	0,99	1,56

*) Duty cycle was not measured, factor 1 is a worst case assumption.

Title 47 §1.1307(b)(3)(i)(B) exemption calculation:

Frequency range (see 4.1 and 4.2)	max(max. time avg. P, ERP) [mW]	§1.1307(b)(3)(i)(B) limit (P_{th}) [mW]	P / P_{th} [1]	< 1
2401	1,72	10,39	0,17	OK
2440	1,65	10,28	0,16	OK
2481	1,69	10,17	0,17	OK

The available maximum time-averaged ERP is below P_{th} for separation distances of 1 cm and above.

The device is a *SAR exempt RF device* as per Title 47 §1.1307(b)(3)(i)(B).

RF Exposure RSS-102, Issue 5

2.5.1 Exemption Limits for Routine Evaluation – SAR Evaluation

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1.

Table 1: SAR evaluation – Exemption limits for routine evaluation based on frequency and separation distance

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

Output power level shall be the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power. For controlled use devices where the 8 W/kg for 1 gram of tissue applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 5. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 2.5. If the operating frequency of the device is between two frequencies located in Table 1, linear interpolation shall be applied for the applicable separation distance. For test separation distance less than 5 mm, the exemption limits for a separation distance of 5 mm can be applied to determine if a routine evaluation is required.

For medical implants devices, the exemption limit for routine evaluation is set at 1 mW. The output power of a medical implants device is defined as the higher of the conducted or e.i.r.p. to determine whether the device is exempt from the SAR evaluation.

RSS-102 2.5.1 Exemption calculation

Frequency (MHz)	cond. P (mW)	max. EIRP (mW)	Duty Cycle (1)	Avg. cond. P (mW)	Avg. EIRP (mW)	separation distance (mm)	Limit (mW)	
2401	1,09	1,35	1	1,09	1,35	5	10.65	OK
2440	1,04	1,51	1	1,04	1,51	5	10.14	OK
2481	1,07	1,62	1	1,07	1,62	5	9.86	OK

*) Duty cycle was not measured, factor 1 is a worst case assumption.

**) Calculations are done for a minimum separation distance of 0.5 cm and limb worn exposure. The distance is derived from the device casing. It is conservative, as customers are not expected to touch electronic shelf labels for extended periods of time.

The time-averaged output power is below the exemption limit for routine evaluation.

Appendix 1

Test equipment used

☐ Anechoic Chamber with 3m measurement distance	NT-100	☐ Ant. tripod for EN61000-4-3 Model TP1000A	NT-156
☐ Stripline according to ISO 11452-5	NT-108	☐ Power quality analyzer Fluke 1760 (complete set)	NT-160 - NT-173
☐ MA4000 - Antenna mast 1 - 4 m height	NT-110/1	☐ Spectrumalyzer – FSP7 9 kHz – 7 GHz	NT-200
☐ DS - Turntable 0 - 400 ° Azimuth	NT-111/1	☐ ESCI - Test receiver 9 kHz - 7 GHz	NT-203/1
☐ CO3000 Controller Mast+Turntable	NT-112/1	☐ ESR – Test receiver 20 Hz – 26,5 GHz	NT-207/1
☐ HUF-Z3 - Log. Per. Antenna 200 - 1000 MHz	NT-121	☐ Digital Radio Tester CMW500	NT-208/1
☐ FMZB1513 - Loop Antenna 9 kHz - 30 MHz	NT-122/1	☐ Noise-gen., ITU-R 559-2 20 Hz – 20 kHz	NT-209
☐ HFH-Z6 - Rod Antenna 9 kHz - 30 MHz	NT-123	☐ CMTA - Radiocommunication analyzer ; 0,1 - 1000 MHz	NT-210
☐ Dipole Antenna VHA9103 30 - 300 MHz	NT-124/1a	☐ 3271 - Spectrum analyzer 100 Hz - 26,5 GHz	NT-211
☐ Dipole Antenna UHA9105 300 - 1000 MHz	NT-124/1b	☐ Digital Radio Tester Aeroflex 3920	NT-212/1
☐ 3115 - Horn Antenna 1 - 18 GHz (immunity)	NT-125	☐ Mixer M28HW 26,5 GHz - 40 GHz	NT-214
☐ 3116 - Horn Antenna 18 - 40 GHz	NT-126	☐ RubiSource T&M Timing reference	NT-216
☐ SAS-200/543 - Bicon. Antenna 20 MHz - 300 MHz	NT-127	☐ Radiocommunicationanalyzer SWR 1180 MD	NT-217
☐ AT-1080 - Log. Per. Antenna 80 - 1000 MHz	NT-128	☐ Mixer FS-Z60 40 GHz – 60 GHz	NT-218/1
☐ HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-129	☐ Mixer FS-Z90 60 GHz – 90 GHz	NT-219/1
☐ HK-116 - bicon. Antenna 20 MHz - 300 MHz	NT-130	☐ DSO9104 Digital scope	NT-220/1
☐ 3146 - Log. Per. Antenna 200 – 1000 MHz	NT-131	☐ TPS 2014 Digital scope	NT-222
☐ VULB 9163 Trilog Antenna 30 – 3000 MHz	NT-131/1	☐ Artificial Ear according to IEC 60318	NT-224
☐ Loop Antenna H-Field	NT-132	☐ 1 kHz Sound calibrator	NT-225
☐ Horn Antenna 500 MHz - 2900 MHz	NT-133	☐ SRM-3006 Spectrumalyzer	NT-233/1a
☐ Horn Antenna 500 MHz - 6000 MHz	NT-133/1	☐ E-field probe SRM 75 MHz – 3 GHz	NT-234
☐ Log. per. Antenna 800 MHz - 2500 MHz	NT-134	☐ Field Meter NBM-500 incl. E- and H-Field probes	NT-240a-e
☐ Log. per. Antenna 800 MHz - 2500 MHz	NT-135	☐ Magnetometer HP-01	NT-241/1
☐ BiConiLog Antenna 26 MHz – 2000 MHz	NT-137	☐ EFA-3 H-field- / E-field probe	NT-243
☐ Conical Dipol Antenna PCD8250	NT-138	☐ EHP-50F H-field- / E-field probe	NT-243/1
☐ HF 906 - Horn Antenna 1 - 18 GHz (emission)	NT-139	☐ Field Meter EMR-200 100 kHz – 3 GHz	NT-244
☐ HZ-1 Antenna tripod	NT-150	☐ E-field probe 100 kHz – 3 GHz	NT-245
☐ BN 1500 Antenna tripod	NT-151	☐ H-field probe 300 kHz – 30 MHz	NT-246

Division:
Industry & Energy

Test report number:
2023-IN-AT-TICL-E-EX-0-
000179-FG-002

Page: 1 of 5

Date: 15.09.2023

Appendix 1 (continued)

Test equipment used

☐ E-field probe 3 MHz – 18 GHz	NT-247	☐ Prana N-MT 500 - RF-Amplifier 80 - 1000 MHz / 500 W	NT-332/1
☐ H-field probe 27 MHz – 1 GHz	NT-248	☐ BBA150 RF-Amplifier 1 GHz - 6 GHz	NT-333/1
☐ ELT-400 1 Hz – 400 kHz	NT-249	☐ APA01 – RF-Amplifier 0,5 GHz – 2,5 GHz	NT-334
☐ MDS 21 - Absorbing clamp 30 - 1000 MHz	NT-250	☐ Preamplifier 1 GHz - 4 GHz	NT-335
☐ FCC-203I EM Injection clamp	NT-251	☐ Preamplifier for GPS MKU 152 A	NT-336
☐ FCC-203I-DCN Ferrite decoupling network	NT-252	☐ Preamplifier 1 GHz – 18 GHz	NT-337/1
☐ PR50 Current Probe	NT-253	☐ DC Block 10 MHz – 18 GHz Model 8048	NT-338
☐ i310s Current Probe	NT-254/1	☐ 2-97201 Electronic load	NT-341
☐ Fluke 87 V True RMS Multimeter	NT-260	☐ TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-344
☐ Model 2000 Digital Multimeter	NT-261	☐ TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-345
☐ Fluke 87 V Digital Multimeter	NT-262/1	☐ VDS 200 Mobil-impuls-generator	NT-350
☐ ESH2-Z5-U1 Artificial mains network 4x25A	NT-300	☐ LD 200 Mobil-impuls-generator	NT-351
☐ ESH3-Z5-U1 Artificial mains network 2x10A	NT-301	☐ MPG 200 Mobil-Impuls-Generators	NT-352
☐ ESH3-Z6-U1 Artificial mains network 1x100A	NT-302	☐ EFT 200 Mobil-impuls-generator	NT-353
☐ ESH3-Z6-U1 Artificial mains network 1x100A	NT-302a	☐ AN 200 S1 Artificial Network	NT-354
☐ EZ10 T-Artificial Network	NT-305	☐ FP-EFT 32M 3 ph. Coupling filter (Burst)	NT-400/1
☐ SMG - Signal generator 0,1 - 1000 MHz	NT-310	☐ PHE 4500 - Mains impedance network	NT-401
☐ SMA100A - Signal generator 9 kHz - 6 GHz	NT-310/1	☐ IP 6.2 Coupling filter for data lines (Surge)	NT-403
☐ RefRad Reference generator	NT-312	☐ TK 9421 High Power Volt. Probe 150 kHz - 30 MHz	NT-409
☐ SMP 02 Signal generator 10 MHz - 20 GHz	NT-313	☐ ESH2-Z3 - Probe 9 kHz - 30 MHz	NT-410
☐ 40 MHz Arbitrary Generator TGA1241	NT-315	☐ CN-EFT1000 - Capacitive clamp (Burst)	NT-411/1
☐ Artificial mains network NSLK 8127-PLC	NT-316	☐ Highpass-Filter 100 MHz – 3 GHz	NT-412
☐ PSURGE 4.1 Surge generator	NT-324	☐ Highpass-Filter 600 MHz – 4 GHz	NT-413
☐ IMU4000 Immunity test system	NT-325/1a-e	☐ Highpass-Filter 1250 MHz – 4 GHz	NT-414
☐ VCS 500-M6 Surge-Generator	NT-326	☐ Highpass-Filter 1800 MHz – 16 GHz	NT-415
☐ Oscillatory Wave Simulator incl. Coupling networks	NT-328a+b+c		
☐ BTA-250 - RF-Amplifier 9 kHz - 220 MHz / 250 W	NT-330		

Division:
Industry & Energy

Test report number:
2023-IN-AT-TICL-E-EX-0-
000179-FG-002

Page: 2 of 5

Date: 15.09.2023

Appendix 1 (continued)

Test equipment used

☐	RF-Attenuator 10 dB DC – 18 GHz / 50 W	NT-417/1	☐	SW 9605 - Current probe 150 kHz – 30 MHz	NT-465/1
☐	RF-Attenuator 6 dB DC – 18 GHz / 50 W	NT-418	☐	95242-1 – Current probe 1 MHz – 400 MHz	NT-468
☐	RF-Attenuator 3 dB DC – 18 GHz / 50 W	NT-419	☐	94106-1L-1 – Current probe 100 kHz – 450 MHz	NT-471
☐	RF-Attenuator 20 dB DC - 1000 MHz / 25 W	NT-421	☐	WHKX12-2700-3000-18000 3 GHz Highpass filter	NT-472
☐	RF-Attenuator 30 dB DC - 1000 MHz / 1 W	NT-423	☐	WHKX10-3870-4500-18000 4,5 GHz Highpass filter	NT-473
☐	RF-Attenuator 30 dB	NT-424	☐	CDN S9 USB3.0 Coupling decoupling network	NT-474
☐	RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-425	☐	CDN S2 XLR3-1 Coupling decoupling network	NT-475
☐	RF-Attenuator 6 dB DC - 1000 MHz / 1 W	NT-426	☐	CDN S8 RJ45 Coupling decoupling network	NT-476
☐	RF-Attenuator 6 dB	NT-428	☐	GA 1240 Power amplifier according to EN 61000-4-16	NT-480
☐	RF-Attenuator 0 dB - 81 dB	NT-429	☐	Coupling networks according to EN 61000-4-16	NT-481 - NT-483
☐	WRU 27 - Band blocking 27 MHz	NT-430	☐	Van der Hoofden Test Head	NT-484
☐	WHJ450C9 AA - High pass 450 MHz	NT-431	☐	WRCJV12-5820-5850-5950-5980 5,9 GHz Band Reject Filter	NT-490
☐	WHJ250C9 AA - High pass 250 MHz	NT-432	☐	WHKX10-5670-6300-18000 6 GHz Highpass filter	NT-491
☐	RF-Load 150 W	NT-433	☐	WHK12-935-1000-7000 1 GHz Highpass filter	NT-492
☐	Impedance transducer 1:4 ; 1:9 ; 1:16	NT-435	☐	EMC Video/Audiosystem	NT-511/1
☐	RF-Attenuator DC – 18 GHz 6 dB	NT-436	☐	EMC32 Version 10.60.20 Test software	NT-520/1
☐	RF-Attenuator DC – 18 GHz 6 dB	NT-437	☐	SRM-TS Version 1.3 software for SRM-3000	NT-522
☐	RF-Attenuator DC – 18 GHz 10 dB	NT-438	☐	SRM-TS Version 1.3.1 software for SRM-3006	NT-522/1
☐	RF-Attenuator DC – 18 GHz 20 dB	NT-439	☐	Spitzenberger und Spies Test software V4.1	NT-525
☐	I+P 7780 Directional coupler 100 - 2000 MHz	NT-440	☐	Vertical coupling plane (ESD)	NT-531
☐	ESH3-Z2 - Pulse limiter 9 kHz - 30 MHz	NT-441	☐	Test cable #4 for EN 61000-4-6	NT-553
☐	Power Divider 6 dB/1 W/50 Ohm	NT-443	☐	Test cable #3 for conducted emission	NT-554
☐	Directional coupler 0,1 MHz – 70 MHz	NT-444	☐	Test cable #5+#6 ESD-cable (2x470k)	NT-555 + NT-556
☐	Directional coupler 0,1 MHz – 70 MHz	NT-445	☐	Test cable #8 Sucoflex 104EA	NT-559
☐	Tube imitations according to EN 55015	NT-450	☐	Test cable #9 (for outdoor measurements)	NT-580
☐	FCC-801-M3-16A Coupling decoupling network	NT-458	☐	Test cable #10 (for outdoor measurements)	NT-581
☐	FCC-801-M2-50A Coupling decoupling network	NT-459	☐	Test cable #13 Sucoflex 104PE	NT-584
☐	FCC-801-M5-25 Coupling decoupling network	NT-460	☐	Test cable #21 for SRM-3000	NT-592
☐	FCC-801-T4 Coupling decoupling network	NT-463	☐	Shield chamber	NT-600
☐	FCC-801-C1 Coupling decoupling network	NT-464	☐	Climatic chamber	M-1200

Division:
Industry & Energy

Test report number:
2023-IN-AT-TICL-E-EX-0-
000179-FG-002

Page: 3 of 5

Date: 15.09.2023

Appendix 1 (continued)

Test equipment used

☐	Anechoic Chamber 3 m / 5 m measuring distance	EMV-100	☐	HF- Amplifier 9 kHz-225 MHz BBL200	EMV-300/1
☐	Turntable 6 m diameter	EMV-101	☐	HF- Amplifier 80 -1000 MHz BBA150	EMV-301
☐	Antenna mast + controller	EMV-102+ EMV-103	☐	HF- Amplifier 0,8 - 6 GHz BBA150	EMV-302
☐	EMC Video/Audiosystem	EMV-104	☐	High Power Ant. 20-200 MHz HPBA-2510	EMV-303/1
☐	EMC Software EMC32 Version 10.60.20	EMV-105	☐	High Power Ant. 20-200 MHz S12018-21	EMV-303/2
☐	Hornantenna 1 – 18 GHz HF 907	EMV-110	☐	Log.per Antenna 80-2700 MHz STLP 9128 E special	EMV-304
☐	Antennapre.amp. 1 – 18 GHz BBV 9718 D	EMV-111/1	☐	Log.per Antenna 0,7 – 9 GHz STLP9149	EMV-305
☐	Trilog Antenna 30-3000 MHz VULB9163	EMV-112	☐	HF- Amplifier 9 kHz-250 MHz BBA150 (low noise)	EMV-306
☐	Monopol 9 kHz – 30 MHz VAMP 9243	EMV-113	☐	ISO11451-2 TLS 10 kHz – 30 MHz	EMV-307
☐	Antennapre.amp 18 – 40 GHz BBV 9721	EMV-114	☐	Load Dump Generator LD 200N	EMV-350
☐	Hornantenna 200 – 2000 MHz AH-220	EMV-115	☐	Ultra Compact Symulator UCS 200N100	EMV-351
☐	DC Artificial Network PVDC 8300	EMV-150	☐	Automotive Power fail module PFM 200N100.1	EMV-352
☐	AC Artificial Network NNLK 8121 RC	EMV-151	☐	Voltage Drop Symulator VDS 200Q100	EMV-353
☐	AC Artificial Network NNLK 140	EMV- 153a-d	☐	Arb. Generator AutoWave	EMV-354
☐	EMI Receiver ESW44	EMV-200/1	☐	Ultra Compact Symulator UCS 500N7	EMV-355
☐	Signalgenerator 9 kHz – 40 GHz N5173B	EMV-201	☐	Coupling decoupling network CNI 503B7 / 32 A	EMV-356
☐	GPS Frequency normal B-88	EMV-202	☐	Coupling decoupling network CNI 503B7 / 63 A	EMV-357
☐	DC Power supply N5745A	EMV-203	☐	Telecom Surge Generator TSurge 7	EMV-358
☐	Spektrum Analyzator FSV40	EMV-205	☐	Coupling decoupling network CNI 508N2	EMV-359
☐	Thd Multimeter Model 2015	EMV-206	☐	Coupling decoupling network CNV 504N2.2	EMV-360
☐	Poweramplifier PAS15000	EMV- 207/abc	☐	Immunity generator NSG4060/NSG4060-1	EMV-361
☐	Inrush Current Source	EMV- 208/abc	☐	Coupling network CDND M316-2	EMV-362
☐	Arb.-generator Sycore	EMV-209	☐	Coupling network CT419-5	EMV-363
☐	Harmonics/Flicker analyzer ARS 16/3	EMV-210	☐	ESD Generator NSG 437	EMV-364
☐	Power Supply Regatron AC	EMV-214	☐	Pulse Limiter VTSD 9561-F BNC	EMV-405
☐	Power Supply Regatron DC	EMV-215	☐	Transient emission BSM200N40+BS200N100	EMV- 450+451
☐	Harmonics/Flicker analyser Zimmer	EMV-216	☐	Cap. Coupling Clamp HFK	EMV-455
☐	Flicker Impedanz Newtons4th 753	EMV-218	☐	Mag. Field System MS100N+MC26100+MC2630	EMV- 456-458
☐	Comemso	EMV-219			

Division:
Industry & Energy

Test report number:
2023-IN-AT-TICL-E-EX-0-
000179-FG-002

Page: 4 of 5

Date: 15.09.2023

Appendix 1 (continued)

Test equipment used

☐	Coupling network CDN M2-100A	EMV-459
☐	Coupling network CDN M3-32A	EMV-460
☐	Coupling network CDN M5-100A	EMV-461
☐	Current Clamp CIP 9136A	EMV-462
☐	DC Artificial Network HV-AN 150	EMV-464+465
☐	Coupling Clamp EM 101	EMV-466
☐	Decoupling Clamp FTC 101	EMV-467
☐	Power attenuator 10 dB / 250 Watt	EMV-469/2
☐	HV AMN NNHV 8123 800A	EMV-472
☐	HV AMN NNHV 8123 800A	EMV-473

Division:
Industry & Energy

Test report number:
2023-IN-AT-TICL-E-EX-0-
000179-FG-002

Page: 5 of 5

Date: 15.09.2023