




n30_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_256_QAM_2310MHz_Outer_Full_Ant7

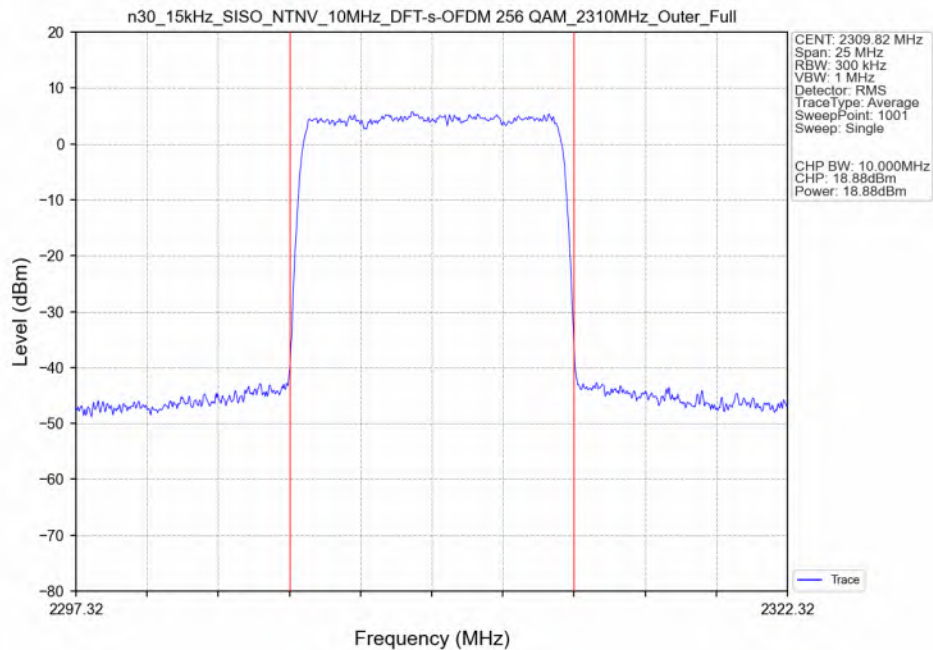


n30_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_256_QAM_2310MHz_Inner_Full_Ant7

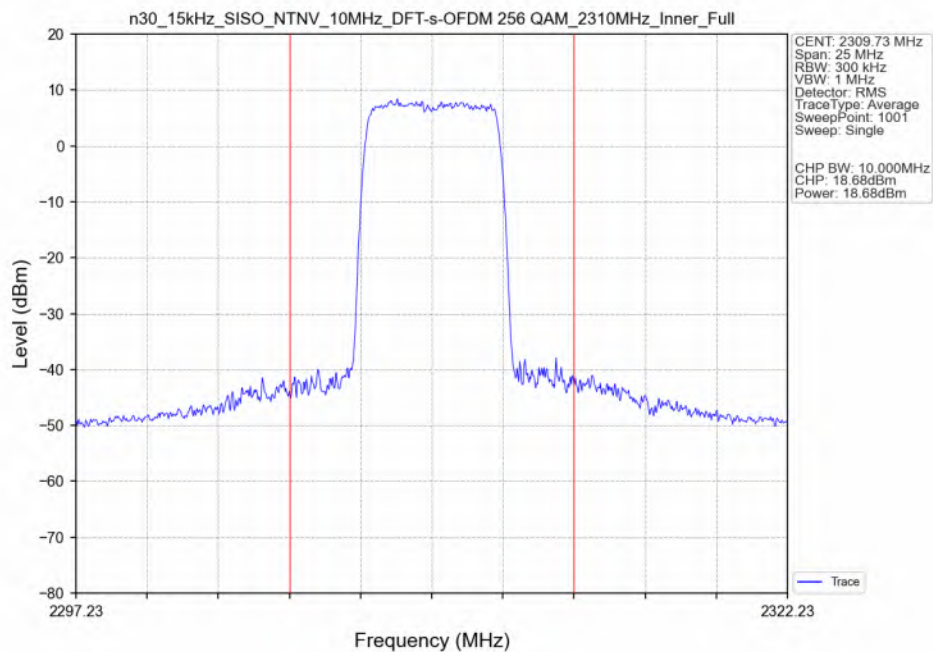


n30_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_256_QAM_2310MHz_Inner_1RB_Left_Ant7

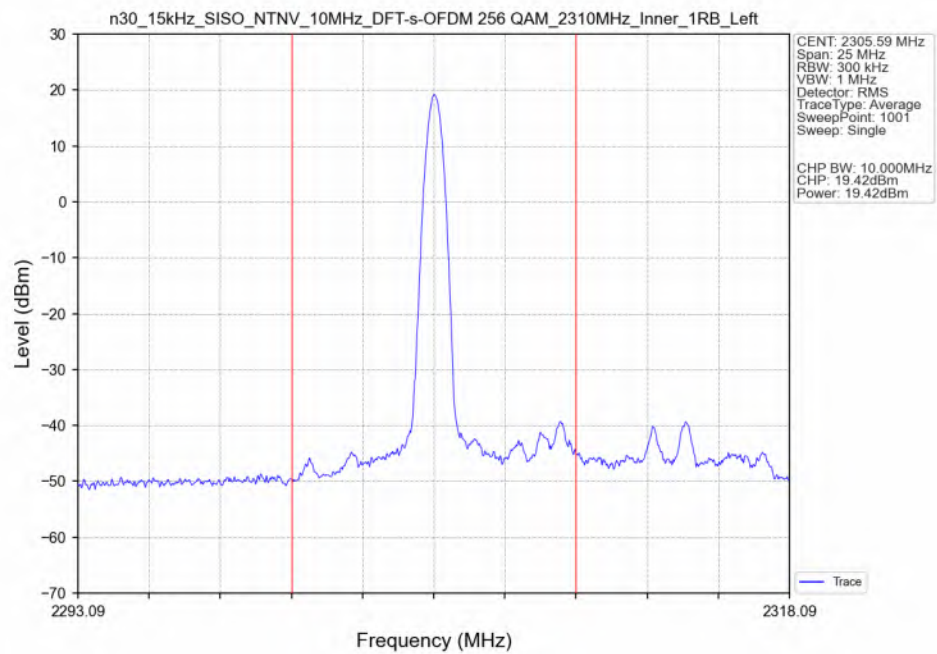


n30_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_256_QAM_2310MHz_Inner_1RB_Right_Ant7

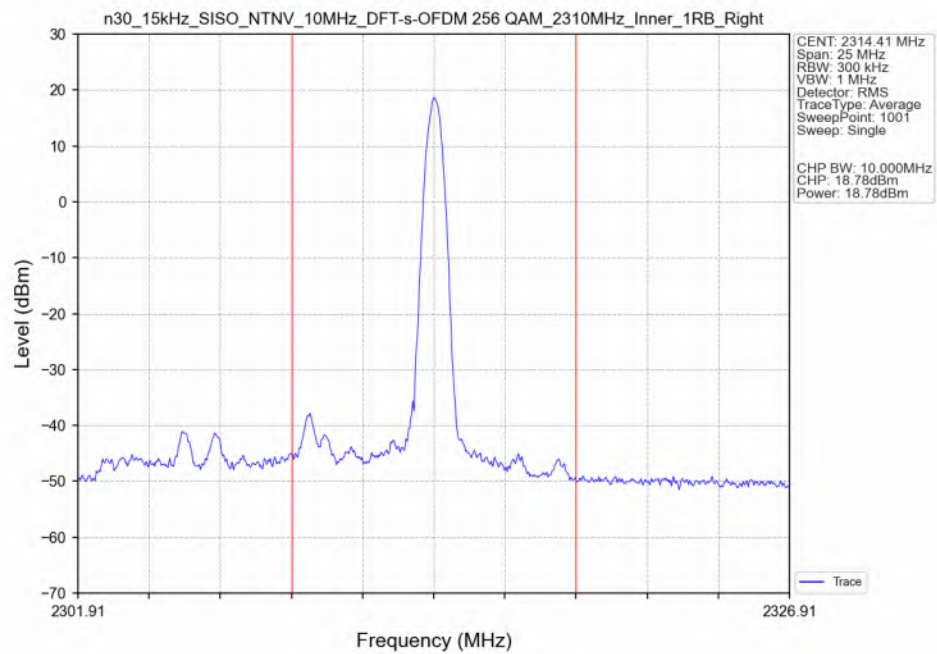


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_2310MHz_Edge_1RB_Left_Ant7

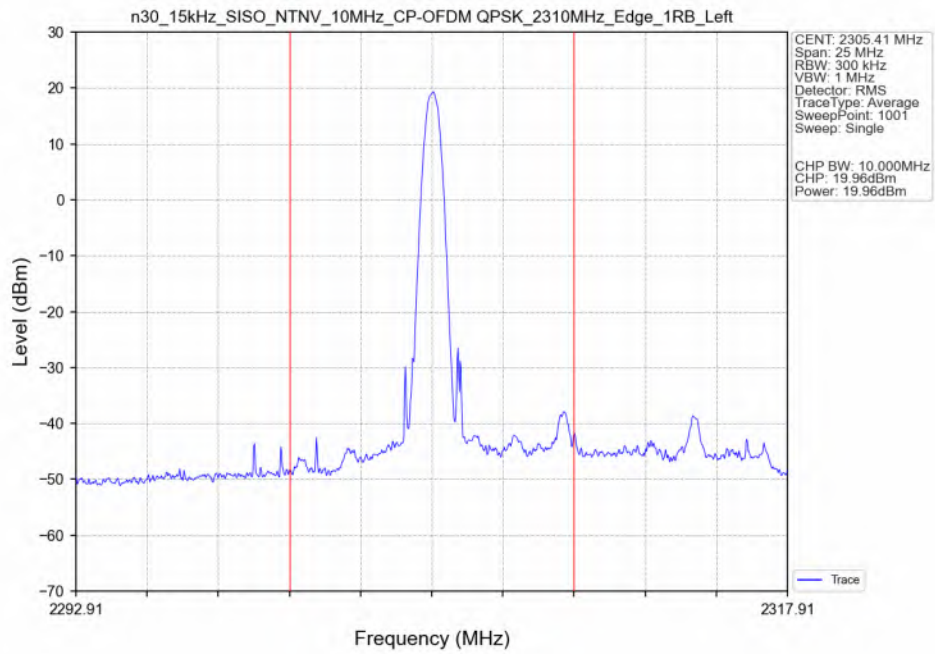


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_2310MHz_Edge_1RB_Right_Ant7

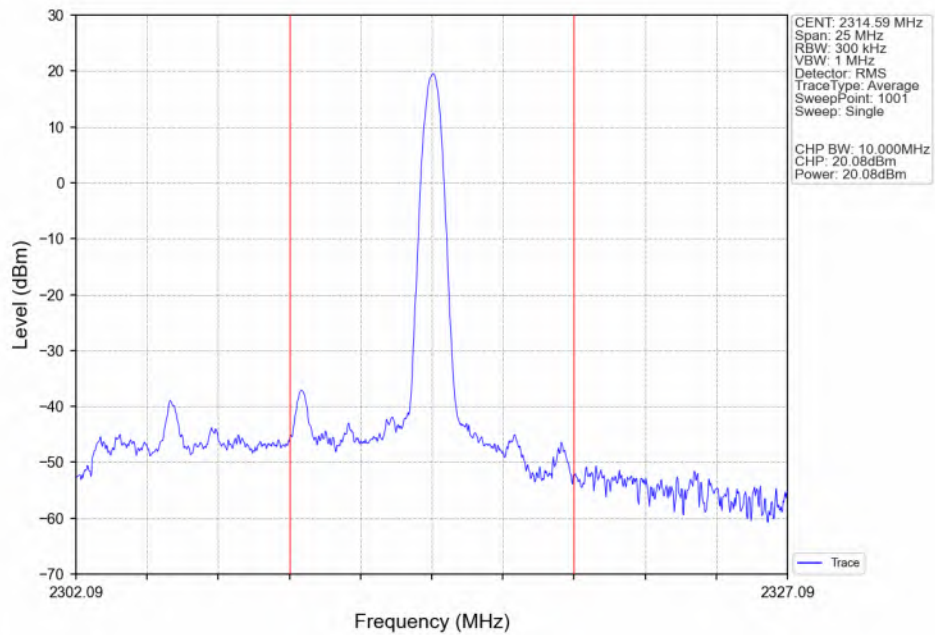


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_2310MHz_Outer_Full_Ant7

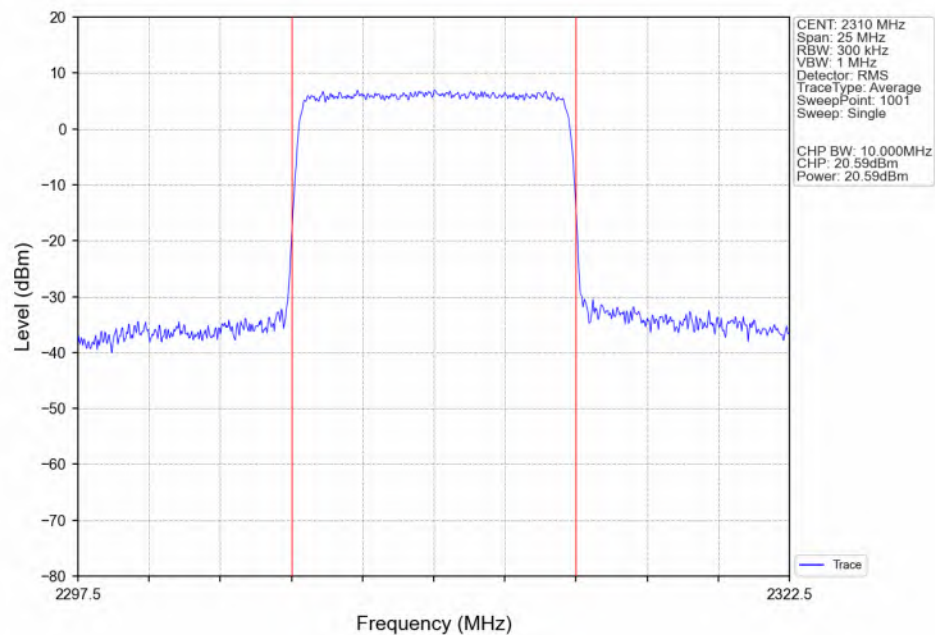


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_2310MHz_Inner_Full_Ant7

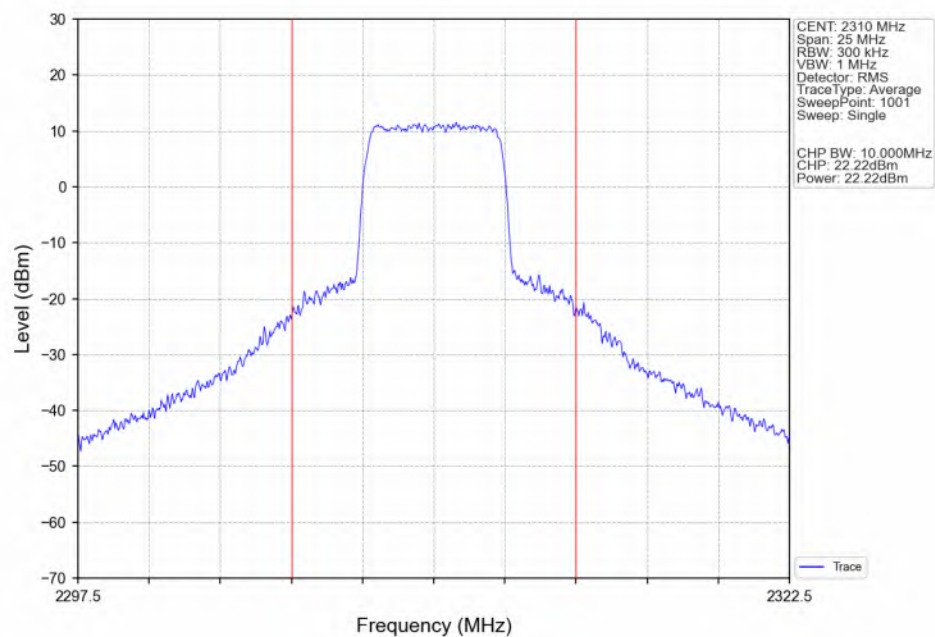


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_2310MHz_Inner_1RB_Left_Ant7

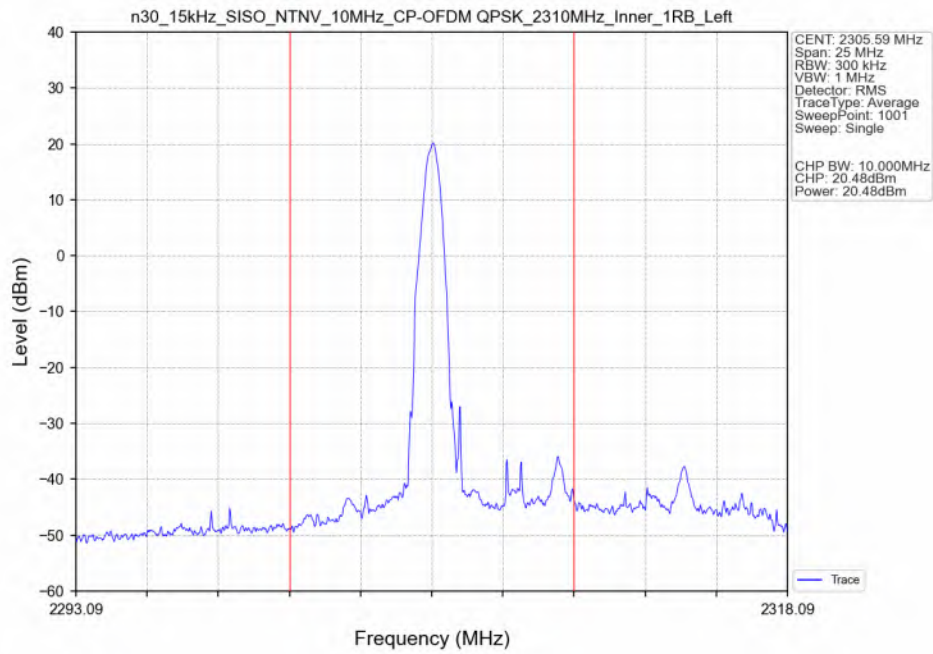


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_2310MHz_Inner_1RB_Right_Ant7

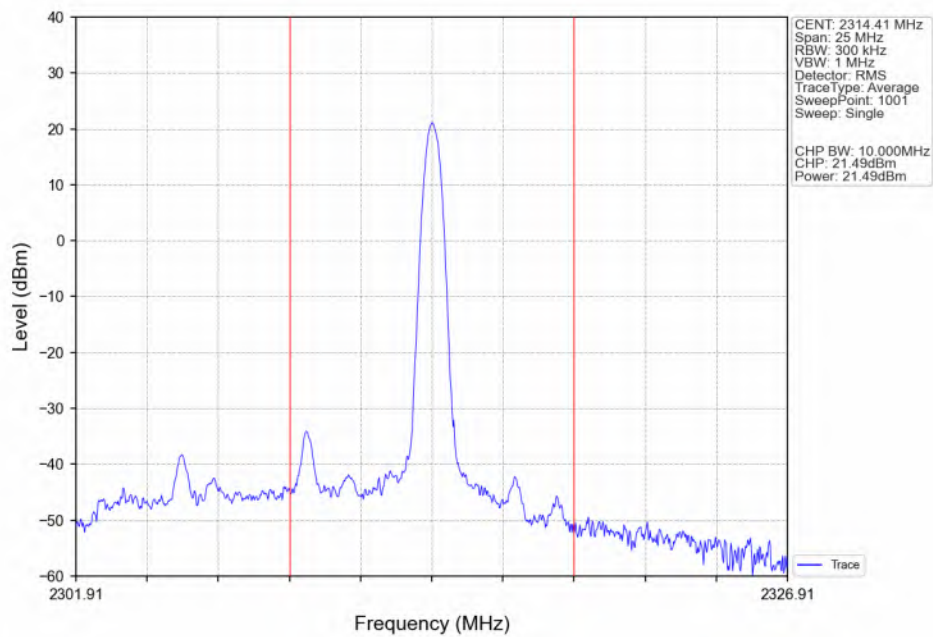


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_16_QAM_2310MHz_Edge_1RB_Left_Ant7

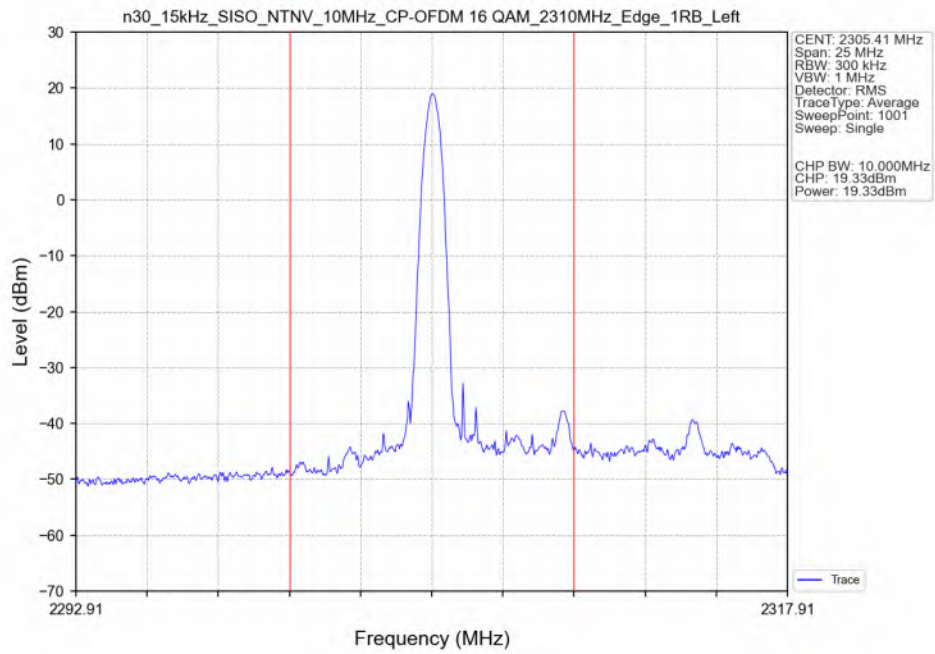


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_16_QAM_2310MHz_Edge_1RB_Right_Ant7

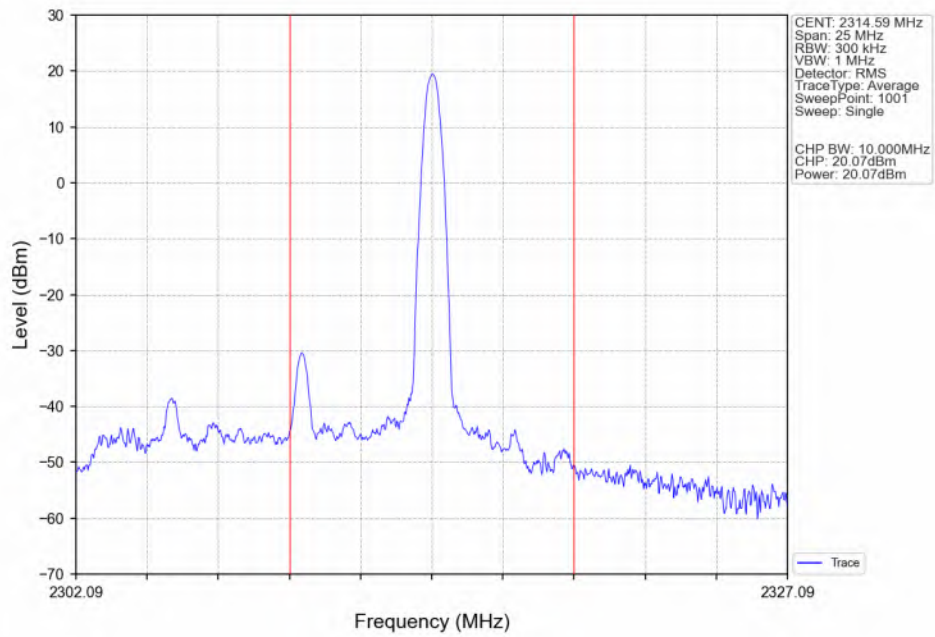


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_16QAM_2310MHz_Outer_Full_Ant7

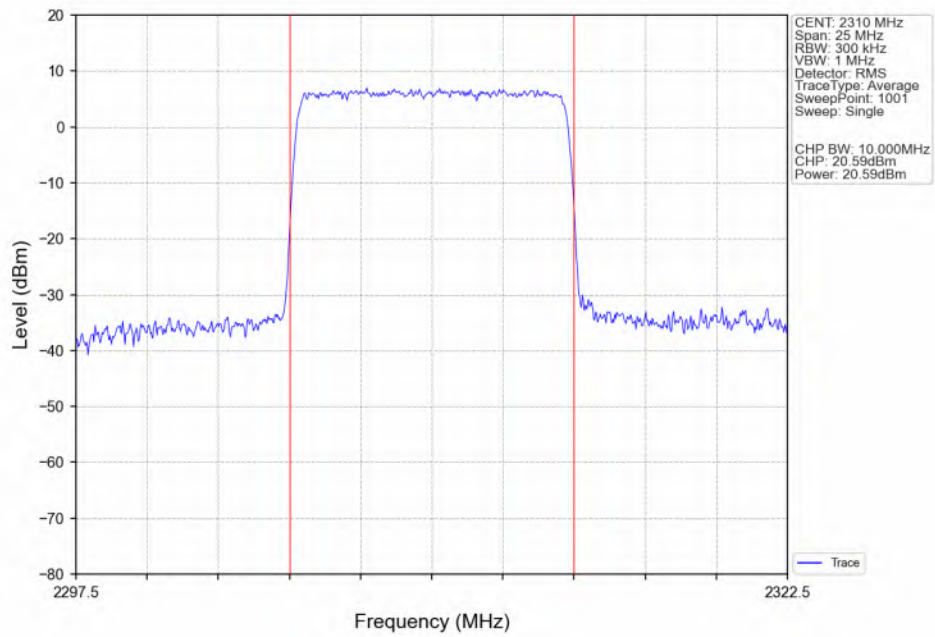


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_16QAM_2310MHz_Inner_Full_Ant7

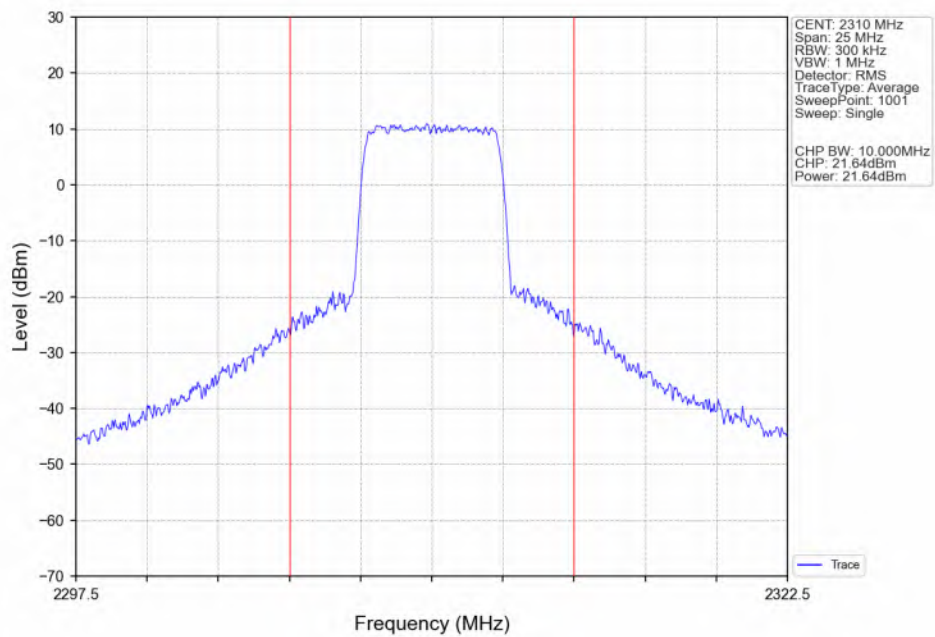


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_16_QAM_2310MHz_Inner_1RB_Left_Ant7

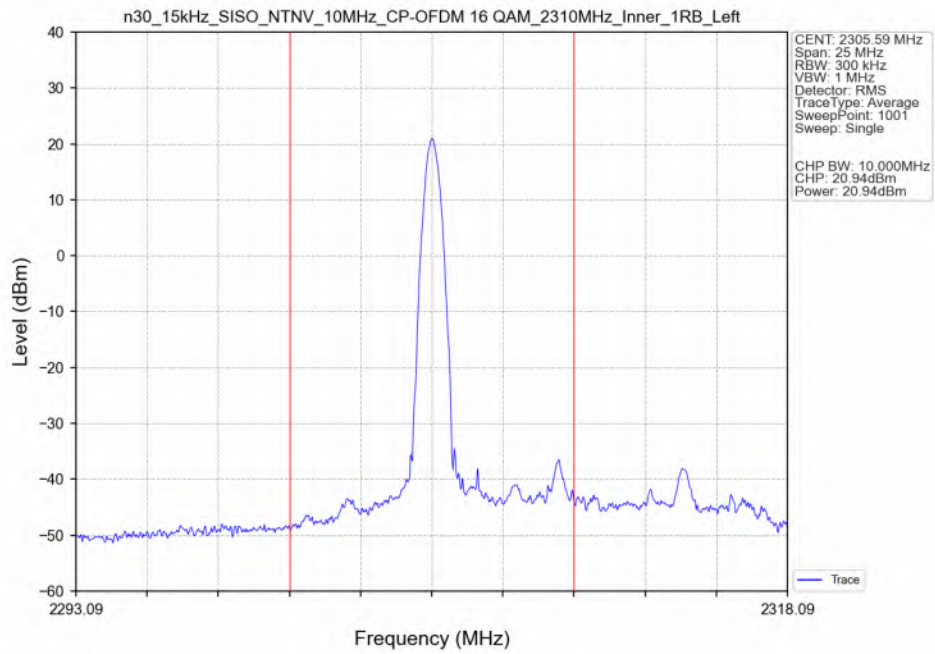


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_16_QAM_2310MHz_Inner_1RB_Right_Ant7

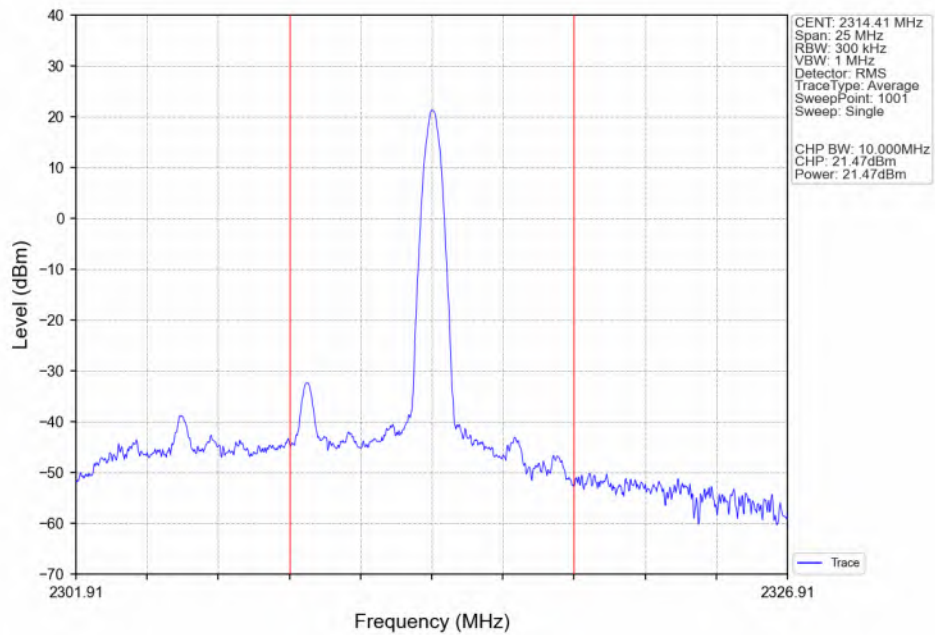


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM 64 QAM 2310MHz_Edge_1RB_Left_Ant7

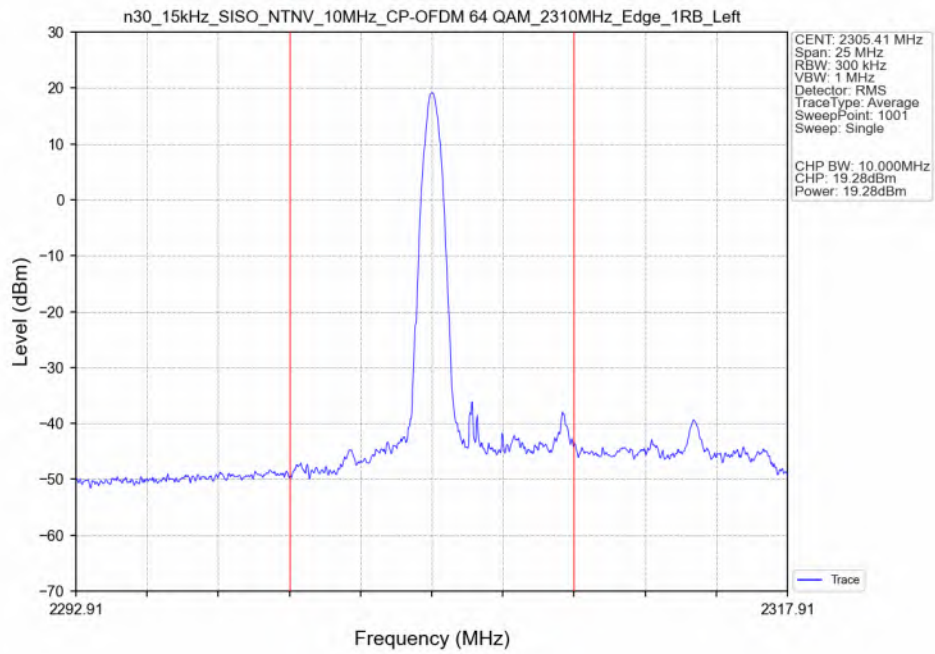


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM 64 QAM 2310MHz_Edge_1RB_Right_Ant7

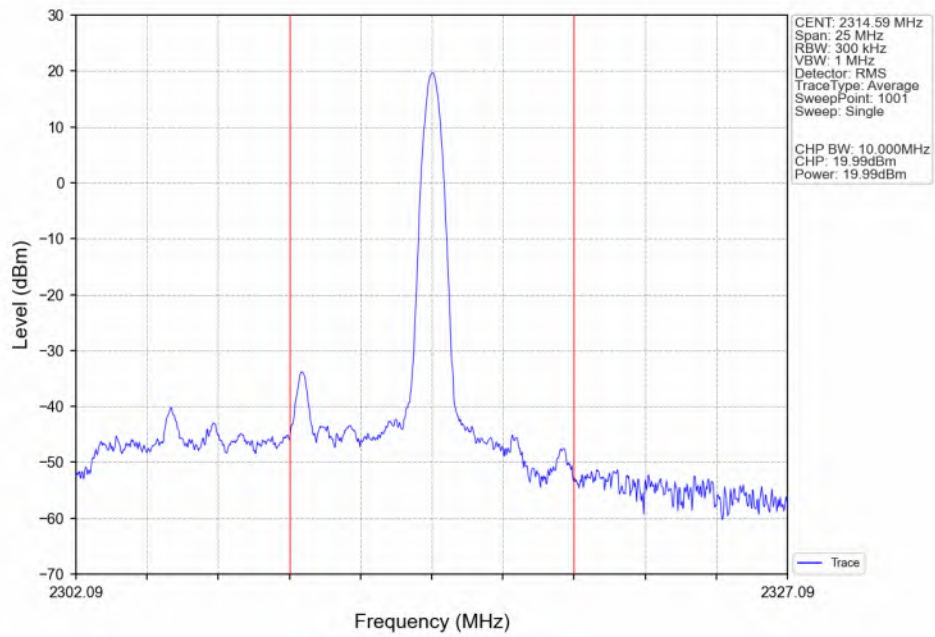


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_64_QAM_2310MHz_Outer_Full_Ant7

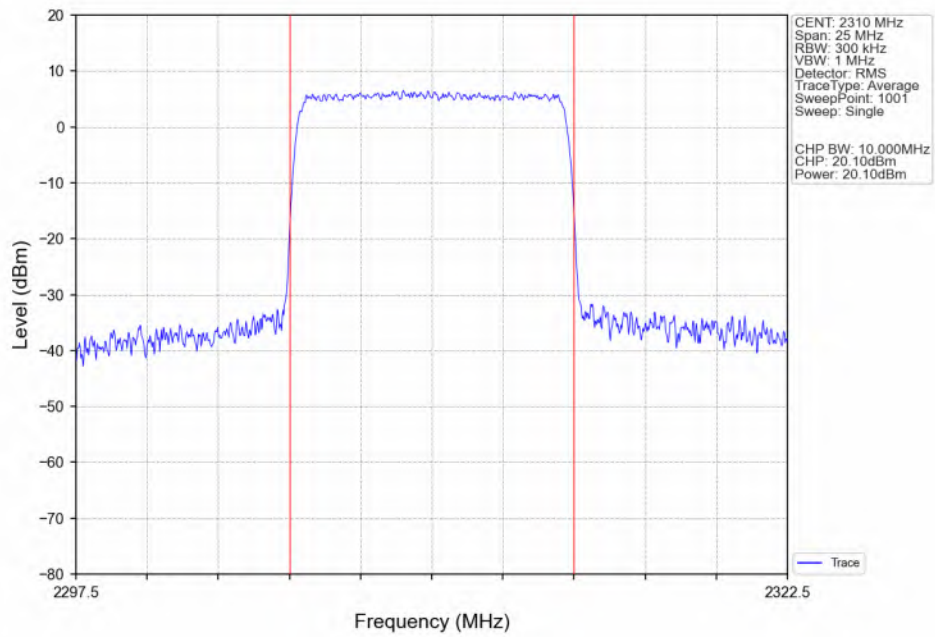


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_64_QAM_2310MHz_Inner_Full_Ant7

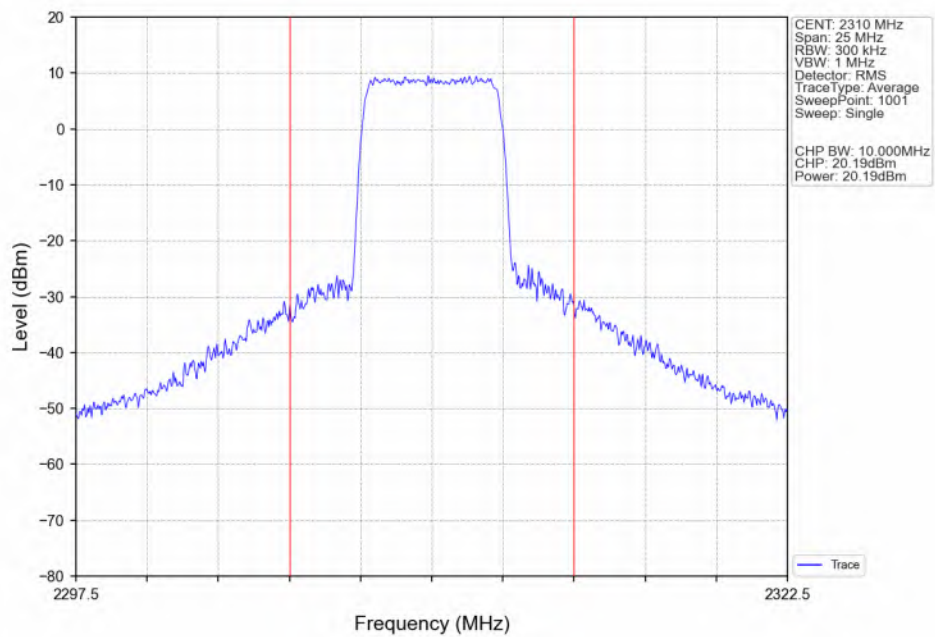


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_64_QAM_2310MHz_Inner_1RB_Left_Ant7

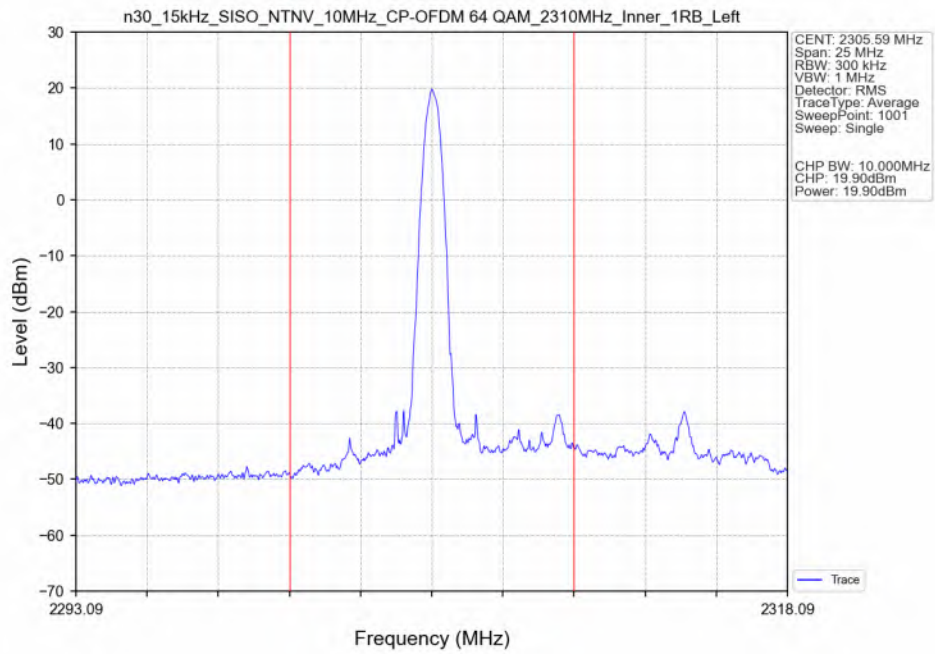


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_64_QAM_2310MHz_Inner_1RB_Right_Ant7

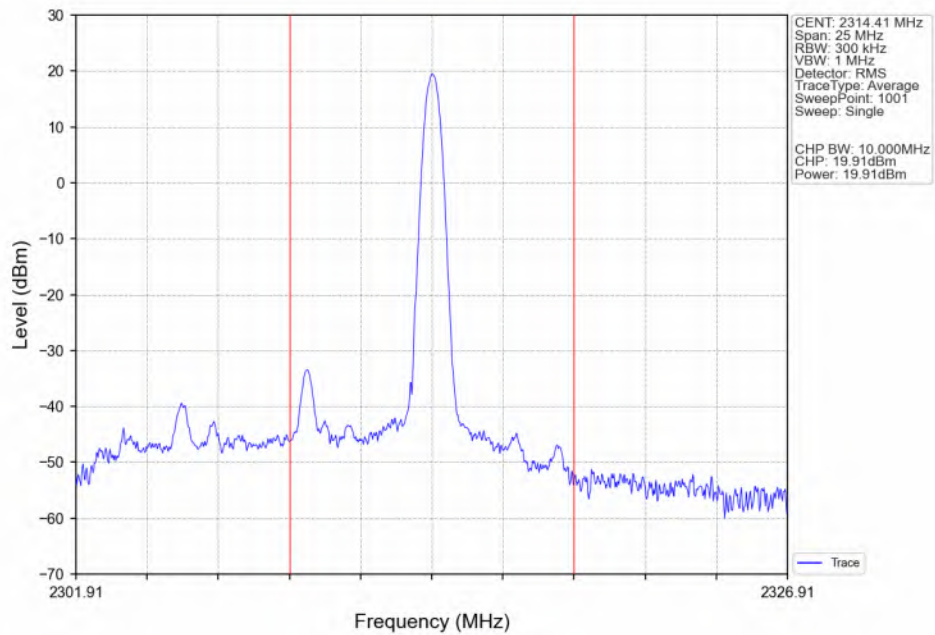


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_256_QAM_2310MHz_Edge_1RB_Left_Ant7

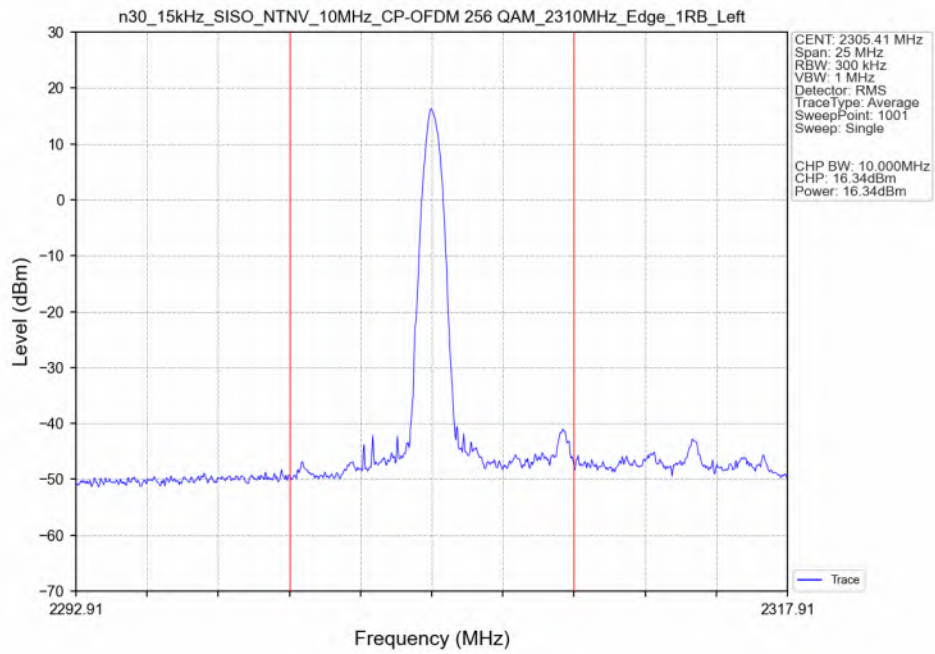


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_256_QAM_2310MHz_Edge_1RB_Right_Ant7

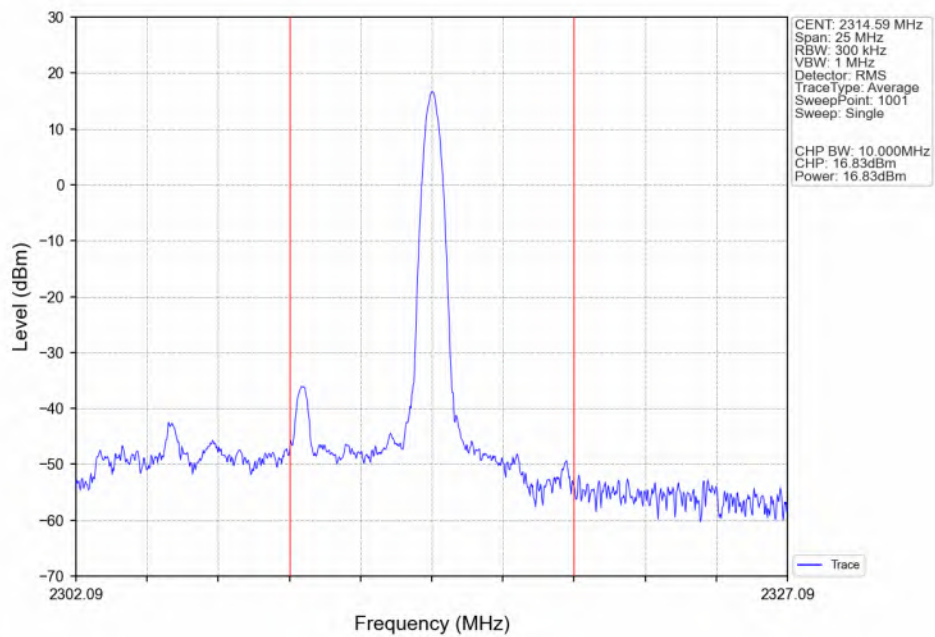


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_256_QAM_2310MHz_Outer_Full_Ant7

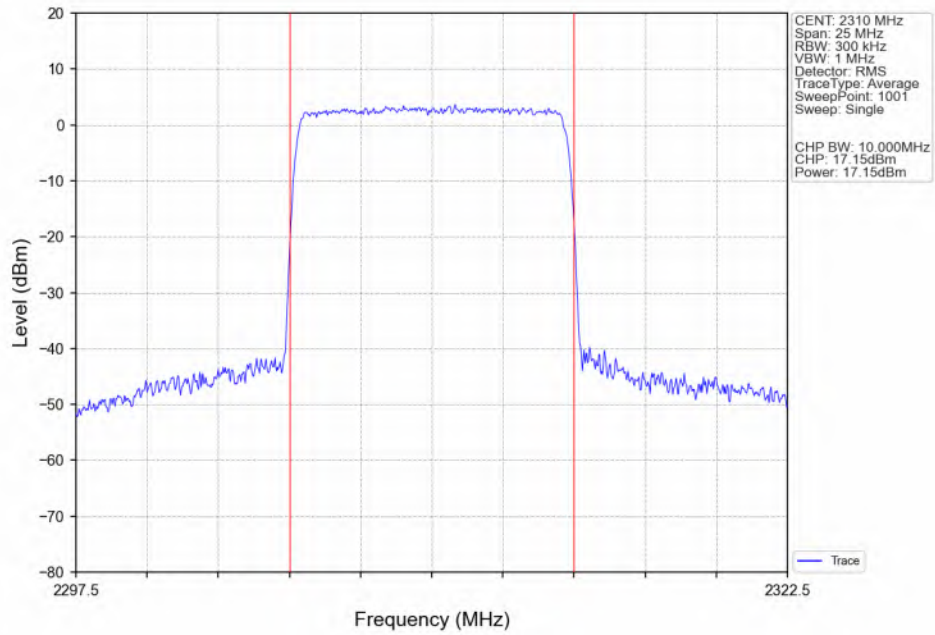


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_256_QAM_2310MHz_Inner_Full_Ant7

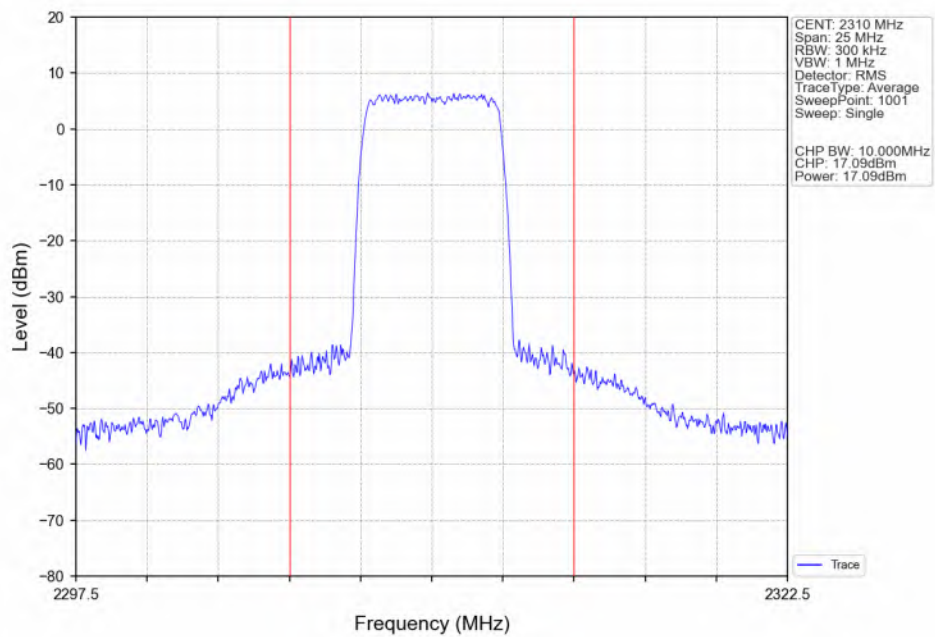

n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_256_QAM_2310MHz_Inner_1RB_Left_Ant7

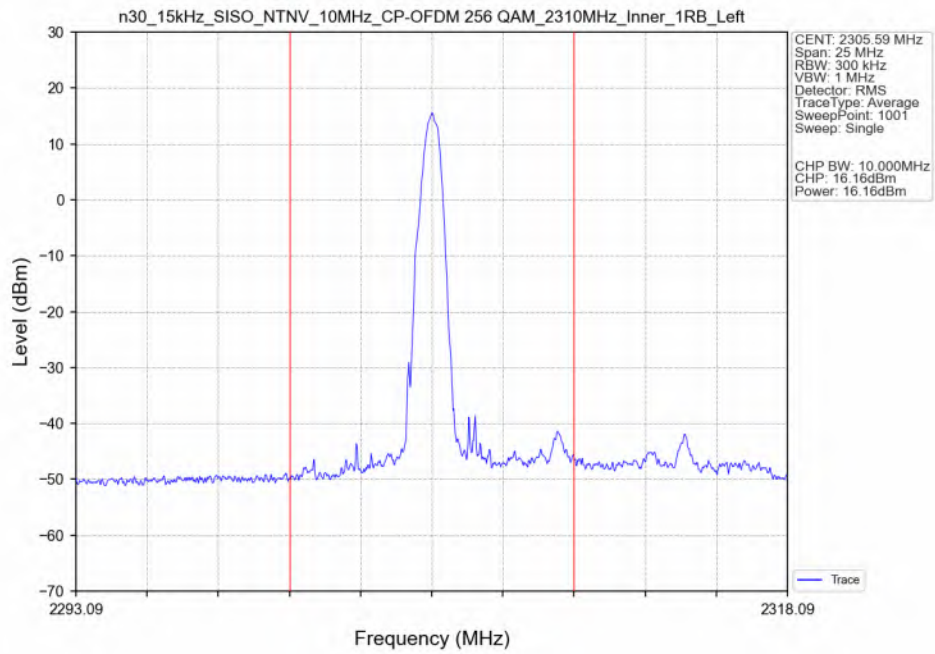

n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_256_QAM_2310MHz_Inner_1RB_Right_Ant7

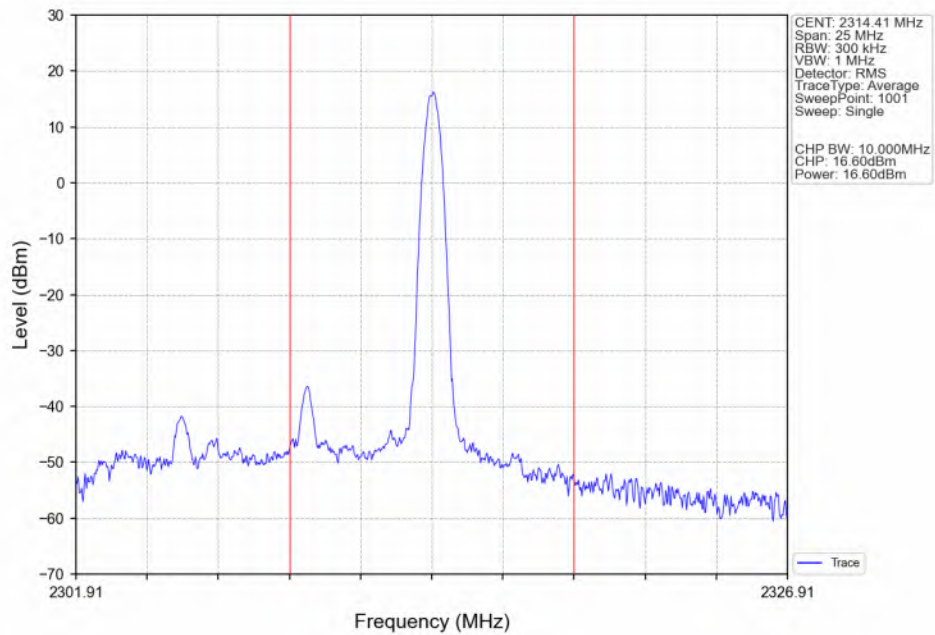

2. Frequency Stability

2.1 Test Result

2.1.1 15_S_10M

5G NR n30 SCS=15kHz SISO 10MHz								
Modulation	Frequency (MHz)	RB Allocation	Temp. (°C)	Volt.	Freq. Error (Hz)	Freq. vs. rated (ppm)		Verdict
						Result	Limit	
DFT-s-OFDM QPSK	2310	Outer_Full	20	LV	-622.24	-0.2694	>=-2.5 & <=2.5	Pass
				HV	549.34	0.2378	>=-2.5 & <=2.5	Pass
			-30	NV	900.37	0.3898	>=-2.5 & <=2.5	Pass
			-20	NV	-557.51	-0.2413	>=-2.5 & <=2.5	Pass
			-10	NV	133.91	0.0580	>=-2.5 & <=2.5	Pass
			0	NV	142.11	0.0615	>=-2.5 & <=2.5	Pass
			10	NV	1120.12	0.4849	>=-2.5 & <=2.5	Pass
			20	NV	206.00	0.0892	>=-2.5 & <=2.5	Pass
			30	NV	157.74	0.0683	>=-2.5 & <=2.5	Pass
			40	NV	-269.70	-0.1168	>=-2.5 & <=2.5	Pass
			50	NV	-683.30	-0.2958	>=-2.5 & <=2.5	Pass

3. 99% & 26dB Bandwidth

3.1 Test Result

3.1.1 15_S_5M_NTNV


5G NR n30 SCS=15kHz SISO 5MHz NTN						
Modulation	Frequency (MHz)	RB Allocation	99% Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
DFT-s-OFDM PI/2 BPSK	2310	Outer_Full	4.52	4.98	/	Pass
DFT-s-OFDM QPSK	2310	Outer_Full	4.53	4.98	/	Pass
DFT-s-OFDM 16 QAM	2310	Outer_Full	4.55	5.04	/	Pass
DFT-s-OFDM 64 QAM	2310	Outer_Full	4.57	5.00	/	Pass
DFT-s-OFDM 256 QAM	2310	Outer_Full	4.55	4.99	/	Pass
CP-OFDM QPSK	2310	Outer_Full	4.53	4.99	/	Pass
CP-OFDM 16 QAM	2310	Outer_Full	4.53	4.98	/	Pass
CP-OFDM 64 QAM	2310	Outer_Full	4.51	4.98	/	Pass
CP-OFDM 256 QAM	2310	Outer_Full	4.53	4.98	/	Pass

3.1.2 15_S_10M_NTNV


5G NR n30 SCS=15kHz SISO 10MHz NTN						
Modulation	Frequency (MHz)	RB Allocation	99% Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
DFT-s-OFDM PI/2 BPSK	2310	Outer_Full	9.04	9.71	/	Pass
DFT-s-OFDM QPSK	2310	Outer_Full	9.03	9.70	/	Pass
DFT-s-OFDM 16 QAM	2310	Outer_Full	9.01	9.70	/	Pass
DFT-s-OFDM 64 QAM	2310	Outer_Full	9.05	9.72	/	Pass
DFT-s-OFDM 256 QAM	2310	Outer_Full	9.05	9.70	/	Pass
CP-OFDM QPSK	2310	Outer_Full	9.38	10.05	/	Pass
CP-OFDM 16 QAM	2310	Outer_Full	9.39	10.10	/	Pass
CP-OFDM 64 QAM	2310	Outer_Full	9.35	10.06	/	Pass
CP-OFDM 256 QAM	2310	Outer_Full	9.35	10.06	/	Pass

3.2 Test Graph


3.2.1 15_S_5M_NTNV

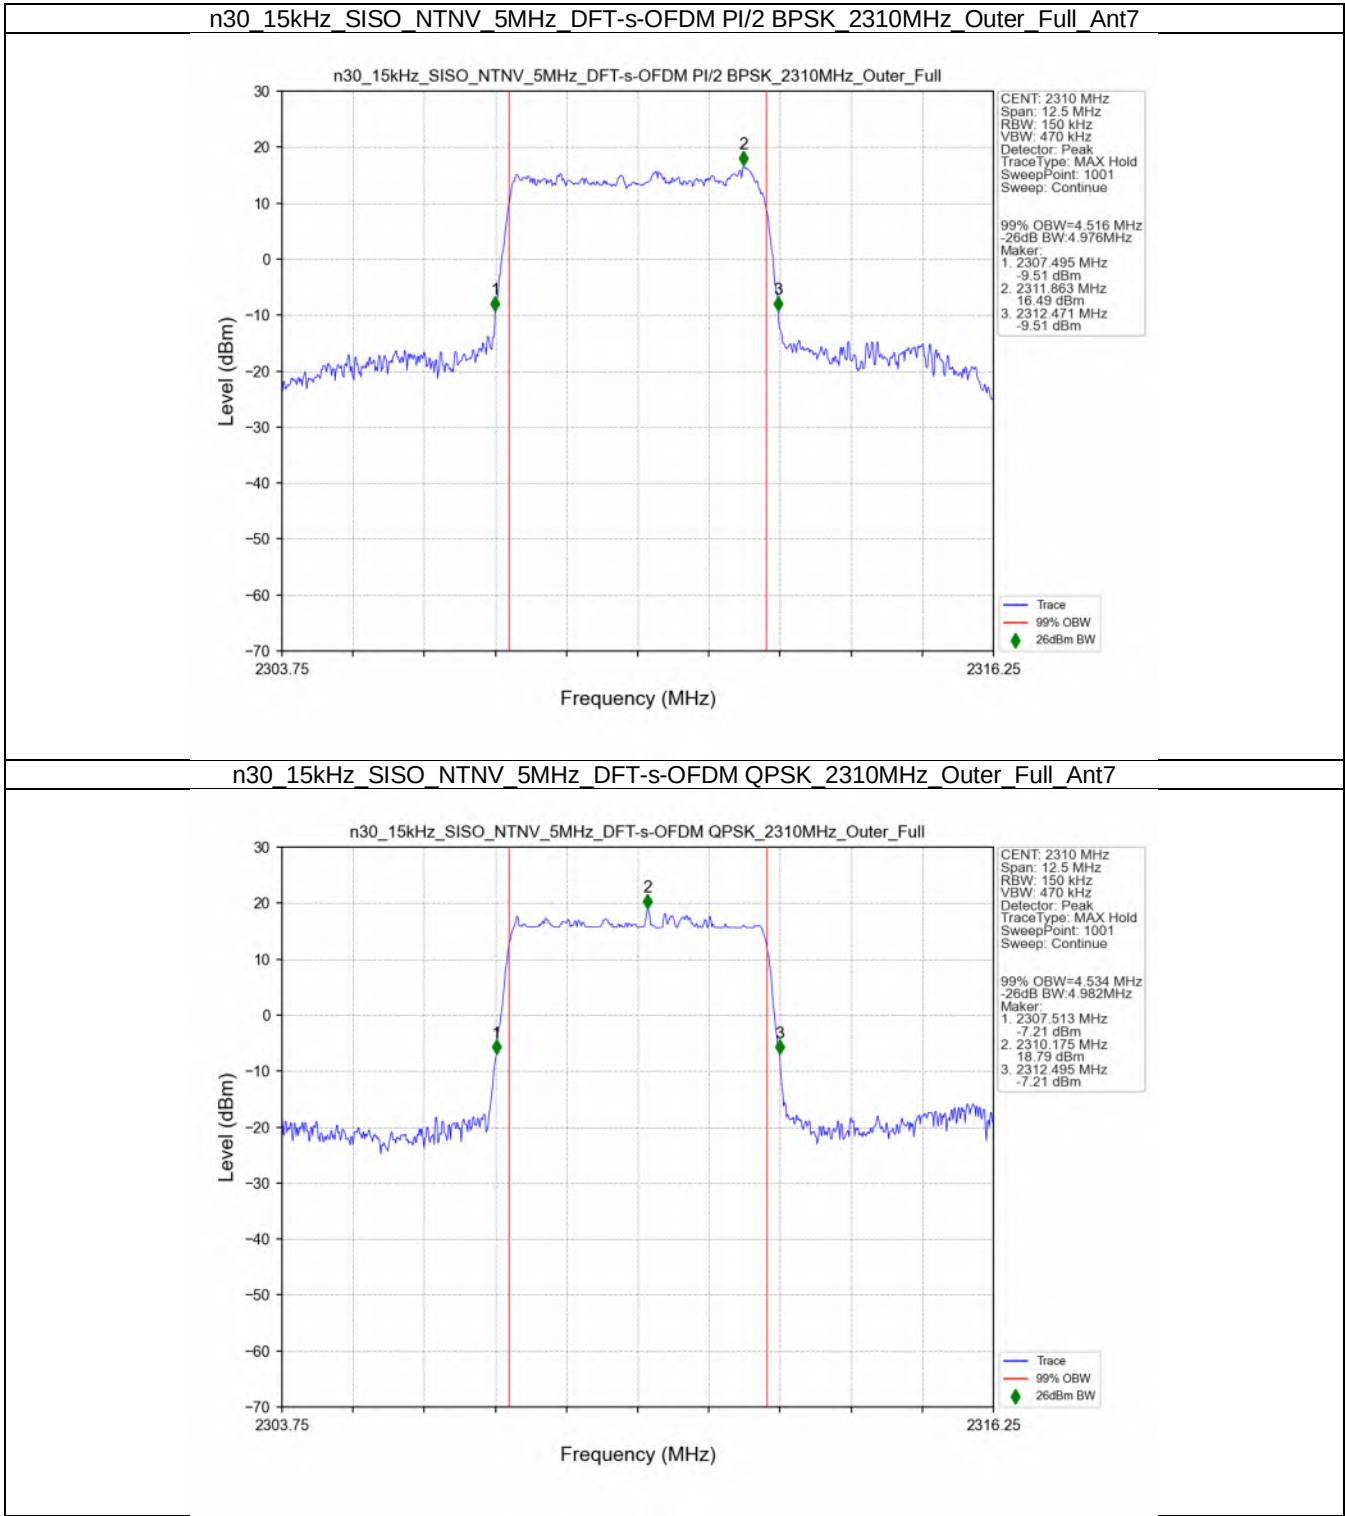


n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM 16 QAM 2310MHz_Outer_Full_Ant7

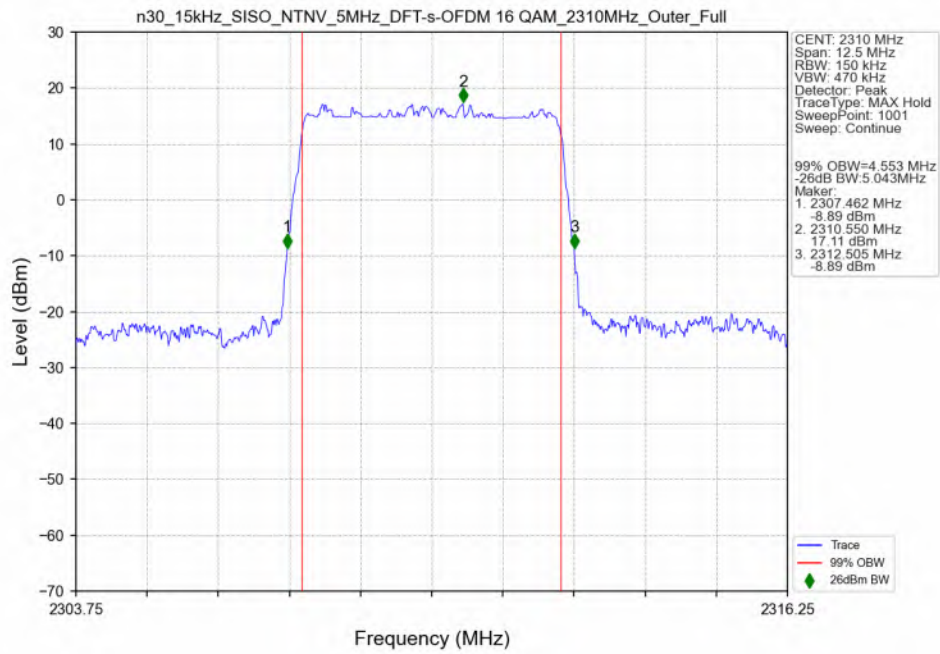


n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM 64 QAM 2310MHz_Outer_Full_Ant7

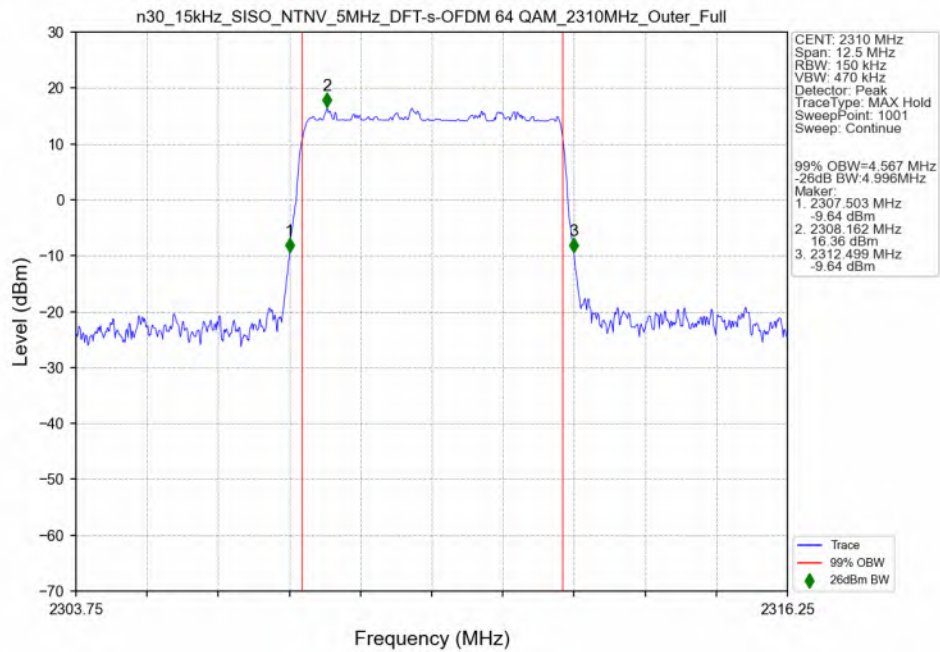


n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_256_QAM_2310MHz_Outer_Full_Ant7

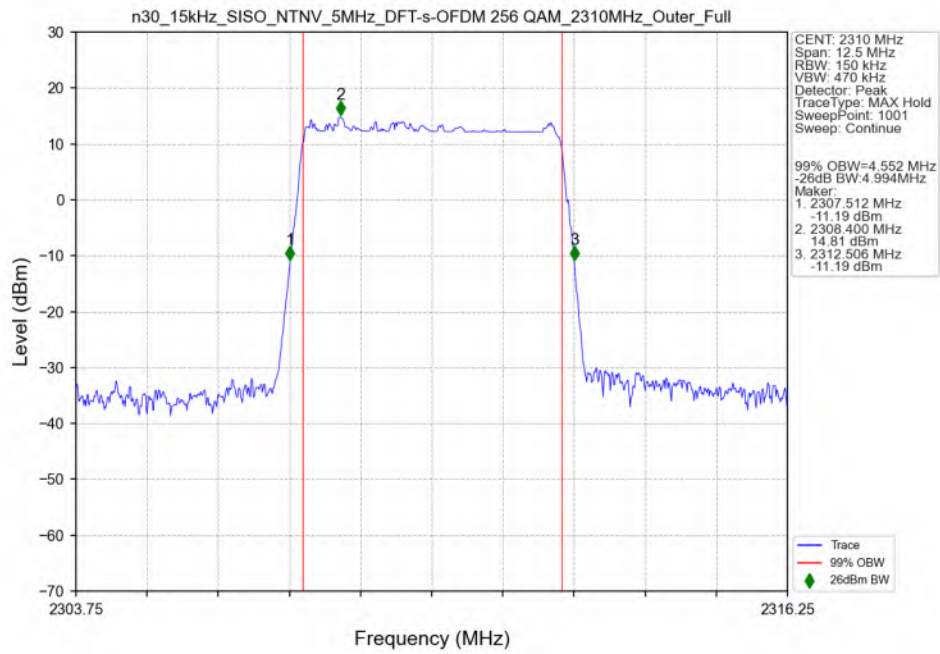


n30_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_2310MHz_Outer_Full_Ant7

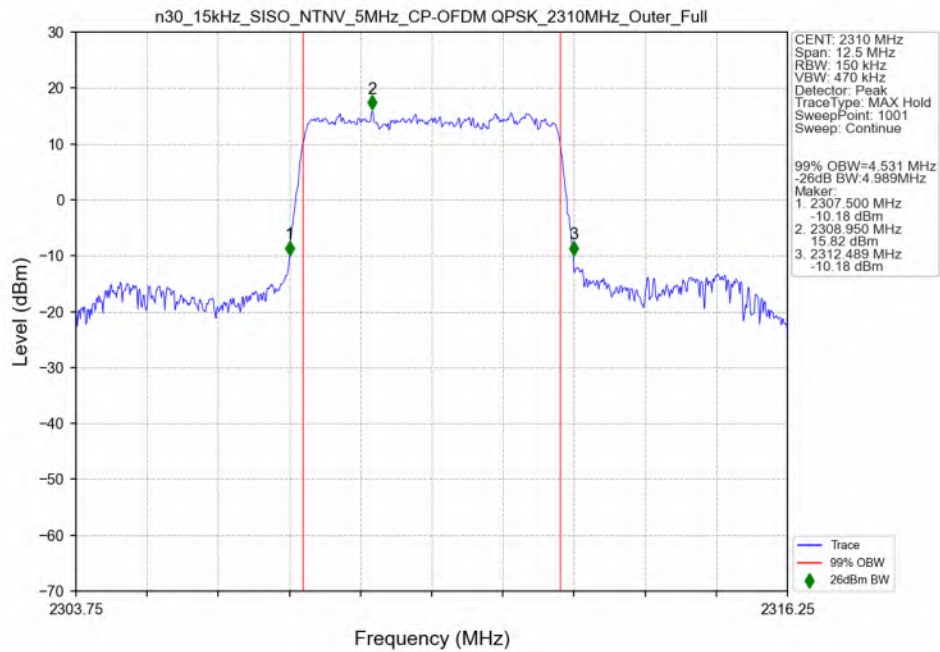


n30_15kHz_SISO_NTNV_5MHz_CP-OFDM 16 QAM 2310MHz_Outer_Full_Ant7

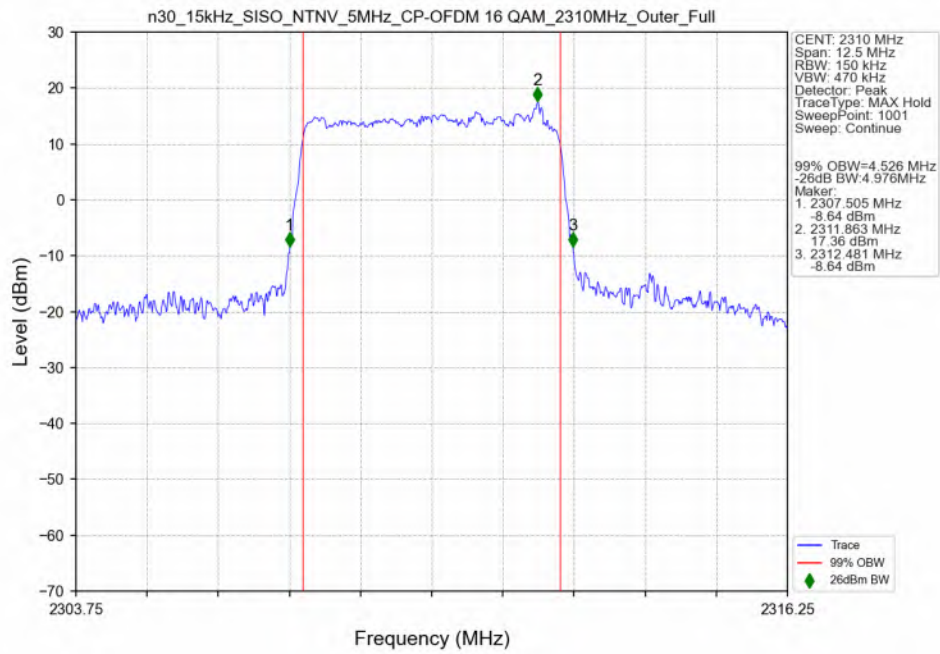

n30_15kHz_SISO_NTNV_5MHz_CP-OFDM 64 QAM 2310MHz_Outer_Full_Ant7

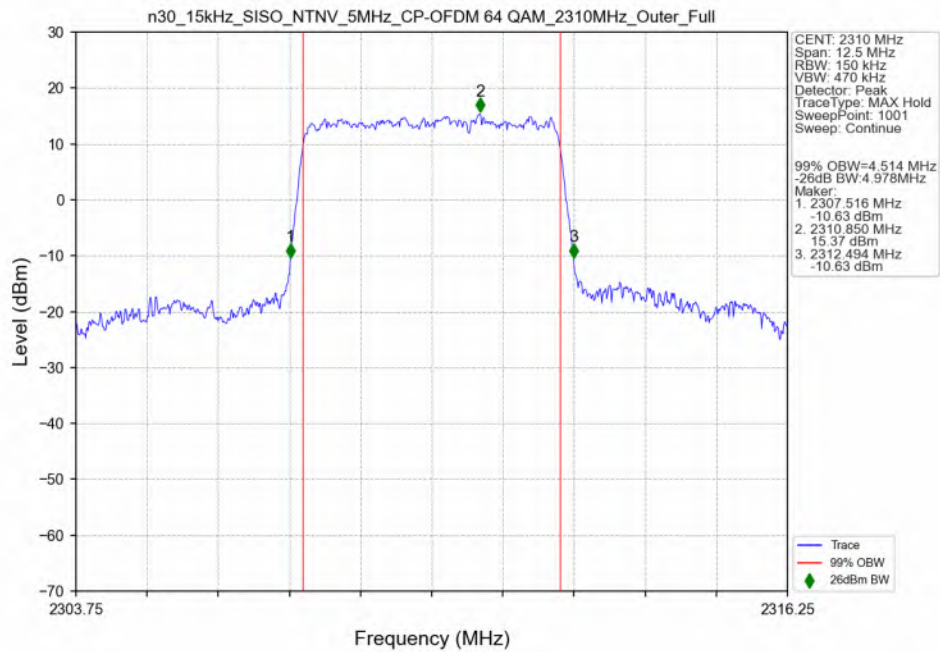


n30_15kHz_SISO_NTNV_5MHz_CP-OFDM_256_QAM_2310MHz_Outer_Full_Ant7

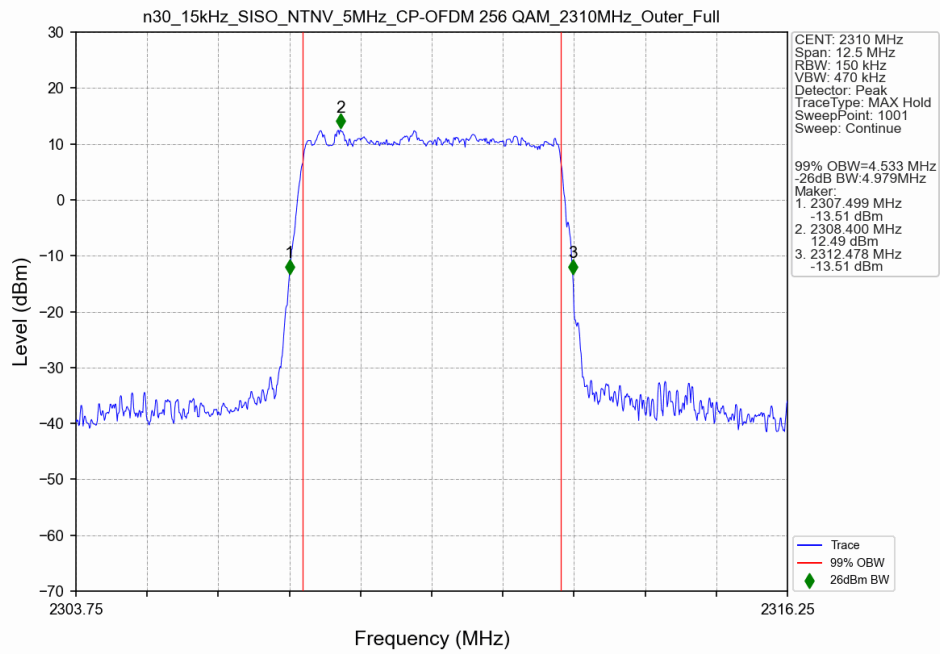


3.2.2 15_S_10M_NTNV


n30_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM PI/2 BPSK_2310MHz_Outer_Full_Ant7

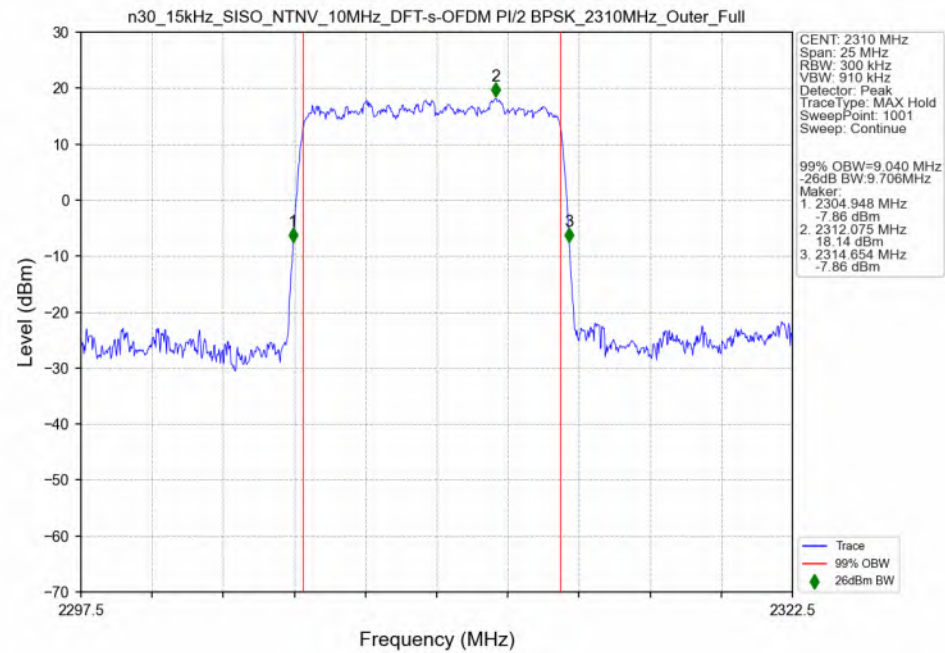


n30_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM QPSK_2310MHz_Outer_Full_Ant7

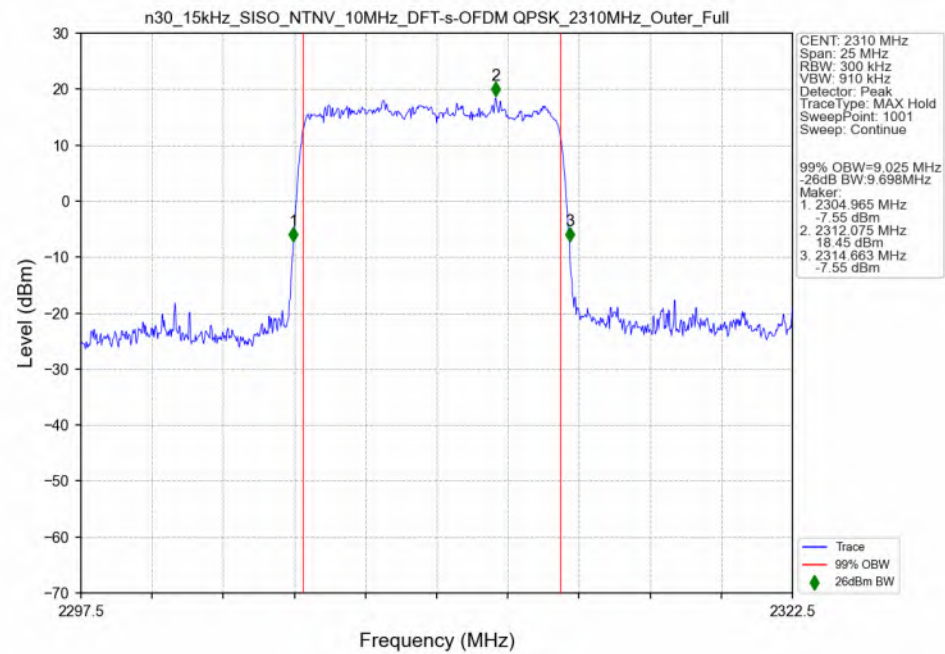


n30_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM 16 QAM 2310MHz_Outer_Full_Ant7

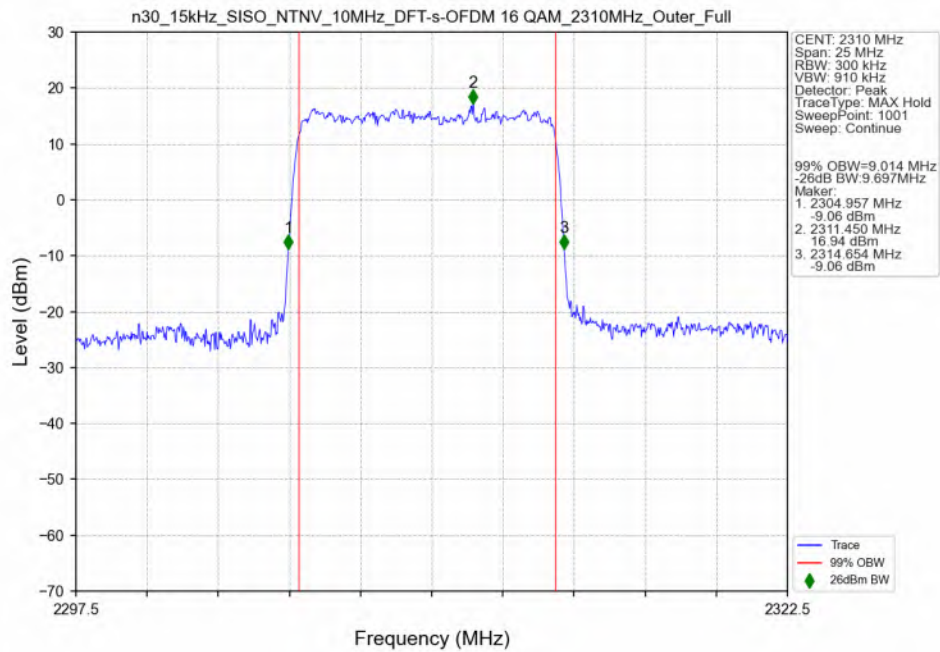


n30_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM 64 QAM 2310MHz_Outer_Full_Ant7

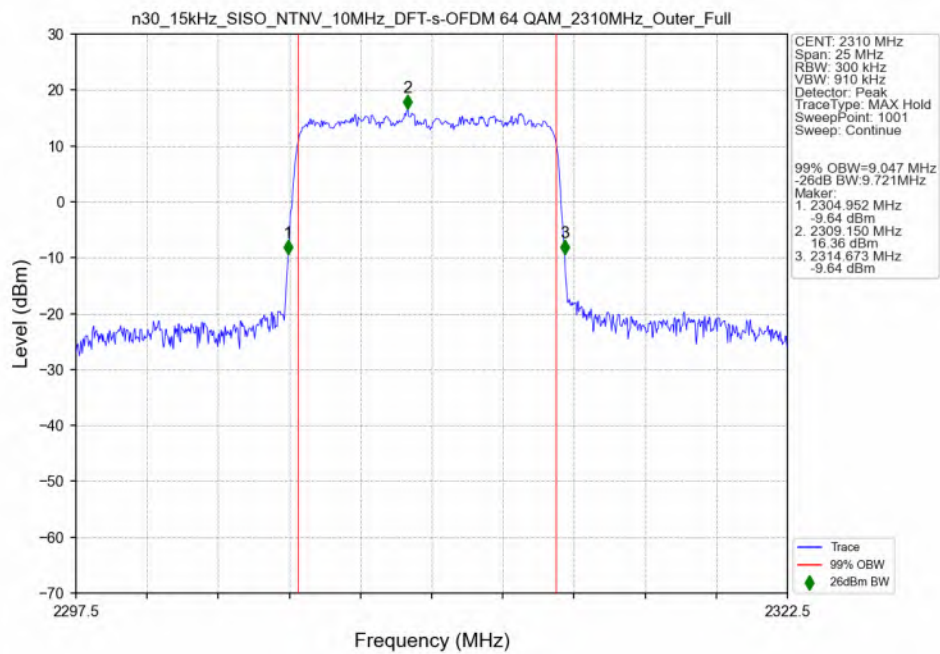


n30_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM 256 QAM 2310MHz_Outer_Full_Ant7

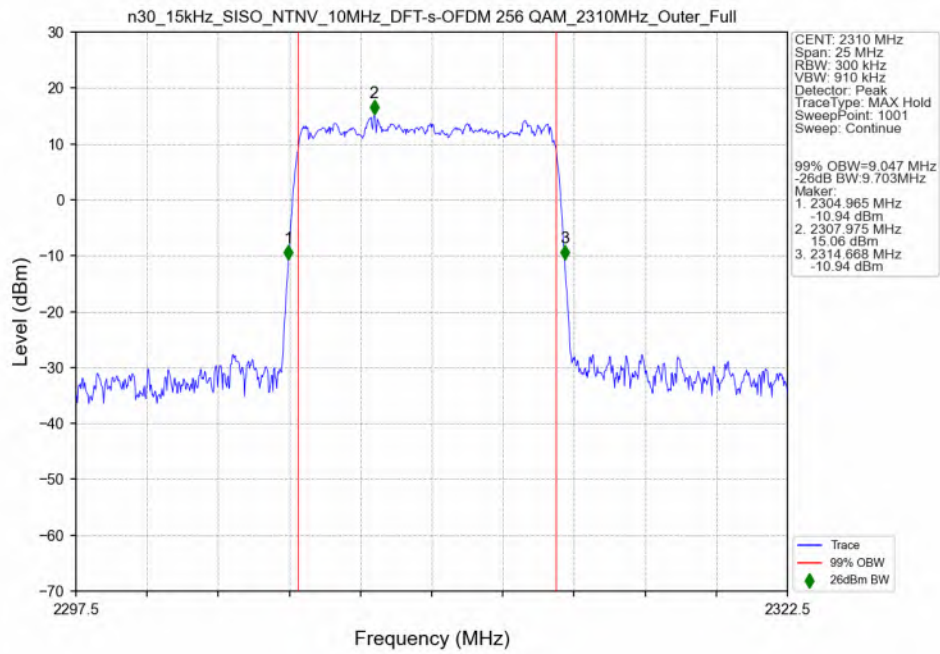


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM QPSK 2310MHz_Outer_Full_Ant7

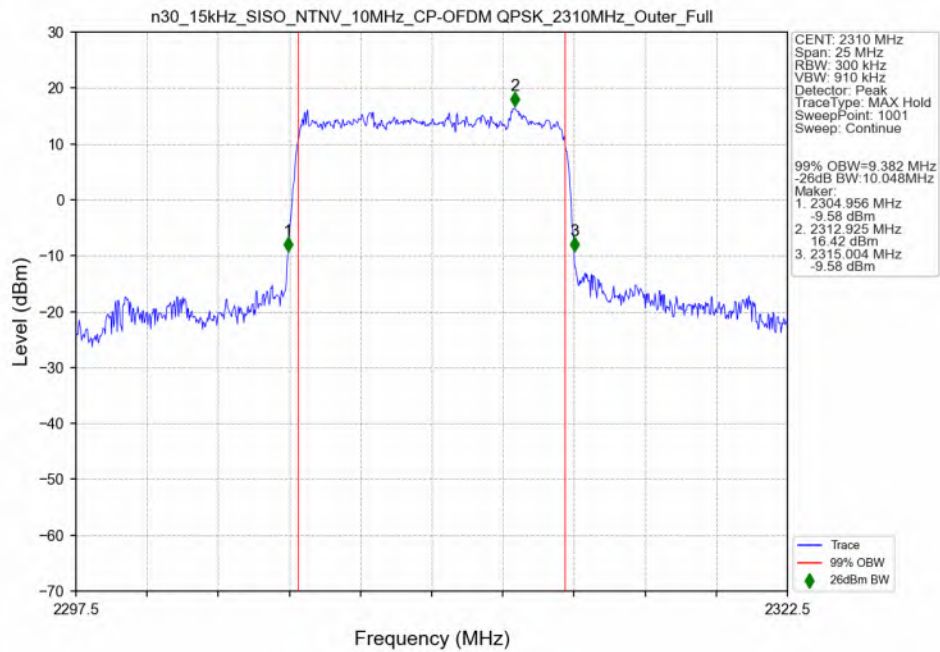


n30_15kHz_SISO_NTNV_10MHz_CP-OFDM 16 QAM 2310MHz_Outer_Full Ant7

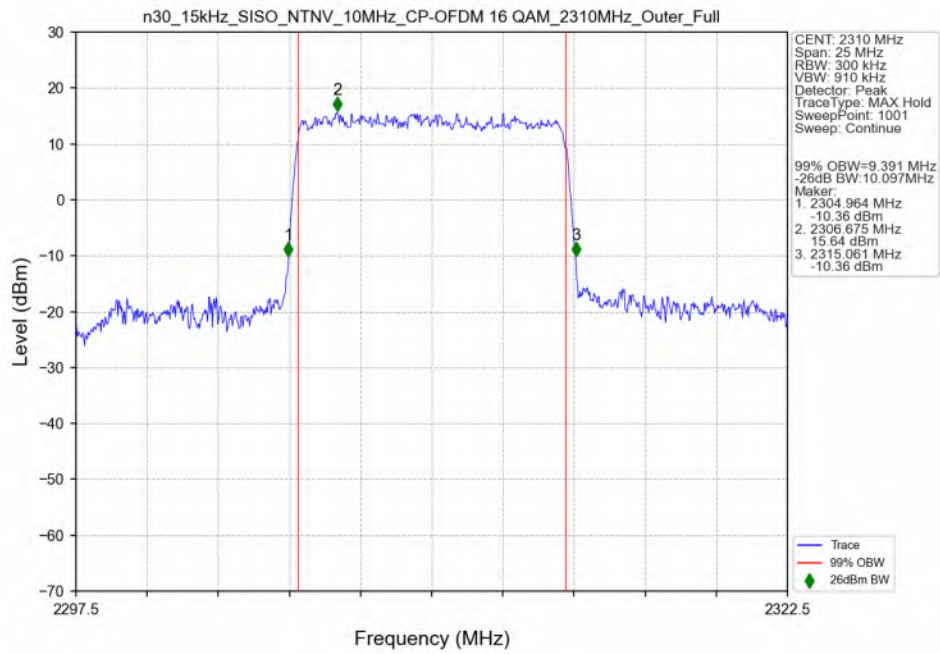

n30_15kHz_SISO_NTNV_10MHz_CP-OFDM 64 QAM 2310MHz_Outer_Full Ant7

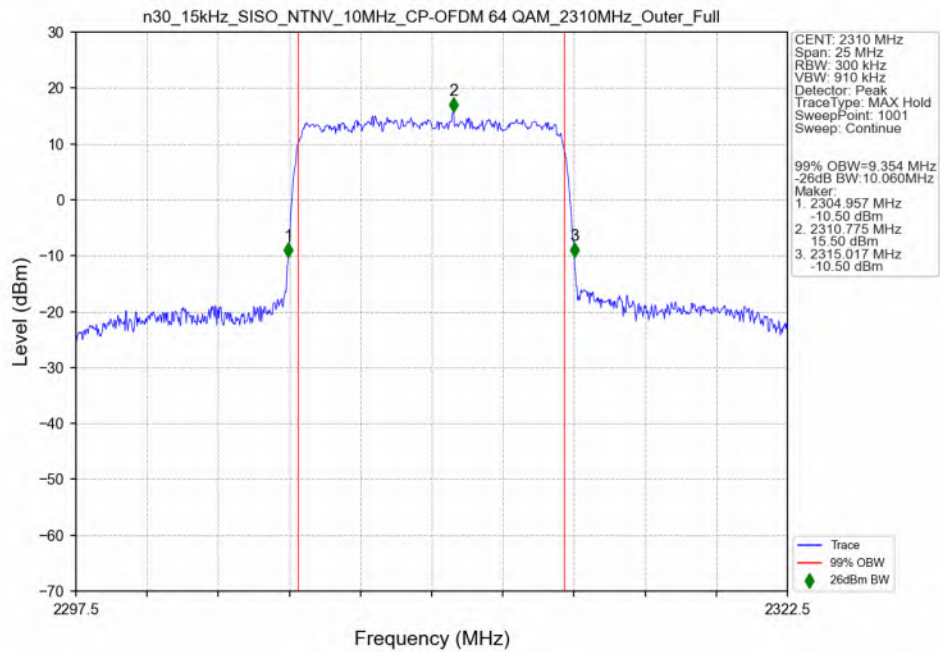

n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_256_QAM_2310MHz_Outer_Full_Ant7

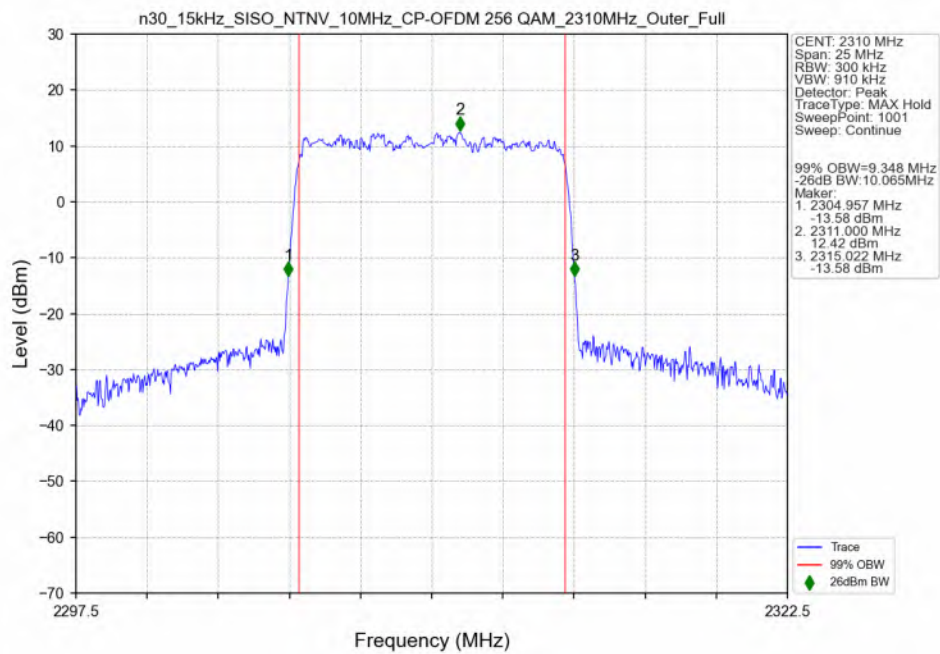

4. Peak-Average Ratio


4.1 Test Result

4.1.1 15_S_10M_NTNV


5G NR n30 SCS=15kHz SISO 10MHz NTNv							
Modulation	Frequency (MHz)	RB Allocation	Peak-Average Ratio (dB)				Verdict
			Ant7	Ant2	Sum	Limit	
DFT-s-OFDM PI/2 BPSK	2310	Outer_Full	3.88	/	/	<=13	Pass
DFT-s-OFDM QPSK	2310	Outer_Full	4.76	/	/	<=13	Pass
CP-OFDM QPSK	2310	Outer_Full	7.48	/	/	<=13	Pass

4.2 Test Graph

4.2.1 15_S_10M_NTNV

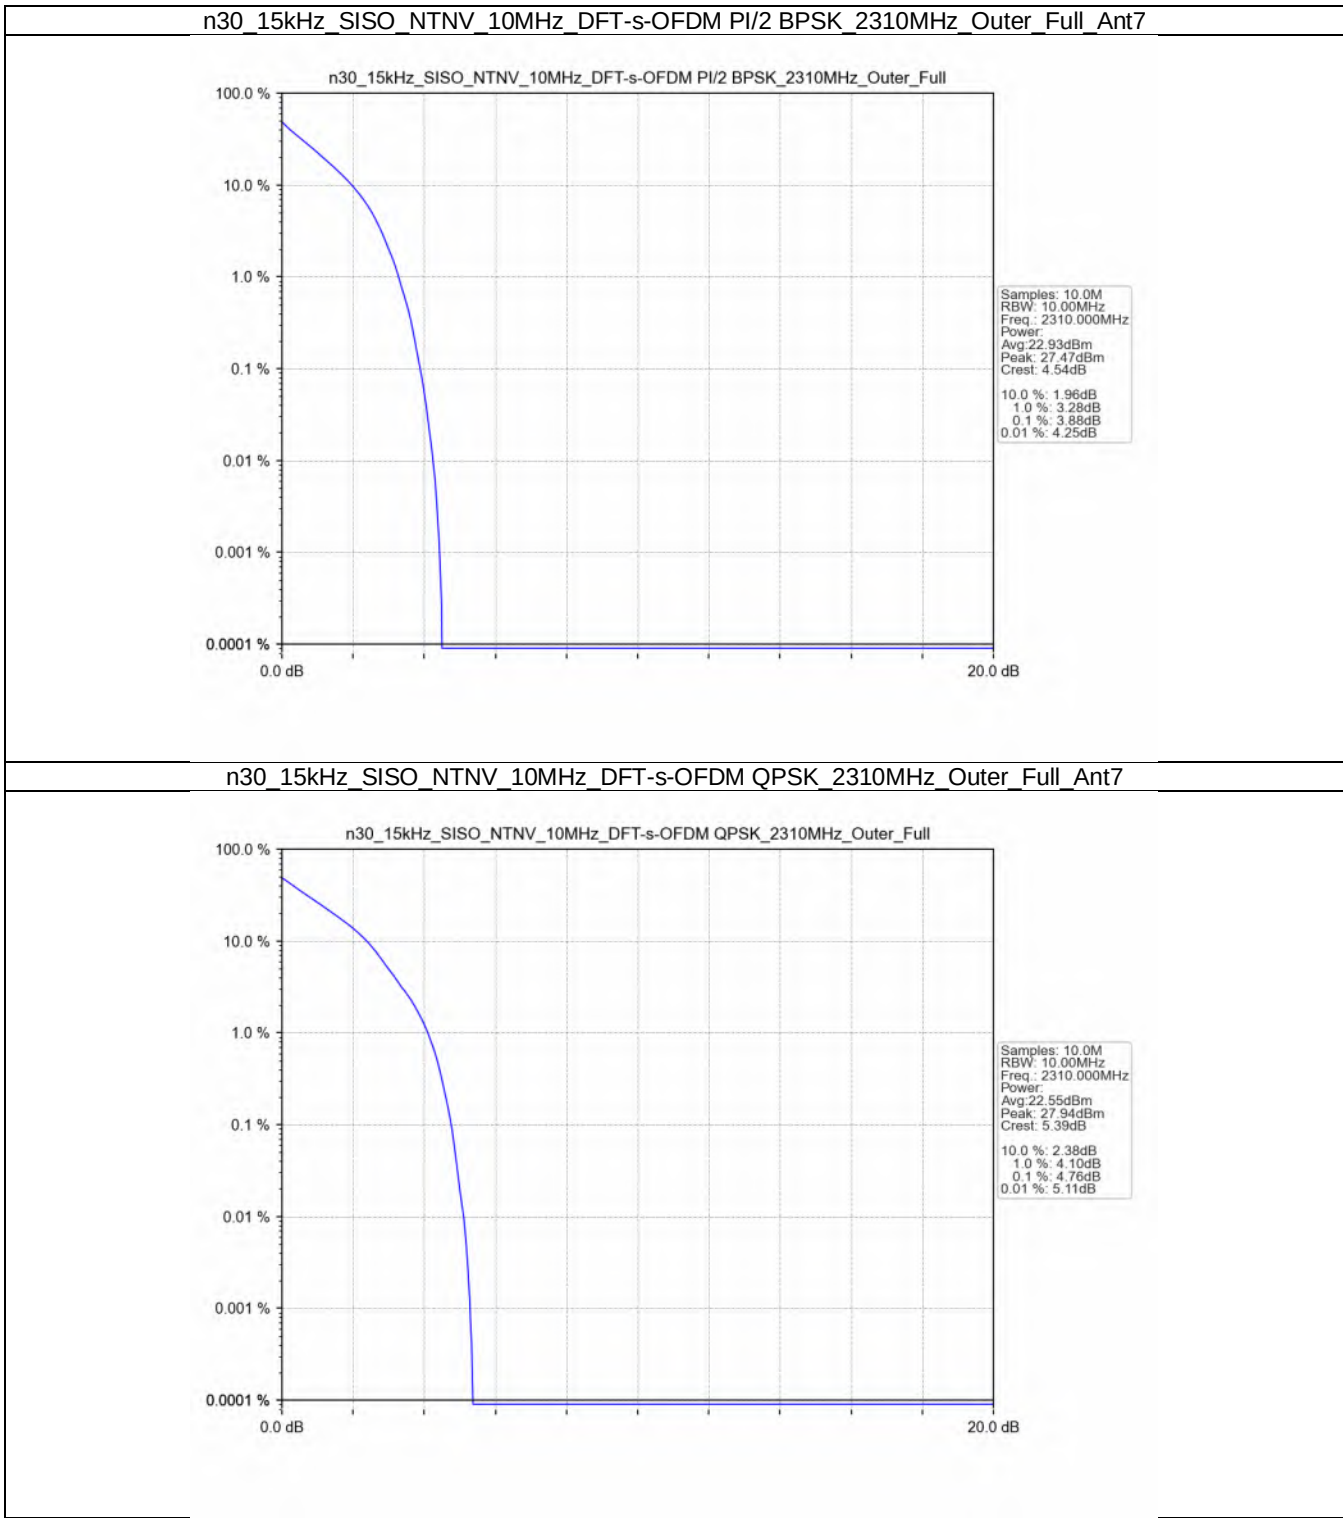

n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_2310MHz_Outer_Full_Ant7

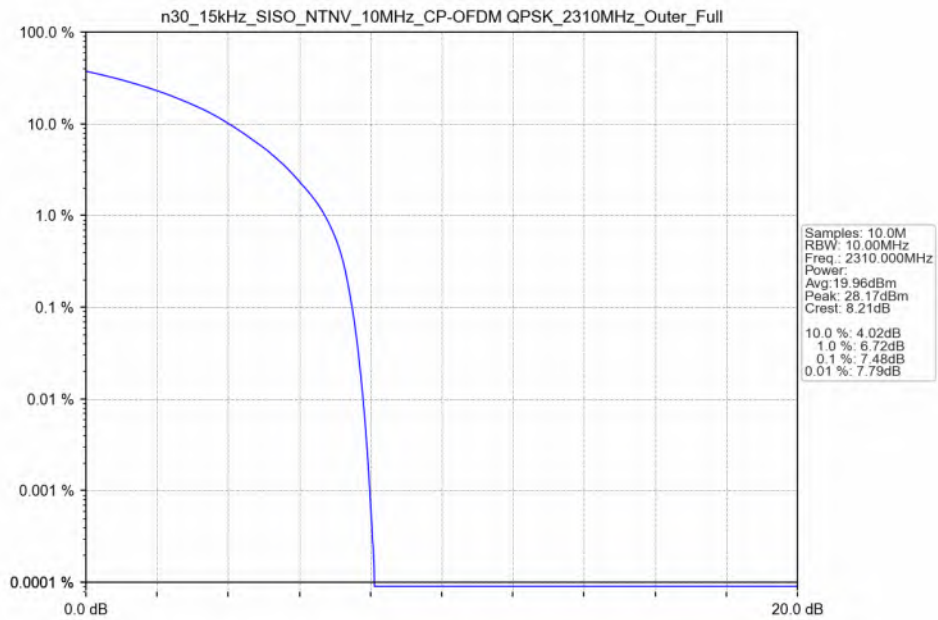

5. Spurious Emission

5.1 Test Result

5.1.1 15_S_5M_NTNV


5G NR n30 SCS=15kHz SISO 5MHz NTN							
Modulation	Frequency (MHz)	RB Allocation	Spurious Emission				Verdict
			Ant7	Ant2	Sum	Limit	
DFT-s-OFDM PI/2 BPSK	2307.5	Edge_1RB_Left	Refer To Test Graph				Pass
		Outer_Full	Refer To Test Graph				Pass
	2310	Edge_1RB_Left	Refer To Test Graph				Pass
	2312.5	Edge_1RB_Right	Refer To Test Graph				Pass
		Outer_Full	Refer To Test Graph				Pass
DFT-s-OFDM QPSK	2307.5	Edge_1RB_Left	Refer To Test Graph				Pass
		Outer_Full	Refer To Test Graph				Pass
	2310	Edge_1RB_Left	Refer To Test Graph				Pass
	2312.5	Edge_1RB_Right	Refer To Test Graph				Pass
		Outer_Full	Refer To Test Graph				Pass
CP-OFDM QPSK	2307.5	Edge_1RB_Left	Refer To Test Graph				Pass
		Outer_Full	Refer To Test Graph				Pass
	2310	Edge_1RB_Left	Refer To Test Graph				Pass
	2312.5	Edge_1RB_Right	Refer To Test Graph				Pass
		Outer_Full	Refer To Test Graph				Pass

5.1.2 15_S_10M_NTNV


5G NR n30 SCS=15kHz SISO 10MHz NTN							
Modulation	Frequency (MHz)	RB Allocation	Spurious Emission				Verdict
			Ant7	Ant2	Sum	Limit	
DFT-s-OFDM PI/2 BPSK	2310	Edge 1RB Left	Refer To Test Graph				Pass
		Outer Full	Refer To Test Graph				Pass
DFT-s-OFDM QPSK	2310	Edge 1RB Left	Refer To Test Graph				Pass
		Outer Full	Refer To Test Graph				Pass
CP-OFDM QPSK	2310	Edge 1RB Left	Refer To Test Graph				Pass
		Outer Full	Refer To Test Graph				Pass

5.2 Test Graph

5.2.1 15_S_5M_NTNV

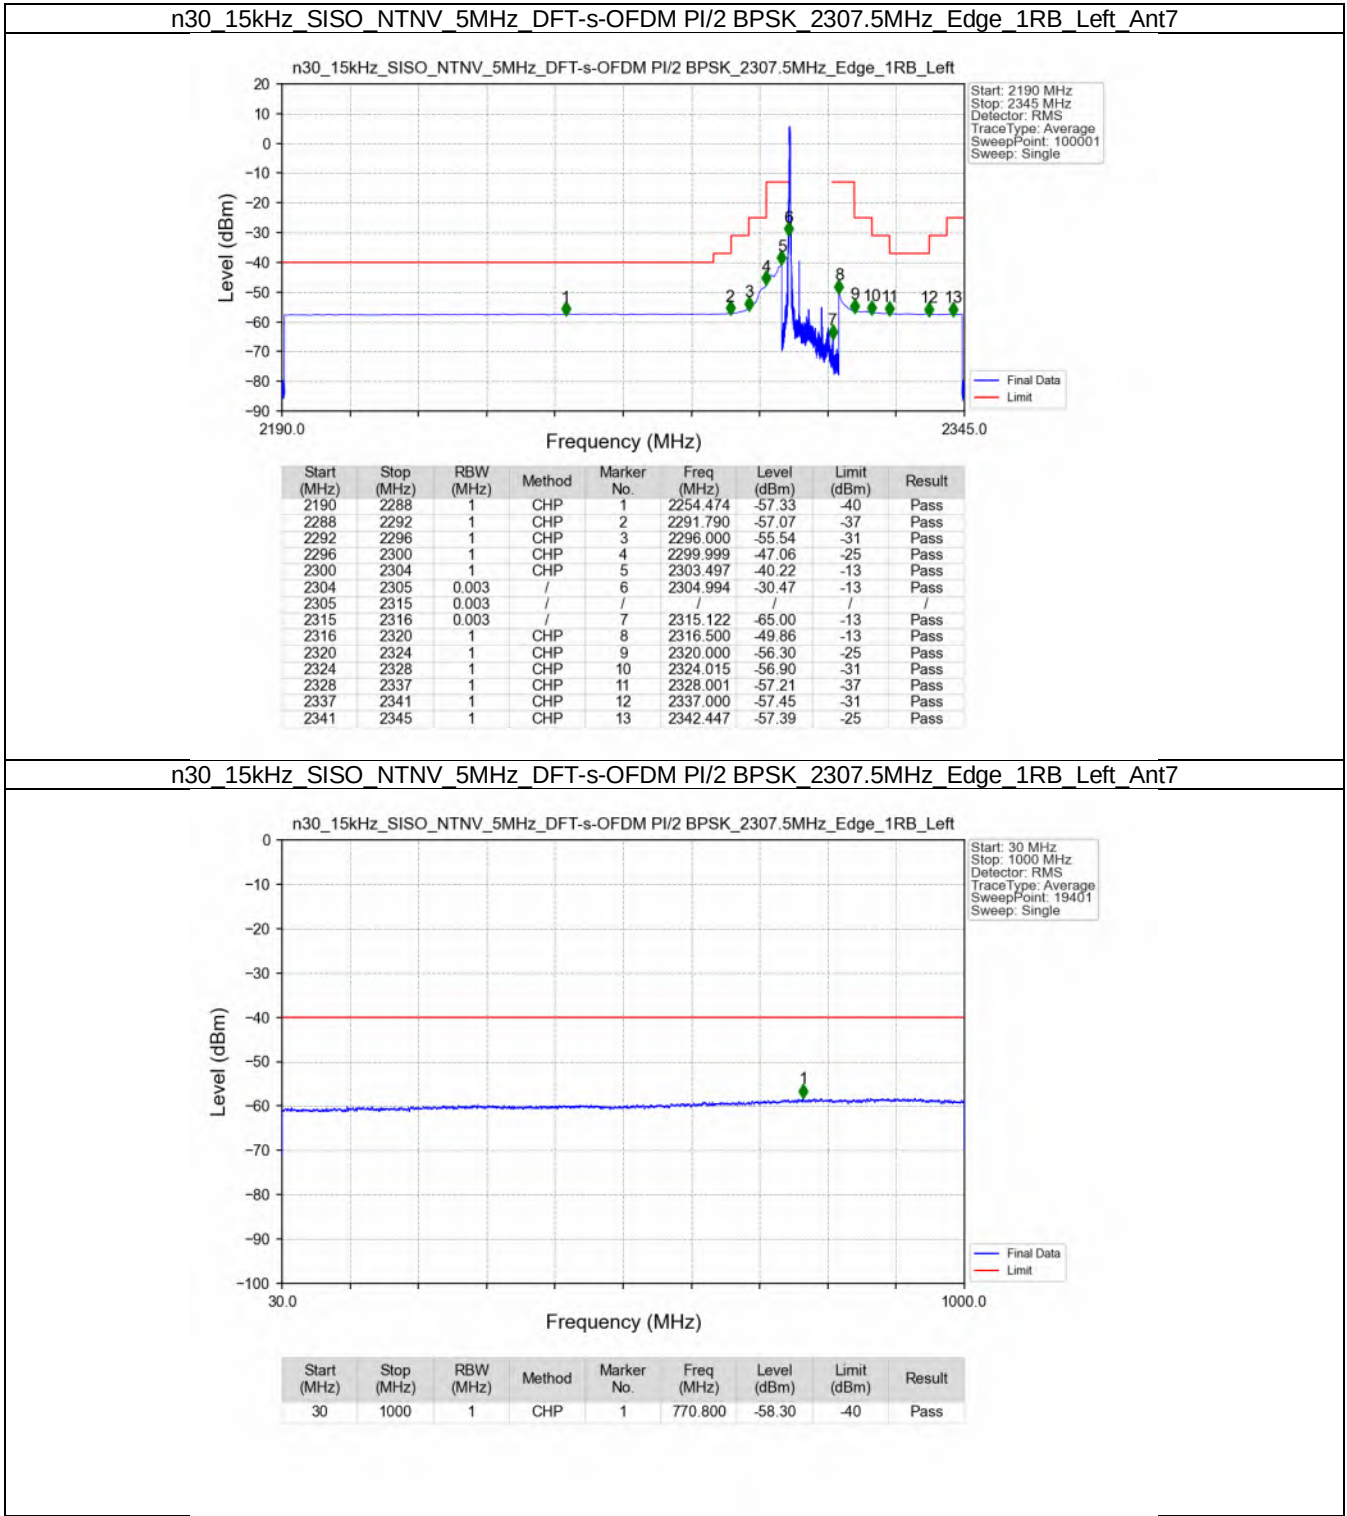

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM PI/2 BPSK_2307.5MHz_Edge_1RB_Left Ant7

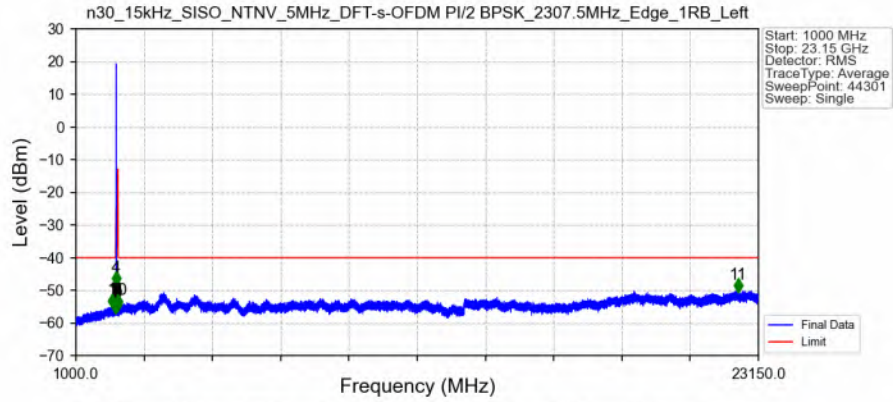


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2288	1	/	1	2177.500	-54.76	-40	Pass
2288	2292	1	/	2	2289.000	-56.42	-37	Pass
2292	2296	1	/	3	2296.000	-54.24	-31	Pass
2296	2300	1	/	4	2298.000	-47.99	-25	Pass
2300	2320	1	/	/	/	/	/	/
2320	2324	1	/	5	2322.500	-54.90	-25	Pass
2324	2328	1	/	6	2324.500	-55.33	-31	Pass
2328	2337	1	/	7	2332.000	-55.91	-37	Pass
2337	2341	1	/	8	2338.500	-55.38	-31	Pass
2341	2345	1	/	9	2345.000	-55.84	-25	Pass
2345	2365	1	/	10	2363.000	-55.04	-13	Pass
2365	23150	1	/	11	22486.000	-50.16	-40	Pass

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM PI/2 BPSK_2307.5MHz_Outer_Full Ant7




Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2273.508	-57.32	-40	Pass
2288	2292	1	CHP	2	2291.988	-56.53	-37	Pass
2292	2296	1	CHP	3	2295.993	-47.23	-31	Pass
2296	2300	1	CHP	4	2299.999	-34.44	-25	Pass
2300	2304	1	CHP	5	2303.494	-29.19	-13	Pass
2304	2305	0.04982	CHP	6	2304.994	-35.28	-13	Pass
2305	2315	0.04982	CHP	/	/	/	/	/
2315	2316	0.04982	CHP	7	2315.044	-45.13	-13	Pass
2316	2320	1	CHP	8	2316.514	-38.06	-13	Pass
2320	2324	1	CHP	9	2320.009	-48.32	-25	Pass
2324	2328	1	CHP	10	2324.014	-55.45	-31	Pass
2328	2337	1	CHP	11	2328.004	-57.04	-37	Pass
2337	2341	1	CHP	12	2339.030	-57.46	-31	Pass
2341	2345	1	CHP	13	2341.835	-57.58	-25	Pass

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_PI/2_BPSK_2310MHz_Edge_1RB_Left_Ant7

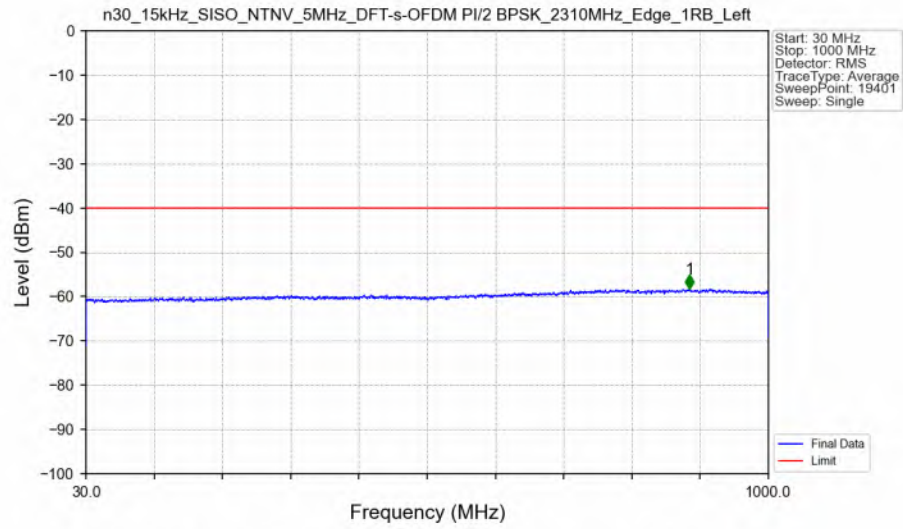


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	1000	1	CHP	1	888.100	-58.20	-40	Pass

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_PI/2_BPSK_2310MHz_Edge_1RB_Left_Ant7

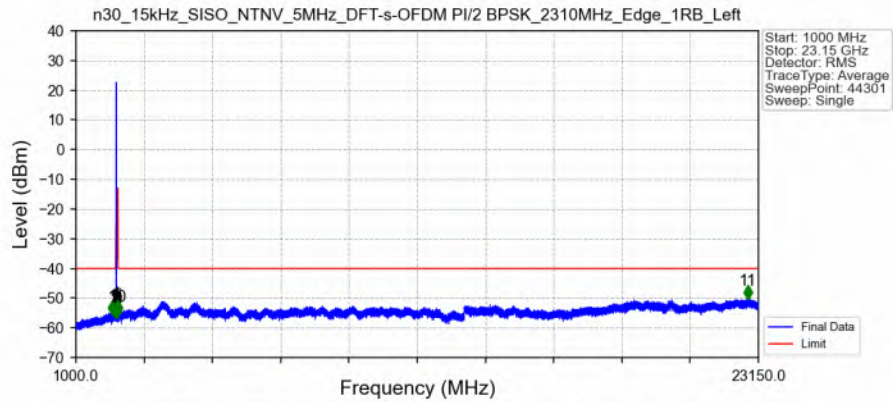


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2288	1	/	1	2181.500	-54.77	-40	Pass
2288	2292	1	/	2	2289.500	-56.02	-37	Pass
2292	2296	1	/	3	2295.000	-55.24	-31	Pass
2296	2300	1	/	4	2299.500	-53.96	-25	Pass
2300	2320	1	/	/	/	/	/	/
2320	2324	1	/	5	2320.500	-54.59	-25	Pass
2324	2328	1	/	6	2325.500	-55.30	-31	Pass
2328	2337	1	/	7	2332.000	-55.44	-37	Pass
2337	2341	1	/	8	2341.000	-55.92	-31	Pass
2341	2345	1	/	9	2343.500	-55.26	-25	Pass
2345	2365	1	/	10	2353.000	-55.01	-13	Pass
2365	23150	1	/	11	22810.000	-49.78	-40	Pass

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM PI/2 BPSK_2312.5MHz_Edge_1RB_Right_Ant7

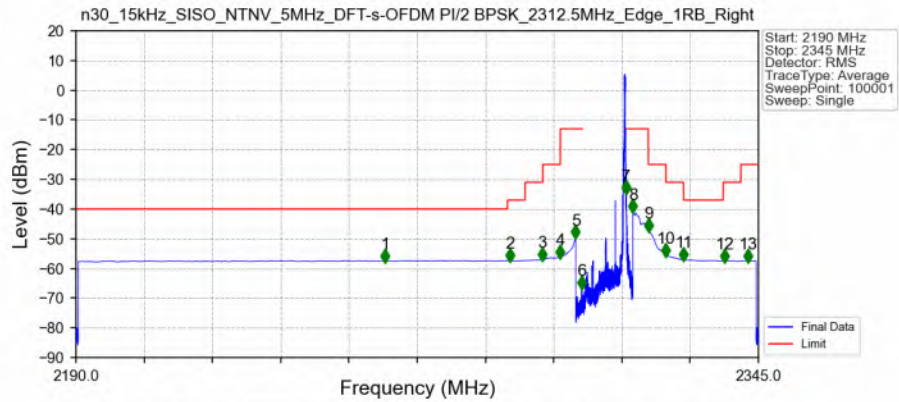


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2260.195	-57.40	-40	Pass
2288	2292	1	CHP	2	2288.515	-57.29	-37	Pass
2292	2296	1	CHP	3	2295.969	-56.97	-31	Pass
2296	2300	1	CHP	4	2299.982	-56.10	-25	Pass
2300	2304	1	CHP	5	2303.497	-49.43	-13	Pass
2304	2305	0.003	/	6	2304.884	-66.45	-13	Pass
2305	2315	0.003	/	/	/	/	/	/
2315	2316	0.003	/	7	2315.003	-34.51	-13	Pass
2316	2320	1	CHP	8	2316.500	-40.74	-13	Pass
2320	2324	1	CHP	9	2320.000	-47.09	-25	Pass
2324	2328	1	CHP	10	2324.001	-55.64	-31	Pass
2328	2337	1	CHP	11	2328.001	-56.99	-37	Pass
2337	2341	1	CHP	12	2337.332	-57.42	-31	Pass
2341	2345	1	CHP	13	2342.615	-57.41	-25	Pass

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM PI/2 BPSK_2312.5MHz_Edge_1RB_Right_Ant7

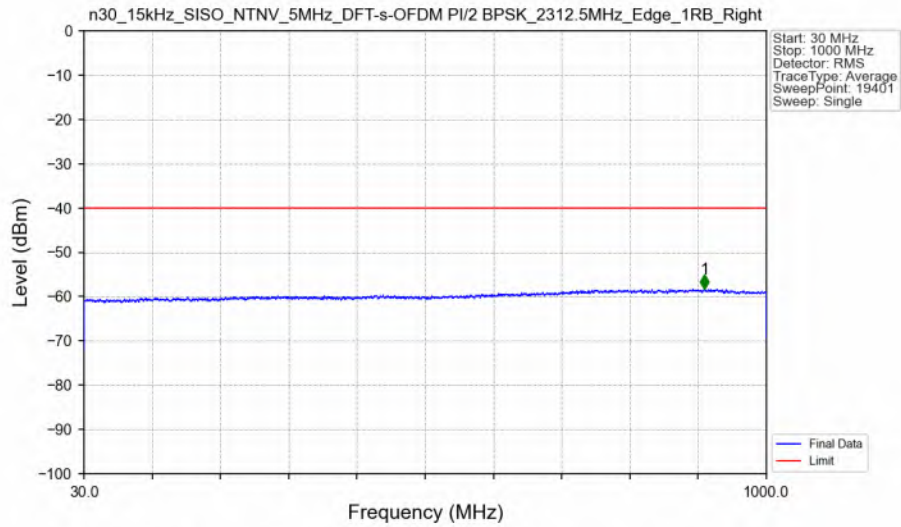


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	1000	1	CHP	1	911.950	-58.24	-40	Pass

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM PI/2 BPSK_2312.5MHz_Edge_1RB_Right_Ant7

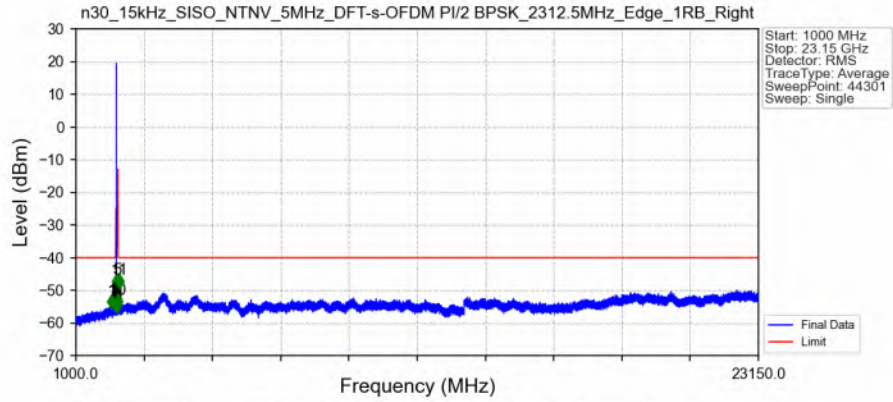


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2288	1	/	1	2162.000	-55.09	-40	Pass
2288	2292	1	/	2	2289.500	-55.02	-37	Pass
2292	2296	1	/	3	2293.000	-55.67	-31	Pass
2296	2300	1	/	4	2297.000	-55.32	-25	Pass
2300	2320	1	/	/	/	/	/	/
2320	2324	1	/	5	2320.500	-48.79	-25	Pass
2324	2328	1	/	6	2324.500	-54.12	-31	Pass
2328	2337	1	/	7	2336.000	-55.66	-37	Pass
2337	2341	1	/	8	2337.500	-56.03	-31	Pass
2341	2345	1	/	9	2344.500	-56.16	-25	Pass
2345	2365	1	/	10	2355.000	-55.05	-13	Pass
2365	23150	1	/	11	2413.500	-48.81	-40	Pass

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM PI/2 BPSK_2312.5MHz_Outer_Full_Ant7

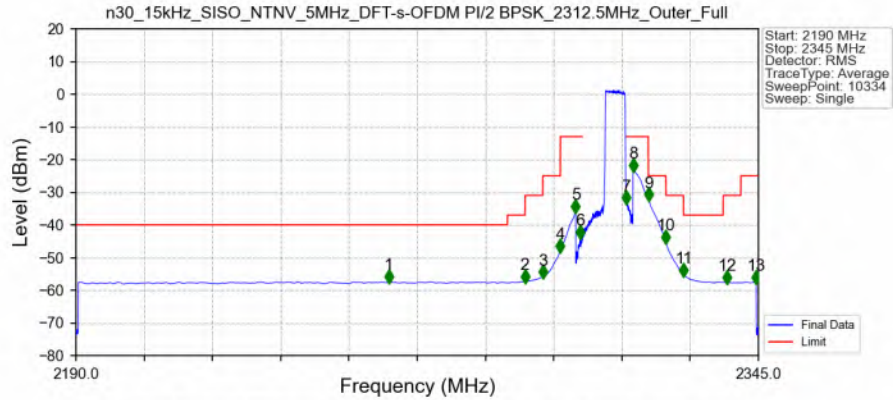


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2261.042	-57.43	-40	Pass
2288	2292	1	CHP	2	2291.973	-57.29	-37	Pass
2292	2296	1	CHP	3	2295.993	-56.01	-31	Pass
2296	2300	1	CHP	4	2299.999	-48.02	-25	Pass
2300	2304	1	CHP	5	2303.494	-35.91	-13	Pass
2304	2305	0.04982	CHP	6	2304.514	-43.72	-13	Pass
2305	2315	0.04982	CHP	/	/	/	/	/
2315	2316	0.04982	CHP	7	2315.014	-33.28	-13	Pass
2316	2320	1	CHP	8	2316.529	-23.35	-13	Pass
2320	2324	1	CHP	9	2320.009	-32.30	-25	Pass
2324	2328	1	CHP	10	2324.014	-45.30	-31	Pass
2328	2337	1	CHP	11	2328.004	-55.36	-37	Pass
2337	2341	1	CHP	12	2337.890	-57.54	-31	Pass
2341	2345	1	CHP	13	2344.490	-57.52	-25	Pass

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_2307.5MHz_Edge_1RB_Left_Ant7

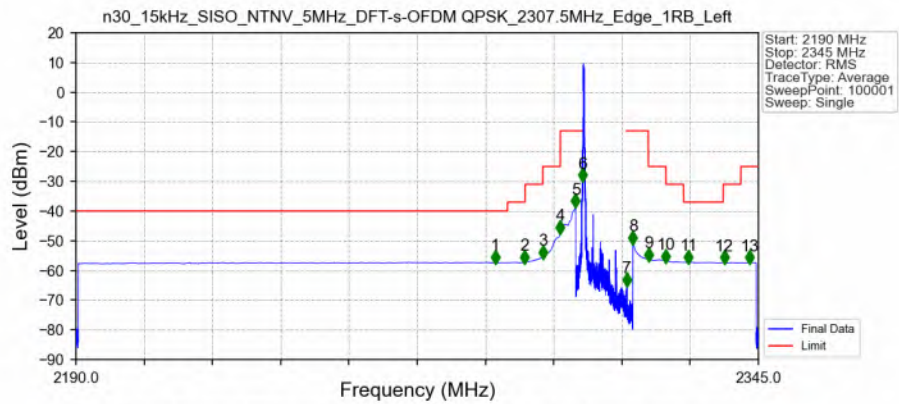


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2285.196	-57.30	-40	Pass
2288	2292	1	CHP	2	2291.874	-57.22	-37	Pass
2292	2296	1	CHP	3	2295.998	-55.49	-31	Pass
2296	2300	1	CHP	4	2299.999	-47.11	-25	Pass
2300	2304	1	CHP	5	2303.497	-38.31	-13	Pass
2304	2305	0.003	/	6	2304.993	-29.67	-13	Pass
2305	2315	0.003	/	/	/	/	/	/
2315	2316	0.003	/	7	2315.128	-64.86	-13	Pass
2316	2320	1	CHP	8	2316.500	-50.73	-13	Pass
2320	2324	1	CHP	9	2320.034	-56.30	-25	Pass
2324	2328	1	CHP	10	2324.005	-56.85	-31	Pass
2328	2337	1	CHP	11	2329.128	-57.25	-37	Pass
2337	2341	1	CHP	12	2337.219	-57.34	-31	Pass
2341	2345	1	CHP	13	2343.028	-57.34	-25	Pass

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_2307.5MHz_Edge_1RB_Left_Ant7

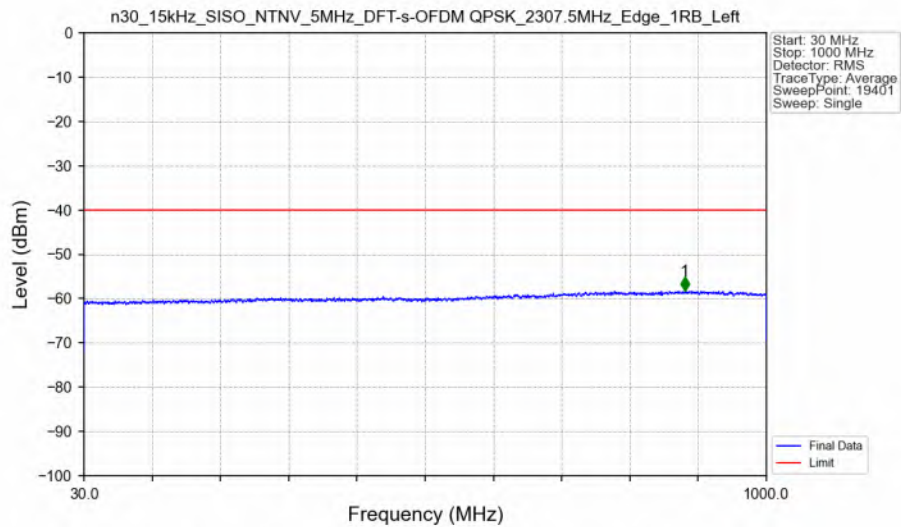


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	1000	1	CHP	1	883.900	-58.28	-40	Pass

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_2307.5MHz_Edge_1RB_Left_Ant7

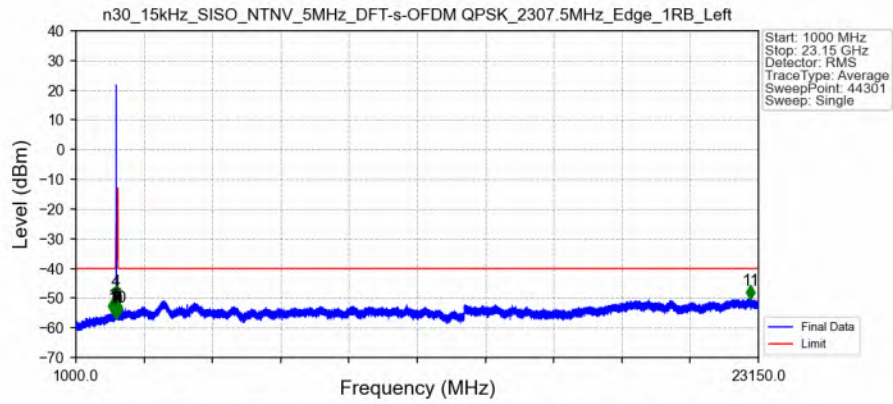


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2288	1	/	1	2190.500	-54.32	-40	Pass
2288	2292	1	/	2	2291.500	-56.04	-37	Pass
2292	2296	1	/	3	2294.500	-54.65	-31	Pass
2296	2300	1	/	4	2299.500	-49.84	-25	Pass
2300	2320	1	/	/	/	/	/	/
2320	2324	1	/	5	2323.000	-54.42	-25	Pass
2324	2328	1	/	6	2328.000	-55.37	-31	Pass
2328	2337	1	/	7	2328.500	-55.58	-37	Pass
2337	2341	1	/	8	2338.000	-55.55	-31	Pass
2341	2345	1	/	9	2345.000	-56.00	-25	Pass
2345	2365	1	/	10	2350.500	-55.30	-13	Pass
2365	23150	1	/	11	22893.500	-49.74	-40	Pass

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_2307.5MHz_Outer_Full_Ant7

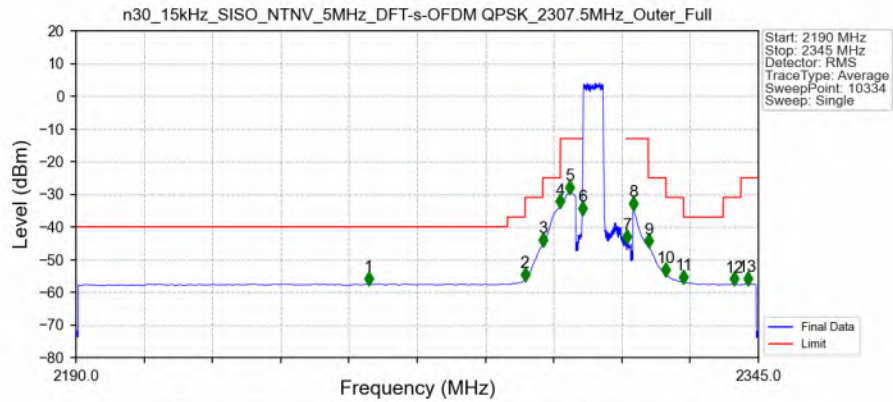


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2256.512	-57.43	-40	Pass
2288	2292	1	CHP	2	2291.988	-56.13	-37	Pass
2292	2296	1	CHP	3	2295.993	-45.45	-31	Pass
2296	2300	1	CHP	4	2299.999	-33.80	-25	Pass
2300	2304	1	CHP	5	2302.084	-29.45	-13	Pass
2304	2305	0.04982	CHP	6	2304.994	-35.80	-13	Pass
2305	2315	0.04982	CHP	/	/	/	/	/
2315	2316	0.04982	CHP	7	2315.224	-44.53	-13	Pass
2316	2320	1	CHP	8	2316.514	-34.47	-13	Pass
2320	2324	1	CHP	9	2320.009	-45.84	-25	Pass
2324	2328	1	CHP	10	2324.014	-54.63	-31	Pass
2328	2337	1	CHP	11	2328.004	-56.89	-37	Pass
2337	2341	1	CHP	12	2339.510	-57.49	-31	Pass
2341	2345	1	CHP	13	2342.555	-57.43	-25	Pass


n30 15kHz SISO NTN 5MHz DFT-s-OFDM QPSK 2310MHz Edge 1RB Left Ant7

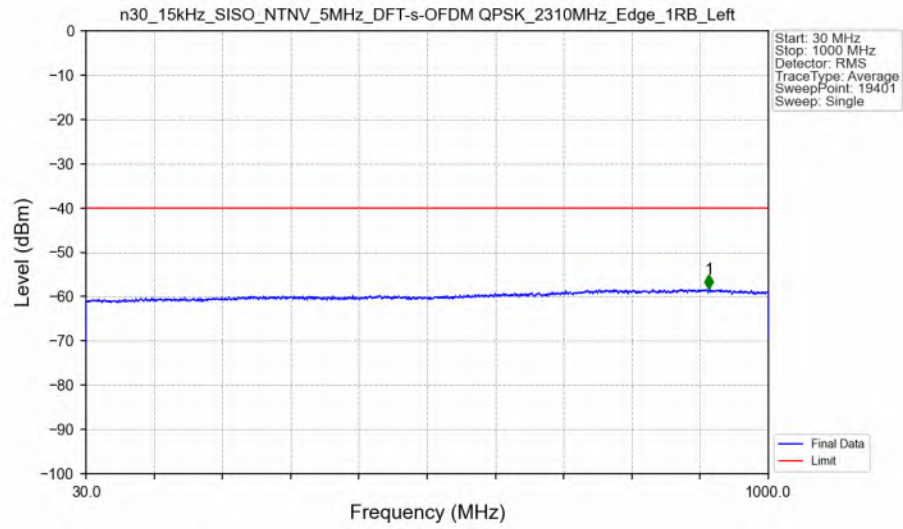

n30 15kHz SISO NTN 5MHz DFT-s-OFDM QPSK 2310MHz Edge 1RB Left Ant7

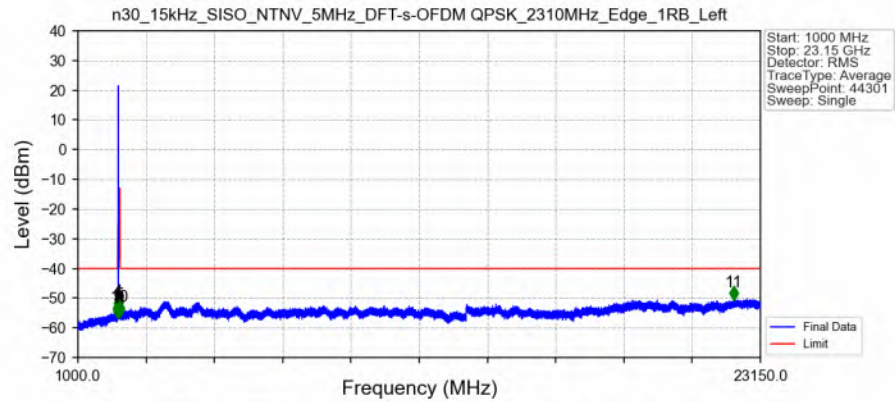


n30 15kHz SISO NTN 5MHz DFT-s-OFDM QPSK 2312.5MHz Edge 1RB Right Ant7

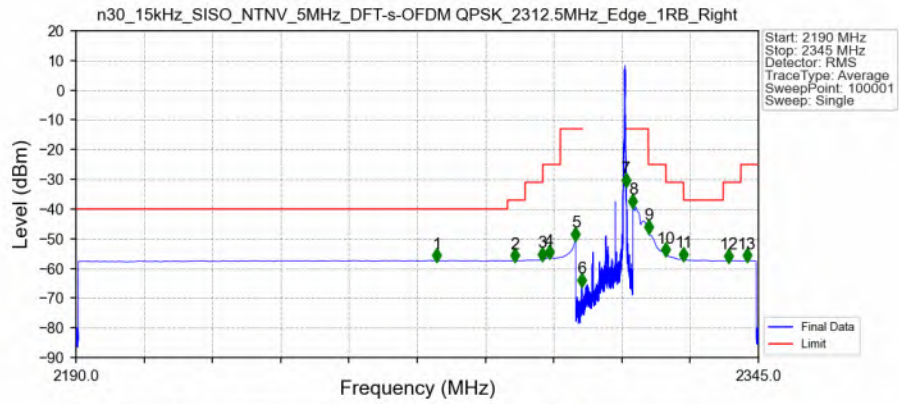


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2271.967	-57.33	-40	Pass
2288	2292	1	CHP	2	2289.642	-57.37	-37	Pass
2292	2296	1	CHP	3	2295.958	-56.97	-31	Pass
2296	2300	1	CHP	4	2297.531	-56.26	-25	Pass
2300	2304	1	CHP	5	2303.499	-50.06	-13	Pass
2304	2305	0.003	/	6	2304.923	-65.67	-13	Pass
2305	2315	0.003	/	/	/	/	/	/
2315	2316	0.003	/	7	2315.008	-31.95	-13	Pass
2316	2320	1	CHP	8	2316.500	-38.96	-13	Pass
2320	2324	1	CHP	9	2320.000	-47.74	-25	Pass
2324	2328	1	CHP	10	2324.001	-55.46	-31	Pass
2328	2337	1	CHP	11	2328.045	-56.90	-37	Pass
2337	2341	1	CHP	12	2338.306	-57.40	-31	Pass
2341	2345	1	CHP	13	2342.373	-57.38	-25	Pass

n30 15kHz SISO NTN 5MHz DFT-s-OFDM QPSK 2312.5MHz Edge 1RB Right Ant7

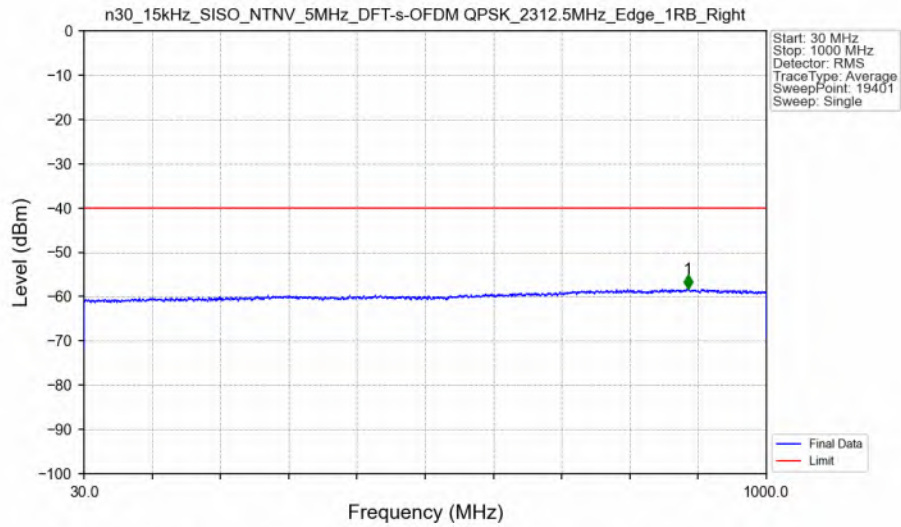


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	1000	1	CHP	1	888.600	-58.23	-40	Pass

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_2312.5MHz_Edge_1RB_Right_Ant7

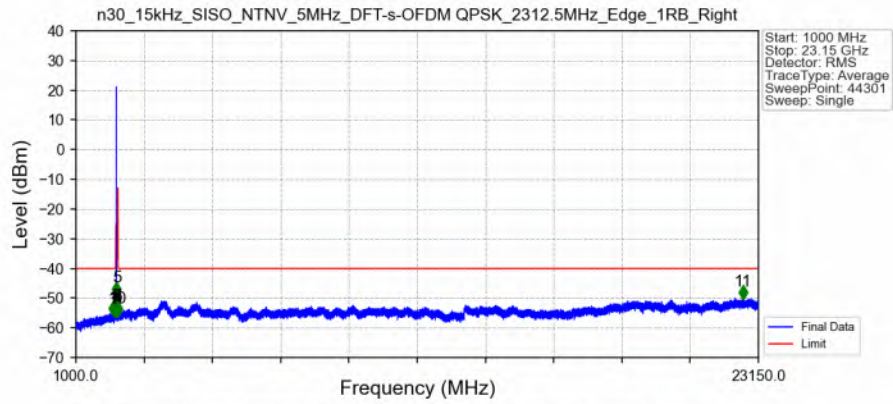


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2288	1	/	1	2212.000	-55.14	-40	Pass
2288	2292	1	/	2	2290.000	-55.60	-37	Pass
2292	2296	1	/	3	2296.000	-55.74	-31	Pass
2296	2300	1	/	4	2297.000	-55.01	-25	Pass
2300	2320	1	/	/	/	/	/	/
2320	2324	1	/	5	2320.500	-48.66	-25	Pass
2324	2328	1	/	6	2324.500	-54.95	-31	Pass
2328	2337	1	/	7	2329.500	-54.87	-37	Pass
2337	2341	1	/	8	2340.000	-54.82	-31	Pass
2341	2345	1	/	9	2342.000	-55.80	-25	Pass
2345	2365	1	/	10	2358.000	-55.51	-13	Pass
2365	23150	1	/	11	22651.000	-49.86	-40	Pass

n30_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_2312.5MHz_Outer_Full_Ant7

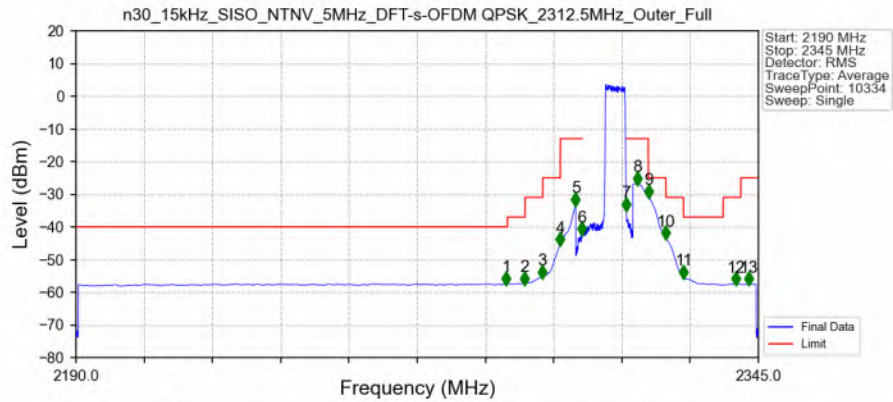


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2287.683	-57.39	-40	Pass
2288	2292	1	CHP	2	2291.853	-57.27	-37	Pass
2292	2296	1	CHP	3	2295.873	-55.30	-31	Pass
2296	2300	1	CHP	4	2299.984	-45.35	-25	Pass
2300	2304	1	CHP	5	2303.494	-33.21	-13	Pass
2304	2305	0.04982	CHP	6	2304.844	-42.16	-13	Pass
2305	2315	0.04982	CHP	/	/	/	/	/
2315	2316	0.04982	CHP	7	2315.014	-34.55	-13	Pass
2316	2320	1	CHP	8	2317.444	-26.69	-13	Pass
2320	2324	1	CHP	9	2320.009	-30.77	-25	Pass
2324	2328	1	CHP	10	2324.014	-43.37	-31	Pass
2328	2337	1	CHP	11	2328.004	-55.46	-37	Pass
2337	2341	1	CHP	12	2339.930	-57.46	-31	Pass
2341	2345	1	CHP	13	2342.780	-57.49	-25	Pass

n30_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_2307.5MHz_Edge_1RB_Left_Ant7

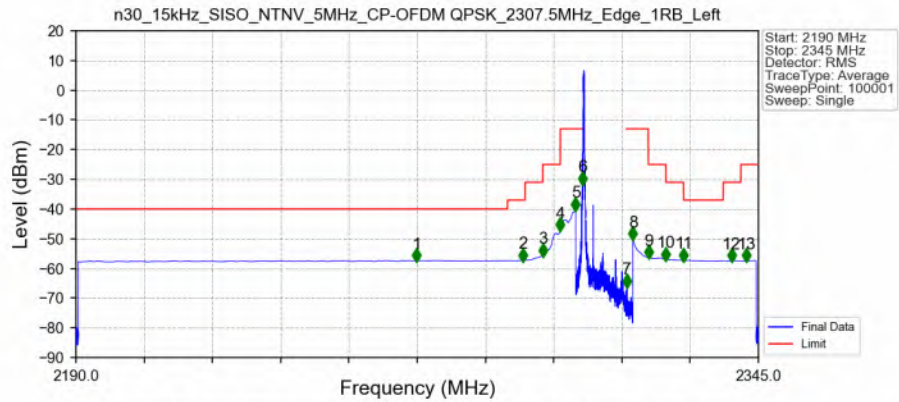


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2267.339	-57.36	-40	Pass
2288	2292	1	CHP	2	2291.479	-57.23	-37	Pass
2292	2296	1	CHP	3	2296.000	-55.49	-31	Pass
2296	2300	1	CHP	4	2299.997	-47.01	-25	Pass
2300	2304	1	CHP	5	2303.496	-40.06	-13	Pass
2304	2305	0.003	/	6	2304.991	-31.42	-13	Pass
2305	2315	0.003	/	/	/	/	/	/
2315	2316	0.003	/	7	2315.150	-65.97	-13	Pass
2316	2320	1	CHP	8	2316.500	-50.00	-13	Pass
2320	2324	1	CHP	9	2320.082	-56.24	-25	Pass
2324	2328	1	CHP	10	2324.001	-56.96	-31	Pass
2328	2337	1	CHP	11	2328.020	-57.21	-37	Pass
2337	2341	1	CHP	12	2338.915	-57.33	-31	Pass
2341	2345	1	CHP	13	2342.331	-57.37	-25	Pass

n30_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_2307.5MHz_Edge_1RB_Left_Ant7

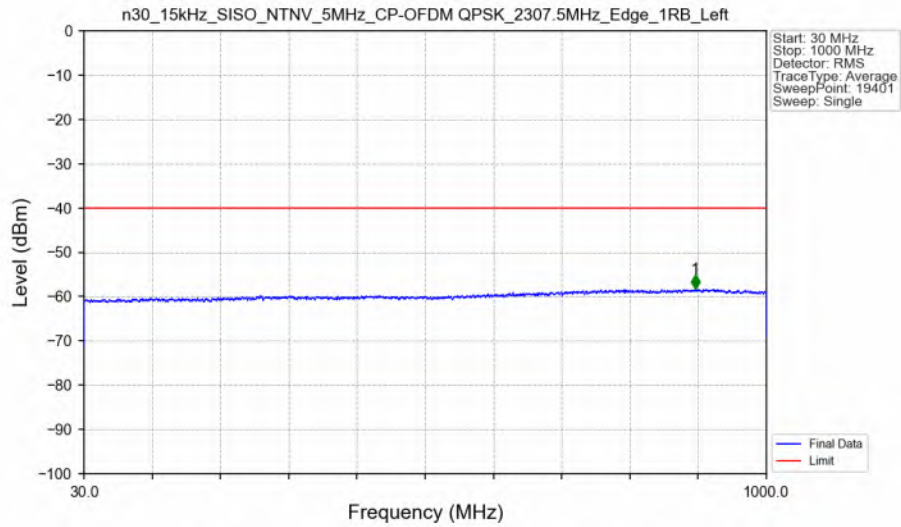


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	1000	1	CHP	1	898.850	-58.23	-40	Pass

n30_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_2307.5MHz_Edge_1RB_Left_Ant7

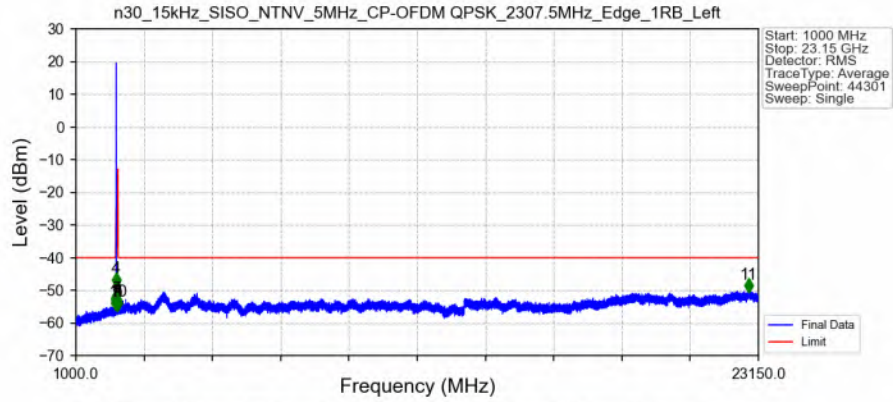


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2288	1	/	1	2278.500	-54.65	-40	Pass
2288	2292	1	/	2	2290.500	-55.53	-37	Pass
2292	2296	1	/	3	2296.000	-54.11	-31	Pass
2296	2300	1	/	4	2299.500	-48.31	-25	Pass
2300	2320	1	/	/	/	/	/	/
2320	2324	1	/	5	2321.000	-55.35	-25	Pass
2324	2328	1	/	6	2324.500	-55.20	-31	Pass
2328	2337	1	/	7	2334.000	-54.59	-37	Pass
2337	2341	1	/	8	2338.500	-55.71	-31	Pass
2341	2345	1	/	9	2344.500	-55.63	-25	Pass
2345	2365	1	/	10	2364.500	-55.42	-13	Pass
2365	23150	1	/	11	22831.000	-50.21	-40	Pass

n30_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_2307.5MHz_Outer_Full_Ant7

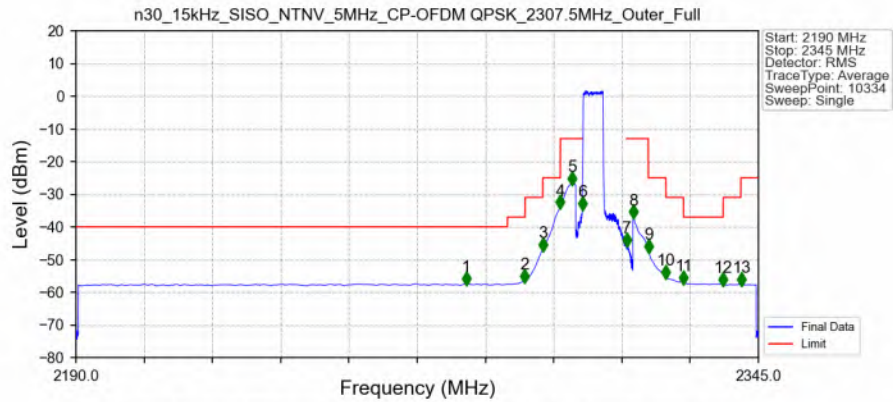


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2278.653	-57.43	-40	Pass
2288	2292	1	CHP	2	2291.913	-56.60	-37	Pass
2292	2296	1	CHP	3	2295.993	-46.94	-31	Pass
2296	2300	1	CHP	4	2299.999	-34.02	-25	Pass
2300	2304	1	CHP	5	2302.609	-26.75	-13	Pass
2304	2305	0.04982	CHP	6	2304.994	-34.37	-13	Pass
2305	2315	0.04982	CHP	/	/	/	/	/
2315	2316	0.04982	CHP	7	2315.059	-45.43	-13	Pass
2316	2320	1	CHP	8	2316.514	-37.01	-13	Pass
2320	2324	1	CHP	9	2320.009	-47.46	-25	Pass
2324	2328	1	CHP	10	2324.014	-55.36	-31	Pass
2328	2337	1	CHP	11	2328.004	-57.06	-37	Pass
2337	2341	1	CHP	12	2337.005	-57.60	-31	Pass
2341	2345	1	CHP	13	2341.160	-57.63	-25	Pass


n30_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_2310MHz_Edge_1RB_Left_Ant7

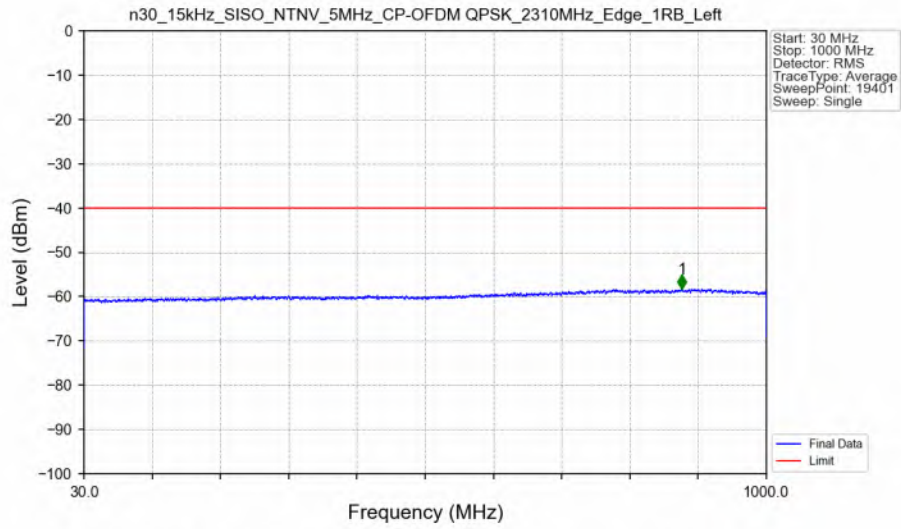

n30_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_2310MHz_Edge_1RB_Left_Ant7

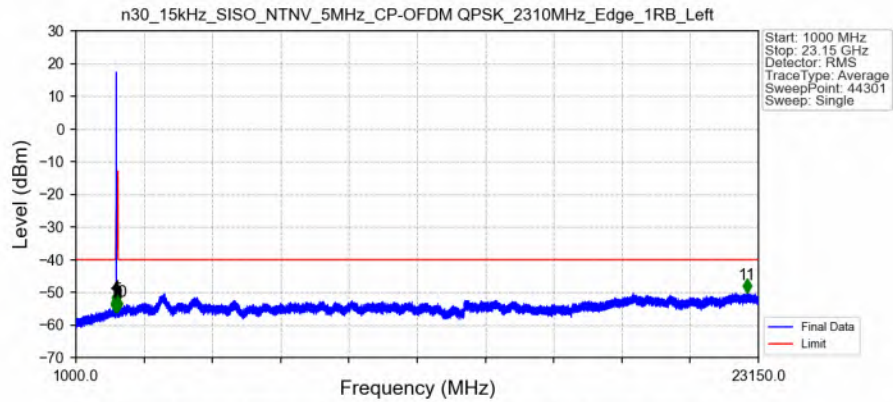


n30_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_2312.5MHz_Edge_1RB_Right_Ant7

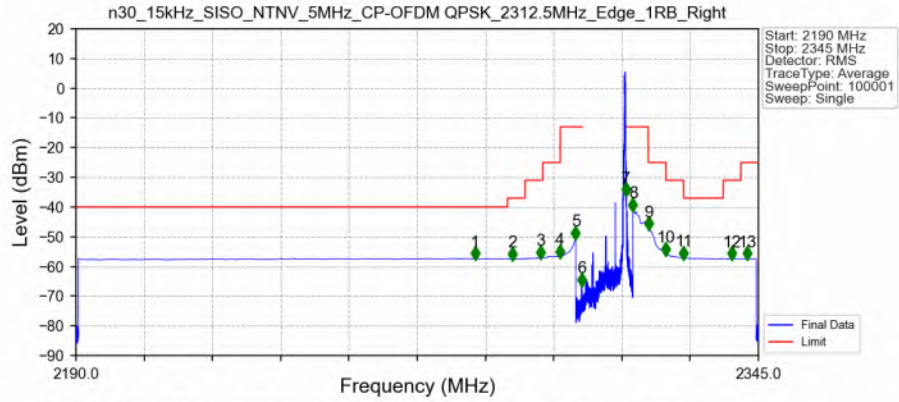


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2280.616	-57.34	-40	Pass
2288	2292	1	CHP	2	2289.081	-57.42	-37	Pass
2292	2296	1	CHP	3	2295.608	-56.99	-31	Pass
2296	2300	1	CHP	4	2299.867	-56.57	-25	Pass
2300	2304	1	CHP	5	2303.499	-50.39	-13	Pass
2304	2305	0.003	/	6	2304.912	-66.27	-13	Pass
2305	2315	0.003	/	/	/	/	/	/
2315	2316	0.003	/	7	2315.008	-35.90	-13	Pass
2316	2320	1	CHP	8	2316.500	-40.82	-13	Pass
2320	2324	1	CHP	9	2320.000	-47.33	-25	Pass
2324	2328	1	CHP	10	2324.015	-55.81	-31	Pass
2328	2337	1	CHP	11	2328.006	-57.13	-37	Pass
2337	2341	1	CHP	12	2339.015	-57.36	-31	Pass
2341	2345	1	CHP	13	2342.458	-57.33	-25	Pass

n30_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_2312.5MHz_Edge_1RB_Right_Ant7

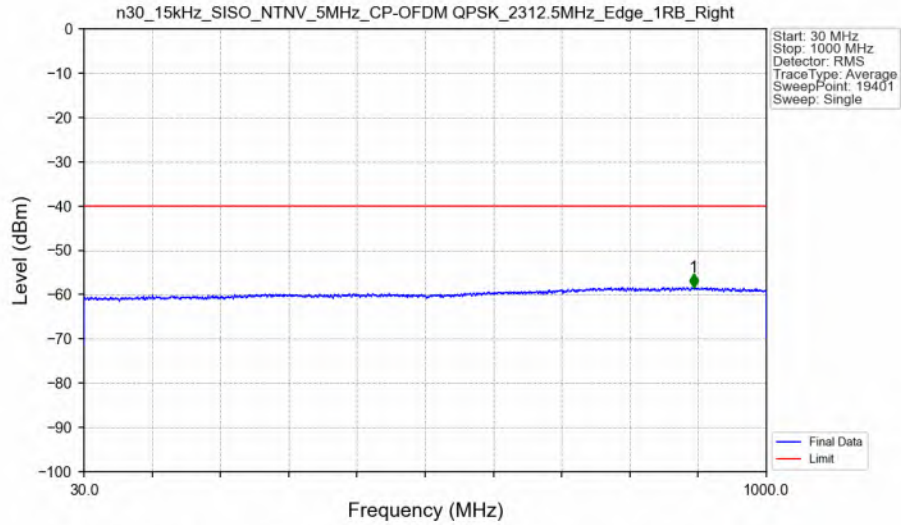


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	1000	1	CHP	1	896.400	-58.32	-40	Pass

n30_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_2312.5MHz_Edge_1RB_Right_Ant7

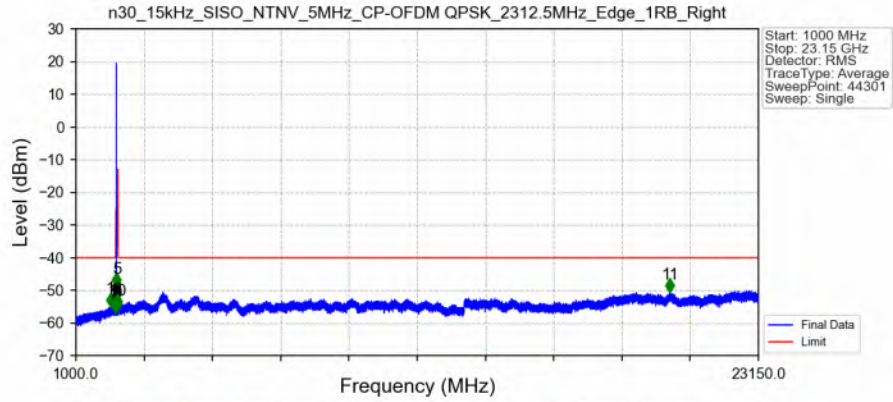


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2288	1	/	1	2126.500	-54.59	-40	Pass
2288	2292	1	/	2	2289.500	-56.21	-37	Pass
2292	2296	1	/	3	2295.500	-55.59	-31	Pass
2296	2300	1	/	4	2299.500	-54.77	-25	Pass
2300	2320	1	/	/	/	/	/	/
2320	2324	1	/	5	2320.500	-48.43	-25	Pass
2324	2328	1	/	6	2326.500	-54.72	-31	Pass
2328	2337	1	/	7	2328.500	-55.36	-37	Pass
2337	2341	1	/	8	2339.000	-55.45	-31	Pass
2341	2345	1	/	9	2344.000	-55.88	-25	Pass
2345	2365	1	/	10	2347.500	-55.14	-13	Pass
2365	23150	1	/	11	20276.500	-50.18	-40	Pass

n30_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_2312.5MHz_Outer_Full_Ant7

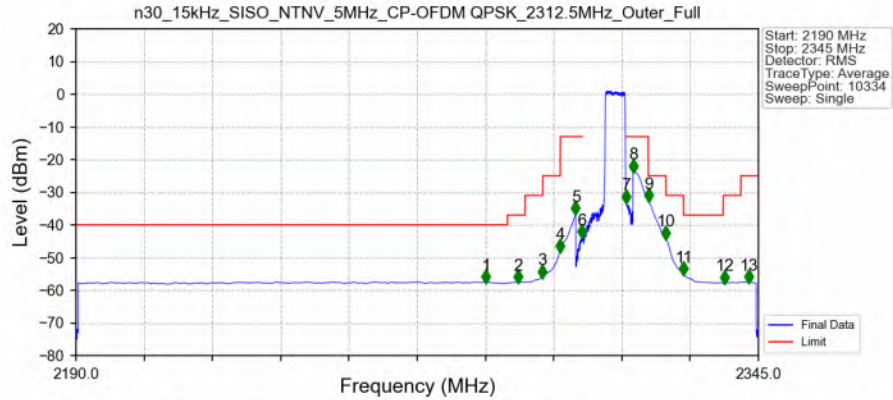


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2283.123	-57.44	-40	Pass
2288	2292	1	CHP	2	2290.383	-57.49	-37	Pass
2292	2296	1	CHP	3	2295.978	-55.85	-31	Pass
2296	2300	1	CHP	4	2299.984	-48.04	-25	Pass
2300	2304	1	CHP	5	2303.494	-36.51	-13	Pass
2304	2305	0.04982	CHP	6	2304.799	-43.66	-13	Pass
2305	2315	0.04982	CHP	/	/	/	/	/
2315	2316	0.04982	CHP	7	2315.044	-32.87	-13	Pass
2316	2320	1	CHP	8	2316.589	-23.46	-13	Pass
2320	2324	1	CHP	9	2320.009	-32.54	-25	Pass
2324	2328	1	CHP	10	2324.014	-44.07	-31	Pass
2328	2337	1	CHP	11	2328.004	-55.02	-37	Pass
2337	2341	1	CHP	12	2337.290	-57.52	-31	Pass
2341	2345	1	CHP	13	2342.825	-57.46	-25	Pass

5.2.2 15_S_10M_NTNV

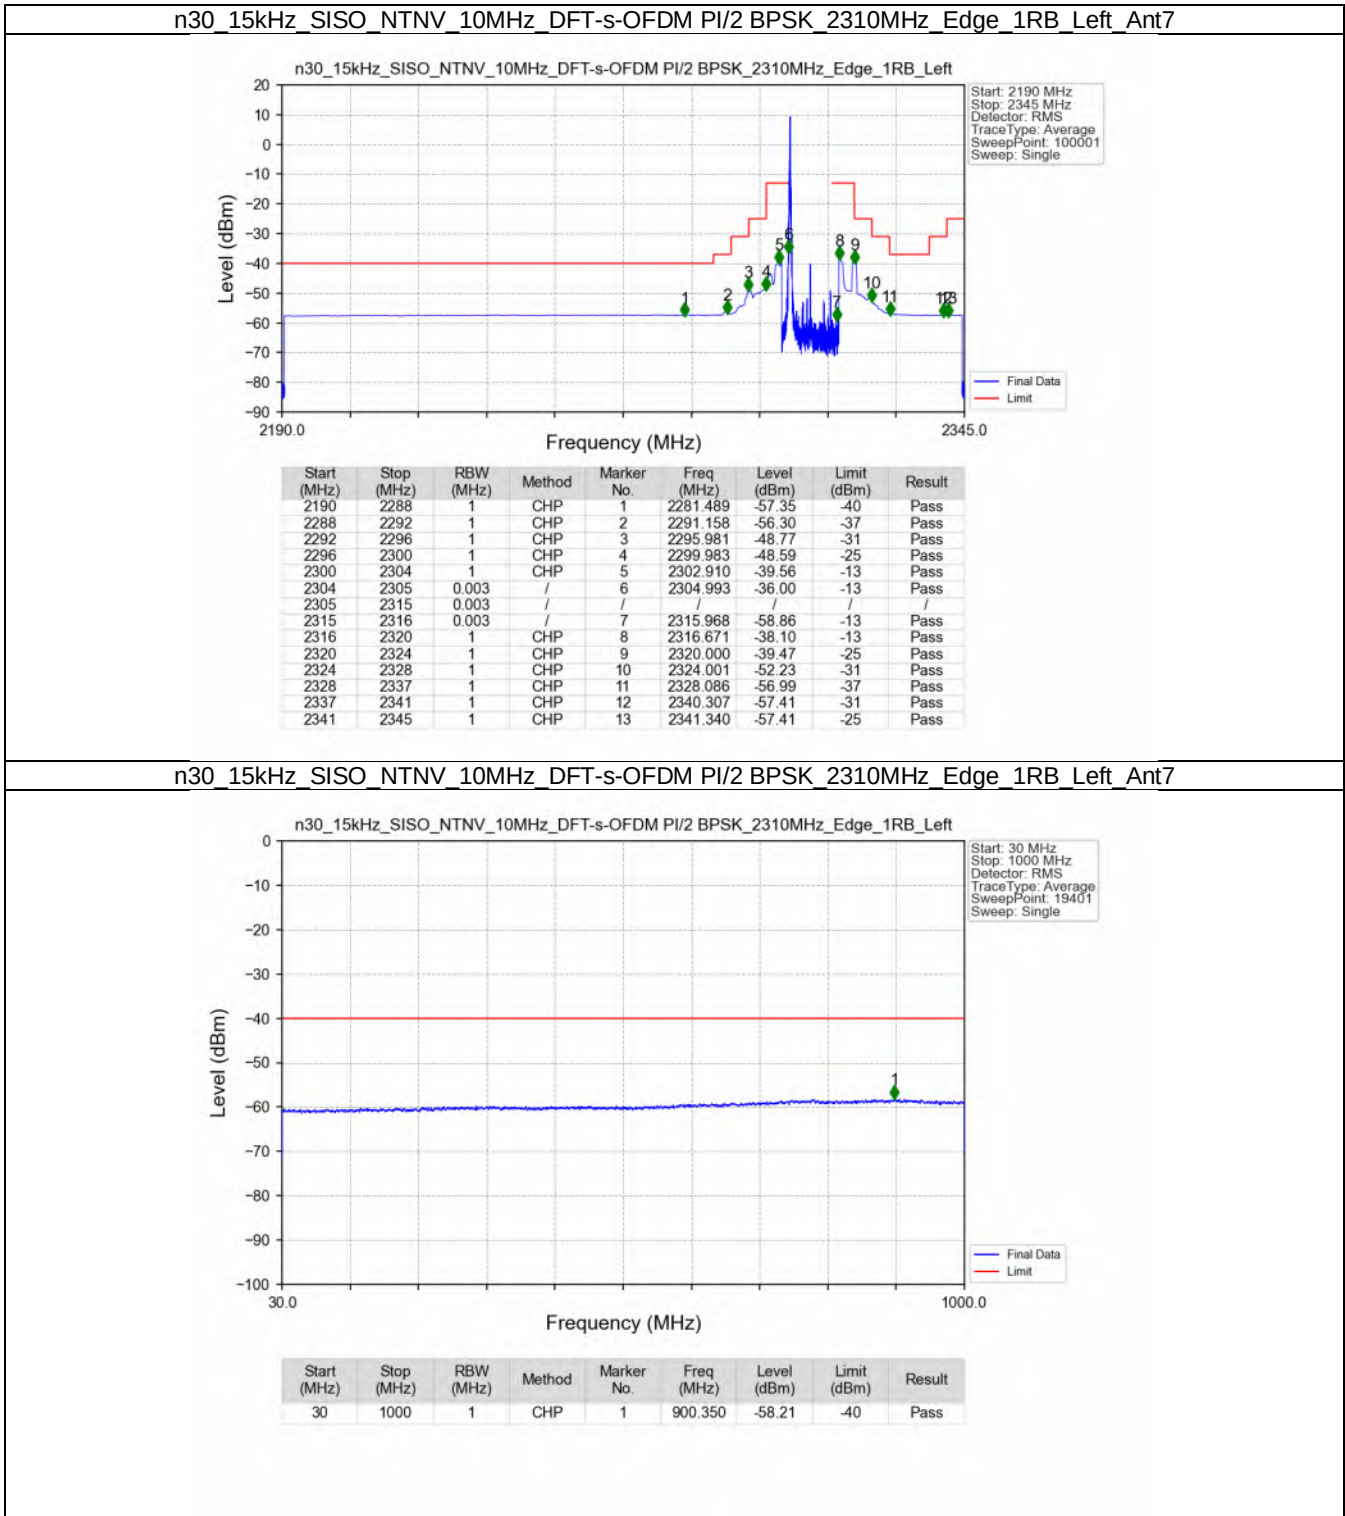


n30 15kHz SISO NTN 10MHz DFT-s-OFDM PI/2 BPSK 2310MHz Edge 1RB Left Ant7

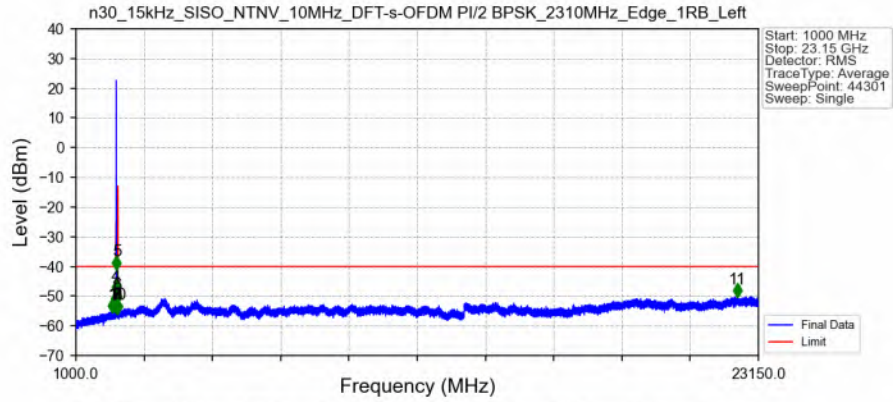


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2288	1	/	1	2182.000	-54.84	-40	Pass
2288	2292	1	/	2	2292.000	-54.91	-37	Pass
2292	2296	1	/	3	2296.000	-52.43	-31	Pass
2296	2300	1	/	4	2297.000	-48.71	-25	Pass
2300	2320	1	/	/	/	/	/	/
2320	2324	1	/	5	2320.500	-40.37	-25	Pass
2324	2328	1	/	6	2324.500	-51.80	-31	Pass
2328	2337	1	/	7	2335.500	-55.34	-37	Pass
2337	2341	1	/	8	2340.000	-55.19	-31	Pass
2341	2345	1	/	9	2345.000	-54.80	-25	Pass
2345	2365	1	/	10	2349.500	-55.07	-13	Pass
2365	23150	1	/	11	22469.000	-49.86	-40	Pass

n30 15kHz SISO NTN 10MHz DFT-s-OFDM PI/2 BPSK 2310MHz Outer_Full Ant7

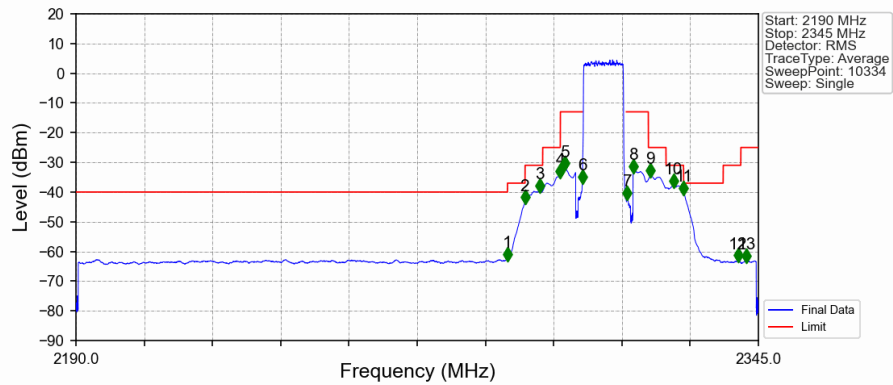


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2287.998	-62.62	-40	Pass
2288	2292	1	CHP	2	2291.988	-43.46	-37	Pass
2292	2296	1	CHP	3	2295.273	-39.63	-31	Pass
2296	2300	1	CHP	4	2299.999	-34.75	-25	Pass
2300	2304	1	CHP	5	2301.034	-32.10	-13	Pass
2304	2305	0.09706	CHP	6	2304.994	-36.48	-13	Pass
2305	2315	0.09706	CHP	/	/	/	/	/
2315	2316	0.09706	CHP	7	2315.209	-41.95	-13	Pass
2316	2320	1	CHP	8	2316.619	-33.01	-13	Pass
2320	2324	1	CHP	9	2320.489	-34.48	-25	Pass
2324	2328	1	CHP	10	2325.679	-37.90	-31	Pass
2328	2337	1	CHP	11	2328.004	-40.33	-37	Pass
2337	2341	1	CHP	12	2340.335	-63.04	-31	Pass
2341	2345	1	CHP	13	2342.330	-63.12	-25	Pass

n30_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_QPSK_2310MHz_Edge_1RB_Left_Ant7

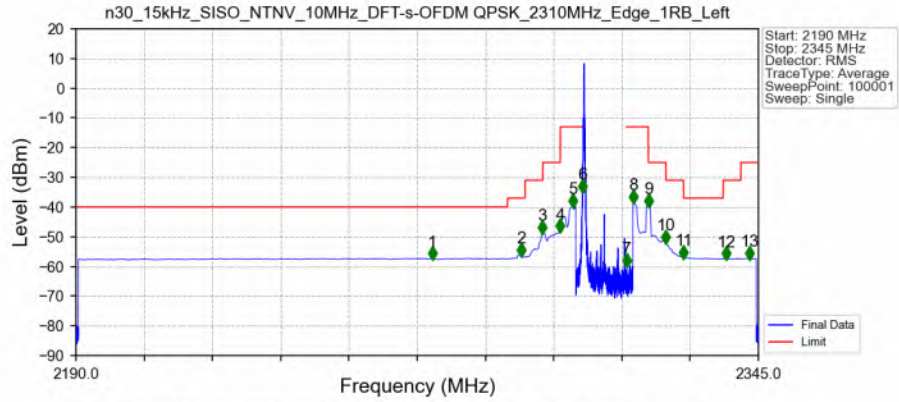


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2270.943	-57.31	-40	Pass
2288	2292	1	CHP	2	2291.137	-56.14	-37	Pass
2292	2296	1	CHP	3	2295.984	-48.55	-31	Pass
2296	2300	1	CHP	4	2299.999	-48.14	-25	Pass
2300	2304	1	CHP	5	2302.829	-39.47	-13	Pass
2304	2305	0.003	/	6	2304.993	-34.58	-13	Pass
2305	2315	0.003	/	/	/	/	/	/
2315	2316	0.003	/	7	2315.085	-59.67	-13	Pass
2316	2320	1	CHP	8	2316.674	-38.17	-13	Pass
2320	2324	1	CHP	9	2320.000	-39.65	-25	Pass
2324	2328	1	CHP	10	2324.001	-51.72	-31	Pass
2328	2337	1	CHP	11	2328.001	-56.92	-37	Pass
2337	2341	1	CHP	12	2337.675	-57.37	-31	Pass
2341	2345	1	CHP	13	2343.030	-57.27	-25	Pass

n30_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_QPSK_2310MHz_Edge_1RB_Left_Ant7

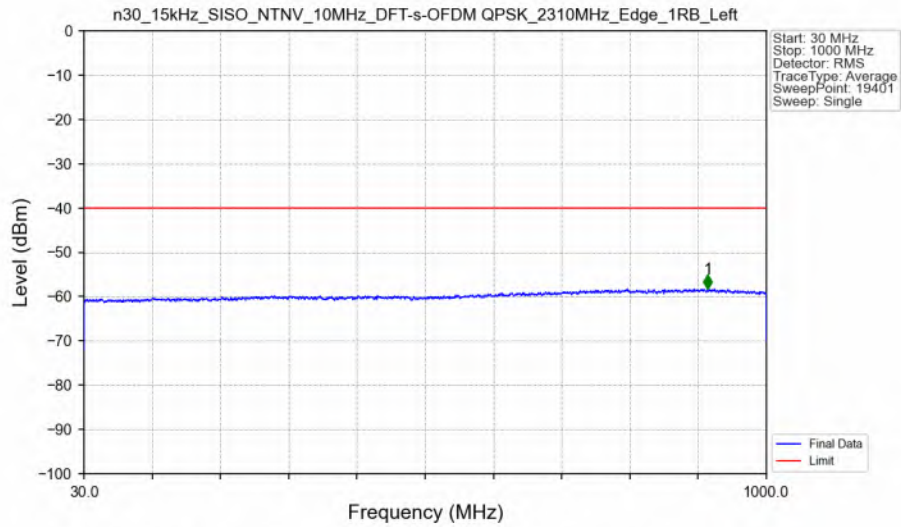


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	1000	1	CHP	1	916.500	-58.21	-40	Pass

n30_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_QPSK_2310MHz_Edge_1RB_Left_Ant7

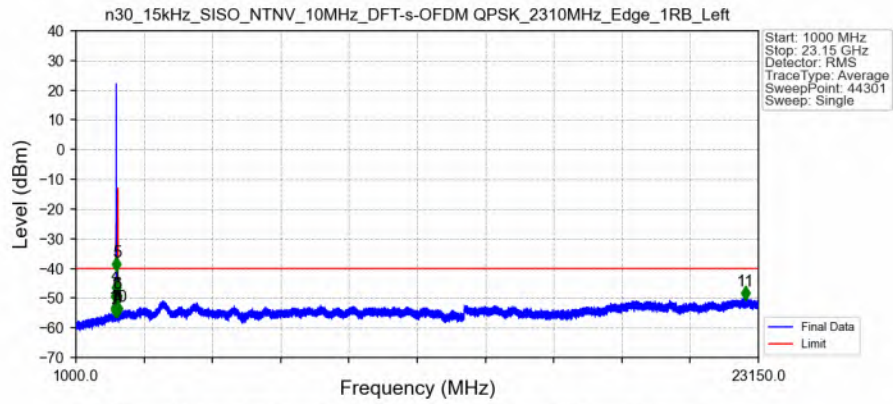


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2288	1	/	1	2271.000	-55.03	-40	Pass
2288	2292	1	/	2	2291.500	-55.81	-37	Pass
2292	2296	1	/	3	2296.000	-50.99	-31	Pass
2296	2300	1	/	4	2299.500	-48.04	-25	Pass
2300	2320	1	/	/	/	/	/	/
2320	2324	1	/	5	2320.500	-40.20	-25	Pass
2324	2328	1	/	6	2324.500	-50.73	-31	Pass
2328	2337	1	/	7	2332.500	-55.09	-37	Pass
2337	2341	1	/	8	2340.000	-55.41	-31	Pass
2341	2345	1	/	9	2341.500	-55.80	-25	Pass
2345	2365	1	/	10	2359.000	-55.17	-13	Pass
2365	23150	1	/	11	22720.000	-50.06	-40	Pass

n30_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_QPSK_2310MHz_Outer_Full_Ant7

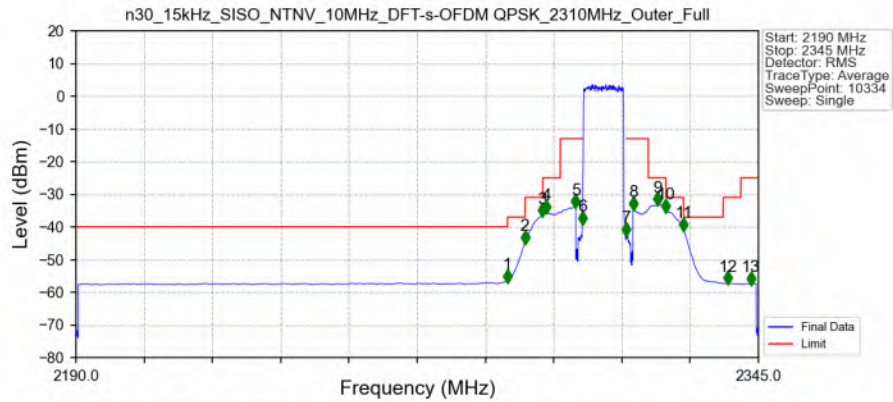


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2287.983	-56.65	-40	Pass
2288	2292	1	CHP	2	2291.988	-44.67	-37	Pass
2292	2296	1	CHP	3	2295.948	-36.51	-31	Pass
2296	2300	1	CHP	4	2296.833	-35.33	-25	Pass
2300	2304	1	CHP	5	2303.494	-33.75	-13	Pass
2304	2305	0.09698	CHP	6	2304.994	-38.87	-13	Pass
2305	2315	0.09698	CHP	/	/	/	/	/
2315	2316	0.09698	CHP	7	2315.014	-42.22	-13	Pass
2316	2320	1	CHP	8	2316.514	-34.44	-13	Pass
2320	2324	1	CHP	9	2322.109	-33.02	-25	Pass
2324	2328	1	CHP	10	2324.014	-35.20	-31	Pass
2328	2337	1	CHP	11	2328.004	-40.79	-37	Pass
2337	2341	1	CHP	12	2338.070	-57.22	-31	Pass
2341	2345	1	CHP	13	2343.305	-57.29	-25	Pass

n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_2310MHz_Edge_1RB_Left_Ant7

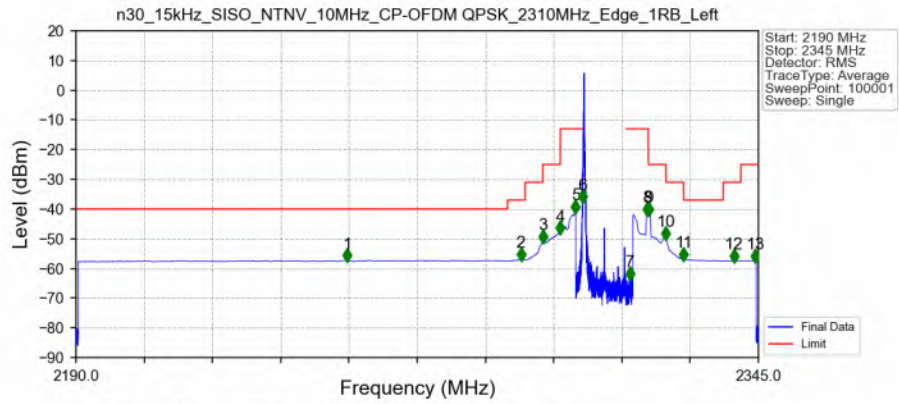


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2251.650	-57.31	-40	Pass
2288	2292	1	CHP	2	2291.054	-56.95	-37	Pass
2292	2296	1	CHP	3	2295.998	-50.88	-31	Pass
2296	2300	1	CHP	4	2299.971	-48.09	-25	Pass
2300	2304	1	CHP	5	2303.496	-41.00	-13	Pass
2304	2305	0.003	/	6	2304.993	-37.51	-13	Pass
2305	2315	0.003	/	/	/	/	/	/
2315	2316	0.003	/	7	2315.880	-63.37	-13	Pass
2316	2320	1	CHP	8	2319.690	-41.65	-13	Pass
2320	2324	1	CHP	9	2320.000	-41.68	-25	Pass
2324	2328	1	CHP	10	2324.001	-49.87	-31	Pass
2328	2337	1	CHP	11	2328.003	-56.95	-37	Pass
2337	2341	1	CHP	12	2339.471	-57.41	-31	Pass
2341	2345	1	CHP	13	2344.329	-57.39	-25	Pass

n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_2310MHz_Edge_1RB_Left_Ant7

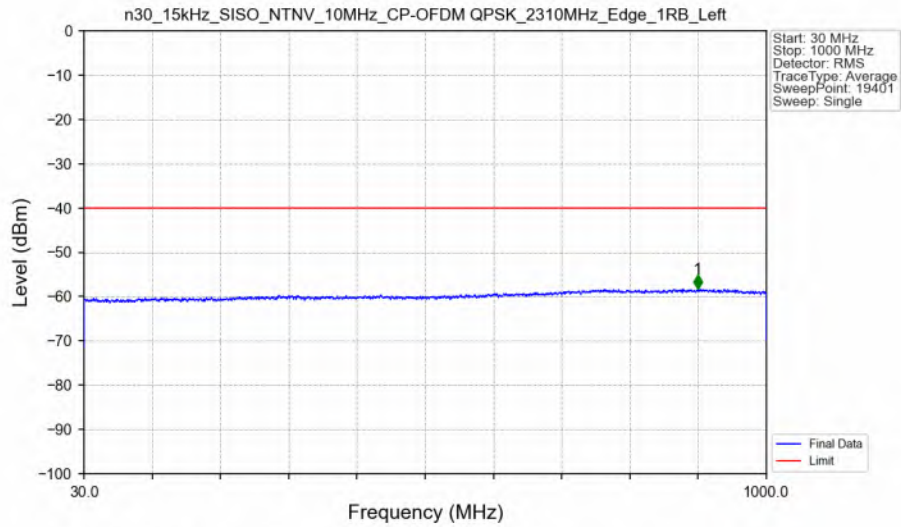


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	1000	1	CHP	1	902.550	-58.22	-40	Pass

n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_2310MHz_Edge_1RB_Left_Ant7

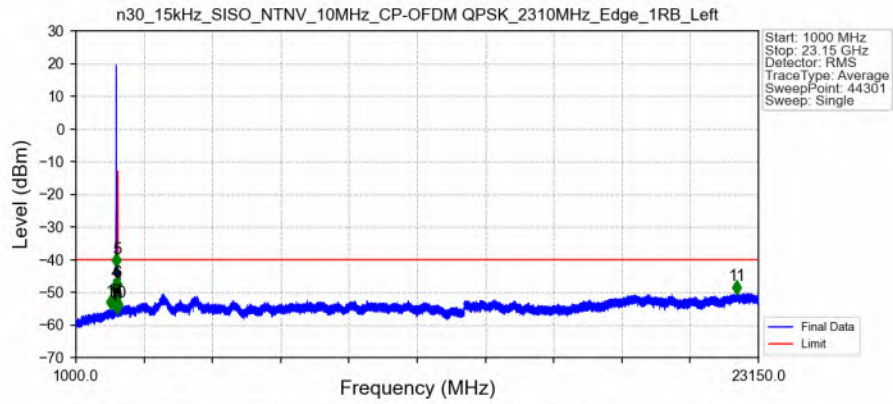

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2288	1	/	1	2114.000	-54.61	-40	Pass
2288	2292	1	/	2	2292.000	-55.17	-37	Pass
2292	2296	1	/	3	2296.000	-50.64	-31	Pass
2296	2300	1	/	4	2298.500	-49.00	-25	Pass
2300	2320	1	/	/	/	/	/	/
2320	2324	1	/	5	2320.500	-41.80	-25	Pass
2324	2328	1	/	6	2324.500	-49.10	-31	Pass
2328	2337	1	/	7	2329.500	-54.69	-37	Pass
2337	2341	1	/	8	2340.500	-55.82	-31	Pass
2341	2345	1	/	9	2345.000	-56.12	-25	Pass
2345	2365	1	/	10	2351.500	-55.30	-13	Pass
2365	23150	1	/	11	22449.500	-50.15	-40	Pass

n30_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_2310MHz_Outer_Full_Ant7

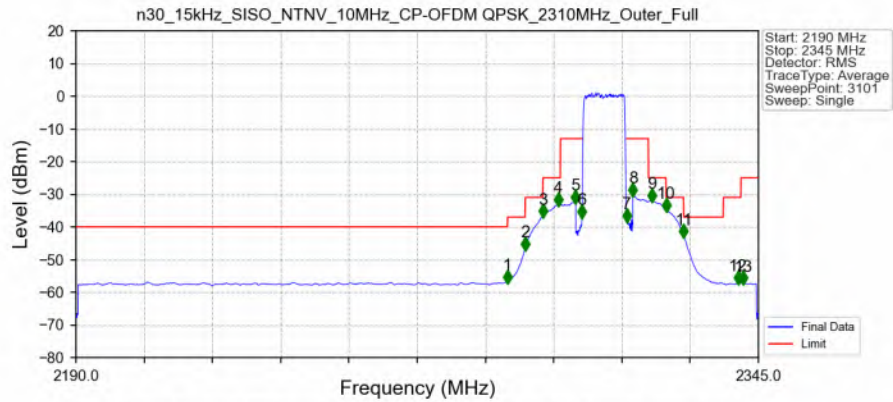

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2190	2288	1	CHP	1	2288.000	-56.83	-40	Pass
2288	2292	1	CHP	2	2292.000	-46.79	-37	Pass
2292	2296	1	CHP	3	2296.000	-36.75	-31	Pass
2296	2300	1	CHP	4	2299.550	-33.14	-25	Pass
2300	2304	1	CHP	5	2303.350	-32.42	-13	Pass
2304	2305	0.10048	CHP	6	2304.950	-36.89	-13	Pass
2305	2315	0.10048	CHP	/	/	/	/	/
2315	2316	0.10048	CHP	7	2315.050	-38.10	-13	Pass
2316	2320	1	CHP	8	2316.500	-30.14	-13	Pass
2320	2324	1	CHP	9	2320.750	-32.00	-25	Pass
2324	2328	1	CHP	10	2324.050	-34.91	-31	Pass
2328	2337	1	CHP	11	2328.050	-42.88	-37	Pass
2337	2341	1	CHP	12	2340.350	-57.19	-31	Pass
2341	2345	1	CHP	13	2341.600	-57.20	-25	Pass