

HAC (T-Coil) Test Report

Application No.: SUCR2510001055WM
Applicant: TCL Communication Ltd.
Address of Applicant: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Manufacturer: TCL Communication Ltd.
Address of Manufacturer: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
EUT Description: GSM/UMTS/LTE/NR Mobile phone
Model No: T807M
FCC ID: 2ACCJH195
Standards: ANSI C63.19-2019
CFR 47 FCC Part 20
Date of Receipt: 2025-10-29
Date of Test: 2025-11-06 to 2025-11-21
Date of Issue: 2025-12-06

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, RunSheng Road, Suzhou Industrial Park,
Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

t (86-512) 6229 2980
www.sgsgroup.com.cn



Revision Record			
Version	Description	Date	Remark
01	Original	2025-12-06	/

Authorized for issue by:				
		Alger Du		
		Alger Du / Project Engineer		
		Leon Liu		
		Leon Liu / Reviewer		

TEST SUMMARY

Frequency Band	HAC T-coil Test Results
GSM 850	PASS
PCS 1900	PASS
WCDMA Band II	PASS
WCDMA Band IV	PASS
WCDMA Band V	PASS
LTE band 2	PASS
LTE band 4	PASS
LTE band 5	PASS
LTE band 7	PASS
LTE band 12	PASS
LTE band 13	PASS
LTE band 14	PASS
LTE band 17	PASS
LTE band 25	PASS
LTE band 26	PASS
LTE band 30	PASS
LTE band 38	PASS
LTE band 41	PASS
LTE band 42	PASS
LTE band 48	PASS
LTE band 66	PASS
LTE band 71	PASS
FR1 n2	PASS
FR1 n5	PASS
FR1 n7	PASS
FR1 n12	PASS
FR1 n14	PASS
FR1 n25	PASS
FR1 n26	PASS
FR1 n30	PASS
FR1 n38	PASS
FR1 n41	PASS
FR1 n48	PASS
FR1 n66	PASS
FR1 n70	PASS
FR1 n71	PASS
FR1 n77	PASS
FR1 n78	PASS
WLAN2.4GHz	PASS
WLAN5GHz	PASS
WLAN6GHz	PASS
HAC Results: PASS	

CONTENTS

1	General Information	5
1.1	Introduction.....	5
1.2	Test Location.....	6
1.3	Test Facility	6
1.4	General Description of EUT	7
1.4.1	DUT Antenna Locations.....	9
1.4.2	List of air interfaces/frequency bands.....	10
1.5	Test Specification.....	12
1.6	ANSI C63.19-2019 limits	12
2	Environmental Conditions.....	13
3	HAC (T-Coil) Measurement System	14
3.1	Measurement System Diagram for SPEAG Robotic	14
3.2	T-Coil Measurement	15
3.3	System Calibration	20
3.4	Audio Magnetic Probe AM1DV3	21
3.5	Test Arch.....	21
3.6	Phone Holder	21
3.7	AMCC- Audio Magnetic Calibration Coil	22
3.8	AMMI - Audio Magnetic Measurement Instrument	22
4	Measurement uncertainty evaluation.....	23
5	HAC (T-Coil) Measurement	24
5.1	T-Coil Performance Requirements	24
5.2	T-Coil measurement points and reference plane	26
5.3	T-Coil Measurement Procedure.....	27
6	T-Coil testing for CMRS Voice.....	28
6.1	General Description.....	28
6.2	GSM Tests Results.....	28
6.3	UMTS Tests Results.....	29
7	T-Coil testing for CMRS IP Voice	30
7.1	VoLTE and VoNR Tests Results.....	30
7.2	VoWiFi Tests Results	35
7.3	T-Coil testing for OTT VoIP Application	37
8	Equipment list	39
9	Calibration certificate.....	40
10	Photographs.....	40
	Appendix A: Detailed Test Results	40
	Appendix B: Calibration certificate.....	40
	Appendix C: Photographs	40

1 General Information

1.1 Introduction

The purpose of this standard is to provide tests and establish requirements for hearing aids and for WDs that allow a hearing aid user to effectively use a WD when both the hearing aid and WD meet the requirements of this standard. The various parameters required in order to demonstrate compatibility are measured. The design of the standard is such that when a hearing aid and a WD achieve the specified requirements, as measured by the methodology of this standard, the user of a hearing aid can effectively use a WD in order to provide for the usability of a hearing aid with a WD, several factors are coordinated, as follows:

- a) The field strength emitted by a WD must not exceed the RF immunity of the hearing aid.
- b) The T-Coil baseband H-field transmission of the WD must be compatible with the T-Coil mode of the hearing aid.
- c) The magnetic noise from the WD in the T-Coil band must not degrade the reception quality to unacceptable levels.

Both the WD's RF and audio-band emissions are measured. Hence, the following measurements are made for the WDs:

- a) RF amplitude modulation characteristics and power level or, optionally, near-field E-field emissions
- b) T-Coil mode, magnetic signal strength in the audio band.
- c) T-Coil mode, magnetic noise in the audio band
- d) T-Coil mode, magnetic signal frequency response in the audio band

Corresponding to these quantities, the hearing aid is measured for the following:

- 1) RF immunity in microphone mode
- 2) RF immunity in T-Coil mode

1.2 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone

No tests were sub-contracted.

1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

1.4 General Description of EUT

Device Type:	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Name:	GSM/UMTS/LTE/NR Mobile phone		
Model No.(EUT):	T807M		
Product Phase:	Identical Prototype		
IMEI:	016765000002659/061765000002667		
Hardware Version:	03		
Software Version:	BJ3X		
Antenna Type:	Integrated Antenna		
Modulation Mode:	GSM: GMSK, 8PSK;		
	WCDMA: QPSK,16QAM;		
	LTE: QPSK,16QAM,64QAM,256QAM;		
	NR: BPSK,QPSK,16QAM,64QAM,256QAM,DFT-s-OFDM,CP-OFDM		
	WIFI: DSSS, OFDM,OFDMA; BT: GFSK, $\pi/4$ DQPSK,8DPSK		
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12
HSDPA UE Category:	24	HSUPA UE Category	7
Power Class	4, tested with power level 5(GSM8500)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(WCDMA Band)		
	3, tested with power control Max Power(LTE Band)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824 - 849	869 - 894
	PCS 1900	1850 - 1910	1930 - 1990
	WCDMA band 2	1850 -1910	1930 - 1990
	WCDMA band 4	1710 -1755	2110 - 2155
	WCDMA band 5	824 - 849	869 - 894
	LTE band 2	1850 - 1910	1930 - 1990
	LTE band 4	1710 - 1755	2110 - 2155
	LTE band 5	824 - 849	869 - 894
	LTE band 7	2500 - 2570	2620 - 2690
	LTE band 12	699 - 716	729 - 746
	LTE band 13	777 - 787	746 - 756
	LTE band 14	788 - 798	758 - 768
	LTE band 17	704 - 716	734 - 746
	LTE band 25	185 - 1915	1930 - 1995
	LTE band 26	814 - 849	859 - 894
	LTE band 30	2305 - 2315	2350 - 2360
	LTE band 38	2570 - 2620	2570 - 2620
	LTE band 41	2496 - 2690	2496 - 2690
	LTE band 42	3400 - 3600	3400 - 3600
	LTE band 48	3550 - 3700	3550 - 3700

	LTE band 66	1710 - 1780	2110 - 2200
	LTE band 71	663 - 698	617 - 652
	FR1 n2	1850 - 1910	1930 - 1990
	FR1 n5	824 - 849	869 - 894
	FR1 n7	2500 - 2570	2620 - 2690
	FR1 n12	699 - 716	729 - 746
	FR1 n14	788 - 798	758- 768
	FR1 n25	1850 - 1915	1930 - 1995
	FR1 n26	814 - 849	859 - 894
	FR1 n30	2305 - 2315	2350 - 2360
	FR1 n38	2570 - 2620	2570 - 2620
	FR1 n41	2496 - 2690	2496 - 2690
	FR1 n48	3550 - 3700	3550 - 3700
	FR1 n66	1710 - 1780	2110 - 2200
	FR1 n70	1695 - 1710	1995 - 2020
	FR1 n71	663 - 698	617 - 652
	FR1 n77	3450 - 3980	3450 - 3980
	FR1 n78	3450 - 3800	3450 - 3800
	WLAN2.4GHz	2412~2462	2412~2462
	WLAN5GHz	5180~5240	5180~5240
		5260~5320	5260~5320
		5500~5720	5500~5720
		5745~5825	5745~5825
	WLAN6GHz	5925~6425	5925~6425
	Bluetooth	2402~2480	2402~2480
Battery Information:	Model:	TLp050E7	
	Normal Voltage:	3.91V	
	Rated capacity:	5200mAh	
	Manufacturer1:	DONGGUAN veken battery Co.,Ltd.	
Note: *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.			

1.4.1 DUT Antenna Locations

ANT6 GPS L5+UHB MIMO PRX

1. GPS L5
 2. UHB MIMO PRX
- LTE 48
NR 48/77/78
ANT12 WIFI 5G CH0

ANT8 WIFI 2.4G CH0+GPS L1

ANT10 UHB MIMO

1. UHB MIMO DRX
 2. WIFI 5G CH1
- LTE 48
NR 48/77/78


ANT11 MHB MIMO DRX

1. MHB MIMO DRX
- LTE
1/2/3/4/7/9/25/30/34/40/41/66/70
NR 2/25/30/41/66/70

ANT9 WIFI 2.4G CH1

ANT2 LB TRX

1. LB TRX
- GSM 850/900
WCDMA 5
LTE 5/8/12/13/14/17/18/19/20/26/28/29/71
NR 5/12/14/20/26/28/29/71

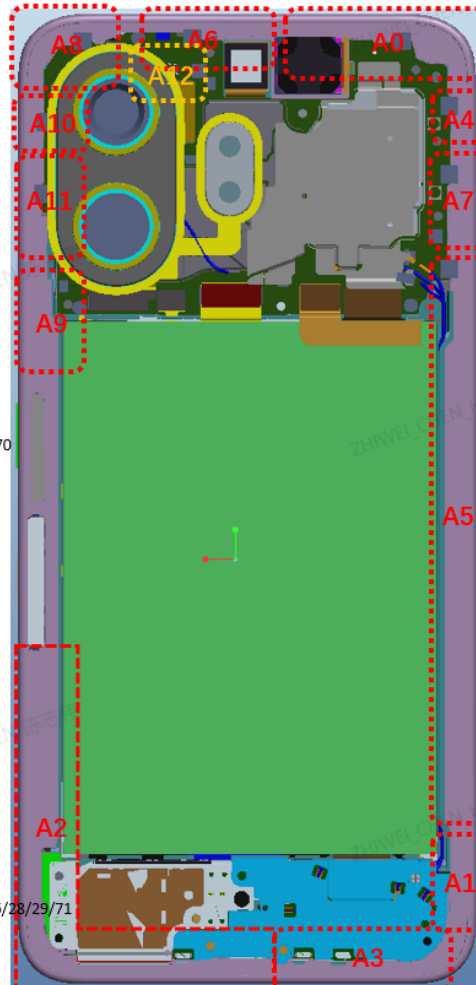

ANT0 MB TRX+HB MIMO PRX

1. MB TRX
- GSM 1800/1900
WCDMA 1/2/4
LTE 1/2/3/4/9/25/34/39/66/70
NR 2/25/66/70- 2. HB MIMO PRX

LTE 7/41
NR 7/41

ANT4 UHB TRX

1. UHB TRX
- LTE 48
NR 48/77/78

ANT7 HB TRX+MB MIMO PRX

1. HB TRX
- LTE 7/30/38/41
NR 7/30/38/41- 2. MB MIMO PRX

LTE 2/4/25/66/70
NR 2/25/66/70

ANT5 LB DRX

1. LB DRX
- GSM 850/900
WCDMA 5
LTE 5/8/12/13/14/17/18/19/20/26/28/29/71
NR 5/12/14/20/26/28/29/71

ANT1 B40 TRX+UHB DRX

1. B40 TRX
- LTE 40
NR 40- 2. UHB DRX

LTE 48
NR 48/77/78

ANT3 MHB TRX2+MHB DRX

1. MHB TRX2
- LTE 2/4/7/25/38/41/66
NR 41- 2. MHB DRX

WCDMA 1/2/4
LTE 2/4/7/25/38/39/41/66/70
NR 7/25/38/41/66/70

1.4.2 List of air interfaces/frequency bands

Air Interface	Band (MHz)	Type	ANSI C63.19	Simultaneous Transmitter	Name of Voice Service	Power Reduction
			Tested			
GSM	GSM850	VO	Yes	BT, Wi-Fi	CMRS Voice	NO
	GSM1900					
WCDMA	Band II	VO	Yes	BT, Wi-Fi	CMRS Voice	NO
	Band IV					
	Band V					
	HSPA	VD	NO		Google Meet*	
LTE FDD	LTE band 2	VD	Yes	5G NR, BT, Wi-Fi	VoLTE Google Meet*	NO
	LTE band 4					
	LTE band 5					
	LTE band 7					
	LTE band 12					
	LTE band 13					
	LTE band 14					
	LTE band 17					
	LTE band 25					
	LTE band 26					
	LTE band 30					
	LTE band 66					
	LTE band 71					
LTE TDD	LTE band 38	VD	Yes	5G NR, BT, Wi-Fi	VoLTE Google Meet*	NO
	LTE band 41					
	LTE band 42					
	LTE band 48					
FR1 FDD	FR1 n2	VD	Yes	LTE, BT, Wi-Fi	VoNR Google Meet*	NO
	FR1 n5					
	FR1 n7					
	FR1 n12					
	FR1 n14					
	FR1 n25					
	FR1 n26					
	FR1 n30					
	FR1 n66					
	FR1 n70					
FR1 TDD	FR1 n71					
	FR1 n38	VD	Yes	LTE, BT, Wi-Fi	VoNR Google Meet*	NO
	FR1 n41					
	FR1 n48					
	FR1 n77					
	FR1 n78					
Wi-Fi	2437	VD	Yes	WWAN, BT	VoWiFi Google Meet*	NO
	5190					
	5200					
	5210					
	5280					
	5580					
	5785					
	5975					

BT	2437	DT	No(1)	WWAN, WiFi	NA	NO
VO: Legacy Cellular Voice Service DT: Digital Transport (no voice) VD: IP Voice Service over Digital Transport *ANSI C63.19-2019 use table 6.1 to establish the Normal speech input level and NOTE 2 of table 6.1 identifies the group of VoIP voice services that use -16 dBm0 as the normal speech input level. Remark: 1.The WLAN6GHz U-NII 6/7/8 were above 6GHz and were not evaluated due to outside of the current scope of ANSI C63.19 and FCC HAC regulations. 2. The WLAN6GHz UNI-5 was evaluated for operations which are entirely below 6GHz, above 6 GHz were not evaluated due outside of the current scope of ANSI C63.19 and FCC HAC regulations. 3. Because features of Google Meet allow the option of voice-only communications, Meet has been tested for HAC/T-Coil compatibility to ensure the best user experience. 4. The Google Meet and google Fi the audio path, parameter and audio codec are all the same, therefore, the Google Meet is evaluation for this device to show compliance.						

1.5 Test Specification

Identity	Document Title
CFR 47 FCC Part 20	§20.19 Hearing aid-compatible mobile handsets.
ANSI C63.19-2019	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices
KDB 285076 D01	HAC Guidance v06r04
KDB 285076 D02	T-Coil testing v04

1.6 ANSI C63.19-2019 limits

GSM operating modes:

- The primary group shall include at least 25 measurement points.
- The secondary group shall include at least 125 contiguous measurement points.

Non-2G GSM operating modes:

- The primary group shall include at least 75 measurement points.
- The secondary group shall include at least 300 contiguous measurement points

Additionally, to avoid an oddly shaped area of low noise, the secondary group shall include at least one longitudinal column of at least 10 contiguous qualifying points and at least one transverse row containing at least 15 contiguous qualifying points.

2 Environmental Conditions

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%

Table 1: The Ambient Conditions

3 HAC (T-Coil) Measurement System

3.1 Measurement System Diagram for SPEAG Robotic

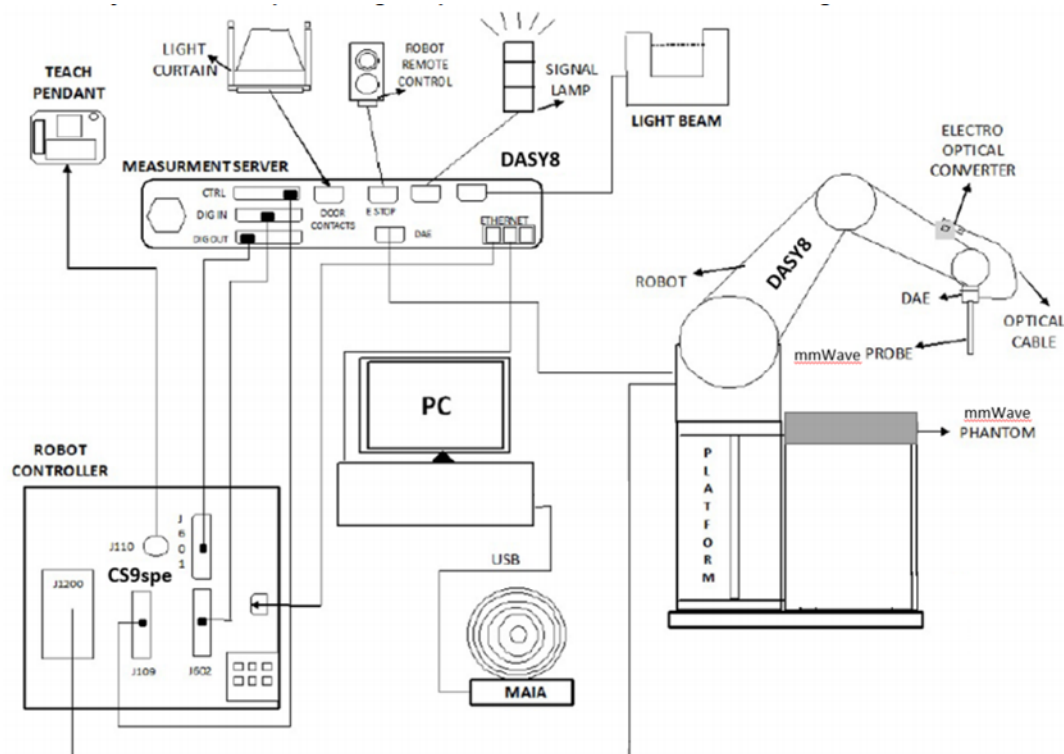


Fig. 1. The SPEAG Robotic Diagram

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- An Audio Magnetic probe.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows system.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The Test Arch SAM phantom
- The device holder for handheld mobile phones.
- Validation dipole kits allowing to validate the proper functioning of the system.

3.2 T-Coil Measurement

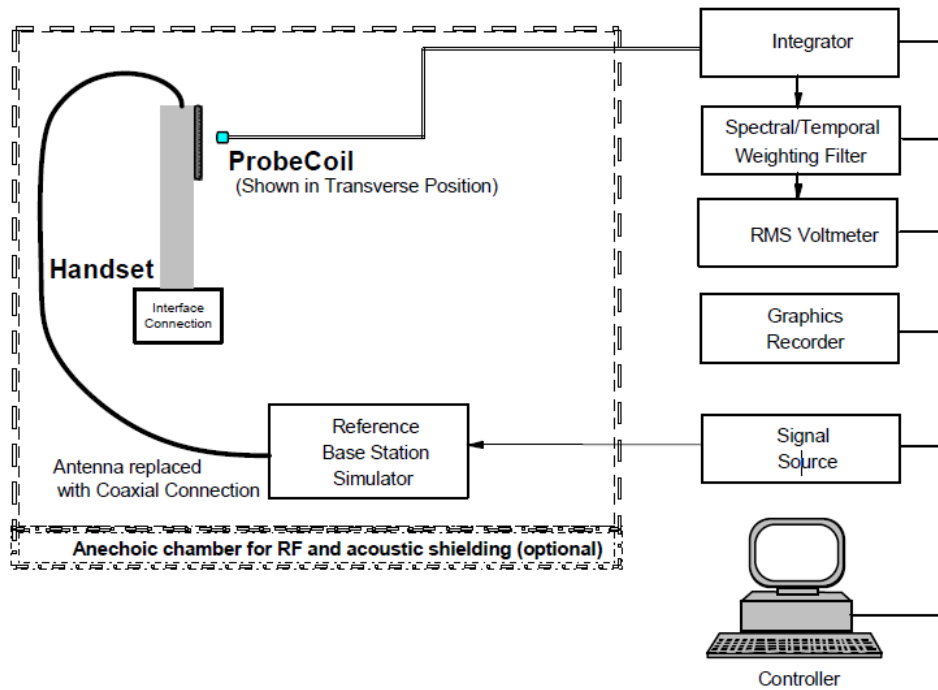


Fig. 2. T-coil signal measurement test setup-in call method

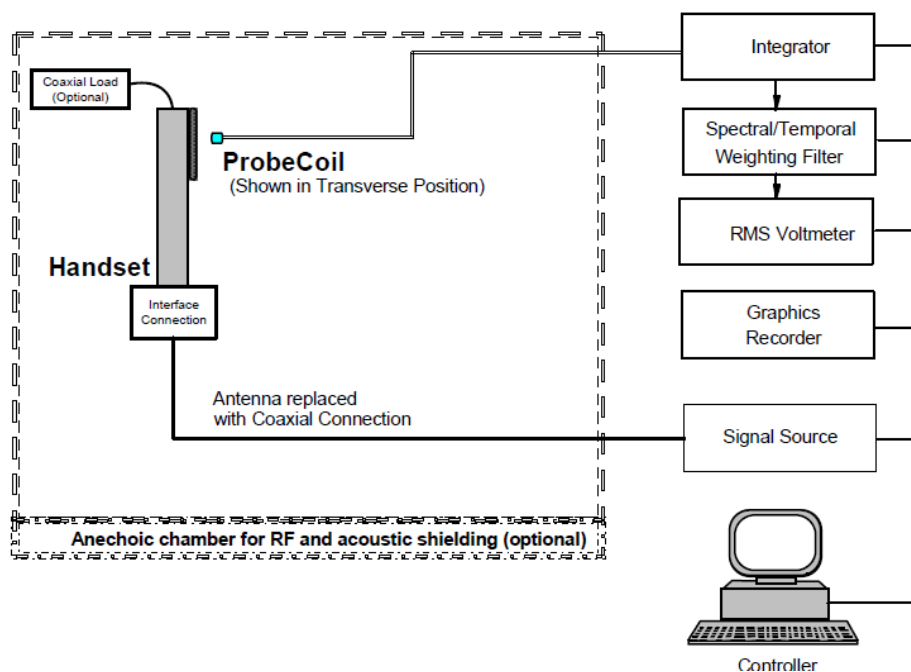


Fig. 3. T-coil signal measurement test setup-test mode method.

The reference axis is normal to the reference plane and passes through the center of the acoustic output (or the center of the whole array); or may be centered on or near a secondary inductive source. The actual location of the reference axis and resultant measurement area shall be noted in the test report.

The measurement area shall be 50 mm by 50 mm. The measurement area for both desired ABM signal and undesired ABM field may be located where the transverse magnetic measurements are optimum with regard to the requirements. However, the measurement area should be in the vicinity of the acoustic output of the WD and shall be in the same half of the phone as the WD receiver. In a WD handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.

Measurements of desired ABM signal strength and undesired ABM field are made at 2.0 mm $\pm$ 0.5 mm or 4 mm intervals in an X-Y measurement area pattern over the entire measurement area (676 measurement points total); either all measured or measured plus interpolated.

Note.

#. The EUT do not use the special HAC SW.

#. Setting the maximum volume for EUT during the measurement.

#. For the measurement, it doesn't use the "post-test measurement processing of results".

#. Per KDB 285076 D01 v06r04, handsets that have the ability to support concurrent connections using simultaneous transmissions shall be independently tested for each air interface/band given in ANSI C63.19-2019. At the present time ANSI C63.19 does not provide simultaneous transmission test procedures.

Define the all applicable input audio level as below according to c63 and KDB 285076 D02v04:

GSM input Level: -16dB

UMTS input Level: -16dB

VOLTE input Level: -16dB

VOWIFI input Level: -16dB

VONR input Level: -16dB

OTT input Level: -16dB

For GSM/UMTS/VoLTE/VOWIF test setup and input level, the correct input level definition is via a communication tester CMW500 "Decoder Cal" and "Codec Cal" to set the correct audio input levels.

For VONR test setup and input level, the correct input level definition is via a communication tester CMX500 and External DAU USB sound card "Decoder Cal" and "Codec Cal" to set the correct audio input levels.

CMW500 and External DAU USB sound card is able to output 1 kHz audio signal equivalent to 3.14dBm0 at "Decoder Cal". configuration, the signal reference is used to adjust the AMMI gain setting to reach -16Bm0 for GSM/UMTS/VoLTE/VONR. CMW500/CMX500 input is calibrated and the relation between the analog input voltage and the internal level in dBm0 can be determined.

3.2.1 Define the input level for GSM/UMTS/LTE/WLAN

1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx. The same level as for the 1kHz sine signal.
2. The below calculation formula is an example and showing how to determine the input level for the device.

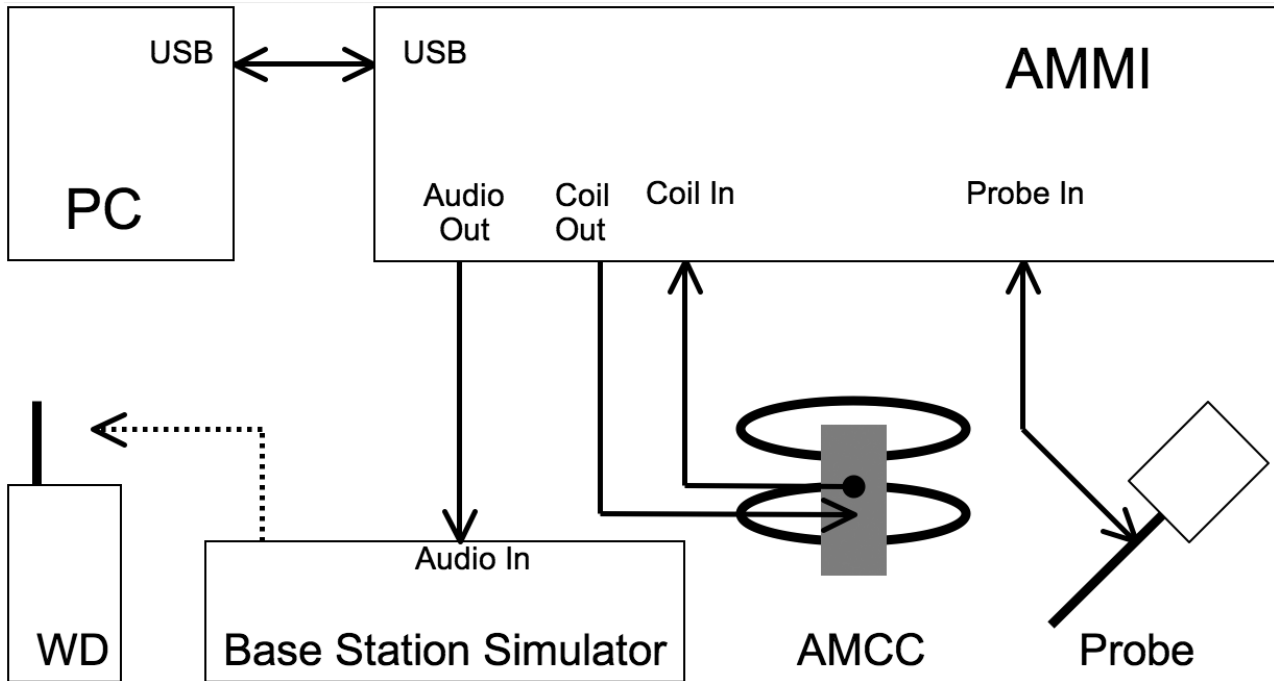


Fig. 2. T-coil signal measurement test setup

The predefined signal types have the following differences / factors compared to the 1kHz sine signal:

Signal [file name]	Duration [s]	Peak-to-RMS [dB]	RMS [dB]	Required gain factor *)	Gain setting
1kHz sine	---	3.0	0.0	1.00	
48k_1.025kHz_10s.wav	10	3.0	0.0	1.00	
48k_1kHz_3.15kHz_10s.wav	10	6.0	-3.0	1.42	
48k_315Hz_1kHz_10s.wav	10	6.0	-2.9	1.40	
48k_csek_8k_441_white_10s.wav	10	13.8	-10.5	3.34	
48k_multisine_50-5000_10s.wav	10	11.1	-7.9	2.49	
48k_voice_1kHz_1s.wav	1	16.2	-12.7	4.33	
48k_voice_300-3000_2s.wav	2	21.6	-18.6	8.48	

(*) The gain for the specific signal shall typically be multiplied by this factor to achieve approx. the same level as for the 1kHz sine signal.

Insert the gain applicable for your setup in the last column of the table.

Input Level for GSM/UMTS/VoLTE/VOWIFI

Gain Value	dBm0	Full scal Voltage	dB	AMMI audio out dBv (RMS)	AMCC Coil Out (dBv (RMS)
	3.14	1.5		0.55	
100	5.53		40	2.94	3.09
8.39	-16		18.47		-18.44
Signal Type	Duratio n (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain Setting
1kHz sine	-	3	0	1	8.39
48k_voice_1kHz	1	15.74	-12.7	4.33	36.32
48k_voice_300-3000	2	21.57	-18.6	8.48	71.13

Define the input level for OTT.

1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx. The same level as for the 1kHz sine signal.
2. The below calculation formula is an example and showing how to determine the input level for the device.

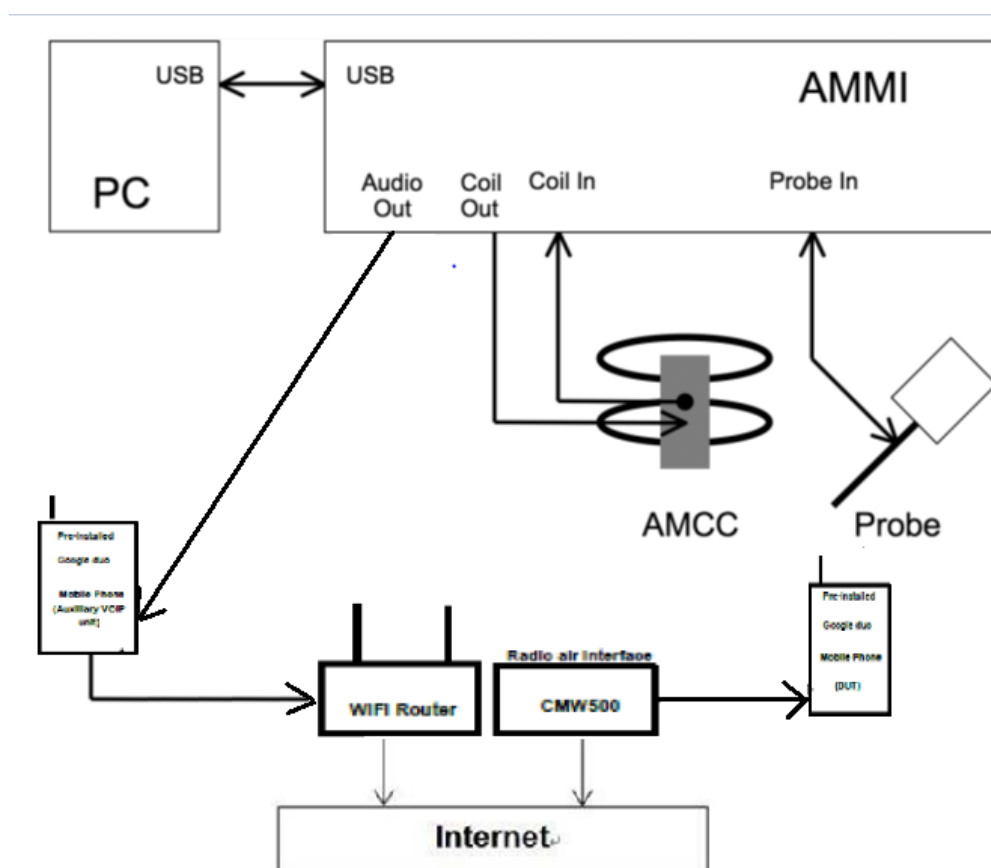


Fig. 2. T-coil signal measurement test setup

- #. Voice over Internet Protocol (VoIP) such as Google Meet application, also called IP telephony, is a methodology and group of technologies for the delivery of voice communications and multimedia sessions over Internet Protocol (IP) networks, such as the Internet. The terms Internet telephony, broadband telephony, and broadband phone service specifically refer to the provisioning of communications services (voice, fax, SMS, voice-messaging) over the public Internet, rather than via the public switched telephone network (PSTN)
- #. The Google Meet service support code and bitrate are list in section9, the customized Google Meet software is installed on a mobile phone which is used as the Auxiliary for the test. The software enables audio coding rate to be changed, and reports the input digital audio level before audio processing which can be used to calibrate the input audio level
- ##. This device comes with the preinstalled VoIP application that supports the Google Meet service and related codec. The test configuration establishes a call between the device under test and an auxiliary handset via the Google Meet server
- #. The test setup used for Google Meet VoIP call is via the data application unit on the 2G/3G/4G/5G/WiFi simulate base station, connected to the internet via the Google Meet server to the auxiliary device. The auxiliary device runs special software that allows the codecs and bit rate to be fixed to a specific value. Please refer to section9, an assessment was made of each of the different codec bit rates to determine the worst case for each of the different OTT transport (WiFi, LTE, GSM, WCDMA,NR)
- #. The auxiliary device includes software that displays the audio level in dBFS which allows calibration of the system to establish the -16dBm0 reference level. After establishing the voice call between auxiliary device and device under test the audio output from the AMMI is injected into the auxiliary device. The gain factor to establish a reference level of -16dBm0 for use during the test is determined as detailed in the next page based on the 0dBFull Scale (0dBFS) value being equivalent to 3.14dBm0.

Input Level for OTT

Gain Value	20* log(gain)	AMCC Coil Out			Level
(linear)	dB	(dBv RMS)			dBm0
		0.533			3.14
10	20	-18.39			-15.78
9.75	19.78	-22.61			-16
Signal Type	Duration (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain Setting
1kHz sine	-	3	0	1	9.75
48k_voice_1kHz	1	15.74	-12.7	4.33	42.23
48k_voice_300-3000	2	21.57	-18.6	8.48	82.71

3.3 System Calibration

For correct and calibrated measurement of the voltages and ABM field, DASY will perform a calibration job as below.

In phase 1, the audio output is switched off, and a 200 mVpp symmetric rectangular signal of 1 kHz is generated and internally connected directly to both channels of the sampling unit (Coil in, Probe in).

In phase 2, the audio output is off, and a 20 mVpp symmetric 100 Hz signal is internally connected. The signals during phases 1 and 2 are available at the output on the rear panel of the AMMI. However, the output must not be loaded, in order to avoid influencing the calibration. An RMS voltmeter would indicate 100 mVRMS during the first phase and 10 mVRMS during the second phase. After the first two phases, the two input channels are both calibrated for absolute measurements of voltages. The resulting factors are displayed above the multi-meter window.

After phases 1 and 2, the input channels are calibrated to measure exact voltages. This is required to use the inputs for measuring voltages with their peak and RMS value.


In phase 3, a multi-sine signal covering each third-octave band from 50 Hz to 10 kHz is generated and applied to both audio outputs. The probe should be positioned in the center of the AMCC and aligned in the z-direction, the field orientation of the AMCC. The “Coil In” channel is measuring the voltage over the AMCC internal shunt, which is proportional to the magnetic field in the AMCC. At the same time, the “Probe In” channel samples the amplified

signal picked up by the probe coil and provides it to a numerical integrator. The ratio of the two voltages in each third-octave filter leads to the spectral representation over the frequency band of interest. The Coil signal is scaled in dBV, and the Probe signal is first integrated and normalized to show dB A/m. The ratio probe-to-coil at the frequency of 1 kHz is the sensitivity which will be used in the consecutive T-Coil jobs.

3.4 Audio Magnetic Probe AM1DV3

Description	Active single sensor probe for both axial and radial measurement scans- Fully RF shielded, compatible with DAE, with adapted probe cup	 AM1DV3 Audio Probe
Dynamic Range	0.1 KHz to 20 KHz	
Sensitivity	<-50dB A/m @ 1KHz	
Internal Amp	20dB	
Dimensions	300X18mm	


3.5 Test Arch

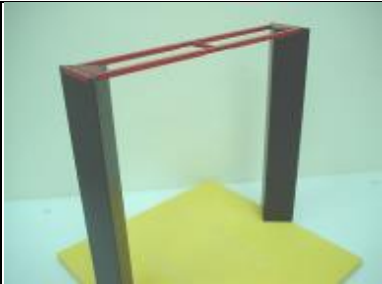Description	Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.	 Test Arch
Dimensions	length: 370 mm width: 370 mm height: 370 mm	

3.6 Phone Holder

Description	Supports accurate and reliable positioning of any phone Effect on near field <+/- 0.5 dB	 Phone Holder
-------------	--	---

3.7 AMCC- Audio Magnetic Calibration Coil

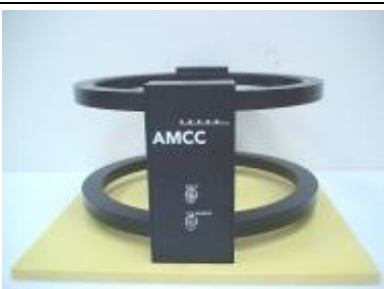Description	Allows calibration of the complete measurement setup, the two horizontal coils create a homogeneous magnetic field in the z direction. Refer to Appendix 5 for more detail on AMCC coil	 AMCC
-------------	---	--

3.8 AMMI - Audio Magnetic Measurement Instrument

Description	-USB interface to PC - Probe signal digitization and power supply- Test signal generation for wireless device (via base station simulator)- Auto-calibration and interfaces to AMCC for complete setup-calibration	 AMMI
Data Rate	48 KHz / 24bit	
Dynamic Range	85 dB	
Dimensions:	19" X 65 X 270mm	

4 Measurement uncertainty evaluation

Error Description	Uncertainty Value (%)	Probability Dist.	Divisor	ci ABM1	ci ABM2	Standard Uncertainty ABM1 (%)	Standard Uncertainty ABM2 (%)
Related to probe sensitivity							
Reference level	±3.0	R	$\sqrt{3}$	1	1	±3.0	±3.0
AMCC geometry	±0.4	R	$\sqrt{3}$	1	1	±0.2	±0.2
AMCC current	±0.6	R	$\sqrt{3}$	1	1	±0.4	±0.4
Probe positioning during calibration	±0.2	R	$\sqrt{3}$	1	1	±0.1	±0.1
Noise distribution	±0.7	R	$\sqrt{3}$	0.0143	1	±0.0	±0.4
Frequency slope	±5.9	R	$\sqrt{3}$	0.1	1	±0.3	±3.5
Related to probe system							
Repeatability / drift	±1.0	R	$\sqrt{3}$	1	1	±0.6	±0.6
Linearity / dynamic range	±0.6	N	1	1	1	±0.4	±0.4
Audio noise	±1.0	R	$\sqrt{3}$	0.1	1	±0.1	±0.6
Probe angle	±2.3	R	$\sqrt{3}$	1	1	±1.4	±1.4
Spectral Processing	±0.9	R	$\sqrt{3}$	1	1	±0.5	±0.5
Integration time	±0.6	N	1	1	5	±0.6	±3.0
Field distribution	±0.2	R	$\sqrt{3}$	1	1	±0.1	±0.1
Test signal							
Reference signal spectrum response	±0.6	R	$\sqrt{3}$	0	1	±0.0	±0.4
Positioning							
Probe positioning	±1.9	R	$\sqrt{3}$	1	1	±1.1	±1.1
Phantom Thickness	±0.9	R	$\sqrt{3}$	1	1	±0.5	±0.5
DUT positioning	±1.9	R	$\sqrt{3}$	1	1	±1.1	±1.1
External Contributions							
RF interference	±0.0	R	$\sqrt{3}$	1	0.3	±0.0	±0.0
Test Signal Variation	±2.0	R	$\sqrt{3}$	1	1	±1.2	±1.2
Combined Std. Uncertainty (ABM Field)	$u'_c = \sqrt{\sum_{i=1}^{20} c_i^2 u_i^2}$					±4.1	±6.2
Expanded Std. Uncertainty (K=2)						±8.2	±12.4

Table 2: Measurement uncertainties for T-Coil

5 HAC (T-Coil) Measurement

5.1 T-Coil Performance Requirements

In order to be rated for T-Coil use, a WD shall meet the requirements for signal level and signal quality contained in this part.

1) T-Coil coupling field intensity

When measured as specified in ANSI C63.19, the T-Coil signal shall be ≥ -18 dB (A/m) at 1 kHz, in a 1/3 octave band filter for all orientations.

2) Frequency response

The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz. Figure 1 and Figure 2 provide the boundaries for the specified frequency.

These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

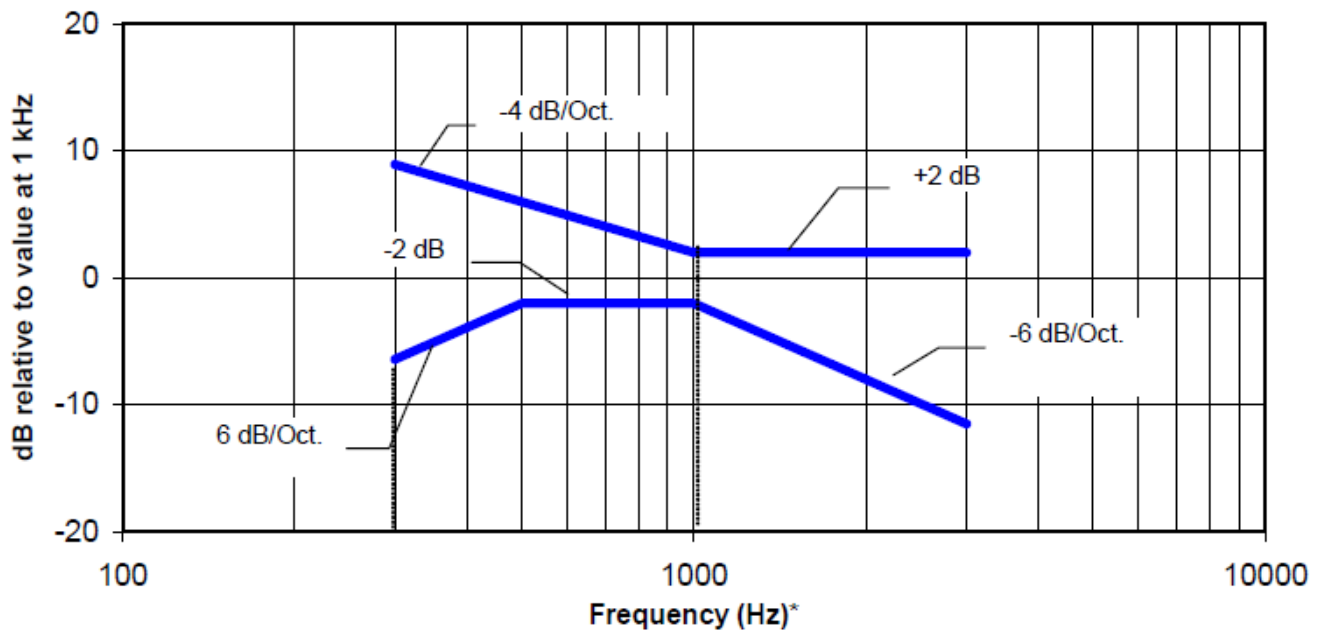


Figure 1—Magnetic field frequency response for WDs with a field ≤ -15 dB (A/m) at 1 kHz

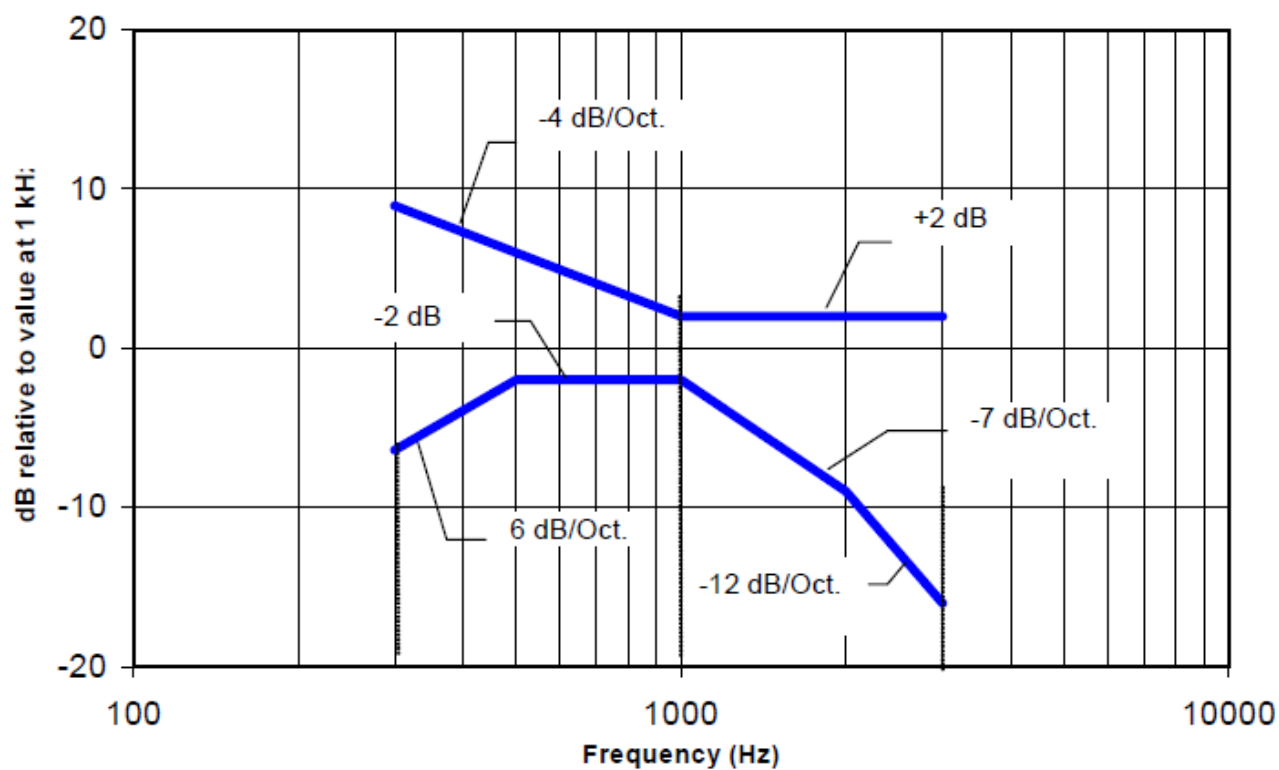


Figure 2 —Magnetic field frequency response for WDs with a field that exceeds -15dB(A/m) at 1 kHz

5.2 T-Coil measurement points and reference plane

Figure 3 illustrate the references and reference plane that shall be used in a typical EUT emissions measurement. The principle of this section is applied to EUT with similar geometry. Please refer to Appendix C for the setup photographs.

- ◆ The area is 5 cm by 5 cm.
- ◆ The area is centered on the audio frequency output transducer of the EUT.
- ◆ The area is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.
- ◆ The measurement plane is parallel to, and 10 mm in front of, the reference plane.

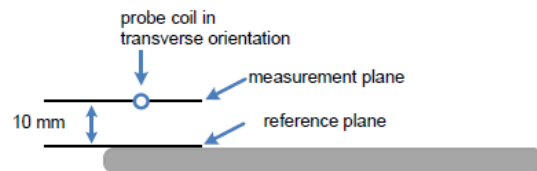
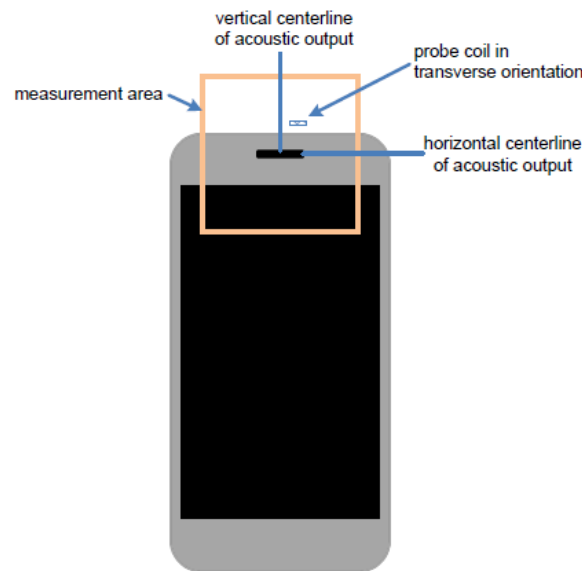


Figure A.4—Measurement and reference planes probe orientation for WD audio frequency magnetic field measurements

Figure 3 Axis and planes for WD audio frequency magnetic field measurements

5.3 T-Coil Measurement Procedure

According to ANSI C63.19-2019, section4:

This subclause describes the procedures used to measure the ABM (T-Coil) performance of the WD. Measurements shall be performed over a measurement area 50 mm square, in the measurement plane, as specified in A.3. The measurement area shall be scanned with a uniform measurement point spacing of 2.0 mm $\pm$ 0.5 mm in each X=Y axis of the plane, yielding 676 measurement points with approximately even spacing throughout the area.

Optionally, measurement point spacing may be increased to 4 mm, with interpolation employed to yield the required 676 equivalent measurement points distributed uniformly over the 50 mm square measurement area. Interpolated points shall be derived from the average of the linear representations of the field strengths of the nearest two or four equidistant measured points. The area of measurement is increased to a 52 mm square so that edge rows and columns of the required 50 mm square can be either measured or interpolated with none extrapolated.

In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal shall be made at the same locations. Measurements shall not include undesired influence from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load might be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there could still be RF leakage from the WD, which could interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 6.1. If the device display can be turned off during a phone call, then that may be done during the measurement as well. If tested with the display in the off state this shall be documented in the test report.

Measurements shall be performed with the probe coil oriented in the transverse direction, aligned in the plane of the measurement area and perpendicular to the long dimension of the WD. A multi-stage sequence consists of first measuring the field strength of the desired T-Coil signal (desired ABM signal) that is useful to a hearing aid.

T-Coil at each specified measurement point. The undesired magnetic component (undesired ABM field) is then measured in the same transverse orientation at each of the same measurement point.

The following steps summarize the basic test flow for determining desired ABM signal and undesired ABM field. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of desired ABM signal level.

To minimize the need to test every WD operating mode to the telecoil requirements of Clause 6, it is permissible to exclude some subset of supported configurations. For a given WD, every mode that supports voice communication shall be considered for telecoil testing. However, if it can be demonstrated that a certain configuration will not be the worst-case telecoil configuration, such configurations may be excluded from the full telecoil scans of 6.4.}4 For example, operating modes may be pre-screened by scanning for both desired ABM signal and undesired ABM field at a lower measurement point density than the final scans, thus saving considerable testing time by eliminating configurations that are excellent performers from more detailed testing for worst-case.

Many factors could affect telecoil test results. RF power level and amplitude modulation characteristics as well as the specific current paths within the WD associated with the RF output stage(s), the display, and processing circuitry could affect the undesired ABM field. Audio codec implementation and acoustic receiver characteristics could also affect the desired ABM signal).

6 T-Coil testing for CMRS Voice

6.1 General Description

1. Codec Investigation:

This clause describes the measurement of the baseband (audio frequency) magnetic T-Coil signal from a WD. The goal is to evaluate the size of the area where a user could position their WD relative to their hearing aid's telecoil and receive an acceptable magnetically coupled signal. Three quantities are measured and evaluated. The first is the field strength of the desired signal at the center of the audio band (desired ABM signal). The second is the frequency response of the desired signal measured across the audio band. The third is the field strength of the undesired audio band magnetic field.

2. Air Interface Investigation:

- Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface.
- According to the ANSI C63.19 2019 section 6.3.4, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil.
- Opening the Hearing-aid can improve the HAC T-Coil performance of the earpiece.

6.2 GSM Tests Results

Codec Investigation:

Air Interface	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Frequency Response	Date
GSM850	Voice	190	AMR NB FR	135	321	PASS	2025/11/06
GSM850	Voice	190	EFR (FR V2)	139	322	PASS	2025/11/06

Remark: According to codec investigation, the worst codec is **AMR NB FR**

Air Interface Investigation:

Air Interface	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Frequency Response	Date
GSM850	Voice	190	AMR NB FR	135	321	PASS	2025/11/06
GSM1900	Voice	661	AMR NB FR	184	375	PASS	2025/11/06

Remark:

- Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
- The detail frequency response results please refer to appendix A.

6.3 UMTS Tests Results

Codec Investigation:

Air Interface	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
WCDMA II	Voice	9400	AMR NB 4.75Kbps	336	540	24	26	PASS	2025/11/6
WCDMA II	Voice	9400	AMR NB12.2Kbps	341	542	24	26	PASS	2025/11/6
WCDMA II	Voice	9400	AMR WB 6.60Kbps	409	568	24	26	PASS	2025/11/6
WCDMA II	Voice	9400	AMR WB 23.85Kbps	415	571	24	26	PASS	2025/11/6

Remark: According to codec investigation, the worst codec is **AMR NB 4.75Kbps**

Air Interface Investigation:

Air Interface	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
WCDMA II	Voice	9400	AMR NB 4.75Kbps	336	540	24	26	PASS	2025/11/6
WCDMA IV	Voice	1412	AMR NB 4.75Kbps	371	573	25	26	PASS	2025/11/7
WCDMA V	Voice	4183	AMR NB 4.75Kbps	368	575	25	26	PASS	2025/11/7

Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
2. The detail frequency response results please refer to appendix A.

7 T-Coil testing for CMRS IP Voice

7.1 VoLTE and VoNR Tests Results

1. Codec Investigation:

For a voice service/air interface, investigate the variations of codec configurations (NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel / band, the following worst investigation codec would be remarked to be used for the testing for the handset.

2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands / channel / bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the handset.

b. Select one frequency band to do measurement at the worst Primary Group Contiguous Point Count position was additionally performed with varying the BWs/Modulations/RB size to verify the variation to find out worst configuration, the observed variation is very little to be within 1.5 dB which is much less than the margin from the rating threshold.

LTE FDD Codec Investigation:

Air Interface	BW	Modulation	RB	RB	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
LTE Band 2	20	QPSK	1	0	18900	AMR NB 4.75Kbps	339	583	24	26	PASS	2025/11/9
LTE Band 2	20	QPSK	1	0	18900	AMR NB 12.2Kbps	346	588	24	26	PASS	2025/11/9
LTE Band 2	20	QPSK	1	0	18900	AMR WB 6.60Kbps	356	582	24	26	PASS	2025/11/9
LTE Band 2	20	QPSK	1	0	18900	AMR WB 23.85Kbps	360	585	24	26	PASS	2025/11/9
LTE Band 2	20	QPSK	1	0	18900	EVS NB 5.9Kbps	331	582	24	26	PASS	2025/11/9
LTE Band 2	20	QPSK	1	0	18900	EVS NB 24.4Kbps	341	587	24	26	PASS	2025/11/9
LTE Band 2	20	QPSK	1	0	18900	EVS WB 5.9Kbps	328	580	24	26	PASS	2025/11/9
LTE Band 2	20	QPSK	1	0	18900	EVS WB 24.4Kbps	332	583	24	26	PASS	2025/11/9
LTE Band 2	20	QPSK	1	0	18900	EVS SWB 9.6Kbps	329	580	24	26	PASS	2025/11/9
LTE Band 2	20	QPSK	1	0	18900	EVS SWB 24.4Kbps	334	583	24	26	PASS	2025/11/9
LTE Band 2	20	QPSK	50	0	18900	EVS WB 5.9Kbps	331	584	24	26	PASS	2025/11/10
LTE Band 2	20	QPSK	100	0	18900	EVS WB 5.9Kbps	337	586	24	26	PASS	2025/11/10
LTE Band 2	20	16QAM	1	0	18900	EVS WB 5.9Kbps	332	584	24	26	PASS	2025/11/10
LTE Band 2	20	64QAM	1	0	18900	EVS WB 5.9Kbps	334	583	24	26	PASS	2025/11/10
LTE Band 2	20	256QAM	1	0	18900	EVS WB 5.9Kbps	329	581	24	26	PASS	2025/11/10
LTE Band 2	15	QPSK	1	0	18900	EVS WB 5.9Kbps	330	587	24	26	PASS	2025/11/10
LTE Band 2	10	QPSK	1	0	18900	EVS WB 5.9Kbps	332	580	24	26	PASS	2025/11/10
LTE Band 2	5	QPSK	1	0	18900	EVS WB 5.9Kbps	333	585	24	26	PASS	2025/11/10
LTE Band 2	3	QPSK	1	0	18900	EVS WB 5.9Kbps	333	581	24	26	PASS	2025/11/10
LTE Band 2	1.4	QPSK	1	0	18900	EVS WB 5.9Kbps	335	582	24	26	PASS	2025/11/10

Remark:

1. Select Worst codec Bandwidth/Modulation/RB Size from LTE FDD Test results to do LTE FDD
2. Select Worst Bandwidth/Modulation/RB Size from LTE FDD Test results to do LTE FDD
3. According to codec investigation, the worst codec is **EVS WB 5.9Kbps**

LTE FDD Air interface:

Air Interface	BW	Modulation	RB	RB	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
LTE Band 2	20	QPSK	1	0	18900	EVS WB 5.9Kbps	328	580	24	26	PASS	2025/11/9
LTE Band 66(4)	20	QPSK	1	0	132322	EVS WB 5.9Kbps	304	533	23	26	PASS	2025/11/11
LTE Band 7	20	QPSK	1	0	21100	EVS WB 5.9Kbps	301	540	23	26	PASS	2025/11/11
LTE Band 12(17)	10	QPSK	1	0	23095	EVS WB 5.9Kbps	318	576	24	26	PASS	2025/11/11
LTE Band 13	10	QPSK	1	0	23230	EVS WB 5.9Kbps	319	580	24	26	PASS	2025/11/11
LTE Band 14	10	QPSK	1	0	23330	EVS WB 5.9Kbps	299	579	24	26	PASS	2025/11/11
LTE Band 25	20	QPSK	1	0	26365	EVS WB 5.9Kbps	319	576	24	26	PASS	2025/11/11
LTE Band 26(5)	15	QPSK	1	0	26865	EVS WB 5.9Kbps	323	579	24	26	PASS	2025/11/11
LTE Band 30	10	QPSK	1	0	27710	EVS WB 5.9Kbps	313	571	24	26	PASS	2025/11/11
LTE Band 71	20	QPSK	1	0	133297	EVS WB 5.9Kbps	288	542	24	26	PASS	2025/11/11

Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
2. The detail frequency response results please refer to appendix A

LTE TDD Codec Investigation:

Air Interface	BW	Modulation	RB	RB	Channel	UL-DL Configuration	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
LTE Band 41(38)	20	QPSK	1	0	40620	1	AMR NB 4.75Kbps	231	434	20	26	PASS	2025/11/7
LTE Band 41(38)	20	QPSK	1	0	40620	1	AMR NB 12.2Kbps	240	436	20	26	PASS	2025/11/7
LTE Band 41(38)	20	QPSK	1	0	40620	1	AMR WB 6.60Kbps	271	431	20	26	PASS	2025/11/7
LTE Band 41(38)	20	QPSK	1	0	40620	1	AMR WB 23.85Kbps	278	431	20	26	PASS	2025/11/7
LTE Band 41(38)	20	QPSK	1	0	40620	1	EVS NB 5.9Kbps	197	429	20	26	PASS	2025/11/7
LTE Band 41(38)	20	QPSK	1	0	40620	1	EVS NB 24.4Kbps	203	432	20	26	PASS	2025/11/7
LTE Band 41(38)	20	QPSK	1	0	40620	1	EVS WB 5.9Kbps	180	425	19	26	PASS	2025/11/7
LTE Band 41(38)	20	QPSK	1	0	40620	1	EVS WB 24.4Kbps	184	431	19	26	PASS	2025/11/7
LTE Band 41(38)	20	QPSK	1	0	40620	1	EVS SWB 9.6Kbps	273	431	20	26	PASS	2025/11/7
LTE Band 41(38)	20	QPSK	1	0	40620	1	EVS SWB 24.4Kbps	282	435	20	26	PASS	2025/11/7
LTE Band 41(38)	20	QPSK	50	0	40620	1	EVS WB 5.9Kbps	183	429	19	26	PASS	2025/11/8
LTE Band 41(38)	20	QPSK	100	0	40620	1	EVS WB 5.9Kbps	188	436	19	26	PASS	2025/11/8
LTE Band 41(38)	20	16QAM	1	0	40620	1	EVS WB 5.9Kbps	182	425	19	26	PASS	2025/11/8
LTE Band 41(38)	20	64QAM	1	0	40620	1	EVS WB 5.9Kbps	187	433	19	26	PASS	2025/11/8
LTE Band 41(38)	20	256QAM	1	0	40620	1	EVS WB 5.9Kbps	182	428	19	26	PASS	2025/11/8
LTE Band 41(38)	15	QPSK	1	0	40620	1	EVS WB 5.9Kbps	187	435	19	26	PASS	2025/11/8
LTE Band 41(38)	10	QPSK	1	0	40620	1	EVS WB 5.9Kbps	182	429	19	26	PASS	2025/11/8
LTE Band 41(38)	5	QPSK	1	0	40620	1	EVS WB 5.9Kbps	186	434	19	26	PASS	2025/11/8
LTE Band 41(38)	20	QPSK	1	0	40620	2	EVS WB 5.9Kbps	185	428	19	26	PASS	2025/11/8
LTE Band 41(38)	20	QPSK	1	0	40620	3	EVS WB 5.9Kbps	184	431	19	26	PASS	2025/11/8
LTE Band 41(38)	20	QPSK	1	0	40620	4	EVS WB 5.9Kbps	181	429	19	26	PASS	2025/11/8
LTE Band 41(38)	20	QPSK	1	0	40620	5	EVS WB 5.9Kbps	186	430	19	26	PASS	2025/11/8
LTE Band 41(38)	20	QPSK	1	0	40620	6	EVS WB 5.9Kbps	193	424	19	26	PASS	2025/11/8
LTE Band 41(38)	20	QPSK	1	0	40620	0	EVS WB 5.9Kbps	183	425	19	26	PASS	2025/11/8

Remark:

1. Select Worst codec Bandwidth/Modulation/RB Size from LTE TDD Test results to do LTE TDD
2. Select Worst Bandwidth/Modulation/RB Size from LTE TDD Test results to do LTE TDD
3. According to codec investigation, the worst codec is **EVS WB 5.9Kbps**

LTE TDD Air interface:

Air Interface	BW	Modulation	RB	RB	Channel	UL-DL Configuration	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
LTE Band 41(38)	20	QPSK	1	0	40620	1	EVS WB 5.9Kbps	180	425	19	26	PASS	2025/11/7
LTE Band 42	20	QPSK	1	0	42590	0	EVS WB 5.9Kbps	226	474	21	26	PASS	2025/11/8
LTE Band 48	20	QPSK	1	0	55990	0	EVS WB 5.9Kbps	192	459	21	26	PASS	2025/11/8

Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
2. The detail frequency response results please refer to appendix A



Report No.: SUCR251000105501
Page: 32 of 40

FR1 NR Codec Investigation:

Air Interface	BW	Modulation	RB	RB	Channel	UL-DL Configuration	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	1	AMR NB 4.75Kbps	183	382	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	1	AMR NB 12.2Kbps	192	387	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	1	AMR WB 6.60Kbps	217	378	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	1	AMR WB 23.85Kbps	219	381	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	150	379	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 24.4Kbps	156	383	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	1	EVS WB 5.9Kbps	184	375	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	1	EVS WB 24.4Kbps	188	378	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	1	EVS SWB 9.6Kbps	218	373	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	1	EVS SWB 24.4Kbps	220	377	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM QPSK	50	0	518598	1	EVS NB 5.9Kbps	156	384	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM QPSK	100	0	518598	1	EVS NB 5.9Kbps	163	383	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM 16QAM	1	1	518598	1	EVS NB 5.9Kbps	162	382	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM 64QAM	1	1	518598	1	EVS NB 5.9Kbps	161	387	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-s-OFDM 256QAM	1	1	518598	1	EVS NB 5.9Kbps	162	381	18	26	PASS	2025/11/12
FR1 n41(38)	100	DFT-PI/2 BPSK	1	1	518598	1	EVS NB 5.9Kbps	156	383	18	26	PASS	2025/11/16
FR1 n41(38)	100	CP-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	162	386	18	26	PASS	2025/11/16
FR1 n41(38)	90	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	156	387	18	26	PASS	2025/11/16
FR1 n41(38)	80	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	160	383	18	26	PASS	2025/11/16
FR1 n41(38)	70	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	162	387	18	26	PASS	2025/11/16
FR1 n41(38)	60	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	162	384	18	26	PASS	2025/11/16
FR1 n41(38)	50	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	161	380	18	26	PASS	2025/11/16
FR1 n41(38)	45	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	157	384	18	26	PASS	2025/11/16
FR1 n41(38)	40	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	161	383	18	26	PASS	2025/11/16
FR1 n41(38)	35	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	163	380	18	26	PASS	2025/11/16
FR1 n41(38)	30	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	156	384	18	26	PASS	2025/11/16
FR1 n41(38)	25	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	161	384	18	26	PASS	2025/11/16
FR1 n41(38)	20	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	163	385	18	26	PASS	2025/11/16
FR1 n41(38)	15	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	162	383	18	26	PASS	2025/11/16
FR1 n41(38)	10	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	165	382	18	26	PASS	2025/11/16
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	2	EVS NB 5.9Kbps	160	388	18	26	PASS	2025/11/16
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	3	EVS NB 5.9Kbps	153	387	18	26	PASS	2025/11/16
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	4	EVS NB 5.9Kbps	157	382	18	26	PASS	2025/11/16
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	5	EVS NB 5.9Kbps	159	387	18	26	PASS	2025/11/16
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	6	EVS NB 5.9Kbps	167	389	18	26	PASS	2025/11/16
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	0	EVS NB 5.9Kbps	162	386	18	26	PASS	2025/11/16

Remark:

1. Select Worst codec Bandwidth/Modulation/RB Size from FR1 NR Test results to do FR1 NR
2. Select Worst Bandwidth/Modulation/RB Size from FR1 NR Test results to do FR1 NR
3. According to codec investigation, the worst codec is **EVS NB 5.9Kbps**

FR1 NR Air interface:

Air Interface	BW	Modulation	RB	RB	Channel	UL-DL Configuration	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
FR1 n41(38)	100	DFT-s-OFDM QPSK	1	1	518598	1	EVS NB 5.9Kbps	150	379	18	26	PASS	2025/11/12
FR1 n66	5	DFT-s-OFDM QPSK	1	1	349000	-	EVS NB 5.9Kbps	314	554	23	26	PASS	2025/11/16
FR1 n48	40	DFT-s-OFDM QPSK	1	1	641666	0	EVS NB 5.9Kbps	203	441	20	26	PASS	2025/11/17
FR1 n77	100	DFT-s-OFDM QPSK	1	1	656000	1	EVS NB 5.9Kbps	137	367	18	26	PASS	2025/11/17
FR1 n78	100	DFT-s-OFDM QPSK	1	1	636666	0	EVS NB 5.9Kbps	183	436	19	26	PASS	2025/11/17
FR1 n66	40	DFT-s-OFDM QPSK	1	1	349000	-	EVS NB 5.9Kbps	309	556	23	26	PASS	2025/11/17
FR1 n7	40	DFT-s-OFDM QPSK	1	1	507000	-	EVS NB 5.9Kbps	301	551	23	26	PASS	2025/11/17
FR1 n12	15	DFT-s-OFDM QPSK	1	1	141500	-	EVS NB 5.9Kbps	305	565	24	26	PASS	2025/11/17
FR1 n14	10	DFT-s-OFDM QPSK	1	1	158600	-	EVS NB 5.9Kbps	336	568	23	26	PASS	2025/11/17
FR1 n25(2)	40	DFT-s-OFDM QPSK	1	1	376500	-	EVS NB 5.9Kbps	307	551	23	26	PASS	2025/11/17
FR1 n26(5)	20	DFT-s-OFDM QPSK	1	1	166300	-	EVS NB 5.9Kbps	326	563	23	26	PASS	2025/11/17
FR1 n30	10	DFT-s-OFDM QPSK	1	1	462000	-	EVS NB 5.9Kbps	305	564	24	26	PASS	2025/11/17
FR1 n71	20	DFT-s-OFDM QPSK	1	1	136100	-	EVS NB 5.9Kbps	323	565	24	26	PASS	2025/11/17
FR1 n70	15	DFT-s-OFDM QPSK	1	1	340500	-	EVS NB 5.9Kbps	335	558	24	26	PASS	2025/11/17

7.2 VoWiFi Tests Results

1. Codec Investigation:

For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.

2. Air Interface Investigation:

- Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the handset.
- Select WLAN 2.4GHz, WLAN5GHz and WLAN6GHz one frequency band to do measurement at the worst Primary Group Contiguous Point Count position was additionally performed with varying the BWs/Modulations/data rate to verify the variation to find out worst configuration, the observed variation is very little to be within 1 dB which is much less than the margin from the rating threshold.

Air Interface	BW	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
802.11b	20	1M	6	AMR NB 4.75Kbps	371	569	26	26	PASS	2025/11/19
802.11b	20	1M	6	AMR NB 12.2Kbps	382	572	26	26	PASS	2025/11/19
802.11b	20	1M	6	AMR WB 6.60Kbps	409	564	26	26	PASS	2025/11/19
802.11b	20	1M	6	AMR WB 12.65Kbps	402	565	26	26	PASS	2025/11/19
802.11b	20	1M	6	EVS NB 5.9Kbps	310	550	25	26	PASS	2025/11/19
802.11b	20	1M	6	EVS NB 24.4Kbps	315	553	25	26	PASS	2025/11/19
802.11b	20	1M	6	EVS WB 5.9Kbps	253	550	25	26	PASS	2025/11/19
802.11b	20	1M	6	EVS WB 24.4Kbps	260	554	25	26	PASS	2025/11/19
802.11b	20	1M	6	EVS SWB 9.6Kbps	393	549	25	26	PASS	2025/11/19
802.11b	20	1M	6	EVS SWB 24.4Kbps	396	552	25	26	PASS	2025/11/19
802.11b	20	11M	6	EVS WB 5.9Kbps	261	558	25	26	PASS	2025/11/19
802.11g	20	6M	6	EVS WB 5.9Kbps	259	553	25	26	PASS	2025/11/19
802.11g	20	54M	6	EVS WB 5.9Kbps	258	556	25	26	PASS	2025/11/19
802.11n-HT20	20	MCS0	6	EVS WB 5.9Kbps	269	554	25	26	PASS	2025/11/19
802.11n-HT20	20	MCS7	6	EVS WB 5.9Kbps	272	557	25	26	PASS	2025/11/19
802.11n-HT40	40	MCS0	6	EVS WB 5.9Kbps	305	556	24	26	PASS	2025/11/19
802.11n-HT40	40	MCS7	6	EVS WB 5.9Kbps	312	552	24	26	PASS	2025/11/19
802.11a	20	6M	40	EVS WB 5.9Kbps	309	594	26	26	PASS	2025/11/20
802.11a	20	54M	40	EVS WB 5.9Kbps	314	590	26	26	PASS	2025/11/20
802.11ac-VHT20	20	MCS0	40	EVS WB 5.9Kbps	328	593	26	26	PASS	2025/11/20
802.11ac-VHT20	20	MCS9	40	EVS WB 5.9Kbps	331	594	26	26	PASS	2025/11/20
802.11ac-VHT40	40	MCS0	38	EVS WB 5.9Kbps	327	587	26	26	PASS	2025/11/20
802.11ac-VHT40	40	MCS9	38	EVS WB 5.9Kbps	331	588	26	26	PASS	2025/11/20
802.11ac-VHT80	80	MCS0	42	EVS WB 5.9Kbps	343	589	26	26	PASS	2025/11/20
802.11ac-VHT80	80	MCS9	42	EVS WB 5.9Kbps	347	591	26	26	PASS	2025/11/20
802.11ax-HE20	20	MCS0	40	EVS WB 5.9Kbps	317	570	26	26	PASS	2025/11/20
802.11ax-HE20	20	MCS11	40	EVS WB 5.9Kbps	321	571	26	26	PASS	2025/11/20
802.11ax-HE40	40	MCS0	38	EVS WB 5.9Kbps	317	579	26	26	PASS	2025/11/20
802.11ax-HE40	40	MCS11	38	EVS WB 5.9Kbps	323	578	26	26	PASS	2025/11/20
802.11ax-HE80	80	MCS0	42	EVS WB 5.9Kbps	311	575	26	26	PASS	2025/11/20
802.11ax-HE80	80	MCS11	42	EVS WB 5.9Kbps	318	580	26	26	PASS	2025/11/20
802.11ax-HE20	20	MCS0	5	EVS WB 5.9Kbps	343	589	26	26	PASS	2025/11/20
802.11a	20	6M	56	EVS WB 5.9Kbps	325	574	25	26	PASS	2025/11/20
802.11a	20	6M	116	EVS WB 5.9Kbps	297	576	25	26	PASS	2025/11/20
802.11a	20	6M	157	EVS WB 5.9Kbps	315	572	25	26	PASS	2025/11/20

Remark:

- According to codec investigation, the worst codec is **EVS WB 5.9Kbps**

Air interface:

Air Interface	BW	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
802.11b	20	1M	6	EVS WB 5.9Kbps	253	550	25	26	PASS	2025/11/19
802.11a	20	6M	40	EVS WB 5.9Kbps	309	594	26	26	PASS	2025/11/20
802.11a	20	6M	56	EVS WB 5.9Kbps	325	574	25	26	PASS	2025/11/20
802.11a	20	6M	116	EVS WB 5.9Kbps	297	576	25	26	PASS	2025/11/20
802.11a	20	6M	157	EVS WB 5.9Kbps	315	572	25	26	PASS	2025/11/20
802.11ax-HE20	20	MCS0	5	EVS WB 5.9Kbps	343	589	26	26	PASS	2025/11/20

Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume
2. The detail frequency response results please refer to appendix A.

7.3 T-Coil testing for OTT VoIP Application

1. The Google Meet only support OPUS audio codec and support 6kbps to 75kbps bitrate.
2. The test setup used for OTT VoIP call is the DUT connect to the CMW500/CMX500 and via the data application unit on CMW500/CMX500 connection to the Internet, the Auxiliary EUT is connected to the WiFi access point, the channel/Modulation/Frequency bands/data rate is configured on the CMW500/CMX500 for the DUT unit. For the Auxiliary VoIP unit which is used to configure the audio codec rate and determine the audio.
3. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel/band, the following tests results which the worst-case codec would be remarked to be used for the testing for the handset.
4. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface.

Air interface:

WCDMA:

Air Interface	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
WCDMA II	HSPA	9400	OPUS 6kbps	305	550	23	26	PASS	2025/11/21
WCDMA II	HSPA	9400	OPUS 40kbps	311	552	23	26	PASS	2025/11/21
WCDMA II	HSPA	9400	OPUS 75kbps	308	551	23	26	PASS	2025/11/21

LTE FDD:

Air Interface	BW	Modulation	RB	RB	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
LTE Band 71	20	QPSK	1	0	133297	OPUS 6kbps	236	468	22	26	PASS	2025/11/21
LTE Band 71	20	QPSK	1	0	133297	OPUS 40kbps	241	469	22	26	PASS	2025/11/21
LTE Band 71	20	QPSK	1	0	133297	OPUS 75kbps	245	471	22	26	PASS	2025/11/21

LTE TDD:

Air Interface	BW	Modulation	RB	RB	Channel	UL-DL Configuration	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
LTE Band 41(38)	20	QPSK	1	0	40620	1	OPUS 6kbps	152	383	17	26	PASS	2025/11/21
LTE Band 41(38)	20	QPSK	1	0	40620	1	OPUS 40kbps	159	385	17	26	PASS	2025/11/21
LTE Band 41(38)	20	QPSK	1	0	40620	1	OPUS 75kbps	162	385	17	26	PASS	2025/11/21

FR1 NR:

Air Interface	BW	Modulation	RB	RB	Channel	UL-DL Configuration	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
FR1 n77	100	DFT-s-OFDM QPSK	1	1	656000	1	OPUS 6kbps	144	372	18	26	PASS	2025/11/21
FR1 n77	100	DFT-s-OFDM QPSK	1	1	656000	1	OPUS 40kbps	148	377	18	26	PASS	2025/11/21
FR1 n77	100	DFT-s-OFDM QPSK	1	1	656000	1	OPUS 75kbps	152	371	18	26	PASS	2025/11/21



WIFI:

Air Interface	BW	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
802.11b	20	1M	6	OPUS 6kbps	192	455	21	26	PASS	2025/11/21
802.11b	20	1M	6	OPUS 40kbps	199	457	21	26	PASS	2025/11/21
802.11b	20	1M	6	OPUS 75kbps	195	459	21	26	PASS	2025/11/21

Remark:

- 1. Phone Condition: Air Link; Mute on; Backlight off; Max Volume
- 2. The detail frequency response results please refer to appendix A.
- 3. According to the manufacturer's statement, NR OTT selects the worst mode in LTE for testing.

8 Equipment list

	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date
☒	Software	SPEAG	DASY8	NA	NCR	NCR
☒	DAE	SPEAG	DAE4	1740	2025-02-17	2026-02-16
☒	Audio Magnetic 1D Field Probe	SPEAG	AM1DV3	3128	2025-06-12	2026-06-11
☒	Test Arch SD HAC	SPEAG	NA	NA	NCR	NCR
☒	Audio Magnetic Measuring Instrument	SPEAG	AMMI	1028	NCR	NCR
☒	Audio Magnetic	SPEAG	AMCC	1143	NCR	NCR
☒	Universal Radio Communication Tester	R&S	CMW500	111637	2025-09-03	2026-09-02
☒	RADIO COMMUNICATION TESTR	R&S	CMX500	101930	2025-01-16	2026-01-15
☒	Humidity and Temperature Indicator	MingGao	MingGao	NA	2025-09-16	2026-09-15

Note:

1. All the equipment are within the valid period when the tests are performed.
2. NCR: "No-Calibration Required".

9 Calibration certificate

Please see the Appendix B

10 Photographs

Please see the Appendix C

Appendix A: Detailed Test Results

Appendix B: Calibration certificate

Appendix C: Photographs

--- End of report ---