

1. Effective (Isotropic) Radiated Power Output Data

1.1 Test Result

1.1.1 15_S_5M_NTNV_ERP

5G NR n14 SCS=15kHz SISO 5MHz NTN										
Modulation	Frequency (MHz)	RB Allocation	Conducted Power(dBm)			ERP(dBm)				Verdict
			Ant0	Ant2	Sum	Ant0	Ant2	Sum	Limit	
DFT-s-OFDM PI/2 BPSK	790.5	Edge 1RB Left	23.07	/	/	18.60	/	/	<=34.77	Pass
		Edge 1RB Right	23.03	/	/	18.56	/	/	<=34.77	Pass
		Outer Full	23.06	/	/	18.59	/	/	<=34.77	Pass
		Inner Full	23.63	/	/	19.16	/	/	<=34.77	Pass
		Inner 1RB Left	23.66	/	/	19.19	/	/	<=34.77	Pass
		Inner 1RB Right	23.60	/	/	19.13	/	/	<=34.77	Pass
	793	Edge 1RB Left	23.10	/	/	18.63	/	/	<=34.77	Pass
		Edge 1RB Right	23.09	/	/	18.62	/	/	<=34.77	Pass
		Outer Full	23.08	/	/	18.61	/	/	<=34.77	Pass
		Inner Full	23.62	/	/	19.15	/	/	<=34.77	Pass
		Inner 1RB Left	23.60	/	/	19.13	/	/	<=34.77	Pass
		Inner 1RB Right	23.63	/	/	19.16	/	/	<=34.77	Pass
	795.5	Edge 1RB Left	23.09	/	/	18.62	/	/	<=34.77	Pass
		Edge 1RB Right	23.23	/	/	18.76	/	/	<=34.77	Pass
		Outer Full	23.05	/	/	18.58	/	/	<=34.77	Pass
		Inner Full	23.65	/	/	19.18	/	/	<=34.77	Pass
		Inner 1RB Left	23.64	/	/	19.17	/	/	<=34.77	Pass
		Inner 1RB Right	23.76	/	/	19.29	/	/	<=34.77	Pass
DFT-s-OFDM QPSK	790.5	Edge 1RB Left	23.01	/	/	18.54	/	/	<=34.77	Pass
		Edge 1RB Right	22.85	/	/	18.38	/	/	<=34.77	Pass
		Outer Full	22.89	/	/	18.42	/	/	<=34.77	Pass
		Inner Full	23.95	/	/	19.48	/	/	<=34.77	Pass
		Inner 1RB Left	24.00	/	/	19.53	/	/	<=34.77	Pass
		Inner 1RB Right	23.96	/	/	19.49	/	/	<=34.77	Pass
	793	Edge 1RB Left	22.97	/	/	18.50	/	/	<=34.77	Pass
		Edge 1RB Right	22.91	/	/	18.44	/	/	<=34.77	Pass
		Outer Full	22.95	/	/	18.48	/	/	<=34.77	Pass
		Inner Full	23.95	/	/	19.48	/	/	<=34.77	Pass
		Inner 1RB Left	23.63	/	/	19.16	/	/	<=34.77	Pass
		Inner 1RB Right	23.88	/	/	19.41	/	/	<=34.77	Pass
	795.5	Edge 1RB Left	22.93	/	/	18.46	/	/	<=34.77	Pass
		Edge 1RB Right	22.94	/	/	18.47	/	/	<=34.77	Pass
		Outer Full	22.86	/	/	18.39	/	/	<=34.77	Pass
		Inner Full	23.86	/	/	19.39	/	/	<=34.77	Pass
		Inner 1RB Left	24.00	/	/	19.54	/	/	<=34.77	Pass
		Inner 1RB Right	23.92	/	/	19.45	/	/	<=34.77	Pass
DFT-s-OFDM 16 QAM	790.5	Edge 1RB Left	22.25	/	/	17.78	/	/	<=34.77	Pass
		Edge 1RB Right	22.10	/	/	17.63	/	/	<=34.77	Pass
		Outer Full	21.94	/	/	17.47	/	/	<=34.77	Pass
		Inner Full	22.95	/	/	18.48	/	/	<=34.77	Pass
		Inner 1RB Left	23.26	/	/	18.79	/	/	<=34.77	Pass
		Inner 1RB Right	23.14	/	/	18.67	/	/	<=34.77	Pass
	793	Edge 1RB Left	22.23	/	/	17.76	/	/	<=34.77	Pass
		Edge 1RB Right	22.04	/	/	17.57	/	/	<=34.77	Pass
		Outer Full	21.92	/	/	17.45	/	/	<=34.77	Pass
		Inner Full	22.93	/	/	18.46	/	/	<=34.77	Pass
		Inner 1RB Left	23.23	/	/	18.76	/	/	<=34.77	Pass
		Inner 1RB Right	23.16	/	/	18.69	/	/	<=34.77	Pass
	795.5	Edge 1RB Left	22.08	/	/	17.61	/	/	<=34.77	Pass

		Edge_1RB_Right	22.12	/	/	17.66	/	/	<=34.77	Pass
		Outer_Full	21.88	/	/	17.41	/	/	<=34.77	Pass
		Inner_Full	22.87	/	/	18.40	/	/	<=34.77	Pass
		Inner_1RB_Left	23.19	/	/	18.72	/	/	<=34.77	Pass
		Inner_1RB_Right	23.22	/	/	18.75	/	/	<=34.77	Pass
DFT-s-OFDM 64 QAM	790.5	Edge_1RB_Left	21.65	/	/	17.18	/	/	<=34.77	Pass
		Edge_1RB_Right	21.53	/	/	17.06	/	/	<=34.77	Pass
		Outer_Full	21.40	/	/	16.93	/	/	<=34.77	Pass
		Inner_Full	21.49	/	/	17.02	/	/	<=34.77	Pass
		Inner_1RB_Left	21.62	/	/	17.15	/	/	<=34.77	Pass
		Inner_1RB_Right	21.61	/	/	17.14	/	/	<=34.77	Pass
	793	Edge_1RB_Left	21.65	/	/	17.18	/	/	<=34.77	Pass
		Edge_1RB_Right	21.48	/	/	17.01	/	/	<=34.77	Pass
		Outer_Full	21.38	/	/	16.91	/	/	<=34.77	Pass
		Inner_Full	21.37	/	/	16.90	/	/	<=34.77	Pass
		Inner_1RB_Left	21.70	/	/	17.23	/	/	<=34.77	Pass
		Inner_1RB_Right	21.60	/	/	17.13	/	/	<=34.77	Pass
	795.5	Edge_1RB_Left	21.52	/	/	17.05	/	/	<=34.77	Pass
		Edge_1RB_Right	21.56	/	/	17.09	/	/	<=34.77	Pass
		Outer_Full	21.36	/	/	16.89	/	/	<=34.77	Pass
		Inner_Full	21.31	/	/	16.84	/	/	<=34.77	Pass
		Inner_1RB_Left	21.65	/	/	17.18	/	/	<=34.77	Pass
		Inner_1RB_Right	21.60	/	/	17.13	/	/	<=34.77	Pass
DFT-s-OFDM 256 QAM	790.5	Edge_1RB_Left	19.41	/	/	14.94	/	/	<=34.77	Pass
		Edge_1RB_Right	19.38	/	/	14.91	/	/	<=34.77	Pass
		Outer_Full	19.33	/	/	14.86	/	/	<=34.77	Pass
		Inner_Full	19.44	/	/	14.97	/	/	<=34.77	Pass
		Inner_1RB_Left	19.44	/	/	14.97	/	/	<=34.77	Pass
		Inner_1RB_Right	19.47	/	/	15.00	/	/	<=34.77	Pass
	793	Edge_1RB_Left	19.39	/	/	14.92	/	/	<=34.77	Pass
		Edge_1RB_Right	19.41	/	/	14.94	/	/	<=34.77	Pass
		Outer_Full	19.33	/	/	14.86	/	/	<=34.77	Pass
		Inner_Full	19.40	/	/	14.93	/	/	<=34.77	Pass
		Inner_1RB_Left	19.40	/	/	14.93	/	/	<=34.77	Pass
		Inner_1RB_Right	19.44	/	/	14.97	/	/	<=34.77	Pass
	795.5	Edge_1RB_Left	19.34	/	/	14.87	/	/	<=34.77	Pass
		Edge_1RB_Right	19.43	/	/	14.96	/	/	<=34.77	Pass
		Outer_Full	19.30	/	/	14.83	/	/	<=34.77	Pass
		Inner_Full	19.34	/	/	14.87	/	/	<=34.77	Pass
		Inner_1RB_Left	19.36	/	/	14.89	/	/	<=34.77	Pass
		Inner_1RB_Right	19.45	/	/	14.98	/	/	<=34.77	Pass
CP-OFDM QPSK	790.5	Edge_1RB_Left	20.97	/	/	16.50	/	/	<=34.77	Pass
		Edge_1RB_Right	20.84	/	/	16.37	/	/	<=34.77	Pass
		Outer_Full	20.93	/	/	16.46	/	/	<=34.77	Pass
		Inner_Full	22.56	/	/	18.09	/	/	<=34.77	Pass
		Inner_1RB_Left	22.56	/	/	18.09	/	/	<=34.77	Pass
		Inner_1RB_Right	22.71	/	/	18.24	/	/	<=34.77	Pass
	793	Edge_1RB_Left	20.89	/	/	16.42	/	/	<=34.77	Pass
		Edge_1RB_Right	20.85	/	/	16.38	/	/	<=34.77	Pass
		Outer_Full	20.86	/	/	16.39	/	/	<=34.77	Pass
		Inner_Full	22.55	/	/	18.08	/	/	<=34.77	Pass
		Inner_1RB_Left	22.63	/	/	18.16	/	/	<=34.77	Pass
		Inner_1RB_Right	22.51	/	/	18.04	/	/	<=34.77	Pass
	795.5	Edge_1RB_Left	20.86	/	/	16.39	/	/	<=34.77	Pass
		Edge_1RB_Right	20.84	/	/	16.37	/	/	<=34.77	Pass
		Outer_Full	20.84	/	/	16.37	/	/	<=34.77	Pass
		Inner_Full	22.33	/	/	17.86	/	/	<=34.77	Pass
		Inner_1RB_Left	22.60	/	/	18.13	/	/	<=34.77	Pass
		Inner_1RB_Right	22.66	/	/	18.19	/	/	<=34.77	Pass

CP-OFDM 16 QAM	790.5	Edge_1RB_Left	21.07	/	/	16.60	/	/	<=34.77	Pass
		Edge_1RB_Right	21.16	/	/	16.69	/	/	<=34.77	Pass
		Outer_Full	20.92	/	/	16.45	/	/	<=34.77	Pass
		Inner_Full	22.04	/	/	17.57	/	/	<=34.77	Pass
		Inner_1RB_Left	22.11	/	/	17.64	/	/	<=34.77	Pass
		Inner_1RB_Right	22.14	/	/	17.67	/	/	<=34.77	Pass
	793	Edge_1RB_Left	21.09	/	/	16.62	/	/	<=34.77	Pass
		Edge_1RB_Right	21.08	/	/	16.61	/	/	<=34.77	Pass
		Outer_Full	20.92	/	/	16.45	/	/	<=34.77	Pass
		Inner_Full	22.02	/	/	17.56	/	/	<=34.77	Pass
		Inner_1RB_Left	22.09	/	/	17.62	/	/	<=34.77	Pass
		Inner_1RB_Right	22.15	/	/	17.68	/	/	<=34.77	Pass
	795.5	Edge_1RB_Left	21.07	/	/	16.60	/	/	<=34.77	Pass
		Edge_1RB_Right	21.15	/	/	16.68	/	/	<=34.77	Pass
		Outer_Full	20.90	/	/	16.43	/	/	<=34.77	Pass
		Inner_Full	21.96	/	/	17.49	/	/	<=34.77	Pass
		Inner_1RB_Left	22.08	/	/	17.61	/	/	<=34.77	Pass
		Inner_1RB_Right	22.10	/	/	17.63	/	/	<=34.77	Pass
CP-OFDM 64 QAM	790.5	Edge_1RB_Left	20.60	/	/	16.13	/	/	<=34.77	Pass
		Edge_1RB_Right	20.55	/	/	16.08	/	/	<=34.77	Pass
		Outer_Full	20.33	/	/	15.86	/	/	<=34.77	Pass
		Inner_Full	20.42	/	/	15.95	/	/	<=34.77	Pass
		Inner_1RB_Left	20.57	/	/	16.10	/	/	<=34.77	Pass
		Inner_1RB_Right	20.71	/	/	16.24	/	/	<=34.77	Pass
	793	Edge_1RB_Left	20.61	/	/	16.14	/	/	<=34.77	Pass
		Edge_1RB_Right	20.46	/	/	15.99	/	/	<=34.77	Pass
		Outer_Full	20.40	/	/	15.93	/	/	<=34.77	Pass
		Inner_Full	20.39	/	/	15.92	/	/	<=34.77	Pass
		Inner_1RB_Left	20.65	/	/	16.18	/	/	<=34.77	Pass
		Inner_1RB_Right	20.57	/	/	16.10	/	/	<=34.77	Pass
	795.5	Edge_1RB_Left	20.46	/	/	15.99	/	/	<=34.77	Pass
		Edge_1RB_Right	20.53	/	/	16.06	/	/	<=34.77	Pass
		Outer_Full	20.30	/	/	15.83	/	/	<=34.77	Pass
		Inner_Full	20.35	/	/	15.88	/	/	<=34.77	Pass
		Inner_1RB_Left	20.53	/	/	16.06	/	/	<=34.77	Pass
		Inner_1RB_Right	20.57	/	/	16.10	/	/	<=34.77	Pass
CP-OFDM 256 QAM	790.5	Edge_1RB_Left	17.32	/	/	12.85	/	/	<=34.77	Pass
		Edge_1RB_Right	17.33	/	/	12.86	/	/	<=34.77	Pass
		Outer_Full	17.46	/	/	12.99	/	/	<=34.77	Pass
		Inner_Full	17.46	/	/	12.99	/	/	<=34.77	Pass
		Inner_1RB_Left	17.39	/	/	12.93	/	/	<=34.77	Pass
		Inner_1RB_Right	17.47	/	/	13.00	/	/	<=34.77	Pass
	793	Edge_1RB_Left	17.34	/	/	12.87	/	/	<=34.77	Pass
		Edge_1RB_Right	17.35	/	/	12.88	/	/	<=34.77	Pass
		Outer_Full	17.37	/	/	12.90	/	/	<=34.77	Pass
		Inner_Full	17.42	/	/	12.95	/	/	<=34.77	Pass
		Inner_1RB_Left	17.38	/	/	12.91	/	/	<=34.77	Pass
		Inner_1RB_Right	17.36	/	/	12.89	/	/	<=34.77	Pass
	795.5	Edge_1RB_Left	17.28	/	/	12.81	/	/	<=34.77	Pass
		Edge_1RB_Right	17.44	/	/	12.97	/	/	<=34.77	Pass
		Outer_Full	17.32	/	/	12.85	/	/	<=34.77	Pass
		Inner_Full	17.37	/	/	12.90	/	/	<=34.77	Pass
		Inner_1RB_Left	17.36	/	/	12.89	/	/	<=34.77	Pass
		Inner_1RB_Right	17.56	/	/	13.09	/	/	<=34.77	Pass
Note1: Antenna Gain: Ant0: -2.32dBi;										
Note2: ERP=Conducted Power+Antenna Gain-2.15										

1.1.2 15_S_10M_NTNV_ERP

5G NR n14 SCS=15kHz SISO 10MHz NTNv										
Modulation	Frequency (MHz)	RB Allocation	Conducted Power(dBm)			ERP(dBm)				Verdict
			Ant0	Ant2	Sum	Ant0	Ant2	Sum	Limit	
DFT-s-OFDM PI/2 BPSK	793	Edge_1RB_Left	23.10	/	/	18.63	/	/	<=34.77	Pass
		Edge_1RB_Right	23.25	/	/	18.78	/	/	<=34.77	Pass
		Outer_Full	23.11	/	/	18.64	/	/	<=34.77	Pass
		Inner_Full	23.67	/	/	19.20	/	/	<=34.77	Pass
		Inner_1RB_Left	23.69	/	/	19.22	/	/	<=34.77	Pass
		Inner_1RB_Right	23.81	/	/	19.34	/	/	<=34.77	Pass
DFT-s-OFDM QPSK	793	Edge_1RB_Left	23.06	/	/	18.59	/	/	<=34.77	Pass
		Edge_1RB_Right	23.00	/	/	18.53	/	/	<=34.77	Pass
		Outer_Full	22.91	/	/	18.44	/	/	<=34.77	Pass
		Inner_Full	23.93	/	/	19.46	/	/	<=34.77	Pass
		Inner_1RB_Left	23.73	/	/	19.26	/	/	<=34.77	Pass
		Inner_1RB_Right	24.00	/	/	19.53	/	/	<=34.77	Pass
DFT-s-OFDM 16 QAM	793	Edge_1RB_Left	22.30	/	/	17.83	/	/	<=34.77	Pass
		Edge_1RB_Right	22.15	/	/	17.68	/	/	<=34.77	Pass
		Outer_Full	21.94	/	/	17.47	/	/	<=34.77	Pass
		Inner_Full	22.93	/	/	18.46	/	/	<=34.77	Pass
		Inner_1RB_Left	23.32	/	/	18.85	/	/	<=34.77	Pass
		Inner_1RB_Right	23.26	/	/	18.79	/	/	<=34.77	Pass
DFT-s-OFDM 64 QAM	793	Edge_1RB_Left	21.71	/	/	17.24	/	/	<=34.77	Pass
		Edge_1RB_Right	21.56	/	/	17.09	/	/	<=34.77	Pass
		Outer_Full	21.45	/	/	16.98	/	/	<=34.77	Pass
		Inner_Full	21.32	/	/	16.86	/	/	<=34.77	Pass
		Inner_1RB_Left	21.71	/	/	17.24	/	/	<=34.77	Pass
		Inner_1RB_Right	21.63	/	/	17.16	/	/	<=34.77	Pass
DFT-s-OFDM 256 QAM	793	Edge_1RB_Left	19.36	/	/	14.89	/	/	<=34.77	Pass
		Edge_1RB_Right	19.38	/	/	14.91	/	/	<=34.77	Pass
		Outer_Full	19.40	/	/	14.93	/	/	<=34.77	Pass
		Inner_Full	19.36	/	/	14.89	/	/	<=34.77	Pass
		Inner_1RB_Left	19.43	/	/	14.96	/	/	<=34.77	Pass
		Inner_1RB_Right	19.43	/	/	14.96	/	/	<=34.77	Pass
CP-OFDM QPSK	793	Edge_1RB_Left	21.04	/	/	16.57	/	/	<=34.77	Pass
		Edge_1RB_Right	20.92	/	/	16.45	/	/	<=34.77	Pass
		Outer_Full	20.96	/	/	16.49	/	/	<=34.77	Pass
		Inner_Full	22.41	/	/	17.94	/	/	<=34.77	Pass
		Inner_1RB_Left	22.70	/	/	18.23	/	/	<=34.77	Pass
		Inner_1RB_Right	22.57	/	/	18.10	/	/	<=34.77	Pass
CP-OFDM 16 QAM	793	Edge_1RB_Left	21.12	/	/	16.65	/	/	<=34.77	Pass
		Edge_1RB_Right	21.06	/	/	16.59	/	/	<=34.77	Pass
		Outer_Full	20.97	/	/	16.50	/	/	<=34.77	Pass
		Inner_Full	21.93	/	/	17.46	/	/	<=34.77	Pass
		Inner_1RB_Left	22.25	/	/	17.78	/	/	<=34.77	Pass
		Inner_1RB_Right	22.10	/	/	17.63	/	/	<=34.77	Pass
CP-OFDM 64 QAM	793	Edge_1RB_Left	20.64	/	/	16.17	/	/	<=34.77	Pass
		Edge_1RB_Right	20.53	/	/	16.06	/	/	<=34.77	Pass
		Outer_Full	20.45	/	/	15.98	/	/	<=34.77	Pass
		Inner_Full	20.48	/	/	16.01	/	/	<=34.77	Pass
		Inner_1RB_Left	20.74	/	/	16.27	/	/	<=34.77	Pass
		Inner_1RB_Right	20.56	/	/	16.09	/	/	<=34.77	Pass
CP-OFDM 256 QAM	793	Edge_1RB_Left	17.27	/	/	12.80	/	/	<=34.77	Pass
		Edge_1RB_Right	17.36	/	/	12.89	/	/	<=34.77	Pass
		Outer_Full	17.41	/	/	12.94	/	/	<=34.77	Pass
		Inner_Full	17.42	/	/	12.95	/	/	<=34.77	Pass
		Inner_1RB_Left	17.36	/	/	12.89	/	/	<=34.77	Pass
		Inner_1RB_Right	17.48	/	/	13.01	/	/	<=34.77	Pass
Note1: Antenna Gain: Ant0: -2.32dBi; Note2: ERP=Conducted Power+Antenna Gain-2.15										

2. Frequency Stability

2.1 Test Result

2.1.1 15_S_10M

5G NR n14 SCS=15kHz SISO 10MHz								
Modulation	Frequency (MHz)	RB Allocation	Temp. (°C)	Volt.	Freq. Error (Hz)	Freq. vs. rated (ppm)		Verdict
						Result	Limit	
DFT-s-OFDM QPSK	793	Outer_Full	20	LV	-38.34	-0.0483	>=-2.5 & <=2.5	Pass
				HV	112.65	0.1421	>=-2.5 & <=2.5	Pass
			-30	NV	-266.99	-0.3367	>=-2.5 & <=2.5	Pass
			-20	NV	879.49	1.1091	>=-2.5 & <=2.5	Pass
			-10	NV	362.52	0.4572	>=-2.5 & <=2.5	Pass
			0	NV	-10.33	-0.0130	>=-2.5 & <=2.5	Pass
			10	NV	91.54	0.1154	>=-2.5 & <=2.5	Pass
			20	NV	24.61	0.0310	>=-2.5 & <=2.5	Pass
			30	NV	-320.76	-0.4045	>=-2.5 & <=2.5	Pass
			40	NV	-584.44	-0.7370	>=-2.5 & <=2.5	Pass
			50	NV	-0.21	-0.0003	>=-2.5 & <=2.5	Pass

3. 99% & 26dB Bandwidth

3.1 Test Result

3.1.1 15_S_5M_NTNV


5G NR n14 SCS=15kHz SISO 5MHz NTN						
Modulation	Frequency (MHz)	RB Allocation	99% Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
DFT-s-OFDM PI/2 BPSK	793	Outer_Full	4.57	5.25	/	Pass
DFT-s-OFDM QPSK	793	Outer_Full	4.54	5.25	/	Pass
DFT-s-OFDM 16 QAM	793	Outer_Full	4.53	5.27	/	Pass
DFT-s-OFDM 64 QAM	793	Outer_Full	4.58	5.33	/	Pass
DFT-s-OFDM 256 QAM	793	Outer_Full	4.56	5.35	/	Pass
CP-OFDM QPSK	793	Outer_Full	4.53	5.29	/	Pass
CP-OFDM 16 QAM	793	Outer_Full	4.53	5.25	/	Pass
CP-OFDM 64 QAM	793	Outer_Full	4.53	5.38	/	Pass
CP-OFDM 256 QAM	793	Outer_Full	4.53	5.26	/	Pass

3.1.2 15_S_10M_NTNV


5G NR n14 SCS=15kHz SISO 10MHz NTN						
Modulation	Frequency (MHz)	RB Allocation	99% Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
DFT-s-OFDM PI/2 BPSK	793	Outer_Full	9.10	10.02	/	Pass
DFT-s-OFDM QPSK	793	Outer_Full	9.08	10.10	/	Pass
DFT-s-OFDM 16 QAM	793	Outer_Full	9.08	9.96	/	Pass
DFT-s-OFDM 64 QAM	793	Outer_Full	9.03	9.90	/	Pass
DFT-s-OFDM 256 QAM	793	Outer_Full	9.04	10.01	/	Pass
CP-OFDM QPSK	793	Outer_Full	9.37	10.41	/	Pass
CP-OFDM 16 QAM	793	Outer_Full	9.38	10.37	/	Pass
CP-OFDM 64 QAM	793	Outer_Full	9.42	10.47	/	Pass
CP-OFDM 256 QAM	793	Outer_Full	9.38	10.45	/	Pass

3.2 Test Graph


3.2.1 15_S_5M_NTNV

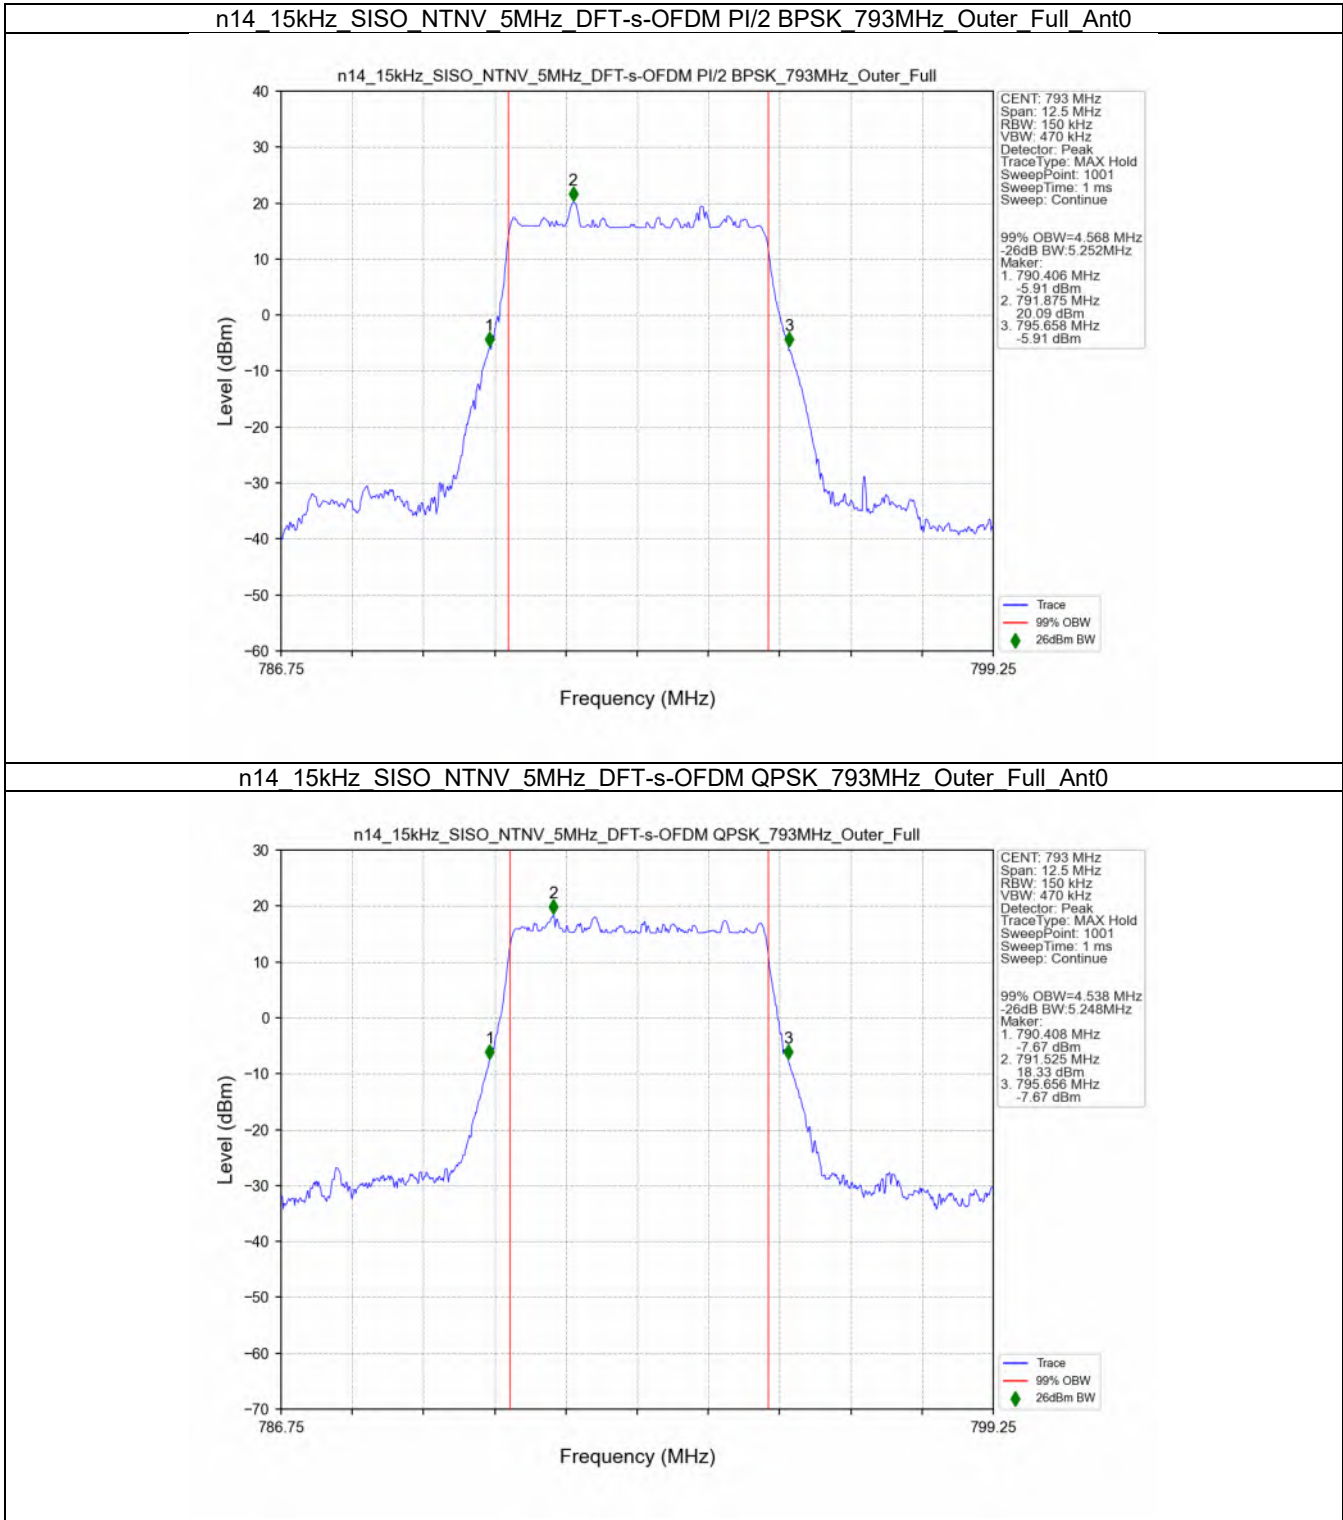


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_16_QAM_793MHz_Outer_Full_Ant0

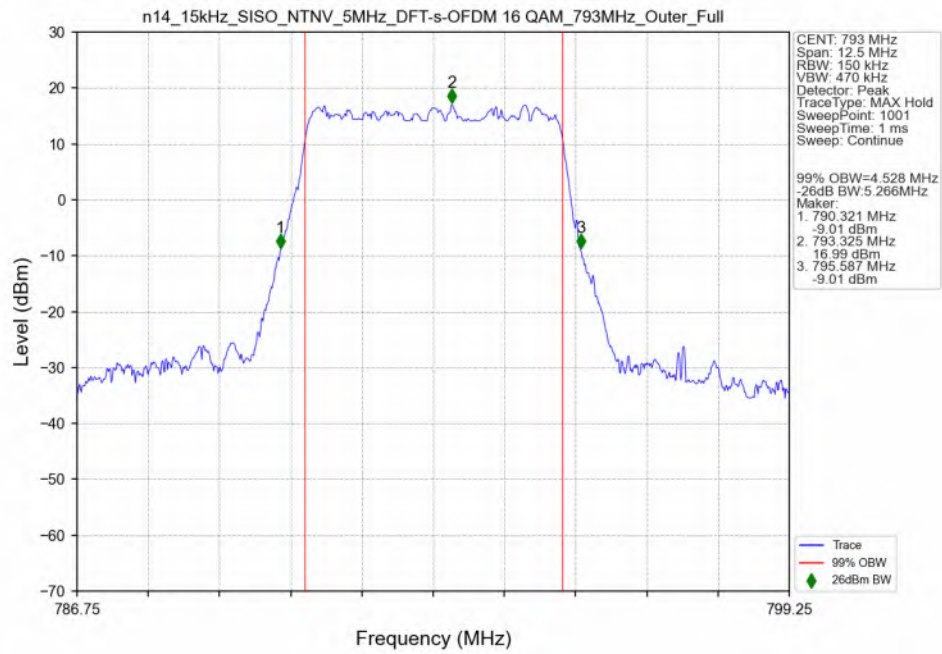


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_64_QAM_793MHz_Outer_Full_Ant0

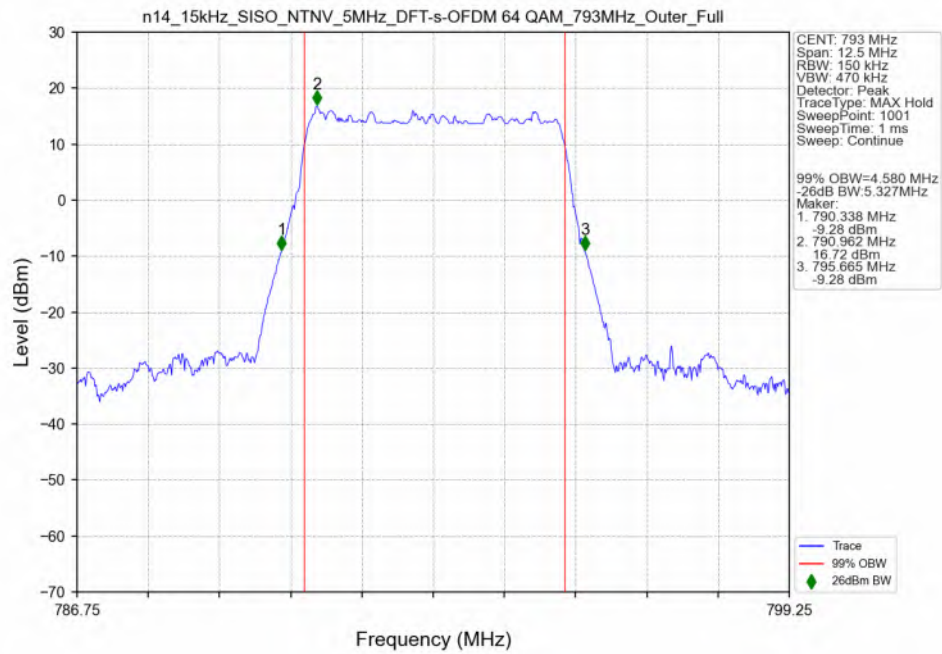


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_256_QAM_793MHz_Outer_Full_Ant0

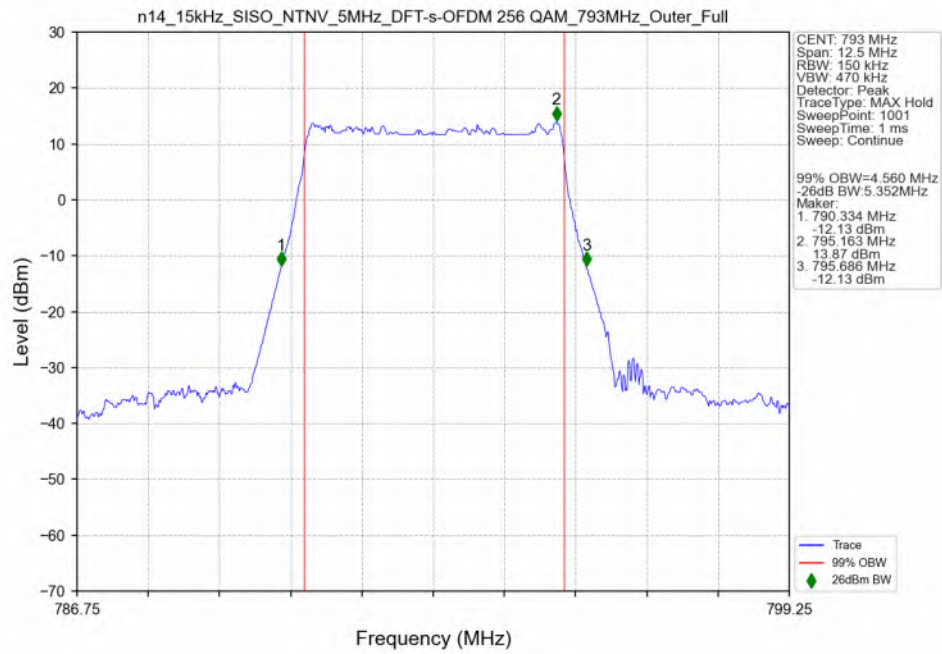


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_793MHz_Outer_Full_Ant0

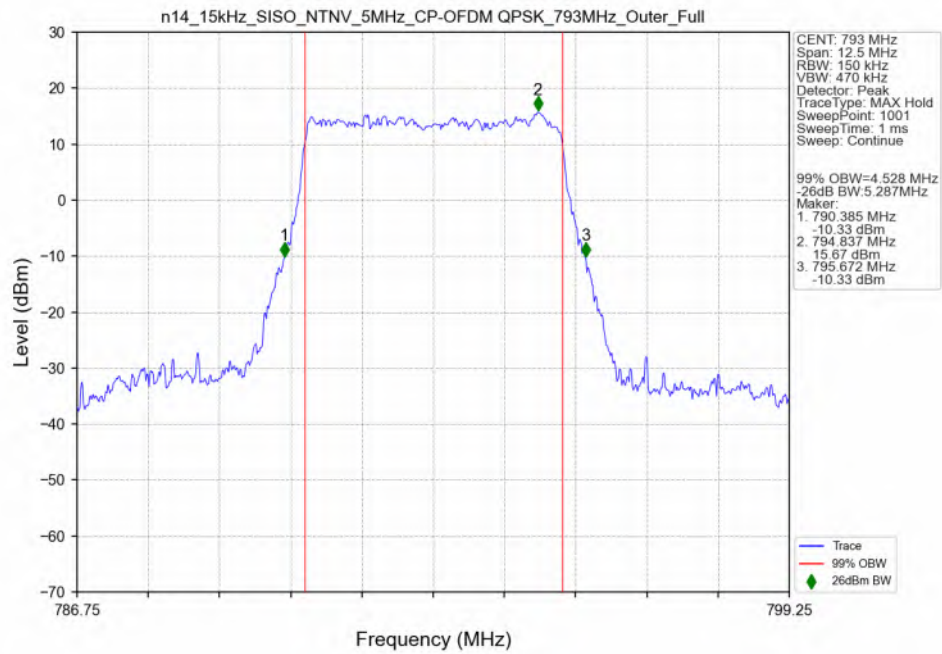


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM 16 QAM 793MHz_Outer_Full_Ant0

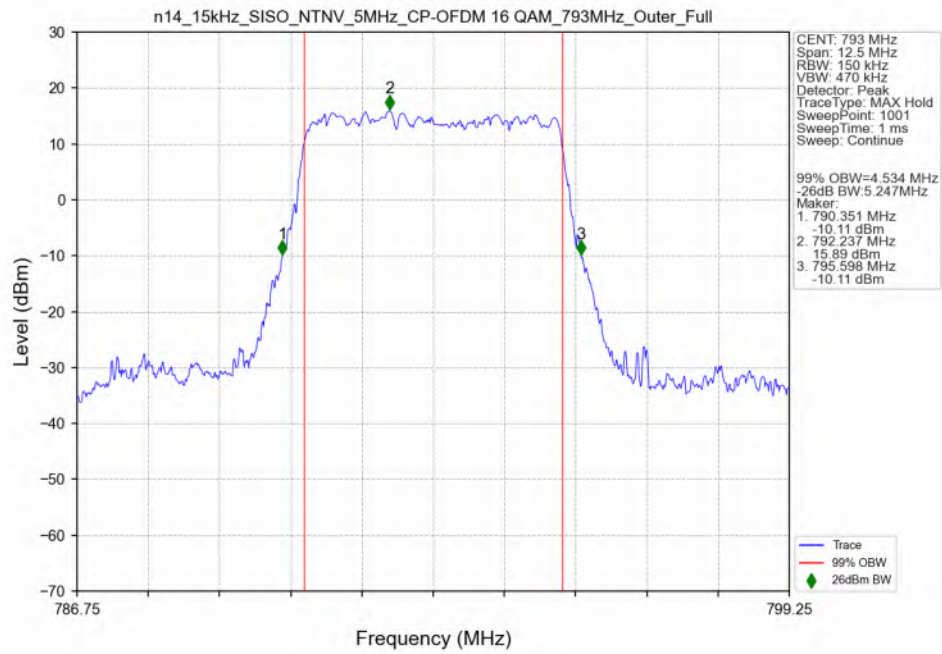


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM 64 QAM 793MHz_Outer_Full_Ant0

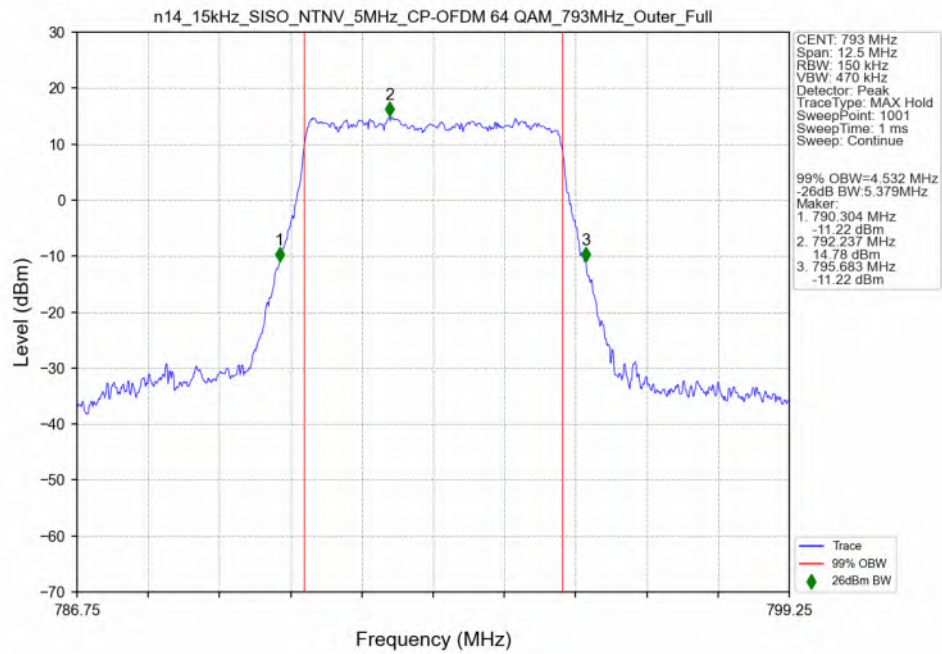


n14 15kHz SISO NTN 5MHz CP-OFDM 256 QAM 793MHz Outer Full Ant0

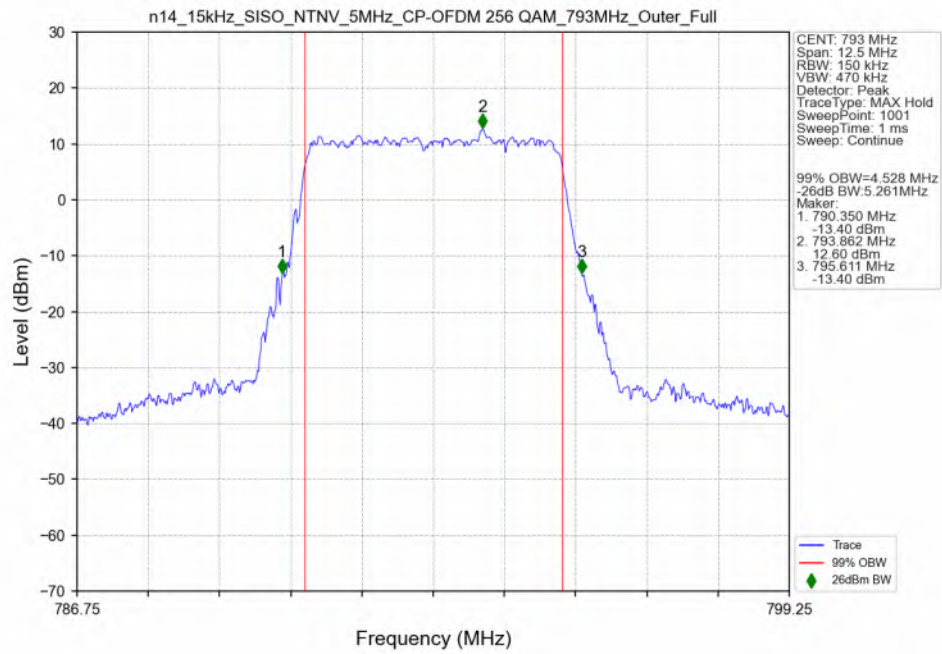


3.2.2 15_S_10M_NTNV

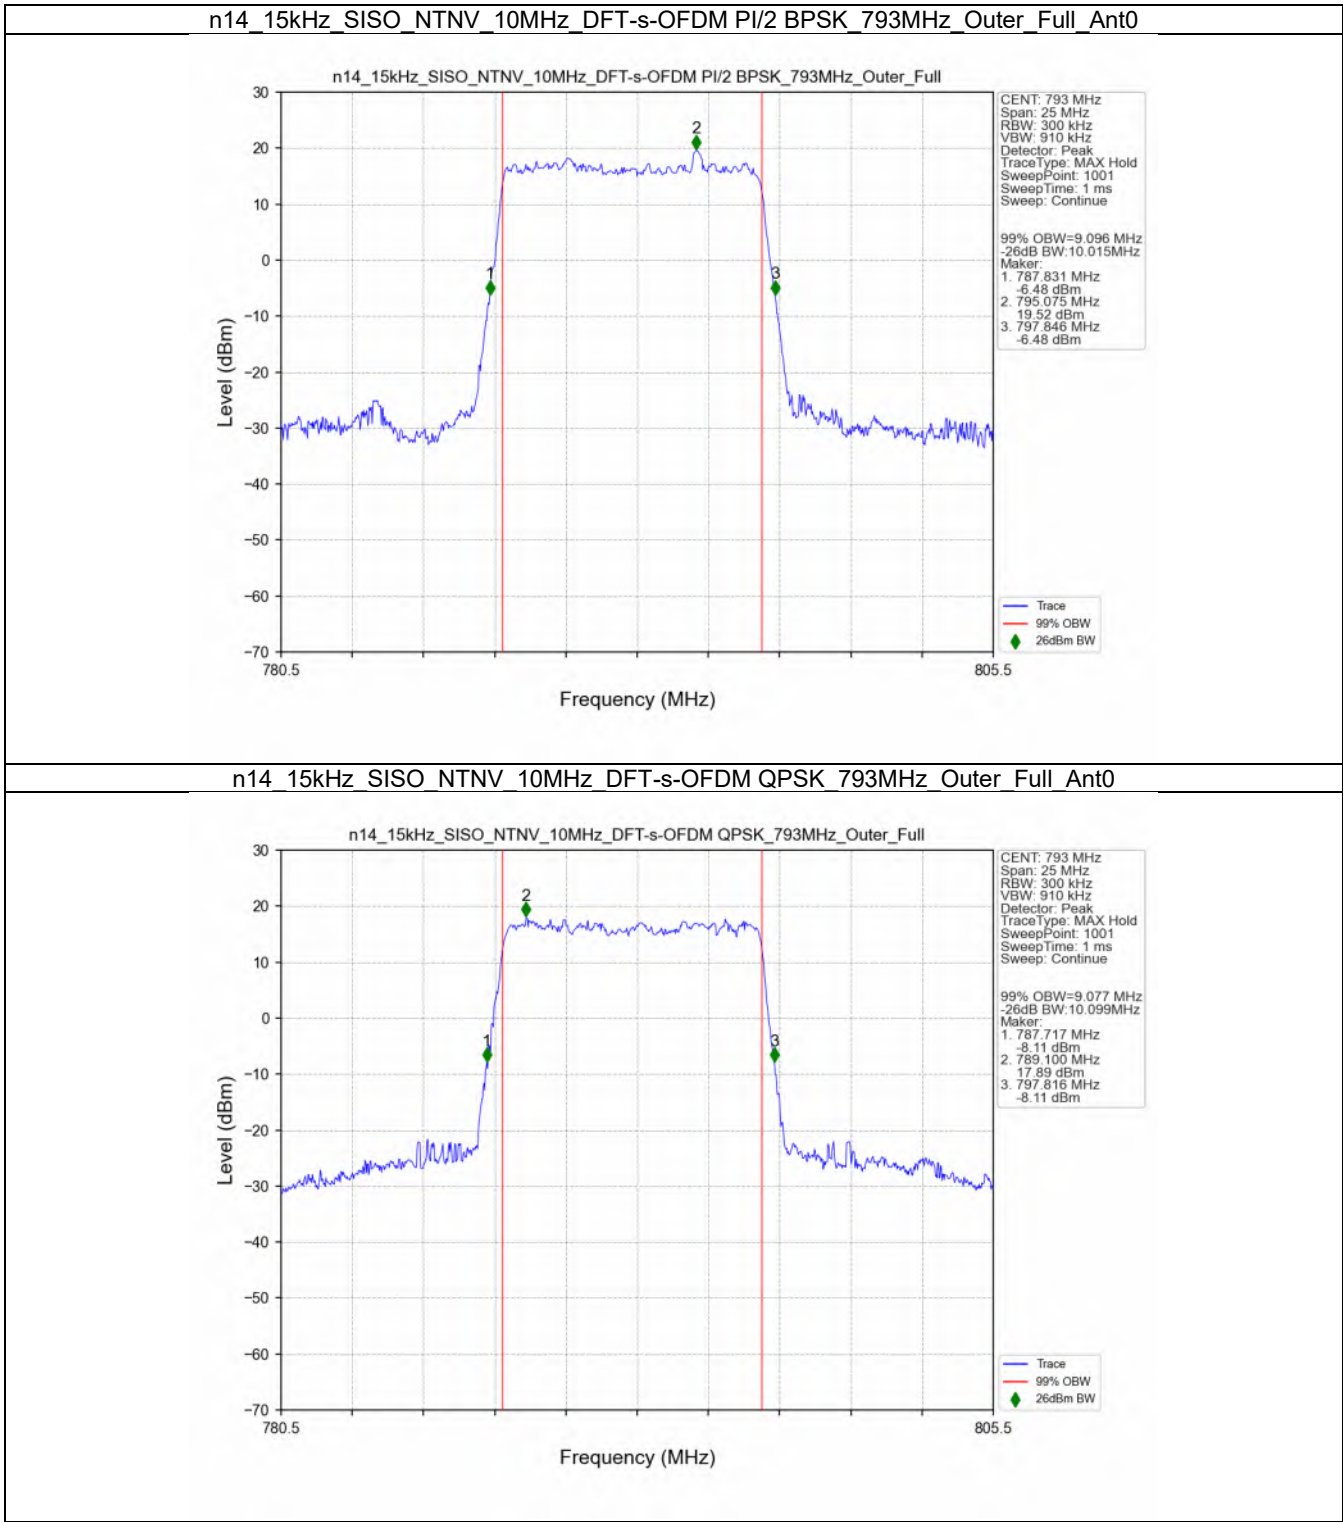


n14_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_16_QAM_793MHz_Outer_Full_Ant0

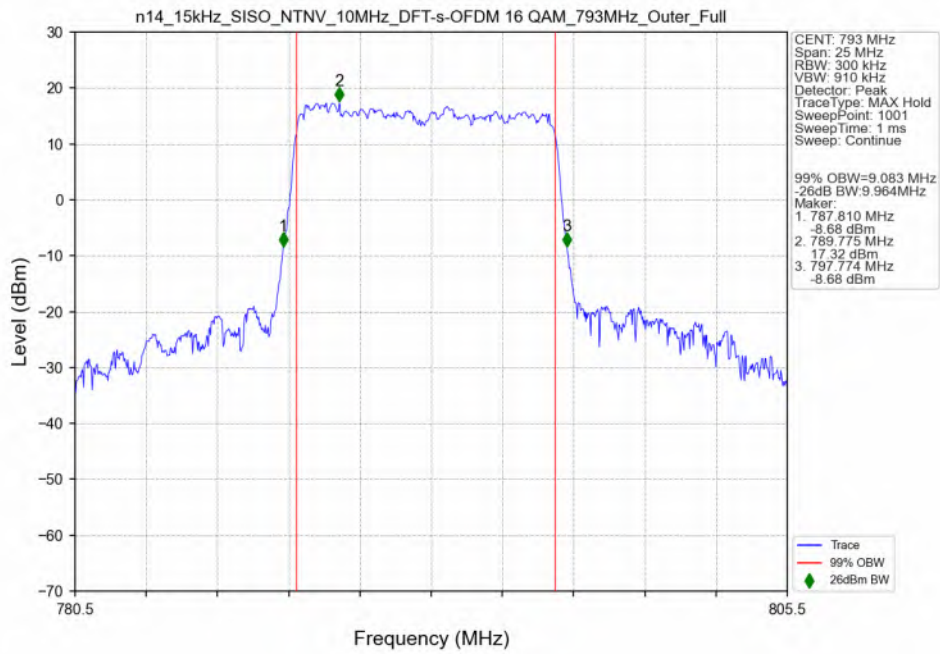


n14_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_64_QAM_793MHz_Outer_Full_Ant0

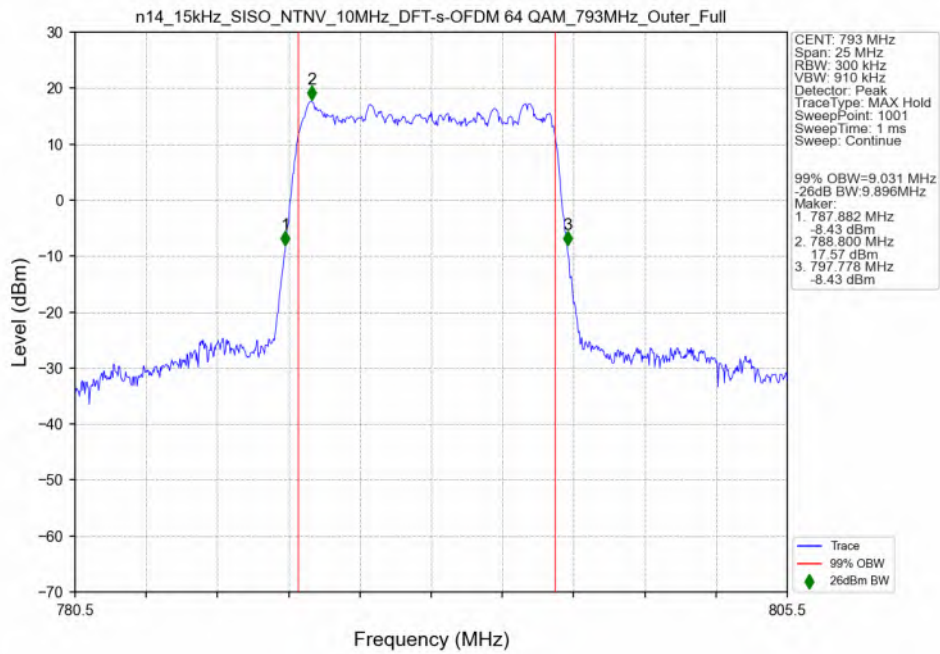


n14_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_256_QAM_793MHz_Outer_Full_Ant0

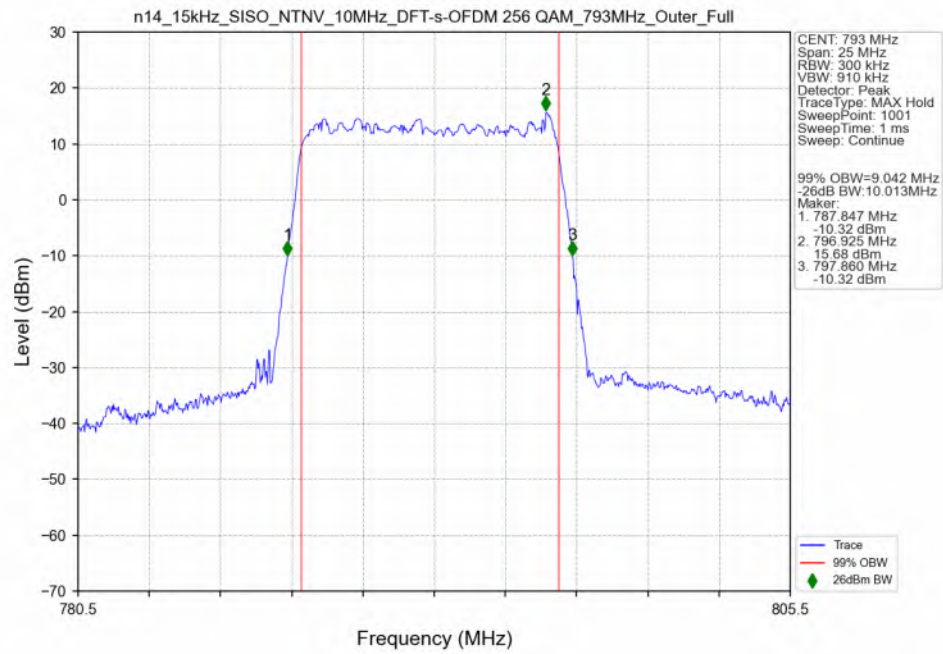


n14_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_793MHz_Outer_Full_Ant0

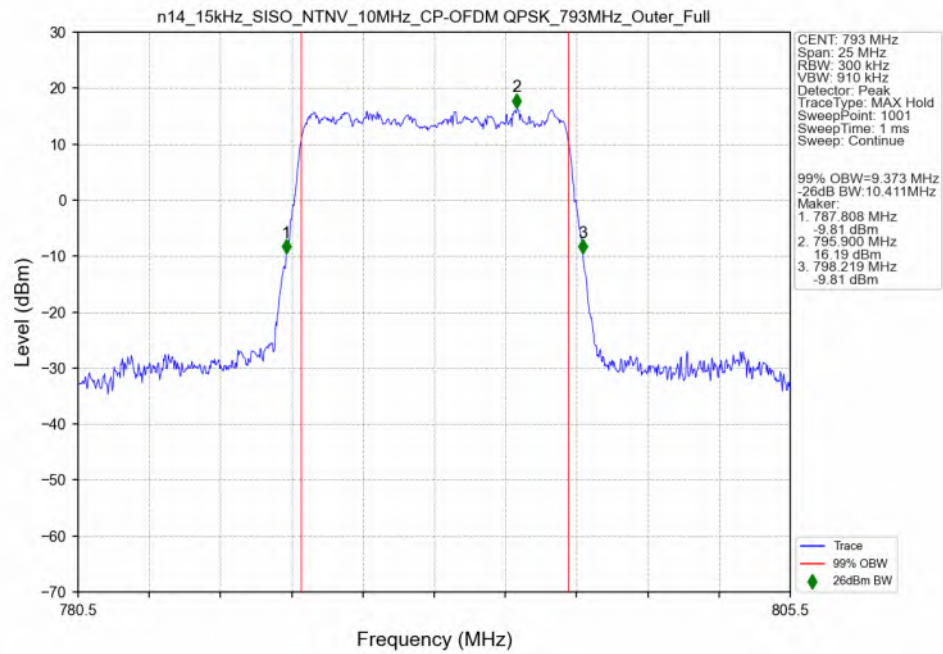


n14_15kHz_SISO_NTNV_10MHz_CP-OFDM_16_QAM_793MHz_Outer_Full_Ant0

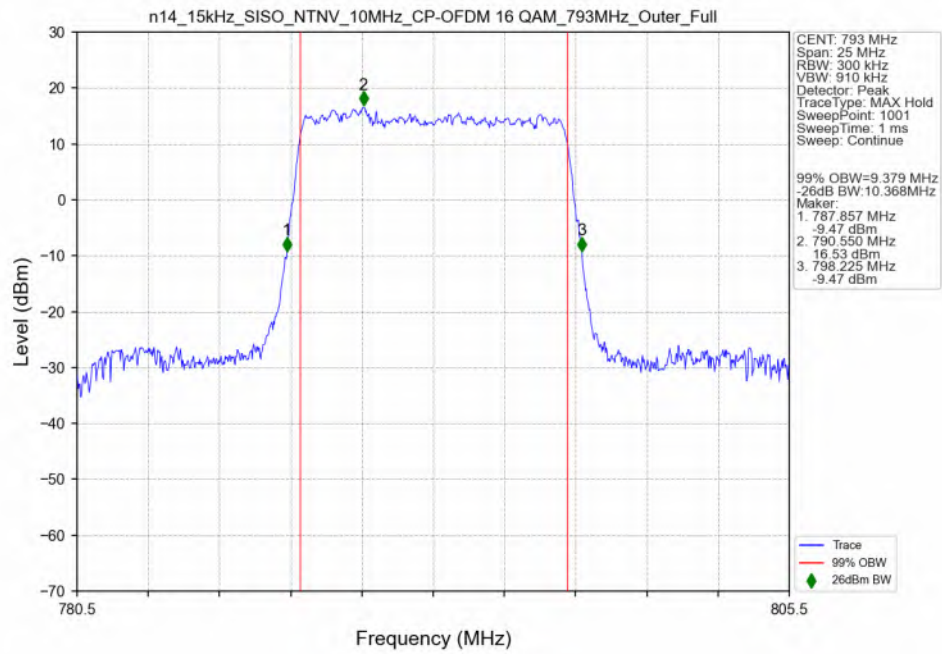

n14_15kHz_SISO_NTNV_10MHz_CP-OFDM_64_QAM_793MHz_Outer_Full_Ant0

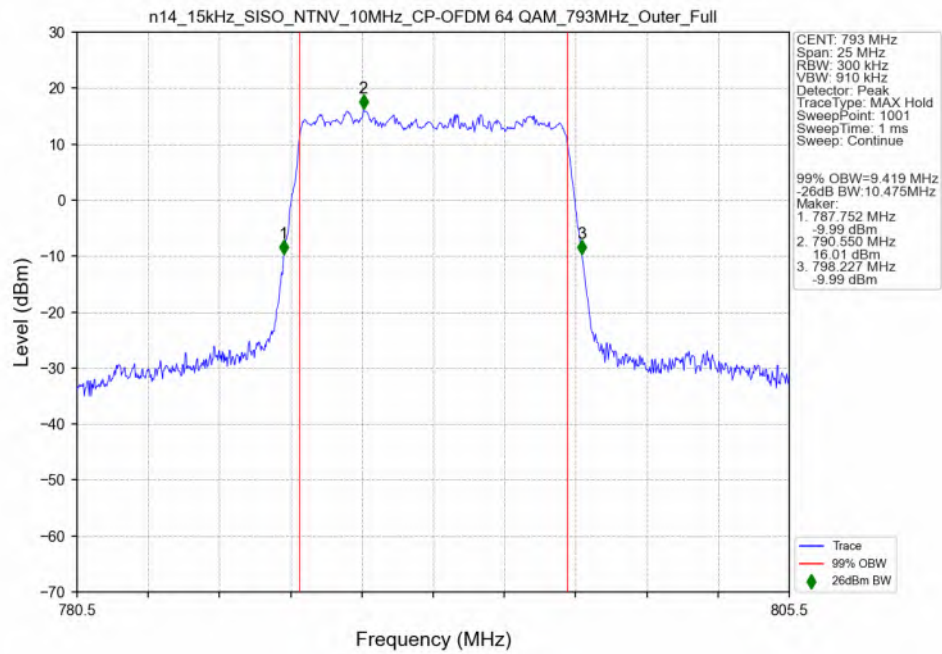

n14 15kHz SISO NTV 10MHz CP-OFDM 256 QAM 793MHz Outer Full Ant0

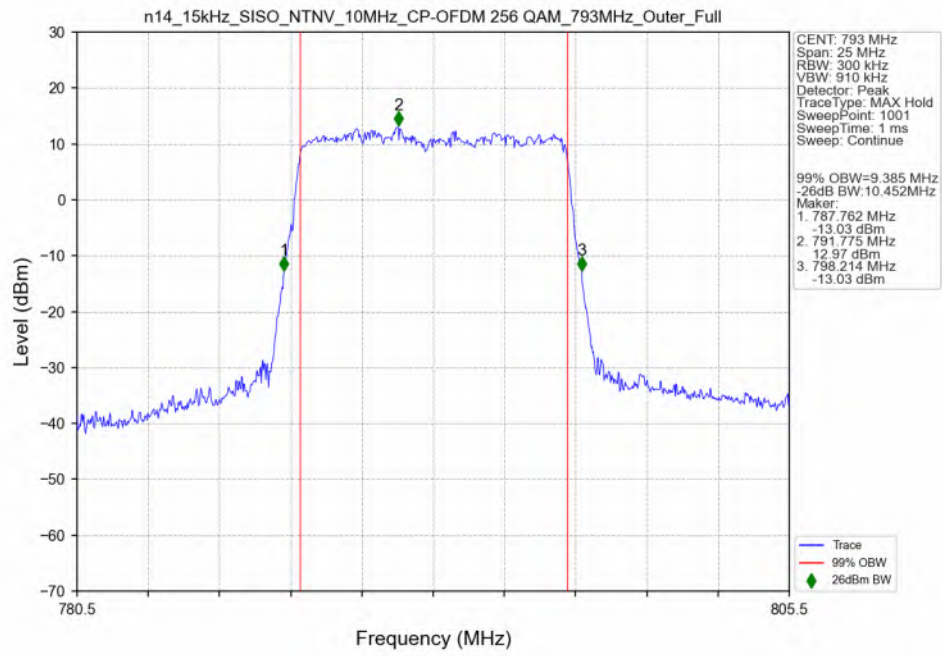

4. Peak-Average Ratio


4.1 Test Result

4.1.1 15_S_10M_NTNV


5G NR n14 SCS=15kHz SISO 10MHz NTN							
Modulation	Frequency (MHz)	RB Allocation	Peak-Average Ratio (dB)				Verdict
			Ant0	Ant2	Sum	Limit	
DFT-s-OFDM PI/2 BPSK	793	Outer_Full	4.14	/	/	<=13	Pass
DFT-s-OFDM QPSK	793	Outer_Full	5.08	/	/	<=13	Pass
CP-OFDM QPSK	793	Outer_Full	6.77	/	/	<=13	Pass

4.2 Test Graph

4.2.1 15_S_10M_NTNV

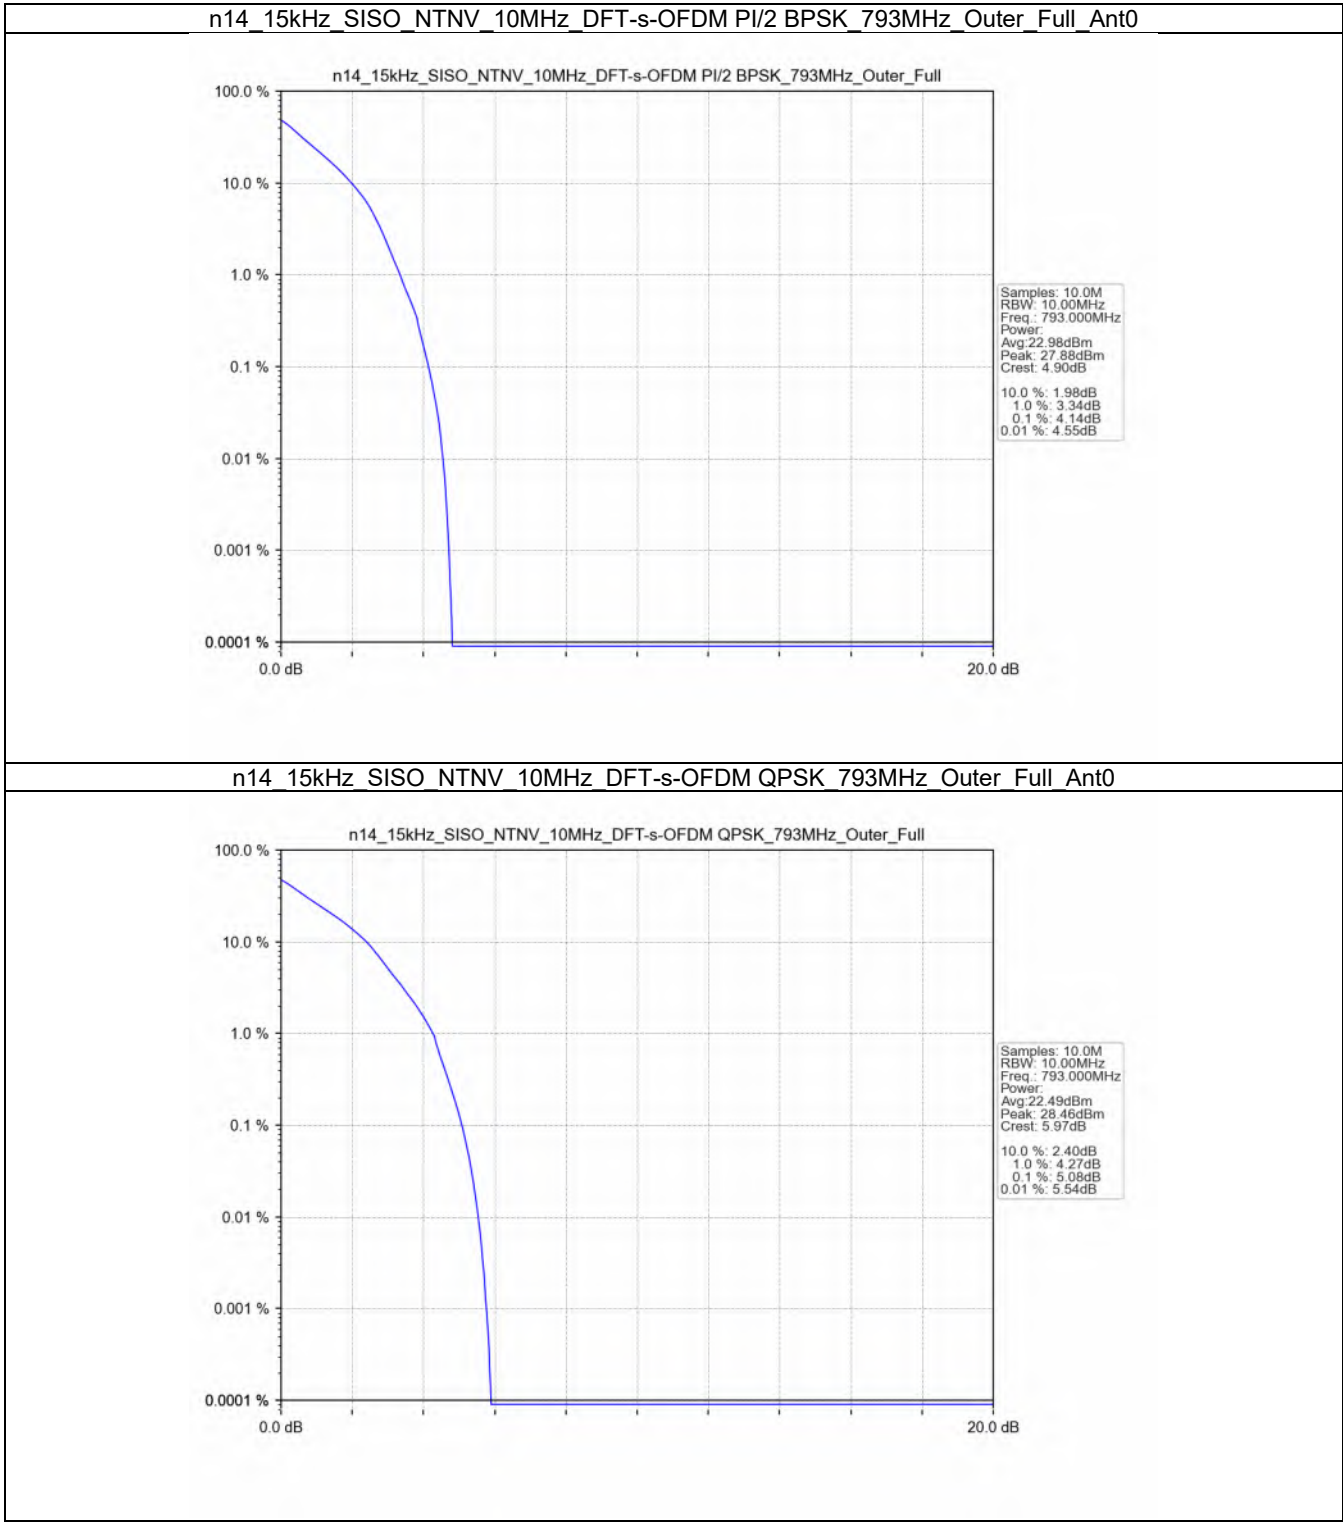

n14 15kHz SISO NTV 10MHz CP-OFDM QPSK 793MHz Outer Full Ant0

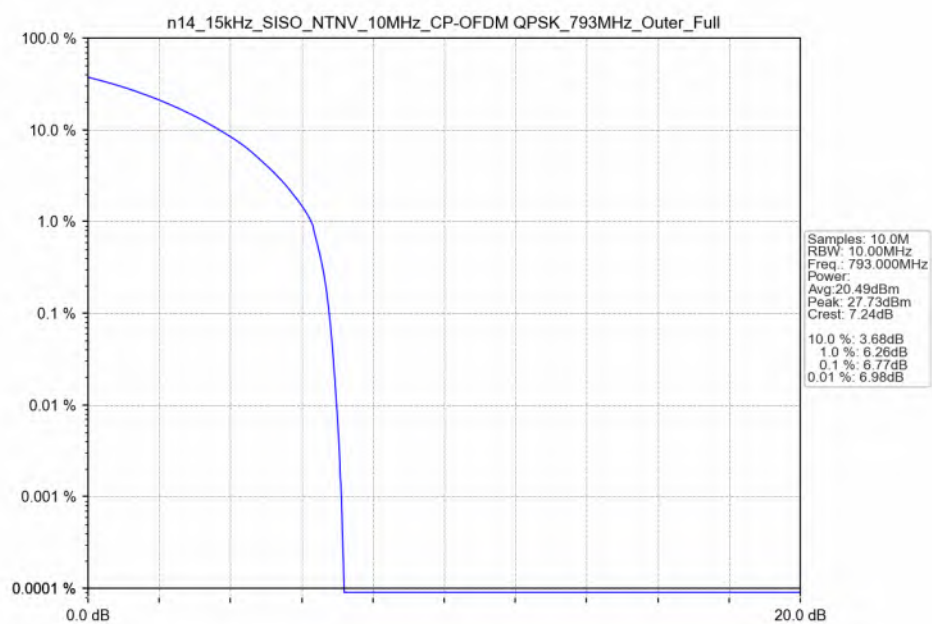

5. Spurious Emission

5.1 Test Result

5.1.1 15_S_5M_NTNV


5G NR n14 SCS=15kHz SISO 5MHz NTN							
Modulation	Frequency (MHz)	RB Allocation	Spurious Emission				Verdict
			Ant0	Ant2	Sum	Limit	
DFT-s-OFDM PI/2 BPSK	790.5	Edge 1RB Left	Refer To Test Graph				Pass
		Outer Full	Refer To Test Graph				Pass
	793	Edge 1RB Left	Refer To Test Graph				Pass
	795.5	Edge 1RB Right	Refer To Test Graph				Pass
		Outer Full	Refer To Test Graph				Pass
DFT-s-OFDM QPSK	790.5	Edge 1RB Left	Refer To Test Graph				Pass
		Outer Full	Refer To Test Graph				Pass
	793	Edge 1RB Left	Refer To Test Graph				Pass
	795.5	Edge 1RB Right	Refer To Test Graph				Pass
		Outer Full	Refer To Test Graph				Pass
CP-OFDM QPSK	790.5	Edge 1RB Left	Refer To Test Graph				Pass
		Outer Full	Refer To Test Graph				Pass
	793	Edge 1RB Left	Refer To Test Graph				Pass
	795.5	Edge 1RB Right	Refer To Test Graph				Pass
		Outer Full	Refer To Test Graph				Pass

5.1.2 15_S_10M_NTNV


5G NR n14 SCS=15kHz SISO 10MHz NTN							
Modulation	Frequency (MHz)	RB Allocation	Spurious Emission				Verdict
			Ant0	Ant2	Sum	Limit	
DFT-s-OFDM PI/2 BPSK	793	Edge 1RB Left	Refer To Test Graph				Pass
		Outer Full	Refer To Test Graph				Pass
DFT-s-OFDM QPSK	793	Edge 1RB Left	Refer To Test Graph				Pass
		Outer Full	Refer To Test Graph				Pass
CP-OFDM QPSK	793	Edge 1RB Left	Refer To Test Graph				Pass
		Outer Full	Refer To Test Graph				Pass

5.2 Test Graph

5.2.1 15_S_5M_NTNV

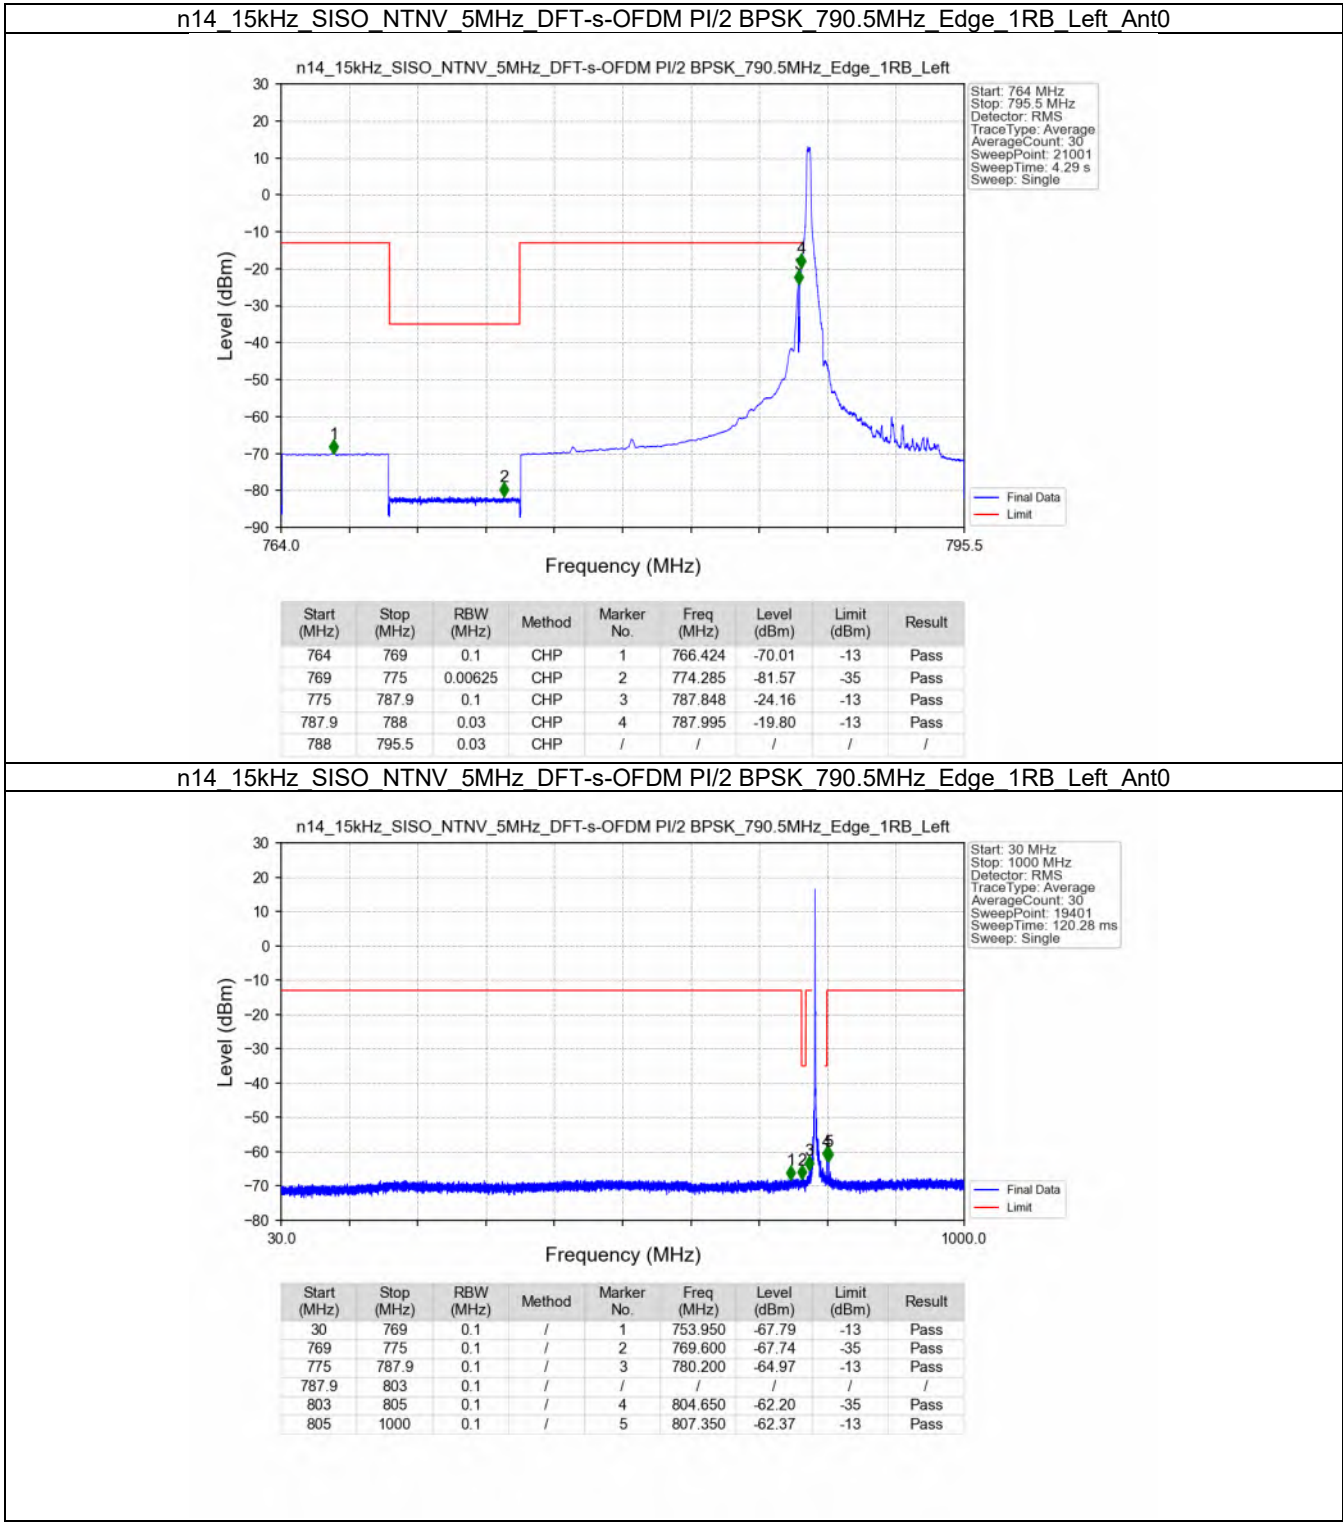


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_PI/2_BPSK_790.5MHz_Edge_1RB_Left_Ant0

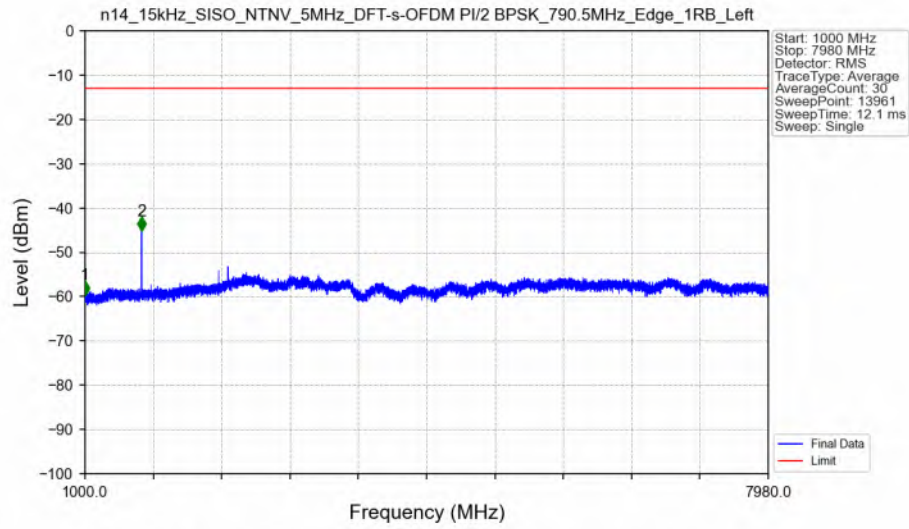


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	1000	1	/	1	1000.000	-59.59	-13	Pass
1000	7980	1	/	2	1577.000	-45.17	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_PI/2_BPSK_790.5MHz_Outer_Full_Ant0

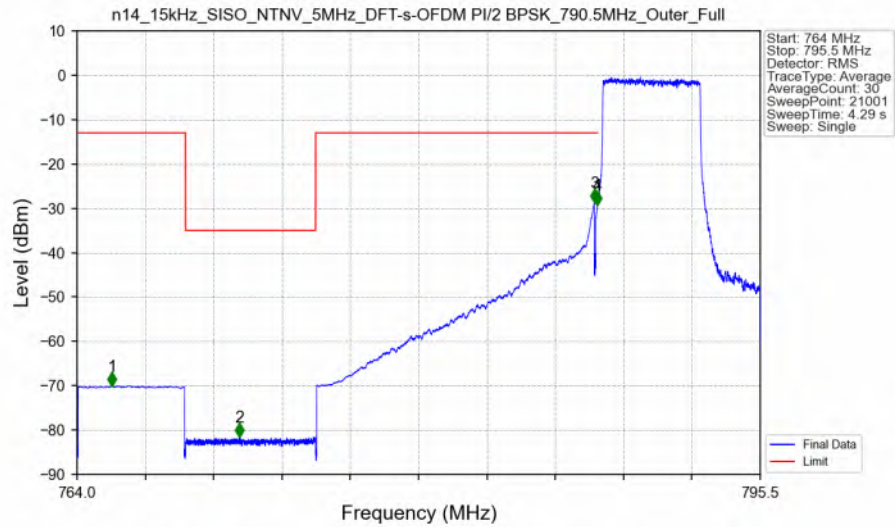


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
764	769	0.1	CHP	1	765.611	-70.03	-13	Pass
769	775	0.00625	CHP	2	771.473	-81.52	-35	Pass
775	787.9	0.1	CHP	3	787.848	-28.73	-13	Pass
787.9	788	0.03	CHP	4	787.997	-29.27	-13	Pass
788	795.5	0.03	CHP	/	/	/	/	/

n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_PI/2_BPSK_793MHz_Edge_1RB_Left_Ant0

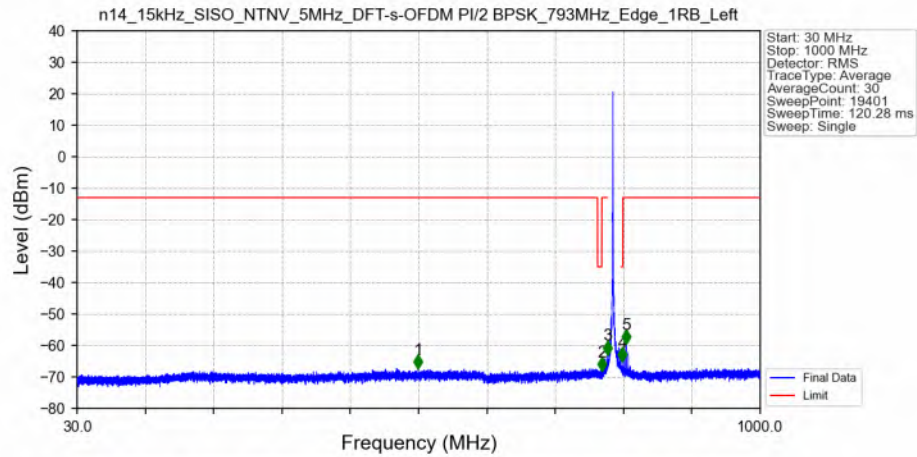


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	769	0.1	/	1	514.300	-67.15	-13	Pass
769	775	0.1	/	2	774.950	-67.91	-35	Pass
775	787.9	0.1	/	3	782.750	-62.61	-13	Pass
787.9	803	0.1	/	/	/	/	/	/
803	805	0.1	/	4	804.400	-64.77	-35	Pass
805	1000	0.1	/	5	809.800	-59.15	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_PI/2_BPSK_793MHz_Edge_1RB_Left_Ant0

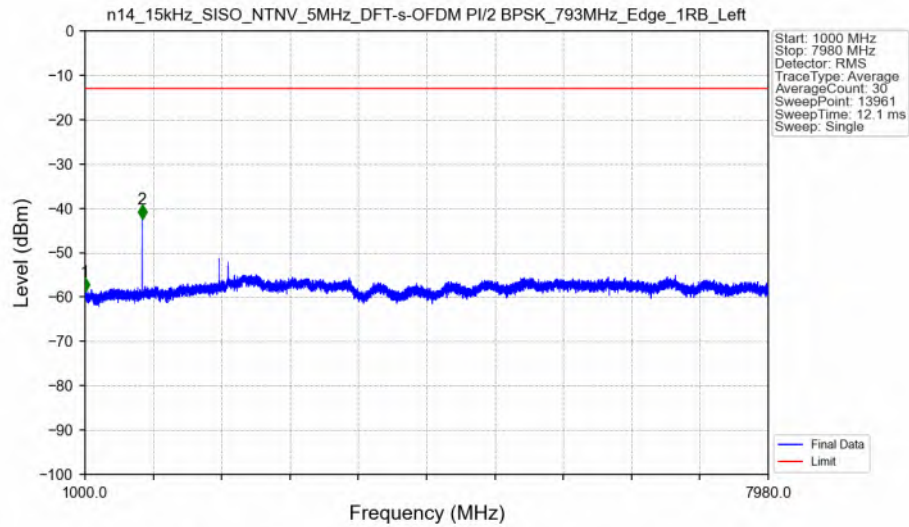


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	1000	1	/	1	1000.000	-58.76	-13	Pass
1000	7980	1	/	2	1582.000	-42.46	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM PI/2 BPSK_795.5MHz_Edge_1RB_Right_Ant0

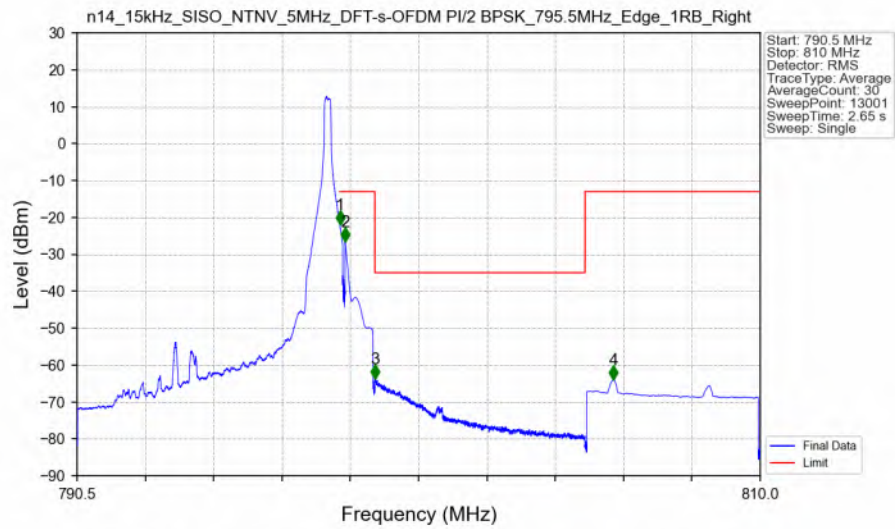


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
790.5	798	0.03	CHP	/	/	/	/	/
798	798.1	0.03	CHP	1	798.003	-21.97	-13	Pass
798.1	799	0.1	CHP	2	798.152	-26.58	-13	Pass
799	805	0.00625	CHP	3	799.004	-63.76	-35	Pass
805	810	0.1	CHP	4	805.815	-63.85	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM PI/2 BPSK_795.5MHz_Edge_1RB_Right_Ant0

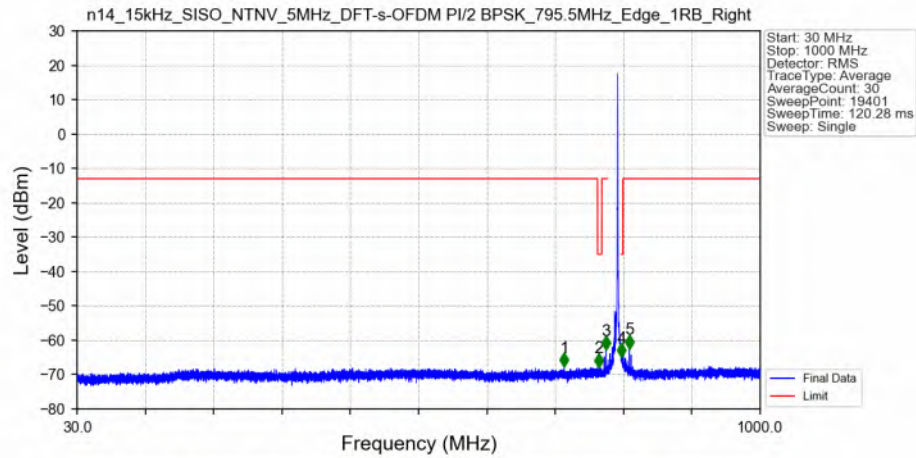


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	769	0.1	/	1	721.800	-67.47	-13	Pass
769	775	0.1	/	2	771.100	-67.54	-35	Pass
775	787.9	0.1	/	3	781.350	-62.44	-13	Pass
787.9	803	0.1	/	/	/	/	/	/
803	805	0.1	/	4	803.300	-64.54	-35	Pass
805	1000	0.1	/	5	813.950	-62.14	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM PI/2 BPSK_795.5MHz_Edge_1RB_Right_Ant0

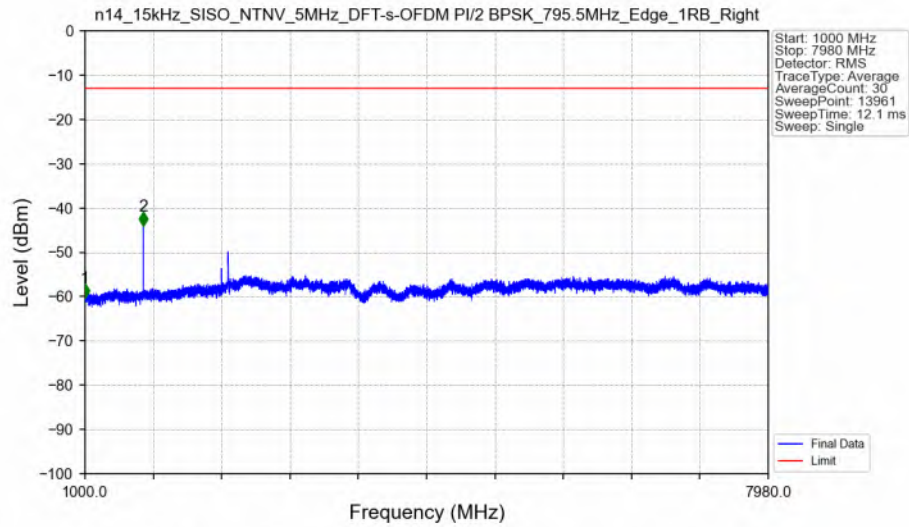


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	1000	1	/	1	1000.000	-60.29	-13	Pass
1000	7980	1	/	2	1596.000	-44.01	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM PI/2 BPSK_795.5MHz_Outer_Full_Ant0

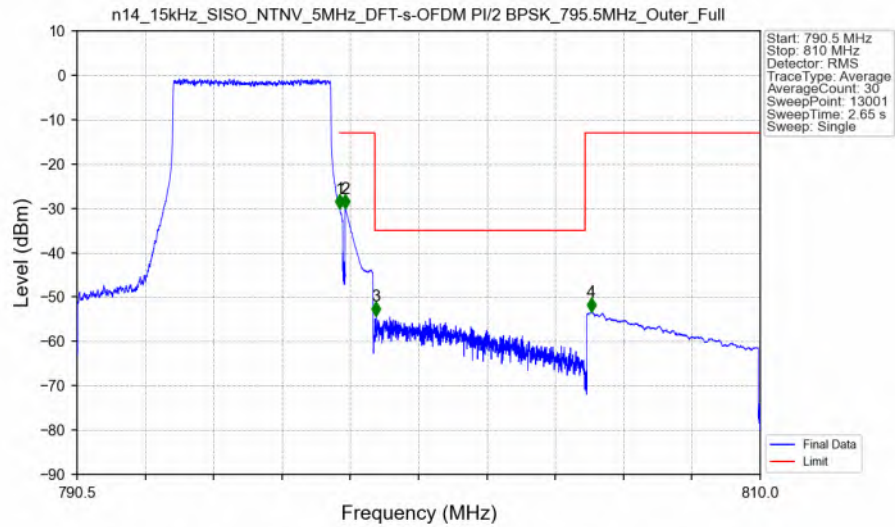


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
790.5	798	0.03	CHP	/	/	/	/	/
798	798.1	0.03	CHP	1	798.001	-30.02	-13	Pass
798.1	799	0.1	CHP	2	798.152	-30.00	-13	Pass
799	805	0.00625	CHP	3	799.039	-54.26	-35	Pass
805	810	0.1	CHP	4	805.179	-53.35	-13	Pass

n14 15kHz SISO NTN 5MHz DFT-s-OFDM QPSK 790.5MHz Edge 1RB Left Ant0

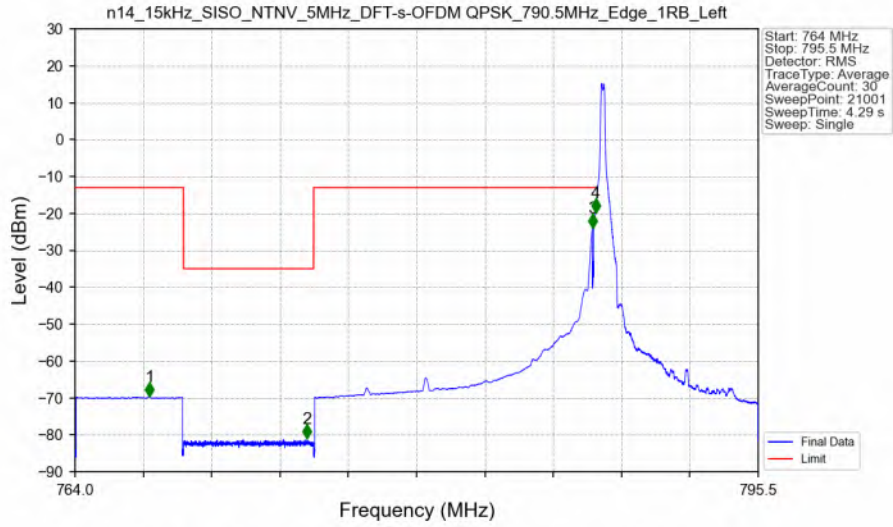


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
764	769	0.1	CHP	1	767.433	-69.67	-13	Pass
769	775	0.00625	CHP	2	774.704	-81.08	-35	Pass
775	787.9	0.1	CHP	3	787.848	-23.92	-13	Pass
787.9	788	0.03	CHP	4	787.999	-19.74	-13	Pass
788	795.5	0.03	CHP	/	/	/	/	/

n14 15kHz SISO NTN 5MHz DFT-s-OFDM QPSK 790.5MHz Edge 1RB Left Ant0

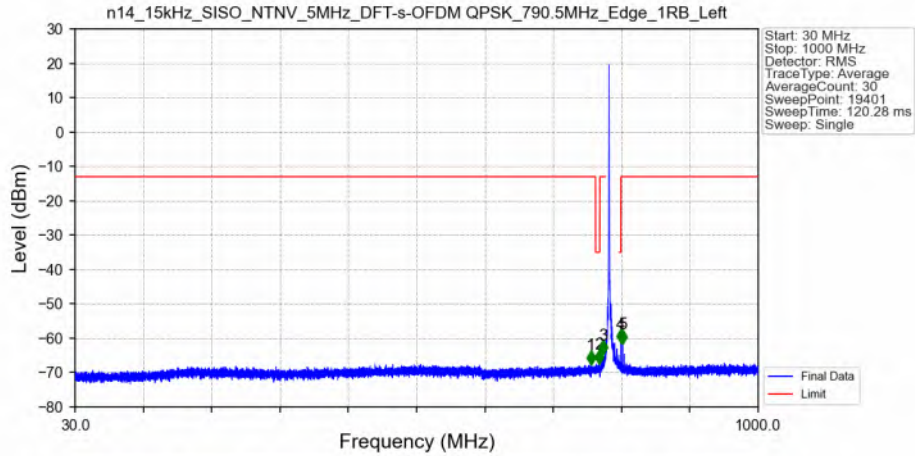


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	769	0.1	/	1	762.150	-67.32	-13	Pass
769	775	0.1	/	2	774.300	-67.09	-35	Pass
775	787.9	0.1	/	3	780.200	-64.32	-13	Pass
787.9	803	0.1	/	/	/	/	/	/
803	805	0.1	/	4	804.700	-61.09	-35	Pass
805	1000	0.1	/	5	807.350	-61.19	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_790.5MHz_Edge_1RB_Left_Ant0

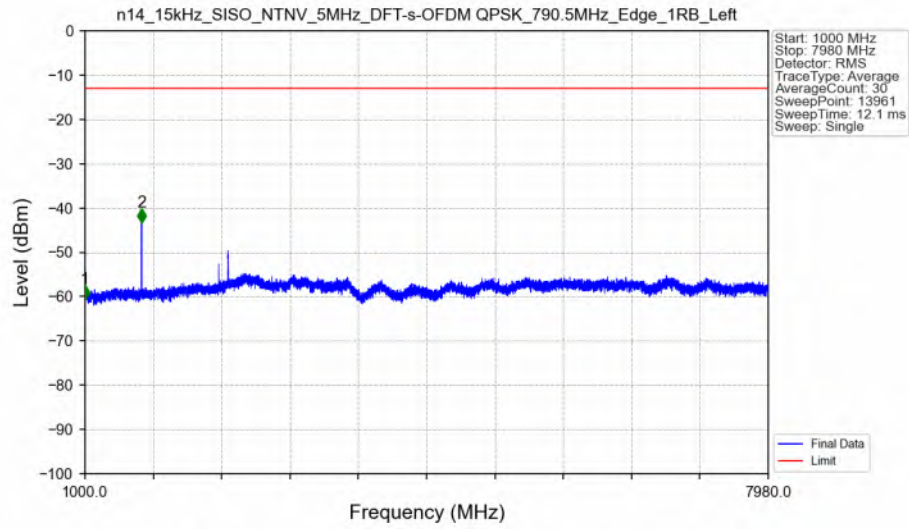


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	1000	1	/	1	1000.000	-60.51	-13	Pass
1000	7980	1	/	2	1577.500	-43.21	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_790.5MHz_Outer_Full_Ant0

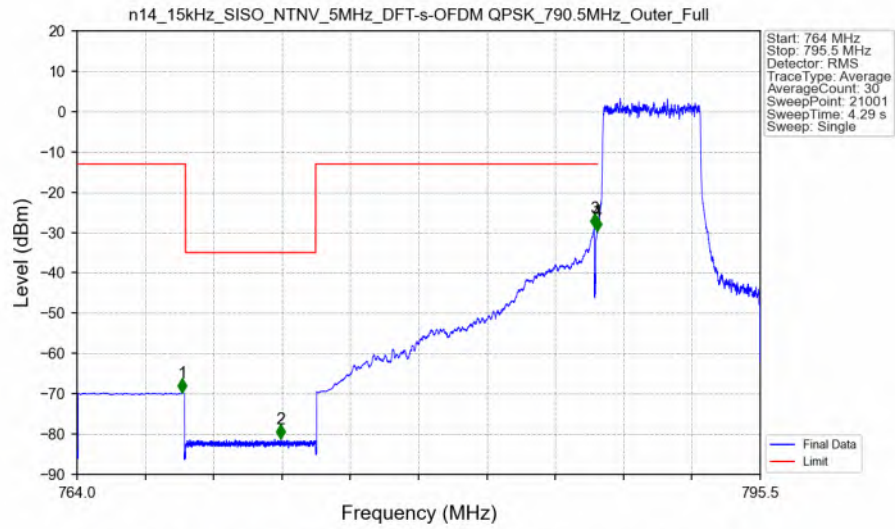


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
764	769	0.1	CHP	1	768.856	-69.70	-13	Pass
769	775	0.00625	CHP	2	773.399	-81.14	-35	Pass
775	787.9	0.1	CHP	3	787.848	-28.90	-13	Pass
787.9	788	0.03	CHP	4	787.990	-29.54	-13	Pass
788	795.5	0.03	CHP	/	/	/	/	/


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_793MHz_Edge_1RB_Left_Ant0

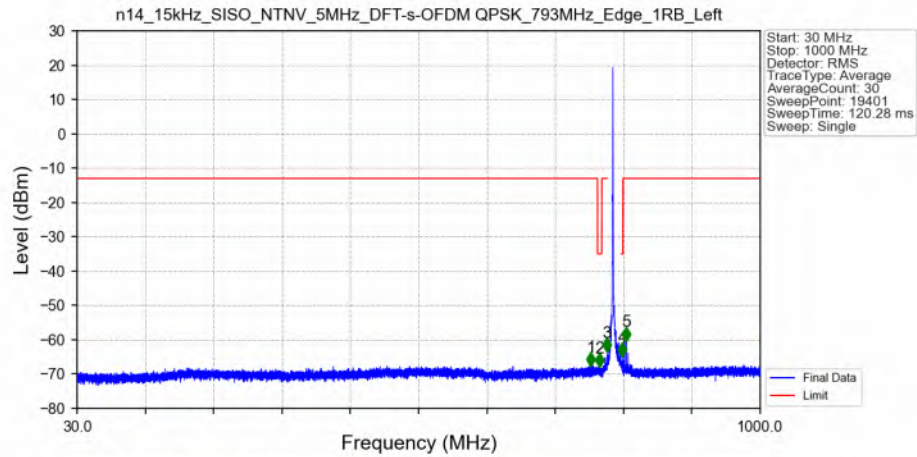


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_793MHz_Edge_1RB_Left_Ant0

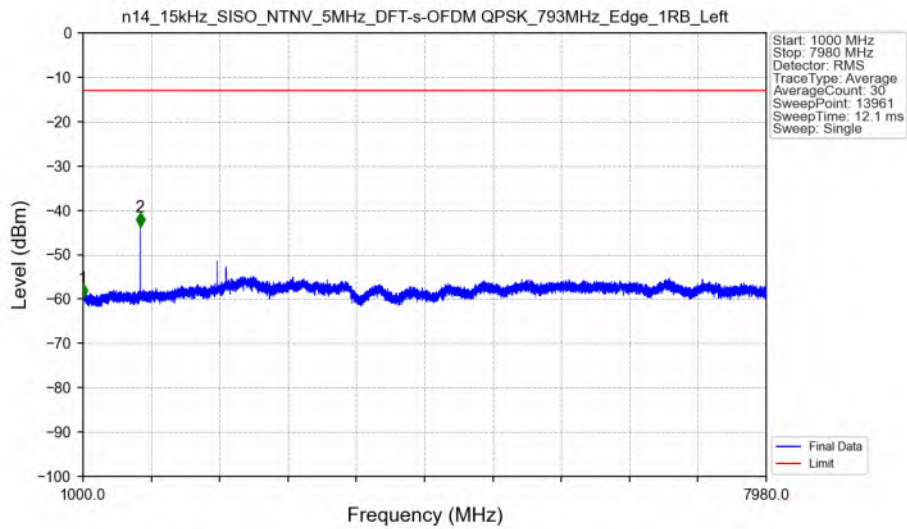


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_795.5MHz_Edge_1RB_Right_Ant0

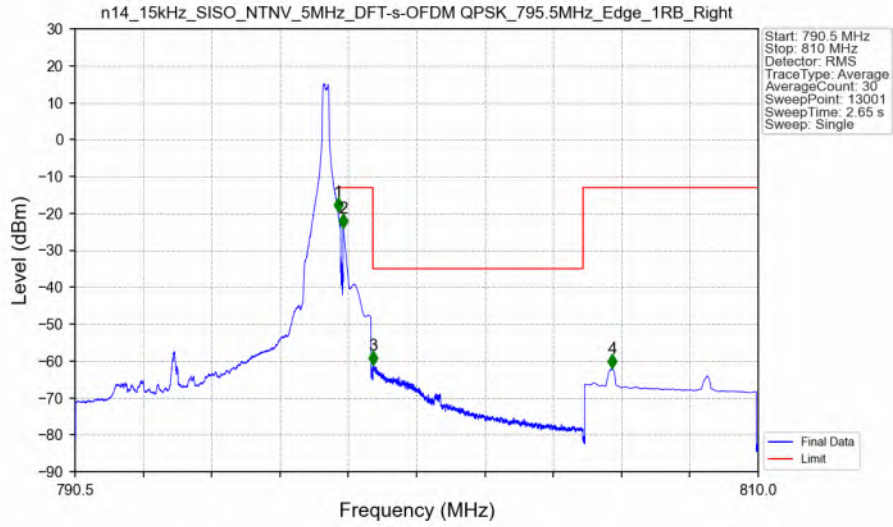

n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_795.5MHz_Edge_1RB_Right_Ant0

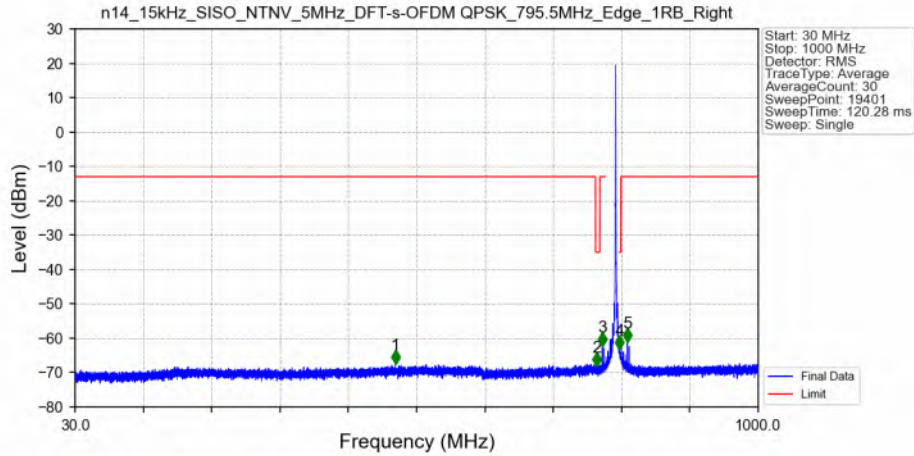


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_795.5MHz_Edge_1RB_Right_Ant0

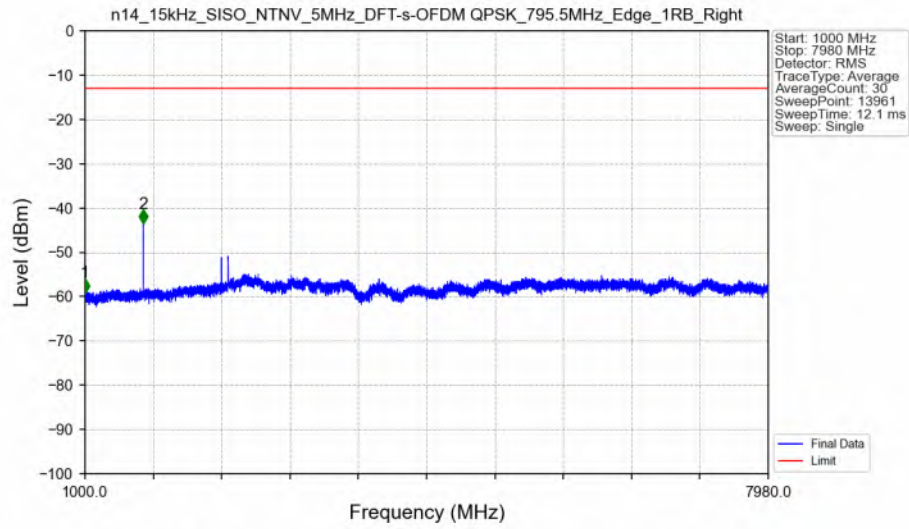


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	1000	1	/	1	1000.000	-59.06	-13	Pass
1000	7980	1	/	2	1596.000	-43.41	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_795.5MHz_Outer_Full_Ant0

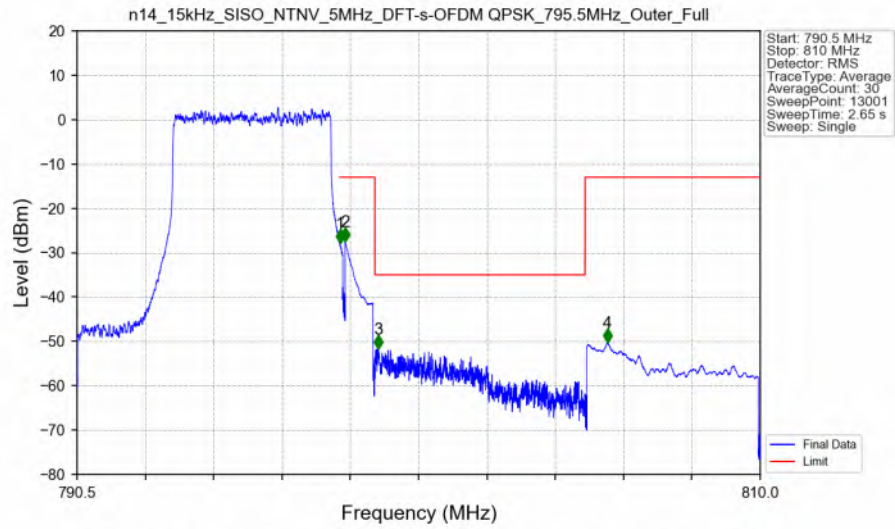


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
790.5	798	0.03	CHP	/	/	/	/	/
798	798.1	0.03	CHP	1	798.003	-27.92	-13	Pass
798.1	799	0.1	CHP	2	798.152	-27.46	-13	Pass
799	805	0.00625	CHP	3	799.096	-51.74	-35	Pass
805	810	0.1	CHP	4	805.641	-50.34	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_790.5MHz_Edge_1RB_Left_Ant0

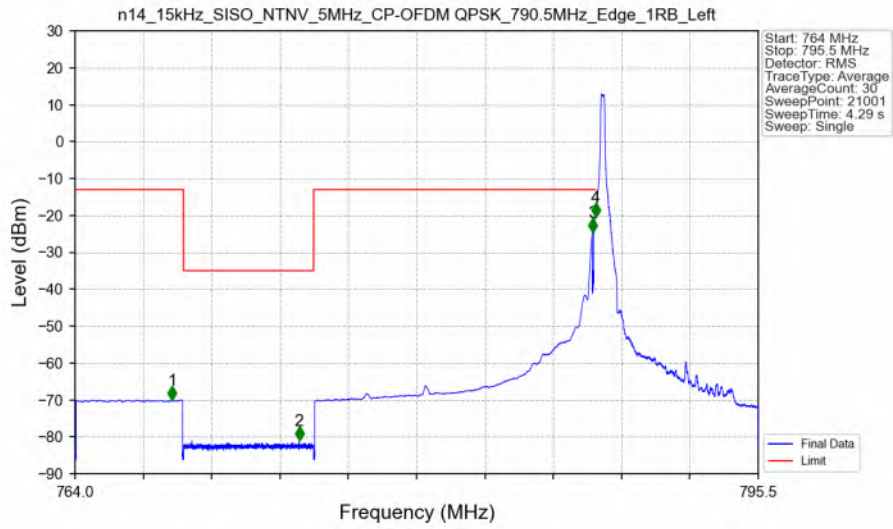


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
764	769	0.1	CHP	1	768.473	-70.03	-13	Pass
769	775	0.00625	CHP	2	774.337	-81.06	-35	Pass
775	787.9	0.1	CHP	3	787.848	-24.56	-13	Pass
787.9	788	0.03	CHP	4	787.999	-20.34	-13	Pass
788	795.5	0.03	CHP	/	/	/	/	/

n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_790.5MHz_Edge_1RB_Left_Ant0

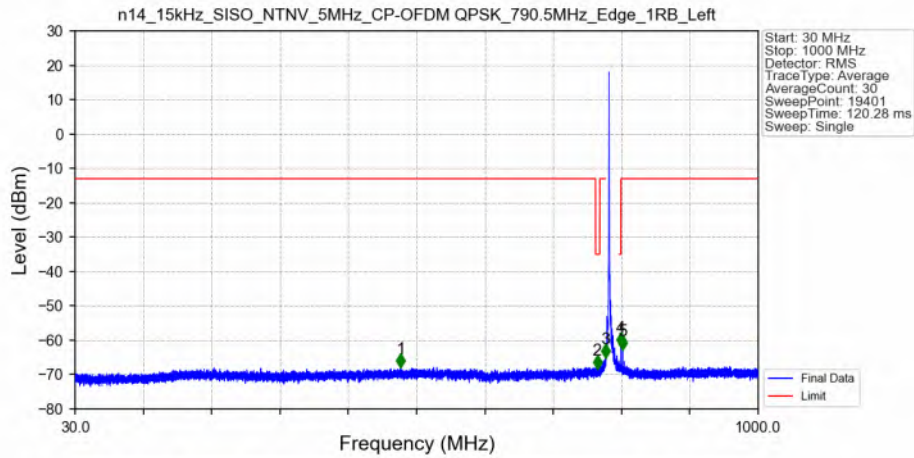


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	769	0.1	/	1	492.200	-67.75	-13	Pass
769	775	0.1	/	2	771.350	-68.11	-35	Pass
775	787.9	0.1	/	3	782.800	-64.88	-13	Pass
787.9	803	0.1	/	/	/	/	/	/
803	805	0.1	/	4	804.650	-61.63	-35	Pass
805	1000	0.1	/	5	807.350	-62.52	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_790.5MHz_Edge_1RB_Left_Ant0

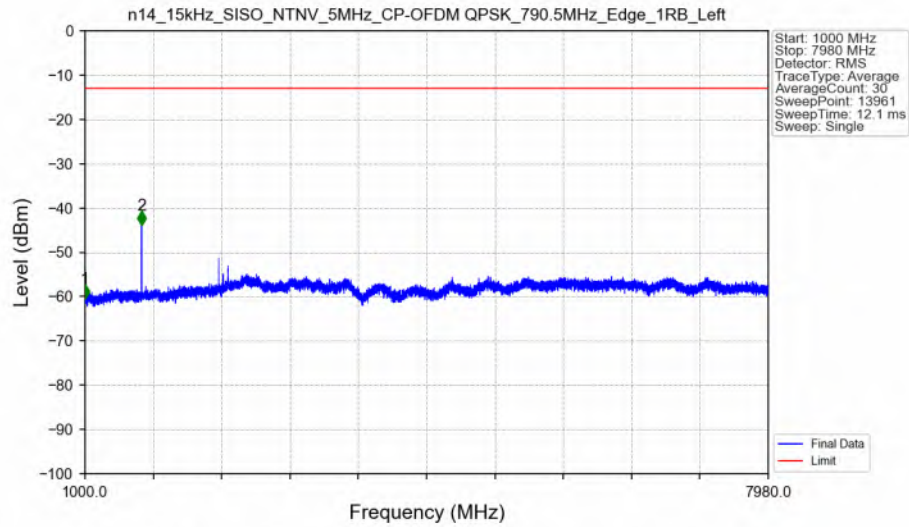


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	1000	1	/	1	1000.000	-60.36	-13	Pass
1000	7980	1	/	2	1577.500	-43.76	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_790.5MHz_Outer_Full_Ant0

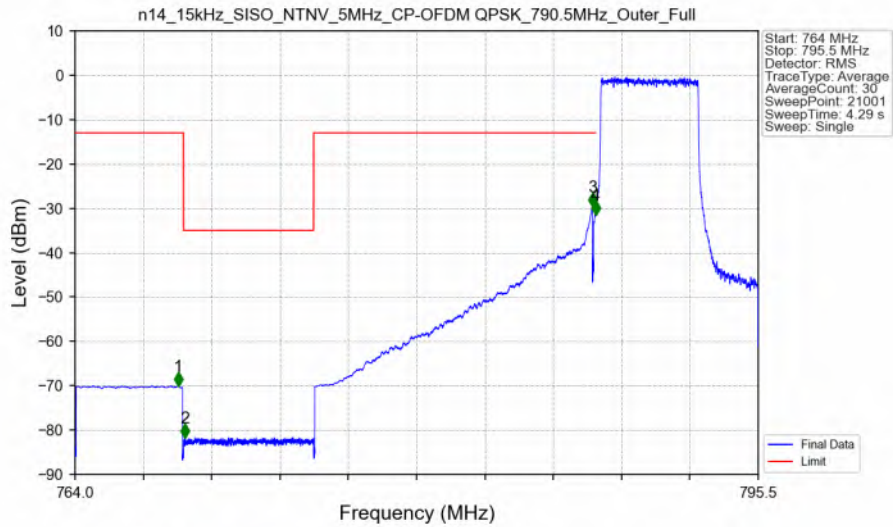


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
764	769	0.1	CHP	1	768.767	-70.07	-13	Pass
769	775	0.00625	CHP	2	769.061	-81.69	-35	Pass
775	787.9	0.1	CHP	3	787.848	-29.66	-13	Pass
787.9	788	0.03	CHP	4	787.999	-31.47	-13	Pass
788	795.5	0.03	CHP	/	/	/	/	/

n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_793MHz_Edge_1RB_Left_Ant0

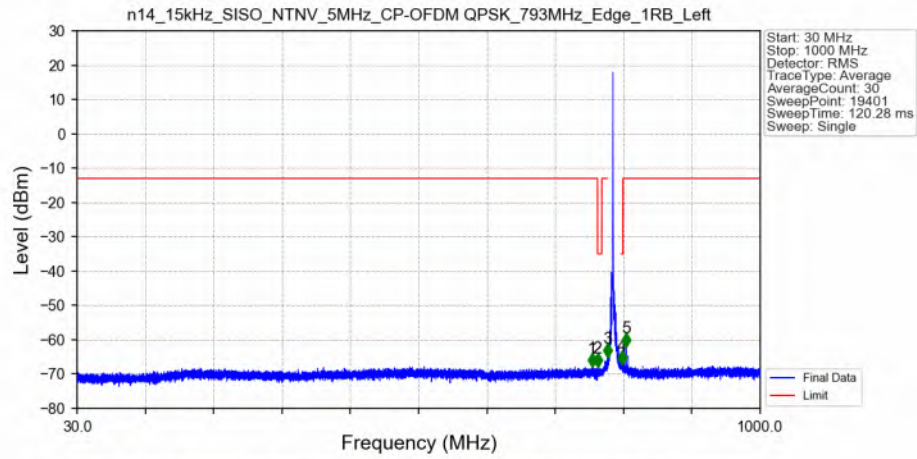


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	769	0.1	/	1	761.200	-67.63	-13	Pass
769	775	0.1	/	2	769.050	-67.63	-35	Pass
775	787.9	0.1	/	3	782.750	-64.77	-13	Pass
787.9	803	0.1	/	/	/	/	/	/
803	805	0.1	/	4	803.500	-66.99	-35	Pass
805	1000	0.1	/	5	809.850	-61.77	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_793MHz_Edge_1RB_Left_Ant0

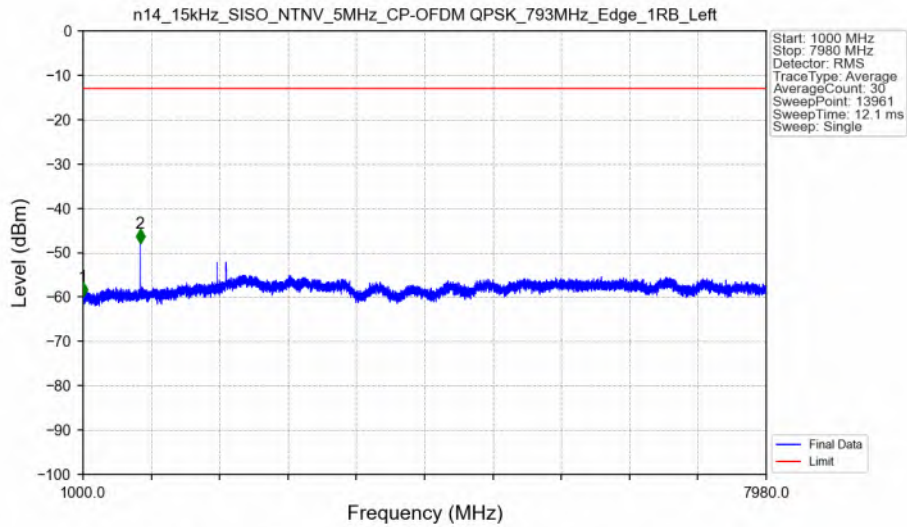


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	1000	1	/	1	1000.000	-59.79	-13	Pass
1000	7980	1	/	2	1582.500	-47.85	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_795.5MHz_Edge_1RB_Right_Ant0

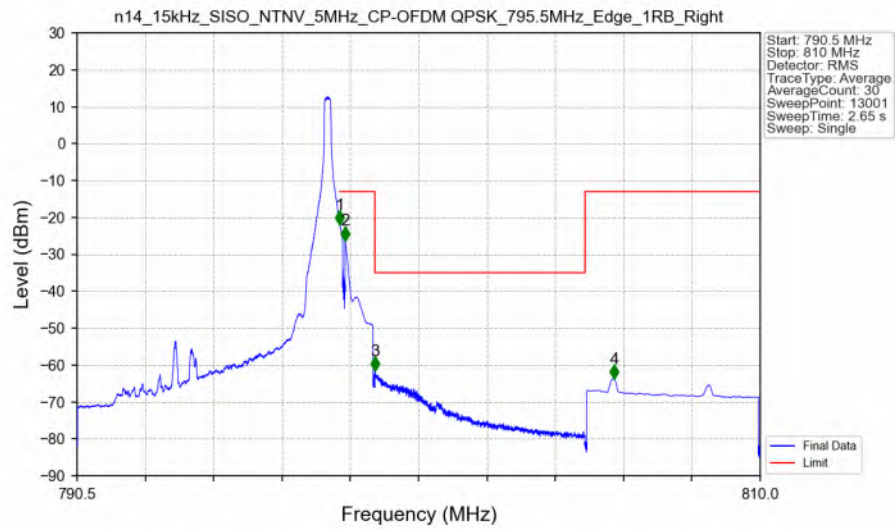


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
790.5	798	0.03	CHP	/	/	/	/	/
798	798.1	0.03	CHP	1	798.001	-21.92	-13	Pass
798.1	799	0.1	CHP	2	798.152	-26.22	-13	Pass
799	805	0.00625	CHP	3	799.006	-61.56	-35	Pass
805	810	0.1	CHP	4	805.832	-63.63	-13	Pass

n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_795.5MHz_Edge_1RB_Right_Ant0

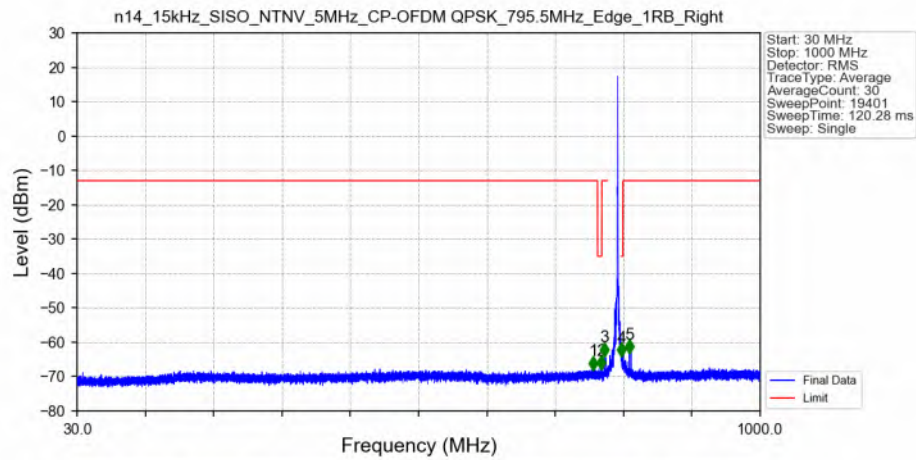


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	769	0.1	/	1	763.100	-67.78	-13	Pass
769	775	0.1	/	2	773.850	-67.74	-35	Pass
775	787.9	0.1	/	3	778.600	-63.80	-13	Pass
787.9	803	0.1	/	/	/	/	/	/
803	805	0.1	/	4	803.300	-63.92	-35	Pass
805	1000	0.1	/	5	814.000	-62.98	-13	Pass


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_795.5MHz_Edge_1RB_Right_Ant0

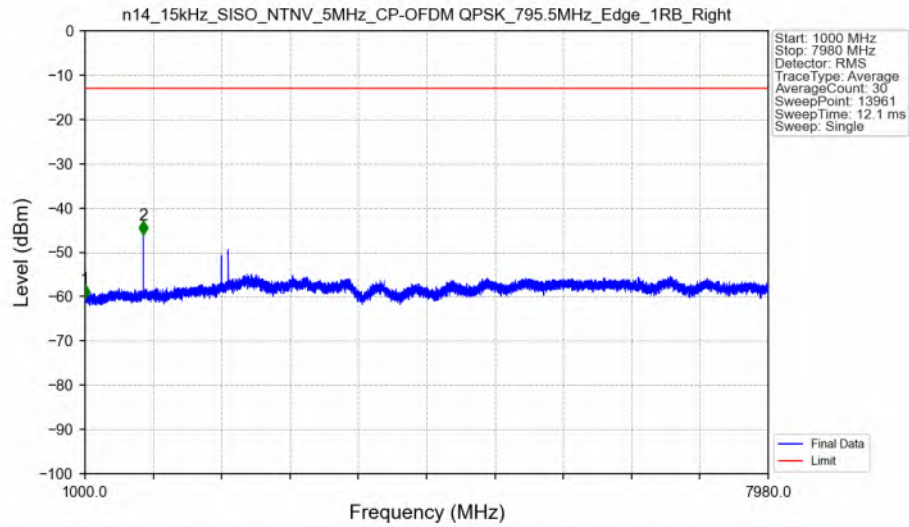


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_795.5MHz_Outer_Full_Ant0

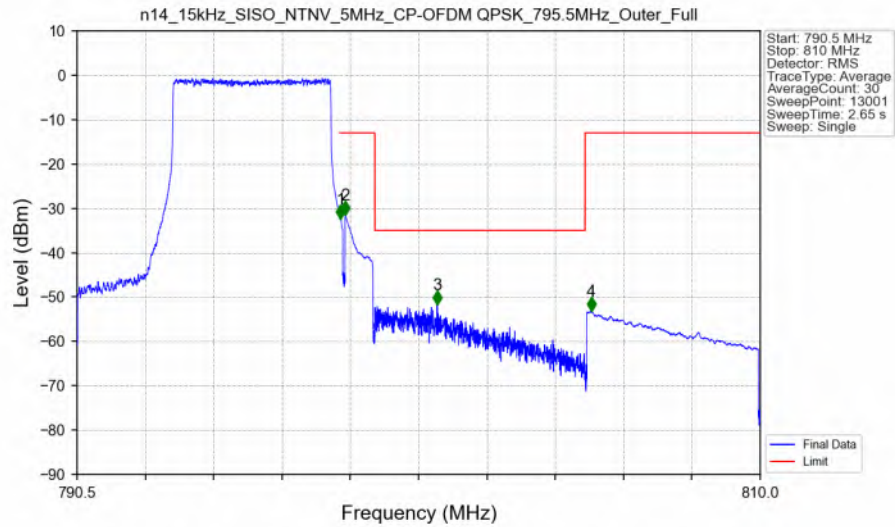

5.2.2 15_S_10M_NTNV

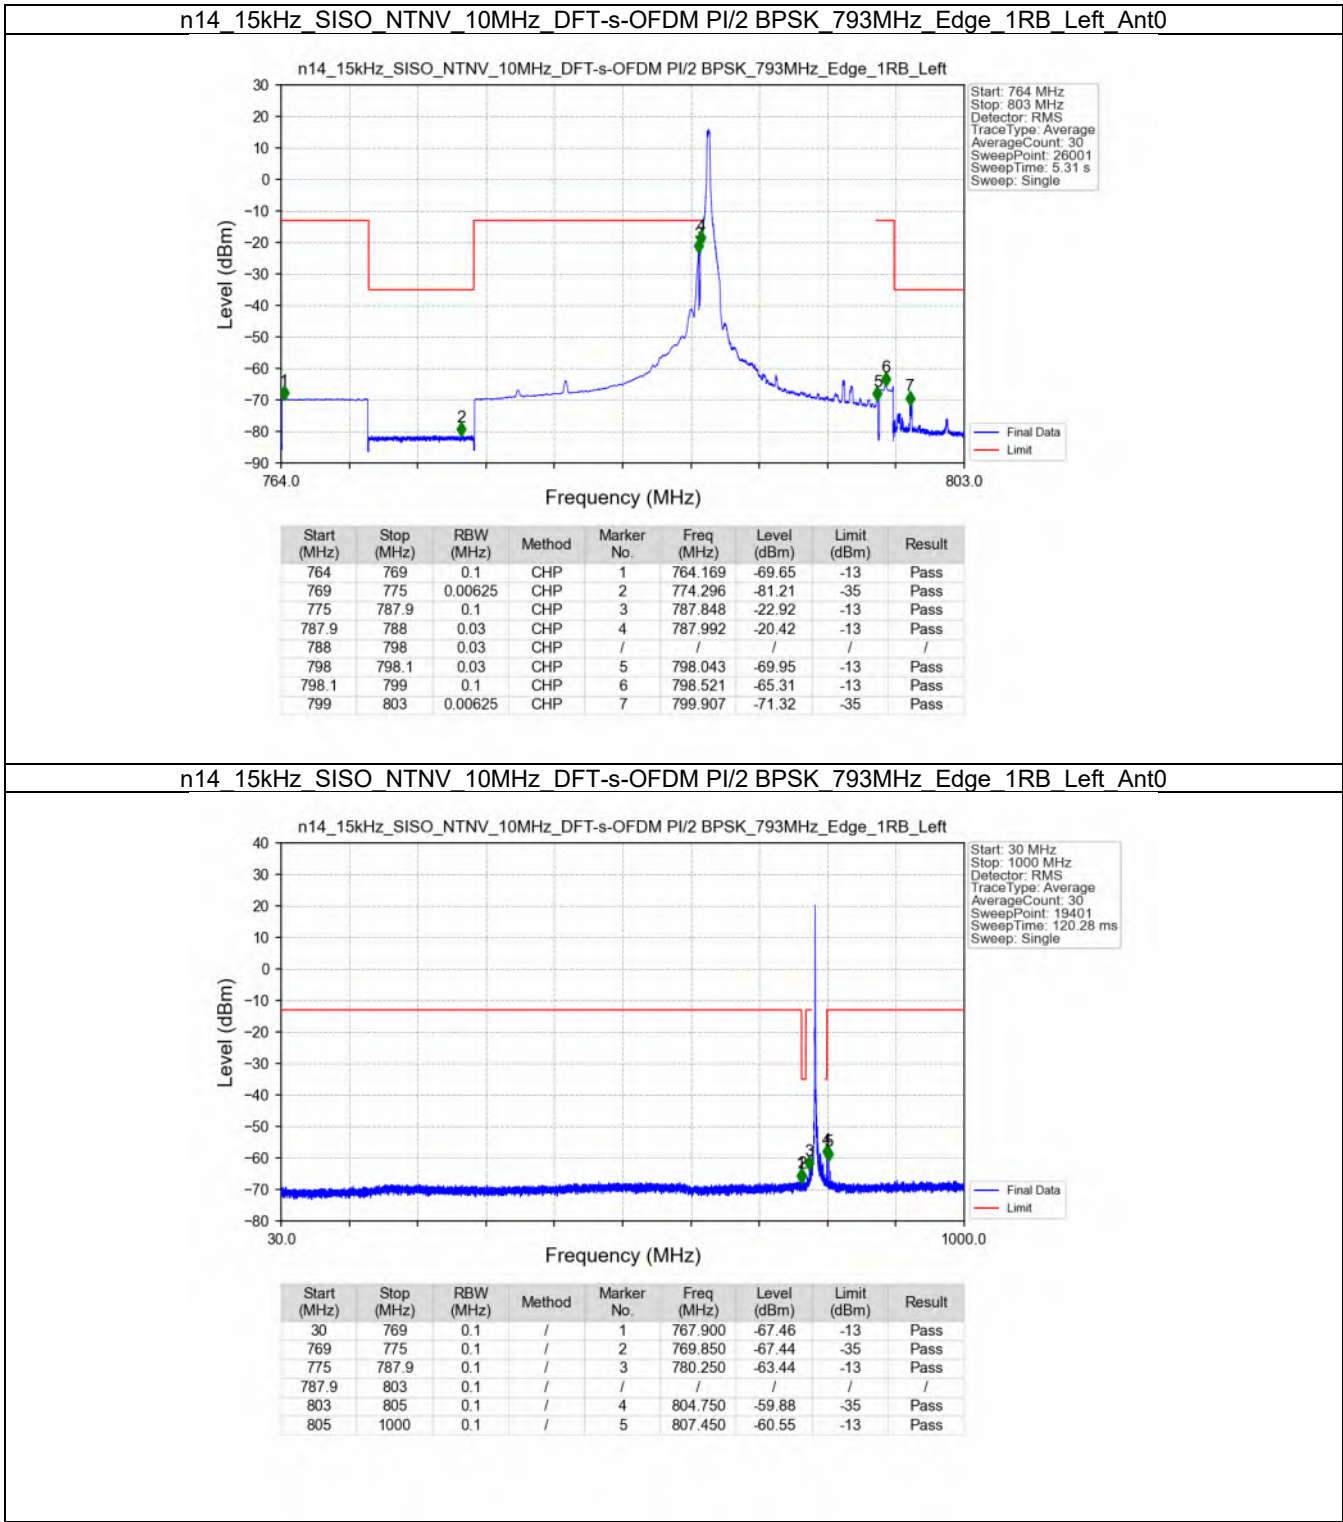


n14_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_PI/2_BPSK_793MHz_Edge_1RB_Left_Ant0

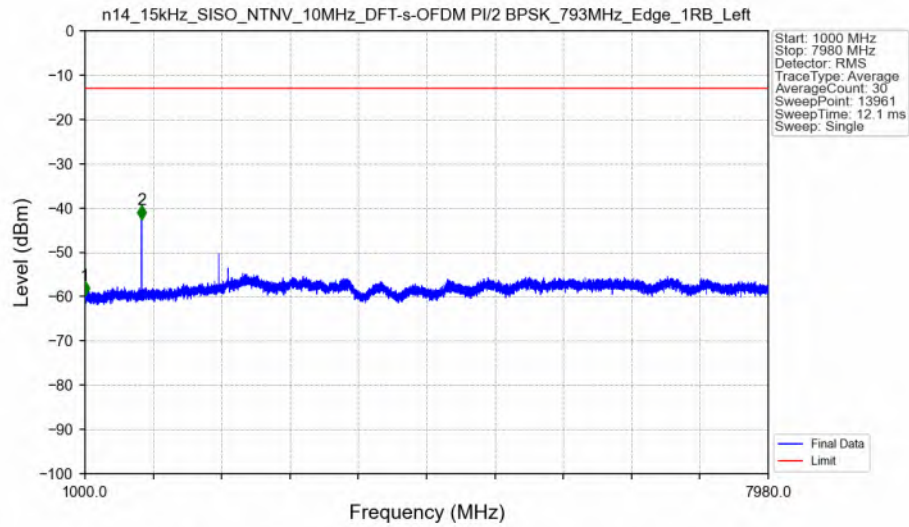


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	1000	1	/	1	1000.000	-59.65	-13	Pass
1000	7980	1	/	2	1577.500	-42.63	-13	Pass

n14_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_PI/2_BPSK_793MHz_Outer_Full_Ant0

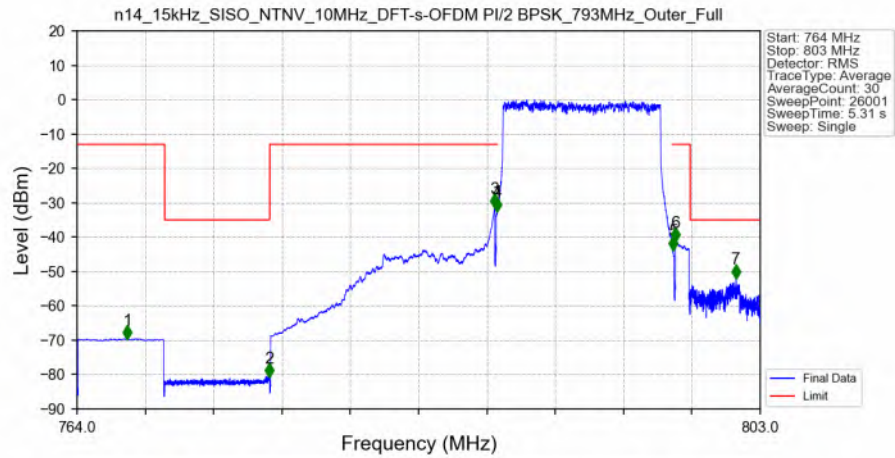


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
764	769	0.1	CHP	1	766.864	-69.50	-13	Pass
769	775	0.00625	CHP	2	774.957	-80.45	-35	Pass
775	787.9	0.1	CHP	3	787.848	-31.09	-13	Pass
787.9	788	0.03	CHP	4	787.994	-32.21	-13	Pass
788	798	0.03	CHP	/	/	/	/	/
798	798.1	0.03	CHP	5	798.000	-43.50	-13	Pass
798.1	799	0.1	CHP	6	798.150	-41.00	-13	Pass
799	803	0.00625	CHP	7	801.629	-51.72	-35	Pass

n14 15kHz SISO NTV 10MHz DFT-s-OFDM QPSK 793MHz Edge 1RB Left Ant0

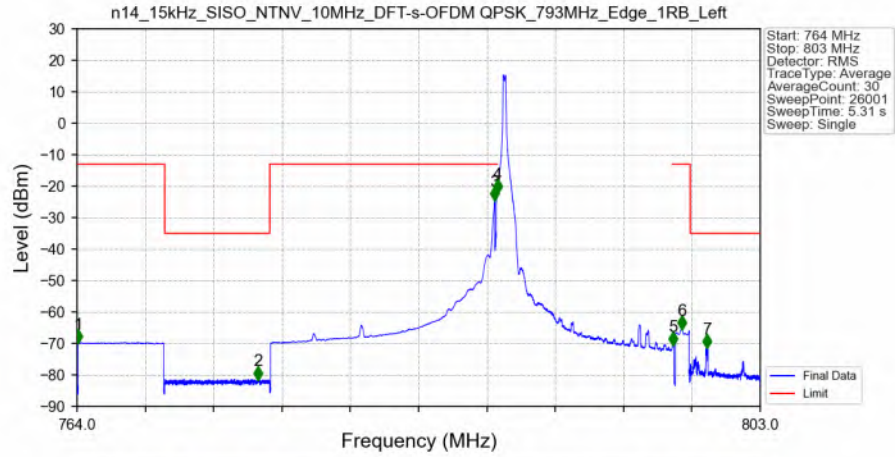


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
764	769	0.1	CHP	1	764.069	-69.71	-13	Pass
769	775	0.00625	CHP	2	774.346	-81.32	-35	Pass
775	787.9	0.1	CHP	3	787.848	-24.26	-13	Pass
787.9	788	0.03	CHP	4	787.999	-21.91	-13	Pass
788	798	0.03	CHP	/	/	/	/	/
798	798.1	0.03	CHP	5	798.019	-70.37	-13	Pass
798.1	799	0.1	CHP	6	798.515	-65.28	-13	Pass
799	803	0.00625	CHP	7	799.977	-71.09	-35	Pass

n14 15kHz SISO NTV 10MHz DFT-s-OFDM QPSK 793MHz Edge 1RB Left Ant0

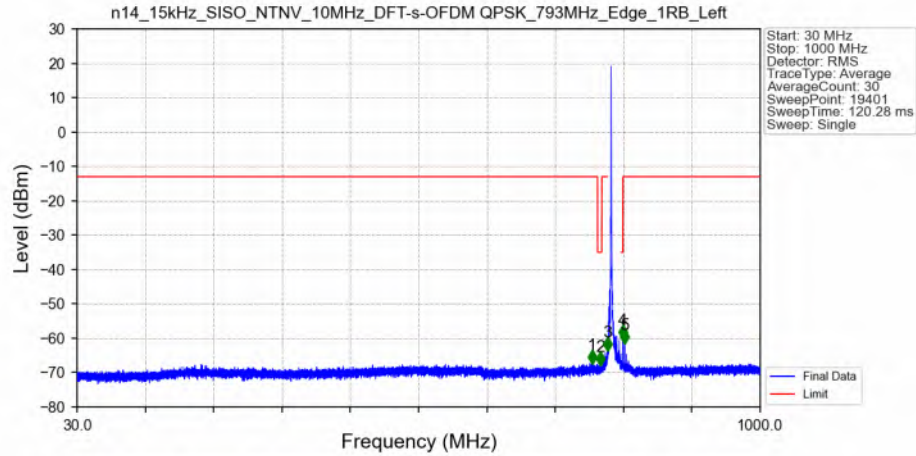


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	769	0.1	/	1	761.300	-67.18	-13	Pass
769	775	0.1	/	2	773.350	-67.61	-35	Pass
775	787.9	0.1	/	3	782.800	-63.50	-13	Pass
787.9	803	0.1	/	/	/	/	/	/
803	805	0.1	/	4	804.700	-60.00	-35	Pass
805	1000	0.1	/	5	807.450	-61.25	-13	Pass


n14 15kHz SISO NTN 10MHz DFT-s-OFDM QPSK 793MHz Edge 1RB Left Ant0

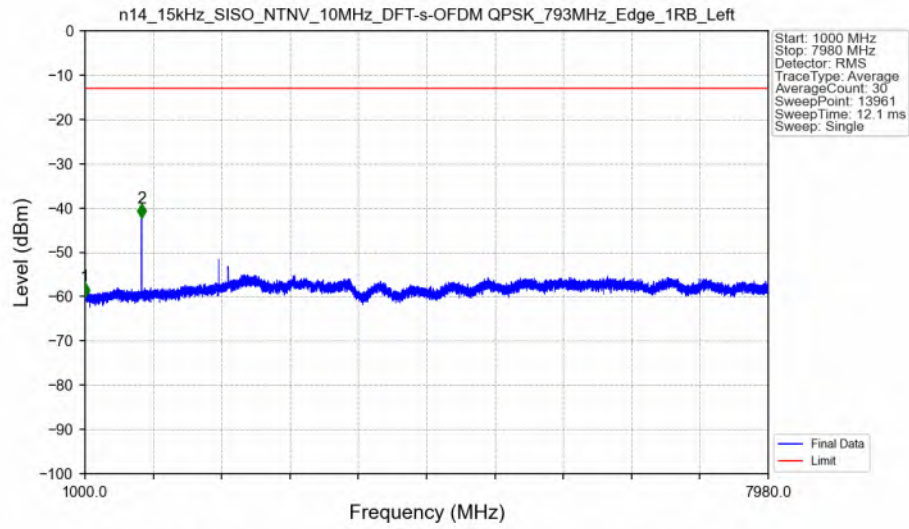

n14 15kHz SISO NTN 10MHz DFT-s-OFDM QPSK 793MHz Outer Full Ant0

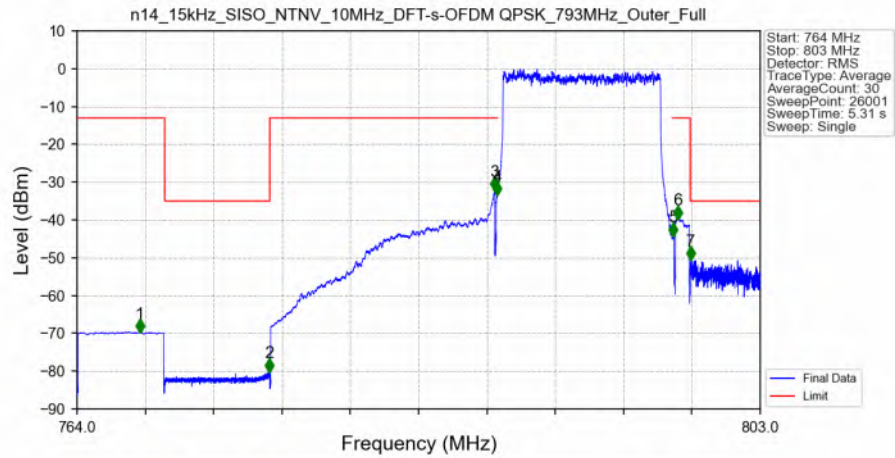


n14 15kHz SISO NTN 10MHz CP-OFDM QPSK 793MHz Edge 1RB Left Ant0

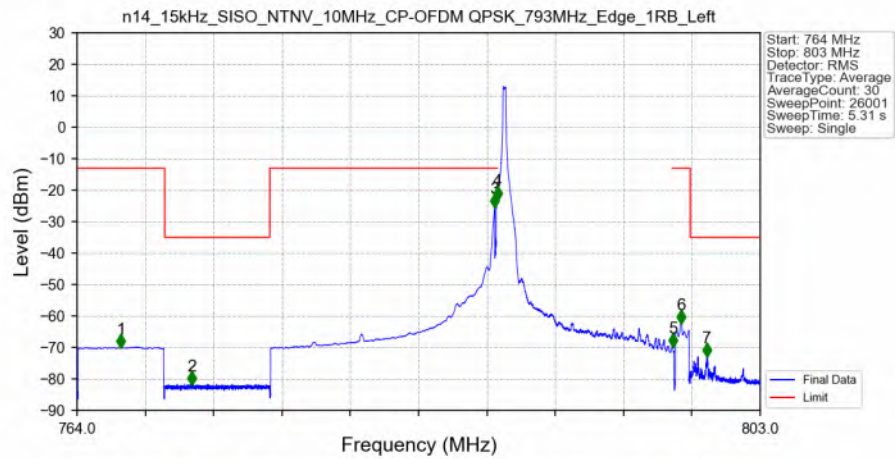


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
764	769	0.1	CHP	1	766.506	-69.85	-13	Pass
769	775	0.00625	CHP	2	770.562	-81.61	-35	Pass
775	787.9	0.1	CHP	3	787.848	-25.26	-13	Pass
787.9	788	0.03	CHP	4	787.997	-22.80	-13	Pass
788	798	0.03	CHP	/	/	/	/	/
798	798.1	0.03	CHP	5	798.013	-69.67	-13	Pass
798.1	799	0.1	CHP	6	798.462	-62.24	-13	Pass
799	803	0.00625	CHP	7	799.960	-72.64	-35	Pass

n14 15kHz SISO NTN 10MHz CP-OFDM QPSK 793MHz Edge 1RB Left Ant0

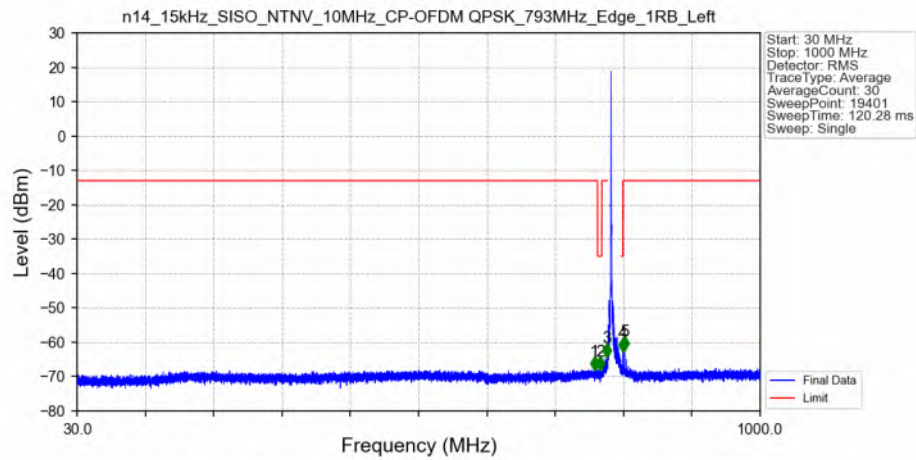


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	769	0.1	/	1	765.000	-67.92	-13	Pass
769	775	0.1	/	2	773.500	-67.95	-35	Pass
775	787.9	0.1	/	3	782.650	-64.00	-13	Pass
787.9	803	0.1	/	/	/	/	/	/
803	805	0.1	/	4	804.700	-62.49	-35	Pass
805	1000	0.1	/	5	807.400	-62.02	-13	Pass

n14_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_793MHz_Edge_1RB_Left_Ant0

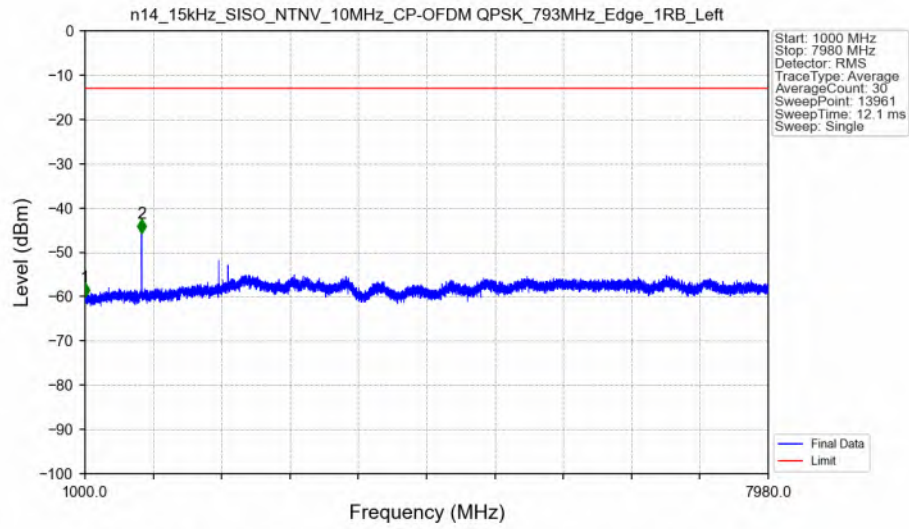

n14_15kHz_SISO_NTNV_10MHz_CP-OFDM_QPSK_793MHz_Outer_Full_Ant0

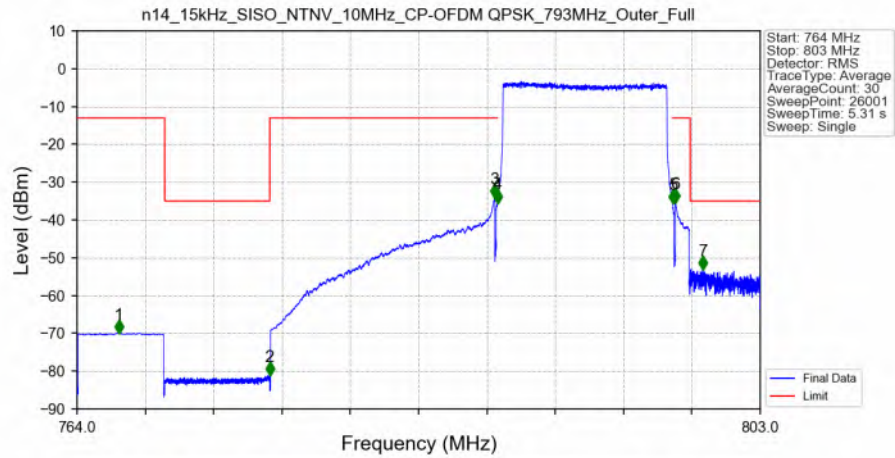

6. Emission Mask

6.1 Test Result

6.1.1 15_S_5M_NTNV

5G NR n14 SCS=15kHz SISO 5MHz NTN							
Modulation	Frequency (MHz)	RB Allocation	Freq. (MHz)		Emission Mask (dBm)		Verdict
			Start	Stop	Result	Limit	
DFT-s-OFDM PI/2 BPSK	790.5	Outer_Full	773	778	-57.21	-13	Pass
			803	808	-55.69	-13	Pass
			793.05	795.5	-26.79	-19.95	Pass
			778	785.5	-42.26	-29.95	Pass
			787.95	793.05	5.05	5.05	Pass
			795.5	803	-42.58	-29.95	Pass
		Edge_1RB_Left	785.5	787.95	-25.57	-19.95	Pass
			785.5	787.95	-18.36	-6.96	Pass
			793.05	795.5	-56.80	-6.96	Pass
			803	808	-57.54	-13	Pass
			773	778	-57.91	-13	Pass
			795.5	803	-57.28	-16.96	Pass
			787.95	793.05	18.04	18.04	Pass
		Edge_1RB_Right	778	785.5	-56.14	-16.96	Pass
			803	808	-57.81	-13	Pass
			773	778	-57.90	-13	Pass
			787.95	793.05	17.94	17.94	Pass
			785.5	787.95	-56.21	-7.06	Pass
			795.5	803	-52.93	-17.06	Pass
			778	785.5	-57.55	-17.06	Pass
			793.05	795.5	-18.01	-7.06	Pass
	793	Outer_Full	790.45	795.55	7.78	7.78	Pass
			780.5	788	-42.73	-27.22	Pass
			788	790.45	-26.16	-17.22	Pass
			805.5	810.5	-54.43	-13	Pass
			795.55	798	-22.29	-17.22	Pass
			775.5	780.5	-56.58	-13	Pass
		Edge_1RB_Left	798	805.5	-46.52	-27.22	Pass
			798	805.5	-56.55	-14.75	Pass
			805.5	810.5	-55.92	-13	Pass
			795.55	798	-56.65	-4.75	Pass
			775.5	780.5	-57.71	-13	Pass
			788	790.45	-16.67	-4.75	Pass
		Edge_1RB_Right	780.5	788	-54.97	-14.75	Pass
			790.45	795.55	20.25	20.25	Pass
			798	805.5	-51.39	-14.83	Pass
			788	790.45	-56.18	-4.83	Pass
			790.45	795.55	20.17	20.17	Pass
			780.5	788	-56.30	-14.83	Pass
	795.5	Outer_Full	805.5	810.5	-57.36	-13	Pass
			775.5	780.5	-57.72	-13	Pass
			795.55	798	-18.07	-4.83	Pass
			800.5	808	-44.50	-30.1	Pass
			798.05	800.5	-27.90	-20.1	Pass
			783	790.5	-44.48	-30.1	Pass
			778	783	-55.90	-13	Pass
			790.5	792.95	-24.29	-20.1	Pass

			792.95	798.05	4.90	4.9	Pass
			808	813	-55.30	-13	Pass
		Edge_1RB_Left	783	790.5	-55.31	-17.27	Pass
			790.5	792.95	-20.80	-7.27	Pass
			800.5	808	-57.06	-17.27	Pass
			798.05	800.5	-56.63	-7.27	Pass
			792.95	798.05	17.73	17.73	Pass
			778	783	-57.87	-13	Pass
			808	813	-56.99	-13	Pass
		Edge_1RB_Right	808	813	-57.82	-13	Pass
			792.95	798.05	17.55	17.55	Pass
			778	783	-57.76	-13	Pass
			798.05	800.5	-18.34	-7.45	Pass
			783	790.5	-56.79	-17.45	Pass
			790.5	792.95	-56.61	-7.45	Pass
			800.5	808	-56.63	-17.45	Pass
DFT-s-OFDM QPSK	790.5	Outer_Full	778	785.5	-40.11	-27.28	Pass
			793.05	795.5	-23.48	-17.28	Pass
			803	808	-53.50	-13	Pass
			795.5	803	-39.62	-27.28	Pass
			787.95	793.05	7.72	7.72	Pass
			785.5	787.95	-25.16	-17.28	Pass
			773	778	-56.20	-13	Pass
		Edge_1RB_Left	778	785.5	-56.09	-15.65	Pass
			803	808	-56.36	-13	Pass
			793.05	795.5	-56.44	-5.65	Pass
			785.5	787.95	-19.39	-5.65	Pass
			787.95	793.05	19.35	19.35	Pass
			773	778	-57.61	-13	Pass
			795.5	803	-56.47	-15.65	Pass
		Edge_1RB_Right	785.5	787.95	-56.27	-4.91	Pass
			803	808	-57.33	-13	Pass
			795.5	803	-55.45	-14.91	Pass
			787.95	793.05	20.09	20.09	Pass
			773	778	-57.94	-13	Pass
			793.05	795.5	-17.17	-4.91	Pass
			778	785.5	-56.92	-14.91	Pass
	793	Outer_Full	788	790.45	-26.47	-17.66	Pass
			795.55	798	-22.48	-17.66	Pass
			790.45	795.55	7.34	7.34	Pass
			775.5	780.5	-55.44	-13	Pass
			798	805.5	-42.79	-27.66	Pass
			780.5	788	-40.61	-27.66	Pass
			805.5	810.5	-53.56	-13	Pass
		Edge_1RB_Left	805.5	810.5	-56.24	-13	Pass
			795.55	798	-56.62	-5.76	Pass
			798	805.5	-57.10	-15.76	Pass
			780.5	788	-55.11	-15.76	Pass
			775.5	780.5	-57.81	-13	Pass
			788	790.45	-16.29	-5.76	Pass
			790.45	795.55	19.24	19.24	Pass
		Edge_1RB_Right	790.45	795.55	19.69	19.69	Pass
			780.5	788	-56.77	-15.31	Pass
			775.5	780.5	-57.34	-13	Pass
			805.5	810.5	-57.13	-13	Pass
			798	805.5	-54.60	-15.31	Pass
			795.55	798	-14.82	-5.31	Pass
			788	790.45	-56.39	-5.31	Pass
	795.5	Outer_Full	783	790.5	-41.82	-27.55	Pass

			778	783	-54.53	-13	Pass
			798.05	800.5	-24.89	-17.55	Pass
			792.95	798.05	7.45	7.45	Pass
			790.5	792.95	-28.65	-17.55	Pass
			800.5	808	-41.89	-27.55	Pass
			808	813	-54.24	-13	Pass
		Edge_1RB_Left	800.5	808	-56.27	-15.43	Pass
			792.95	798.05	19.57	19.57	Pass
			778	783	-57.42	-13	Pass
			808	813	-56.05	-13	Pass
			790.5	792.95	-15.45	-5.43	Pass
			798.05	800.5	-56.47	-5.43	Pass
		Edge_1RB_Right	783	790.5	-53.41	-15.43	Pass
			790.5	792.95	-56.47	-4.84	Pass
			798.05	800.5	-14.65	-4.84	Pass
			808	813	-57.84	-13	Pass
			783	790.5	-56.58	-14.84	Pass
			778	783	-57.29	-13	Pass
DFT-s-OFDM 16 QAM	790.5	Outer_Full	800.5	808	-53.21	-14.84	Pass
			792.95	798.05	20.16	20.16	Pass
		Edge_1RB_Left	785.5	787.95	-24.44	-18.59	Pass
			778	785.5	-42.12	-28.59	Pass
			793.05	795.5	-23.38	-18.59	Pass
			803	808	-53.80	-13	Pass
		Edge_1RB_Right	795.5	803	-41.63	-28.59	Pass
			773	778	-56.81	-13	Pass
			787.95	793.05	6.41	6.41	Pass
		Edge_1RB_Left	803	808	-57.11	-13	Pass
			778	785.5	-55.54	-15.81	Pass
			793.05	795.5	-56.92	-5.81	Pass
		Edge_1RB_Right	787.95	793.05	19.19	19.19	Pass
			773	778	-57.76	-13	Pass
			795.5	803	-57.35	-15.81	Pass
		Edge_1RB_Left	785.5	787.95	-17.23	-5.81	Pass
			793.05	795.5	-16.47	-6.06	Pass
			778	785.5	-57.22	-16.06	Pass
		Edge_1RB_Right	787.95	793.05	18.94	18.94	Pass
			803	808	-57.61	-13	Pass
			773	778	-57.94	-13	Pass
		Edge_1RB_Left	785.5	787.95	-56.38	-6.06	Pass
			795.5	803	-55.46	-16.06	Pass
		Outer_Full	790.45	795.55	6.61	6.61	Pass
			775.5	780.5	-56.17	-13	Pass
			780.5	788	-42.62	-28.39	Pass
			805.5	810.5	-54.46	-13	Pass
		Edge_1RB_Right	798	805.5	-43.93	-28.39	Pass
			795.55	798	-26.46	-18.39	Pass
		Edge_1RB_Left	788	790.45	-26.73	-18.39	Pass
			780.5	788	-51.59	-16.05	Pass
			805.5	810.5	-56.17	-13	Pass
		Edge_1RB_Right	798	805.5	-56.85	-16.05	Pass
			790.45	795.55	18.95	18.95	Pass
			795.55	798	-56.84	-6.05	Pass
		Edge_1RB_Left	788	790.45	-17.21	-6.05	Pass
			775.5	780.5	-57.77	-13	Pass
			788	790.45	-56.02	-6.14	Pass
			775.5	780.5	-57.56	-13	Pass
		Edge_1RB_Right	805.5	810.5	-57.25	-13	Pass
			790.45	795.55	18.86	18.86	Pass

			780.5	788	-57.11	-16.14	Pass
			795.55	798	-16.59	-6.14	Pass
			798	805.5	-55.12	-16.14	Pass
	795.5	Outer_Full	798.05	800.5	-26.02	-18.52	Pass
			778	783	-55.31	-13	Pass
			800.5	808	-43.62	-28.52	Pass
			792.95	798.05	6.48	6.48	Pass
			783	790.5	-42.70	-28.52	Pass
			808	813	-53.45	-13	Pass
			790.5	792.95	-24.94	-18.52	Pass
			792.95	798.05	19.11	19.11	Pass
			778	783	-57.64	-13	Pass
		Edge_1RB_Left	798.05	800.5	-56.65	-5.89	Pass
			808	813	-56.32	-13	Pass
			783	790.5	-55.66	-15.89	Pass
			800.5	808	-57.03	-15.89	Pass
			790.5	792.95	-17.41	-5.89	Pass
			792.95	798.05	18.72	18.72	Pass
		Edge_1RB_Right	783	790.5	-56.46	-16.28	Pass
			778	783	-57.49	-13	Pass
			790.5	792.95	-56.57	-6.28	Pass
			808	813	-57.88	-13	Pass
			800.5	808	-55.02	-16.28	Pass
			798.05	800.5	-16.66	-6.28	Pass
DFT-s-OFDM 64 QAM	790.5	Outer_Full	785.5	787.95	-26.53	-19.36	Pass
			778	785.5	-43.72	-29.36	Pass
			793.05	795.5	-25.99	-19.36	Pass
			787.95	793.05	5.64	5.64	Pass
			803	808	-54.43	-13	Pass
			773	778	-56.79	-13	Pass
		Edge_1RB_Left	795.5	803	-42.09	-29.36	Pass
			793.05	795.5	-56.55	-6.64	Pass
			787.95	793.05	18.36	18.36	Pass
			773	778	-57.95	-13	Pass
			803	808	-57.26	-13	Pass
			778	785.5	-55.99	-16.64	Pass
		Edge_1RB_Right	795.5	803	-57.06	-16.64	Pass
			785.5	787.95	-18.60	-6.64	Pass
			778	785.5	-57.28	-16.53	Pass
			803	808	-57.60	-13	Pass
			773	778	-57.93	-13	Pass
			785.5	787.95	-56.51	-6.53	Pass
	793	Outer_Full	793.05	795.5	-20.31	-6.53	Pass
			795.5	803	-55.12	-16.53	Pass
			787.95	793.05	18.47	18.47	Pass
		Edge_1RB_Left	795.55	798	-25.86	-19.1	Pass
			775.5	780.5	-56.12	-13	Pass
			780.5	788	-43.89	-29.1	Pass
			788	790.45	-24.63	-19.1	Pass
			798	805.5	-44.65	-29.1	Pass
			790.45	795.55	5.90	5.9	Pass
			805.5	810.5	-53.96	-13	Pass
		Edge_1RB_Right	790.45	795.55	18.39	18.39	Pass
			795.55	798	-56.81	-6.61	Pass
			775.5	780.5	-57.81	-13	Pass
			805.5	810.5	-56.74	-13	Pass
			788	790.45	-17.98	-6.61	Pass
			798	805.5	-56.89	-16.61	Pass
			780.5	788	-54.73	-16.61	Pass

		Edge_1RB_Right	798	805.5	-55.70	-16.89	Pass
			780.5	788	-56.61	-16.89	Pass
			795.55	798	-15.60	-6.89	Pass
			790.45	795.55	18.11	18.11	Pass
			788	790.45	-56.71	-6.89	Pass
			805.5	810.5	-57.66	-13	Pass
			775.5	780.5	-57.56	-13	Pass
	795.5	Outer_Full	800.5	808	-43.83	-29.34	Pass
			783	790.5	-43.83	-29.34	Pass
			790.5	792.95	-28.69	-19.34	Pass
			808	813	-53.98	-13	Pass
			778	783	-55.73	-13	Pass
			792.95	798.05	5.66	5.66	Pass
			798.05	800.5	-22.63	-19.34	Pass
		Edge_1RB_Left	808	813	-56.12	-13	Pass
			792.95	798.05	18.49	18.49	Pass
			800.5	808	-57.14	-16.51	Pass
			783	790.5	-56.12	-16.51	Pass
			798.05	800.5	-56.88	-6.51	Pass
			790.5	792.95	-19.21	-6.51	Pass
			778	783	-57.43	-13	Pass
		Edge_1RB_Right	790.5	792.95	-56.56	-6.76	Pass
			783	790.5	-57.23	-16.76	Pass
			792.95	798.05	18.24	18.24	Pass
			778	783	-57.11	-13	Pass
			800.5	808	-55.54	-16.76	Pass
			808	813	-57.57	-13	Pass
			798.05	800.5	-18.99	-6.76	Pass
DFT-s-OFDM 256 QAM	790.5	Outer_Full	787.95	793.05	3.43	3.43	Pass
			773	778	-57.74	-13	Pass
			793.05	795.5	-25.76	-21.57	Pass
			803	808	-56.43	-13	Pass
			778	785.5	-48.11	-31.57	Pass
			795.5	803	-45.33	-31.57	Pass
			785.5	787.95	-29.37	-21.57	Pass
		Edge_1RB_Left	803	808	-57.74	-13	Pass
			787.95	793.05	15.97	15.97	Pass
			778	785.5	-56.64	-19.03	Pass
			785.5	787.95	-21.22	-9.03	Pass
			793.05	795.5	-54.34	-9.03	Pass
			795.5	803	-56.19	-19.03	Pass
			773	778	-57.81	-13	Pass
		Edge_1RB_Right	793.05	795.5	-18.72	-9.3	Pass
			785.5	787.95	-53.92	-9.3	Pass
			778	785.5	-56.81	-19.3	Pass
			773	778	-57.92	-13	Pass
			795.5	803	-55.92	-19.3	Pass
			787.95	793.05	15.70	15.7	Pass
			803	808	-58.03	-13	Pass
	793	Outer_Full	775.5	780.5	-57.02	-13	Pass
			798	805.5	-45.33	-31.19	Pass
			805.5	810.5	-56.01	-13	Pass
			795.55	798	-26.31	-21.19	Pass
			780.5	788	-45.77	-31.19	Pass
			790.45	795.55	3.81	3.81	Pass
			788	790.45	-28.92	-21.19	Pass
		Edge_1RB_Left	780.5	788	-56.68	-18.67	Pass
			788	790.45	-19.49	-8.67	Pass
			775.5	780.5	-57.64	-13	Pass

			805.5	810.5	-57.40	-13	Pass
			790.45	795.55	16.33	16.33	Pass
			798	805.5	-57.19	-18.67	Pass
			795.55	798	-54.79	-8.67	Pass
		Edge_1RB_Right	780.5	788	-57.22	-18.75	Pass
			805.5	810.5	-57.57	-13	Pass
			795.55	798	-18.44	-8.75	Pass
			790.45	795.55	16.25	16.25	Pass
			775.5	780.5	-57.64	-13	Pass
			788	790.45	-52.62	-8.75	Pass
			798	805.5	-56.33	-18.75	Pass
			798.05	800.5	-24.42	-21.11	Pass
		Outer_Full	783	790.5	-45.85	-31.11	Pass
			790.5	792.95	-33.00	-21.11	Pass
			778	783	-56.88	-13	Pass
			808	813	-56.15	-13	Pass
			800.5	808	-45.07	-31.11	Pass
			792.95	798.05	3.89	3.89	Pass
		Edge_1RB_Left	783	790.5	-56.59	-18.68	Pass
			778	783	-57.72	-13	Pass
			800.5	808	-57.19	-18.68	Pass
			808	813	-57.33	-13	Pass
			790.5	792.95	-21.66	-8.68	Pass
			798.05	800.5	-53.90	-8.68	Pass
			792.95	798.05	16.32	16.32	Pass
		Edge_1RB_Right	778	783	-57.58	-13	Pass
			808	813	-57.66	-13	Pass
			800.5	808	-56.79	-18.97	Pass
			790.5	792.95	-53.49	-8.97	Pass
			783	790.5	-57.01	-18.97	Pass
			798.05	800.5	-19.65	-8.97	Pass
			792.95	798.05	16.03	16.03	Pass
CP-OFDM QPSK	790.5	Outer_Full	793.05	795.5	-26.38	-20.09	Pass
			778	785.5	-42.07	-30.09	Pass
			773	778	-57.47	-13	Pass
			787.95	793.05	4.91	4.91	Pass
			795.5	803	-41.71	-30.09	Pass
			785.5	787.95	-26.47	-20.09	Pass
			803	808	-55.10	-13	Pass
		Edge_1RB_Left	773	778	-57.66	-13	Pass
			803	808	-57.42	-13	Pass
			787.95	793.05	17.79	17.79	Pass
			793.05	795.5	-56.76	-7.21	Pass
			785.5	787.95	-17.66	-7.21	Pass
			778	785.5	-53.74	-17.21	Pass
			795.5	803	-57.35	-17.21	Pass
		Edge_1RB_Right	773	778	-58.00	-13	Pass
			803	808	-57.61	-13	Pass
			787.95	793.05	17.78	17.78	Pass
			793.05	795.5	-21.06	-7.22	Pass
			795.5	803	-55.54	-17.22	Pass
			785.5	787.95	-55.51	-7.22	Pass
			778	785.5	-57.16	-17.22	Pass
	793	Outer_Full	795.55	798	-26.78	-20.24	Pass
			775.5	780.5	-56.48	-13	Pass
			798	805.5	-44.01	-30.24	Pass
			805.5	810.5	-55.00	-13	Pass
			790.45	795.55	4.76	4.76	Pass
			780.5	788	-44.24	-30.24	Pass

			788	790.45	-27.26	-20.24	Pass
		Edge_1RB_Left	780.5	788	-52.61	-17.17	Pass
			805.5	810.5	-57.35	-13	Pass
			795.55	798	-55.82	-7.17	Pass
			775.5	780.5	-58.03	-13	Pass
			798	805.5	-56.95	-17.17	Pass
			790.45	795.55	17.83	17.83	Pass
			788	790.45	-18.92	-7.17	Pass
		Edge_1RB_Right	798	805.5	-55.62	-17.91	Pass
			788	790.45	-55.16	-7.91	Pass
			775.5	780.5	-57.70	-13	Pass
			780.5	788	-57.11	-17.91	Pass
			790.45	795.55	17.09	17.09	Pass
			795.55	798	-17.98	-7.91	Pass
			805.5	810.5	-57.70	-13	Pass
	795.5	Outer_Full	778	783	-56.19	-13	Pass
			792.95	798.05	4.87	4.87	Pass
			798.05	800.5	-25.58	-20.13	Pass
			790.5	792.95	-25.33	-20.13	Pass
			783	790.5	-43.08	-30.13	Pass
			800.5	808	-42.45	-30.13	Pass
			808	813	-55.40	-13	Pass
		Edge_1RB_Left	808	813	-56.86	-13	Pass
			778	783	-57.80	-13	Pass
			783	790.5	-55.45	-16.79	Pass
			800.5	808	-57.39	-16.79	Pass
			798.05	800.5	-56.09	-6.79	Pass
			792.95	798.05	18.21	18.21	Pass
			790.5	792.95	-18.32	-6.79	Pass
		Edge_1RB_Right	790.5	792.95	-55.57	-7.04	Pass
			783	790.5	-57.16	-17.04	Pass
			808	813	-57.83	-13	Pass
			798.05	800.5	-18.57	-7.04	Pass
			792.95	798.05	17.96	17.96	Pass
			800.5	808	-52.91	-17.04	Pass
			778	783	-57.77	-13	Pass
CP-OFDM 16 QAM	790.5	Outer_Full	803	808	-55.20	-13	Pass
			778	785.5	-41.47	-29.99	Pass
			773	778	-57.31	-13	Pass
			787.95	793.05	5.01	5.01	Pass
			793.05	795.5	-26.69	-19.99	Pass
			795.5	803	-41.45	-29.99	Pass
			785.5	787.95	-25.57	-19.99	Pass
		Edge_1RB_Left	793.05	795.5	-55.94	-6.77	Pass
			778	785.5	-52.64	-16.77	Pass
			803	808	-57.45	-13	Pass
			795.5	803	-57.05	-16.77	Pass
			773	778	-57.77	-13	Pass
			785.5	787.95	-17.78	-6.77	Pass
			787.95	793.05	18.23	18.23	Pass
		Edge_1RB_Right	793.05	795.5	-20.34	-6.8	Pass
			795.5	803	-55.63	-16.8	Pass
			778	785.5	-57.17	-16.8	Pass
			785.5	787.95	-55.57	-6.8	Pass
			803	808	-57.64	-13	Pass
			787.95	793.05	18.20	18.2	Pass
			773	778	-57.95	-13	Pass
	793	Outer_Full	805.5	810.5	-55.26	-13	Pass
			790.45	795.55	4.96	4.96	Pass

	795.5		775.5	780.5	-56.43	-13	Pass
			795.55	798	-26.97	-20.04	Pass
			780.5	788	-42.41	-30.04	Pass
			798	805.5	-43.02	-30.04	Pass
			788	790.45	-27.52	-20.04	Pass
			780.5	788	-52.93	-17.18	Pass
		Edge_1RB_Left	775.5	780.5	-57.71	-13	Pass
			805.5	810.5	-57.36	-13	Pass
			788	790.45	-20.13	-7.18	Pass
			798	805.5	-56.93	-17.18	Pass
			790.45	795.55	17.82	17.82	Pass
			795.55	798	-55.95	-7.18	Pass
		Edge_1RB_Right	790.45	795.55	18.37	18.37	Pass
			805.5	810.5	-57.77	-13	Pass
			795.55	798	-20.68	-6.63	Pass
			775.5	780.5	-57.58	-13	Pass
			788	790.45	-55.67	-6.63	Pass
			780.5	788	-57.23	-16.63	Pass
			798	805.5	-54.90	-16.63	Pass
	795.5	Outer_Full	783	790.5	-42.20	-30.07	Pass
			778	783	-56.22	-13	Pass
			792.95	798.05	4.93	4.93	Pass
			790.5	792.95	-24.85	-20.07	Pass
			800.5	808	-41.93	-30.07	Pass
			808	813	-55.39	-13	Pass
		Edge_1RB_Left	798.05	800.5	-27.34	-20.07	Pass
			778	783	-57.68	-13	Pass
			783	790.5	-54.98	-17.71	Pass
			800.5	808	-57.29	-17.71	Pass
			792.95	798.05	17.29	17.29	Pass
			790.5	792.95	-21.07	-7.71	Pass
		Edge_1RB_Right	798.05	800.5	-55.18	-7.71	Pass
			808	813	-57.08	-13	Pass
			790.5	792.95	-55.69	-7.4	Pass
			798.05	800.5	-19.92	-7.4	Pass
			800.5	808	-55.27	-17.4	Pass
			783	790.5	-56.72	-17.4	Pass
CP-OFDM 64 QAM	790.5	Outer_Full	792.95	798.05	17.60	17.6	Pass
			778	783	-57.82	-13	Pass
			808	813	-57.39	-13	Pass
		Edge_1RB_Left	793.05	795.5	-27.28	-20.63	Pass
			795.5	803	-43.69	-30.63	Pass
			778	785.5	-44.59	-30.63	Pass
			773	778	-57.38	-13	Pass
			787.95	793.05	4.37	4.37	Pass
		Edge_1RB_Right	803	808	-56.35	-13	Pass
			785.5	787.95	-26.48	-20.63	Pass
			785.5	787.95	-18.58	-7.77	Pass
			773	778	-57.74	-13	Pass
			795.5	803	-57.64	-17.77	Pass
			787.95	793.05	17.23	17.23	Pass
		Edge_1RB_Left	803	808	-57.31	-13	Pass
			778	785.5	-56.04	-17.77	Pass
			793.05	795.5	-57.05	-7.77	Pass
			803	808	-57.74	-13	Pass
			795.5	803	-55.93	-18.29	Pass
			785.5	787.95	-55.99	-8.29	Pass
			793.05	795.5	-20.58	-8.29	Pass
			773	778	-57.93	-13	Pass

			787.95	793.05	16.71	16.71	Pass
			778	785.5	-57.26	-18.29	Pass
	793	Outer_Full	788	790.45	-27.09	-20.59	Pass
			805.5	810.5	-55.84	-13	Pass
			780.5	788	-44.68	-30.59	Pass
			775.5	780.5	-56.86	-13	Pass
			795.55	798	-26.09	-20.59	Pass
			790.45	795.55	4.41	4.41	Pass
			798	805.5	-45.26	-30.59	Pass
		Edge_1RB_Left	780.5	788	-55.96	-17.78	Pass
			795.55	798	-56.87	-7.78	Pass
			788	790.45	-19.34	-7.78	Pass
			798	805.5	-57.34	-17.78	Pass
			775.5	780.5	-57.81	-13	Pass
			790.45	795.55	17.22	17.22	Pass
			805.5	810.5	-56.94	-13	Pass
		Edge_1RB_Right	775.5	780.5	-57.59	-13	Pass
			790.45	795.55	17.41	17.41	Pass
			795.55	798	-19.35	-7.59	Pass
			788	790.45	-56.57	-7.59	Pass
			798	805.5	-55.23	-17.59	Pass
			780.5	788	-57.14	-17.59	Pass
			805.5	810.5	-57.83	-13	Pass
	795.5	Outer_Full	783	790.5	-44.91	-30.65	Pass
			798.05	800.5	-27.46	-20.65	Pass
			778	783	-56.68	-13	Pass
			800.5	808	-45.04	-30.65	Pass
			808	813	-56.21	-13	Pass
			790.5	792.95	-27.42	-20.65	Pass
			792.95	798.05	4.35	4.35	Pass
		Edge_1RB_Left	808	813	-56.80	-13	Pass
			792.95	798.05	17.56	17.56	Pass
			798.05	800.5	-56.61	-7.44	Pass
			800.5	808	-57.12	-17.44	Pass
			783	790.5	-55.81	-17.44	Pass
			778	783	-57.80	-13	Pass
			790.5	792.95	-18.94	-7.44	Pass
		Edge_1RB_Right	783	790.5	-57.14	-17.74	Pass
			798.05	800.5	-18.02	-7.74	Pass
			800.5	808	-55.32	-17.74	Pass
			778	783	-57.58	-13	Pass
			790.5	792.95	-56.75	-7.74	Pass
			808	813	-57.54	-13	Pass
			792.95	798.05	17.26	17.26	Pass
CP-OFDM 256 QAM	790.5	Outer_Full	793.05	795.5	-34.61	-23.21	Pass
			795.5	803	-46.57	-33.21	Pass
			787.95	793.05	1.79	1.79	Pass
			803	808	-57.32	-13	Pass
			778	785.5	-48.64	-33.21	Pass
			785.5	787.95	-29.82	-23.21	Pass
			773	778	-57.52	-13	Pass
		Edge_1RB_Left	785.5	787.95	-19.31	-10.85	Pass
			773	778	-57.77	-13	Pass
			803	808	-57.56	-13	Pass
			793.05	795.5	-55.89	-10.85	Pass
			787.95	793.05	14.15	14.15	Pass
			795.5	803	-57.32	-20.85	Pass
			778	785.5	-57.53	-20.85	Pass
		Edge_1RB_Right	803	808	-57.81	-13	Pass

			795.5	803	-56.41	-20.52	Pass
			773	778	-58.01	-13	Pass
			787.95	793.05	14.48	14.48	Pass
			793.05	795.5	-22.56	-10.52	Pass
			778	785.5	-57.42	-20.52	Pass
			785.5	787.95	-54.89	-10.52	Pass
			775.5	780.5	-57.79	-13	Pass
			788	790.45	-31.81	-23.21	Pass
			790.45	795.55	1.79	1.79	Pass
			795.55	798	-28.71	-23.21	Pass
			805.5	810.5	-57.27	-13	Pass
			780.5	788	-46.61	-33.21	Pass
	793	Outer_Full	798	805.5	-47.00	-33.21	Pass
			795.55	798	-55.79	-10.59	Pass
			790.45	795.55	14.41	14.41	Pass
			780.5	788	-55.76	-20.59	Pass
			788	790.45	-22.12	-10.59	Pass
			805.5	810.5	-57.67	-13	Pass
			775.5	780.5	-57.46	-13	Pass
			798	805.5	-57.44	-20.59	Pass
		Edge_1RB_Left	795.55	798	-24.76	-11.17	Pass
			775.5	780.5	-57.88	-13	Pass
			798	805.5	-56.66	-21.17	Pass
			805.5	810.5	-58.00	-13	Pass
			780.5	788	-57.17	-21.17	Pass
			788	790.45	-54.53	-11.17	Pass
			790.45	795.55	13.83	13.83	Pass
			808	813	-57.53	-13	Pass
	795.5	Outer_Full	800.5	808	-46.51	-33.86	Pass
			778	783	-57.54	-13	Pass
			783	790.5	-46.76	-33.86	Pass
			790.5	792.95	-29.83	-23.86	Pass
			792.95	798.05	1.14	1.14	Pass
			798.05	800.5	-31.60	-23.86	Pass
			783	790.5	-55.74	-20.89	Pass
			778	783	-57.67	-13	Pass
		Edge_1RB_Left	798.05	800.5	-55.60	-10.89	Pass
			790.5	792.95	-23.10	-10.89	Pass
			792.95	798.05	14.11	14.11	Pass
			808	813	-57.87	-13	Pass
			800.5	808	-57.28	-20.89	Pass
			783	790.5	-57.12	-20.85	Pass
		Edge_1RB_Right	798.05	800.5	-20.05	-10.85	Pass
			808	813	-57.57	-13	Pass
			800.5	808	-57.13	-20.85	Pass
			792.95	798.05	14.15	14.15	Pass
			790.5	792.95	-54.43	-10.85	Pass
			778	783	-57.90	-13	Pass

6.1.2 15_S_10M_NTNV

5G NR n14 SCS=15kHz SISO 10MHz NTNv							
Modulation	Frequency (MHz)	RB Allocation	Freq. (MHz)		Emission Mask (dBm)		Verdict
			Start	Stop	Result	Limit	
DFT-s-OFDM PI/2 BPSK	793	Outer_Full	768	783	-43.82	-30.22	Pass
			787.95	798.05	4.78	4.78	Pass
			818	828	-57.87	-13	Pass

			758	768	-57.57	-13	Pass
			803	818	-44.41	-30.22	Pass
			783	787.95	-26.54	-20.22	Pass
			798.05	803	-39.14	-20.22	Pass
		Edge_1RB_Left	787.95	798.05	19.76	19.76	Pass
			803	818	-56.47	-15.24	Pass
			818	828	-58.27	-13	Pass
			768	783	-57.57	-15.24	Pass
			798.05	803	-56.75	-5.24	Pass
			758	768	-58.03	-13	Pass
			783	787.95	-21.62	-5.24	Pass
			803	818	-56.99	-15.1	Pass
		Edge_1RB_Right	787.95	798.05	19.90	19.9	Pass
			798.05	803	-19.17	-5.1	Pass
			758	768	-57.98	-13	Pass
			818	828	-58.08	-13	Pass
			783	787.95	-56.81	-5.1	Pass
			768	783	-57.63	-15.1	Pass
DFT-s-OFDM QPSK	793	Outer_Full	783	787.95	-27.28	-20.6	Pass
			818	828	-56.95	-13	Pass
			787.95	798.05	4.40	4.4	Pass
			803	818	-41.87	-30.6	Pass
			758	768	-57.91	-13	Pass
			768	783	-43.01	-30.6	Pass
		Edge_1RB_Left	798.05	803	-38.64	-20.6	Pass
			783	787.95	-19.95	-5.07	Pass
			787.95	798.05	19.93	19.93	Pass
			818	828	-58.18	-13	Pass
			798.05	803	-57.28	-5.07	Pass
			803	818	-57.20	-15.07	Pass
		Edge_1RB_Right	768	783	-57.71	-15.07	Pass
			758	768	-57.81	-13	Pass
			787.95	798.05	19.37	19.37	Pass
			803	818	-56.98	-15.63	Pass
			768	783	-57.50	-15.63	Pass
			783	787.95	-56.86	-5.63	Pass
DFT-s-OFDM 16 QAM	793	Outer_Full	798.05	803	-41.13	-21.23	Pass
			787.95	798.05	3.77	3.77	Pass
			803	818	-43.83	-31.23	Pass
			758	768	-58.00	-13	Pass
			783	787.95	-30.24	-21.23	Pass
			768	783	-45.19	-31.23	Pass
		Edge_1RB_Left	818	828	-57.34	-13	Pass
			803	818	-56.96	-16.41	Pass
			758	768	-57.79	-13	Pass
			783	787.95	-20.54	-6.41	Pass
			818	828	-57.94	-13	Pass
			798.05	803	-56.61	-6.41	Pass
		Edge_1RB_Right	787.95	798.05	18.59	18.59	Pass
			768	783	-57.44	-16.41	Pass
			758	768	-57.96	-13	Pass
			787.95	798.05	18.79	18.79	Pass
			768	783	-57.23	-16.21	Pass
			783	787.95	-56.50	-6.21	Pass
			798.05	803	-21.58	-6.21	Pass
			818	828	-58.20	-13	Pass


			803	818	-56.63	-16.21	Pass
DFT-s-OFDM 64 QAM	793	Outer_Full	768	783	-47.99	-31.31	Pass
			758	768	-57.70	-13	Pass
			818	828	-57.63	-13	Pass
			783	787.95	-33.21	-21.31	Pass
			787.95	798.05	3.69	3.69	Pass
			803	818	-45.76	-31.31	Pass
			798.05	803	-42.27	-21.31	Pass
		Edge_1RB_Left	758	768	-57.91	-13	Pass
			768	783	-57.64	-16.26	Pass
			803	818	-57.14	-16.26	Pass
			783	787.95	-20.33	-6.26	Pass
			798.05	803	-57.62	-6.26	Pass
			787.95	798.05	18.74	18.74	Pass
		Edge_1RB_Right	818	828	-58.02	-13	Pass
			818	828	-58.20	-13	Pass
			758	768	-57.94	-13	Pass
			783	787.95	-57.41	-6.84	Pass
			787.95	798.05	18.16	18.16	Pass
			768	783	-57.35	-16.84	Pass
			798.05	803	-20.58	-6.84	Pass
			803	818	-57.11	-16.84	Pass
DFT-s-OFDM 256 QAM	793	Outer_Full	798.05	803	-43.74	-24.12	Pass
			758	768	-57.82	-13	Pass
			803	818	-47.56	-34.12	Pass
			787.95	798.05	0.88	0.88	Pass
			768	783	-52.07	-34.12	Pass
			783	787.95	-31.71	-24.12	Pass
			818	828	-57.82	-13	Pass
		Edge_1RB_Left	787.95	798.05	16.06	16.06	Pass
			818	828	-58.20	-13	Pass
			803	818	-57.26	-18.94	Pass
			798.05	803	-55.24	-8.94	Pass
			768	783	-57.72	-18.94	Pass
			758	768	-57.80	-13	Pass
		Edge_1RB_Right	783	787.95	-22.09	-8.94	Pass
			758	768	-57.94	-13	Pass
			783	787.95	-54.08	-8.98	Pass
			787.95	798.05	16.02	16.02	Pass
			768	783	-57.63	-18.98	Pass
			803	818	-57.20	-18.98	Pass
			818	828	-58.31	-13	Pass
CP-OFDM QPSK	793	Outer_Full	798.05	803	-24.18	-8.98	Pass
			818	828	-57.38	-13	Pass
			783	787.95	-30.71	-23.19	Pass
			803	818	-44.95	-33.19	Pass
			758	768	-58.00	-13	Pass
			798.05	803	-32.46	-23.19	Pass
			787.95	798.05	1.81	1.81	Pass
		Edge_1RB_Left	768	783	-46.09	-33.19	Pass
			758	768	-57.80	-13	Pass
			787.95	798.05	17.40	17.4	Pass
			803	818	-57.61	-17.6	Pass
			798.05	803	-56.96	-7.6	Pass
			783	787.95	-20.42	-7.6	Pass
		Edge_1RB_Right	818	828	-58.20	-13	Pass
			768	783	-57.50	-17.6	Pass
			787.95	798.05	17.91	17.91	Pass
			783	787.95	-57.00	-7.09	Pass

			768	783	-57.43	-17.09	Pass
			798.05	803	-22.73	-7.09	Pass
			803	818	-57.01	-17.09	Pass
			758	768	-57.76	-13	Pass
			818	828	-57.94	-13	Pass
CP-OFDM 16 QAM	793	Outer_Full	758	768	-57.87	-13	Pass
			798.05	803	-32.77	-22.81	Pass
			783	787.95	-31.94	-22.81	Pass
			818	828	-57.54	-13	Pass
			803	818	-44.52	-32.81	Pass
			787.95	798.05	2.19	2.19	Pass
		Edge_1RB_Left	768	783	-46.11	-32.81	Pass
			783	787.95	-20.09	-6.84	Pass
			803	818	-57.16	-16.84	Pass
			768	783	-57.38	-16.84	Pass
			818	828	-58.08	-13	Pass
			758	768	-58.02	-13	Pass
		Edge_1RB_Right	787.95	798.05	18.16	18.16	Pass
			798.05	803	-57.17	-6.84	Pass
			783	787.95	-57.29	-7.31	Pass
			787.95	798.05	17.69	17.69	Pass
			803	818	-57.23	-17.31	Pass
			768	783	-57.65	-17.31	Pass
CP-OFDM 64 QAM	793	Outer_Full	818	828	-58.15	-13	Pass
			758	768	-57.72	-13	Pass
			798.05	803	-24.15	-7.31	Pass
			818	828	-57.75	-13	Pass
			758	768	-57.68	-13	Pass
			783	787.95	-31.79	-23.24	Pass
		Edge_1RB_Left	787.95	798.05	1.76	1.76	Pass
			798.05	803	-33.07	-23.24	Pass
			768	783	-47.72	-33.24	Pass
			803	818	-45.85	-33.24	Pass
			783	787.95	-20.92	-8.27	Pass
			758	768	-57.87	-13	Pass
		Edge_1RB_Right	768	783	-57.77	-18.27	Pass
			798.05	803	-57.35	-8.27	Pass
			787.95	798.05	16.73	16.73	Pass
			803	818	-57.16	-18.27	Pass
			818	828	-57.93	-13	Pass
			798.05	803	-22.94	-8.07	Pass
CP-OFDM 256 QAM	793	Outer_Full	768	783	-57.86	-18.07	Pass
			783	787.95	-56.77	-8.07	Pass
			787.95	798.05	16.93	16.93	Pass
			758	768	-57.77	-13	Pass
			803	818	-56.85	-18.07	Pass
			818	828	-58.18	-13	Pass
		Edge_1RB_Left	798.05	803	-37.74	-26.34	Pass
			768	783	-52.36	-36.34	Pass
			803	818	-48.58	-36.34	Pass
			787.95	798.05	-1.34	-1.34	Pass
			818	828	-58.09	-13	Pass
			758	768	-57.70	-13	Pass
		Edge_1RB_Right	783	787.95	-37.17	-26.34	Pass
			803	818	-57.86	-20.45	Pass
			768	783	-57.51	-20.45	Pass
			783	787.95	-21.82	-10.45	Pass
		Edge_1RB_Left	818	828	-58.10	-13	Pass
			758	768	-57.89	-13	Pass


			787.95	798.05	14.55	14.55	Pass
			798.05	803	-56.50	-10.45	Pass
		Edge_1RB_Right	783	787.95	-55.36	-10.96	Pass
			758	768	-57.82	-13	Pass
			803	818	-57.65	-20.96	Pass
			818	828	-58.04	-13	Pass
			787.95	798.05	14.04	14.04	Pass
			768	783	-57.68	-20.96	Pass
			798.05	803	-24.15	-10.96	Pass

6.2 Test Graph


6.2.1 15_S_5M_NTNV

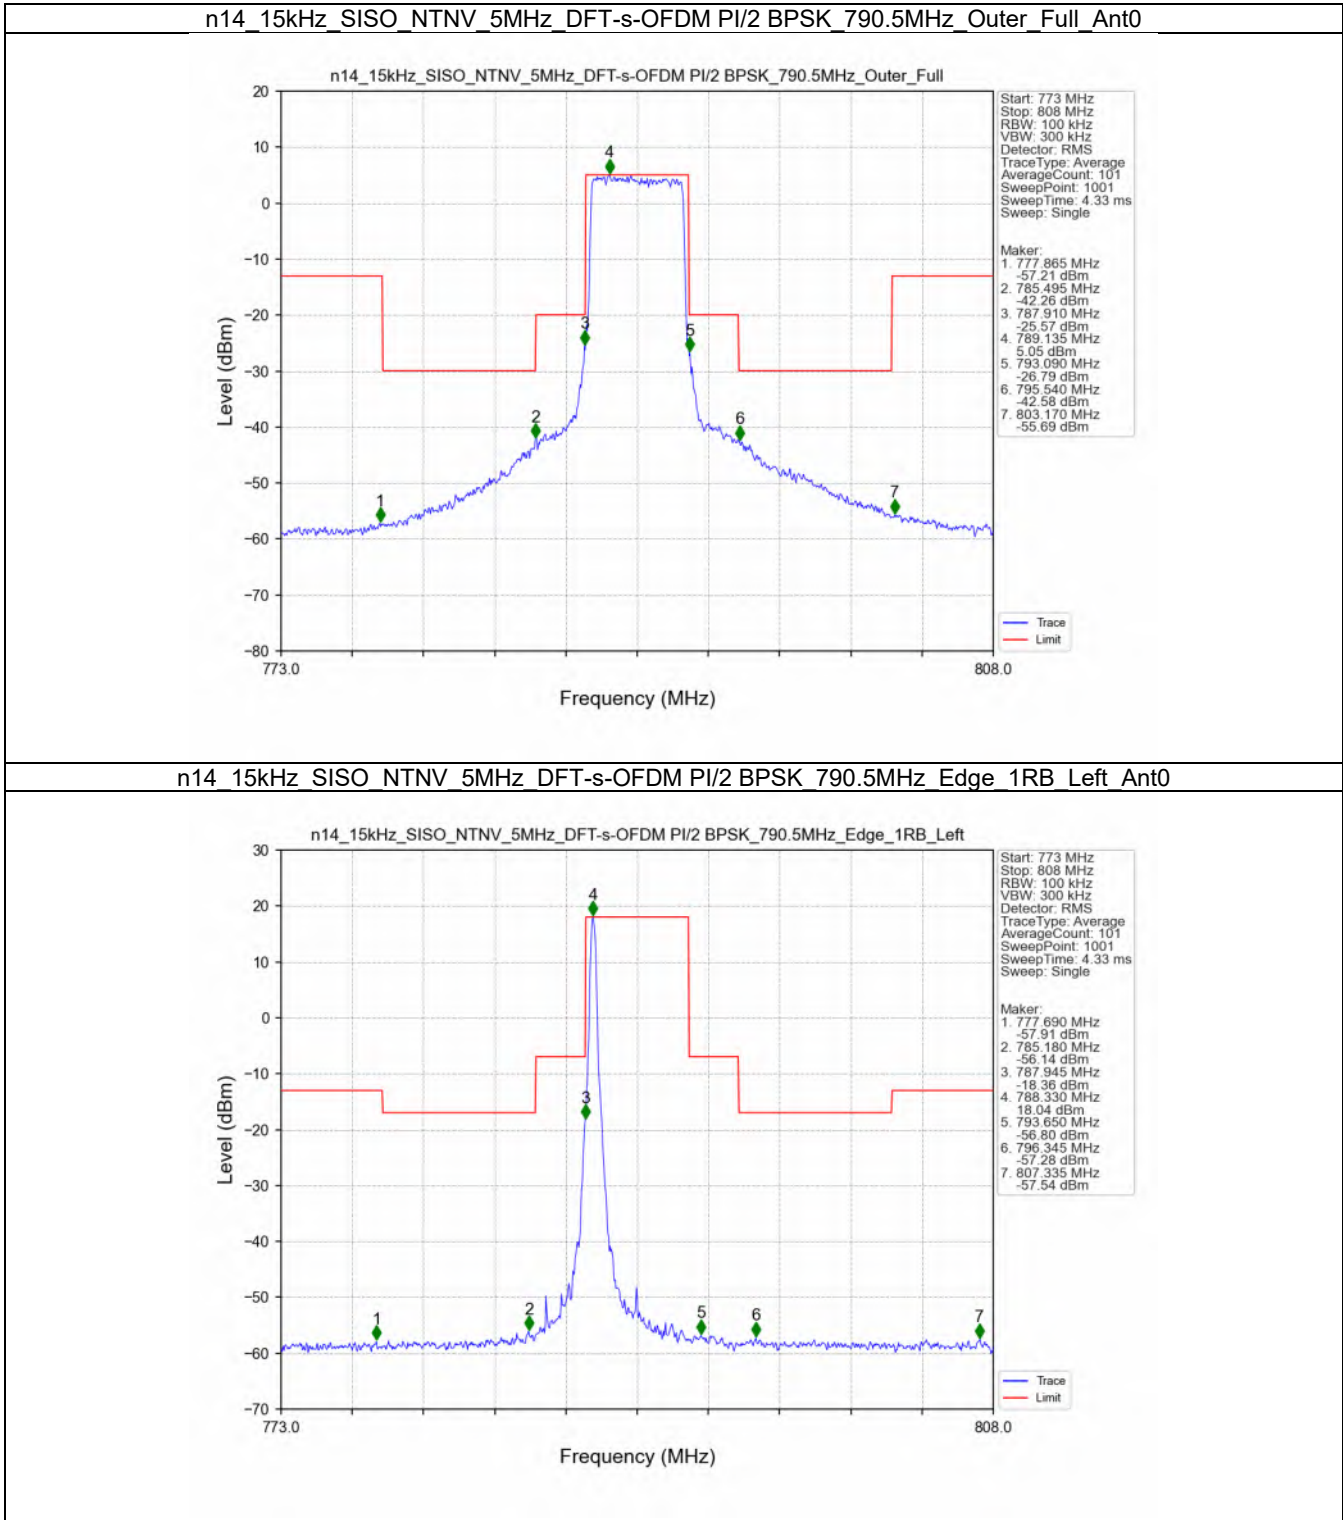


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_PI/2_BPSK_790.5MHz_Edge_1RB_Right_Ant0

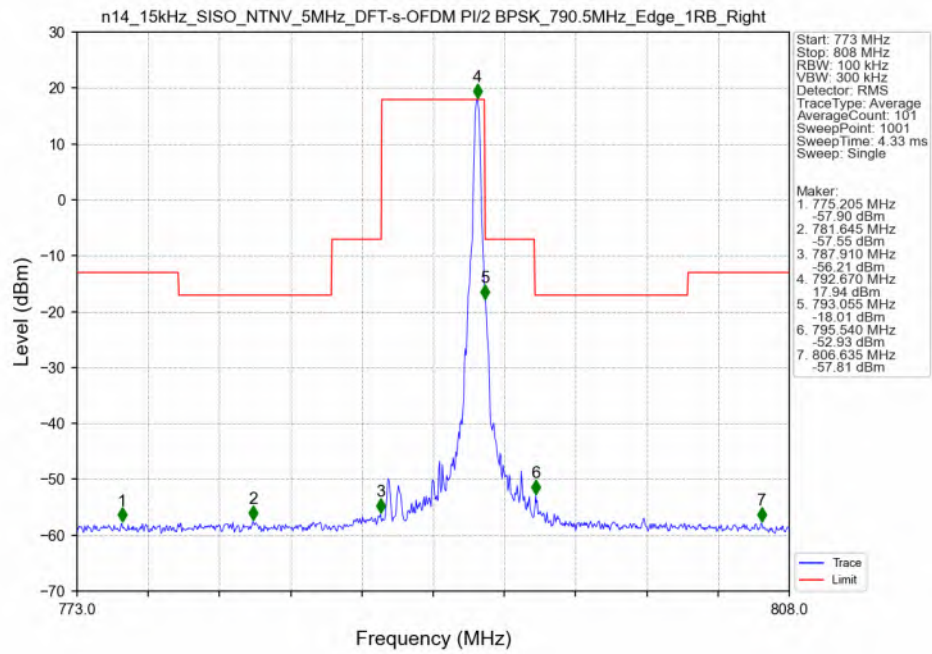


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_PI/2_BPSK_793MHz_Outer_Full_Ant0

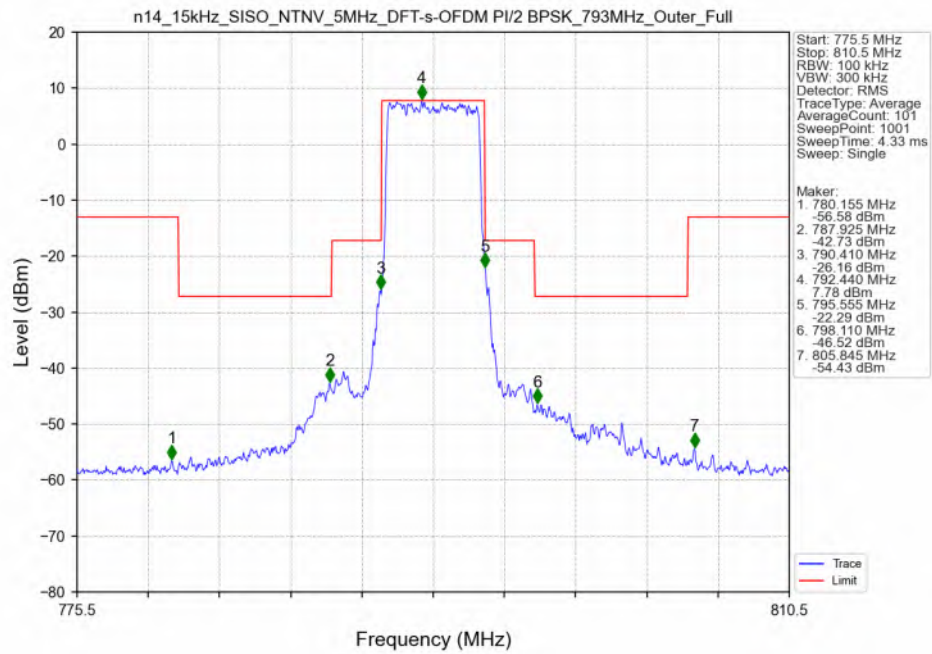


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_PI/2_BPSK_793MHz_Edge_1RB_Left_Ant0

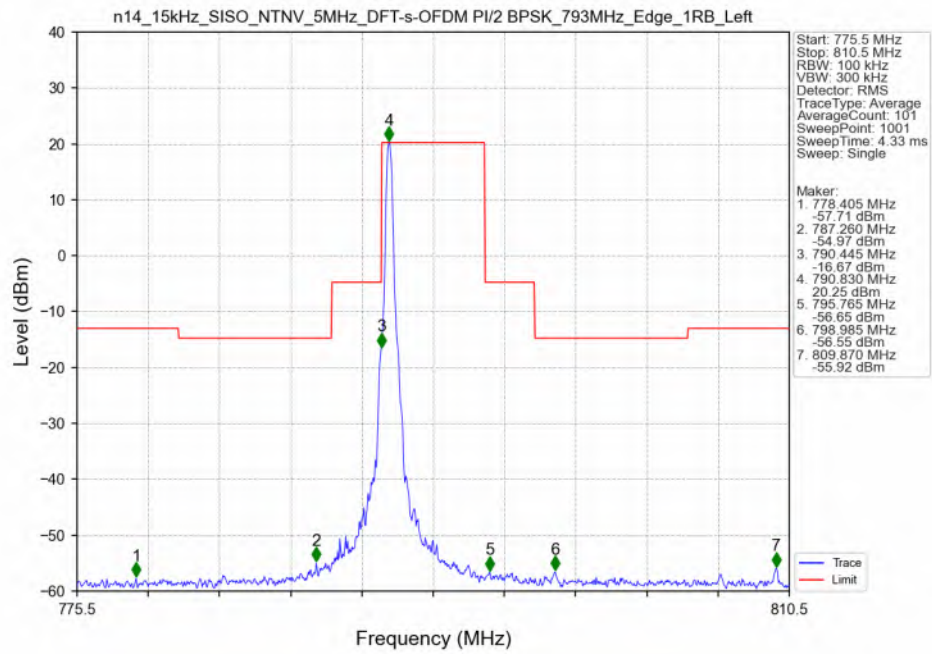


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_PI/2_BPSK_793MHz_Edge_1RB_Right_Ant0

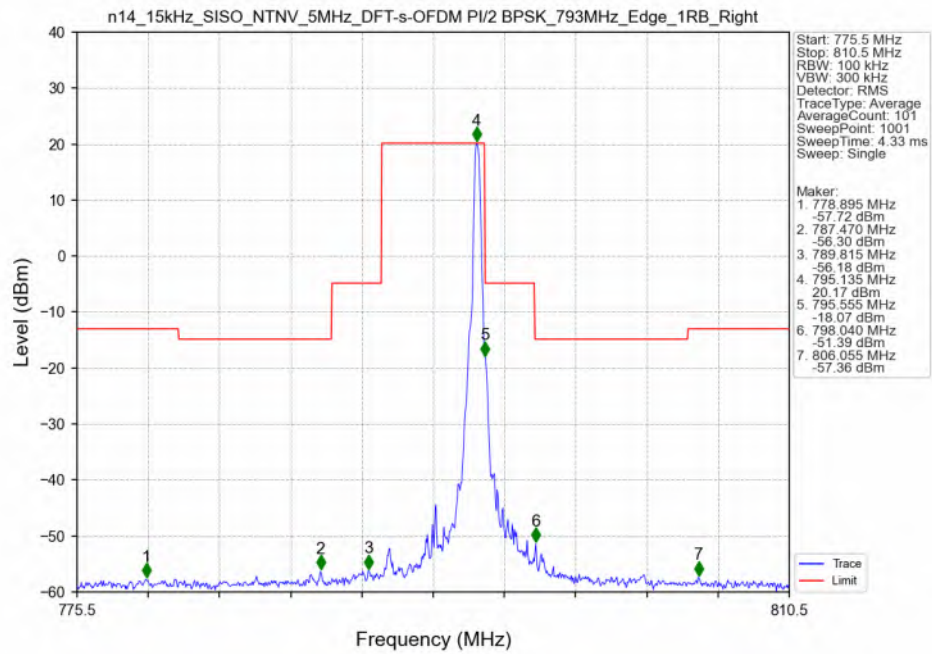


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM PI/2 BPSK_795.5MHz_Outer_Full_Ant0

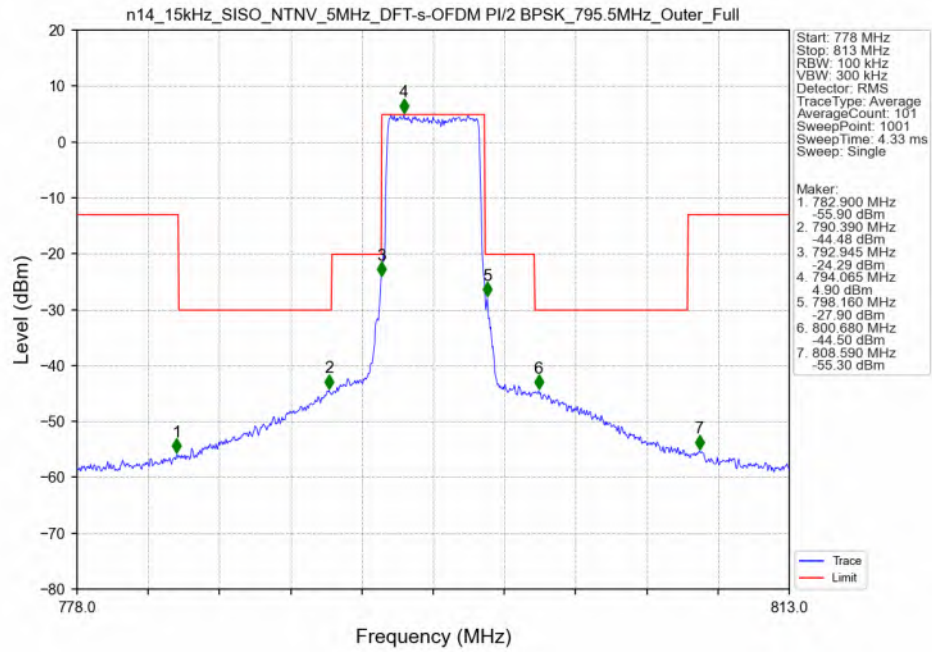


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM PI/2 BPSK_795.5MHz_Edge_1RB_Left_Ant0

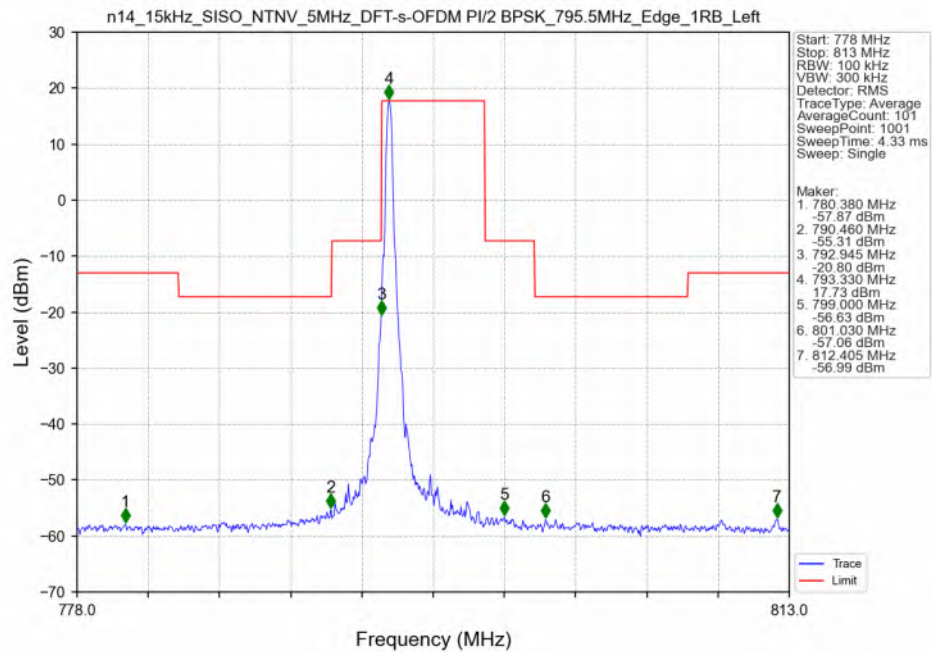


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM PI/2 BPSK_795.5MHz_Edge_1RB_Right_Ant0

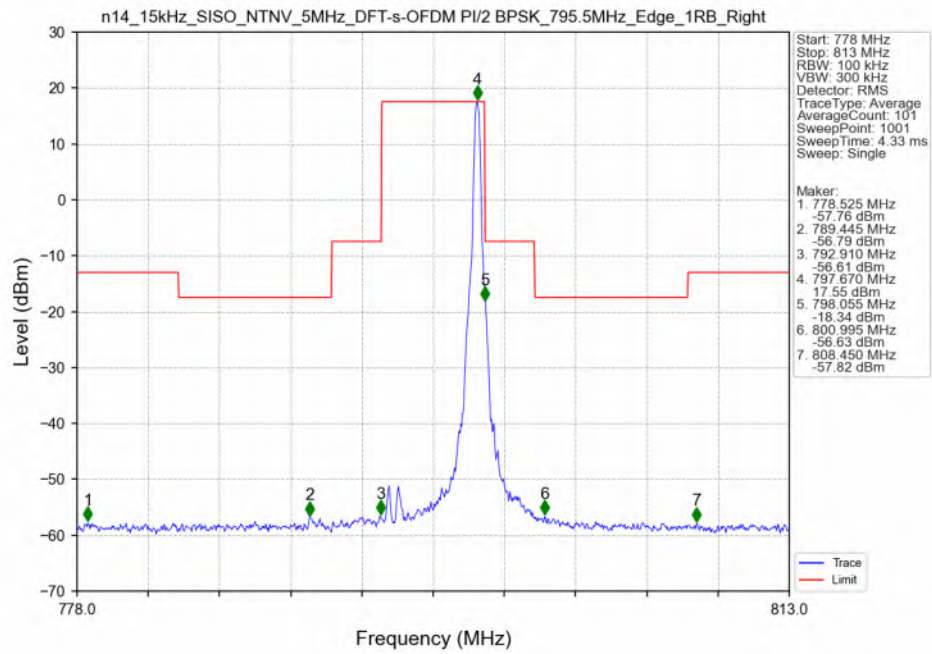


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM QPSK_790.5MHz_Outer_Full_Ant0

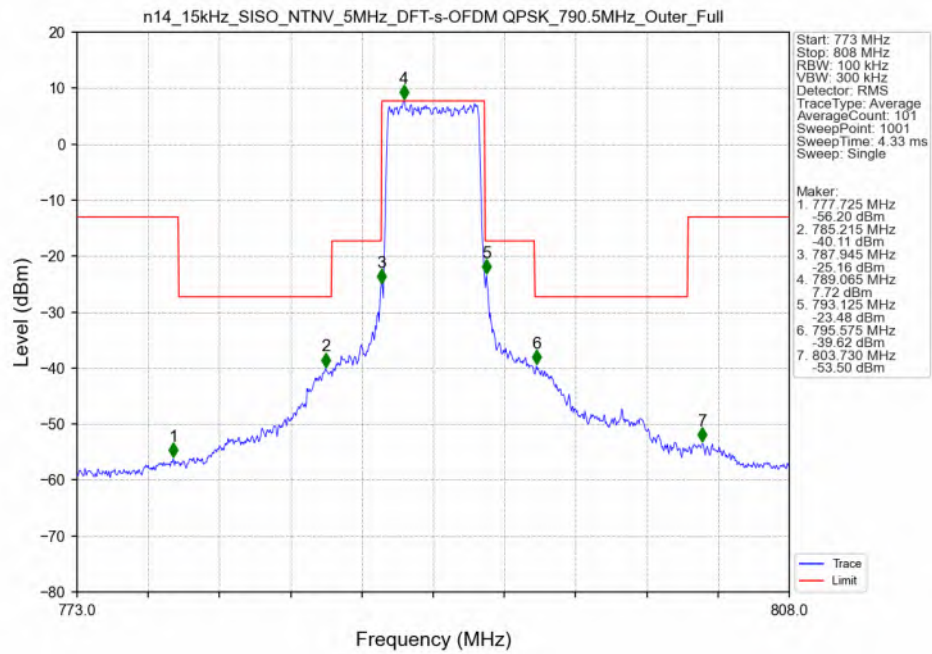


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_790.5MHz_Edge_1RB_Left_Ant0

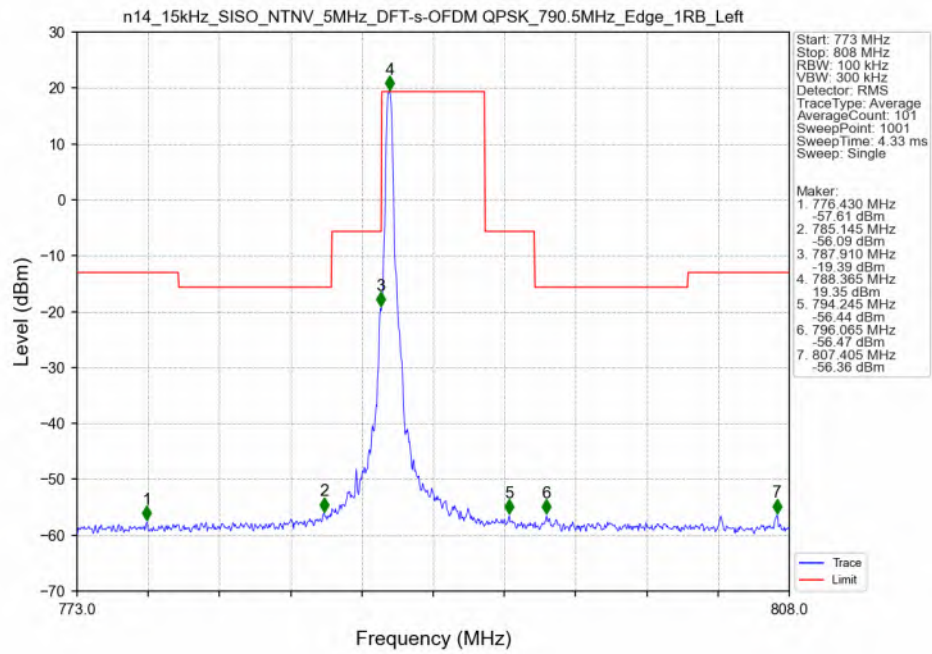


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_790.5MHz_Edge_1RB_Right_Ant0

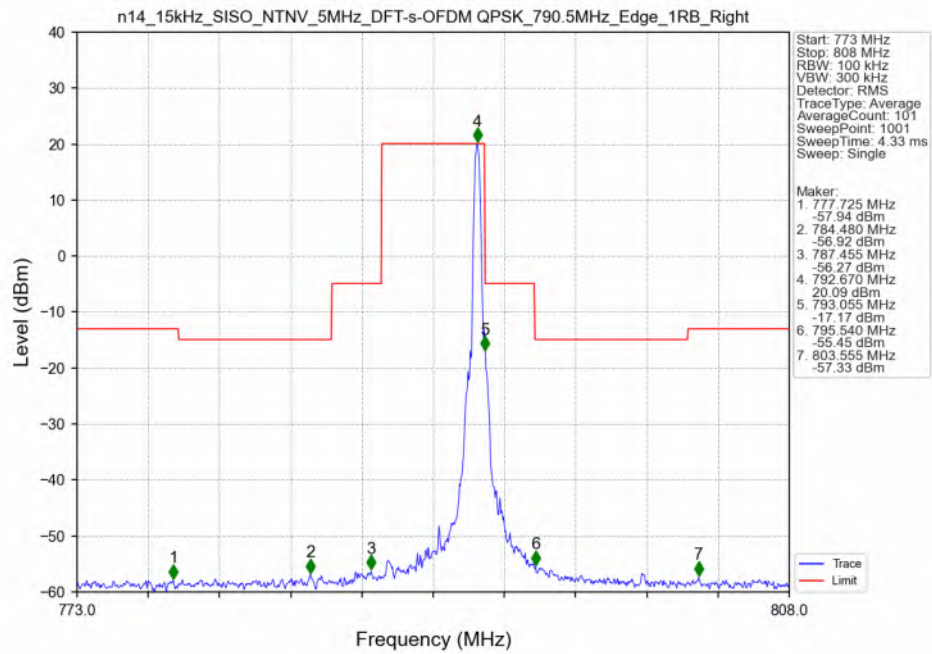


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_793MHz_Outer_Full_Ant0

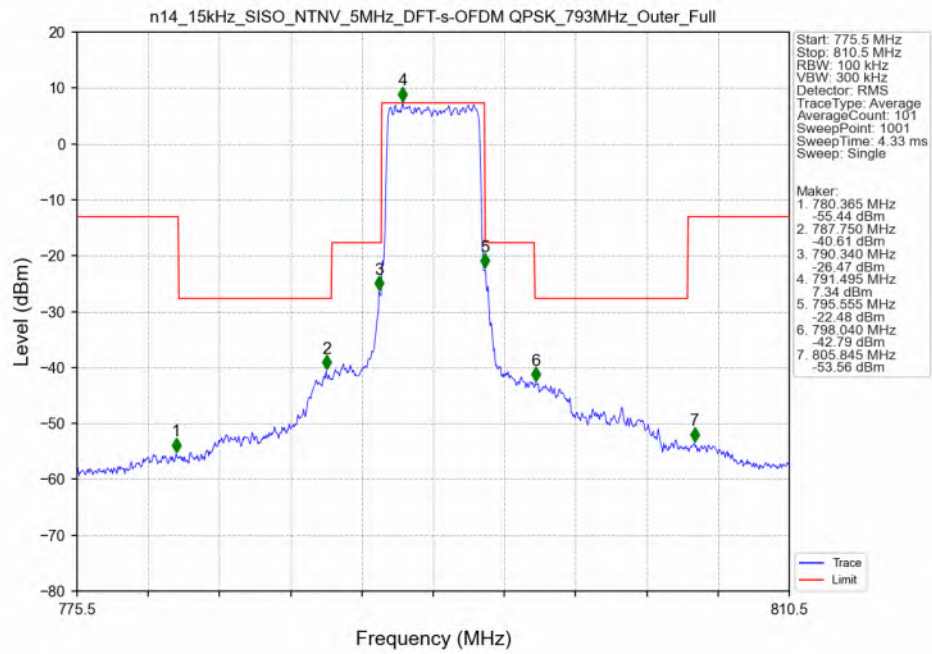


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_793MHz_Edge_1RB_Left_Ant0

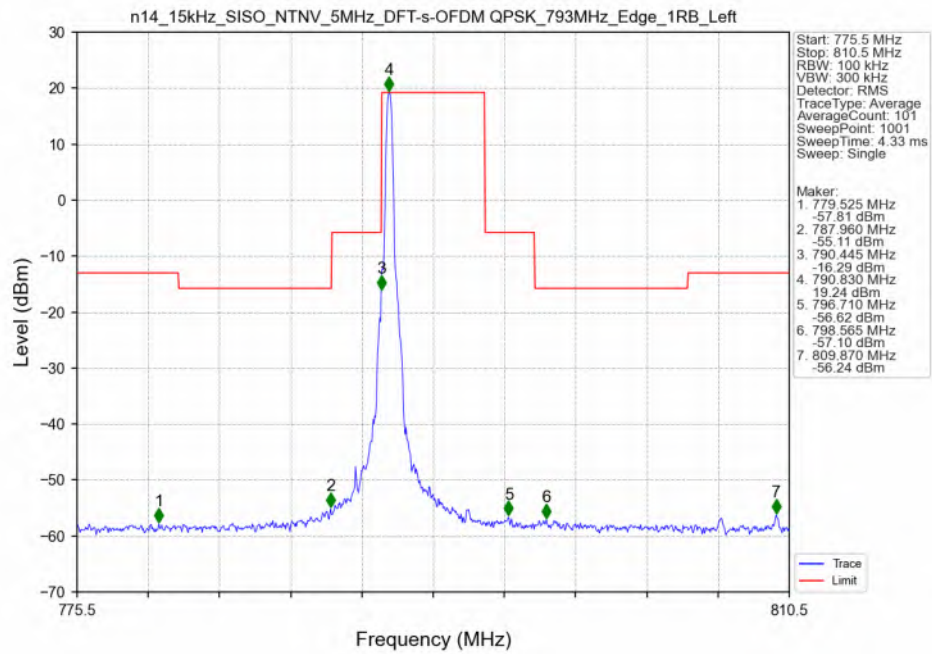


n14 15kHz SISO NTN 5MHz DFT-s-OFDM QPSK 793MHz Edge 1RB Right Ant0

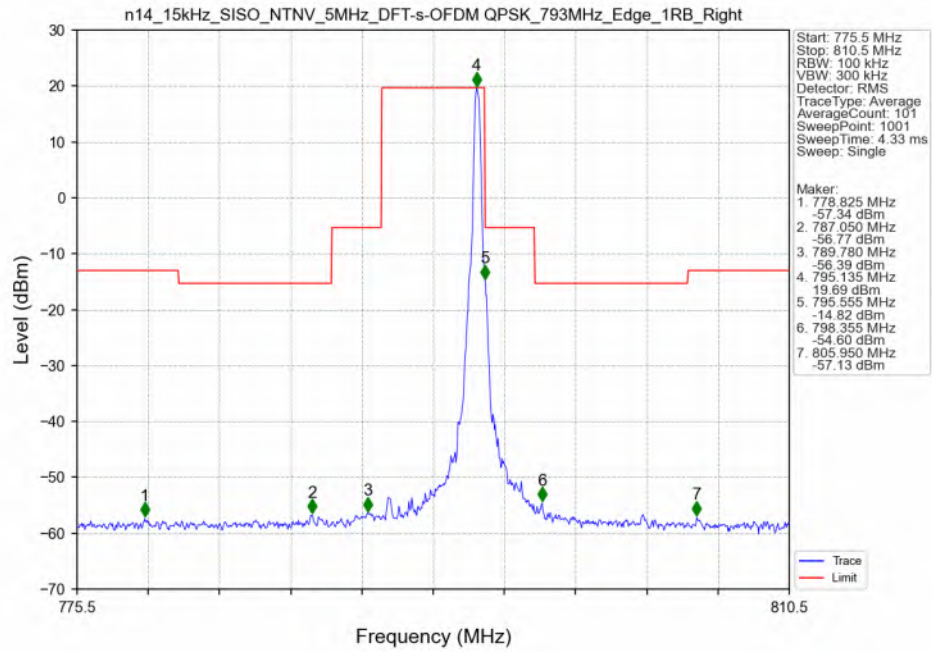


n14 15kHz SISO NTN 5MHz DFT-s-OFDM QPSK 795.5MHz Outer Full Ant0

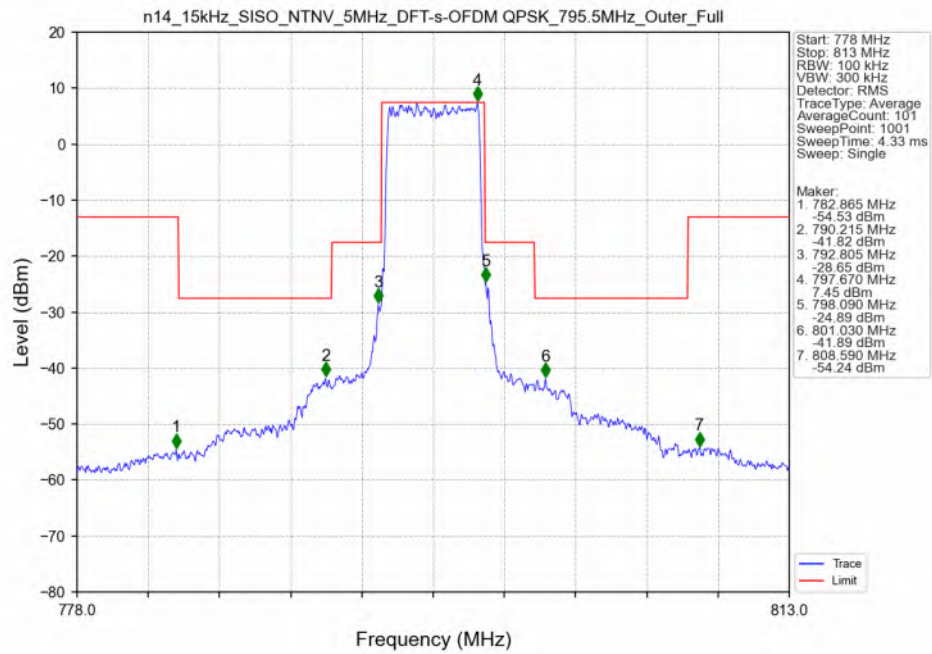


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_795.5MHz_Edge_1RB_Left_Ant0

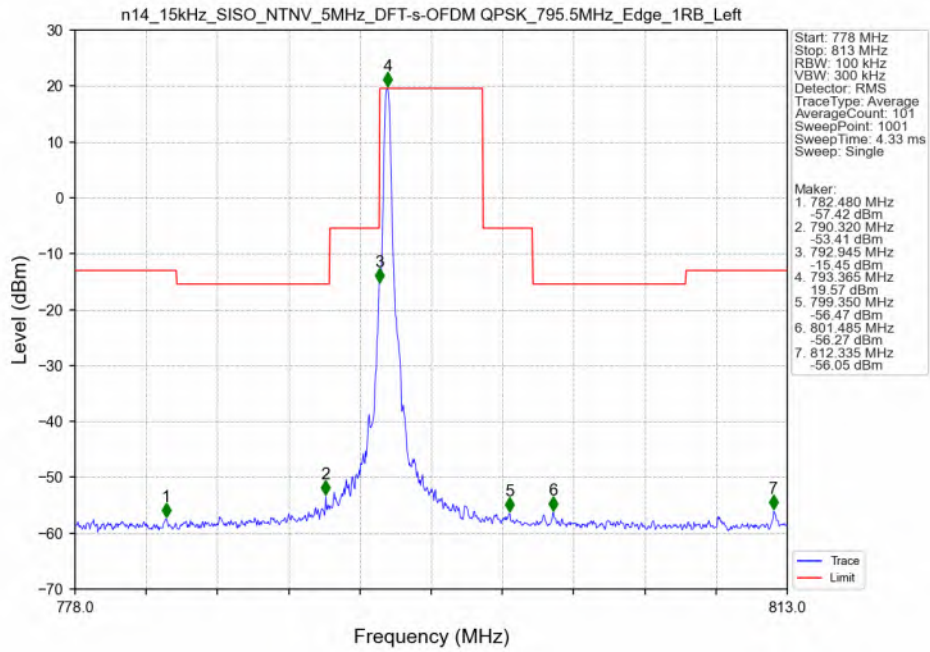


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_QPSK_795.5MHz_Edge_1RB_Right_Ant0

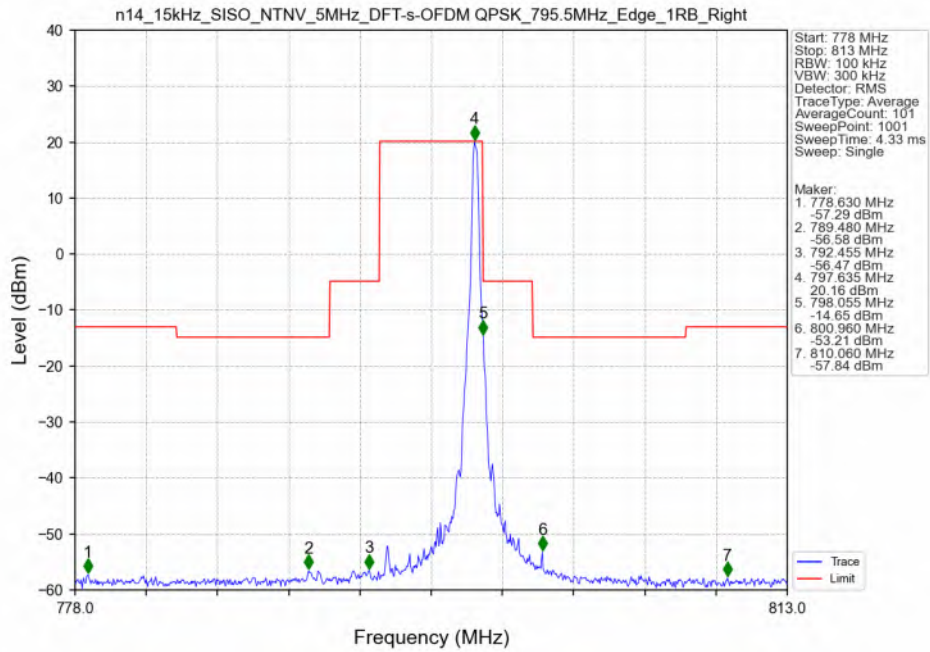


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_16_QAM_790.5MHz_Outer_Full_Ant0

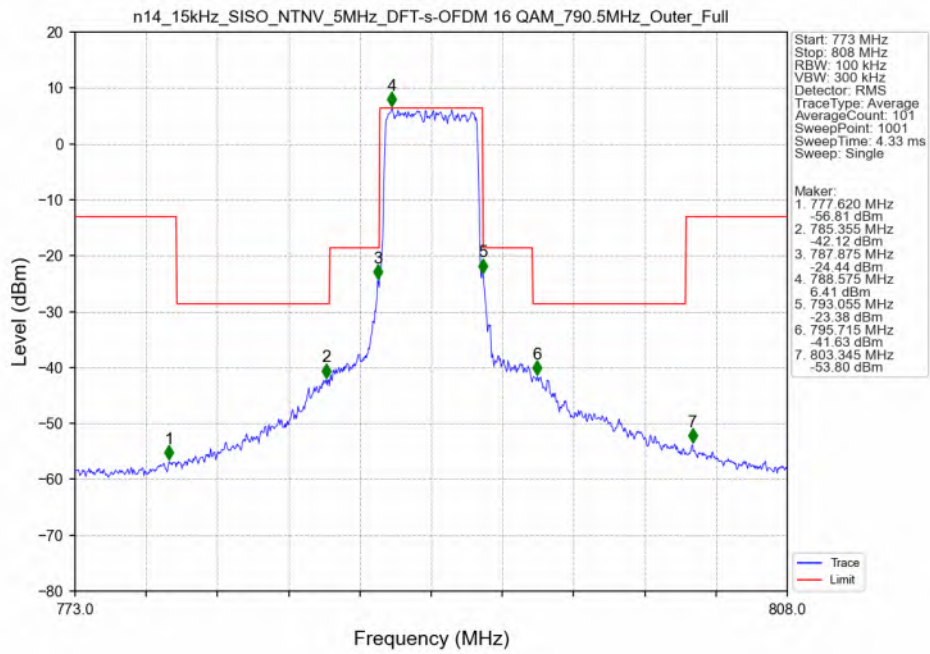


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_16_QAM_790.5MHz_Edge_1RB_Left_Ant0

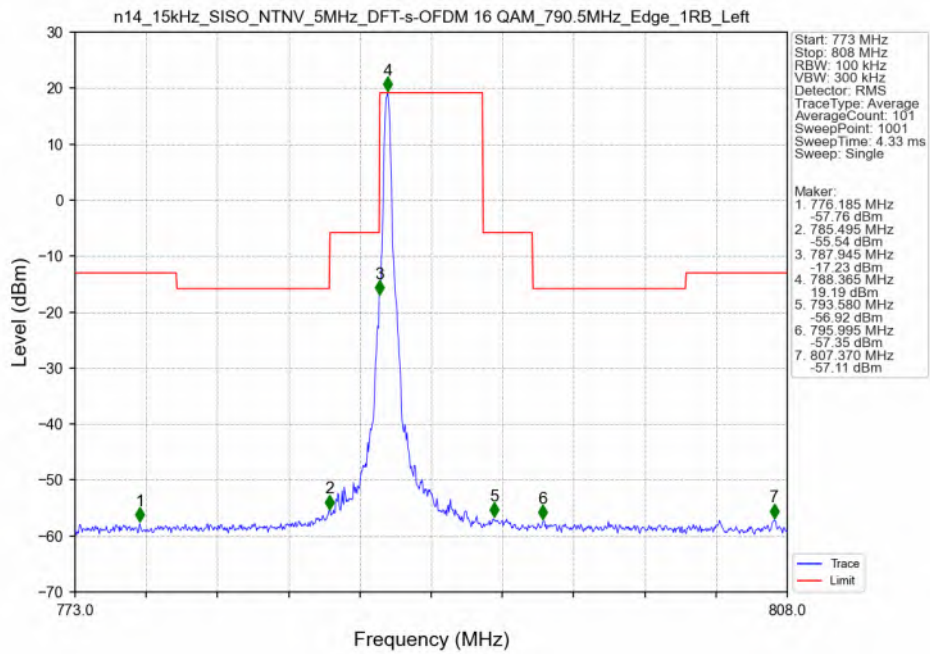


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_16_QAM_790.5MHz_Edge_1RB_Right_Ant0

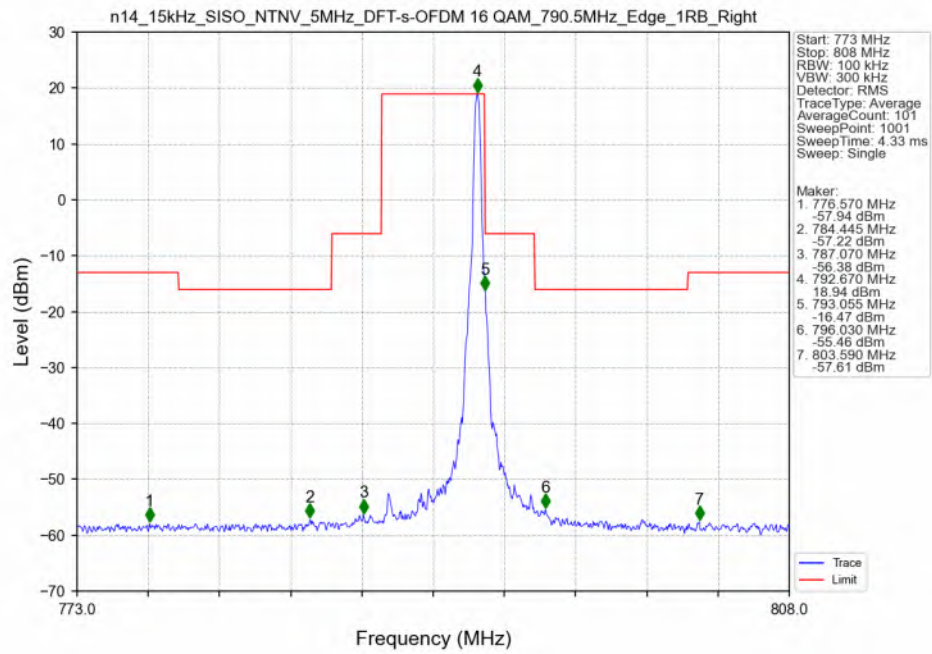


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_16_QAM_793MHz_Outer_Full_Ant0

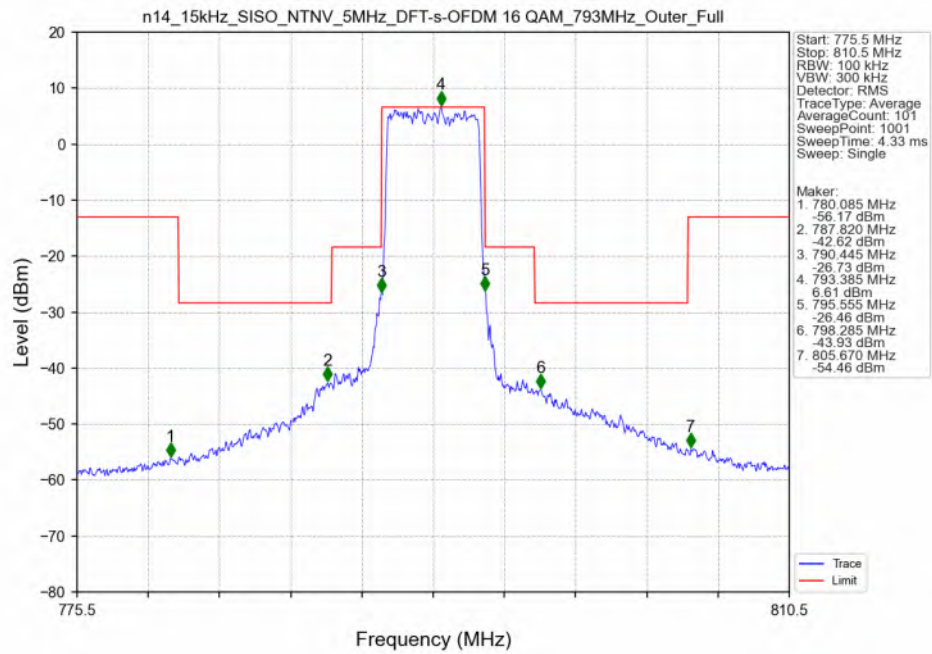


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_16_QAM_793MHz_Edge_1RB_Left_Ant0

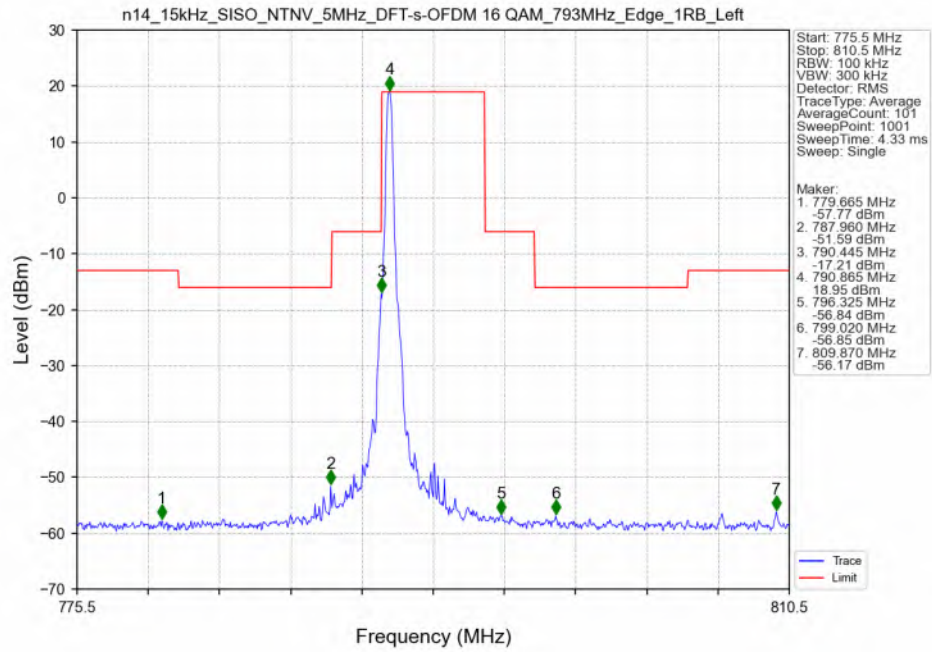


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_16_QAM_793MHz_Edge_1RB_Right_Ant0

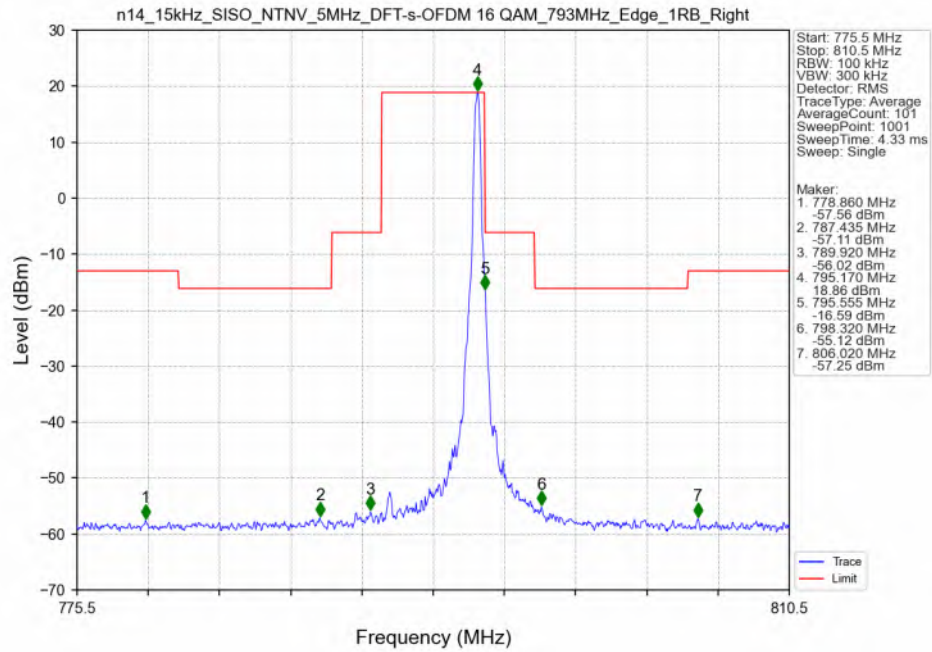


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_16_QAM_795.5MHz_Outer_Full_Ant0

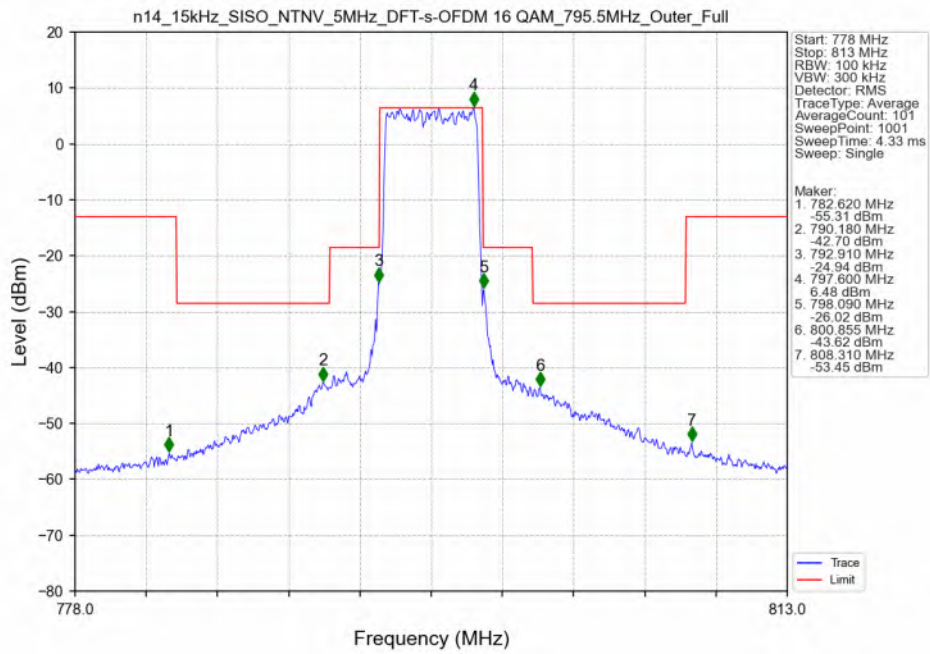


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_16_QAM_795.5MHz_Edge_1RB_Left_Ant0

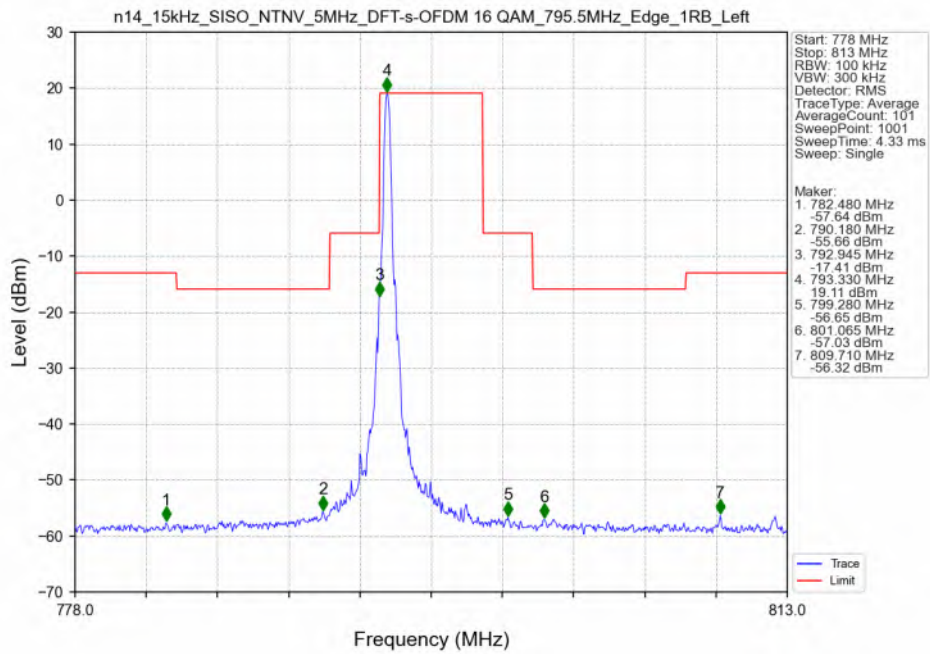


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM 16 QAM_795.5MHz_Edge_1RB_Right_Ant0

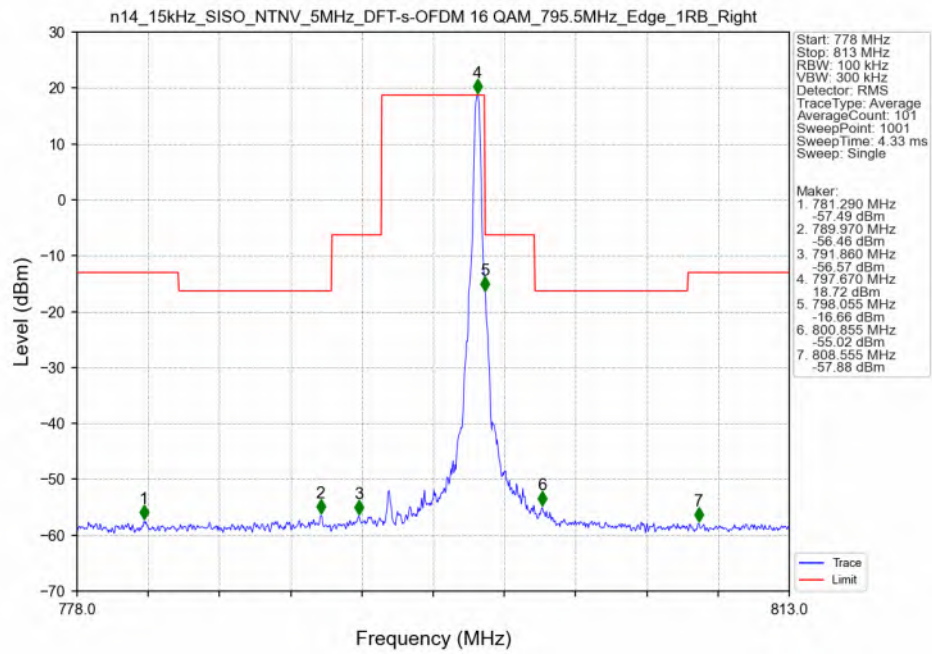


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM 64 QAM_790.5MHz_Outer_Full_Ant0

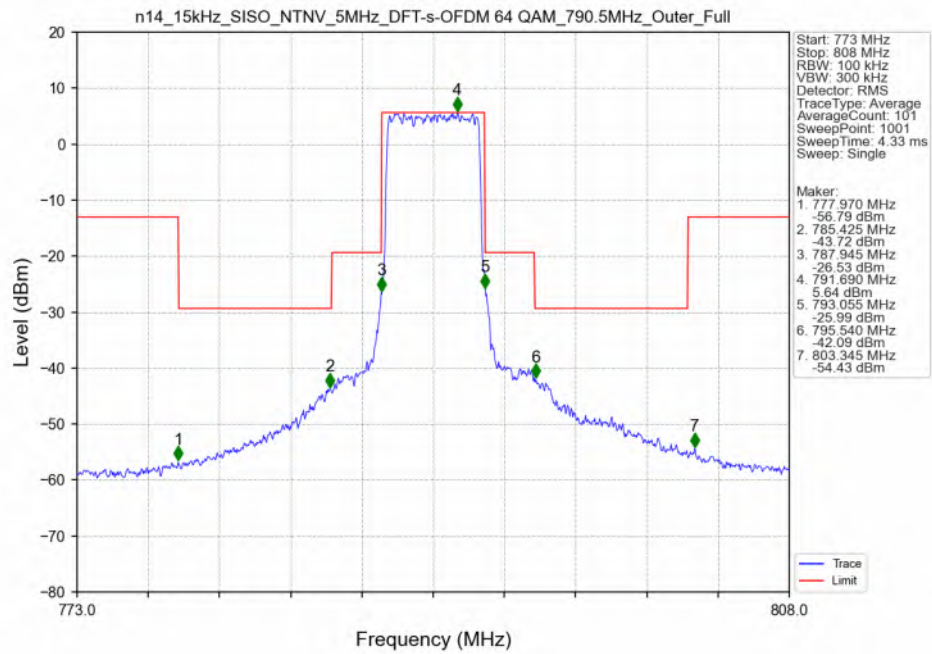


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_64_QAM_790.5MHz_Edge_1RB_Left_Ant0

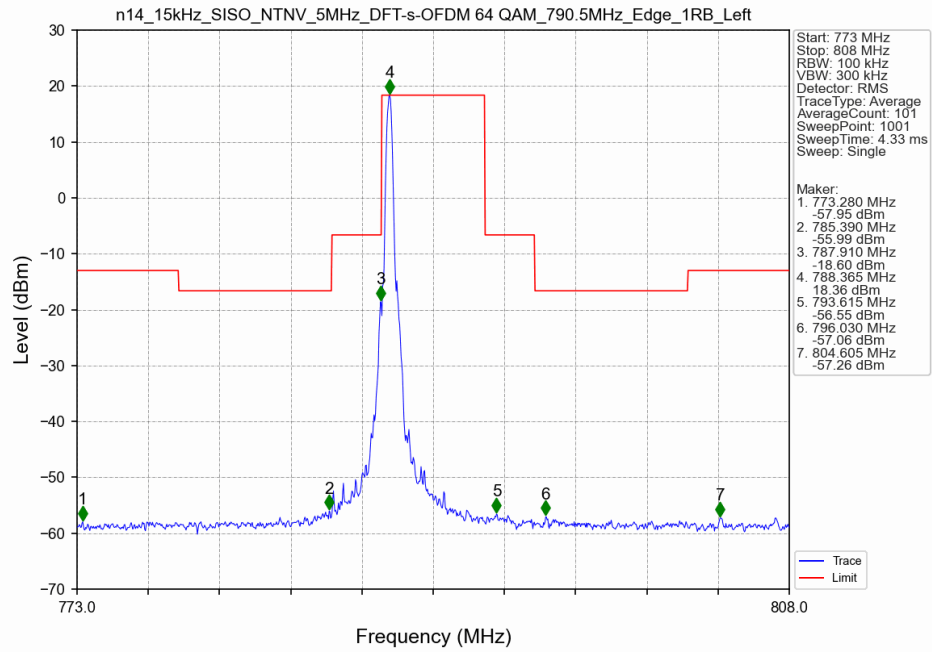


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_64_QAM_790.5MHz_Edge_1RB_Right_Ant0

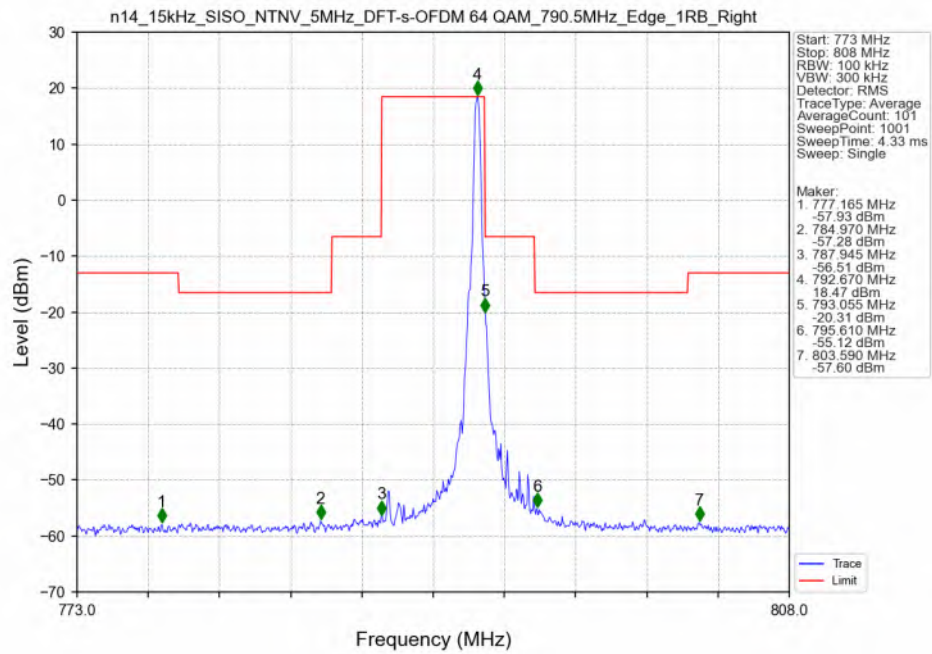


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM 64 QAM_793MHz_Outer_Full_Ant0

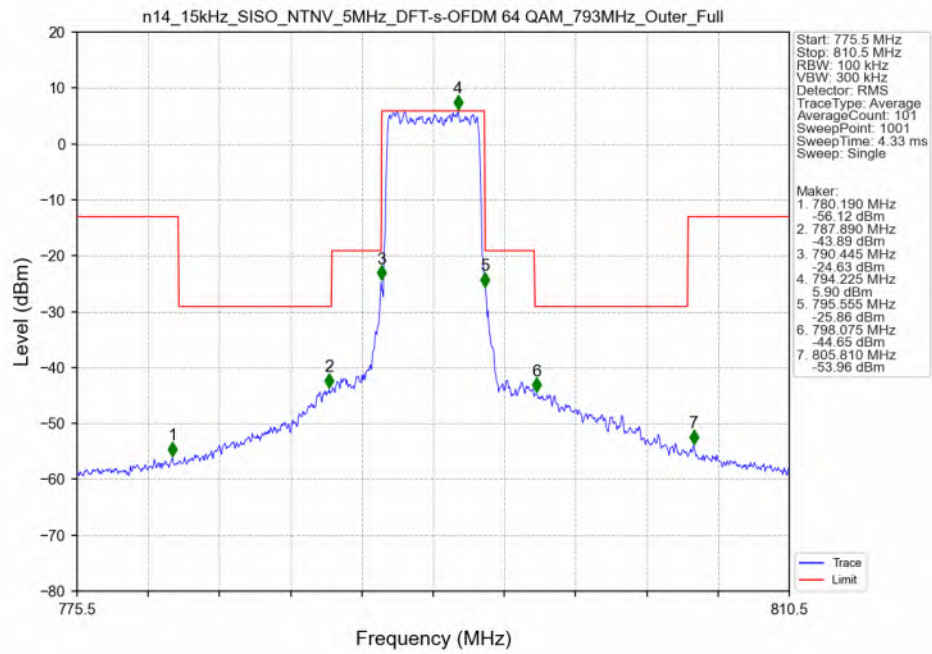


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM 64 QAM_793MHz_Edge_1RB_Left_Ant0

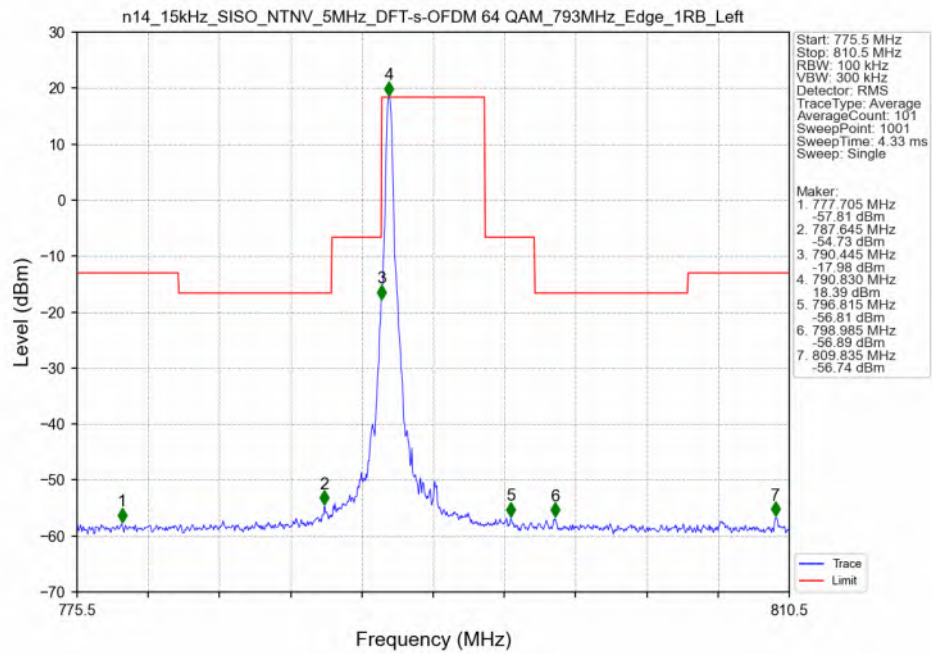


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_64_QAM_793MHz_Edge_1RB_Right_Ant0

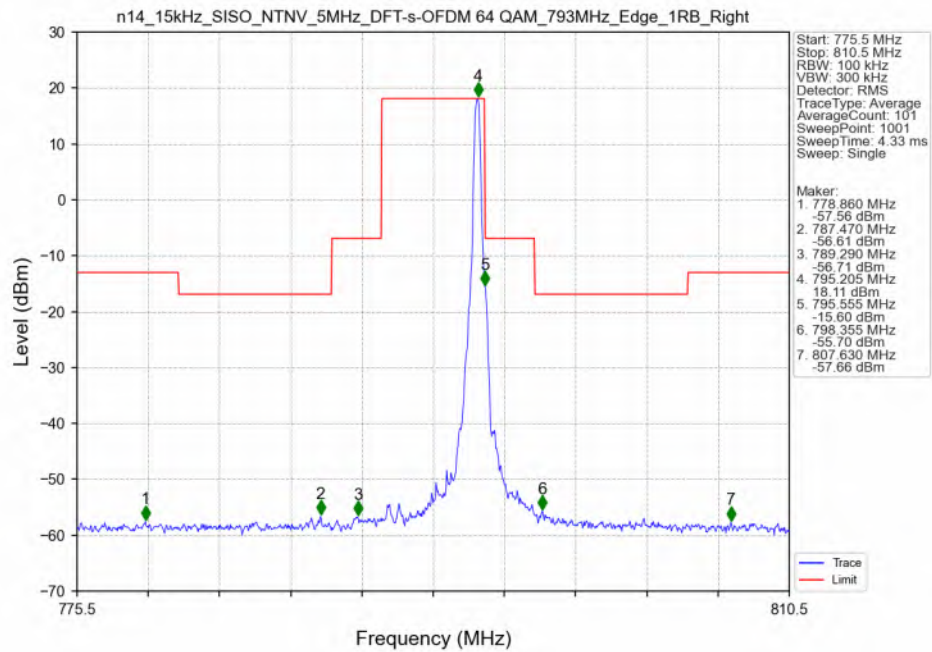


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_64_QAM_795.5MHz_Outer_Full_Ant0

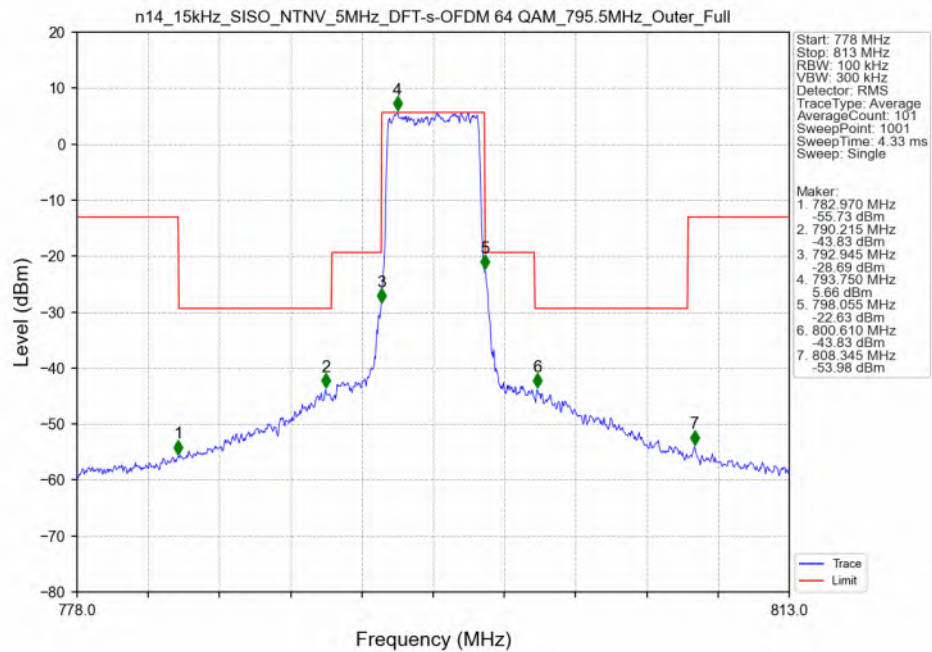


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_64_QAM_795.5MHz_Edge_1RB_Left_Ant0

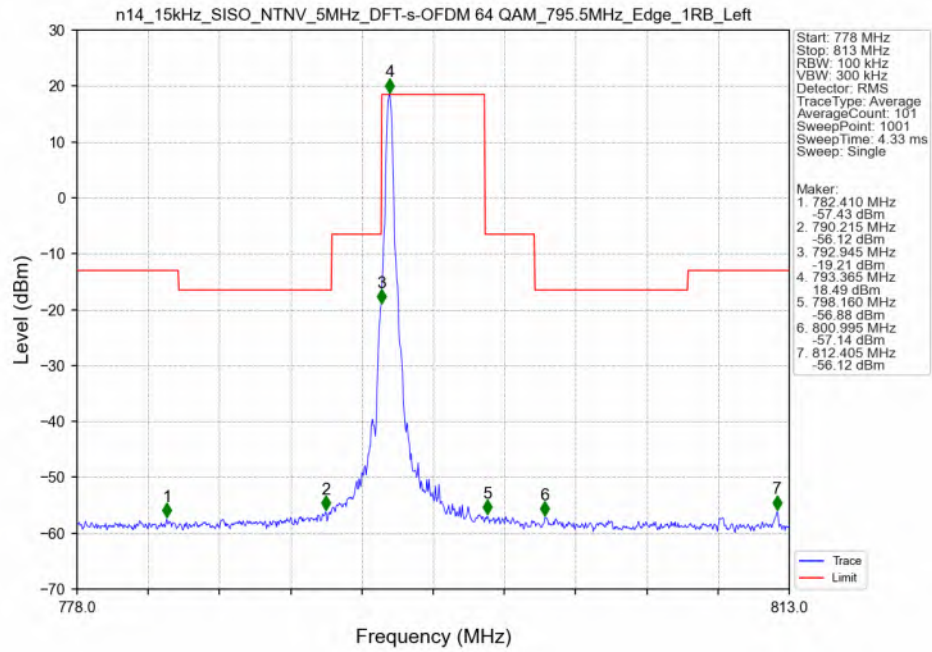


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_64_QAM_795.5MHz_Edge_1RB_Right_Ant0

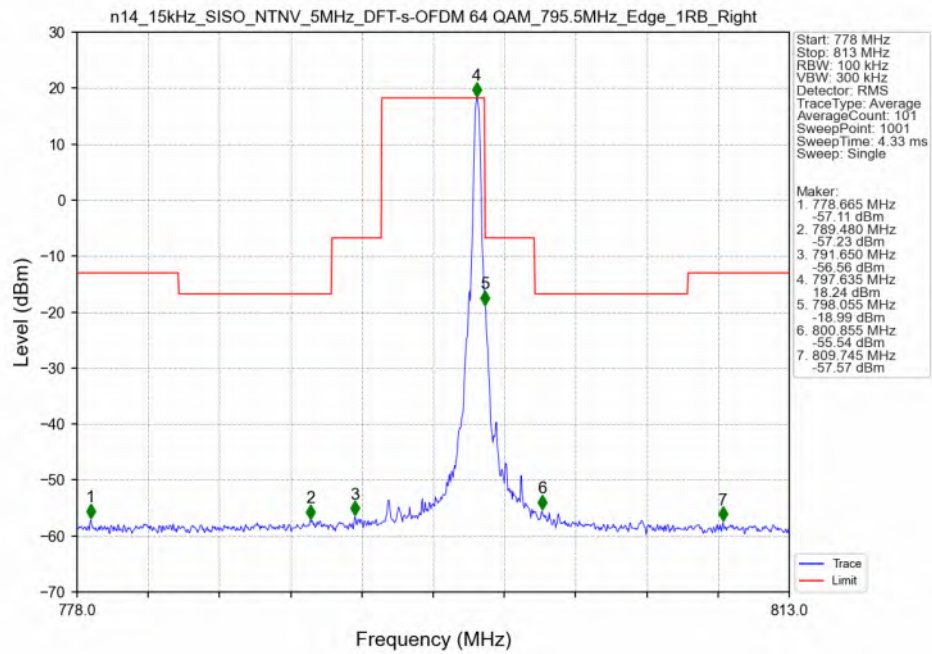


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_256_QAM_790.5MHz_Outer_Full_Ant0

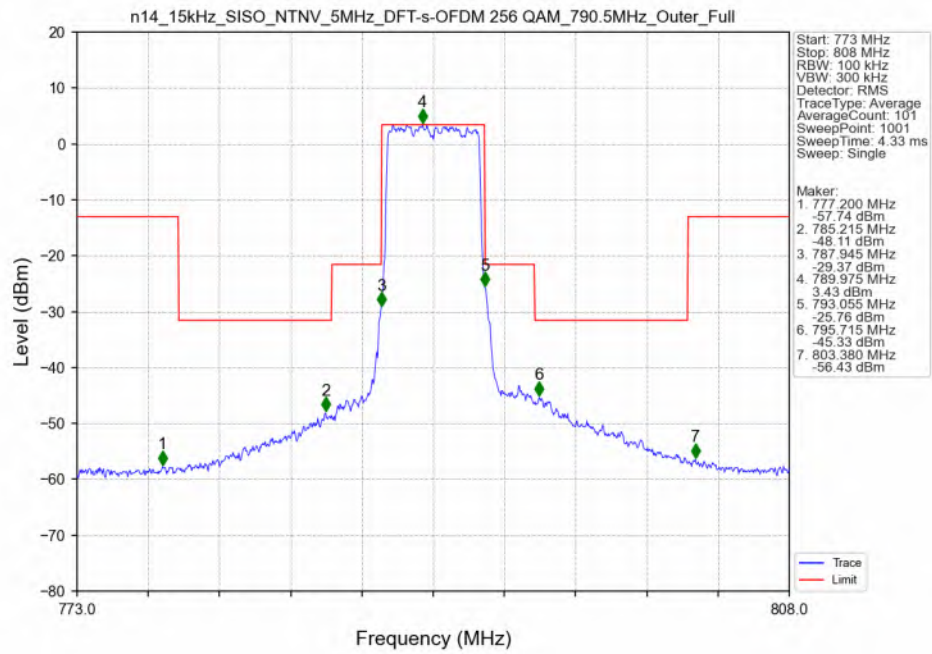


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_256_QAM_790.5MHz_Edge_1RB_Left_Ant0

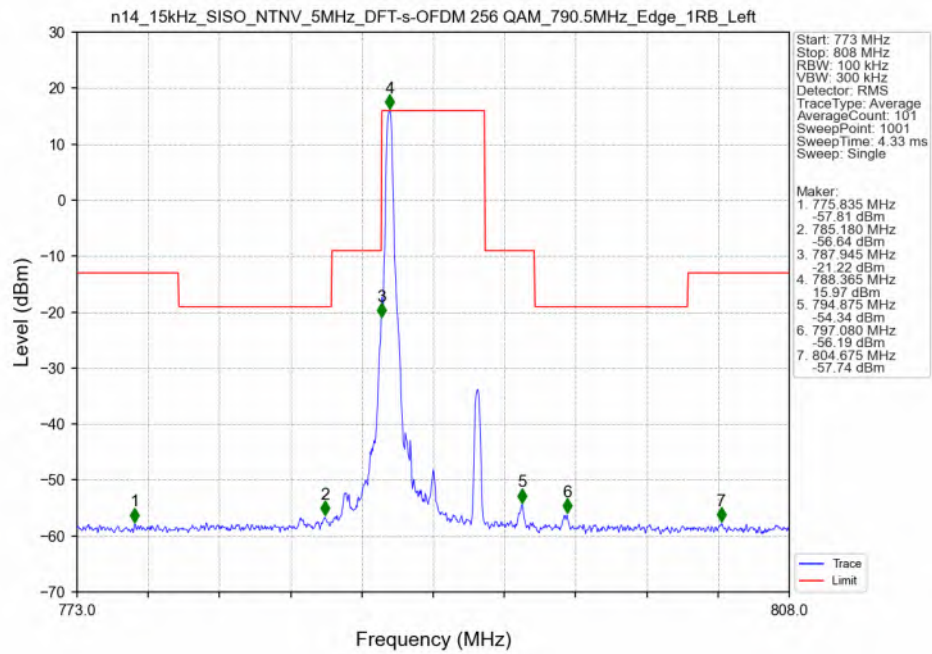


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_256_QAM_790.5MHz_Edge_1RB_Right_Ant0

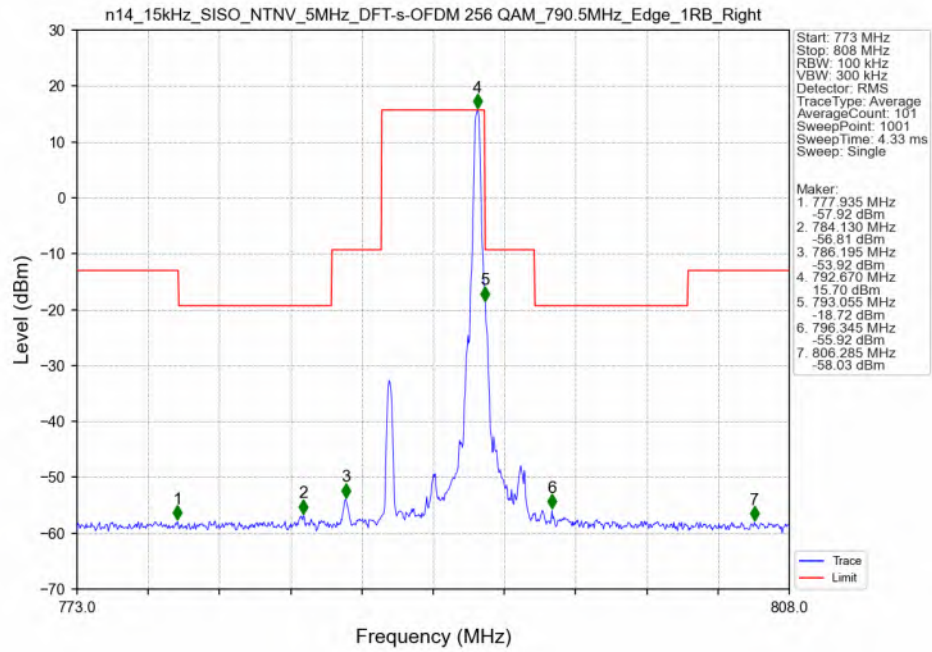


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_256_QAM_793MHz_Outer_Full_Ant0

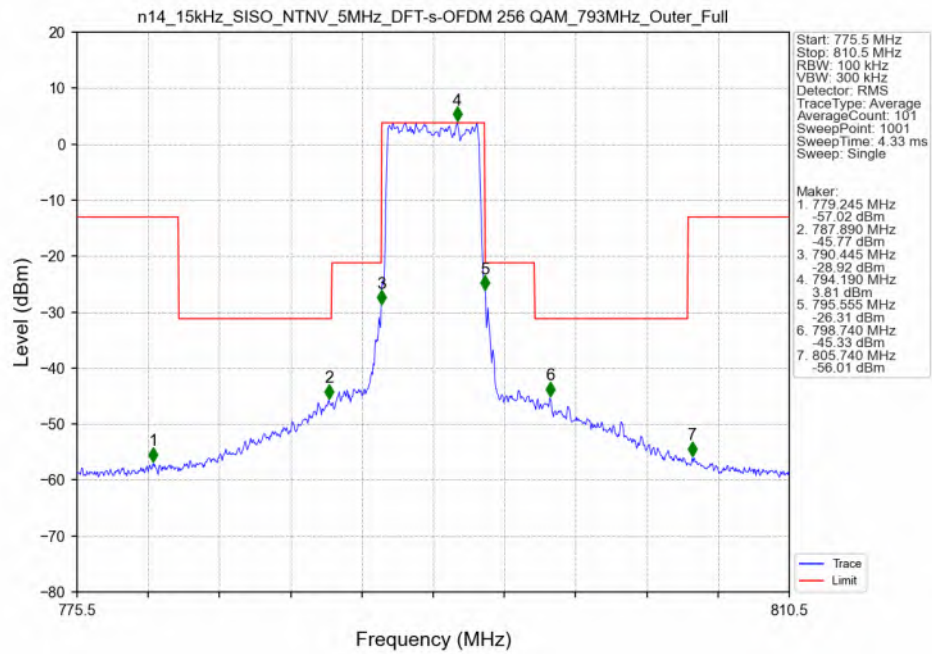


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_256_QAM_793MHz_Edge_1RB_Left_Ant0

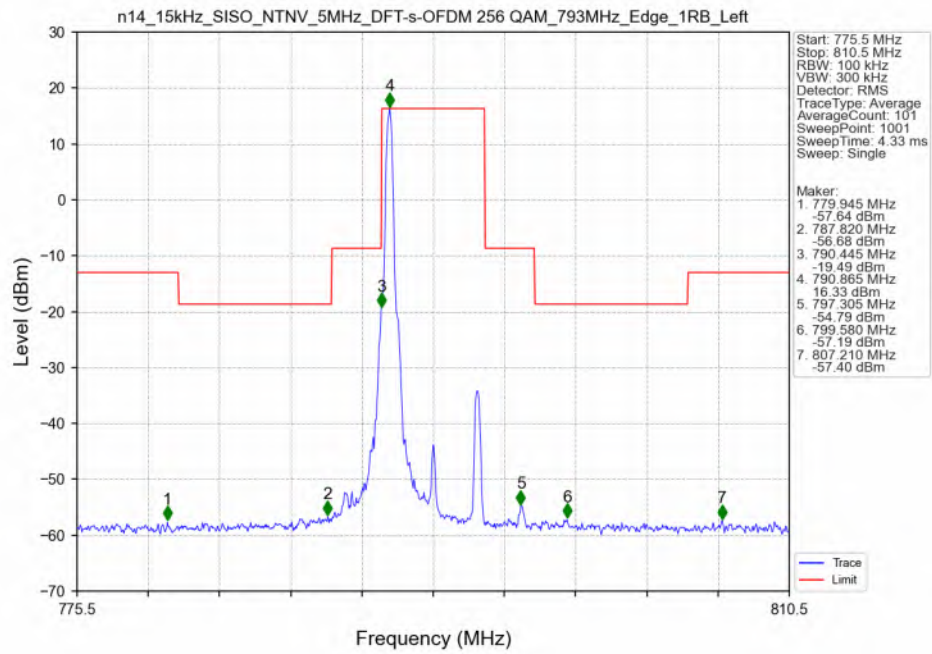


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_256_QAM_793MHz_Edge_1RB_Right_Ant0

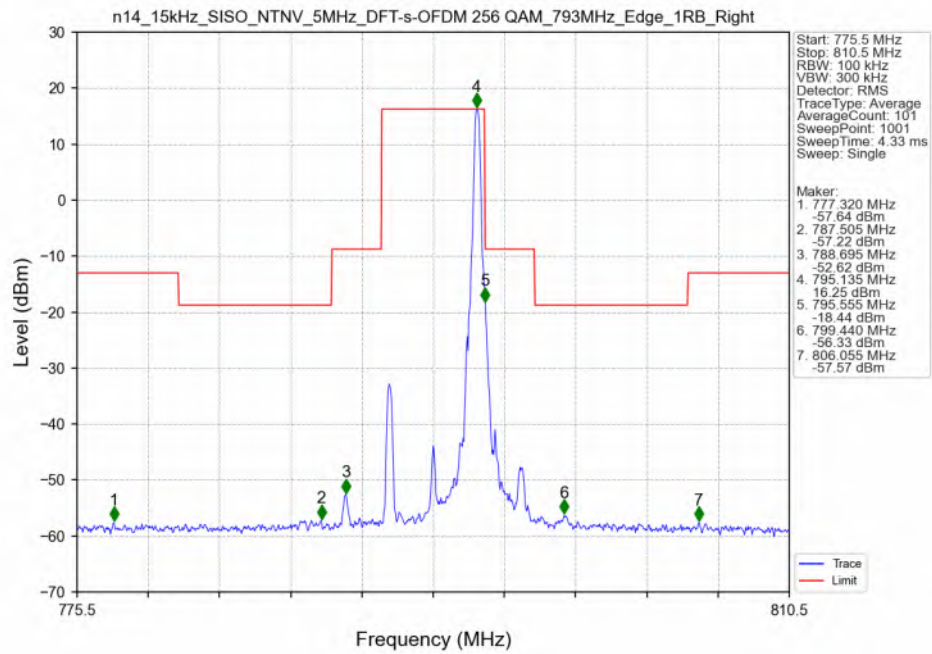


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_256_QAM_795.5MHz_Outer_Full_Ant0

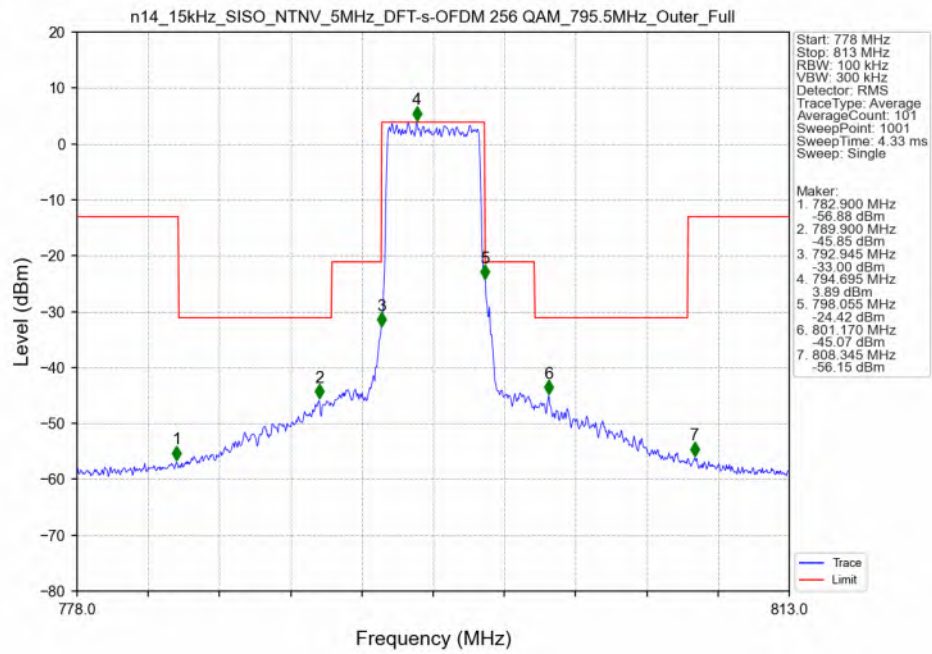


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_256_QAM_795.5MHz_Edge_1RB_Left_Ant0

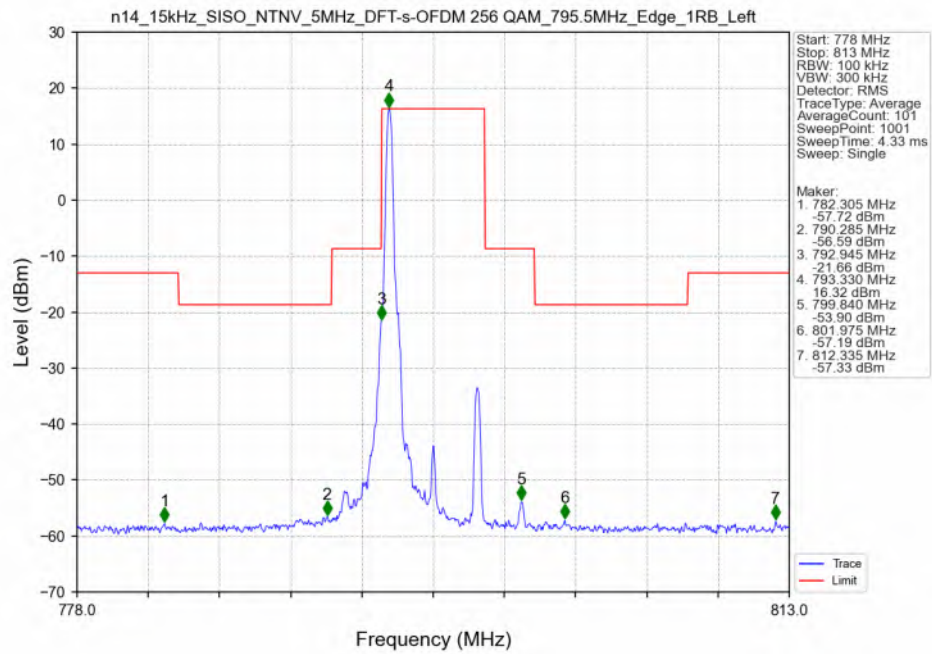


n14_15kHz_SISO_NTNV_5MHz_DFT-s-OFDM_256_QAM_795.5MHz_Edge_1RB_Right_Ant0

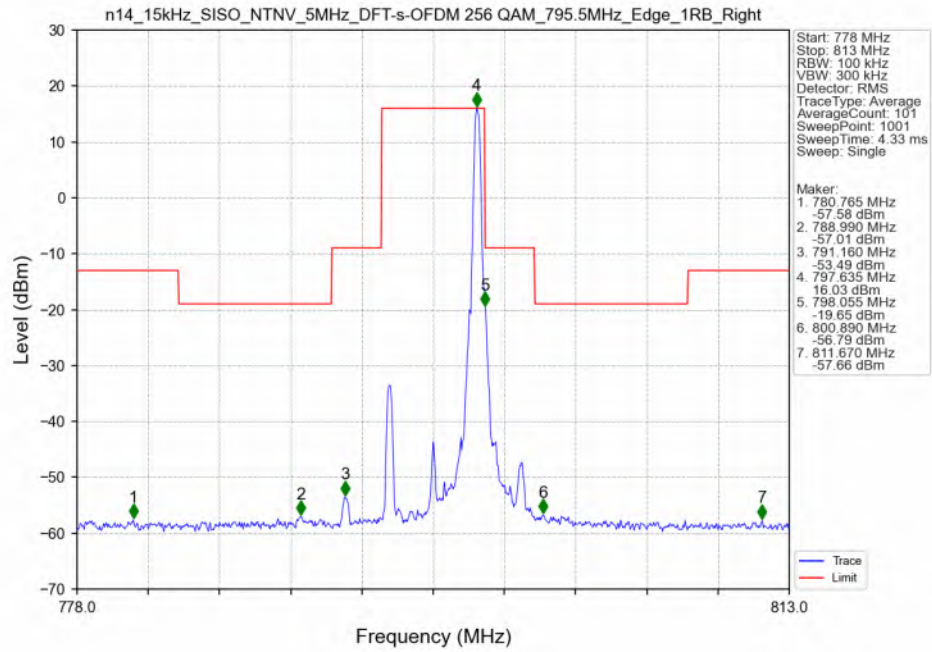


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_790.5MHz_Outer_Full_Ant0

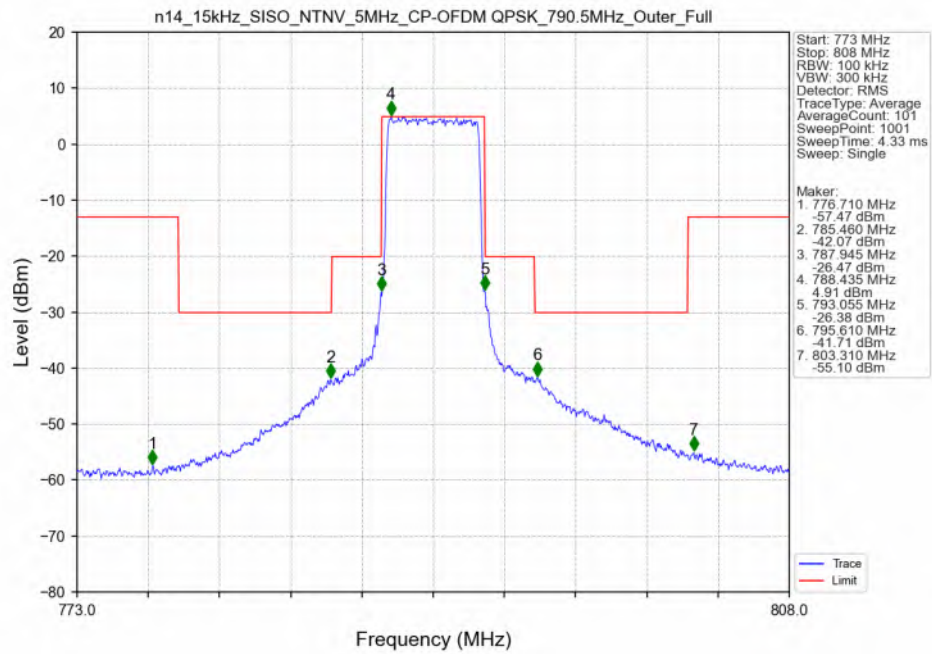


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_790.5MHz_Edge_1RB_Left_Ant0

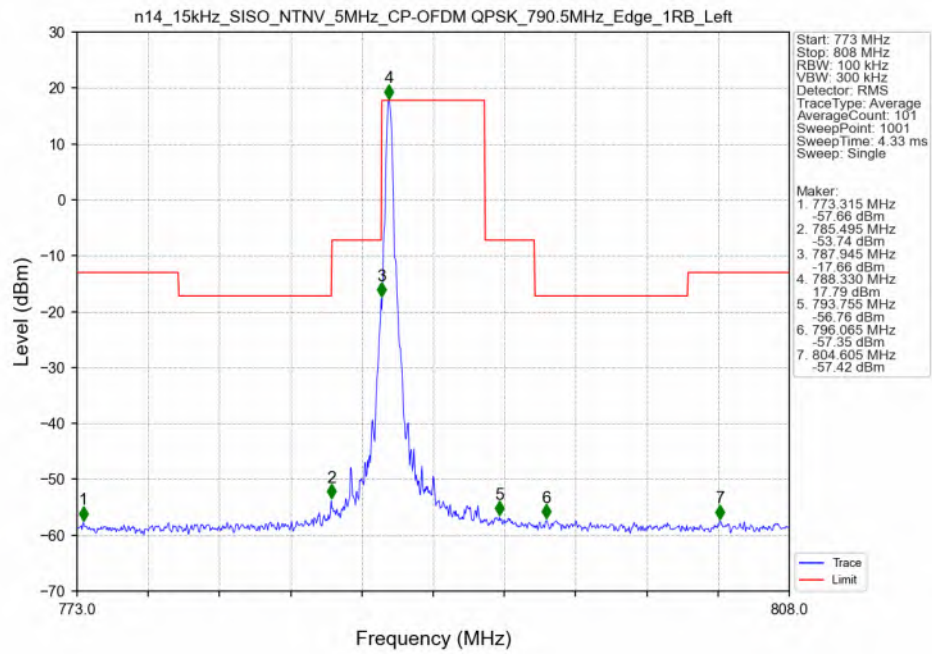


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_790.5MHz_Edge_1RB_Right_Ant0

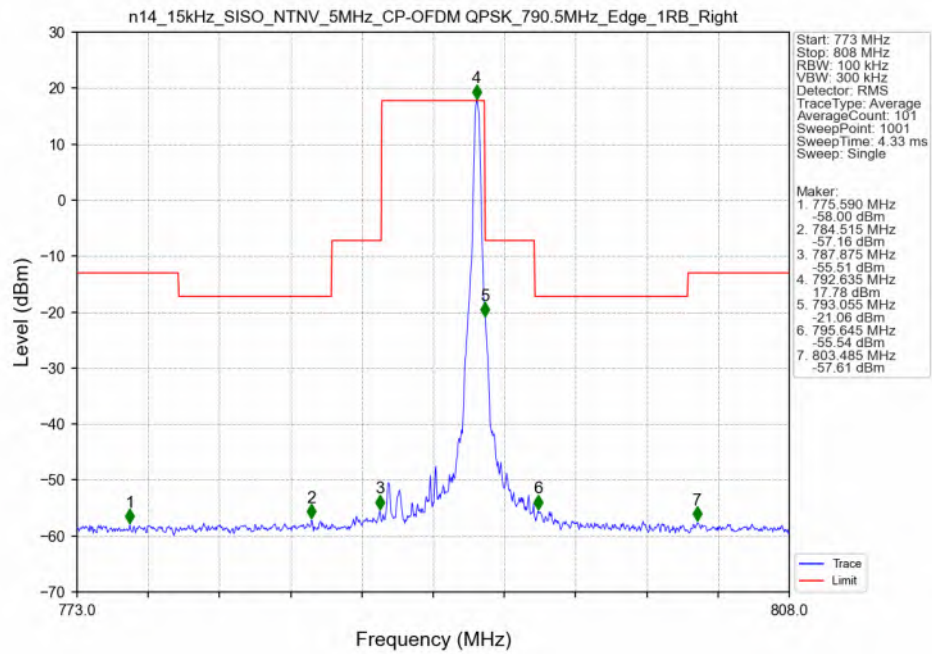


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_793MHz_Outer_Full_Ant0

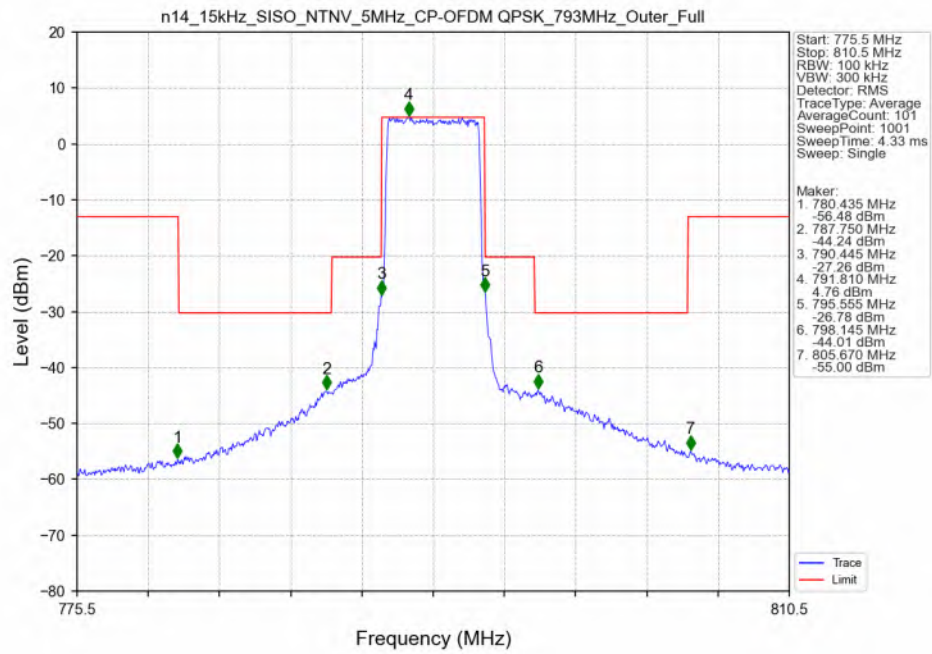


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_793MHz_Edge_1RB_Left_Ant0

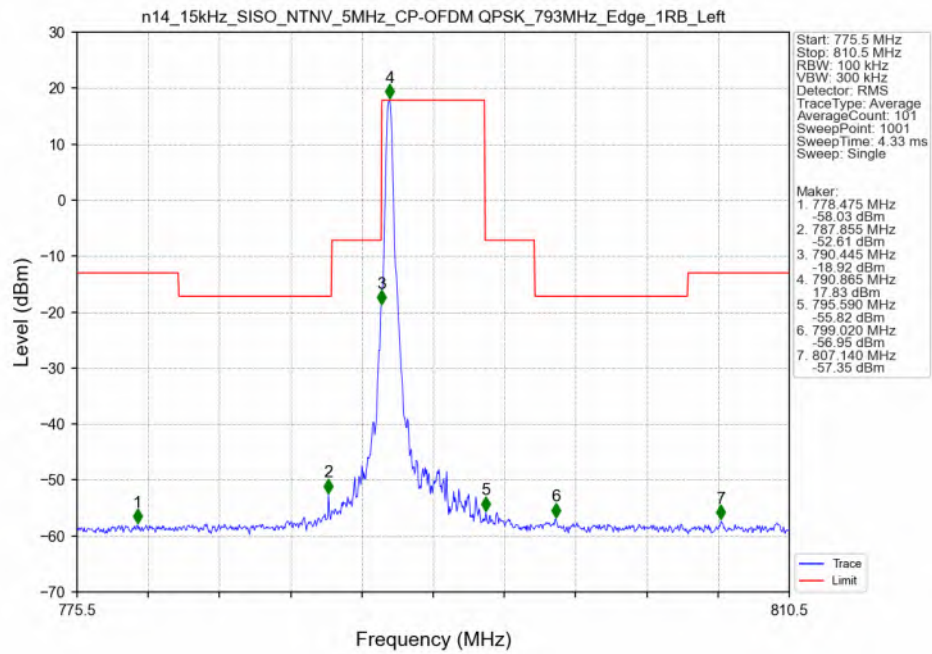


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_793MHz_Edge_1RB_Right_Ant0

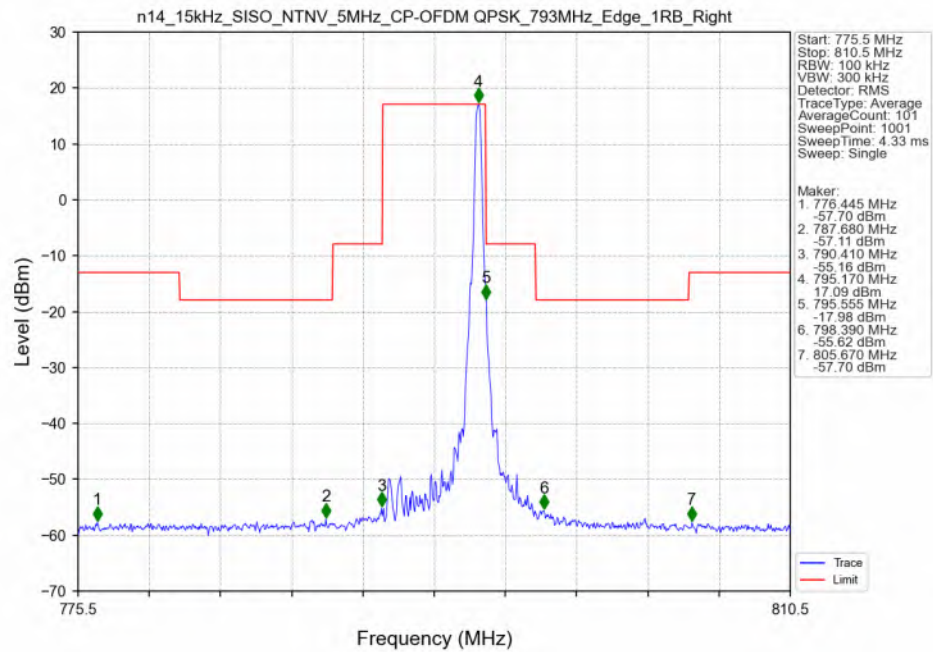


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_795.5MHz_Outer_Full_Ant0

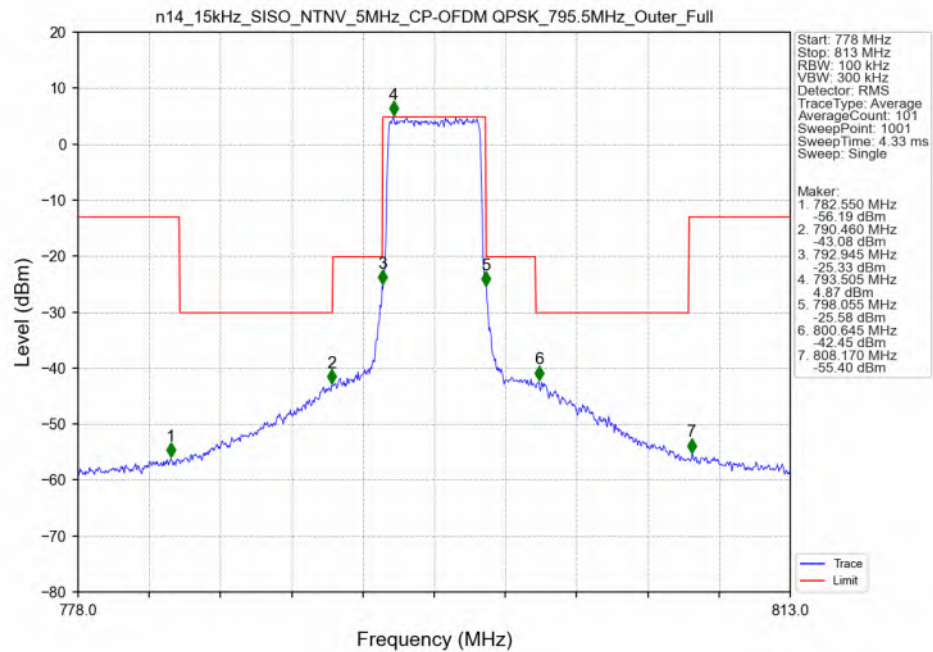


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_795.5MHz_Edge_1RB_Left_Ant0

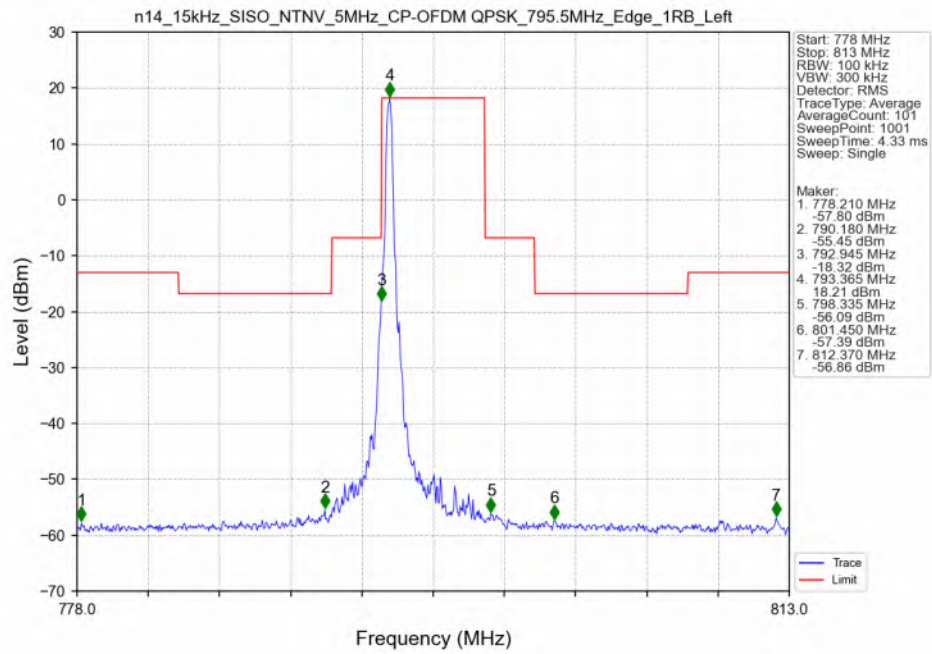


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_QPSK_795.5MHz_Edge_1RB_Right_Ant0

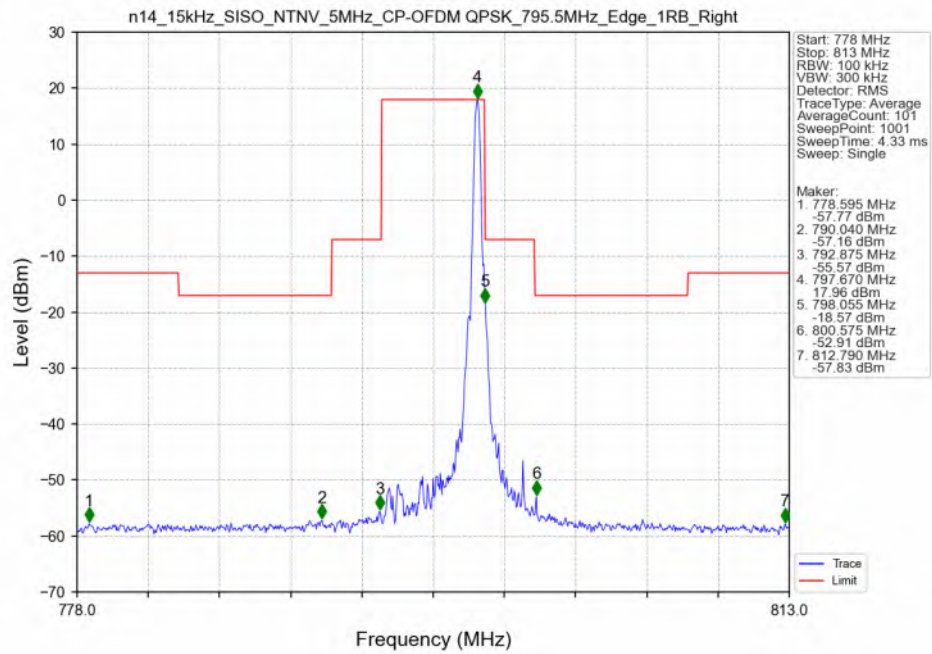


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_16_QAM_790.5MHz_Outer_Full_Ant0

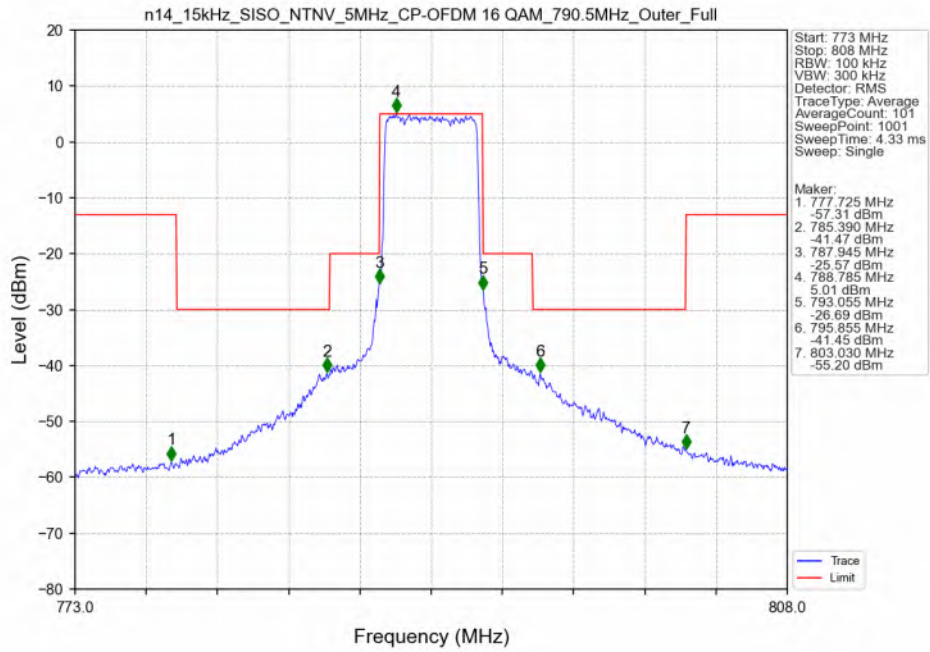


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_16_QAM_790.5MHz_Edge_1RB_Left_Ant0

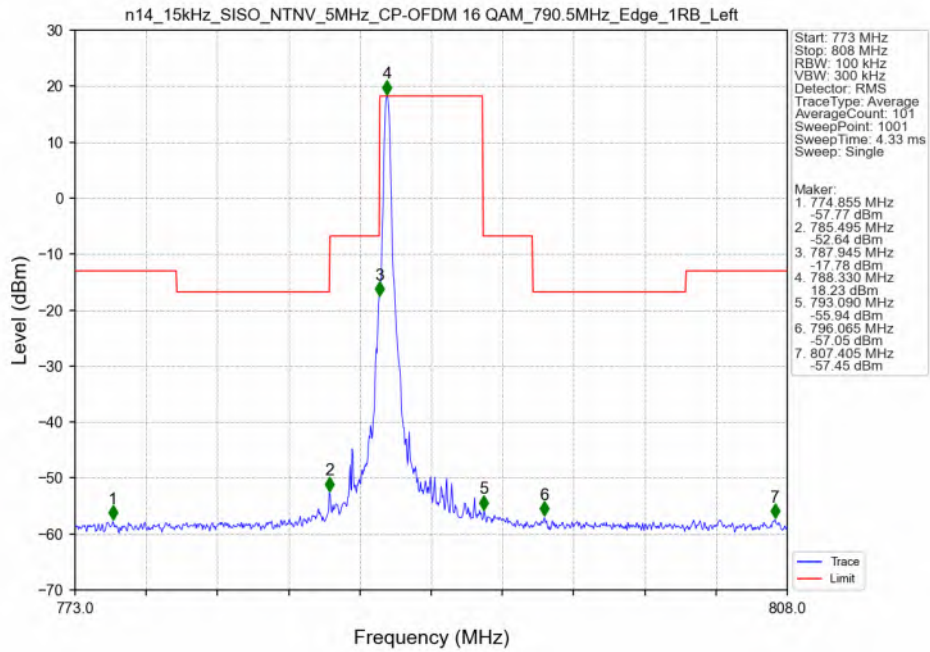


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_16_QAM_790.5MHz_Edge_1RB_Right_Ant0

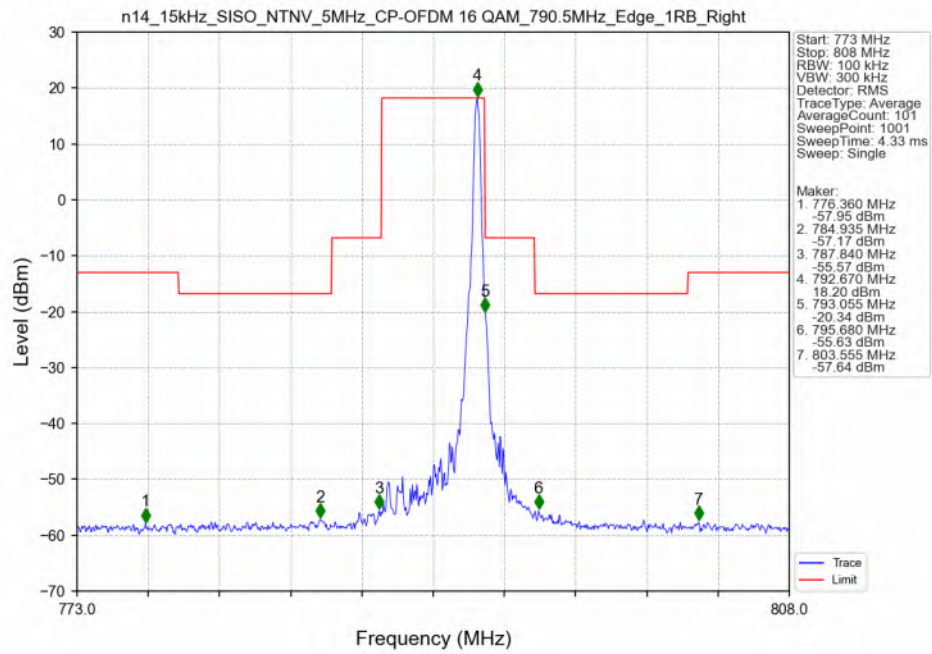


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_16_QAM_793MHz_Outer_Full_Ant0

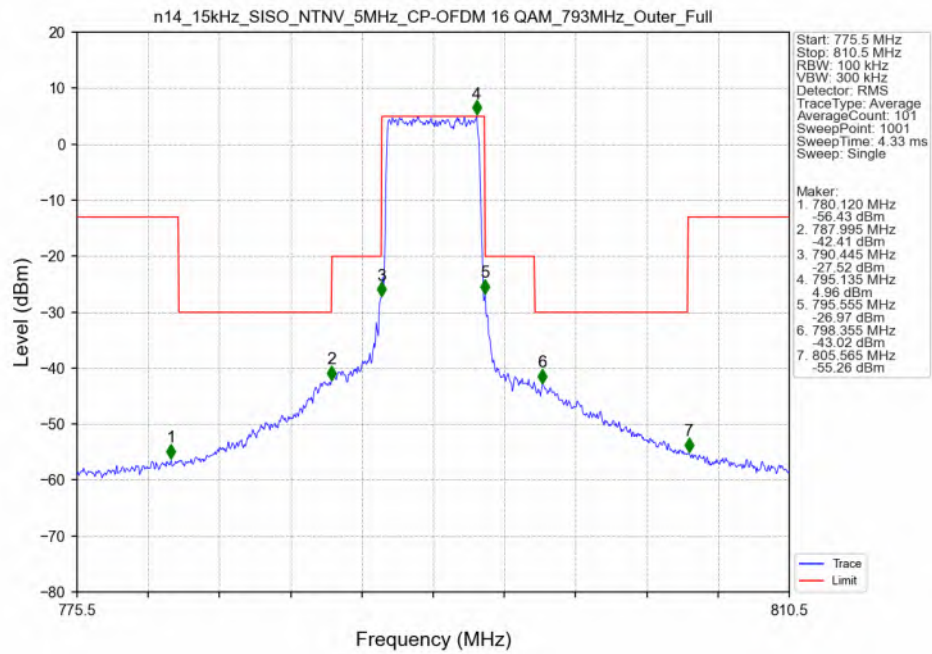


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_16_QAM_793MHz_Edge_1RB_Left_Ant0

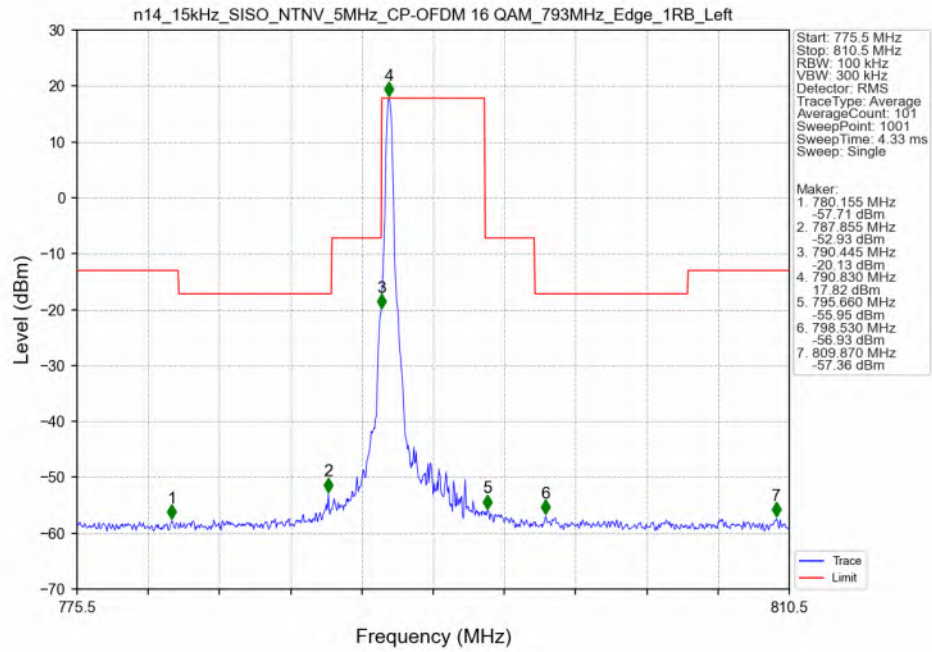


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_16_QAM_793MHz_Edge_1RB_Right_Ant0

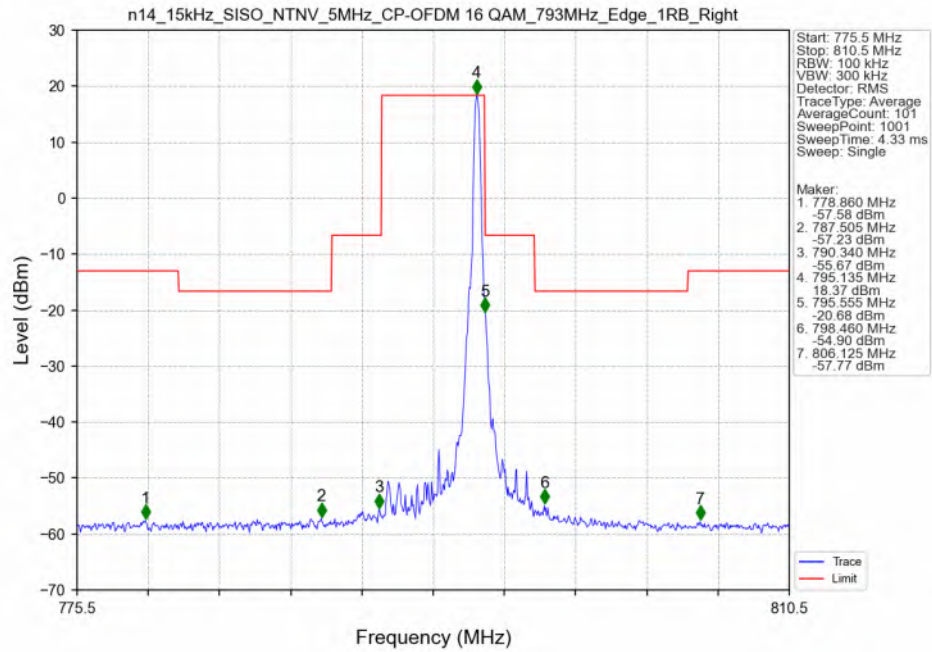


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_16_QAM_795.5MHz_Outer_Full_Ant0

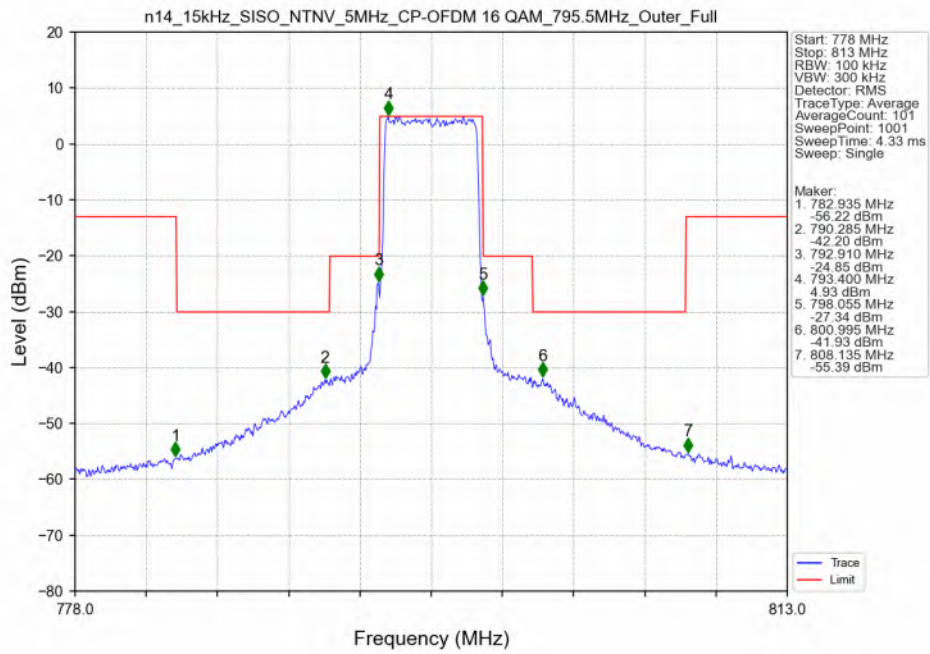


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_16_QAM_795.5MHz_Edge_1RB_Left_Ant0

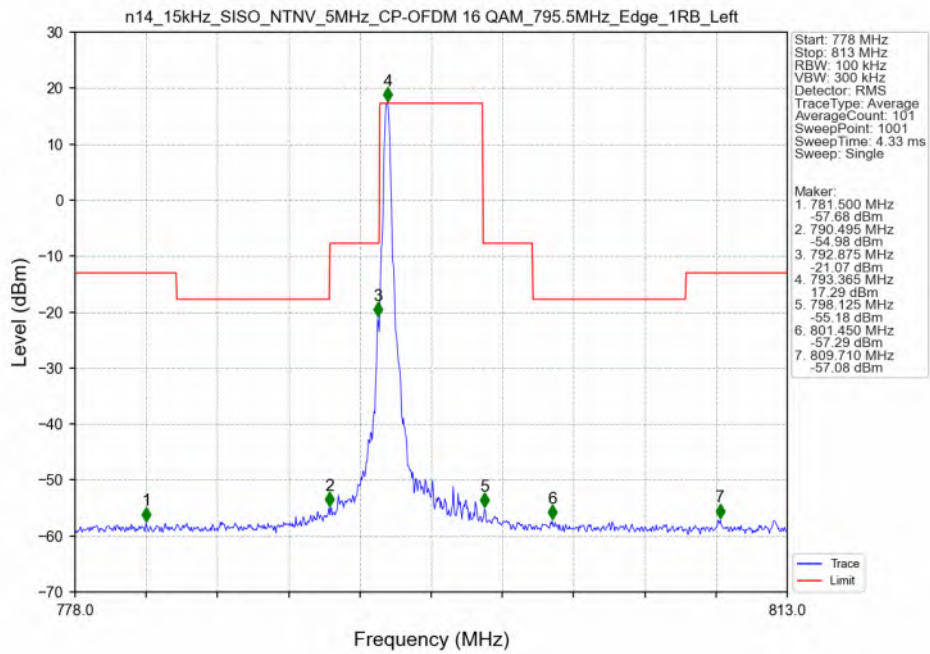


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_16_QAM_795.5MHz_Edge_1RB_Right_Ant0

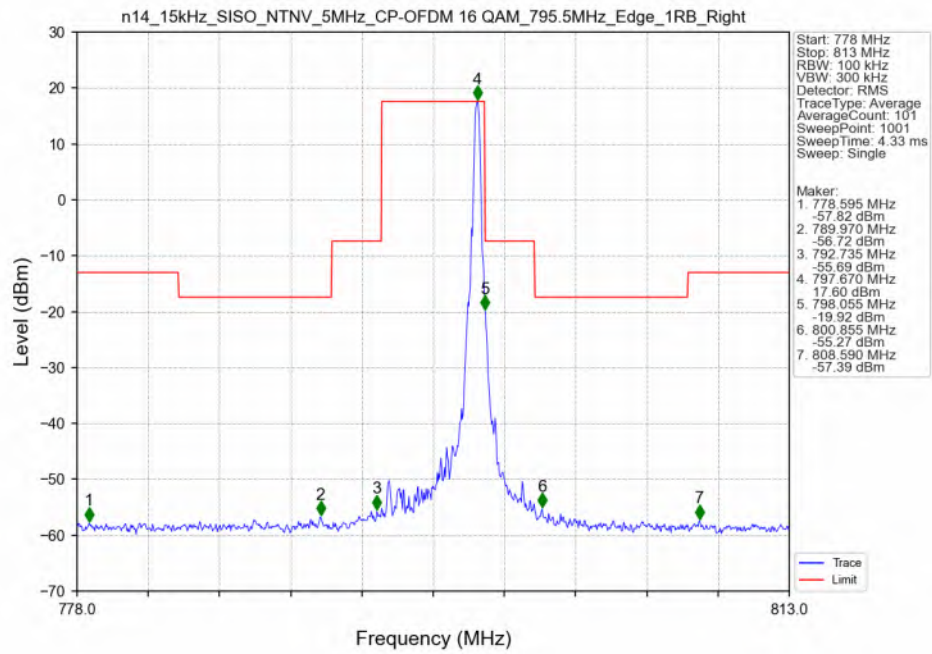


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_64_QAM_790.5MHz_Outer_Full_Ant0

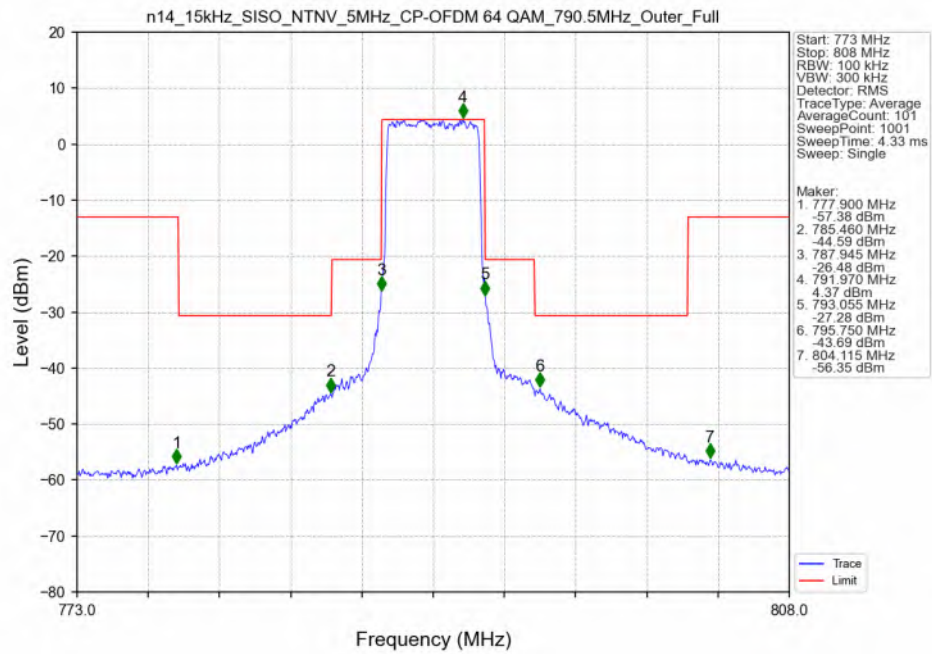


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM 64 QAM 790.5MHz_Edge_1RB_Left_Ant0

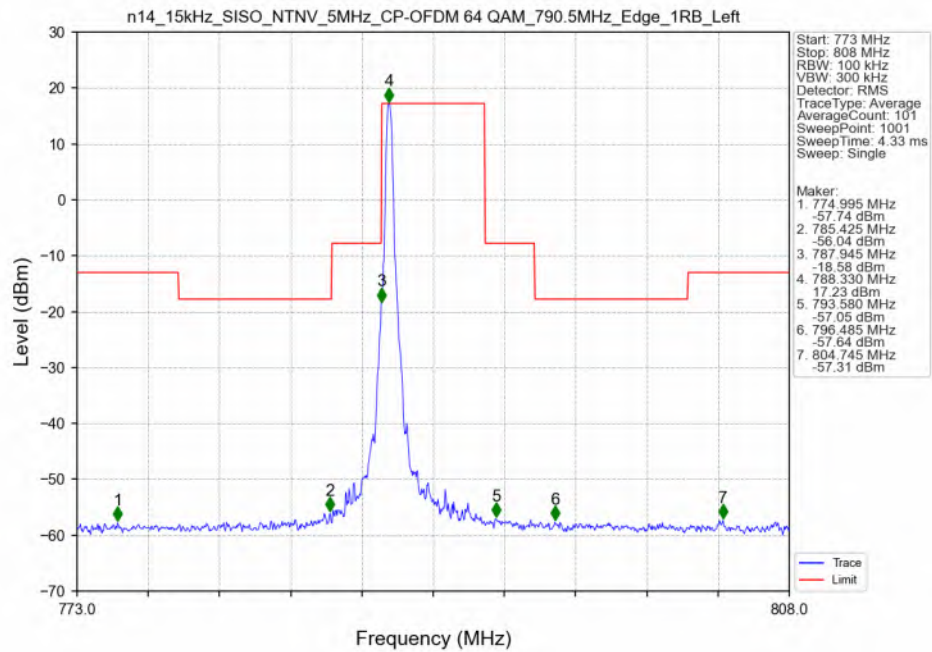


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM 64 QAM 790.5MHz_Edge_1RB_Right_Ant0

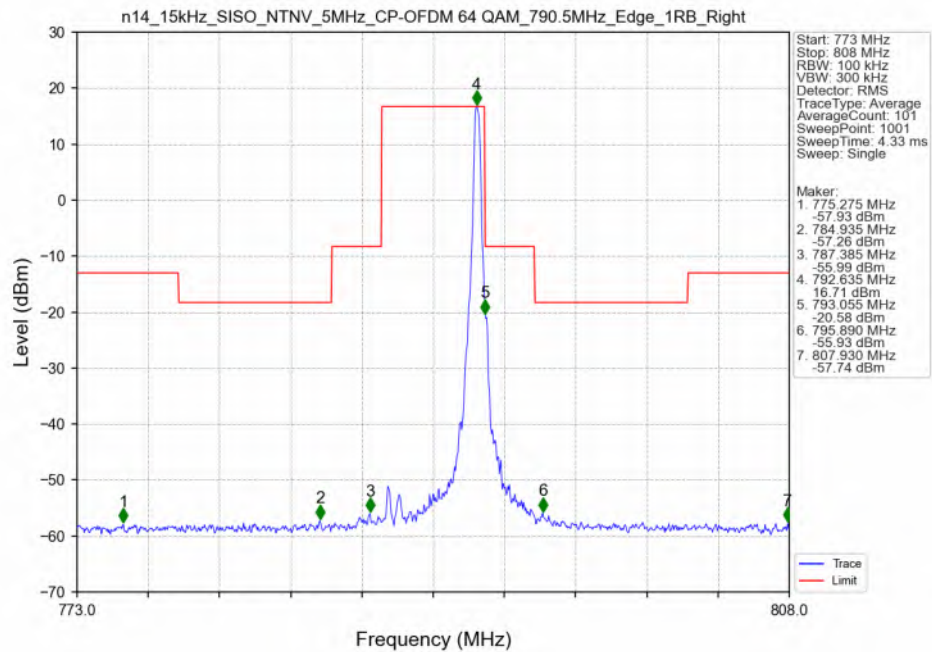


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM 64 QAM 793MHz_Outer_Full_Ant0

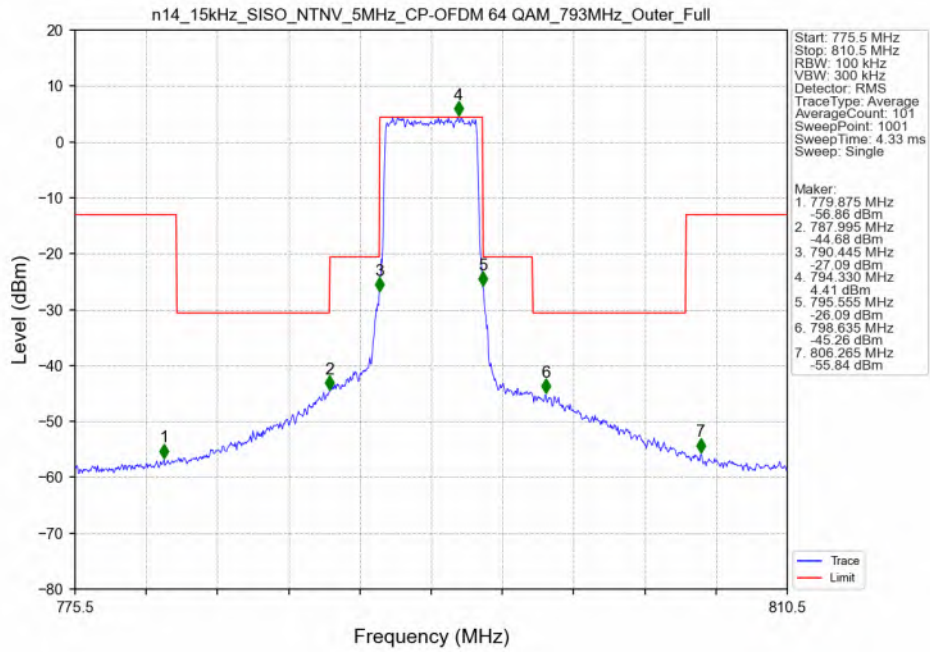


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM 64 QAM 793MHz_Edge_1RB_Left_Ant0

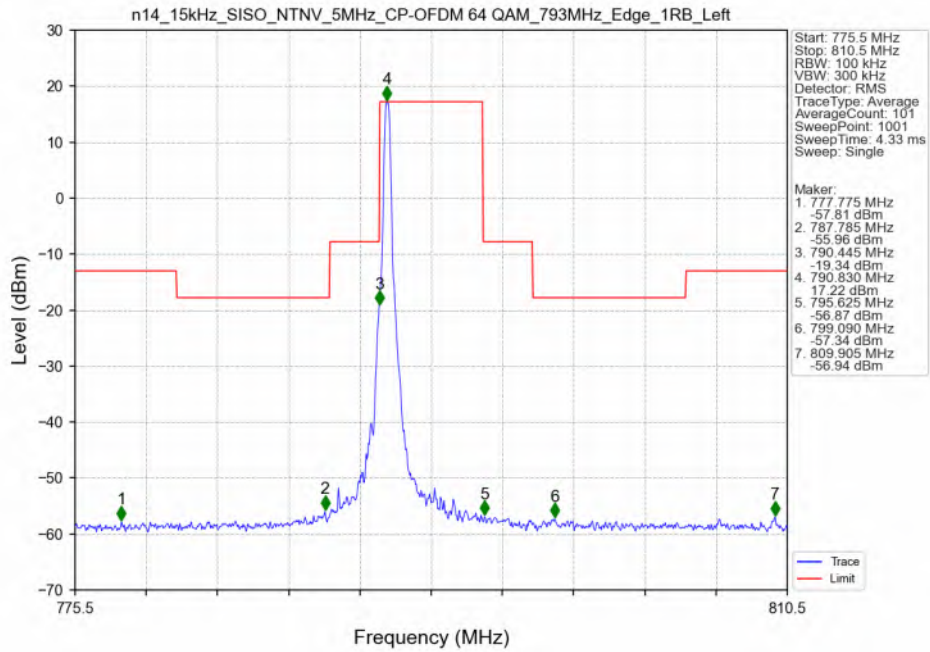


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM 64 QAM 793MHz_Edge_1RB_Right_Ant0

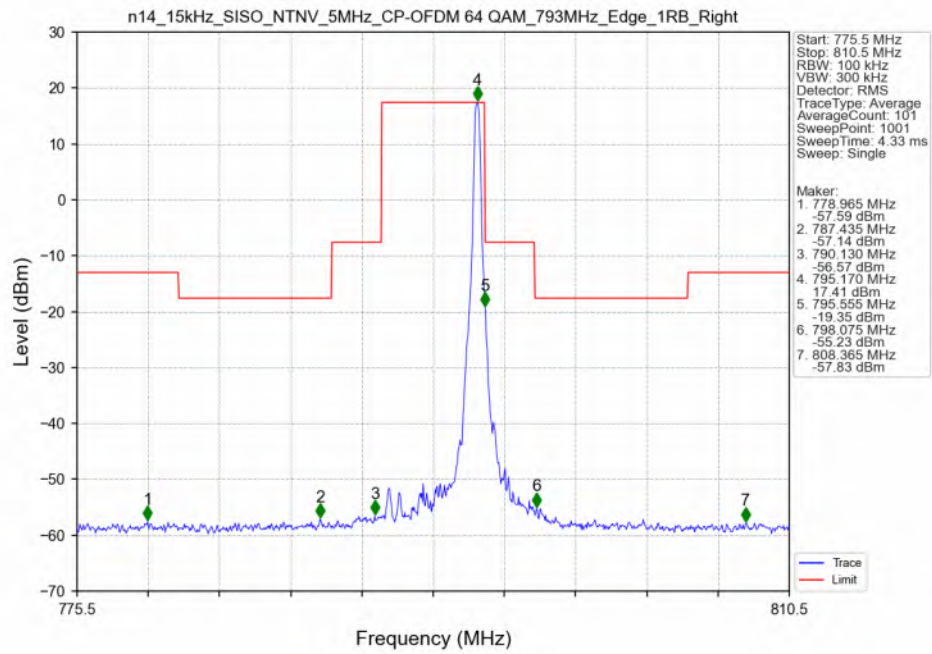


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM 64 QAM 795.5MHz_Outer_Full_Ant0

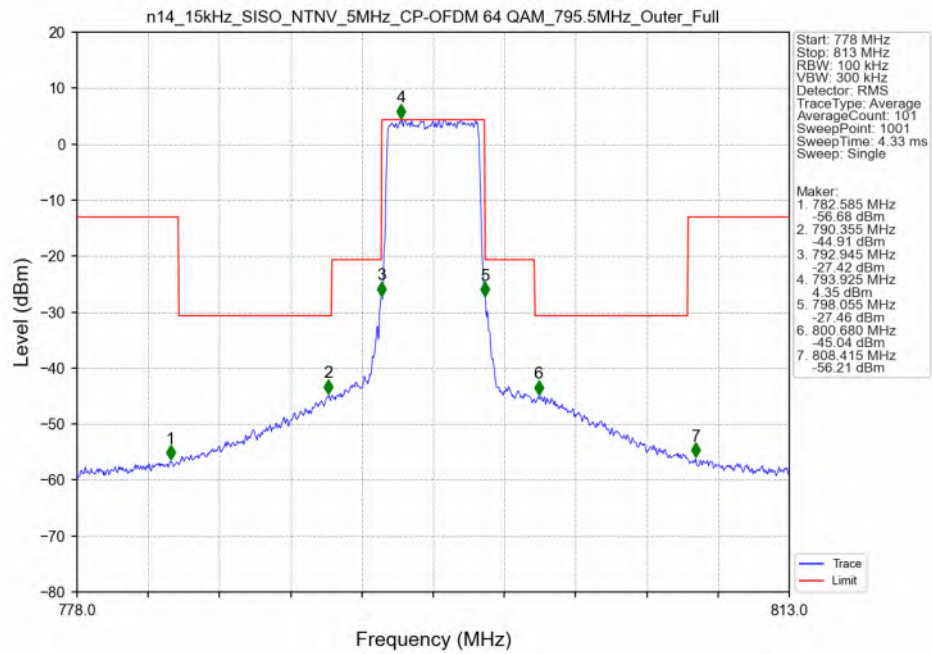


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_64_QAM_795.5MHz_Edge_1RB_Left_Ant0

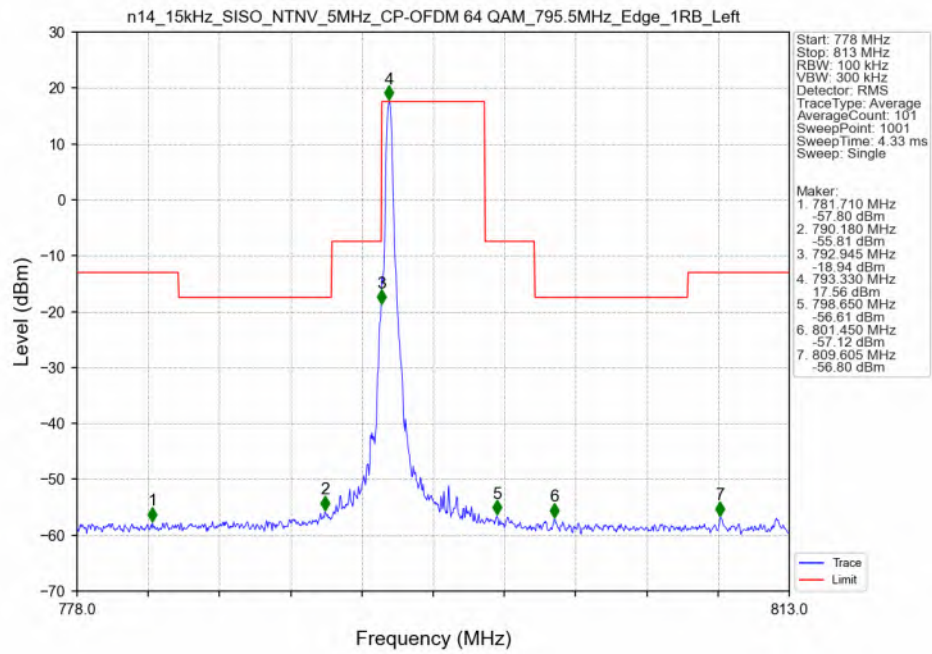


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_64_QAM_795.5MHz_Edge_1RB_Right_Ant0

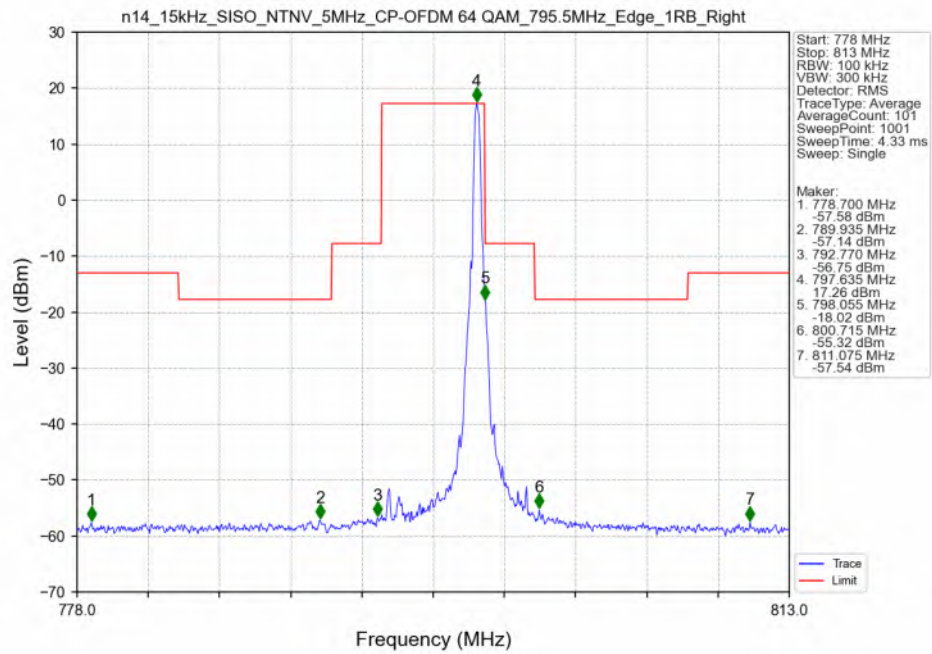


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM 256 QAM 790.5MHz_Outer_Full_Ant0

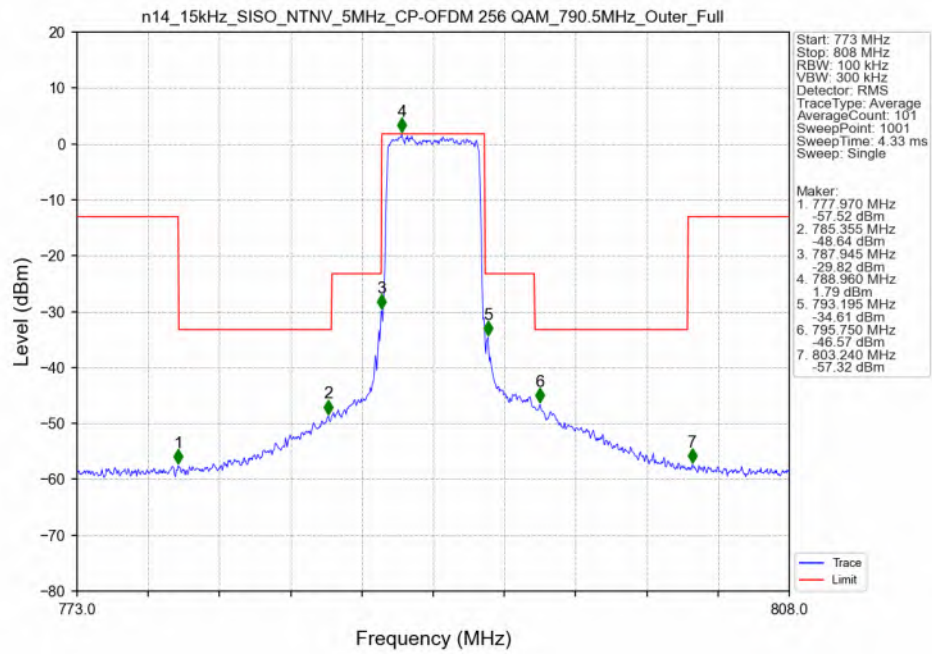


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM 256 QAM 790.5MHz_Edge_1RB_Left_Ant0

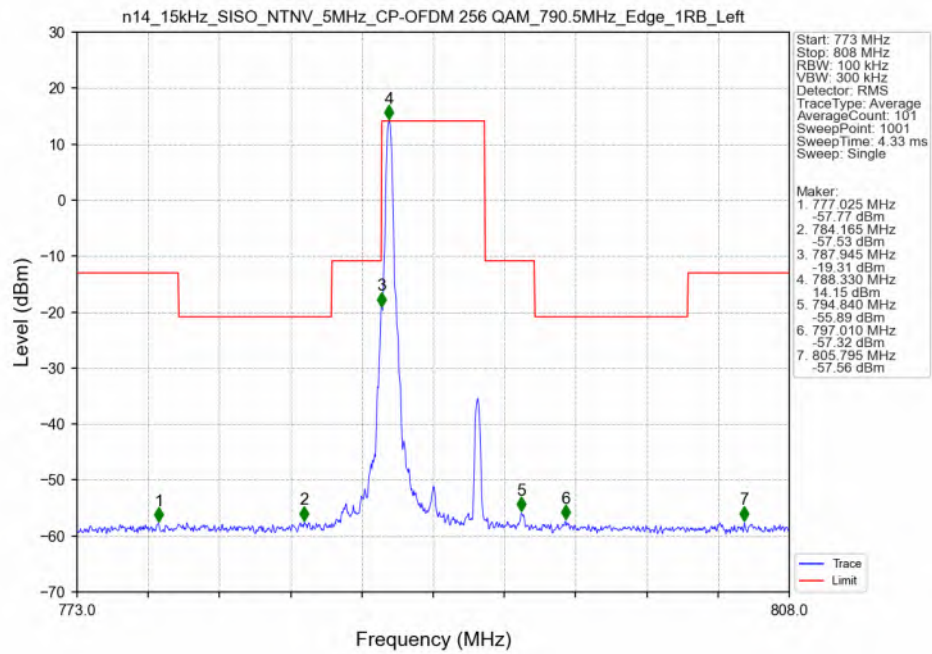


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_256_QAM_790.5MHz_Edge_1RB_Right_Ant0

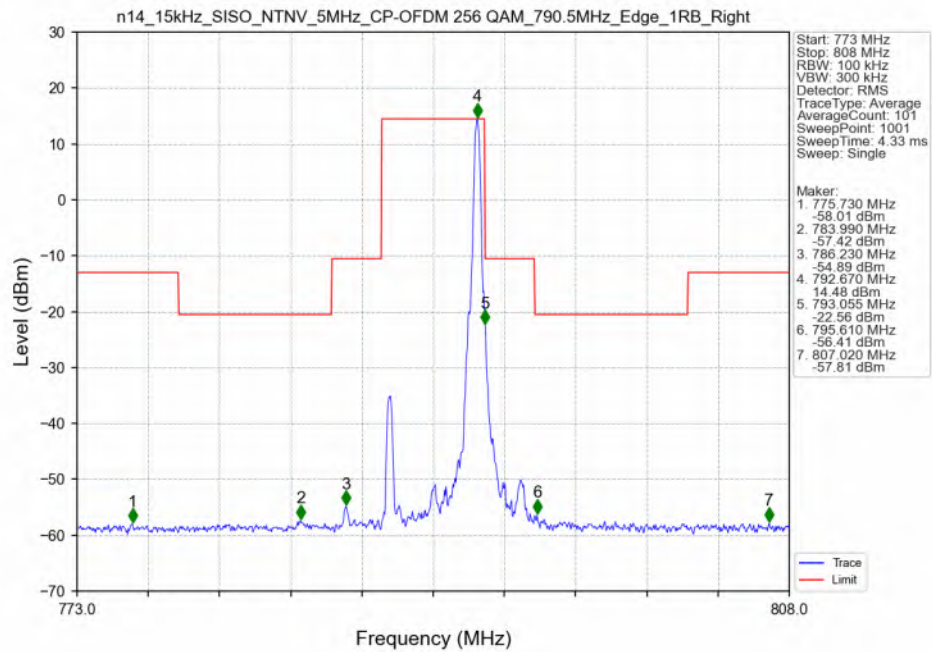


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_256_QAM_793MHz_Outer_Full_Ant0

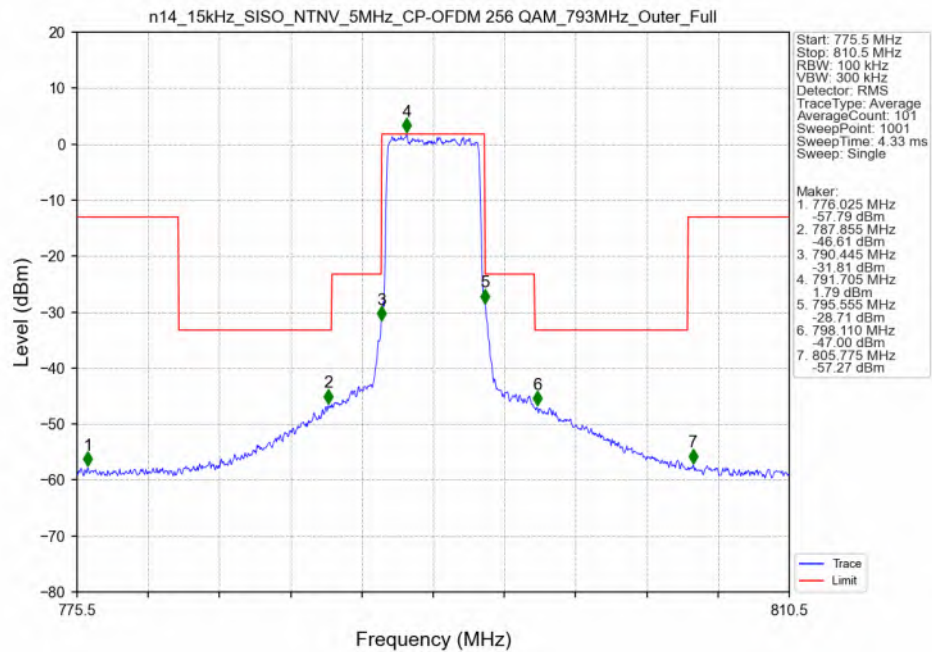


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_256_QAM_793MHz_Edge_1RB_Left_Ant0

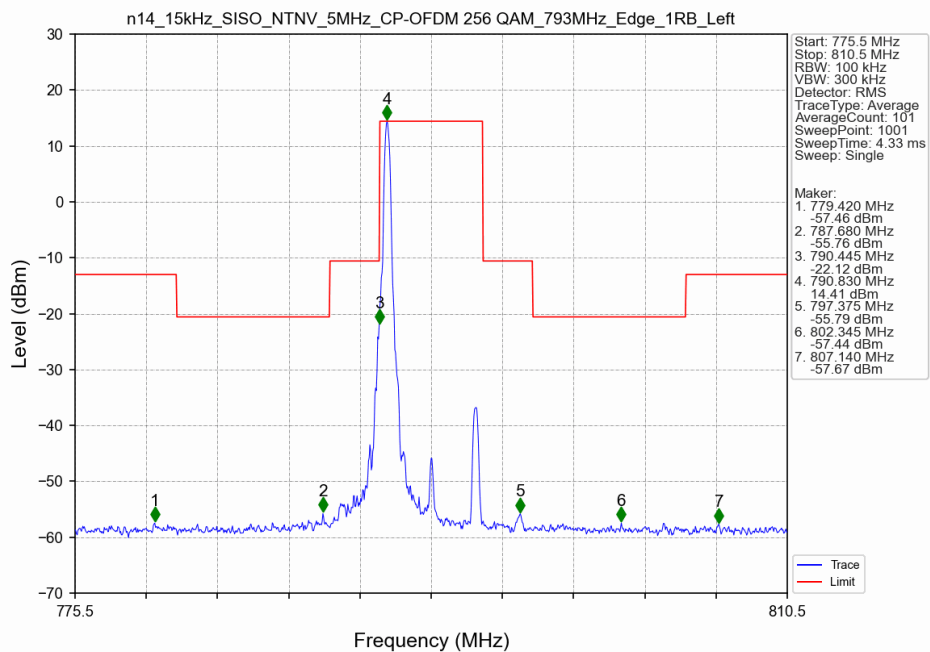


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_256_QAM_793MHz_Edge_1RB_Right_Ant0

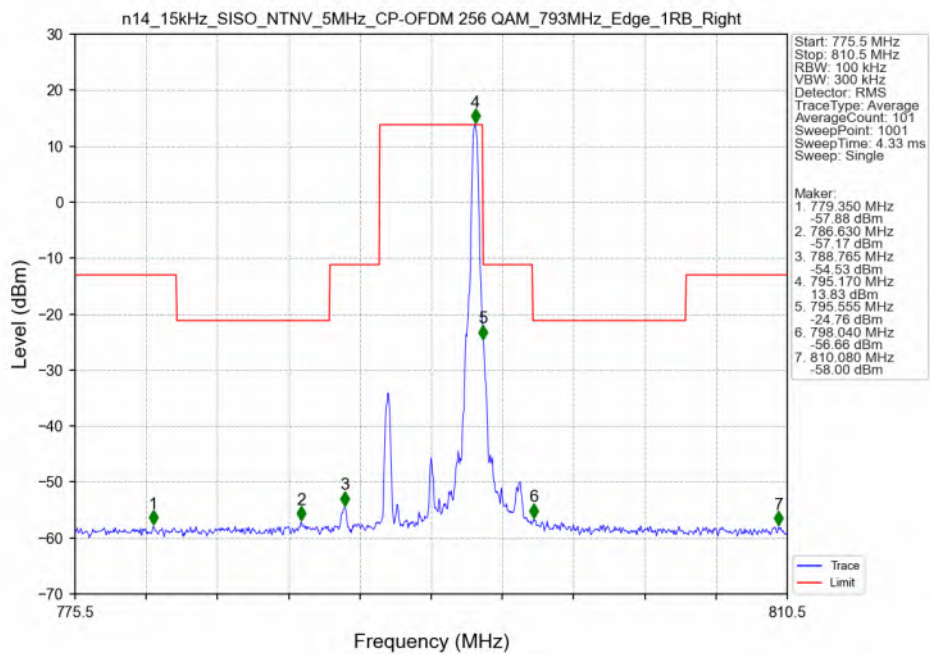


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM 256 QAM 795.5MHz_Outer_Full_Ant0

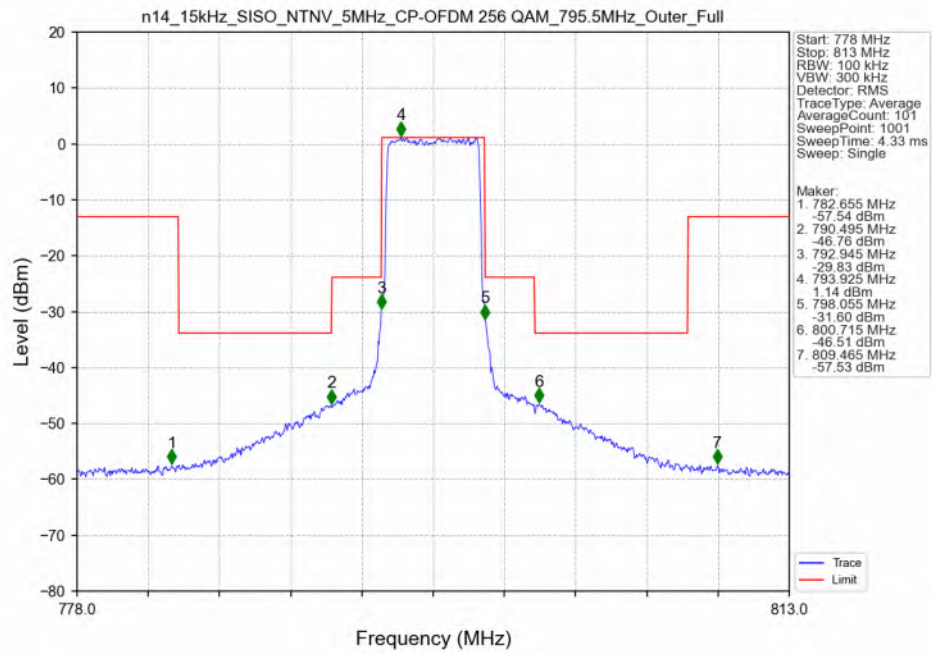


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM 256 QAM 795.5MHz_Edge_1RB_Left_Ant0

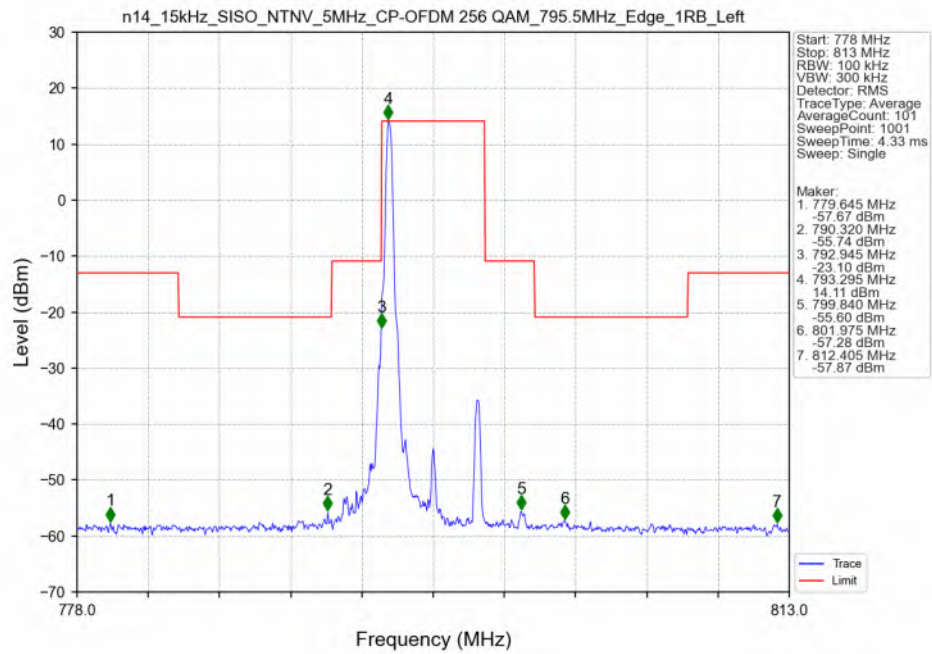


n14_15kHz_SISO_NTNV_5MHz_CP-OFDM_256_QAM_795.5MHz_Edge_1RB_Right_Ant0

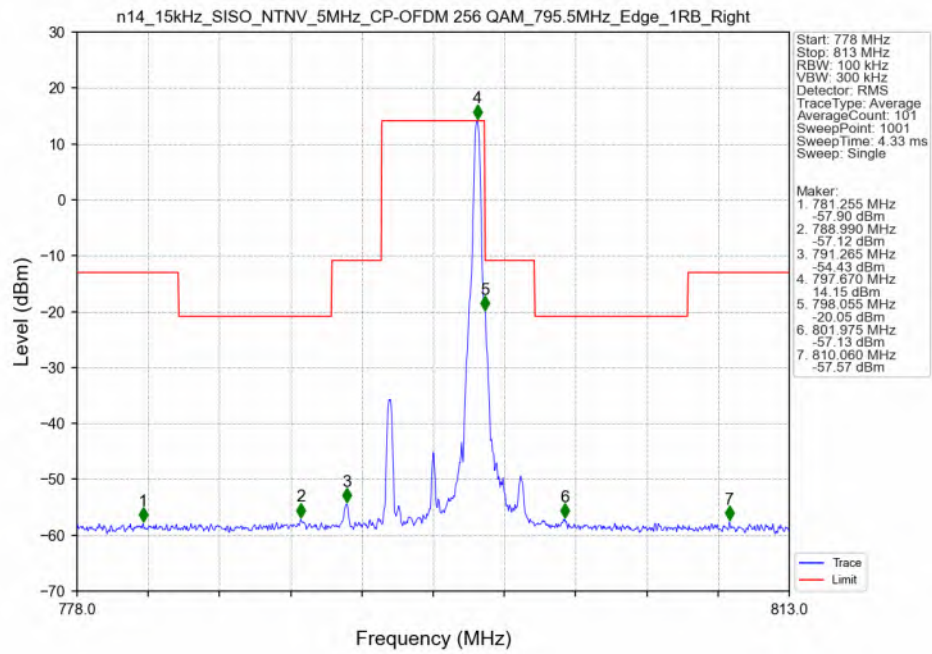


6.2.2 15_S_10M_NTNV

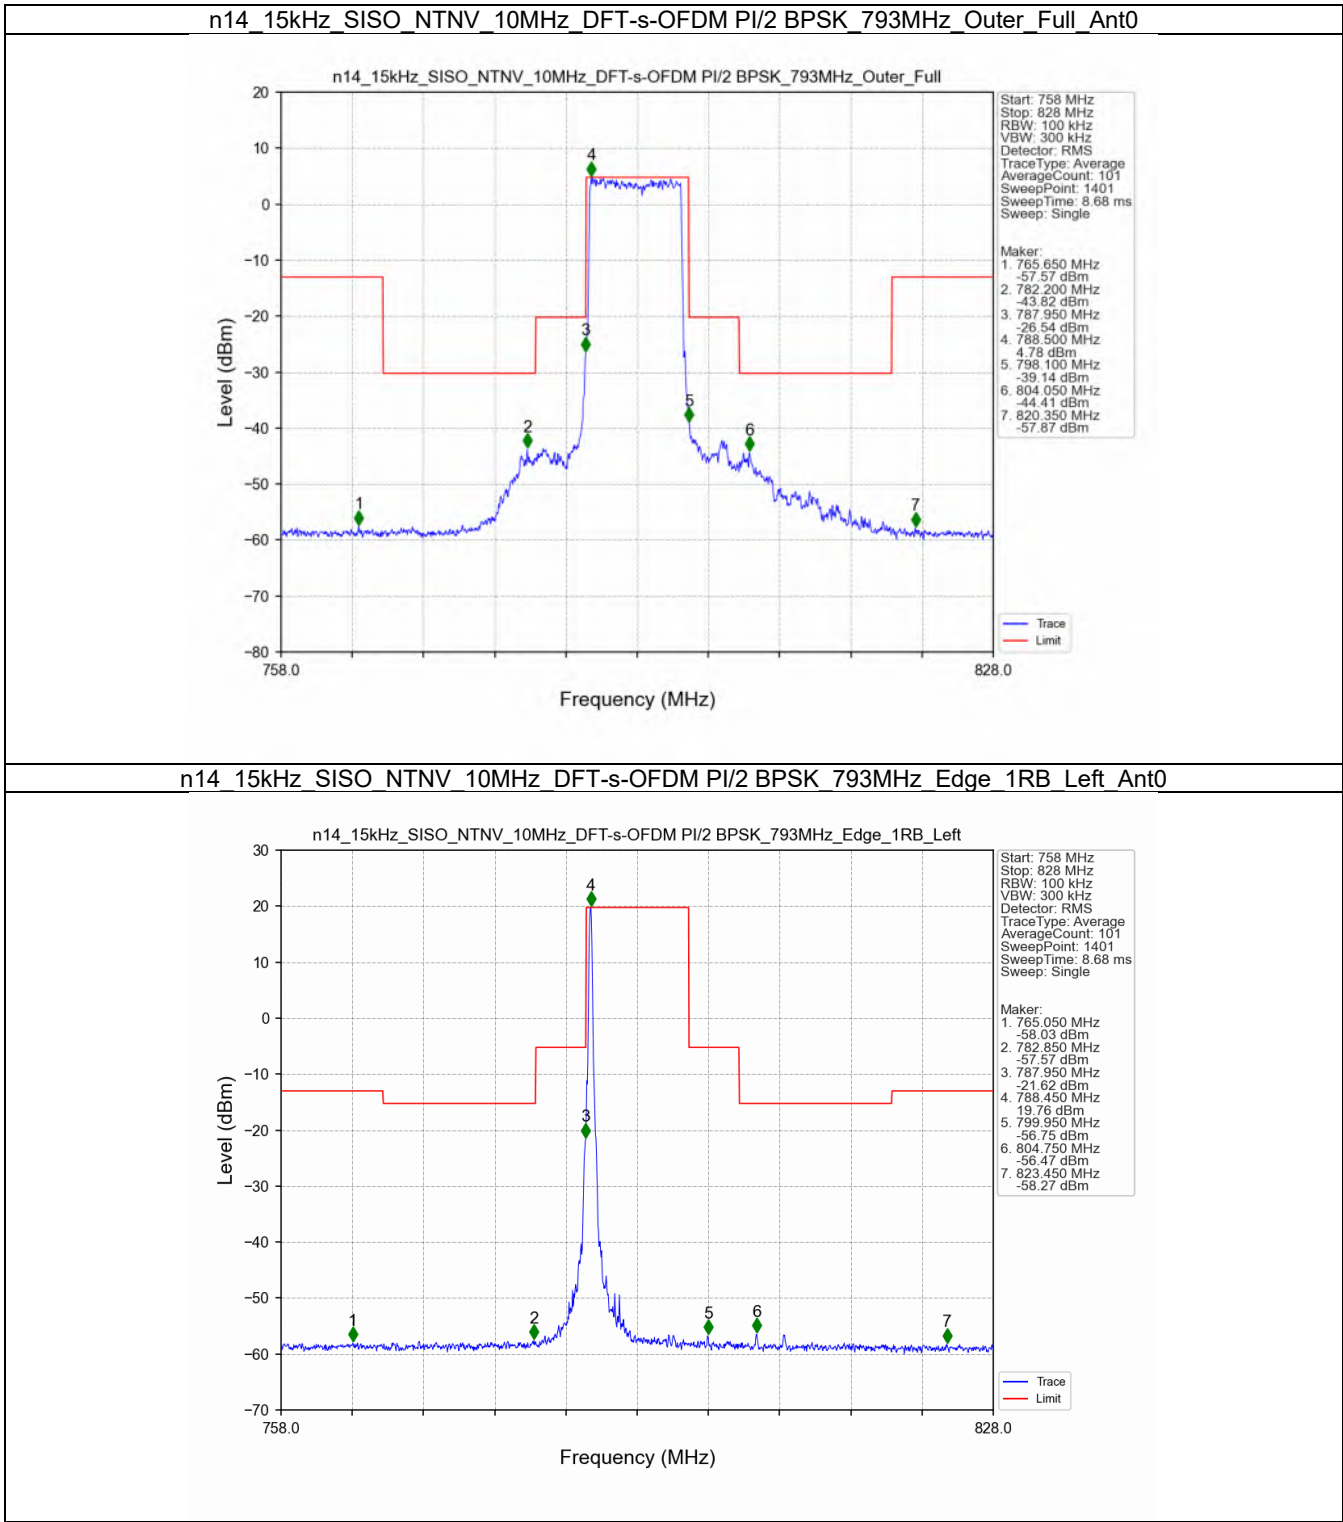


n14 15kHz SISO NTN 10MHz DFT-s-OFDM PI/2 BPSK 793MHz Edge 1RB Right Ant0

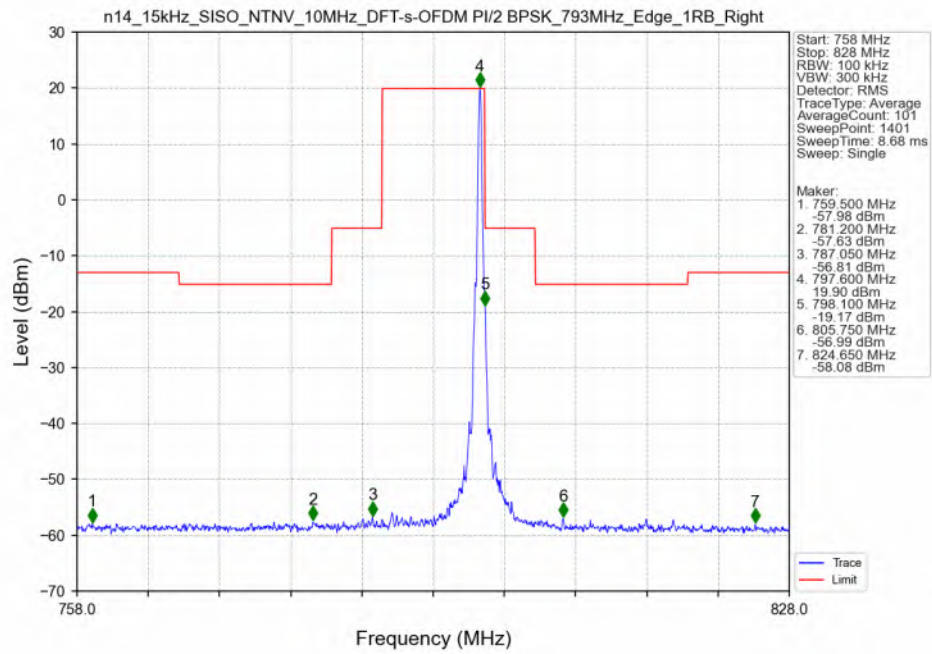


n14 15kHz SISO NTN 10MHz DFT-s-OFDM QPSK 793MHz Outer Full Ant0

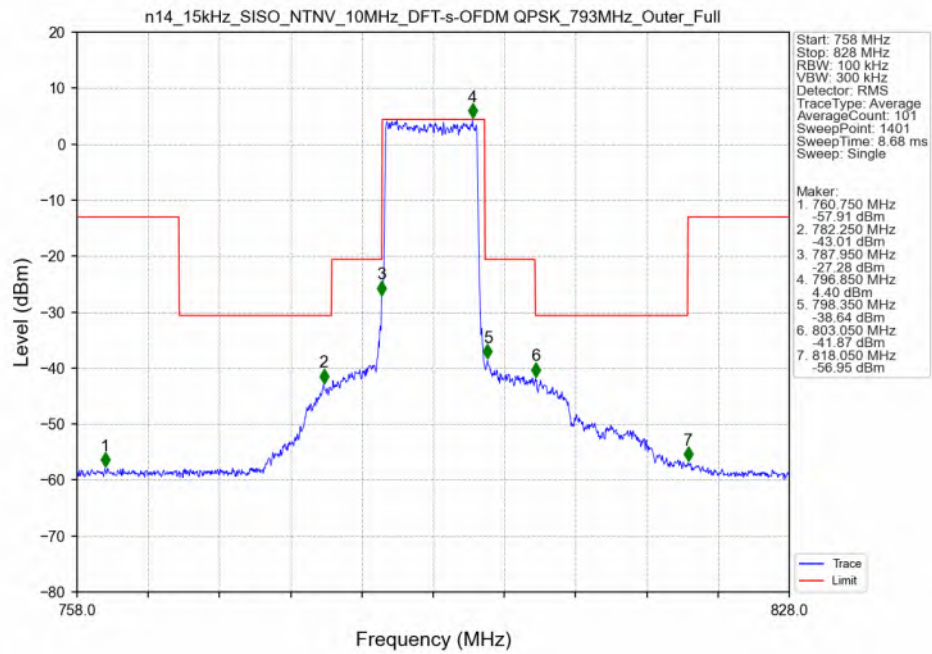


n14_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_QPSK_793MHz_Edge_1RB_Left_Ant0

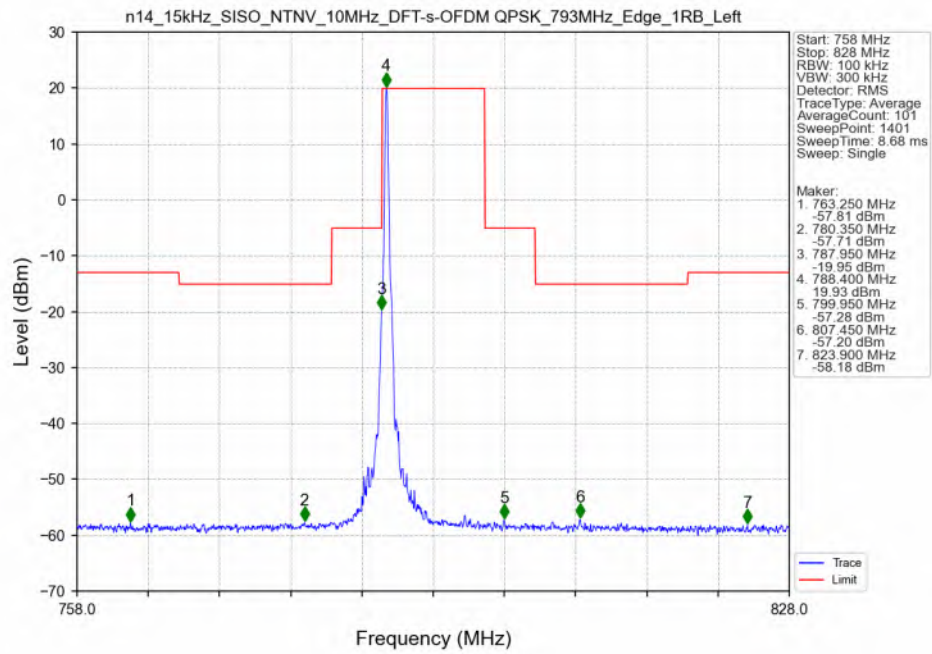

n14_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_QPSK_793MHz_Edge_1RB_Right_Ant0

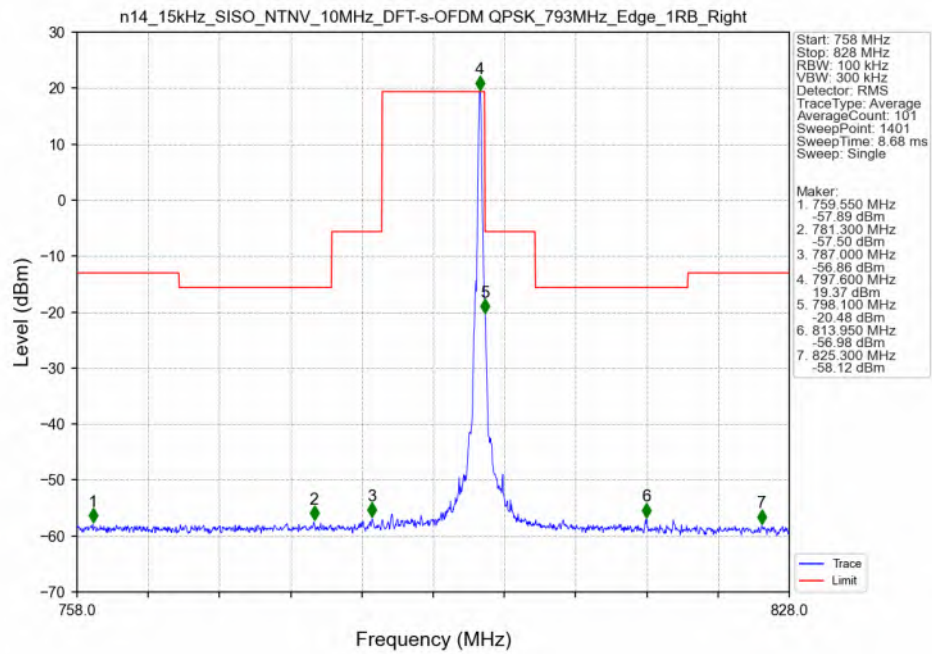

n14_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_16_QAM_793MHz_Outer_Full_Ant0

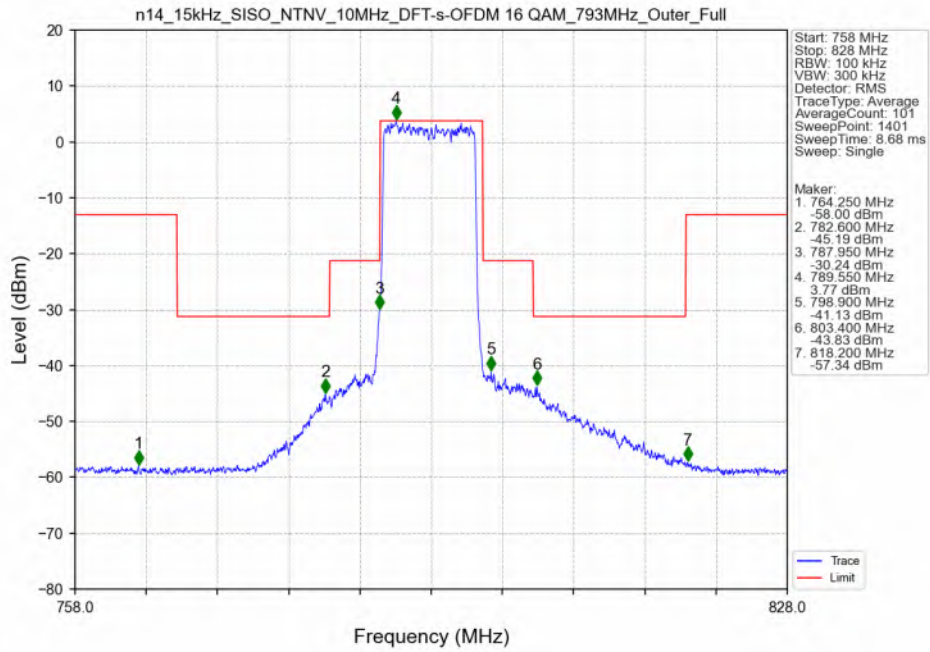

n14_15kHz_SISO_NTNV_10MHz_DFT-s-OFDM_16_QAM_793MHz_Edge_1RB_Left_Ant0

